



## Appendix A

### RF Test Data for BT (Conducted Measurement)

Product Name: Bluetooth Headset

Test Model: PuroQuiet-AIR

#### Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jerry Chu
Supervised by:	Nick Peng





### A.1 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.957	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.957	N/A	Pass
NVNT	1-DH5	2480	Ant1	0.949	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.321	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.268	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.304	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.292	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.31	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.297	N/A	Pass






Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

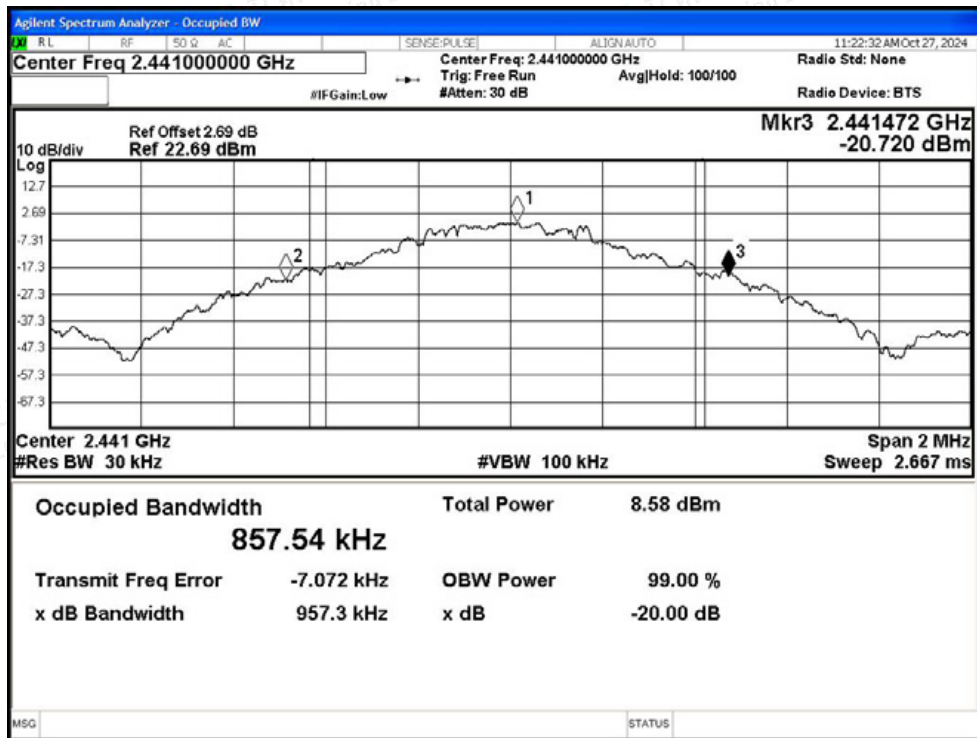




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

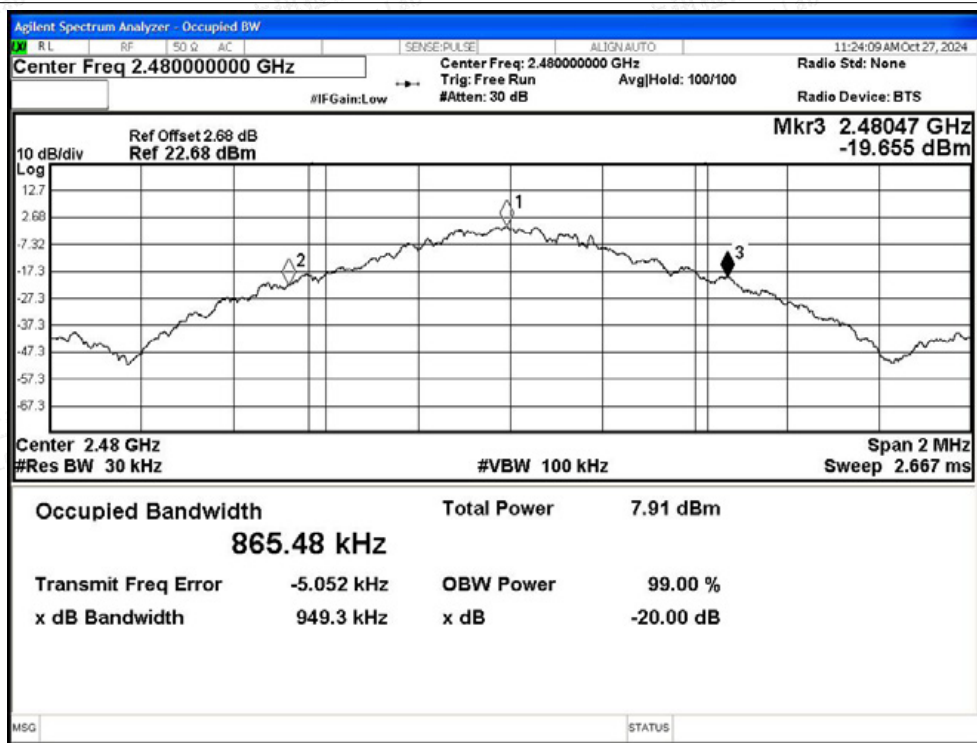


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

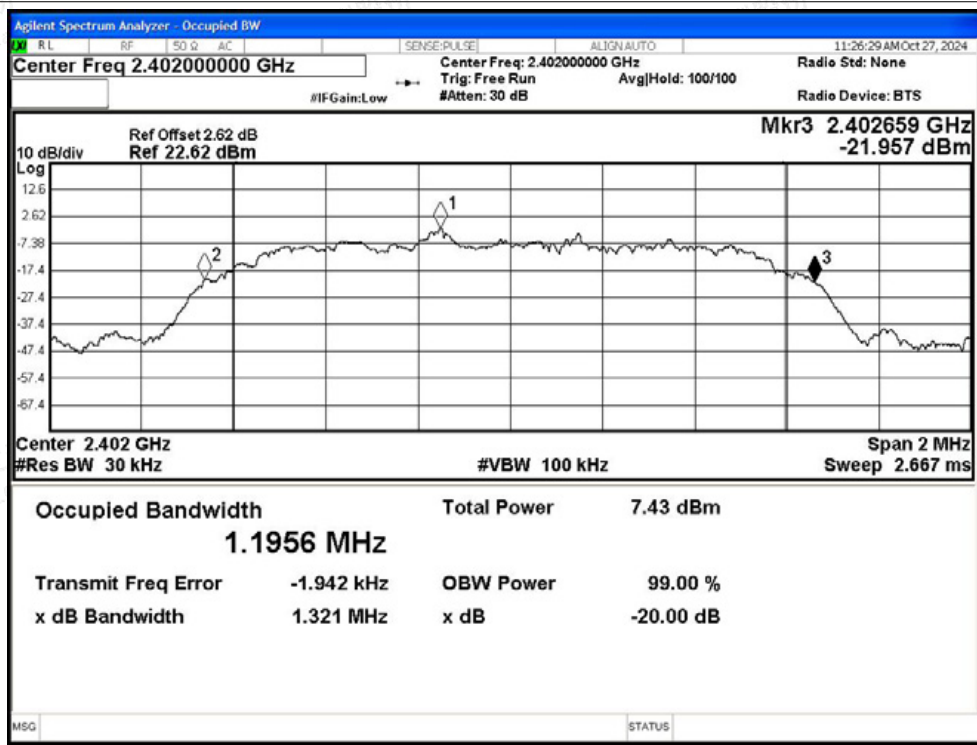




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

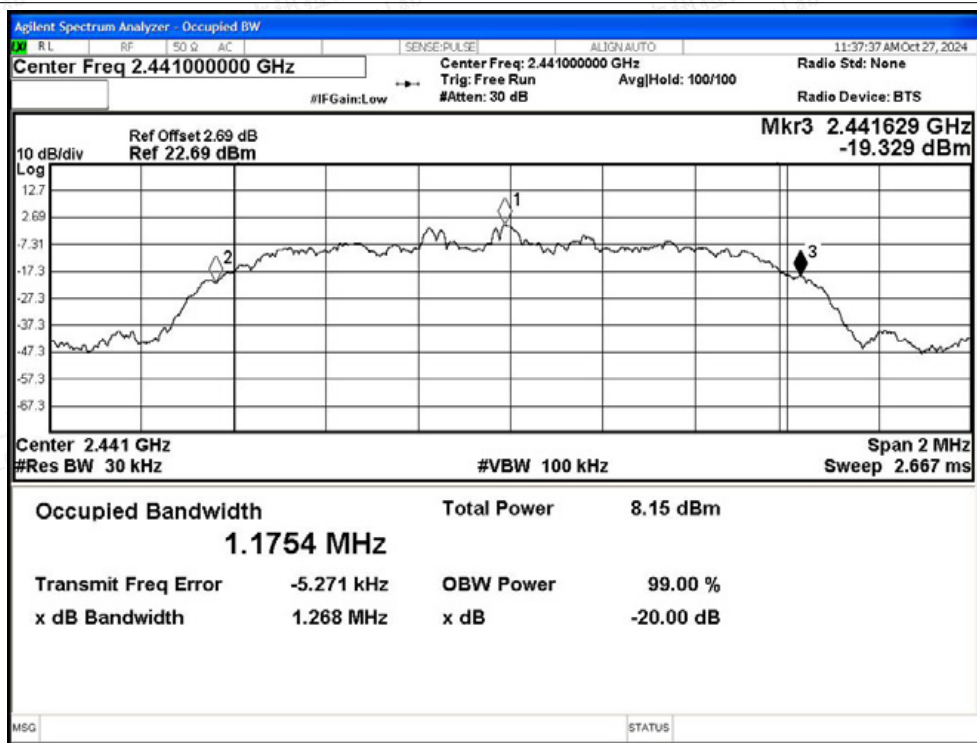


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

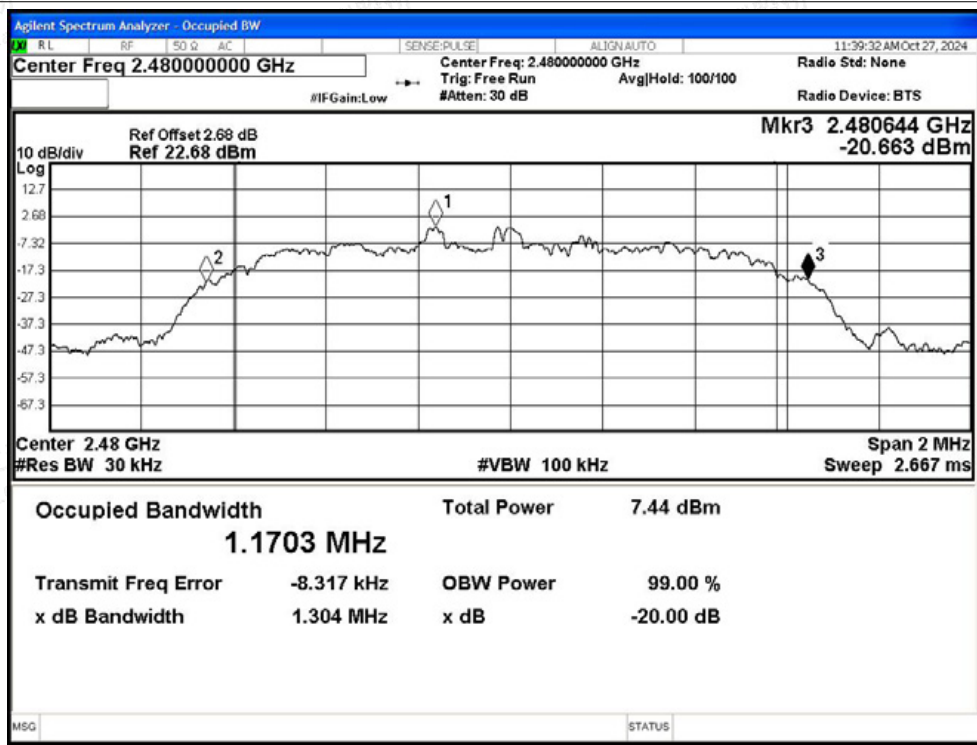




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

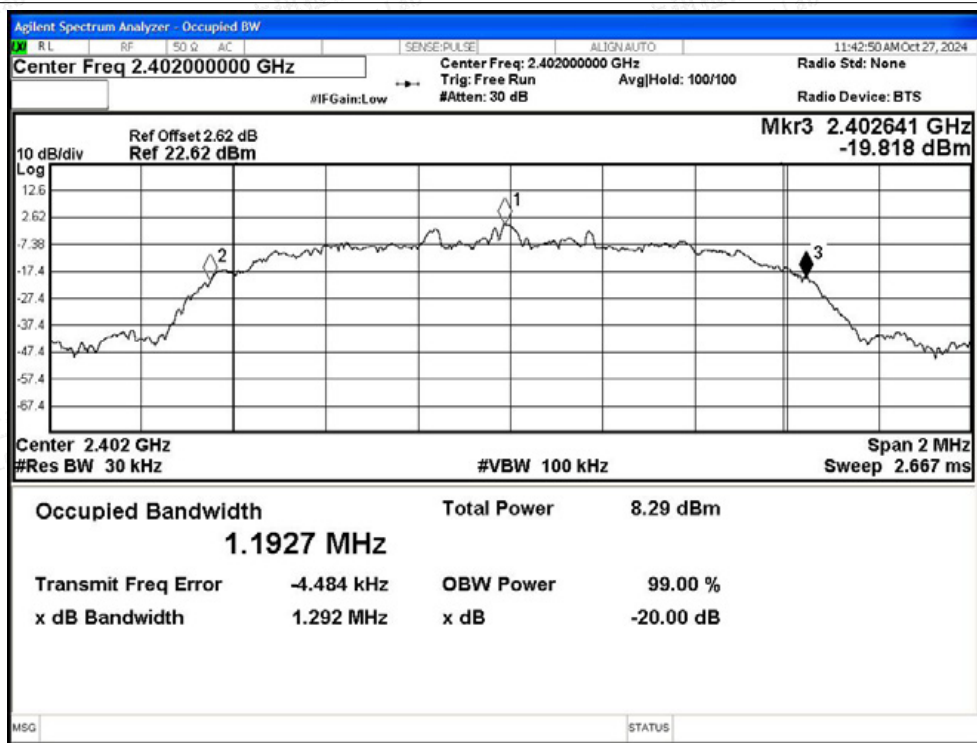


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

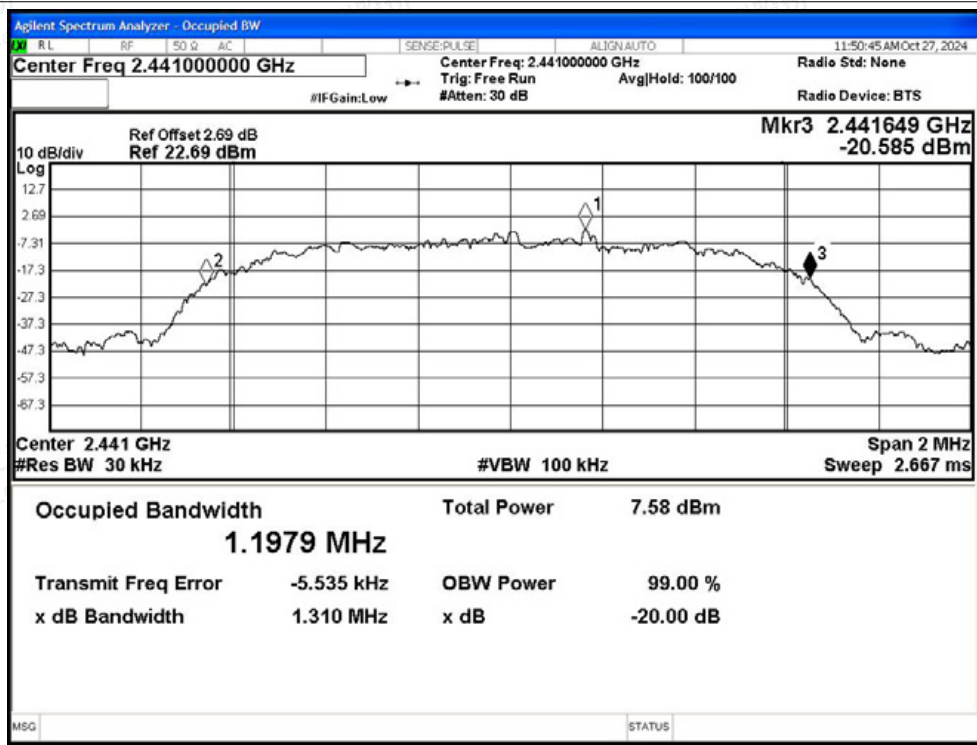



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

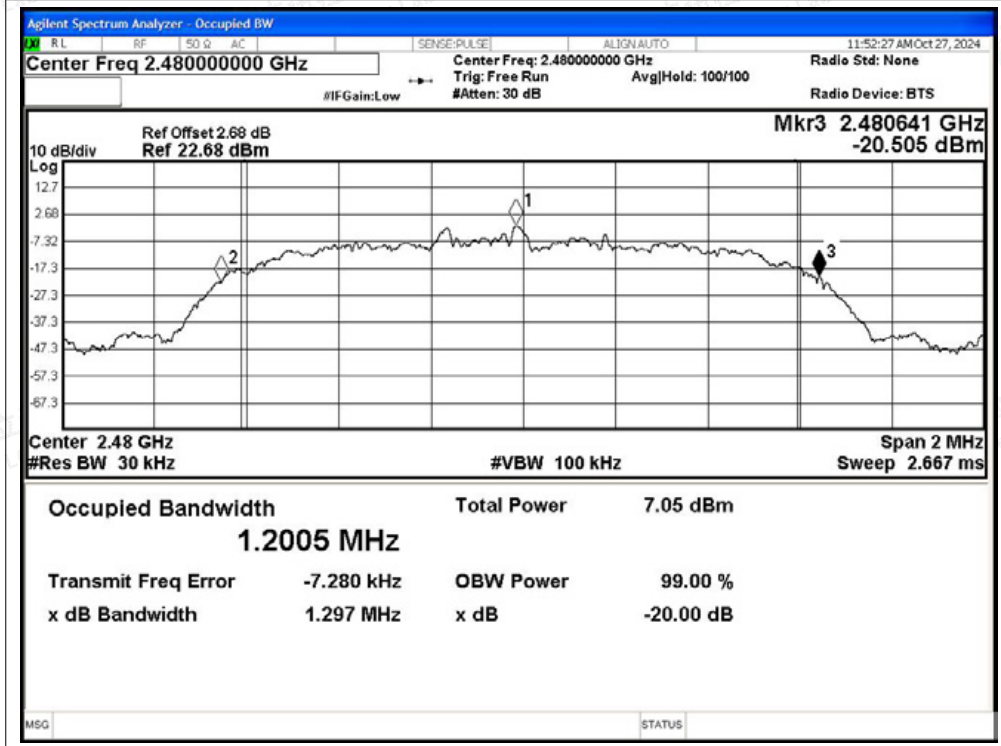



## A.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	0.95	21	Pass
NVNT	1-DH5	2441	Ant1	0.55	21	Pass
NVNT	1-DH5	2480	Ant1	1.23	21	Pass
NVNT	2-DH5	2402	Ant1	1.0	21	Pass
NVNT	2-DH5	2441	Ant1	1.19	21	Pass
NVNT	2-DH5	2480	Ant1	0.4	21	Pass
NVNT	3-DH5	2402	Ant1	0.44	21	Pass
NVNT	3-DH5	2441	Ant1	1.28	21	Pass
NVNT	3-DH5	2480	Ant1	0.39	21	Pass









Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

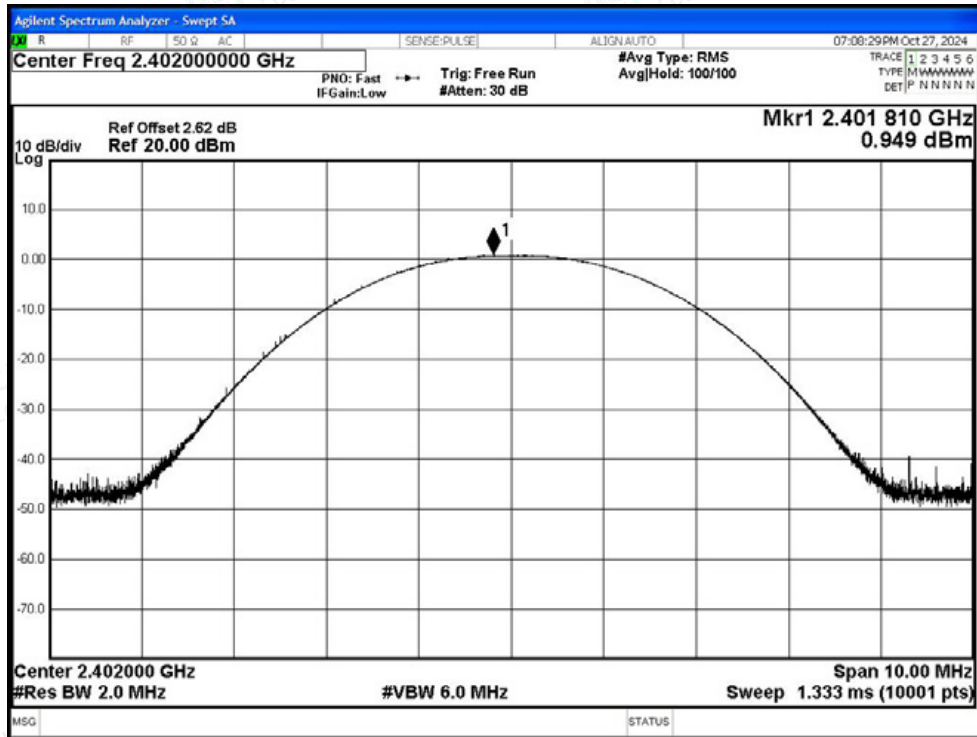


Power NVNT 1-DH5 2441MHz Ant1

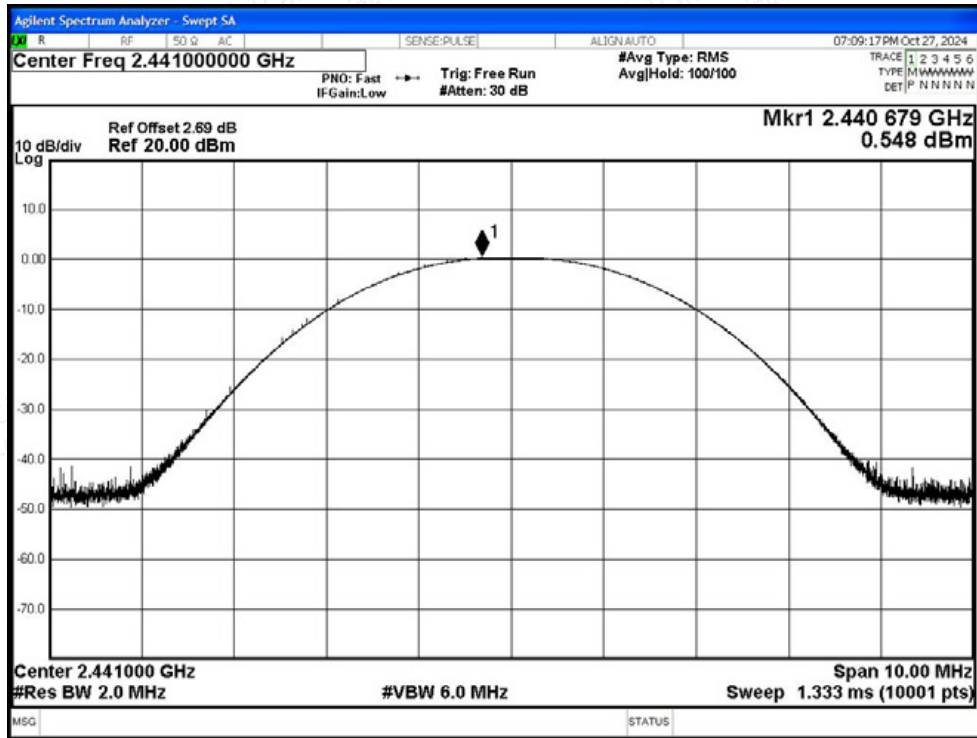




Power NVNT 1-DH5 2480MHz Ant1

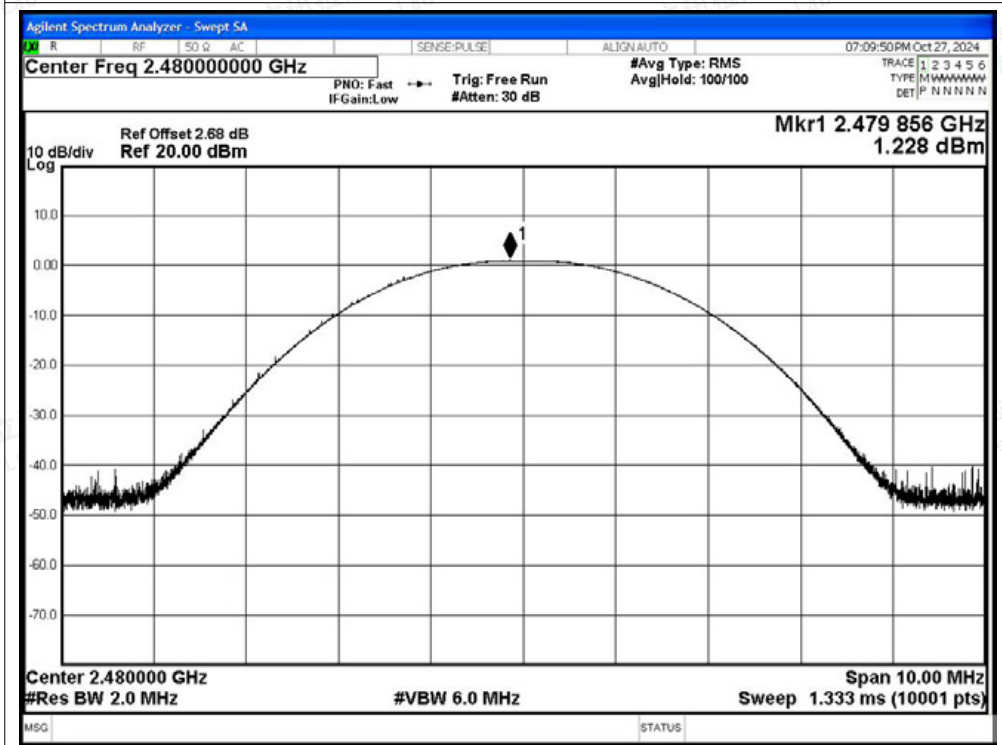


Power NVNT 2-DH5 2402MHz Ant1

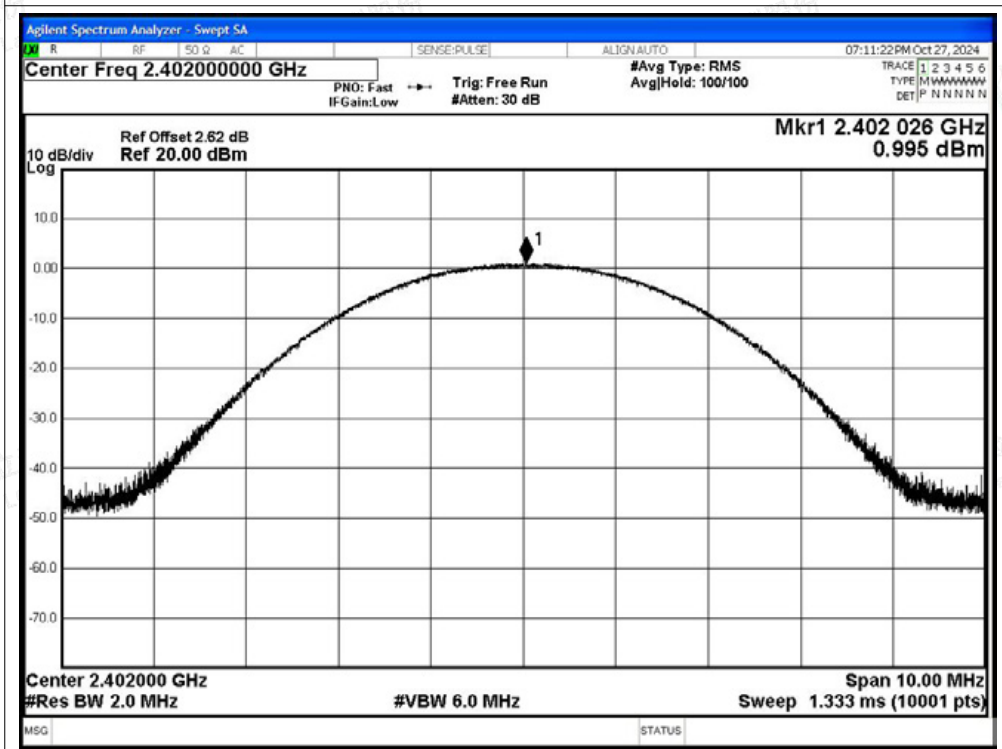




Power NVNT 2-DH5 2441MHz Ant1

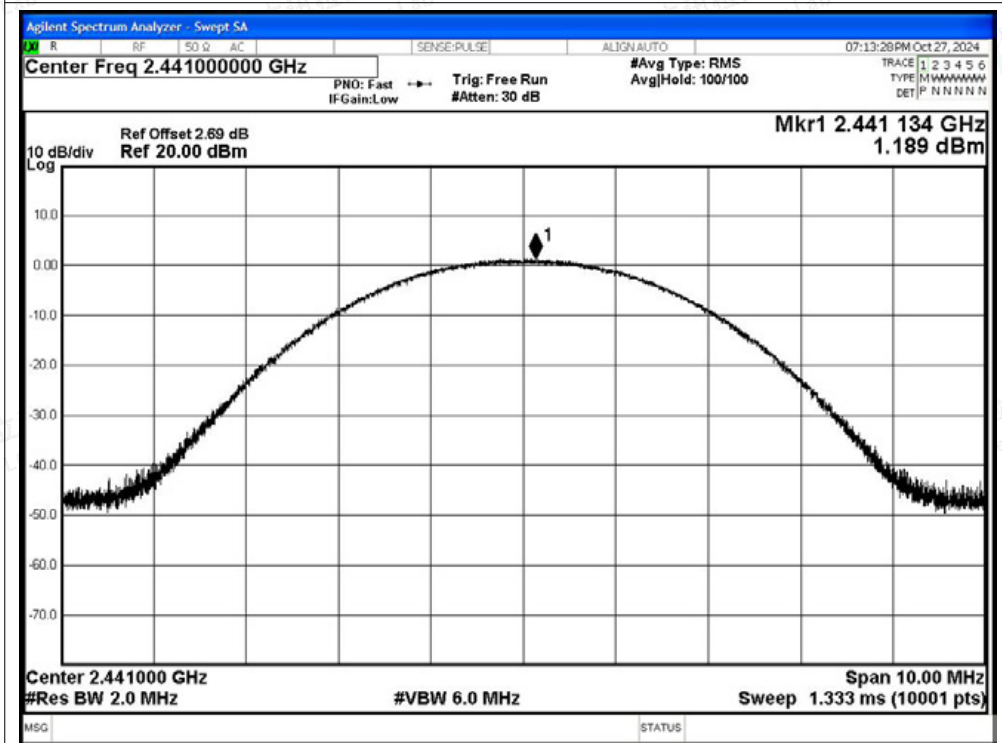


Power NVNT 2-DH5 2480MHz Ant1

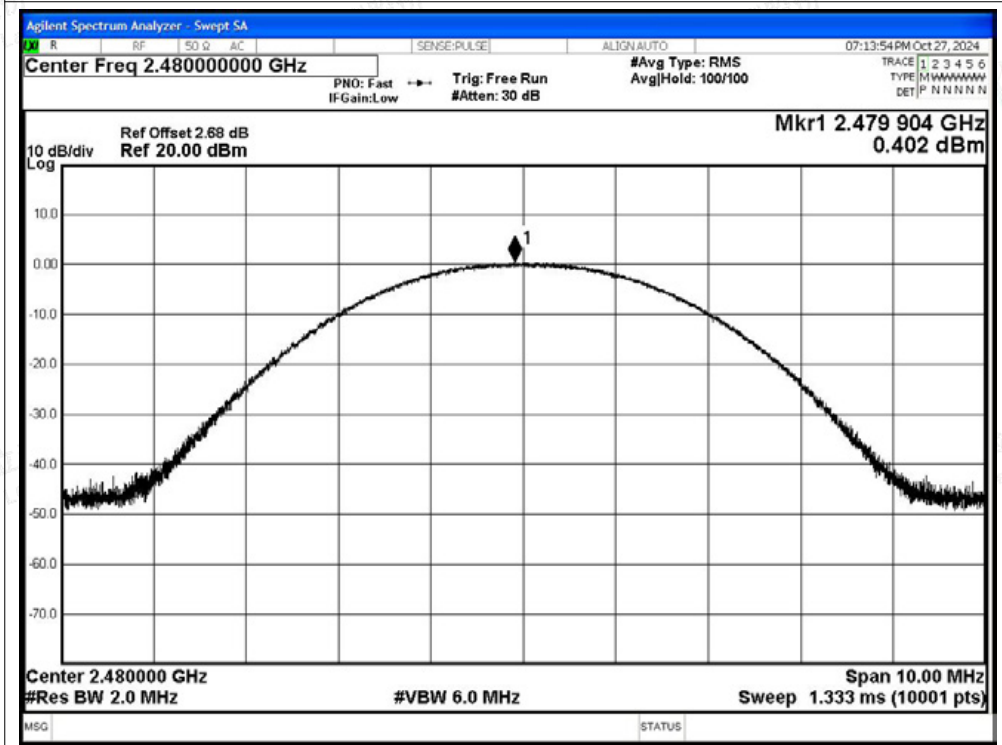





Power NVNT 3-DH5 2402MHz Ant1

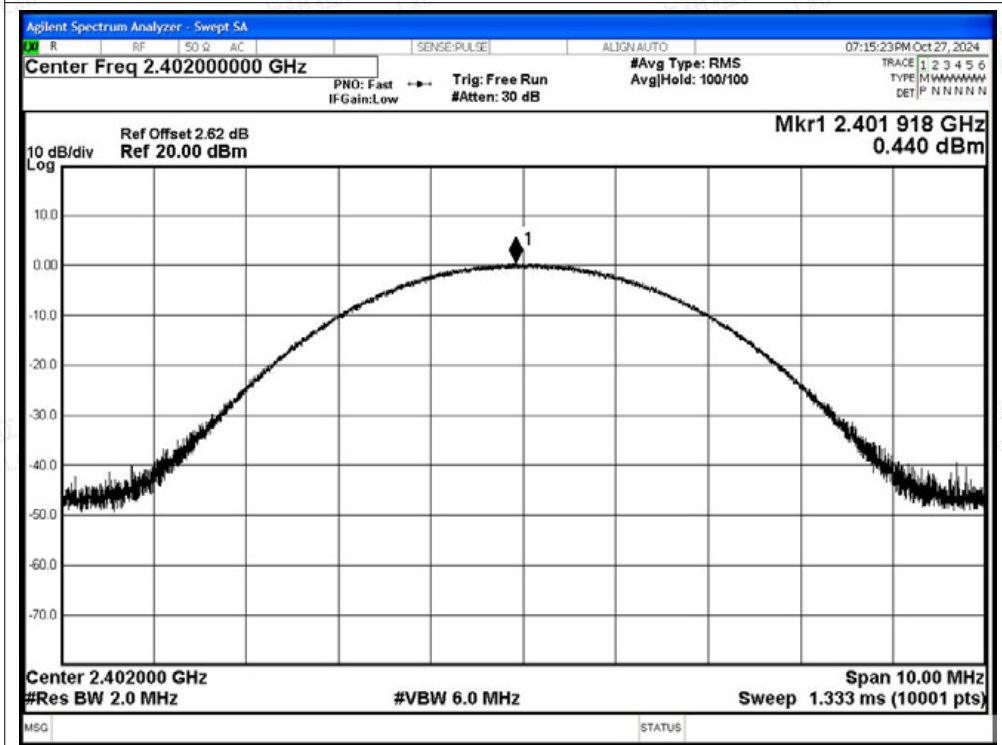

Power NVNT 3-DH5 2441MHz Ant1

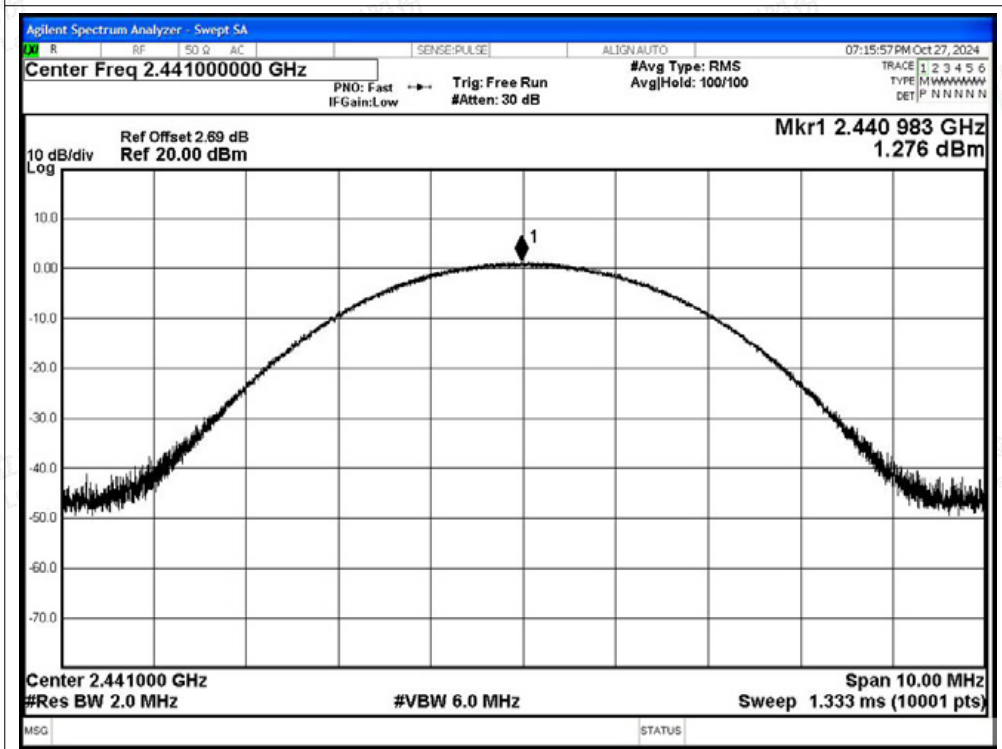

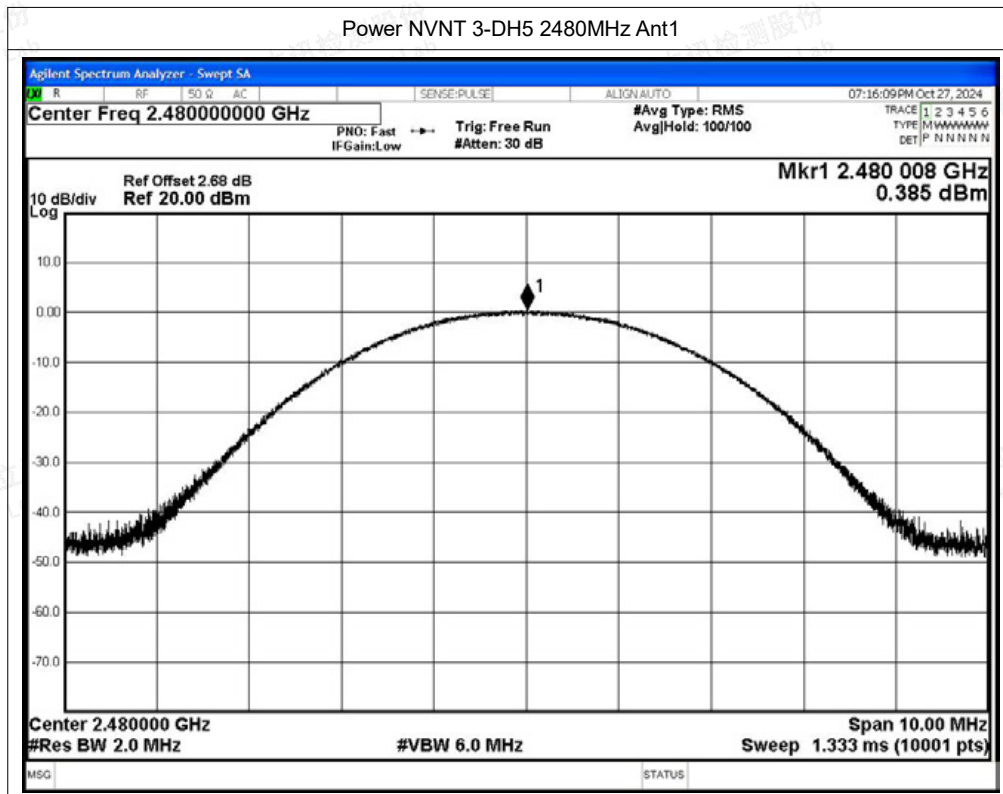



### A.3 Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.996	2402.99	0.994	0.638	Pass
NVNT	2-DH5	Ant1	2401.824	2402.974	1.15	0.881	Pass
NVNT	3-DH5	Ant1	2401.976	2403.162	1.186	0.873	Pass






Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

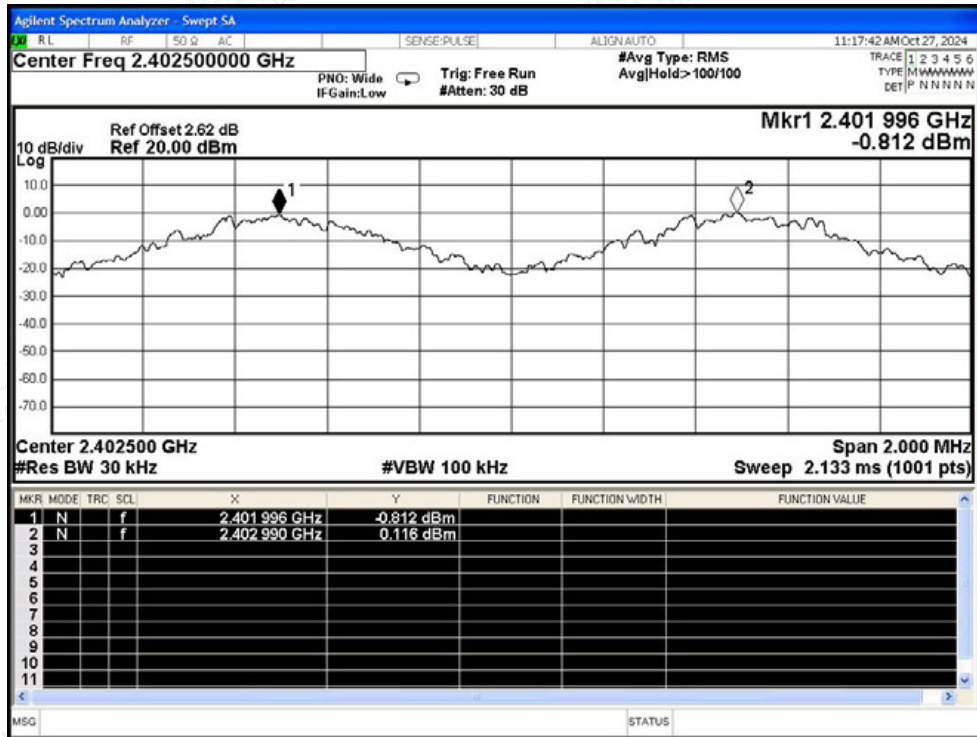


CFS NVNT 2-DH5 2402MHz Ant1

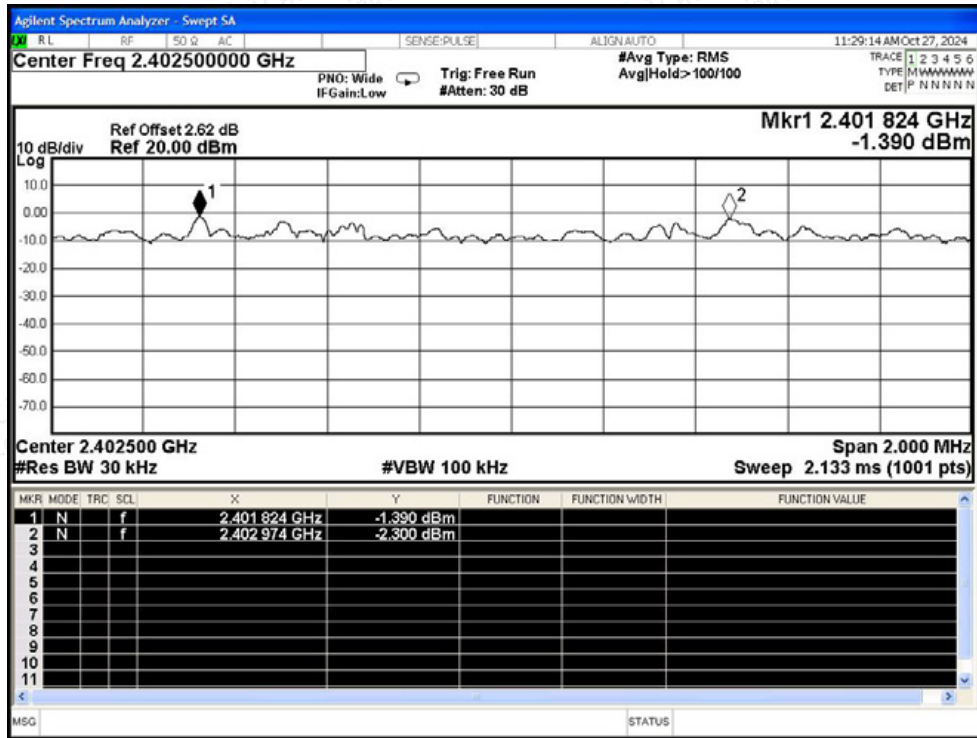



CFS NVNT 3-DH5 2402MHz Ant1

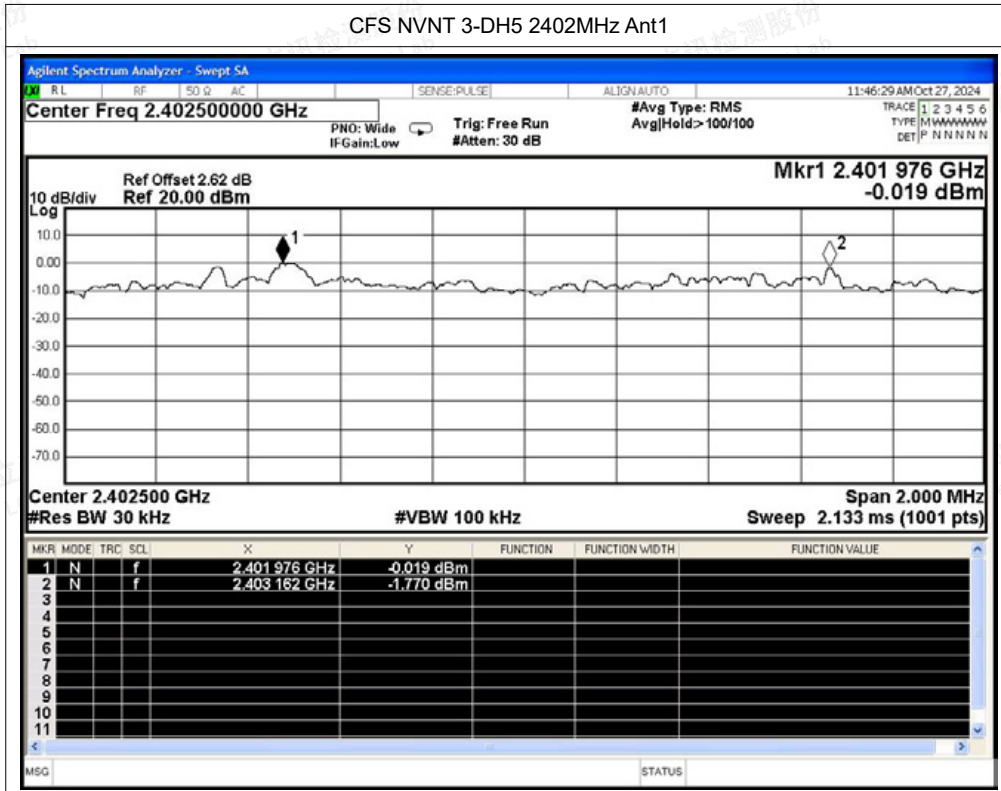





### A.4 Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.887	280.039	97	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.892	271.848	94	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.894	298.082	103	31600	400	Pass






Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

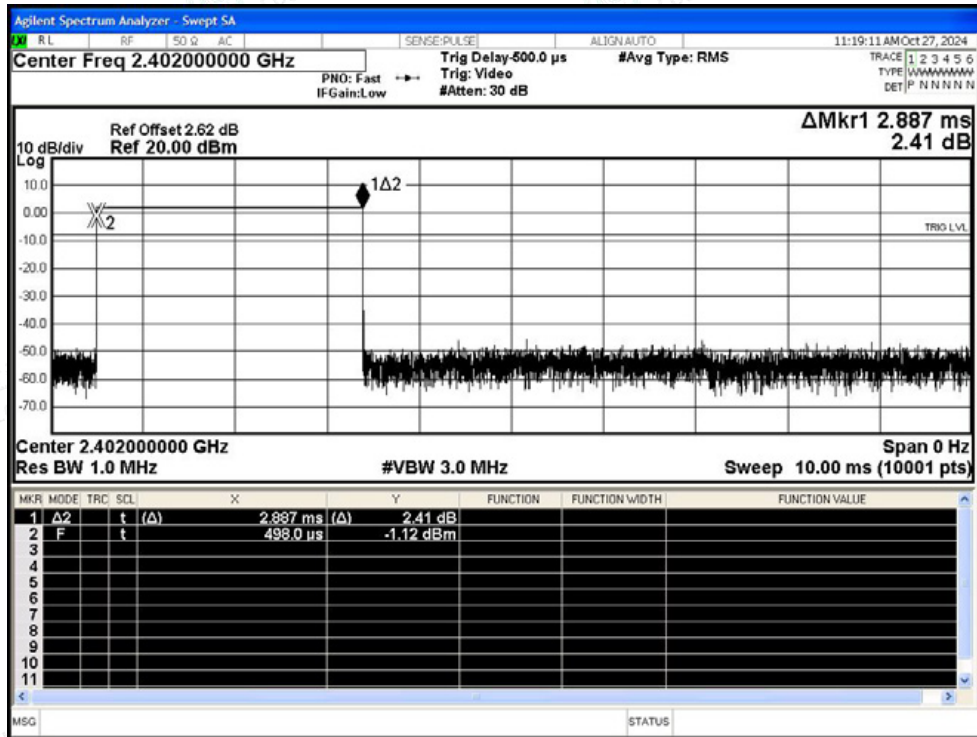


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

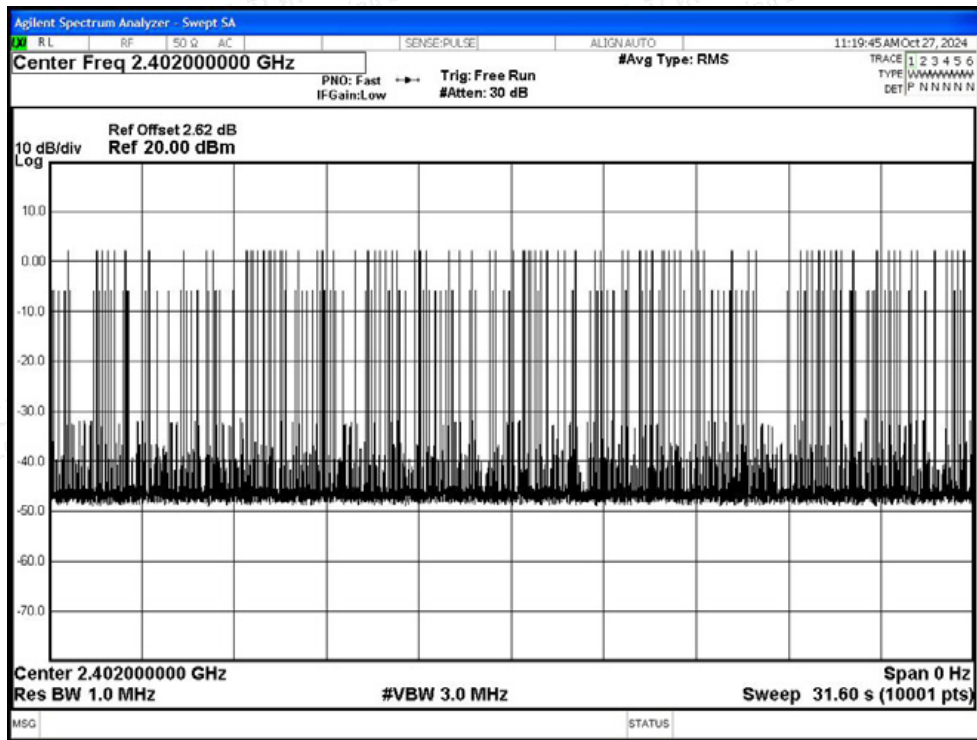




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

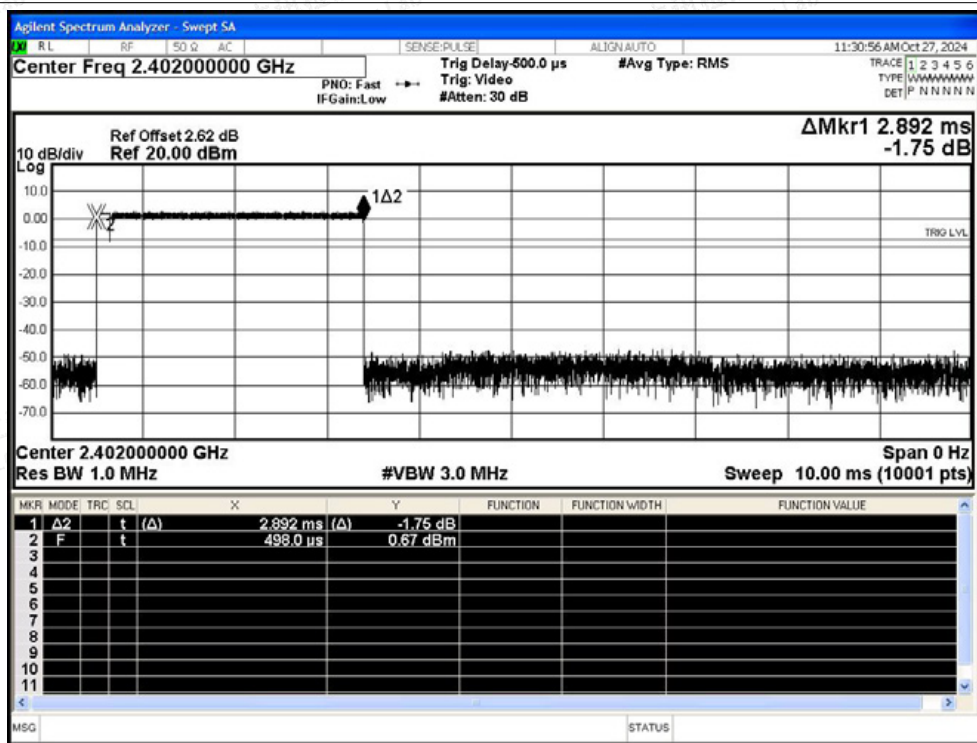


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

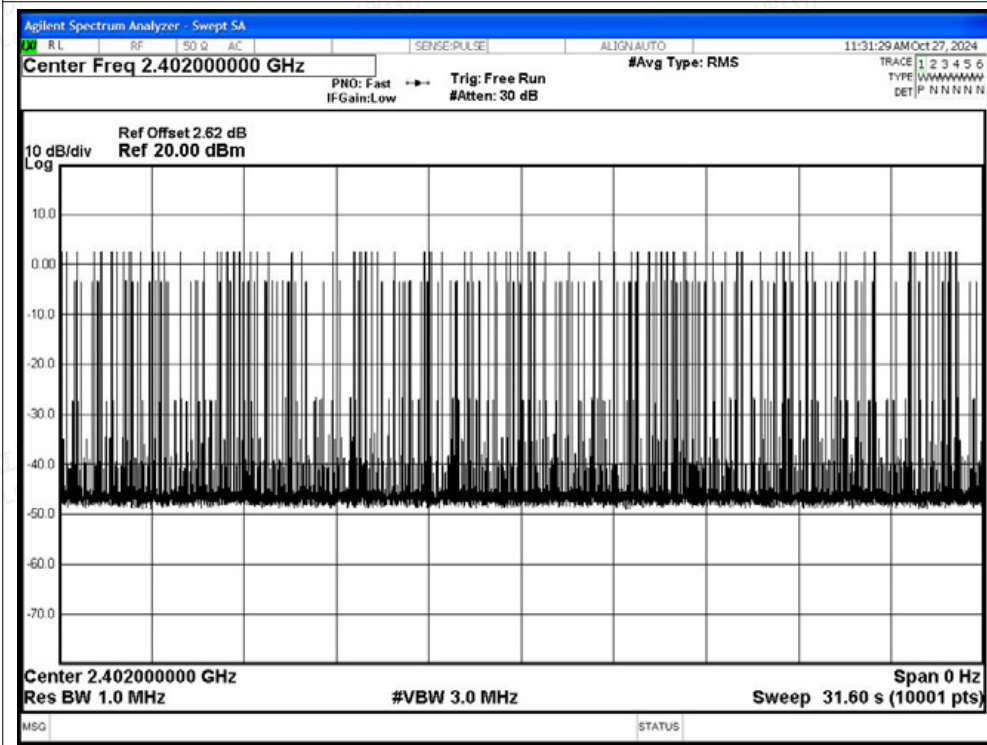




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

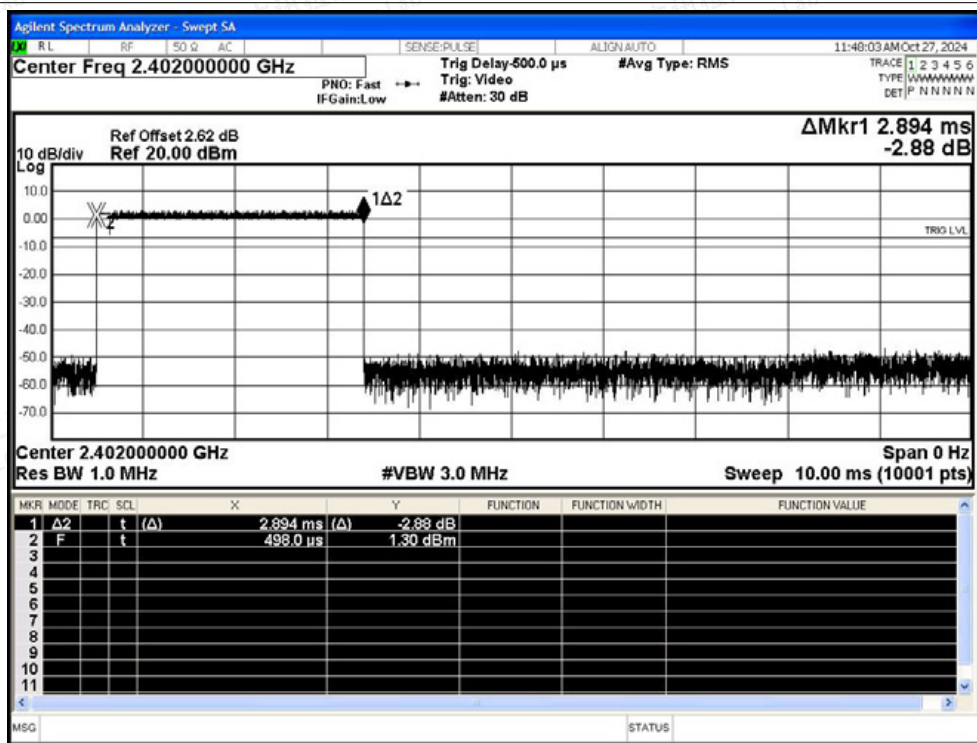

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

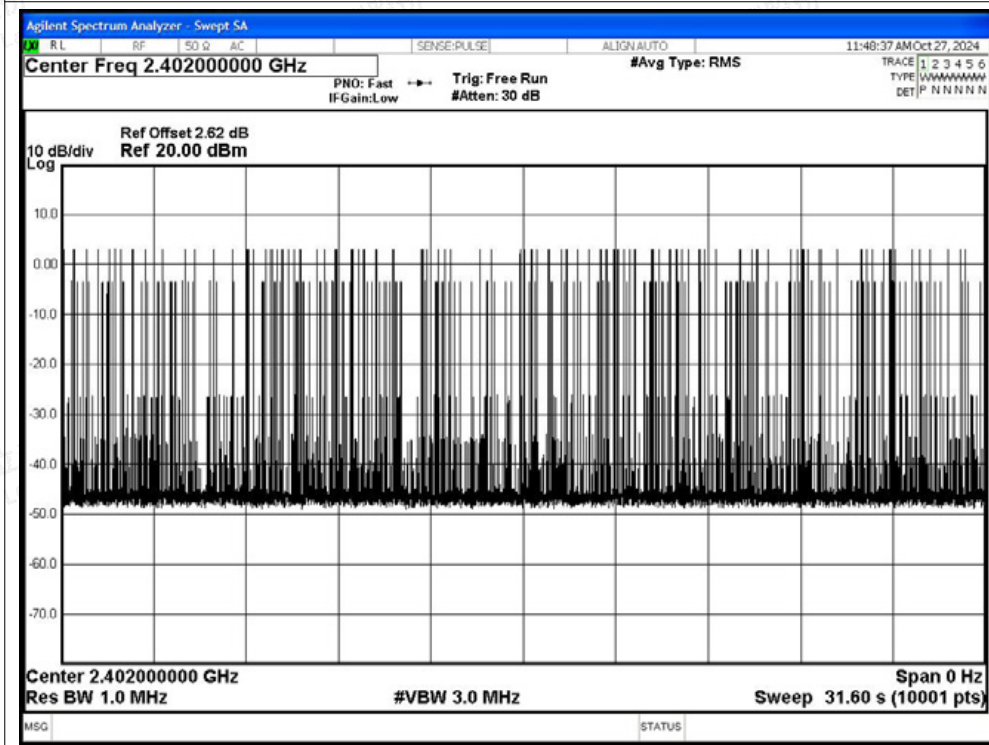



## A.5 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

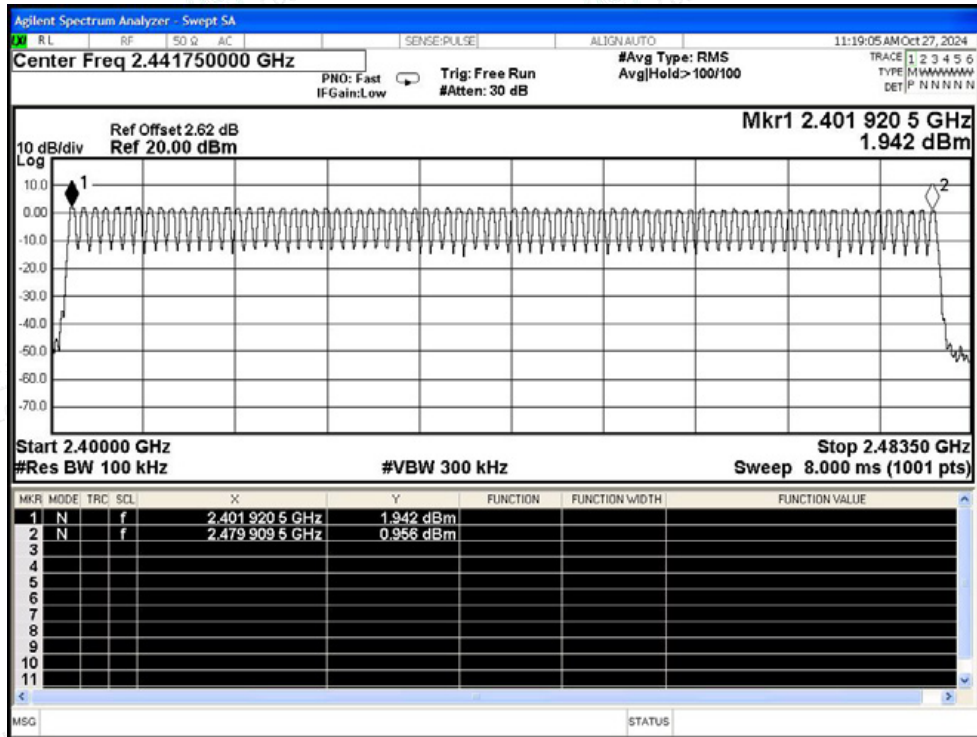


Hopping No. NVNT 2-DH5 2402MHz Ant1

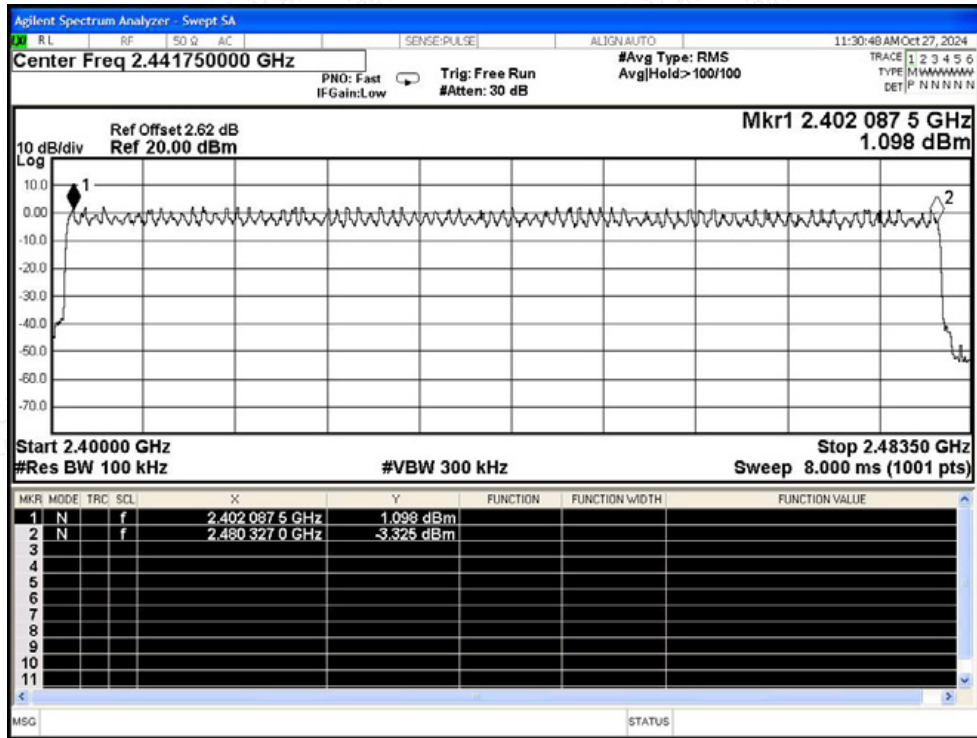



Hopping No. NVNT 3-DH5 2402MHz Ant1

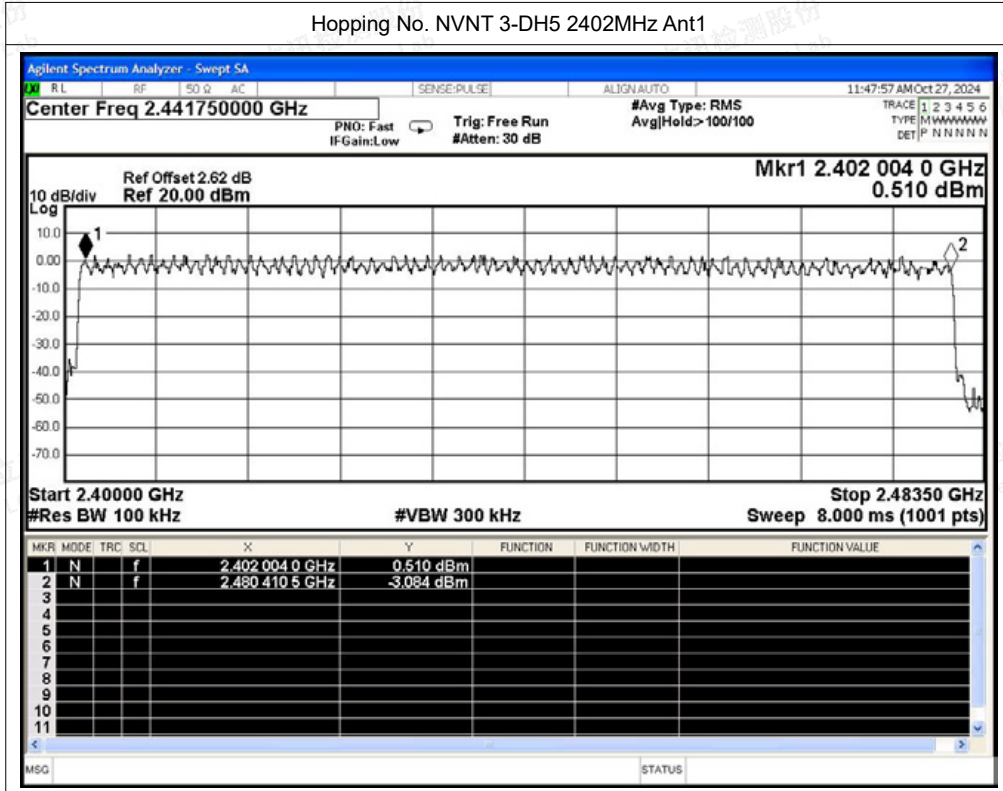



## A.6 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-44.37	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-50.08	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-43.03	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-50.97	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-43.23	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-51.98	-20	Pass









Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

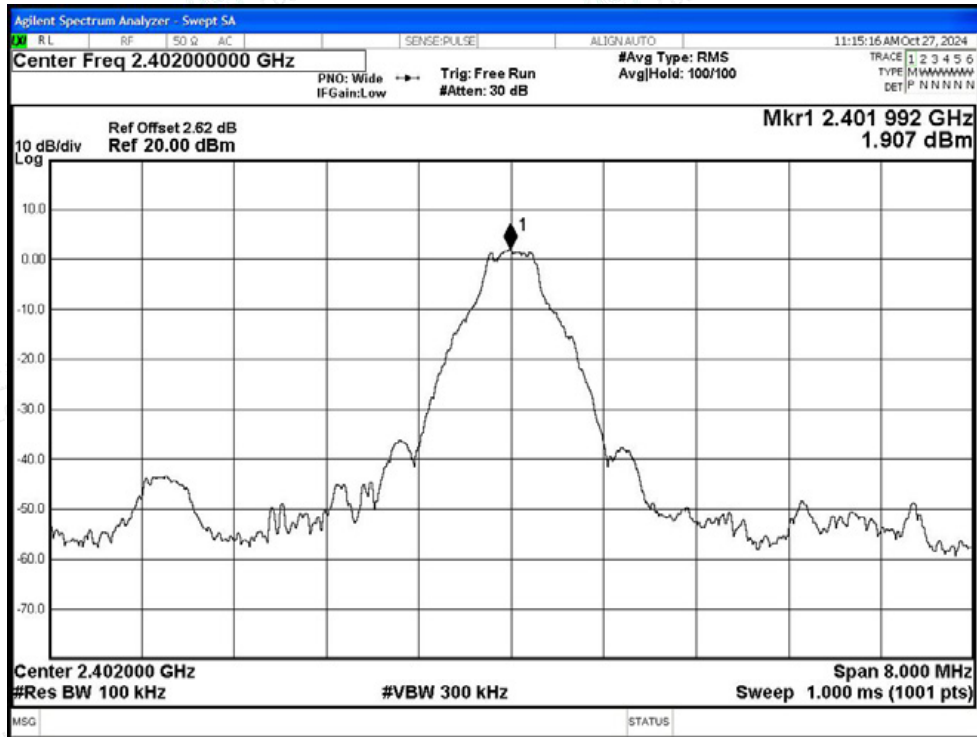


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

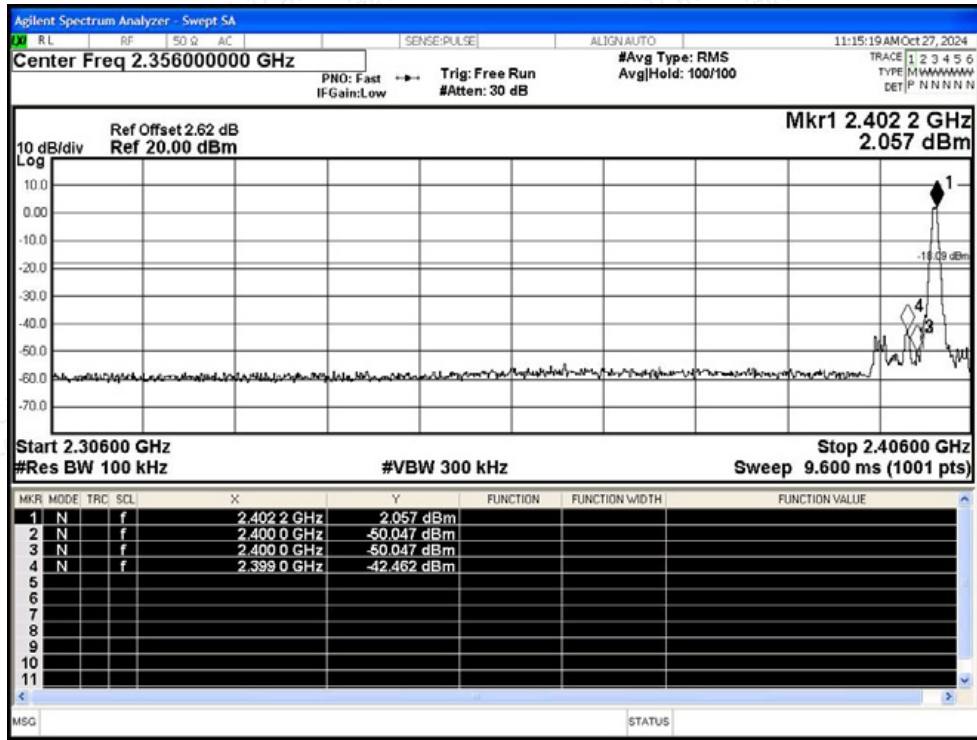




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

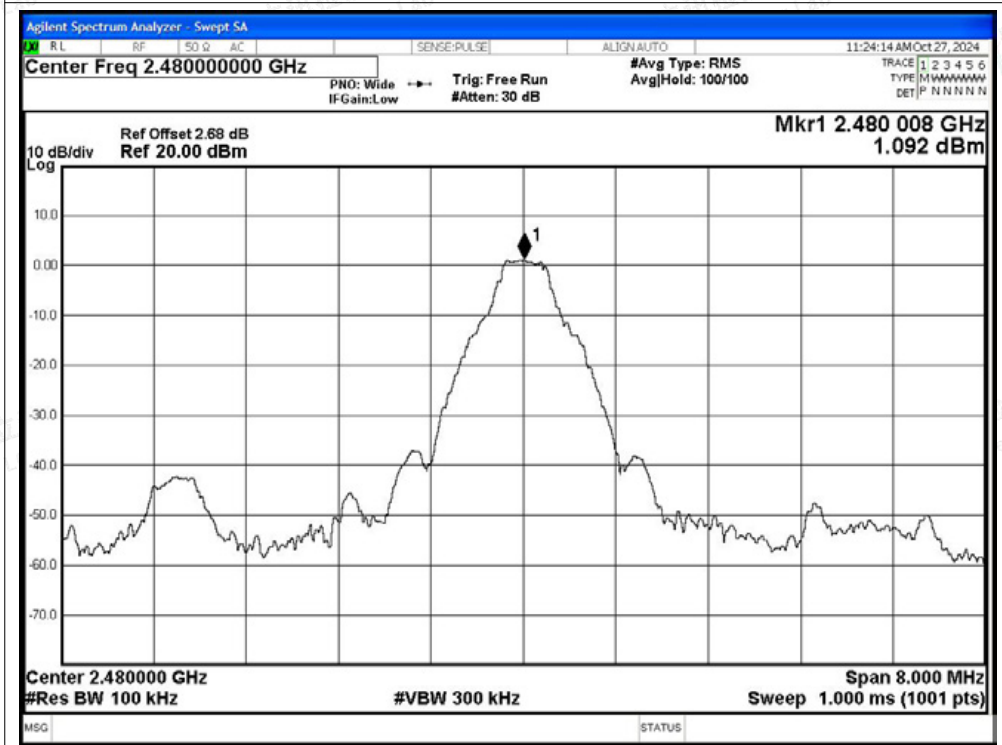


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

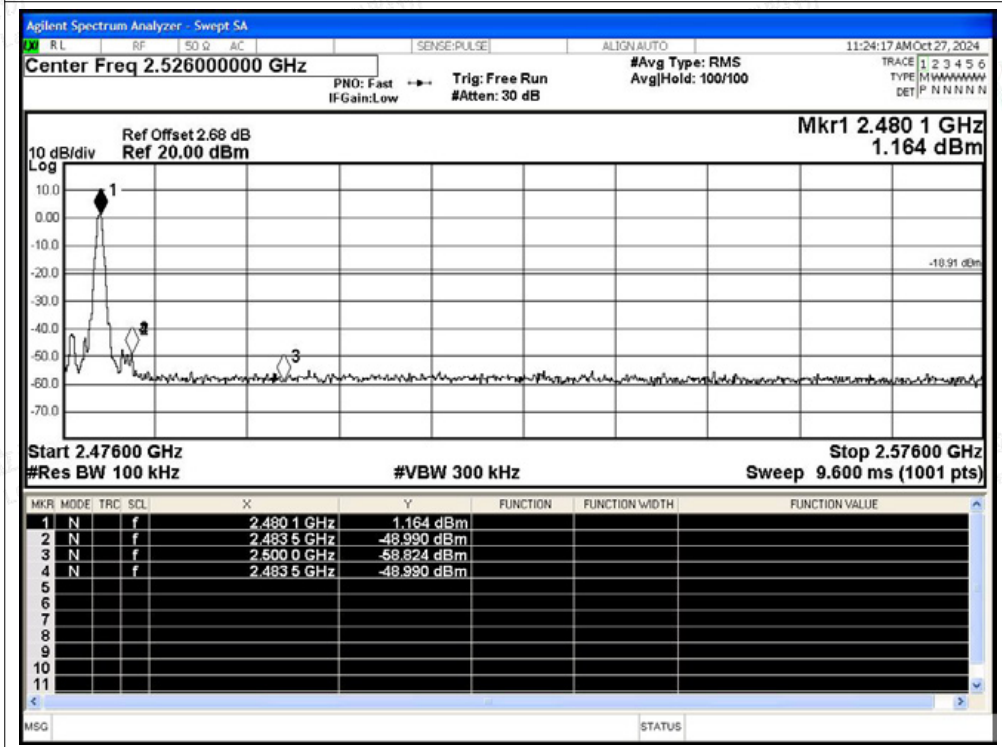




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

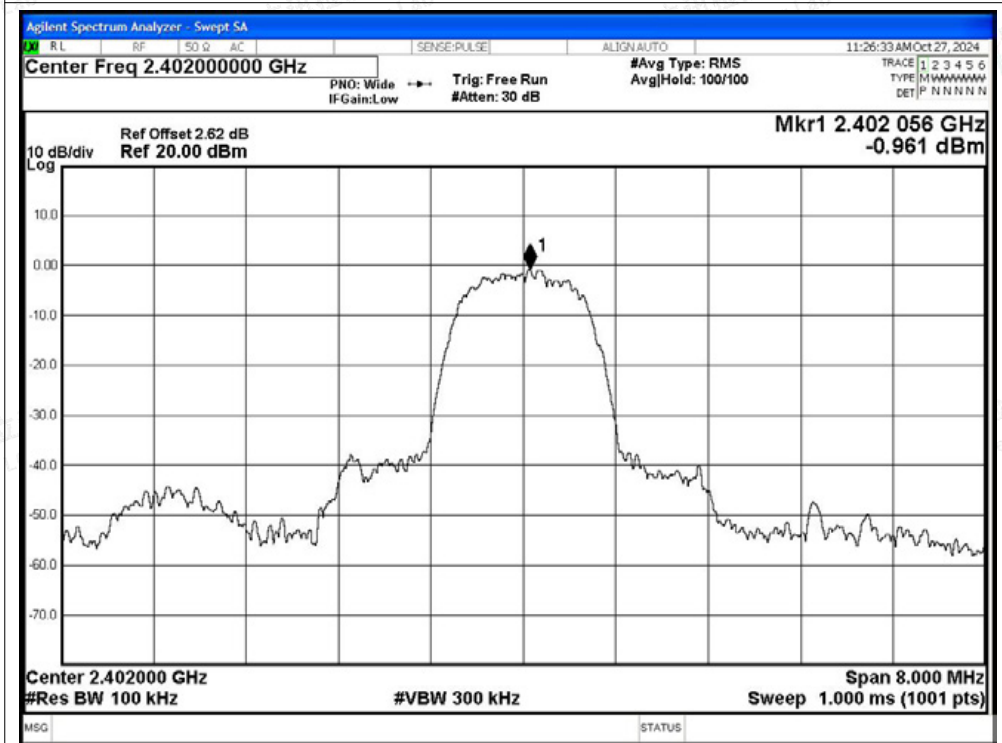


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

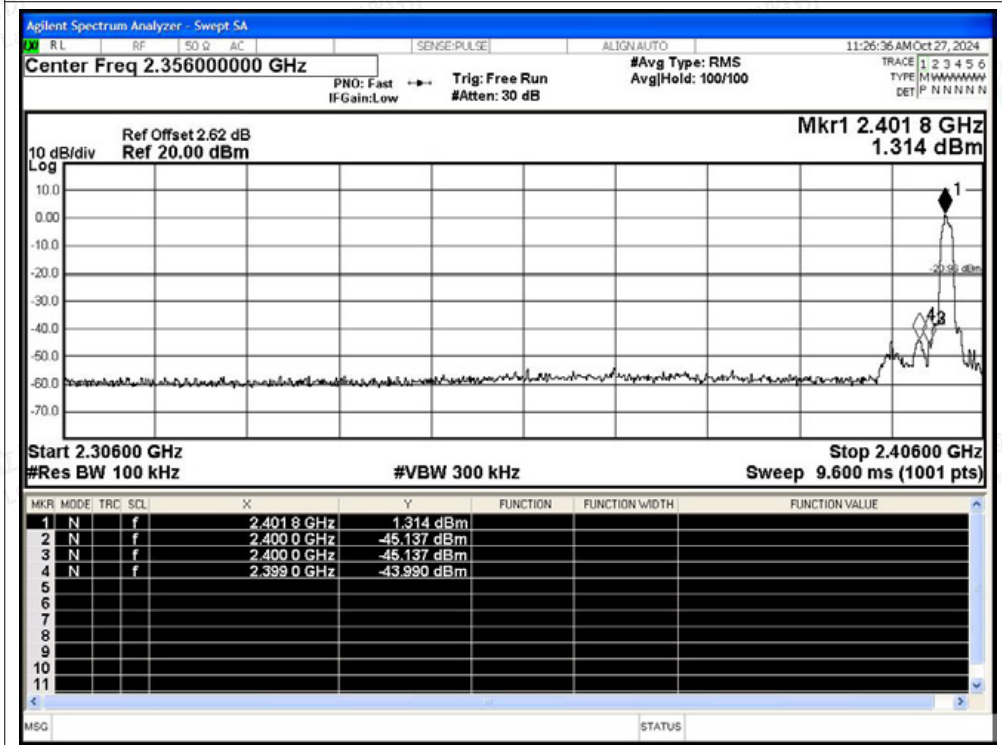




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

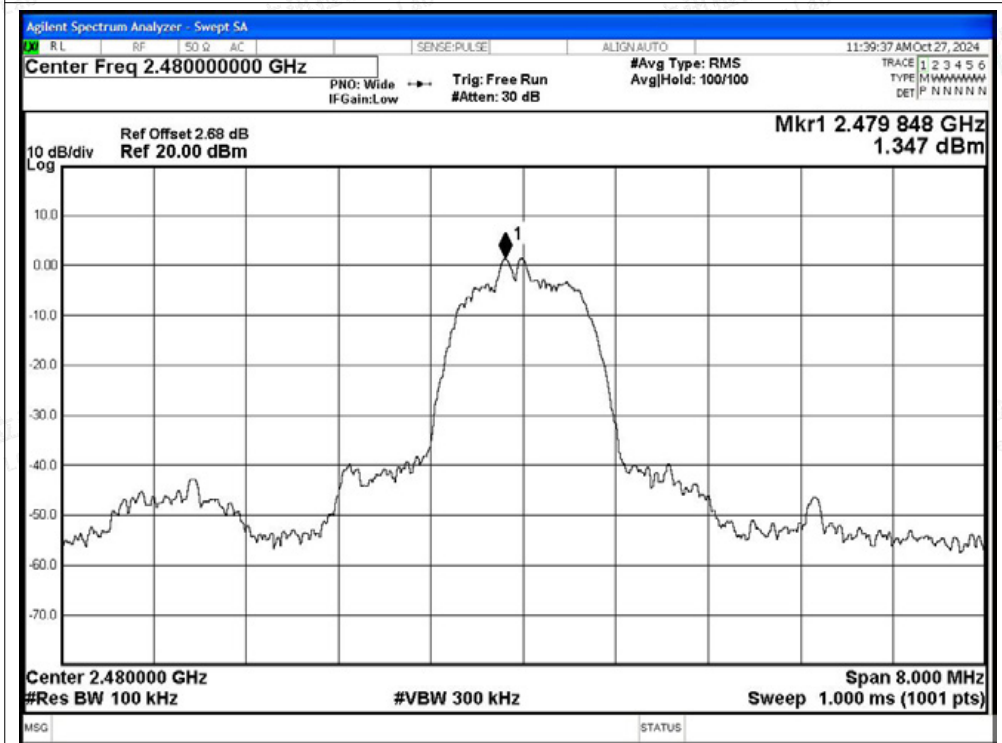


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

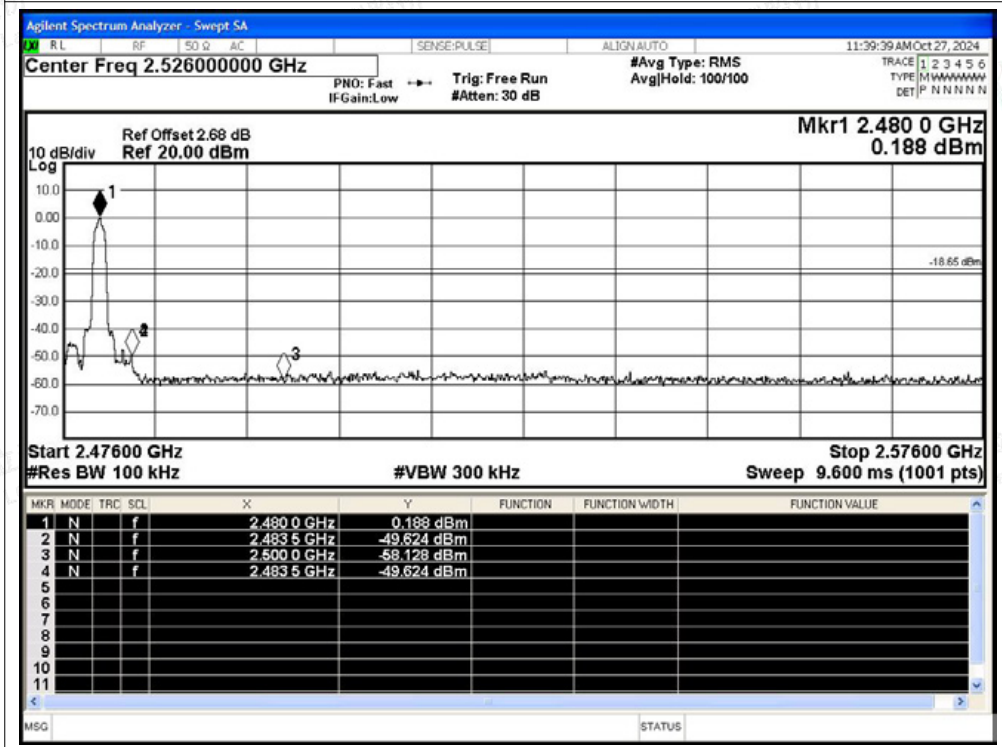




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

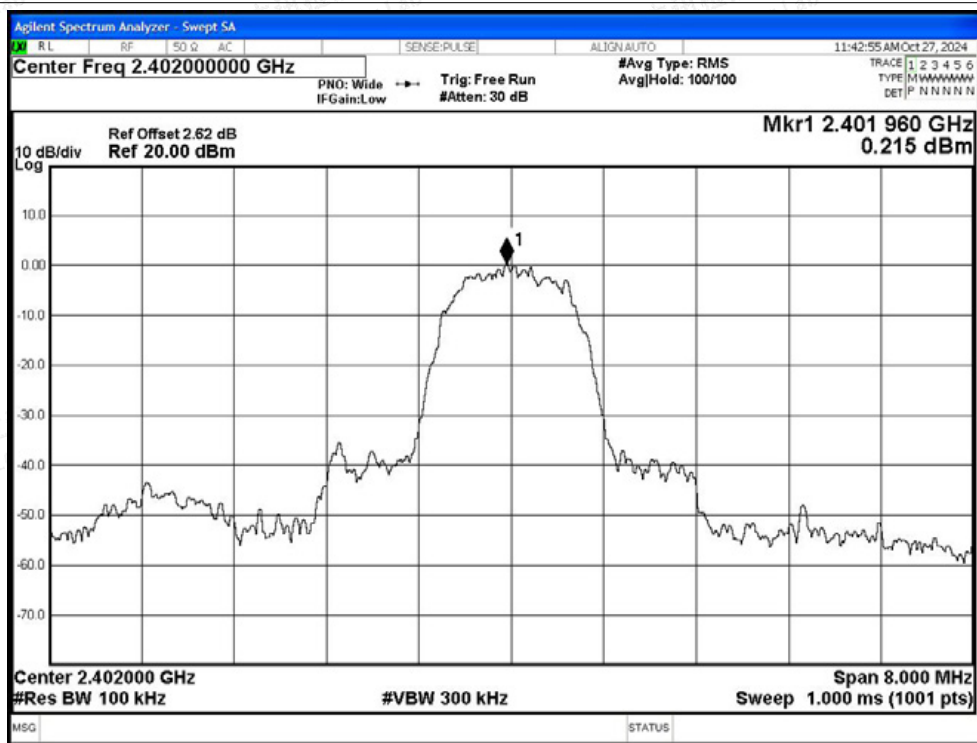


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

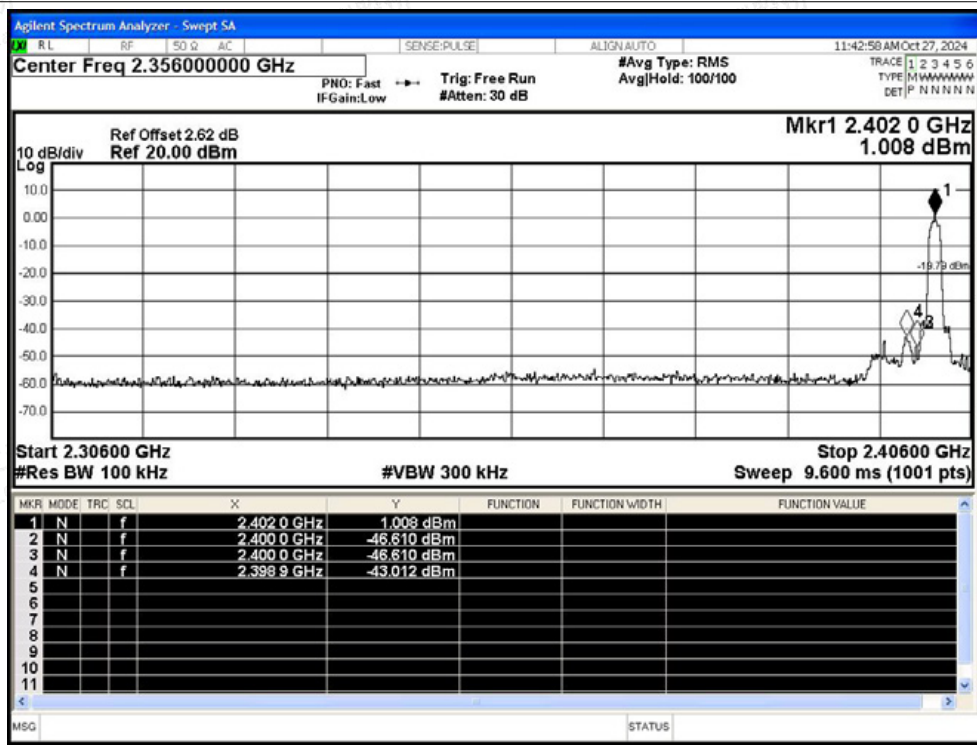




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

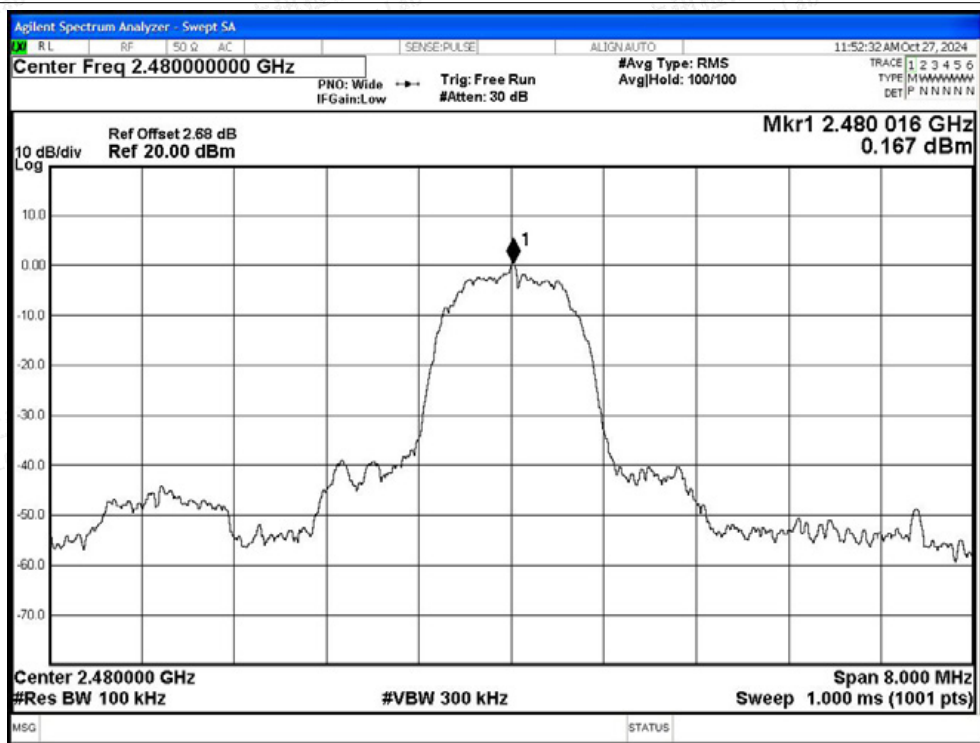

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

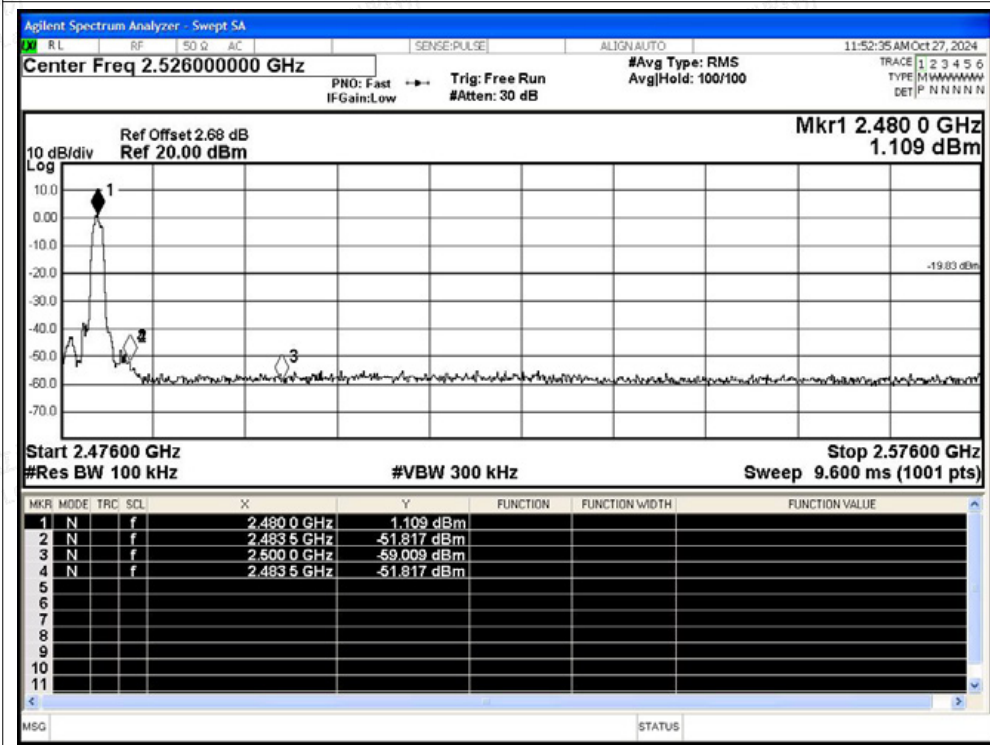



### (Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-55.37	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-50.33	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-56.05	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-54.87	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-55.38	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-53.37	-20	Pass






Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

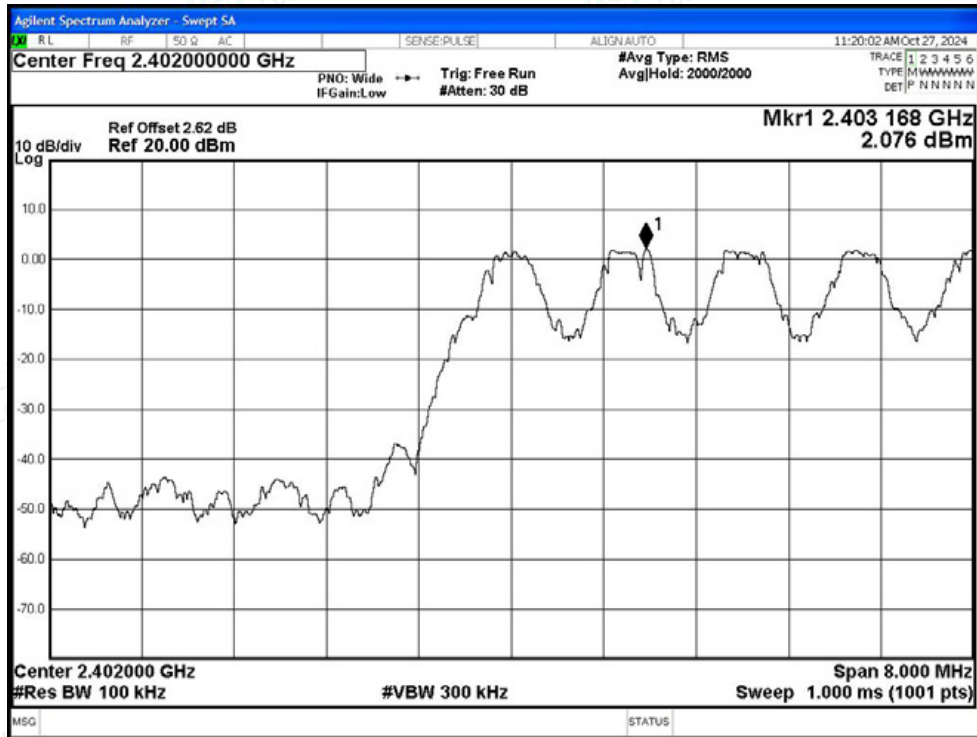


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

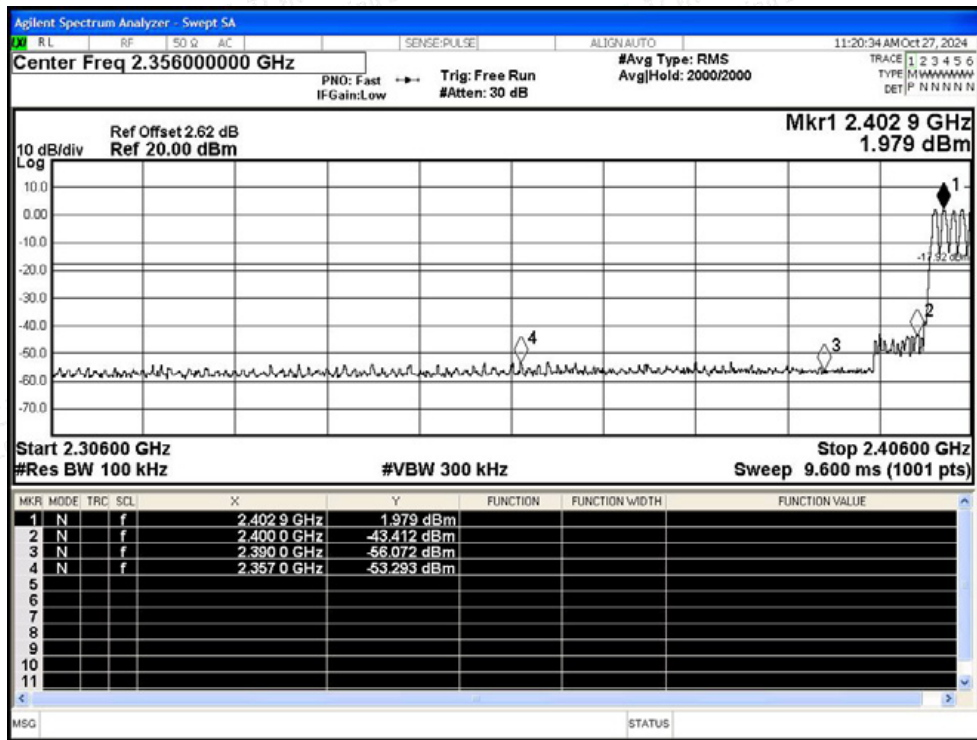






Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

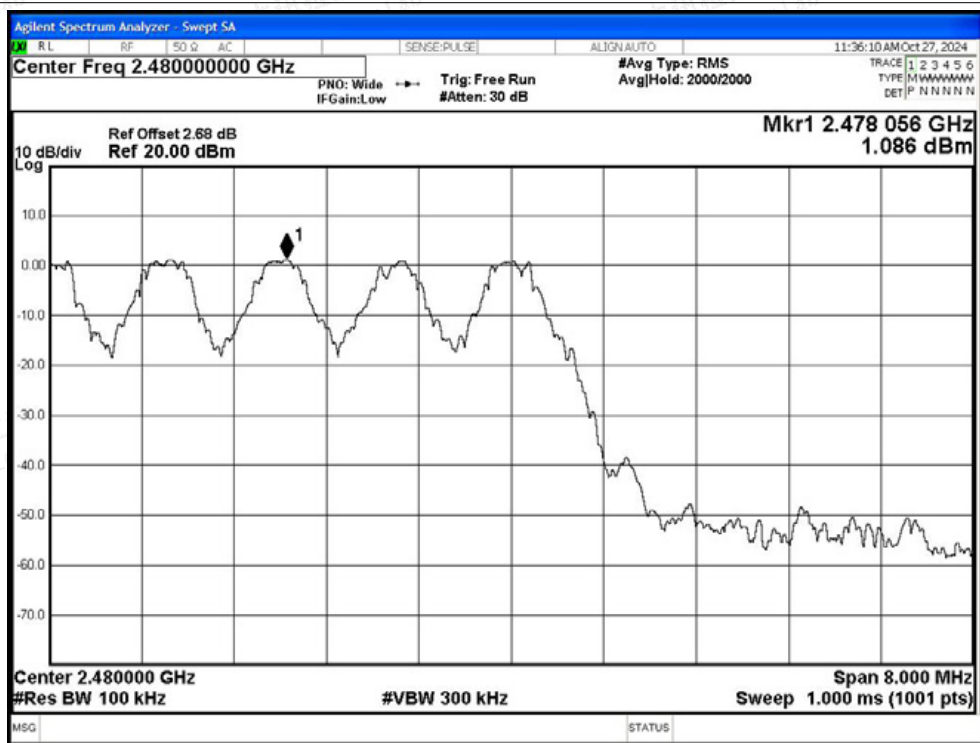


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

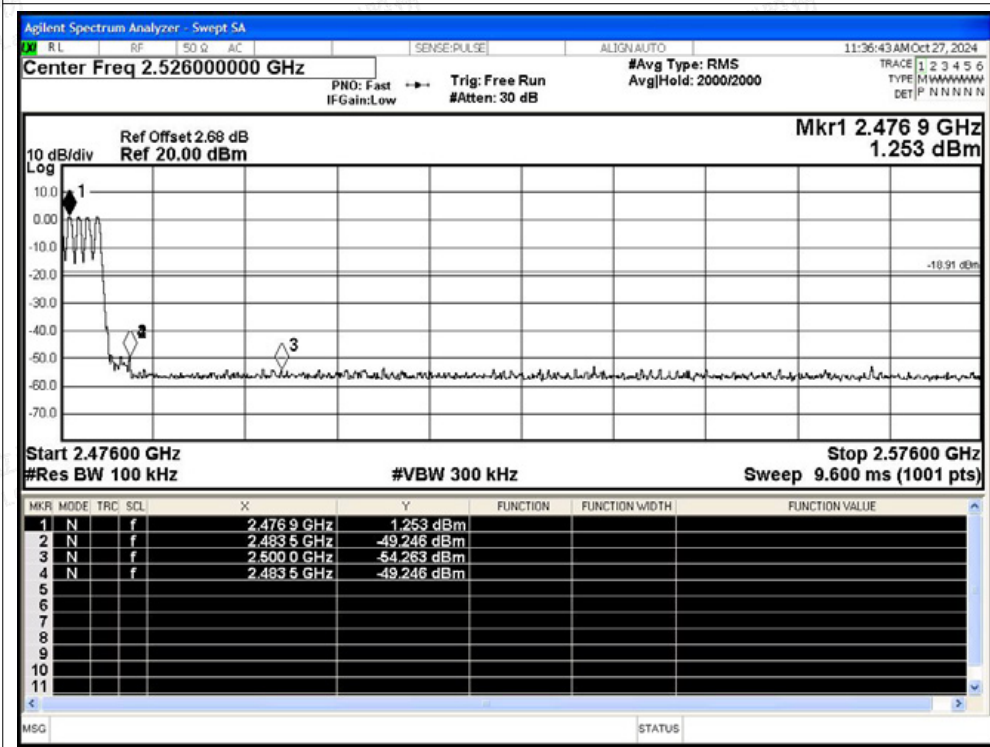




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

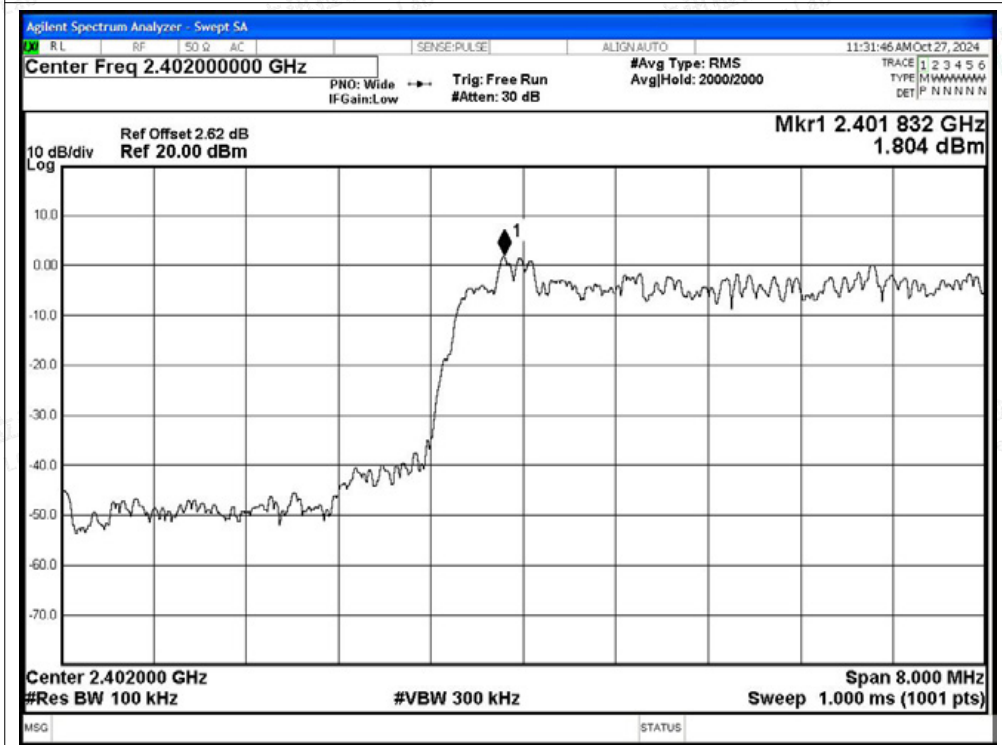

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

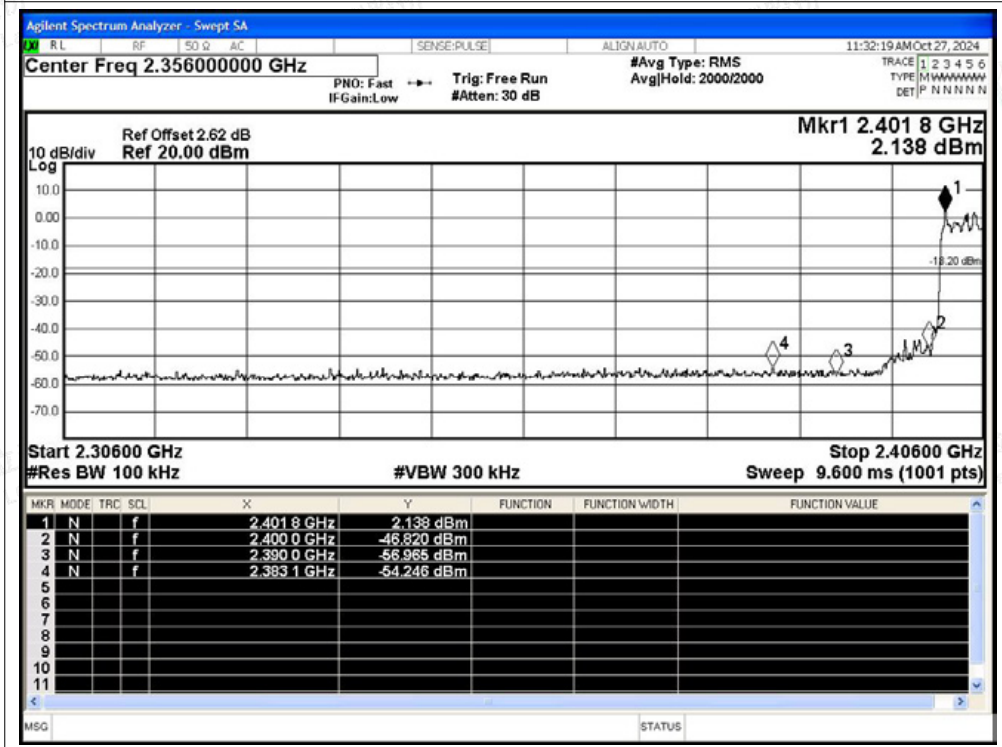



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

