



2437 MHz

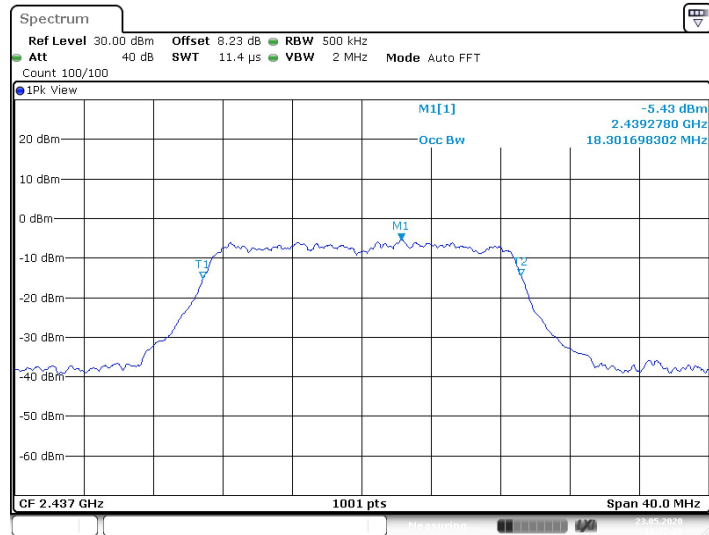

Date: 23.MAY.2020 10:37:20


2462 MHz

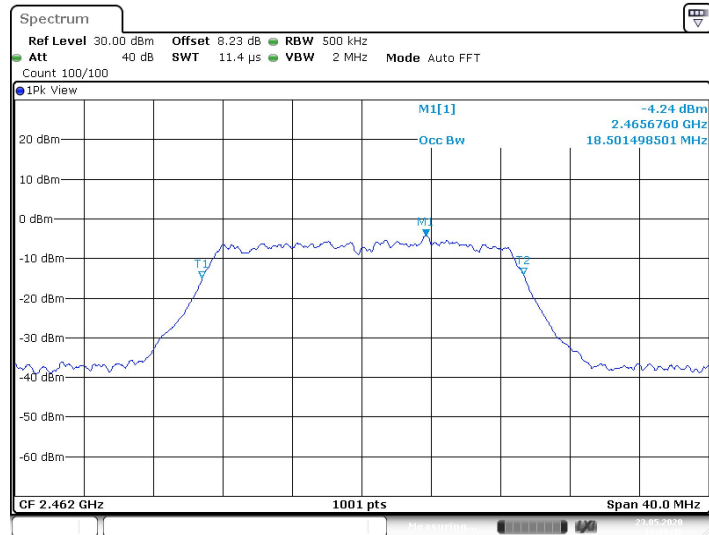

Date: 23.MAY.2020 10:38:49


Test Mode:	802.11n(HT40) Mode	
Channel frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	36.044	>=0.5
2437	35.964	
2452	35.964	

2422 MHz

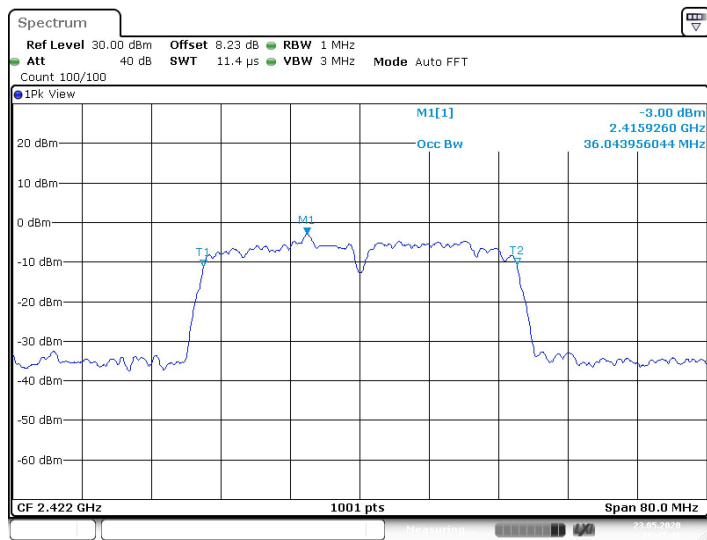


Date: 23.MAY.2020 10:41:46

2437 MHz

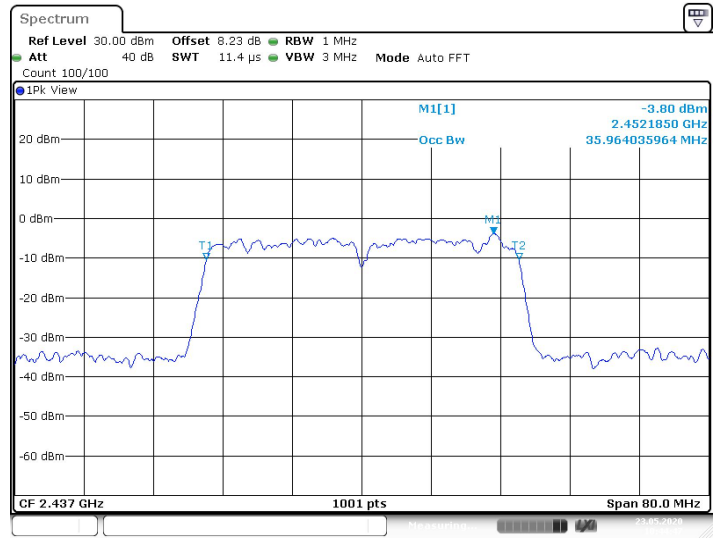

2452 MHz

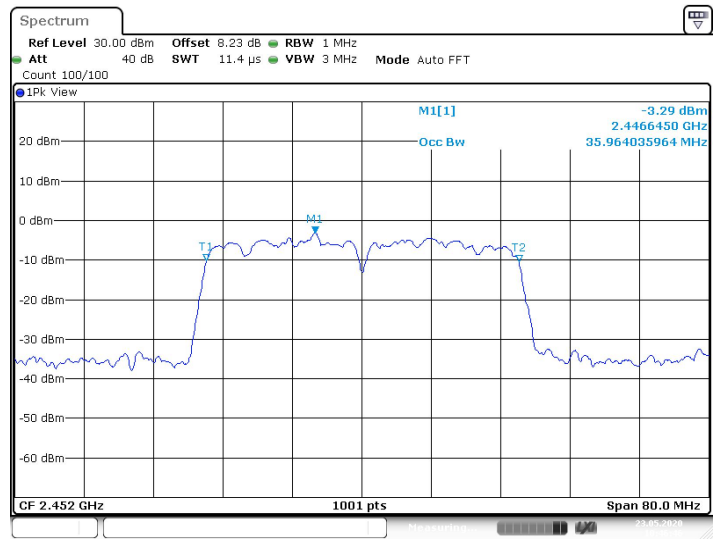


3.4. Peak Output Power

Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

Test Configuration

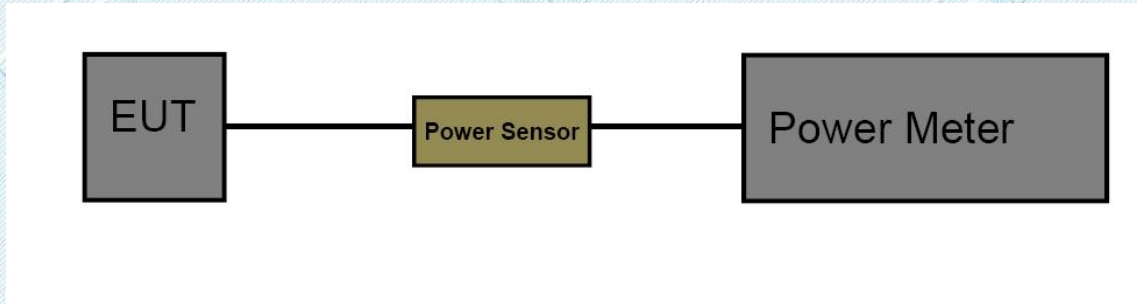

Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- The measurement is according to section 9.1.2 of KDB 558074 D01 15.247 DTS Meas Guidance v05.
- Spectrum Setting:
 Set analyser center frequency to DTS channel center frequency.
 Set the RBW to: 1MHz
 Set the VBW to: 3MHz
 Detector: peak
 Sweep time: auto
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.
- The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

Test Mode

Please refer to the clause 2.3

Test Result


Mode	Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)
802.11b	2412	13.06	30
	2437	13.21	
	2462	13.20	
802.11g	2412	11.65	
	2437	11.87	
	2462	11.86	
802.11n (HT20)	2412	9.65	
	2437	9.80	
	2462	9.76	
802.11n (HT40)	2422	10.03	
	2437	10.13	
	2452	10.17	
Result : PASS			

3.5. Power Spectral Density

Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

Test Configuration

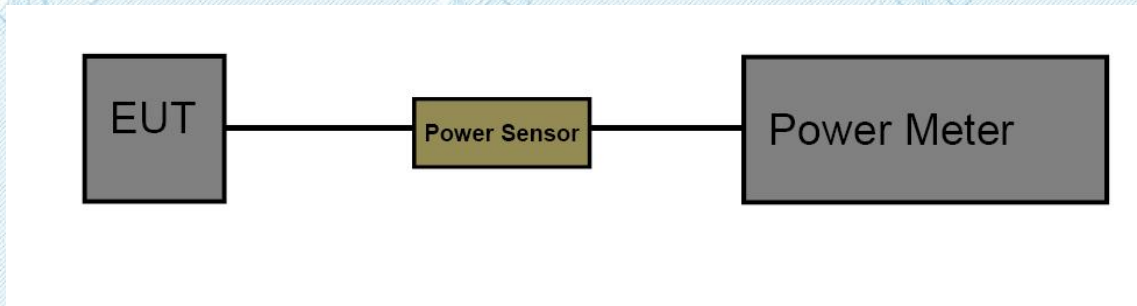

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 15.247 DTS Meas Guidance v05.
3. Spectrum Setting:
 Set analyser center frequency to DTS channel center frequency.
 Set the span to 1.5 times the DTS bandwidth.
 Set the RBW to: 10 kHz
 Set the VBW to: 30 kHz
 Detector: peak
 Sweep time: auto
 Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.


Test Mode

Please refer to the clause 2.3


Test Result

Note:


$$\text{Power Density(dBm/3kHz)} = \text{Power Density(dBm/10kHz)} - 10 \cdot \log(10/3)$$

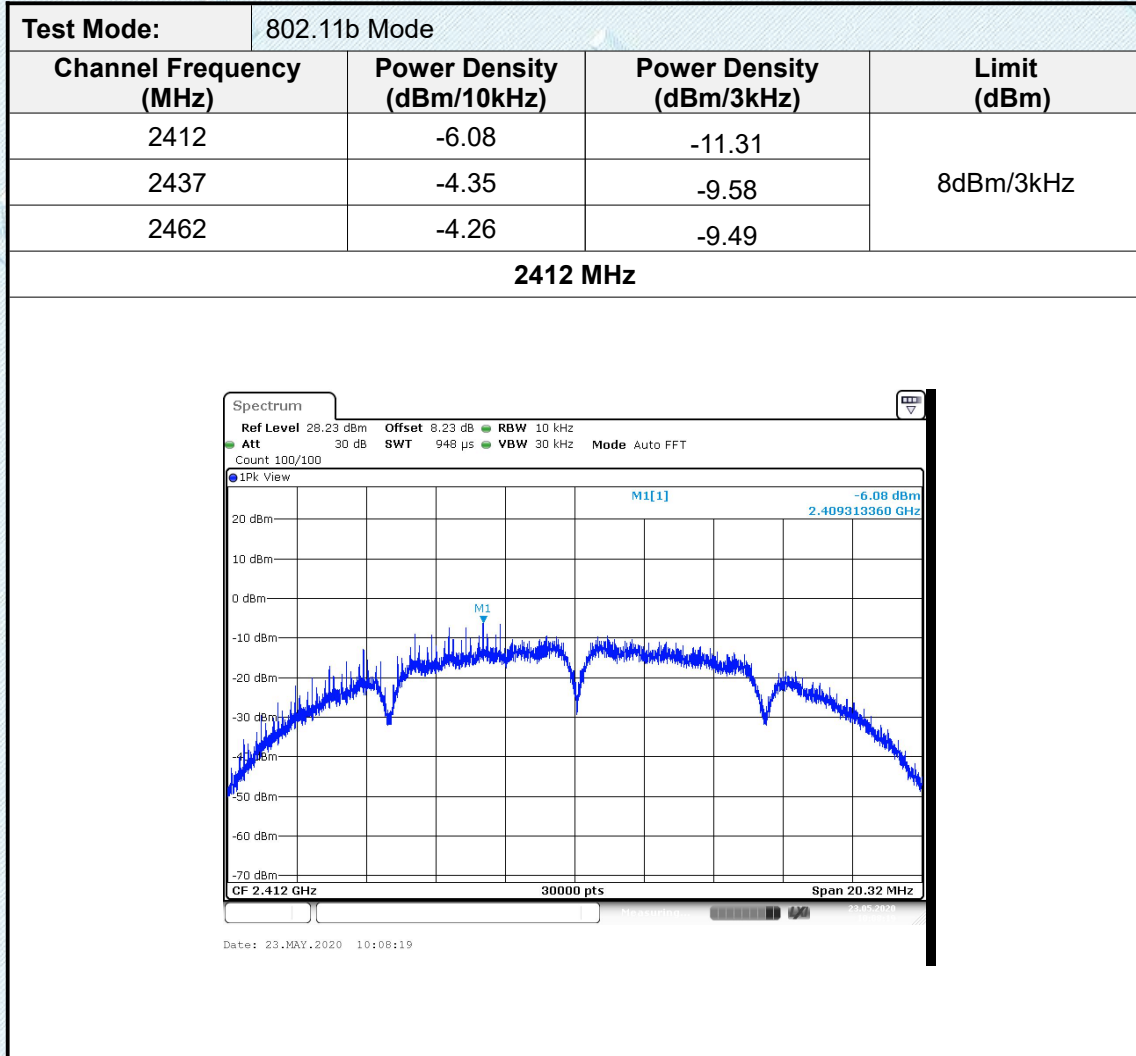

2437 MHz

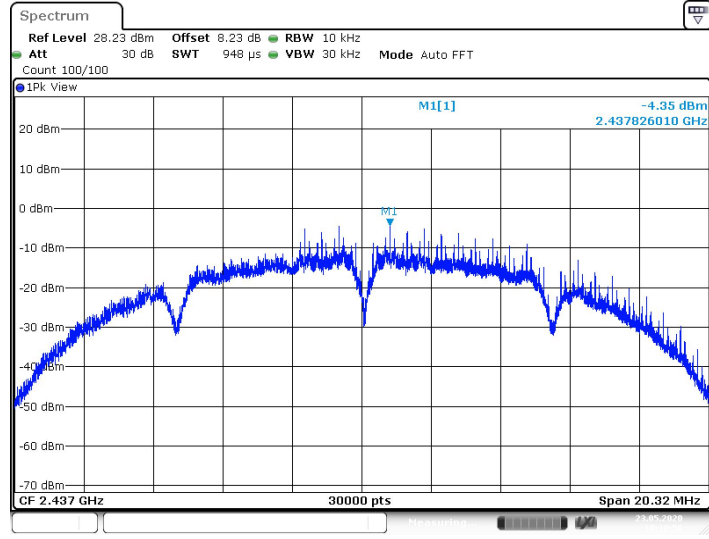


2462 MHz

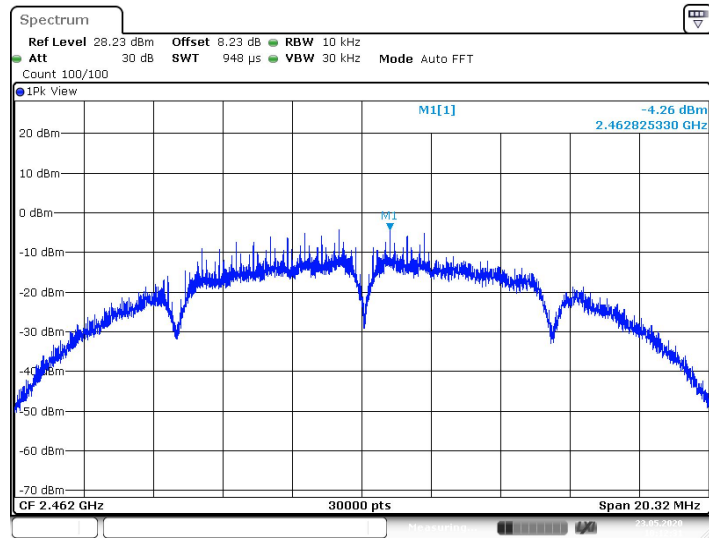


Test Mode:	802.11g Mode		
Channel Frequency (MHz)	Power Density (dBm/10 kHz)	Power Density (dBm/3 kHz)	Limit (dBm)
2412	-16.39	-21.62	8dBm/3kHz
2437	-18.35	-23.58	
2462	-18.12	-23.35	

2412 MHz

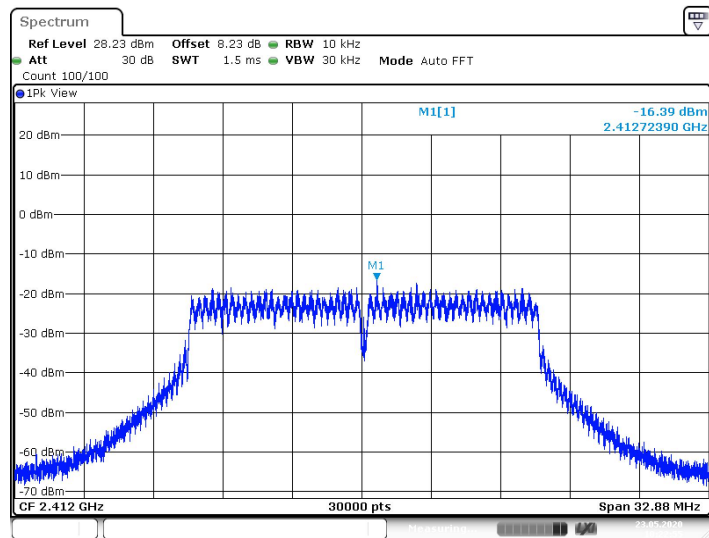


Date: 23.MAY.2020 10:22:55

2437 MHz

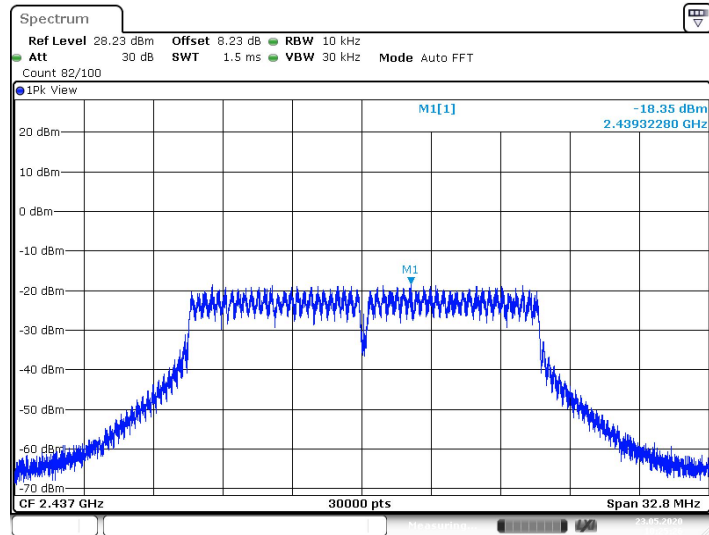


Date: 23.MAY.2020 10:25:26


2462 MHz

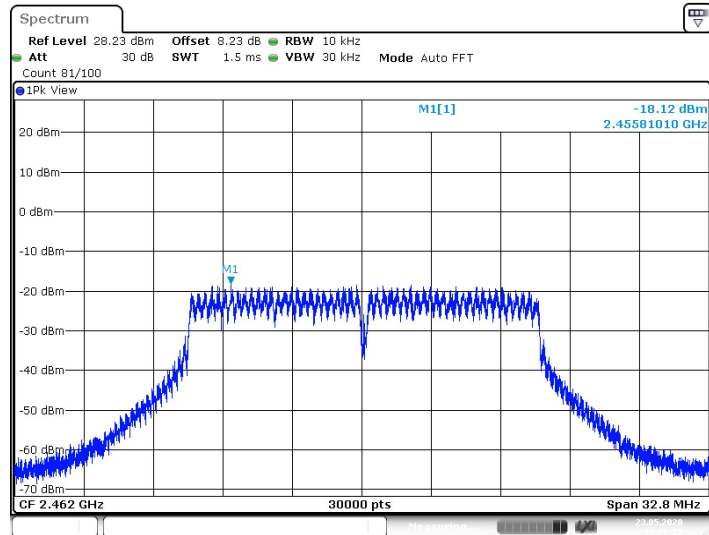

Date: 23.MAY.2020 10:26:51

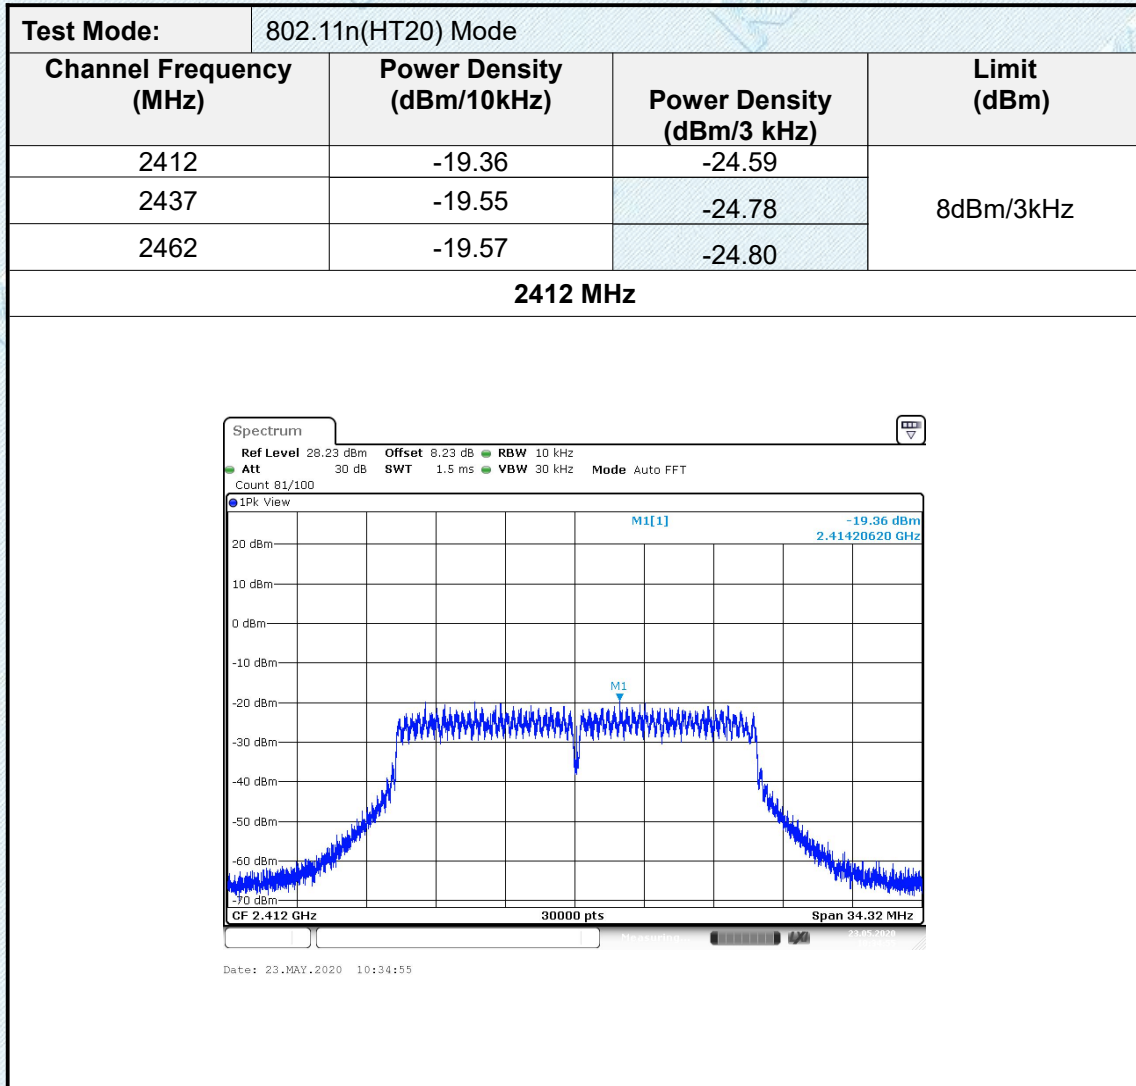


2437 MHz

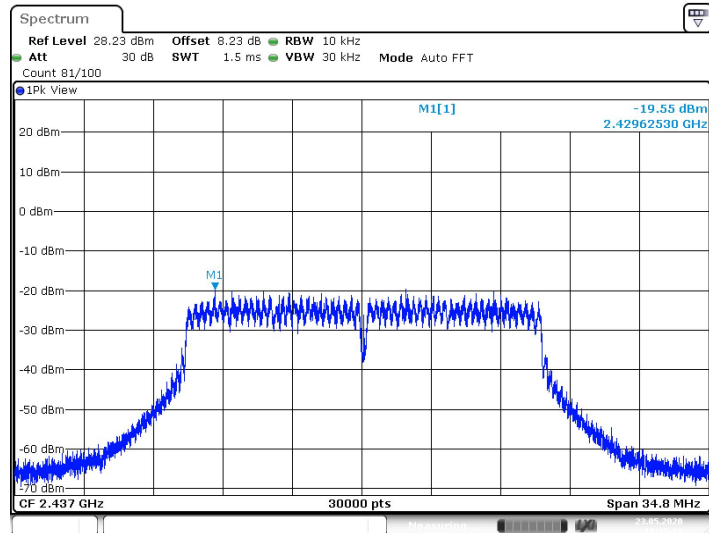

Date: 23.MAY.2020 10:37:28


2462 MHz

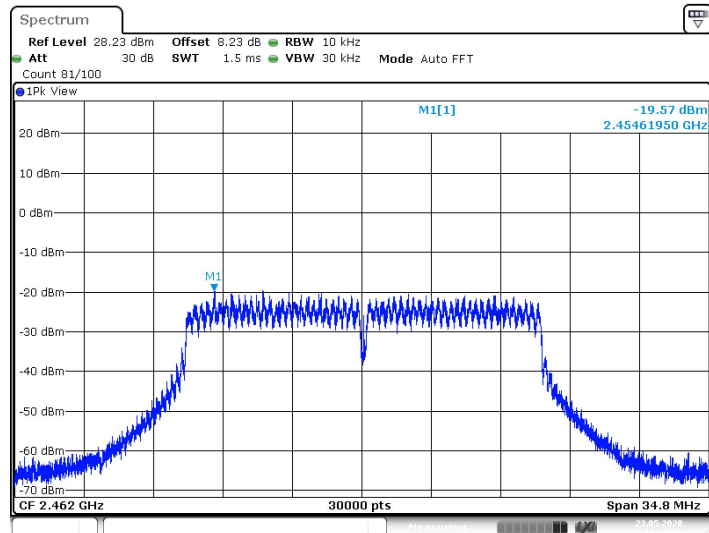

Date: 23.MAY.2020 10:38:57


Test Mode:	802.11n(HT40) Mode		
Channel Frequency (MHz)	Power Density (dBm/10 kHz)	Power Density (dBm/3 kHz)	Limit (dBm)
2422	-21.88	-27.11	8dBm/3kHz
2437	-21.99	-27.22	
2452	-21.53	-26.76	

2422 MHz

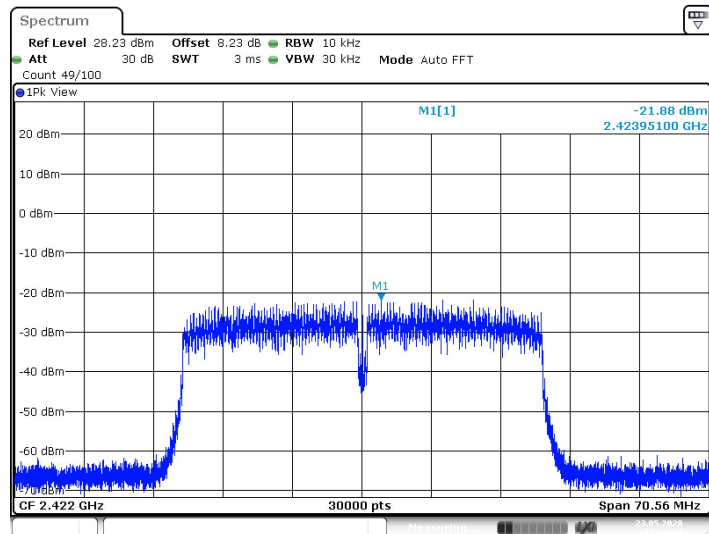


Date: 23.MAY.2020 10:42:01

2437 MHz

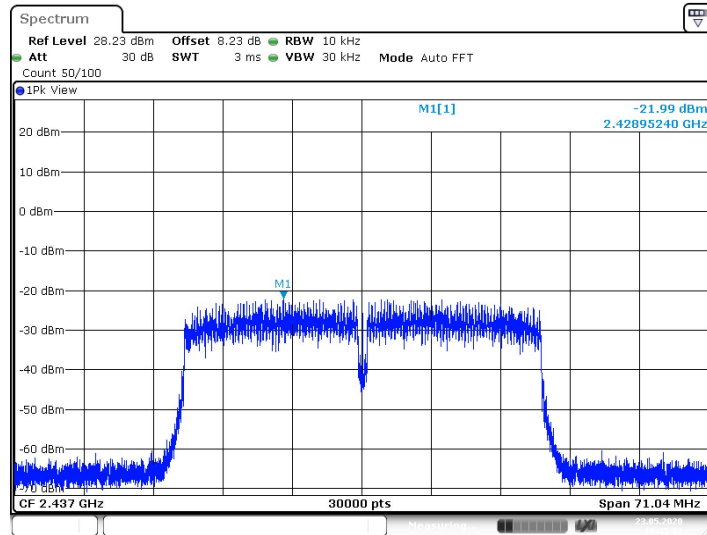

Date: 23.MAY.2020 10:45:01

2452 MHz

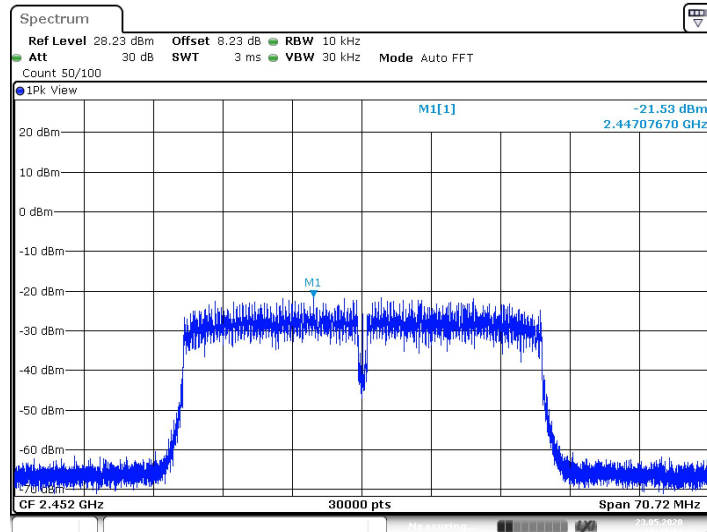

Date: 23.MAY.2020 10:47:01


3.6. Band edge and Spurious Emission (conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration

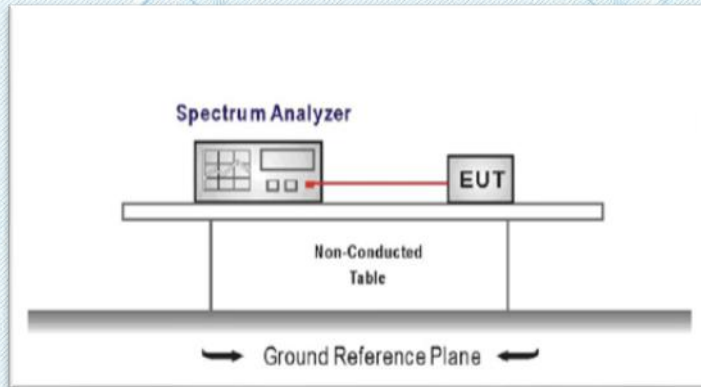

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
 Center frequency=DTS channel center frequency
 The span = 1.5 times the DTS bandwidth.
 RBW = 100 kHz, VBW $\geq 3 \times$ RBW
 Detector = peak, Sweep time = auto couple, Trace mode = max hold
 Allow trace to fully stabilize
 Use the peak marker function to determine the maximum PSD level

 Note: the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement
 Set the center frequency and span to encompass frequency range to be measured
 RBW = 100 kHz, VBW $\geq 3 \times$ RBW
 Detector = peak, Sweep time = auto couple, Trace mode = max hold
 Allow trace to fully stabilize
 Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.


Test Mode

Please refer to the clause 2.3.

Test Results

802.11b

CH01-Bandedge

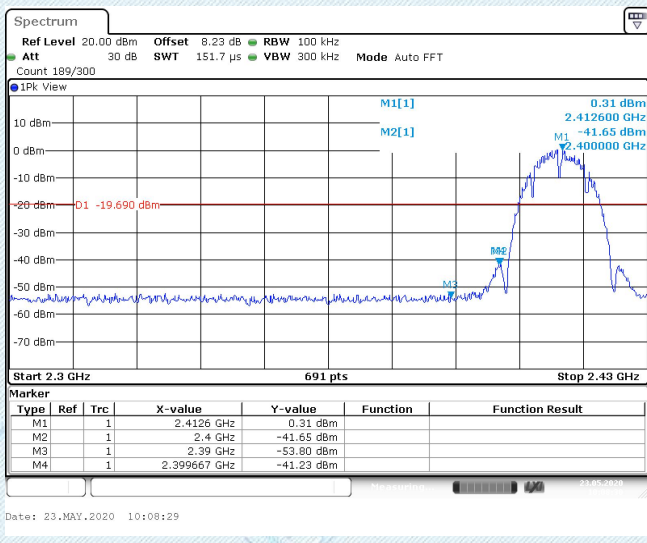

CH11-Bandedge

