

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

**Report No.:** RFBCKS-WTW-P23090477A

**FCC ID:** 2AWHPR232

**Product:** Starlink Router

**Brand:** SPACEX



**Model No.:** UTR-232

**Received Date:** 2023/9/8

**Test Date:** 2023/9/8 ~ 2023/10/23

**Issued Date:** 2023/11/20

**Applicant:** Space Exploration Technologies Corp. (SPACEX)

**Address:** 1 Rocket Rd., Hawthorne, CA 90250 USA


**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**FCC Registration /** 723255 / TW2022

**Designation Number:**

**Approved by:**  , **Date:** 2023/11/20  
Wen Yu / Assistant Manager

This test report consists of 149 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vito Lung / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate.....</b>	<b>5</b>
<b>2 Summary of Test Results .....</b>	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Antenna Description of EUT .....	9
3.3 Channel List.....	11
3.4 Test Mode Applicability and Tested Channel Detail.....	12
3.5 Duty Cycle of Test Signal.....	15
3.6 Test Program Used and Operation Descriptions .....	19
3.7 Connection Diagram of EUT and Peripheral Devices .....	19
3.8 Configuration of Peripheral Devices and Cable Connections .....	20
<b>4 Test Instruments .....</b>	<b>21</b>
4.1 26 dB Bandwidth .....	21
4.2 RF Output Power.....	21
4.3 Power Spectral Density .....	21
4.4 6 dB Bandwidth .....	21
4.5 Occupied Bandwidth.....	21
4.6 Frequency Stability .....	22
4.7 AC Power Conducted Emissions .....	22
4.8 Unwanted Emissions below 1 GHz .....	23
4.9 Unwanted Emissions above 1 GHz.....	24
<b>5 Limits of Test Items.....</b>	<b>25</b>
5.1 26 dB Bandwidth .....	25
5.2 RF Output Power.....	25
5.3 Power Spectral Density .....	25
5.4 6 dB Bandwidth .....	25
5.5 Occupied Bandwidth.....	26
5.6 Frequency Stability .....	26
5.7 AC Power Conducted Emissions .....	26
5.8 Unwanted Emissions below 1 GHz .....	26
5.9 Unwanted Emissions above 1 GHz.....	27
<b>6 Test Arrangements.....</b>	<b>28</b>
6.1 26 dB Bandwidth .....	28
6.1.1 Test Setup .....	28
6.1.2 Test Procedure.....	28
6.2 RF Output Power.....	29
6.2.1 Test Setup .....	29
6.2.2 Test Procedure.....	29
6.3 Power Spectral Density .....	30
6.3.1 Test Setup .....	30
6.3.2 Test Procedure.....	30
6.4 6 dB Bandwidth .....	31
6.4.1 Test Setup .....	31
6.4.2 Test Procedure.....	31
6.5 Occupied Bandwidth.....	31
6.5.1 Test Setup .....	31
6.5.2 Test Procedure.....	31
6.6 Frequency Stability .....	32
6.6.1 Test Setup .....	32
6.6.2 Test Procedure.....	32
6.7 AC Power Conducted Emissions .....	33



6.7.1	Test Setup .....	33
6.7.2	Test Procedure .....	33
6.8	Unwanted Emissions below 1 GHz .....	34
6.8.1	Test Setup .....	34
6.8.2	Test Procedure .....	35
6.9	Unwanted Emissions above 1 GHz .....	36
6.9.1	Test Setup .....	36
6.9.2	Test Procedure .....	36
<b>7</b>	<b>Test Results of Test Item .....</b>	<b>37</b>
7.1	26 dB Bandwidth .....	37
7.2	RF Output Power .....	43
7.3	Power Spectral Density .....	62
7.4	6 dB Bandwidth .....	70
7.5	Occupied Bandwidth .....	72
7.6	Frequency Stability .....	76
7.7	AC Power Conducted Emissions .....	78
7.8	Unwanted Emissions below 1 GHz .....	82
7.9	Unwanted Emissions above 1 GHz .....	86
<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>148</b>
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>149</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBCKS-WTW-P23090477A	Original release.	2023/11/20

## 1 Certificate

**Product:** Starlink Router

**Brand:** SPACEX



**Test Model:** UTR-232

**Sample Status:** Engineering sample

**Applicant:** Space Exploration Technologies Corp. (SPACEX)

**Test Date:** 2023/9/8 ~ 2023/10/23

**Standard:** 47 CFR FCC Part 15, Subpart E (Section 15.407)

**Measurement** ANSI C63.10-2013

**procedure:** KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	Pass	For U-NII-2A U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -10.36 dB at 0.50122 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -12.6 dB at 561.75 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.1 dB at 5725.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

### Notes:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- The "Dynamic Frequency Selection measurement" was recorded in DFS test report.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
26 dB Bandwidth	-	1050.00 Hz
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
6 dB Bandwidth	-	1050.00 Hz
Occupied Bandwidth	-	1050.00 Hz
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.5 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB


The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Starlink Router
Brand	SPACEEX 
Test Model	UTR-232
Status of EUT	Engineering sample
Power Supply Rating	30 Vdc or 57 Vdc from power adapter
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 3466.7 Mbps 802.11ax: up to 4803.9 Mbps
Operating Frequency	5.26 GHz ~ 5.32 GHz 5.5 GHz ~ 5.72 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 16 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 8 802.11ac (VHT80), 802.11ax (HE80): 4 802.11ac (VHT160), 802.11ax (HE160): 1
Output Power	<b>CDD Mode:</b> 5.25 GHz ~ 5.32 GHz: 239.857 mW (23.8 dBm) 5.5 GHz ~ 5.72 GHz: 240.313 mW (23.81 dBm) <b>Beamforming Mode:</b> 5.26 GHz ~ 5.32 GHz: 195.895 mW (22.92 dBm) 5.5 GHz ~ 5.72 GHz: 213.074 mW (23.29 dBm)
EUT Category	Indoor Access Point

Note:

- This report is prepared for FCC class II change. The difference compared with the Report No.: RFBCKS-WTW-P23090477-1 as the following:
  - ◆ Enable U-NII-2A, U-NII-2C bands through software change.
  - ◆ Enabling bandwidth 160 MHz mode.
- According to above conditions, for U-NII-2A, U-NII-2C bands all of test items need to be performed and all data was verified to meet the requirements.
- The EUT uses following accessories.

AC Adapter 1		
Brand	Model	Specification
STARLINK	UTP-231L	AC Input: 100-240 V~1.6 A 50/60 Hz DC Output: 30 V-2.0 A (Total Max 60 W) LPS DC Output Cable: 1.5 m, unshielded without core Plug: FCC
AC Adapter 2		
Brand	Model	Specification
STARLINK	UTP-232C	AC Input: 100 V-240 V, 2.5 A, 50/60 Hz AC Input Cable: 1.55 m, shielded without core DC Output: 57 V, 3.42 A DC Output Cable: 1.55 m, unshielded without core Plug: FCC

4. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3
WLAN 2.4GHz	WLAN 5GHz (Low)	WLAN 5GHz (High)

5. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz (Low)	WLAN 5GHz (High)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
2G1	Ant1	4.49	2.4~2.4835	PIFA	ipex(MHF)
2G2	Ant2	4.89	2.4~2.4835	PIFA	ipex(MHF)
2G3	Ant3	2.63	2.4~2.4835	PIFA	ipex(MHF)
2G4	Ant4	4.88	2.4~2.4835	PIFA	ipex(MHF)
5L1	Ant1	4.35	5.15~5.25	PIFA	ipex(MHF)
		3.70	5.25~5.35		
5L2	Ant2	3.27	5.15~5.25	PIFA	ipex(MHF)
		3.09	5.25~5.35		
5L3	Ant3	4.22	5.15~5.25	PIFA	ipex(MHF)
		4.22	5.25~5.35		
5L4	Ant4	2.82	5.15~5.25	PIFA	ipex(MHF)
		2.56	5.25~5.35		
5H1	Ant1	5.14	5.47~5.725	PIFA	ipex(MHF)
		5.65	5.725~5.85		
5H2	Ant2	4.87	5.47~5.725	PIFA	ipex(MHF)
		4.26	5.725~5.85		
5H3	Ant3	5.46	5.47~5.725	PIFA	ipex(MHF)
		5.48	5.725~5.85		
5H4	Ant4	4.76	5.47~5.725	PIFA	ipex(MHF)
		4.33	5.725~5.85		

2. The directional gain table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Connector Type
2.4~2.4835	7.17	PIFA	ipex(MHF)
5.15 ~ 5.25	7.09	PIFA	ipex(MHF)
5.25 ~ 5.35	7.01	PIFA	ipex(MHF)
5.47 ~ 5.725	6.57	PIFA	ipex(MHF)
5.725 ~ 5.85	7.21	PIFA	ipex(MHF)

\*Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ac (VHT160)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
802.11ax (HE160)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz, 160MHz) and 802.11ax mode for 20 MHz (40 MHz, 80 MHz, 160MHz) therefore the manufacturer will control the power for 802.11n/ac mode is same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report.

### 3.3 Channel List

#### FOR 5250 ~ 5320 MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
58	5290 MHz

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency
50	5250 MHz

#### FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	<ol style="list-style-type: none"> <li>EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.</li> <li>The AC Adapter has the following models: UTP-231L/UTP-232C. Pre-scan these models of AC Adapters and find the worst case as a representative test condition.</li> <li>Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).</li> </ol>
Worst Case:	<ol style="list-style-type: none"> <li>X-axis/ Y-axis/ Z-axis Worst Condition: Z-axis</li> <li>AC Adapter Worst Condition: UTP-231L</li> </ol>

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
26 dB Bandwidth	A	802.11a	CDD	52, 60, 64	BPSK	6Mb/s
		802.11ax (HE20)	CDD	52, 60, 64	BPSK	MCS0
		802.11ax (HE40)	CDD	54, 62	BPSK	MCS0
		802.11ax (HE80)	CDD	58	BPSK	MCS0
		802.11ax (HE160)	CDD	50	BPSK	MCS0
	B	802.11a	CDD	100, 116, 140, 144	BPSK	6Mb/s
		802.11ax (HE20)	CDD	100, 116, 140, 144	BPSK	MCS0
		802.11ax (HE40)	CDD	102, 110, 134, 142	BPSK	MCS0
		802.11ax (HE80)	CDD	106, 122, 138	BPSK	MCS0
6 dB Bandwidth	B	802.11a	CDD	144	BPSK	6Mb/s
		802.11ax (HE20)	CDD	144	BPSK	MCS0
		802.11ax (HE40)	CDD	142	BPSK	MCS0
		802.11ax (HE80)	CDD	138	BPSK	MCS0

RF Output Power	A	802.11a	CDD	52, 60, 64	BPSK	6Mb/s
		802.11ac (VHT20)	CDD & Beamforming	52, 60, 64	BPSK	MCS0
		802.11ac (VHT40)	CDD & Beamforming	54, 62	BPSK	MCS0
		802.11ac (VHT80)	CDD & Beamforming	58	BPSK	MCS0
		802.11ac (VHT160)	CDD & Beamforming	50	BPSK	MCS0
		802.11ax (HE20)	CDD & Beamforming	52, 60, 64	BPSK	MCS0
		802.11ax (HE40)	CDD & Beamforming	54, 62	BPSK	MCS0
		802.11ax (HE80)	CDD & Beamforming	58	BPSK	MCS0
		802.11ax (HE160)	CDD & Beamforming	50	BPSK	MCS0
	B	802.11a	CDD	100, 116, 140, 144	BPSK	6Mb/s
		802.11ac (VHT20)	CDD & Beamforming	100, 116, 140, 144	BPSK	MCS0
		802.11ac (VHT40)	CDD & Beamforming	102, 110, 134, 142	BPSK	MCS0
		802.11ac (VHT80)	CDD & Beamforming	106, 122, 138	BPSK	MCS0
		802.11ax (HE20)	CDD & Beamforming	100, 116, 140, 144	BPSK	MCS0
		802.11ax (HE40)	CDD & Beamforming	102, 110, 134, 142	BPSK	MCS0
802.11ax (HE80)		CDD & Beamforming	106, 122, 138	BPSK	MCS0	
Power Spectral Density / Occupied Bandwidth	A	802.11a	CDD	52, 60, 64	BPSK	6Mb/s
		802.11ax (HE20)	CDD	52, 60, 64	BPSK	MCS0
		802.11ax (HE40)	CDD	54, 62	BPSK	MCS0
		802.11ax (HE80)	CDD	58	BPSK	MCS0
		802.11ax (HE160)	CDD	50	BPSK	MCS0
	B	802.11a	CDD	100, 116, 140, 144	BPSK	6Mb/s
		802.11ax (HE20)	CDD	100, 116, 140, 144	BPSK	MCS0
		802.11ax (HE40)	CDD	102, 110, 134, 142	BPSK	MCS0
		802.11ax (HE80)	CDD	106, 122, 138	BPSK	MCS0
Frequency Stability	A	802.11a	-	52	unmodulated	-
	B	802.11a	-	100	unmodulated	-

AC Power Conducted Emissions	A	802.11ax (HE40)	CDD	54	BPSK	MCS0
	B	802.11ax (HE40)	CDD	110	BPSK	MCS0
Unwanted Emissions below 1 GHz	A	802.11ax (HE40)	CDD	54	BPSK	MCS0
	B	802.11ax (HE40)	CDD	110	BPSK	MCS0
Unwanted Emissions above 1 GHz	A	802.11a	CDD	52, 60, 64	BPSK	6Mb/s
		802.11ax (HE20)	CDD	52, 60, 64	BPSK	MCS0
		802.11ax (HE40)	CDD	54, 62	BPSK	MCS0
		802.11ax (HE80)	CDD	58	BPSK	MCS0
		802.11ax (HE160)	CDD	50	BPSK	MCS0
	B	802.11a	CDD	100, 116, 140, 144	BPSK	6Mb/s
		802.11ax (HE20)	CDD	100, 116, 140, 144	BPSK	MCS0
		802.11ax (HE40)	CDD	102, 110, 134, 142	BPSK	MCS0
		802.11ax (HE80)	CDD	106, 122, 138	BPSK	MCS0
	EUT Configure Mode:	A	5G Low Radio Chip Model: MT7976A			
B		5G High Radio Chip Model: MT7975AN				
Note: Partial RU (resource unit) mechanism is not supported.						

### 3.5 Duty Cycle of Test Signal

#### Mode A


**802.11a:** Duty cycle = 2.698 ms / 2.753 ms x 100% = 98.0%

**802.11ax (HE20):** Duty cycle = 2.868 ms / 2.924 ms x 100% = 98.1%


**802.11ax (HE40):** Duty cycle = 2.86 ms / 2.916 ms x 100% = 98.1%

**802.11ax (HE80):** Duty cycle = 1.848 ms / 1.904 ms x 100% = 97.1%, duty factor =  $10 * \log (1/\text{Duty cycle}) = 0.13 \text{ dB}$


**802.11ax (HE160):** Duty cycle = 1.4 ms / 1.456 ms x 100% = 96.2%, duty factor =  $10 * \log (1/\text{Duty cycle}) = 0.17 \text{ dB}$

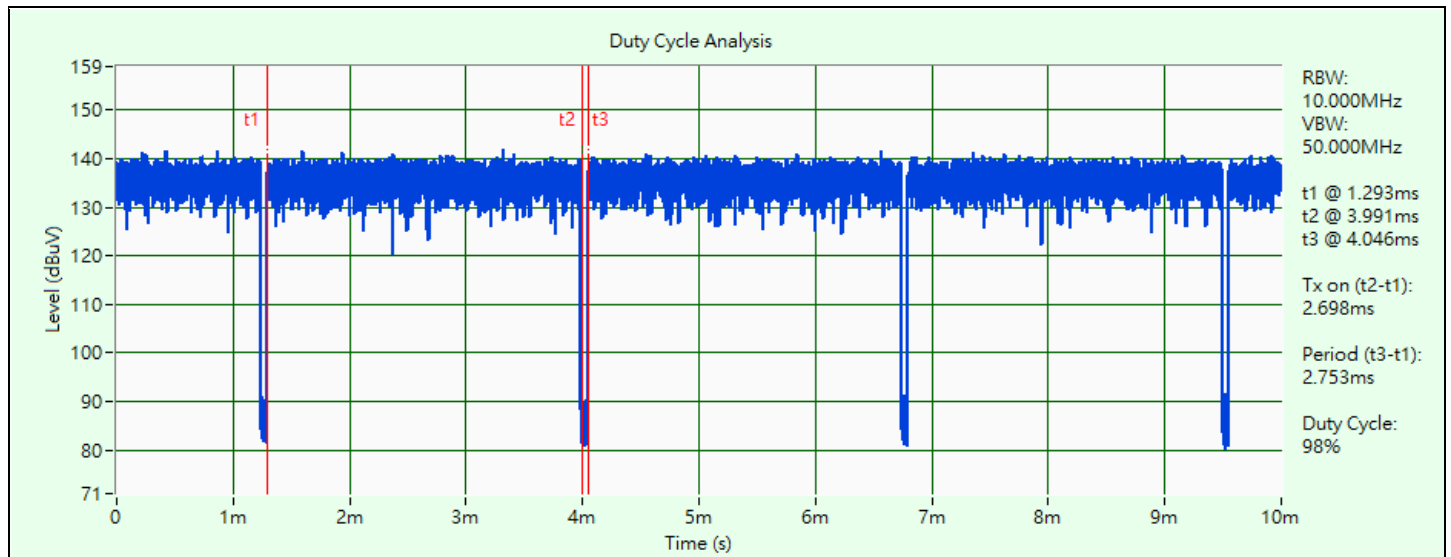


802.11a

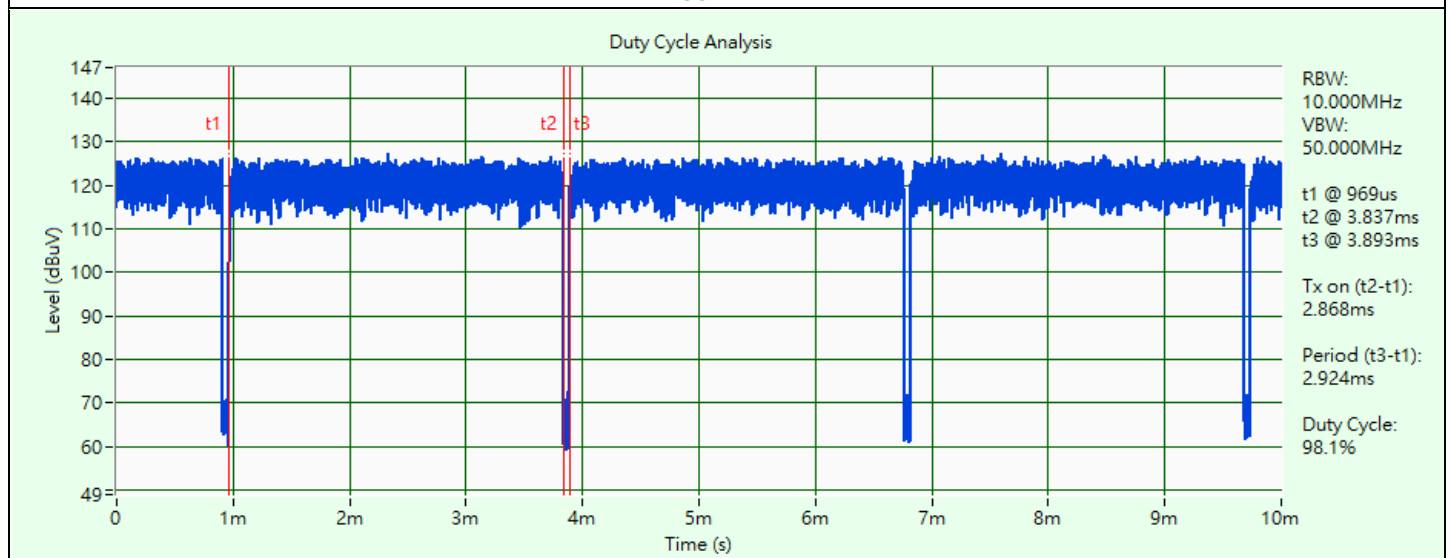


802.11ax (HE20)

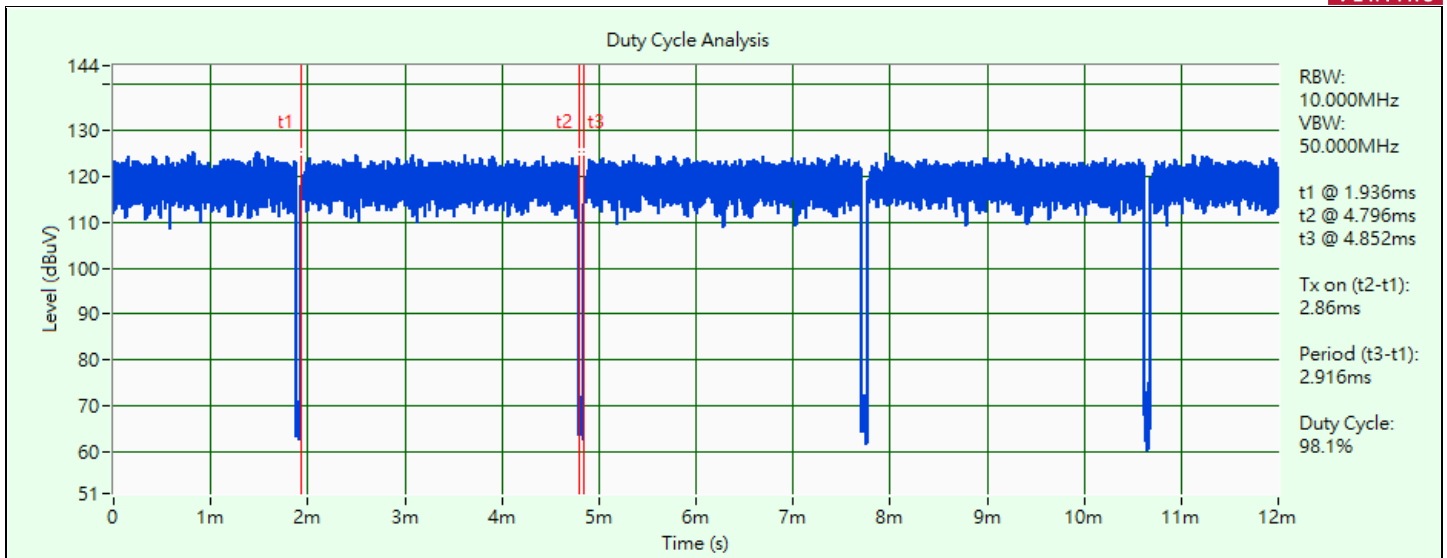

802.11ax (HE40)

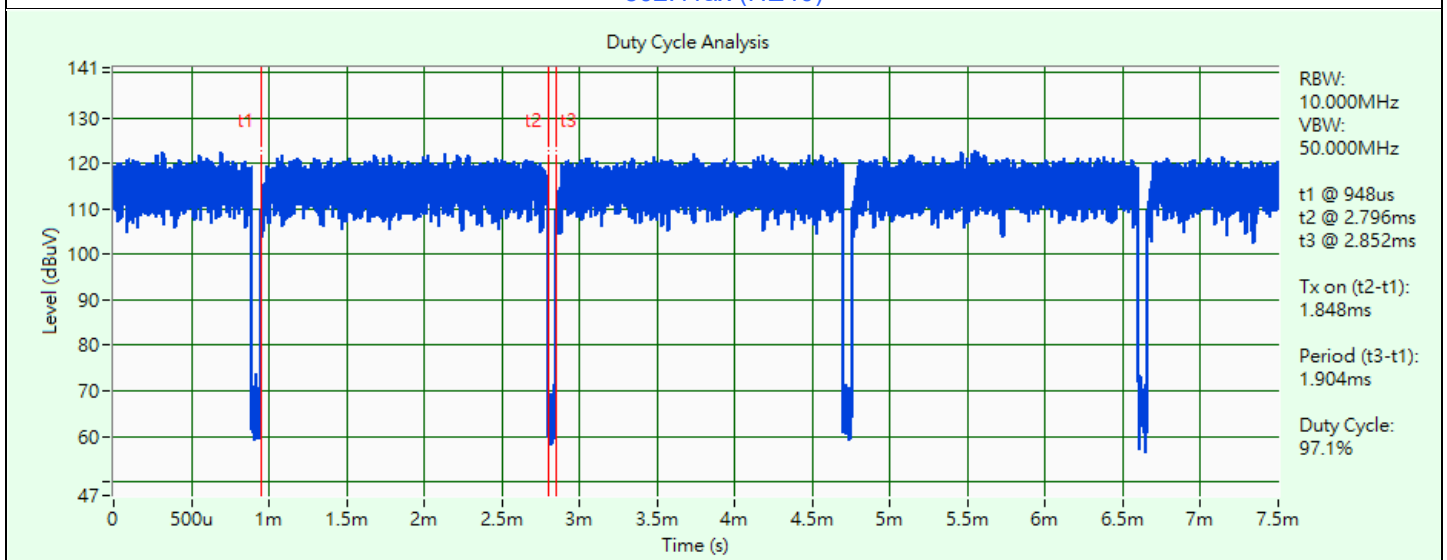

802.11ax (HE80)

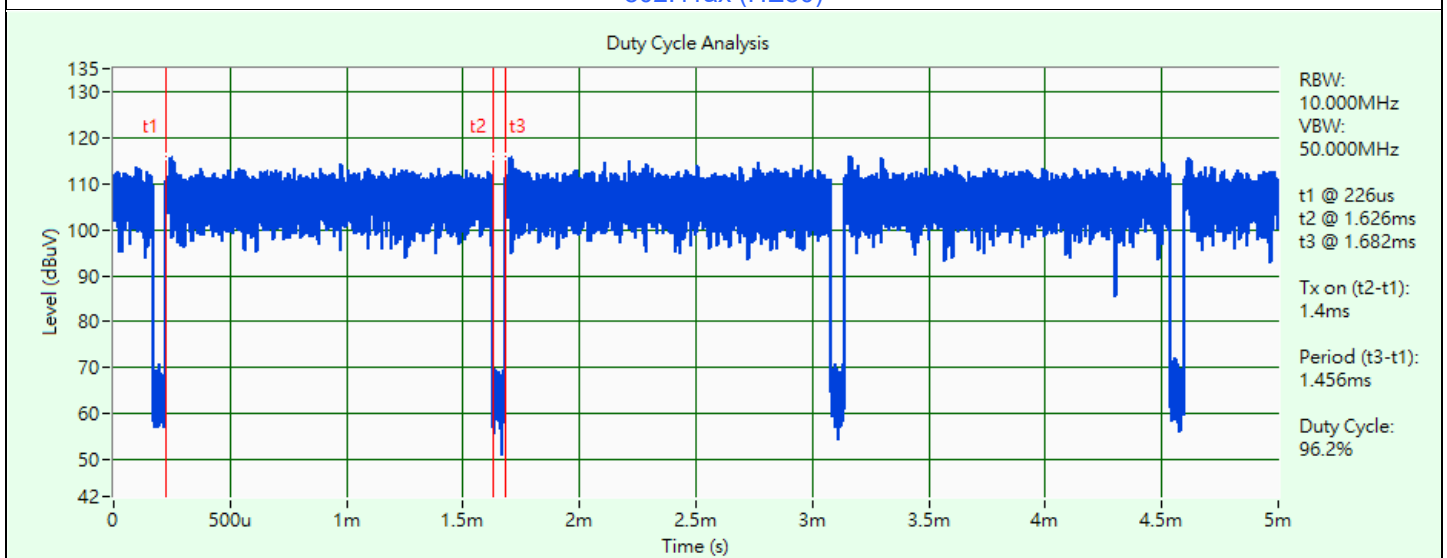

802.11ax (HE160)




**Mode B**

**802.11a:** Duty cycle = 2.697 ms / 2.753 ms x 100% = 98.0%


**802.11ax (HE20):** Duty cycle = 2.867 ms / 2.924 ms x 100% = 98.1%

**802.11ax (HE40):** Duty cycle = 2.86 ms / 2.916 ms x 100% = 98.1%


**802.11ax (HE80):** Duty cycle = 1.848 ms / 1.904 ms x 100% = 97.1%, duty factor = 10 \* log (1/Duty cycle) = 0.13 dB

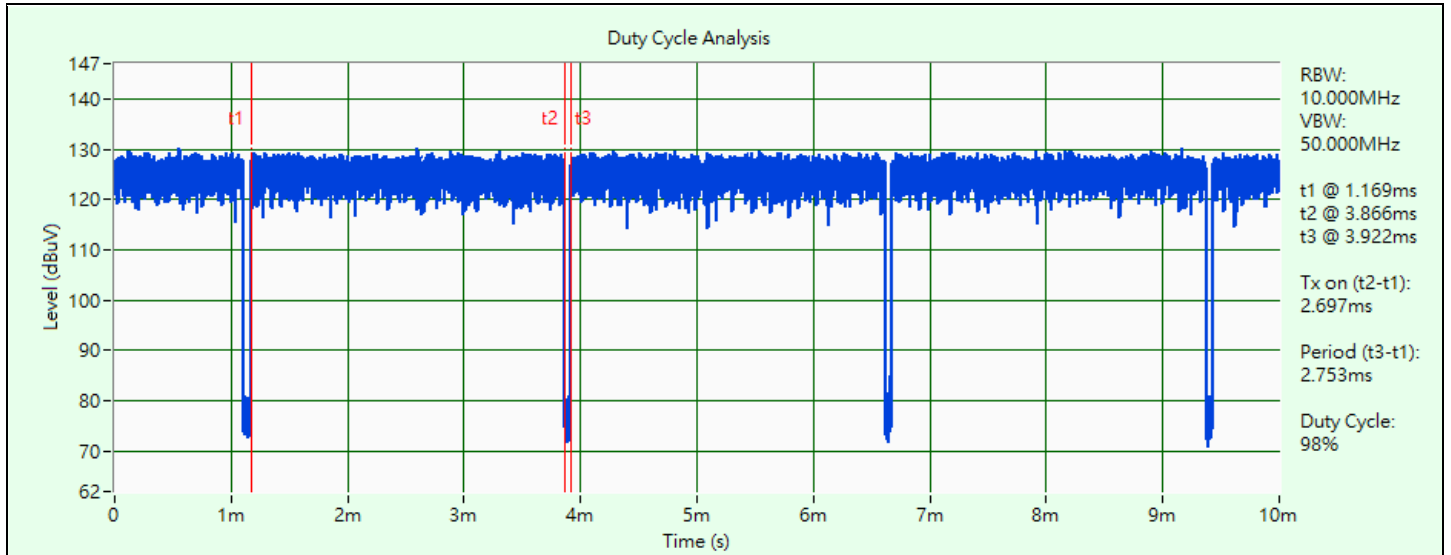


802.11a

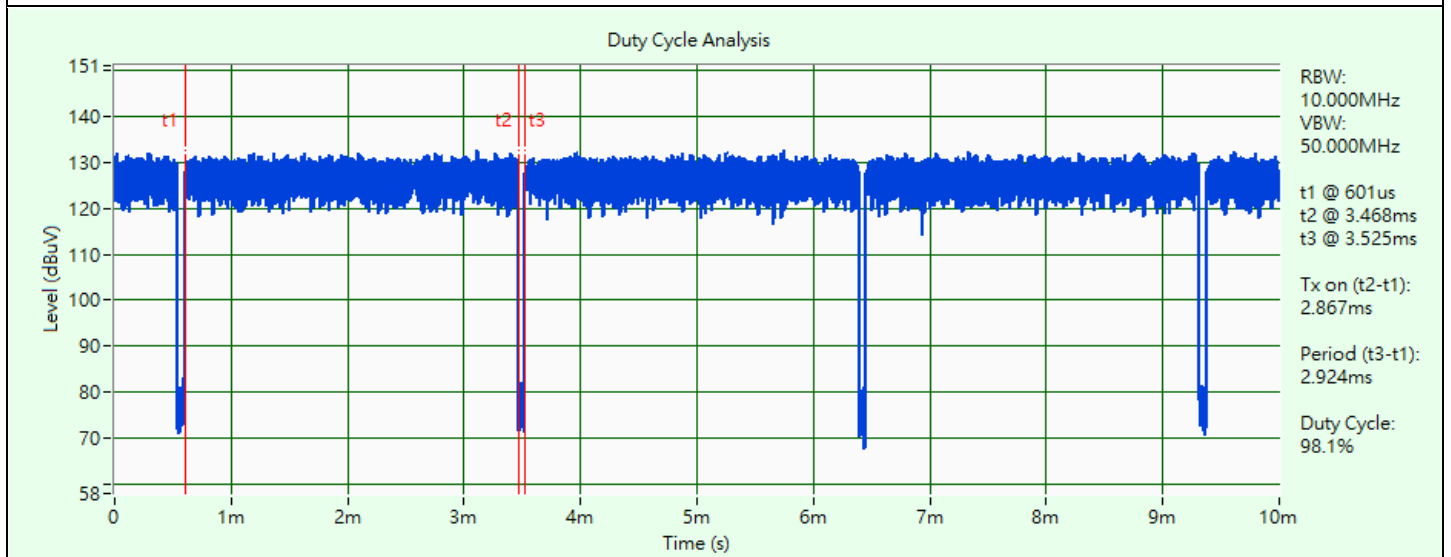

802.11ax (HE20)

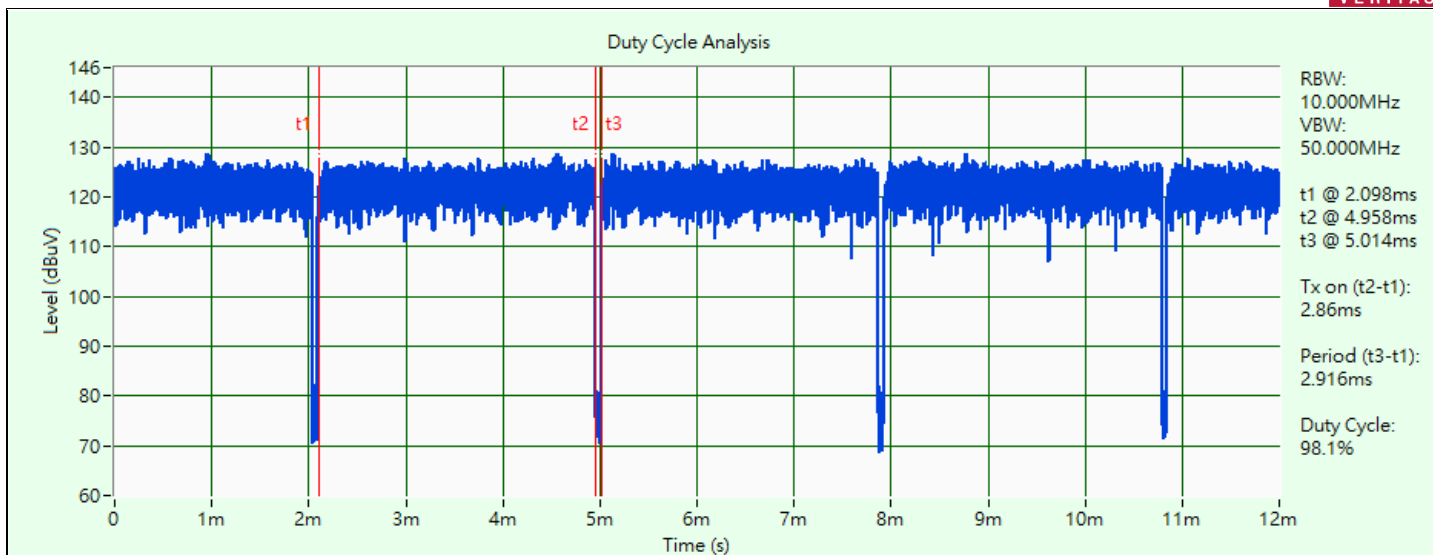

802.11ax (HE40)

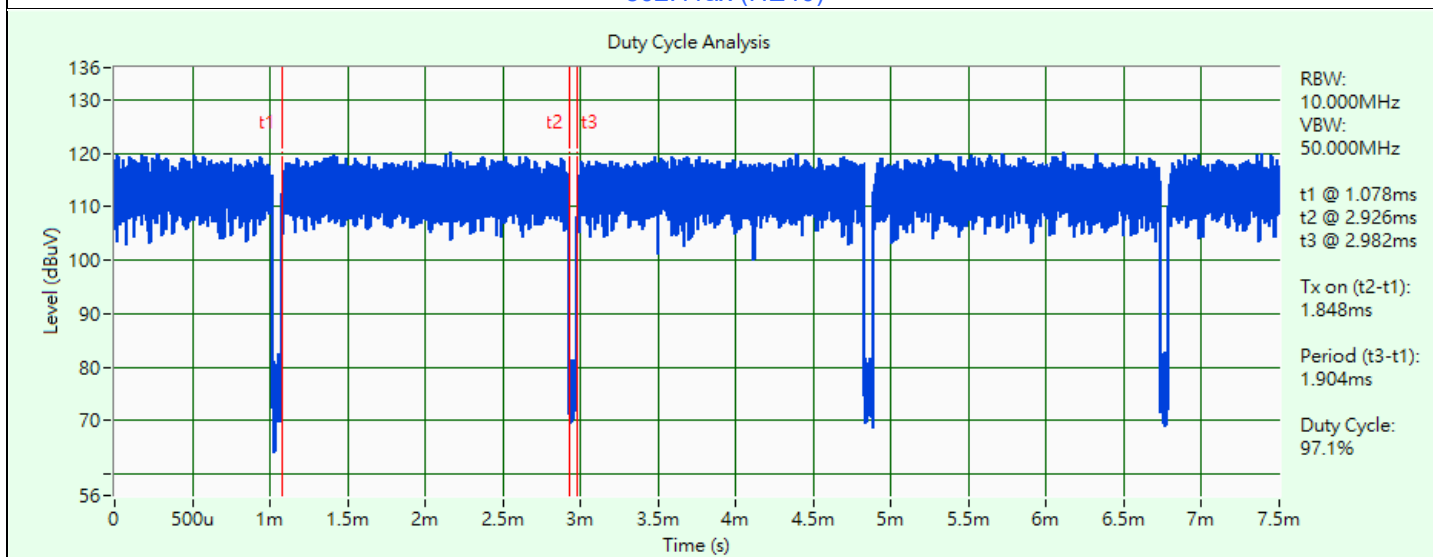


802.11ax (HE80)

### 3.6 Test Program Used and Operation Descriptions

Controlling software (QATool\_Ulv2.88\_DLLv6.93\_ap\_2022.01.04(V14)c) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

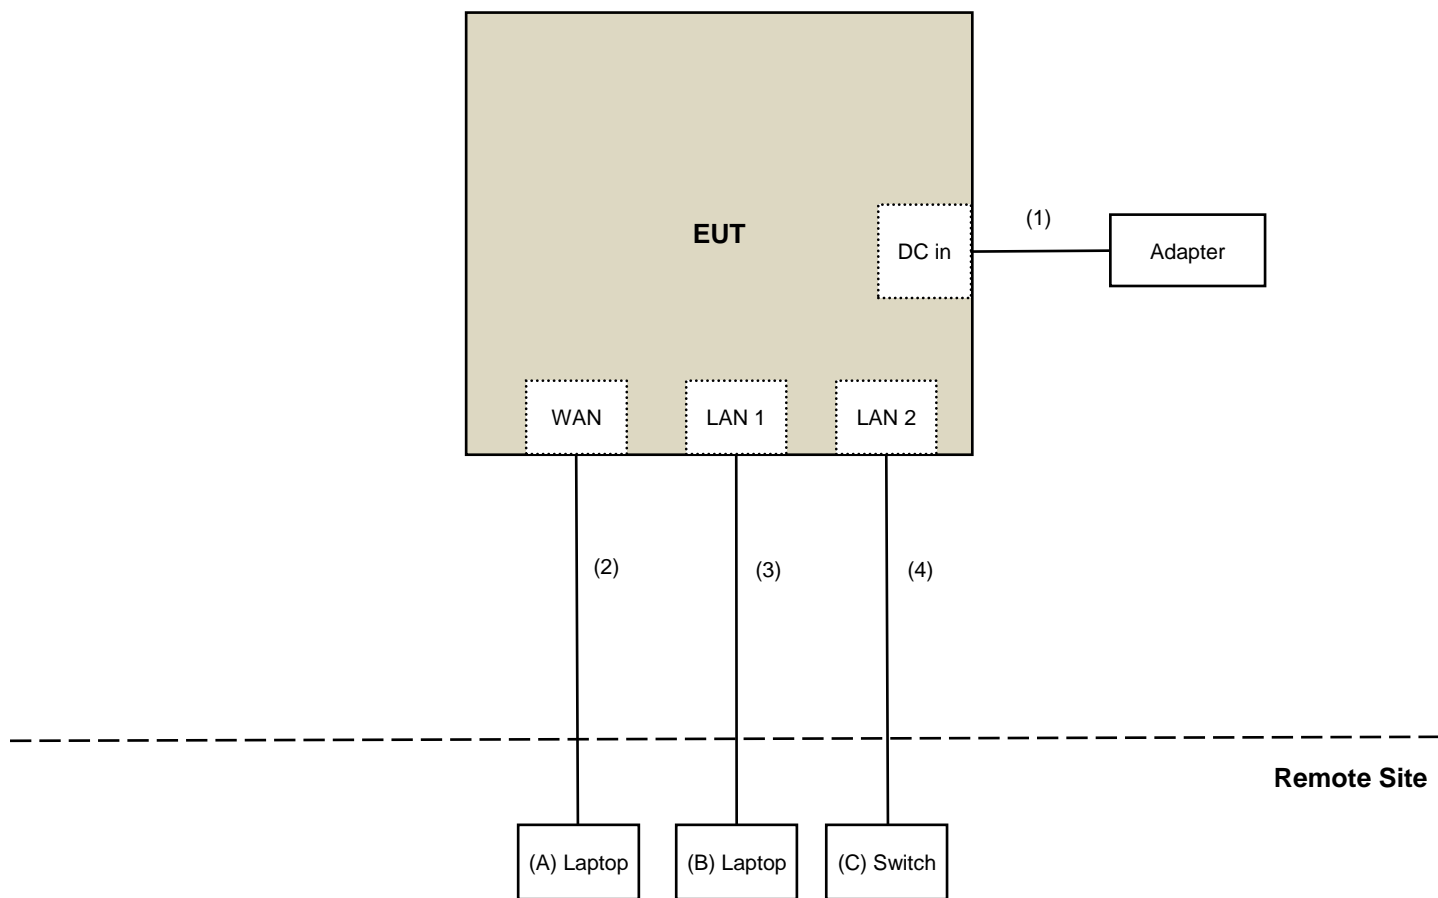

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	N/A	Provided by Lab
B	Laptop	Lenovo	20U5S01X00 L14	PF-28LKK7	N/A	Provided by Lab
C	Switch	D-Link	DGS-1005D	DR8WC92000523	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.5	No	0	Supplied by applicant
2	RJ45 Cable	1	10	Yes	0	Provided by Lab
3	RJ45 Cable	1	10	No	0	Provided by Lab
4	RJ45 Cable	1	10	No	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 26 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/10/10

### 4.2 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Power Meter Anritsu	ML2495A	1529002	2023/6/17	2024/6/16
Pulse Power Sensor Anritsu	MA2411B	1726434	2023/6/19	2024/6/18
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/10/10

### 4.3 Power Spectral Density

Refer to section 4.1 to get information of the instruments.

### 4.4 6 dB Bandwidth

Refer to section 4.1 to get information of the instruments.

### 4.5 Occupied Bandwidth

Refer to section 4.1 to get information of the instruments.

#### 4.6 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
AC Power Source GOOD WILL	6905S	1991551	N/A	N/A
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	2022/12/26	2023/12/25
True RMS Clamp Meter FLUKE	325	31130711WS	2023/6/8	2024/6/7

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/10/10

#### 4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	N/A	EMC-04	2022/10/25	2023/10/24
EMI Test Receiver R&S	ESCS 30	100375	2023/5/17	2024/5/16
Fixed Attenuator STI	STI02-2200-10	005	2023/7/1	2024/6/30
LISN R&S	ENV216	100071	2022/10/26	2023/10/25
RF Coaxial Cable JYEBAO	5D-FB	COCCAB-001	2023/7/1	2024/6/30
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2023/10/6

#### 4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-406	2023/10/13	2024/10/12
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2022/12/28	2023/12/27
Loop Antenna Electro-Metrics	EM-6879	264	2023/2/21	2024/2/20
MXA Signal Analyzer Keysight	N9020B	MY60112408	2023/3/6	2024/3/5
MXE EMI Receiver Keysight	N9038A	MY59050100	2023/6/13	2024/6/12
Preamplifier EMCI	EMC330N	980701	2023/2/18	2024/2/17
	EMC001340	980142	2023/5/8	2024/5/7
RF Coaxial Cable JYEBAO	5D-FB	LOOPCAB-001	2022/12/19	2023/12/18
		LOOPCAB-002	2022/12/19	2023/12/18
RF Coaxial Cable PEWC	8D	966-4-1	2023/2/18	2024/2/17
		966-4-2	2023/2/18	2024/2/17
		966-4-3	2023/2/18	2024/2/17
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2023/10/13

#### 4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-783	2022/11/13	2023/11/12
	BBHA 9170	9170-739	2022/11/13	2023/11/12
MXA Signal Analyzer Keysight	N9020B	MY60112408	2023/3/6	2024/3/5
Preamplifier EMCI	EMC12630SE	980688	2023/10/3	2024/10/2
	EMC184045SE	980387	2023/8/9	2024/8/8
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2023/2/20	2024/2/19
	EMC102-KM-KM-1200	160924	2023/8/9	2024/8/8
	EMC104-SM-SM-1200	160922	2023/8/9	2024/8/8
	EMC104-SM-SM-2000	180502	2023/3/27	2024/3/26
	EMC104-SM-SM-6000	210704	2022/11/4	2023/11/3
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 4.
2. Tested Date: 2023/9/8 ~ 2023/10/23



## 5 Limits of Test Items

### 5.1 26 dB Bandwidth

The results are for reference only.

### 5.2 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

\*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain = 5 log( $N_{ANT}/N_{SS}$ ) dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain = 10 log( $N_{ANT}/N_{SS}$ ) dB.

### 5.3 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

### 5.4 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

## 5.5 Occupied Bandwidth

The results are for reference only.

## 5.6 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

## 5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

## 5.8 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 5.9 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

### Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

### Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

### For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

### For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

### For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

### For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) <sup>*1</sup>	PK: 68.2 (dBμV/m) <sup>*1</sup>
	PK: 10 (dBm/MHz) <sup>*2</sup>	PK: 105.2 (dBμV/m) <sup>*2</sup>
	PK: 15.6 (dBm/MHz) <sup>*3</sup>	PK: 110.8 (dBμV/m) <sup>*3</sup>
	PK: 27 (dBm/MHz) <sup>*4</sup>	PK: 122.2 (dBμV/m) <sup>*4</sup>

<sup>\*1</sup> beyond 75 MHz or more above of the band edge.

<sup>\*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

<sup>\*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

<sup>\*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

## 6 Test Arrangements

### 6.1 26 dB Bandwidth

#### 6.1.1 Test Setup




#### 6.1.2 Test Procedure


- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 6.2 RF Output Power

### 6.2.1 Test Setup

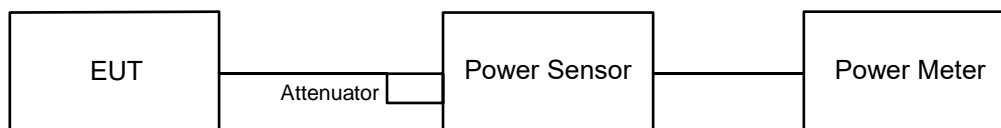

#### For channel straddling:

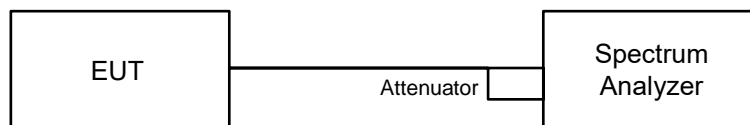

### 6.2.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

#### For channel straddling:

##### Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
- Sweep points  $\geq$   $[2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

#### For channel straddling:


##### Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
- Sweep points  $\geq$   $[2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.) Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add  $10 \log (1/\text{duty cycle})$ .

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

## 6.3 Power Spectral Density

### 6.3.1 Test Setup

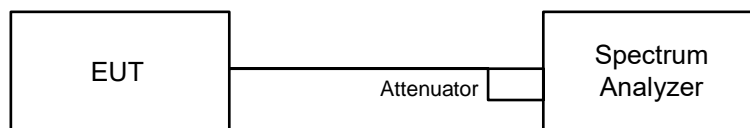

### 6.3.2 Test Procedure

#### For specified measurement bandwidth 1 MHz:

##### Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
- Sweep points  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

#### For specified measurement bandwidth 1 MHz:

##### Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
- Sweep points  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add 10 log (1/duty cycle).

#### For specified measurement bandwidth 500 kHz:

##### Method SA-1

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW  $\geq$  1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where  $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value

#### For specified measurement bandwidth 500 kHz:


##### Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW  $\geq$  1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where  $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\leq$  RBW / 2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".

- f. Trace average at least 100 traces in power averaging mode.
- g. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- h. Record the max value and add  $10 \log (1/\text{duty cycle})$ .

## 6.4 6 dB Bandwidth

### 6.4.1 Test Setup




### 6.4.2 Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz.
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 6.5 Occupied Bandwidth

### 6.5.1 Test Setup




### 6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

## 6.6 Frequency Stability

### 6.6.1 Test Setup

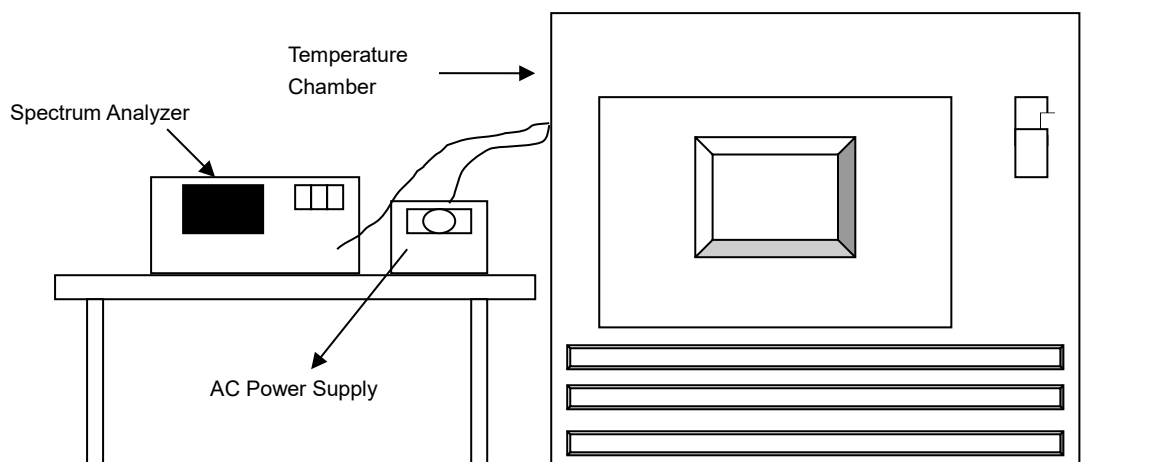


### 6.6.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.



## 6.7 AC Power Conducted Emissions

### 6.7.1 Test Setup

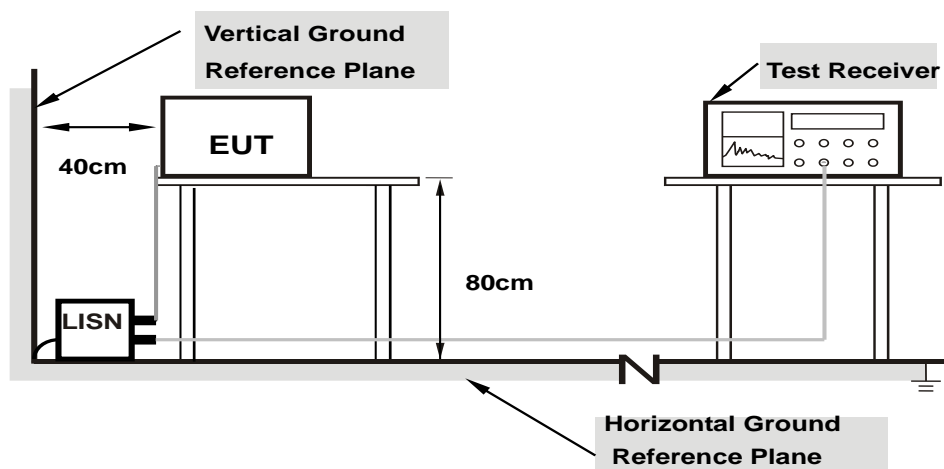

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.8 Unwanted Emissions below 1 GHz

### 6.8.1 Test Setup

#### For Radiated emission below 30 MHz

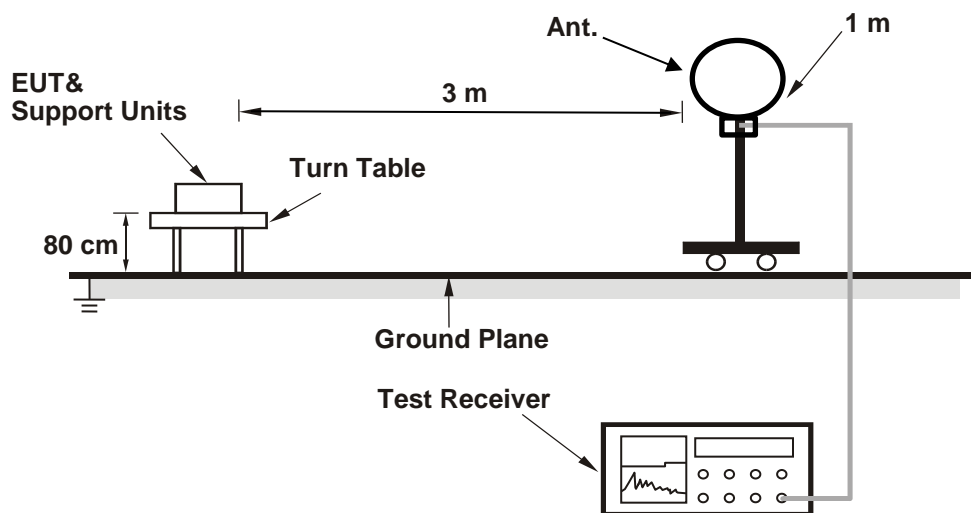

#### For Radiated emission above 30 MHz

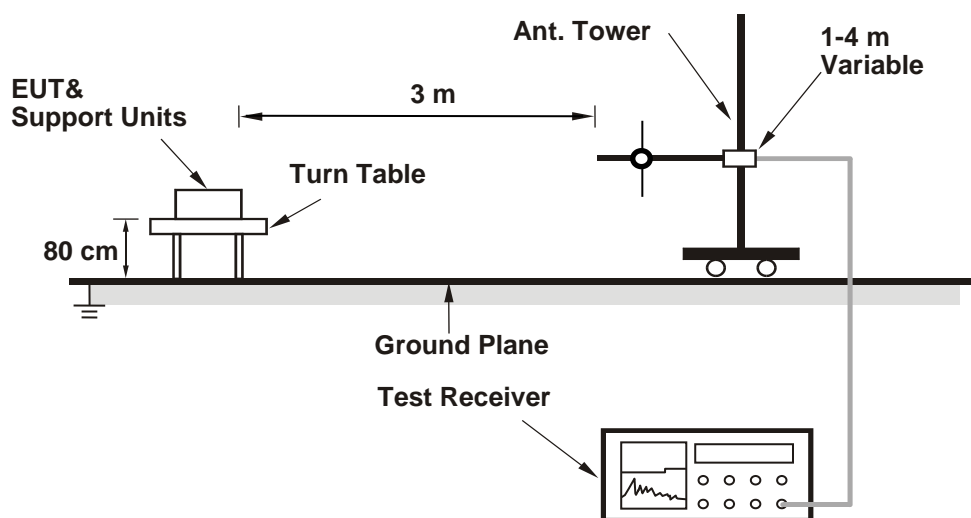

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.8.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.9 Unwanted Emissions above 1 GHz

### 6.9.1 Test Setup

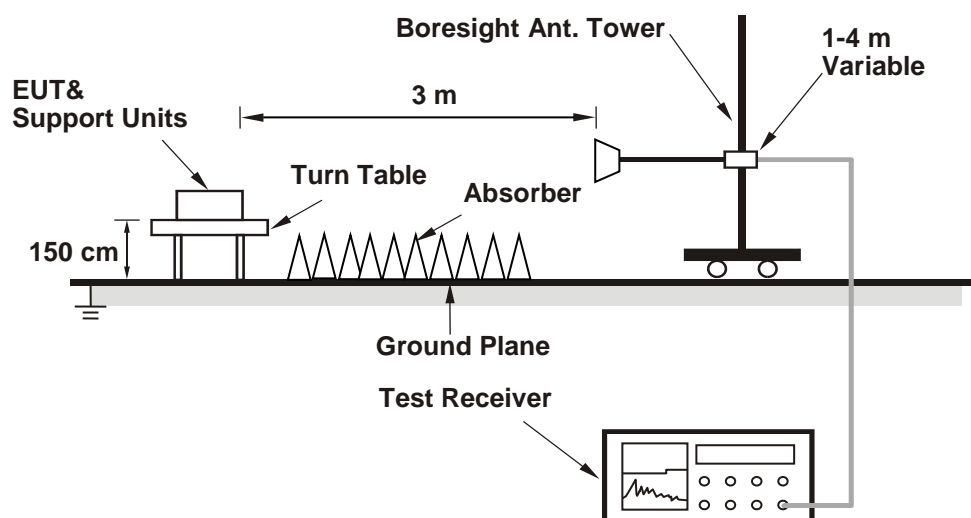

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.9.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 26 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

#### Mode A

##### 802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
52	5260	19.53	18.70	19.66	19.71
60	5300	21.73	19.16	22.92	21.56
64	5320	19.89	24.82	20.69	20.85

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	18.70	23.71 < 24
60	5300	19.16	23.82 < 24
64	5320	19.89	23.98 < 24

Note: For U-NII-2A Band output power limitation is determined based on 26dBc bandwidth.

##### 802.11ax (HE20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
52	5260	21.36	21.42	21.55	20.73
60	5300	21.78	21.68	22.35	23.56
64	5320	21.66	23.36	21.33	21.25

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	20.73	24.16 > 24
60	5300	21.68	24.36 > 24
64	5320	21.25	24.27 > 24

Note: For U-NII-2A Band output power limitation is determined based on 26dBc bandwidth.

**802.11ax (HE40)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
54	5270	39.54	39.49	39.48	39.53
62	5310	39.49	39.64	39.50	39.60

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
54	5270	39.48	26.96 > 24
62	5310	39.49	26.96 > 24

Note: For U-NII-2A Band output power limitation is determined based on 26dBc bandwidth.

**802.11ax (HE80)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
58	5290	80.24	80.33	80.53	80.38

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
58	5290	80.24	30.04 > 24

Note: For U-NII-2A Band output power limitation is determined based on 26dBc bandwidth.






**802.11ax (HE160)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
50 (U-NII-1)	5250	81.05	81.25	81.12	80.98
50 (U-NII-2A)	5250	81.12	80.96	81.00	80.82

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
50 (U-NII-2A)	5250	80.82	30.07 > 24

Note: For U-NII-2A Band output power limitation is determined based on 26dBc bandwidth.

### Spectrum Plot of Minimum Value

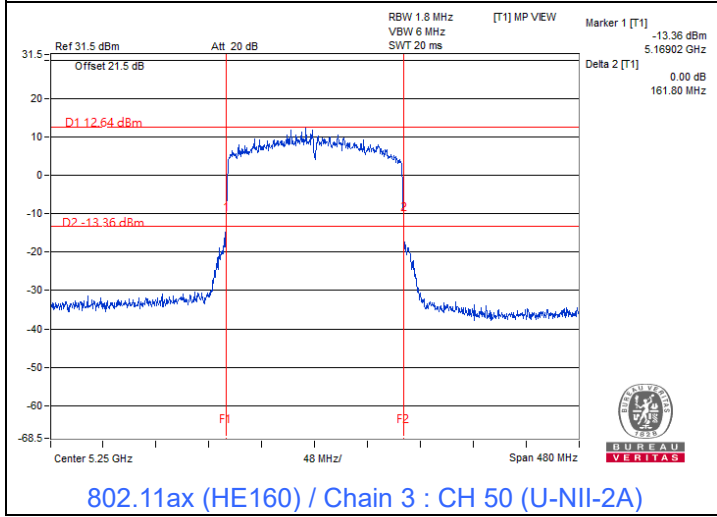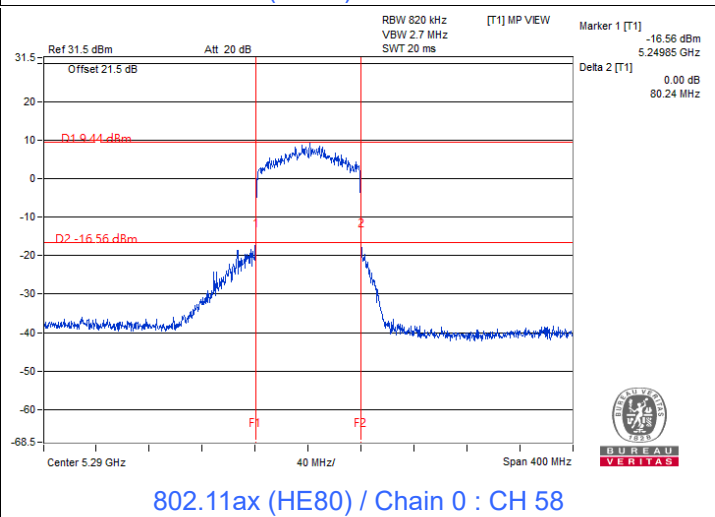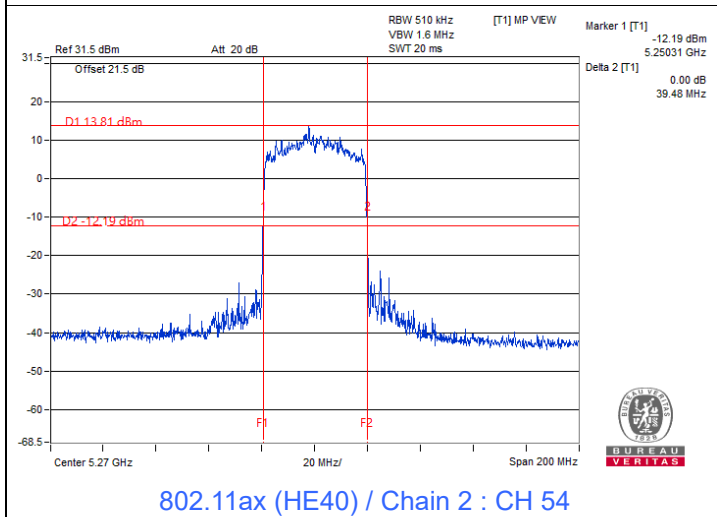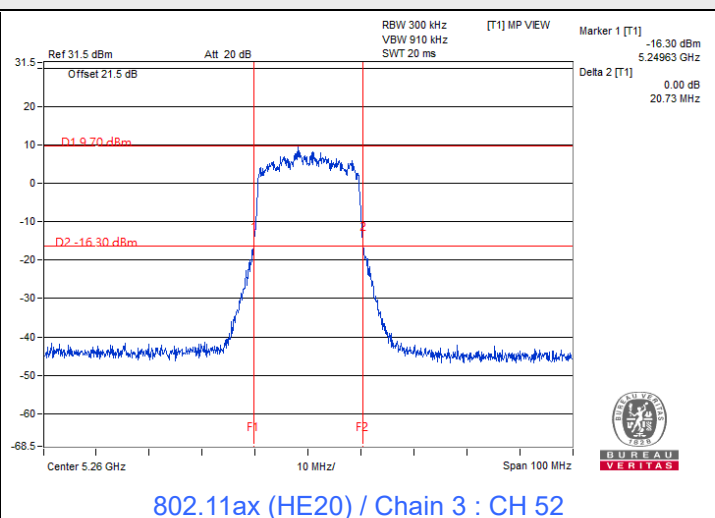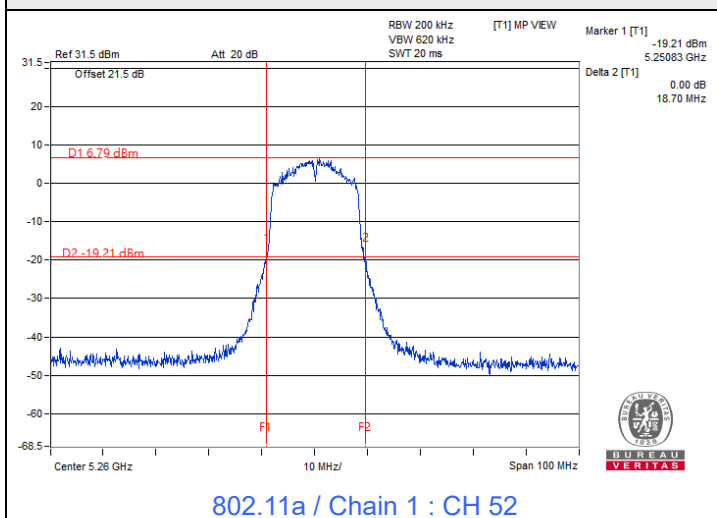

Notes:

1. For U-NII-1 straddle channel = 5250 MHz - Marker 1
2. For U-NII-2A straddle channel = Marker 1 + Delta 2 - 5250 MHz



Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

**Mode B**

**802.11a**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	19.92	19.27	19.43	19.19
116	5580	19.69	19.38	19.76	19.27
140	5700	19.69	19.58	19.62	19.24
144 (U-NII-2C)	5720	14.84	14.54	14.71	14.67
144 (U-NII-3)	5720	4.89	4.84	4.87	4.77

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
100	5500	19.19	23.83 < 24
116	5580	19.27	23.84 < 24
140	5700	19.24	23.84 < 24
144 (U-NII-2C)	5720	14.54	22.62 < 24

Note: For U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

**802.11ax (HE20)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	21.24	21.67	21.75	21.47
116	5580	22.20	21.45	21.50	21.36
140	5700	22.09	21.58	20.95	21.54
144 (U-NII-2C)	5720	16.42	16.11	15.68	15.44
144 (U-NII-3)	5720	5.97	5.84	5.91	5.52

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
100	5500	21.24	24.27 > 24
116	5580	21.36	24.29 > 24
140	5700	20.95	24.21 > 24
144 (U-NII-2C)	5720	15.44	22.88 < 24

Note: For U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.



**802.11ax (HE40)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
102	5510	39.63	39.55	39.64	39.65
110	5550	39.63	39.61	39.64	39.72
134	5670	39.54	39.66	39.72	39.66
142 (U-NII-2C)	5710	34.75	34.79	34.72	34.73
142 (U-NII-3)	5710	4.89	4.81	4.82	4.86

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
102	5510	39.55	26.97 > 24
110	5550	39.61	26.97 > 24
134	5670	39.54	26.97 > 24
142 (U-NII-2C)	5710	34.72	26.4 > 24

Note: For U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.





**802.11ax (HE80)**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
106	5530	80.02	80.15	80.24	80.31
122	5610	80.23	80.13	80.03	80.03
138 (U-NII-2C)	5690	75.03	74.95	75.07	75.05
138 (U-NII-3)	5690	4.97	5.11	5.03	4.99

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
106	5530	80.02	30.03 > 24
122	5610	80.03	30.03 > 24
138 (U-NII-2C)	5690	74.95	29.74 > 24

Note: For U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

### Spectrum Plot of Minimum Value

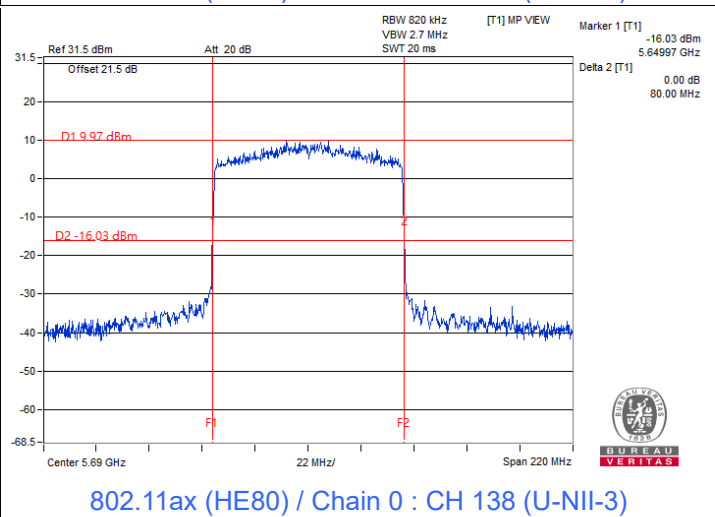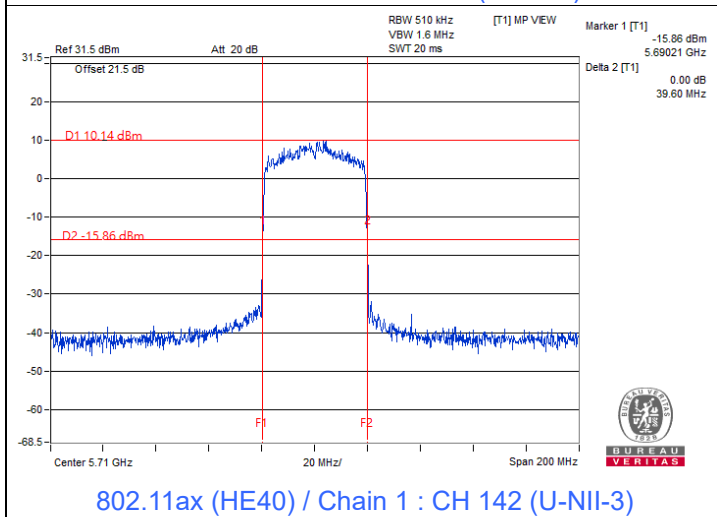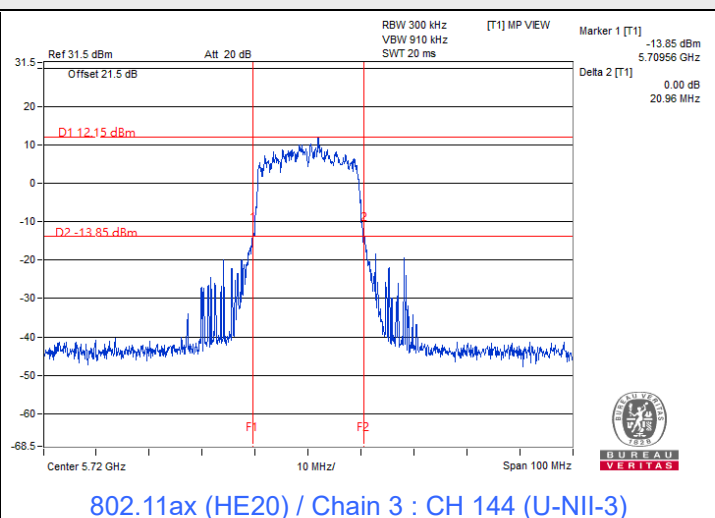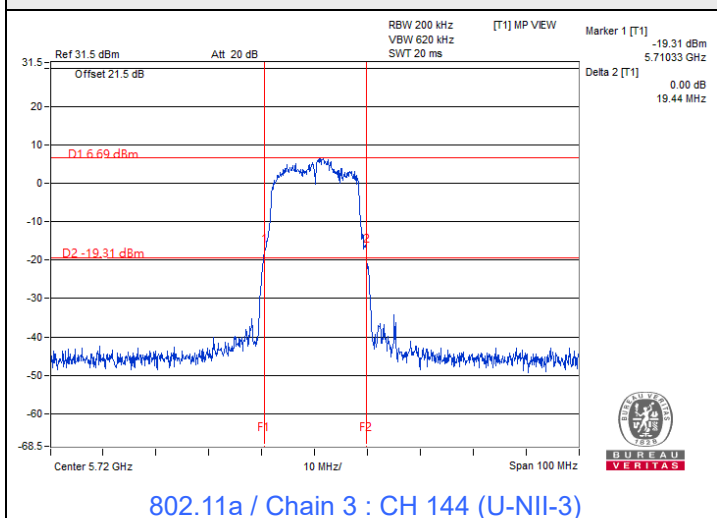

**Notes:**

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

## 7.2 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

### Mode A

#### 802.11a CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
52	5260	17.30	16.81	17.02	16.40	195.678	22.92	23.71	Pass
60	5300	17.21	16.32	17.10	16.42	190.596	22.80	23.82	Pass
64	5320	17.08	16.75	16.95	16.07	188.368	22.75	23.98	Pass

#### Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-2A, the directional gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

#### 802.11ac (VHT20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
52	5260	17.03	16.68	16.66	16.24	185.442	22.68	24	Pass
60	5300	16.99	16.46	16.87	16.10	183.641	22.64	24	Pass
64	5320	17.02	16.77	16.73	16.15	186.191	22.70	24	Pass

#### Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-2A, the directional gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

#### 802.11ac (VHT40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
54	5270	17.98	17.68	17.43	16.99	226.758	23.56	24	Pass
62	5310	17.31	16.54	17.20	16.44	195.445	22.91	24	Pass

#### Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-2A, the maximum gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT80) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
58	5290	16.16	15.60	15.75	15.06	147.259	21.68	24	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-2A, the maximum gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT160) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
*50 (U-NII-1)	5250	15.39	14.24	14.58	14.38	121.954	20.86	30	Pass
*50 (U-NII-2A)	5250	15.12	14.33	14.91	14.08	120.818	20.82	24	Pass

Notes:

1. \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
2. Directional gain is the maximum gain of antennas.
3. For U-NII-1, the maximum gain is 4.35 dBi < 6 dBi, so the output power limit shall not be reduced.
4. For U-NII-2A, the maximum gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
52	5260	17.31	16.91	16.86	16.45	195.604	22.91	24	Pass
60	5300	17.23	16.69	17.08	16.40	194.213	22.88	24	Pass
64	5320	17.24	16.97	16.99	16.35	195.895	22.92	24	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-2A, the directional gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
54	5270	18.21	17.97	17.68	17.19	239.857	23.80	24	Pass
62	5310	17.60	16.80	17.42	16.74	207.821	23.18	24	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-2A, the maximum gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE80) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
58	5290	16.39	15.87	15.99	15.33	156.026	21.93	24	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-2A, the maximum gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE160) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
*50 (U-NII-1)	5250	15.39	14.24	14.58	14.38	121.954	20.86	30	Pass
*50 (U-NII-2A)	5250	15.12	14.33	14.91	14.08	120.818	20.82	24	Pass

Notes:

1. \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
2. Directional gain is the maximum gain of antennas.
3. For U-NII-1, the maximum gain is 4.35 dBi < 6 dBi, so the output power limit shall not be reduced.
4. For U-NII-2A, the maximum gain is 4.22 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
52	5260	17.03	16.68	16.66	16.24	185.442	22.68	22.99	Pass
60	5300	16.99	16.46	16.87	16.10	183.641	22.64	22.99	Pass
64	5320	17.02	16.77	16.73	16.15	186.191	22.70	22.99	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(7.01-6)].

### 802.11ac (VHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
54	5270	16.92	16.55	16.37	15.91	176.735	22.47	22.99	Pass
62	5310	16.72	15.96	16.61	15.95	171.604	22.35	22.99	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(7.01-6)].

### 802.11ac (VHT80) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
58	5290	16.16	15.60	15.75	15.06	147.259	21.68	22.99	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(7.01-6)].

### 802.11ac (VHT160) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
*50 (U-NII-1)	5250	15.39	14.24	14.58	14.38	121.954	20.86	28.91	Pass
*50 (U-NII-2A)	5250	15.12	14.33	14.91	14.08	120.818	20.82	22.99	Pass

Notes:

1. \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-1, the directional gain is 7.09 dBi > 6 dBi, so the output power limit shall be reduced to 30-(7.09-6) = 28.91 dBm.
4. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(7.01-6)].

### 802.11ax (HE20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
52	5260	17.31	16.91	16.86	16.45	195.604	22.91	22.99	Pass
60	5300	17.23	16.69	17.08	16.40	194.213	22.88	22.99	Pass
64	5320	17.24	16.97	16.99	16.35	195.895	22.92	22.99	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(7.01-6)].

### 802.11ax (HE40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
54	5270	17.17	16.83	16.60	16.15	187.233	22.72	22.99	Pass
62	5310	16.99	16.17	16.91	16.23	182.47	22.61	22.99	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(7.01-6)].

### 802.11ax (HE80) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
58	5290	16.39	15.87	15.99	15.33	156.026	21.93	22.99	Pass

Notes:

1. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
2. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(7.01-6)].




### 802.11ax (HE160) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
*50 (U-NII-1)	5250	15.39	14.24	14.58	14.38	121.954	20.86	28.91	Pass
*50 (U-NII-2A)	5250	15.12	14.33	14.91	14.08	120.818	20.82	22.99	Pass


Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 7.09 dBi > 6 dBi, so the output power limit shall be reduced to  $30 - (7.09 - 6) = 28.91$  dBm.
- For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit - (7.01 - 6)].

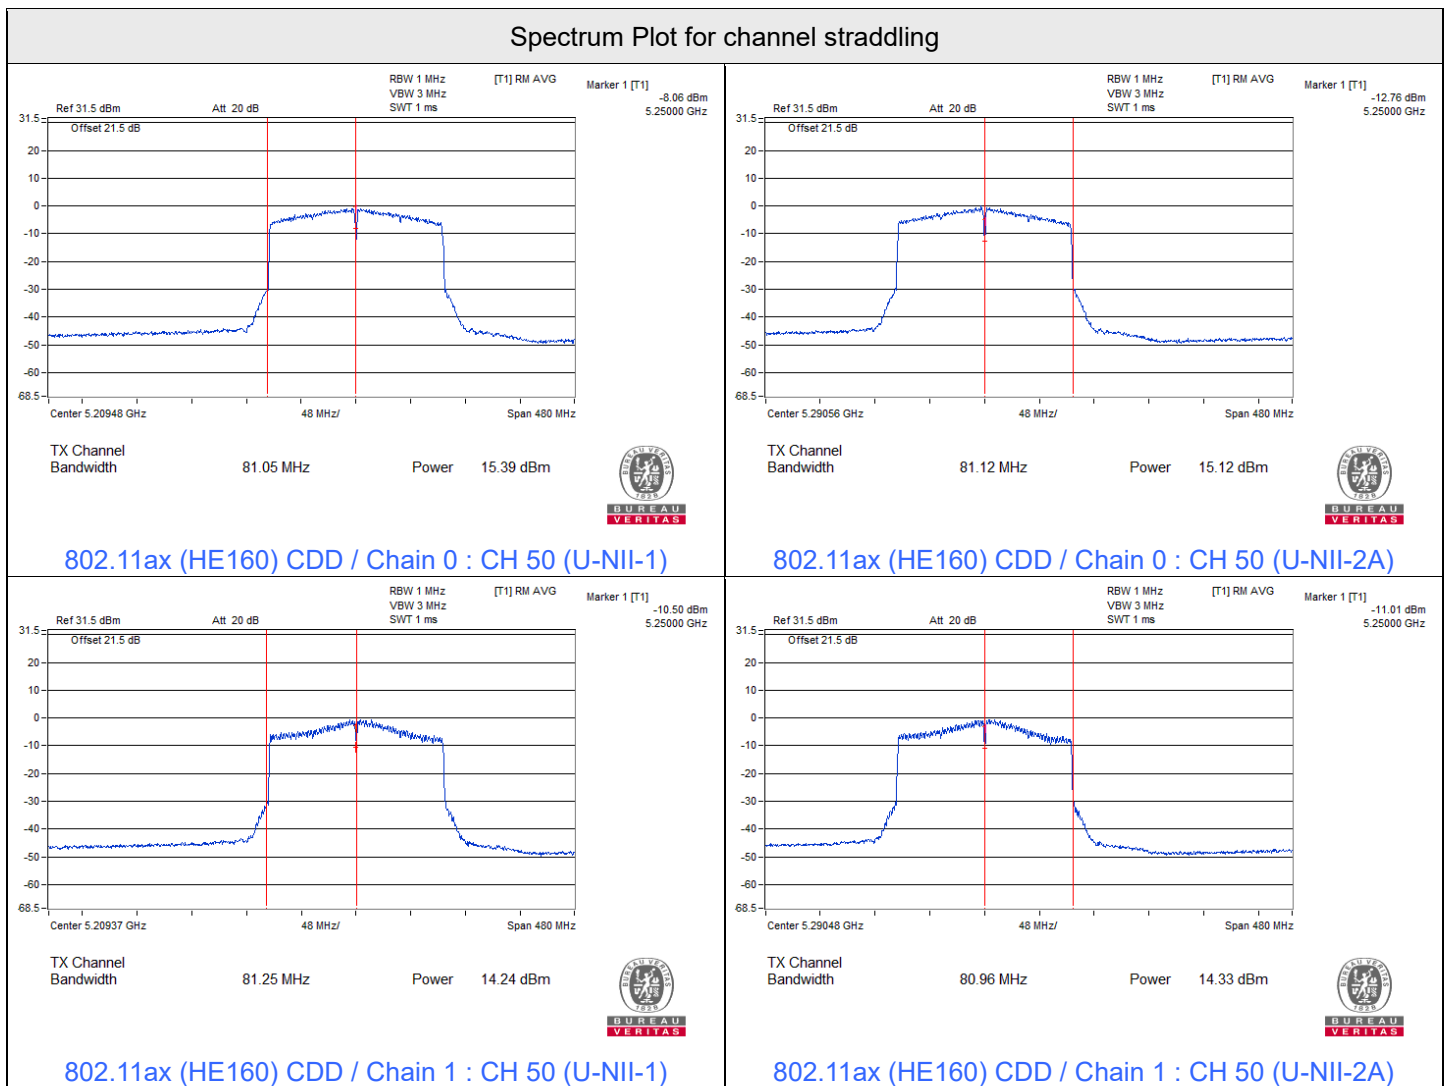





### Spectrum Plot for channel straddling

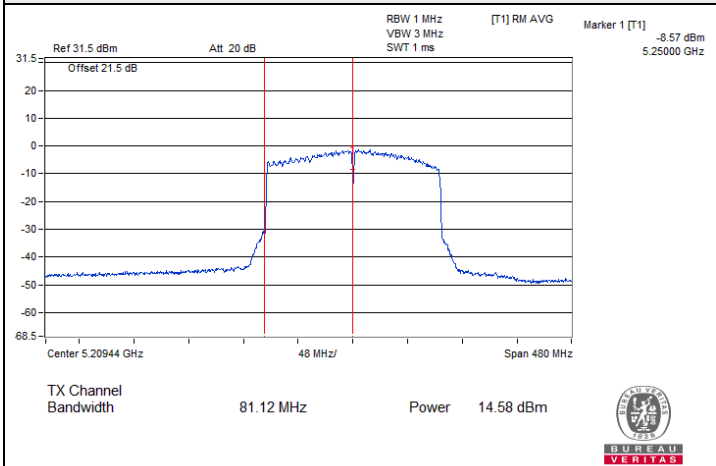


802.11ax (HE160) CDD / Chain 2 : CH 50 (U-NII-1)

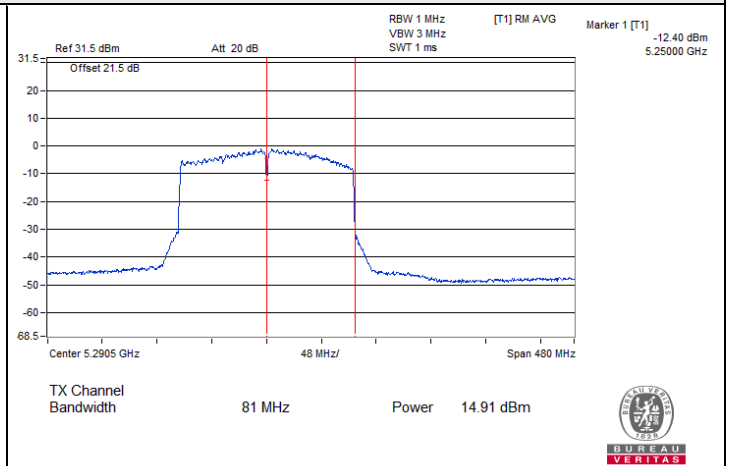

802.11ax (HE160) CDD / Chain 2 : CH 50 (U-NII-2A)

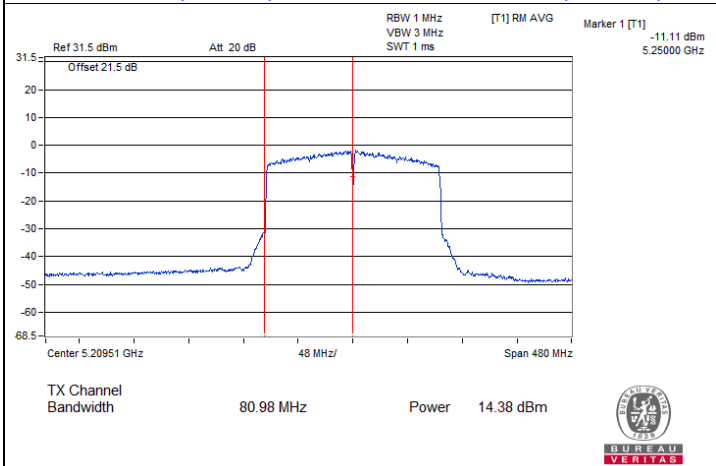

802.11ax (HE160) CDD / Chain 3 : CH 50 (U-NII-1)

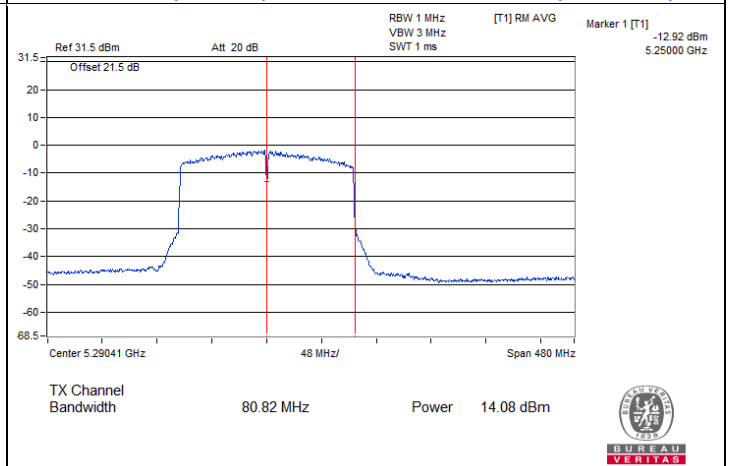

802.11ax (HE160) CDD / Chain 3 : CH 50 (U-NII-2A)



Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

**Mode B**

**802.11a CDD**

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	16.61	16.94	17.67	17.01	203.959	23.10	23.83	Pass
116	5580	16.88	17.03	17.63	16.85	205.579	23.13	23.84	Pass
140	5700	16.81	16.79	17.62	16.85	201.953	23.05	23.84	Pass
*144 (U-NII-2C)	5720	15.99	15.54	15.92	15.89	153.428	21.86	22.62	Pass
*144 (U-NII-3)	5720	8.09	7.81	8.14	7.93	25.206	14.02	30	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the directional gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the directional gain is 5.65 dBi < 6 dBi, so the output power limit shall not be reduced.

**802.11ac (VHT20) CDD**

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	16.76	17.06	17.53	16.85	203.281	23.08	24	Pass
116	5580	17.02	17.59	17.83	17.00	218.554	23.40	24	Pass
140	5700	17.01	16.96	17.77	16.84	208.041	23.18	24	Pass
*144 (U-NII-2C)	5720	16.29	15.82	16.29	16.19	164.905	22.17	24	Pass
*144 (U-NII-3)	5720	9.90	9.50	9.69	9.77	37.48	15.74	30	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the directional gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the directional gain is 5.65 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	16.84	17.31	17.82	17.25	215.755	23.34	24	Pass
110	5550	17.42	17.11	17.90	17.65	226.482	23.55	24	Pass
134	5670	17.37	17.20	17.77	17.61	224.574	23.51	24	Pass
*142 (U-NII-2C)	5710	16.26	15.93	16.43	16.23	167.371	22.24	24	Pass
*142 (U-NII-3)	5710	5.17	4.72	4.98	4.59	12.278	10.89	30	Pass

#### Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the maximum gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 5.65 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT80) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	16.99	17.50	17.87	17.36	221.923	23.46	24	Pass
122	5610	17.06	17.76	17.88	17.20	224.376	23.51	24	Pass
*138 (U-NII-2C)	5690	16.97	16.82	17.31	16.90	206.743	23.15	24	Pass
*138 (U-NII-3)	5690	1.99	1.66	1.87	1.89	6.316	8.00	30	Pass

#### Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the maximum gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 5.65 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	17.04	17.27	17.77	17.11	215.161	23.33	24	Pass
116	5580	17.31	17.84	18.07	17.24	231.728	23.65	24	Pass
140	5700	17.28	17.19	18.07	17.07	220.871	23.44	24	Pass
*144 (U-NII-2C)	5720	16.29	15.82	16.29	16.19	164.905	22.17	22.88	Pass
*144 (U-NII-3)	5720	9.90	9.50	9.69	9.77	37.48	15.74	30	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the directional gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the directional gain is 5.65 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	17.10	17.56	18.03	17.52	228.329	23.59	24	Pass
110	5550	17.63	17.40	18.17	17.91	240.313	23.81	24	Pass
134	5670	17.65	17.49	18.07	17.87	239.671	23.80	24	Pass
*142 (U-NII-2C)	5710	16.26	15.93	16.43	16.23	167.371	22.24	24	Pass
*142 (U-NII-3)	5710	5.17	4.72	4.98	4.59	12.278	10.89	30	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the maximum gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 5.65 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE80) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	17.23	17.72	18.15	17.59	234.725	23.71	24	Pass
122	5610	17.31	17.98	18.16	17.44	237.559	23.76	24	Pass
*138 (U-NII-2C)	5690	16.97	16.82	17.31	16.90	206.743	23.15	24	Pass
*138 (U-NII-3)	5690	1.99	1.66	1.87	1.89	6.316	8.00	30	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the maximum gain of antennas.
- For U-NII-2C, the maximum gain is 5.46 dBi < 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the maximum gain is 5.65 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	16.25	16.44	16.89	16.30	177.748	22.50	23.43	Pass
116	5580	16.53	17.04	17.32	16.48	193.975	22.88	23.43	Pass
140	5700	16.45	16.47	17.22	16.26	183.508	22.64	23.43	Pass
*144 (U-NII-2C)	5720	16.29	15.82	16.29	16.19	164.905	22.17	23.43	Pass
*144 (U-NII-3)	5720	9.90	9.50	9.69	9.77	37.48	15.74	28.79	Pass

Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.57-6)].
- For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the output power limit shall be reduced to 30-(7.21-6) = 28.79 dBm.

### 802.11ac (VHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	16.33	16.74	17.22	16.67	189.334	22.77	23.43	Pass
110	5550	16.81	16.60	17.46	17.13	201.042	23.03	23.43	Pass
134	5670	16.82	16.70	17.31	17.02	199.034	22.99	23.43	Pass
*142 (U-NII-2C)	5710	16.26	15.93	16.43	16.23	167.371	22.24	23.43	Pass
*142 (U-NII-3)	5710	5.17	4.72	4.98	4.59	12.278	10.89	28.79	Pass

#### Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.57-6)].
- For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the output power limit shall be reduced to 30-(7.21-6) = 28.79 dBm.

### 802.11ac (VHT80) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	16.45	16.87	17.41	16.78	195.522	22.91	23.43	Pass
122	5610	16.51	17.20	17.43	16.68	199.146	22.99	23.43	Pass
*138 (U-NII-2C)	5690	16.97	16.82	17.31	16.90	206.743	23.15	23.43	Pass
*138 (U-NII-3)	5690	1.99	1.66	1.87	1.89	6.316	8.00	28.79	Pass

#### Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.57-6)].
- For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the output power limit shall be reduced to 30-(7.21-6) = 28.79 dBm.

### 802.11ax (HE20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	16.53	16.71	17.17	16.60	189.688	22.78	23.43	Pass
116	5580	16.76	17.24	17.52	16.68	203.443	23.08	23.43	Pass
140	5700	16.73	16.67	17.48	16.49	194.091	22.88	23.43	Pass
*144 (U-NII-2C)	5720	16.29	15.82	16.29	16.19	164.905	22.17	23.43	Pass
*144 (U-NII-3)	5720	9.90	9.50	9.69	9.77	37.48	15.74	28.79	Pass

#### Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.57-6)].
- For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the output power limit shall be reduced to  $30-(7.21-6) = 28.79$  dBm.

### 802.11ax (HE40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	16.57	17.03	17.45	16.95	200.996	23.03	23.43	Pass
110	5550	17.08	16.90	17.66	17.38	213.074	23.29	23.43	Pass
134	5670	17.08	16.93	17.53	17.27	210.325	23.23	23.43	Pass
*142 (U-NII-2C)	5710	16.26	15.93	16.43	16.23	167.371	22.24	23.43	Pass
*142 (U-NII-3)	5710	5.17	4.72	4.98	4.59	12.278	10.89	28.79	Pass

#### Notes:


- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-1 and use spectrum analyzer test.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.57-6)].
- For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the output power limit shall be reduced to  $30-(7.21-6) = 28.79$  dBm.

802.11ax (HE80) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	16.72	17.15	17.63	17.02	207.162	23.16	23.43	Pass
122	5610	16.78	17.47	17.64	16.89	210.432	23.23	23.43	Pass
*138 (U-NII-2C)	5690	16.97	16.82	17.31	16.90	206.743	23.15	23.43	Pass
*138 (U-NII-3)	5690	1.99	1.66	1.87	1.89	6.316	8.00	28.79	Pass


Notes:

- \* : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test , the duty factor was included in the total power.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the output power limit shall be reduced to [Determined Conducted Power Limit-(6.57-6)].
- For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the output power limit shall be reduced to 30-(7.21-6) = 28.79 dBm.

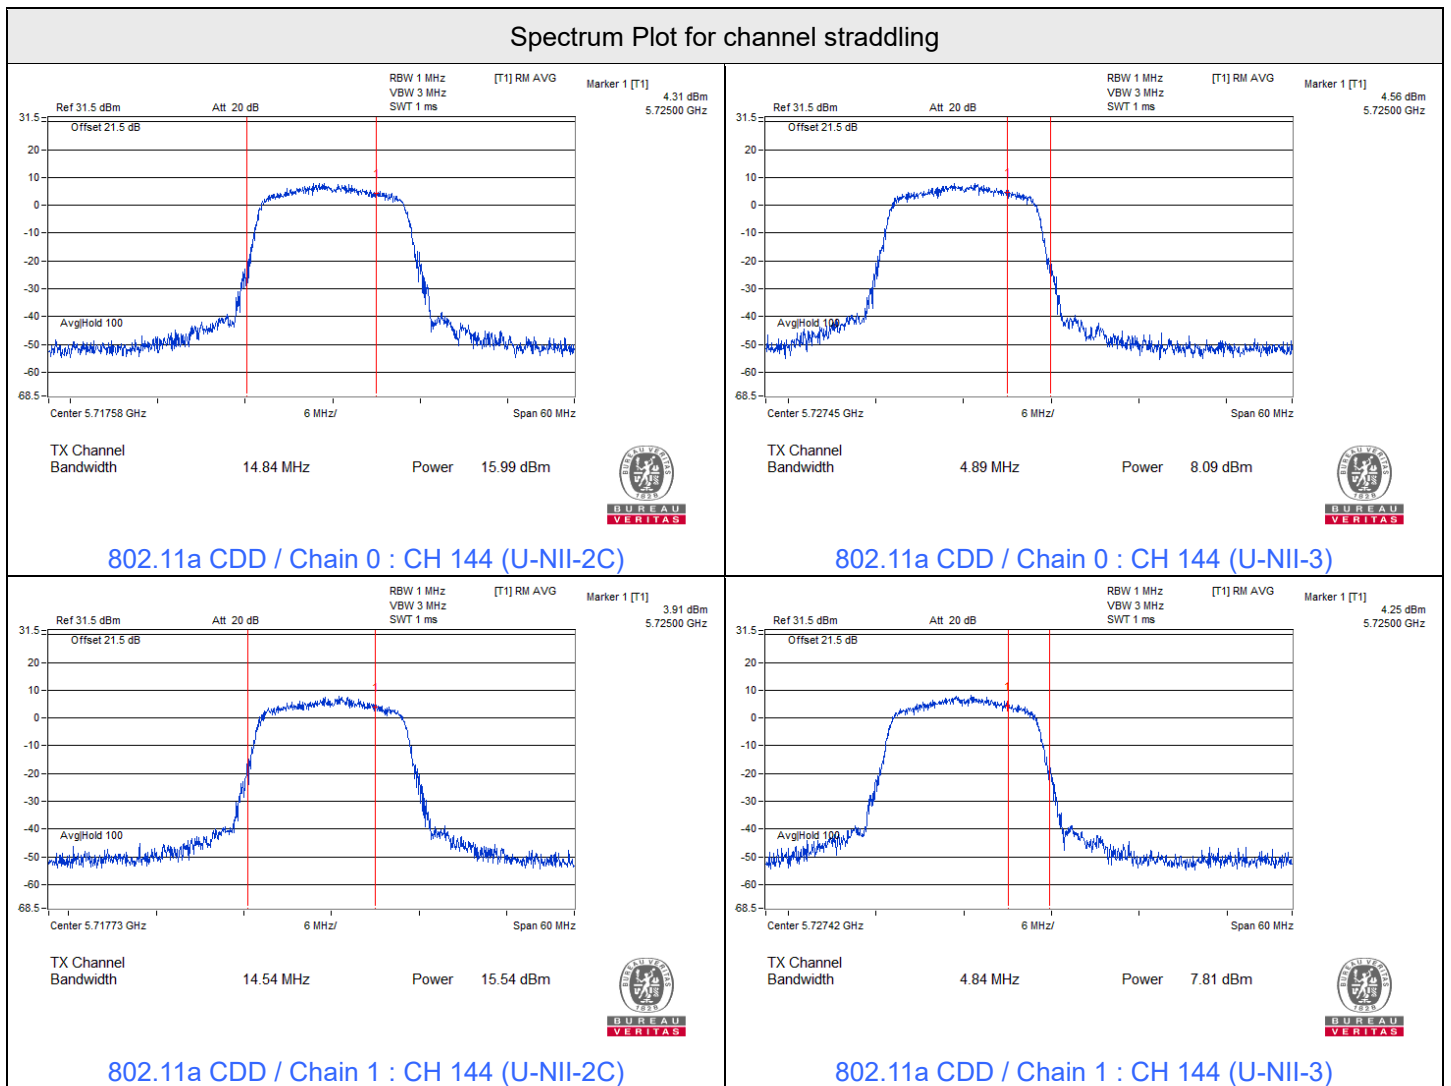





### Spectrum Plot for channel straddling

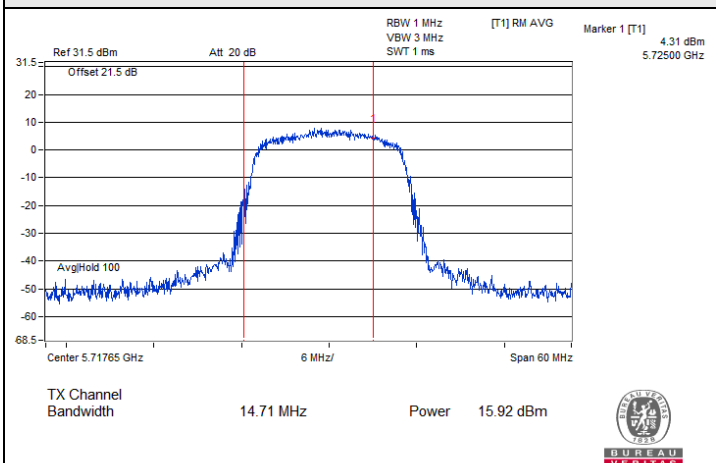


802.11a CDD / Chain 2 : CH 144 (U-NII-2C)

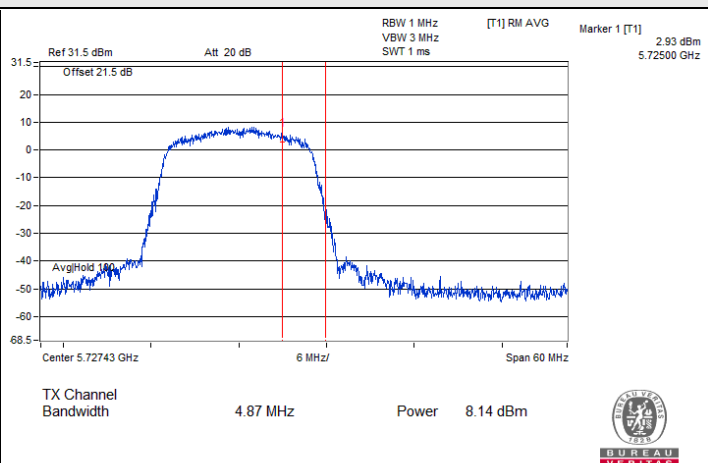


802.11a CDD / Chain 2 : CH 144 (U-NII-3)

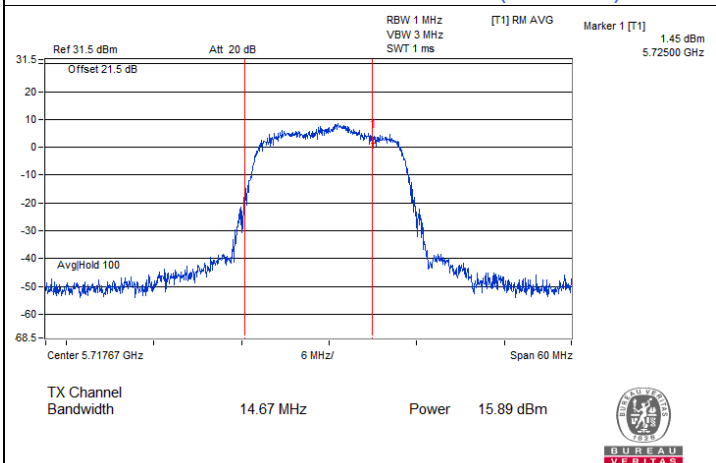


802.11a CDD / Chain 3 : CH 144 (U-NII-2C)

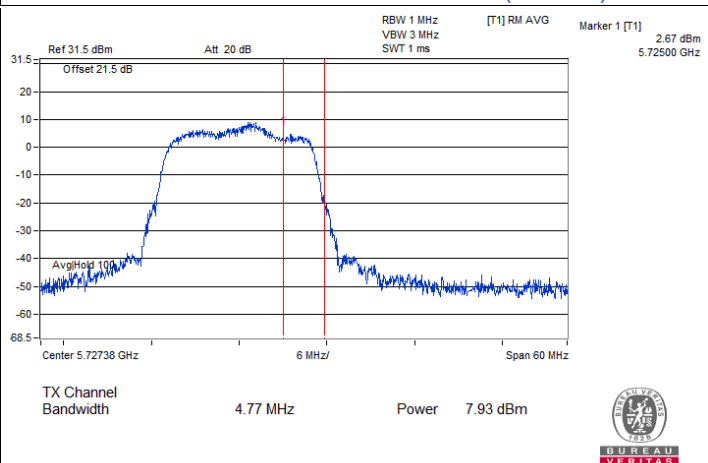

802.11a CDD / Chain 3 : CH 144 (U-NII-3)

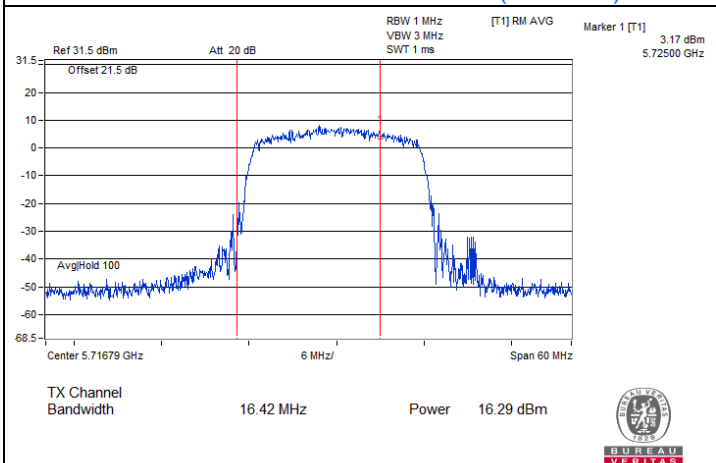


802.11ax (HE20) CDD / Chain 0 : CH 144 (U-NII-2C)

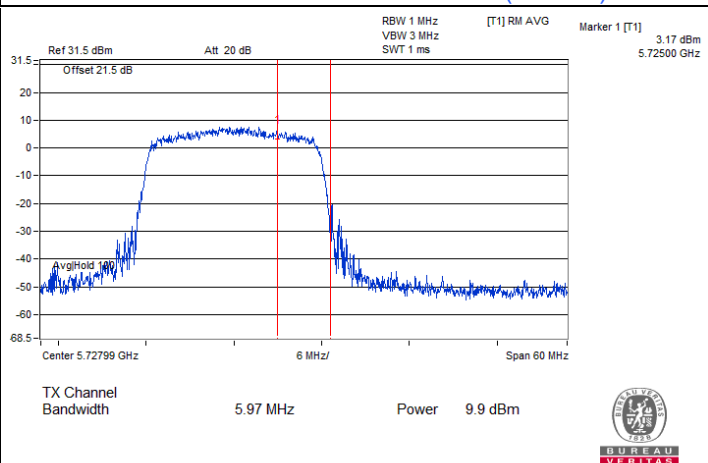


802.11ax (HE20) CDD / Chain 0 : CH 144 (U-NII-3)


### Spectrum Plot for channel straddling

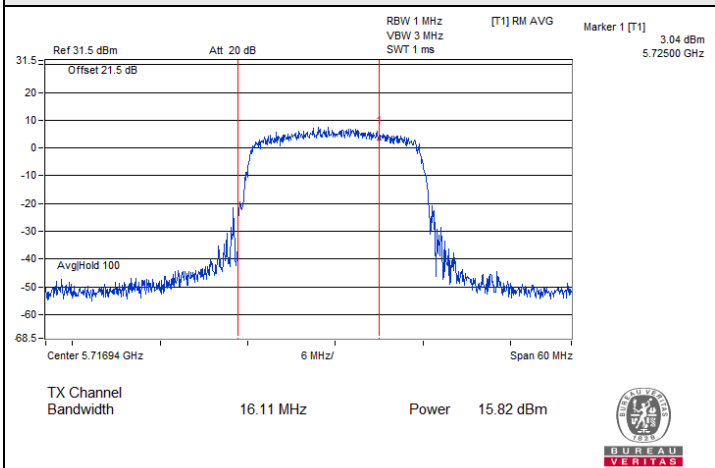


802.11ax (HE20) CDD / Chain 1 : CH 144 (U-NII-2C)

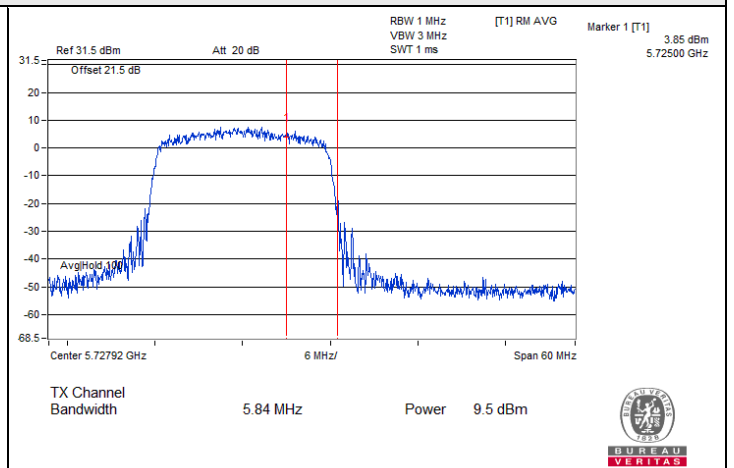


802.11ax (HE20) CDD / Chain 1 : CH 144 (U-NII-3)

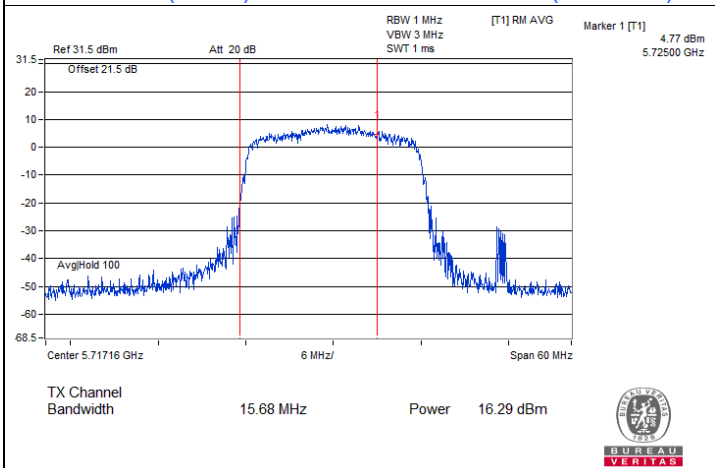


802.11ax (HE20) CDD / Chain 2 : CH 144 (U-NII-2C)

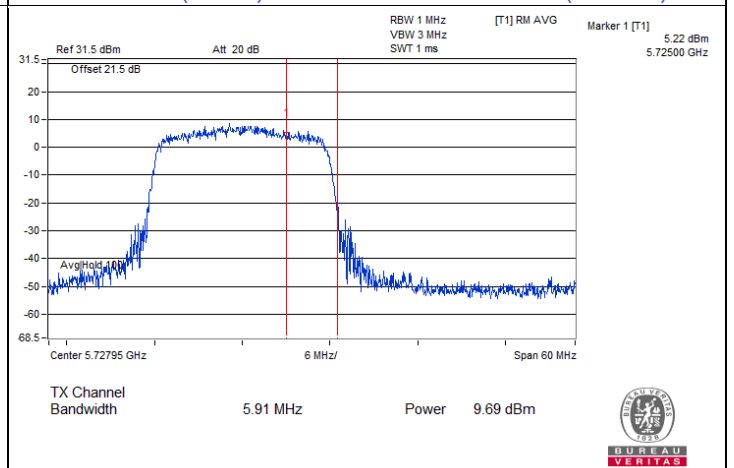

802.11ax (HE20) CDD / Chain 2 : CH 144 (U-NII-3)

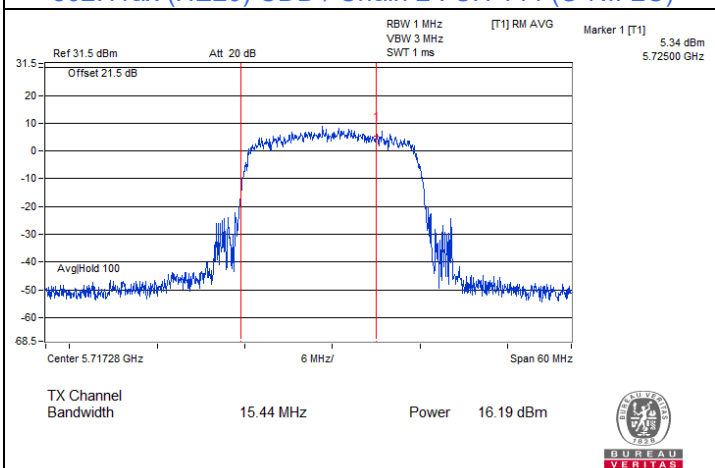


802.11ax (HE20) CDD / Chain 3 : CH 144 (U-NII-2C)

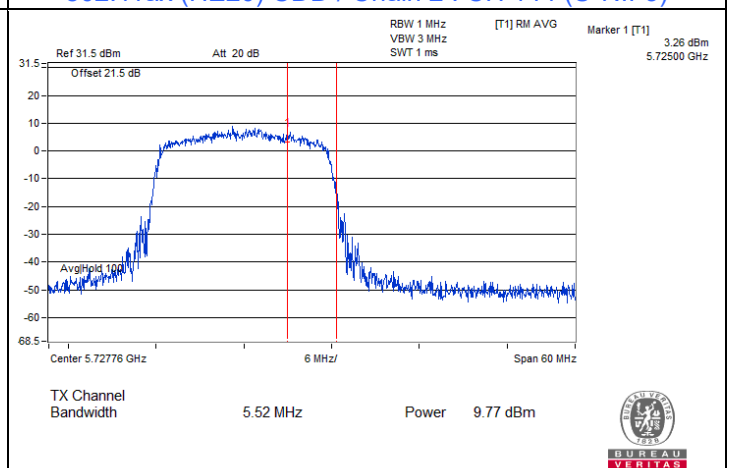


802.11ax (HE20) CDD / Chain 3 : CH 144 (U-NII-3)




### Spectrum Plot for channel straddling

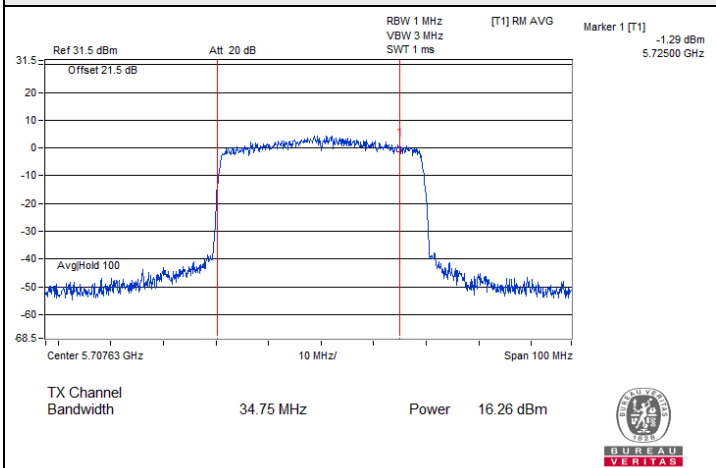


802.11ax (HE40) CDD / Chain 0 : CH 142 (U-NII-2C)

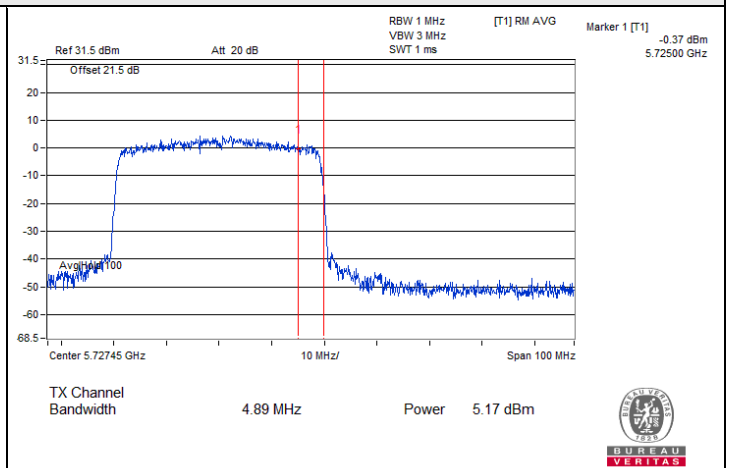


802.11ax (HE40) CDD / Chain 0 : CH 142 (U-NII-3)

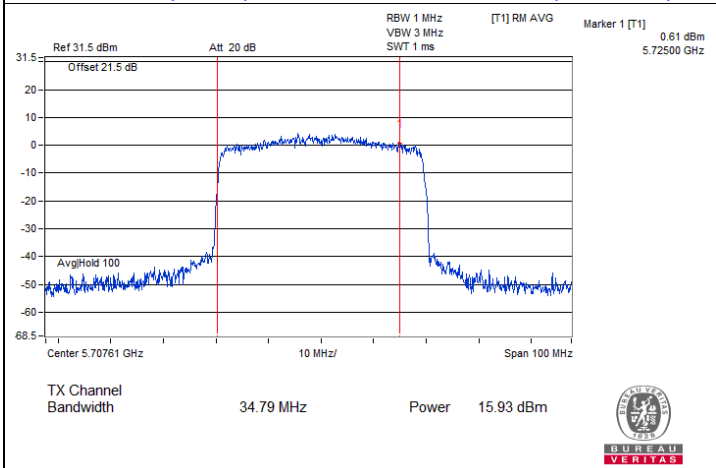


802.11ax (HE40) CDD / Chain 1 : CH 142 (U-NII-2C)

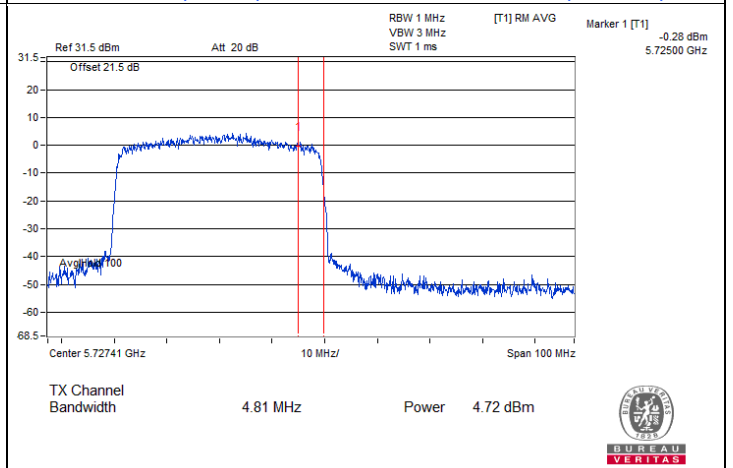

802.11ax (HE40) CDD / Chain 1 : CH 142 (U-NII-3)

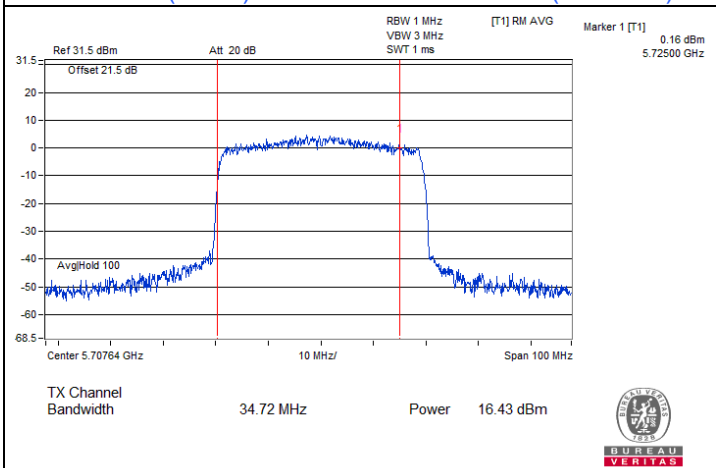


802.11ax (HE40) CDD / Chain 2 : CH 142 (U-NII-2C)

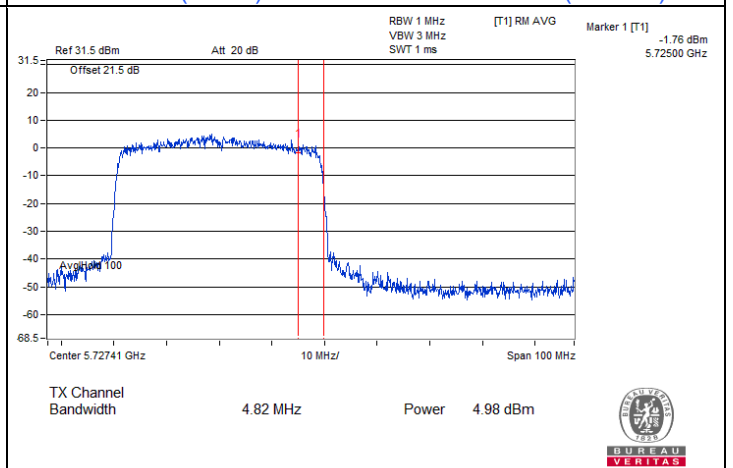


802.11ax (HE40) CDD / Chain 2 : CH 142 (U-NII-3)


### Spectrum Plot for channel straddling

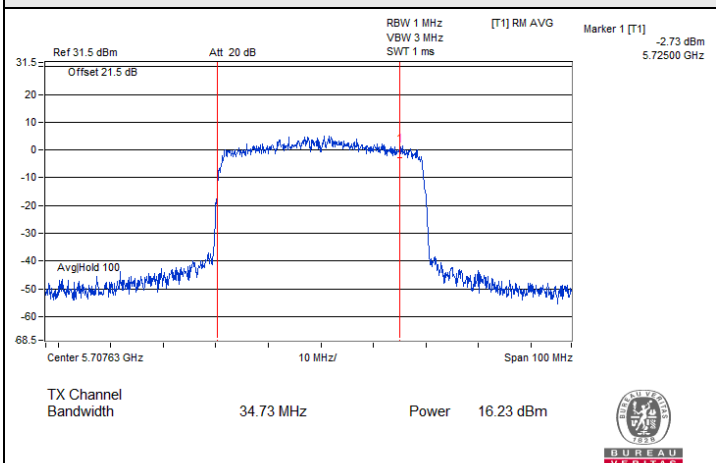


802.11ax (HE40) CDD / Chain 3 : CH 142 (U-NII-2C)

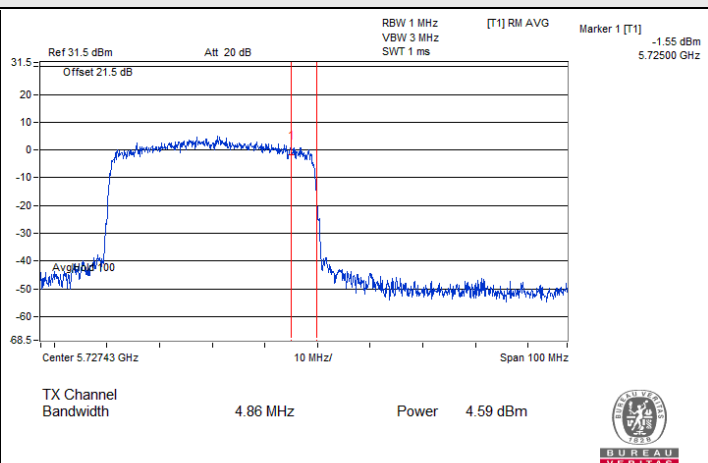


802.11ax (HE40) CDD / Chain 3 : CH 142 (U-NII-3)

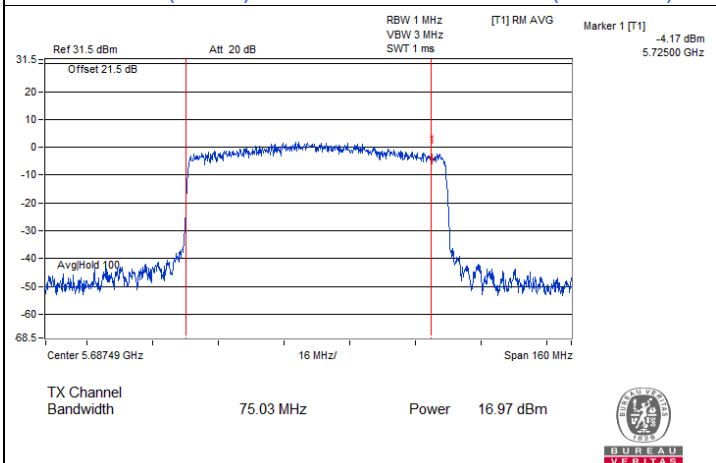


802.11ax (HE80) CDD / Chain 0 : CH 138 (U-NII-2C)

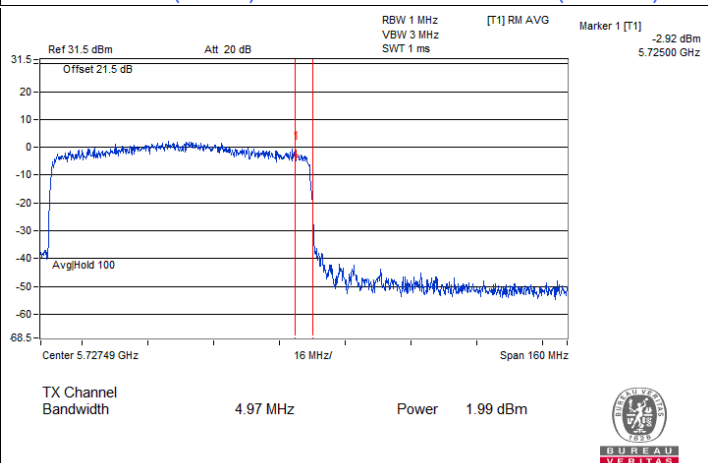

802.11ax (HE80) CDD / Chain 0 : CH 138 (U-NII-3)

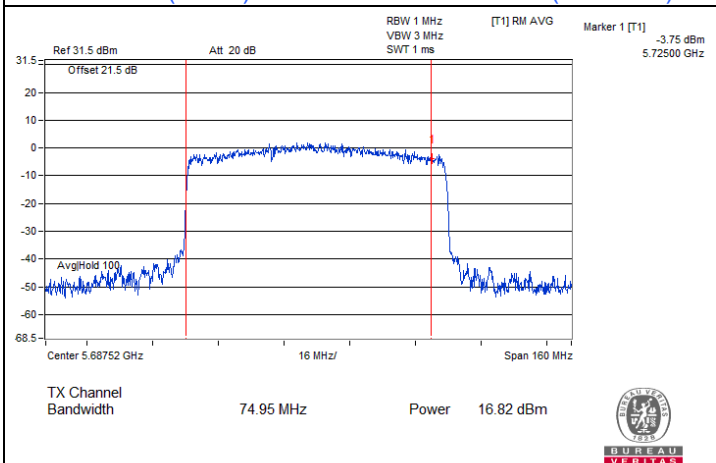


802.11ax (HE80) CDD / Chain 1 : CH 138 (U-NII-2C)

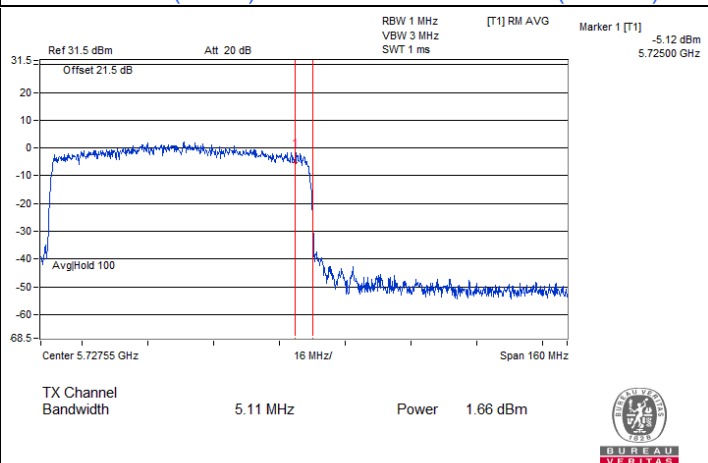


802.11ax (HE80) CDD / Chain 1 : CH 138 (U-NII-3)


### Spectrum Plot for channel straddling

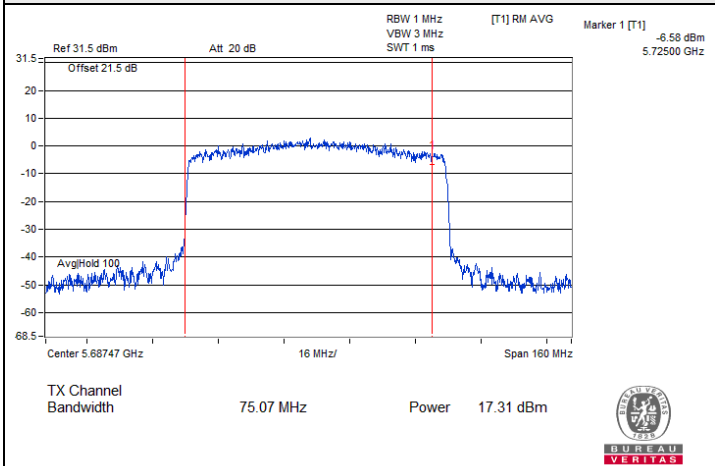


802.11ax (HE80) CDD / Chain 2 : CH 138 (U-NII-2C)

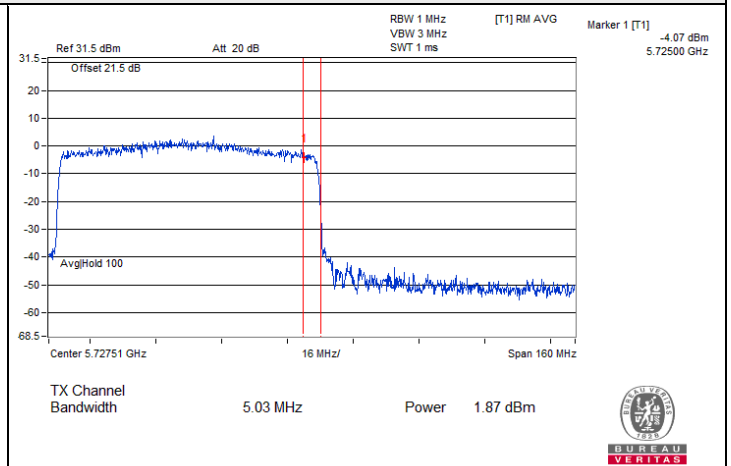

802.11ax (HE80) CDD / Chain 2 : CH 138 (U-NII-3)

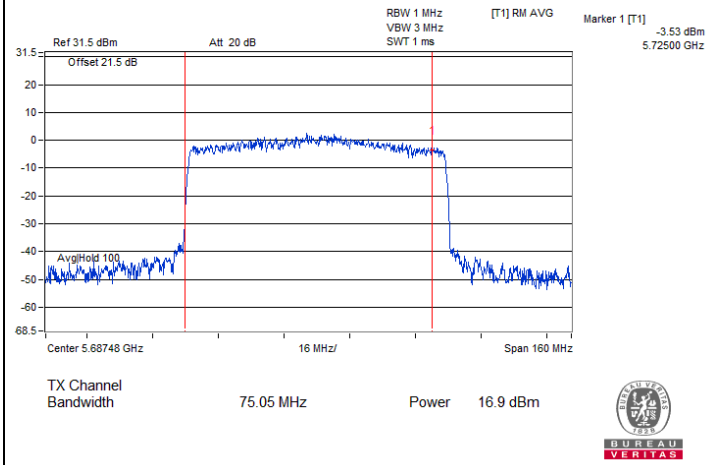

802.11ax (HE80) CDD / Chain 3 : CH 138 (U-NII-2C)

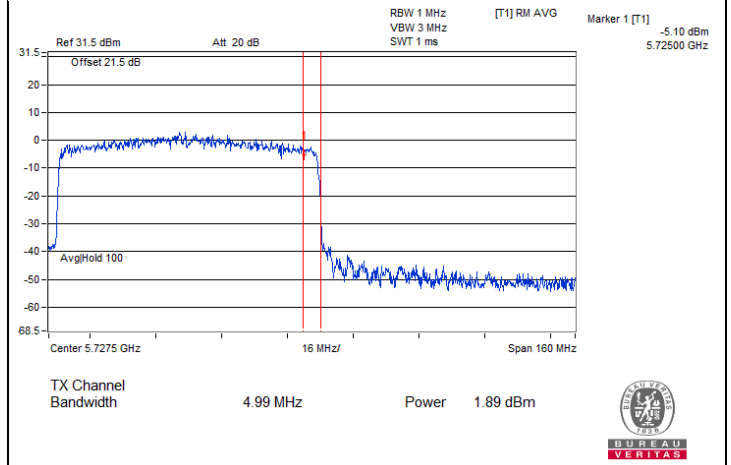

802.11ax (HE80) CDD / Chain 3 : CH 138 (U-NII-3)

### 7.3 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

#### Mode A

##### 802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
52	5260	3.88	4.78	3.70	3.30	9.97	9.99	Pass
60	5300	3.41	4.26	3.57	2.74	9.55	9.99	Pass
64	5320	3.30	4.24	4.00	2.83	9.65	9.99	Pass

#### Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(7.01-6) = 9.99$  dBm/MHz.

##### 802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
52	5260	3.20	4.53	3.50	2.93	9.60	9.99	Pass
60	5300	2.97	4.01	3.81	3.10	9.52	9.99	Pass
64	5320	3.59	3.56	3.34	3.40	9.49	9.99	Pass

#### Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(7.01-6) = 9.99$  dBm/MHz.

### 802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
54	5270	4.37	4.30	3.56	3.14	9.89	9.99	Pass
62	5310	3.09	3.57	2.76	2.65	9.05	9.99	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(7.01-6) = 9.99$  dBm/MHz.

### 802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
58	5290	-1.31	-1.53	-2.15	-2.18	0.13	4.37	9.99	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(7.01-6) = 9.99$  dBm/MHz.


### 802.11ax (HE160)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
50 (U-NII-1)	5250	-2.44	-2.38	-3.30	-4.04	0.17	3.20	15.91	Pass
50 (U-NII-2A)	5250	-2.64	-1.71	-3.37	-3.90	0.17	3.36	9.99	Pass


Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-1, the directional gain is 7.09 dBi > 6dBi, so the power density limit shall be reduced to  $17-(7.09-6) = 15.91$  dBm/MHz.
- For U-NII-2A, the directional gain is 7.01 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(7.01-6) = 9.99$  dBm/MHz.


### Spectrum Plot of Maximum Value

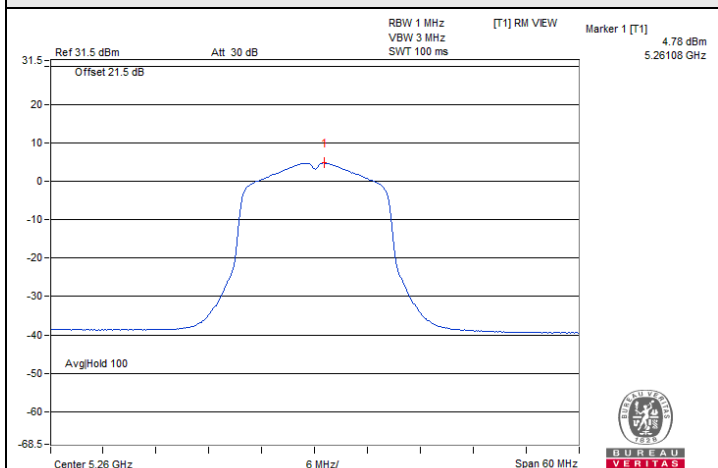


802.11a / Chain 1 : CH 52

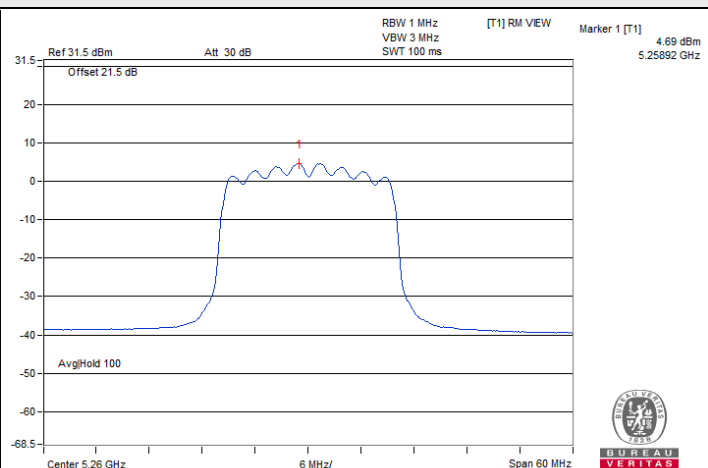


802.11ax (HE20) / Chain 1 : CH 52

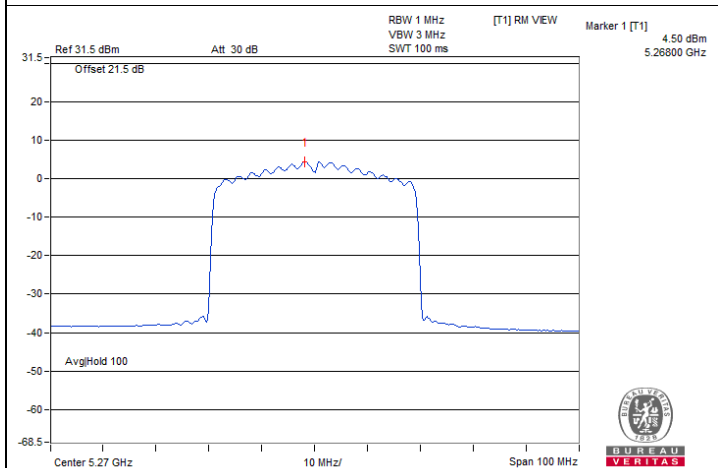

802.11ax (HE40) / Chain 0 : CH 54

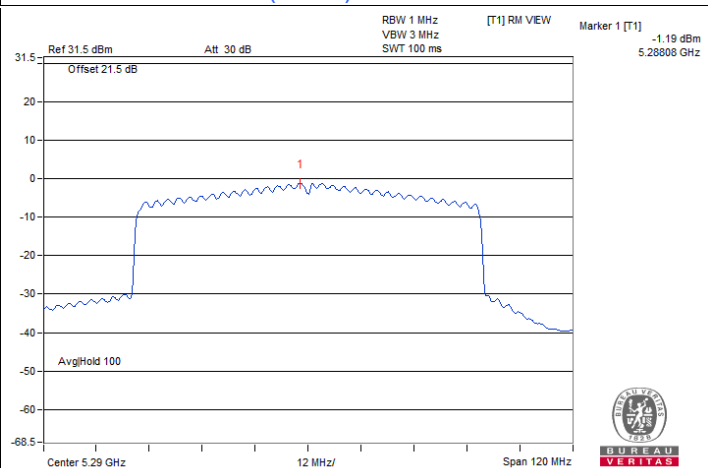

802.11ax (HE80) / Chain 0 : CH 58

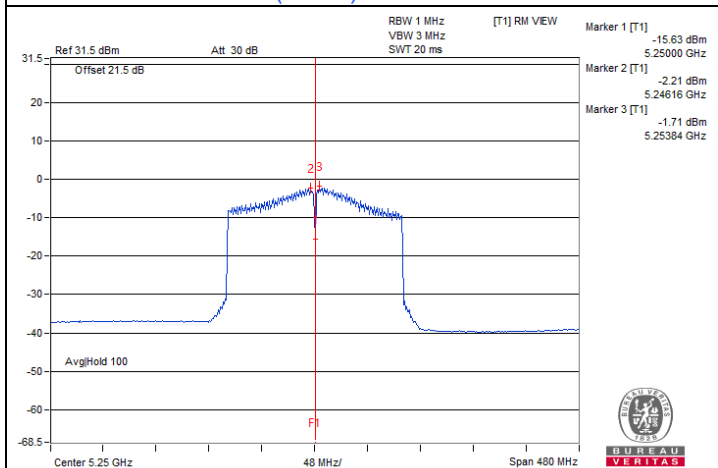

802.11ax (HE160) / Chain 1 : CH 50 (U-NII-2A)



Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

**Mode B**

**802.11a**

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
100	5500	3.98	3.99	4.83	4.68	10.41	10.43	Pass
116	5580	3.99	3.65	4.02	5.05	10.23	10.43	Pass
140	5700	3.81	3.05	4.12	4.64	9.96	10.43	Pass
144 (U-NII-2C)	5720	3.76	3.51	3.91	4.83	10.05	10.43	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.57-6) = 10.43$  dBm/MHz.

**802.11ax (HE20)**

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
100	5500	3.83	3.68	4.03	4.03	9.92	10.43	Pass
116	5580	4.24	4.00	3.85	4.08	10.07	10.43	Pass
140	5700	3.82	4.14	3.99	4.97	10.27	10.43	Pass
144 (U-NII-2C)	5720	4.20	4.30	4.17	4.75	10.38	10.43	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.57-6) = 10.43$  dBm/MHz.

### 802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3			
102	5510	1.33	1.31	2.28	1.60	7.67	10.43	Pass
110	5550	1.62	1.13	1.56	1.57	7.50	10.43	Pass
134	5670	1.31	1.20	1.92	1.79	7.59	10.43	Pass
142 (U-NII-2C)	5710	1.32	1.04	1.34	1.84	7.42	10.43	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.57-6) = 10.43$  dBm/MHz.

### 802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	-0.66	-0.84	-0.99	-0.47	0.13	5.41	10.43	Pass
122	5610	-1.02	-1.15	-1.38	-0.66	0.13	5.11	10.43	Pass
138 (U-NII-2C)	5690	-1.07	-1.21	-0.50	-0.29	0.13	5.40	10.43	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-2C, the directional gain is 6.57 dBi > 6 dBi, so the power density limit shall be reduced to  $11-(6.57-6) = 10.43$  dBm/MHz.

### 802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
144 (U-NII-3)	5720	-3.39	-3.68	-3.39	-3.76	2.47	4.69	28.79	Pass

Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
- For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the power density limit shall be reduced to  $30-(7.21-6) = 28.79$  dBm/500kHz.

### 802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
144 (U-NII-3)	5720	-3.00	-3.38	-3.32	-2.27	3.05	5.27	28.79	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the power density limit shall be reduced to  $30-(7.21-6) = 28.79$  dBm/500kHz.

### 802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)				Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3				
142 (U-NII-3)	5710	-7.12	-7.27	-7.18	-6.55	-1	1.22	28.79	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the power density limit shall be reduced to  $30-(7.21-6) = 28.79$  dBm/500kHz.

### 802.11ax (HE80)


Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)				Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3					
138 (U-NII-3)	5690	-10.24	-10.45	-10.36	-9.89	-4.21	0.13	-1.86	28.79	Pass

Notes:


1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement.
3. For U-NII-3, the directional gain is 7.21 dBi > 6 dBi, so the power density limit shall be reduced to  $30-(7.21-6) = 28.79$  dBm/500kHz.




### Spectrum Plot of Maximum Value

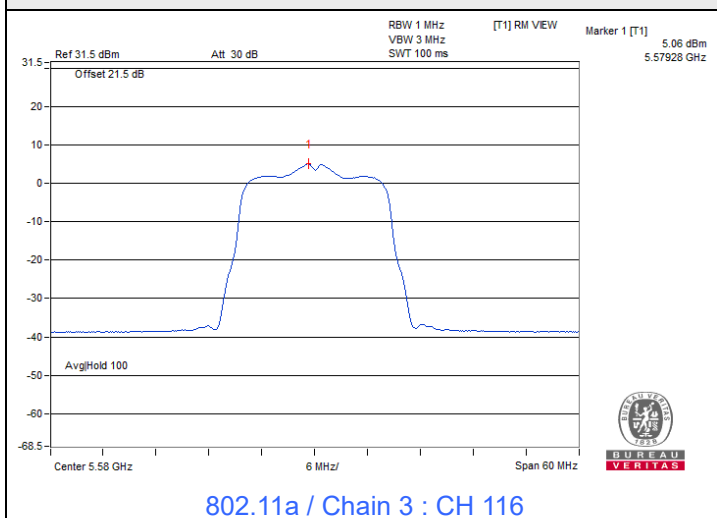


802.11a / Chain 3 : CH 116

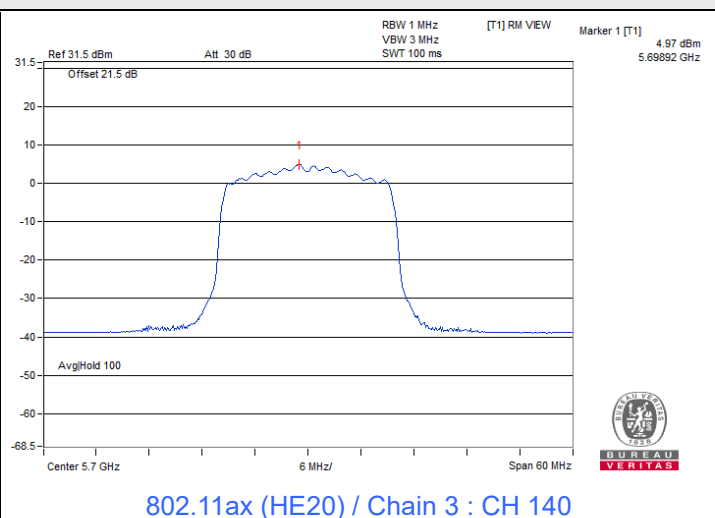


802.11ax (HE20) / Chain 3 : CH 140

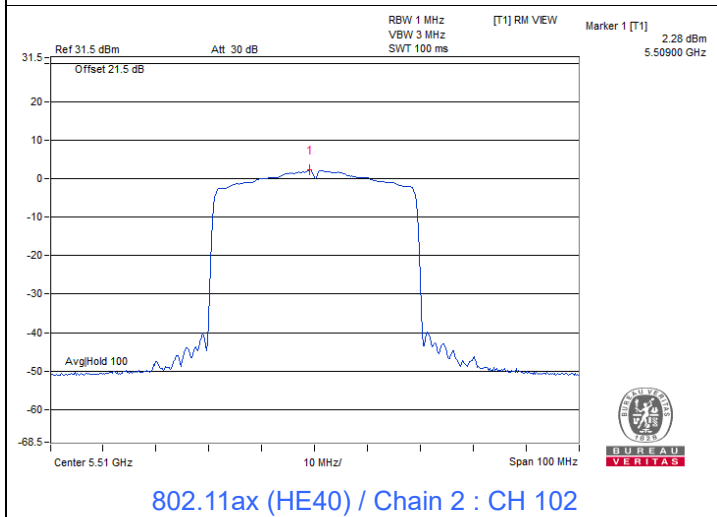


802.11ax (HE40) / Chain 2 : CH 102

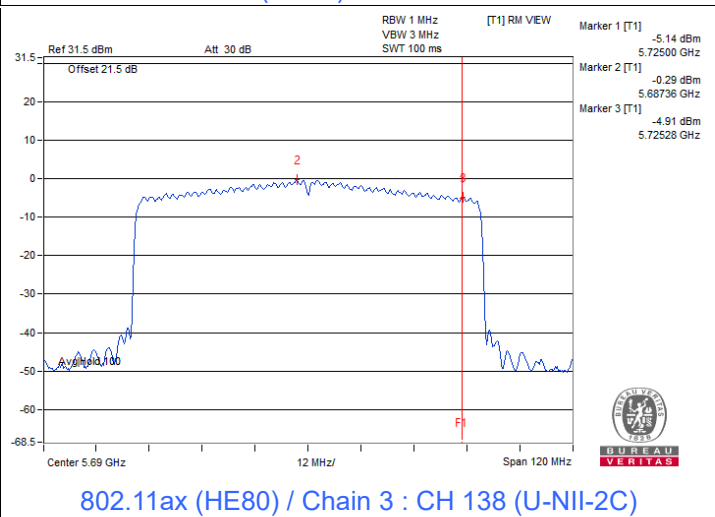

802.11ax (HE80) / Chain 3 : CH 138 (U-NII-2C)

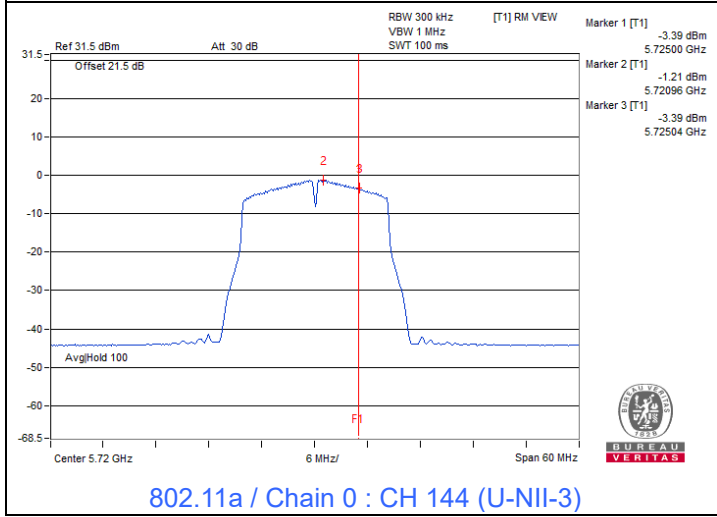


802.11a / Chain 0 : CH 144 (U-NII-3)

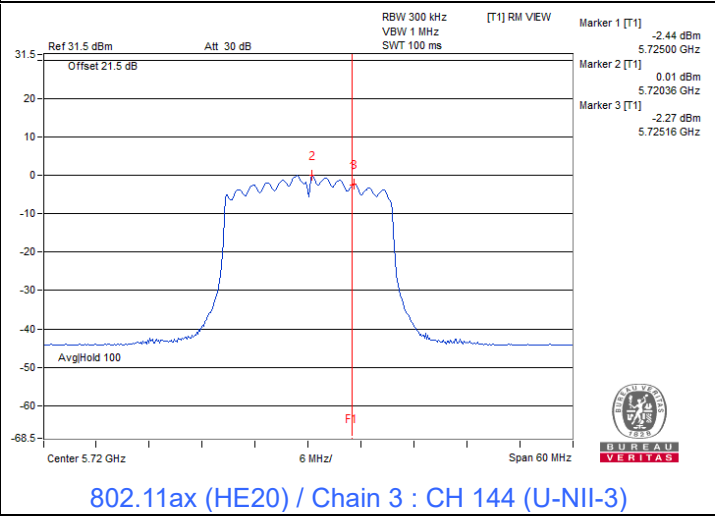


802.11ax (HE20) / Chain 3 : CH 144 (U-NII-3)

### Spectrum Plot of Maximum Value

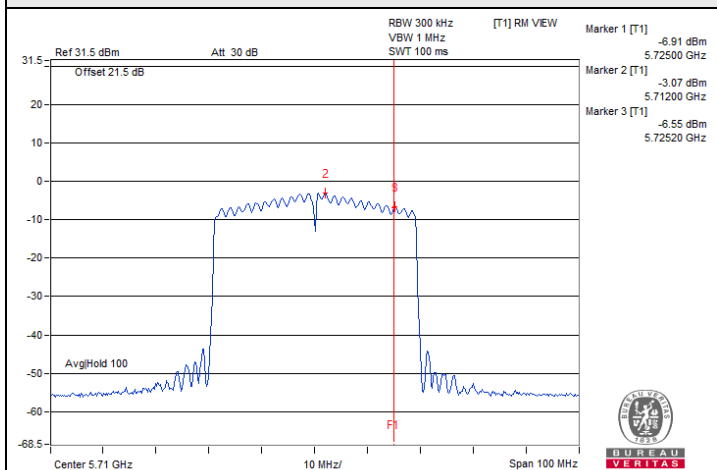

802.11ax (HE40) / Chain 3 : CH 142 (U-NII-3)

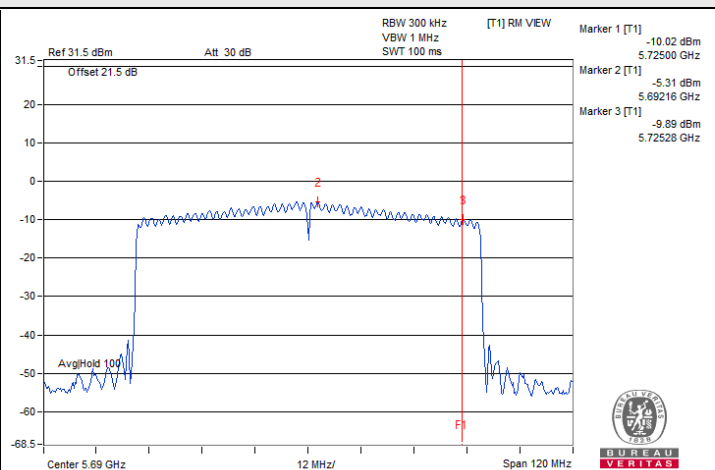

802.11ax (HE80) / Chain 3 : CH 138 (U-NII-3)

#### 7.4 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

#### Mode B

##### 802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
144 (U-NII-3)	5720	3.18	2.55	1.68	1.93	0.5	Pass

##### 802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
144 (U-NII-3)	5720	4.39	3.06	3.45	3.23	0.5	Pass

##### 802.11ax (HE40)





Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
142 (U-NII-3)	5710	2.92	3.46	2.70	2.57	0.5	Pass

##### 802.11ax (HE80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1	Chain 2	Chain 3		
138 (U-NII-3)	5690	3.23	0.63	2.54	2.61	0.5	Pass



### Spectrum Plot of Minimum Value

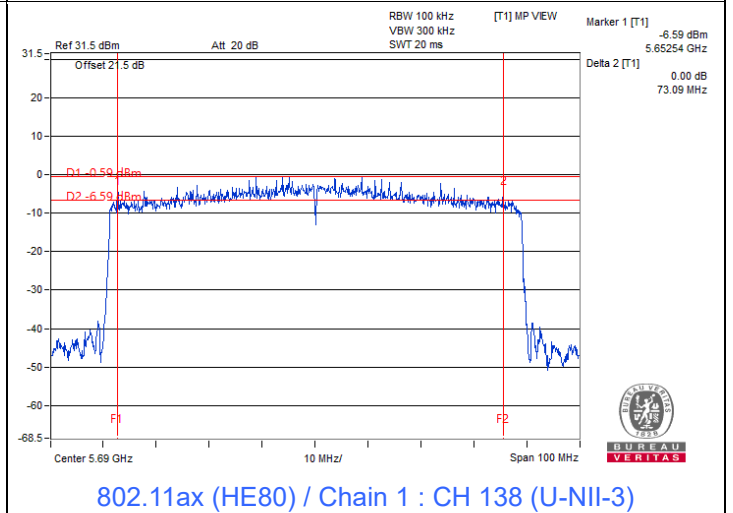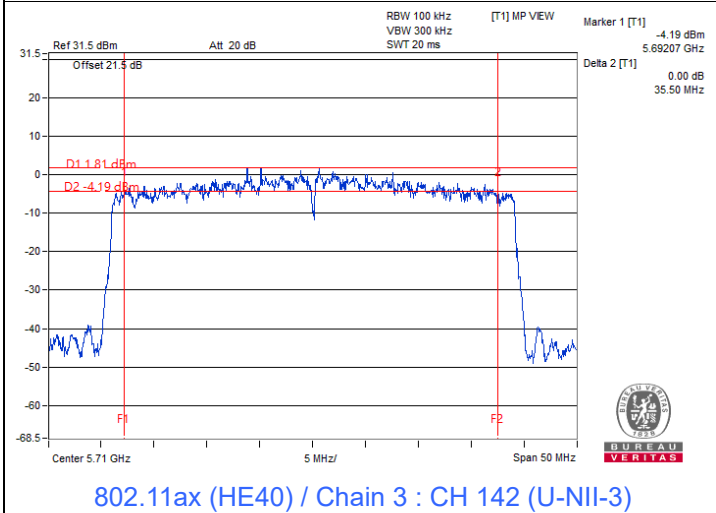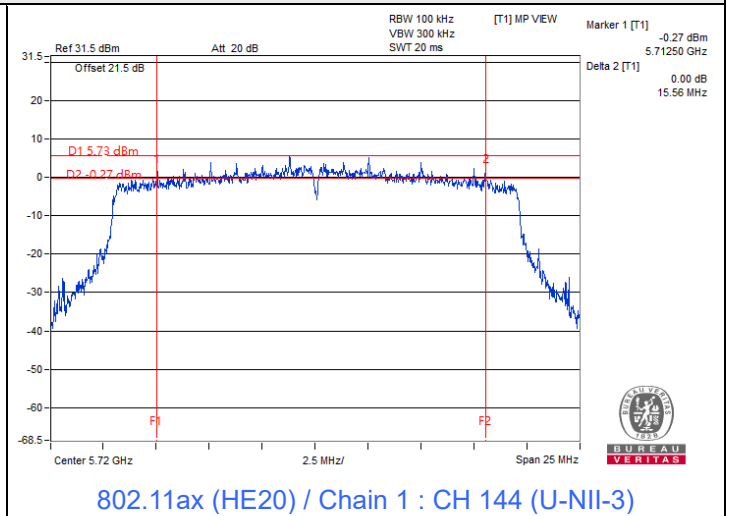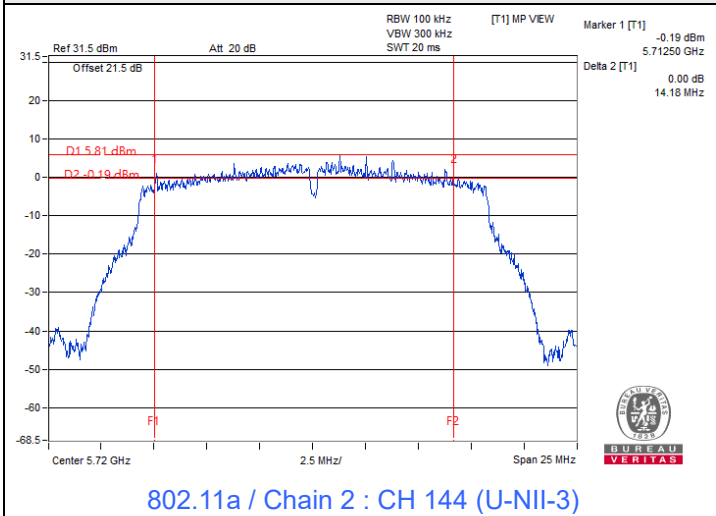

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

## 7.5 Occupied Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

### Mode A

#### 802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
52	5260	16.38	16.14	16.44	16.44
60	5300	16.44	16.26	16.50	16.44
64	5320	16.50	16.74	16.44	16.50

#### 802.11ax (HE20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
52	5260	18.78	18.84	18.84	18.90
60	5300	18.84	18.84	18.96	18.90
64	5320	18.90	18.84	18.90	18.84

#### 802.11ax (HE40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
54	5270	37.44	37.08	37.44	37.32
62	5310	37.56	37.08	37.44	37.44

#### 802.11ax (HE80)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
58	5290	76.32	77.04	76.56	76.56

#### 802.11ax (HE160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
50 (U-NII-1)	5250	77.76	78.24	77.28	77.76
50 (U-NII-2A)	5250	77.28	77.28	76.80	77.28



### Spectrum Plot of Maximum Value

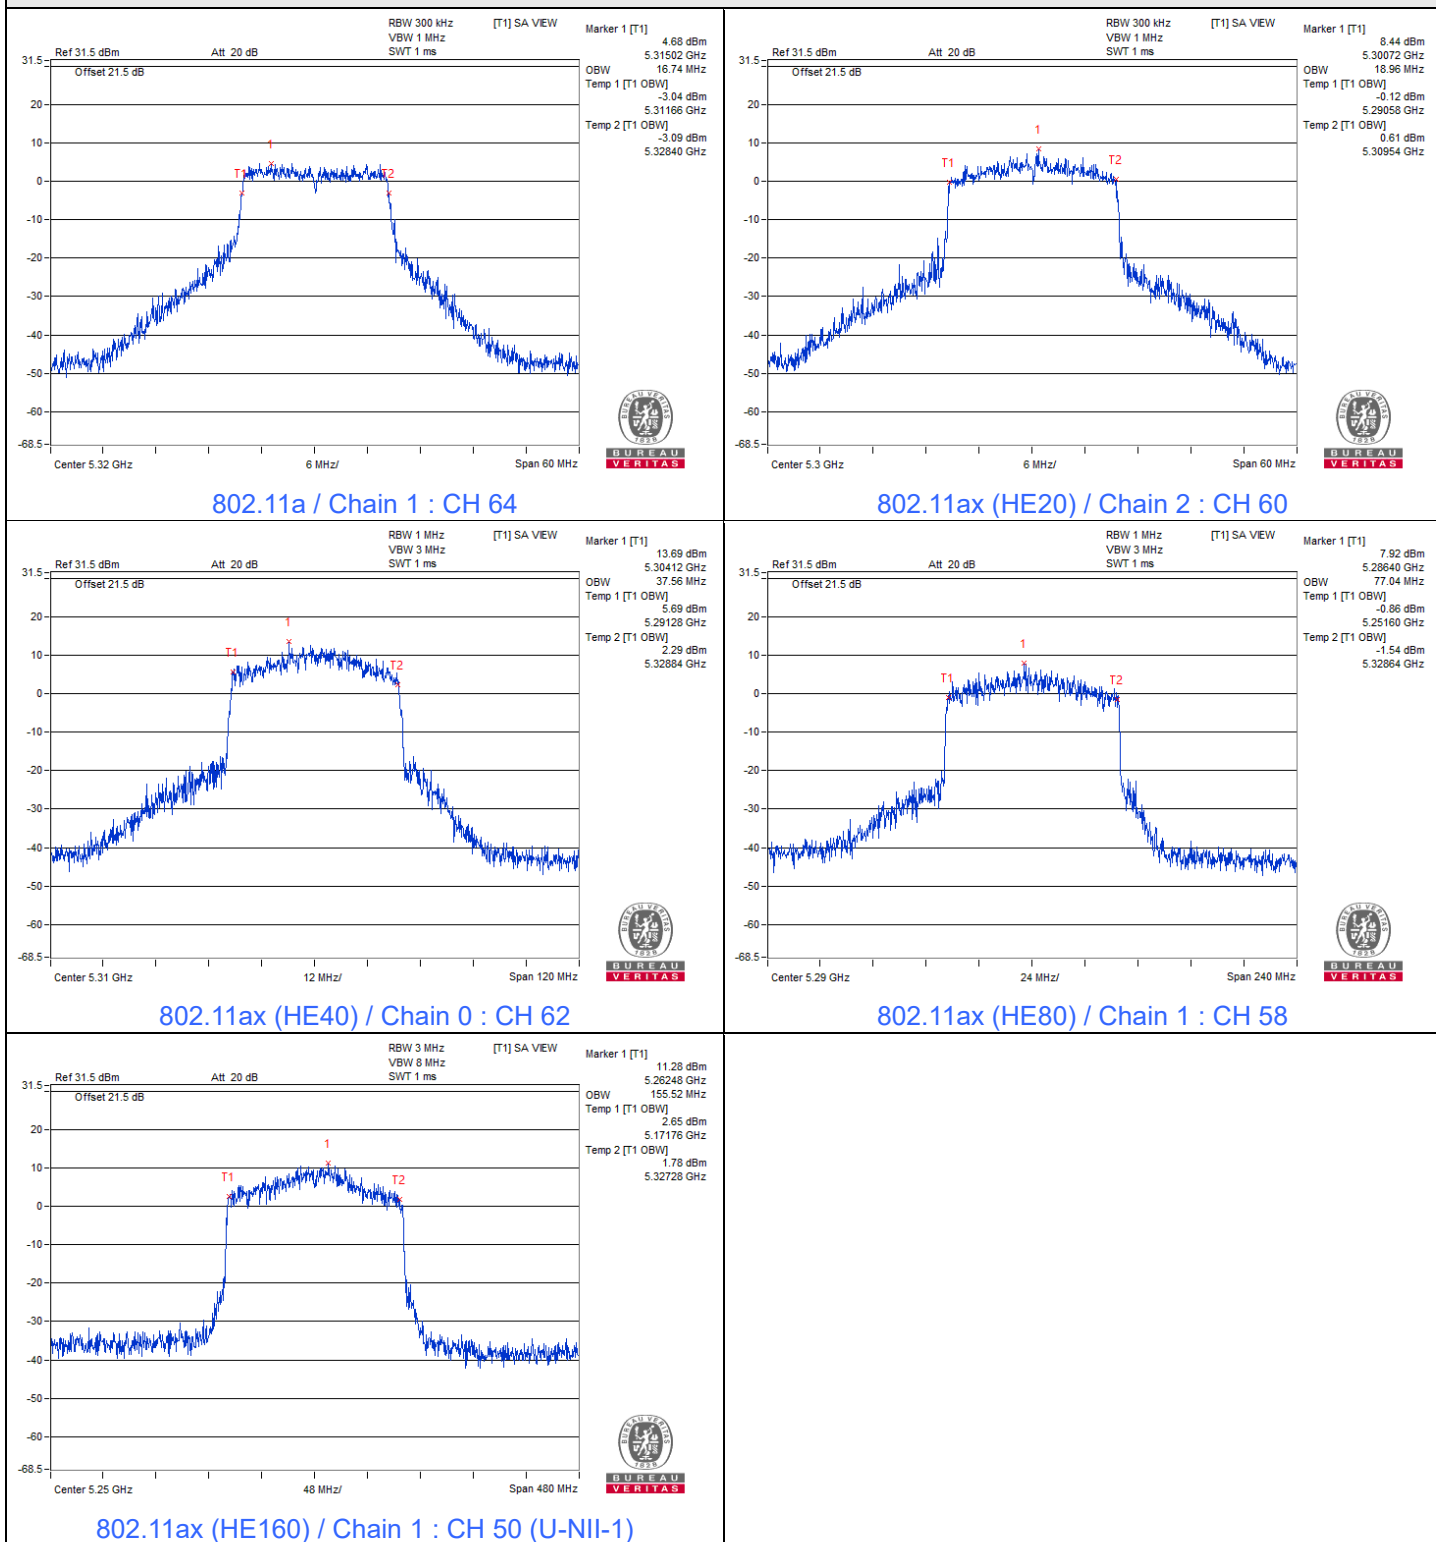

**Notes:**

1. For U-NII-1 straddle channel = 5250 MHz - Temp 1
2. For U-NII-2A straddle channel = Temp 1 + OBW - 5250 MHz



Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

**Mode B**

**802.11a**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	16.32	16.32	16.32	16.32
116	5580	16.44	16.38	16.38	16.44
140	5700	16.38	16.38	16.32	16.44
144 (U-NII-2C)	5720	13.22	13.10	13.10	13.10
144 (U-NII-3)	5720	3.34	3.22	3.16	3.28

**802.11ax (HE20)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	18.90	18.78	18.84	18.84
116	5580	18.84	18.78	18.84	18.90
140	5700	18.84	18.84	18.90	18.90
144 (U-NII-2C)	5720	14.42	14.36	14.36	14.36
144 (U-NII-3)	5720	4.48	4.42	4.42	4.42

**802.11ax (HE40)**


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
102	5510	37.56	37.56	37.56	37.56
110	5550	37.80	37.44	37.56	37.56
134	5670	37.68	37.56	37.68	37.56
142 (U-NII-2C)	5710	33.72	33.72	33.96	33.72
142 (U-NII-3)	5710	3.84	3.72	3.84	3.84



802.11ax (HE80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
106	5530	76.80	76.56	76.32	76.56
122	5610	76.56	76.80	76.56	76.80
138 (U-NII-2C)	5690	72.92	73.16	73.16	73.40
138 (U-NII-3)	5690	3.40	3.16	3.16	3.40

Spectrum Plot of Maximum Value

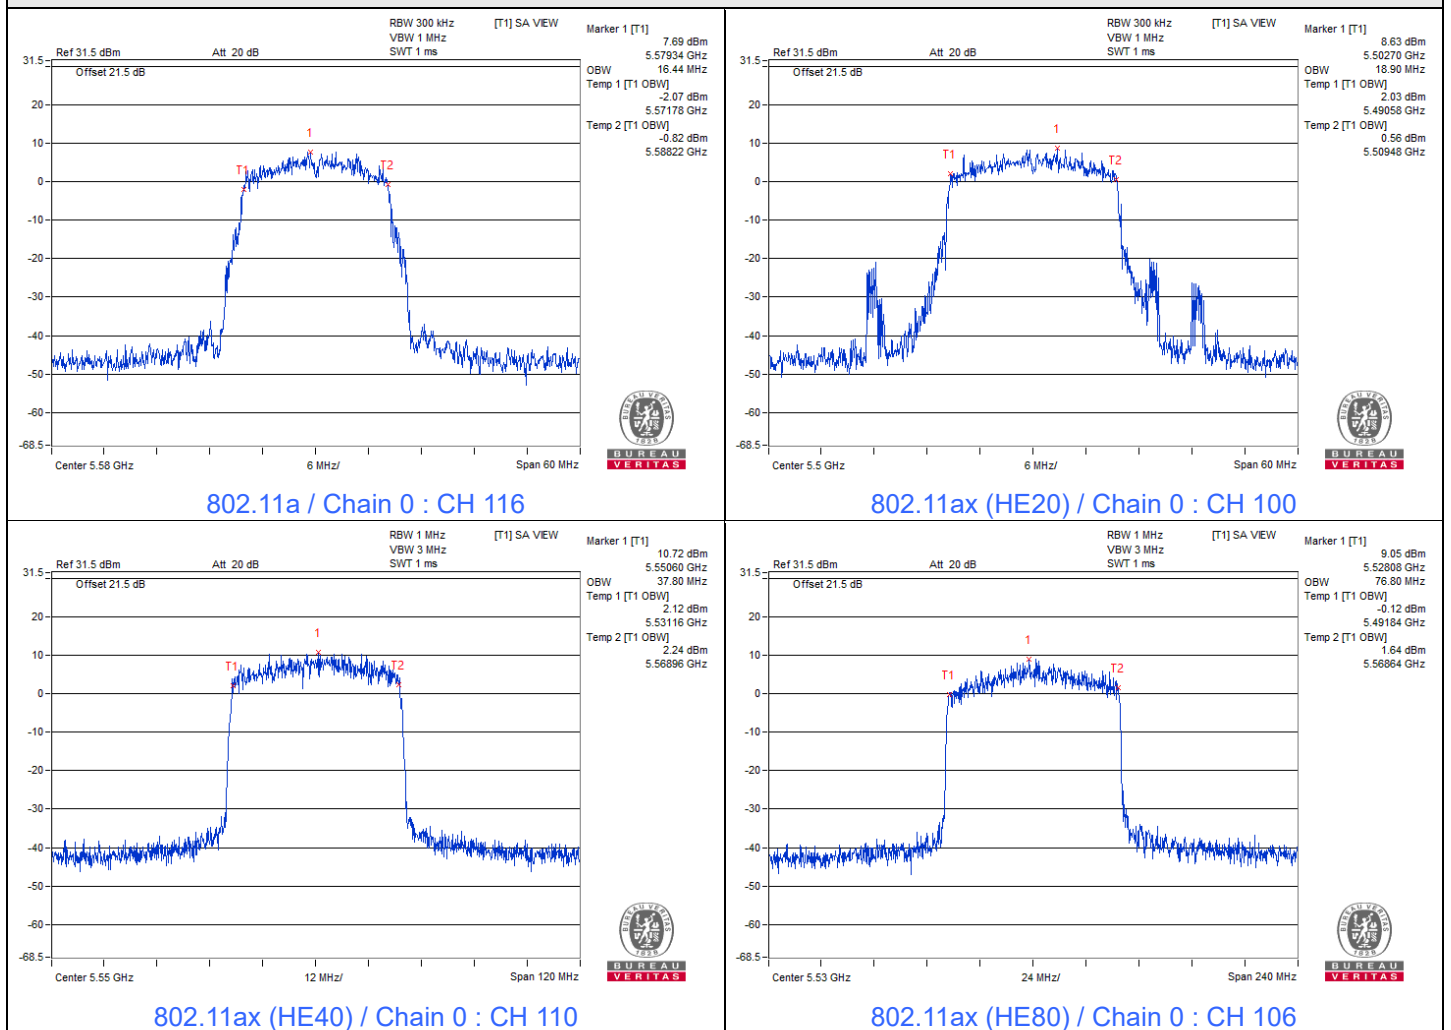

## 7.6 Frequency Stability

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

### Mode A

Frequency Stability Versus Temperature									
Operating Frequency: 5260 MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
50	120	5260.0192	Pass	5260.0155	Pass	5260.0159	Pass	5260.0162	Pass
40	120	5259.9789	Pass	5259.9804	Pass	5259.9797	Pass	5259.9781	Pass
30	120	5259.9753	Pass	5259.9773	Pass	5259.975	Pass	5259.9754	Pass
20	120	5259.996	Pass	5259.9942	Pass	5259.9956	Pass	5259.9943	Pass
10	120	5259.9756	Pass	5259.9778	Pass	5259.9777	Pass	5259.9753	Pass
0	120	5259.9812	Pass	5259.9798	Pass	5259.9802	Pass	5259.9828	Pass
-10	120	5259.989	Pass	5259.9884	Pass	5259.9903	Pass	5259.99	Pass
-20	120	5259.9803	Pass	5259.9776	Pass	5259.982	Pass	5259.9816	Pass
-30	120	5259.9736	Pass	5259.9751	Pass	5259.972	Pass	5259.976	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5260 MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	138	5260.0058	Pass	5260.0052	Pass	5260.0082	Pass	5260.0084	Pass
	120	5259.996	Pass	5259.9942	Pass	5259.9956	Pass	5259.9943	Pass
	102	5259.9998	Pass	5259.9951	Pass	5259.9959	Pass	5259.9959	Pass



Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Sampson Chen
--------------	----------------	---------------------------	--------------	------------	--------------

Mode B

Frequency Stability Versus Temperature									
Operating Frequency: 5500 MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
50	120	5500.0034	Pass	5500.0022	Pass	5500.0044	Pass	5500.0019	Pass
40	120	5499.9729	Pass	5499.974	Pass	5499.9721	Pass	5499.9721	Pass
30	120	5500.0234	Pass	5500.0208	Pass	5500.0232	Pass	5500.0245	Pass
20	120	5499.9803	Pass	5499.9767	Pass	5499.9807	Pass	5499.9811	Pass
10	120	5499.9928	Pass	5499.9925	Pass	5499.9919	Pass	5499.9938	Pass
0	120	5499.9904	Pass	5499.9872	Pass	5499.9898	Pass	5499.9905	Pass
-10	120	5500.0116	Pass	5500.0119	Pass	5500.008	Pass	5500.0102	Pass
-20	120	5500.012	Pass	5500.0075	Pass	5500.0125	Pass	5500.0101	Pass
-30	120	5500.0158	Pass	5500.018	Pass	5500.02	Pass	5500.0194	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5500 MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	138	5499.9816	Pass	5499.9826	Pass	5499.9827	Pass	5499.981	Pass
	120	5499.9803	Pass	5499.9767	Pass	5499.9807	Pass	5499.9811	Pass
	102	5499.9765	Pass	5499.9757	Pass	5499.9765	Pass	5499.9742	Pass

## 7.7 AC Power Conducted Emissions


### Mode A

RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 74% RH
Tested By	Sampson Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.95	33.26	18.46	43.21	28.41	65.79	55.79	-22.58	-27.38
2	0.18125	9.95	29.07	15.19	39.02	25.14	64.43	54.43	-25.41	-29.29
3	0.49500	9.97	23.63	15.94	33.60	25.91	56.08	46.08	-22.48	-20.17
4	0.99766	10.00	15.68	9.19	25.68	19.19	56.00	46.00	-30.32	-26.81
5	7.11719	10.45	19.76	13.57	30.21	24.02	60.00	50.00	-29.79	-25.98
6	12.12500	10.77	20.25	15.02	31.02	25.79	60.00	50.00	-28.98	-24.21

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

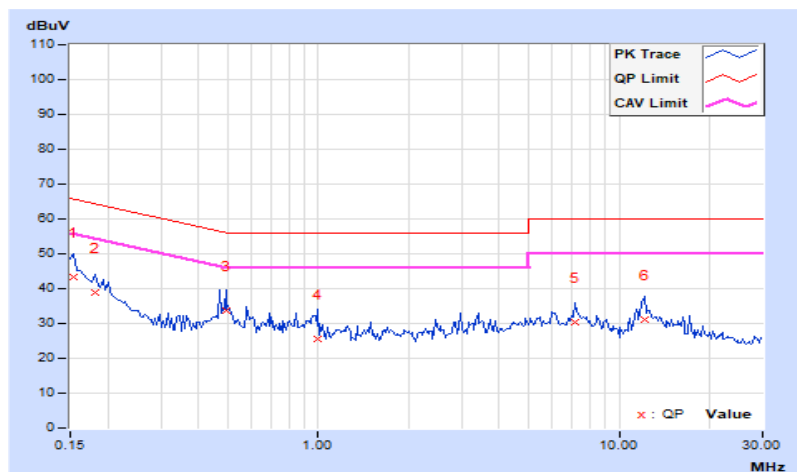


RF Mode	802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 74% RH
Tested By	Sampson Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.00	34.42	22.03	44.42	32.03	65.79	55.79	-21.37	-23.76
2	0.17344	10.00	31.75	20.68	41.75	30.68	64.79	54.79	-23.04	-24.11
3	0.31797	10.01	21.90	14.83	31.91	24.84	59.76	49.76	-27.85	-24.92
<b>4</b>	<b>0.50122</b>	<b>10.02</b>	<b>32.02</b>	<b>25.62</b>	<b>42.04</b>	<b>35.64</b>	<b>56.00</b>	<b>46.00</b>	<b>-13.96</b>	<b>-10.36</b>
5	7.02344	10.46	16.75	10.77	27.21	21.23	60.00	50.00	-32.79	-28.77
6	12.53516	10.75	13.32	7.35	24.07	18.10	60.00	50.00	-35.93	-31.90

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

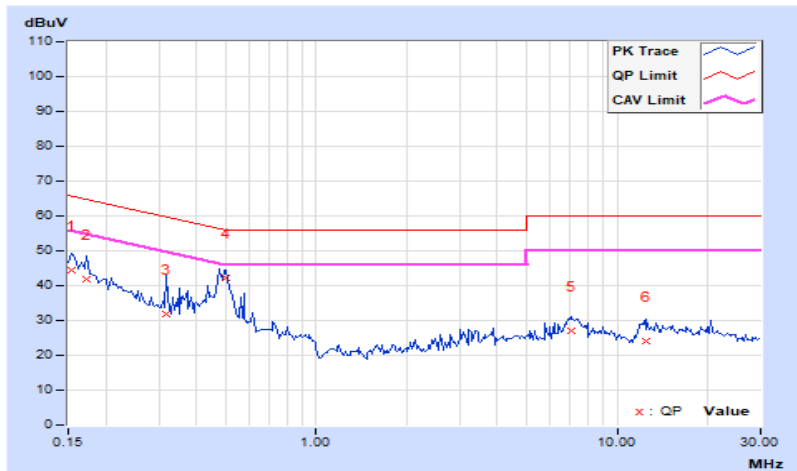


## Mode B

<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 74% RH
<b>Tested By</b>	Sampson Chen		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.95	32.98	18.81	42.93	28.76	65.58	55.58	-22.65	-26.82
2	0.18516	9.95	28.27	14.58	38.22	24.53	64.25	54.25	-26.03	-29.72
3	0.50450	9.97	23.96	16.88	33.93	26.85	56.00	46.00	-22.07	-19.15
4	0.57969	9.97	16.89	8.90	26.86	18.87	56.00	46.00	-29.14	-27.13
5	2.50781	10.09	16.55	10.20	26.64	20.29	56.00	46.00	-29.36	-25.71
6	11.62109	10.74	18.96	13.60	29.70	24.34	60.00	50.00	-30.30	-25.66

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

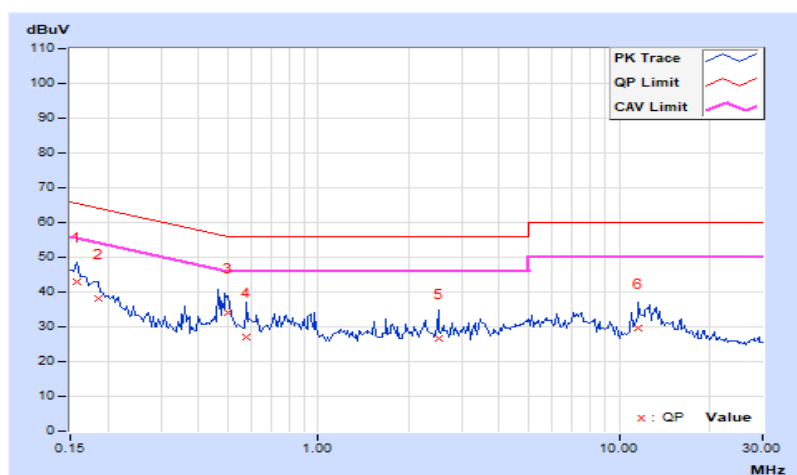




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 74% RH
<b>Tested By</b>	Sampson Chen		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	34.48	22.58	44.48	32.58	66.00	56.00	-21.52	-23.42
2	0.16953	10.00	31.55	20.93	41.55	30.93	64.98	54.98	-23.43	-24.05
3	0.26719	10.00	23.27	15.57	33.27	25.57	61.20	51.20	-27.93	-25.63
4	0.49675	10.02	31.83	25.61	41.85	35.63	56.05	46.05	-14.20	-10.42
5	7.00781	10.46	16.70	10.58	27.16	21.04	60.00	50.00	-32.84	-28.96
6	12.14063	10.74	12.76	6.70	23.50	17.44	60.00	50.00	-36.50	-32.56

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

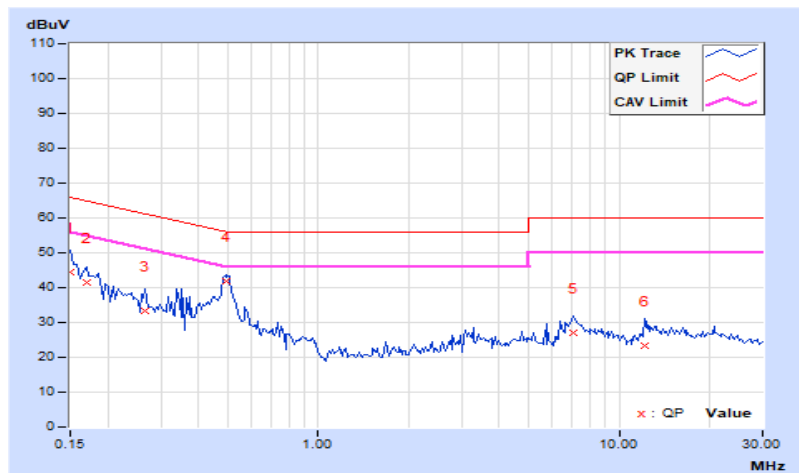

## 7.8 Unwanted Emissions below 1 GHz

### Mode A


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.99	24.1 QP	40.0	-15.9	3.00 H	248	38.5	-14.4
2	113.83	22.7 QP	43.5	-20.8	3.00 H	95	38.7	-16.0
3	150.13	22.6 QP	43.5	-20.9	3.50 H	96	35.7	-13.1
4	523.73	30.7 QP	46.0	-15.3	2.00 H	317	38.0	-7.3
5	598.40	29.0 QP	46.0	-17.0	2.00 H	2	34.6	-5.6
6	673.69	28.3 QP	46.0	-17.7	1.00 H	305	32.6	-4.3

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

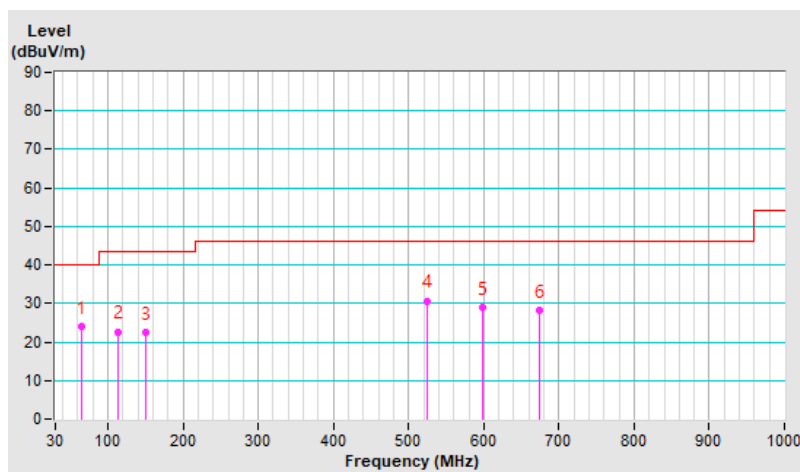


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.80	25.1 QP	40.0	-14.9	2.00 V	2	39.5	-14.4
2	145.31	22.8 QP	43.5	-20.7	2.00 V	2	36.1	-13.3
3	405.58	22.0 QP	46.0	-24.0	1.00 V	275	32.1	-10.1
4	486.72	27.9 QP	46.0	-18.1	2.00 V	2	36.1	-8.2
<b>5</b>	<b>561.75</b>	<b>33.4 QP</b>	<b>46.0</b>	<b>-12.6</b>	<b>1.00 V</b>	<b>24</b>	<b>40.1</b>	<b>-6.7</b>
6	690.04	27.1 QP	46.0	-18.9	1.00 V	313	31.2	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

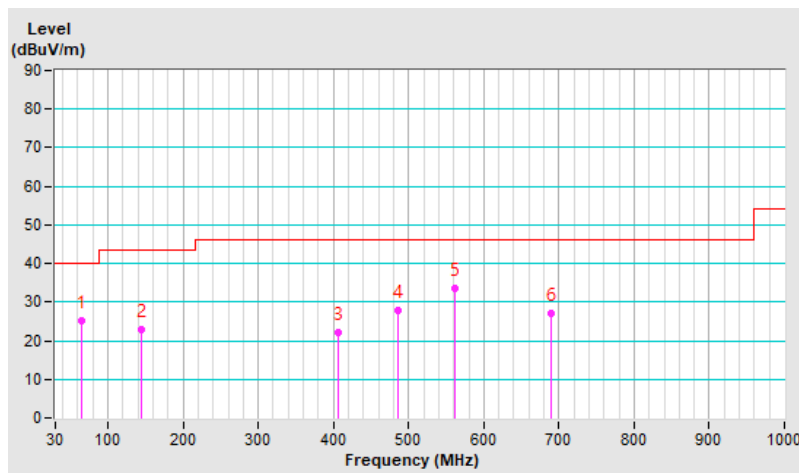

## Mode B


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.70	23.3 QP	40.0	-16.7	3.50 H	236	37.7	-14.4
2	250.00	23.4 QP	46.0	-22.6	1.00 H	56	37.7	-14.3
3	438.25	22.9 QP	46.0	-23.1	2.00 H	355	31.7	-8.8
4	526.18	28.8 QP	46.0	-17.2	3.50 H	228	36.0	-7.2
5	563.89	30.4 QP	46.0	-15.6	3.50 H	2	37.2	-6.8
6	684.99	27.6 QP	46.0	-18.4	3.50 H	2	31.8	-4.2

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

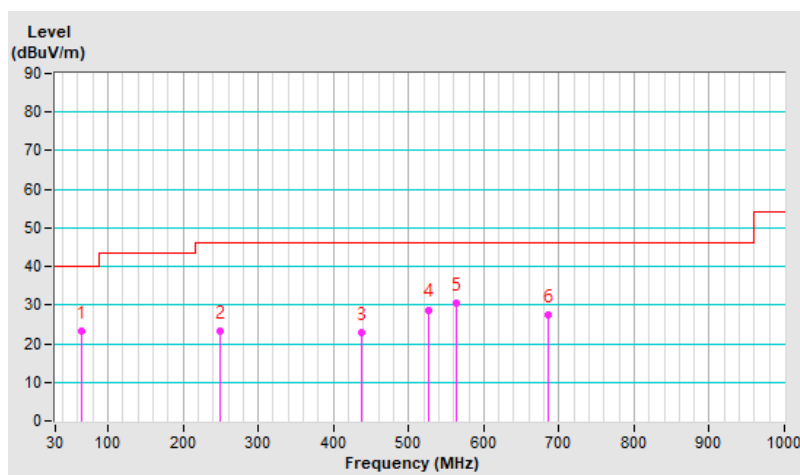


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.82	24.9 QP	40.0	-15.1	2.00 V	2	39.3	-14.4
2	148.10	24.3 QP	43.5	-19.2	1.00 V	312	37.6	-13.3
3	360.26	20.8 QP	46.0	-25.2	3.50 V	52	32.0	-11.2
4	448.82	25.0 QP	46.0	-21.0	1.00 V	55	33.6	-8.6
5	523.61	30.7 QP	46.0	-15.3	2.00 V	329	38.0	-7.3
6	560.98	31.6 QP	46.0	-14.4	1.00 V	360	38.3	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

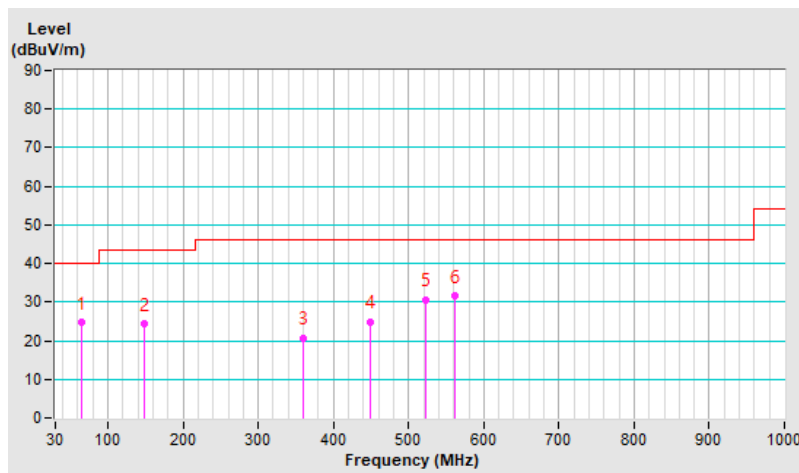

## 7.9 Unwanted Emissions above 1 GHz


### Mode A

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5140.10	51.4 PK	74.0	-22.6	2.02 H	99	45.9	5.5
2	5140.10	41.7 AV	54.0	-12.3	2.02 H	99	36.2	5.5
3	*5260.00	121.3 PK			2.02 H	99	116.0	5.3
4	*5260.00	111.0 AV			2.02 H	99	105.7	5.3
5	#10520.00	52.3 PK	68.2	-15.9	1.79 H	226	35.9	16.4
6	15780.00	50.3 PK	74.0	-23.7	1.83 H	141	33.8	16.5
7	15780.00	39.1 AV	54.0	-14.9	1.83 H	141	22.6	16.5

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

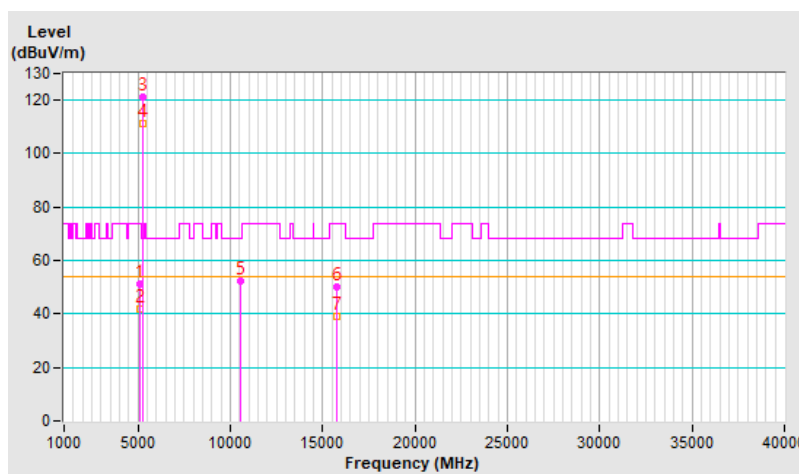


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5142.60	52.4 PK	74.0	-21.6	1.00 V	17	46.9	5.5
2	5142.60	42.2 AV	54.0	-11.8	1.00 V	17	36.7	5.5
3	*5260.00	122.6 PK			1.00 V	17	117.3	5.3
4	*5260.00	112.6 AV			1.00 V	17	107.3	5.3
5	#10520.00	58.2 PK	68.2	-10.0	1.30 V	8	41.8	16.4
6	15780.00	51.3 PK	74.0	-22.7	1.66 V	291	34.8	16.5
7	15780.00	40.0 AV	54.0	-14.0	1.66 V	291	23.5	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

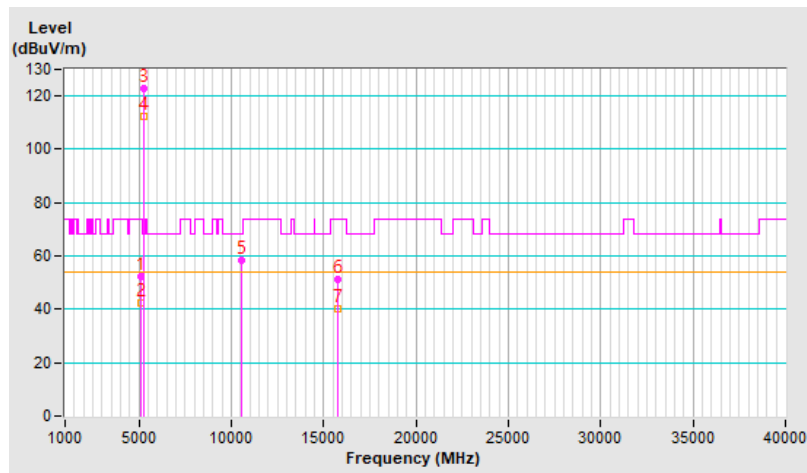


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.0 PK			1.99 H	94	115.7	5.3
2	*5300.00	110.8 AV			1.99 H	94	105.5	5.3
3	10600.00	52.6 PK	74.0	-21.4	1.75 H	210	36.3	16.3
4	10600.00	40.6 AV	54.0	-13.4	1.75 H	210	24.3	16.3
5	15900.00	50.3 PK	74.0	-23.7	1.86 H	134	33.6	16.7
6	15900.00	39.4 AV	54.0	-14.6	1.86 H	134	22.7	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

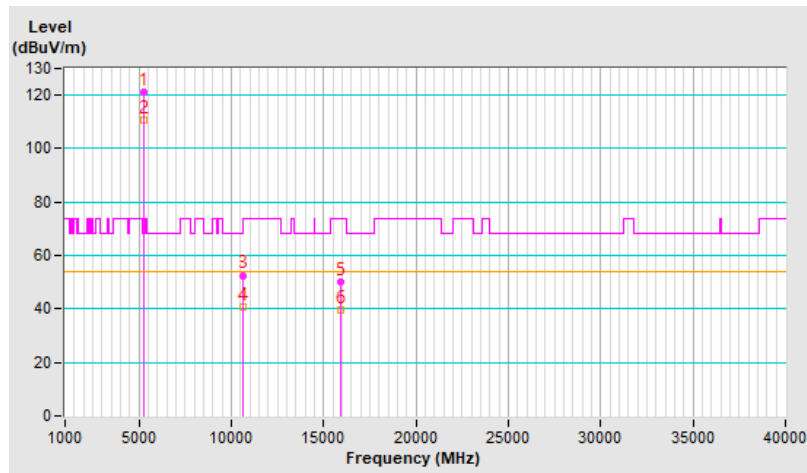




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.1 PK			1.05 V	30	117.8	5.3
2	*5300.00	113.0 AV			1.05 V	30	107.7	5.3
3	10600.00	58.1 PK	74.0	-15.9	1.32 V	3	41.8	16.3
4	10600.00	45.0 AV	54.0	-9.0	1.32 V	3	28.7	16.3
5	15900.00	51.3 PK	74.0	-22.7	1.68 V	302	34.6	16.7
6	15900.00	39.7 AV	54.0	-14.3	1.68 V	302	23.0	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

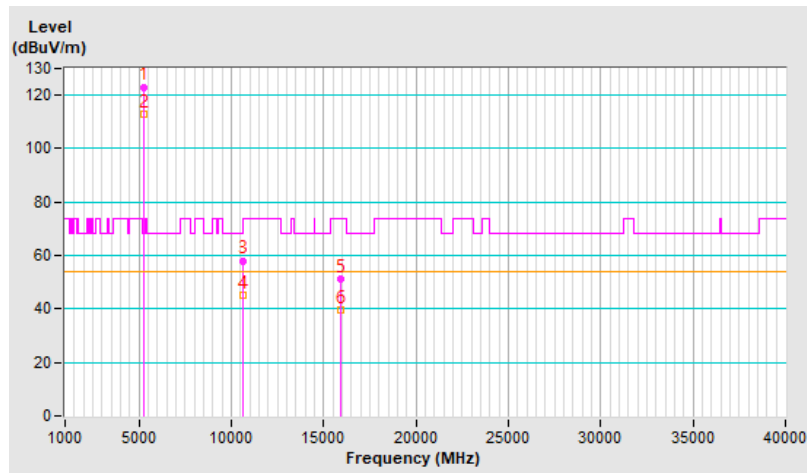


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.3 PK			1.00 H	112	114.9	5.4
2	*5320.00	110.0 AV			1.00 H	112	104.6	5.4
3	5350.00	57.1 PK	74.0	-16.9	1.00 H	112	51.6	5.5
4	5350.00	46.8 AV	54.0	-7.2	1.00 H	112	41.3	5.5
5	10640.00	52.1 PK	74.0	-21.9	1.73 H	211	35.6	16.5
6	10640.00	40.4 AV	54.0	-13.6	1.73 H	211	23.9	16.5
7	15960.00	50.4 PK	74.0	-23.6	1.89 H	140	33.6	16.8
8	15960.00	39.6 AV	54.0	-14.4	1.89 H	140	22.8	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

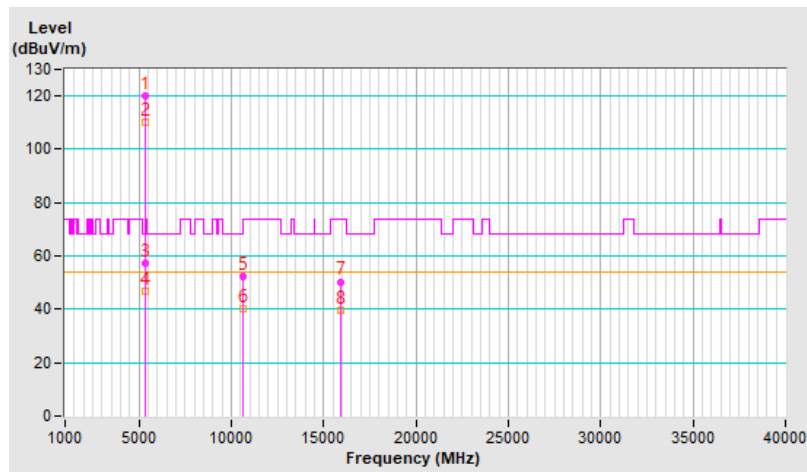


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.9 PK			2.83 V	4	118.5	5.4
2	*5320.00	114.9 AV			2.83 V	4	109.5	5.4
3	5350.00	62.8 PK	74.0	-11.2	2.83 V	4	57.3	5.5
4	5350.00	53.6 AV	54.0	-0.4	2.83 V	4	48.1	5.5
5	10640.00	58.0 PK	74.0	-16.0	1.33 V	13	41.5	16.5
6	10640.00	44.8 AV	54.0	-9.2	1.33 V	13	28.3	16.5
7	15960.00	51.4 PK	74.0	-22.6	1.73 V	303	34.6	16.8
8	15960.00	39.9 AV	54.0	-14.1	1.73 V	303	23.1	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

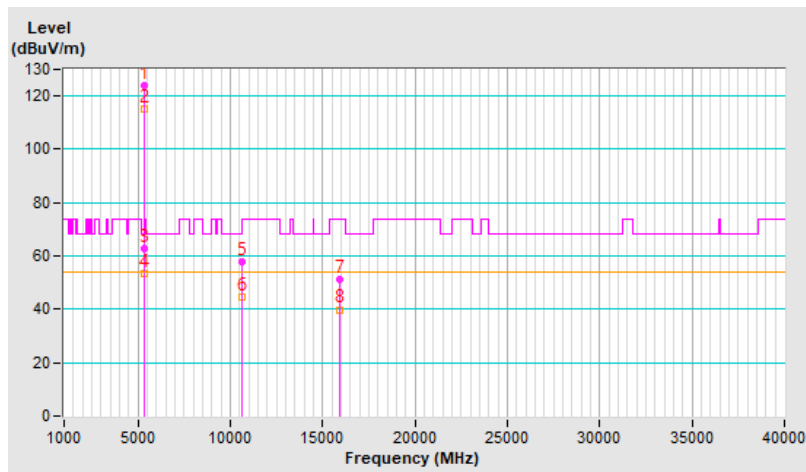


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5139.00	52.4 PK	74.0	-21.6	1.04 H	90	46.9	5.5
2	5139.00	41.9 AV	54.0	-12.1	1.04 H	90	36.4	5.5
3	*5260.00	122.9 PK			1.04 H	90	117.6	5.3
4	*5260.00	111.5 AV			1.04 H	90	106.2	5.3
5	#10520.00	52.4 PK	68.2	-15.8	1.79 H	219	36.0	16.4
6	15780.00	50.4 PK	74.0	-23.6	1.80 H	137	33.9	16.5
7	15780.00	39.2 AV	54.0	-14.8	1.80 H	137	22.7	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

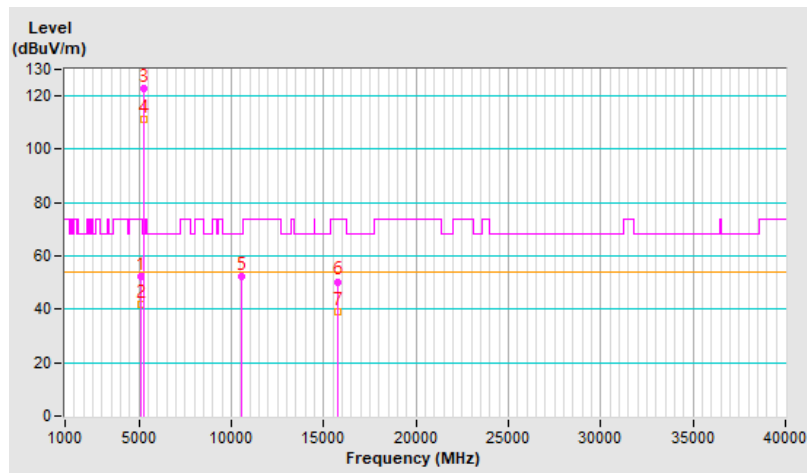


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 52 : 5260 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.0 PK	74.0	-21.0	1.07 V	358	47.4	5.6
2	5150.00	42.5 AV	54.0	-11.5	1.07 V	358	36.9	5.6
3	*5260.00	123.6 PK			1.07 V	358	118.3	5.3
4	*5260.00	112.7 AV			1.07 V	358	107.4	5.3
5	#10520.00	58.1 PK	68.2	-10.1	1.35 V	14	41.7	16.4
6	15780.00	51.4 PK	74.0	-22.6	1.67 V	277	34.9	16.5
7	15780.00	40.1 AV	54.0	-13.9	1.67 V	277	23.6	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

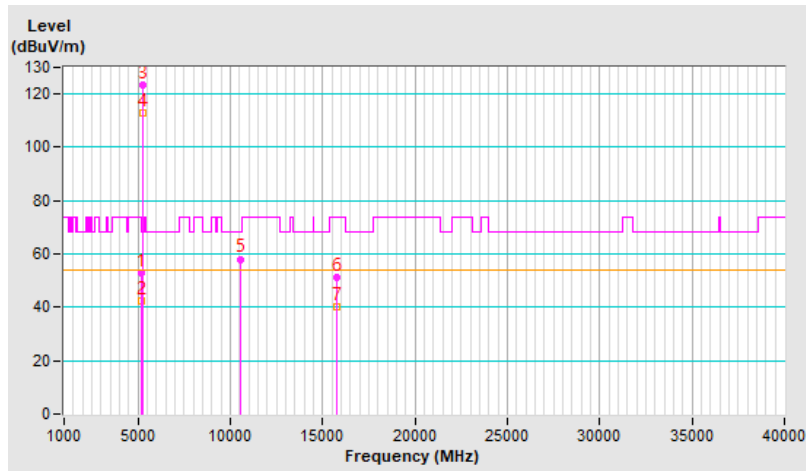


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.2 PK			1.05 H	78	117.9	5.3
2	*5300.00	111.7 AV			1.05 H	78	106.4	5.3
3	10600.00	52.1 PK	74.0	-21.9	1.85 H	217	35.8	16.3
4	10600.00	40.2 AV	54.0	-13.8	1.85 H	217	23.9	16.3
5	15900.00	50.5 PK	74.0	-23.5	1.87 H	145	33.8	16.7
6	15900.00	39.1 AV	54.0	-14.9	1.87 H	145	22.4	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

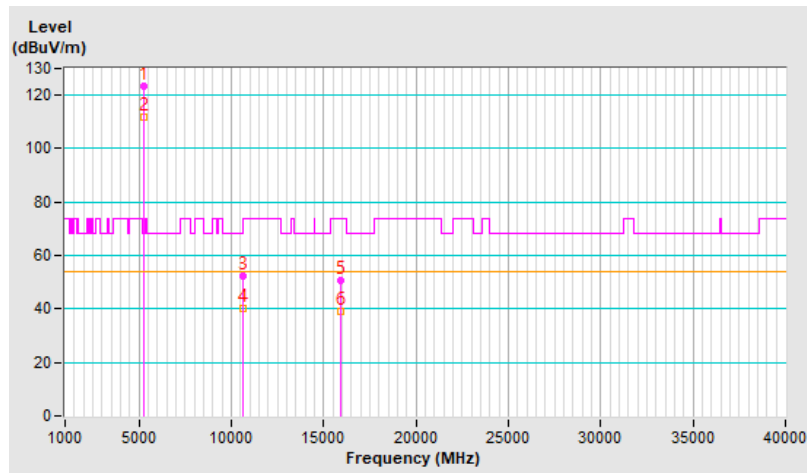


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 60 : 5300 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.4 PK			1.06 V	342	118.1	5.3
2	*5300.00	112.6 AV			1.06 V	342	107.3	5.3
3	10600.00	58.1 PK	74.0	-15.9	1.25 V	0	41.8	16.3
4	10600.00	45.4 AV	54.0	-8.6	1.25 V	0	29.1	16.3
5	15900.00	50.7 PK	74.0	-23.3	1.70 V	286	34.0	16.7
6	15900.00	39.6 AV	54.0	-14.4	1.70 V	286	22.9	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

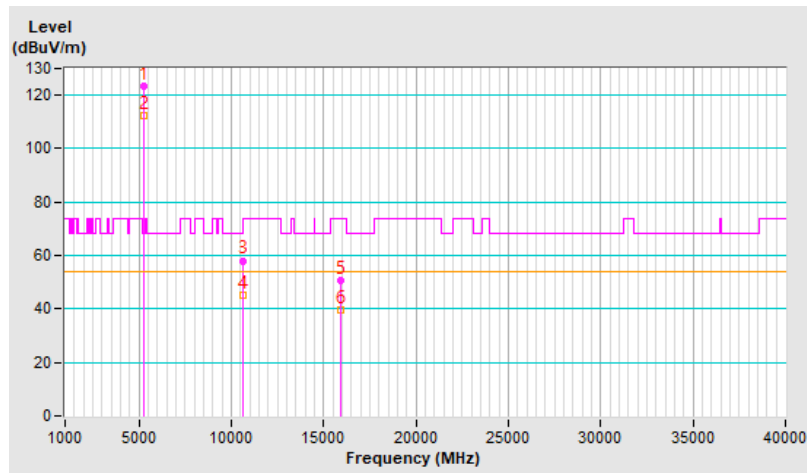


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.9 PK			1.93 H	98	116.5	5.4
2	*5320.00	110.0 AV			1.93 H	98	104.6	5.4
3	5351.75	62.1 PK	74.0	-11.9	1.93 H	98	56.6	5.5
4	5351.75	52.0 AV	54.0	-2.0	1.93 H	98	46.5	5.5
5	10640.00	52.1 PK	74.0	-21.9	1.81 H	210	35.6	16.5
6	10640.00	40.2 AV	54.0	-13.8	1.81 H	210	23.7	16.5
7	15960.00	50.7 PK	74.0	-23.3	1.86 H	130	33.9	16.8
8	15960.00	39.3 AV	54.0	-14.7	1.86 H	130	22.5	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

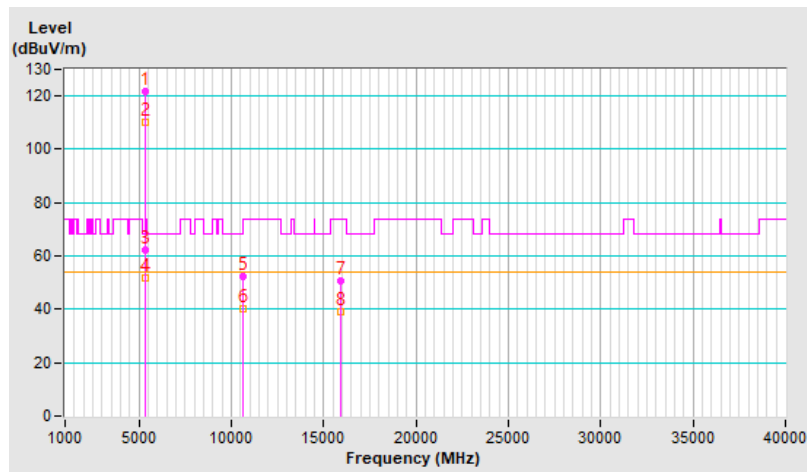




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 64 : 5320 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	122.6 PK			2.83 V	3	117.2	5.4
2	*5320.00	112.5 AV			2.83 V	3	107.1	5.4
3	5350.00	65.9 PK	74.0	-8.1	2.83 V	3	60.4	5.5
4	5350.00	53.7 AV	54.0	-0.3	2.83 V	3	48.2	5.5
5	10640.00	58.2 PK	74.0	-15.8	1.25 V	17	41.7	16.5
6	10640.00	45.1 AV	54.0	-8.9	1.25 V	17	28.6	16.5
7	15960.00	51.5 PK	74.0	-22.5	1.61 V	280	34.7	16.8
8	15960.00	40.2 AV	54.0	-13.8	1.61 V	280	23.4	16.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

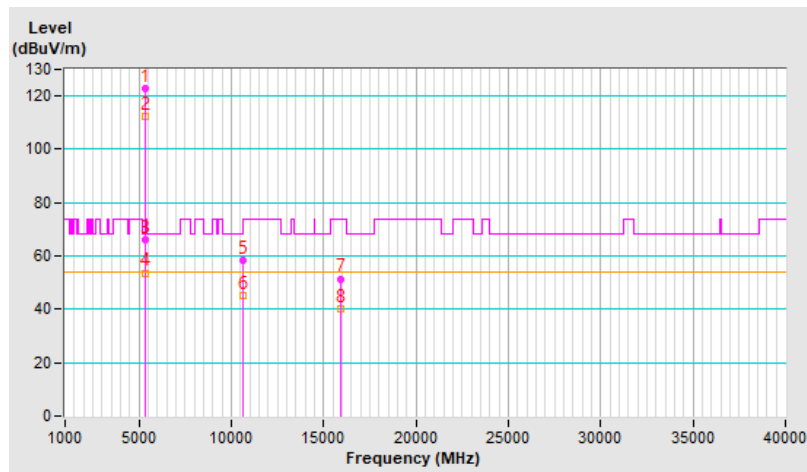


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	121.1 PK			1.00 H	112	115.8	5.3
2	*5270.00	109.5 AV			1.00 H	112	104.2	5.3
3	5353.80	58.1 PK	74.0	-15.9	1.00 H	112	52.6	5.5
4	5353.80	46.8 AV	54.0	-7.2	1.00 H	112	41.3	5.5
5	#10540.00	50.6 PK	68.2	-17.6	1.75 H	215	34.3	16.3
6	15810.00	48.2 PK	74.0	-25.8	1.76 H	131	31.7	16.5
7	15810.00	36.7 AV	54.0	-17.3	1.76 H	131	20.2	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

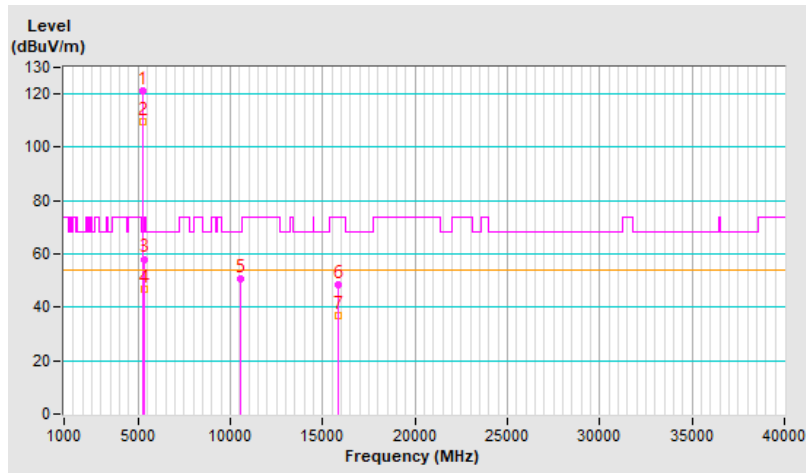


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 54 : 5270 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	121.9 PK			1.00 V	360	116.6	5.3
2	*5270.00	110.3 AV			1.00 V	360	105.0	5.3
3	5351.70	60.3 PK	74.0	-13.7	1.00 V	360	54.8	5.5
4	5351.70	48.9 AV	54.0	-5.1	1.00 V	360	43.4	5.5
5	#10540.00	55.8 PK	68.2	-12.4	1.30 V	6	39.5	16.3
6	15810.00	48.9 PK	74.0	-25.1	1.70 V	277	32.4	16.5
7	15810.00	37.5 AV	54.0	-16.5	1.70 V	277	21.0	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

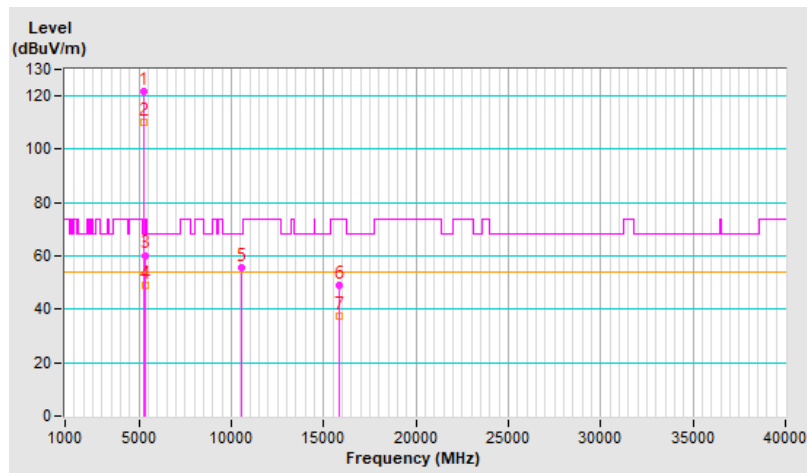


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 62 : 5310 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	114.5 PK			1.03 H	99	109.2	5.3
2	*5310.00	103.3 AV			1.03 H	99	98.0	5.3
3	5350.00	61.0 PK	74.0	-13.0	1.03 H	99	55.5	5.5
4	5350.00	52.3 AV	54.0	-1.7	1.03 H	99	46.8	5.5
5	10620.00	48.6 PK	74.0	-25.4	1.77 H	260	32.1	16.5
6	10620.00	37.8 AV	54.0	-16.2	1.77 H	260	21.3	16.5
7	15930.00	47.8 PK	74.0	-26.2	1.85 H	150	31.1	16.7
8	15930.00	36.0 AV	54.0	-18.0	1.85 H	150	19.3	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

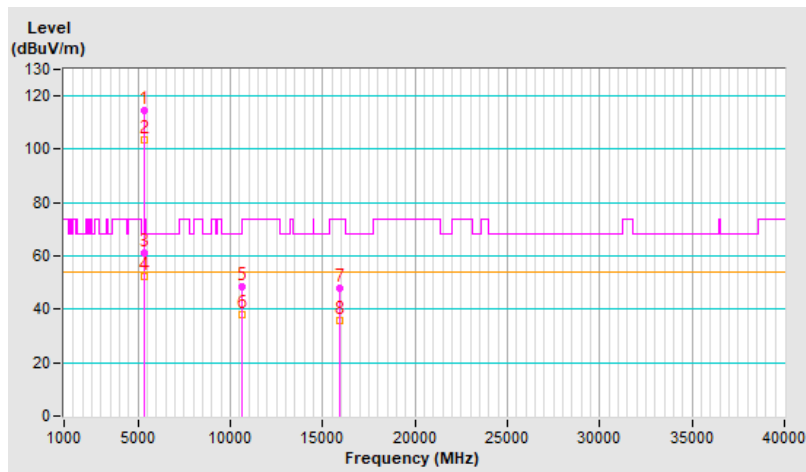


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 62 : 5310 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	119.1 PK			2.83 V	1	113.8	5.3
2	*5310.00	108.0 AV			2.83 V	1	102.7	5.3
3	5352.70	65.7 PK	74.0	-8.3	2.83 V	1	60.2	5.5
4	5352.70	53.3 AV	54.0	-0.7	2.83 V	1	47.8	5.5
5	10620.00	53.2 PK	74.0	-20.8	1.46 V	10	36.7	16.5
6	10620.00	41.8 AV	54.0	-12.2	1.46 V	10	25.3	16.5
7	15930.00	47.6 PK	74.0	-26.4	1.75 V	280	30.9	16.7
8	15930.00	36.7 AV	54.0	-17.3	1.75 V	280	20.0	16.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

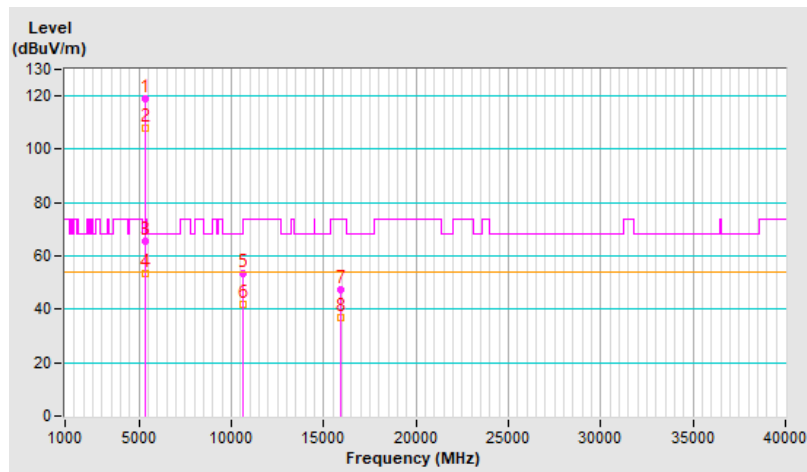


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 58 : 5290 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.0 PK	74.0	-23.0	1.00 H	110	45.4	5.6
2	5150.00	41.7 AV	54.0	-12.3	1.00 H	110	36.1	5.6
3	*5290.00	109.5 PK			1.00 H	110	104.2	5.3
4	*5290.00	99.7 AV			1.00 H	110	94.4	5.3
5	5354.00	60.4 PK	74.0	-13.6	1.00 H	110	54.9	5.5
6	5354.00	50.6 AV	54.0	-3.4	1.00 H	110	45.1	5.5
7	#10580.00	48.3 PK	68.2	-19.9	1.83 H	252	31.9	16.4
8	15870.00	47.8 PK	74.0	-26.2	1.85 H	143	31.2	16.6
9	15870.00	35.7 AV	54.0	-18.3	1.85 H	143	19.1	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

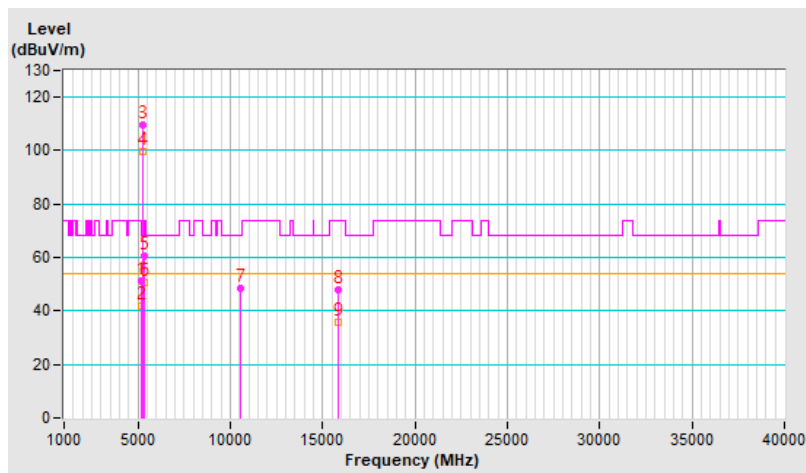


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 58 : 5290 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	2.86 V	2	46.3	5.6
2	5150.00	42.1 AV	54.0	-11.9	2.86 V	2	36.5	5.6
3	*5290.00	113.2 PK			2.86 V	2	107.9	5.3
4	*5290.00	103.0 AV			2.86 V	2	97.7	5.3
5	5351.00	62.4 PK	74.0	-11.6	2.86 V	2	56.9	5.5
6	5351.00	53.3 AV	54.0	-0.7	2.86 V	2	47.8	5.5
7	#10580.00	52.9 PK	68.2	-15.3	1.49 V	24	36.5	16.4
8	15870.00	47.9 PK	74.0	-26.1	1.80 V	282	31.3	16.6
9	15870.00	37.0 AV	54.0	-17.0	1.80 V	282	20.4	16.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

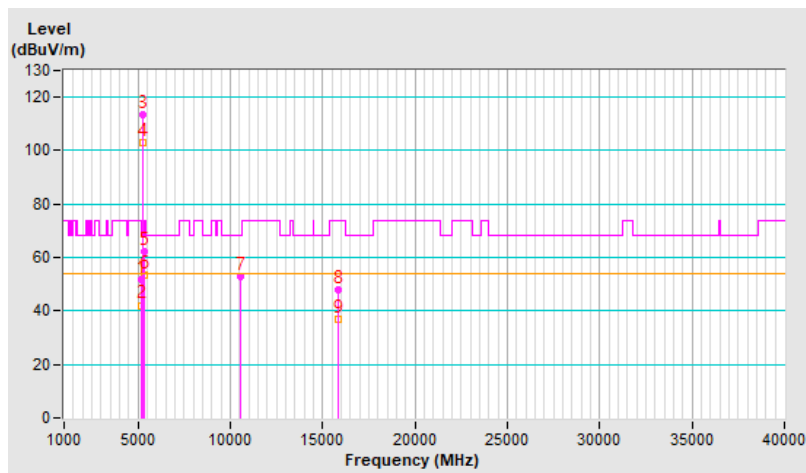


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 50 : 5250 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5143.30	57.1 PK	74.0	-16.9	1.91 H	276	51.6	5.5
2	5143.30	49.5 AV	54.0	-4.5	1.91 H	276	44.0	5.5
3	*5250.00	108.4 PK			1.91 H	276	103.2	5.2
4	*5250.00	98.2 AV			1.91 H	276	93.0	5.2
5	5353.00	60.7 PK	74.0	-13.3	1.91 H	276	55.2	5.5
6	5353.00	49.8 AV	54.0	-4.2	1.91 H	276	44.3	5.5
7	#10500.00	48.4 PK	68.2	-19.8	1.77 H	241	32.1	16.3
8	15750.00	47.8 PK	74.0	-26.2	1.91 H	144	31.3	16.5
9	15750.00	35.5 AV	54.0	-18.5	1.91 H	144	19.0	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

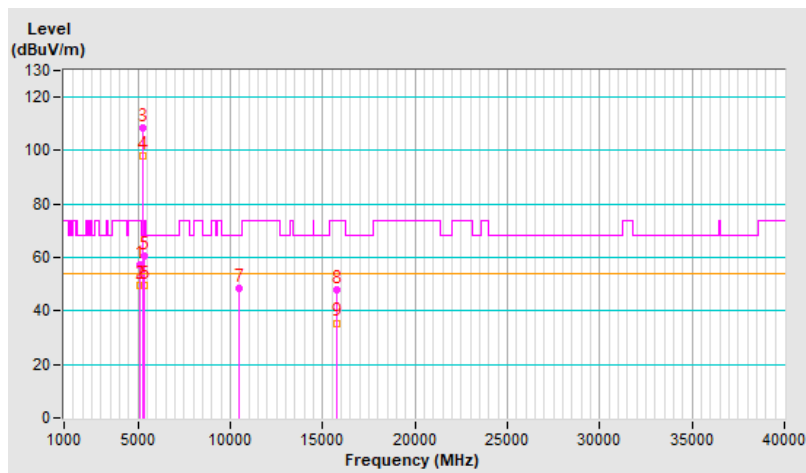




<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 50 : 5250 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5145.10	62.3 PK	74.0	-11.7	1.00 V	182	56.7	5.6
2	5145.10	52.8 AV	54.0	-1.2	1.00 V	182	47.2	5.6
3	*5250.00	111.2 PK			1.00 V	182	106.0	5.2
4	*5250.00	100.3 AV			1.00 V	182	95.1	5.2
5	5354.88	62.6 PK	74.0	-11.4	1.00 V	182	57.1	5.5
6	5354.88	53.5 AV	54.0	-0.5	1.00 V	182	48.0	5.5
7	#10500.00	53.0 PK	68.2	-15.2	1.49 V	21	36.7	16.3
8	15750.00	47.8 PK	74.0	-26.2	1.75 V	278	31.3	16.5
9	15750.00	36.9 AV	54.0	-17.1	1.75 V	278	20.4	16.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

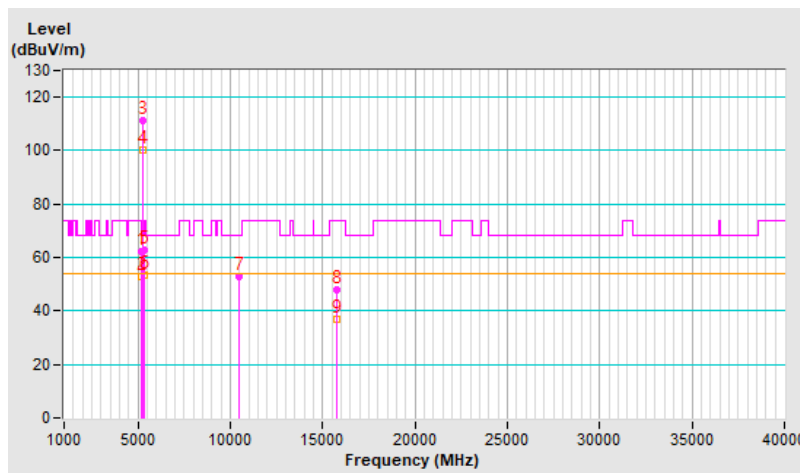


### Mode B

<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.0 PK	74.0	-13.0	1.02 H	2	55.4	5.6
2	5460.00	47.9 AV	54.0	-6.1	1.02 H	2	42.3	5.6
3	#5470.00	67.3 PK	68.2	-0.9	1.02 H	2	61.7	5.6
4	*5500.00	120.3 PK			1.02 H	2	114.6	5.7
5	*5500.00	111.5 AV			1.02 H	2	105.8	5.7
6	11000.00	49.4 PK	74.0	-24.6	1.52 H	360	32.0	17.4
7	11000.00	37.4 AV	54.0	-16.6	1.52 H	360	20.0	17.4
8	#16500.00	62.1 PK	68.2	-6.1	1.84 H	183	42.6	19.5

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

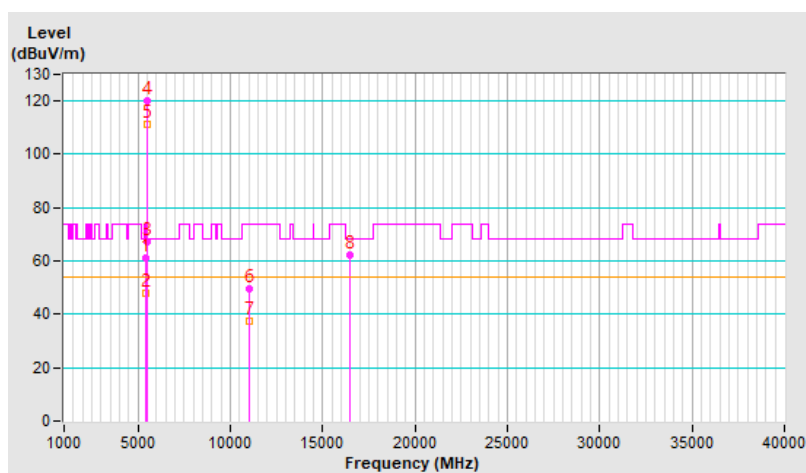


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	1.64 V	27	53.5	5.6
2	5460.00	45.3 AV	54.0	-8.7	1.64 V	27	39.7	5.6
3	#5470.00	63.2 PK	68.2	-5.0	1.64 V	27	57.6	5.6
4	*5500.00	118.7 PK			1.64 V	27	113.0	5.7
5	*5500.00	108.9 AV			1.64 V	27	103.2	5.7
6	11000.00	50.2 PK	74.0	-23.8	1.49 V	339	32.8	17.4
7	11000.00	38.3 AV	54.0	-15.7	1.49 V	339	20.9	17.4
8	#16500.00	56.6 PK	68.2	-11.6	1.57 V	15	37.1	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

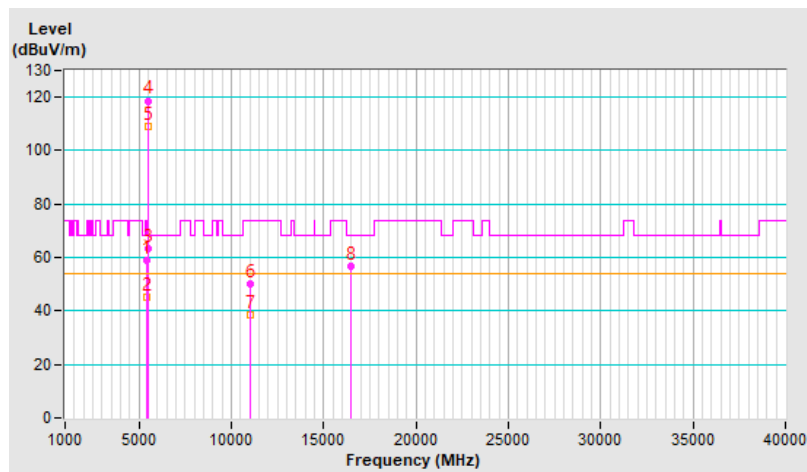


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	118.4 PK			1.26 H	280	112.8	5.6
2	*5580.00	108.8 AV			1.26 H	280	103.2	5.6
3	11160.00	49.1 PK	74.0	-24.9	1.50 H	356	32.2	16.9
4	11160.00	37.1 AV	54.0	-16.9	1.50 H	356	20.2	16.9
5	#16740.00	61.9 PK	68.2	-6.3	1.81 H	184	40.5	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

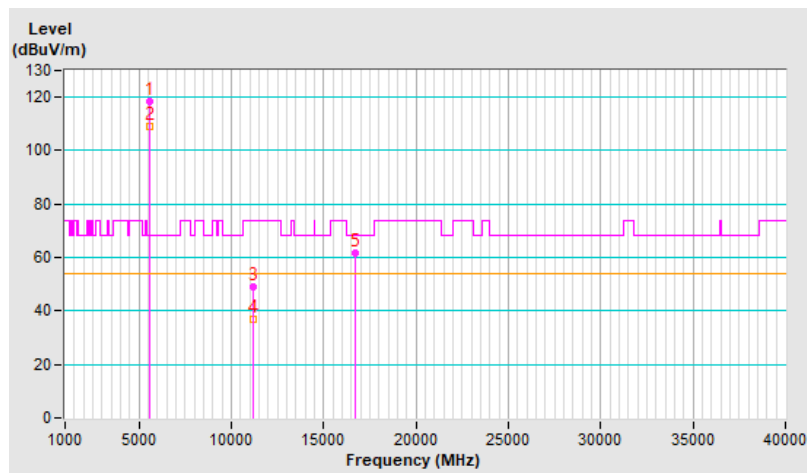


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	116.6 PK			1.00 V	358	111.0	5.6
2	*5580.00	107.5 AV			1.00 V	358	101.9	5.6
3	11160.00	49.7 PK	74.0	-24.3	1.50 V	346	32.8	16.9
4	11160.00	37.9 AV	54.0	-16.1	1.50 V	346	21.0	16.9
5	#16740.00	56.9 PK	68.2	-11.3	1.55 V	4	35.5	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

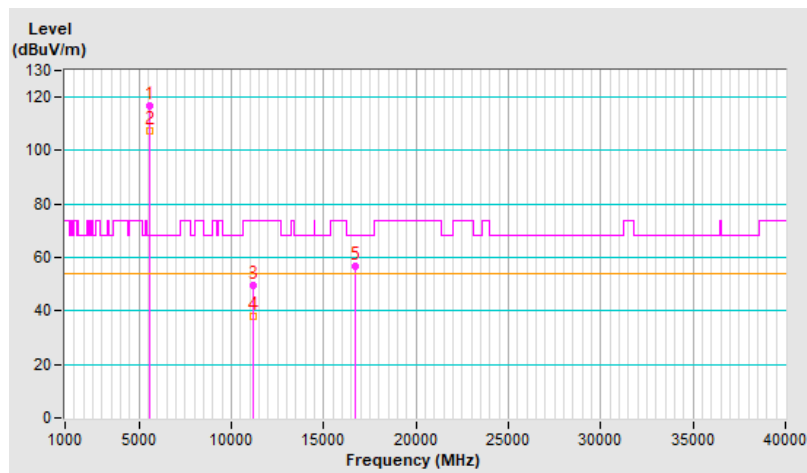


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.9 PK			2.34 H	321	113.2	5.7
2	*5700.00	110.0 AV			2.34 H	321	104.3	5.7
<b>3</b>	<b>#5725.00</b>	<b>68.1 PK</b>	<b>68.2</b>	<b>-0.1</b>	<b>2.34 H</b>	<b>321</b>	<b>62.3</b>	<b>5.8</b>
4	11400.00	47.2 PK	74.0	-26.8	1.46 H	352	30.4	16.8
5	11400.00	35.4 AV	54.0	-18.6	1.46 H	352	18.6	16.8
6	#17100.00	58.3 PK	68.2	-9.9	1.77 H	189	37.6	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

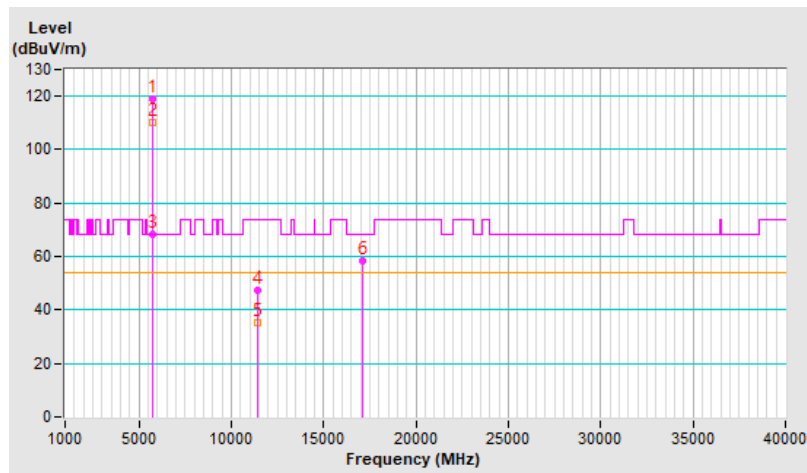


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	114.9 PK			1.50 V	312	109.2	5.7
2	*5700.00	106.2 AV			1.50 V	312	100.5	5.7
3	#5725.00	61.3 PK	68.2	-6.9	1.50 V	312	55.5	5.8
4	11400.00	47.6 PK	74.0	-26.4	1.55 V	357	30.8	16.8
5	11400.00	35.8 AV	54.0	-18.2	1.55 V	357	19.0	16.8
6	#17100.00	53.8 PK	68.2	-14.4	1.54 V	6	33.1	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

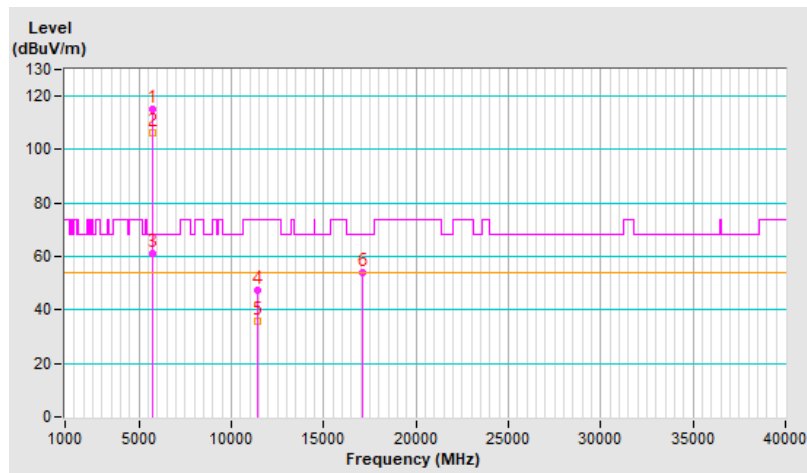


<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.7 PK	74.0	-19.3	1.16 H	280	49.1	5.6
2	5460.00	42.5 AV	54.0	-11.5	1.16 H	280	36.9	5.6
3	#5470.00	54.4 PK	68.2	-13.8	1.16 H	280	48.8	5.6
4	*5720.00	118.8 PK			1.16 H	280	113.0	5.8
5	*5720.00	110.1 AV			1.16 H	280	104.3	5.8
6	#5850.00	57.5 PK	68.2	-10.7	1.16 H	280	51.1	6.4
7	11440.00	49.0 PK	74.0	-25.0	1.48 H	344	32.2	16.8
8	11440.00	37.0 AV	54.0	-17.0	1.48 H	344	20.2	16.8
9	#17160.00	61.6 PK	68.2	-6.6	1.78 H	184	40.8	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

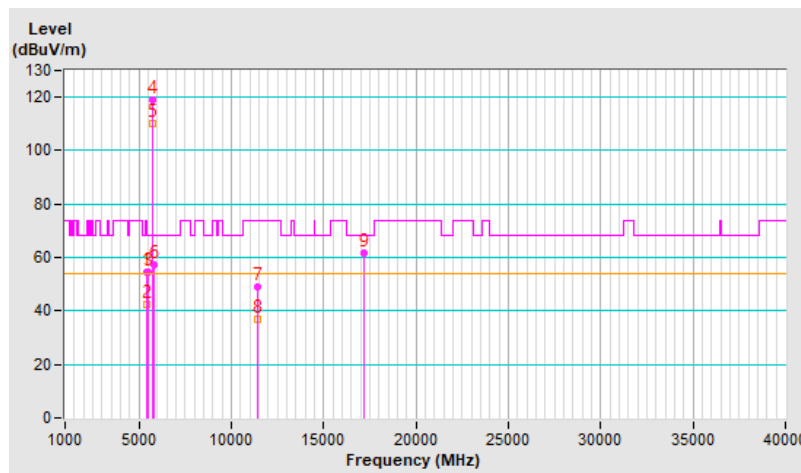




<b>RF Mode</b>	802.11a	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	52.8 PK	74.0	-21.2	1.06 V	22	47.2	5.6
2	5460.00	41.5 AV	54.0	-12.5	1.06 V	22	35.9	5.6
3	#5470.00	53.4 PK	68.2	-14.8	1.06 V	22	47.8	5.6
4	*5720.00	117.2 PK			1.06 V	22	111.4	5.8
5	*5720.00	108.3 AV			1.06 V	22	102.5	5.8
6	#5850.00	57.0 PK	68.2	-11.2	1.06 V	22	50.6	6.4
7	11440.00	50.0 PK	74.0	-24.0	1.54 V	352	33.2	16.8
8	11440.00	37.9 AV	54.0	-16.1	1.54 V	352	21.1	16.8
9	#17160.00	56.7 PK	68.2	-11.5	1.59 V	14	35.9	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

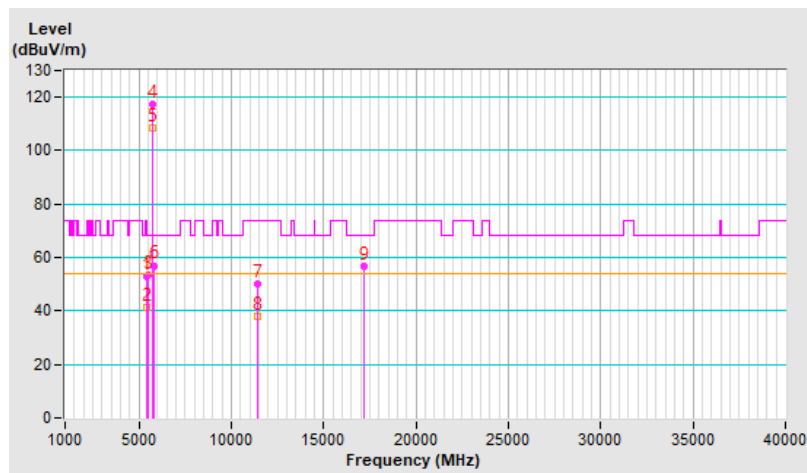


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.1 PK	74.0	-15.9	1.46 H	25	52.5	5.6
2	5460.00	44.9 AV	54.0	-9.1	1.46 H	25	39.3	5.6
3	#5467.87	66.8 PK	68.2	-1.4	1.46 H	25	61.2	5.6
4	*5500.00	119.9 PK			1.46 H	25	114.2	5.7
5	*5500.00	108.0 AV			1.46 H	25	102.3	5.7
6	11000.00	47.5 PK	74.0	-26.5	1.44 H	360	30.1	17.4
7	11000.00	35.7 AV	54.0	-18.3	1.44 H	360	18.3	17.4
8	#16500.00	58.5 PK	68.2	-9.7	1.76 H	202	39.0	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

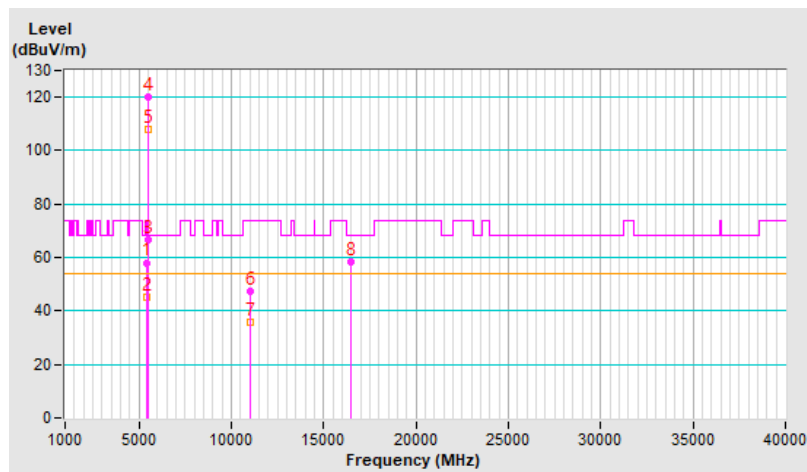


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 100 : 5500 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.40	58.5 PK	74.0	-15.5	1.04 V	38	52.9	5.6
2	5458.40	45.5 AV	54.0	-8.5	1.04 V	38	39.9	5.6
3	#5468.94	67.9 PK	68.2	-0.3	1.04 V	38	62.3	5.6
4	*5500.00	120.0 PK			1.04 V	38	114.3	5.7
5	*5500.00	109.0 AV			1.04 V	38	103.3	5.7
6	11000.00	48.9 PK	74.0	-25.1	1.50 V	353	31.5	17.4
7	11000.00	36.5 AV	54.0	-17.5	1.50 V	353	19.1	17.4
8	#16500.00	54.5 PK	68.2	-13.7	1.54 V	10	35.0	19.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

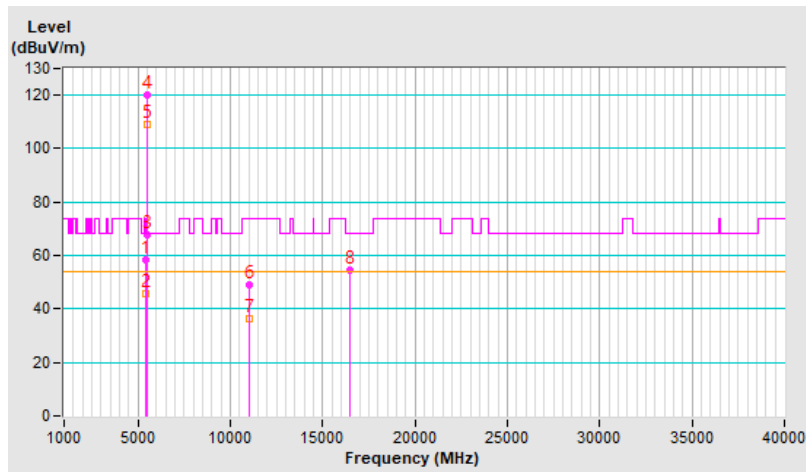


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	120.3 PK			1.34 H	282	114.7	5.6
2	*5580.00	109.0 AV			1.34 H	282	103.4	5.6
3	11160.00	48.9 PK	74.0	-25.1	1.49 H	345	32.0	16.9
4	11160.00	36.8 AV	54.0	-17.2	1.49 H	345	19.9	16.9
5	#16740.00	61.6 PK	68.2	-6.6	1.78 H	193	40.2	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

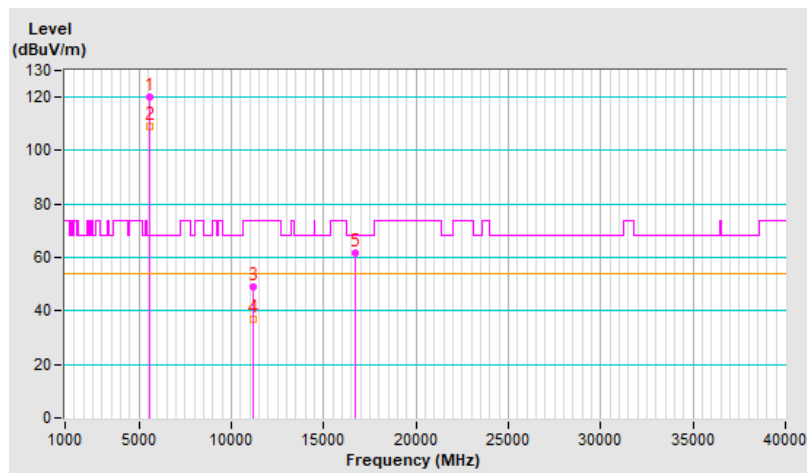


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 116 : 5580 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	119.6 PK			3.59 V	261	114.0	5.6
2	*5580.00	108.0 AV			3.59 V	261	102.4	5.6
3	11160.00	49.8 PK	74.0	-24.2	1.53 V	326	32.9	16.9
4	11160.00	38.0 AV	54.0	-16.0	1.53 V	326	21.1	16.9
5	#16740.00	56.1 PK	68.2	-12.1	1.55 V	23	34.7	21.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

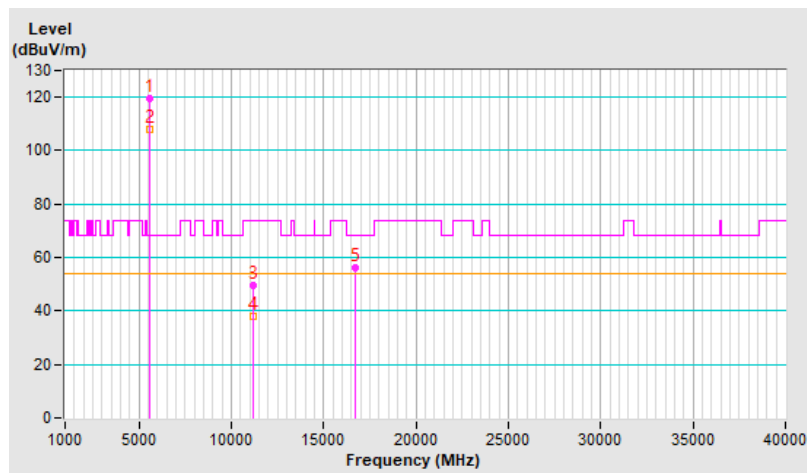


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.6 PK			1.50 H	336	112.9	5.7
2	*5700.00	107.1 AV			1.50 H	336	101.4	5.7
3	#5725.00	67.6 PK	68.2	-0.6	1.50 H	336	61.8	5.8
4	11400.00	47.1 PK	74.0	-26.9	1.47 H	341	30.3	16.8
5	11400.00	35.2 AV	54.0	-18.8	1.47 H	341	18.4	16.8
6	#17100.00	58.3 PK	68.2	-9.9	1.80 H	200	37.6	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

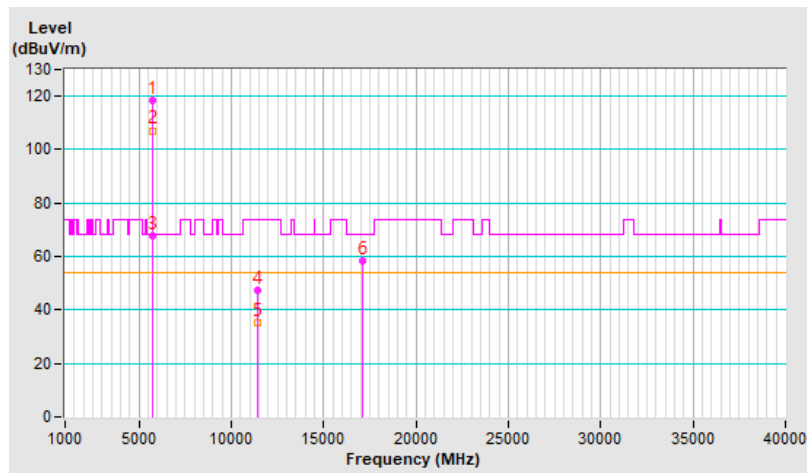


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 140 : 5700 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	117.5 PK			1.13 V	24	111.8	5.7
2	*5700.00	106.2 AV			1.13 V	24	100.5	5.7
3	#5725.00	64.0 PK	68.2	-4.2	1.13 V	24	58.2	5.8
4	11400.00	47.1 PK	74.0	-26.9	1.50 V	354	30.3	16.8
5	11400.00	35.6 AV	54.0	-18.4	1.50 V	354	18.8	16.8
6	#17100.00	53.9 PK	68.2	-14.3	1.58 V	2	33.2	20.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

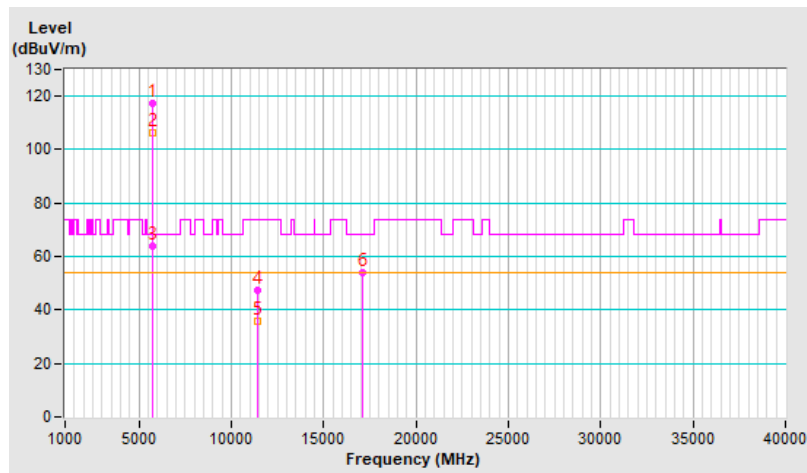


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.4 PK	74.0	-18.6	1.16 H	281	49.8	5.6
2	5460.00	42.6 AV	54.0	-11.4	1.16 H	281	37.0	5.6
3	#5470.00	55.9 PK	68.2	-12.3	1.16 H	281	50.3	5.6
4	*5720.00	119.8 PK			1.16 H	281	114.0	5.8
5	*5720.00	109.0 AV			1.16 H	281	103.2	5.8
6	#5850.00	58.6 PK	68.2	-9.6	1.16 H	281	52.2	6.4
7	11440.00	49.2 PK	74.0	-24.8	1.47 H	358	32.4	16.8
8	11440.00	37.4 AV	54.0	-16.6	1.47 H	358	20.6	16.8
9	#17160.00	61.2 PK	68.2	-7.0	1.82 H	186	40.4	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

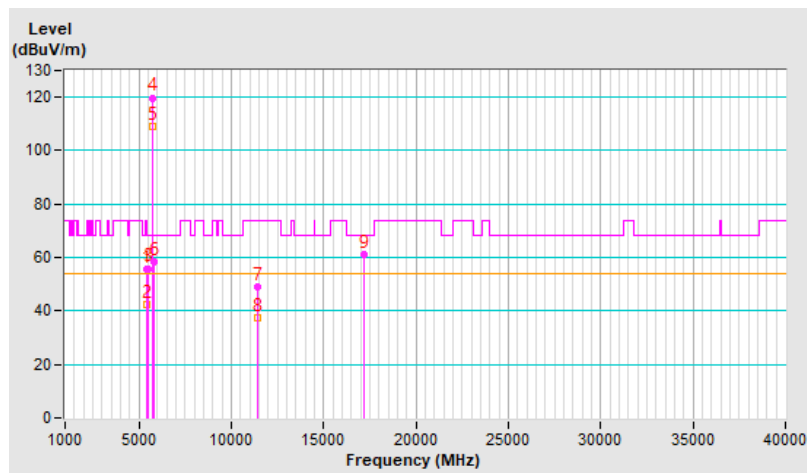




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 144 : 5720 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.8 PK	74.0	-18.2	3.55 V	106	50.2	5.6
2	5460.00	43.7 AV	54.0	-10.3	3.55 V	106	38.1	5.6
3	#5470.00	56.5 PK	68.2	-11.7	3.55 V	106	50.9	5.6
4	*5720.00	119.2 PK			3.55 V	106	113.4	5.8
5	*5720.00	108.0 AV			3.55 V	106	102.2	5.8
6	#5850.00	57.8 PK	68.2	-10.4	3.55 V	106	51.4	6.4
7	11440.00	49.5 PK	74.0	-24.5	1.45 V	329	32.7	16.8
8	11440.00	37.8 AV	54.0	-16.2	1.45 V	329	21.0	16.8
9	#17160.00	57.1 PK	68.2	-11.1	1.63 V	23	36.3	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

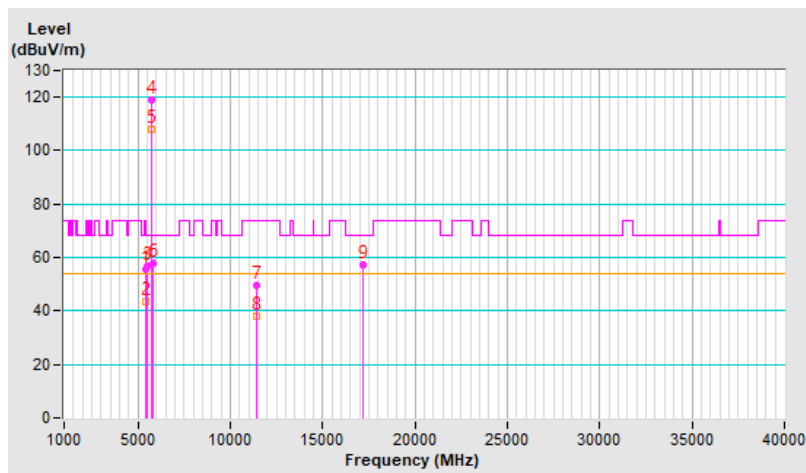


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 102 : 5510 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.3 PK	74.0	-8.7	1.02 H	66	59.7	5.6
2	5460.00	46.2 AV	54.0	-7.8	1.02 H	66	40.6	5.6
3	*5510.00	117.9 PK			1.02 H	66	112.2	5.7
4	*5510.00	105.6 AV			1.02 H	66	99.9	5.7
5	#6465.05	67.0 PK	68.2	-1.2	1.02 H	66	58.6	8.4
6	11020.00	48.5 PK	74.0	-25.5	1.77 H	269	31.3	17.2
7	11020.00	37.6 AV	54.0	-16.4	1.77 H	269	20.4	17.2
8	#16530.00	47.7 PK	68.2	-20.5	1.80 H	134	27.8	19.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

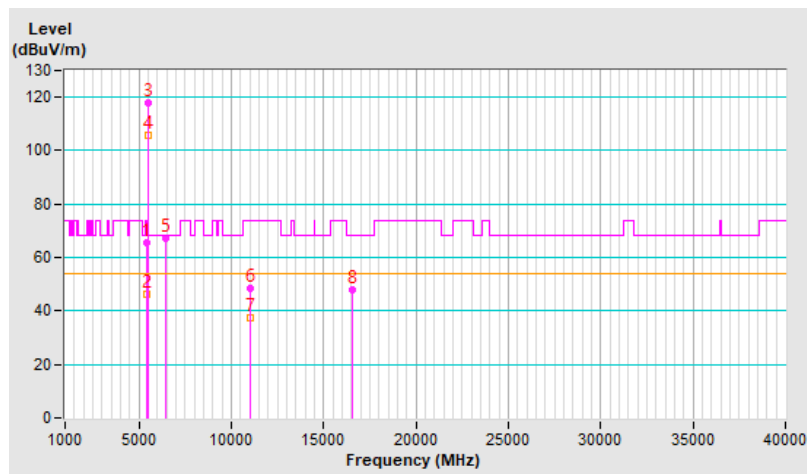


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 102 : 5510 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.0 PK	74.0	-13.0	1.01 V	23	55.4	5.6
2	5460.00	44.7 AV	54.0	-9.3	1.01 V	23	39.1	5.6
3	#5470.00	67.8 PK	68.2	-0.4	1.01 V	23	62.2	5.6
4	*5510.00	114.6 PK			1.01 V	23	108.9	5.7
5	*5510.00	103.7 AV			1.01 V	23	98.0	5.7
6	11020.00	53.7 PK	74.0	-20.3	1.48 V	25	36.5	17.2
7	11020.00	42.1 AV	54.0	-11.9	1.48 V	25	24.9	17.2
8	#16530.00	47.9 PK	68.2	-20.3	1.71 V	292	28.0	19.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

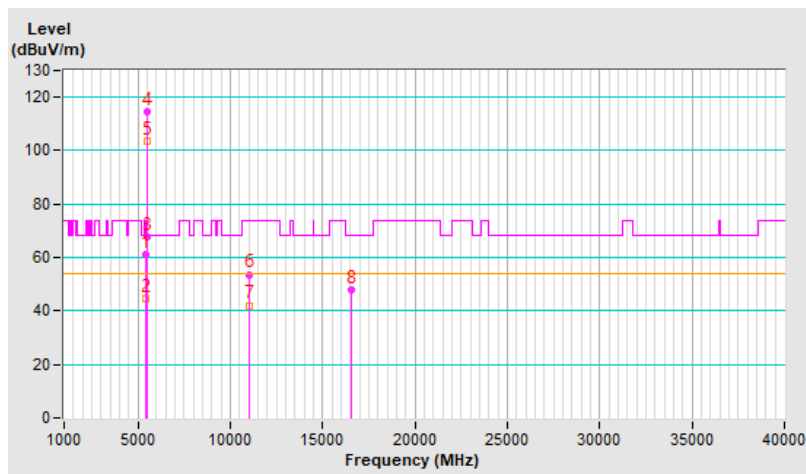


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	117.2 PK			1.18 H	282	111.6	5.6
2	*5550.00	106.3 AV			1.18 H	282	100.7	5.6
3	11100.00	47.9 PK	74.0	-26.1	1.52 H	341	30.9	17.0
4	11100.00	35.8 AV	54.0	-18.2	1.52 H	341	18.8	17.0
5	#16650.00	58.6 PK	68.2	-9.6	1.83 H	179	37.4	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

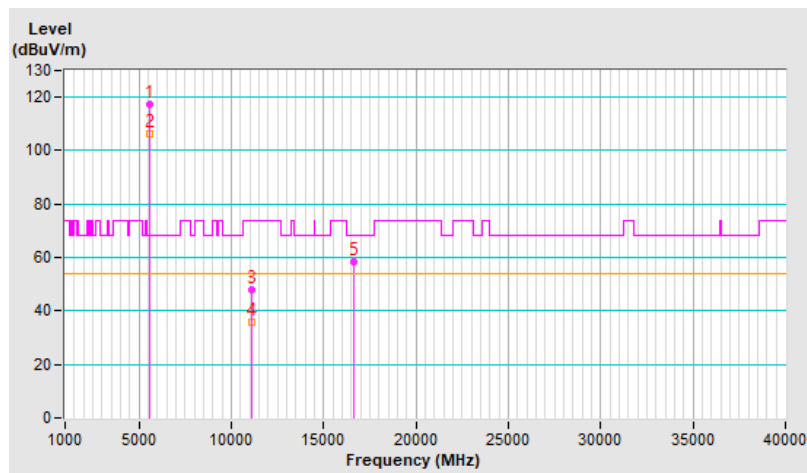


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 110 : 5550 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	116.3 PK			1.11 V	29	110.7	5.6
2	*5550.00	105.6 AV			1.11 V	29	100.0	5.6
3	11100.00	47.3 PK	74.0	-26.7	1.47 V	342	30.3	17.0
4	11100.00	35.6 AV	54.0	-18.4	1.47 V	342	18.6	17.0
5	#16650.00	54.8 PK	68.2	-13.4	1.54 V	31	33.6	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

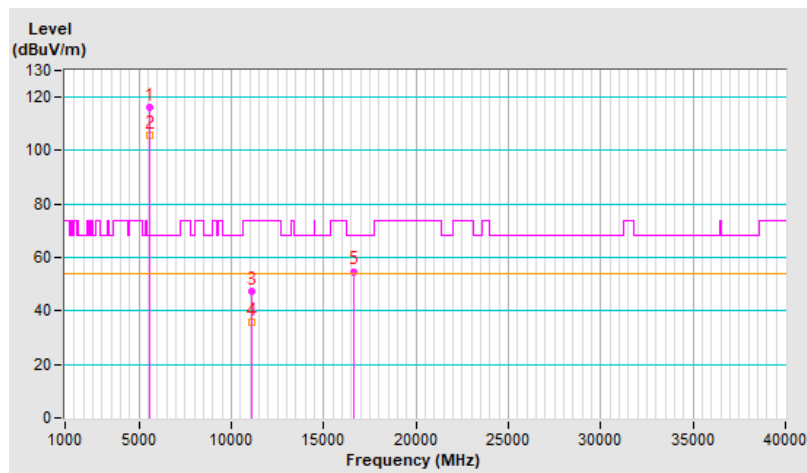


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 134 : 5670 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	117.6 PK			1.36 H	337	111.8	5.8
2	*5670.00	106.8 AV			1.36 H	337	101.0	5.8
3	#5725.00	67.3 PK	68.2	-0.9	1.36 H	337	61.5	5.8
4	11340.00	48.3 PK	74.0	-25.7	1.51 H	358	31.4	16.9
5	11340.00	36.5 AV	54.0	-17.5	1.51 H	358	19.6	16.9
6	#17010.00	58.5 PK	68.2	-9.7	1.85 H	170	37.2	21.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

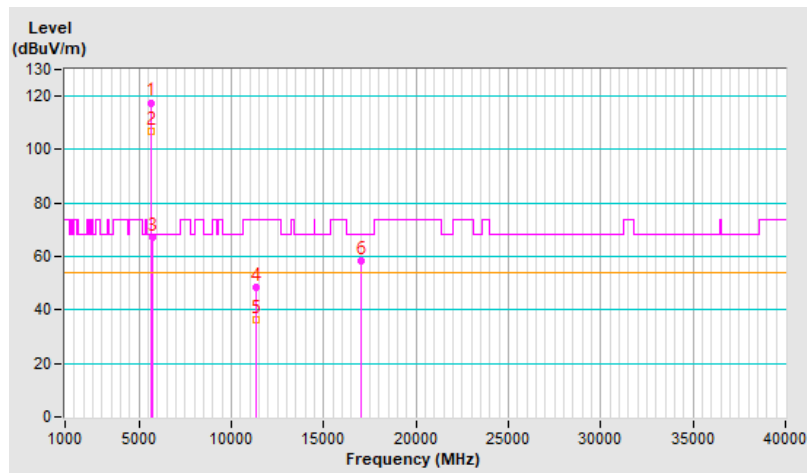


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 134 : 5670 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	116.9 PK			1.01 V	314	111.1	5.8
2	*5670.00	106.3 AV			1.01 V	314	100.5	5.8
3	#5725.00	67.0 PK	68.2	-1.2	1.01 V	314	61.2	5.8
4	11340.00	47.3 PK	74.0	-26.7	1.45 V	332	30.4	16.9
5	11340.00	35.4 AV	54.0	-18.6	1.45 V	332	18.5	16.9
6	#17010.00	55.2 PK	68.2	-13.0	1.51 V	34	33.9	21.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

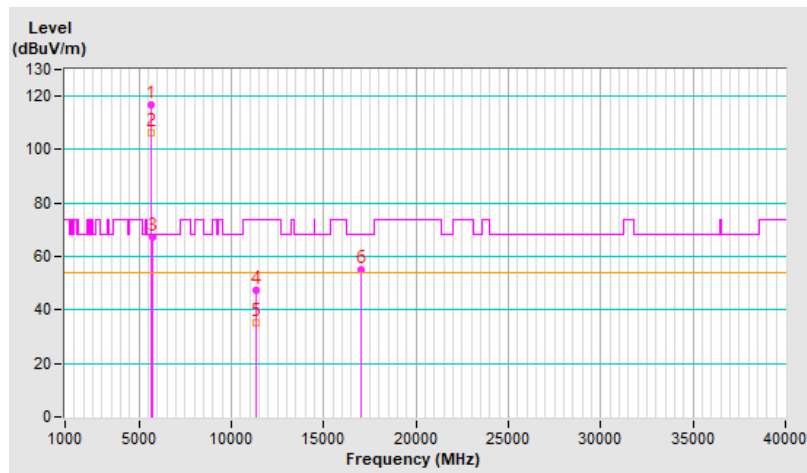


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 142 : 5710 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.9 PK	74.0	-19.1	1.20 H	281	49.3	5.6
2	5460.00	42.9 AV	54.0	-11.1	1.20 H	281	37.3	5.6
3	#5470.00	55.2 PK	68.2	-13.0	1.20 H	281	49.6	5.6
4	*5710.00	117.6 PK			1.20 H	281	111.9	5.7
5	*5710.00	106.1 AV			1.20 H	281	100.4	5.7
6	#5850.00	58.8 PK	68.2	-9.4	1.20 H	281	52.4	6.4
7	11420.00	48.0 PK	74.0	-26.0	1.48 H	346	31.3	16.7
8	11420.00	36.0 AV	54.0	-18.0	1.48 H	346	19.3	16.7
9	#17130.00	58.8 PK	68.2	-9.4	1.80 H	173	38.0	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

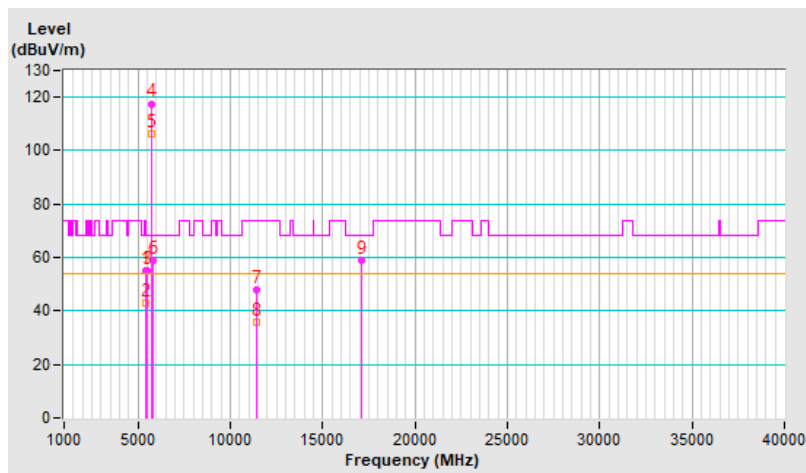




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 142 : 5710 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	1.11 V	320	48.7	5.6
2	5460.00	42.5 AV	54.0	-11.5	1.11 V	320	36.9	5.6
3	#5470.00	54.9 PK	68.2	-13.3	1.11 V	320	49.3	5.6
4	*5710.00	116.9 PK			1.11 V	320	111.2	5.7
5	*5710.00	105.8 AV			1.11 V	320	100.1	5.7
6	#5850.00	58.0 PK	68.2	-10.2	1.11 V	320	51.6	6.4
7	11420.00	47.5 PK	74.0	-26.5	1.45 V	340	30.8	16.7
8	11420.00	35.8 AV	54.0	-18.2	1.45 V	340	19.1	16.7
9	#17130.00	55.1 PK	68.2	-13.1	1.57 V	31	34.3	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

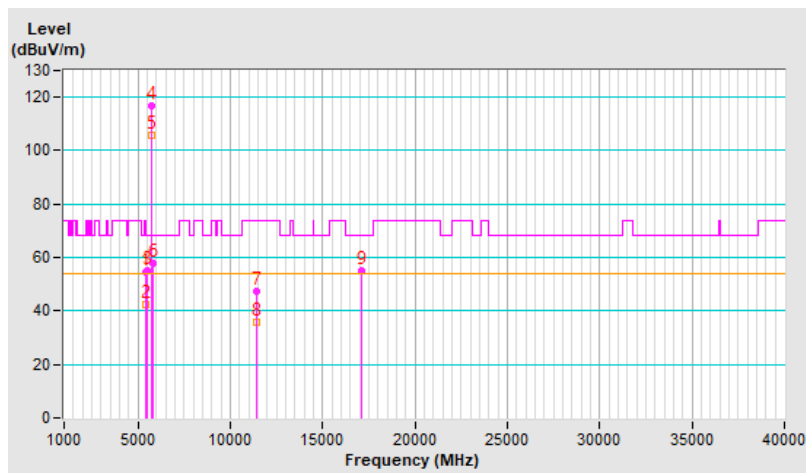


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 106 : 5530 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.80	66.3 PK	74.0	-7.7	1.09 H	65	60.7	5.6
2	5457.80	52.2 AV	54.0	-1.8	1.09 H	65	46.6	5.6
3	#5464.70	67.8 PK	68.2	-0.4	1.09 H	65	62.2	5.6
4	*5530.00	113.4 PK			1.09 H	65	107.8	5.6
5	*5530.00	103.0 AV			1.09 H	65	97.4	5.6
6	#5725.00	55.3 PK	68.2	-12.9	1.09 H	65	49.5	5.8
7	11060.00	48.3 PK	74.0	-25.7	1.75 H	259	31.2	17.1
8	11060.00	37.6 AV	54.0	-16.4	1.75 H	259	20.5	17.1
9	#16590.00	48.0 PK	68.2	-20.2	1.79 H	130	27.2	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

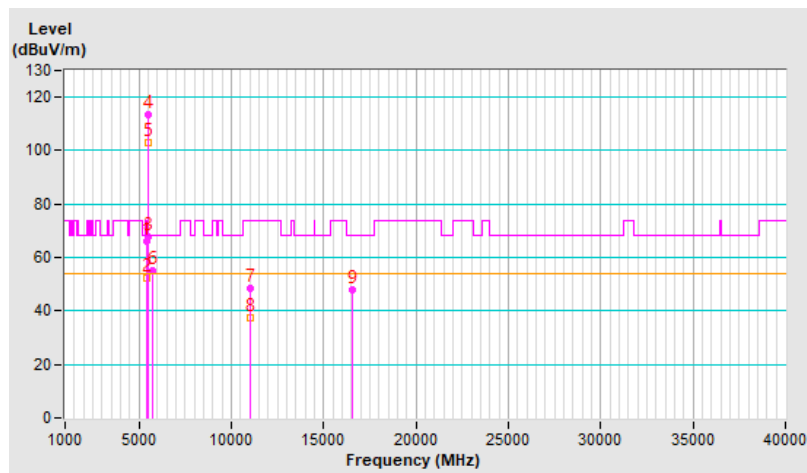


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 106 : 5530 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5453.69	64.2 PK	74.0	-9.8	3.50 V	98	58.6	5.6
2	5453.69	50.7 AV	54.0	-3.3	3.50 V	98	45.1	5.6
3	#5464.30	65.0 PK	68.2	-3.2	3.50 V	98	59.4	5.6
4	*5530.00	112.9 PK			3.50 V	98	107.3	5.6
5	*5530.00	102.2 AV			3.50 V	98	96.6	5.6
6	#5725.00	55.9 PK	68.2	-12.3	3.50 V	98	50.1	5.8
7	11060.00	53.6 PK	74.0	-20.4	1.42 V	32	36.5	17.1
8	11060.00	42.0 AV	54.0	-12.0	1.42 V	32	24.9	17.1
9	#16590.00	47.7 PK	68.2	-20.5	1.68 V	296	26.9	20.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

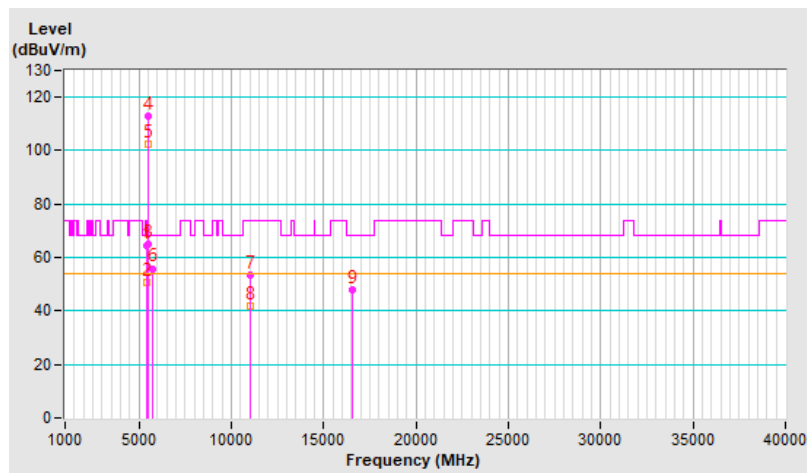


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 122 : 5610 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.6 PK	74.0	-16.4	1.05 H	103	52.0	5.6
2	5460.00	47.3 AV	54.0	-6.7	1.05 H	103	41.7	5.6
3	#5470.00	59.7 PK	68.2	-8.5	1.05 H	103	54.1	5.6
4	*5610.00	118.9 PK			1.05 H	103	113.2	5.7
5	*5610.00	106.8 AV			1.05 H	103	101.1	5.7
6	#5725.00	67.5 PK	68.2	-0.7	1.05 H	103	61.7	5.8
7	11220.00	48.1 PK	74.0	-25.9	1.53 H	360	31.3	16.8
8	11220.00	36.5 AV	54.0	-17.5	1.53 H	360	19.7	16.8
9	#16830.00	58.6 PK	68.2	-9.6	1.84 H	161	37.4	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

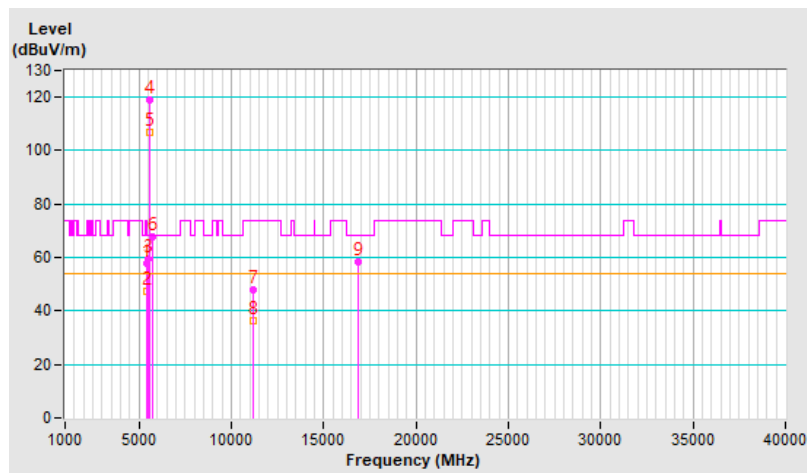


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 122 : 5610 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.8 PK	74.0	-17.2	1.04 V	314	51.2	5.6
2	5460.00	45.7 AV	54.0	-8.3	1.04 V	314	40.1	5.6
3	#5470.00	59.2 PK	68.2	-9.0	1.04 V	314	53.6	5.6
4	*5610.00	115.2 PK			1.04 V	314	109.5	5.7
5	*5610.00	105.0 AV			1.04 V	314	99.3	5.7
6	#5725.00	63.9 PK	68.2	-4.3	1.04 V	314	58.1	5.8
7	11220.00	47.6 PK	74.0	-26.4	1.42 V	322	30.8	16.8
8	11220.00	35.7 AV	54.0	-18.3	1.42 V	322	18.9	16.8
9	#16830.00	55.7 PK	68.2	-12.5	1.54 V	31	34.5	21.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

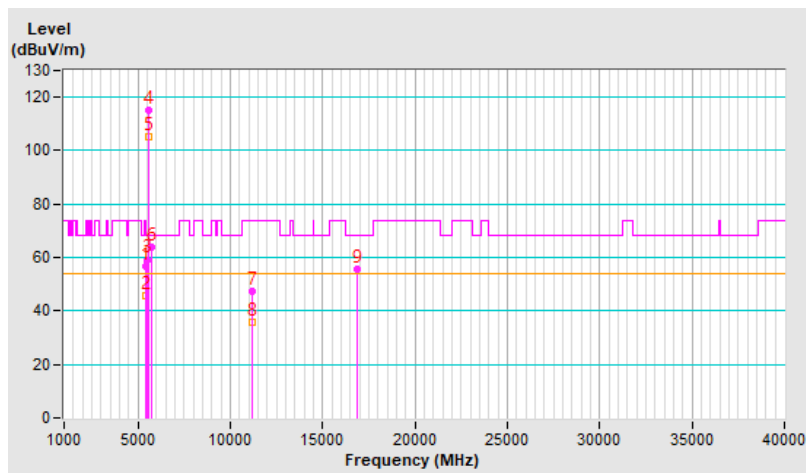


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 138 : 5690 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.4 PK	74.0	-18.6	1.19 H	283	49.8	5.6
2	5460.00	43.6 AV	54.0	-10.4	1.19 H	283	38.0	5.6
3	#5470.00	55.9 PK	68.2	-12.3	1.19 H	283	50.3	5.6
4	*5690.00	114.9 PK			1.19 H	283	109.1	5.8
5	*5690.00	104.3 AV			1.19 H	283	98.5	5.8
6	#5850.00	63.6 PK	68.2	-4.6	1.19 H	283	57.2	6.4
7	11380.00	48.5 PK	74.0	-25.5	1.56 H	350	31.6	16.9
8	11380.00	36.9 AV	54.0	-17.1	1.56 H	350	20.0	16.9
9	#17070.00	58.0 PK	68.2	-10.2	1.80 H	164	37.0	21.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

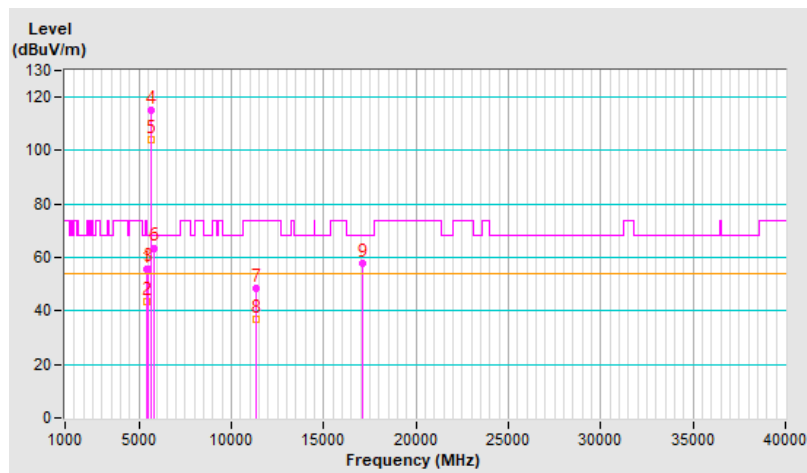


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 138 : 5690 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	24°C, 70% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	54.8 PK	74.0	-19.2	1.09 V	320	49.2	5.6
2	5460.00	42.8 AV	54.0	-11.2	1.09 V	320	37.2	5.6
3	#5470.00	55.2 PK	68.2	-13.0	1.09 V	320	49.6	5.6
4	*5690.00	114.0 PK			1.09 V	320	108.2	5.8
5	*5690.00	103.7 AV			1.09 V	320	97.9	5.8
6	#5850.00	62.7 PK	68.2	-5.5	1.09 V	320	56.3	6.4
7	11380.00	47.3 PK	74.0	-26.7	1.44 V	337	30.4	16.9
8	11380.00	35.6 AV	54.0	-18.4	1.44 V	337	18.7	16.9
9	#17070.00	54.9 PK	68.2	-13.3	1.51 V	26	33.9	21.0

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

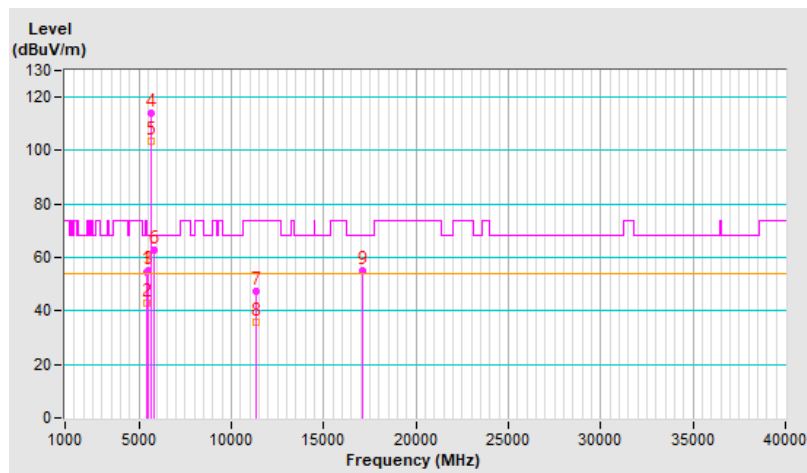

Plot of Band Edge


Mode A

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

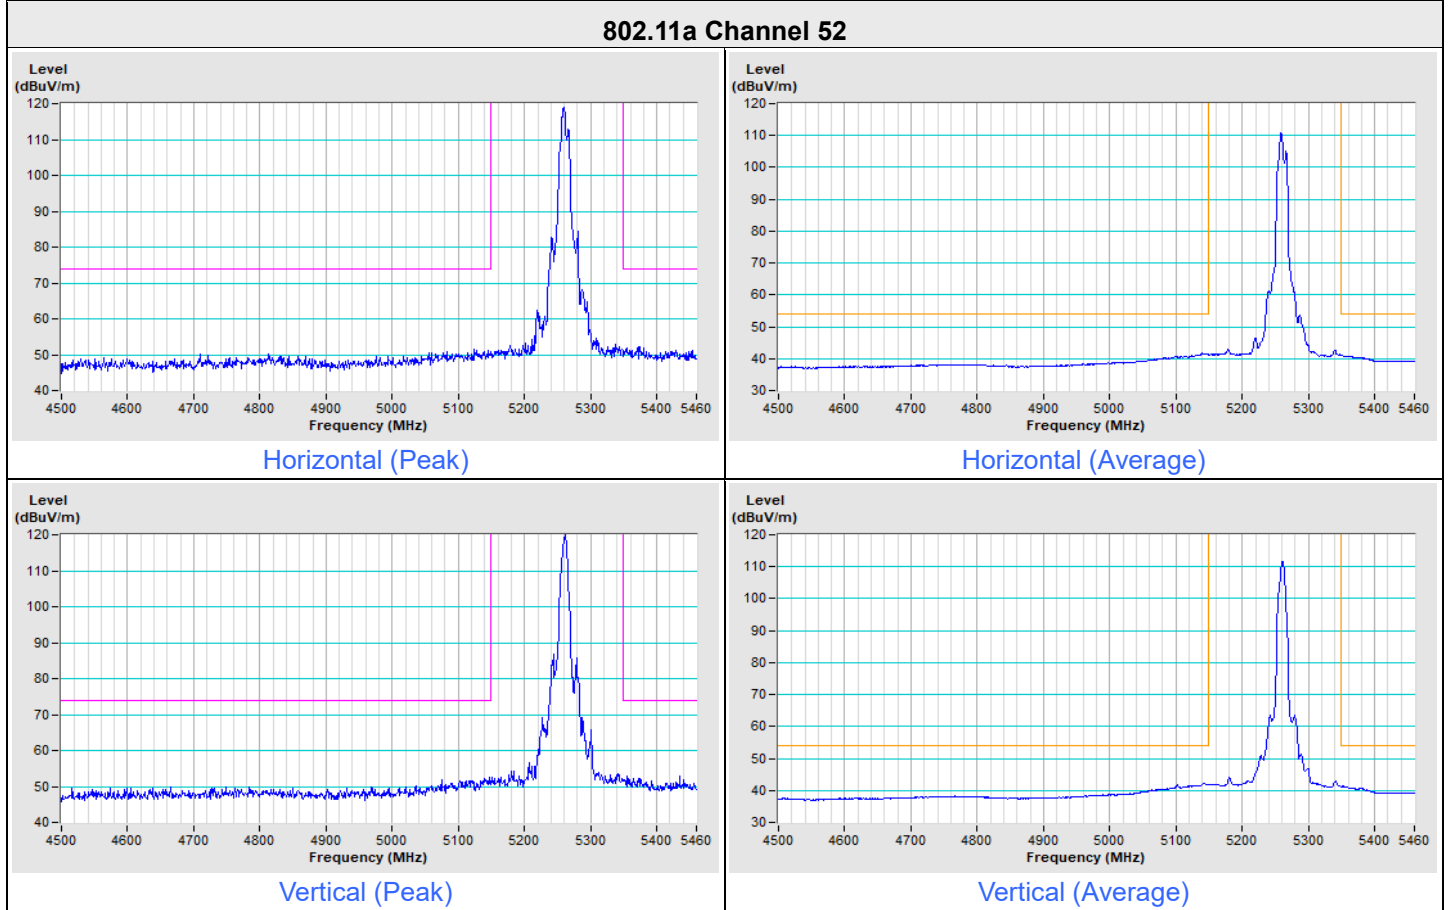





### 802.11a Channel 64

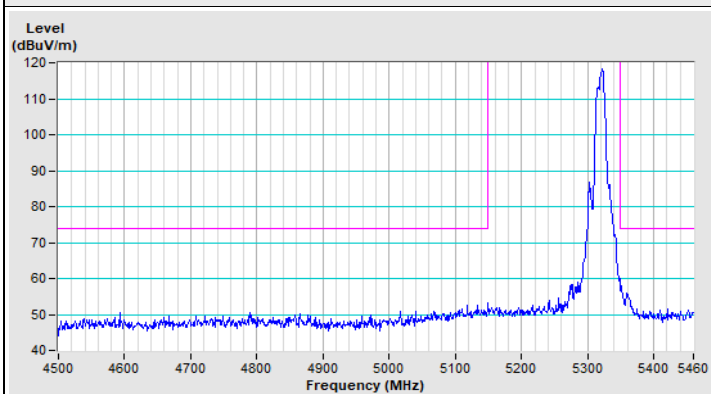


Horizontal (Peak)

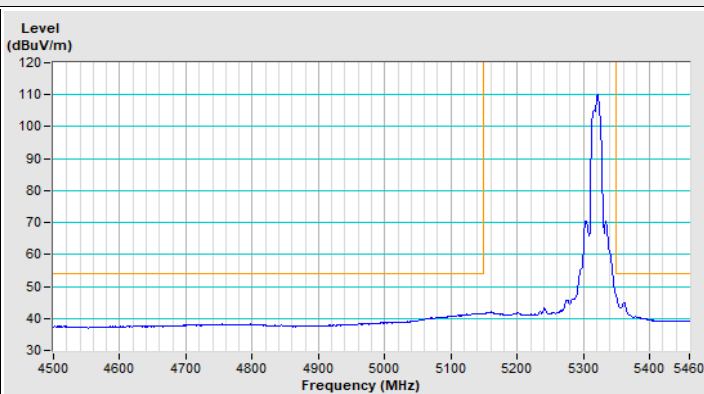

Horizontal (Average)

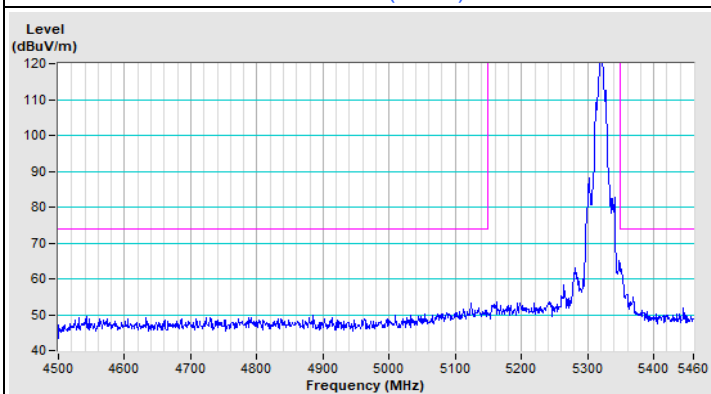


Vertical (Peak)

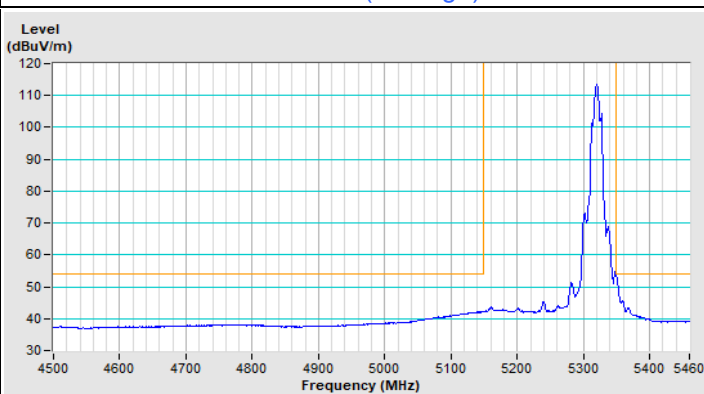


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


**802.11ax (HE20) Channel 52**

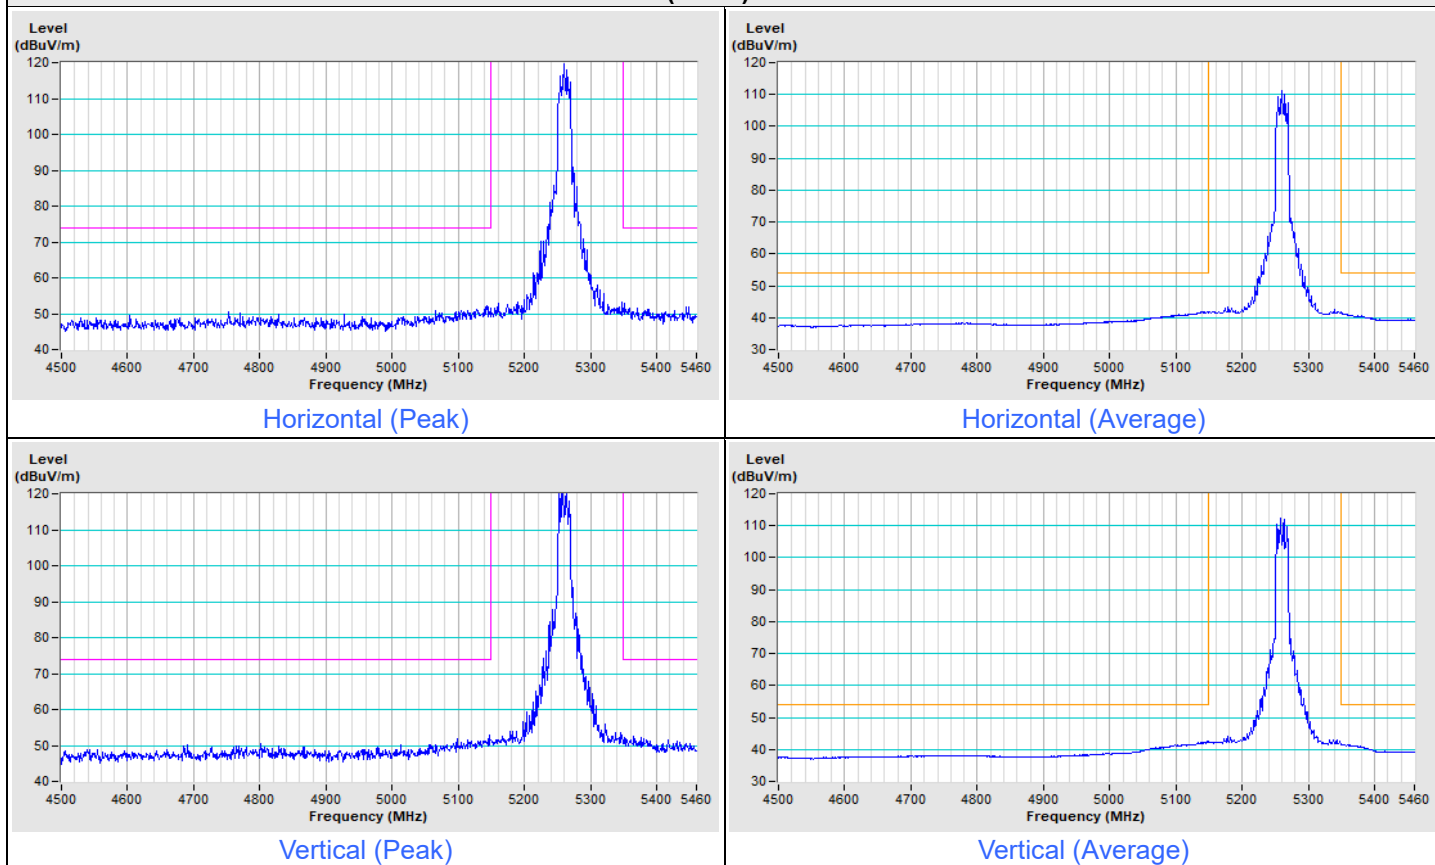


### 802.11ax (HE20) Channel 64

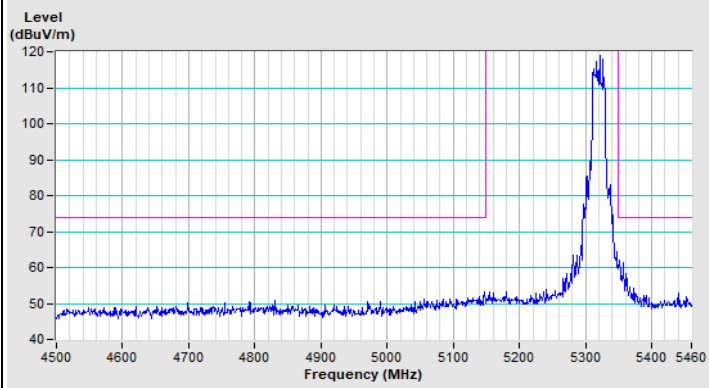


Horizontal (Peak)

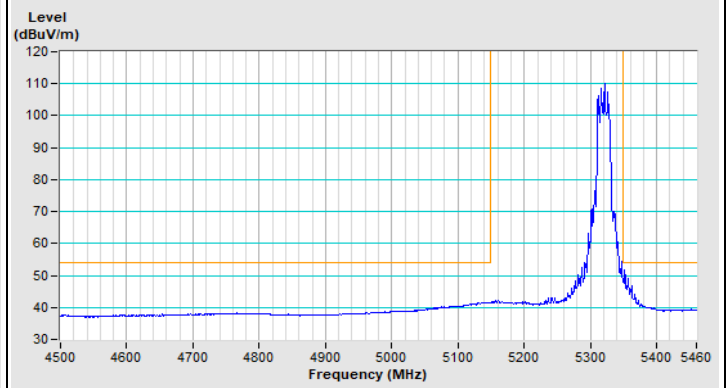

Horizontal (Average)

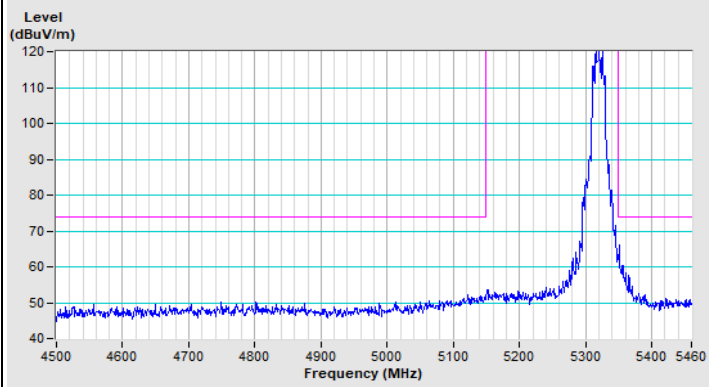


Vertical (Peak)

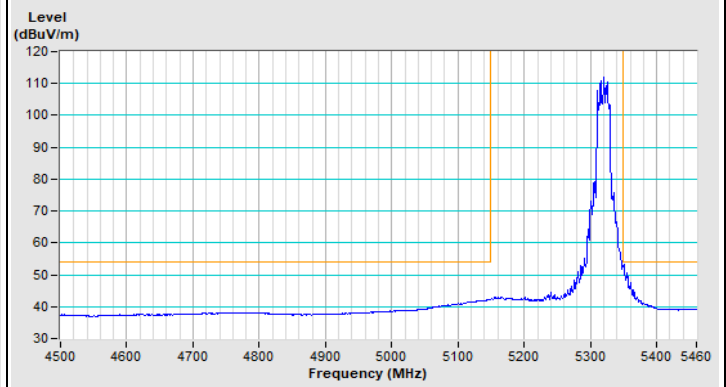


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


### 802.11ax (HE40) Channel 54

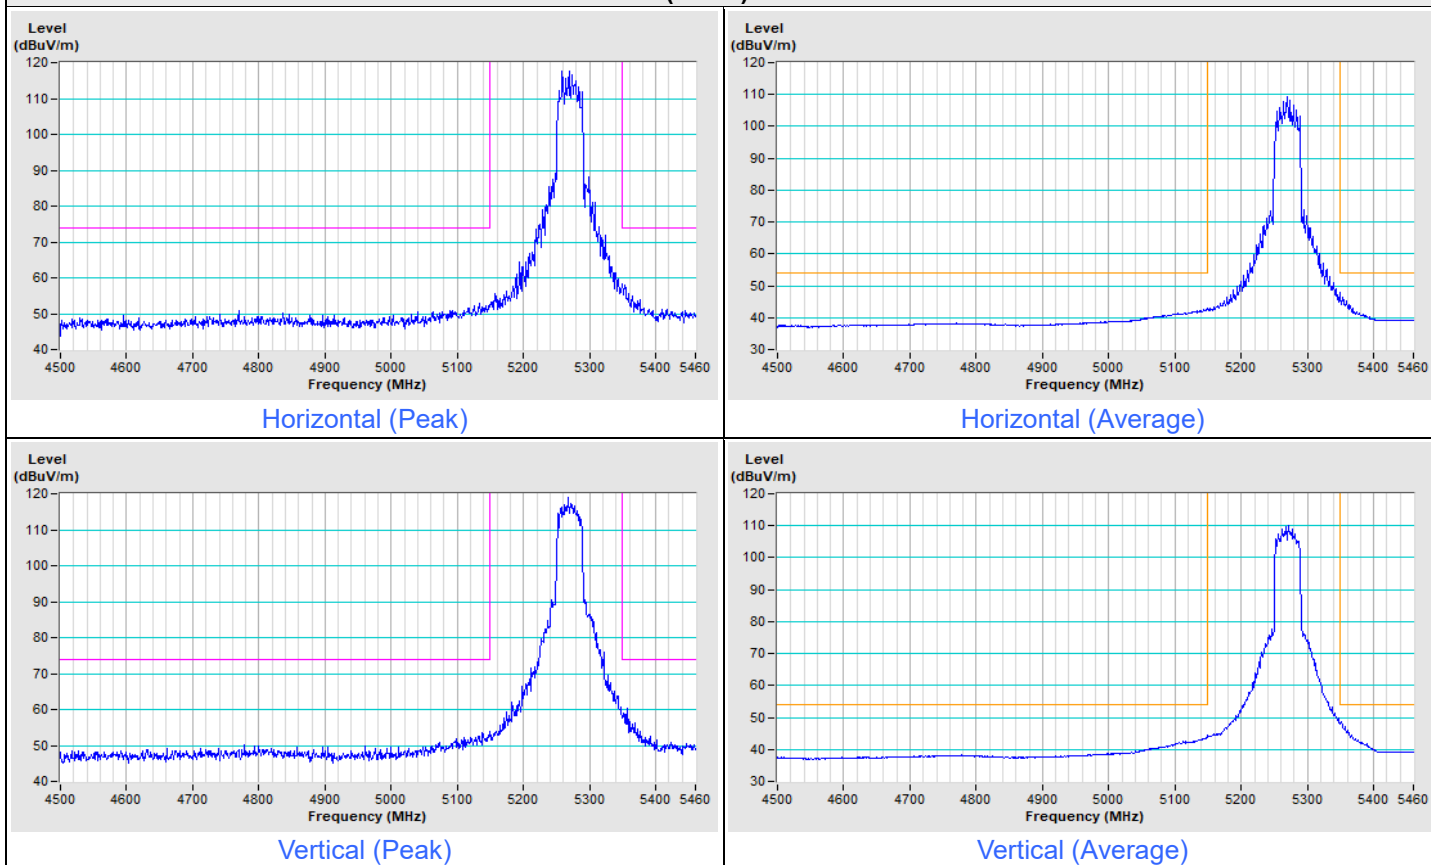


### 802.11ax (HE40) Channel 62

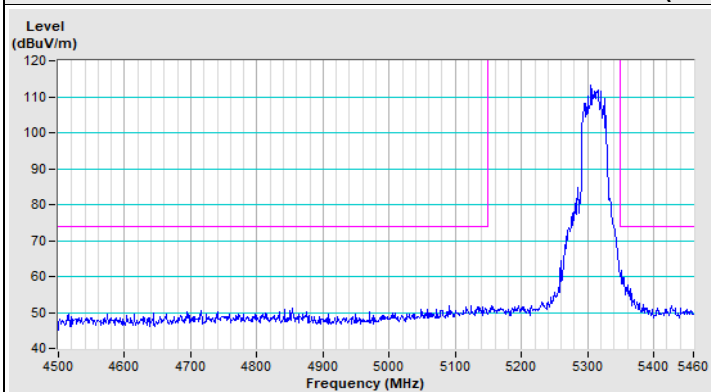


Horizontal (Peak)

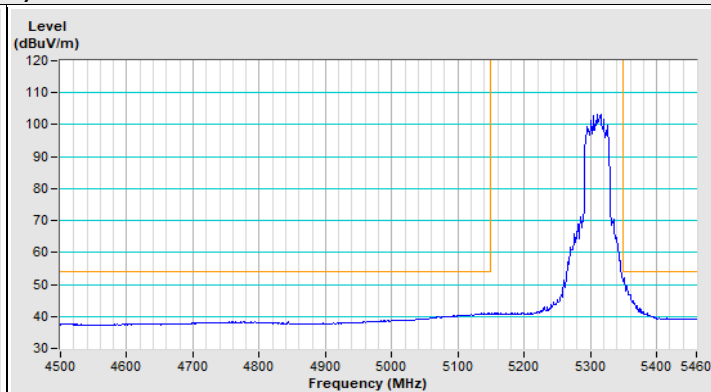

Horizontal (Average)

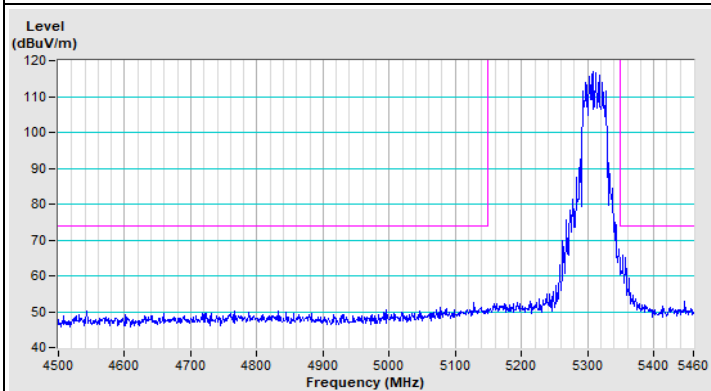


Vertical (Peak)

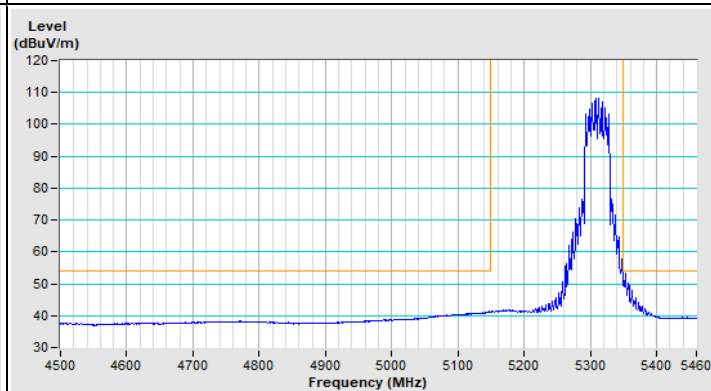

Vertical (Average)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

**802.11ax (HE80) Channel 58**

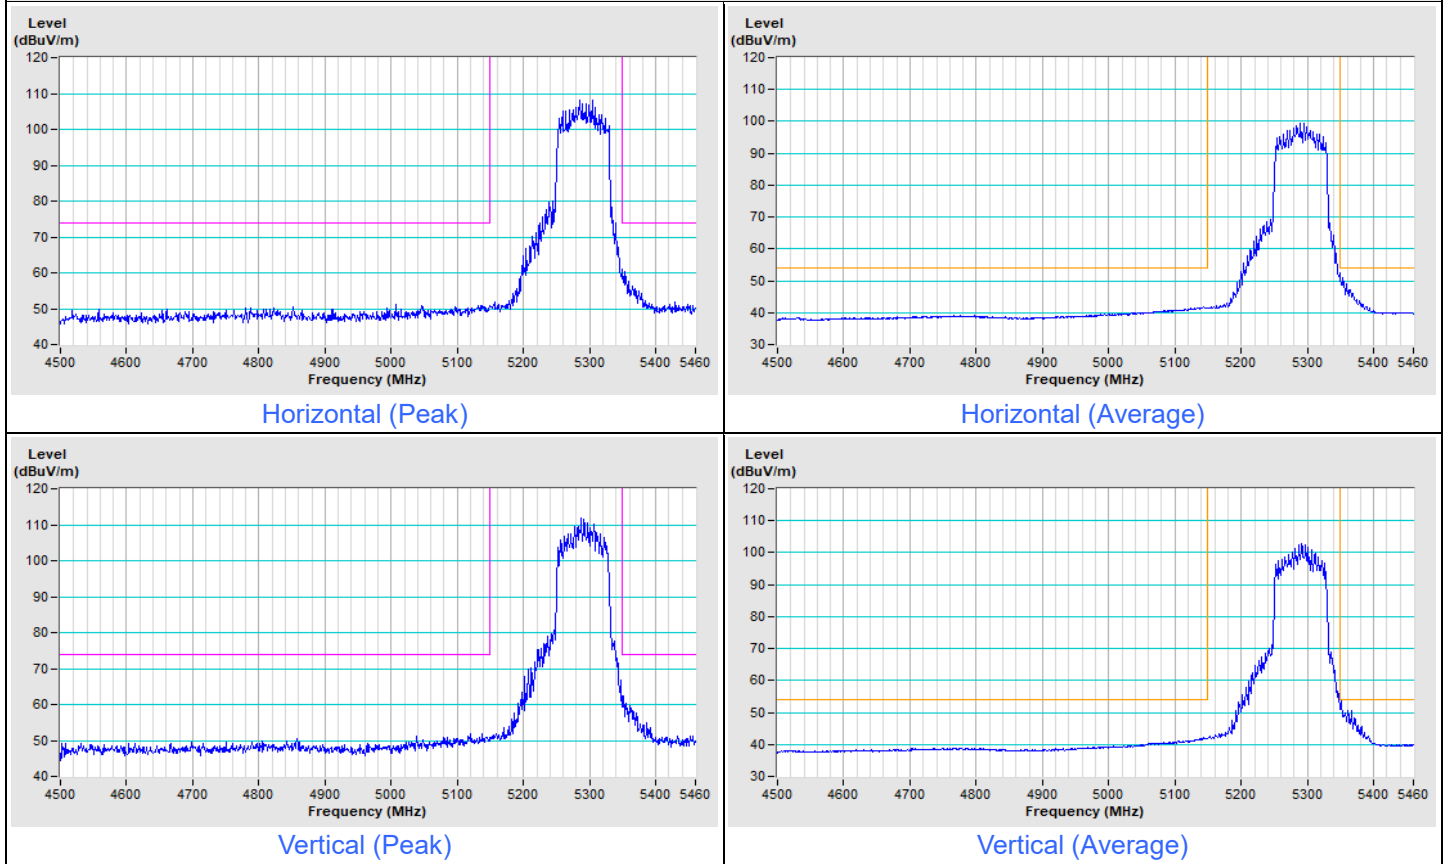


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

### 802.11ax (HE160) Channel 50

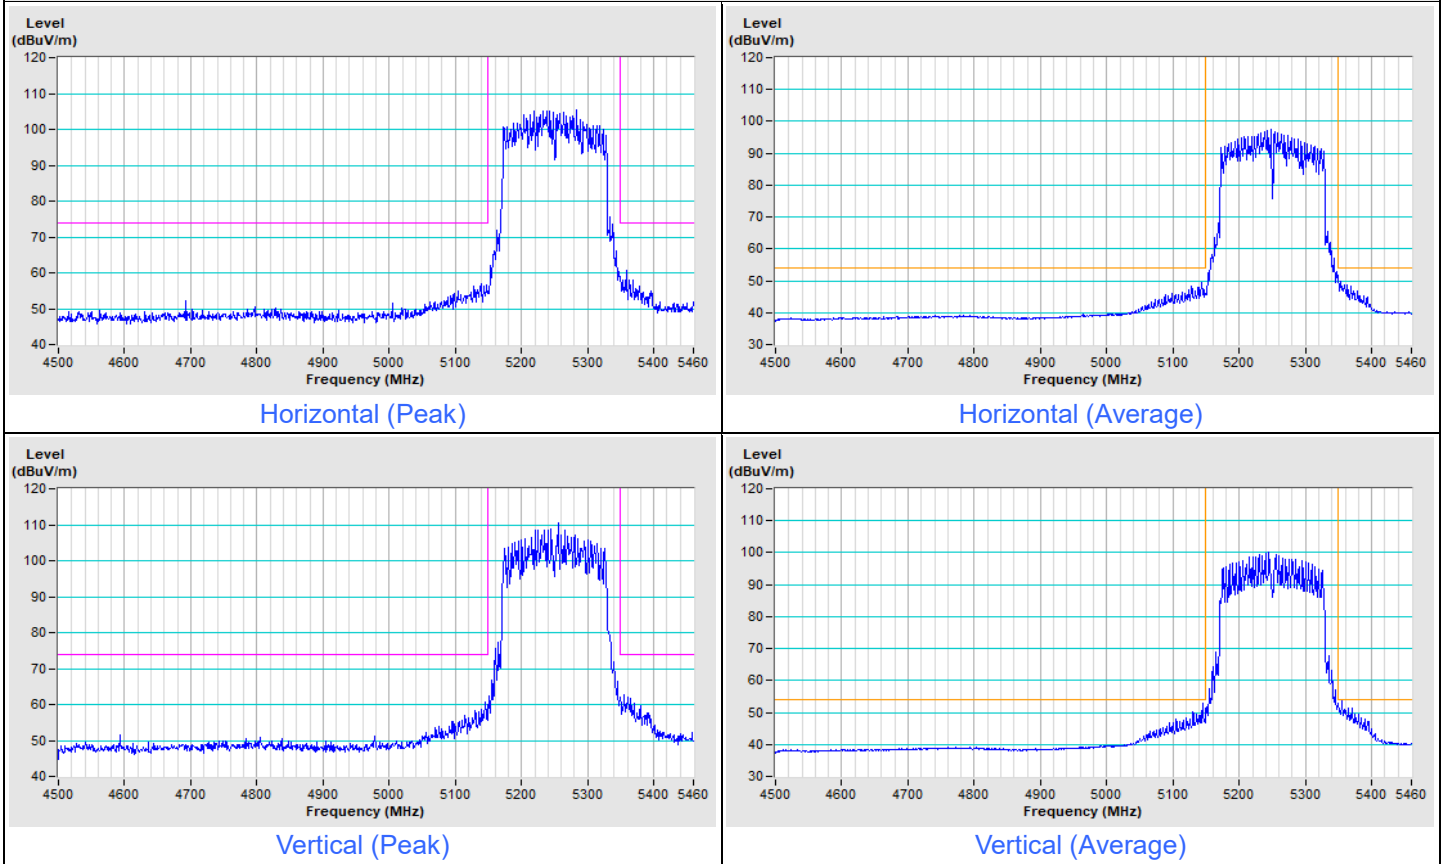


Mode B

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

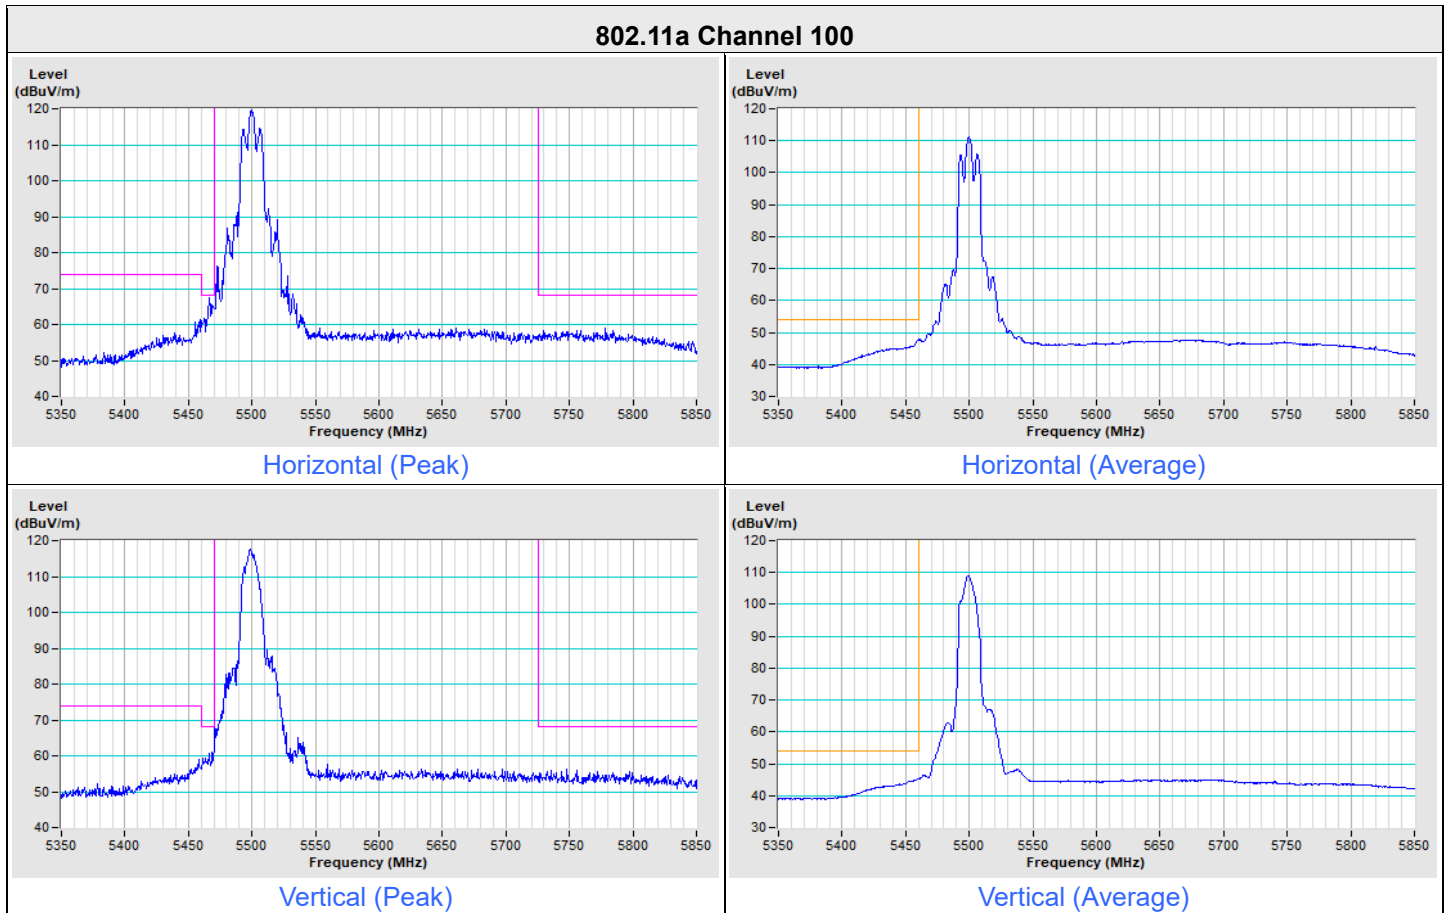





### 802.11ax (HE20) Channel 100

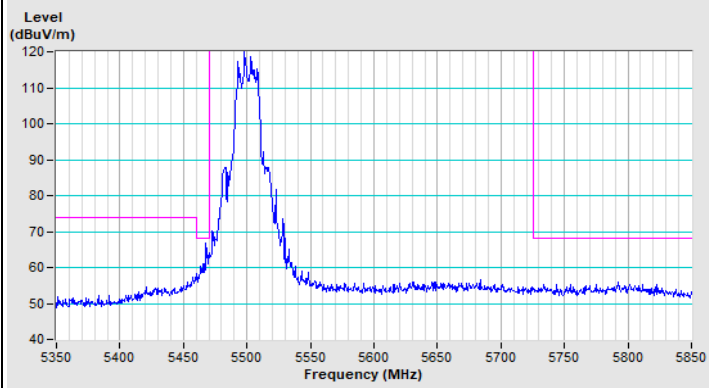


Horizontal (Peak)

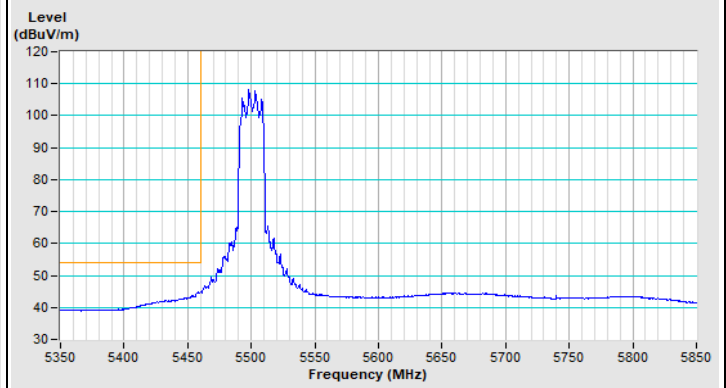

Horizontal (Average)

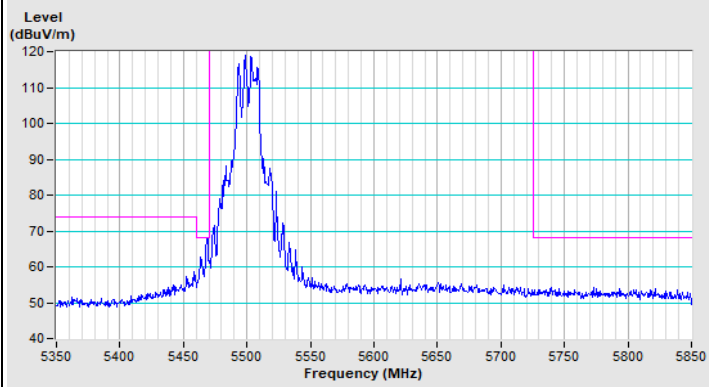


Vertical (Peak)

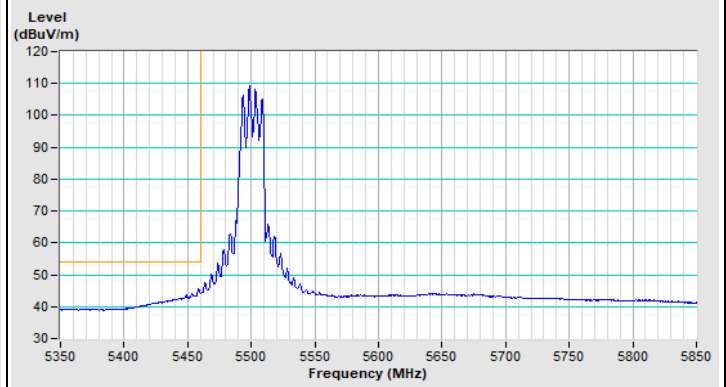

Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11ax (HE40) Channel 102**

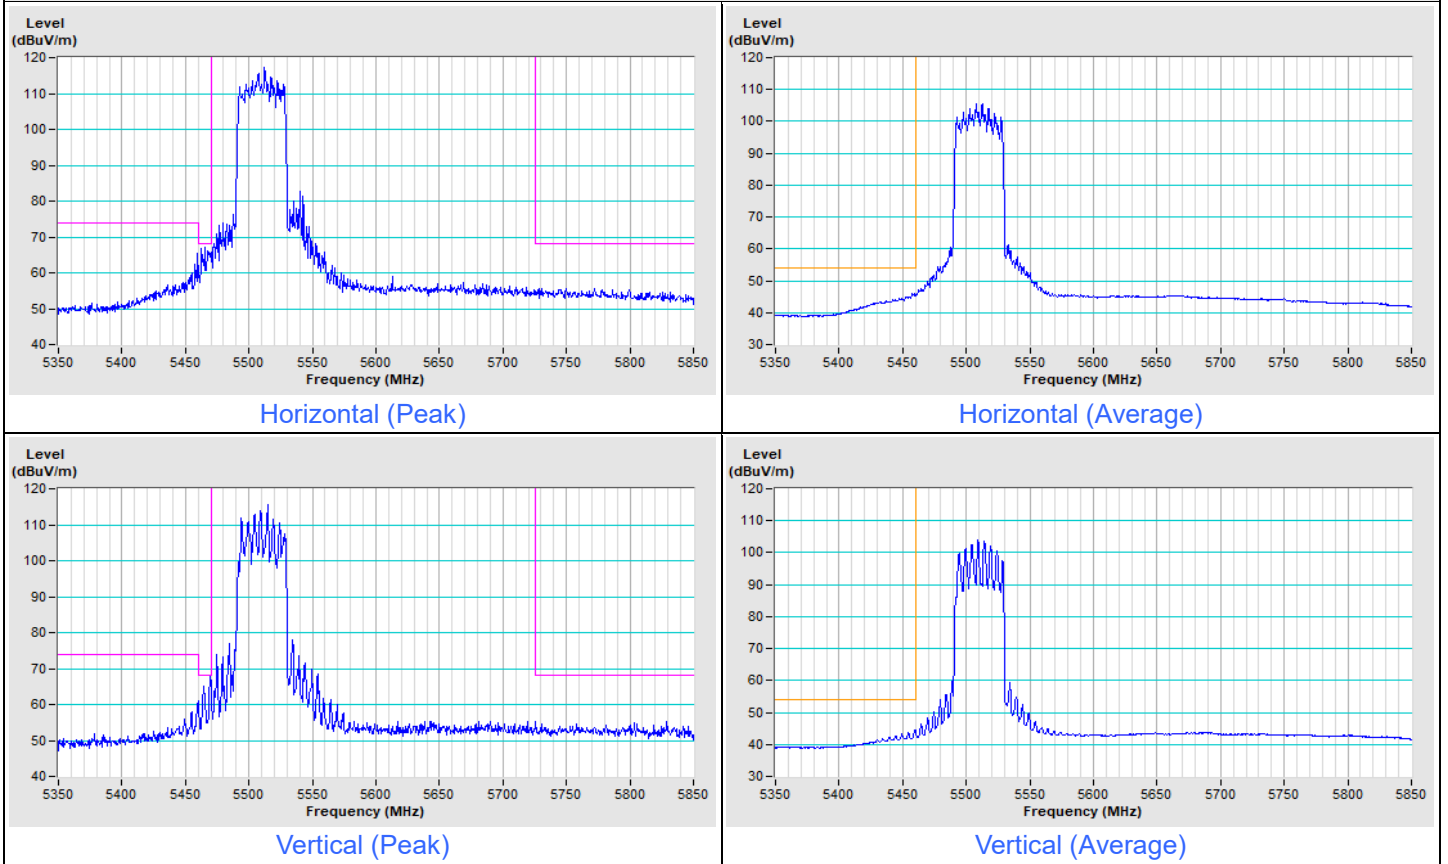

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

**802.11ax (HE80) Channel 106**

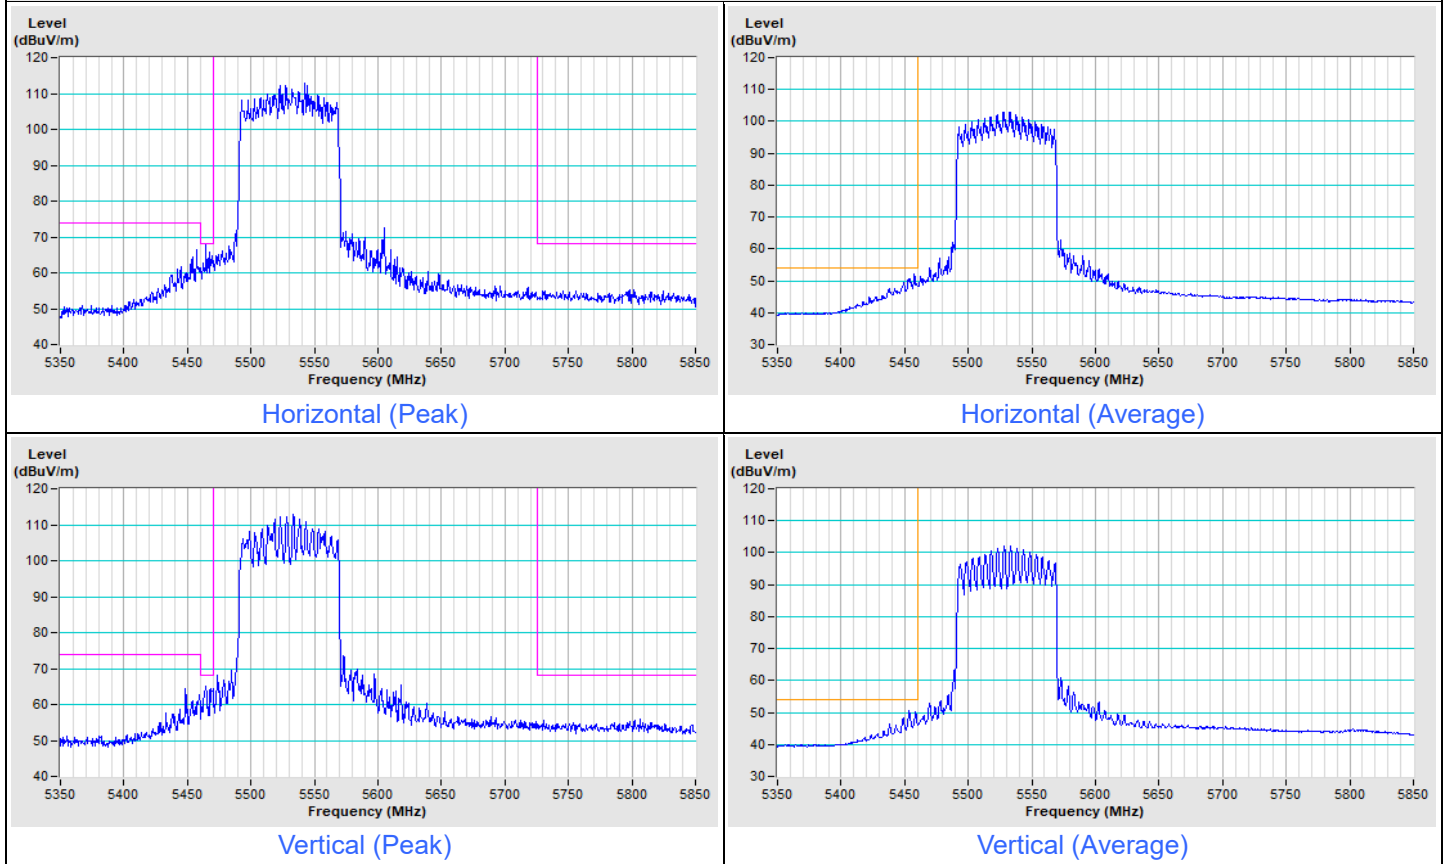

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---