


Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	9.762	30	Pass
NVNT	BLE	2442	Ant1	9.806	30	Pass
NVNT	BLE	2480	Ant1	8.745	30	Pass




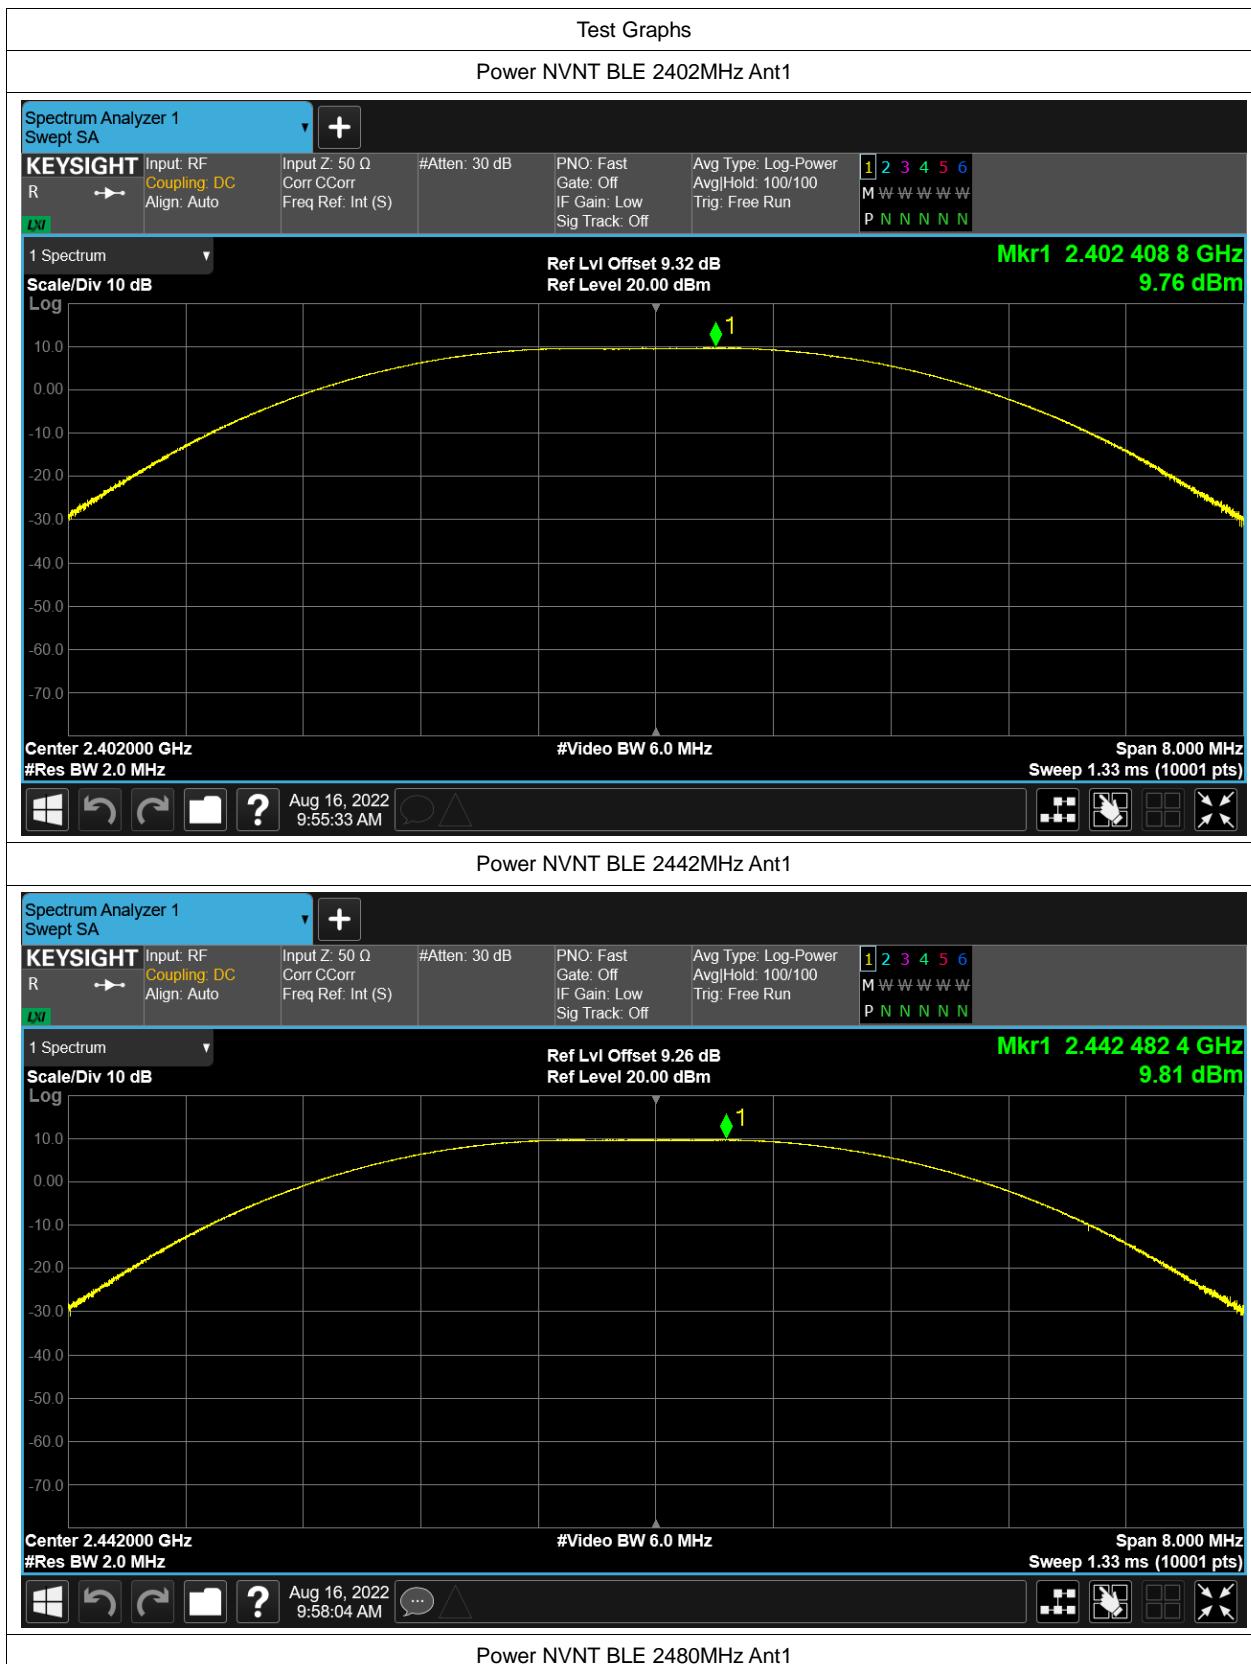

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.114	0.5	Pass
NVNT	BLE	2442	Ant1	1.141	0.5	Pass
NVNT	BLE	2480	Ant1	1.147	0.5	Pass



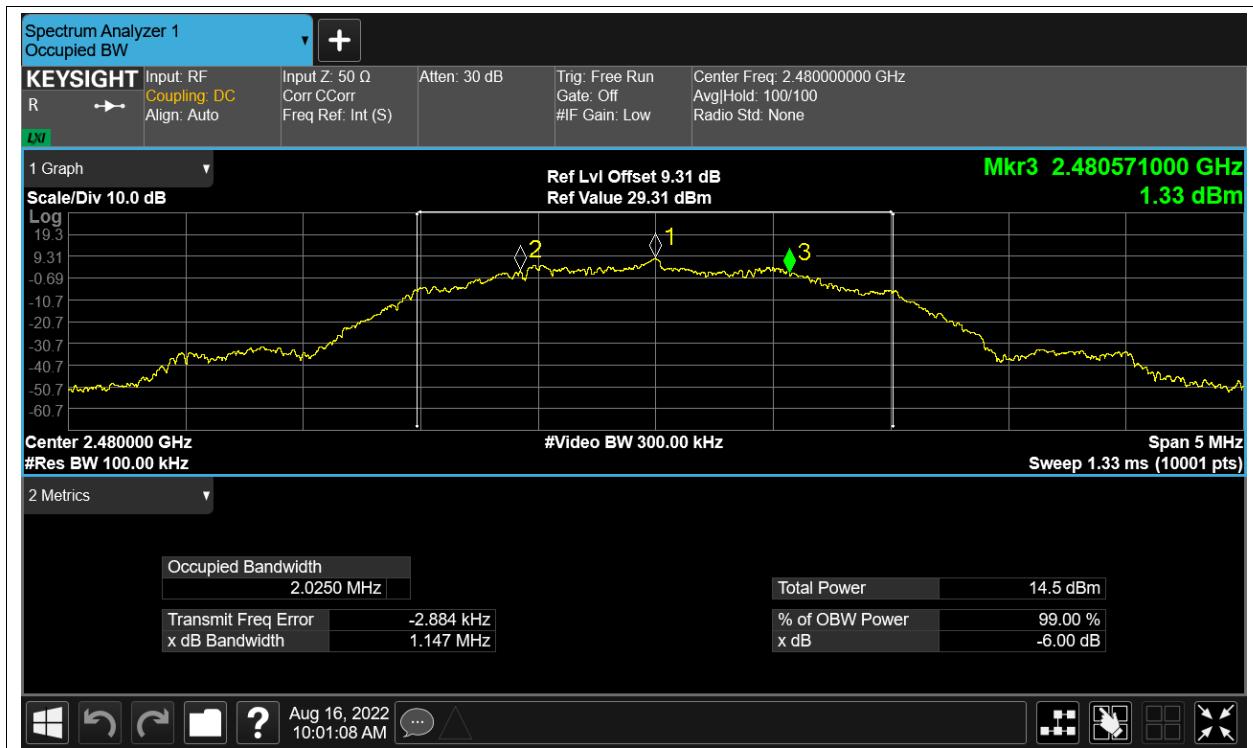

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	2.013993645
NVNT	BLE	2442	Ant1	2.010287418
NVNT	BLE	2480	Ant1	2.014568423

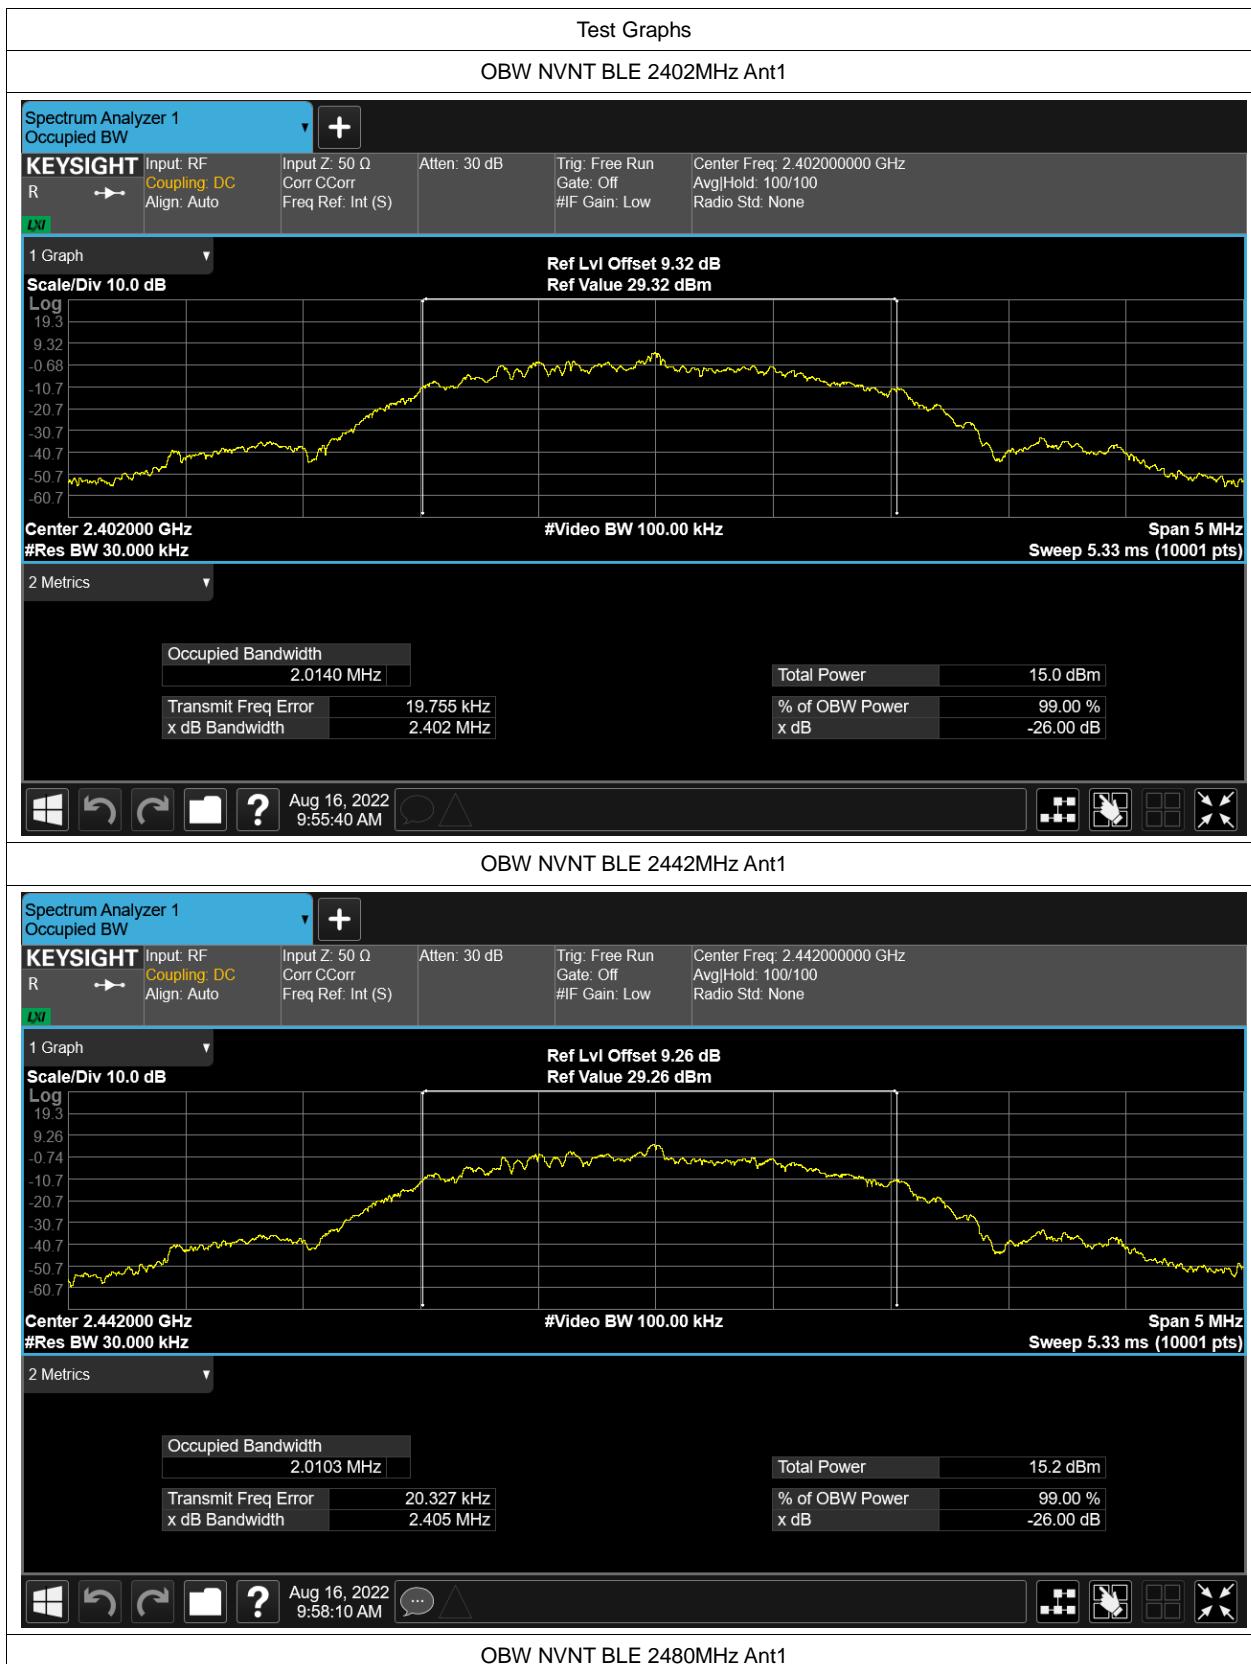




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-8.14	8	Pass
NVNT	BLE	2442	Ant1	-7.993	8	Pass
NVNT	BLE	2480	Ant1	-9.13	8	Pass

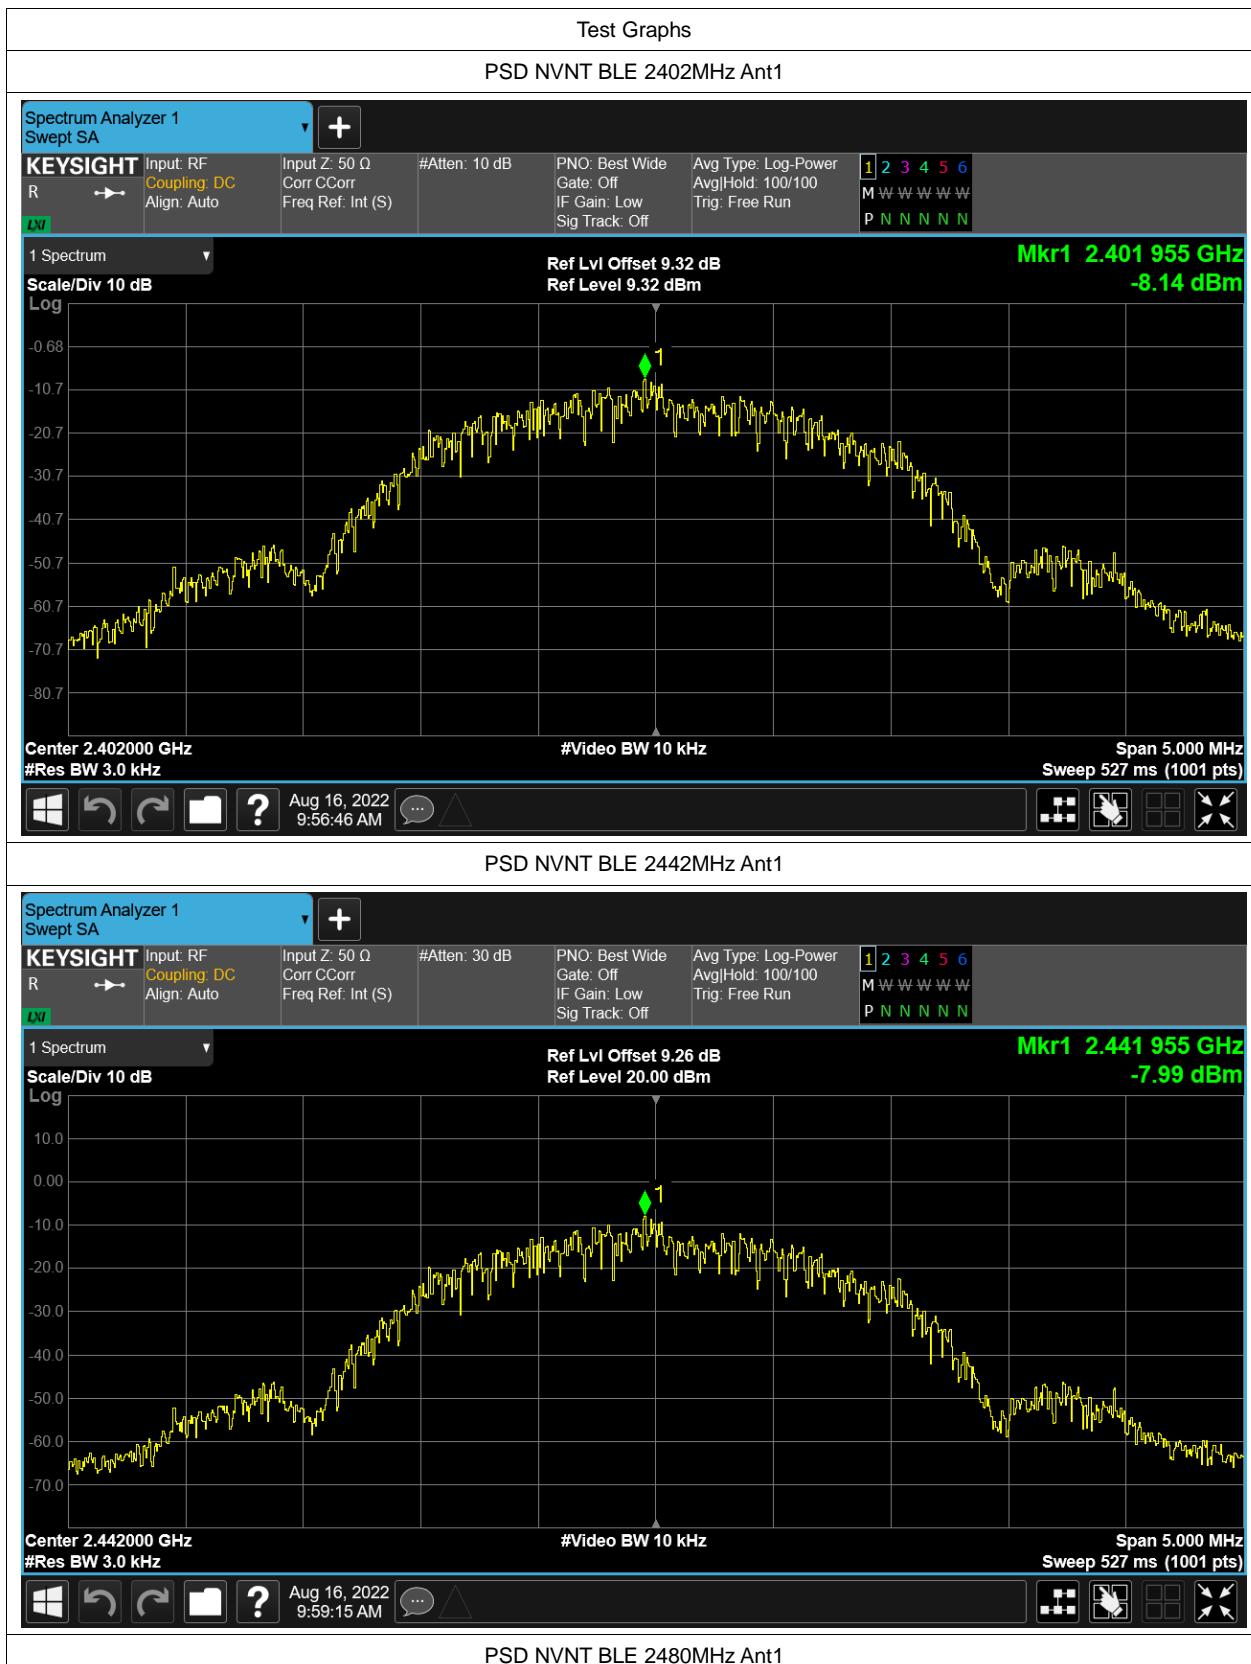


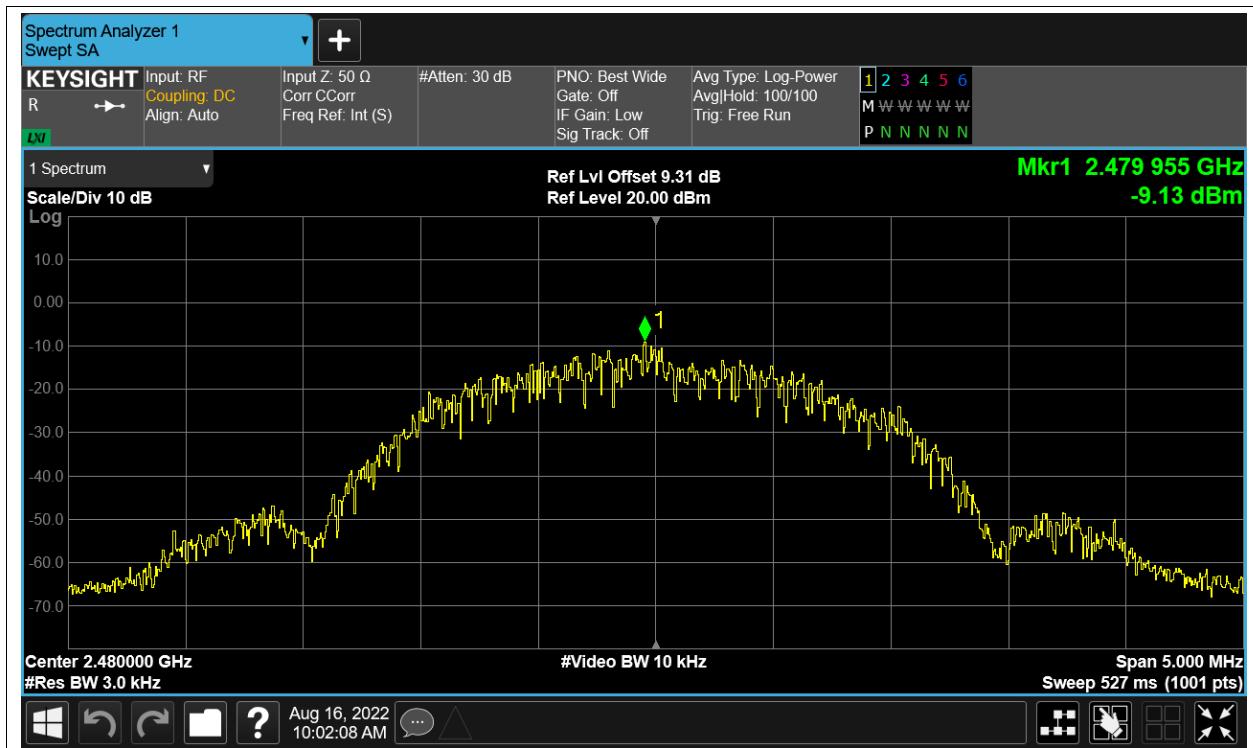


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-59.66	-20	Pass
NVNT	BLE	2480	Ant1	-57.32	-20	Pass



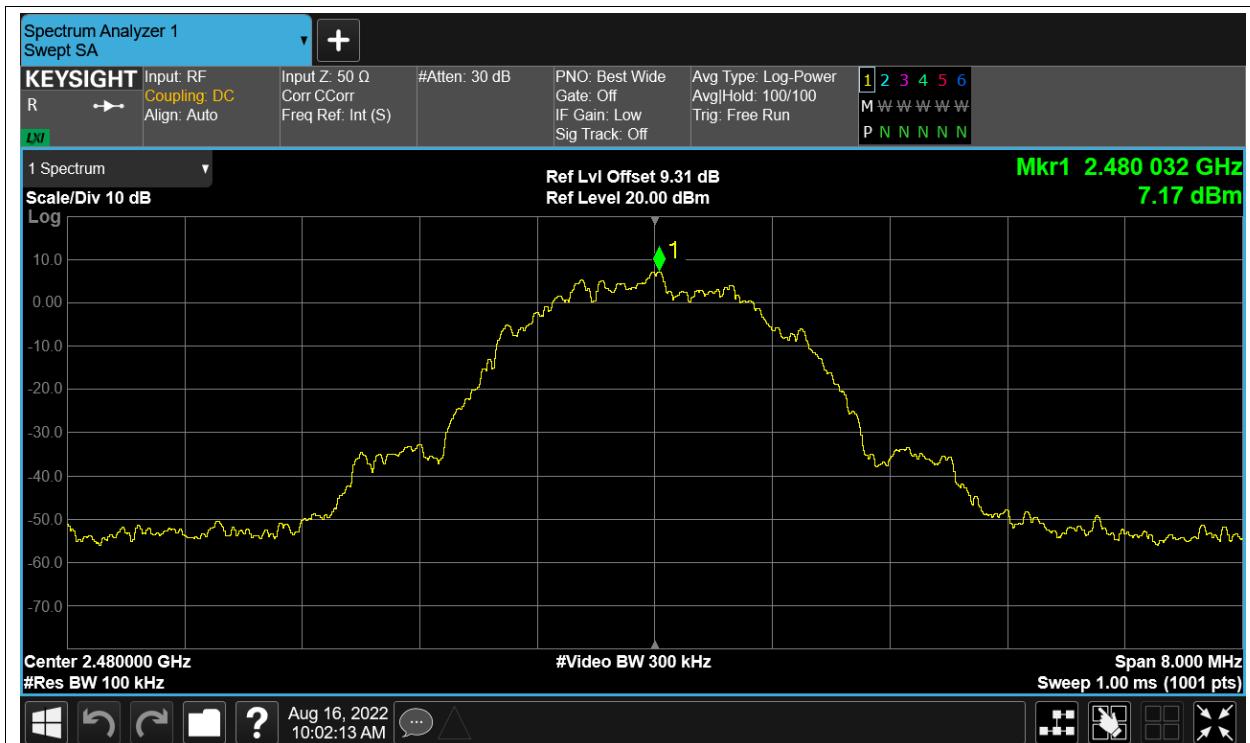


Band Edge NVNT BLE 2480MHz Ant1 Emission

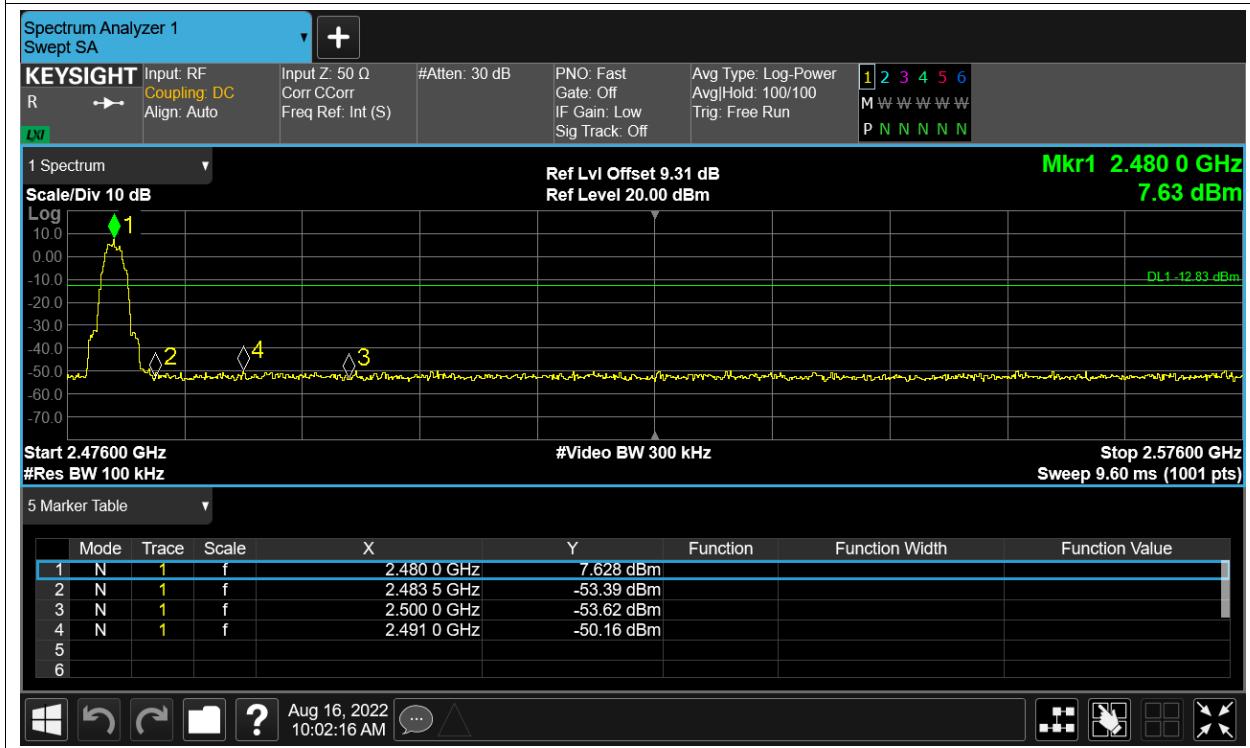

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-50.26	-20	Pass
NVNT	BLE	2442	Ant1	-50.84	-20	Pass
NVNT	BLE	2480	Ant1	-49.38	-20	Pass



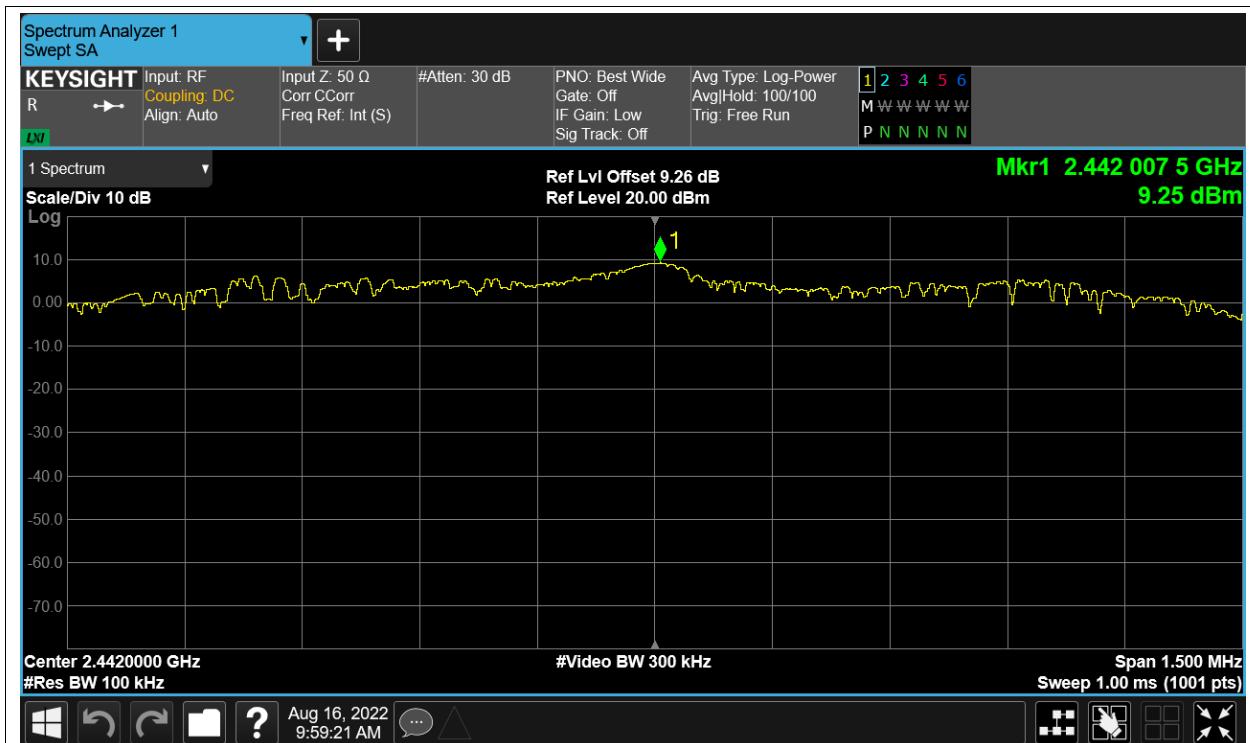

Tx. Spurious NVNT BLE 2442MHz Ant1 Emission



Tx. Spurious NVNT BLE 2480MHz Ant1 Ref

