


TEST REPORT

Product Name: G3
FCC ID: 2AWO9-G3
Trademark: N/A
Model Number: G3
Prepared For: Shenzhen Quanmeng Technology Co., Ltd.
Address: 201, Unit 2, no.1219, Guanguang Road, Guihua Community, Guanlan Street, Longhua District, Shenzhen City, 518110 Guangdong Province, China
Manufacturer: Shenzhen Quanmeng Technology Co., Ltd.
Address: 201, Unit 2, no.1219, Guanguang Road, Guihua Community, Guanlan Street, Longhua District, Shenzhen City, 518110 Guangdong Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Feb. 11, 2022
Sample tested Date: Feb. 11, 2022 to Feb. 17, 2022
Issue Date: Feb. 17, 2022
Report No.: CTB220217028RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup	35
9.2 Limit	35
9.3 Test procedure	35
9.4 Test Result	36
10. 20DB OCCUPIED BANDWIDTH	40
10.1 Block Diagram Of Test Setup	40
10.2 Limit	40
10.3 Test procedure	40
10.4 Test Result	40
11. CARRIER FREQUENCIES SEPARATION	44
11.1 Block Diagram Of Test Setup	44
11.2 Limit	44

11.3	Test procedure	44
11.4	Test Result	44
12.	HOPPING CHANNEL NUMBER	48
12.1	Block Diagram Of Test Setup	48
12.2	Limit	48
12.3	Test procedure	48
12.4	Test Result	48
13.	DWELL TIME	50
13.1	Block Diagram Of Test Setup	50
13.2	Limit	50
13.3	Test procedure	50
13.4	Test Result	51
14.	PSEUDORANDOM FREQUENCY	55
14.1	Limit	55
14.2	Test procedure	55
14.3	Test Result	56
15.	ANTENNA REQUIREMENT	57
16.	EUT PHOTOGRAPHS	58
17.	EUT TEST SETUP PHOTOGRAPHS	59

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220217028RFX	Feb. 17, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10^{-7}
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	G3
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 2.134dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Ceramic Antenna
Antenna Gain:	Bluetooth: 1.0dBi
Ratings:	DC 5V charging from adapter Battery DC 3.7V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZHEN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	25
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

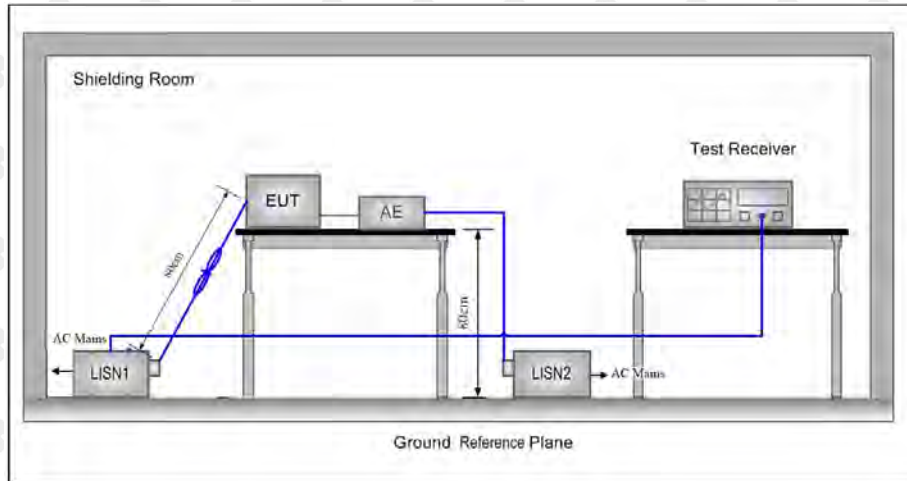

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference

plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L:

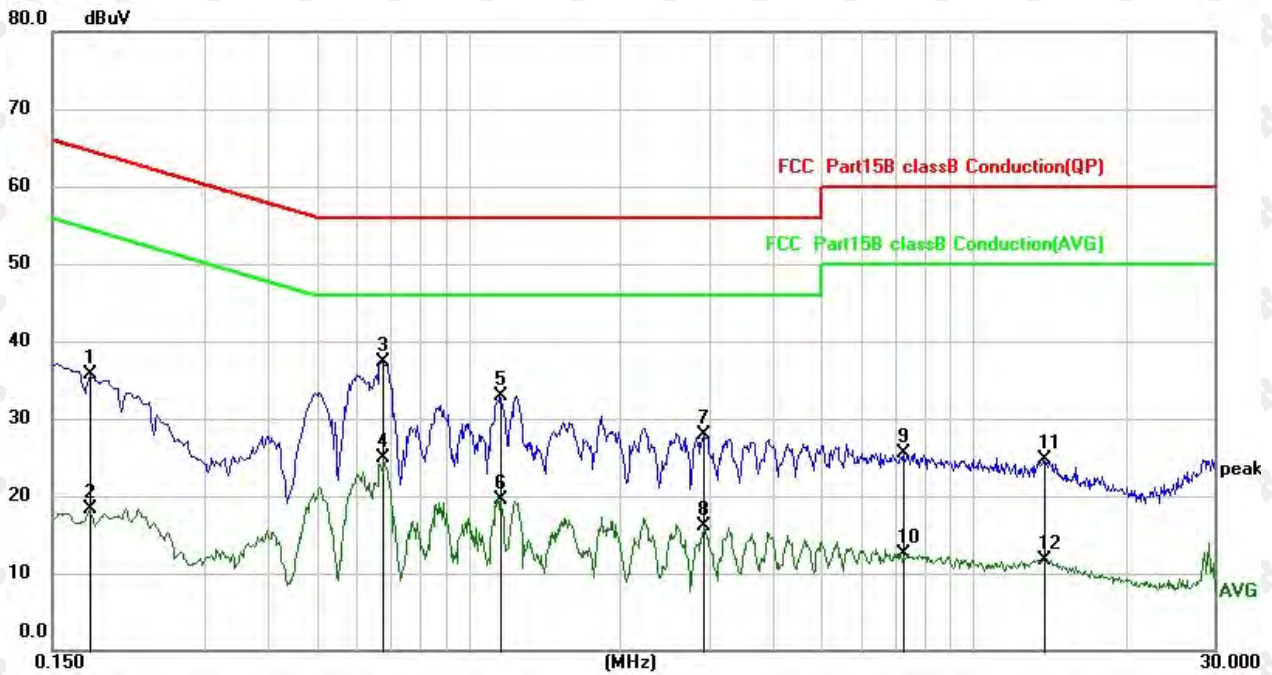


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	25.02	10.70	35.72	64.58	-28.86	QP
2	0.1780	7.69	10.70	18.39	54.58	-36.19	AVG
3 *	0.6740	26.74	10.55	37.29	56.00	-18.71	QP
4	0.6740	14.36	10.55	24.91	46.00	-21.09	AVG
5	1.1580	22.25	10.62	32.87	56.00	-23.13	QP
6	1.1580	8.79	10.62	19.41	46.00	-26.59	AVG
7	2.9180	17.28	10.63	27.91	56.00	-28.09	QP
8	2.9180	5.55	10.63	16.18	46.00	-29.82	AVG
9	7.2780	14.70	10.73	25.43	60.00	-34.57	QP
10	7.2780	1.76	10.73	12.49	50.00	-37.51	AVG
11	13.7860	13.88	10.88	24.76	60.00	-35.24	QP
12	13.7860	0.75	10.88	11.63	50.00	-38.37	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

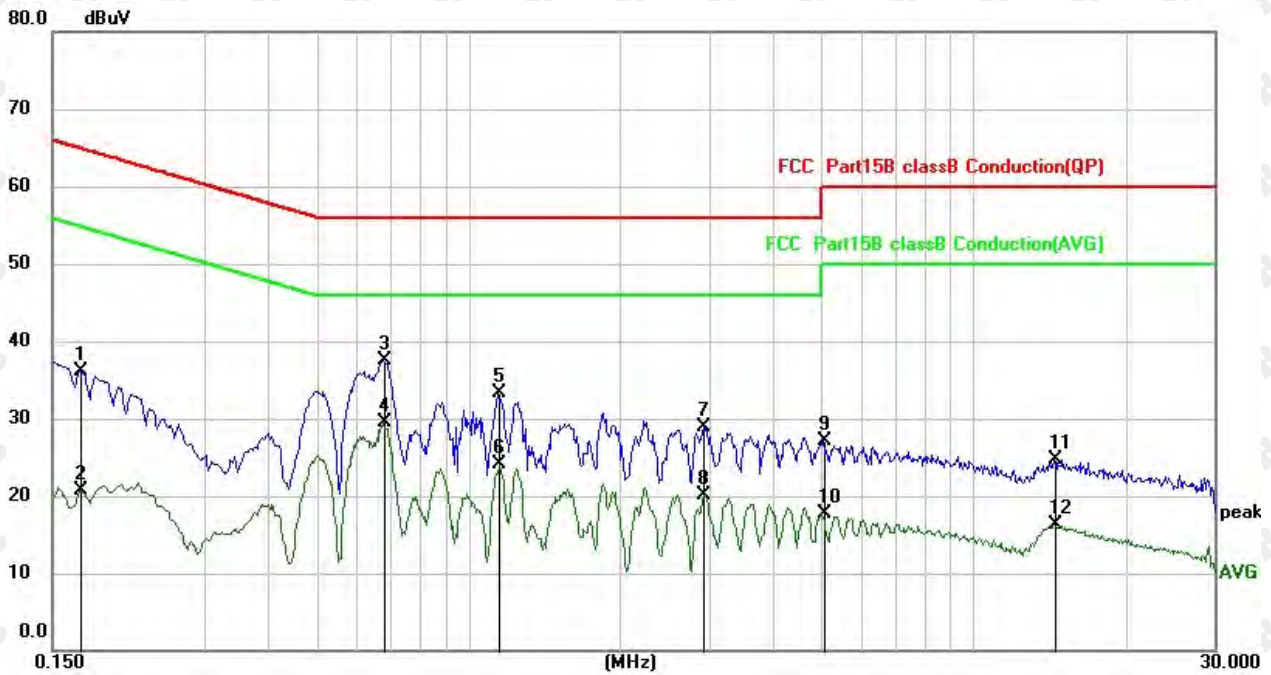

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1		0.1700	25.43	10.71	36.14	64.96	-28.82	QP
2		0.1700	10.02	10.71	20.73	54.96	-34.23	AVG
3		0.6820	26.92	10.56	37.48	56.00	-18.52	QP
4	*	0.6820	18.93	10.56	29.49	46.00	-16.51	AVG
5		1.1420	22.66	10.62	33.28	56.00	-22.72	QP
6		1.1420	13.53	10.62	24.15	46.00	-21.85	AVG
7		2.9219	18.22	10.63	28.85	56.00	-27.15	QP
8		2.9219	9.55	10.63	20.18	46.00	-25.82	AVG
9		5.0380	16.40	10.65	27.05	60.00	-32.95	QP
10		5.0380	6.98	10.65	17.63	50.00	-32.37	AVG
11		14.5020	13.74	10.90	24.64	60.00	-35.36	QP
12		14.5020	5.36	10.90	16.26	50.00	-33.74	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

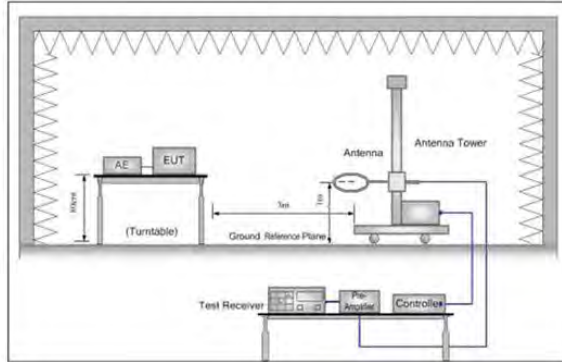


Figure 1. Below 30MHz

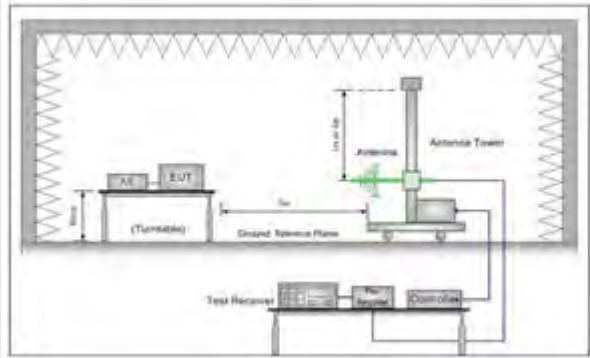


Figure 2. 30MHz to 1GHz

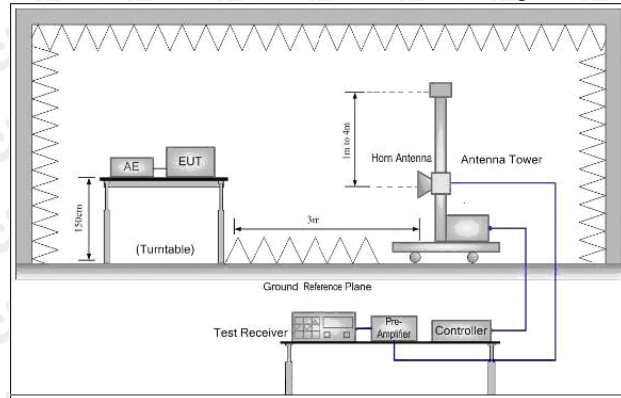


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

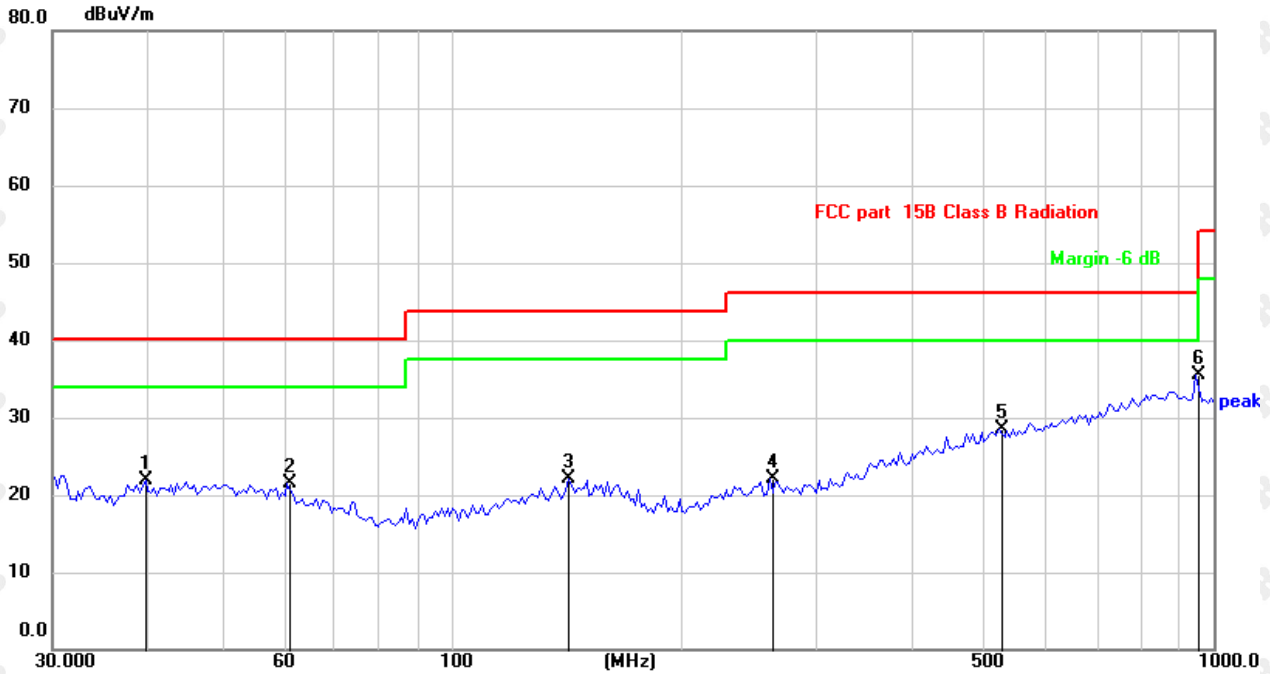

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.7146	27.18	-5.34	21.84	40.00	-18.16	QP
2		61.0245	27.86	-6.35	21.51	40.00	-18.49	QP
3		142.8243	27.64	-5.46	22.18	43.50	-21.32	QP
4		261.5164	27.66	-5.59	22.07	46.00	-23.93	QP
5		522.7180	27.30	1.13	28.43	46.00	-17.57	QP
6	*	948.7610	29.62	5.91	35.53	46.00	-10.47	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

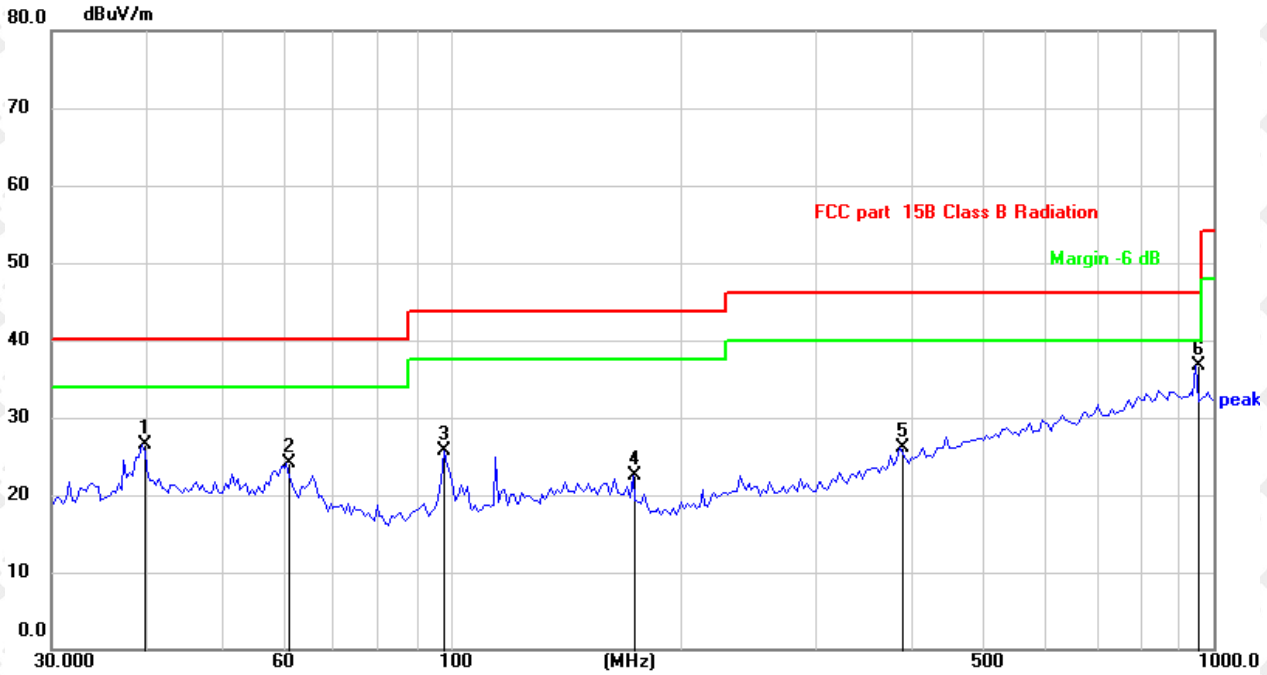

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.3681	31.94	-5.42	26.52	40.00	-13.48	QP
2		61.0245	30.46	-6.35	24.11	40.00	-15.89	QP
3		97.9699	34.54	-8.86	25.68	43.50	-17.82	QP
4		173.2051	29.19	-6.68	22.51	43.50	-20.99	QP
5		387.9920	28.26	-2.10	26.16	46.00	-19.84	QP
6	*	948.7610	30.70	5.91	36.61	46.00	-9.39	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

All modes have been tested, and the test results show that GFSK(2402MHz)-mode data is the worst, only GFSK(2402MHz)-mode test chart is put.

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	58.60	-3.65	54.95	74.00	-19.05	peak
4804	49.35	-3.65	45.70	54.00	-8.30	AVG
7206	59.58	-0.95	58.63	74.00	-15.37	peak
7206	41.39	-0.95	40.44	54.00	-13.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	59.39	-3.65	55.74	74.00	-18.26	peak
4804	50.21	-3.65	46.56	54.00	-7.44	AVG
7206	59.86	-0.95	58.91	74.00	-15.09	peak
7206	42.72	-0.95	41.77	54.00	-12.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	60.09	-3.54	56.55	74.00	-17.45	peak
4882.00	48.66	-3.54	45.12	54.00	-8.88	AVG
7323.00	55.98	-0.81	55.17	74.00	-18.83	peak
7323.00	42.06	-0.81	41.25	54.00	-12.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	56.64	-3.54	53.10	74.00	-20.90	peak
4882.00	49.37	-3.54	45.83	54.00	-8.17	AVG
7323.00	58.75	-0.81	57.94	74.00	-16.06	peak
7323.00	42.57	-0.81	41.76	54.00	-12.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	58.52	-3.43	55.09	74.00	-18.91	peak
4960	49.13	-3.44	45.69	54.00	-8.31	AVG
7440	59.80	-0.77	59.03	74.00	-14.97	peak
7440	40.91	-0.77	40.14	54.00	-13.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	59.15	-3.43	55.72	74.00	-18.28	peak
4960	48.73	-3.44	45.29	54.00	-8.71	AVG
7440	61.42	-0.77	60.65	74.00	-13.35	peak
7440	41.54	-0.77	40.77	54.00	-13.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz ◦
- (2). All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

hopping
 Operation Mode: TX CH Low (2402MHz) -GFSK
 Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.59	-5.81	50.78	74.00	-23.22	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.72	-5.84	49.88	74.00	-24.12	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.91	-5.81	50.10	74.00	-23.90	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.38	-5.84	50.54	74.00	-23.46	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz) -GFSK
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.96	-5.81	49.15	74.00	-24.85	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.06	-6.06	47.00	74.00	-27.00	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.29	-5.81	51.48	74.00	-22.52	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.93	-6.06	48.87	74.00	-25.13	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

NO hopping

Operation Mode: TX CH Low (2402MHz)-GFSK
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.43	-5.81	49.62	74.00	-24.38	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.57	-5.84	47.73	74.00	-26.27	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.78	-5.81	49.97	74.00	-24.03	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.26	-5.84	47.42	74.00	-26.58	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz) -GFSK
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.23	-5.81	49.42	74.00	-24.58	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.17	-6.06	49.11	74.00	-24.89	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.42	-5.81	50.61	74.00	-23.39	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.14	-6.06	49.08	74.00	-24.92	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

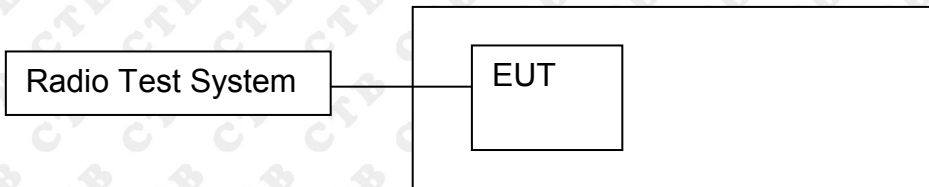

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).




8.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Blow 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result




<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 8.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.443 000 00 GHz 1.948 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.443 000 00 GHz</td> <td>1.948 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-51.241 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 000 00 GHz</td> <td>-52.859 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 581 25 GHz</td> <td>-42.311 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.443 000 00 GHz	1.948 dBm				2	N	1	f	2.483 500 00 GHz	-51.241 dBm				3	N	1	f	2.480 000 00 GHz	-52.859 dBm				4	N	1	f	2.483 581 25 GHz	-42.311 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.443 000 00 GHz	1.948 dBm																																																																																																								
2	N	1	f	2.483 500 00 GHz	-51.241 dBm																																																																																																								
3	N	1	f	2.480 000 00 GHz	-52.859 dBm																																																																																																								
4	N	1	f	2.483 581 25 GHz	-42.311 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 8.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.402 02 GHz -1.235 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 02 GHz</td> <td>-1.235 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-47.512 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 00 GHz</td> <td>-52.265 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.355 55 GHz</td> <td>-50.694 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 02 GHz	-1.235 dBm				2	N	1	f	2.400 00 GHz	-47.512 dBm				3	N	1	f	2.399 00 GHz	-52.265 dBm				4	N	1	f	2.355 55 GHz	-50.694 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.402 02 GHz	-1.235 dBm																																																																																																								
2	N	1	f	2.400 00 GHz	-47.512 dBm																																																																																																								
3	N	1	f	2.399 00 GHz	-52.265 dBm																																																																																																								
4	N	1	f	2.355 55 GHz	-50.694 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 8.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.414 004 GHz -0.880 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.414 004 GHz</td> <td>-0.880 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-51.289 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-52.523 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378 372 GHz</td> <td>-47.568 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 004 GHz	-0.880 dBm				2	N	1	f	2.400 000 GHz	-51.289 dBm				3	N	1	f	2.390 000 GHz	-52.523 dBm				4	N	1	f	2.378 372 GHz	-47.568 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.414 004 GHz	-0.880 dBm																																																																																																								
2	N	1	f	2.400 000 GHz	-51.289 dBm																																																																																																								
3	N	1	f	2.390 000 GHz	-52.523 dBm																																																																																																								
4	N	1	f	2.378 372 GHz	-47.568 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
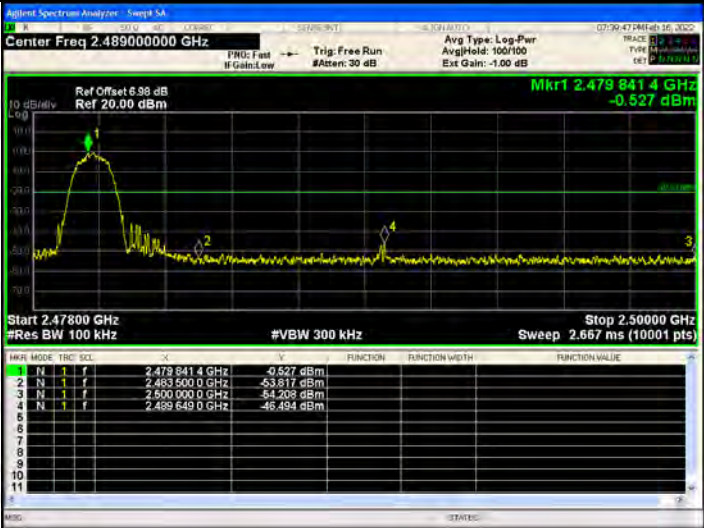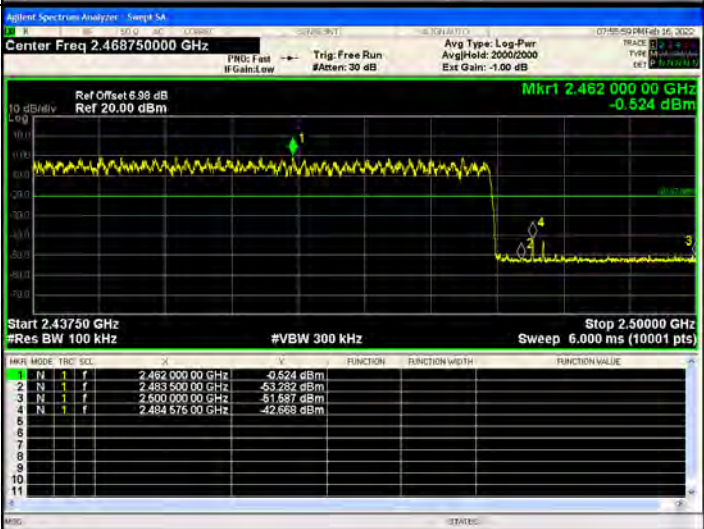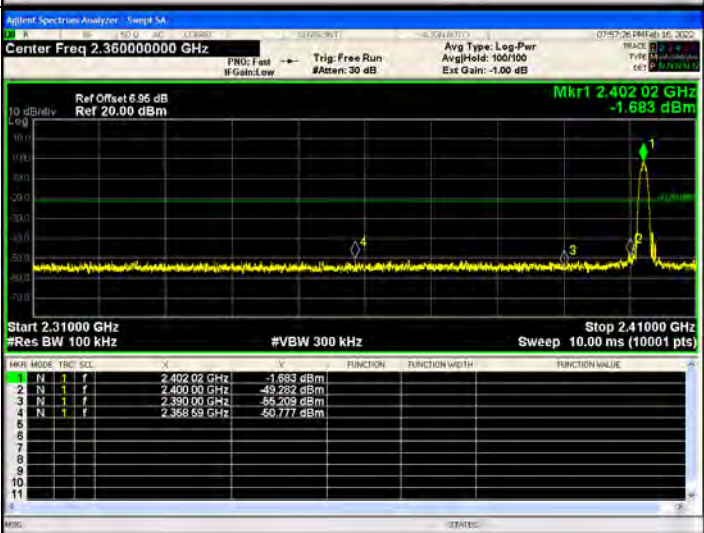
<p>$\pi/4$DQPSK/HCH/ No Hop</p>	 <table border="1" data-bbox="579 560 1286 705"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.478 841 4 GHz</td> <td>-0.527 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.817 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 0 GHz</td> <td>-54.208 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.495 649 0 GHz</td> <td>-46.394 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 841 4 GHz	-0.527 dBm				2	N	1	f	2.483 500 0 GHz	-53.817 dBm				3	N	1	f	2.490 000 0 GHz	-54.208 dBm				4	N	1	f	2.495 649 0 GHz	-46.394 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.478 841 4 GHz	-0.527 dBm																																									
2	N	1	f	2.483 500 0 GHz	-53.817 dBm																																									
3	N	1	f	2.490 000 0 GHz	-54.208 dBm																																									
4	N	1	f	2.495 649 0 GHz	-46.394 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	 <table border="1" data-bbox="579 1086 1286 1232"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.462 000 00 GHz</td> <td>-0.524 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-53.282 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-51.687 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 576 00 GHz</td> <td>-42.668 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.462 000 00 GHz	-0.524 dBm				2	N	1	f	2.483 500 00 GHz	-53.282 dBm				3	N	1	f	2.500 000 00 GHz	-51.687 dBm				4	N	1	f	2.484 576 00 GHz	-42.668 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.462 000 00 GHz	-0.524 dBm																																									
2	N	1	f	2.483 500 00 GHz	-53.282 dBm																																									
3	N	1	f	2.500 000 00 GHz	-51.687 dBm																																									
4	N	1	f	2.484 576 00 GHz	-42.668 dBm																																									
<p>8DPSK/LCH/No Hop</p>	 <table border="1" data-bbox="579 1624 1286 1769"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 02 GHz</td> <td>-1.683 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-49.282 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-55.209 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.358 53 GHz</td> <td>-50.777 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 02 GHz	-1.683 dBm				2	N	1	f	2.400 00 GHz	-49.282 dBm				3	N	1	f	2.390 00 GHz	-55.209 dBm				4	N	1	f	2.358 53 GHz	-50.777 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 02 GHz	-1.683 dBm																																									
2	N	1	f	2.400 00 GHz	-49.282 dBm																																									
3	N	1	f	2.390 00 GHz	-55.209 dBm																																									
4	N	1	f	2.358 53 GHz	-50.777 dBm																																									

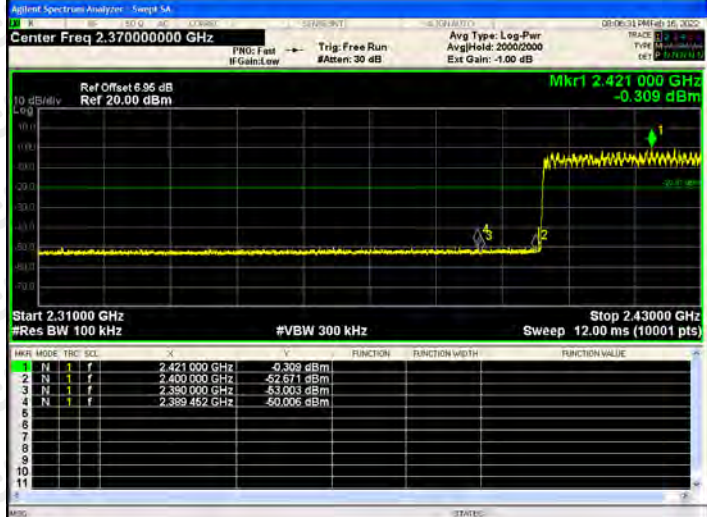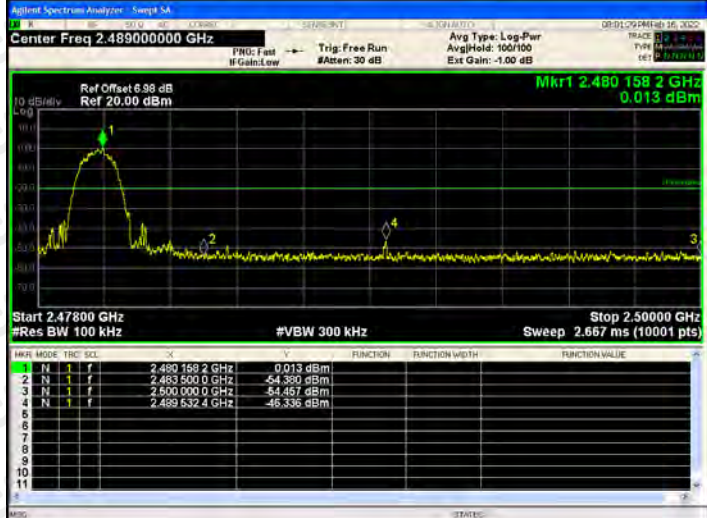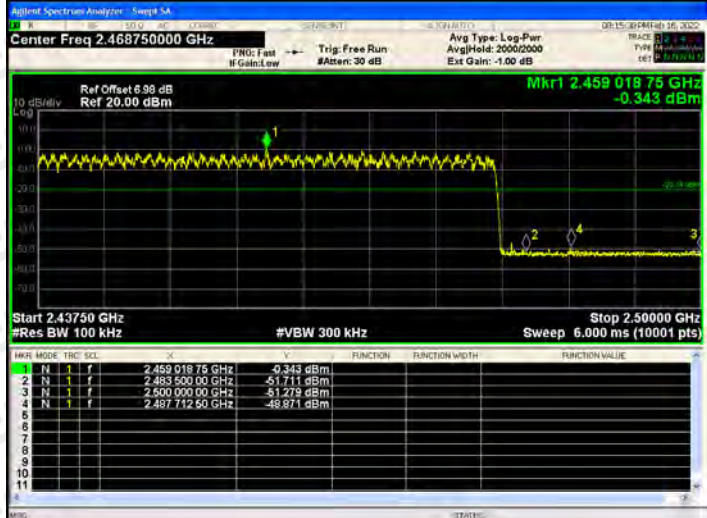
<p>8DPSK /LCH/Hop</p>	 <table border="1" data-bbox="574 560 1284 716"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.421 000 GHz</td> <td>-0.309 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-52.671 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-53.003 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.389 452 GHz</td> <td>-50.006 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.421 000 GHz	-0.309 dBm				2	N	1	f	2.400 000 GHz	-52.671 dBm				3	N	1	f	2.390 000 GHz	-53.003 dBm				4	N	1	f	2.389 452 GHz	-50.006 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.421 000 GHz	-0.309 dBm																																																																																																								
2	N	1	f	2.400 000 GHz	-52.671 dBm																																																																																																								
3	N	1	f	2.390 000 GHz	-53.003 dBm																																																																																																								
4	N	1	f	2.389 452 GHz	-50.006 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>8DPSK /HCH/No Hop</p>	 <table border="1" data-bbox="574 1086 1284 1254"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 158 2 GHz</td> <td>0.013 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.380 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-54.467 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 532 4 GHz</td> <td>-46.838 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 158 2 GHz	0.013 dBm				2	N	1	f	2.483 500 0 GHz	-54.380 dBm				3	N	1	f	2.500 000 0 GHz	-54.467 dBm				4	N	1	f	2.488 532 4 GHz	-46.838 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.480 158 2 GHz	0.013 dBm																																																																																																								
2	N	1	f	2.483 500 0 GHz	-54.380 dBm																																																																																																								
3	N	1	f	2.500 000 0 GHz	-54.467 dBm																																																																																																								
4	N	1	f	2.488 532 4 GHz	-46.838 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>8DPSK /HCH/Hop</p>	 <table border="1" data-bbox="574 1612 1284 1780"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.459 018 75 GHz</td> <td>-0.343 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-51.711 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-51.279 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.487 712 50 GHz</td> <td>-48.871 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.459 018 75 GHz	-0.343 dBm				2	N	1	f	2.483 500 0 GHz	-51.711 dBm				3	N	1	f	2.500 000 0 GHz	-51.279 dBm				4	N	1	f	2.487 712 50 GHz	-48.871 dBm				5									6									7									8									9									10									11								
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.459 018 75 GHz	-0.343 dBm																																																																																																								
2	N	1	f	2.483 500 0 GHz	-51.711 dBm																																																																																																								
3	N	1	f	2.500 000 0 GHz	-51.279 dBm																																																																																																								
4	N	1	f	2.487 712 50 GHz	-48.871 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

RF Conducted Spurious Emissions Graphs


GFSK/LCH

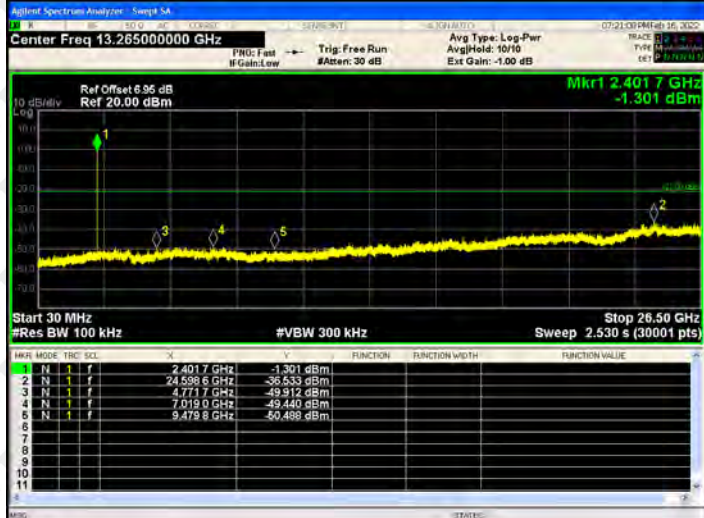

GFSK/MCH

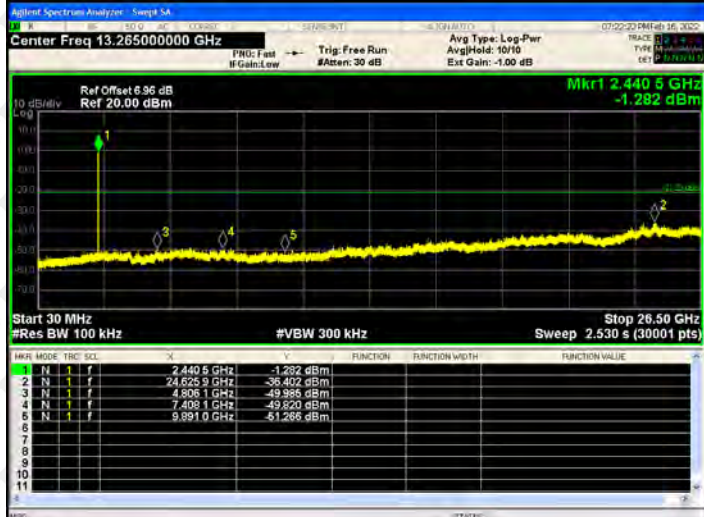

GFSK/HCH

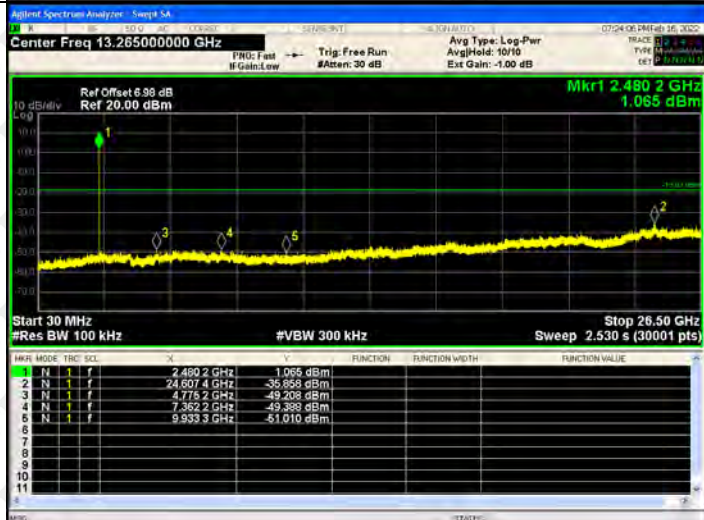


<p>$\pi/4$DQPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4026 GHz</td> <td>-4.478 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6224 GHz</td> <td>-37.331 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8184 GHz</td> <td>-50.012 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3754 GHz</td> <td>-49.856 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6124 GHz</td> <td>-49.922 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4026 GHz	-4.478 dBm				2	N	1	f	24.6224 GHz	-37.331 dBm				3	N	1	f	4.8184 GHz	-50.012 dBm				4	N	1	f	7.3754 GHz	-49.856 dBm				5	N	1	f	9.6124 GHz	-49.922 dBm			
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4026 GHz	-4.478 dBm																																																		
2	N	1	f	24.6224 GHz	-37.331 dBm																																																		
3	N	1	f	4.8184 GHz	-50.012 dBm																																																		
4	N	1	f	7.3754 GHz	-49.856 dBm																																																		
5	N	1	f	9.6124 GHz	-49.922 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-1.885 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0209 GHz</td> <td>-36.583 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7587 GHz</td> <td>-48.738 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3251 GHz</td> <td>-50.076 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9624 GHz</td> <td>-51.139 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-1.885 dBm				2	N	1	f	26.0209 GHz	-36.583 dBm				3	N	1	f	4.7587 GHz	-48.738 dBm				4	N	1	f	7.3251 GHz	-50.076 dBm				5	N	1	f	9.9624 GHz	-51.139 dBm			
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	-1.885 dBm																																																		
2	N	1	f	26.0209 GHz	-36.583 dBm																																																		
3	N	1	f	4.7587 GHz	-48.738 dBm																																																		
4	N	1	f	7.3251 GHz	-50.076 dBm																																																		
5	N	1	f	9.9624 GHz	-51.139 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-2.018 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6233 GHz</td> <td>-36.162 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7752 GHz</td> <td>-50.145 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4649 GHz</td> <td>-49.392 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.0507 GHz</td> <td>-50.551 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-2.018 dBm				2	N	1	f	24.6233 GHz	-36.162 dBm				3	N	1	f	4.7752 GHz	-50.145 dBm				4	N	1	f	7.4649 GHz	-49.392 dBm				5	N	1	f	10.0507 GHz	-50.551 dBm			
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-2.018 dBm																																																		
2	N	1	f	24.6233 GHz	-36.162 dBm																																																		
3	N	1	f	4.7752 GHz	-50.145 dBm																																																		
4	N	1	f	7.4649 GHz	-49.392 dBm																																																		
5	N	1	f	10.0507 GHz	-50.551 dBm																																																		

<p>8DPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SCF</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-4.644 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6347 GHz</td> <td>-37.113 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8070 GHz</td> <td>-50.037 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3340 GHz</td> <td>-49.496 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5142 GHz</td> <td>-49.700 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRF	SCF	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-4.644 dBm				2	N	1	f	24.6347 GHz	-37.113 dBm				3	N	1	f	4.8070 GHz	-50.037 dBm				4	N	1	f	7.3340 GHz	-49.496 dBm				5	N	1	f	9.5142 GHz	-49.700 dBm			
MKR	MODE	TRF	SCF	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-4.644 dBm																																																		
2	N	1	f	24.6347 GHz	-37.113 dBm																																																		
3	N	1	f	4.8070 GHz	-50.037 dBm																																																		
4	N	1	f	7.3340 GHz	-49.496 dBm																																																		
5	N	1	f	9.5142 GHz	-49.700 dBm																																																		
<p>8DPSK /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SCF</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-3.959 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6577 GHz</td> <td>-36.739 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7857 GHz</td> <td>-49.427 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3445 GHz</td> <td>-48.146 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7674 GHz</td> <td>-51.033 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRF	SCF	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-3.959 dBm				2	N	1	f	24.6577 GHz	-36.739 dBm				3	N	1	f	4.7857 GHz	-49.427 dBm				4	N	1	f	7.3445 GHz	-48.146 dBm				5	N	1	f	9.7674 GHz	-51.033 dBm			
MKR	MODE	TRF	SCF	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	-3.959 dBm																																																		
2	N	1	f	24.6577 GHz	-36.739 dBm																																																		
3	N	1	f	4.7857 GHz	-49.427 dBm																																																		
4	N	1	f	7.3445 GHz	-48.146 dBm																																																		
5	N	1	f	9.7674 GHz	-51.033 dBm																																																		
<p>8DPSK /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SCF</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-1.526 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6427 GHz</td> <td>-36.682 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7839 GHz</td> <td>-50.166 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4892 GHz</td> <td>-50.234 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9192 GHz</td> <td>-51.469 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRF	SCF	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-1.526 dBm				2	N	1	f	24.6427 GHz	-36.682 dBm				3	N	1	f	4.7839 GHz	-50.166 dBm				4	N	1	f	7.4892 GHz	-50.234 dBm				5	N	1	f	9.9192 GHz	-51.469 dBm			
MKR	MODE	TRF	SCF	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-1.526 dBm																																																		
2	N	1	f	24.6427 GHz	-36.682 dBm																																																		
3	N	1	f	4.7839 GHz	-50.166 dBm																																																		
4	N	1	f	7.4892 GHz	-50.234 dBm																																																		
5	N	1	f	9.9192 GHz	-51.469 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

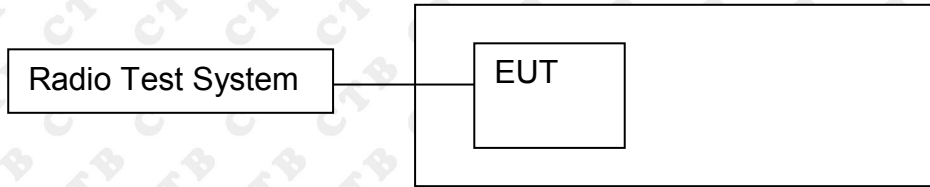

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	1.138	PASS
	MCH	1.094	PASS
	HCH	1.974	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	1.113	PASS
	MCH	1.016	PASS
	HCH	1.961	PASS
EDR mode (8DPSK)	LCH	1.295	PASS
	MCH	1.138	PASS
	HCH	2.134	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.40190 GHz 1.138 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.44093 GHz 1.094 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.47996 GHz 1.974 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

<p>8DPSK/LCH</p>	
<p>8DPSK /MCH</p>	
<p>8DPSK /HCH</p>	

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

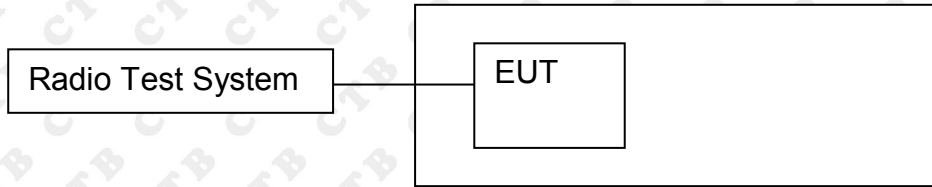

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.877	PASS
	Mid channel	0.946	PASS
	High channel	0.918	PASS
$\pi/4$ DQPSK	Low channel	1.488	PASS
	Mid channel	1.485	PASS
	High channel	1.444	PASS
8DPSK	Low channel	1.493	PASS
	Mid channel	1.571	PASS
	High channel	1.478	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.95 dB</p> <p>Ref 26.95 dBm</p> <p>Mkr3 2.402424 GHz</p> <p>-21.528 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 844.06 kHz</p> <p>Total Power 7.53 dBm</p> <p>Transmit Freq Error -14.749 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 877.3 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.95 dB</p> <p>Ref 26.95 dBm</p> <p>Mkr3 2.441457 GHz</p> <p>-21.956 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 857.93 kHz</p> <p>Total Power 7.34 dBm</p> <p>Transmit Freq Error -16.026 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 946.2 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.95 dB</p> <p>Ref 26.95 dBm</p> <p>Mkr3 2.480442 GHz</p> <p>-20.303 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 860.07 kHz</p> <p>Total Power 8.21 dBm</p> <p>Transmit Freq Error -17.002 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 918.2 kHz</p> <p>x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.95 dBm</p> <p>Mkr3: 2.402726 GHz -23.319 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">6.23 dBm</td> </tr> <tr> <td>1.3639 MHz</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td colspan="2">99.00 %</td> </tr> <tr> <td>-17.978 kHz</td> <td></td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td colspan="2">-20.00 dB</td> </tr> <tr> <td>1.488 MHz</td> <td></td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.23 dBm		1.3639 MHz				Transmit Freq Error	OBW Power	99.00 %		-17.978 kHz				x dB Bandwidth	x dB	-20.00 dB		1.488 MHz			
Occupied Bandwidth	Total Power	6.23 dBm																							
1.3639 MHz																									
Transmit Freq Error	OBW Power	99.00 %																							
-17.978 kHz																									
x dB Bandwidth	x dB	-20.00 dB																							
1.488 MHz																									
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3: 2.441727 GHz -23.449 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">6.28 dBm</td> </tr> <tr> <td>1.3632 MHz</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td colspan="2">99.00 %</td> </tr> <tr> <td>-15.556 kHz</td> <td></td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td colspan="2">-20.00 dB</td> </tr> <tr> <td>1.485 MHz</td> <td></td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.28 dBm		1.3632 MHz				Transmit Freq Error	OBW Power	99.00 %		-15.556 kHz				x dB Bandwidth	x dB	-20.00 dB		1.485 MHz			
Occupied Bandwidth	Total Power	6.28 dBm																							
1.3632 MHz																									
Transmit Freq Error	OBW Power	99.00 %																							
-15.556 kHz																									
x dB Bandwidth	x dB	-20.00 dB																							
1.485 MHz																									
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.98 dBm</p> <p>Mkr3: 2.480703 GHz -23.215 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">7.18 dBm</td> </tr> <tr> <td>1.3600 MHz</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td colspan="2">99.00 %</td> </tr> <tr> <td>-18.376 kHz</td> <td></td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td colspan="2">-20.00 dB</td> </tr> <tr> <td>1.444 MHz</td> <td></td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.18 dBm		1.3600 MHz				Transmit Freq Error	OBW Power	99.00 %		-18.376 kHz				x dB Bandwidth	x dB	-20.00 dB		1.444 MHz			
Occupied Bandwidth	Total Power	7.18 dBm																							
1.3600 MHz																									
Transmit Freq Error	OBW Power	99.00 %																							
-18.376 kHz																									
x dB Bandwidth	x dB	-20.00 dB																							
1.444 MHz																									

<p>8DPSK Low channel</p>		<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Parameter</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.402000000 GHz</td> <td>Total Power</td> <td>6.53 dBm</td> </tr> <tr> <td>Ref Offset</td> <td>6.96 dB</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>Ref</td> <td>26.95 dBm</td> <td>x dB Bandwidth</td> <td>-20.00 dB</td> </tr> <tr> <td>Occupied Bandwidth</td> <td>1.3658 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-15.066 kHz</td> <td></td> <td></td> </tr> </tbody> </table>	Parameter	Value	Parameter	Value	Center Freq	2.402000000 GHz	Total Power	6.53 dBm	Ref Offset	6.96 dB	OBW Power	99.00 %	Ref	26.95 dBm	x dB Bandwidth	-20.00 dB	Occupied Bandwidth	1.3658 MHz			Transmit Freq Error	-15.066 kHz		
Parameter	Value	Parameter	Value																							
Center Freq	2.402000000 GHz	Total Power	6.53 dBm																							
Ref Offset	6.96 dB	OBW Power	99.00 %																							
Ref	26.95 dBm	x dB Bandwidth	-20.00 dB																							
Occupied Bandwidth	1.3658 MHz																									
Transmit Freq Error	-15.066 kHz																									
<p>8DPSK Mid channel</p>		<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Parameter</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.441000000 GHz</td> <td>Total Power</td> <td>6.10 dBm</td> </tr> <tr> <td>Ref Offset</td> <td>6.96 dB</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>Ref</td> <td>26.96 dBm</td> <td>x dB Bandwidth</td> <td>-20.00 dB</td> </tr> <tr> <td>Occupied Bandwidth</td> <td>1.3765 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-12.320 kHz</td> <td></td> <td></td> </tr> </tbody> </table>	Parameter	Value	Parameter	Value	Center Freq	2.441000000 GHz	Total Power	6.10 dBm	Ref Offset	6.96 dB	OBW Power	99.00 %	Ref	26.96 dBm	x dB Bandwidth	-20.00 dB	Occupied Bandwidth	1.3765 MHz			Transmit Freq Error	-12.320 kHz		
Parameter	Value	Parameter	Value																							
Center Freq	2.441000000 GHz	Total Power	6.10 dBm																							
Ref Offset	6.96 dB	OBW Power	99.00 %																							
Ref	26.96 dBm	x dB Bandwidth	-20.00 dB																							
Occupied Bandwidth	1.3765 MHz																									
Transmit Freq Error	-12.320 kHz																									
<p>8DPSK High channel</p>		<table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> <th>Parameter</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.480000000 GHz</td> <td>Total Power</td> <td>7.56 dBm</td> </tr> <tr> <td>Ref Offset</td> <td>6.96 dB</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>Ref</td> <td>26.98 dBm</td> <td>x dB Bandwidth</td> <td>-20.00 dB</td> </tr> <tr> <td>Occupied Bandwidth</td> <td>1.3602 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-15.365 kHz</td> <td></td> <td></td> </tr> </tbody> </table>	Parameter	Value	Parameter	Value	Center Freq	2.480000000 GHz	Total Power	7.56 dBm	Ref Offset	6.96 dB	OBW Power	99.00 %	Ref	26.98 dBm	x dB Bandwidth	-20.00 dB	Occupied Bandwidth	1.3602 MHz			Transmit Freq Error	-15.365 kHz		
Parameter	Value	Parameter	Value																							
Center Freq	2.480000000 GHz	Total Power	7.56 dBm																							
Ref Offset	6.96 dB	OBW Power	99.00 %																							
Ref	26.98 dBm	x dB Bandwidth	-20.00 dB																							
Occupied Bandwidth	1.3602 MHz																									
Transmit Freq Error	-15.365 kHz																									

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

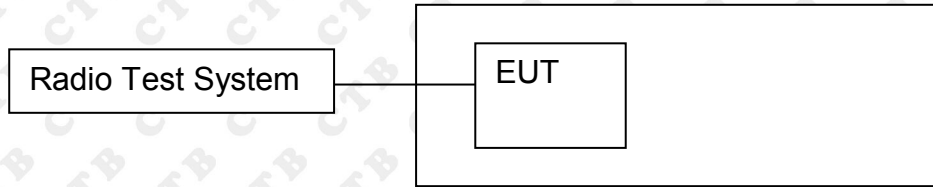

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.002	PASS
GFSK	MCH	1.000	PASS
GFSK	HCH	1.002	PASS
$\pi/4$ DQPSK	LCH	1.000	PASS
$\pi/4$ DQPSK	MCH	1.000	PASS
$\pi/4$ DQPSK	HCH	1.002	PASS
8DPSK	LCH	1.002	PASS
8DPSK	MCH	1.002	PASS
8DPSK	HCH	1.002	PASS

Test Graph


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.002000000 MHz Ref Offset: 6.96 dB, Ref: 20.00 dBm Avg Type: Log-Pwr, Avg Hold: 100/100, Ext Gain: -1.00 dB Center 2.402500 GHz, #Res BW 30 kHz, #VBW 100 kHz, Span 2.000 MHz, Sweep 2.133 ms (1001 pts) Marker 1: 1.002 MHz (0.167 dB) Marker 2: 2.401970 GHz (-2.061 dBm)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.000000000 MHz Ref Offset: 6.96 dB, Ref: 20.00 dBm Avg Type: Log-Pwr, Avg Hold: 100/100, Ext Gain: -1.00 dB Center 2.441500 GHz, #Res BW 30 kHz, #VBW 100 kHz, Span 2.000 MHz, Sweep 2.133 ms (1001 pts) Marker 1: 1.000 MHz (-0.235 dB) Marker 2: 2.440980 GHz (-9.576 dBm)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.002000000 MHz Ref Offset: 6.96 dB, Ref: 20.00 dBm Avg Type: Log-Pwr, Avg Hold: 100/100, Ext Gain: -1.00 dB Center 2.479500 GHz, #Res BW 30 kHz, #VBW 100 kHz, Span 2.000 MHz, Sweep 2.133 ms (1001 pts) Marker 1: 1.002 MHz (-0.198 dB) Marker 2: 2.478972 GHz (-1.410 dBm)</p>

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>AMkr1 1.000 MHz 0.203 dB</p> <p>Center 2.402500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td>0.203 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401978 GHz</td> <td></td> <td>-4.298 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)	0.203 dB		2	F	1	f		2.401978 GHz		-4.298 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.000 MHz	(A)	0.203 dB																					
2	F	1	f		2.401978 GHz		-4.298 dBm																					
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>AMkr1 1.000 MHz -0.069 dB</p> <p>Center 2.441500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td>-0.069 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440970 GHz</td> <td></td> <td>-3.260 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)	-0.069 dB		2	F	1	f		2.440970 GHz		-3.260 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.000 MHz	(A)	-0.069 dB																					
2	F	1	f		2.440970 GHz		-3.260 dBm																					
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 6.98 dB Ref 20.00 dBm</p> <p>AMkr1 1.002 MHz 0.943 dB</p> <p>Center 2.479500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.002 MHz</td> <td>(A)</td> <td>0.943 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478970 GHz</td> <td></td> <td>-4.526 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)	0.943 dB		2	F	1	f		2.478970 GHz		-4.526 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.002 MHz	(A)	0.943 dB																					
2	F	1	f		2.478970 GHz		-4.526 dBm																					

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>AMkr1 1.002 MHz -0.629 dBm</p> <p>Center 2.402500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.002 MHz</td> <td>(A)</td> <td></td> <td>-0.629 dBm</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402154 GHz</td> <td></td> <td></td> <td>-4.356 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)		-0.629 dBm	2	F	1	f		2.402154 GHz			-4.356 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.002 MHz	(A)		-0.629 dBm																				
2	F	1	f		2.402154 GHz			-4.356 dBm																				
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>AMkr1 1.002 MHz -1.293 dBm</p> <p>Center 2.441500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.002 MHz</td> <td>(A)</td> <td></td> <td>-1.293 dBm</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440154 GHz</td> <td></td> <td></td> <td>-3.128 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)		-1.293 dBm	2	F	1	f		2.440154 GHz			-3.128 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.002 MHz	(A)		-1.293 dBm																				
2	F	1	f		2.440154 GHz			-3.128 dBm																				
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 6.98 dB Ref 20.00 dBm</p> <p>AMkr1 1.002 MHz 1.225 dBm</p> <p>Center 2.479500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.002 MHz</td> <td>(A)</td> <td></td> <td>1.225 dBm</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478974 GHz</td> <td></td> <td></td> <td>-5.608 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)		1.225 dBm	2	F	1	f		2.478974 GHz			-5.608 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.002 MHz	(A)		1.225 dBm																				
2	F	1	f		2.478974 GHz			-5.608 dBm																				

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

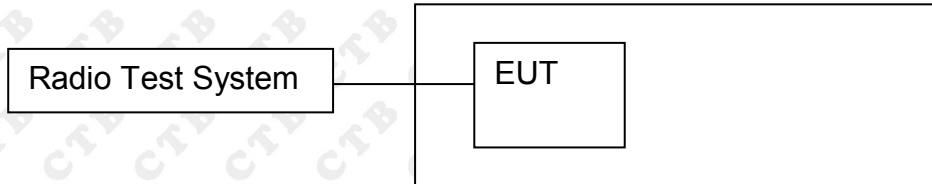

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

Graphs																												
GFSK/Hop	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 6.99 dB Ref 20.00 dBm</p> <p>Mkr1 2.402 004 0 GHz 1.022 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 004 0 GHz</td> <td>1.022 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 993 5 GHz</td> <td>0.242 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 004 0 GHz	1.022 dBm				2	N	1	f	2.479 993 5 GHz	0.242 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.402 004 0 GHz	1.022 dBm																							
2	N	1	f	2.479 993 5 GHz	0.242 dBm																							
$\pi/4$ DQPSK/Hop	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.402 004 0 GHz -1.522 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 004 0 GHz</td> <td>-1.522 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 993 5 GHz</td> <td>-1.858 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 004 0 GHz	-1.522 dBm				2	N	1	f	2.479 993 5 GHz	-1.858 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.402 004 0 GHz	-1.522 dBm																							
2	N	1	f	2.479 993 5 GHz	-1.858 dBm																							
8DPSK/Hop	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.401 837 0 GHz -1.947 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 837 0 GHz</td> <td>-1.947 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 410 5 GHz</td> <td>-4.401 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 837 0 GHz	-1.947 dBm				2	N	1	f	2.480 410 5 GHz	-4.401 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.401 837 0 GHz	-1.947 dBm																							
2	N	1	f	2.480 410 5 GHz	-4.401 dBm																							

13. DWELL TIME

13.1 Block Diagram Of Test Setup

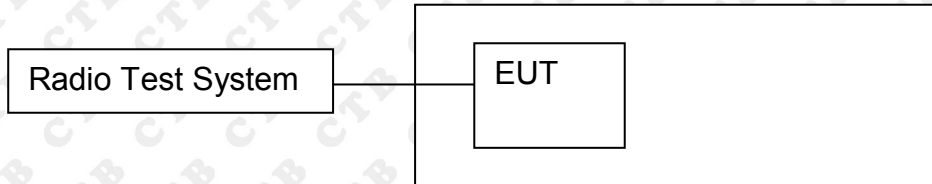

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.381	121.92	400	PASS
	DH1	MCH	0.381	121.92	400	PASS
	DH1	HCH	0.381	121.92	400	PASS
	DH3	LCH	1.642	262.72	400	PASS
	DH3	MCH	1.642	262.72	400	PASS
	DH3	HCH	1.642	262.72	400	PASS
	DH5	LCH	2.891	308.373	400	PASS
	DH5	MCH	2.891	308.373	400	PASS
	DH5	HCH	2.891	308.373	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.

Test Graph

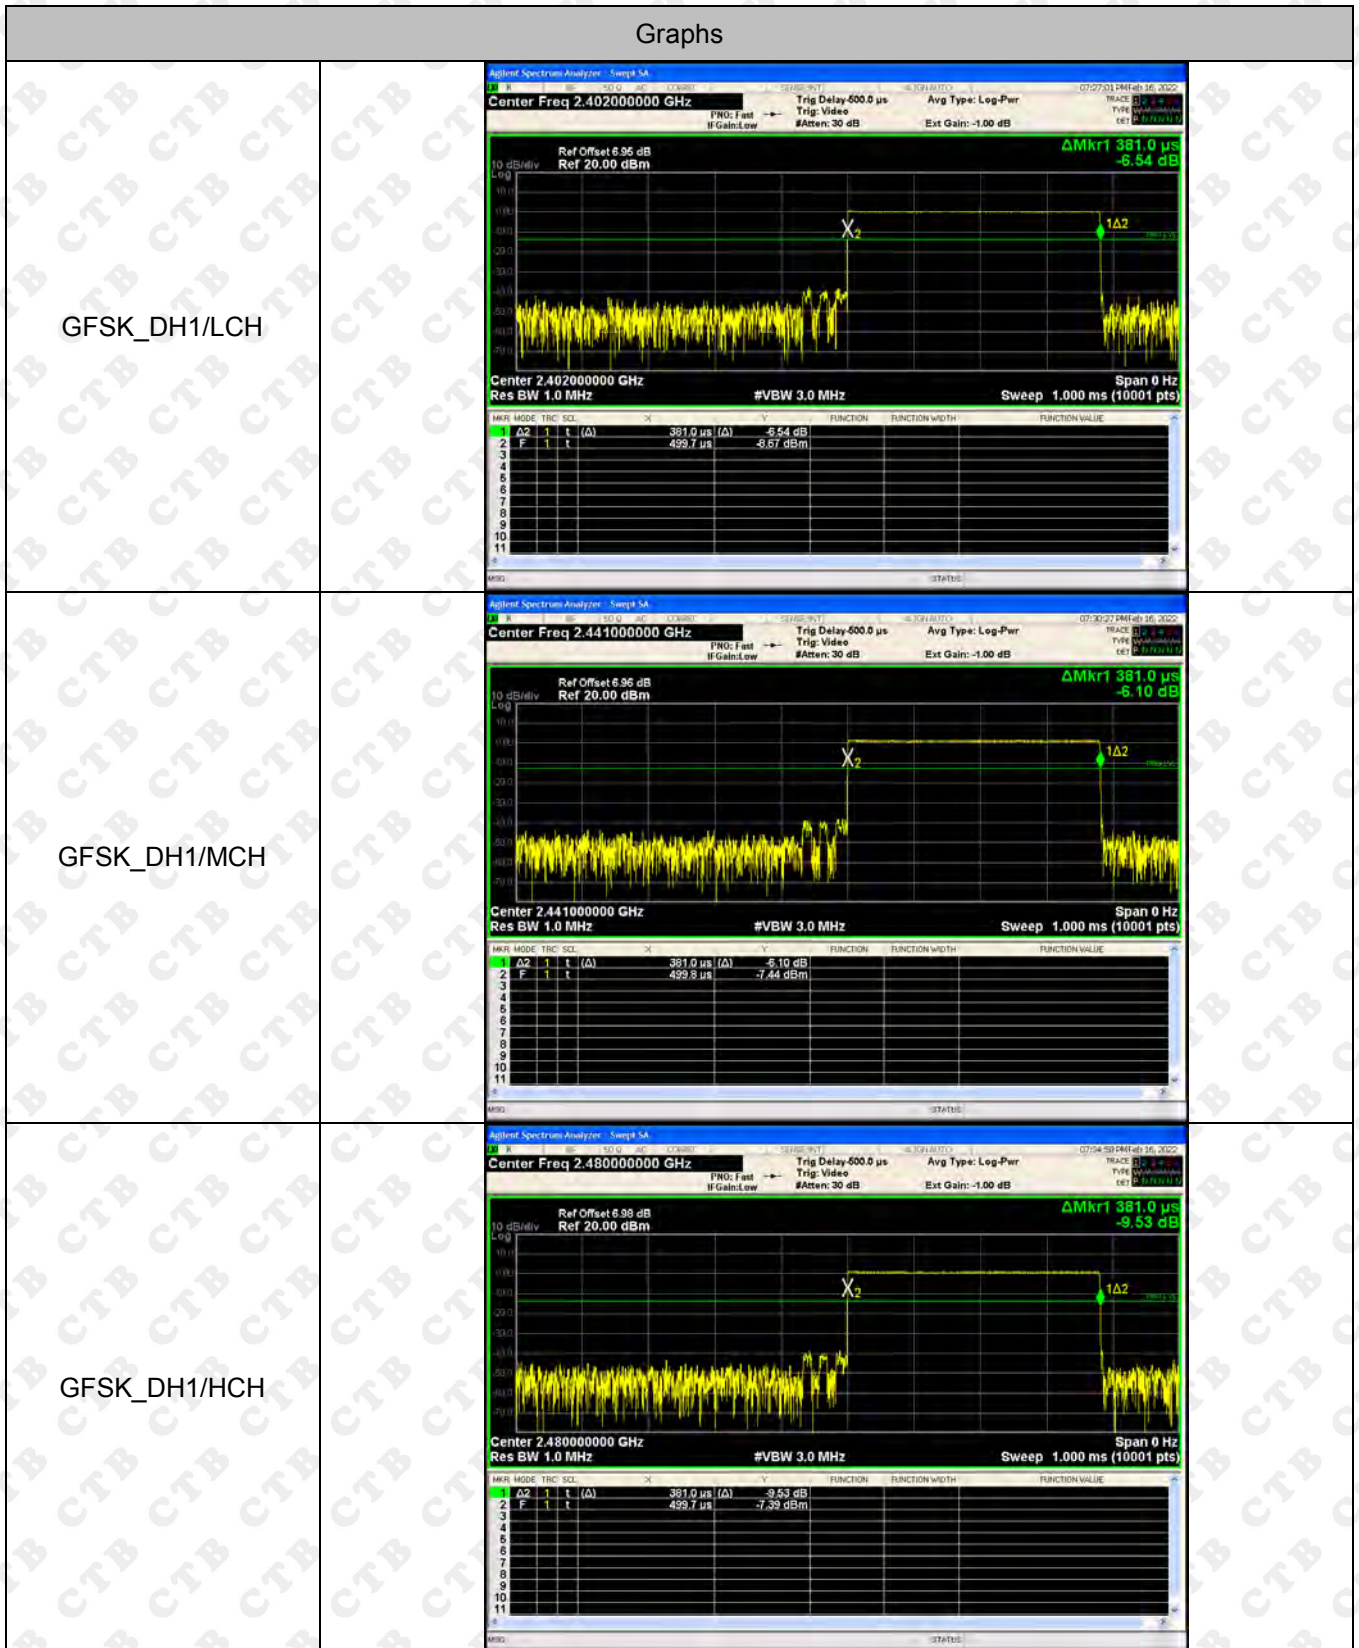



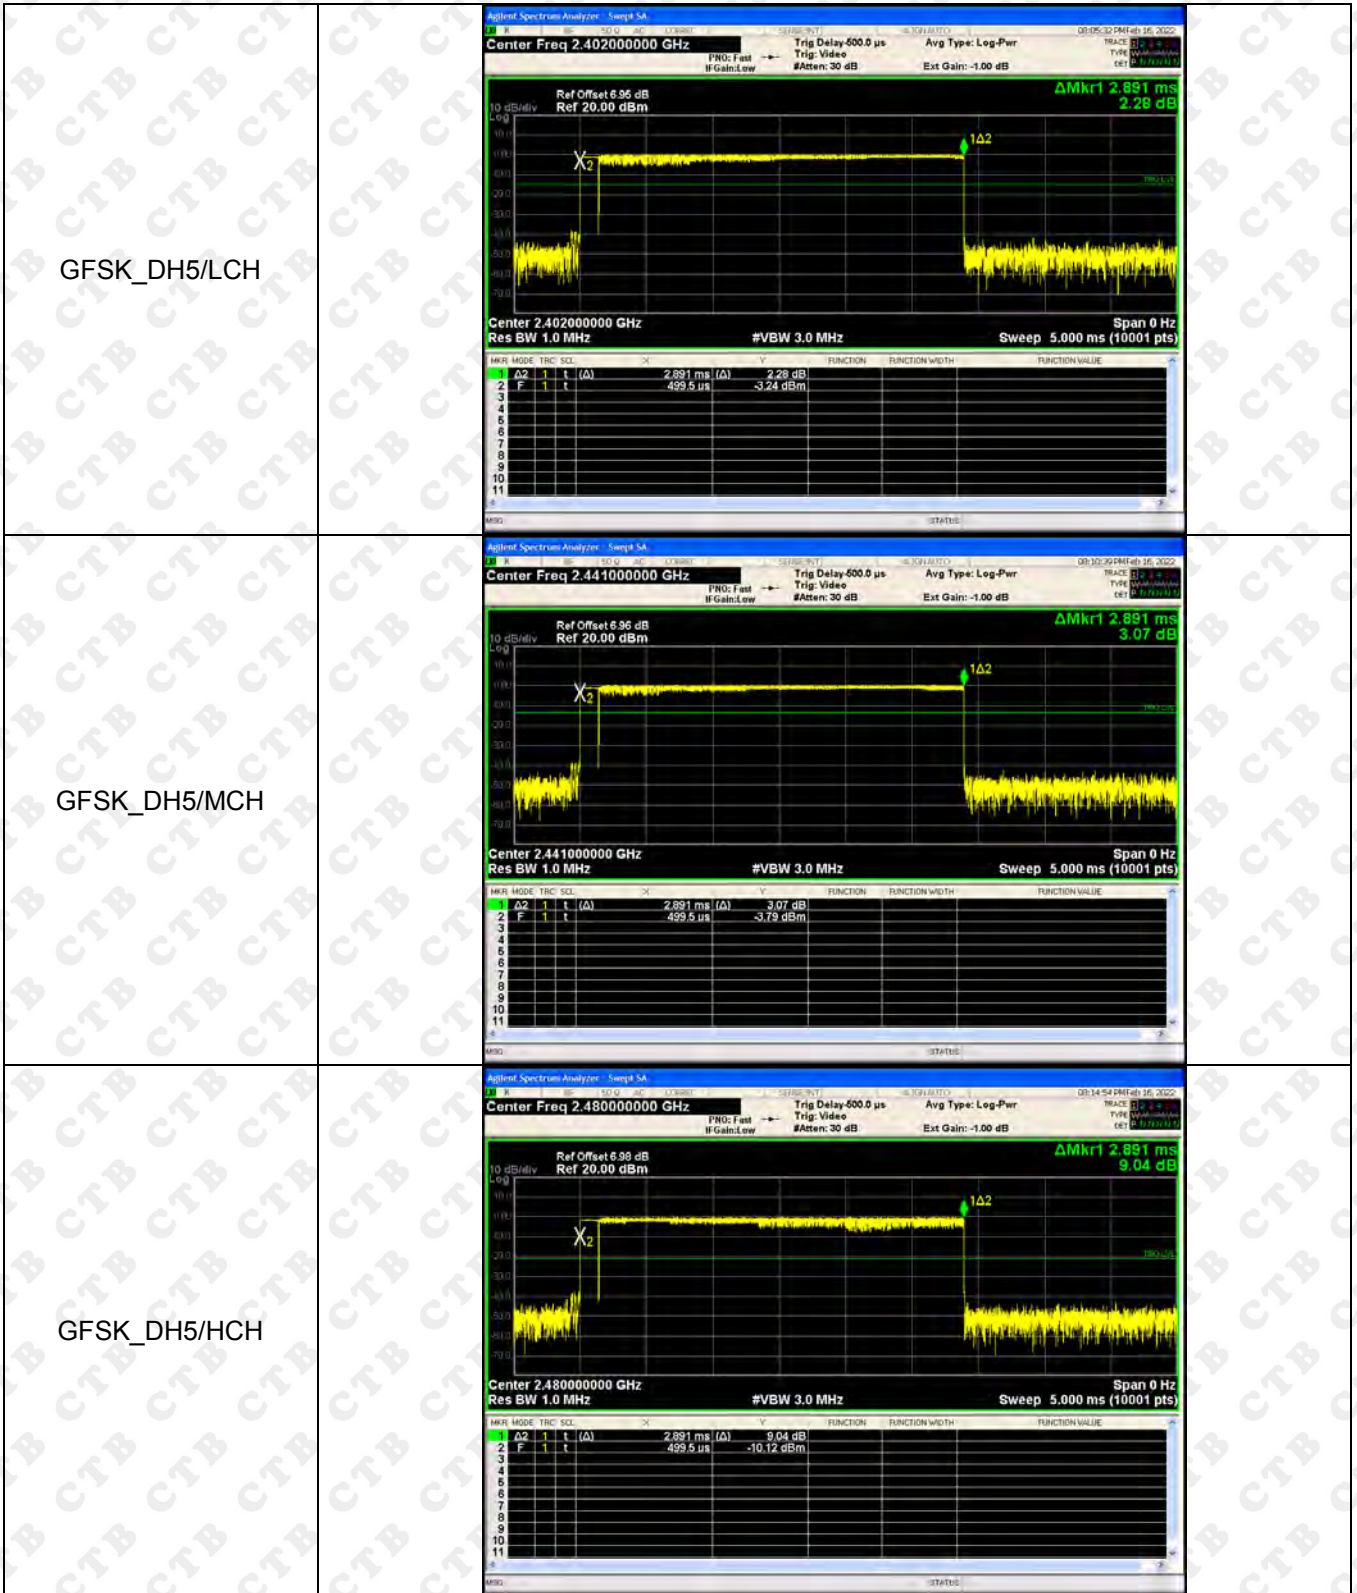

14. PSEUDORANDOM FREQUENCY


14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

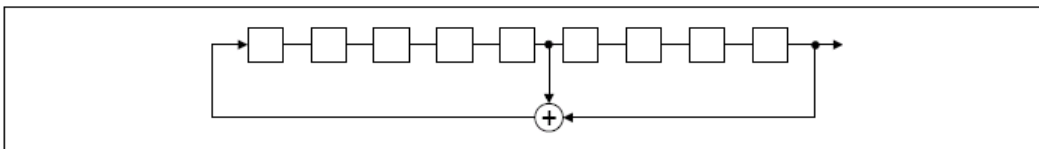

An example of Pseudorandom Frequency Hopping Sequence as follow:

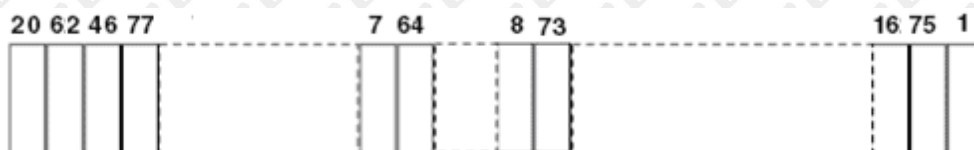

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Ceramic Antenna. The best case gain of the antenna is 1.0dBi.

16. EUT PHOTOGRAPHS

EUT Photo 1





EUT Photo 2




17. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

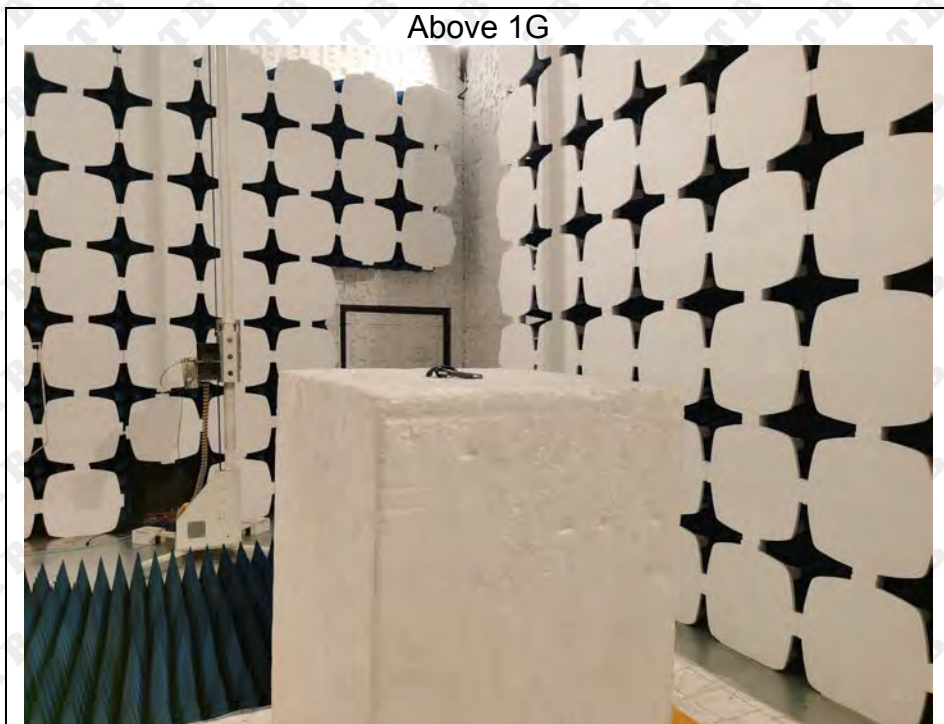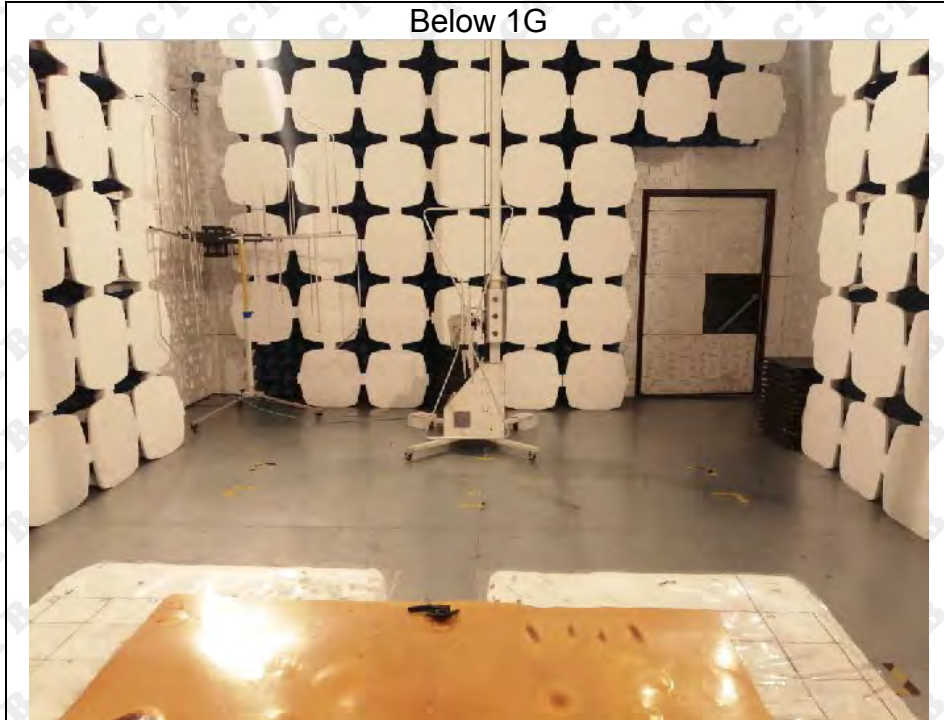

Conducted emissions

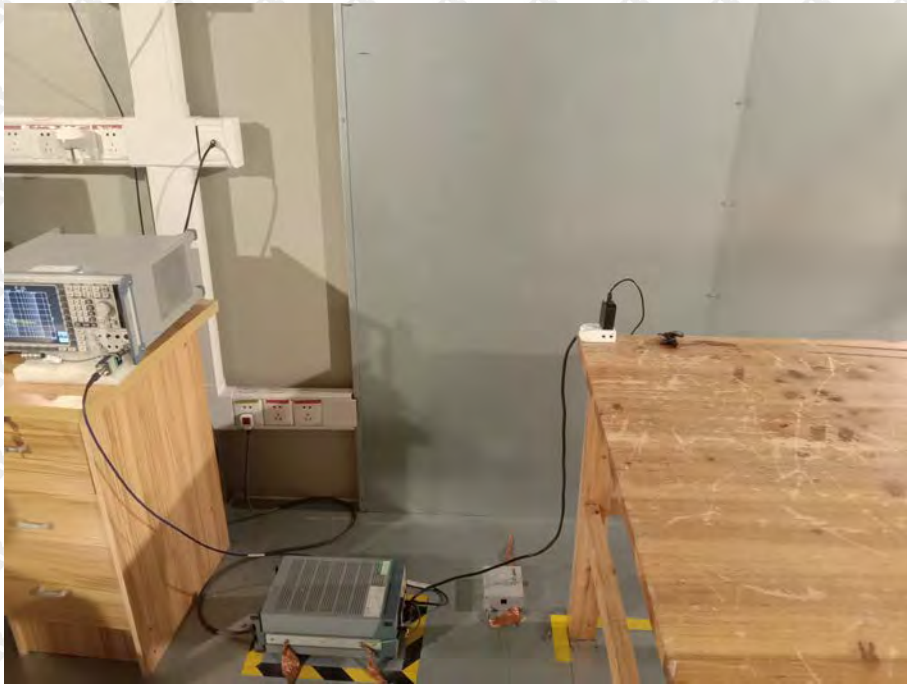

XXXXXXXX END OF REPORT XXXXXXXX