

## 1. Bandwidth


### 1.1 OBW

#### 1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
O-QPSK	SISO	2405	1	2.221	Pass
		2445	1	2.220	Pass
		2480	1	2.226	Pass

## 1.1.2 Test Graph



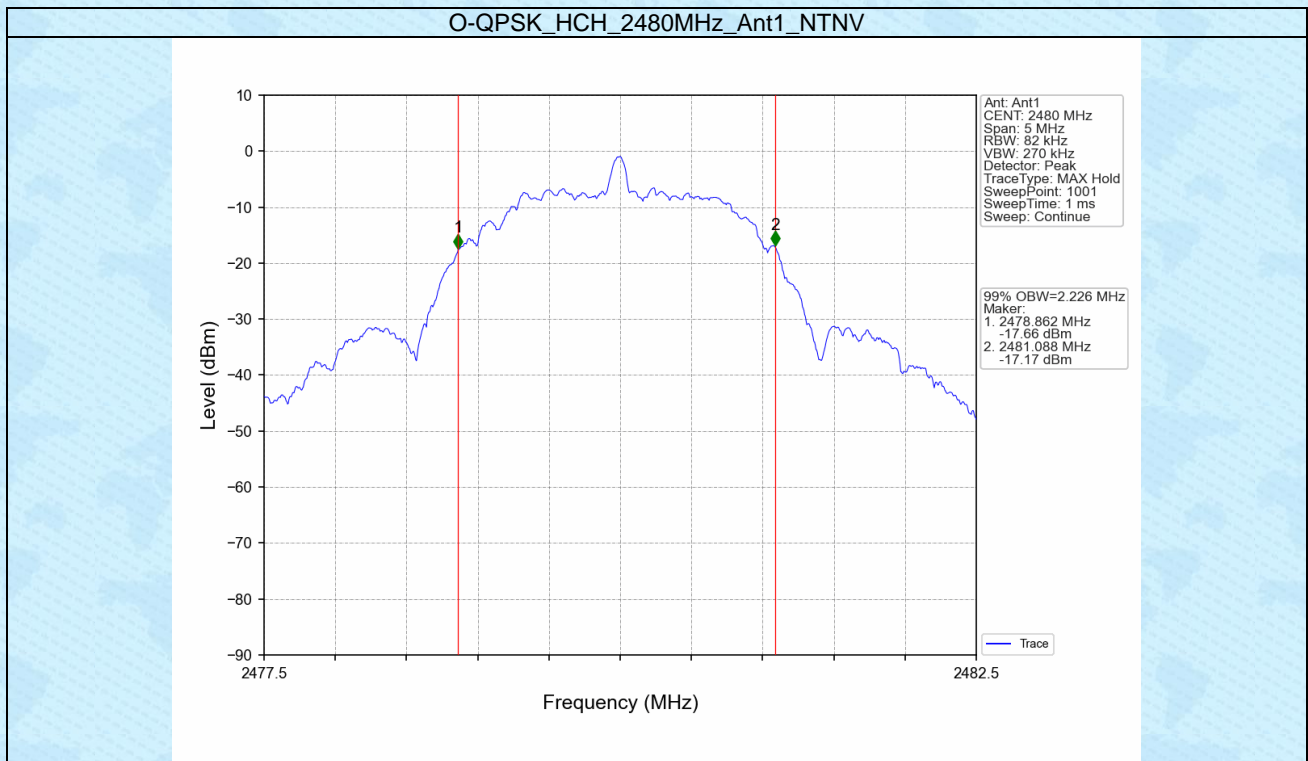


## 1.2 6dB BW


### 1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
O-QPSK	SISO	2405	1	1.071	$\geq 0.5$	Pass
		2445	1	0.843	$\geq 0.5$	Pass
		2480	1	0.847	$\geq 0.5$	Pass



## 1.2.2 Test Graph

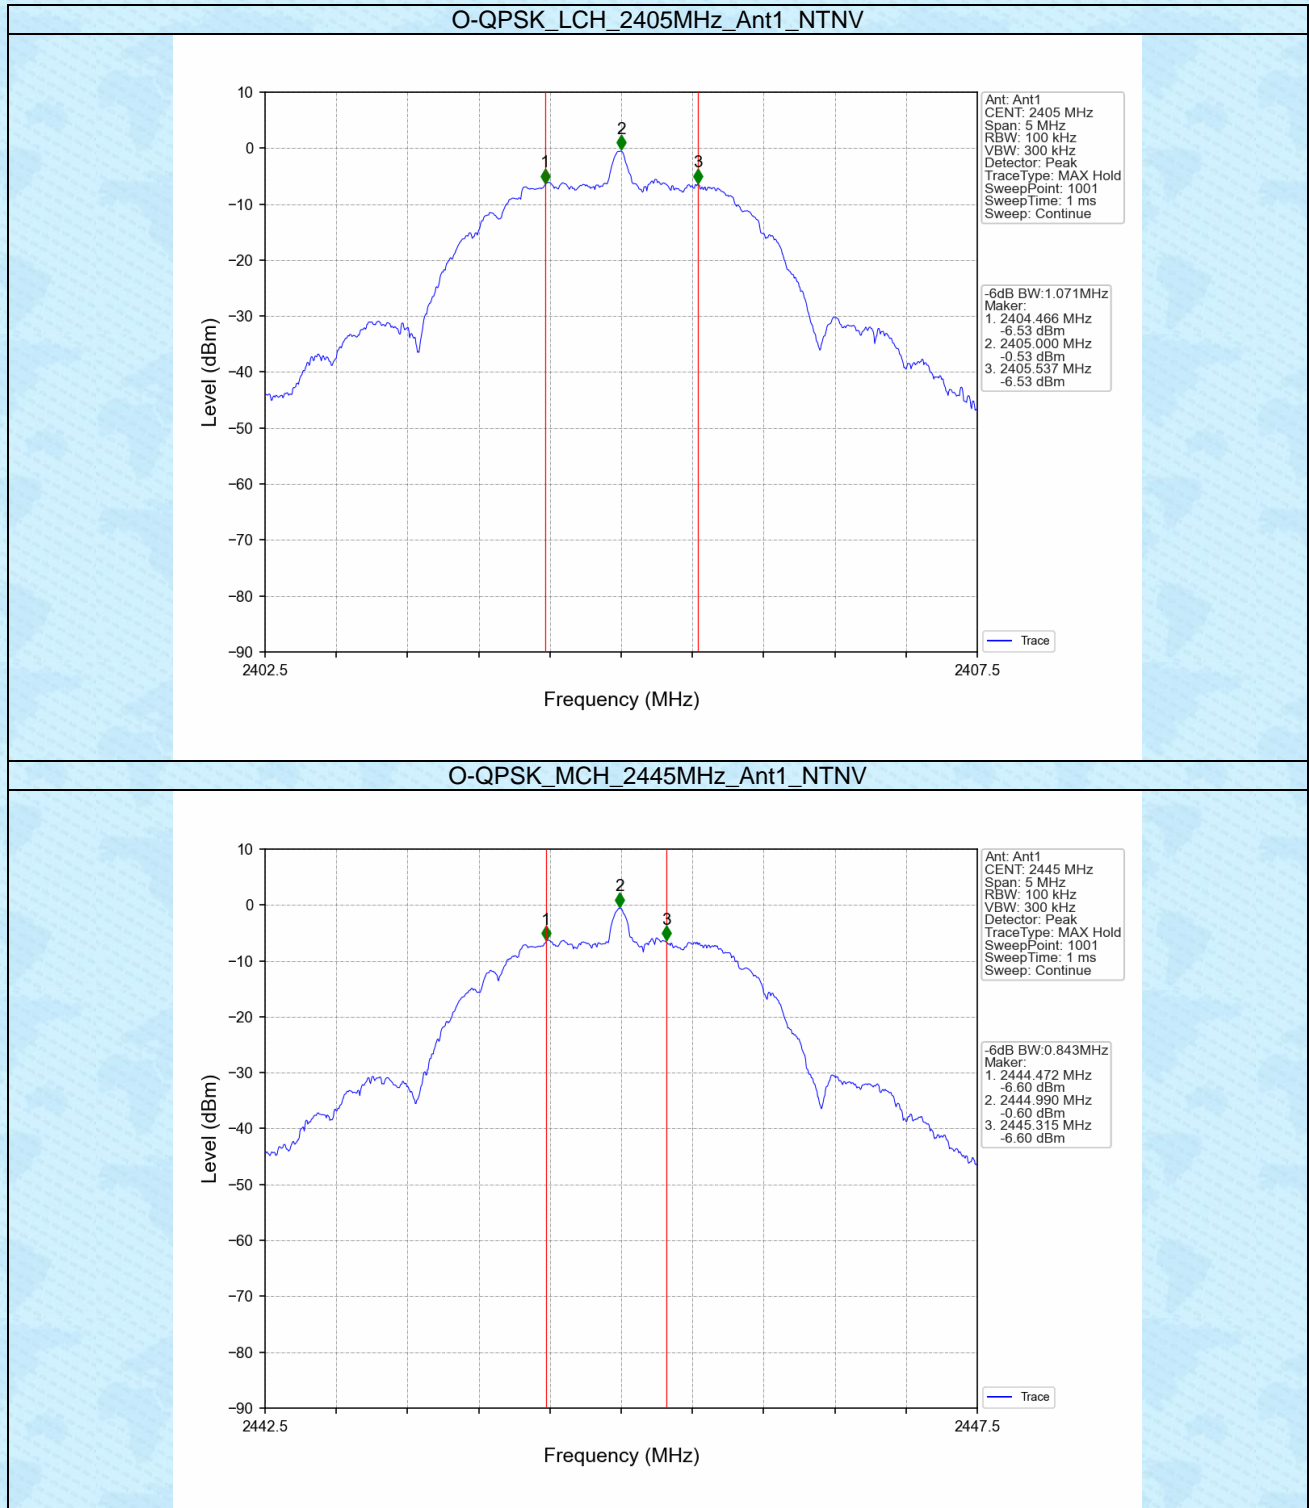

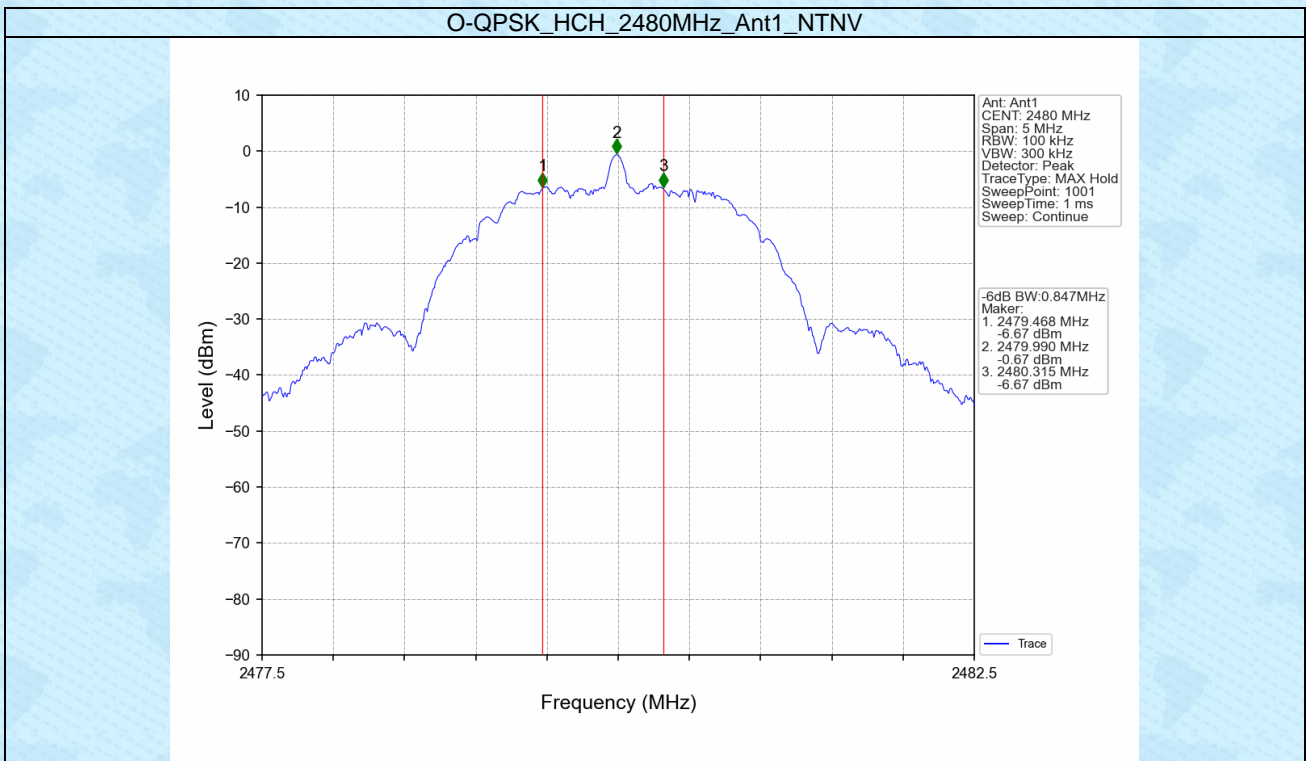


## 2. Maximum Conducted Output Power


### 2.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
O-QPSK	SISO	2405	-0.13	<=30	Pass
		2445	-0.31	<=30	Pass
		2480	-0.39	<=30	Pass

## 2.2 Test Graph

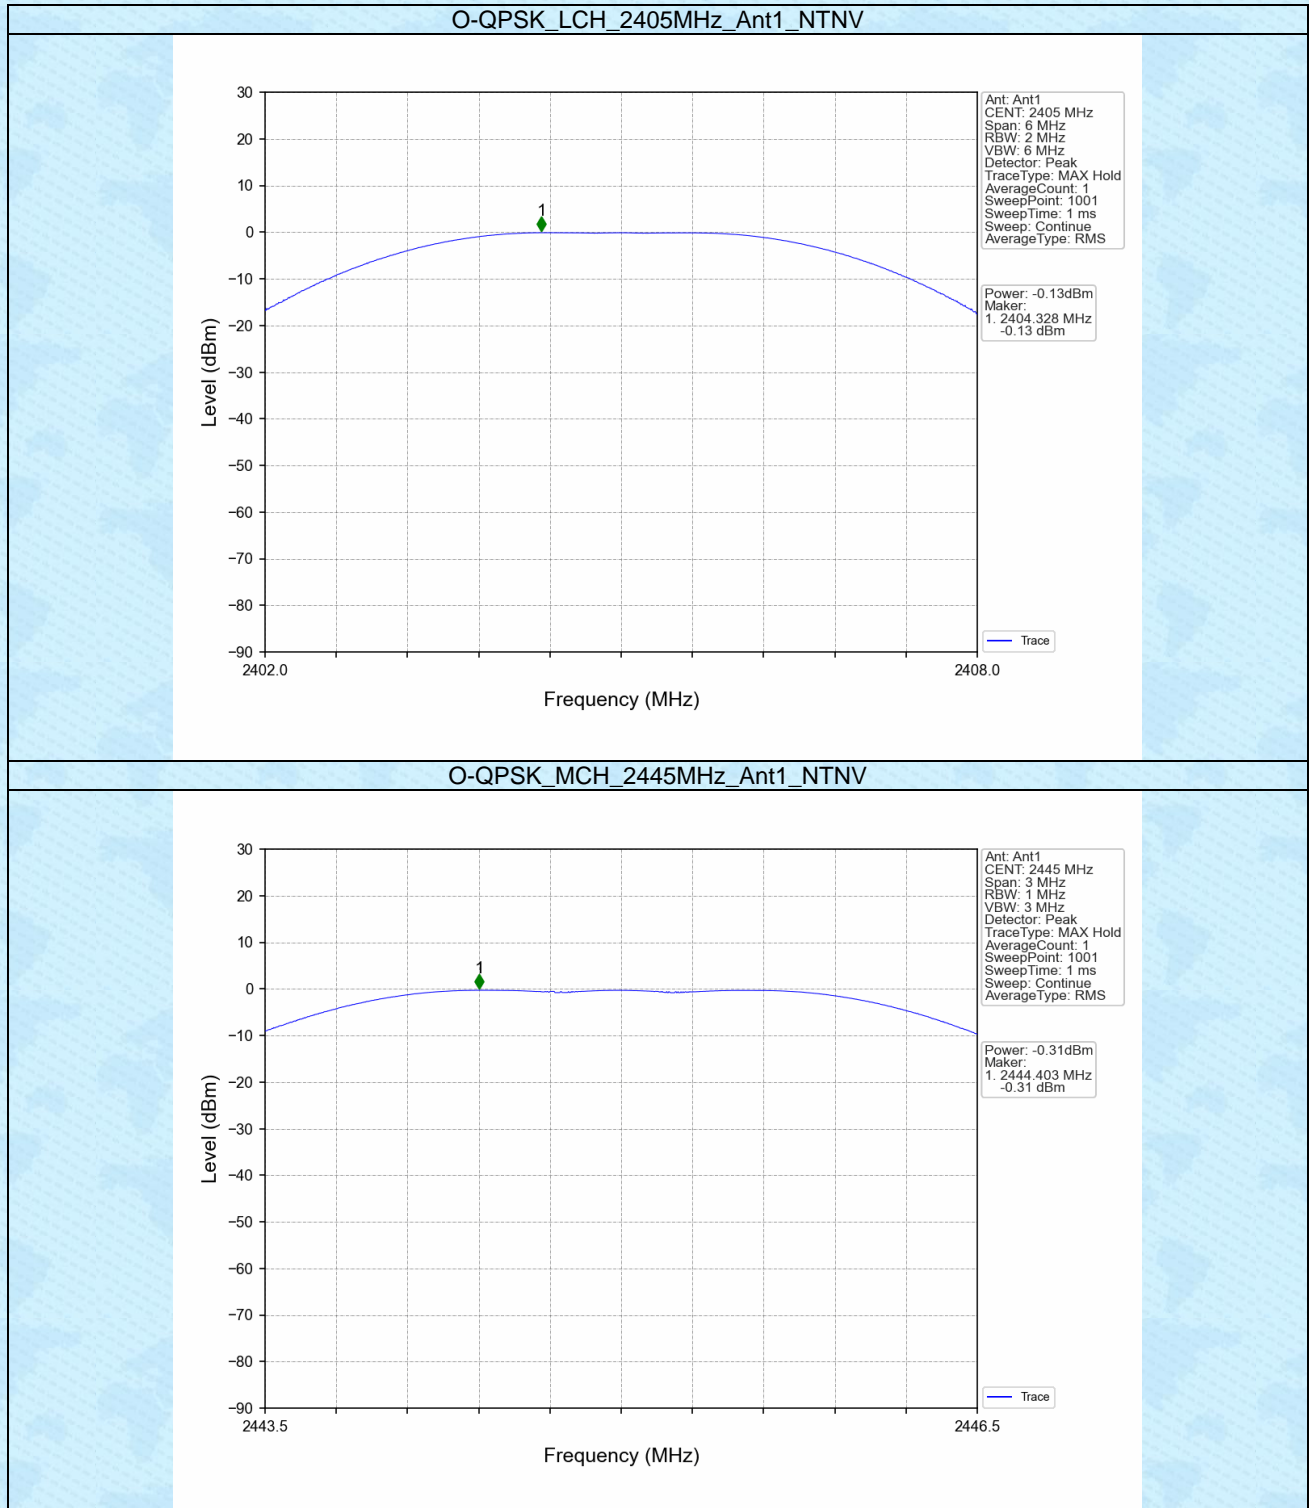



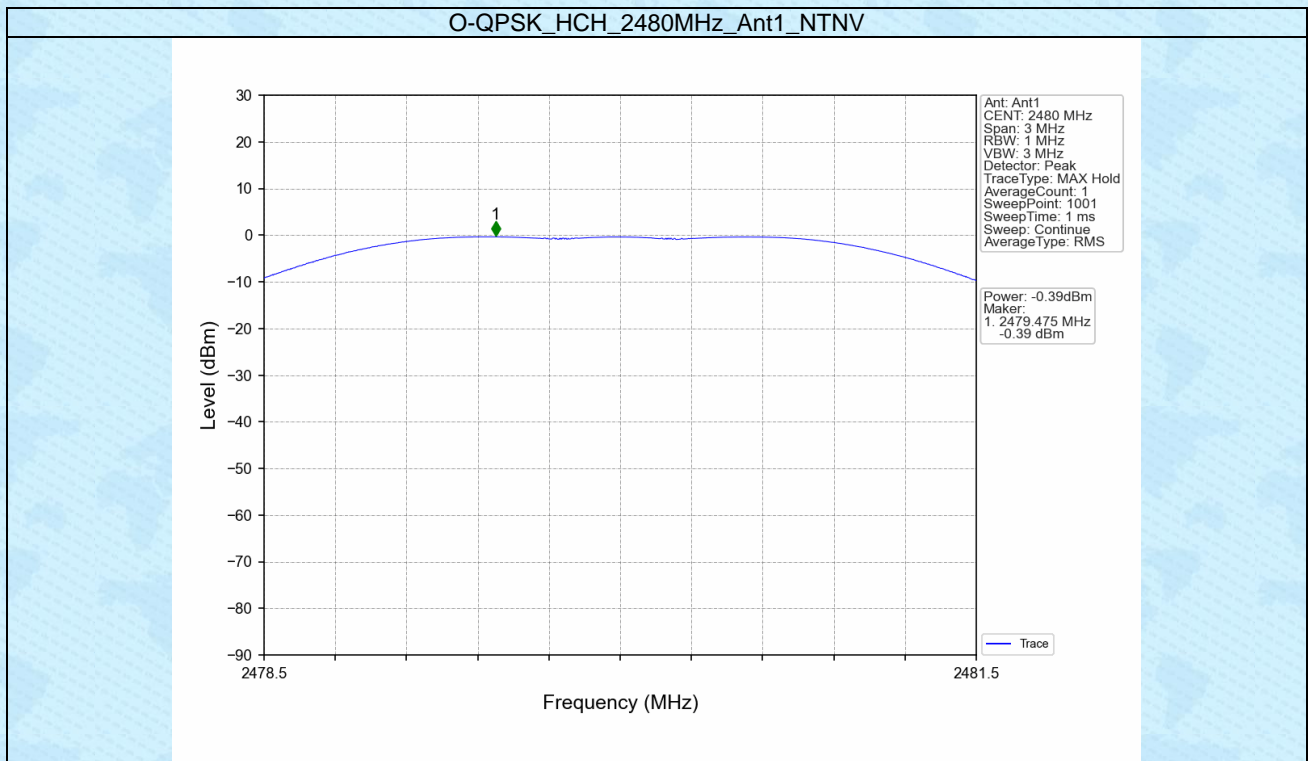



## 3. Maximum Power Spectral Density

### 3.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
O-QPSK	SISO	2405	-14.88	<=8	Pass
		2445	-15.14	<=8	Pass
		2480	-15.10	<=8	Pass

## 3.2 Test Graph

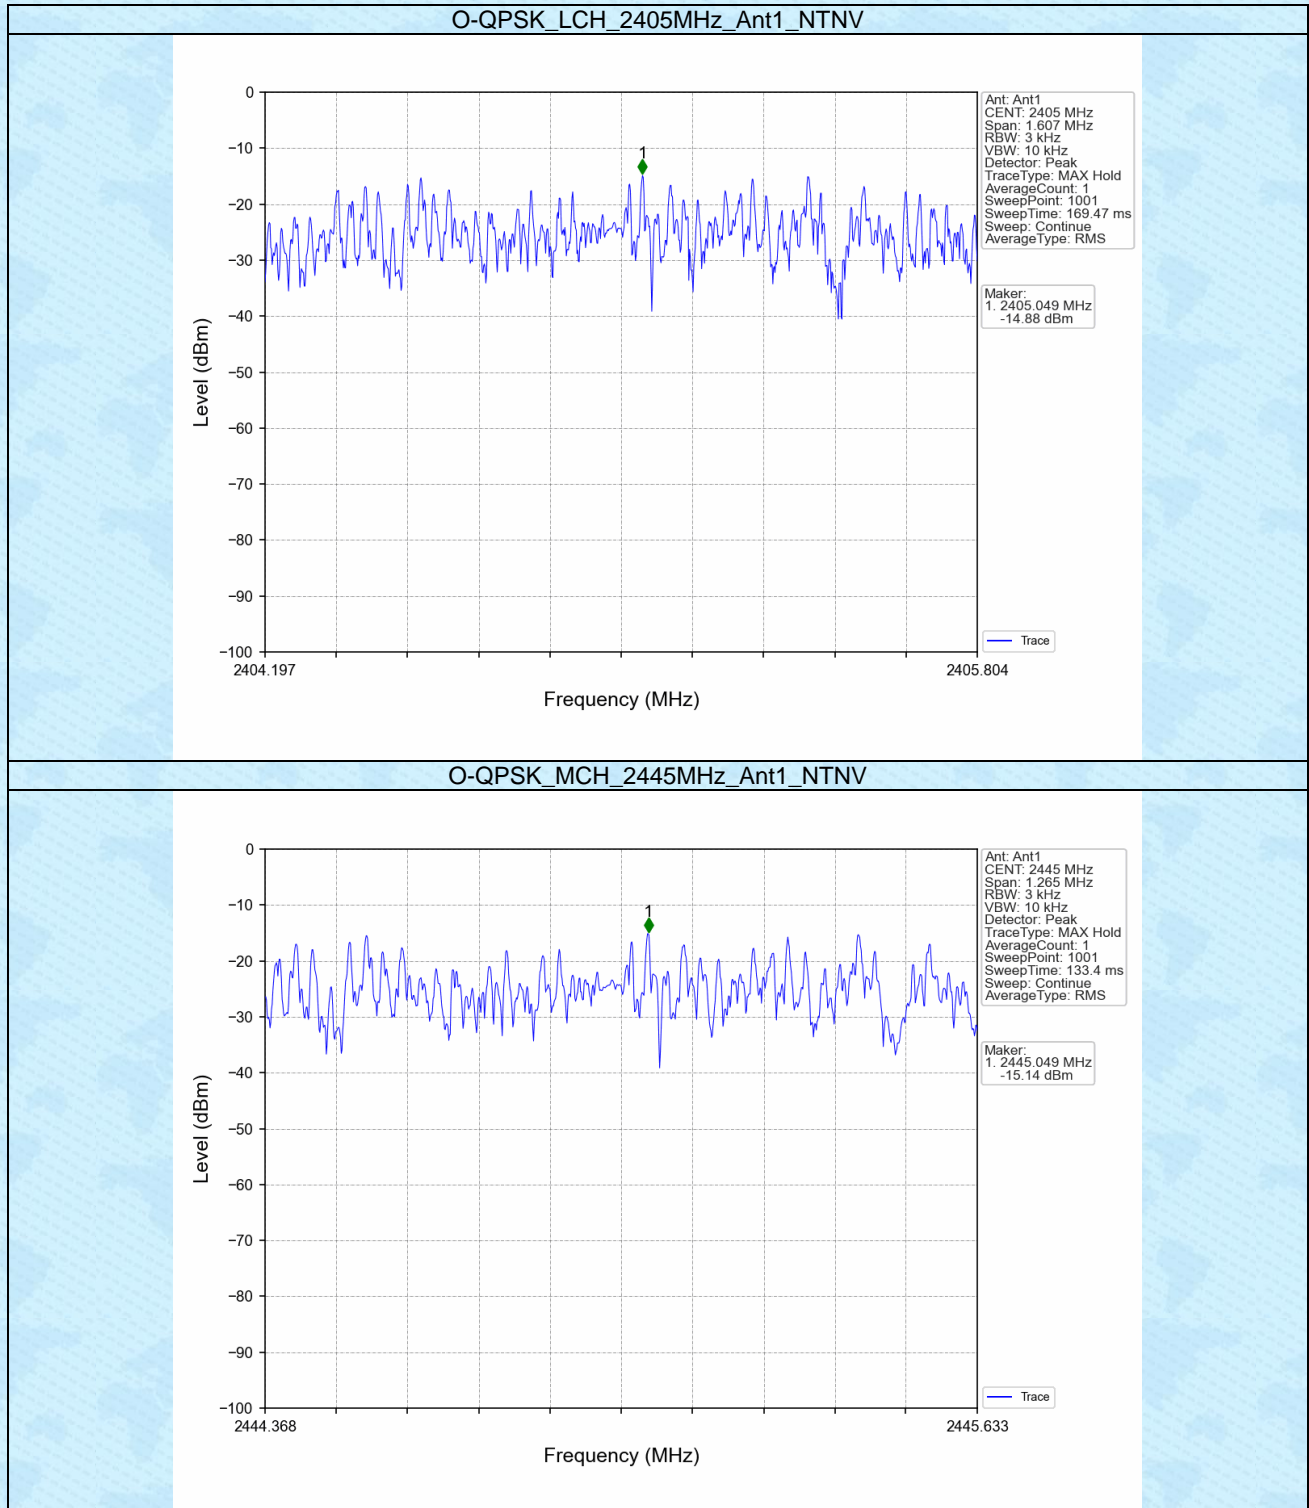

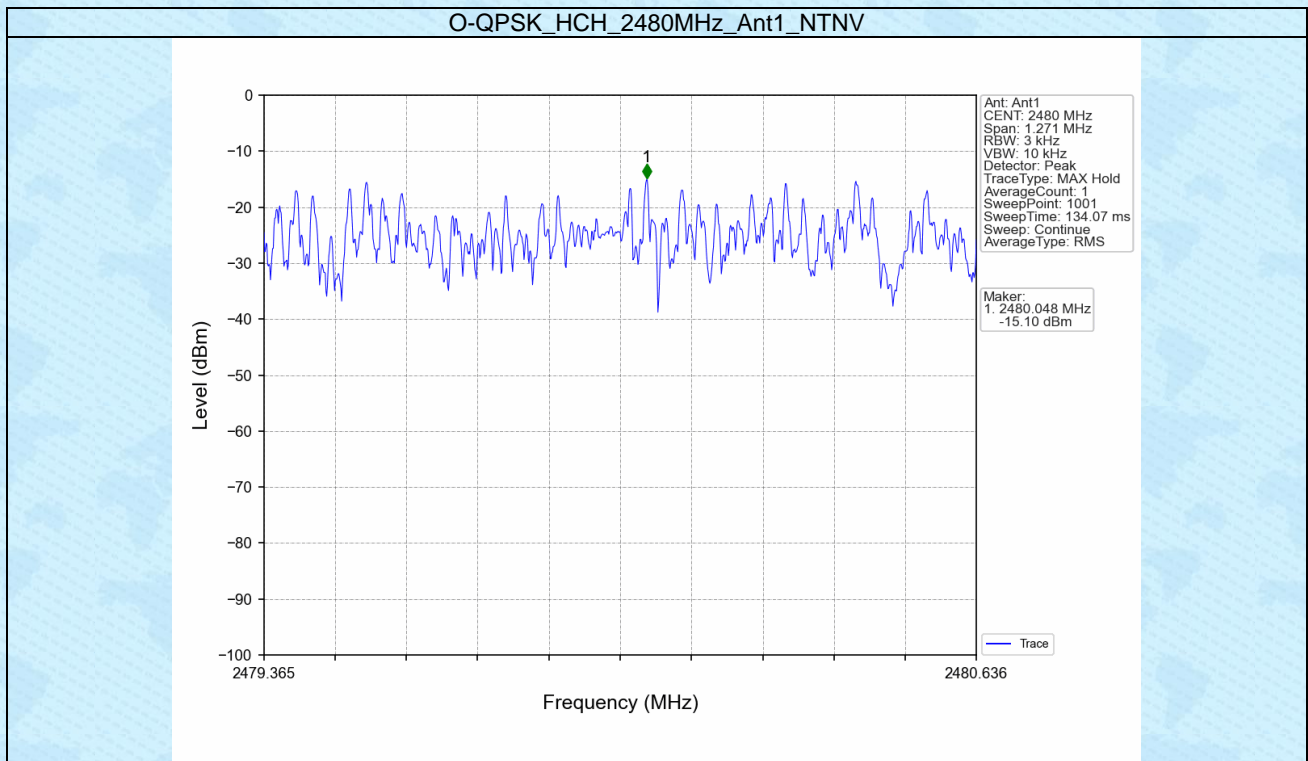



## 4. Unwanted Emissions In Non-restricted Frequency Bands


### 4.1 Ref


#### 4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
O-QPSK	SISO	2405	1	-0.44
		2445	1	-0.64
		2480	1	-0.71

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

## 4.1.2 Test Graph

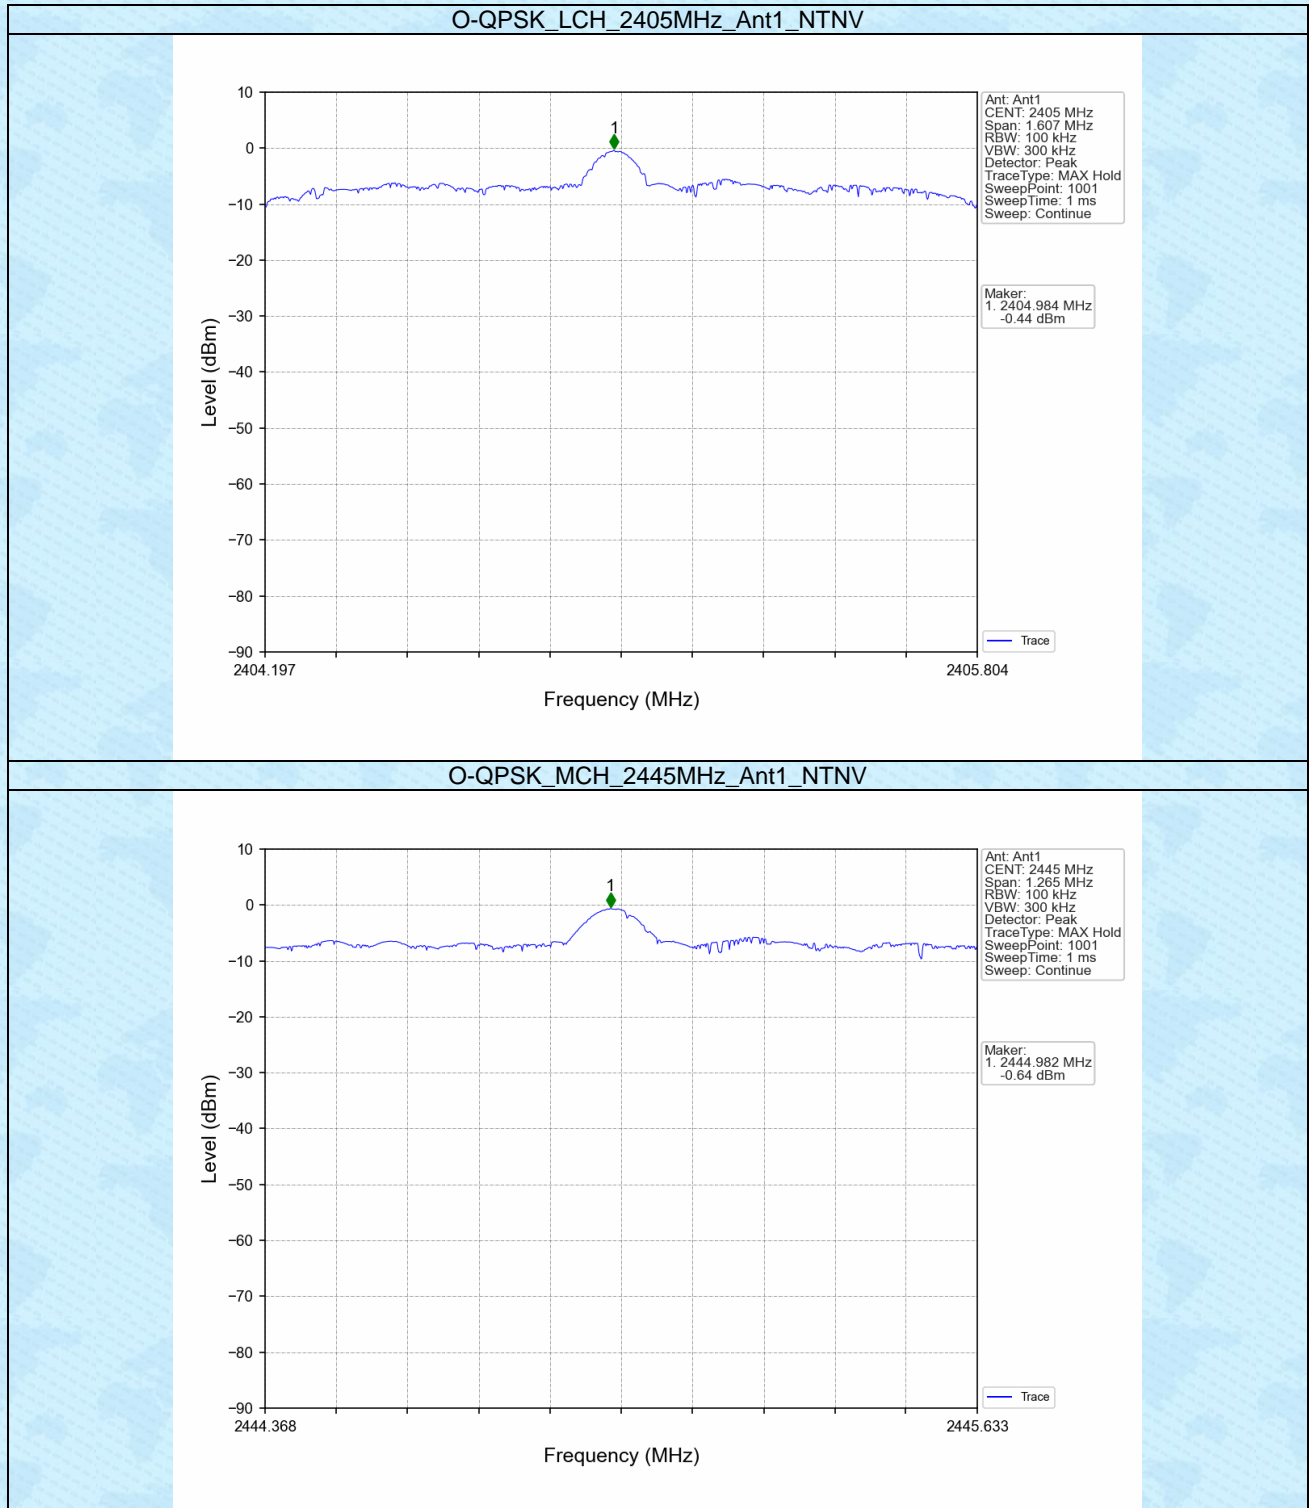

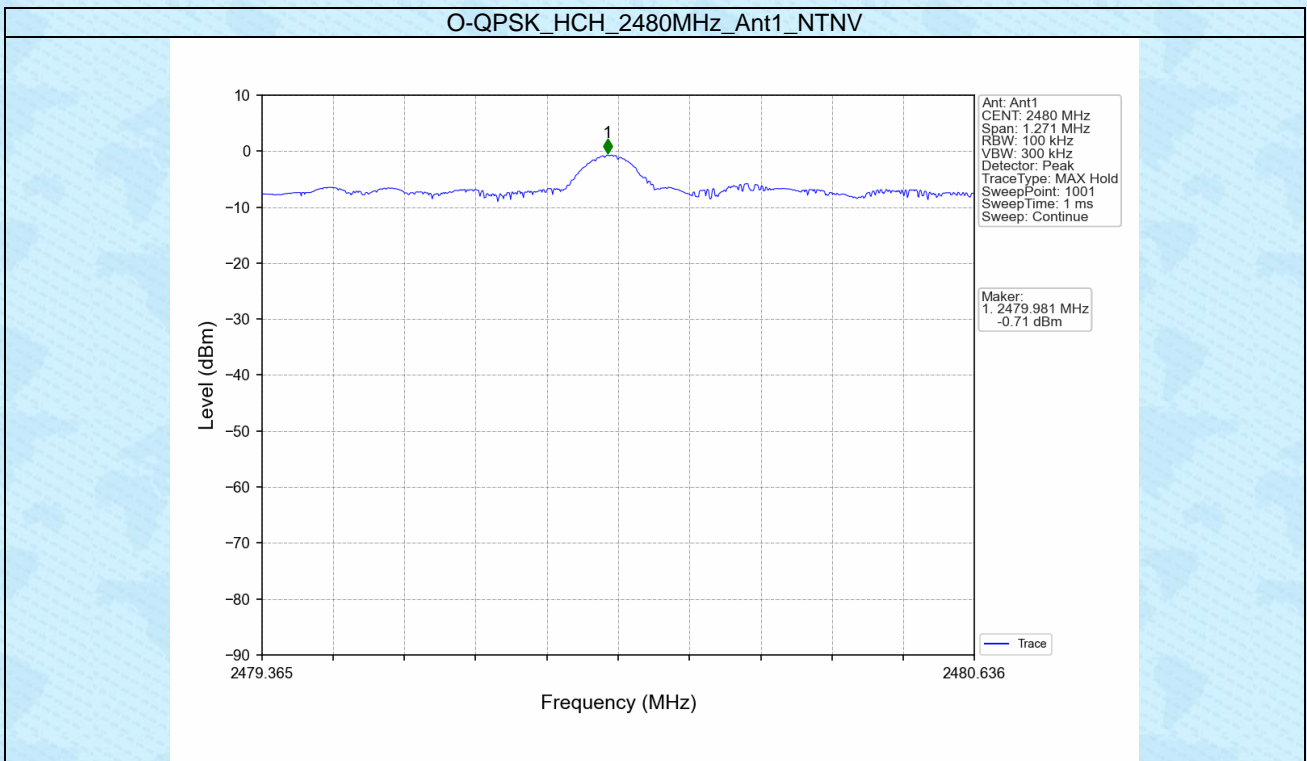

## 4.2 CSE


### 4.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
O-QPSK	SISO	2405	1	-0.44	-20.44	Pass
		2445	1	-0.44	-20.44	Pass
		2480	1	-0.44	-20.44	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.




## 4.2.2 Test Graph

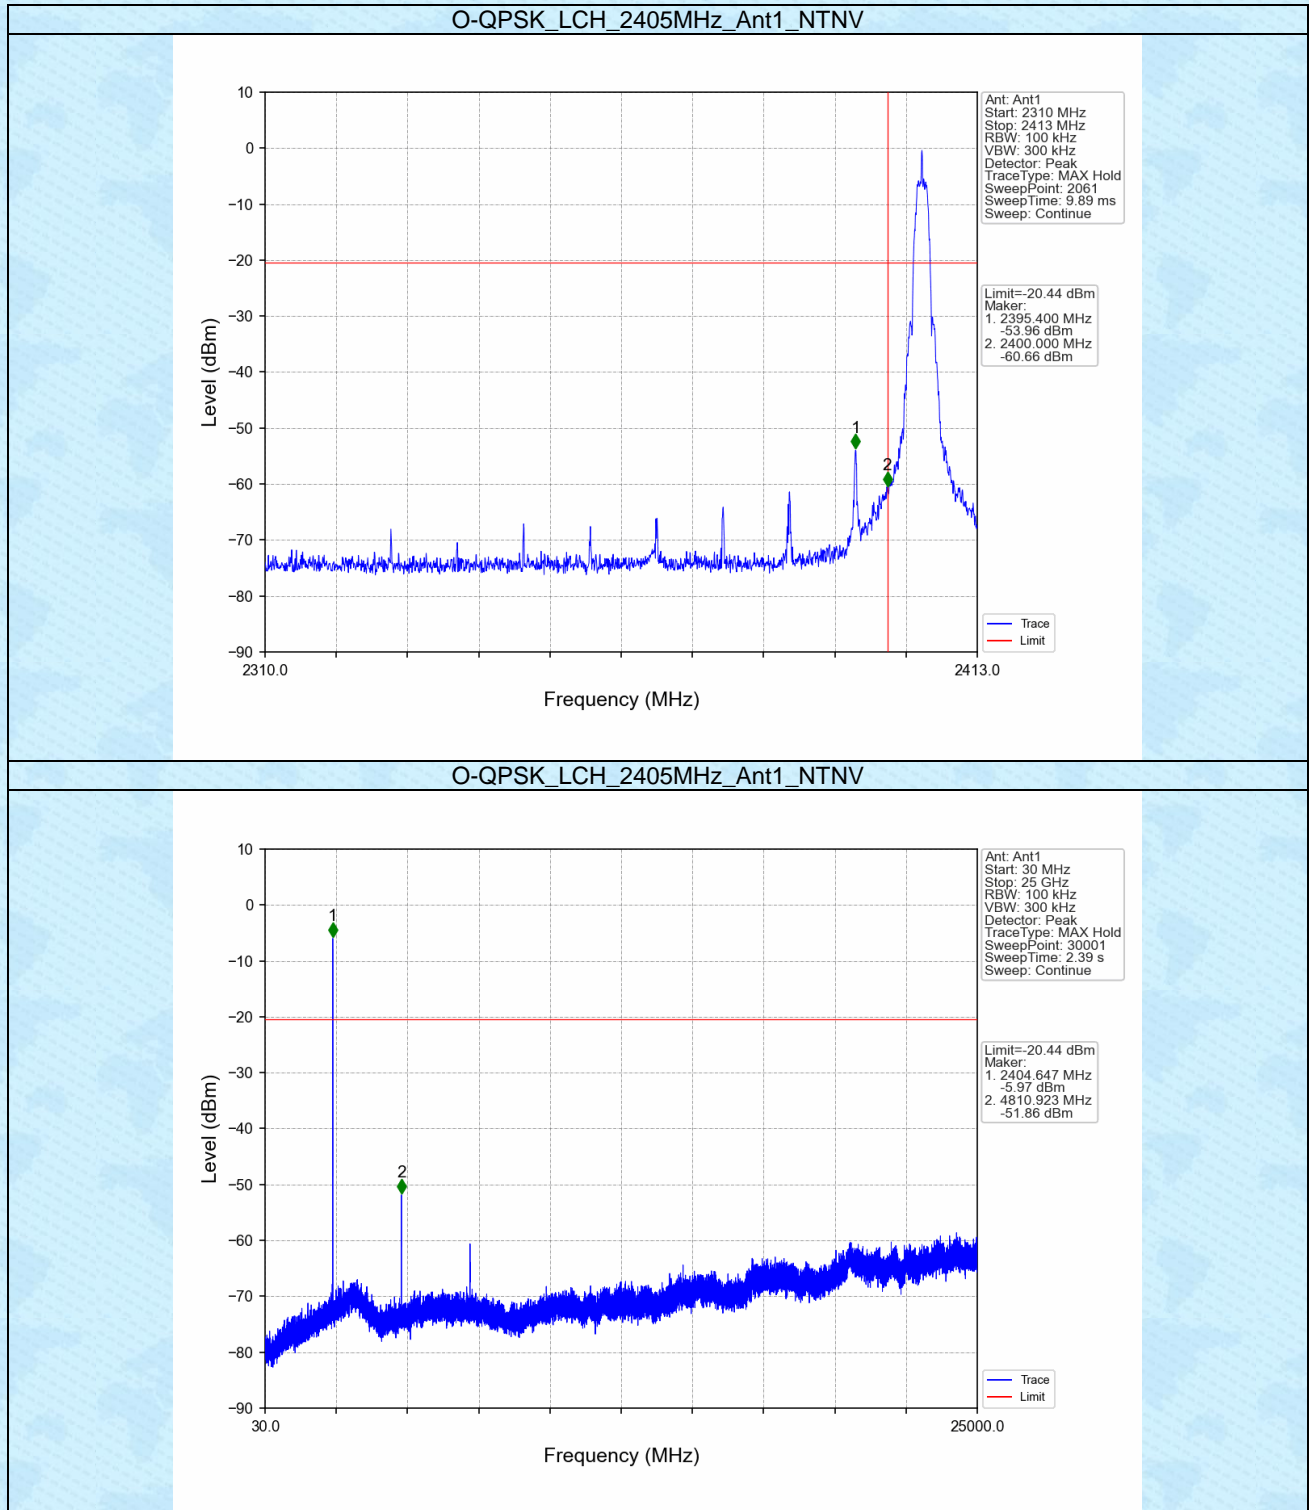


### O-QPSK\_MCH\_2445MHz\_Ant1\_NTNV

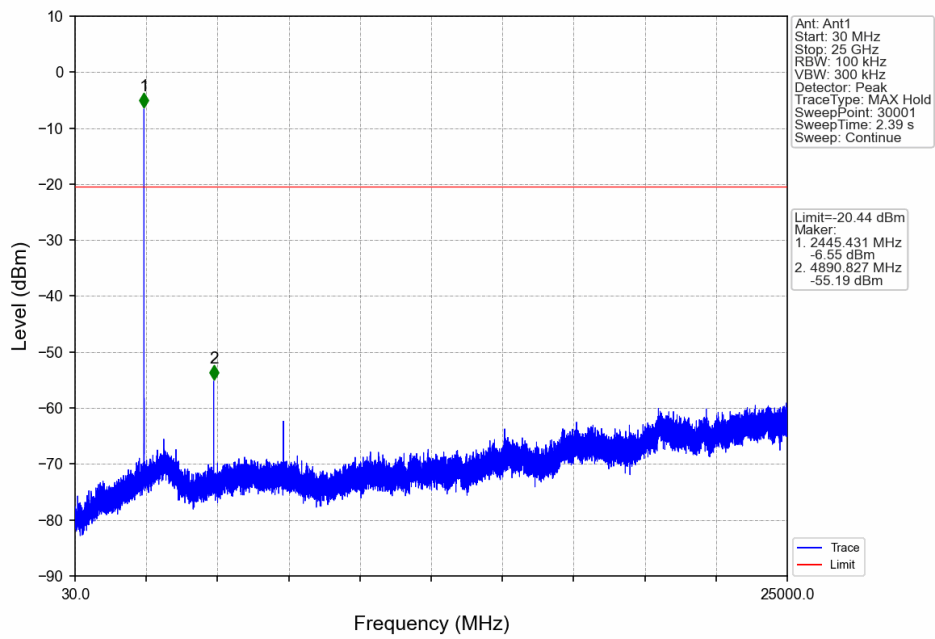

### O-QPSK\_HCH\_2480MHz\_Ant1\_NTNV

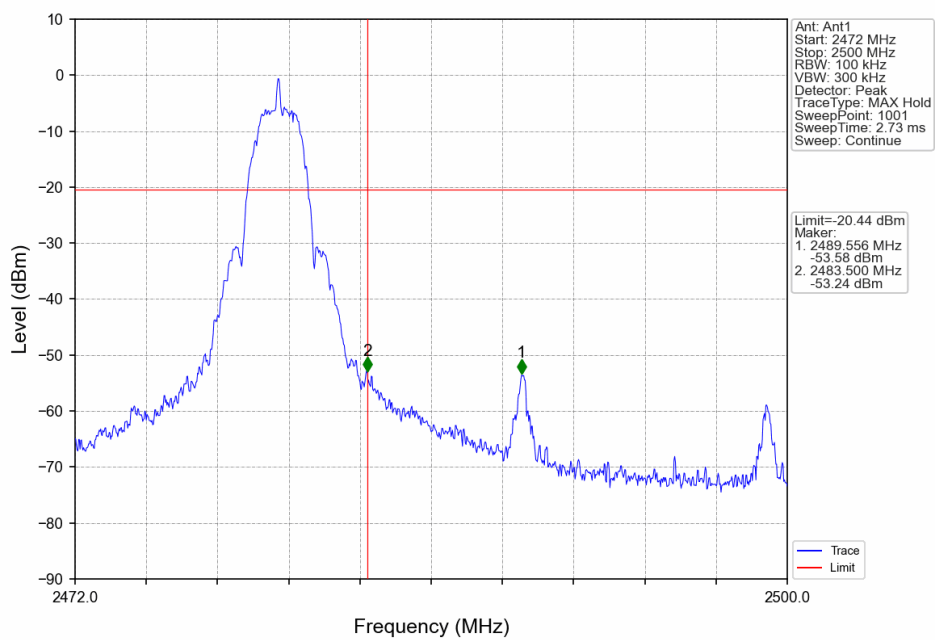

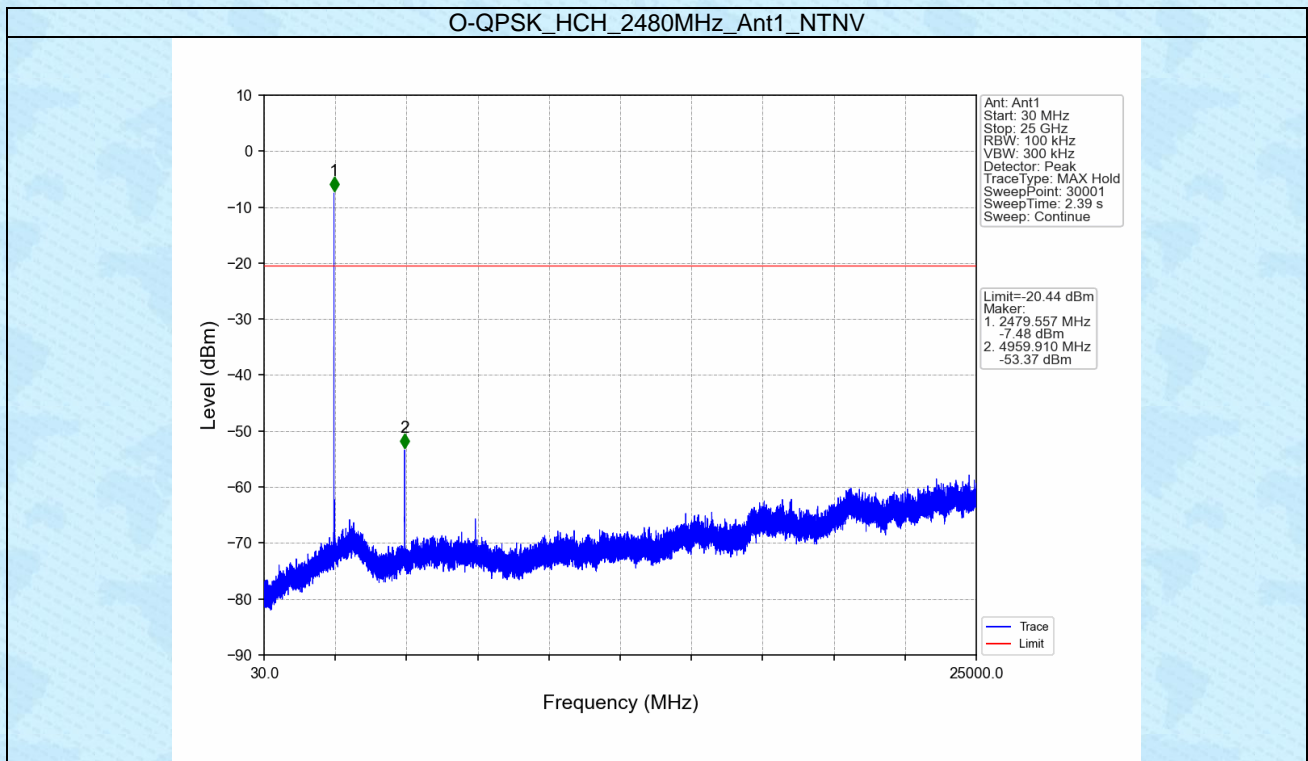

-----End-----