


Product Name: Smart Phone	Report No: ITEZA2-202400259RF5
Product Model: S200, S200 S, S200 SE, S200 E, S200 X, S200 Plus, S200 Ultra, S200 Max, S200 XS, S200 X Pro, S200 X Plus, S200 X Max, S200 Mini, S200 Note, S200 Air, S200 Lite	Security Classification: Open
Version: V1.0	Total Page: 379

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
<i>Aaron Long</i>	<i>Stone Tang</i>	<i>Joky Wang</i>	

FCCRadio Test Report

FCC ID: 2AX4YS200

This report concerns:Original Grant

Applicant:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Manufacturer:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Sample No:	1000040010
Product Name:	Smart Phone
Brand Name:	DOOGEE
Model No.:	S200, S200 S, S200 SE, S200 E, S200 X, S200 Plus, S200 Ultra, S200 Max, S200 XS, S200 X Pro, S200 X Plus, S200 X Max, S200 Mini, S200 Note, S200 Air, S200 Lite
Test No.:	S200

Date of Receipt:	2024/07/02
Date of Test:	2024/07/02~2024/07/20
Issued Date:	2024/07/20
Testing Lab:	TIRT

Note: This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen. Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	12
2.3 DUTY CYCLE	15
2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	75
2.5 SUPPORT UNITS	75
3 .AC POWER LINE CONDUCTED EMISSIONS	76
3.1 LIMIT	76
3.2 TEST PROCEDURE	76
3.3 DEVIATIONFROMTESTSTANDARD	76
3.4 TESTSETUP	77
3.5 EUT OPERATION CONDITIONS	77
3.6 TEST RESULTS	77
4 . RADIATED EMISSIONS	78
4.1 LIMIT	78
4.2 TEST PROCEDURE	78
4.3 DEVIATIONFROMTESTSTANDARD	80
4.4 TESTSETUP	80
4.5 EUT OPERATION CONDITIONS	81
4.6 TEST RESULTS - 9 KHZTO 30MHZ	81
4.7 TEST RESULTS - 30 MHZTO 1000 MHZ	81
4.8 TEST RESULTS - ABOVE1000 MHZ	81
5 .BANDWIDTH	82
5.1 LIMIT	82
5.2 TEST PROCEDURE	82
5.3 DEVIATION FROM STANDARD	82
5.4 TEST SETUP	83
5.5 EUT OPERATION CONDITIONS	83

5.6 TEST RESULTS	83
6 .MAXIMUMOUTPUT POWER	84
6.1 LIMIT	84
6.2 TEST PROCEDURE	84
6.3 DEVIATION FROM STANDARD	84
6.4 TEST SETUP	84
6.5 EUT OPERATION CONDITIONS	84
6.6 TEST RESULTS	84
7 .POWER SPECTRAL DENSITY	85
7.1 LIMIT	85
7.2 TEST PROCEDURE	85
7.3 DEVIATION FROM STANDARD	85
7.4 TEST SETUP	86
7.5 EUT OPERATION CONDITIONS	86
7.6 TEST RESULTS	86
8 .FREQUENCY STABILITY	87
8.1 LIMIT	87
8.2 TEST PROCEDURE	87
8.3 DEVIATION FROM STANDARD	87
8.4 TEST SETUP	87
8.5 EUT OPERATION CONDITIONS	87
8.6 TEST RESULTS	87
9 . MEASUREMENT INSTRUMENTS LIST	88
10 .EUT TEST PHOTOS	89
11 .EUT PHOTOS	91
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	102
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	104
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	105
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	107
APPENDIXE -BANDWIDTH	148
APPENDIXF -MAXIMUMOUTPUT POWER	223
APPENDIXG - POWER SPECTRAL DENSITY	285
APPENDIX H - Frequency Stability	347

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
ITEZA2-202400259RF5	V1.0	Original Report.	2024.07.20	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	MaximumOutput Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	NOTE (5)
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving.the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - Outdoor access point device
 - Indoor access point device
 - Fixed point-to-point access points device
 - Client device
- (5) The manufacturer states that the frequency sability is in compliance with 15.407(g).
- (6) Measurement Standard Used:
FCC Rules and Regulations Part 15 Subpart E
ANSI C63.4:2014, ANSI C63.10:2013

1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The TIRT measurement uncertainty as below table:

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±142.12 KHz
RF power conducted	±0.74 dB
RF power radiated	±3.25dB
Spurious emissions, conducted	±1.78dB
Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
Conduction Emissions(150kHz~30MHz)	±3.1 dB
Humidity	±4.6%
Temperature	±0.7°C
Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25.1°C	52%	DC 11V from adapter	Stone Tang
Radiated Emissions-9kHz to 30MHz	24.5°C	50%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.2°C	53%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Radiated Emissions-Above 1000 MHz	26.0°C	53%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Bandwidth	25.0°C	56%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Maximum Output Power	24.9°C	54%	DC 3.87V from battery or DC 11V from adapter	Stone Tang
Power Spectral Density	25.1°C	62%	DC 3.87V from battery or DC 11V from adapter	Stone Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	DOOGEE
Test Model	S200
Series Model	S200, S200 S, S200 SE, S200 E, S200 X, S200 Plus, S200 Ultra, S200 Max, S200 XS, S200 X Pro, S200 X Plus, S200 X Max, S200 Mini, S200 Note, S200 Air, S200 Lite
Model Difference(s)	There is no difference except the name of the model
Software Version	DOOGEE-S200-Android14.0-20240614_20240614-1857
Hardware Version	M162-MUB-V2
Power Rating	DC 3.87V from battery or DC 11V from adapter
Operation FrequencyBand(s)	UNII-1: 5180 MHz~5240 MHz UNII-2A: 5260 MHz ~ 5320 MHz UNII-2C: 5500 MHz ~ 5700 MHz UNII-3: 5745 MHz~5825MHz
Modulation Type	IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK) IEEE802.11ax:OFDMA(64QAM,16QAM,QPSK,BPSK,256QAM,1024QAM)
MaximumOutput Power _UNII-1	11ax40MIMO: 16.36dBm(0.043251W)
MaximumOutput Power _UNII-2A	11ac80MIMO: 16.94dBm(0.049431W)
MaximumOutput Power _UNII-2C	11ac80MIMO: 16.41dBm(0.043752W)
MaximumOutput Power _UNII-3	11ac80MIMO: 14.27dBm(0.026730W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20 IEEE 802.11ax20		IEEE 802.11n40 IEEE 802.11ac40 IEEE 802.11ax40		IEEE 802.11ac80 IEEE 802.11ax80	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20 IEEE 802.11ax20		IEEE 802.11n40 IEEE 802.11ac40 IEEE 802.11ax40		IEEE 802.11ac80 IEEE 802.11ax80	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20 IEEE 802.11ax20		IEEE 802.11n40 IEEE 802.11ac40 IEEE 802.11ax40		IEEE 802.11ac80 IEEE 802.11ax80	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
116	5580	110	5550	122	5610
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20 IEEE 802.11ax20		IEEE 802.11n40 IEEE 802.11ac40 IEEE 802.11ax40		IEEE 802.11ac80 IEEE 802.11ax80	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Manufactured	Model Name	Antenna Type	Connector	Gain (dBi)
1	Shenzhen 3Good Wireless Communication Co.,LTD.	M24P	PIFA	N/A	1.36
2	Shenzhen 3Good Wireless Communication Co.,LTD.	M24P	PIFA	N/A	-4.38

Note:

- 1) The antenna gain is provided by the manufacturer.
- 2) The antenna is for testing and fixation purposes
- 3) The device supports WLAN MIMO CDD mode

4. Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

 Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

 $\text{Array Gain} = 10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

 Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with

 G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

 For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

Mode	ANT1(dBi)	ANT2(dBi)	DG for Power (dBi)	DG for PSD(dBi)	Power Limit Reduction (dBi)	PSD Limit Reduction (dBi)
5GWIFI	1.36	-4.38	1.36	4.37	0	0

 $\text{Power Limit Reduction} = \text{DG(Power)} - 6\text{dBi}, (\text{min} = 0)$
 $\text{PSD Limit Reduction} = \text{DG(PSD)} - 6\text{dBi}, (\text{min} = 0)$

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 2	TX N20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 3	TX N40 Mode Channel 38/46 (UNII-1) SISO/MIMO
Mode 4	TX AC20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 5	TX AC40 ModeChannel 38/46 (UNII-1) SISO/MIMO
Mode 6	TX AC80 Mode Channel 42 (UNII-1) SISO/MIMO
Mode 7	TX A Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 8	TX N20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 9	TX N40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 10	TX AC20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 11	TX AC40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 12	TX AC80 Mode Channel 155 (UNII-3) SISO/MIMO
Mode 13	TX A Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 14	TX N20 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 15	TX N40 Mode Channel 54/62 (UNII-2A) SISO/MIMO
Mode 16	TX AC20 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 17	TX AC40 Mode Channel 54/62 (UNII-2A) SISO/MIMO
Mode 18	TX AC80 Mode Channel 58 (UNII-2A) SISO/MIMO
Mode 19	TX A Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 20	TX N20 Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 21	TX N40 Mode Channel 102/110/134 (UNII-2C) SISO/MIMO
Mode 22	TX AC20 Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 23	TX AC40 Mode Channel 102/110/134 (UNII-2C) SISO/MIMO
Mode 24	TX AC80 Mode Channel 106/122 (UNII-2C) SISO/MIMO
Mode 25	TX AX20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 26	TX AX40 ModeChannel 38/46 (UNII-1) SISO/MIMO
Mode 27	TX AX80 Mode Channel 42 (UNII-1) SISO/MIMO
Mode 28	TX AX20 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 29	TX AX40 Mode Channel 54/62 (UNII-2A) SISO/MIMO
Mode 30	TX AX80 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 31	TX AX20 Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 32	TX AX40 Mode Channel 102/110/134 (UNII-2C) SISO/MIMO
Mode 33	TX AX80 Mode Channel 106/122 (UNII-2C) SISO/MIMO
Mode 34	TX AX20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 35	TX AX40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 36	TX AX80 Mode Channel 155 (UNII-3) SISO/MIMO

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 18	TX AC80 Mode Channel 58 (UNII-2A) MIMO

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 18	TX AC80 Mode Channel 58 (UNII-2A) MIMO

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 25	TX AX20 Mode Channel 36/40/48 (UNII-1) MIMO
Mode 16	TX AC20 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 22	TX AC20 Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 10	TX AC20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO

Final conducted RF Test Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 2	TX N20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 3	TX N40 Mode Channel 38/46 (UNII-1) SISO/MIMO
Mode 4	TX AC20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO
Mode 5	TX AC40 ModeChannel 38/46 (UNII-1) SISO/MIMO
Mode 6	TX AC80 Mode Channel 42 (UNII-1) SISO/MIMO
Mode 7	TX A Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 8	TX N20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 9	TX N40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 10	TX AC20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 11	TX AC40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 12	TX AC80 Mode Channel 155 (UNII-3) SISO/MIMO
Mode 13	TX A Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 14	TX N20 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 15	TX N40 Mode Channel 54/62 (UNII-2A) SISO/MIMO
Mode 16	TX AC20 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 17	TX AC40 Mode Channel 54/62 (UNII-2A) SISO/MIMO
Mode 18	TX AC80 Mode Channel 58 (UNII-2A) SISO/MIMO
Mode 19	TX A Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 20	TX N20 Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 21	TX N40 Mode Channel 102/110/134 (UNII-2C) SISO/MIMO
Mode 22	TX AC20 Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 23	TX AC40 Mode Channel 102/110/134 (UNII-2C) SISO/MIMO
Mode 24	TX AC80 Mode Channel 106/122 (UNII-2C) SISO/MIMO
Mode 25	TX AX20 ModeChannel 36/40/48 (UNII-1) SISO/MIMO

Mode 26	TX AX40 ModeChannel 38/46 (UNII-1) SISO/MIMO
Mode 27	TX AX80 Mode Channel 42 (UNII-1) SISO/MIMO
Mode 28	TX AX20 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 29	TX AX40 Mode Channel 54/62 (UNII-2A) SISO/MIMO
Mode 30	TX AX80 Mode Channel 52/60/64 (UNII-2A) SISO/MIMO
Mode 31	TX AX20 Mode Channel 100/116/140 (UNII-2C) SISO/MIMO
Mode 32	TX AX40 Mode Channel 102/110/134 (UNII-2C) SISO/MIMO
Mode 33	TX AX80 Mode Channel 106/122 (UNII-2C) SISO/MIMO
Mode 34	TX AX20 Mode Channel 149/157/165 (UNII-3) SISO/MIMO
Mode 35	TX AX40 Mode Channel 151/159 (UNII-3) SISO/MIMO
Mode 36	TX AX80 Mode Channel 155 (UNII-3) SISO/MIMO

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AX80 Mode Channel 58 (UNII-2A) MIMO is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.

2.3DUTY CYCLE

 If duty cycle is $\geq 98\%$, duty factor is not required.

 If duty cycle is $< 98\%$, duty factor shall be considered.


The output power = measured power + duty factor.


The power spectral density = measured power spectral density + duty factor.

TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11A	Ant1	5180	1.40	1.43	97.90	---	---
		5200	1.39	1.43	97.20	---	---
		5240	1.40	1.43	97.90	---	---
		5260	1.39	1.43	97.20	---	---
		5300	1.39	1.42	97.89	---	---
		5320	1.39	1.43	97.20	---	---
		5500	1.38	1.42	97.18	---	---
		5600	1.40	1.43	97.90	---	---
		5700	1.39	1.43	97.20	---	---
		5745	1.39	1.43	97.20	---	---
	5785	1.39	1.42	97.89	---	---	
	5825	1.39	1.43	97.20	---	---	
	Ant1	5180	1.39	1.43	97.20	---	---
		5200	1.40	1.43	97.90	---	---
		5240	1.39	1.43	97.20	---	---
		5260	1.39	1.43	97.20	---	---
		5280	1.39	1.43	97.20	---	---
		5320	1.39	1.43	97.20	---	---
		5500	1.38	1.42	97.18	---	---
		5580	1.39	1.43	97.20	---	---
5700		1.39	1.43	97.20	---	---	
5745		1.39	1.43	97.20	---	---	
5785	1.40	1.43	97.90	---	---		
5825	1.39	1.43	97.20	---	---		
11N20MIMO	Ant1	5180	0.16	0.20	80.00	---	---
	Ant2	5180	0.17	0.20	85.00	---	---
	Ant1	5200	0.16	0.20	80.00	---	---
	Ant2	5200	0.17	0.20	85.00	---	---
	Ant1	5240	0.16	0.20	80.00	---	---
	Ant2	5240	0.17	0.20	85.00	---	---
	Ant1	5260	0.17	0.20	85.00	---	---
	Ant2	5260	0.17	0.20	85.00	---	---
	Ant1	5300	0.17	0.20	85.00	---	---
	Ant2	5300	0.17	0.20	85.00	---	---
	Ant1	5320	0.17	0.20	85.00	---	---
	Ant2	5320	0.16	0.20	80.00	---	---
	Ant1	5500	0.16	0.20	80.00	---	---
	Ant2	5500	0.16	0.20	80.00	---	---
	Ant1	5600	0.16	0.20	80.00	---	---
	Ant2	5600	0.17	0.20	85.00	---	---
	Ant1	5700	0.17	0.20	85.00	---	---
	Ant2	5700	0.17	0.20	85.00	---	---
	Ant1	5745	0.16	0.20	80.00	---	---
	Ant2	5745	0.16	0.20	80.00	---	---
Ant1	5785	0.17	0.20	85.00	---	---	
Ant2	5785	0.17	0.20	85.00	---	---	
Ant1	5825	0.17	0.20	85.00	---	---	
Ant2	5825	0.16	0.20	80.00	---	---	
11N40MIMO	Ant1	5190	0.10	0.14	71.43	---	---
	Ant2	5190	0.10	0.14	71.43	---	---
	Ant1	5230	0.10	0.13	76.92	---	---
	Ant2	5230	0.10	0.14	71.43	---	---
	Ant1	5270	0.10	0.14	71.43	---	---
	Ant2	5270	0.10	0.14	71.43	---	---
	Ant1	5310	0.10	0.14	71.43	---	---
	Ant2	5310	0.65	0.68	95.59	---	---
	Ant1	5510	0.10	0.13	76.92	---	---
	Ant2	5510	0.65	0.69	94.20	---	---
Ant1	5590	0.10	0.14	71.43	---	---	

	Ant2	5590	0.65	0.68	95.59	---	---
	Ant1	5670	0.10	0.14	71.43	---	---
	Ant2	5670	0.65	0.68	95.59	---	---
	Ant1	5755	0.10	0.13	76.92	---	---
	Ant2	5755	0.65	0.68	95.59	---	---
	Ant1	5795	0.10	0.14	71.43	---	---
11AC20MIMO	Ant2	5795	0.65	0.69	94.20	---	---
	Ant1	5180	0.17	0.20	85.00	---	---
	Ant2	5180	1.31	1.35	97.04	---	---
	Ant1	5200	0.16	0.20	80.00	---	---
	Ant2	5200	1.32	1.35	97.78	---	---
	Ant1	5240	0.17	0.21	80.95	---	---
	Ant2	5240	1.32	1.35	97.78	---	---
	Ant1	5260	0.17	0.20	85.00	---	---
	Ant2	5260	1.31	1.35	97.04	---	---
	Ant1	5300	0.17	0.20	85.00	---	---
	Ant2	5300	1.31	1.35	97.04	---	---
	Ant1	5320	0.17	0.20	85.00	---	---
	Ant2	5320	1.31	1.34	97.76	---	---
	Ant1	5500	0.17	0.21	80.95	---	---
	Ant2	5500	1.31	1.35	97.04	---	---
	Ant1	5600	0.17	0.21	80.95	---	---
	Ant2	5600	1.32	1.35	97.78	---	---
	Ant1	5700	0.17	0.21	80.95	---	---
	Ant2	5700	1.31	1.34	97.76	---	---
	Ant1	5745	0.17	0.21	80.95	---	---
	Ant2	5745	1.31	1.35	97.04	---	---
	Ant1	5785	0.16	0.20	80.00	---	---
	Ant2	5785	1.31	1.34	97.76	---	---
	Ant1	5825	0.17	0.20	85.00	---	---
	Ant2	5825	1.32	1.35	97.78	---	---
	11AC40MIMO	Ant1	5190	0.10	0.14	71.43	---
Ant2		5190	0.66	0.69	95.65	---	---
Ant1		5230	0.10	0.14	71.43	---	---
Ant2		5230	0.65	0.69	94.20	---	---
Ant1		5270	0.10	0.14	71.43	---	---
Ant2		5270	0.65	0.68	95.59	---	---
Ant1		5310	0.10	0.14	71.43	---	---
Ant2		5310	0.65	0.69	94.20	---	---
Ant1		5510	0.10	0.14	71.43	---	---
Ant2		5510	0.65	0.69	94.20	---	---
Ant1		5590	0.10	0.14	71.43	---	---
Ant2		5590	0.65	0.69	94.20	---	---
Ant1		5670	0.11	0.14	78.57	---	---
Ant2		5670	0.65	0.69	94.20	---	---
Ant1		5755	0.10	0.14	71.43	---	---
Ant2		5755	0.65	0.68	95.59	---	---
11AC80MIMO	Ant1	5795	0.10	0.14	71.43	---	---
	Ant2	5795	0.65	0.69	94.20	---	---
	Ant1	5210	0.08	0.11	72.73	---	---
	Ant2	5210	0.32	0.36	88.89	---	---
	Ant1	5290	0.08	0.16	50.00	---	---
	Ant2	5290	0.32	0.36	88.89	---	---
	Ant1	5530	0.07	0.17	41.18	---	---
	Ant2	5530	0.33	0.36	91.67	---	---
11AX20MIMO	Ant1	5610	0.07	0.11	63.64	---	---
	Ant2	5610	0.32	0.36	88.89	---	---
	Ant1	5775	0.07	0.11	63.64	---	---
	Ant2	5775	0.32	0.36	88.89	---	---
	Ant1	5180	0.17	0.21	80.95	---	---
	Ant2	5180	1.31	1.35	97.04	---	---
	Ant1	5200	0.17	0.21	80.95	---	---
	Ant2	5200	1.31	1.35	97.04	---	---
	Ant1	5240	0.17	0.21	80.95	---	---
	Ant2	5240	1.31	1.35	97.04	---	---
	Ant1	5260	0.16	0.20	80.00	---	---
	Ant2	5260	1.30	1.34	97.01	---	---


	Ant1	5300	0.17	0.21	80.95	---	---
	Ant2	5300	1.31	1.34	97.76	---	---
	Ant1	5320	0.17	0.21	80.95	---	---
	Ant2	5320	1.32	1.35	97.78	---	---
	Ant1	5500	0.17	0.21	80.95	---	---
	Ant2	5500	1.31	1.35	97.04	---	---
	Ant1	5600	0.17	0.21	80.95	---	---
	Ant2	5600	1.31	1.35	97.04	---	---
	Ant1	5700	0.17	0.20	85.00	---	---
	Ant2	5700	1.32	1.35	97.78	---	---
	Ant1	5745	0.17	0.21	80.95	---	---
	Ant2	5745	1.31	1.35	97.04	---	---
	Ant1	5785	0.16	0.20	80.00	---	---
	Ant2	5785	1.31	1.35	97.04	---	---
	Ant1	5825	0.17	0.21	80.95	---	---
	Ant2	5825	27.00	27.00	100.00	---	---
11AX40MIMO	Ant1	5190	0.10	0.14	71.43	---	---
	Ant2	5190	0.65	0.69	94.20	---	---
	Ant1	5230	0.10	0.14	71.43	---	---
	Ant2	5230	0.65	0.69	94.20	---	---
	Ant1	5270	0.10	0.14	71.43	---	---
	Ant2	5270	0.65	0.69	94.20	---	---
	Ant1	5310	0.10	0.14	71.43	---	---
	Ant2	5310	0.09	0.12	75.00	---	---
	Ant1	5510	0.10	0.14	71.43	---	---
	Ant2	5510	0.09	0.13	69.23	---	---
	Ant1	5590	0.10	0.14	71.43	---	---
	Ant2	5590	0.08	0.12	66.67	---	---
	Ant1	5670	0.10	0.14	71.43	---	---
	Ant2	5670	0.09	0.13	69.23	---	---
	Ant1	5755	0.11	0.14	78.57	---	---
	Ant2	5755	0.08	0.12	66.67	---	---
11AX80MIMO	Ant1	5795	0.10	0.14	71.43	---	---
	Ant2	5795	0.09	0.13	69.23	---	---
	Ant1	5210	0.08	0.20	40.00	---	---
	Ant2	5210	1.37	2.34	58.55	---	---
	Ant1	5290	0.07	0.16	43.75	---	---
	Ant2	5290	27.00	27.00	100.00	---	---
	Ant1	5530	0.07	0.11	63.64	---	---
	Ant2	5530	27.00	27.00	100.00	---	---
	Ant1	5610	0.08	0.12	66.67	---	---
	Ant2	5610	27.00	27.00	100.00	---	---
	Ant1	5775	0.07	0.16	43.75	---	---
	Ant2	5775	27.00	27.00	100.00	---	---

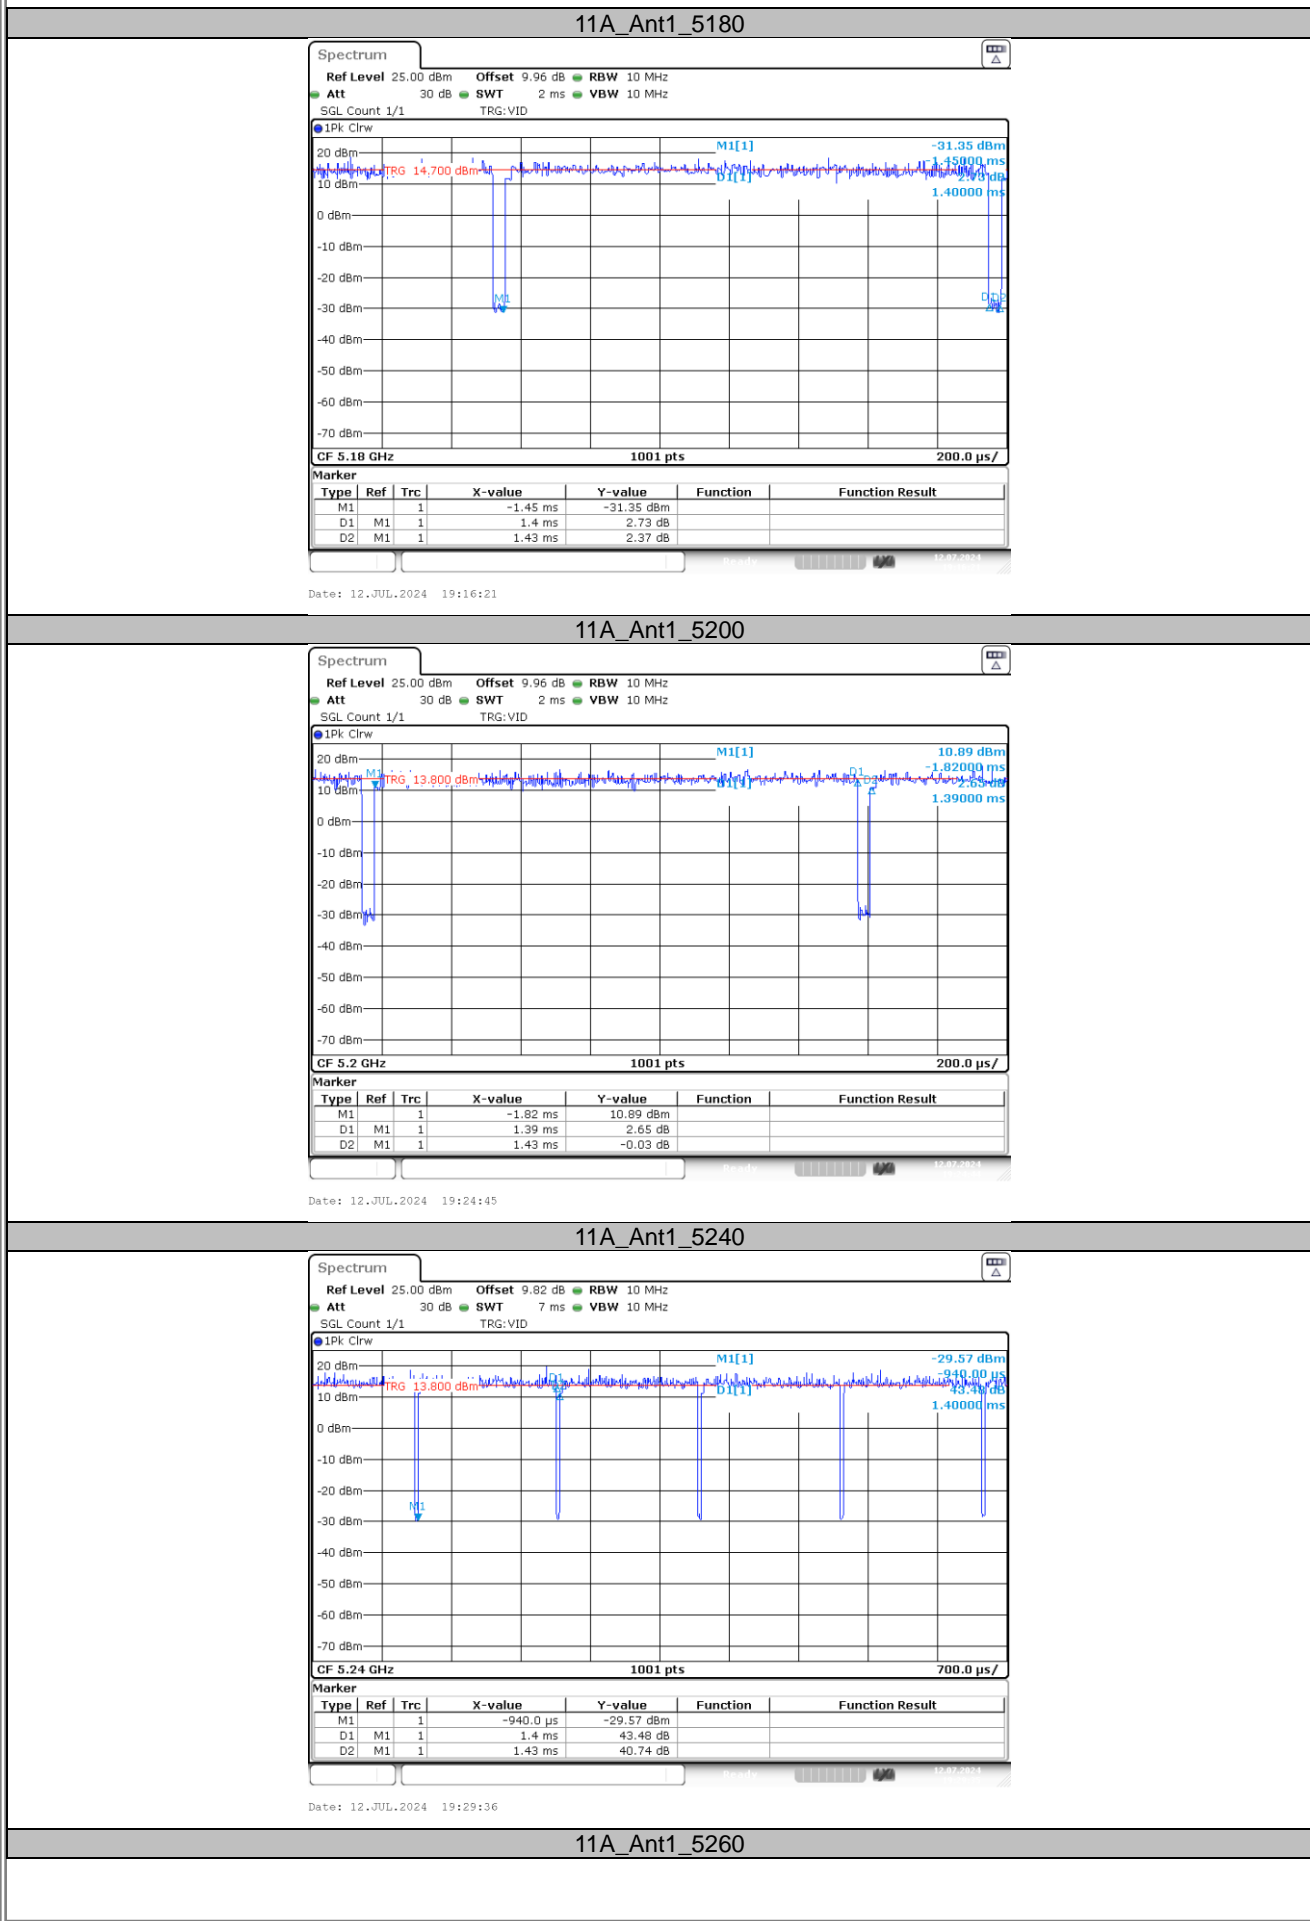

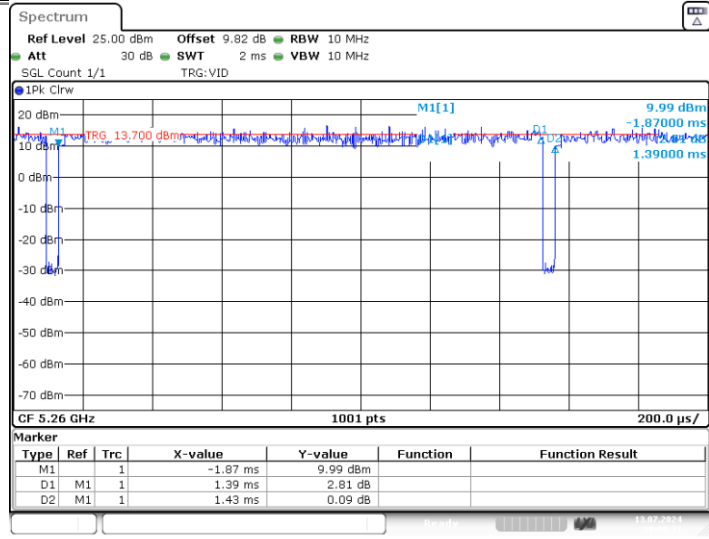


Date: 13.JUL.2024 10:00:31

11A_Ant1_5300

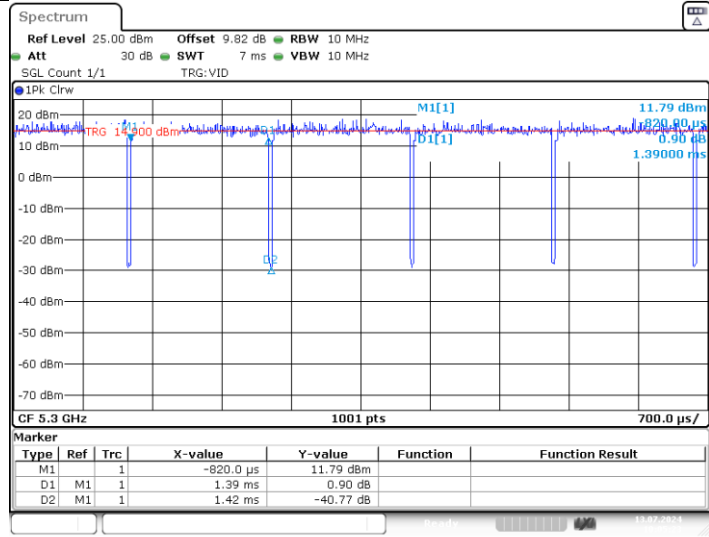


Date: 13.JUL.2024 10:05:22

11A_Ant1_5320

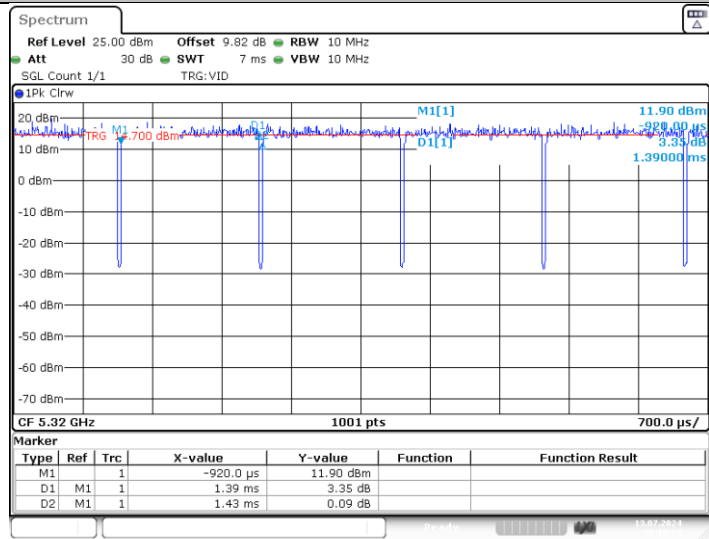


Date: 13.JUL.2024 10:10:54


11A_Ant1_5500

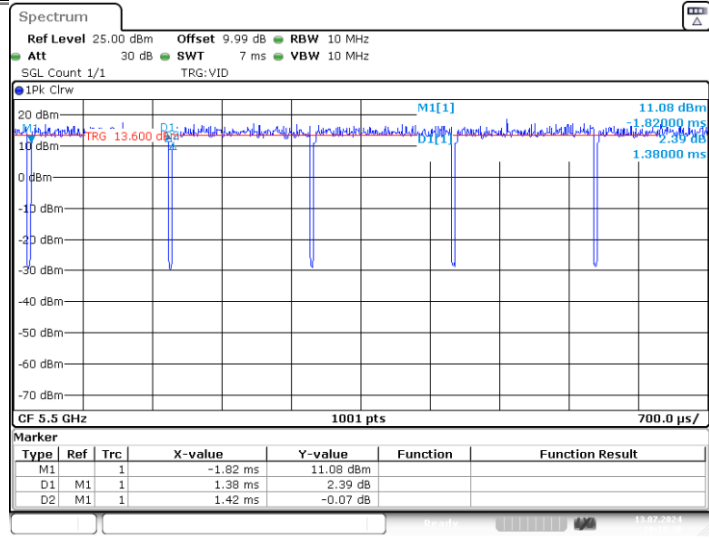


11A_Ant1_5600

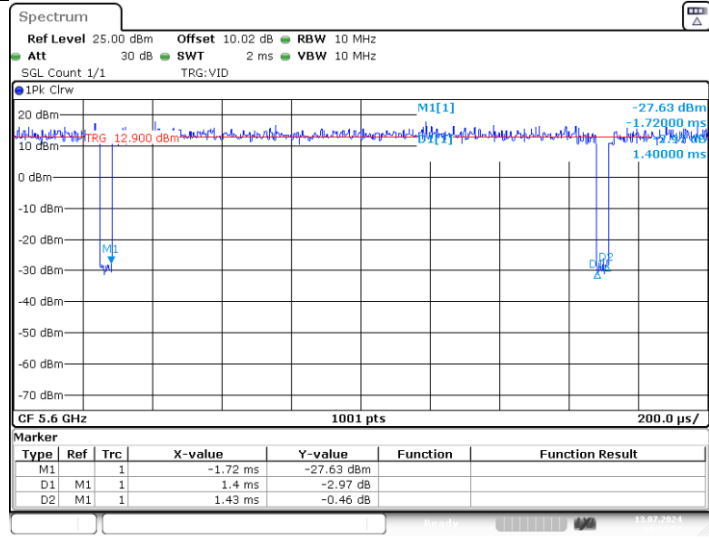

11A_Ant1_5700

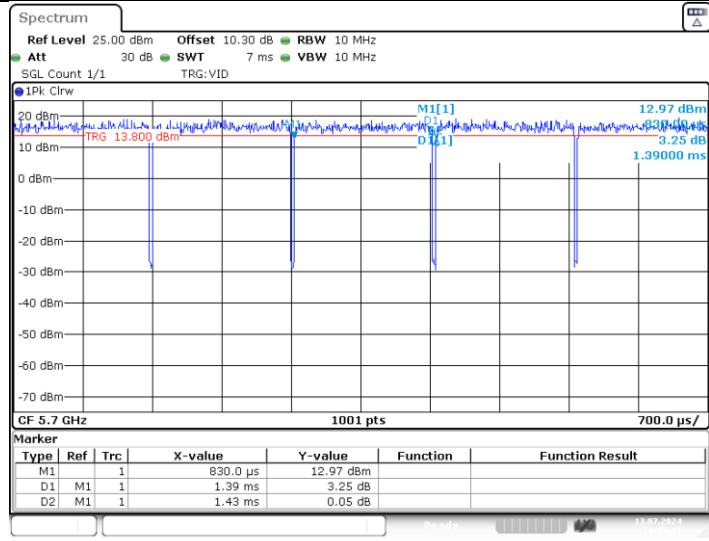


11A_Ant1_5745

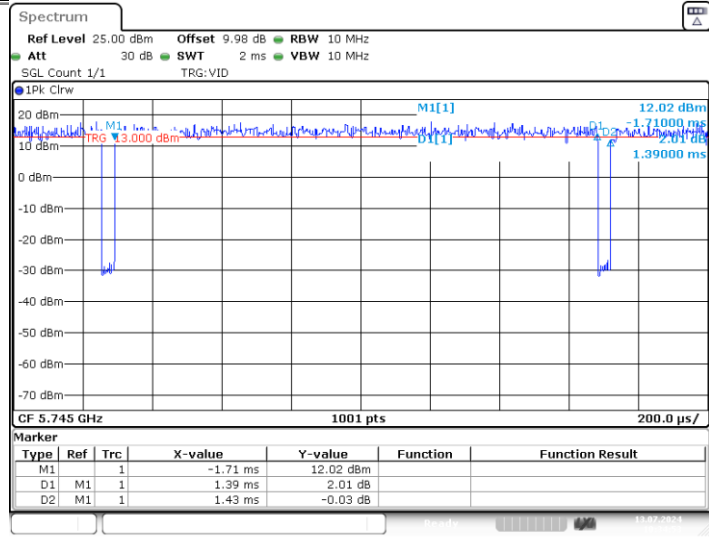


Date: 13.JUL.2024 10:34:54

11A_Ant1_5785

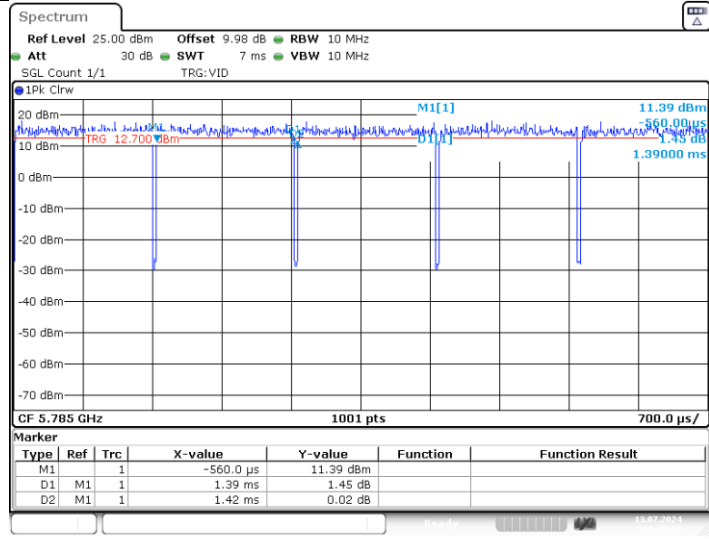


Date: 13.JUL.2024 10:44:02

11A_Ant1_5825

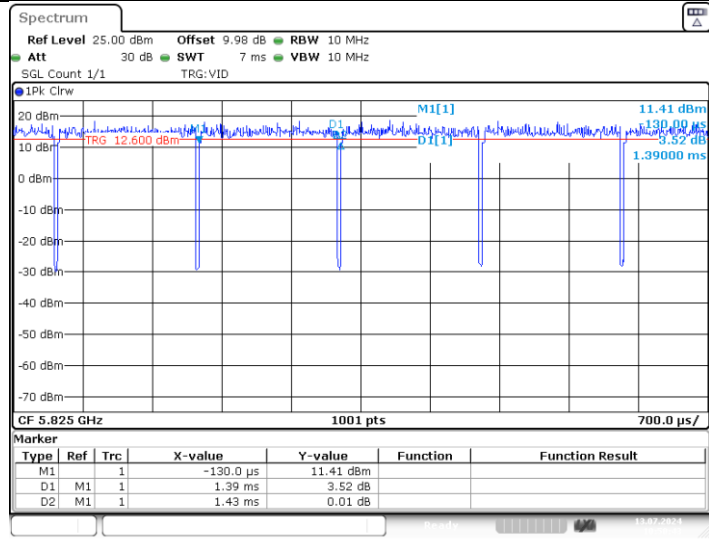


Date: 13.JUL.2024 10:50:43

11A_Ant2_5180

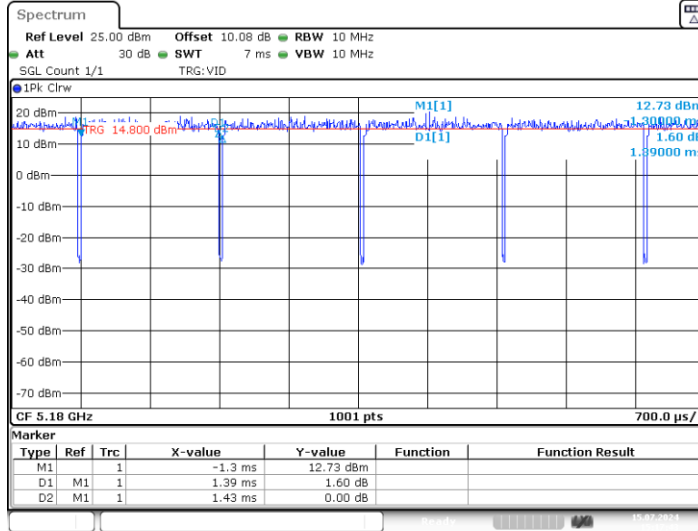


Date: 15.JUL.2024 15:17:42

11A_Ant2_5200

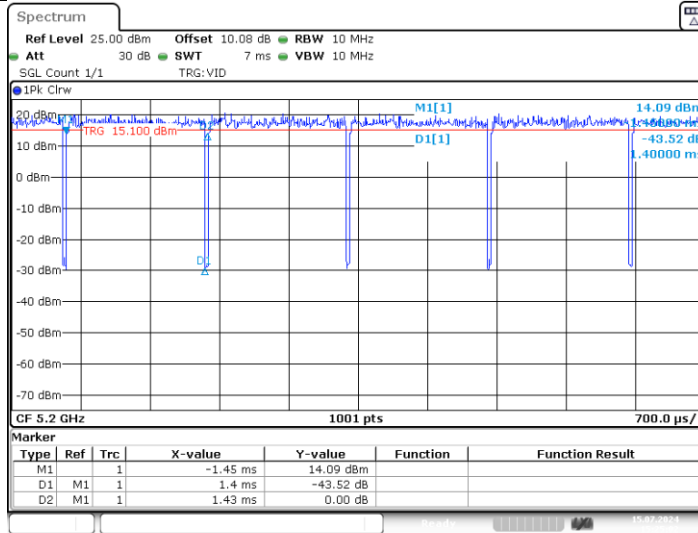


Date: 15.JUL.2024 15:25:02

11A_Ant2_5240

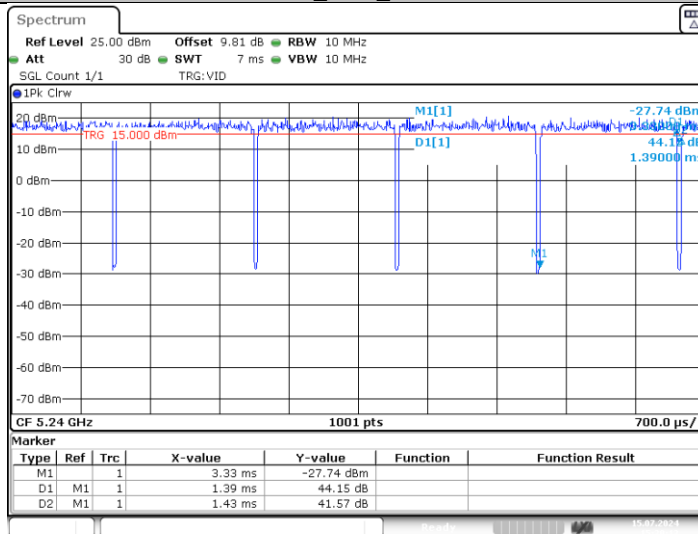


Date: 15.JUL.2024 15:30:13

11A_Ant2_5260

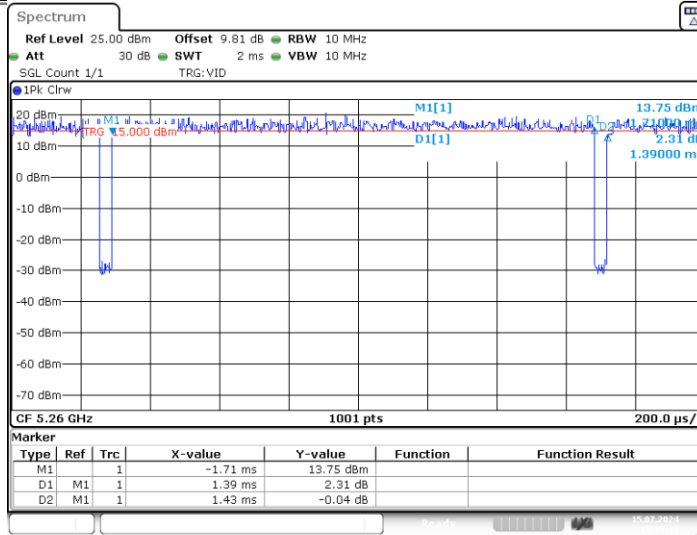


Date: 15.JUL.2024 15:35:13

11A_Ant2_5280

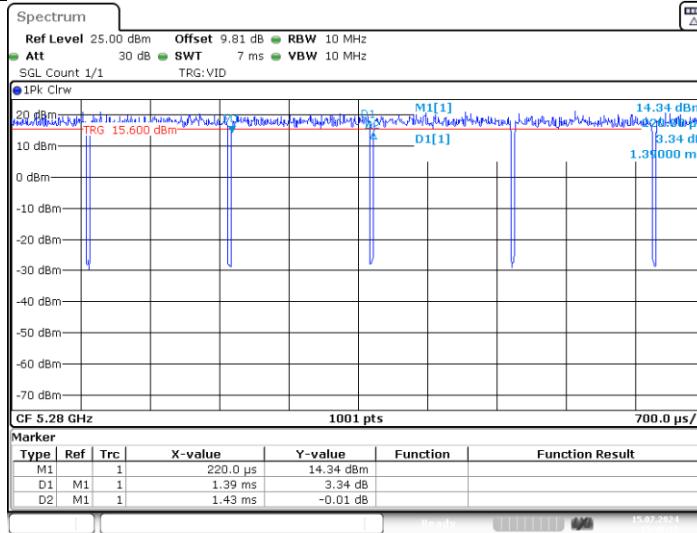


Date: 15.JUL.2024 15:40:18

11A_Ant2_5320

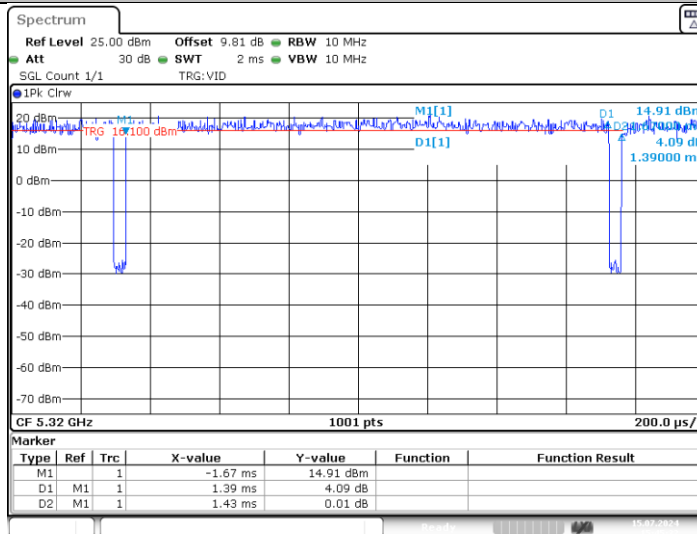


Date: 15.JUL.2024 15:45:32

11A_Ant2_5500

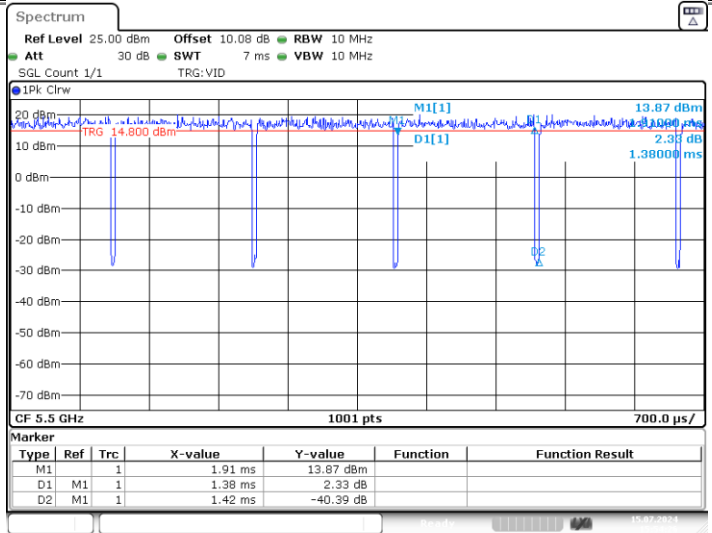


Date: 15.JUL.2024 15:54:26

11A_Ant2_5580

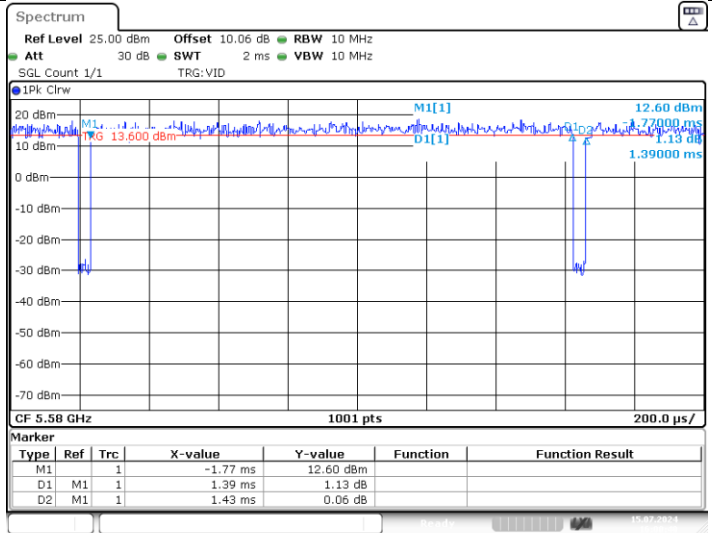


Date: 15.JUL.2024 16:00:40

11A_Ant2_5700

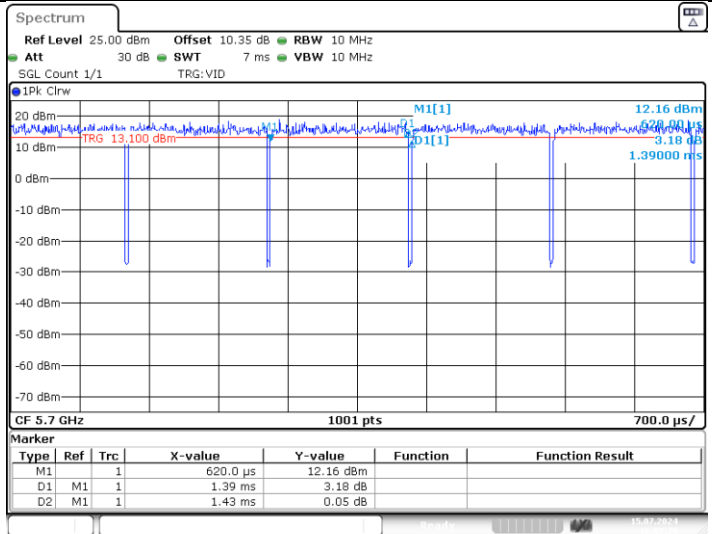


Date: 15.JUL.2024 16:07:30

11A_Ant2_5745

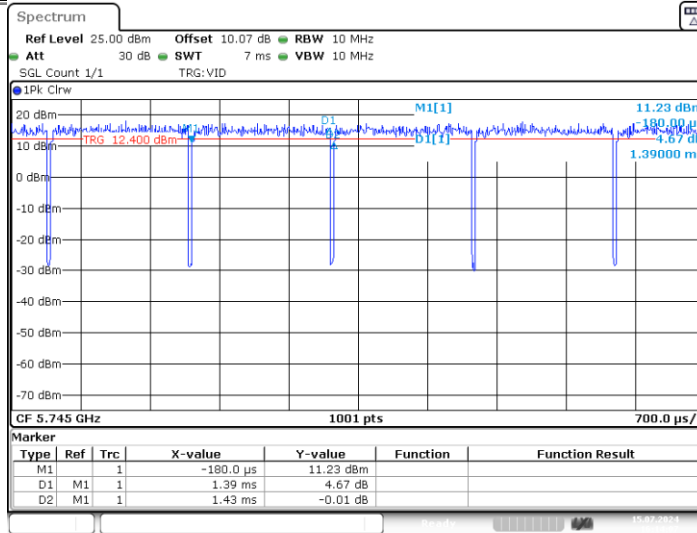


Date: 15.JUL.2024 16:14:07

11A_Ant2_5785

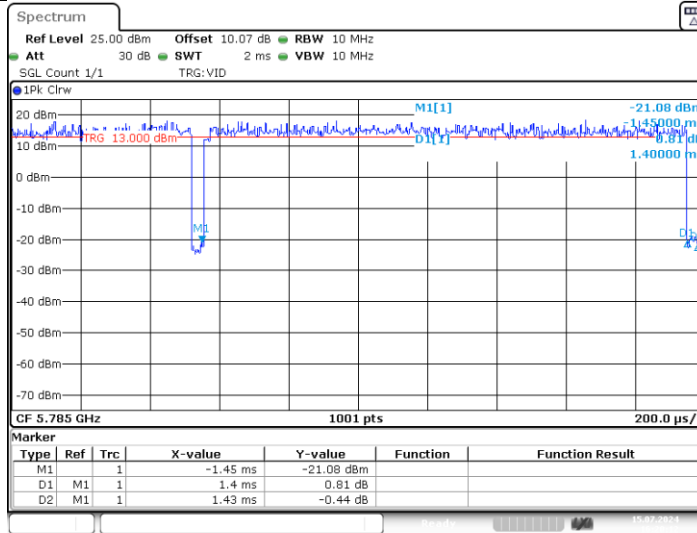


Date: 15.JUL.2024 16:20:12

11A_Ant2_5825

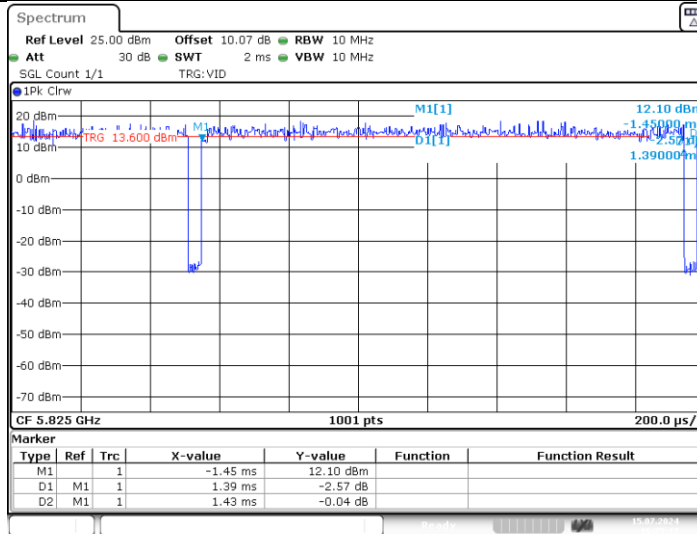


Date: 15.JUL.2024 16:25:17

11N20MIMO_Ant1_5180

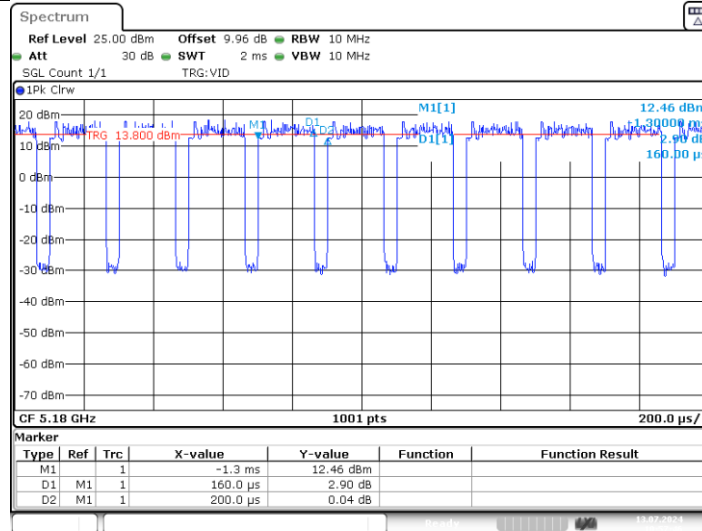


Date: 13.JUL.2024 10:57:46

11N20MIMO_Ant2_5180

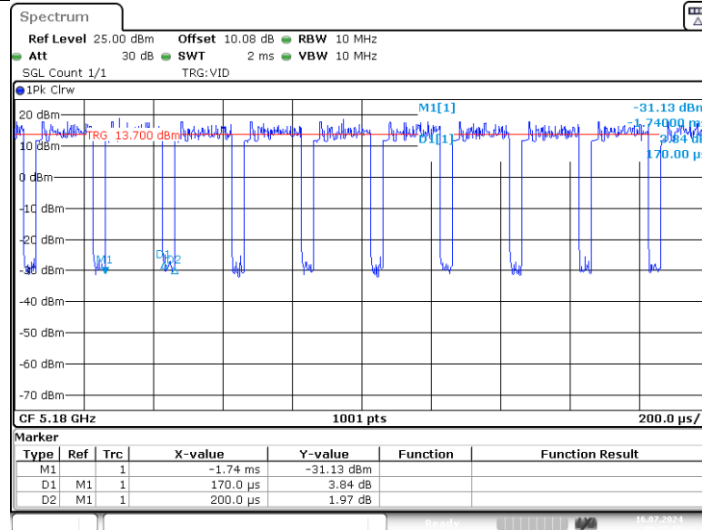


Date: 16.JUL.2024 09:37:55

11N20MIMO_Ant1_5200

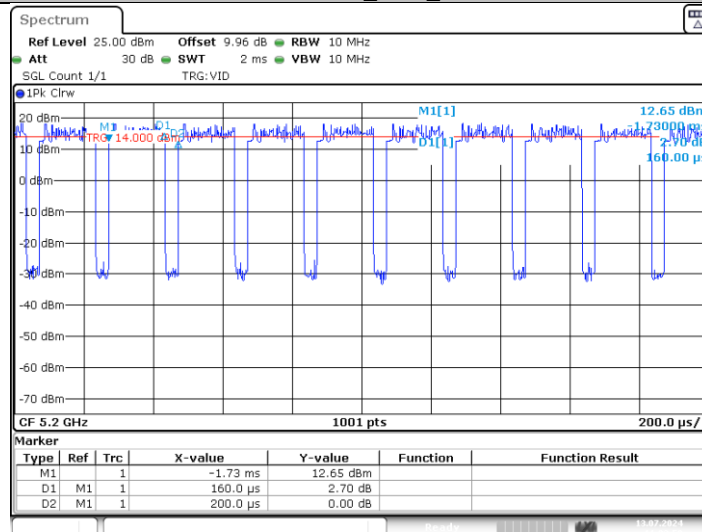


Date: 13.JUL.2024 11:02:58


11N20MIMO_Ant2_5200

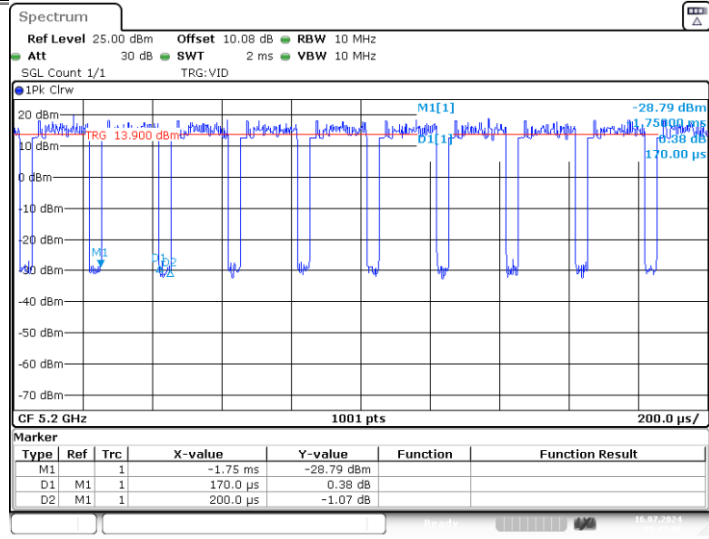


11N20MIMO_Ant1_5240

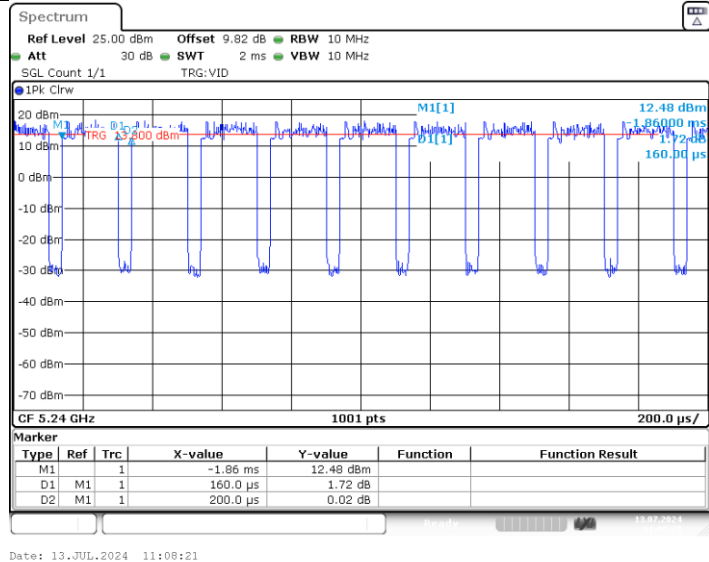

11N20MIMO_Ant2_5240

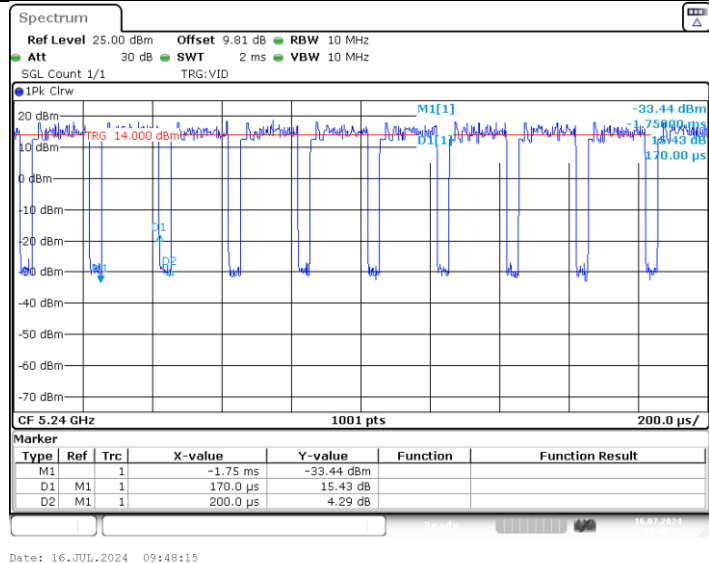


11N20MIMO_Ant1_5260

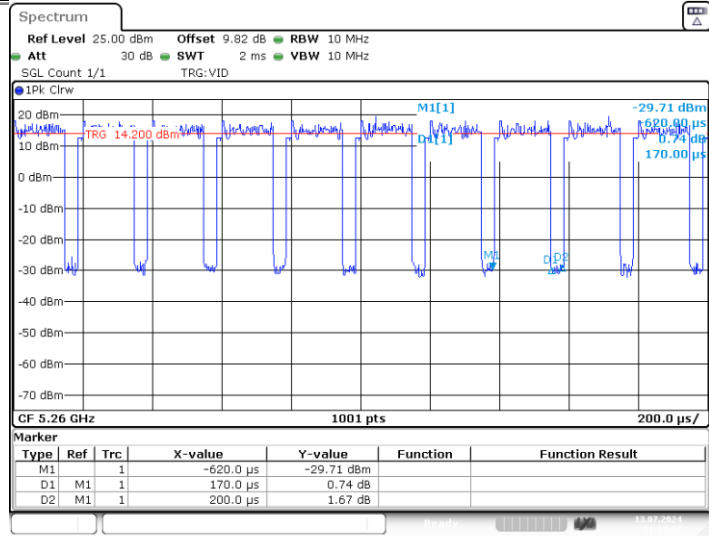


Date: 13.JUL.2024 11:19:01

11N20MIMO_Ant2_5260

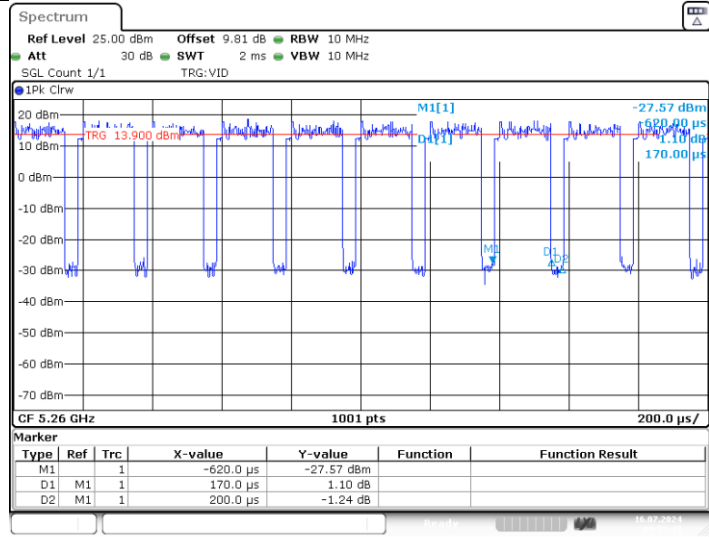


Date: 16.JUL.2024 09:53:43

11N20MIMO_Ant1_5300

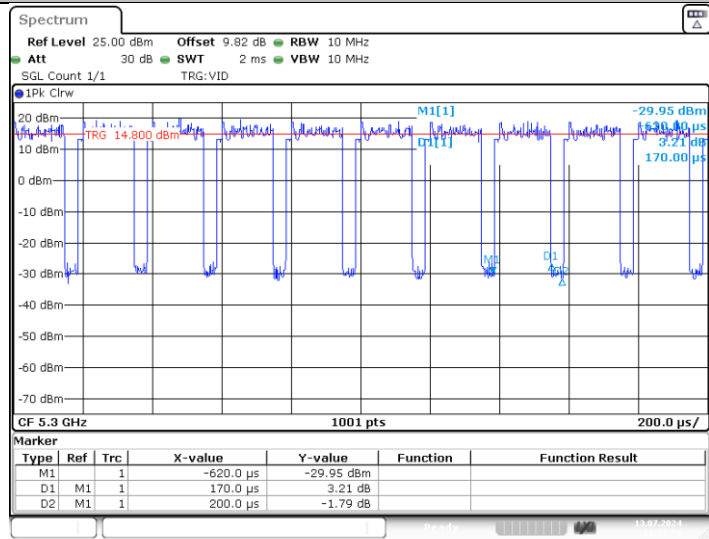


Date: 13.JUL.2024 11:23:56

11N20MIMO_Ant2_5300

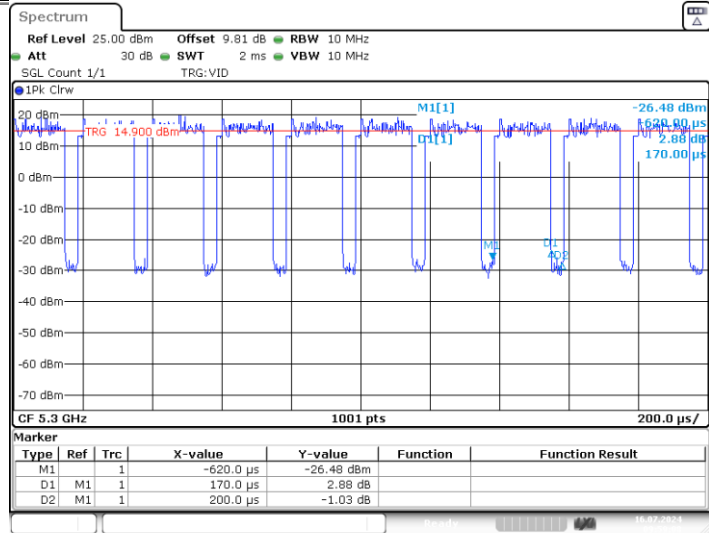


Date: 16.JUL.2024 09:59:07

11N20MIMO_Ant1_5320

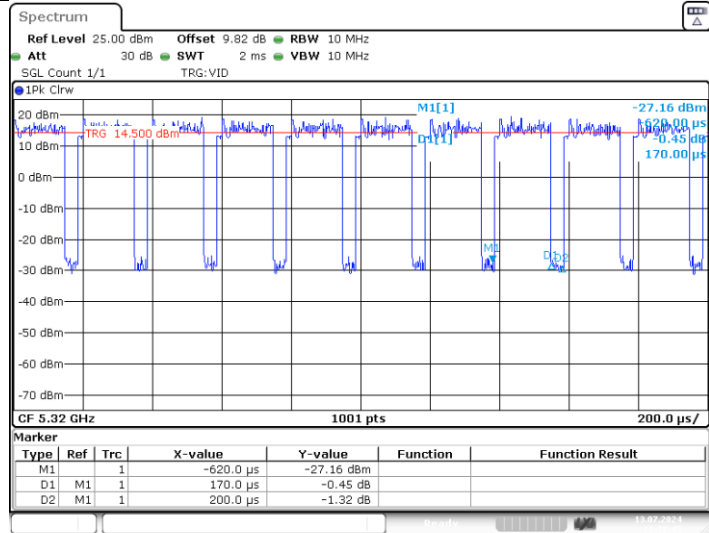


Date: 13.JUL.2024 11:28:44

11N20MIMO_Ant2_5320

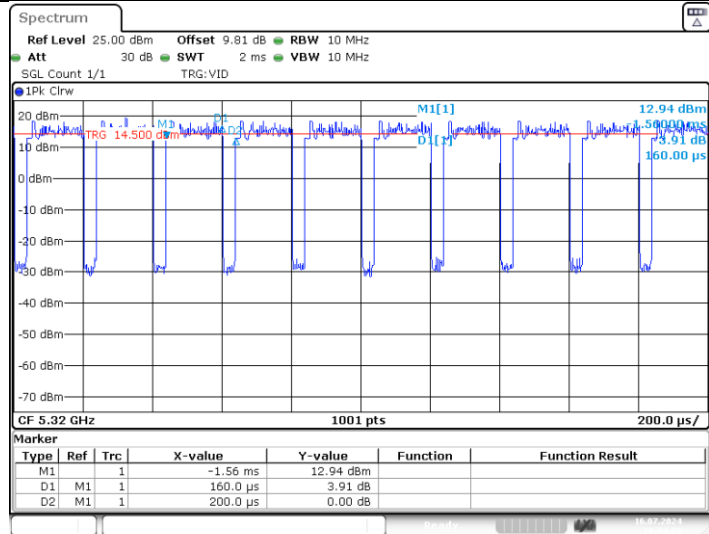


Date: 16.JUL.2024 10:04:08

11N20MIMO_Ant1_5500

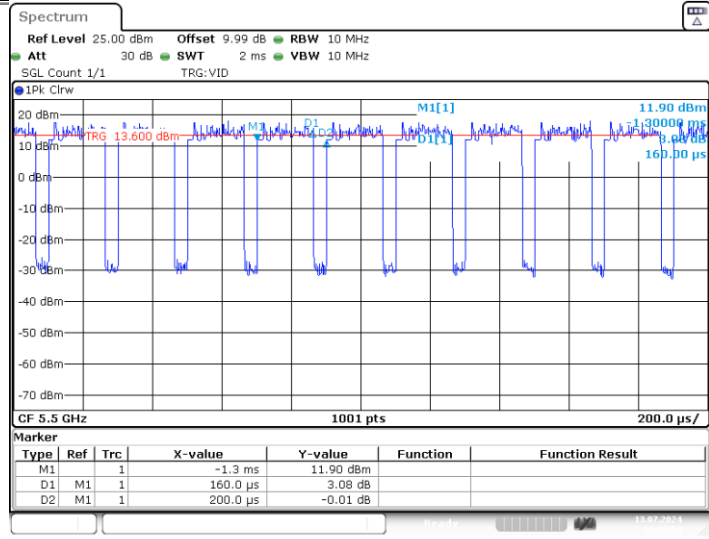


Date: 13.JUL.2024 11:33:53

11N20MIMO_Ant2_5500

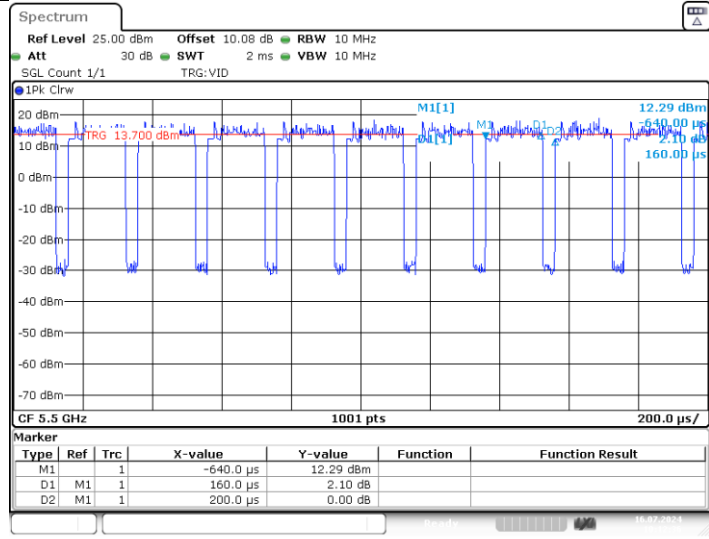

Date: 16.JUL.2024 10:12:35

11N20MIMO_Ant1_5600

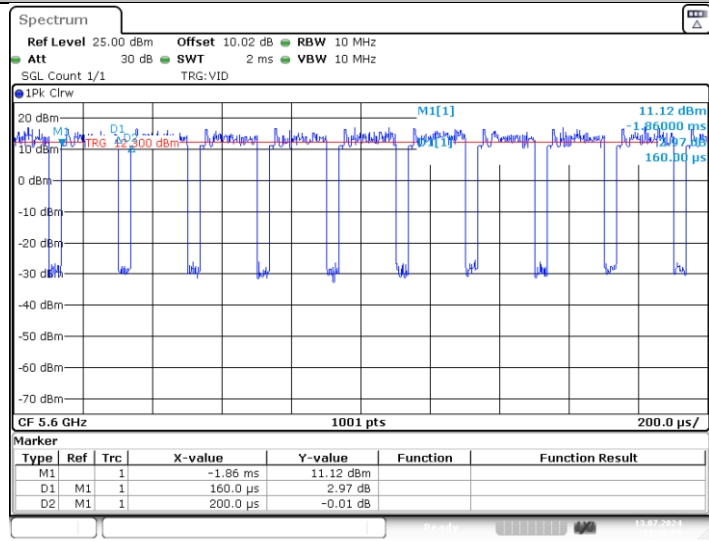

Date: 13.JUL.2024 11:38:59

11N20MIMO_Ant2_5600