


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	high Limit (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	31.71	37	PASS
GPRS1900 1 Slot	661	1880	31.95	37	PASS
GPRS1900 1 Slot	810	1909.8	31.95	37	PASS
GPRS1900 2 Slot	512	1850.2	31.55	37	PASS
GPRS1900 2 Slot	661	1880	31.77	37	PASS
GPRS1900 2 Slot	810	1909.8	31.80	37	PASS
GPRS1900 3 Slot	512	1850.2	30.85	37	PASS
GPRS1900 3 Slot	661	1880	31.07	37	PASS
GPRS1900 3 Slot	810	1909.8	31.25	37	PASS
GPRS1900 4 Slot	512	1850.2	30.09	37	PASS
GPRS1900 4 Slot	661	1880	30.24	37	PASS
GPRS1900 4 Slot	810	1909.8	30.52	37	PASS
GPRS850 1 Slot	128	824.2	33.59	37	PASS
GPRS850 1 Slot	189	836.4	33.77	37	PASS
GPRS850 1 Slot	251	848.8	33.58	37	PASS
GPRS850 2 Slot	128	824.2	32.31	37	PASS
GPRS850 2 Slot	189	836.4	32.52	37	PASS
GPRS850 2 Slot	251	848.8	32.21	37	PASS
GPRS850 3 Slot	128	824.2	29.40	37	PASS
GPRS850 3 Slot	189	836.4	29.60	37	PASS
GPRS850 3 Slot	251	848.8	29.21	37	PASS
GPRS850 4 Slot	128	824.2	27.56	37	PASS
GPRS850 4 Slot	189	836.4	27.83	37	PASS
GPRS850 4 Slot	251	848.8	27.36	37	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.791258645	13.00	PASS
GPRS1900	661	1880	2.809100529	13.00	PASS
GPRS1900	810	1909.8	2.830041841	13.00	PASS
GPRS850	128	824.2	2.928438072	13.00	PASS
GPRS850	189	836.4	2.888070624	13.00	PASS
GPRS850	251	848.8	2.848879686	13.00	PASS

GPRS1900 Channel=512

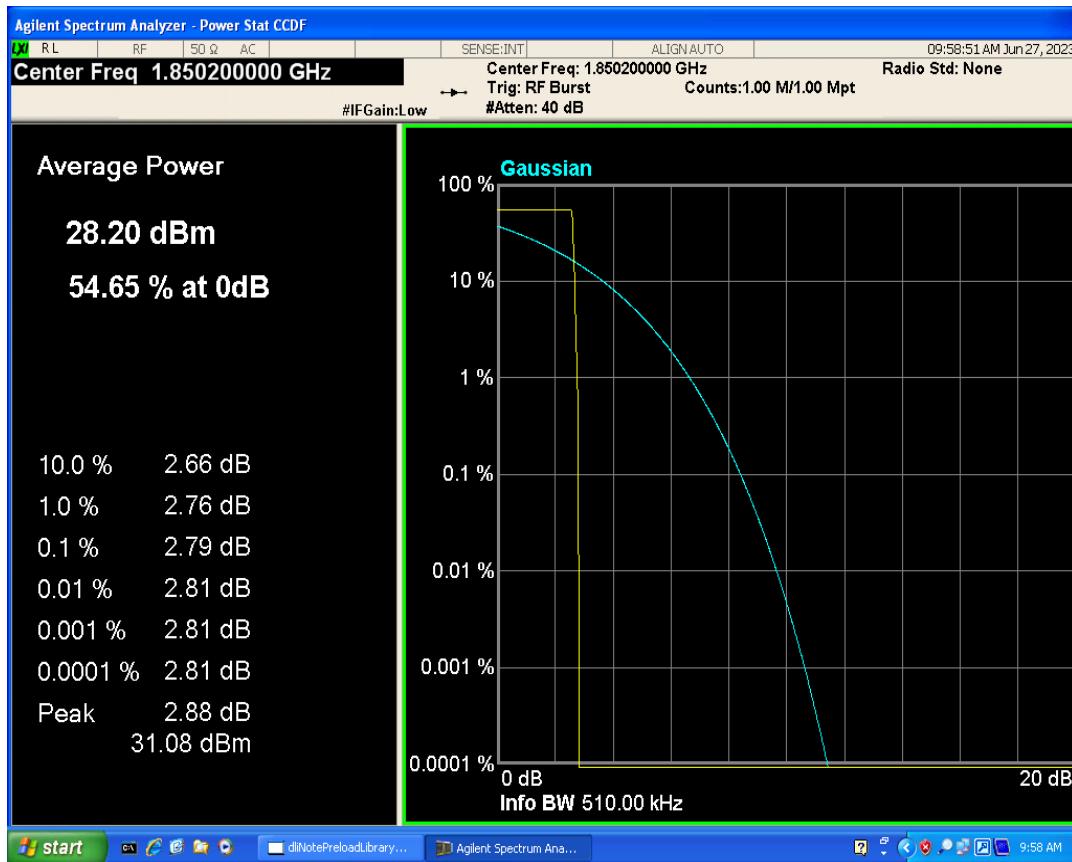


GPRS1900 Channel=661

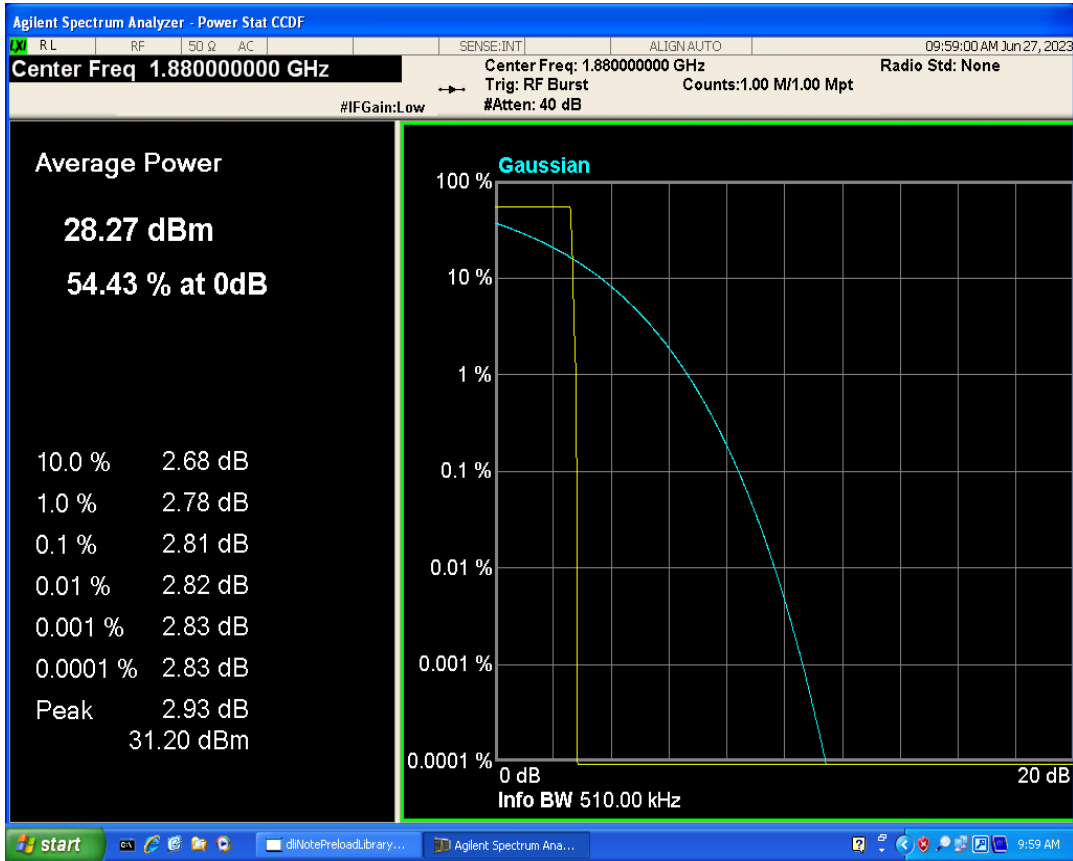


GPRS1900 Channel=810




GPRS850 Channel=128

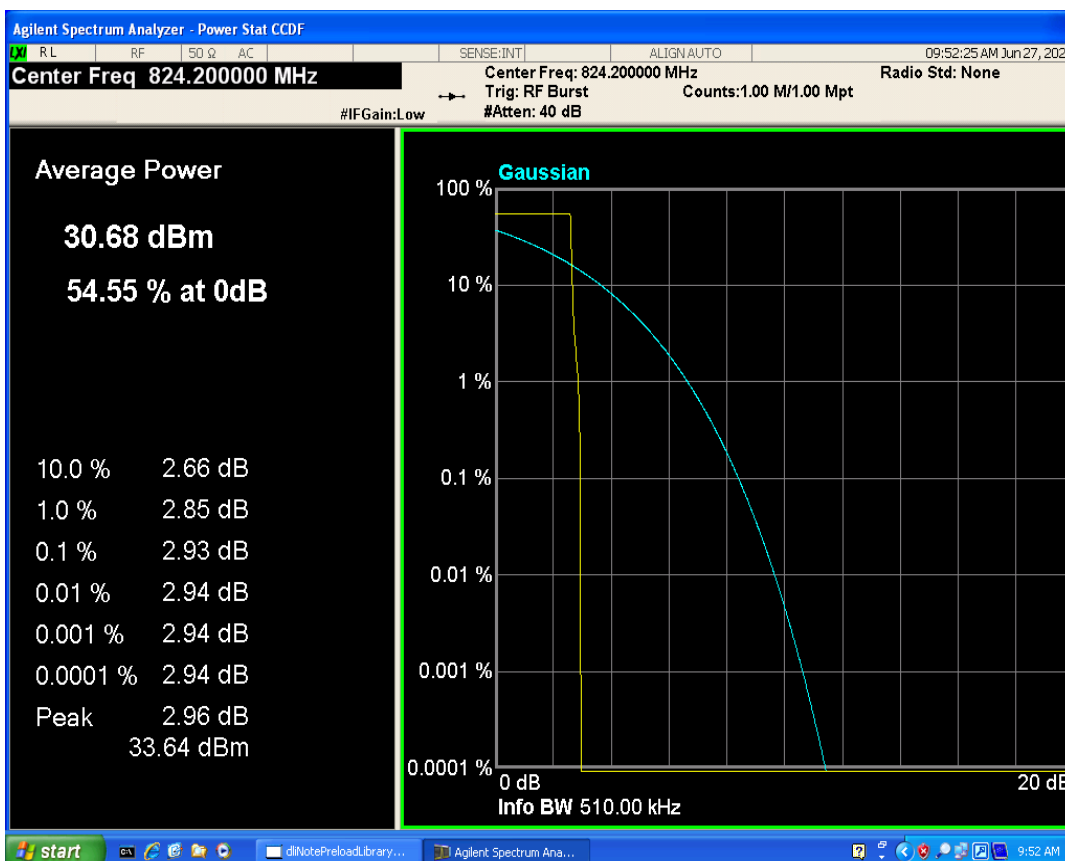

GPRS850 Channel=189

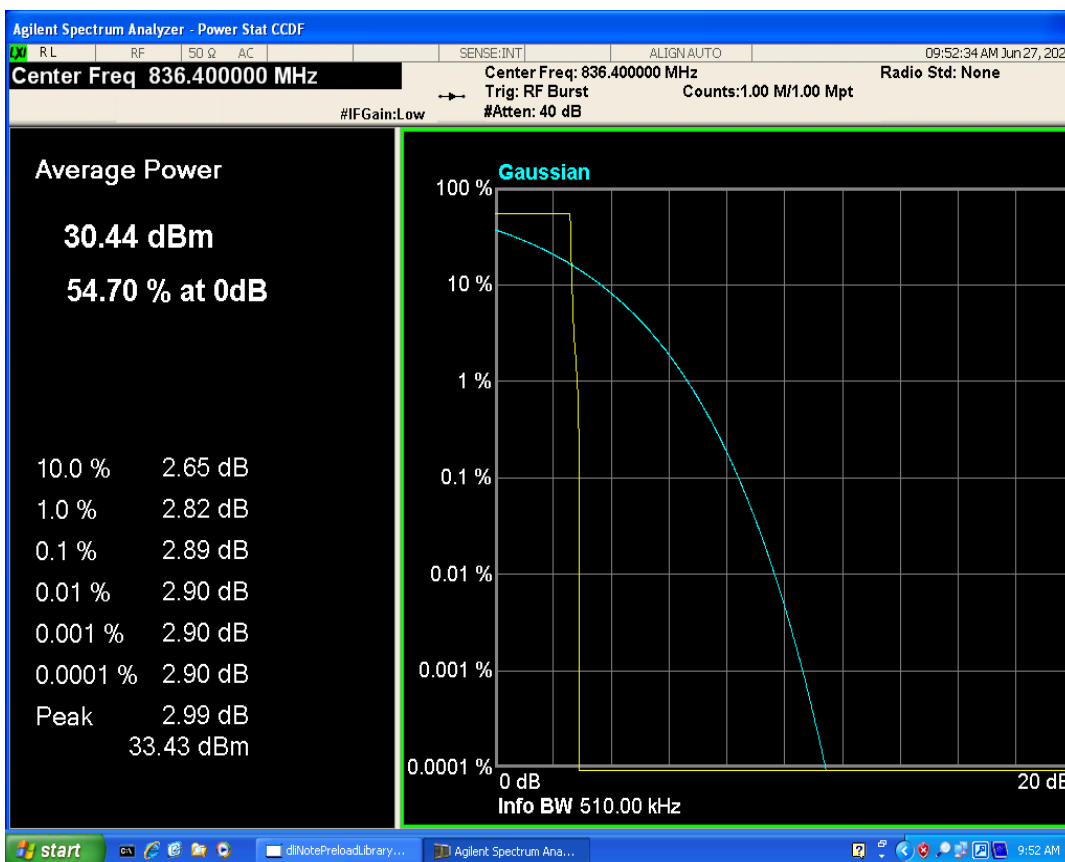


GPRS850 Channel=251

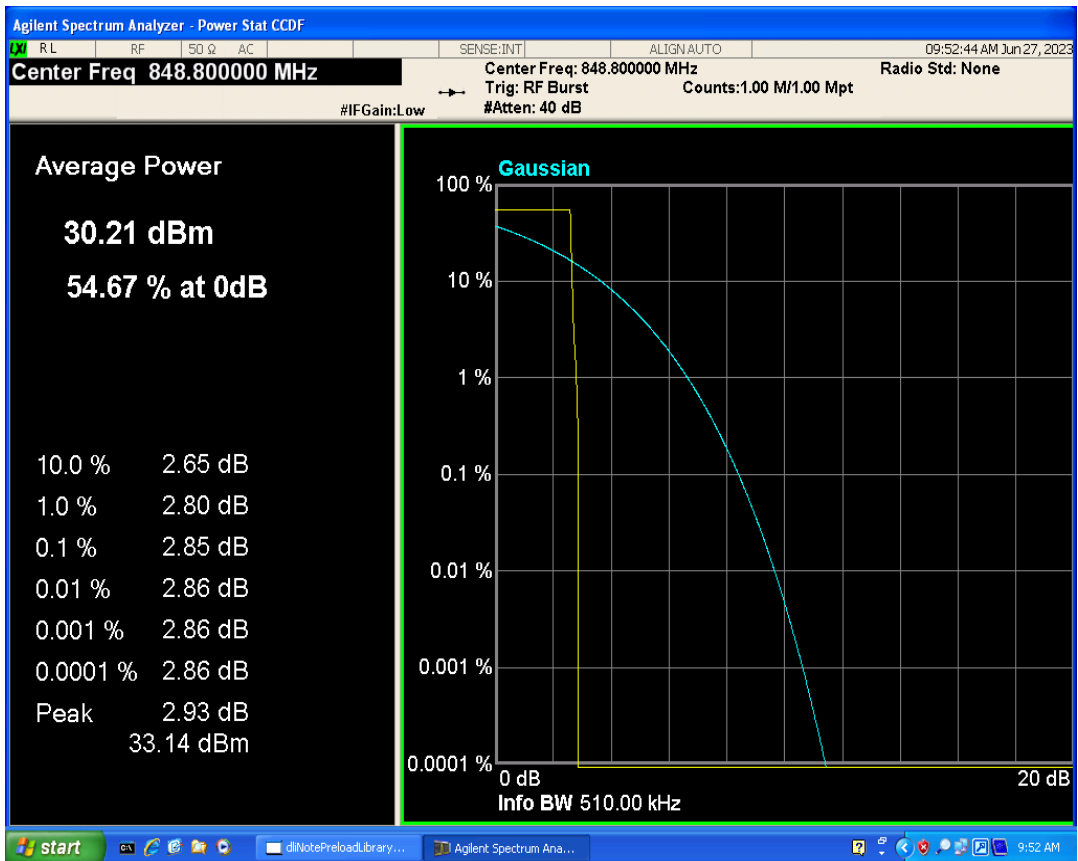


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	241.525	321.953	PASS
GPRS1900	661	1880	236.251	312.063	PASS
GPRS1900	810	1909.8	243.174	313.899	PASS
GPRS850	128	824.2	243.542	314.416	PASS
GPRS850	189	836.4	245.836	320.926	PASS
GPRS850	251	848.8	243.351	323.652	PASS


GPRS1900 Channel=512

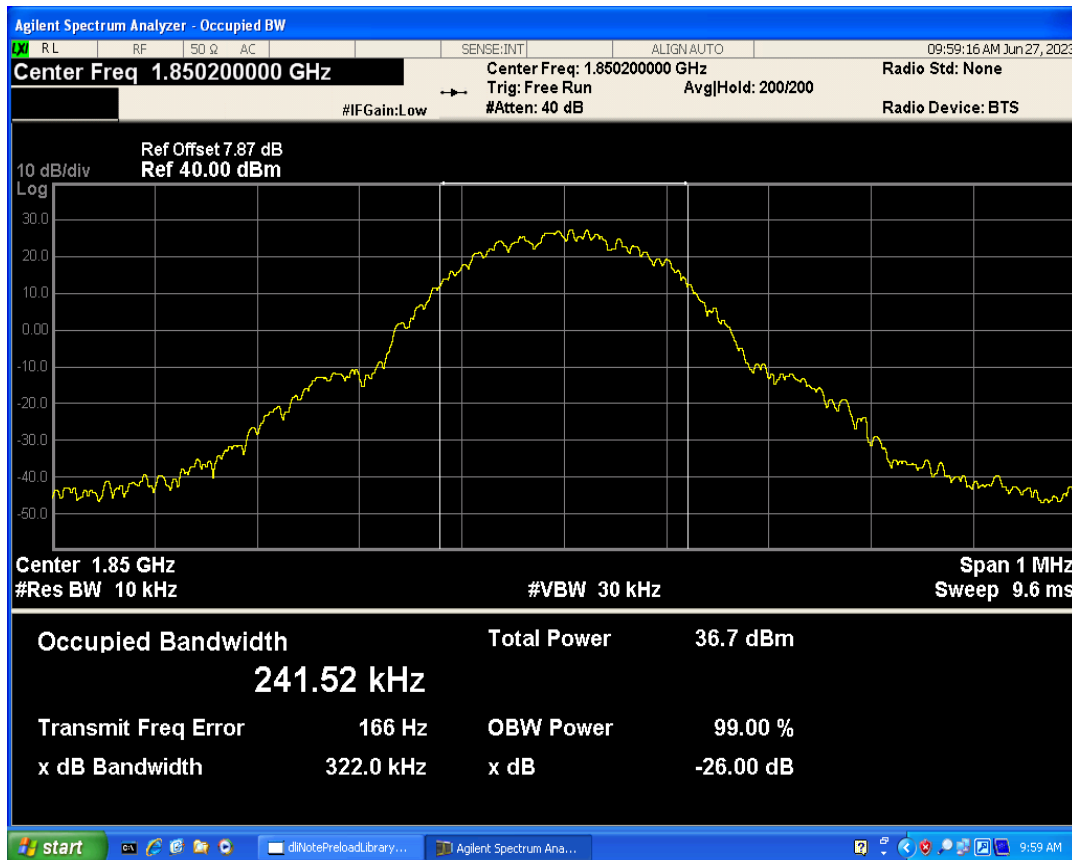


GPRS1900 Channel=661

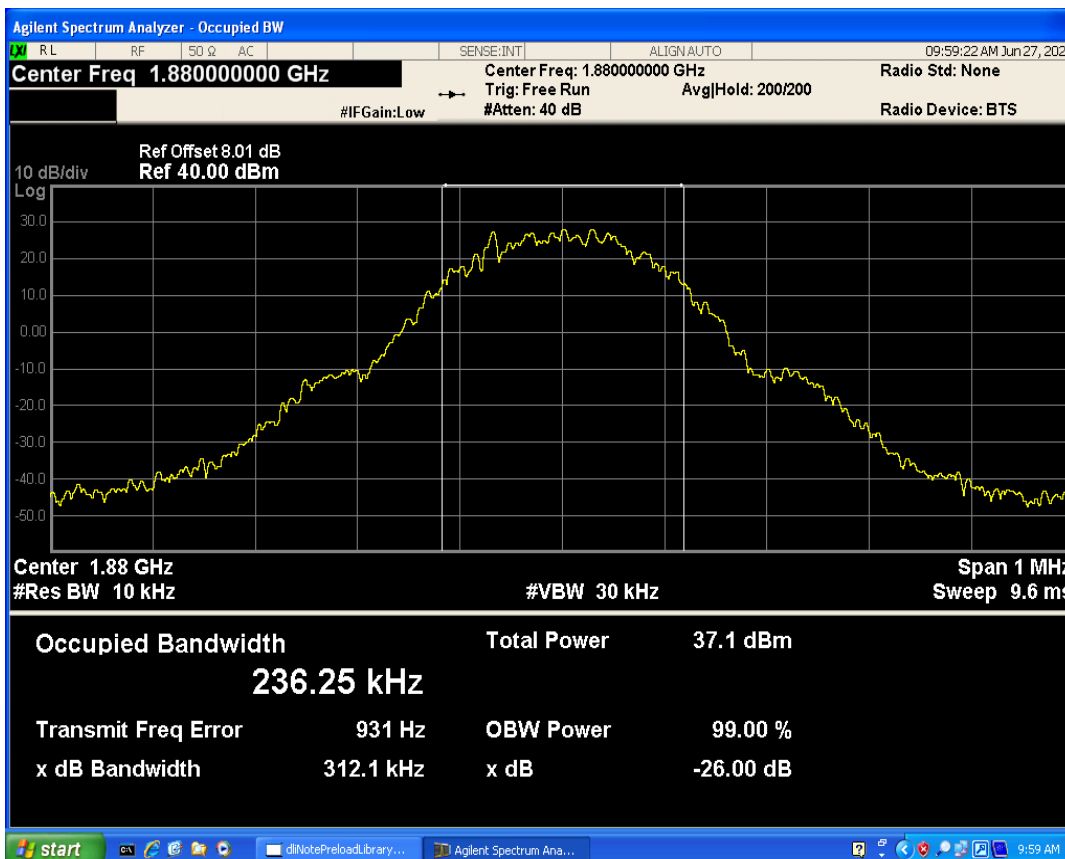


GPRS1900 Channel=810

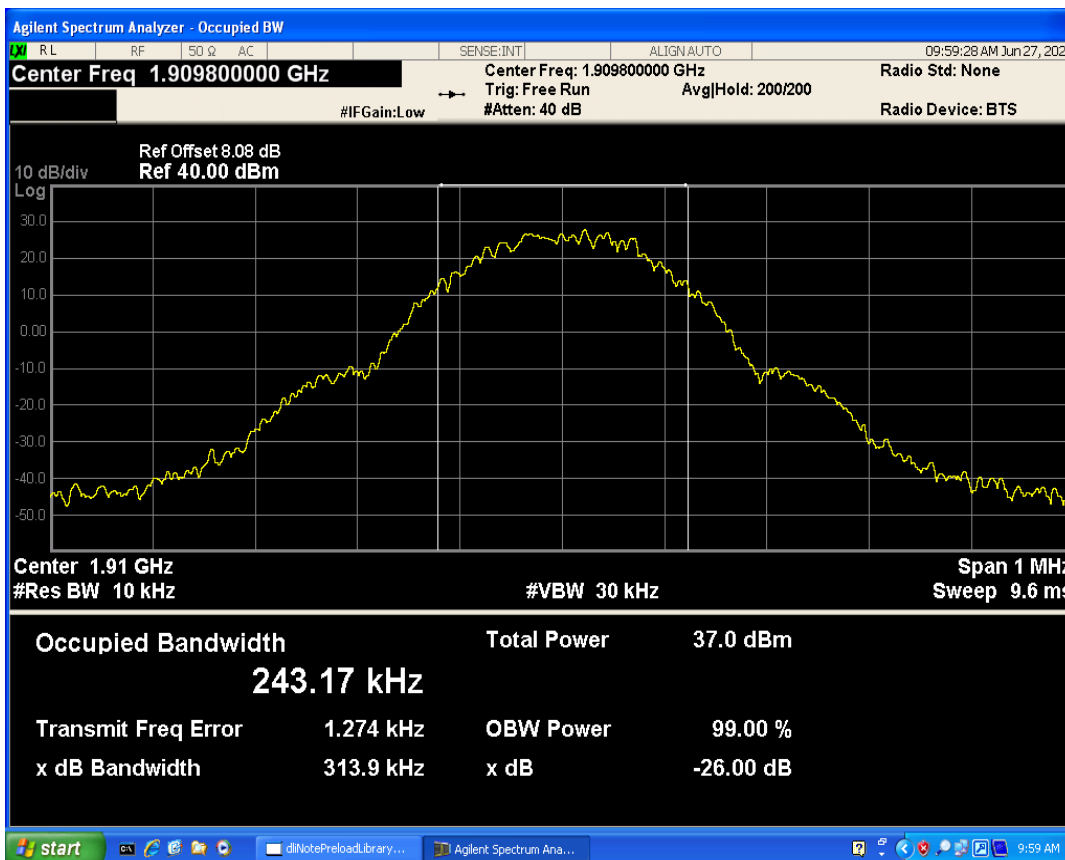


GPRS850 Channel=128

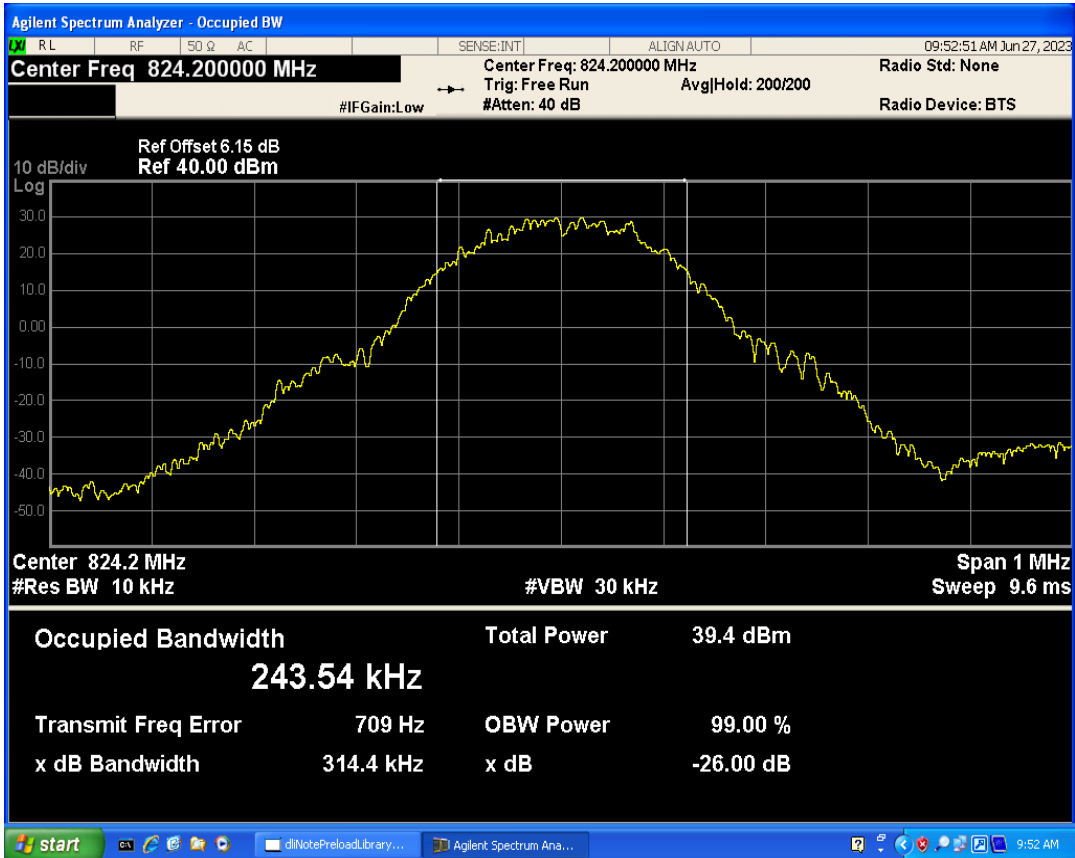

GPRS850 Channel=189

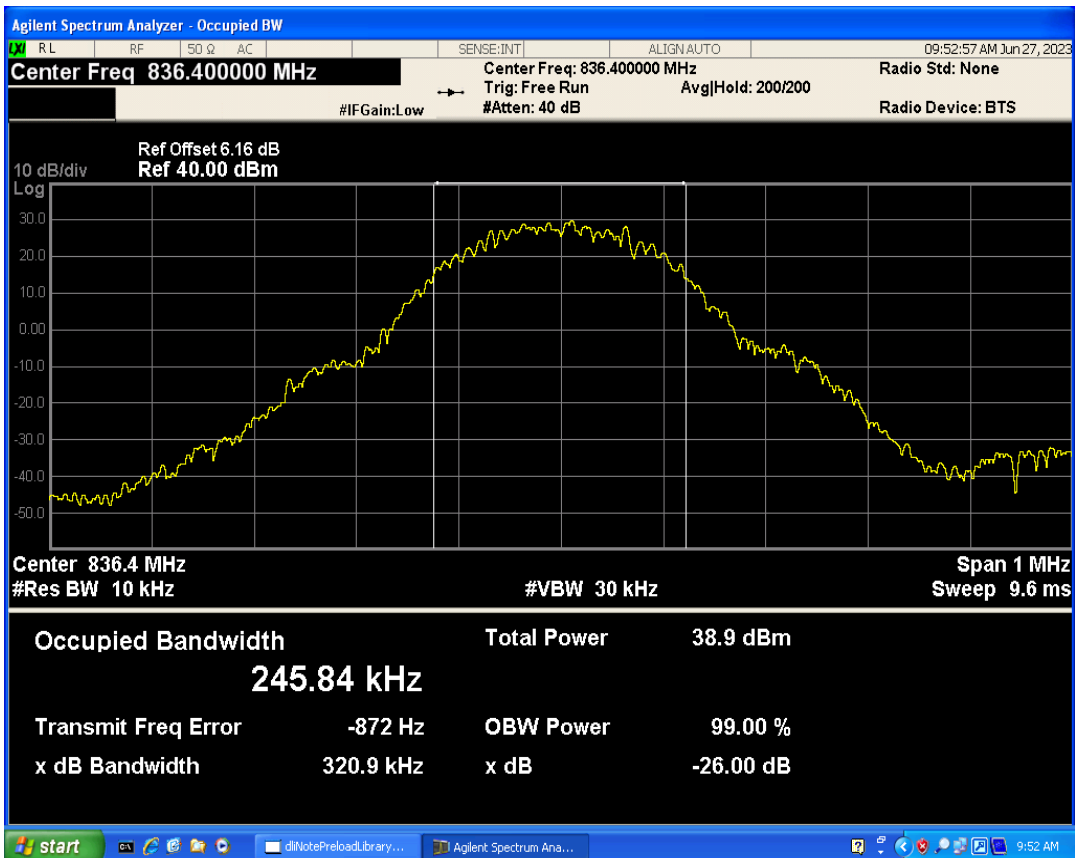


GPRS850 Channel=251

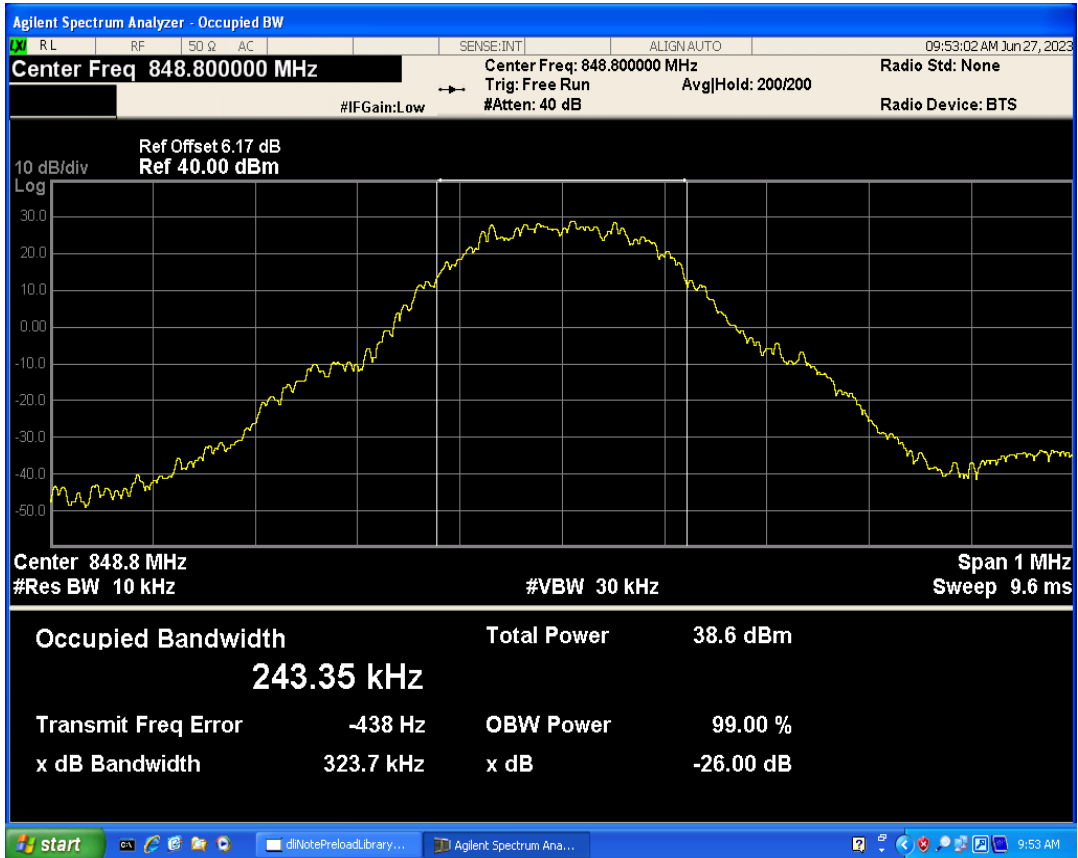


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1850.00	-31.49	-13	PASS
GPRS1900	810	1909.8	1910.02	-28.79	-13	PASS
GPRS850	128	824.2	824.00	-26.32	-13	PASS
GPRS850	251	848.8	849.02	-26.71	-13	PASS


GPRS1900 Channel=512

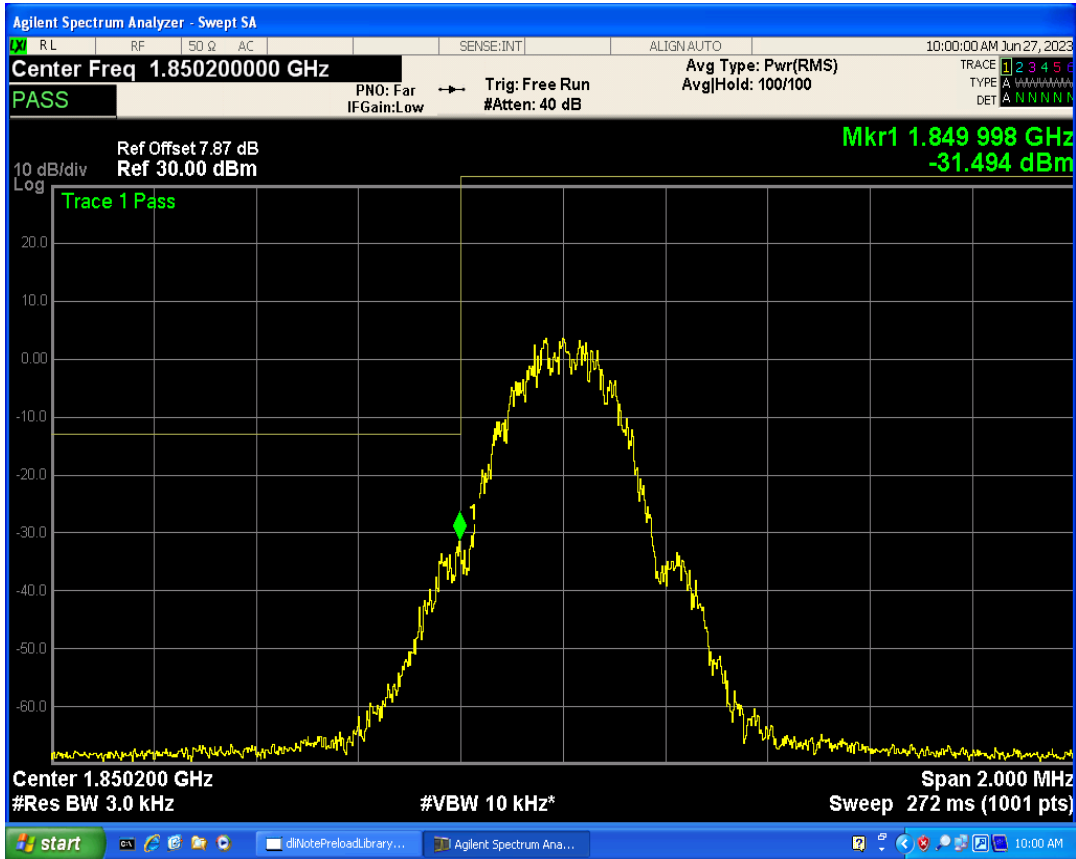

GPRS1900 Channel=810

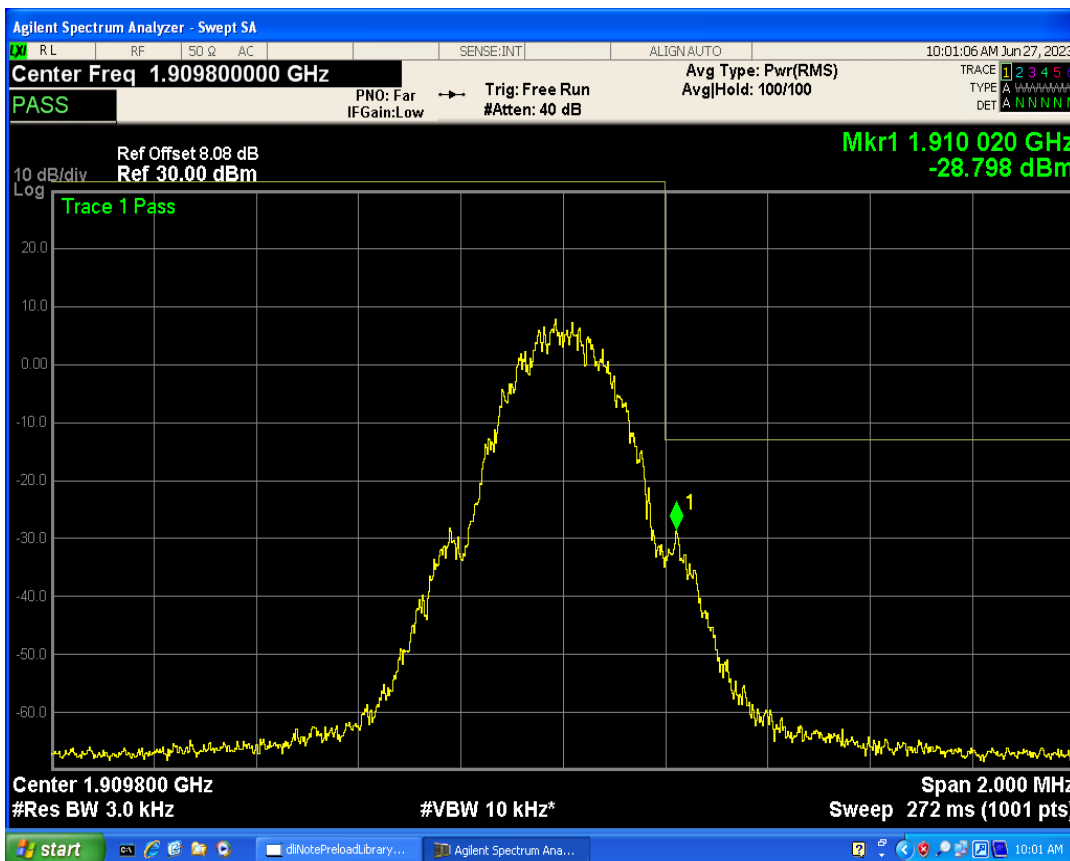

GPRS850 Channel=128

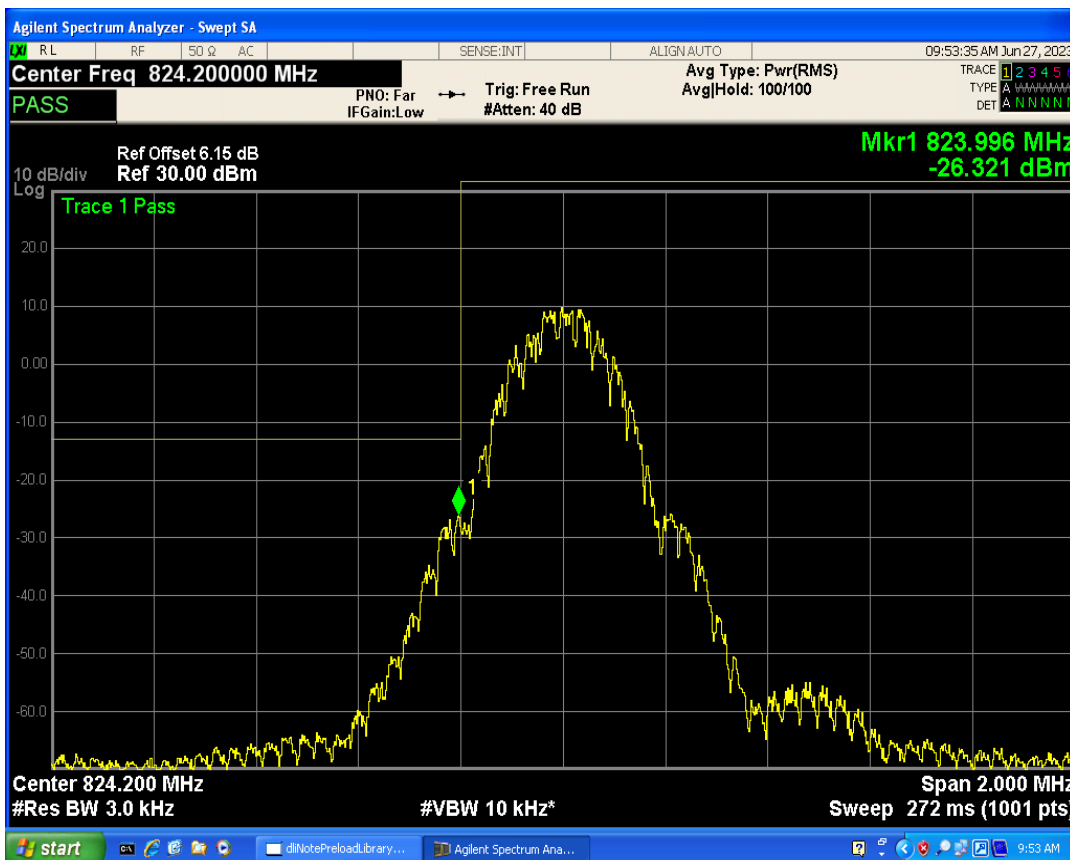


GPRS850 Channel=251




Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	26041.41	-18.43	-13	PASS
GPRS1900	661	1880	25971.26	-18.01	-13	PASS
GPRS1900	810	1909.8	26005.01	-18.06	-13	PASS
GPRS850	128	824.2	25571.56	-19.89	-13	PASS
GPRS850	189	836.4	25580.83	-19.92	-13	PASS
GPRS850	251	848.8	25817.74	-20.62	-13	PASS


GPRS1900 Channel=512

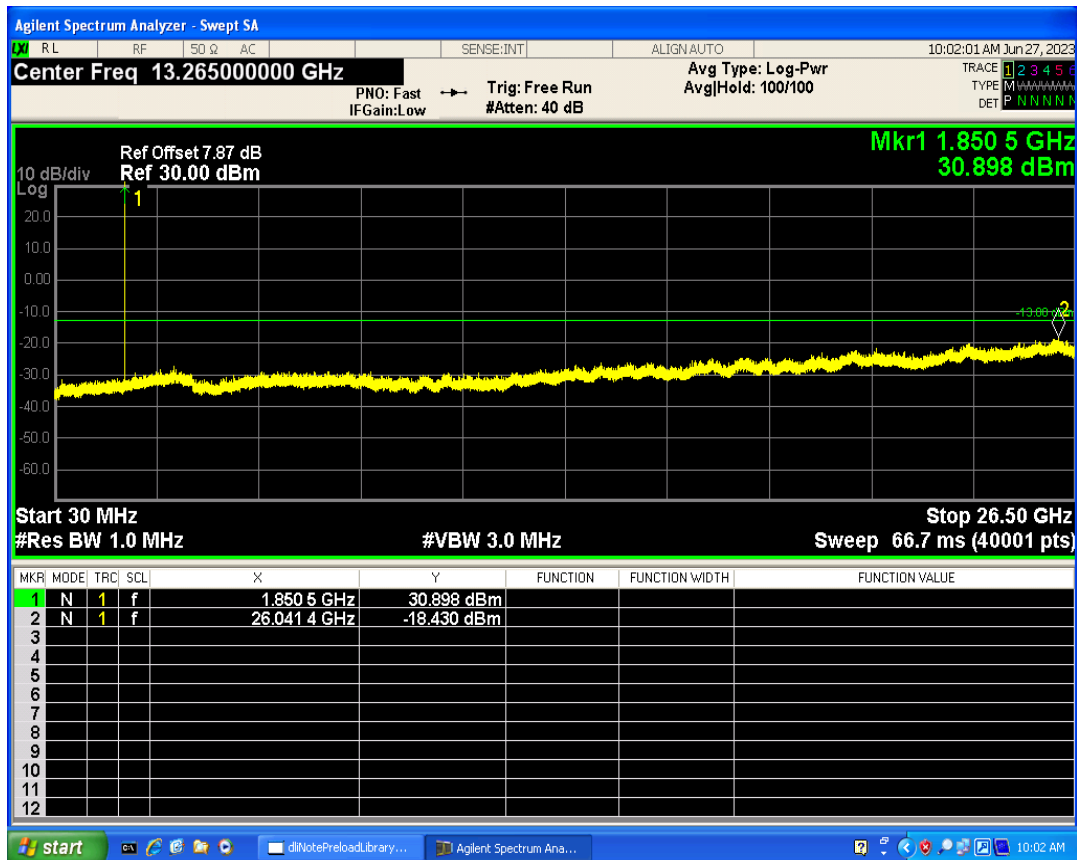


GPRS1900 Channel=810

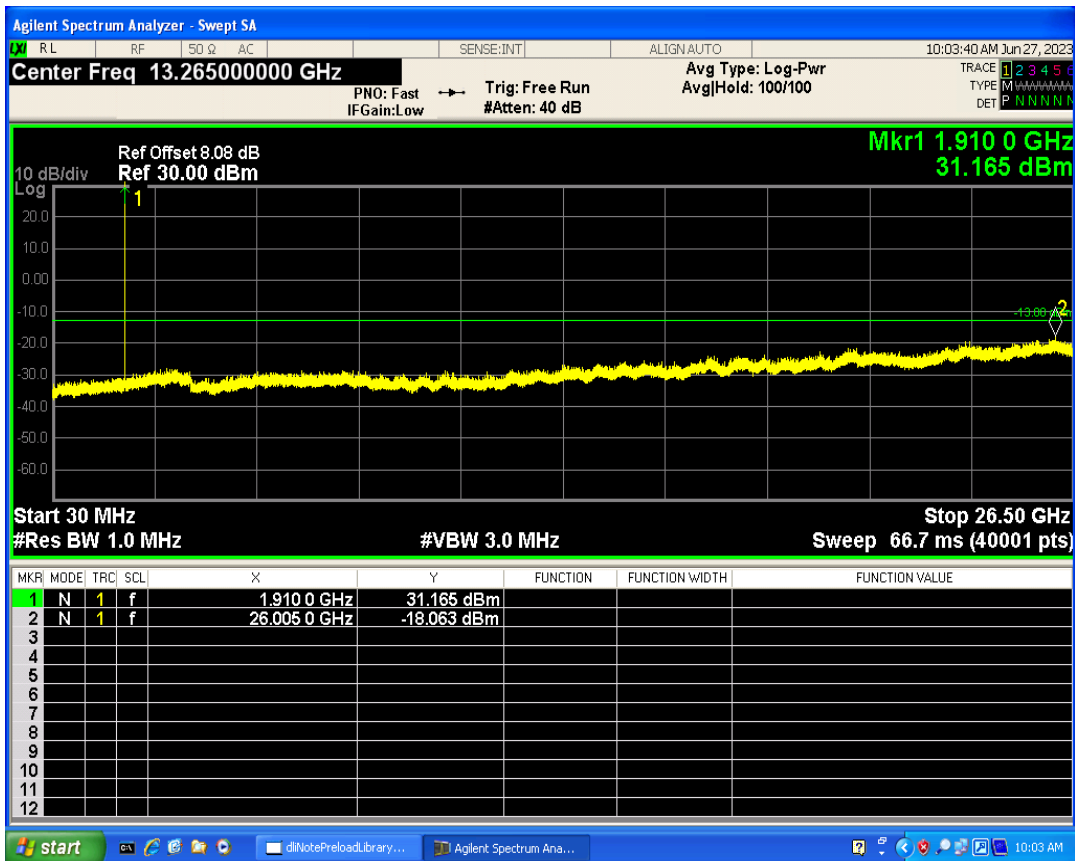


GPRS1900 Channel=661

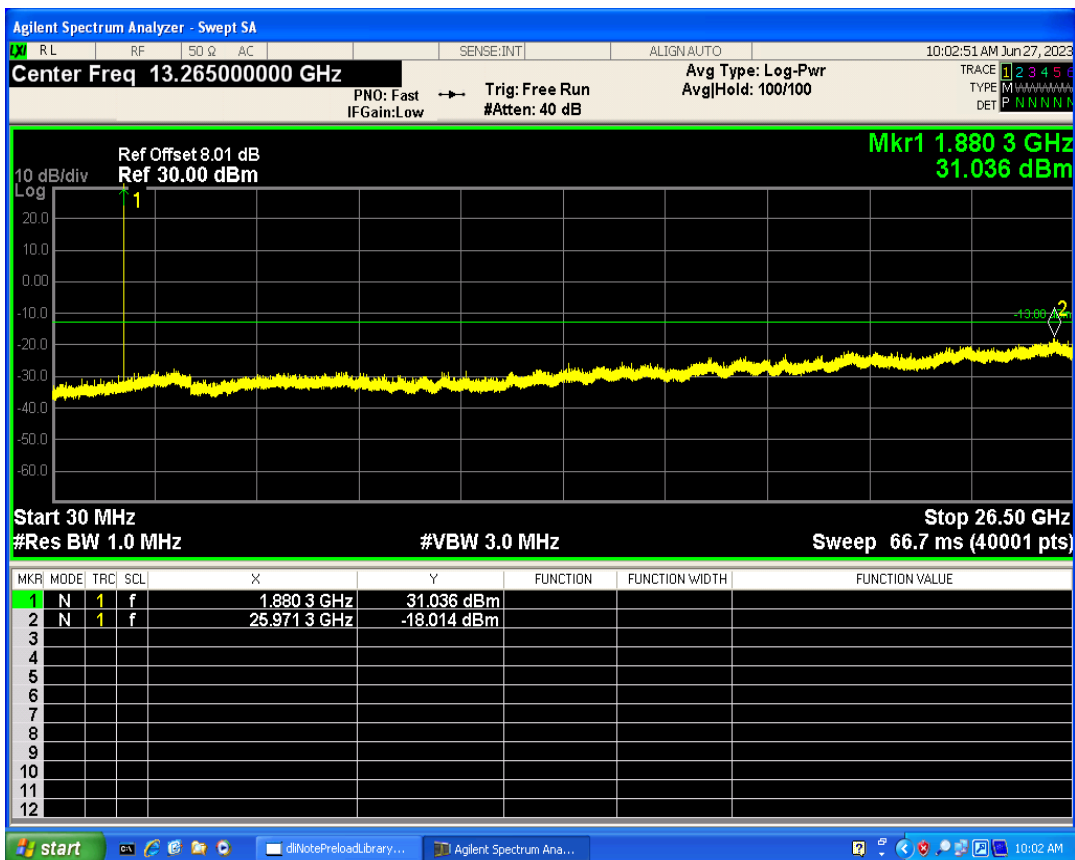

GPRS850 Channel=128

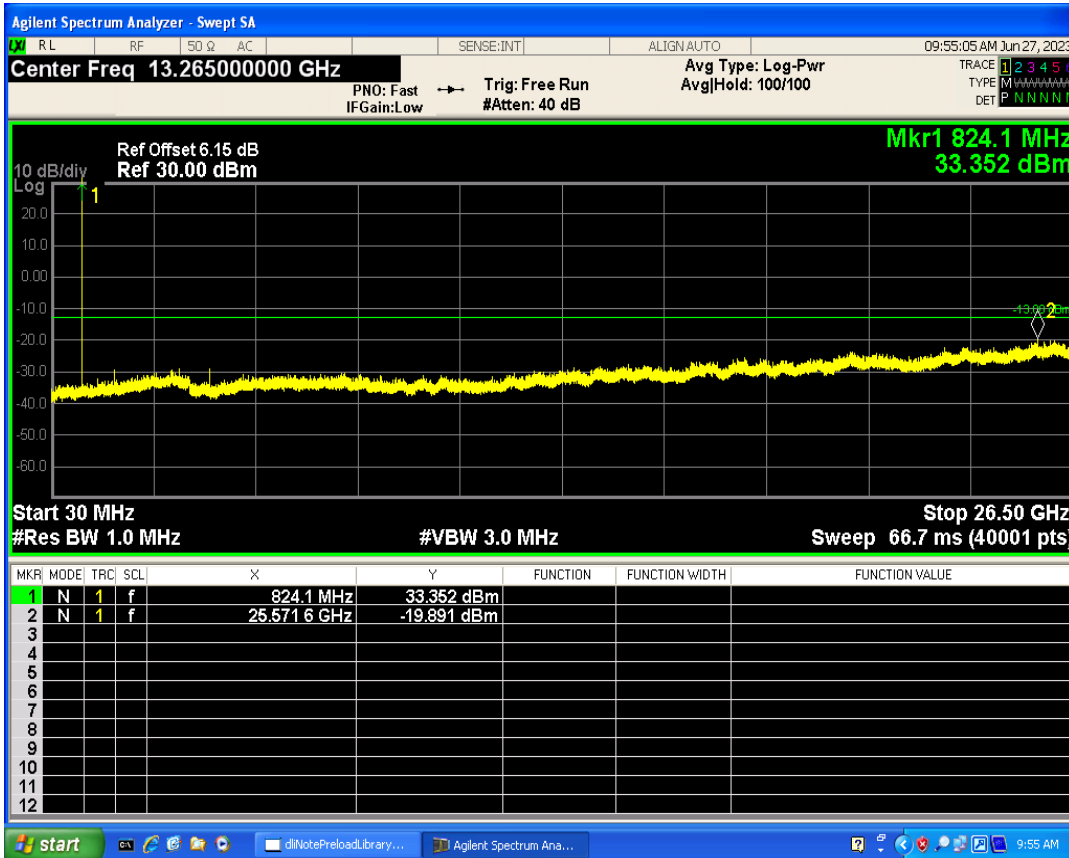

GPRS850 Channel=251

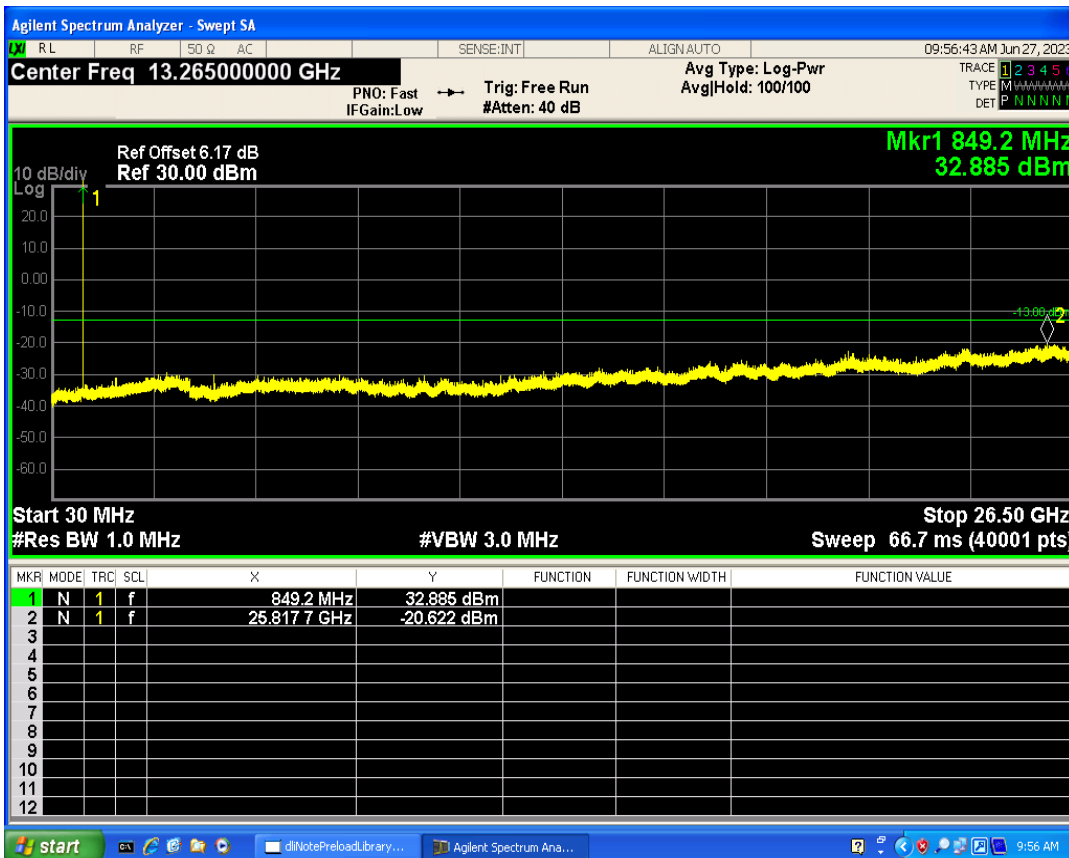

GPRS850 Channel=189

