


Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	high Limit (dBm)	Verdict
GPRS1900 1 Slot	512	1850.2	28.68	37	PASS
GPRS1900 1 Slot	661	1880	28.81	37	PASS
GPRS1900 1 Slot	810	1909.8	28.24	37	PASS
GPRS1900 2 Slot	512	1850.2	28.48	37	PASS
GPRS1900 2 Slot	661	1880	28.62	37	PASS
GPRS1900 2 Slot	810	1909.8	28.12	37	PASS
GPRS1900 3 Slot	512	1850.2	27.64	37	PASS
GPRS1900 3 Slot	661	1880	27.95	37	PASS
GPRS1900 3 Slot	810	1909.8	27.70	37	PASS
GPRS1900 4 Slot	512	1850.2	26.63	37	PASS
GPRS1900 4 Slot	661	1880	27.06	37	PASS
GPRS1900 4 Slot	810	1909.8	27.12	37	PASS
GPRS850 1 Slot	128	824.2	33.70	37	PASS
GPRS850 1 Slot	189	836.4	33.53	37	PASS
GPRS850 1 Slot	251	848.8	33.82	37	PASS
GPRS850 2 Slot	128	824.2	32.44	37	PASS
GPRS850 2 Slot	189	836.4	32.17	37	PASS
GPRS850 2 Slot	251	848.8	32.46	37	PASS
GPRS850 3 Slot	128	824.2	29.66	37	PASS
GPRS850 3 Slot	189	836.4	29.35	37	PASS
GPRS850 3 Slot	251	848.8	29.62	37	PASS
GPRS850 4 Slot	128	824.2	27.87	37	PASS
GPRS850 4 Slot	189	836.4	27.52	37	PASS
GPRS850 4 Slot	251	848.8	27.80	37	PASS


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.773461854	13.00	PASS
GPRS1900	661	1880	2.82722488	13.00	PASS
GPRS1900	810	1909.8	2.796555091	13.00	PASS
GPRS850	128	824.2	2.766809872	13.00	PASS
GPRS850	189	836.4	2.801649485	13.00	PASS
GPRS850	251	848.8	3.353585069	13.00	PASS


GPRS1900 Channel=661

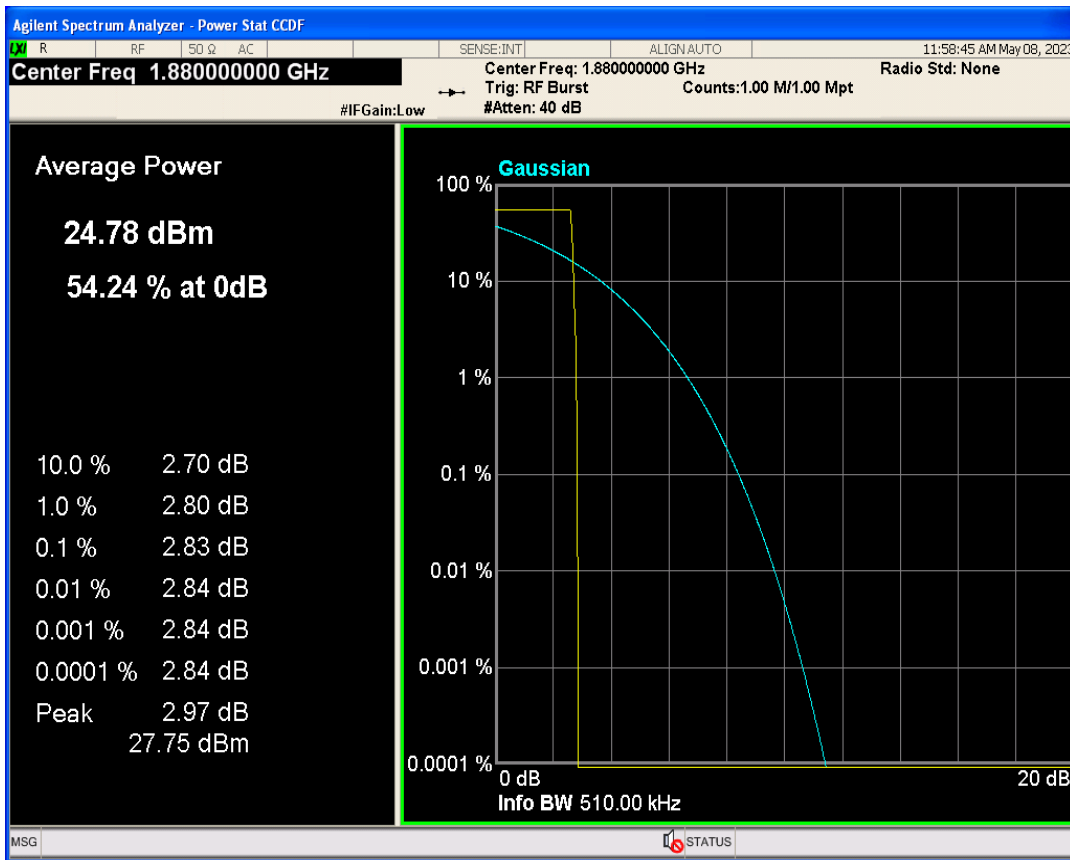


GPRS1900 Channel=512

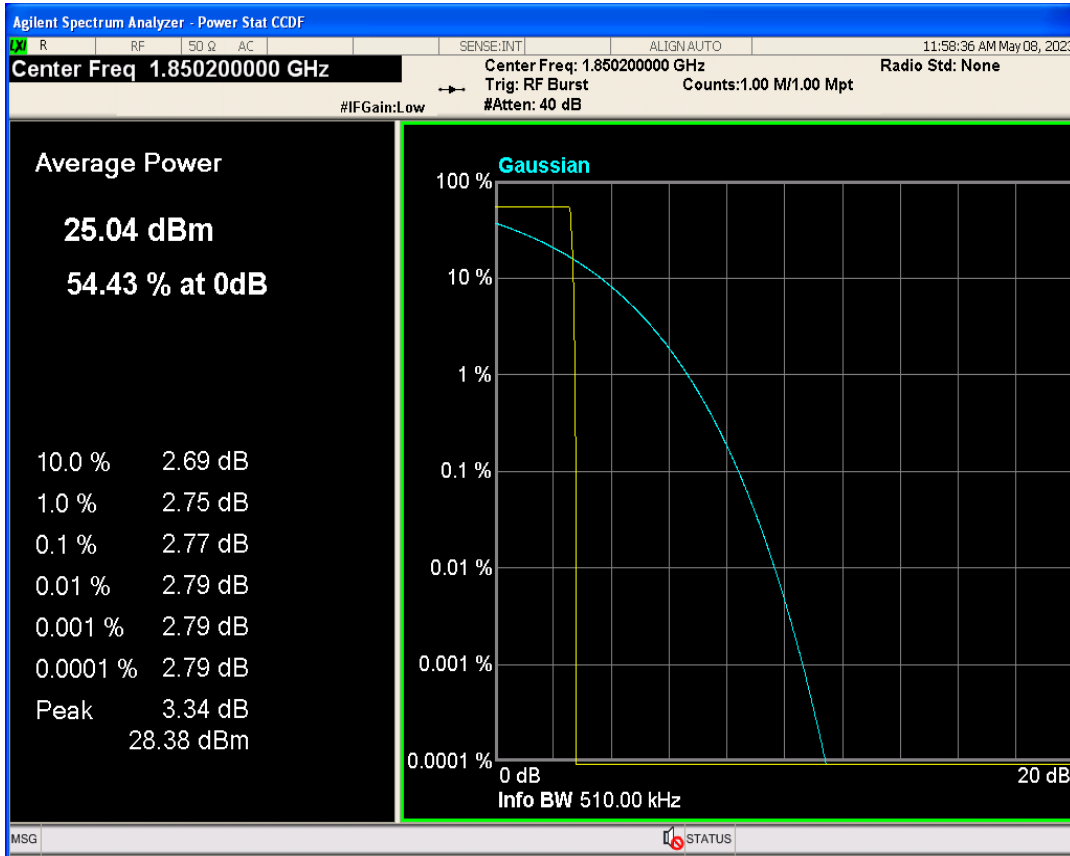


GPRS1900 Channel=810

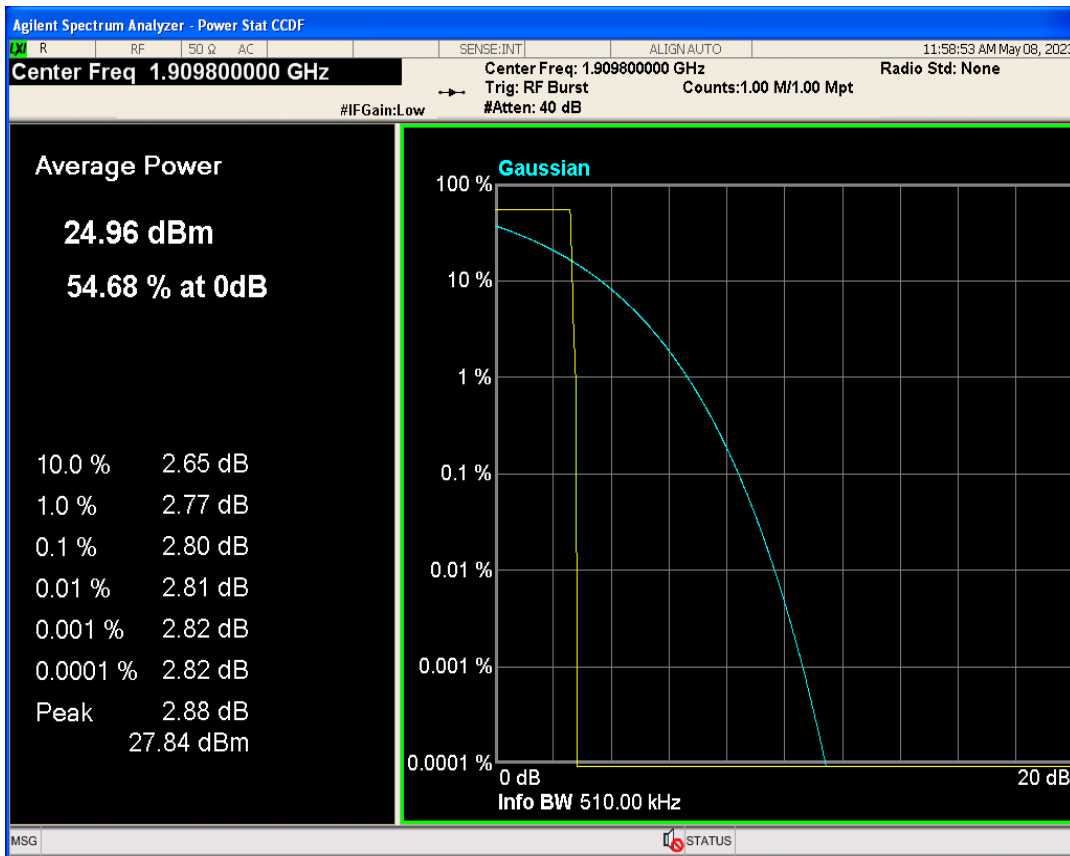


GPRS850 Channel=189

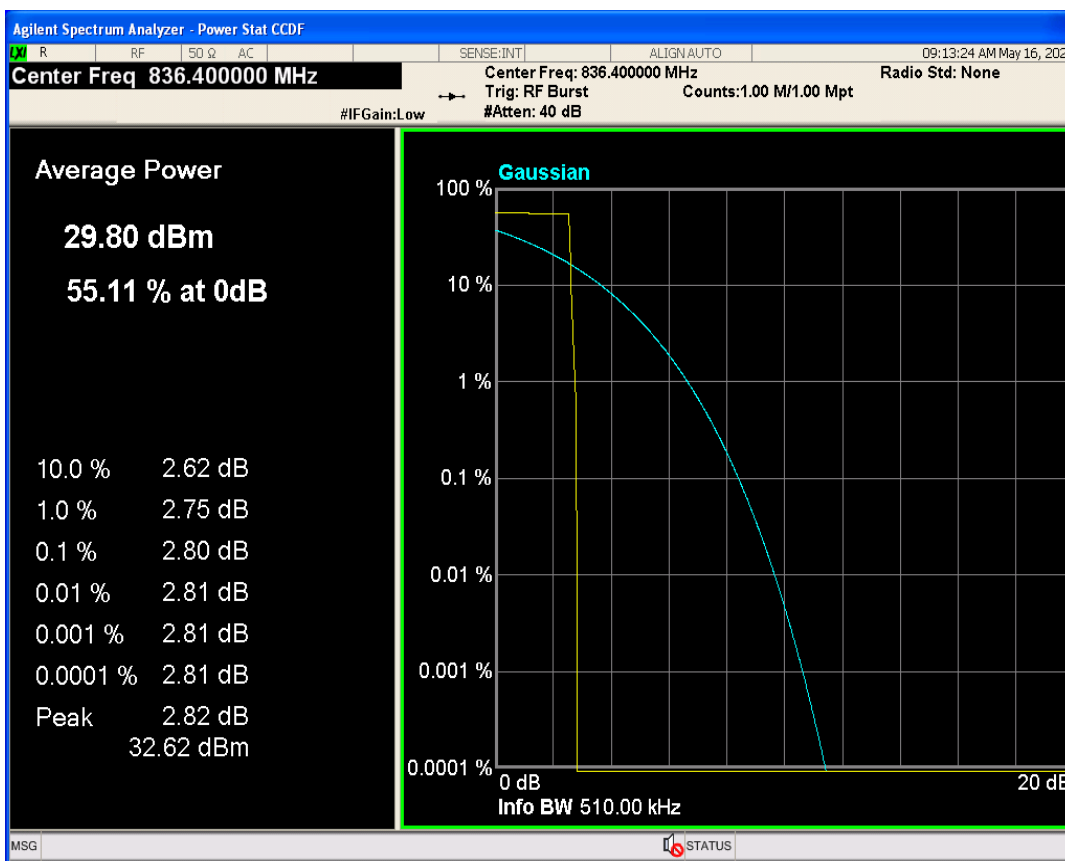

GPRS850 Channel=128

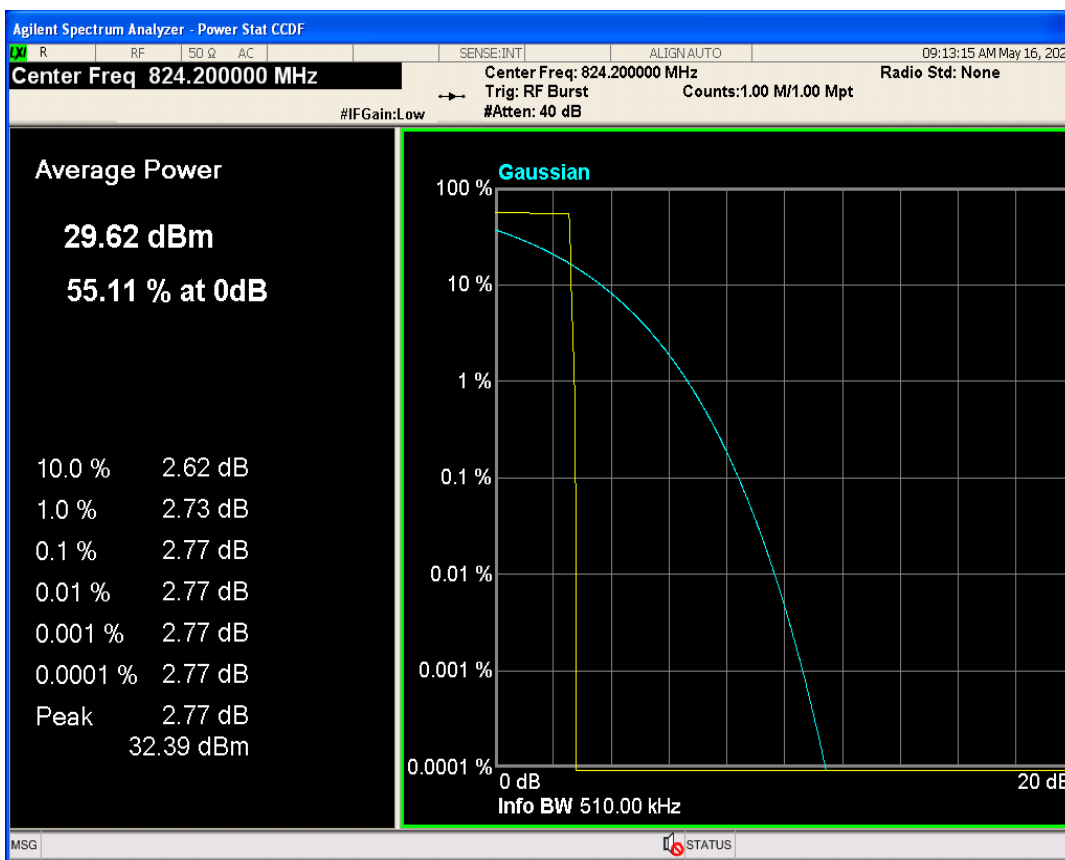


GPRS850 Channel=251

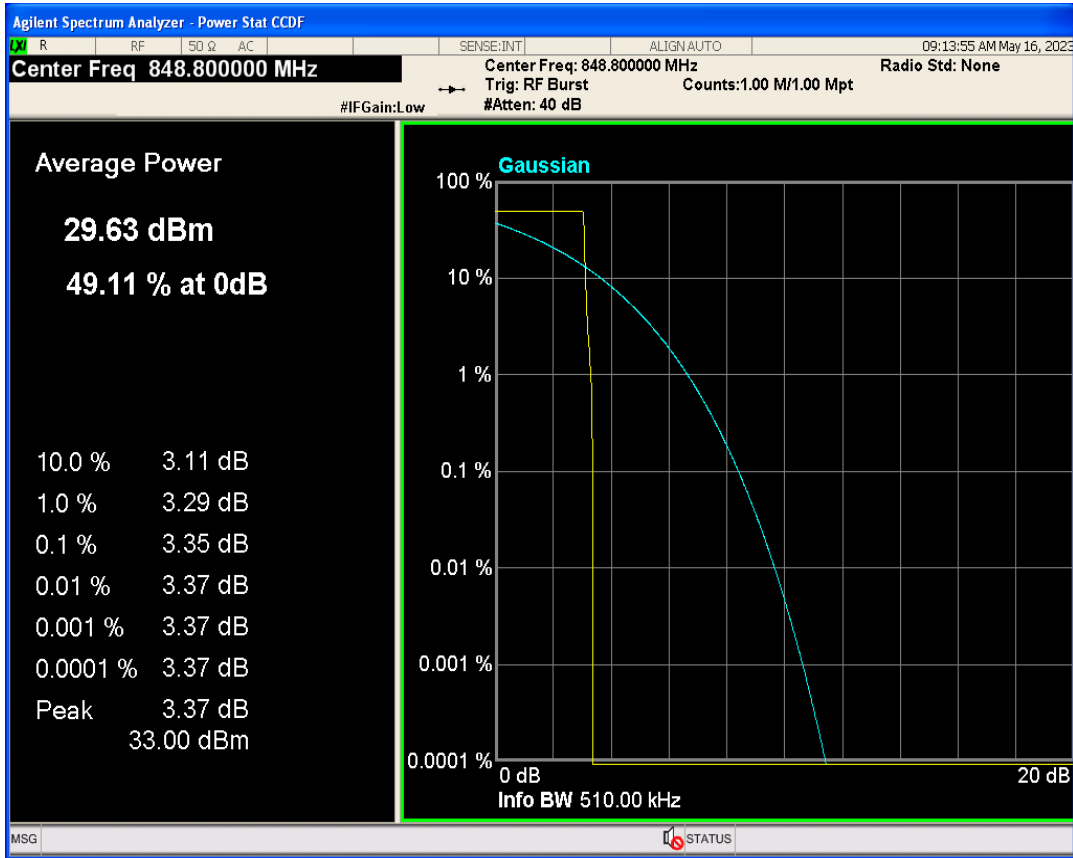


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	243.999	307.156	PASS
GPRS1900	661	1880	246.918	312.907	PASS
GPRS1900	810	1909.8	251.125	322.749	PASS
GPRS850	128	824.2	249.115	321.600	PASS
GPRS850	189	836.4	245.388	321.742	PASS
GPRS850	251	848.8	250.823	324.864	PASS


GPRS1900 Channel=512

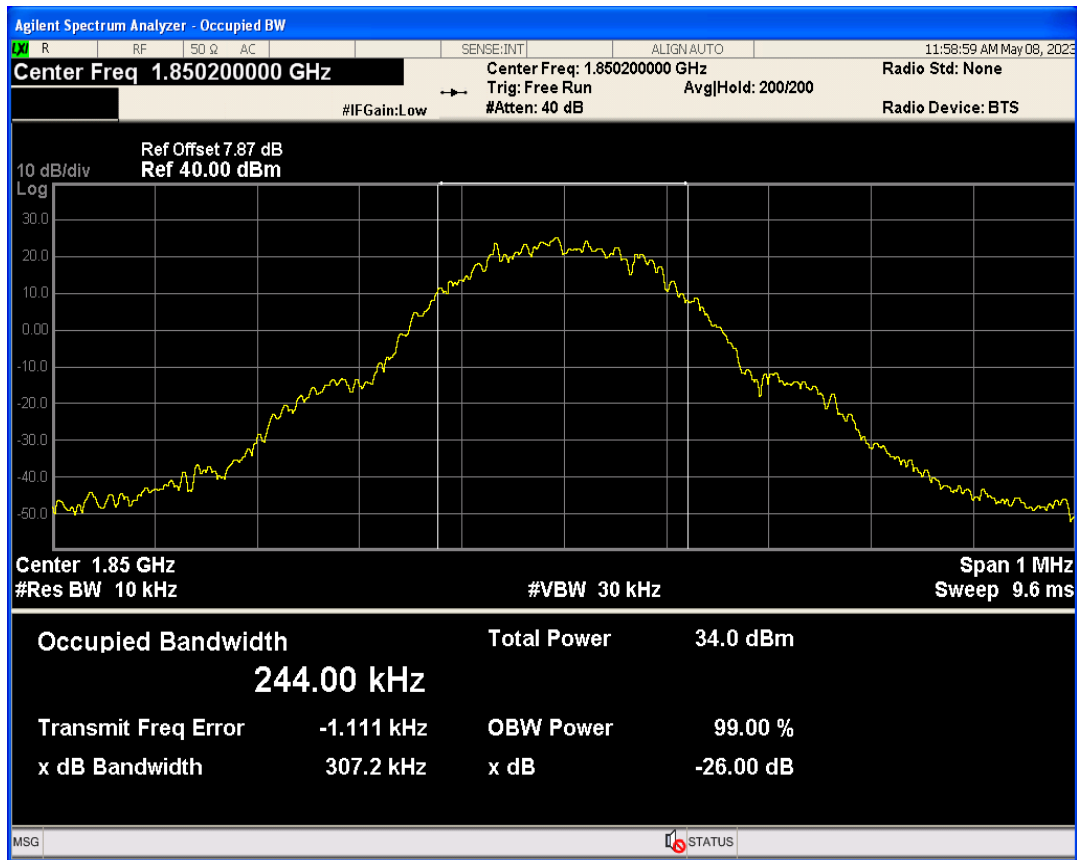


GPRS1900 Channel=810

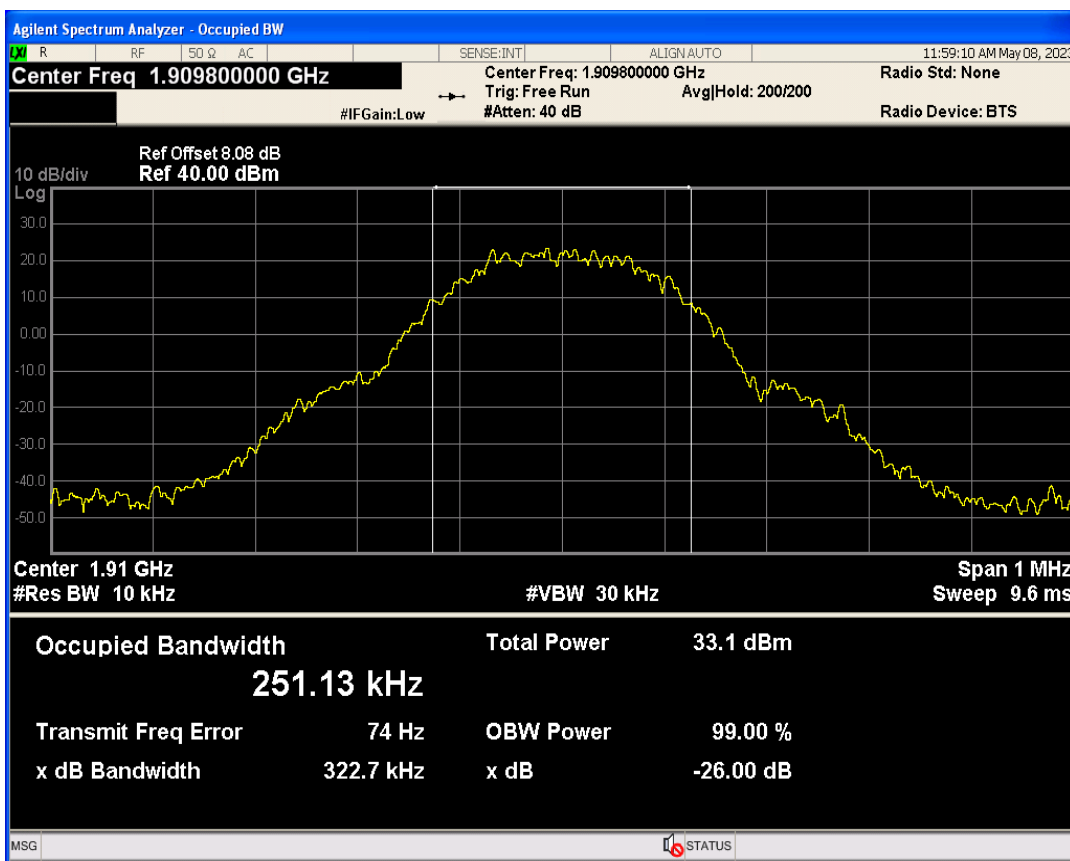


GPRS1900 Channel=661

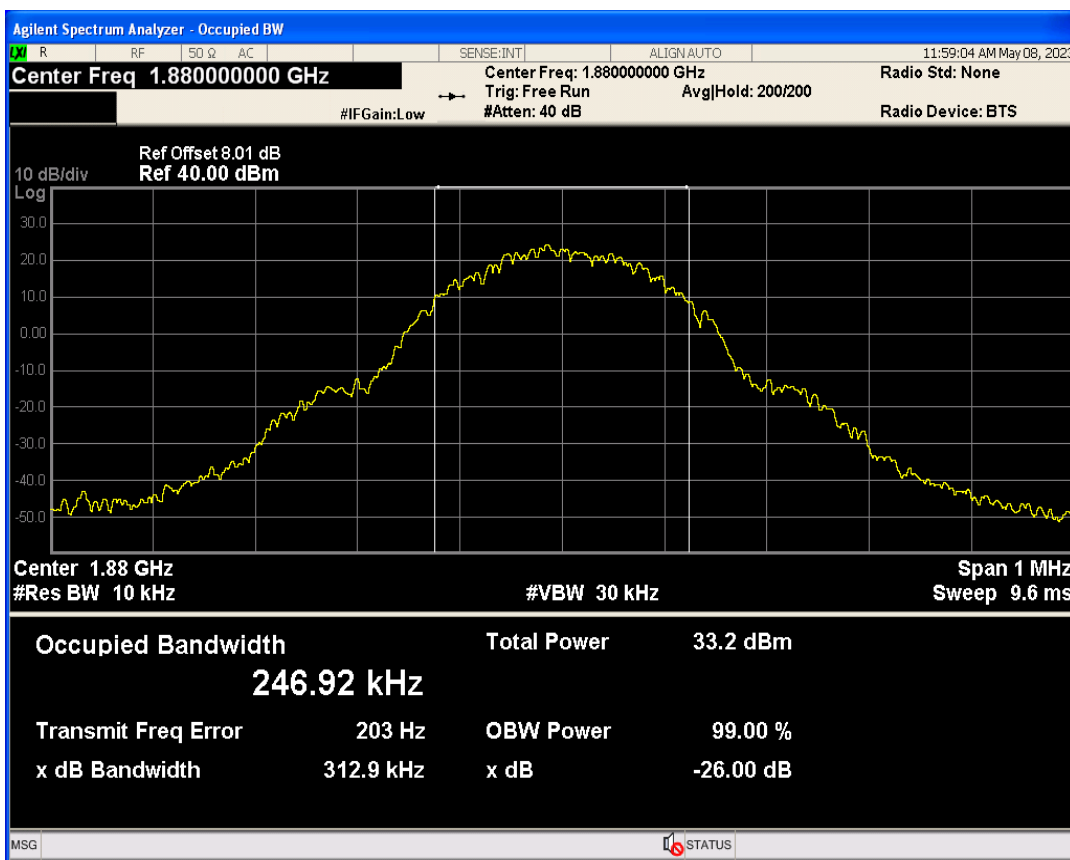


GPRS850 Channel=128

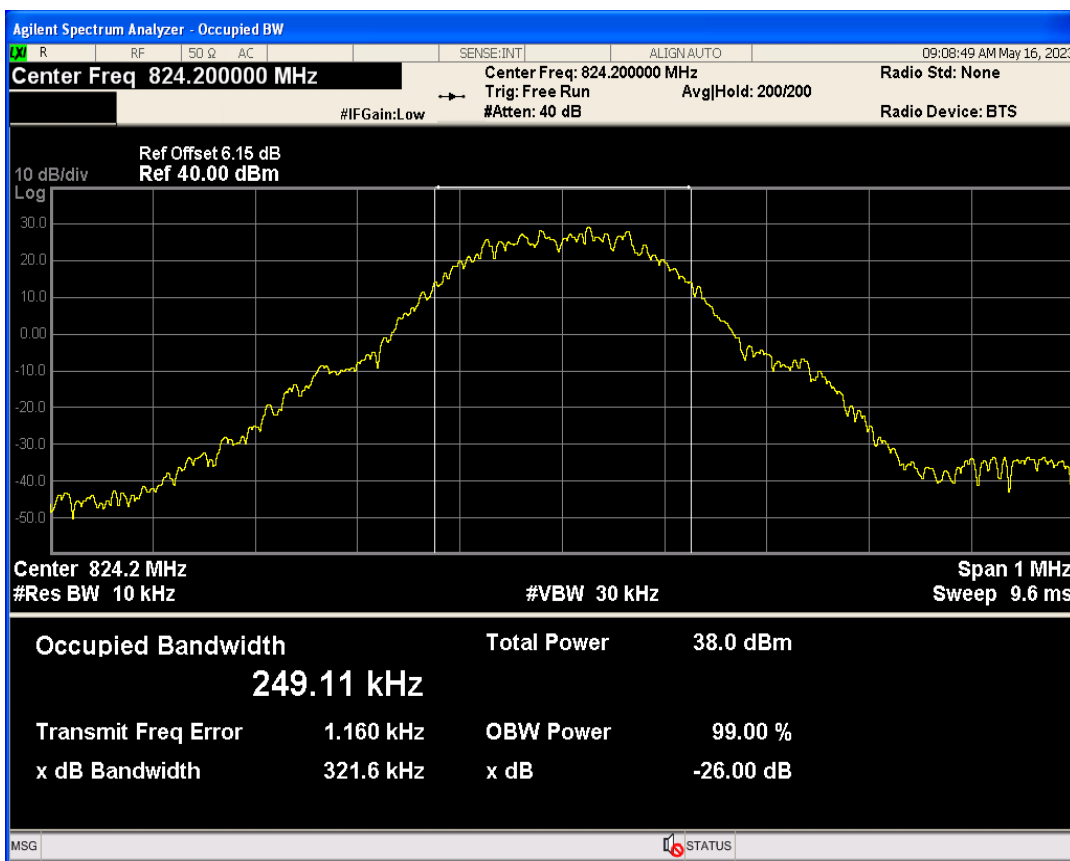

GPRS850 Channel=189

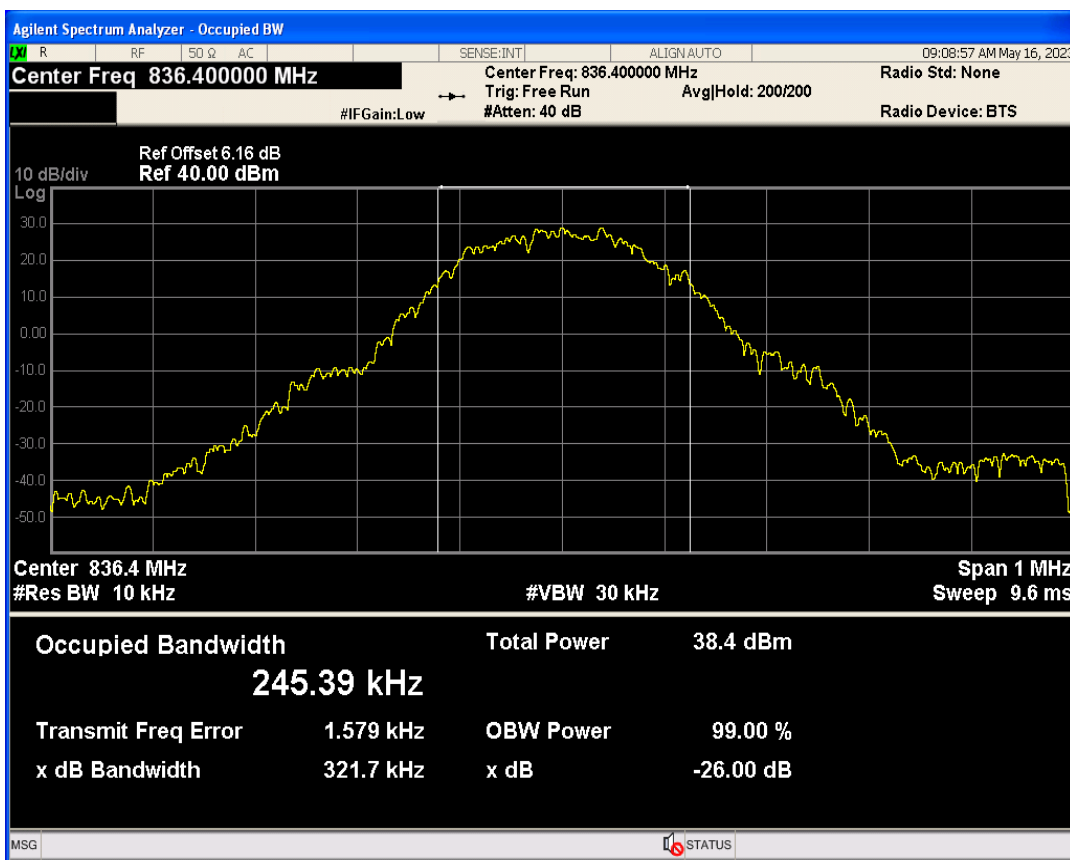


GPRS850 Channel=251

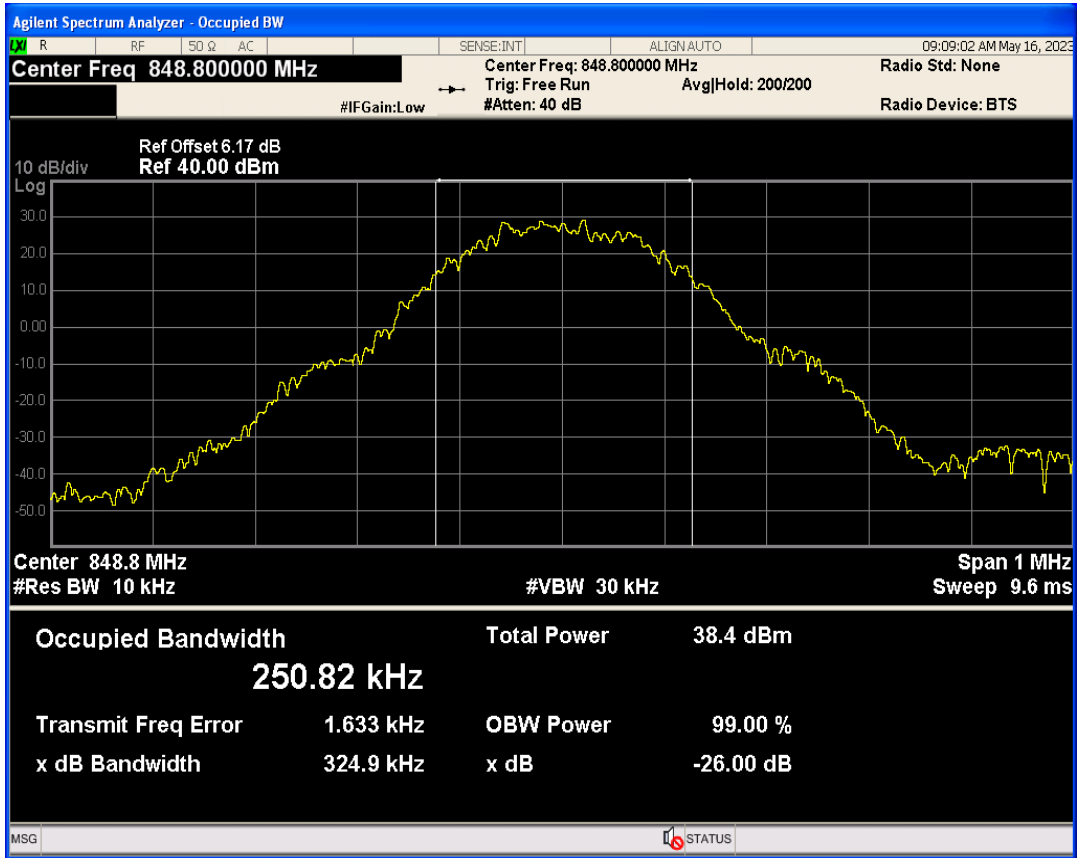


Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1850.00	-32.85	-13	PASS
GPRS1900	810	1909.8	1910.02	-35.19	-13	PASS
GPRS850	128	824.2	823.98	-27.13	-13	PASS
GPRS850	251	848.8	849.01	-25.10	-13	PASS


GPRS1900 Channel=512

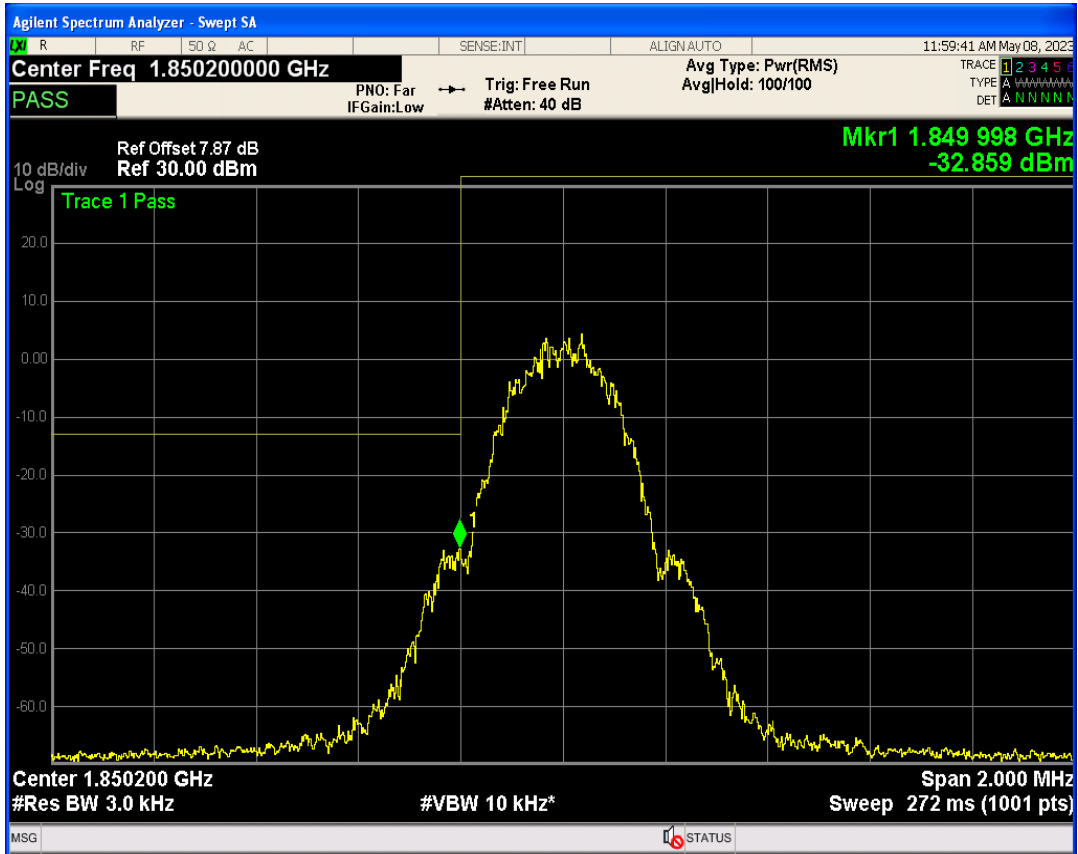


GPRS1900 Channel=810

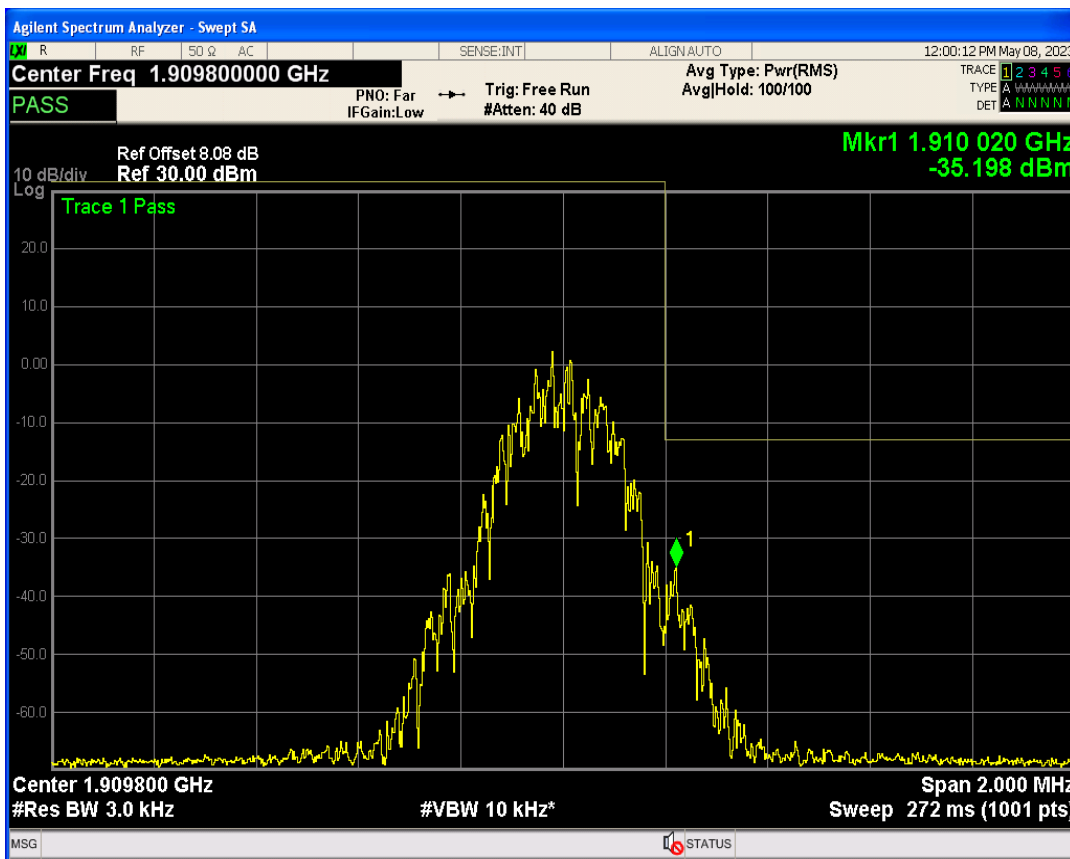

GPRS850 Channel=251

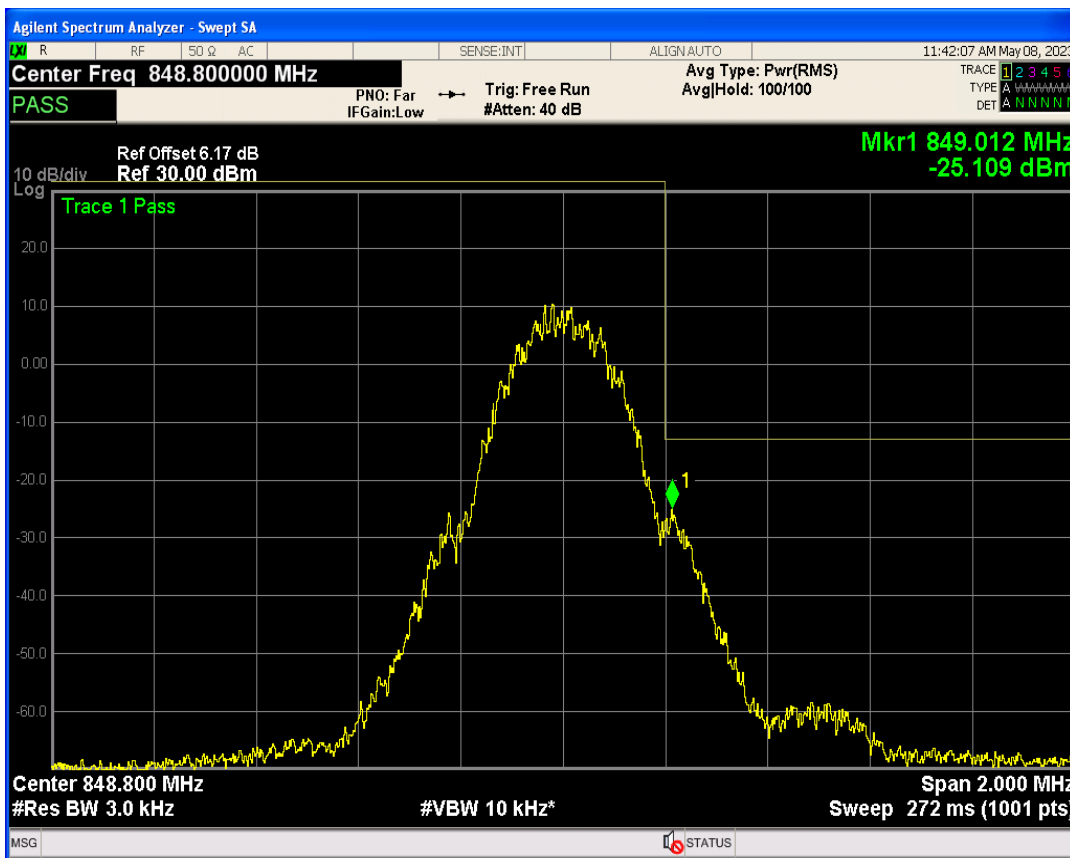


GPRS850 Channel=128

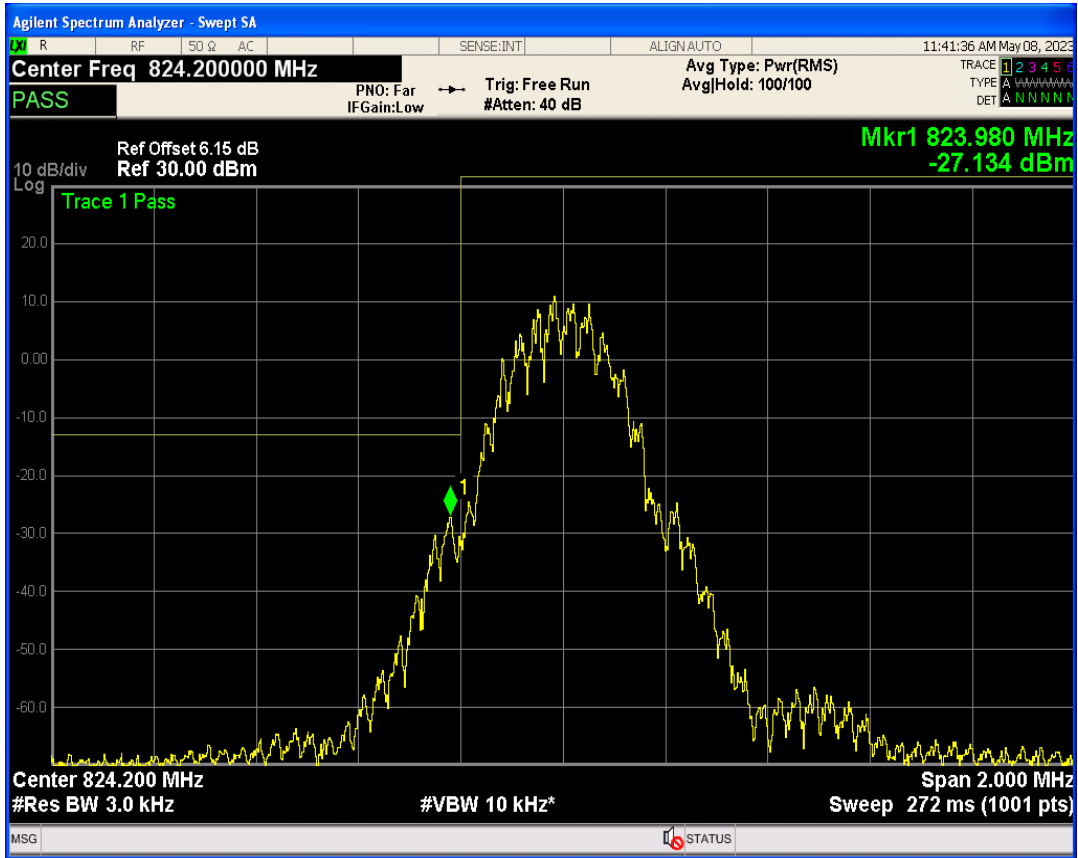


Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25986.48	-18.63	-13	PASS
GPRS1900	661	1880	25973.25	-18.28	-13	PASS
GPRS1900	810	1909.8	26040.75	-17.44	-13	PASS
GPRS850	128	824.2	26020.23	-19.98	-13	PASS
GPRS850	189	836.4	25552.37	-19.84	-13	PASS
GPRS850	251	848.8	25482.23	-19.71	-13	PASS


GPRS1900 Channel=512

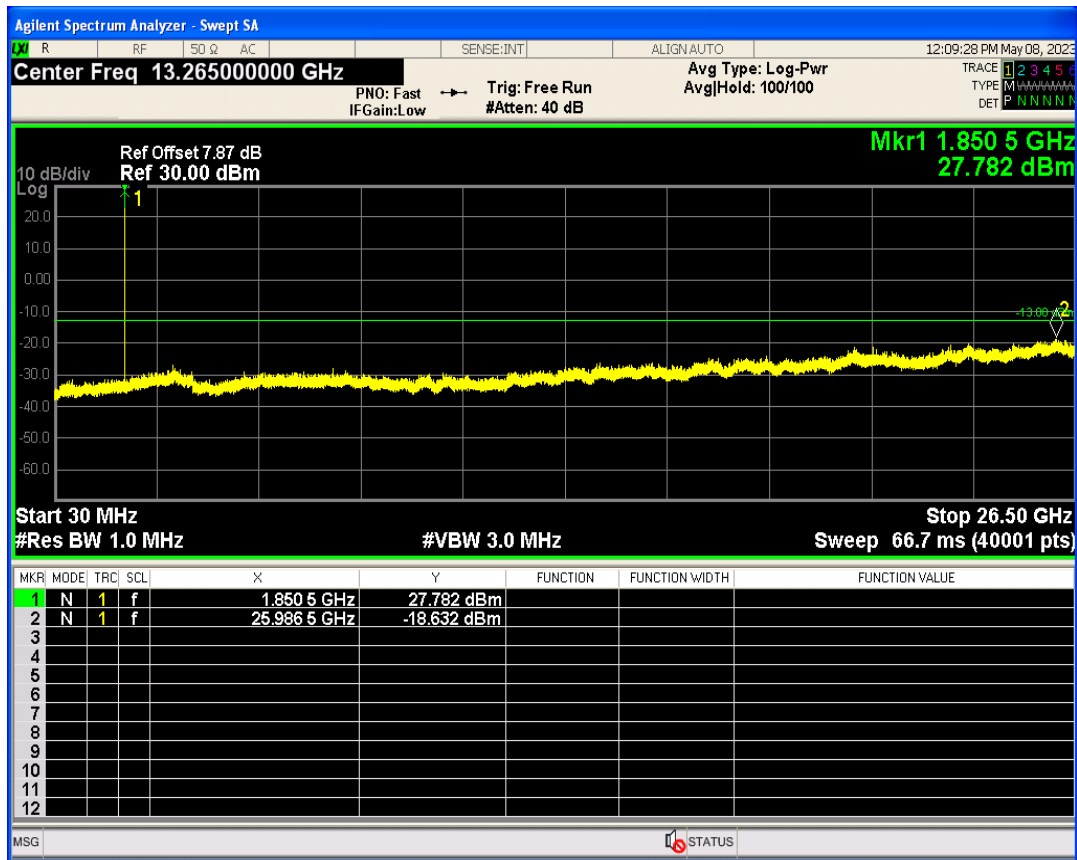


GPRS1900 Channel=661

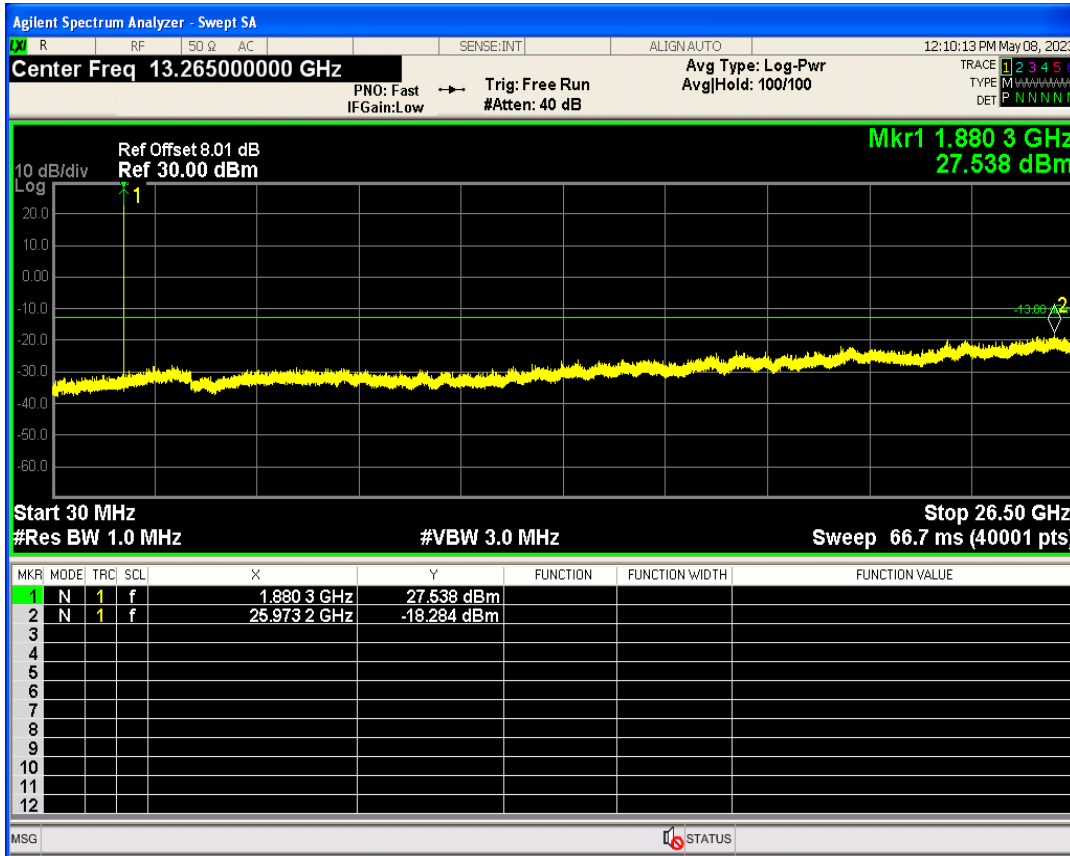


GPRS1900 Channel=810

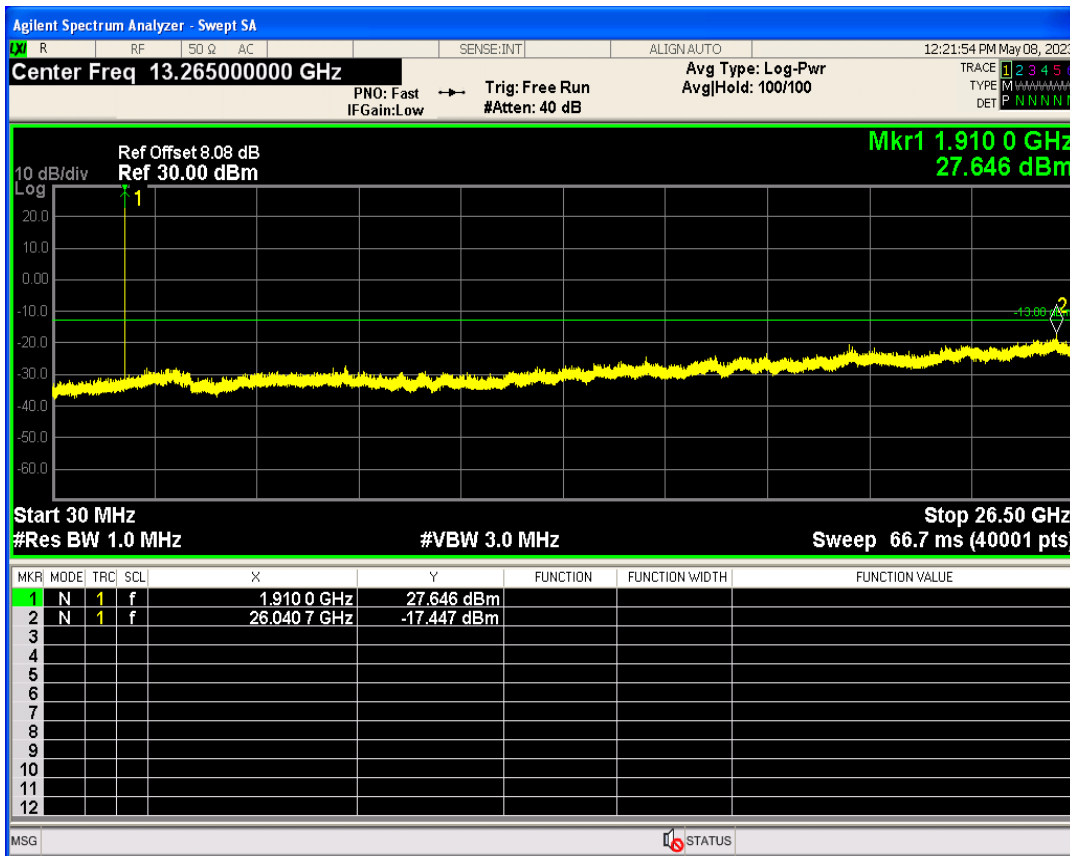

GPRS850 Channel=128

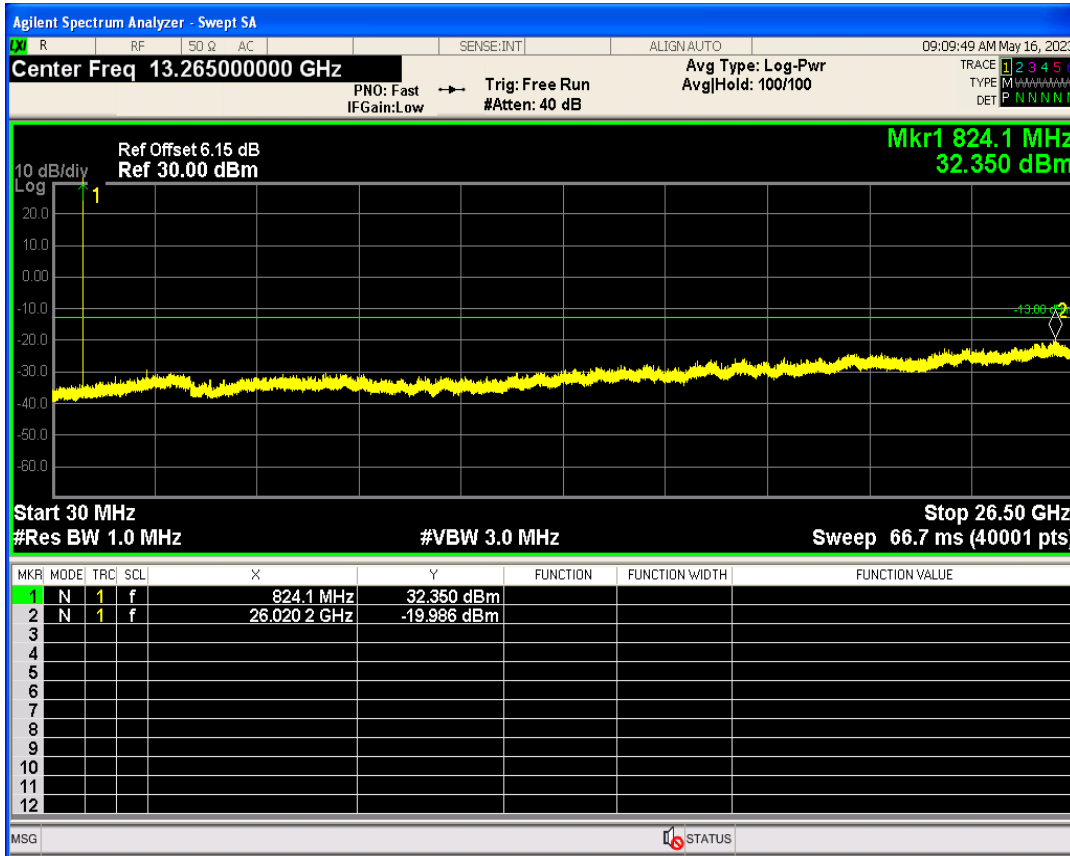

GPRS850 Channel=189

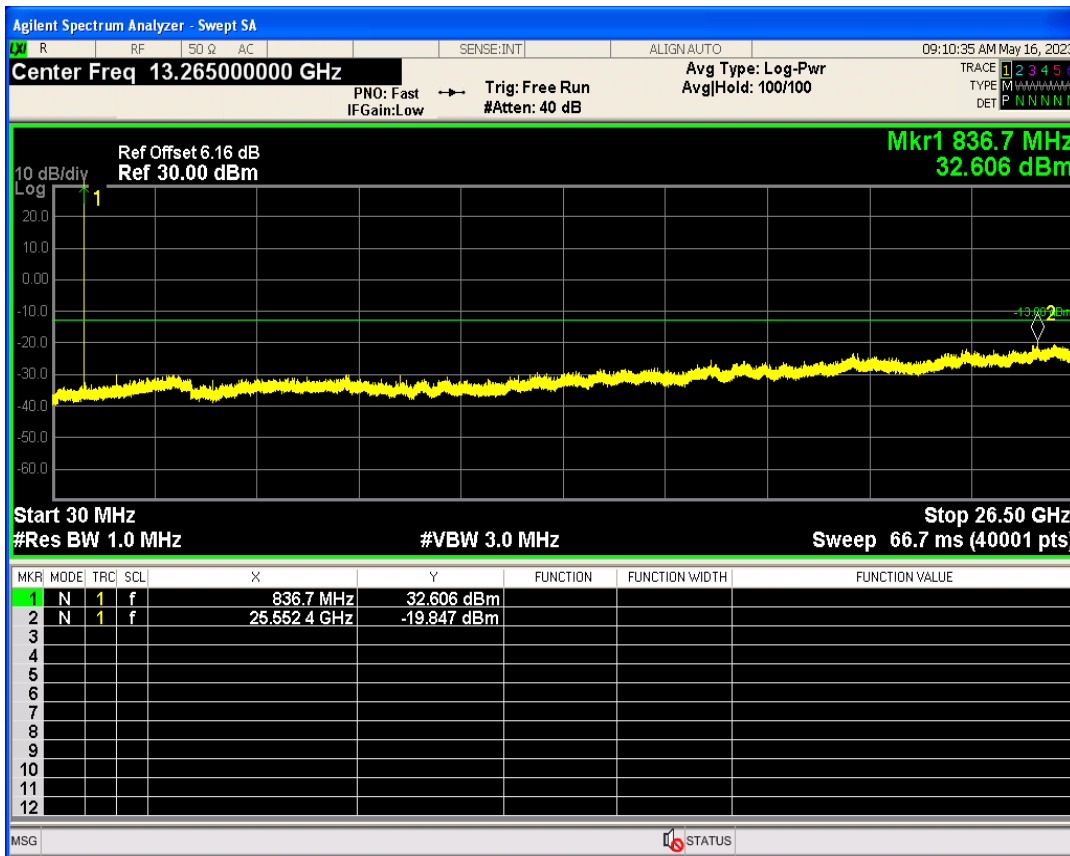

GPRS850 Channel=251

