


## Product specification

### Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	-0.48 (Avg Gain XY-plane)	
Maximum Power (dBm)	1.68(XZ-plane)	
Minimum Power (dBm )	-3.83(XZ-plane)	
Avg. Power (dBm)	-0.48(XY-plane)	
Input Impedence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S. W. R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

### Antenna Layout & module on the system board

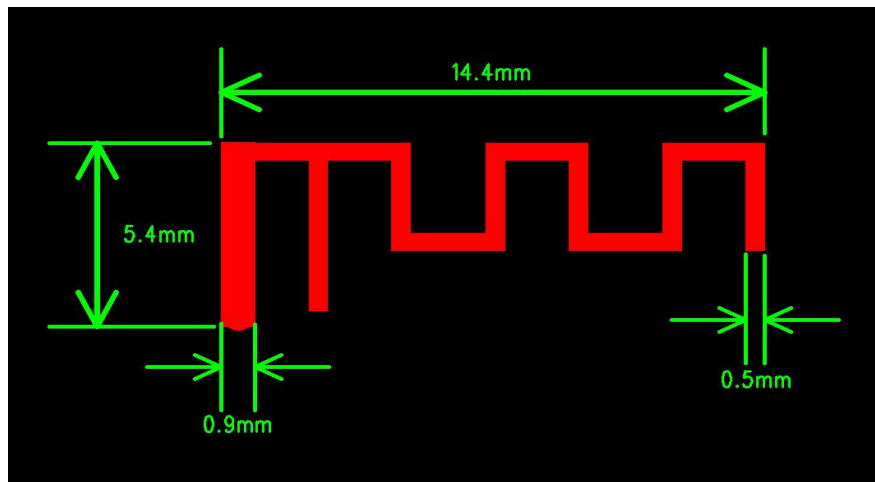


### Antenna Gain


Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	60.2 %


# Return Loss

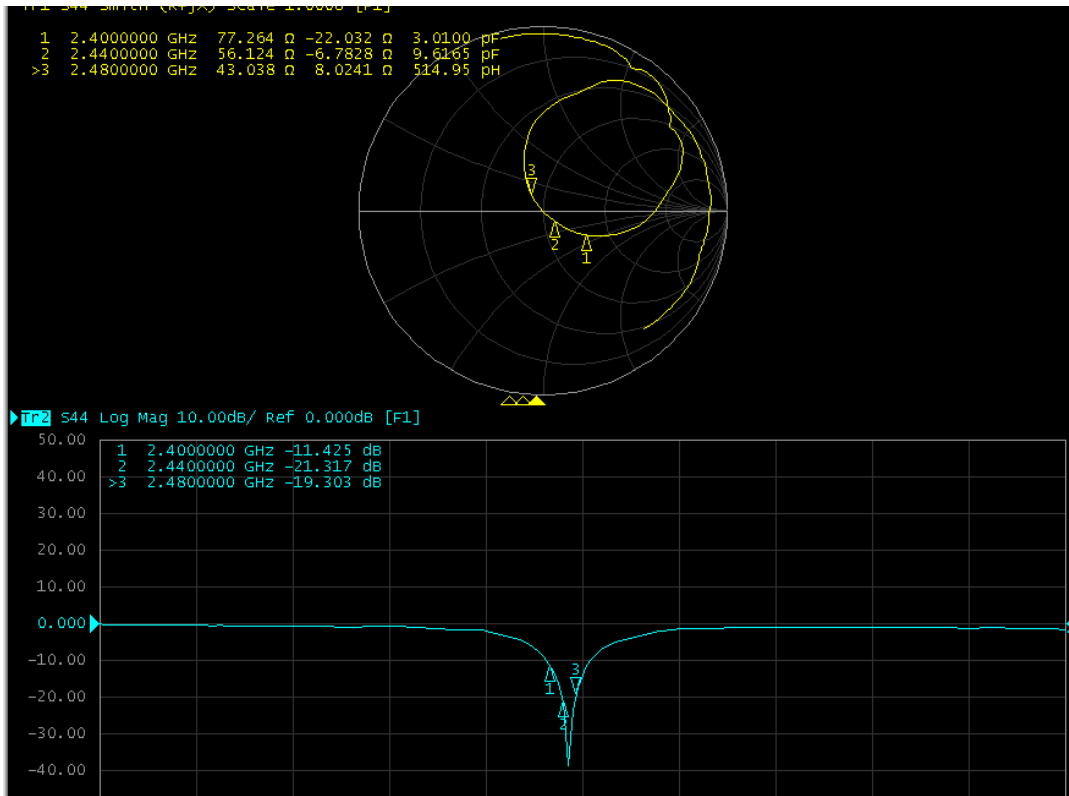

# The Environment of Antenna Radiation Pattern

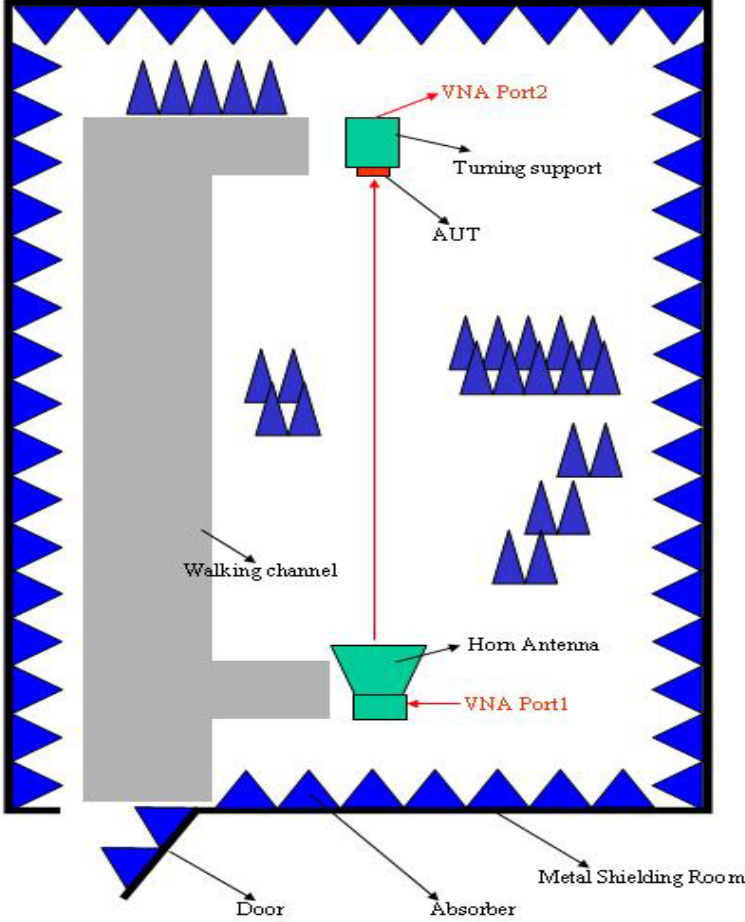


# 3D radiation pattern diagram

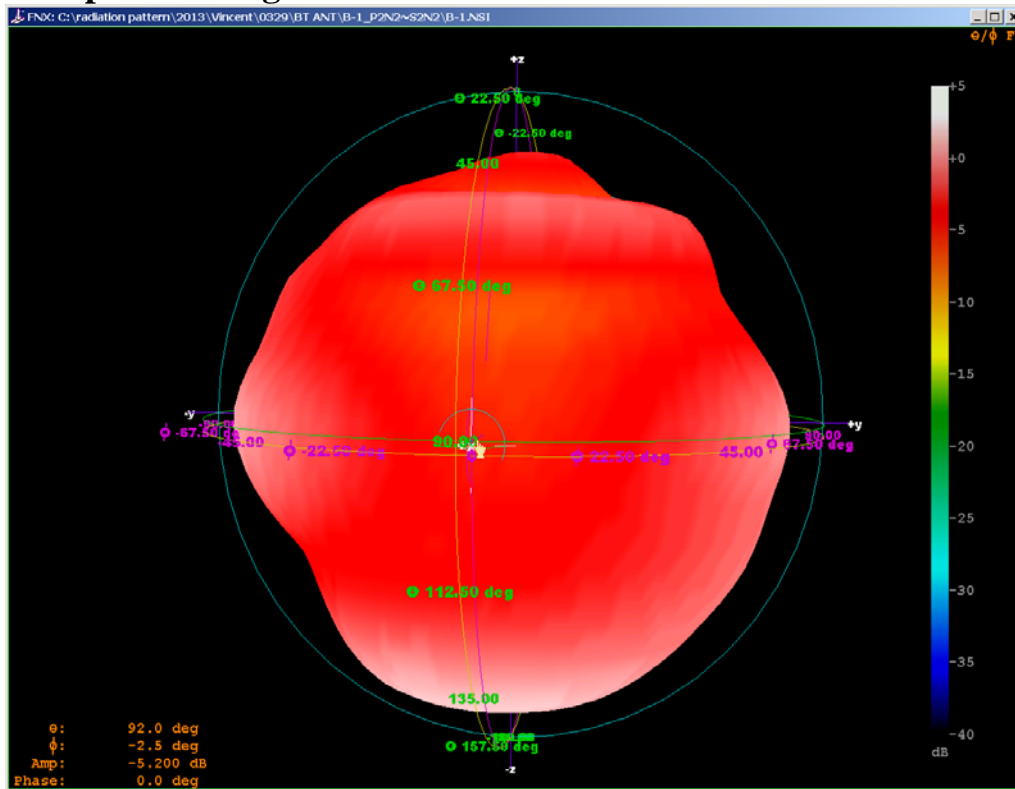


## XY-plane

Far-field Power Distribution(H+V) on X-Y Plane  
 Plot Peak Gain(H+V)= 1.35 dBi; Plot AvgGain(H+V)= -0.48dBi @2.4000 GHz

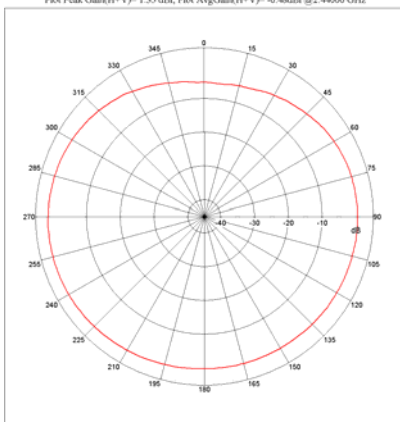

## XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane  
 Plot Peak Gain(H+V)= 1.68 dBi; Plot AvgGain(H+V)= -3.83dBi @2.4000 GHz

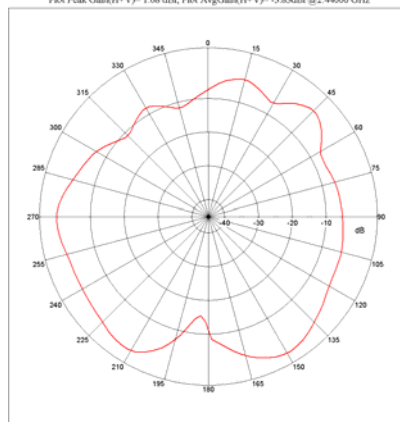

## YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane  
 Plot Peak Gain(H+V)= 1.11 dBi; Plot AvgGain(H+V)= -2.99dBi @2.4000 GHz

