




OBW NVNT 802.11n(HT40) 5590MHz Ant 2

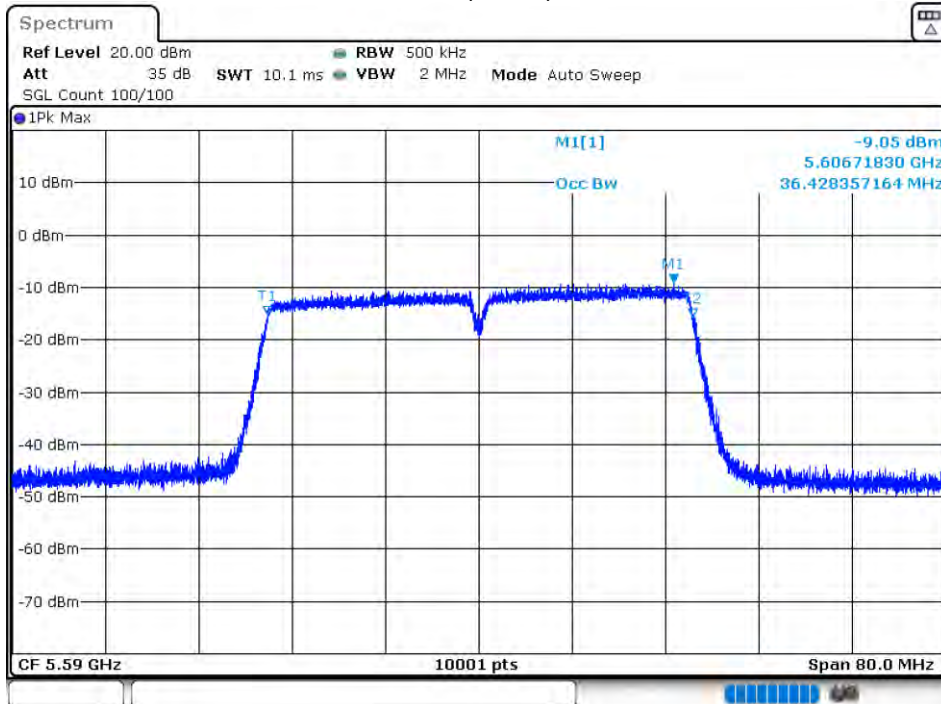


-26 dB BW NVNT 802.11n(HT40) 5590MHz Ant 2

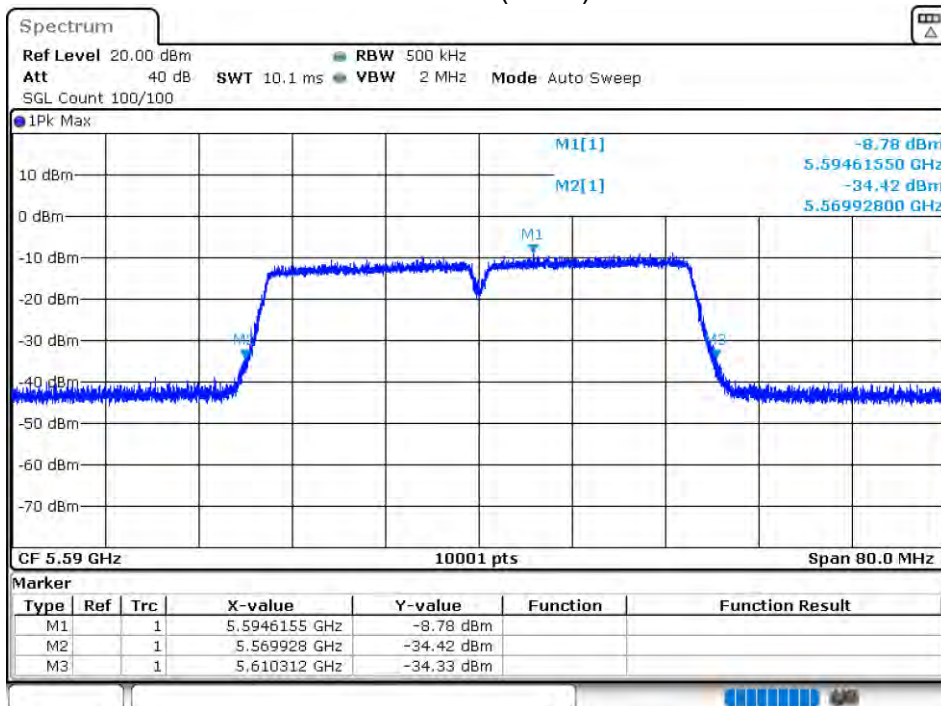

OBW NVNT 802.11n(HT40) 5670MHz Ant 2

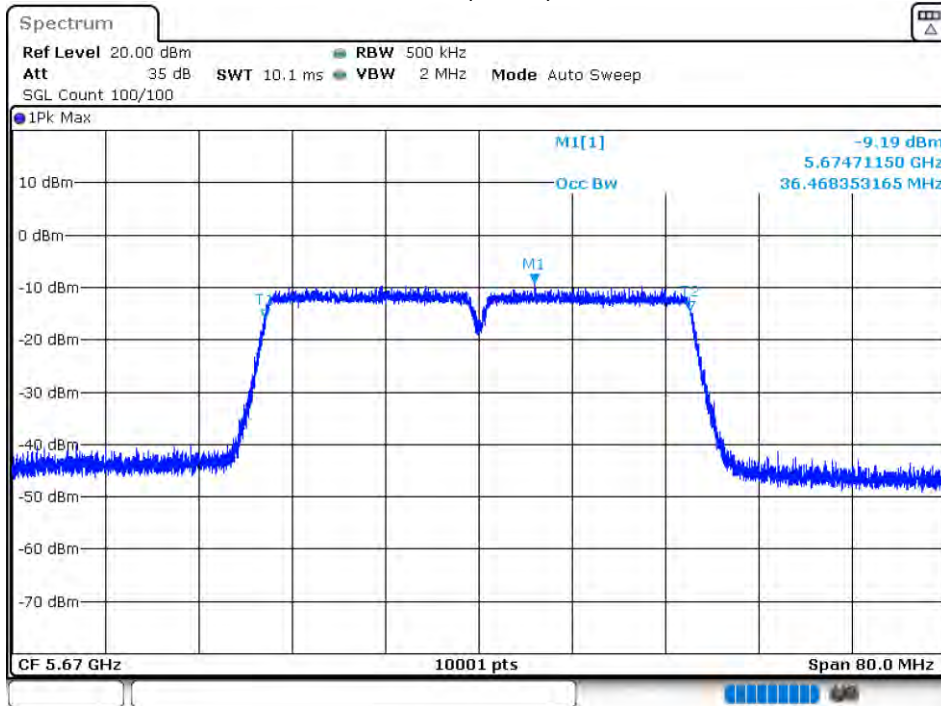


-26 dB BW NVNT 802.11n(HT40) 5670MHz Ant 2

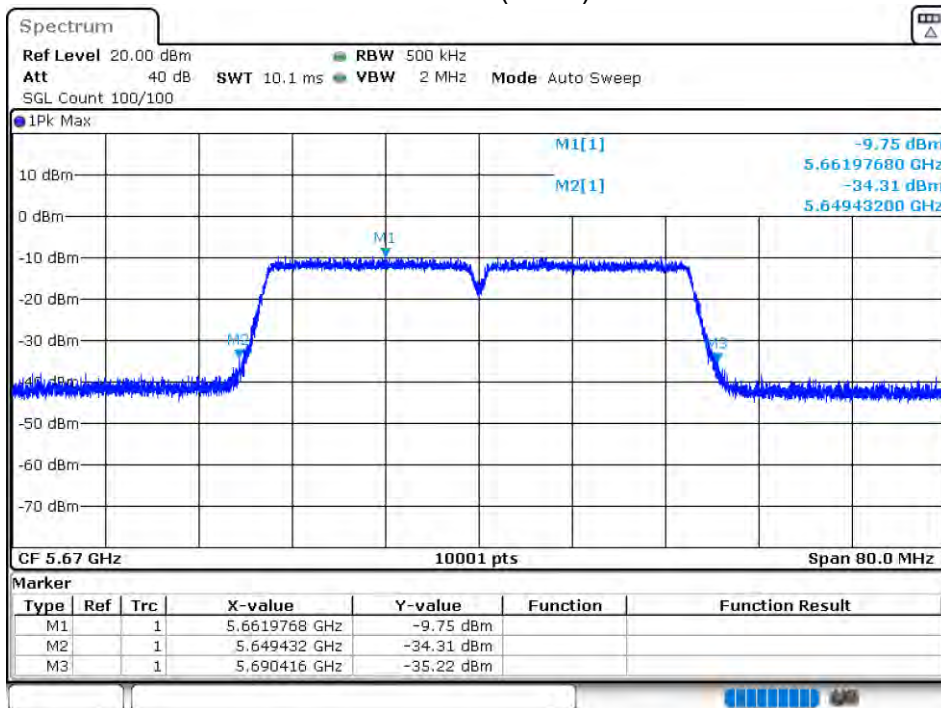


11.3.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Total Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5500	Ant 1	5.381	-	11	Pass
NVNT	802.11a	5600	Ant 1	5.123	-	11	Pass
NVNT	802.11a	5700	Ant 1	5.218	-	11	Pass
NVNT	802.11a	5500	Ant 2	4.647	-	11	Pass
NVNT	802.11a	5600	Ant 2	5.326	-	11	Pass
NVNT	802.11a	5700	Ant 2	4.918	-	11	Pass
NVNT	802.11ac20	5500	Ant 1	5.334	8.13	8.99	Pass
NVNT	802.11ac20	5500	Ant 2	4.897		8.99	Pass
NVNT	802.11ac20	5600	Ant 1	5.17	8.32	8.99	Pass
NVNT	802.11ac20	5600	Ant 2	5.443		8.99	Pass
NVNT	802.11ac20	5700	Ant 1	5.292	7.98	8.99	Pass
NVNT	802.11ac20	5700	Ant 2	4.628		8.99	Pass
NVNT	802.11ac40	5510	Ant 1	2.171	5.36	8.99	Pass
NVNT	802.11ac40	5510	Ant 2	2.517		8.99	Pass
NVNT	802.11ac40	5590	Ant 1	2.998	5.73	8.99	Pass
NVNT	802.11ac40	5590	Ant 2	2.427		8.99	Pass
NVNT	802.11ac40	5670	Ant 1	2.52	5.18	8.99	Pass
NVNT	802.11ac40	5670	Ant 2	1.779		8.99	Pass
NVNT	802.11ac80	5530	Ant 1	-0.672	2.49	8.99	Pass
NVNT	802.11ac80	5530	Ant 2	-0.372		8.99	Pass
NVNT	802.11ac80	5610	Ant 1	-1.221	2.57	8.99	Pass
NVNT	802.11ac80	5610	Ant 2	0.221		8.99	Pass
NVNT	802.11n(HT20)	5500	Ant 1	5.706	8.66	8.99	Pass
NVNT	802.11n(HT20)	5500	Ant 2	5.59		8.99	Pass
NVNT	802.11n(HT20)	5600	Ant 1	5.412	8.33	8.99	Pass
NVNT	802.11n(HT20)	5600	Ant 2	5.22		8.99	Pass
NVNT	802.11n(HT20)	5700	Ant 1	5.804	8.59	8.99	Pass
NVNT	802.11n(HT20)	5700	Ant 2	5.342		8.99	Pass
NVNT	802.11n(HT40)	5510	Ant 1	2.605	5.33	8.99	Pass
NVNT	802.11n(HT40)	5510	Ant 2	2.006		8.99	Pass
NVNT	802.11n(HT40)	5590	Ant 1	3.198	5.82	8.99	Pass
NVNT	802.11n(HT40)	5590	Ant 2	2.388		8.99	Pass
NVNT	802.11n(HT40)	5670	Ant 1	2.041	5.05	8.99	Pass
NVNT	802.11n(HT40)	5670	Ant 2	2.044		8.99	Pass


PSD NVNT 802.11a 5500MHz Ant 1

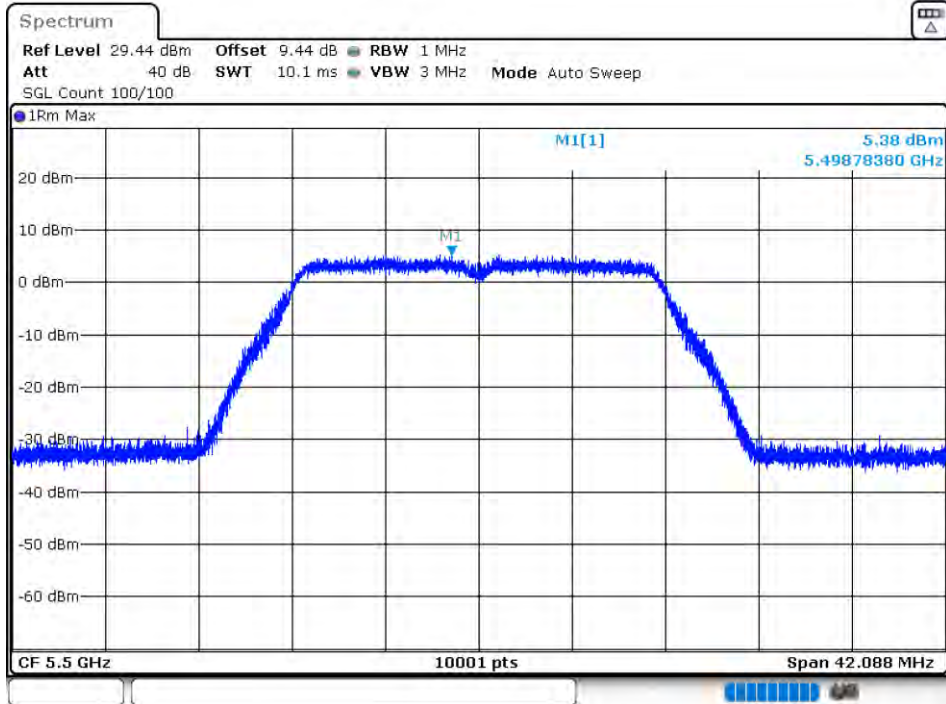


PSD NVNT 802.11a 5600MHz Ant 1

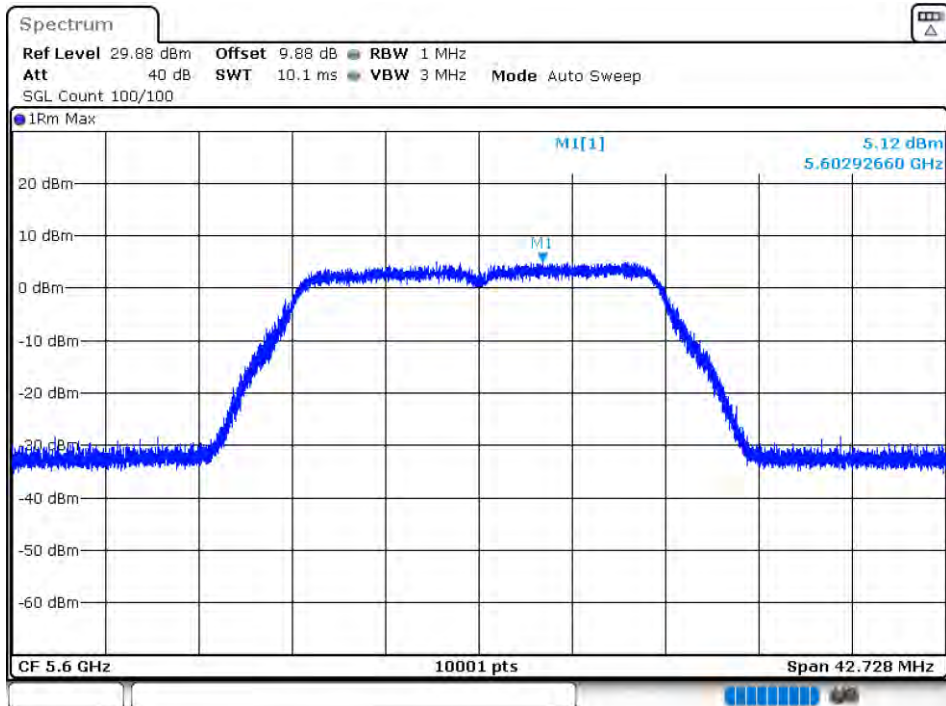


PSD NVNT 802.11a 5700MHz Ant 1

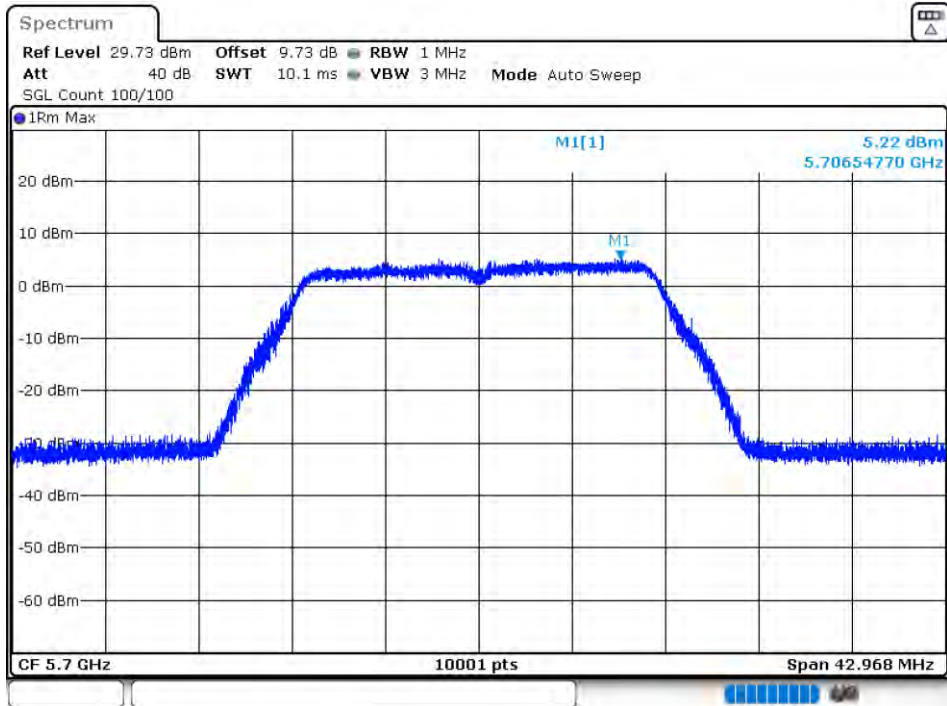


PSD NVNT 802.11a 5500MHz Ant 2

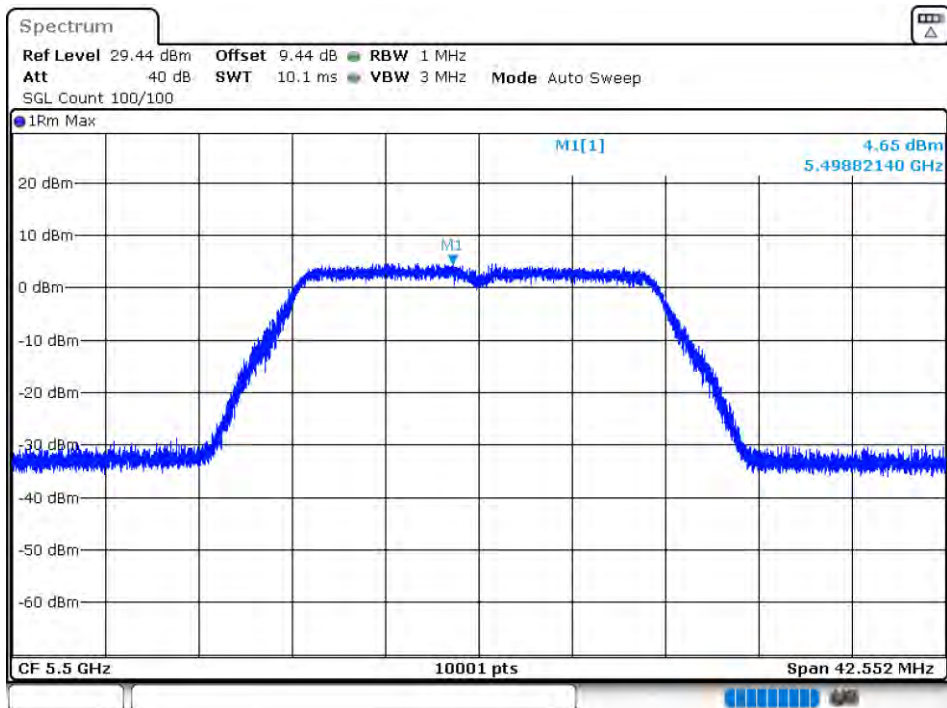


PSD NVNT 802.11a 5600MHz Ant 2

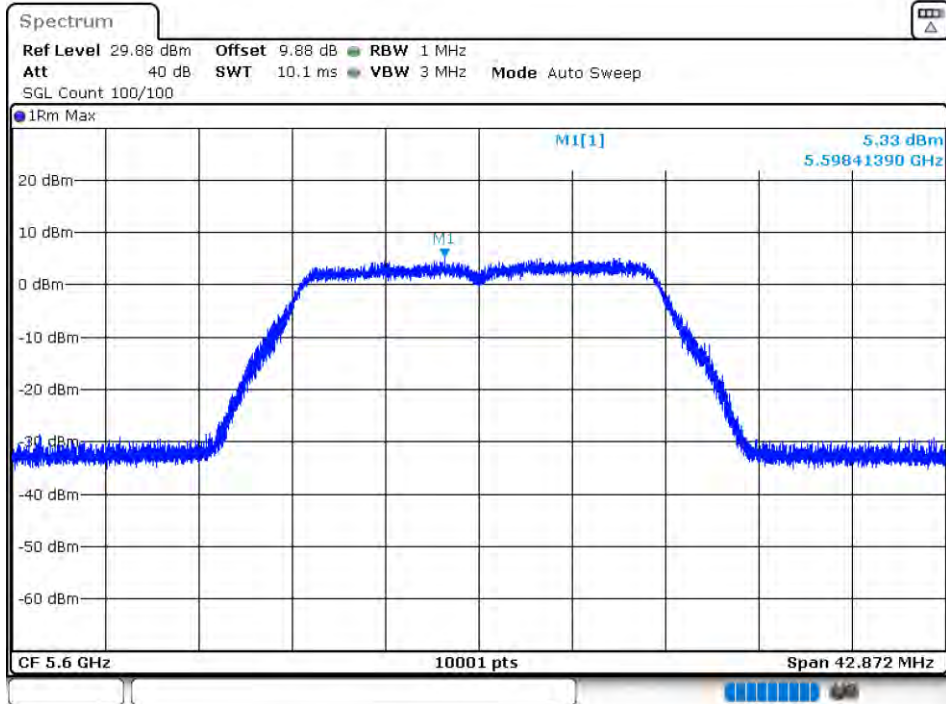


PSD NVNT 802.11a 5700MHz Ant 2

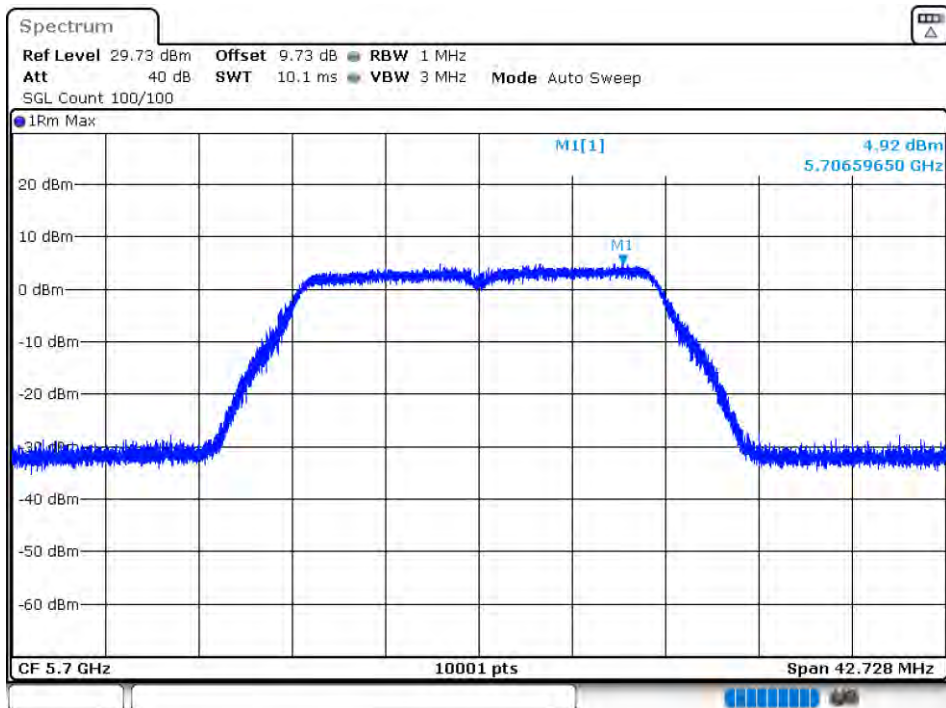


PSD NVNT 802.11ac20 5500MHz Ant 1

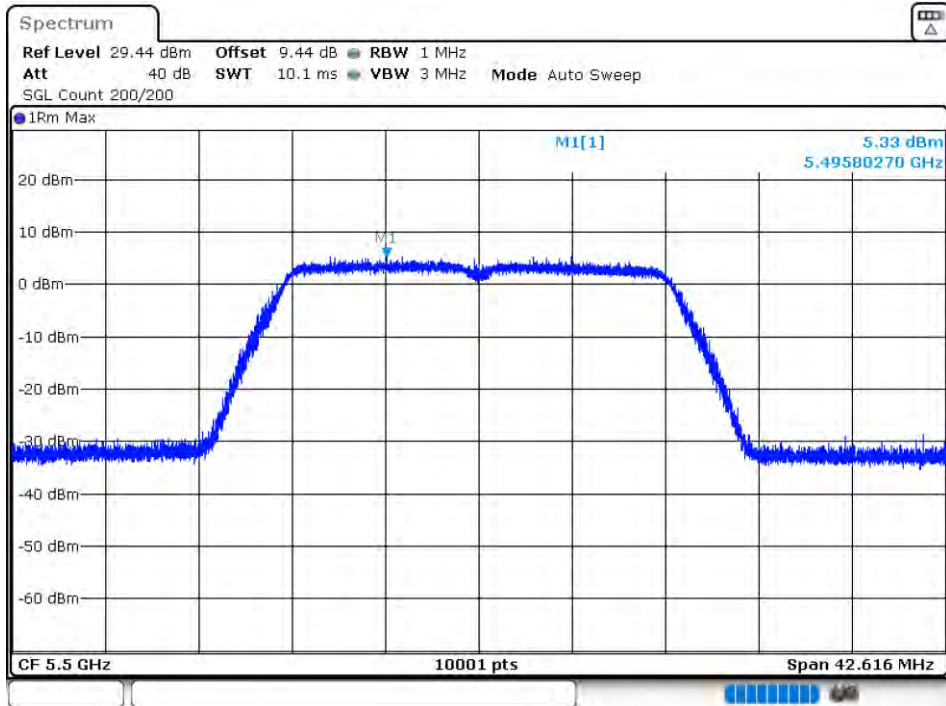


PSD NVNT 802.11ac20 5600MHz Ant 1

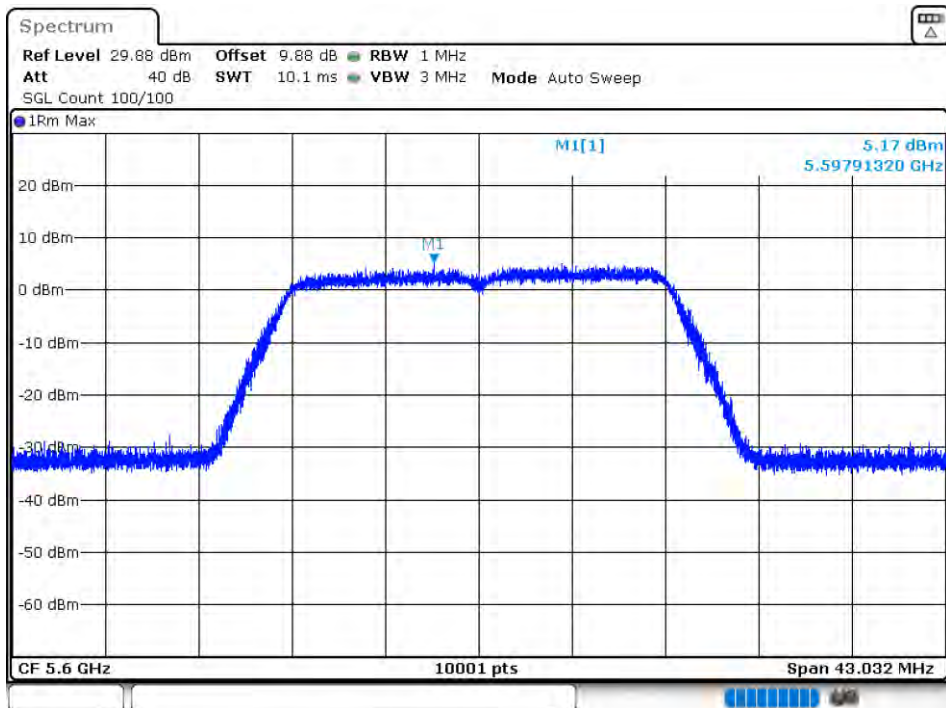


PSD NVNT 802.11ac20 5700MHz Ant 1

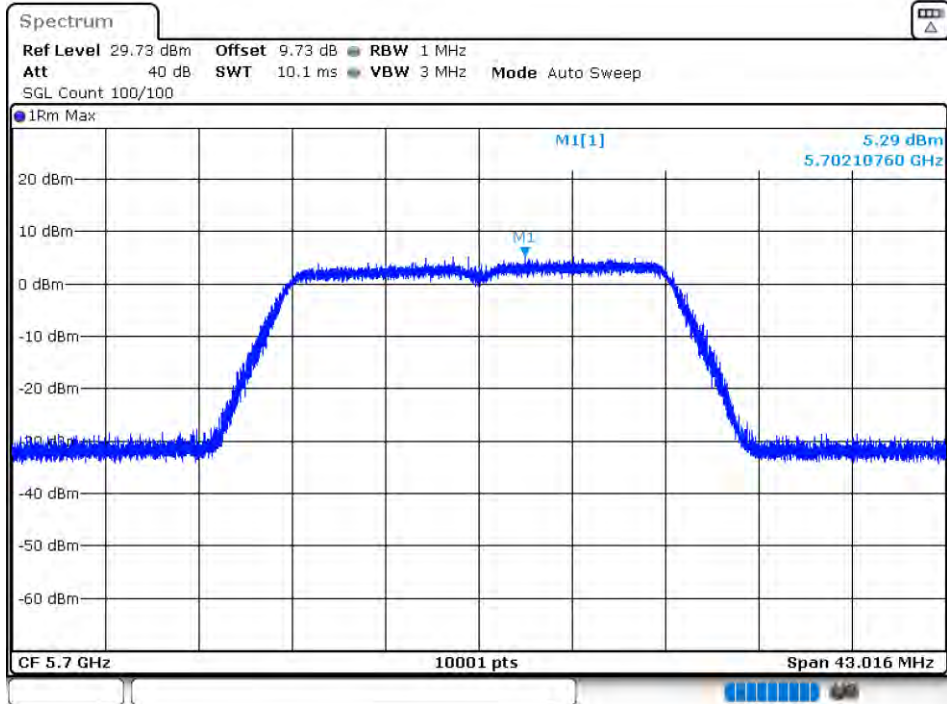


PSD NVNT 802.11ac20 5500MHz Ant 2

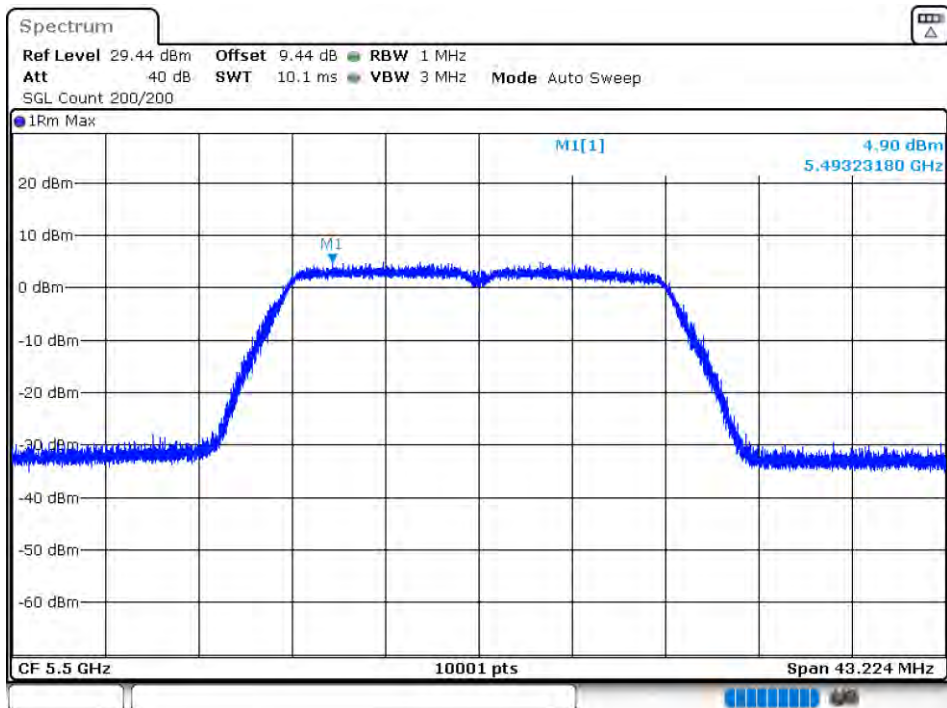


PSD NVNT 802.11ac20 5600MHz Ant 2

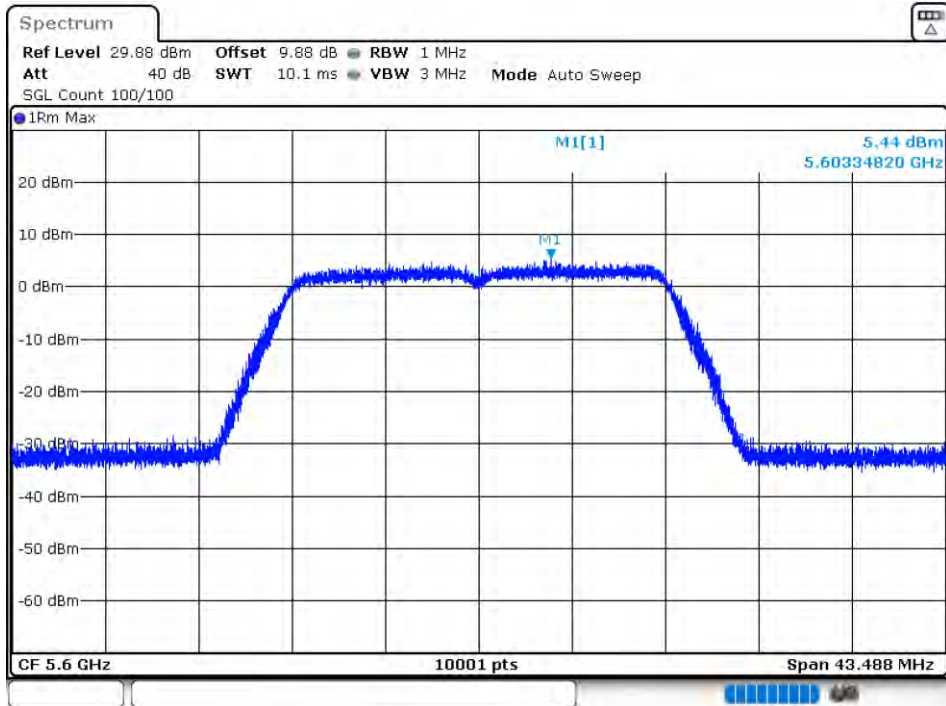


PSD NVNT 802.11ac20 5700MHz Ant 2

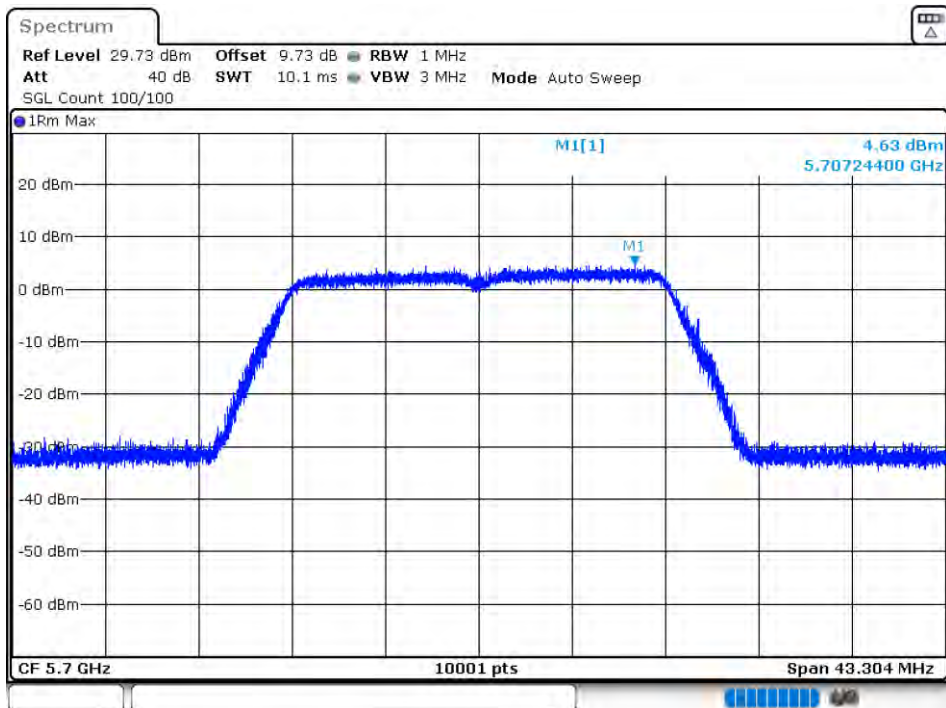


PSD NVNT 802.11ac40 5510MHz Ant 1

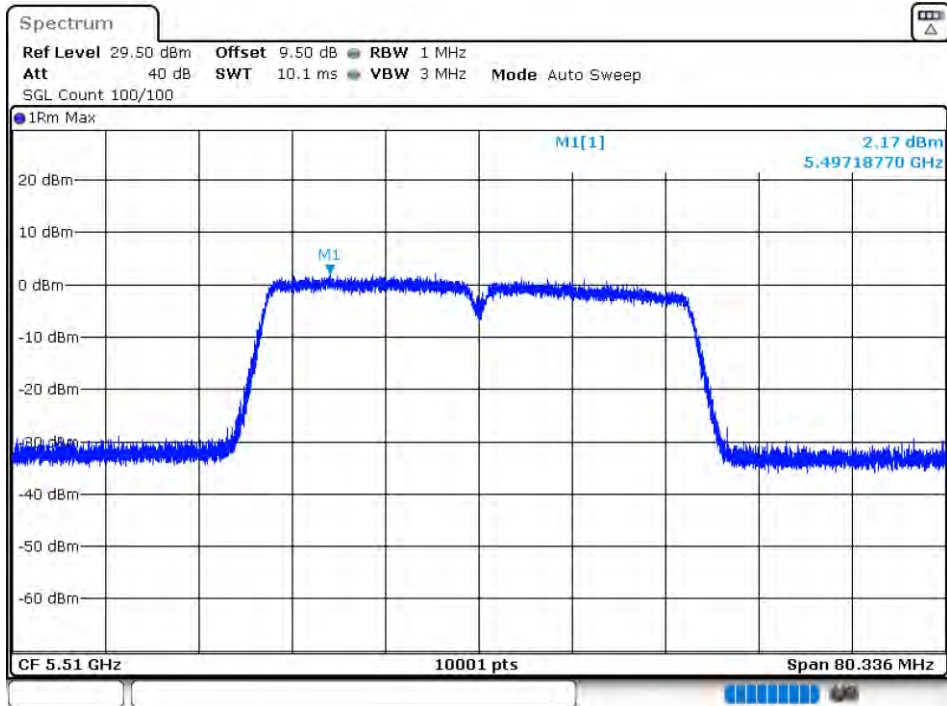


PSD NVNT 802.11ac40 5590MHz Ant 1

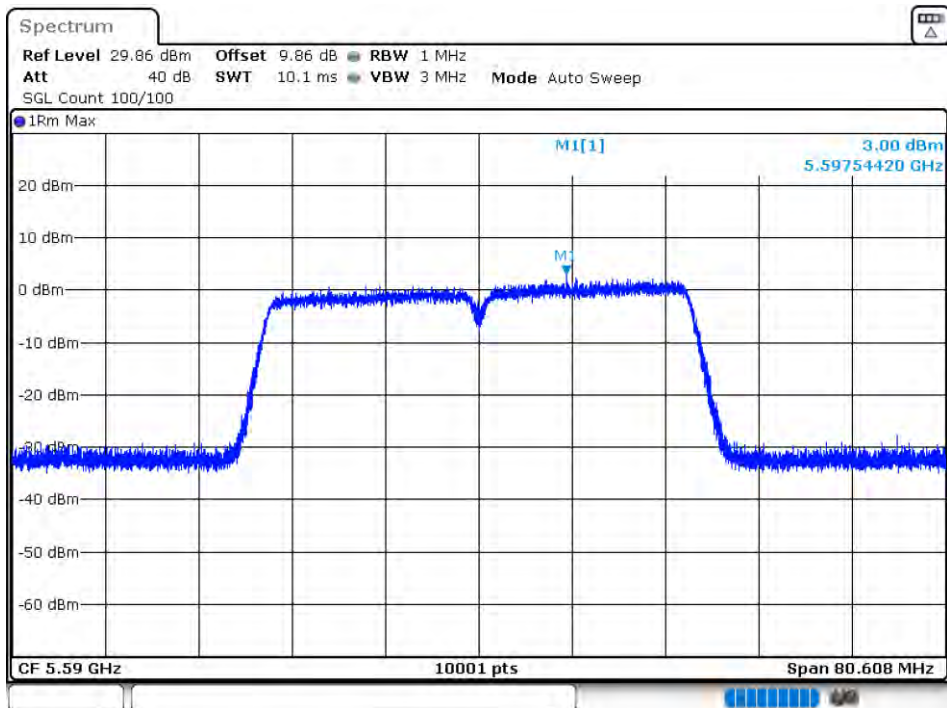


PSD NVNT 802.11ac40 5670MHz Ant 1

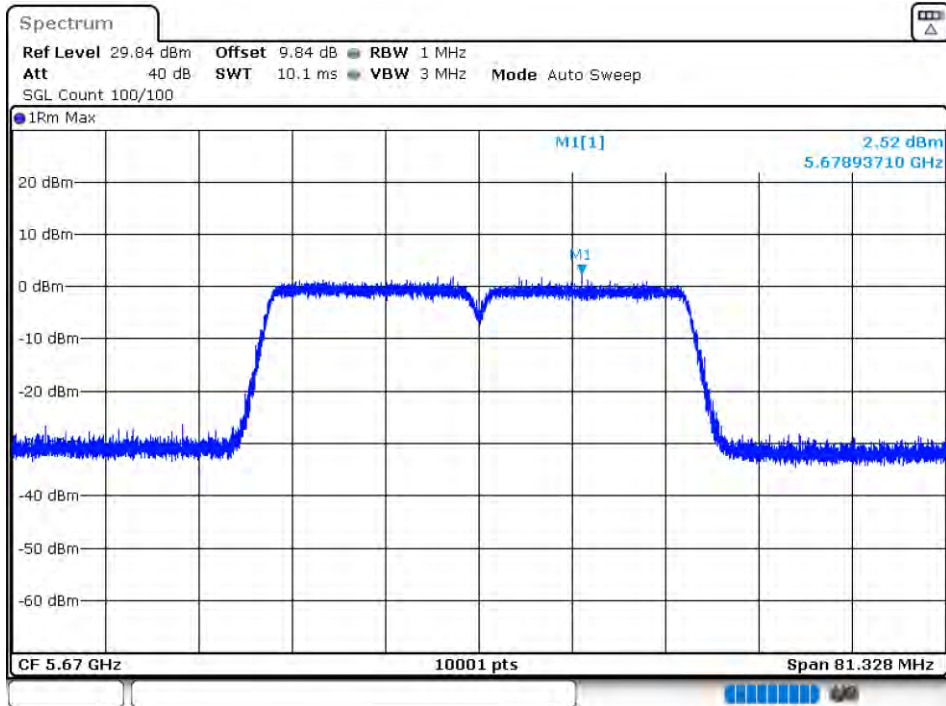


PSD NVNT 802.11ac40 5510MHz Ant 2

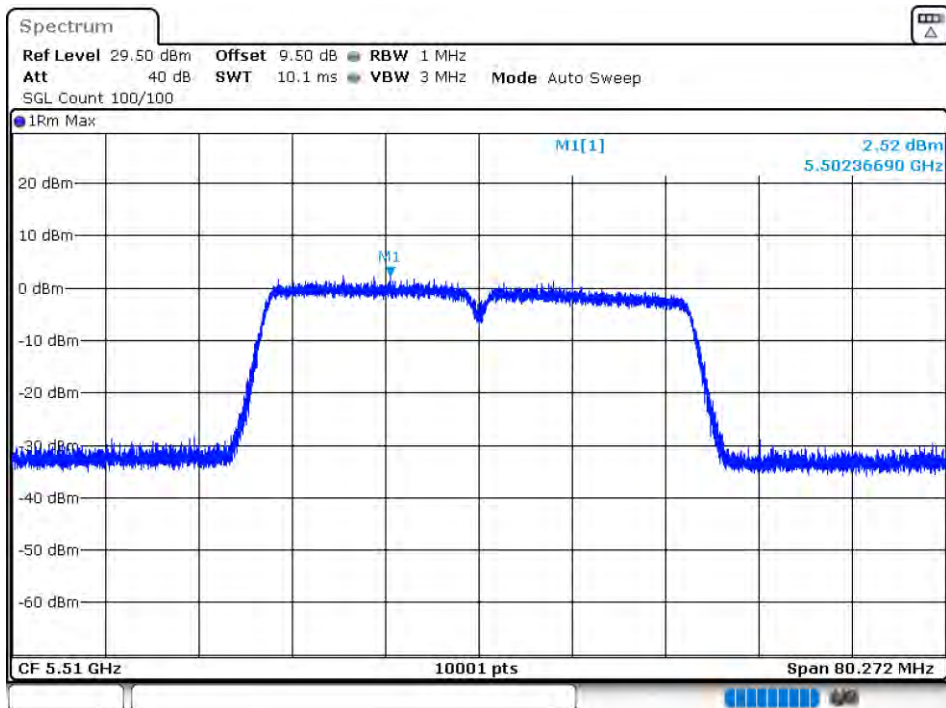


PSD NVNT 802.11ac40 5590MHz Ant 2

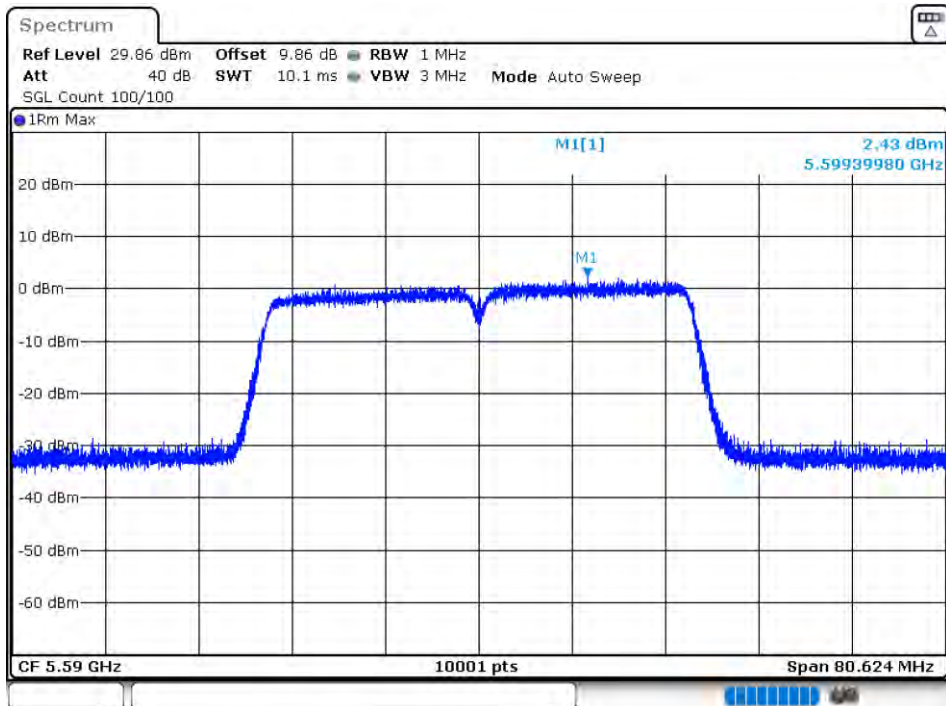


PSD NVNT 802.11ac40 5670MHz Ant 2

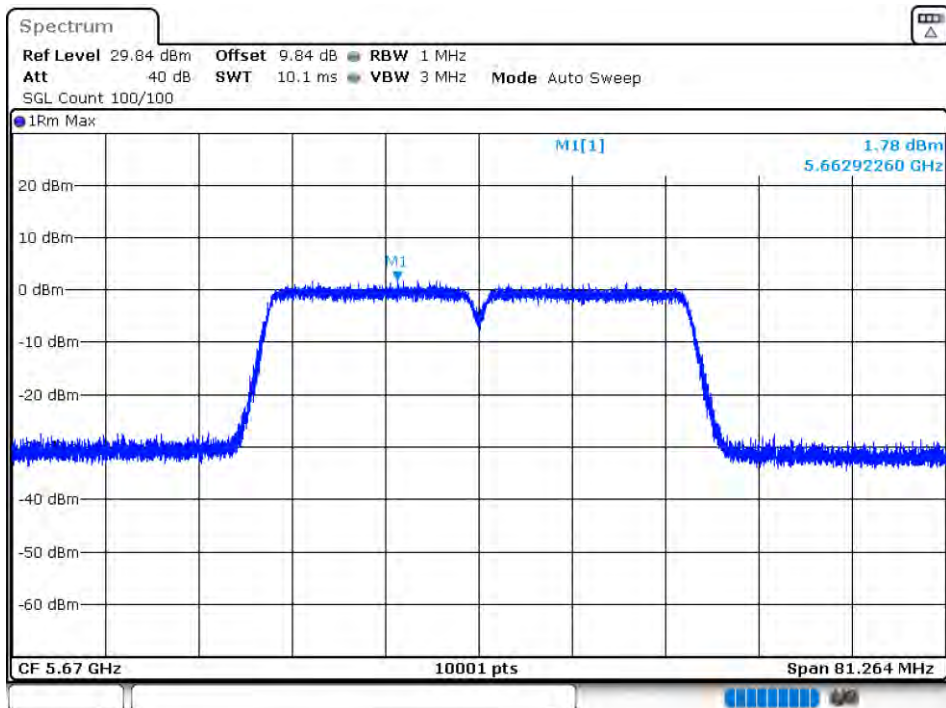


PSD NVNT 802.11ac80 5530MHz Ant 1

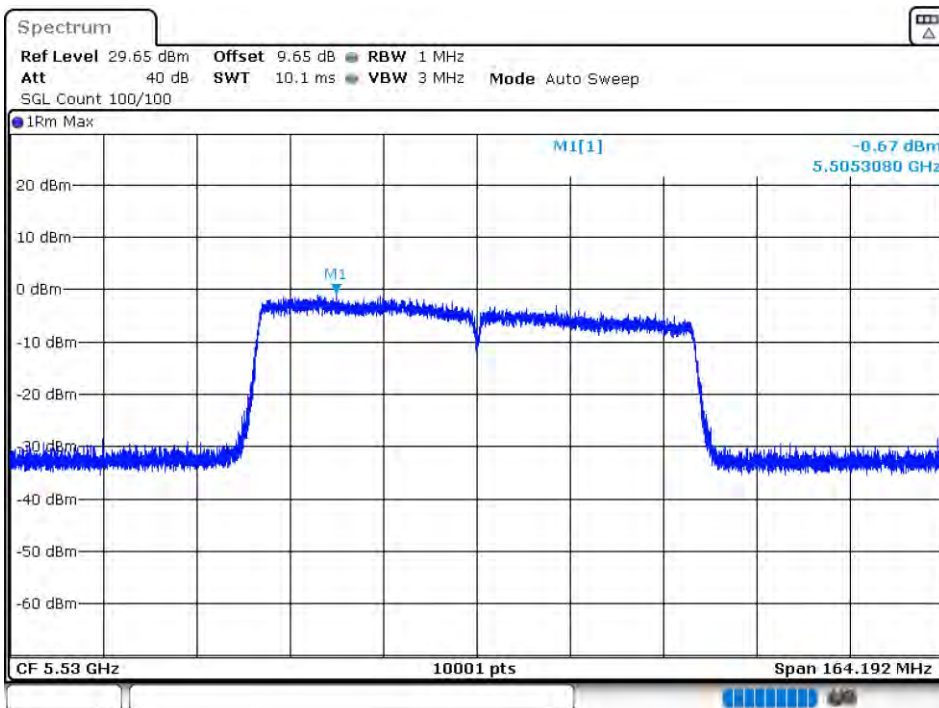


PSD NVNT 802.11ac80 5610MHz Ant 1

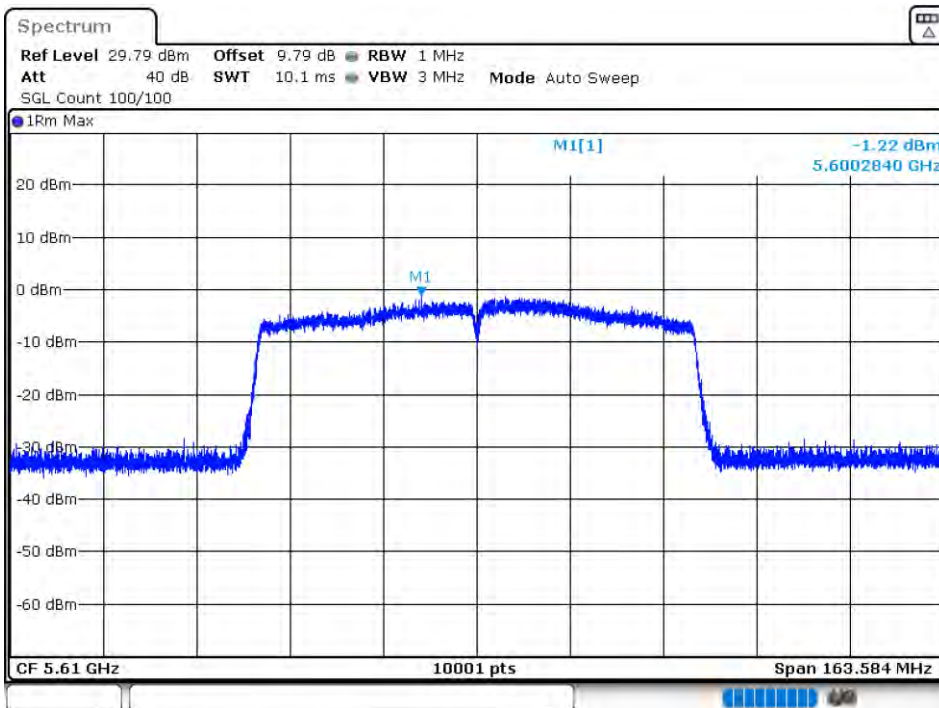


PSD NVNT 802.11ac80 5530MHz Ant 2

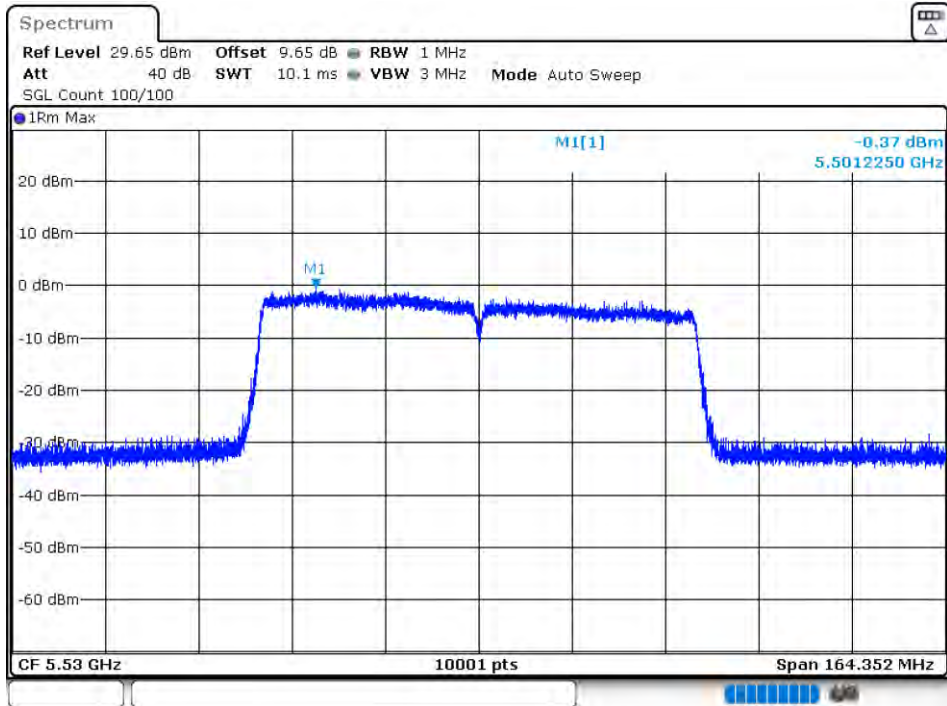


PSD NVNT 802.11ac80 5610MHz Ant 2

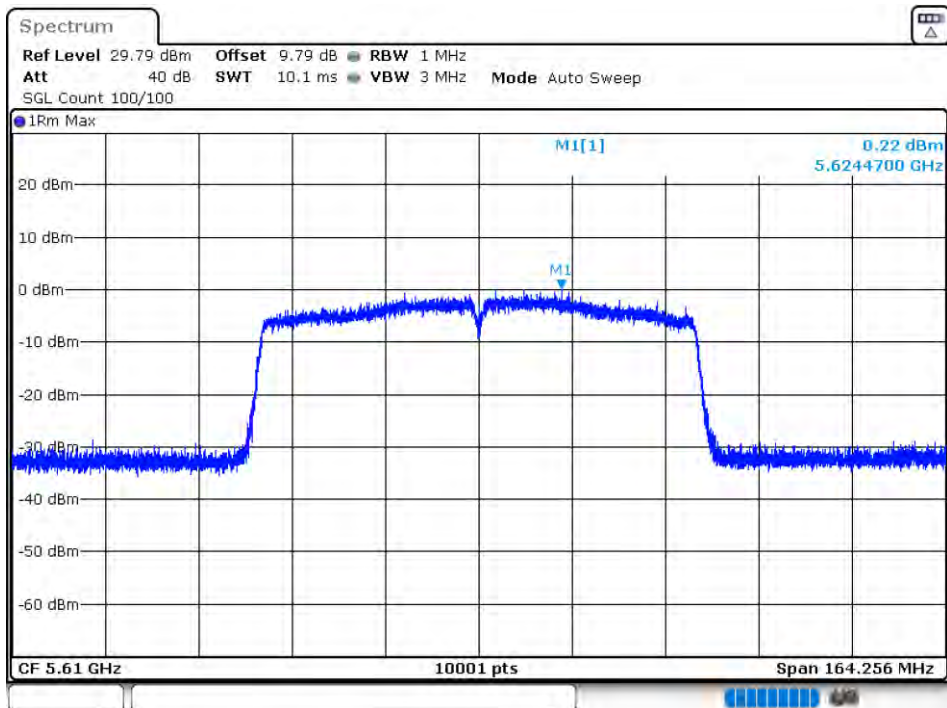


PSD NVNT 802.11n(HT20) 5500MHz Ant 1

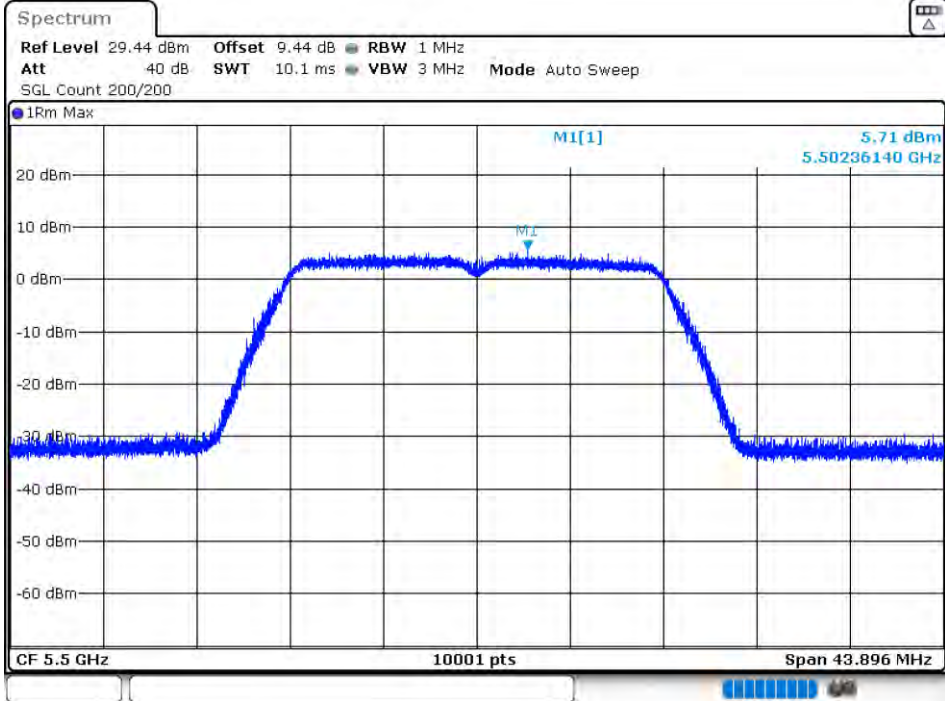


PSD NVNT 802.11n(HT20) 5600MHz Ant 1

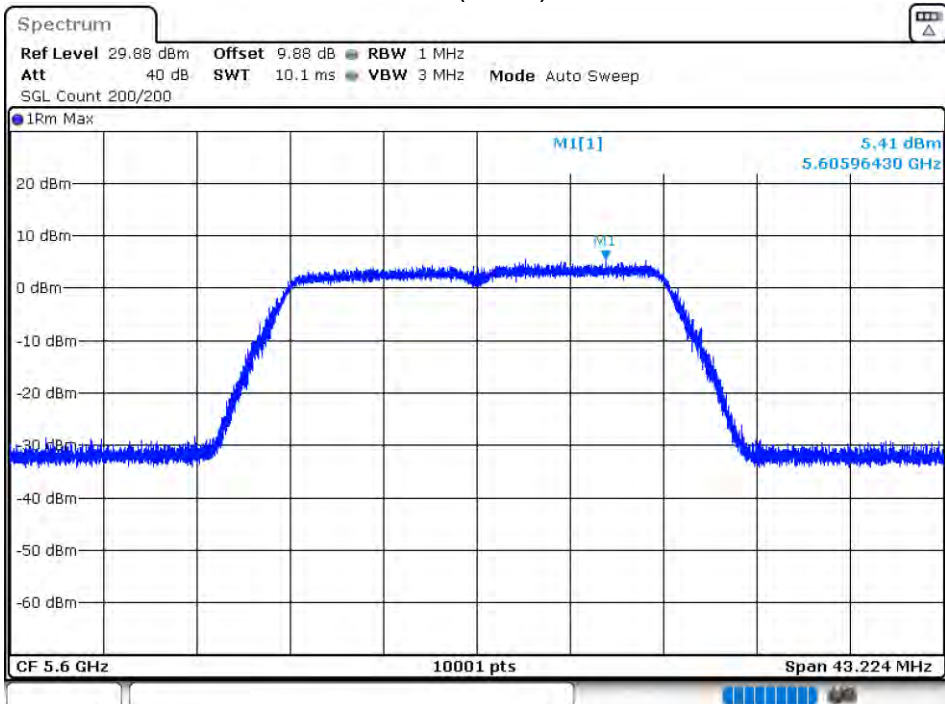


PSD NVNT 802.11n(HT20) 5700MHz Ant 1

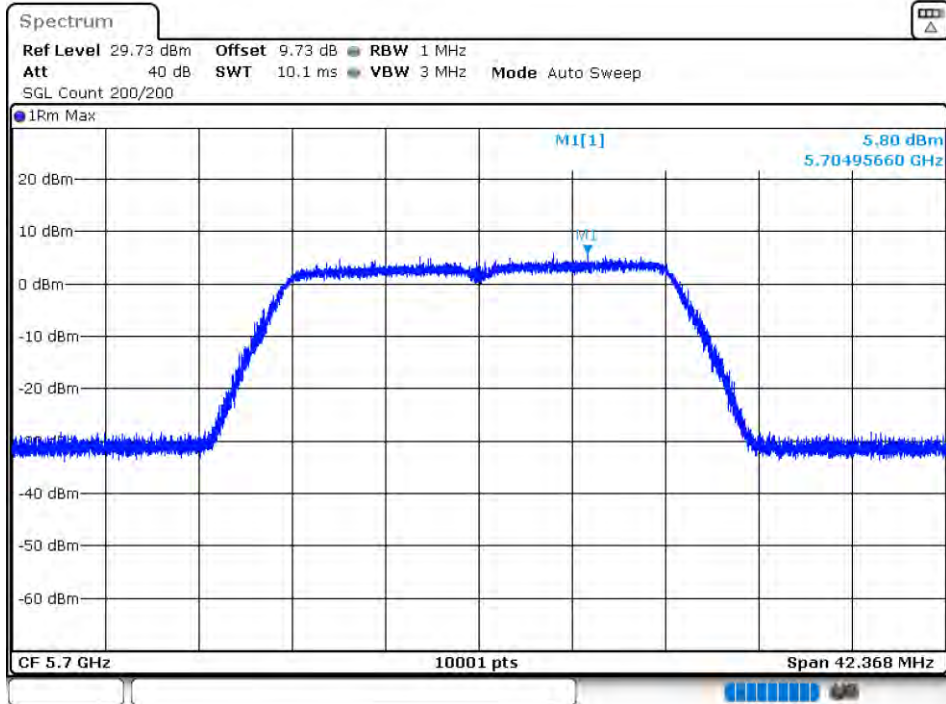


PSD NVNT 802.11n(HT20) 5500MHz Ant 2

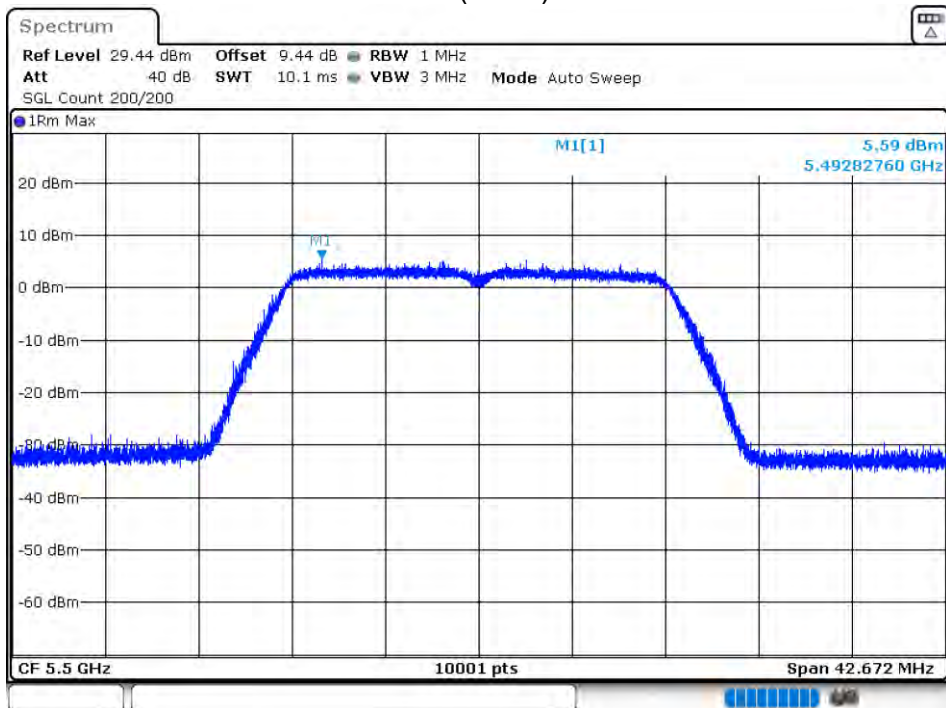

PSD NVNT 802.11n(HT20) 5600MHz Ant 2

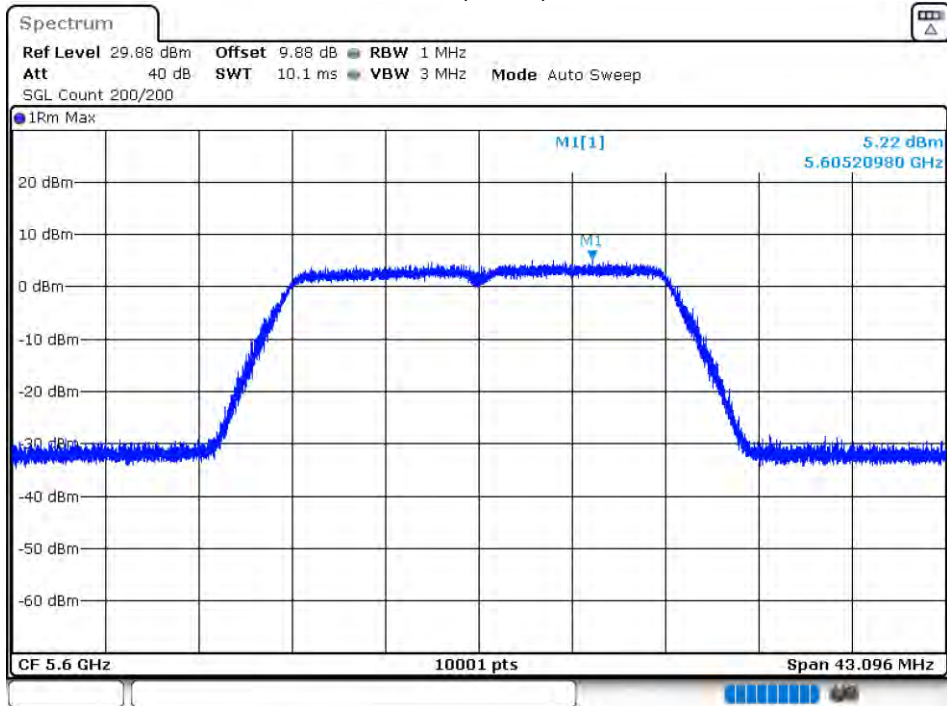


PSD NVNT 802.11n(HT20) 5700MHz Ant 2

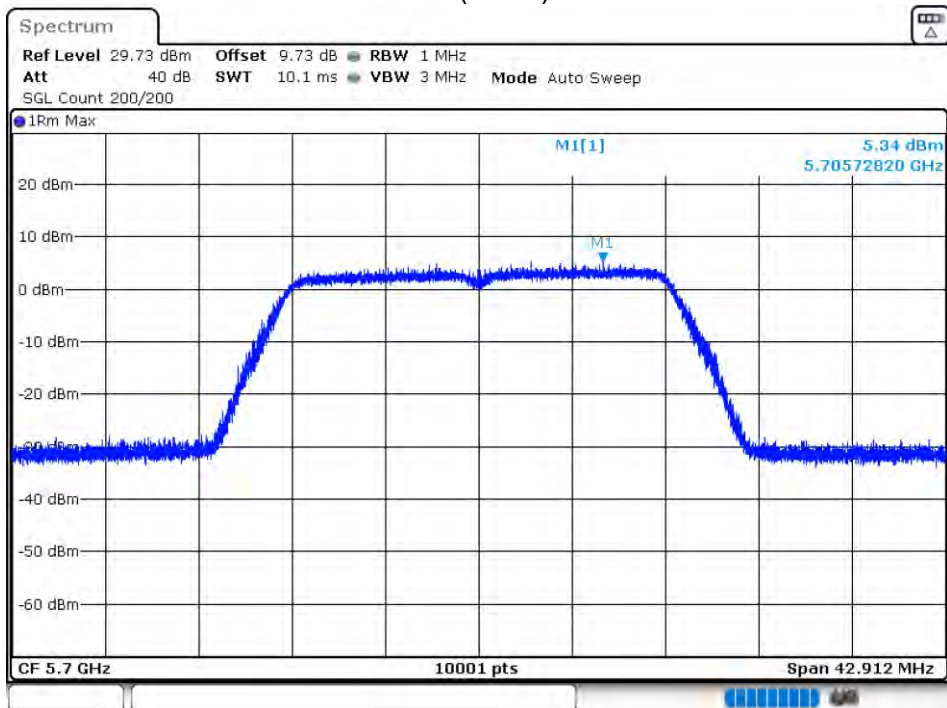


PSD NVNT 802.11n(HT40) 5510MHz Ant 1




PSD NVNT 802.11n(HT40) 5590MHz Ant 1

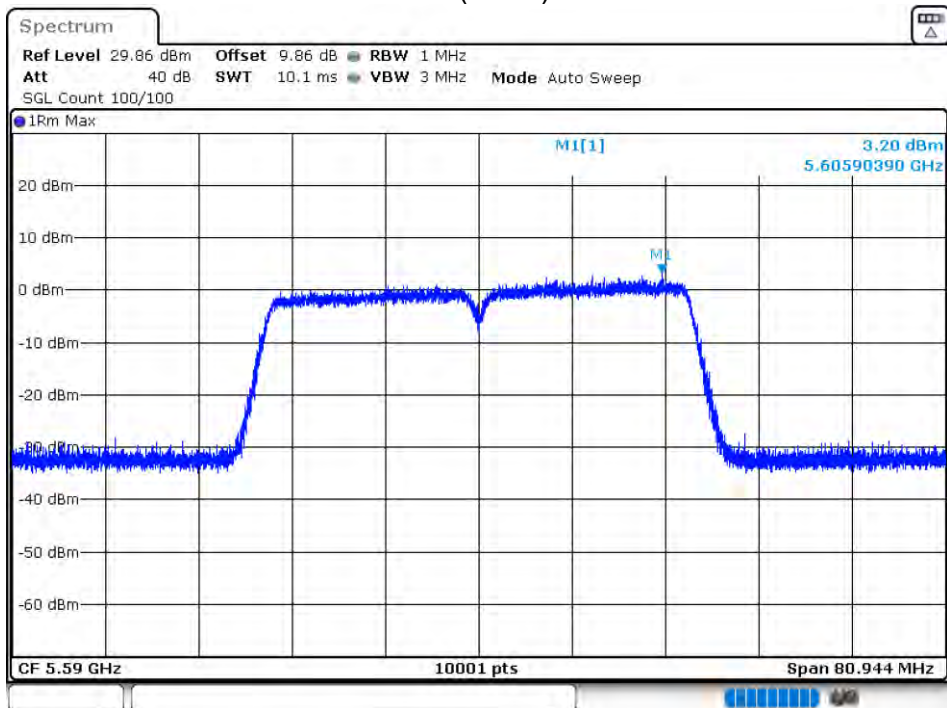


PSD NVNT 802.11n(HT40) 5670MHz Ant 1

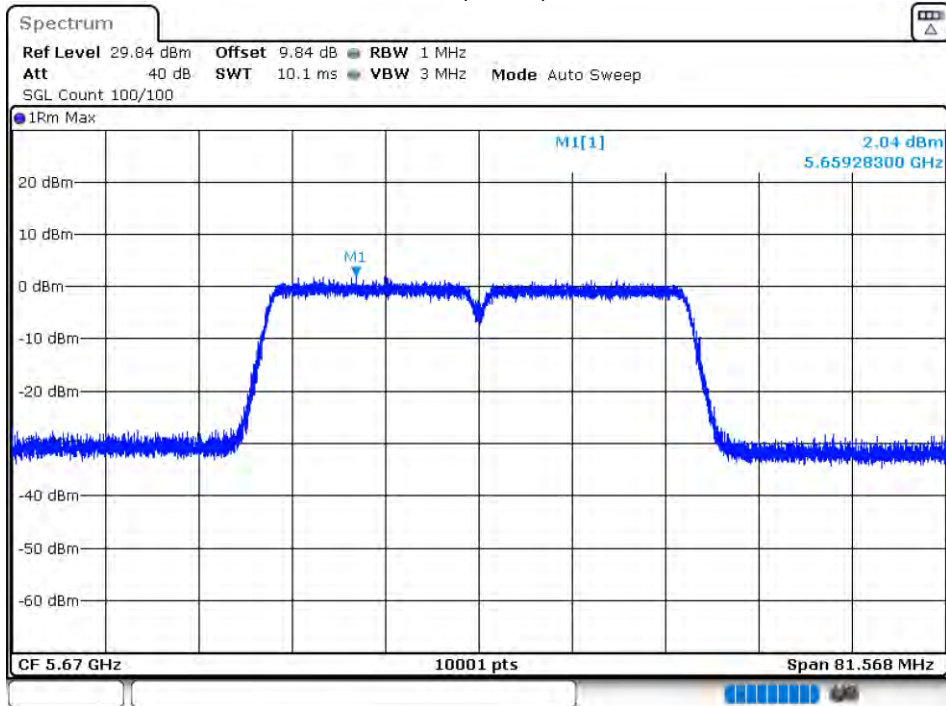


PSD NVNT 802.11n(HT40) 5510MHz Ant 2

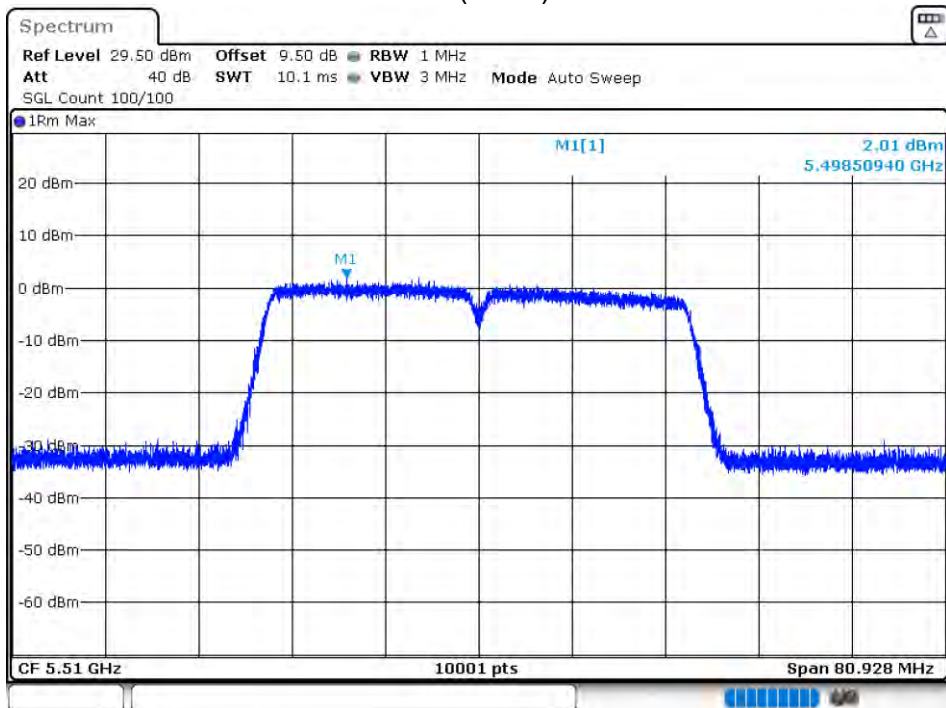

PSD NVNT 802.11n(HT40) 5590MHz Ant 2

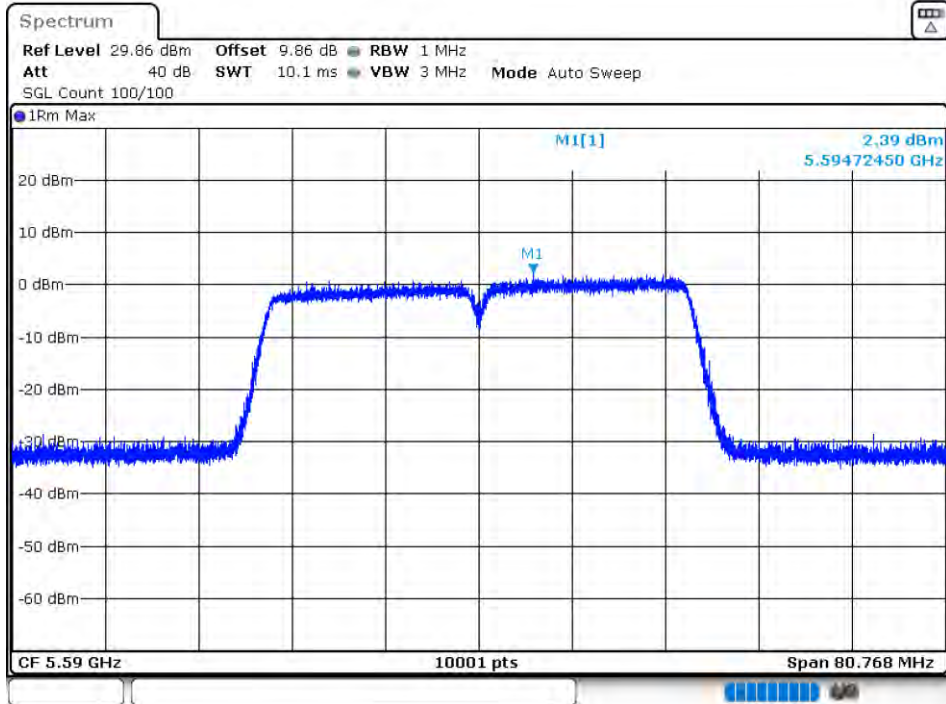


PSD NVNT 802.11n(HT40) 5670MHz Ant 2

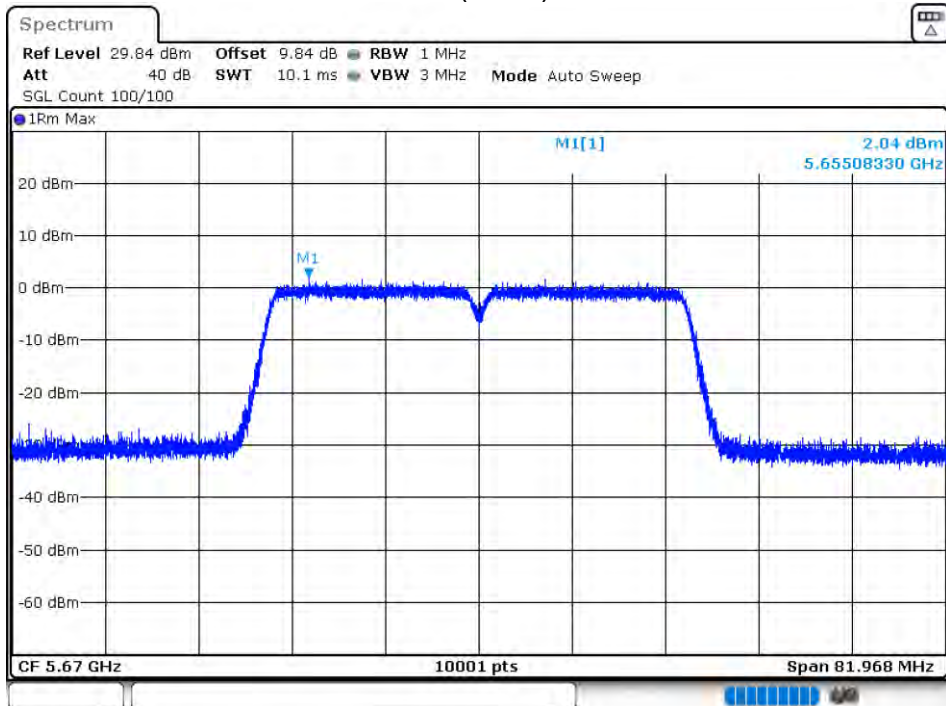


11.3.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5500	Ant 1	-45.46	-27	Pass
NVNT	802.11a	5700	Ant 1	-43.37	-27	Pass
NVNT	802.11a	5500	Ant 2	-44.75	-27	Pass
NVNT	802.11a	5700	Ant 2	-41.94	-27	Pass
NVNT	802.11ac20	5500	Ant 1	-44.27	-27	Pass
NVNT	802.11ac20	5700	Ant 1	-42.02	-27	Pass
NVNT	802.11ac20	5500	Ant 2	-45.29	-27	Pass
NVNT	802.11ac20	5700	Ant 2	-41.34	-27	Pass
NVNT	802.11ac40	5510	Ant 1	-32.86	-27	Pass
NVNT	802.11ac40	5670	Ant 1	-39.03	-27	Pass
NVNT	802.11ac40	5510	Ant 2	-36.34	-27	Pass
NVNT	802.11ac40	5670	Ant 2	-39.72	-27	Pass
NVNT	802.11ac80	5530	Ant 1	-36.23	-27	Pass
NVNT	802.11ac80	5610	Ant 1	-45.28	-27	Pass
NVNT	802.11ac80	5530	Ant 2	-35.03	-27	Pass
NVNT	802.11ac80	5610	Ant 2	-45.14	-27	Pass
NVNT	802.11n(HT20)	5500	Ant 1	-45.4	-27	Pass
NVNT	802.11n(HT20)	5700	Ant 1	-42.39	-27	Pass
NVNT	802.11n(HT20)	5500	Ant 2	-43.91	-27	Pass
NVNT	802.11n(HT20)	5700	Ant 2	-41.21	-27	Pass
NVNT	802.11n(HT40)	5510	Ant 1	-35.3	-27	Pass
NVNT	802.11n(HT40)	5670	Ant 1	-39.43	-27	Pass
NVNT	802.11n(HT40)	5510	Ant 2	-35.52	-27	Pass
NVNT	802.11n(HT40)	5670	Ant 2	-37.63	-27	Pass


Band Edge NVNT 802.11a 5500MHz Low Ant 1

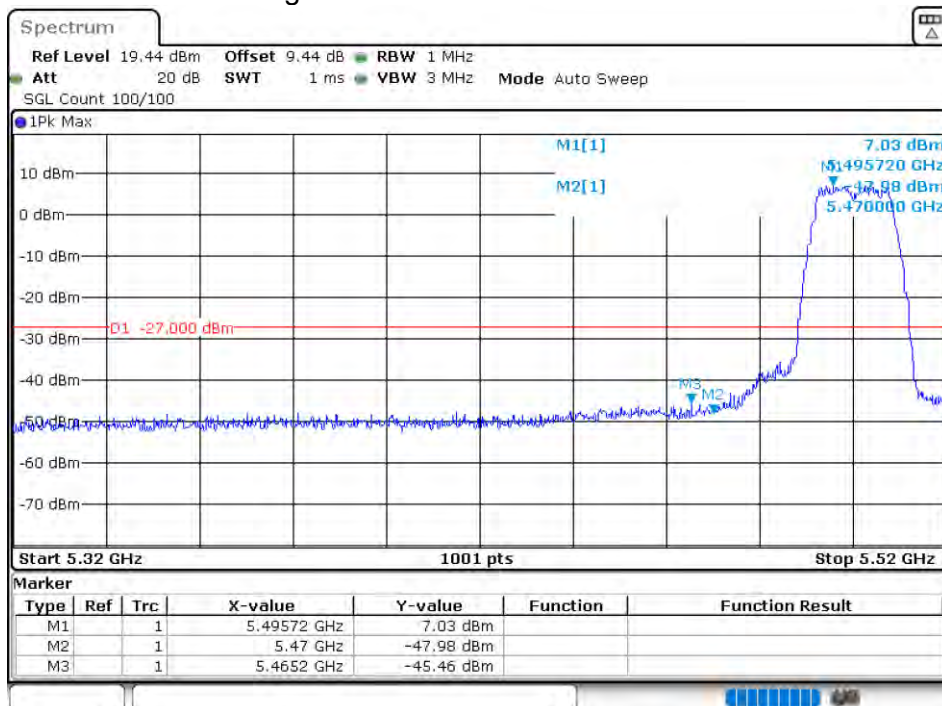


Band Edge NVNT 802.11a 5700MHz High Ant 1

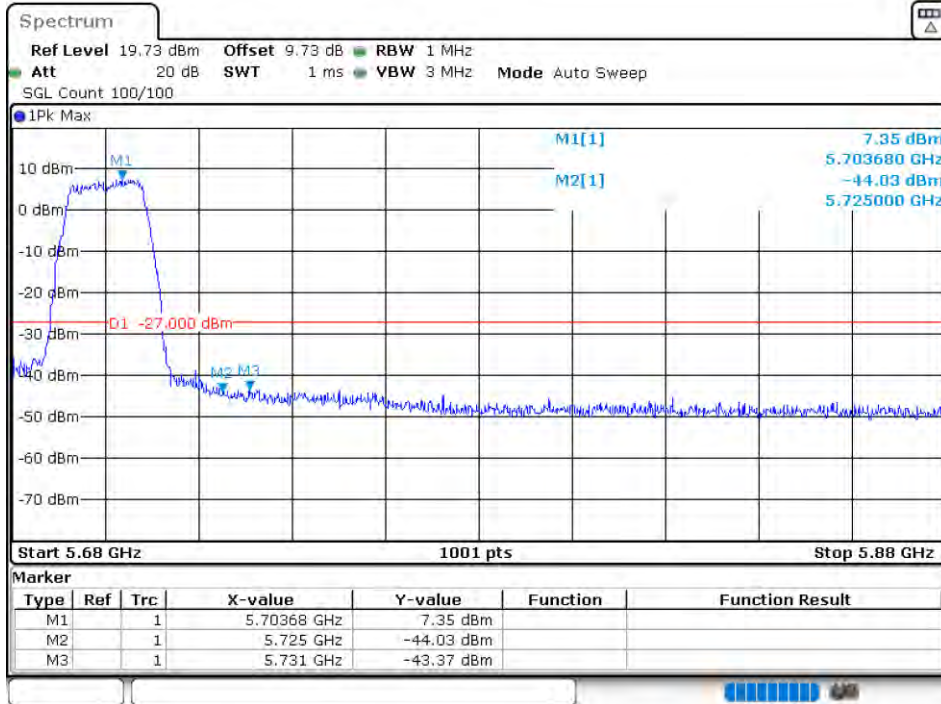


Band Edge NVNT 802.11a 5500MHz Low Ant 2

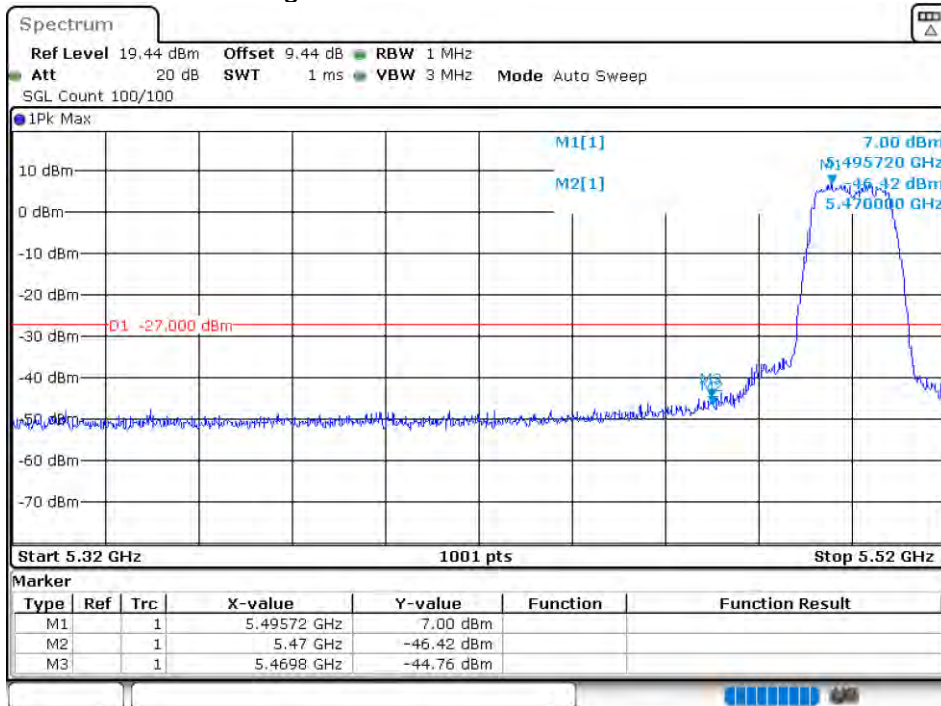


Band Edge NVNT 802.11a 5700MHz High Ant 2

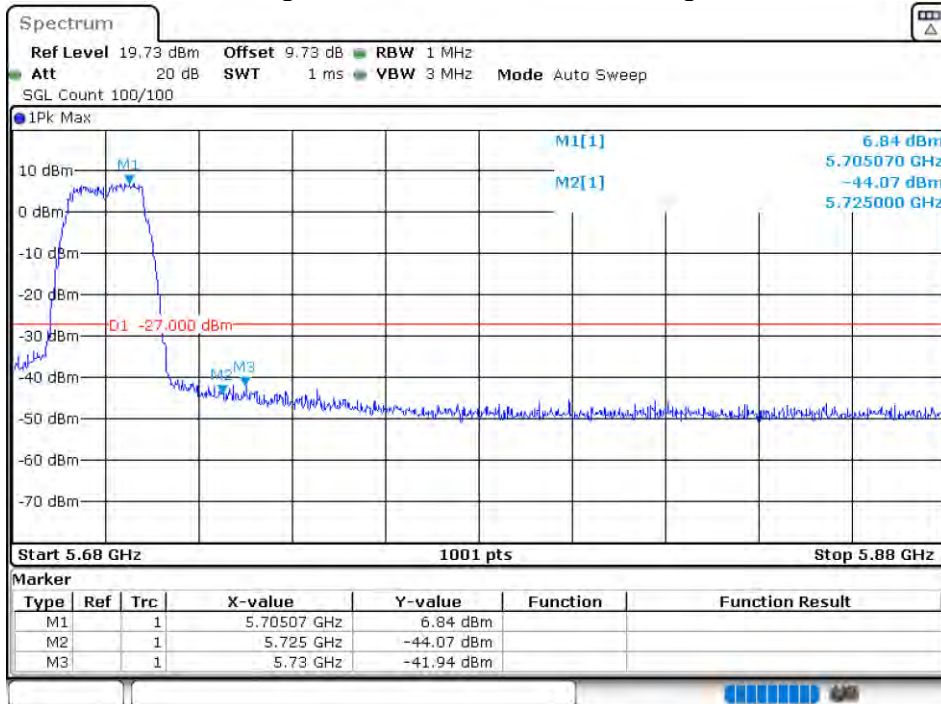


Band Edge NVNT 802.11ac20 5500MHz Low Ant 1

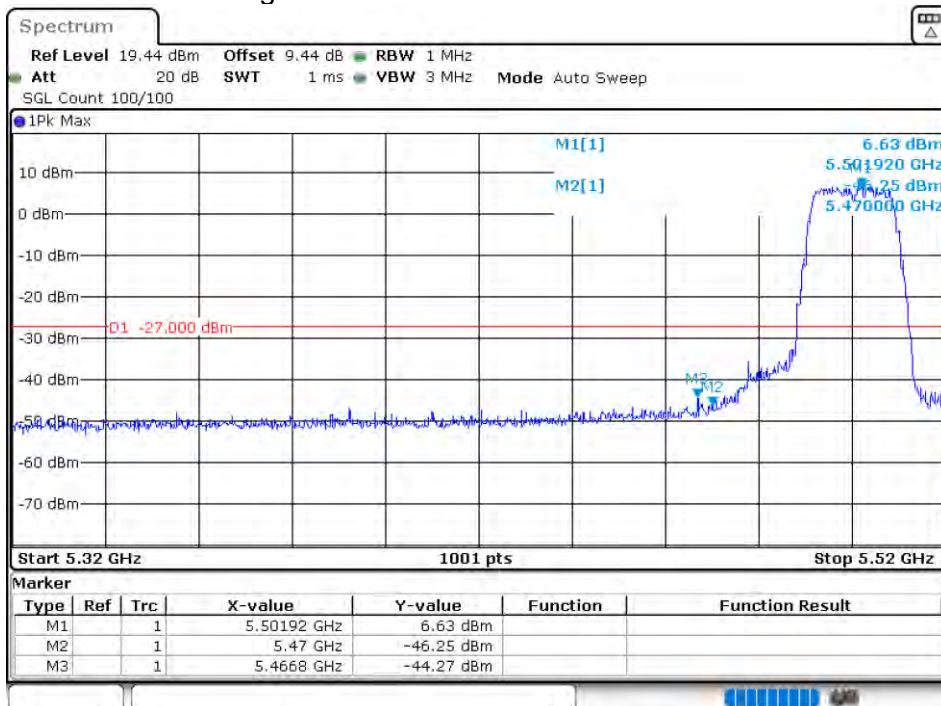


Band Edge NVNT 802.11ac20 5700MHz High Ant 1

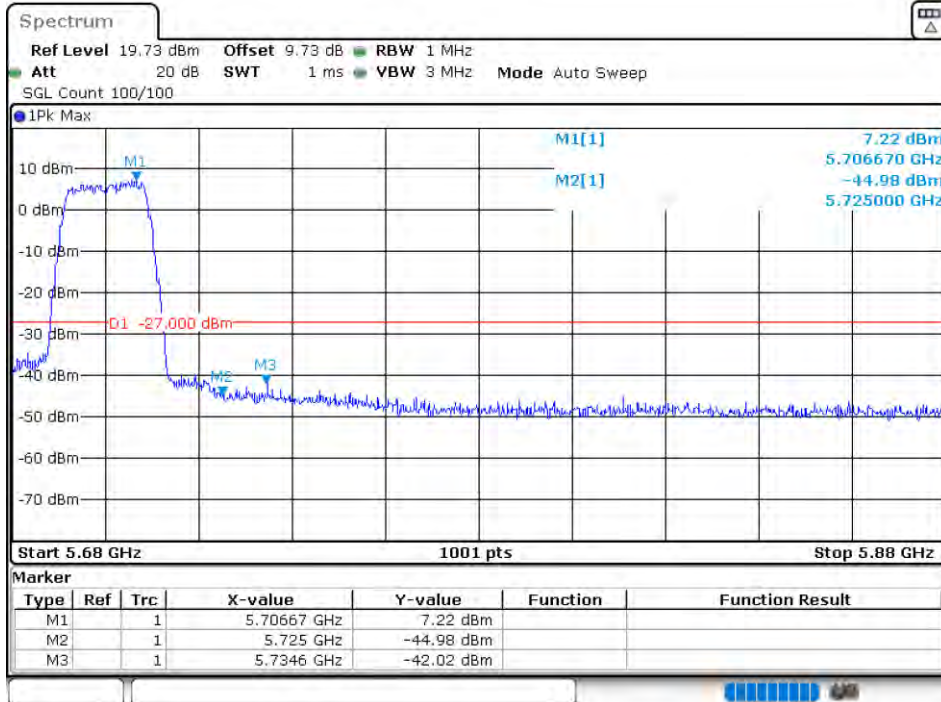


Band Edge NVNT 802.11ac20 5500MHz Low Ant 2

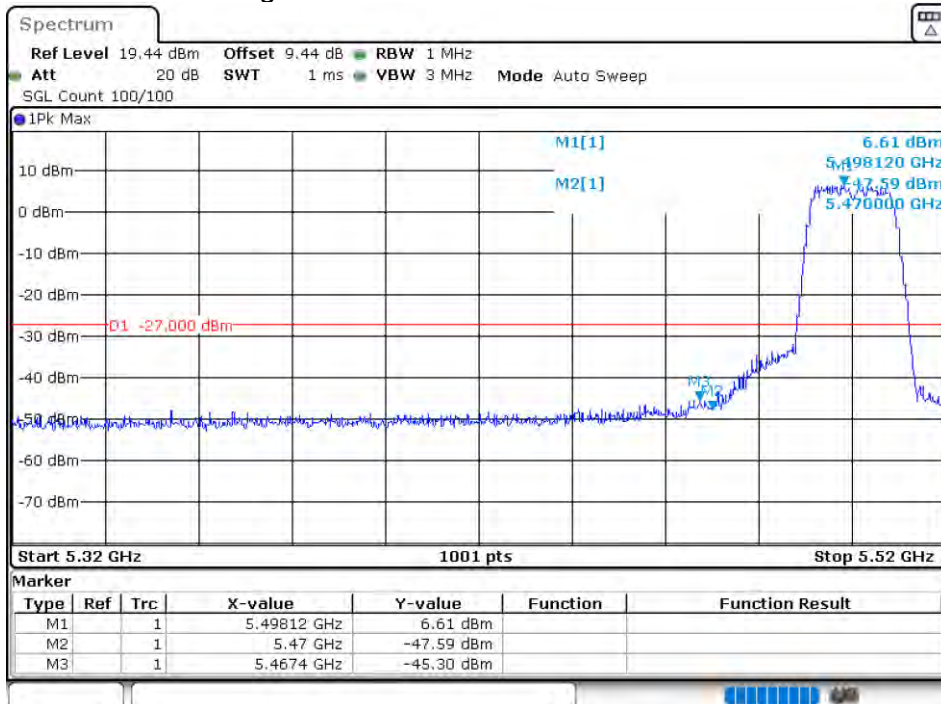


Band Edge NVNT 802.11ac20 5700MHz High Ant 2

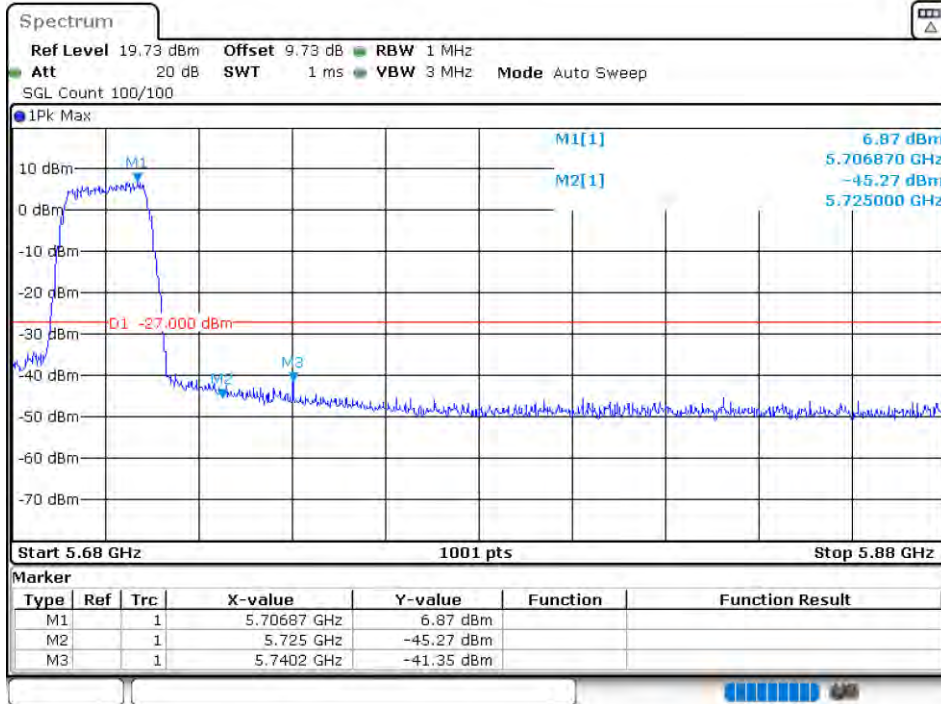


Band Edge NVNT 802.11ac40 5510MHz Low Ant 1

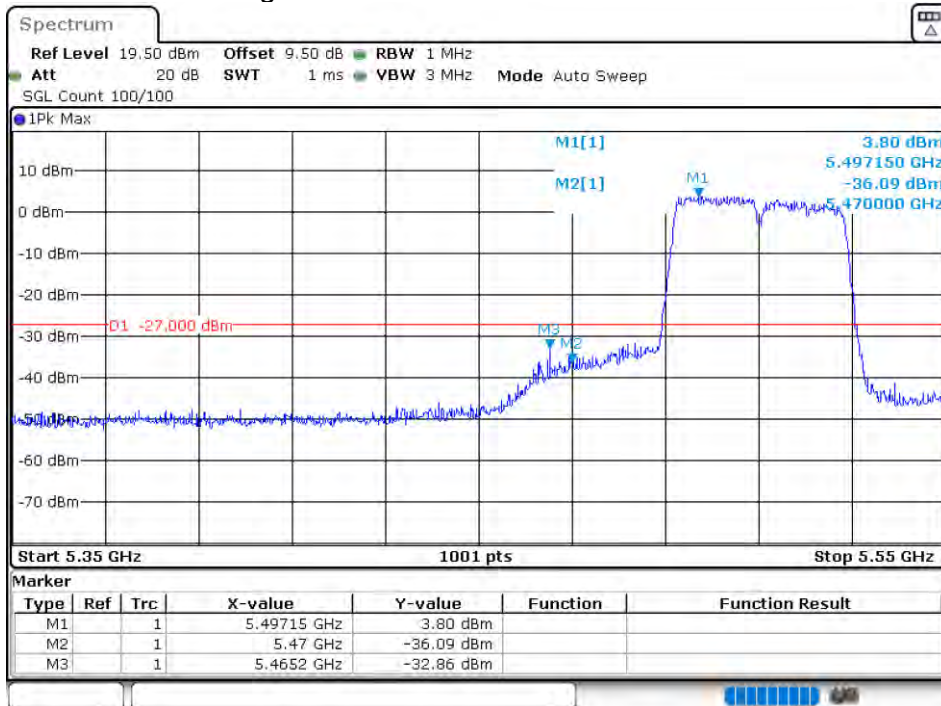


Band Edge NVNT 802.11ac40 5670MHz High Ant 1

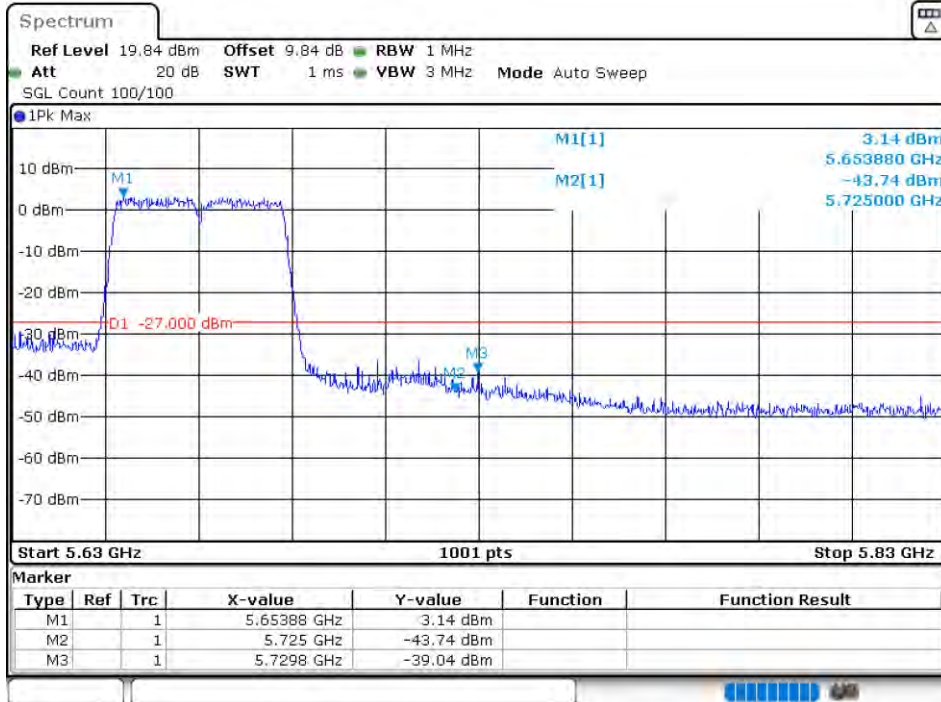


Band Edge NVNT 802.11ac40 5510MHz Low Ant 2

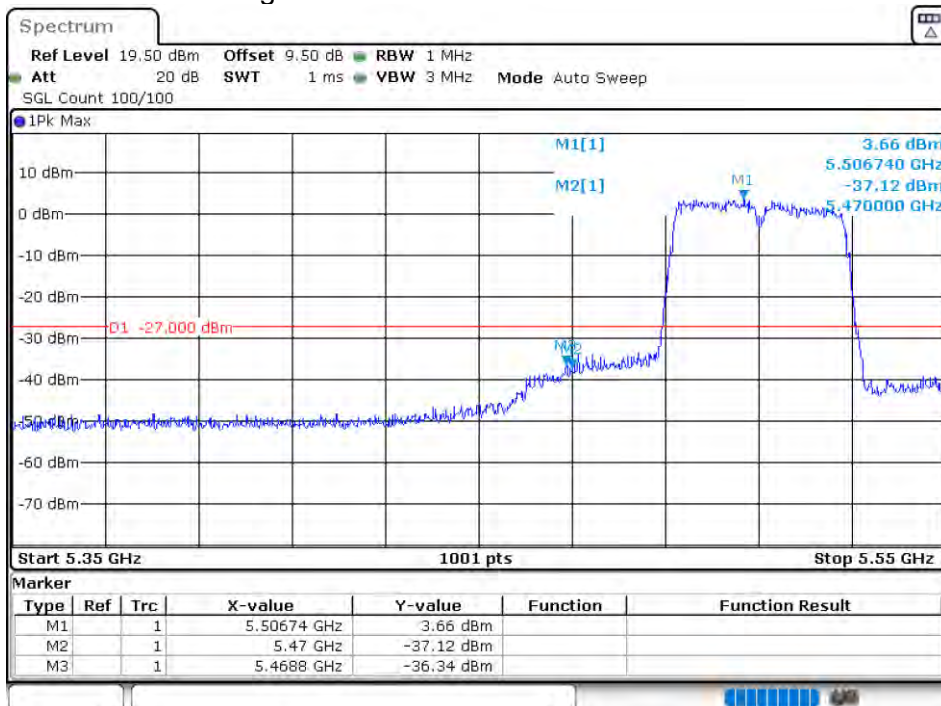


Band Edge NVNT 802.11ac40 5670MHz High Ant 2

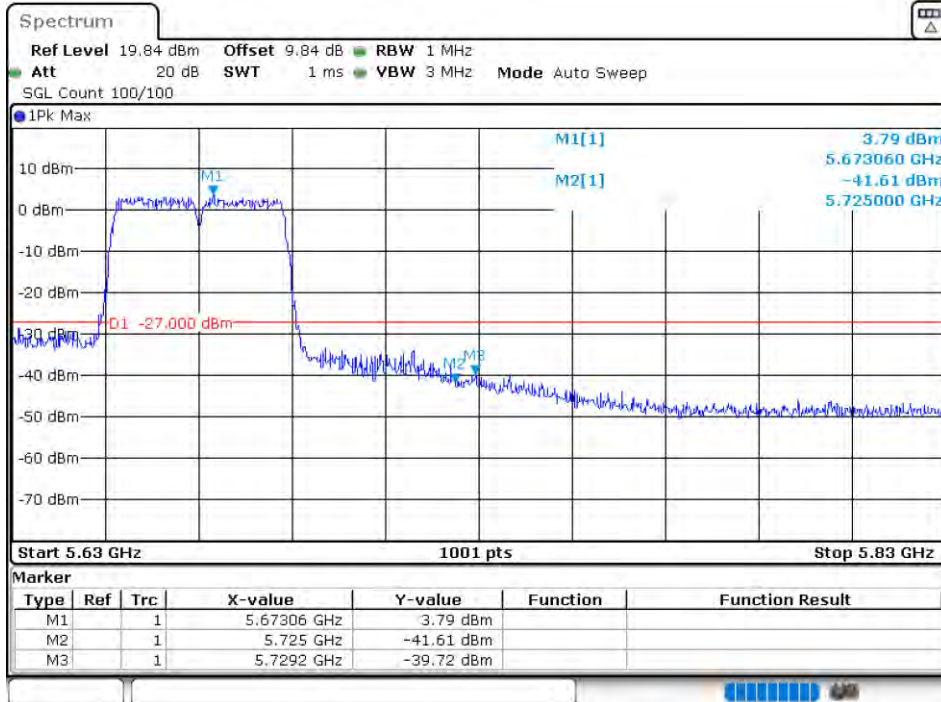


Band Edge NVNT 802.11ac80 5530MHz Low Ant 1

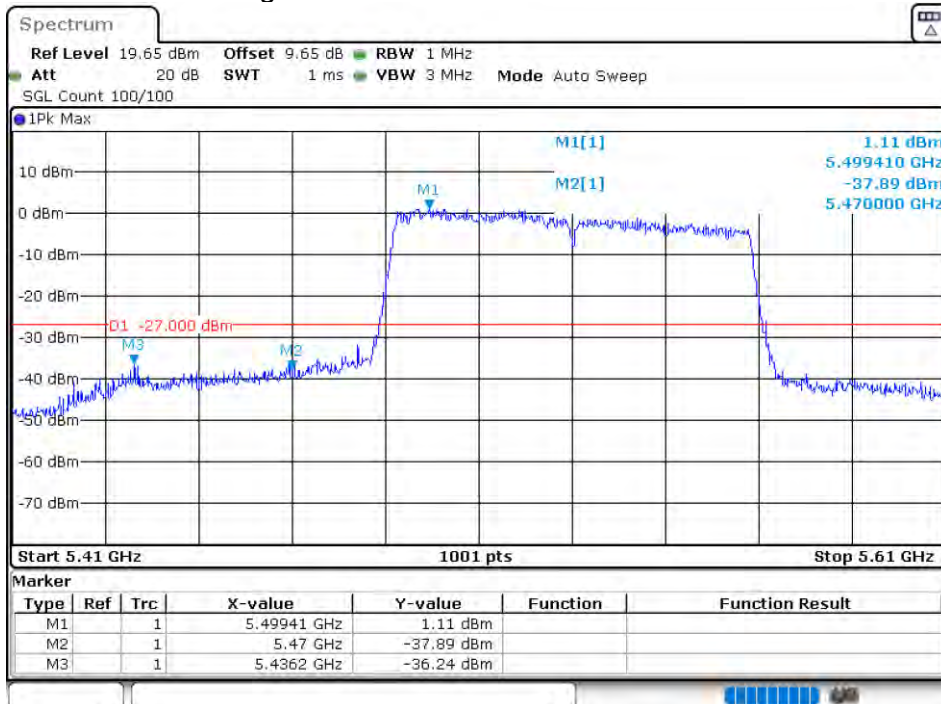


Band Edge NVNT 802.11ac80 5610MHz High Ant 1

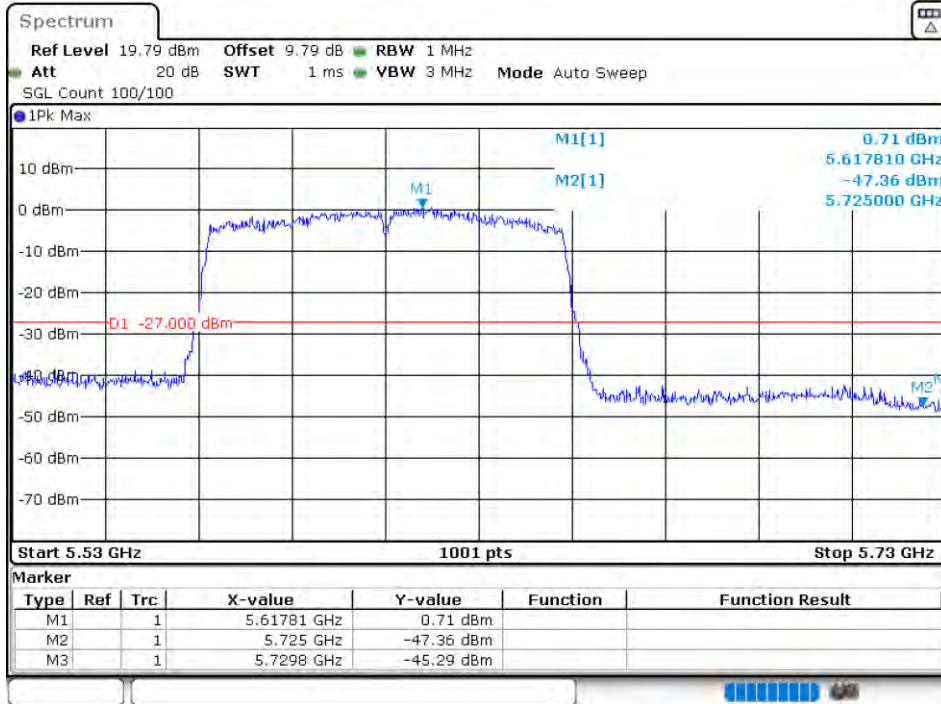


Band Edge NVNT 802.11ac80 5530MHz Low Ant 2

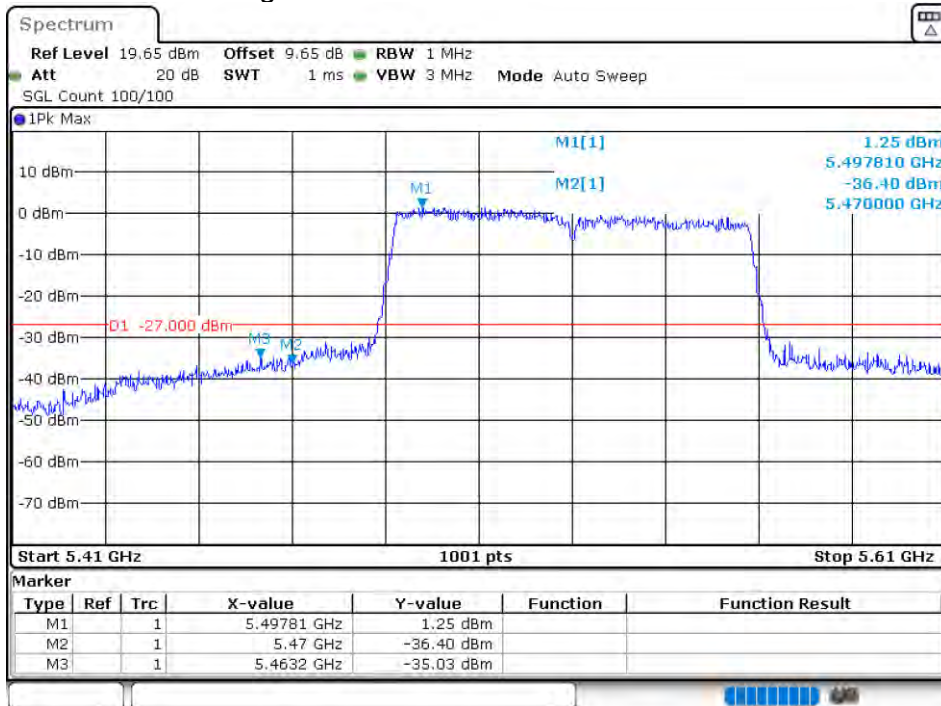


Band Edge NVNT 802.11ac80 5610MHz High Ant 2

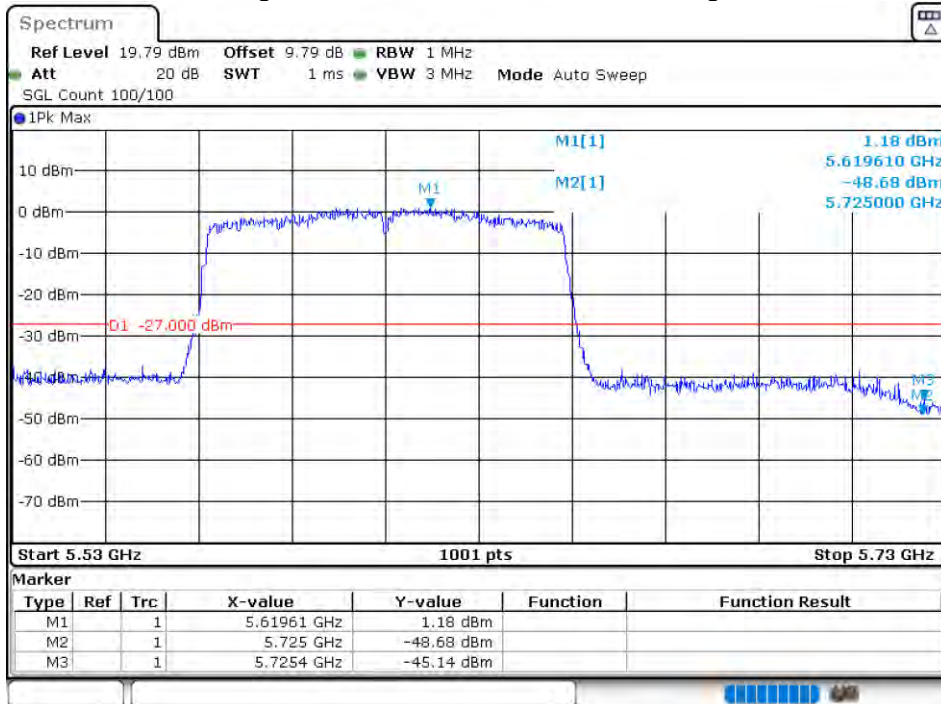


Band Edge NVNT 802.11n(HT20) 5500MHz Low Ant 1

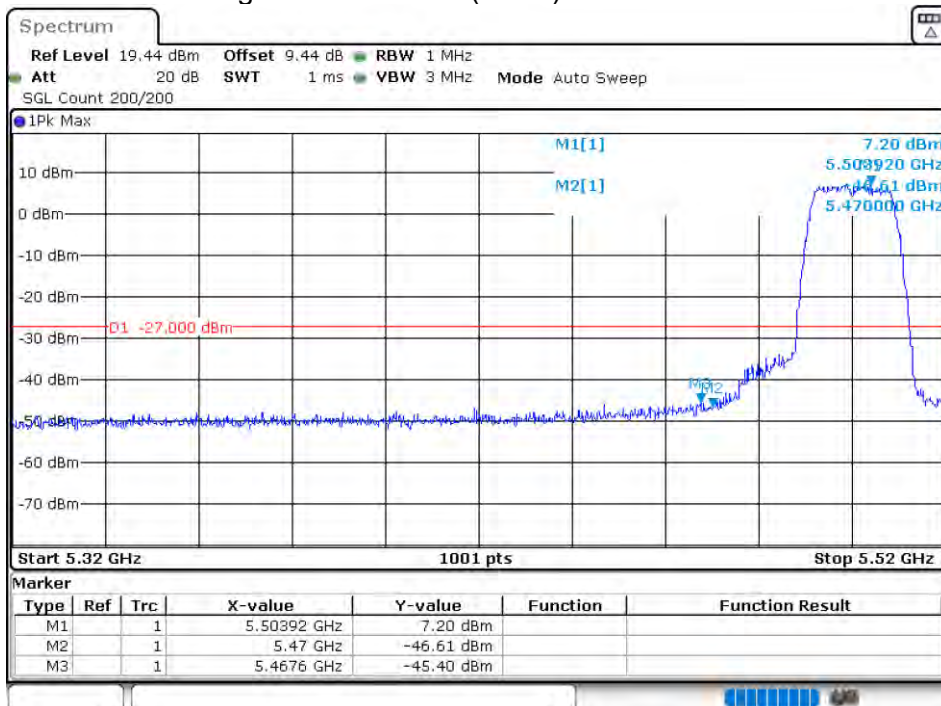


Band Edge NVNT 802.11n(HT20) 5700MHz High Ant 1

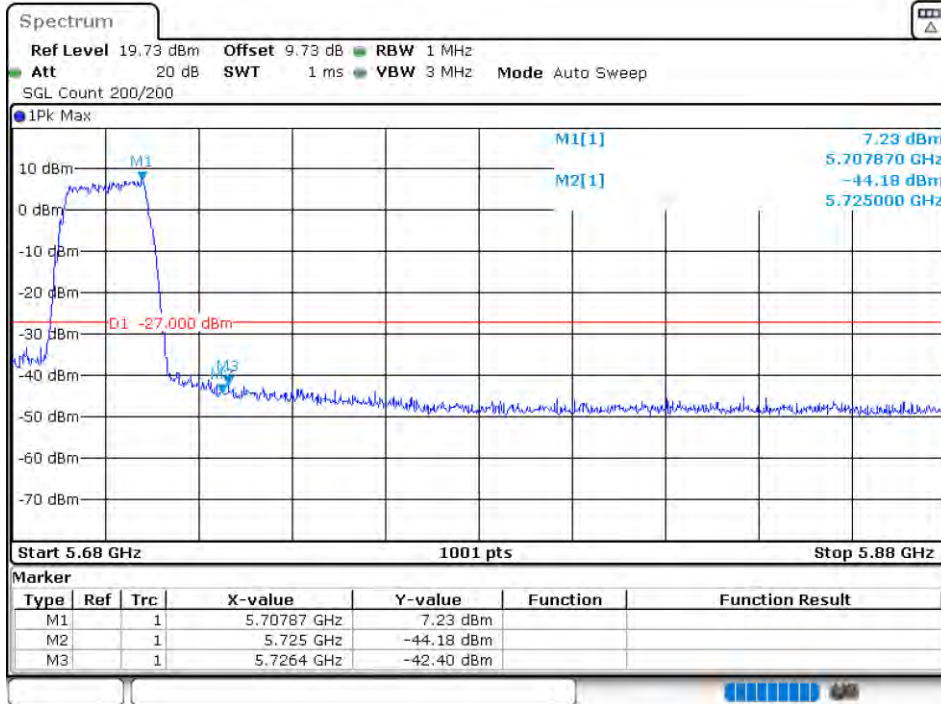


Band Edge NVNT 802.11n(HT20) 5500MHz Low Ant 2

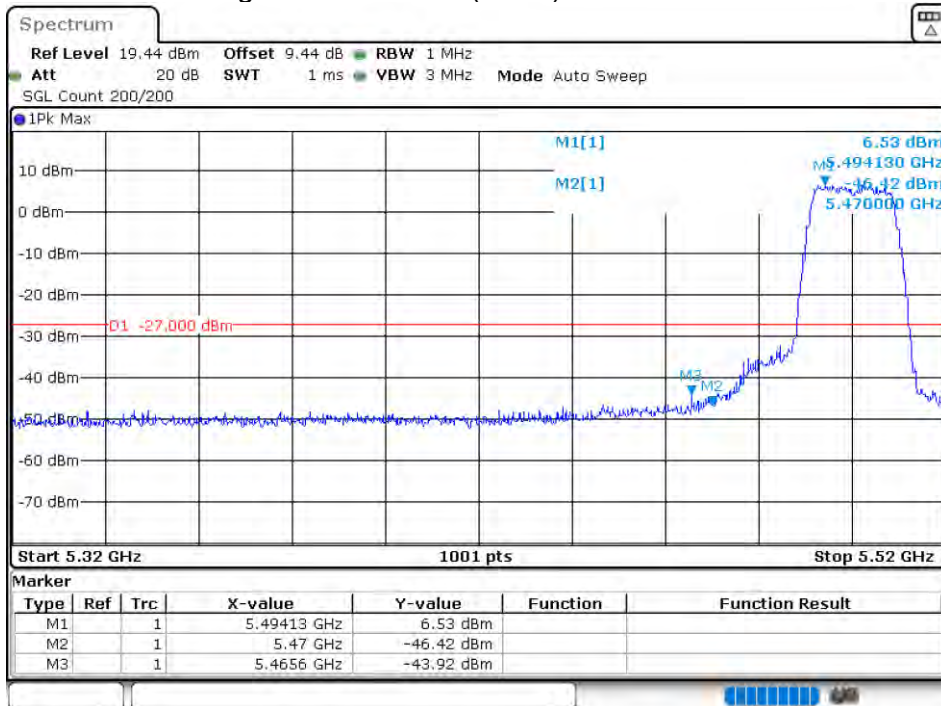


Band Edge NVNT 802.11n(HT20) 5700MHz High Ant 2

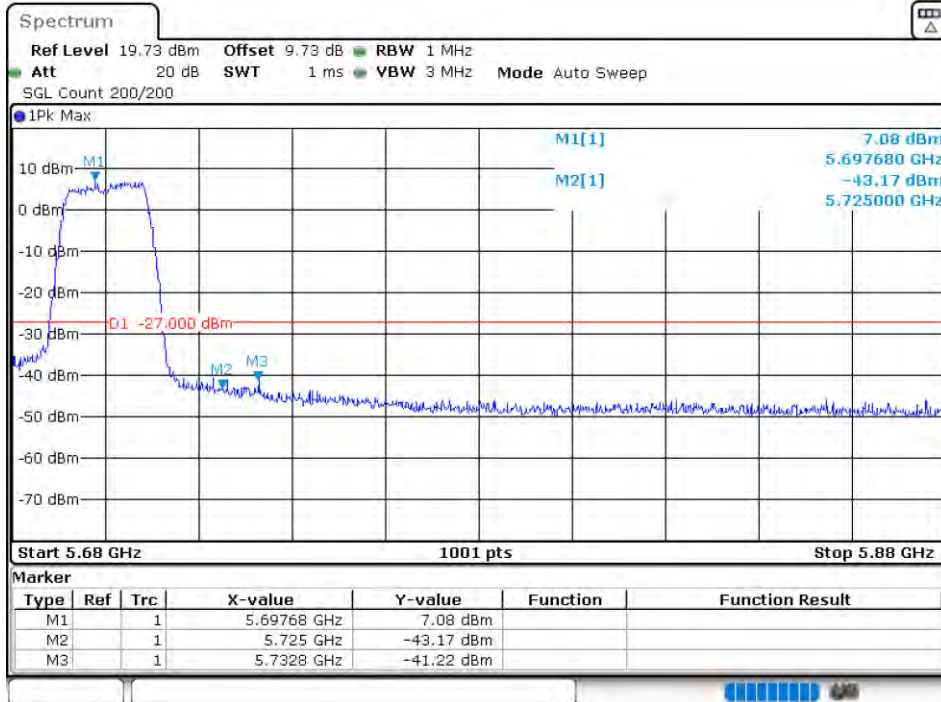


Band Edge NVNT 802.11n(HT40) 5510MHz Low Ant 1

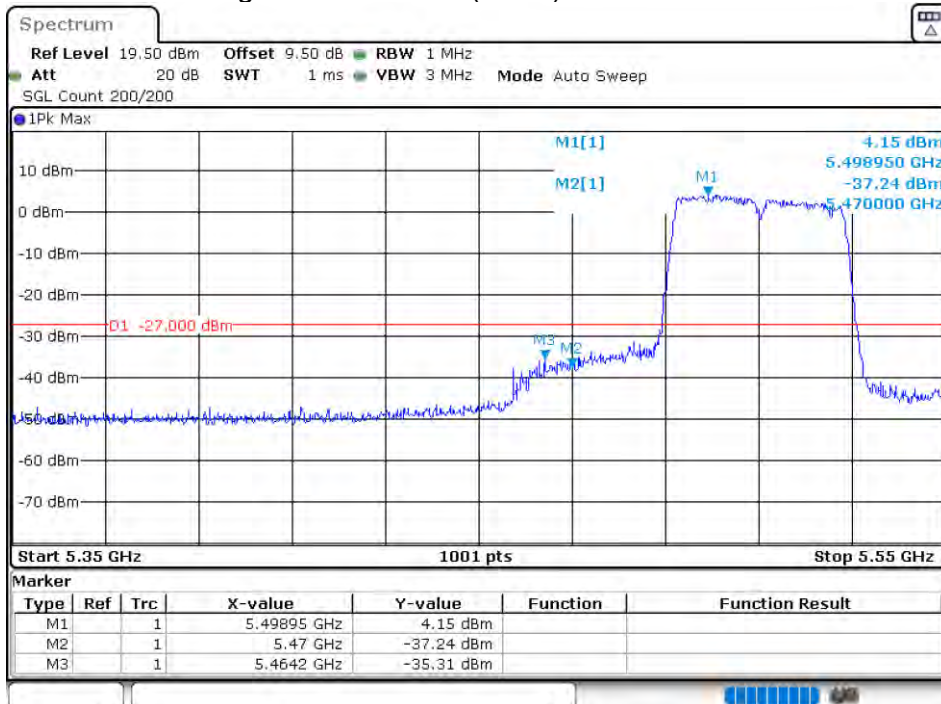

Band Edge NVNT 802.11n(HT40) 5670MHz High Ant 1

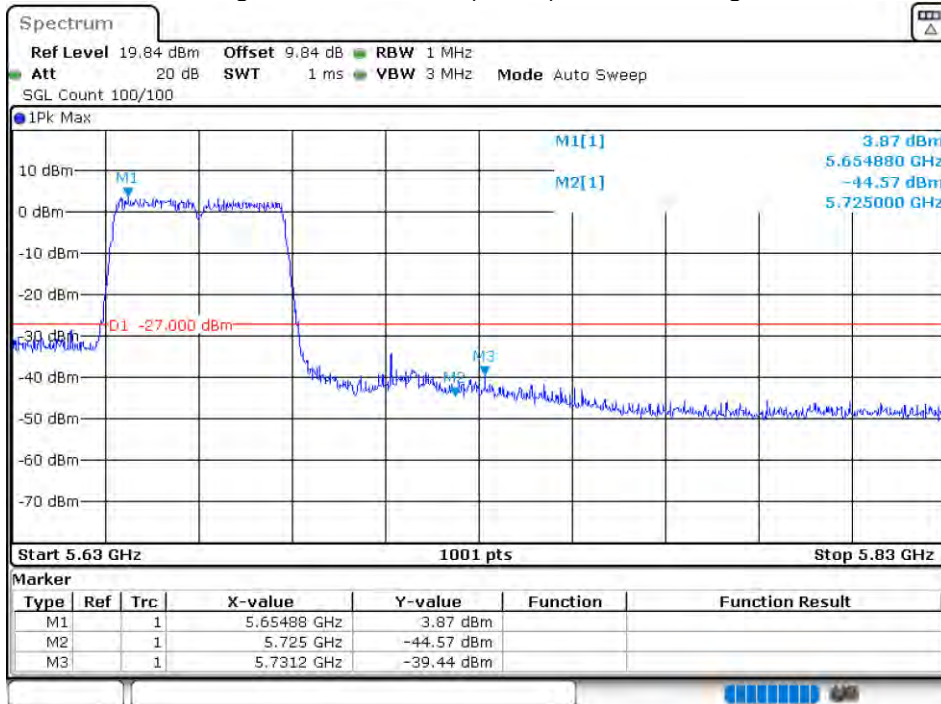

Band Edge NVNT 802.11n(HT40) 5510MHz Low Ant 2

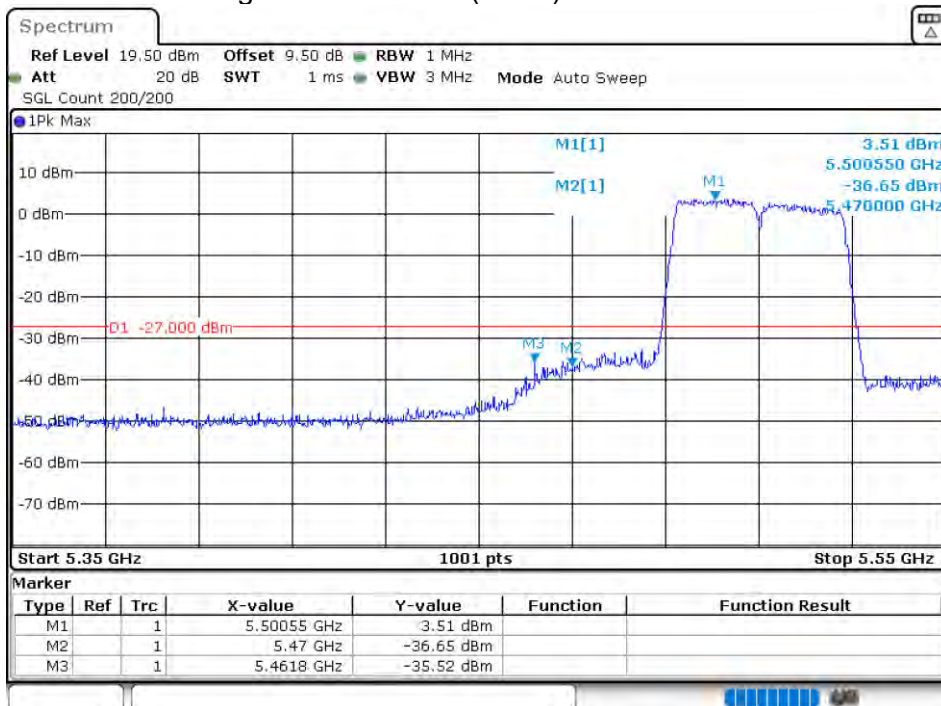


Band Edge NVNT 802.11n(HT40) 5670MHz High Ant 2




11.3.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11a	5500	Ant 1	-40.65	-27	Pass
NVNT	802.11a	5600	Ant 1	-39.93	-27	Pass
NVNT	802.11a	5700	Ant 1	-40.51	-27	Pass
NVNT	802.11a	5500	Ant 2	-41.43	-27	Pass
NVNT	802.11a	5600	Ant 2	-39.84	-27	Pass
NVNT	802.11a	5700	Ant 2	-40.75	-27	Pass
NVNT	802.11ac20	5500	Ant 1	-40.61	-27	Pass
NVNT	802.11ac20	5600	Ant 1	-40.83	-27	Pass
NVNT	802.11ac20	5700	Ant 1	-40.75	-27	Pass
NVNT	802.11ac20	5500	Ant 2	-40.51	-27	Pass
NVNT	802.11ac20	5600	Ant 2	-39.64	-27	Pass
NVNT	802.11ac20	5700	Ant 2	-40.63	-27	Pass
NVNT	802.11ac40	5510	Ant 1	-41.38	-27	Pass
NVNT	802.11ac40	5590	Ant 1	-40.73	-27	Pass
NVNT	802.11ac40	5670	Ant 1	-40.72	-27	Pass
NVNT	802.11ac40	5510	Ant 2	-40.54	-27	Pass
NVNT	802.11ac40	5590	Ant 2	-40.75	-27	Pass
NVNT	802.11ac40	5670	Ant 2	-41.11	-27	Pass
NVNT	802.11ac80	5530	Ant 1	-39.44	-27	Pass
NVNT	802.11ac80	5610	Ant 1	-41	-27	Pass
NVNT	802.11ac80	5530	Ant 2	-40.72	-27	Pass
NVNT	802.11ac80	5610	Ant 2	-41.12	-27	Pass
NVNT	802.11n(HT20)	5500	Ant 1	-40.87	-27	Pass
NVNT	802.11n(HT20)	5600	Ant 1	-40.34	-27	Pass
NVNT	802.11n(HT20)	5700	Ant 1	-40.97	-27	Pass
NVNT	802.11n(HT20)	5500	Ant 2	-40.83	-27	Pass
NVNT	802.11n(HT20)	5600	Ant 2	-40.71	-27	Pass
NVNT	802.11n(HT20)	5700	Ant 2	-40.42	-27	Pass
NVNT	802.11n(HT40)	5510	Ant 1	-40.67	-27	Pass
NVNT	802.11n(HT40)	5590	Ant 1	-40.84	-27	Pass
NVNT	802.11n(HT40)	5670	Ant 1	-40.31	-27	Pass
NVNT	802.11n(HT40)	5510	Ant 2	-41.34	-27	Pass
NVNT	802.11n(HT40)	5590	Ant 2	-40.02	-27	Pass
NVNT	802.11n(HT40)	5670	Ant 2	-38.73	-27	Pass


Tx. Spurious NVNT 802.11a 5500MHz Ant 1 Emission

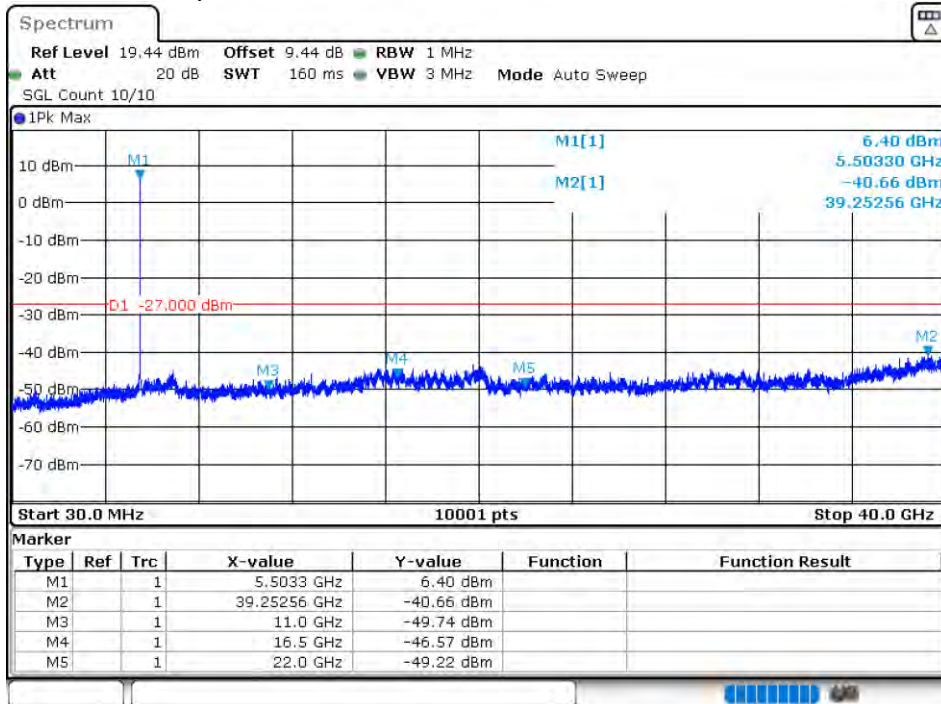


Tx. Spurious NVNT 802.11a 5600MHz Ant 1 Emission

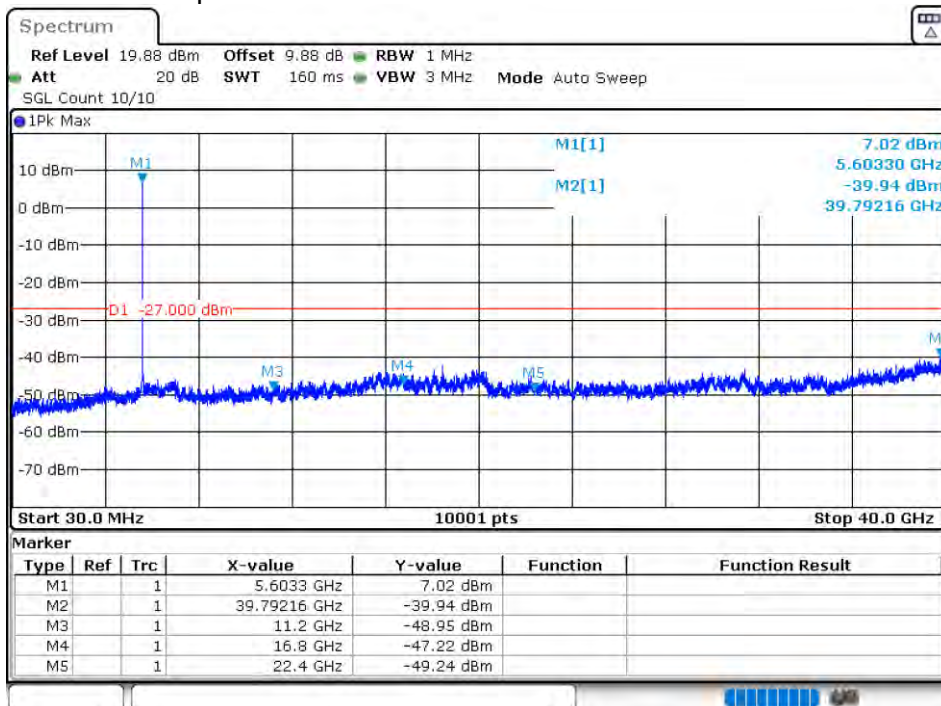


Tx. Spurious NVNT 802.11a 5700MHz Ant 1 Emission

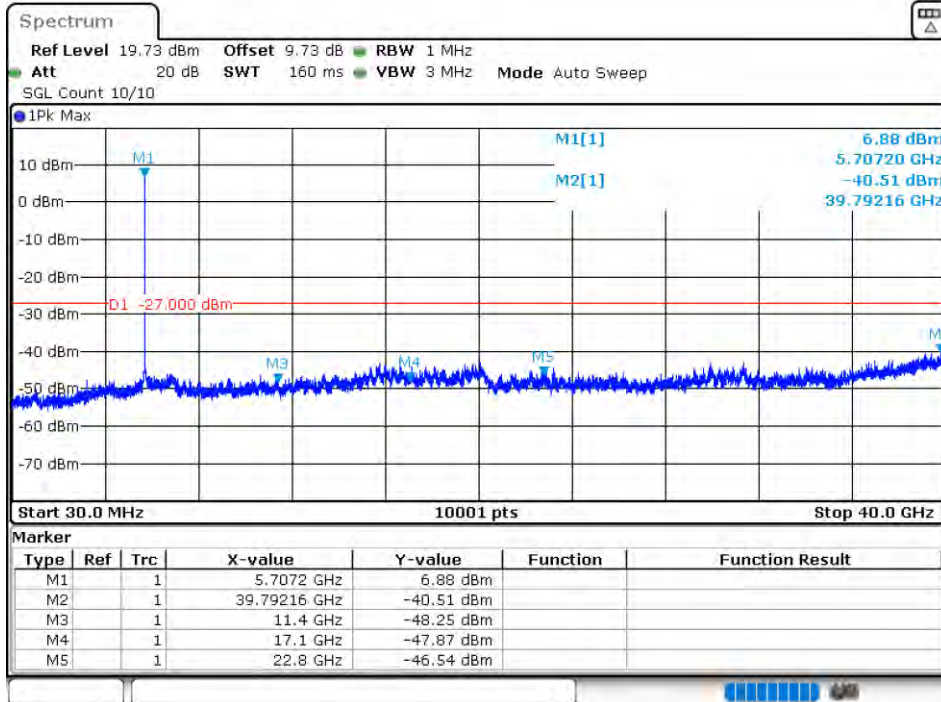


Tx. Spurious NVNT 802.11a 5500MHz Ant 2 Emission

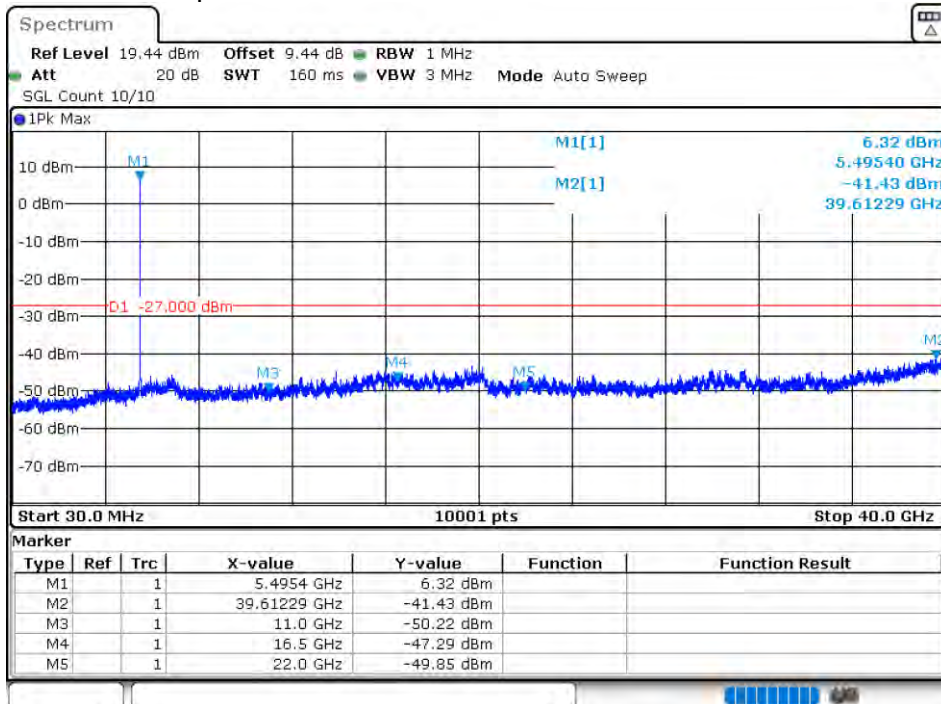


Tx. Spurious NVNT 802.11a 5600MHz Ant 2 Emission

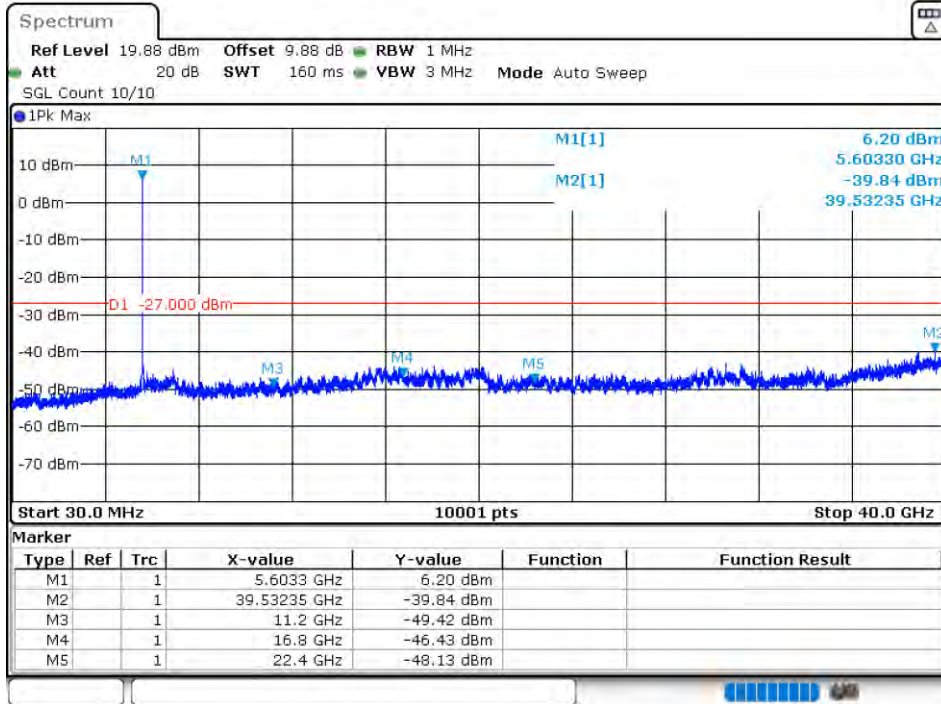


Tx. Spurious NVNT 802.11a 5700MHz Ant 2 Emission

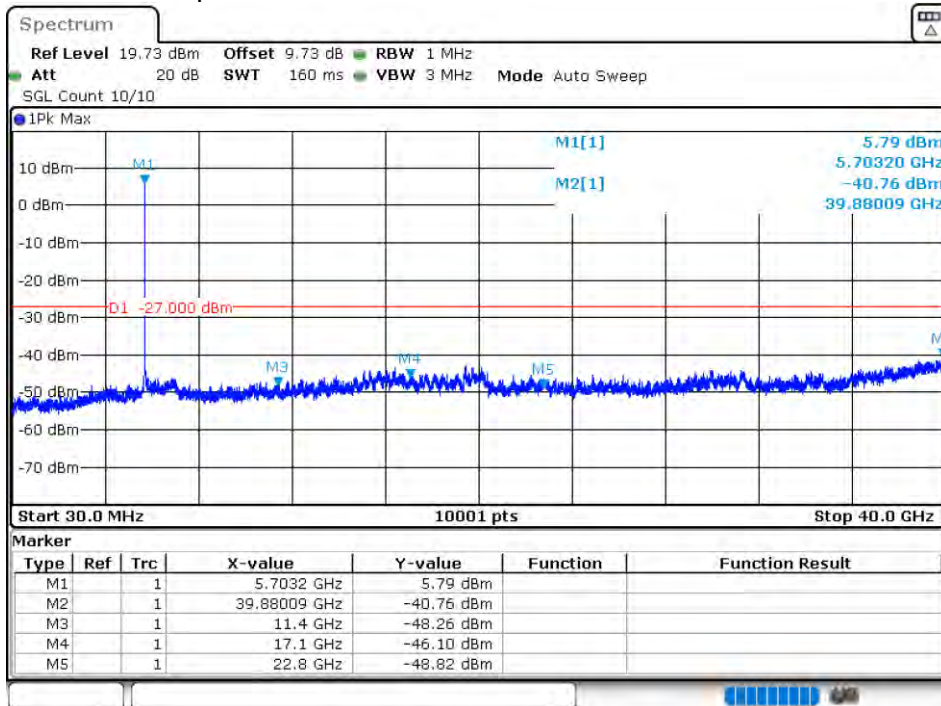


Tx. Spurious NVNT 802.11ac20 5500MHz Ant 1 Emission

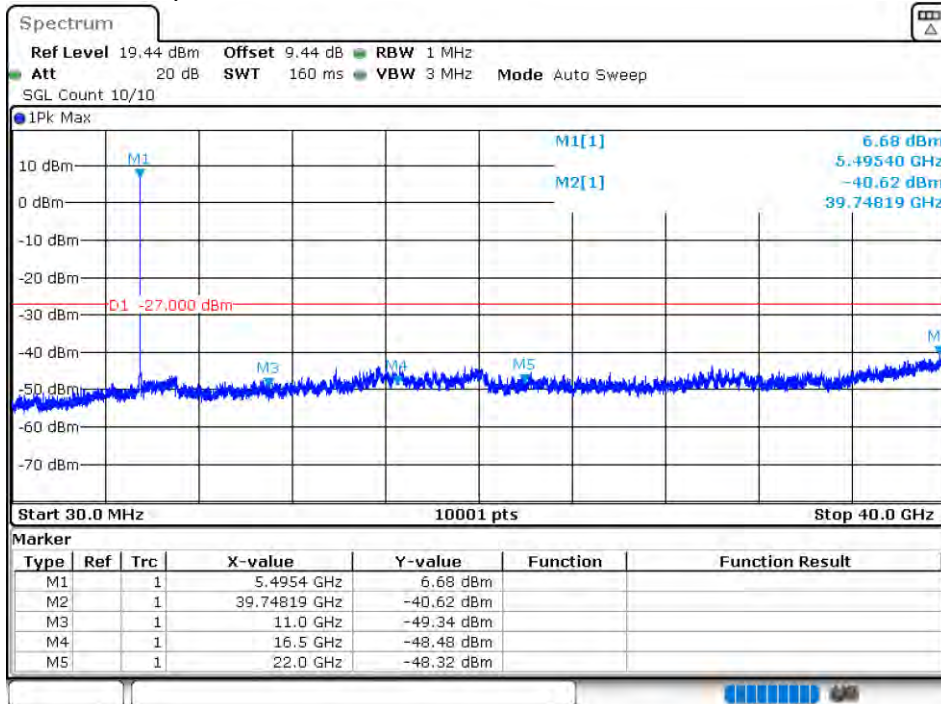


Tx. Spurious NVNT 802.11ac20 5600MHz Ant 1 Emission

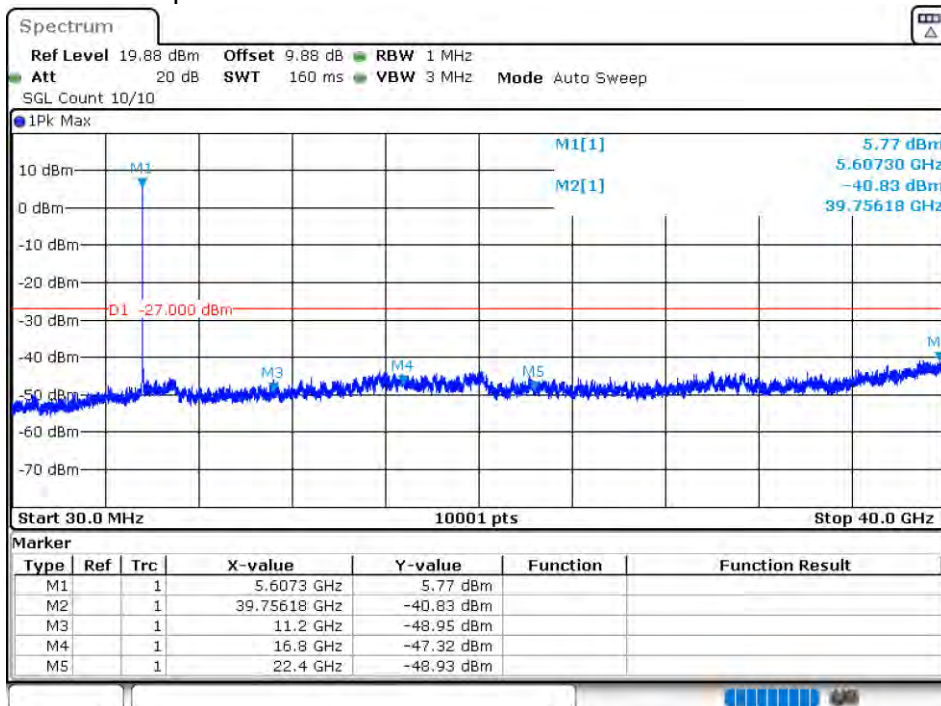


Tx. Spurious NVNT 802.11ac20 5700MHz Ant 1 Emission

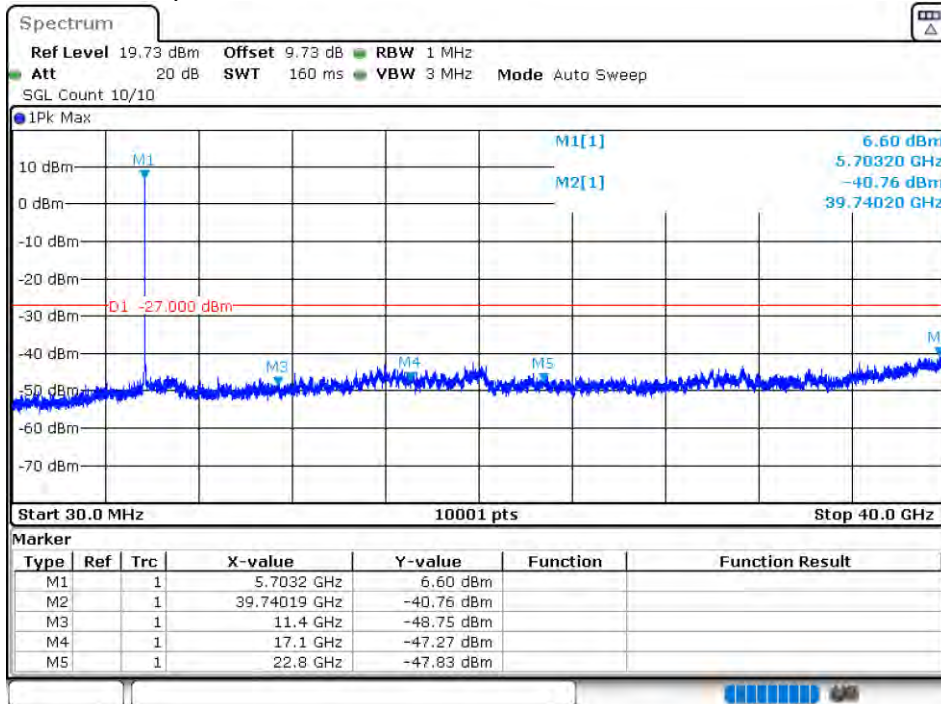


Tx. Spurious NVNT 802.11ac20 5500MHz Ant 2 Emission

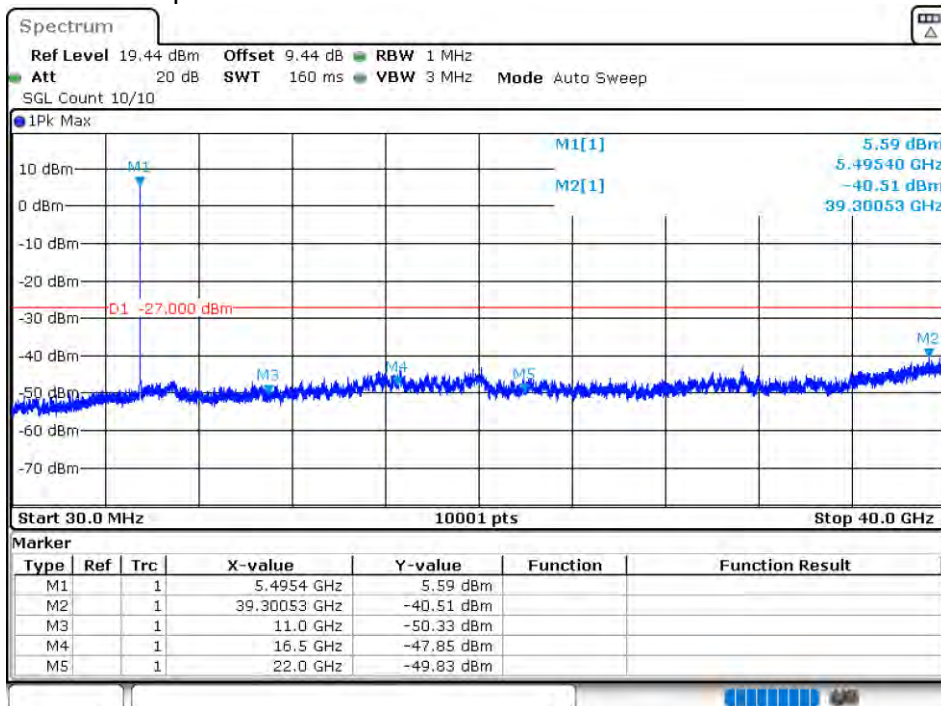


Tx. Spurious NVNT 802.11ac20 5600MHz Ant 2 Emission

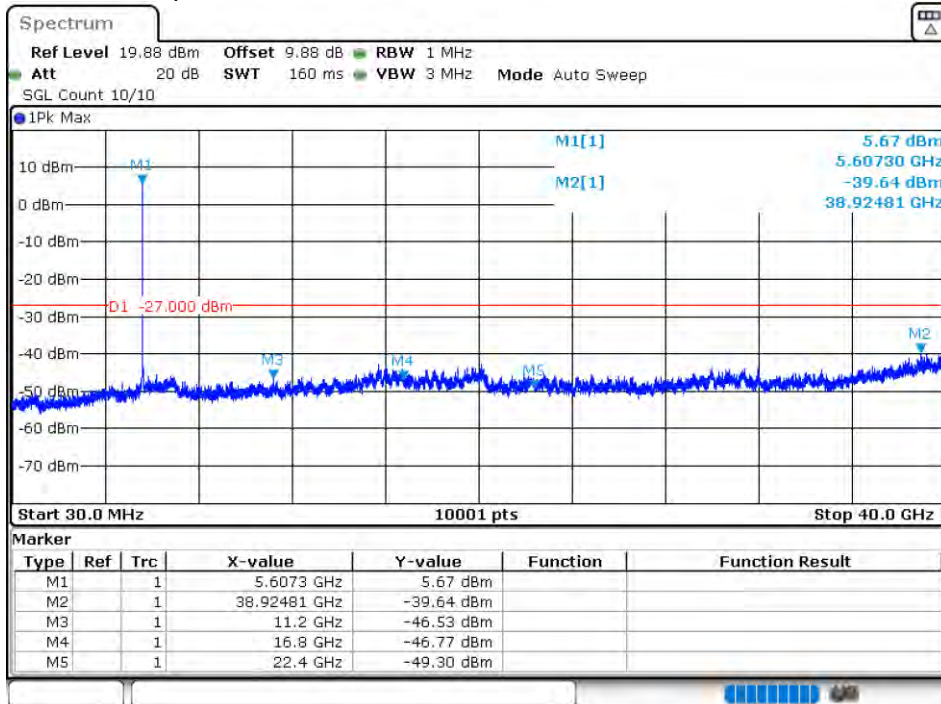


Tx. Spurious NVNT 802.11ac20 5700MHz Ant 2 Emission

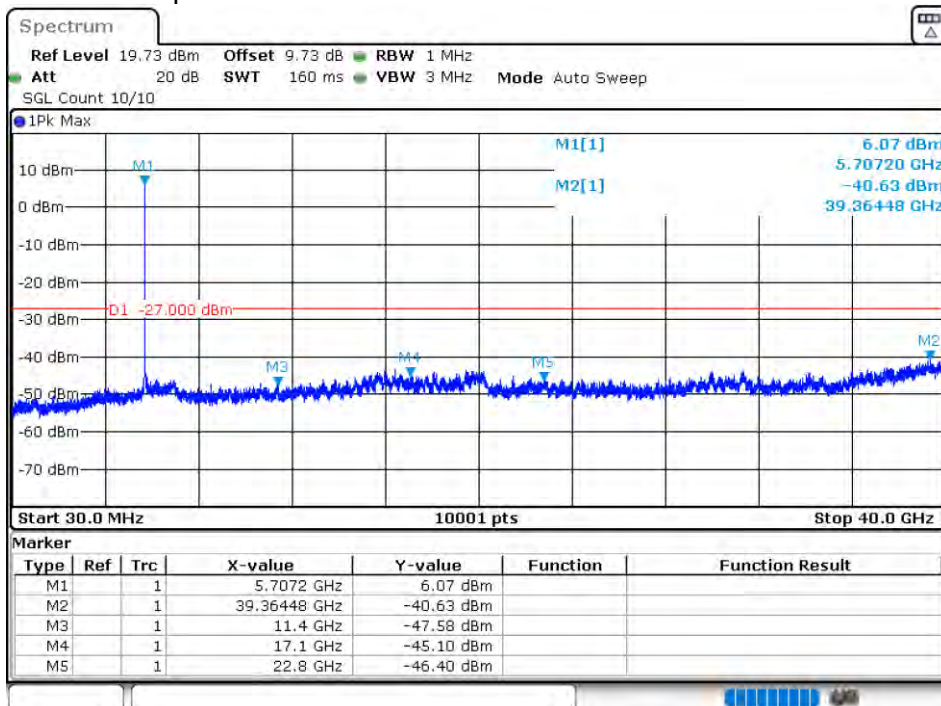


Tx. Spurious NVNT 802.11ac40 5510MHz Ant 1 Emission

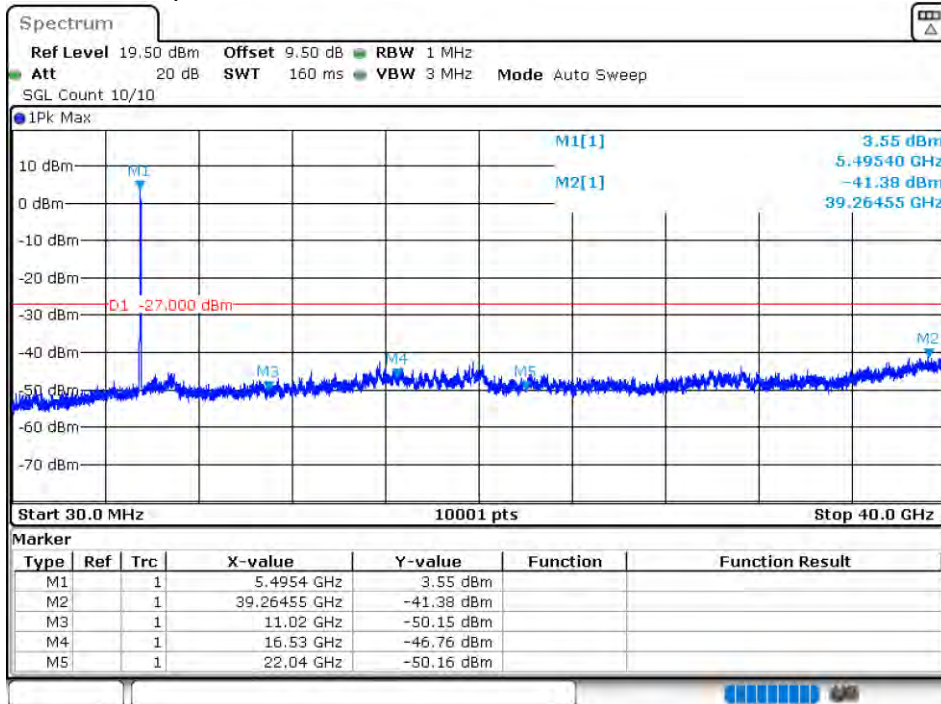


Tx. Spurious NVNT 802.11ac40 5590MHz Ant 1 Emission

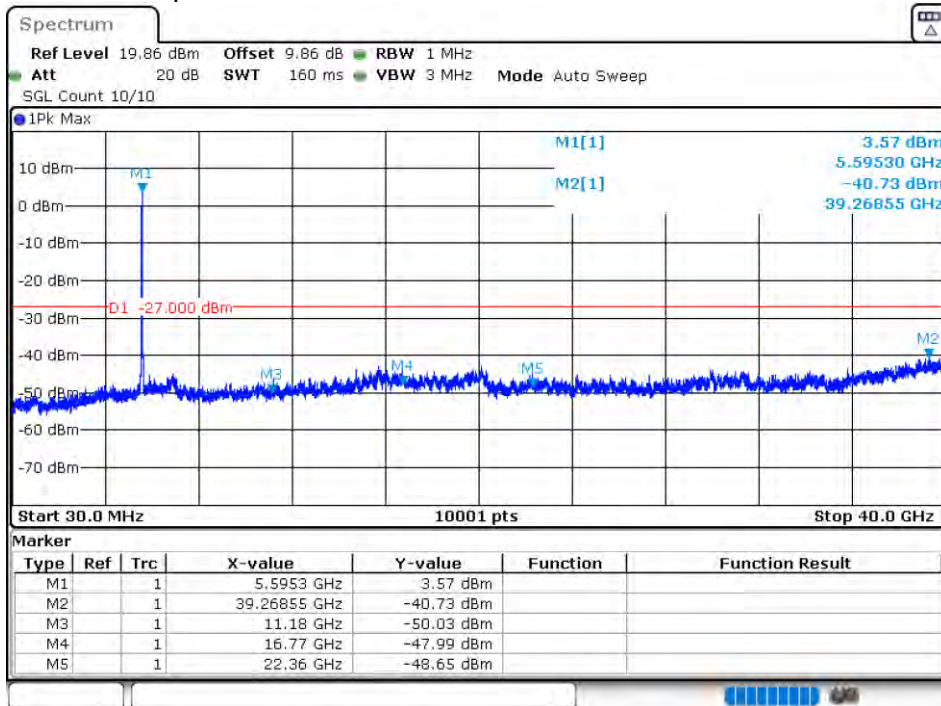


Tx. Spurious NVNT 802.11ac40 5670MHz Ant 1 Emission

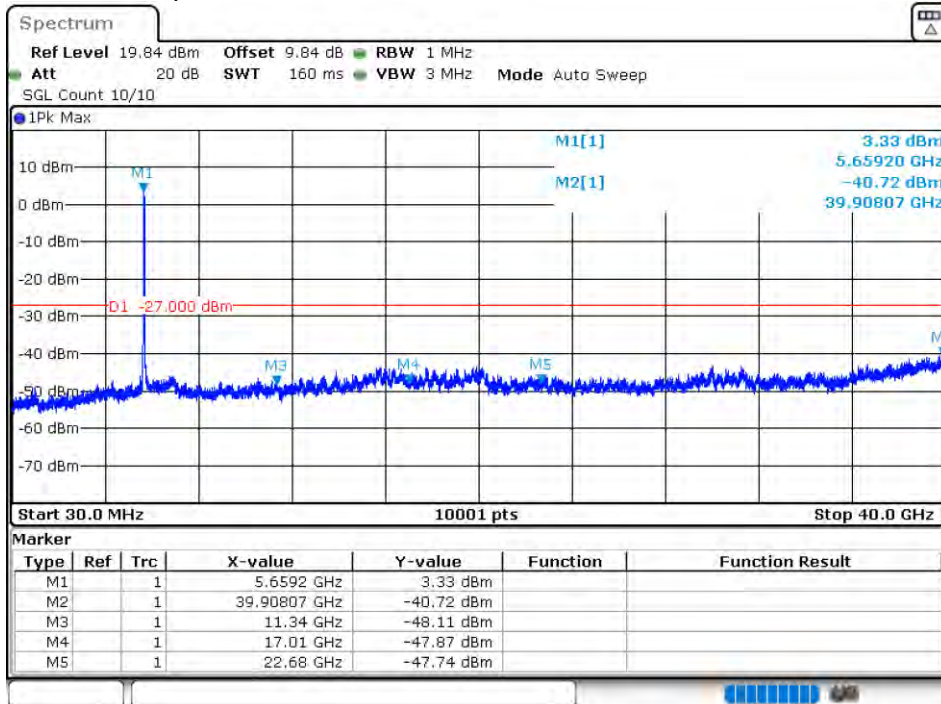


Tx. Spurious NVNT 802.11ac40 5510MHz Ant 2 Emission

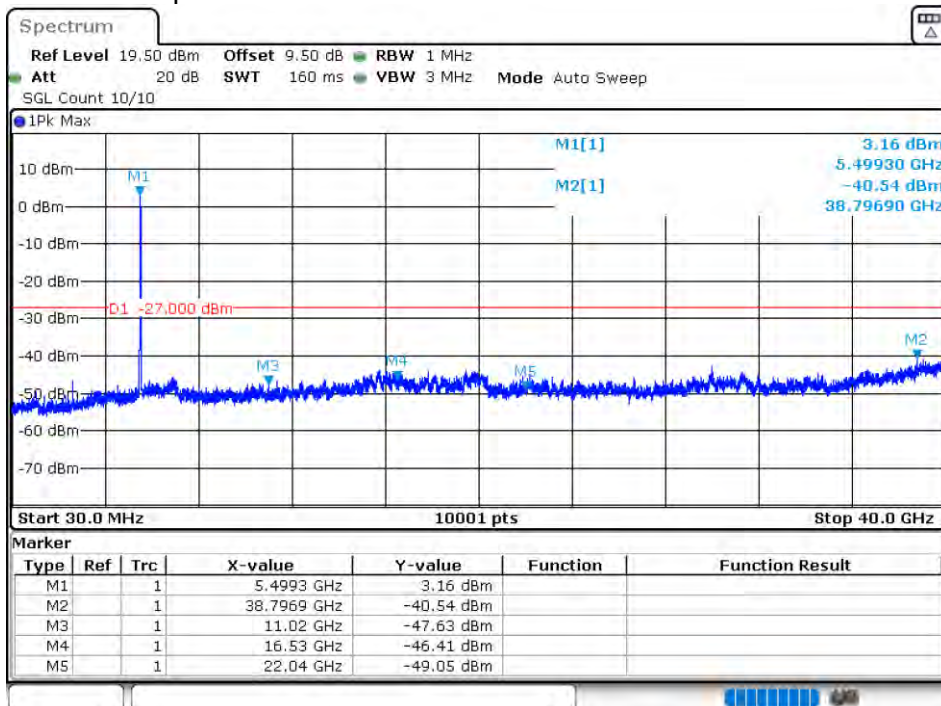


Tx. Spurious NVNT 802.11ac40 5590MHz Ant 2 Emission

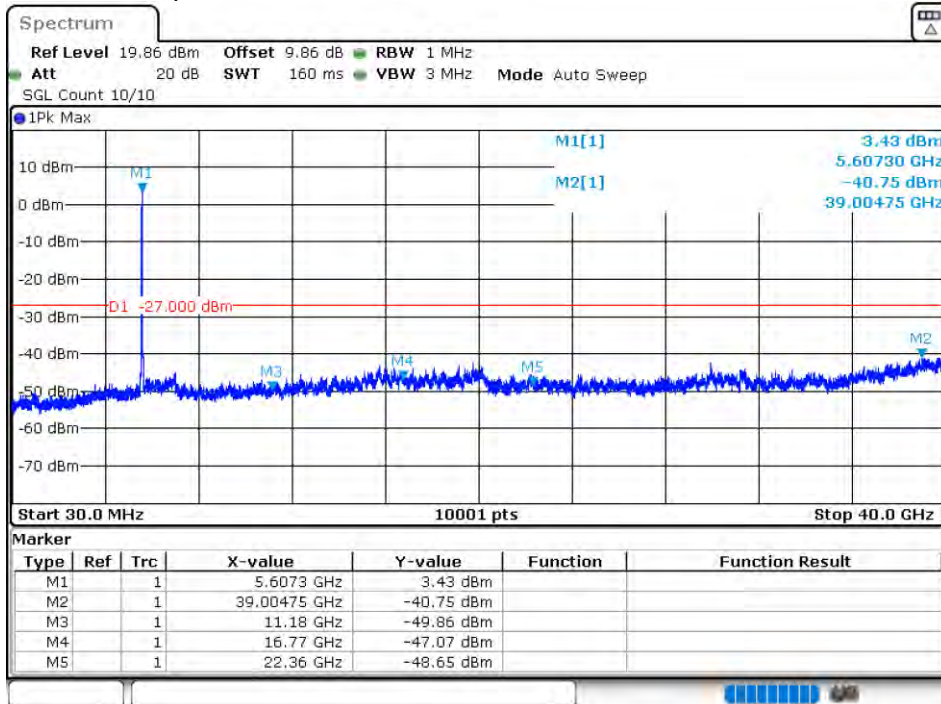


Tx. Spurious NVNT 802.11ac40 5670MHz Ant 2 Emission

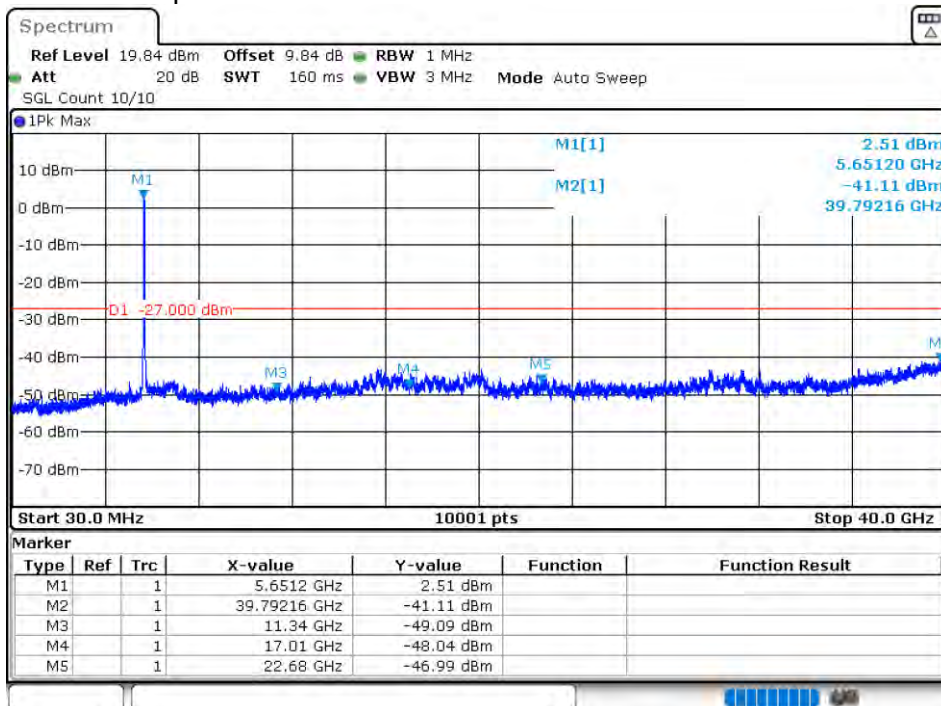


Tx. Spurious NVNT 802.11ac80 5530MHz Ant 1 Emission

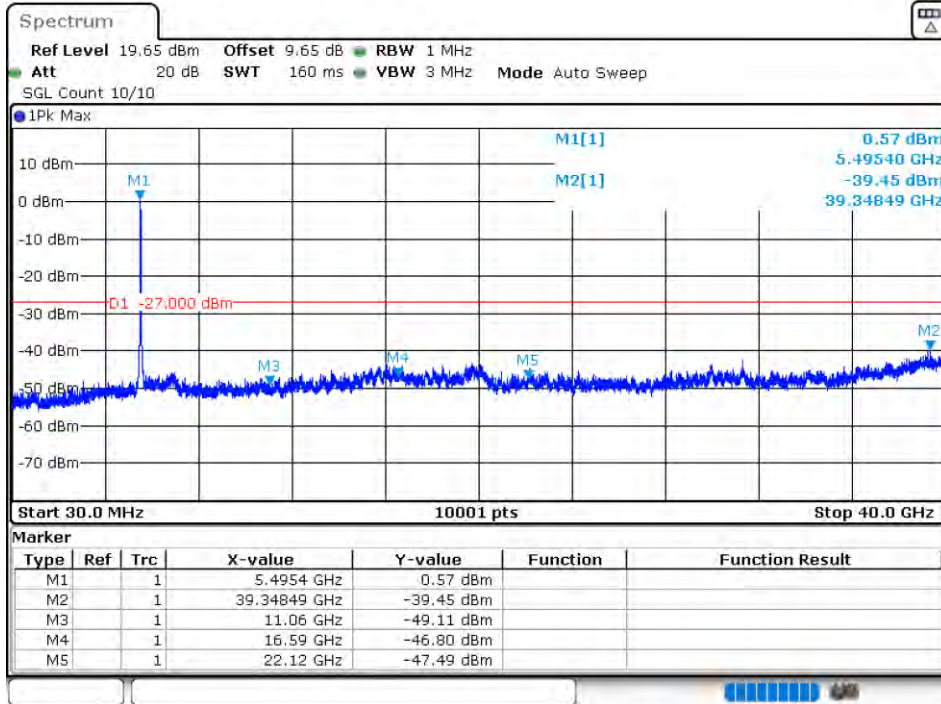


Tx. Spurious NVNT 802.11ac80 5610MHz Ant 1 Emission

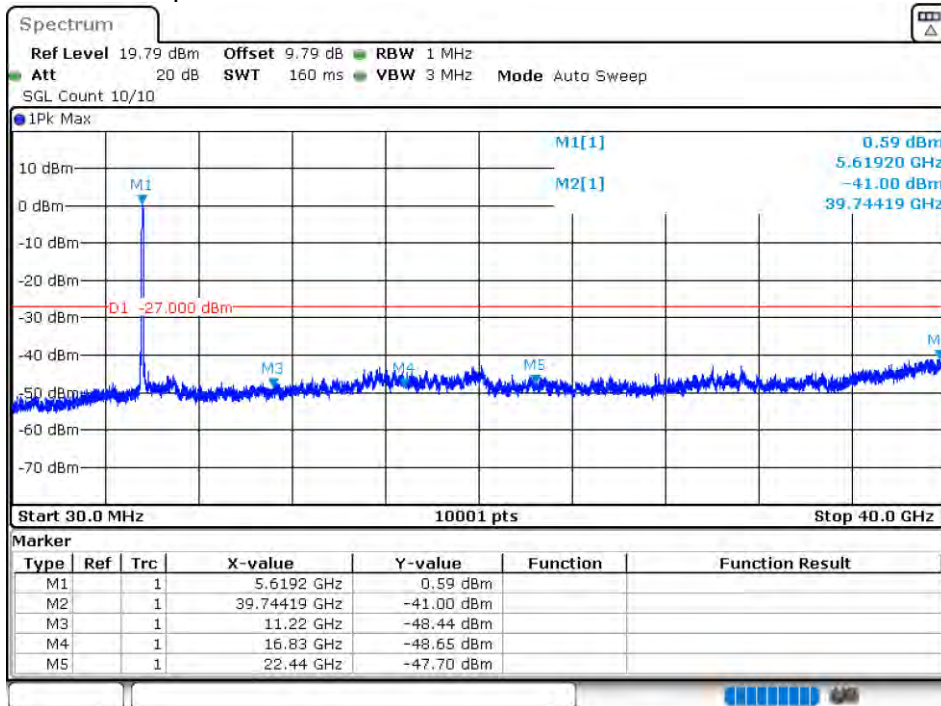


Tx. Spurious NVNT 802.11ac80 5530MHz Ant 2 Emission

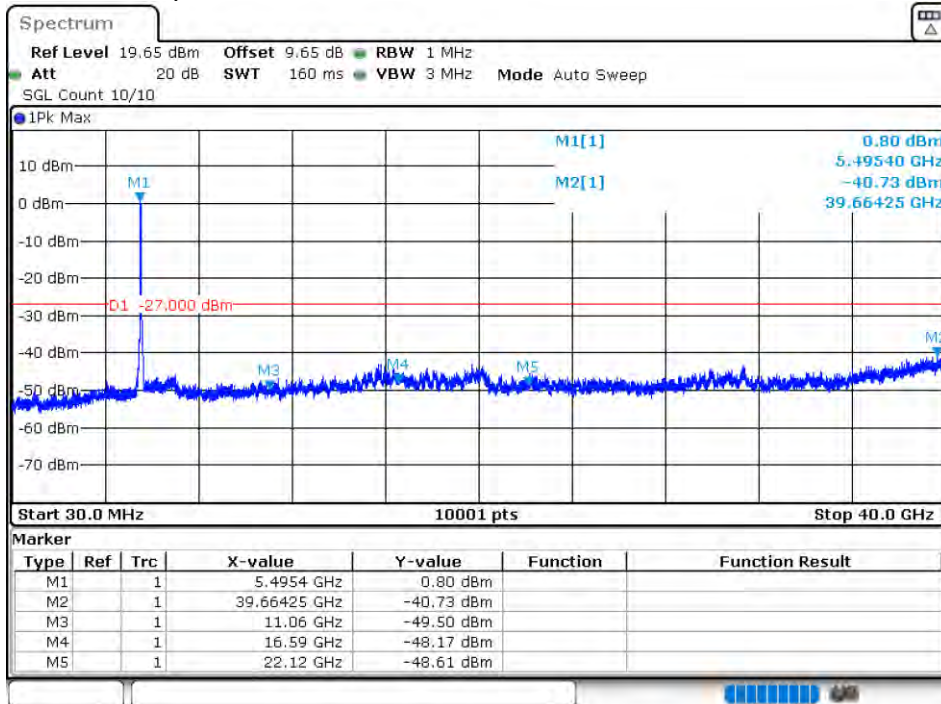


Tx. Spurious NVNT 802.11ac80 5610MHz Ant 2 Emission

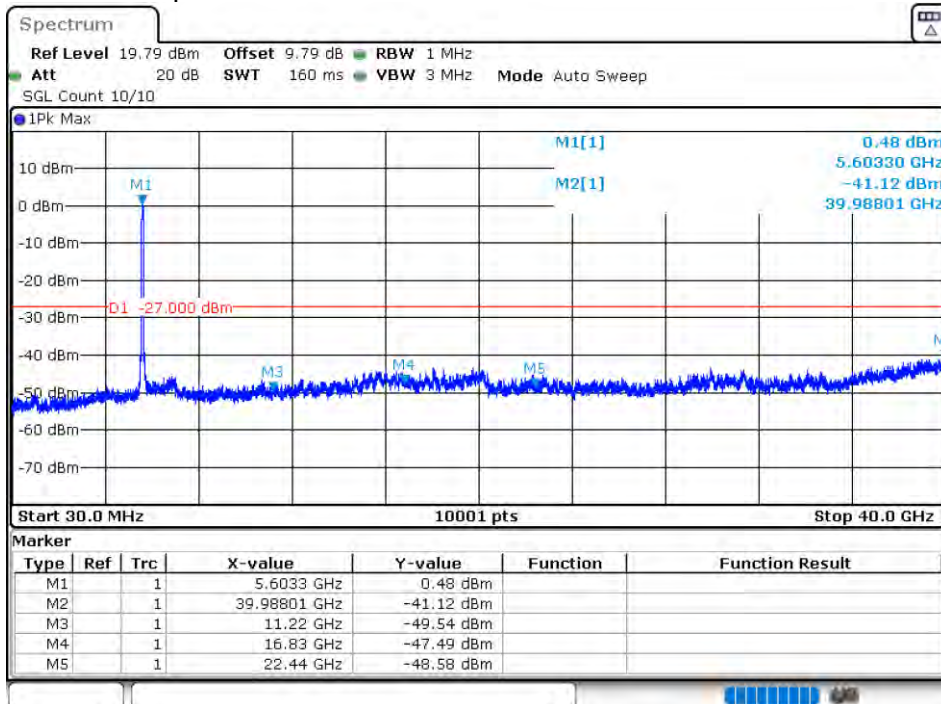


Tx. Spurious NVNT 802.11n(HT20) 5500MHz Ant 1 Emission

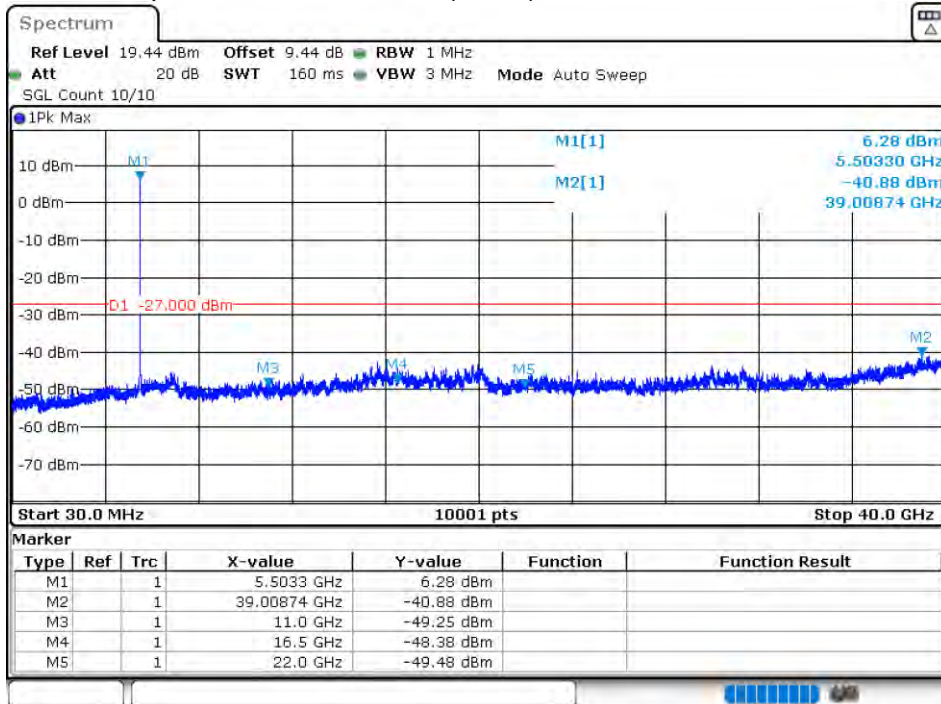


Tx. Spurious NVNT 802.11n(HT20) 5600MHz Ant 1 Emission

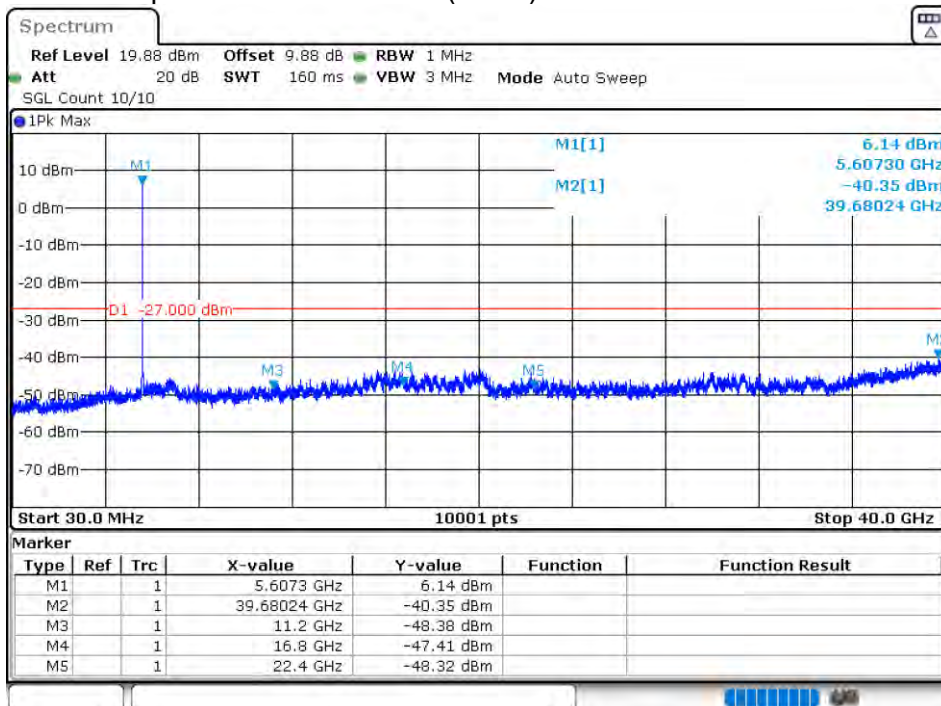


Tx. Spurious NVNT 802.11n(HT20) 5700MHz Ant 1 Emission

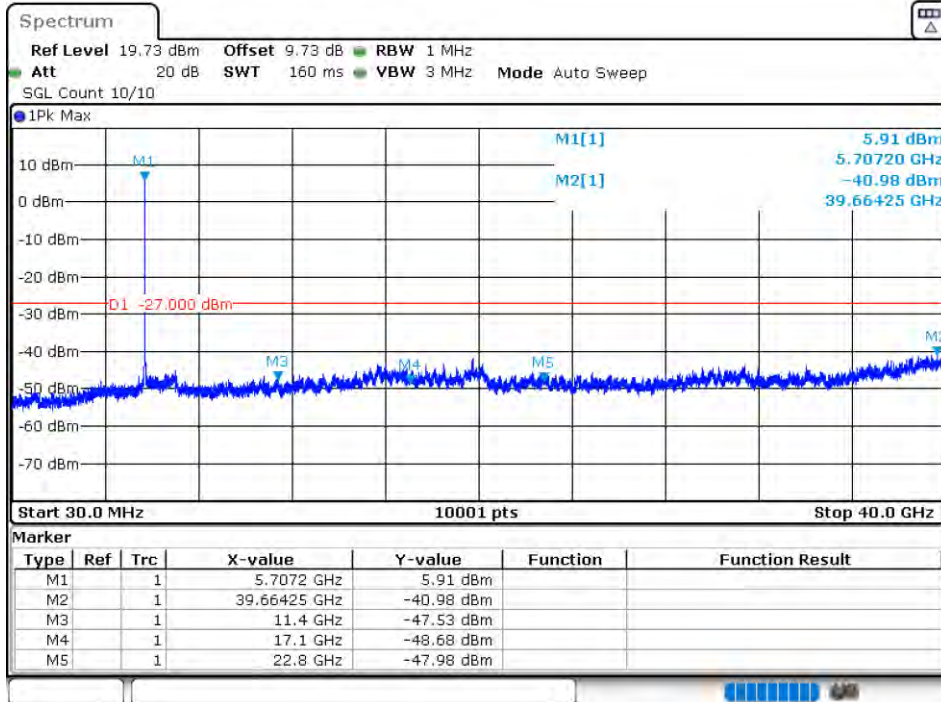


Tx. Spurious NVNT 802.11n(HT20) 5500MHz Ant 2 Emission

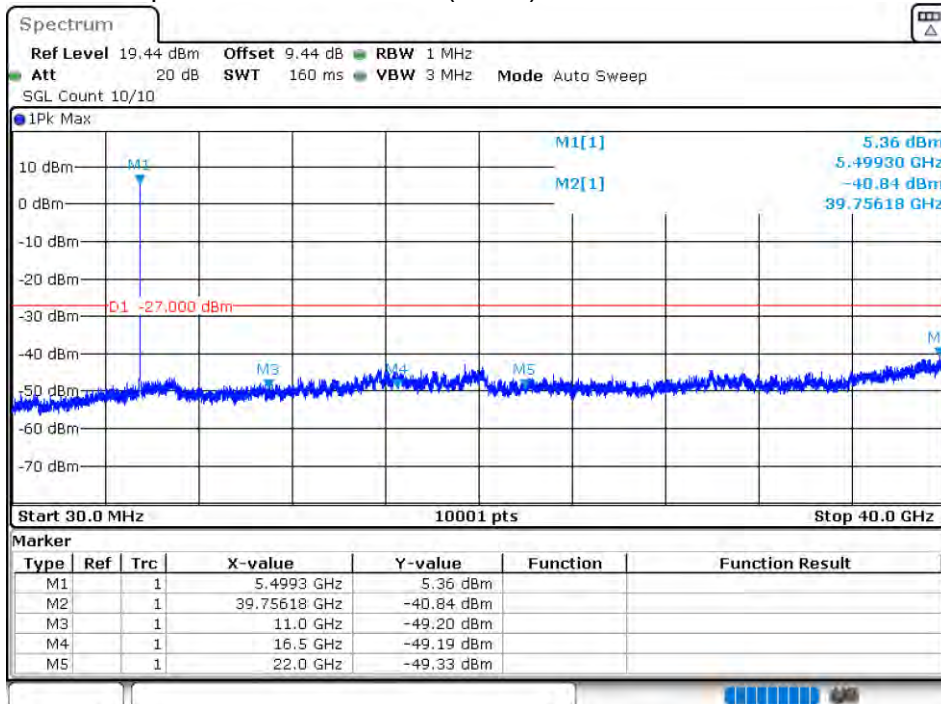


Tx. Spurious NVNT 802.11n(HT20) 5600MHz Ant 2 Emission

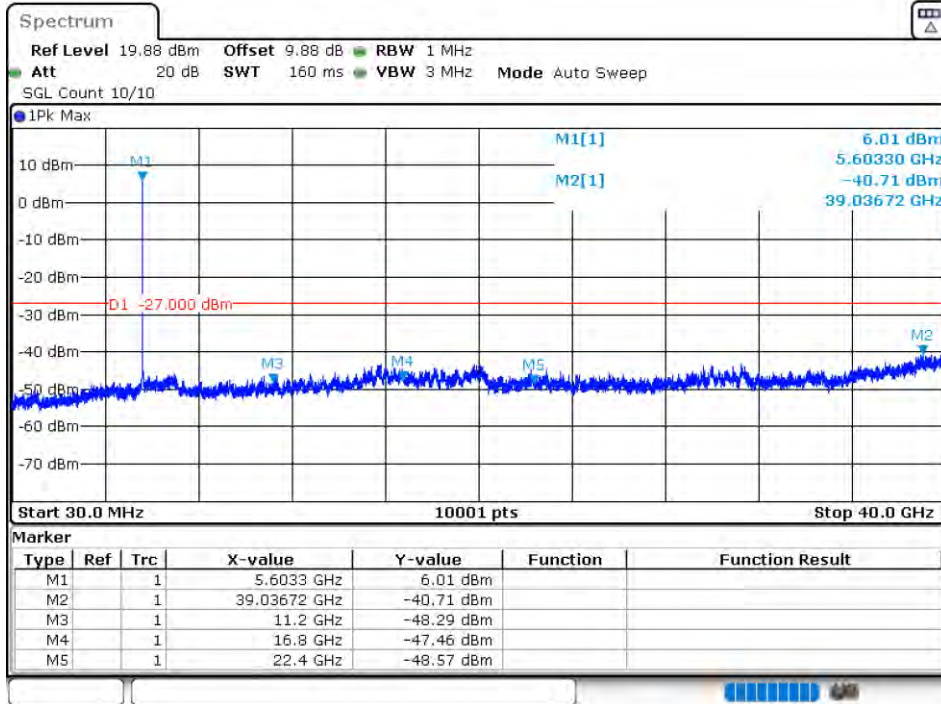


Tx. Spurious NVNT 802.11n(HT20) 5700MHz Ant 2 Emission

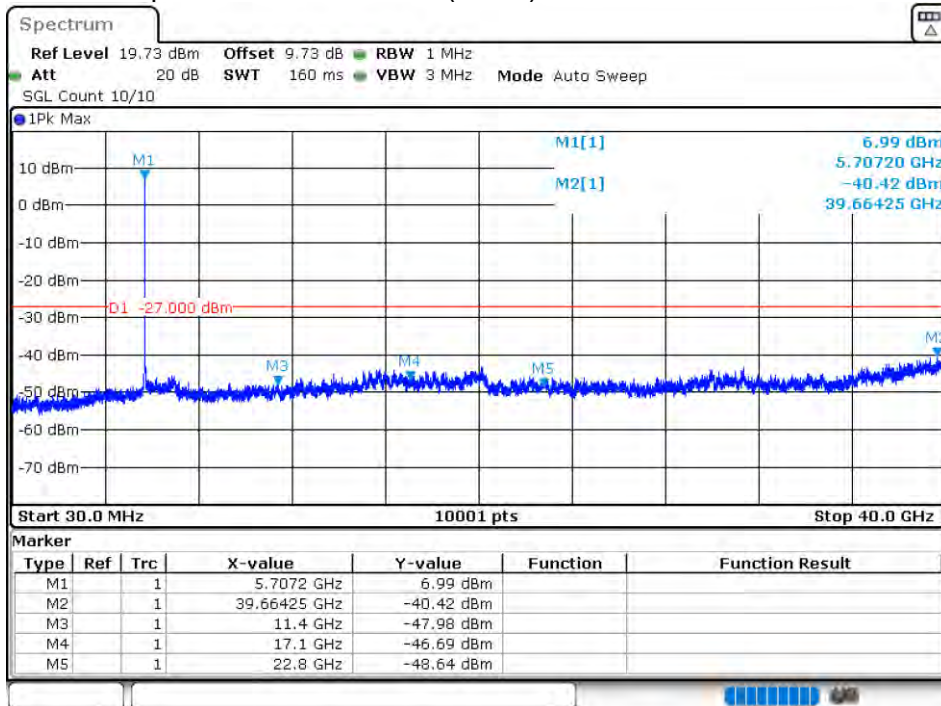


Tx. Spurious NVNT 802.11n(HT40) 5510MHz Ant 1 Emission

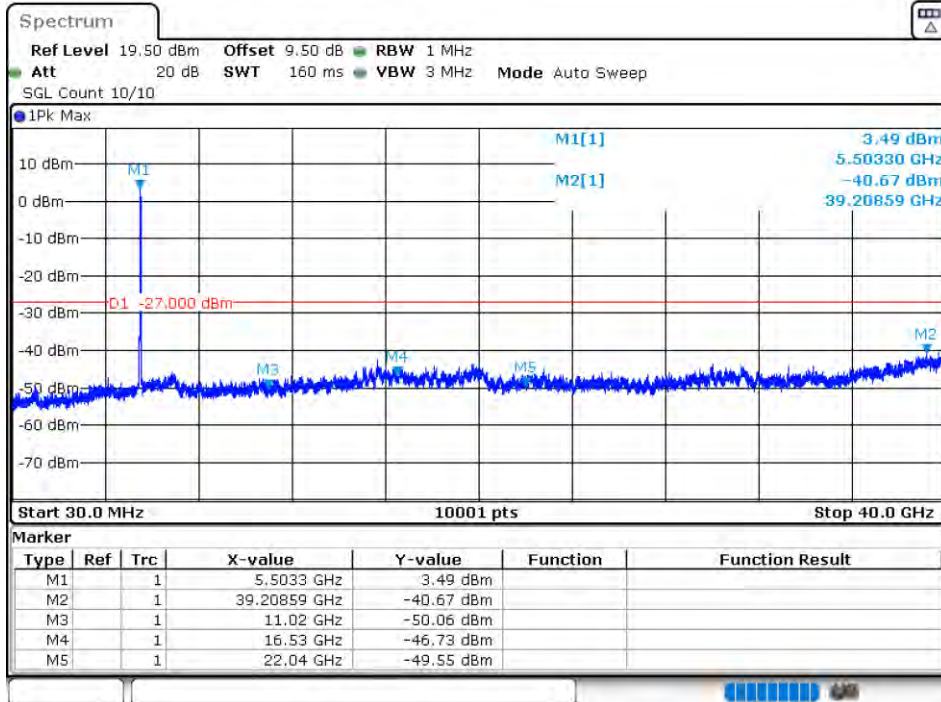


Tx. Spurious NVNT 802.11n(HT40) 5590MHz Ant 1 Emission

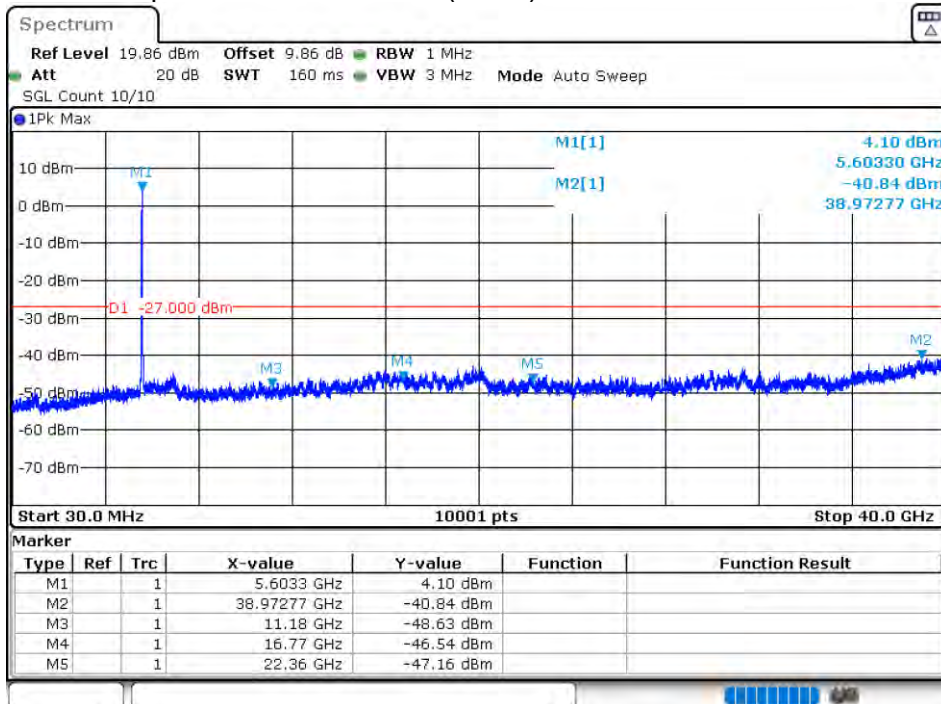


Tx. Spurious NVNT 802.11n(HT40) 5670MHz Ant 1 Emission

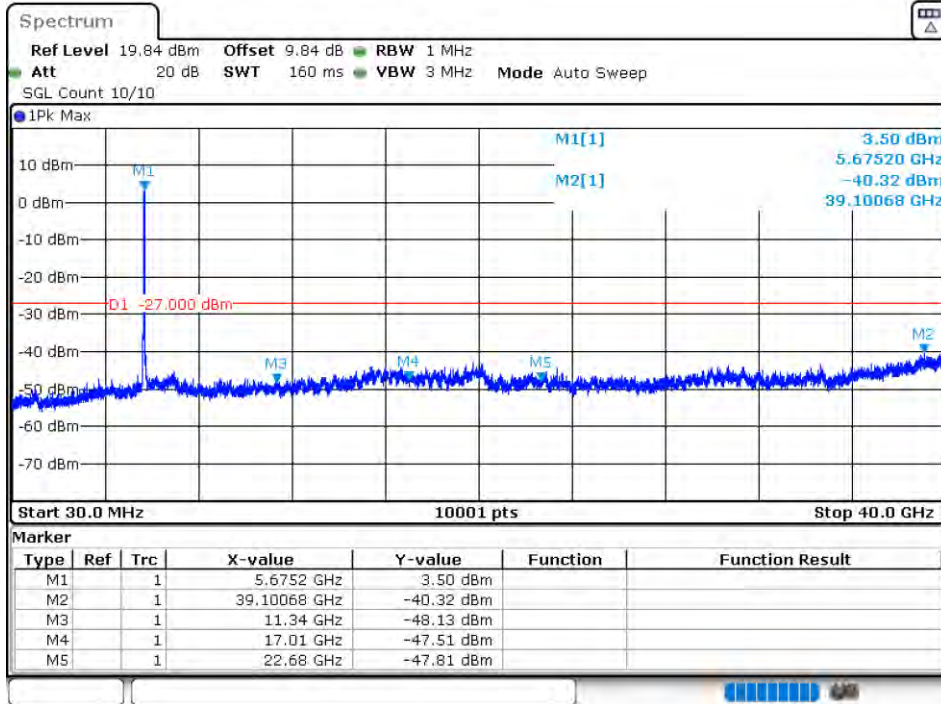


Tx. Spurious NVNT 802.11n(HT40) 5510MHz Ant 2 Emission

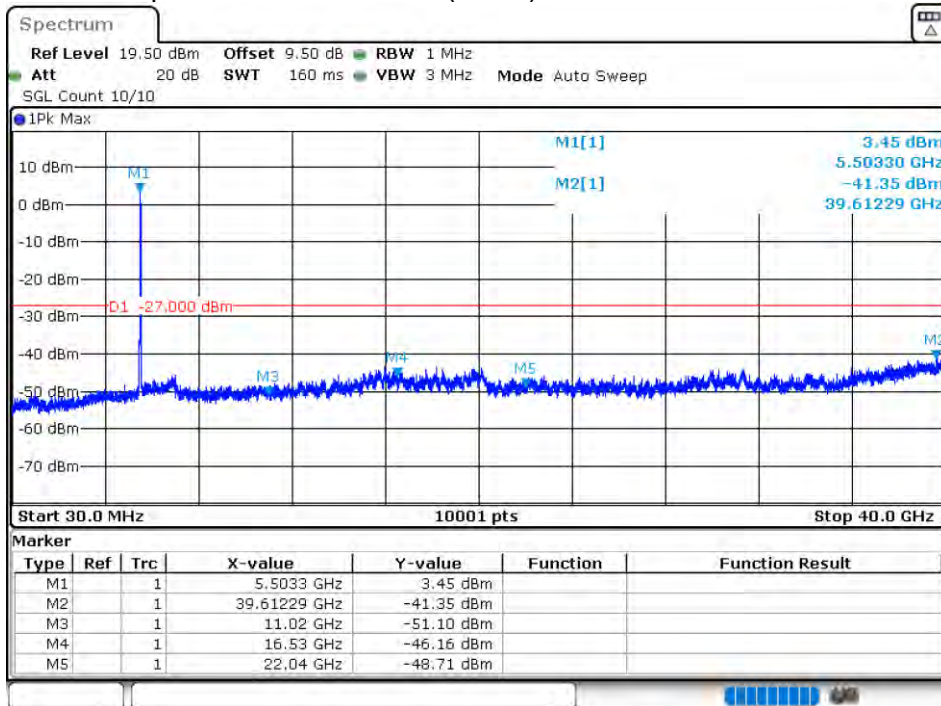

Tx. Spurious NVNT 802.11n(HT40) 5590MHz Ant 2 Emission

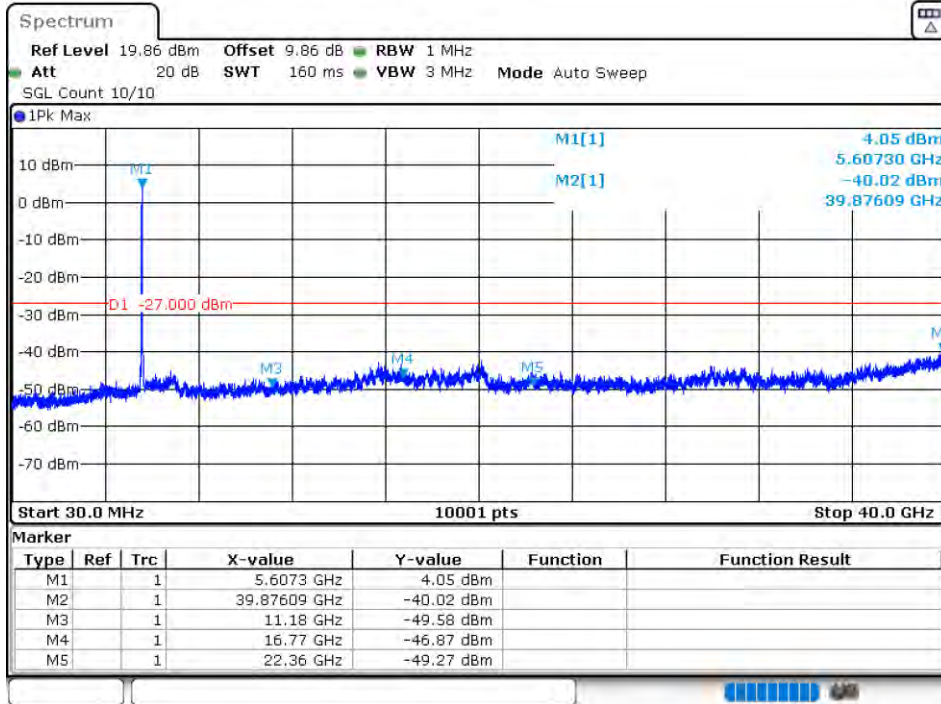

Tx. Spurious NVNT 802.11n(HT40) 5670MHz Ant 2 Emission

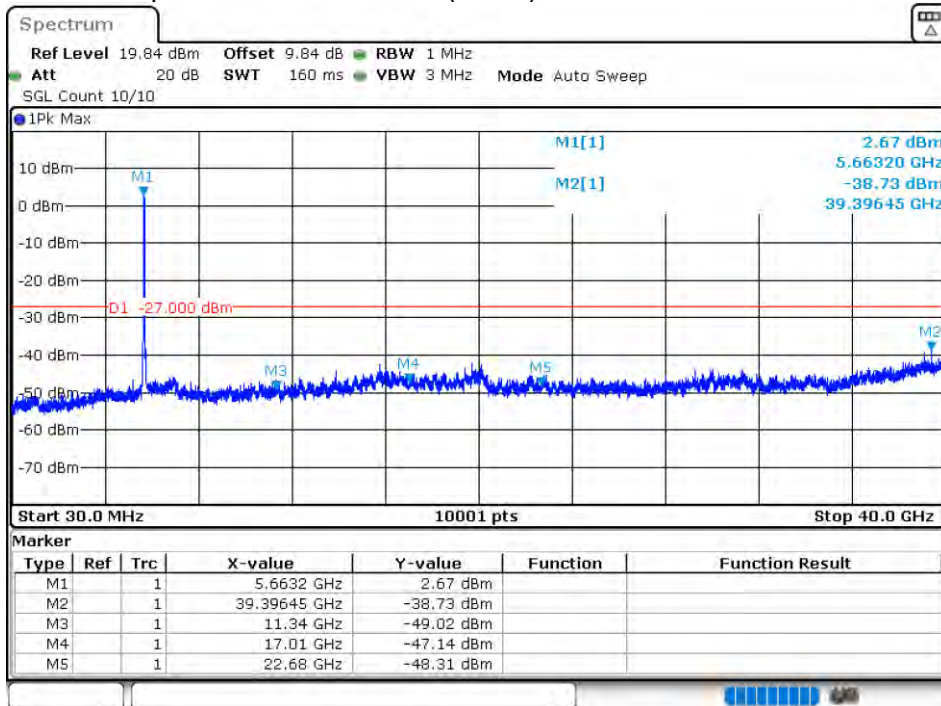


5.8G:


11.4.1 DUTY CYCLE

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)
Ant 1	NVNT	802.11a	5745	100
Ant 1	NVNT	802.11a	5785	100
Ant 1	NVNT	802.11a	5825	100
Ant 2	NVNT	802.11a	5745	100
Ant 2	NVNT	802.11a	5785	100
Ant 2	NVNT	802.11a	5825	100
Ant 1	NVNT	802.11ac20	5745	100
Ant 1	NVNT	802.11ac20	5785	100
Ant 1	NVNT	802.11ac20	5825	100
Ant 2	NVNT	802.11ac20	5745	100
Ant 2	NVNT	802.11ac20	5785	100
Ant 2	NVNT	802.11ac20	5825	100
Ant 1	NVNT	802.11ac40	5755	100
Ant 1	NVNT	802.11ac40	5795	100
Ant 2	NVNT	802.11ac40	5755	100
Ant 2	NVNT	802.11ac40	5795	100
Ant 1	NVNT	802.11ac80	5775	100
Ant 2	NVNT	802.11ac80	5775	100
Ant 1	NVNT	802.11n(HT20)	5745	100
Ant 1	NVNT	802.11n(HT20)	5785	100
Ant 1	NVNT	802.11n(HT20)	5825	100
Ant 2	NVNT	802.11n(HT20)	5745	100
Ant 2	NVNT	802.11n(HT20)	5785	100
Ant 2	NVNT	802.11n(HT20)	5825	100
Ant 1	NVNT	802.11n(HT40)	5755	100
Ant 1	NVNT	802.11n(HT40)	5795	100
Ant 2	NVNT	802.11n(HT40)	5755	100
Ant 2	NVNT	802.11n(HT40)	5795	100


Duty Cycle NVNT 802.11a 5745MHz Ant 1

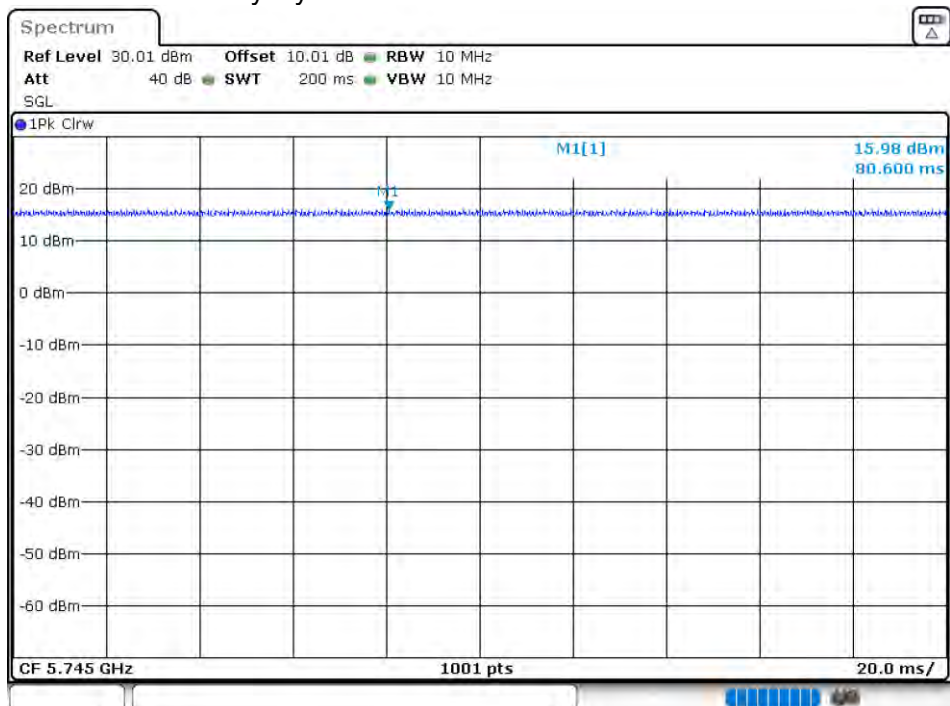


Duty Cycle NVNT 802.11a 5785MHz Ant 1

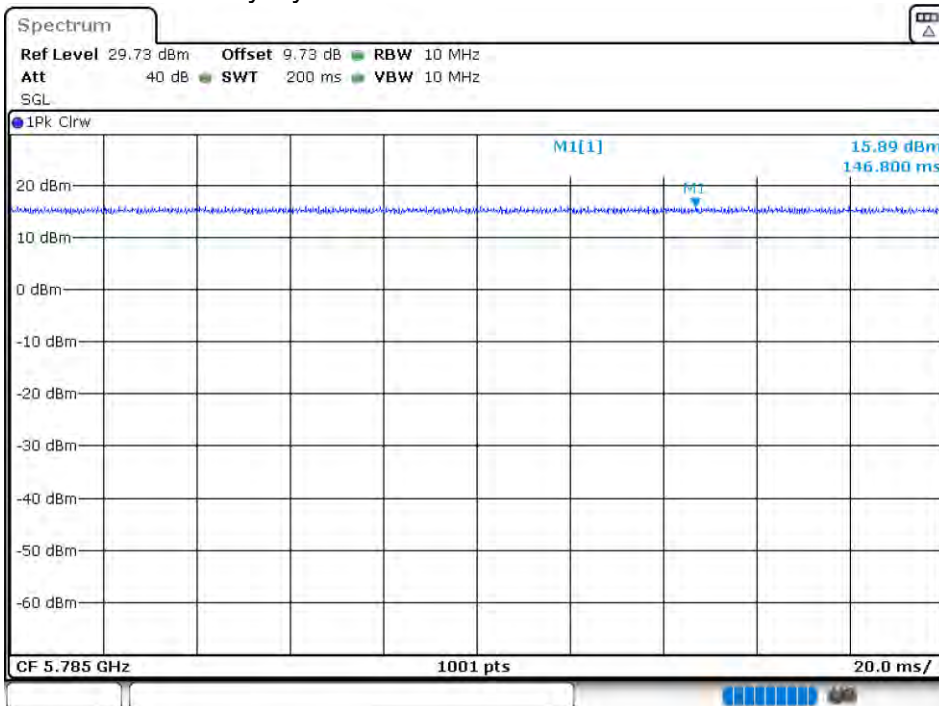


Duty Cycle NVNT 802.11a 5825MHz Ant 1

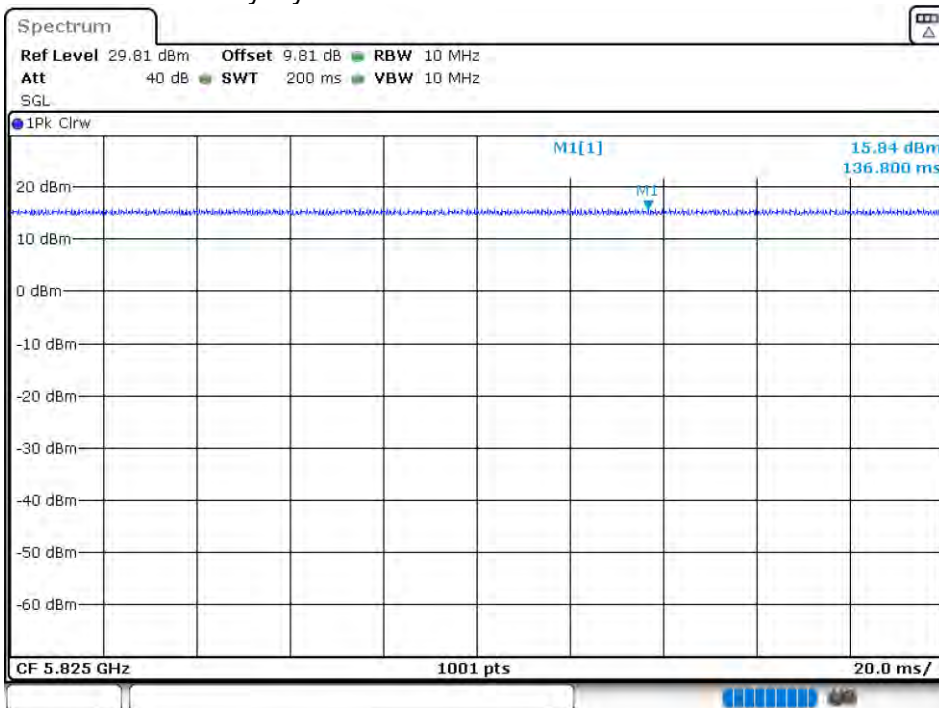


Duty Cycle NVNT 802.11a 5745MHz Ant 2

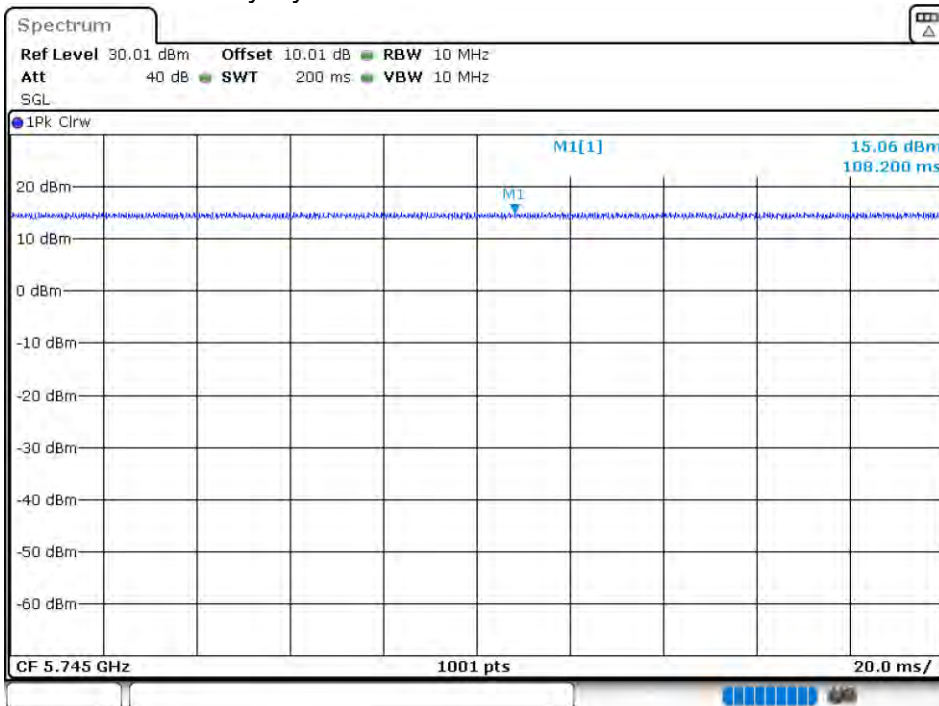


Duty Cycle NVNT 802.11a 5785MHz Ant 2

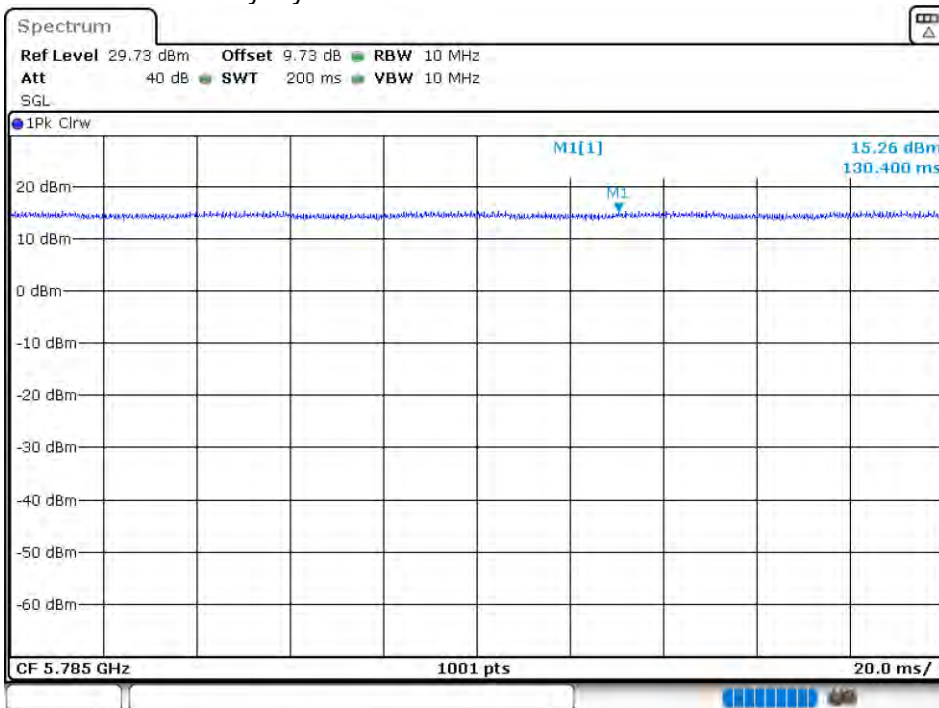


Duty Cycle NVNT 802.11a 5825MHz Ant 2

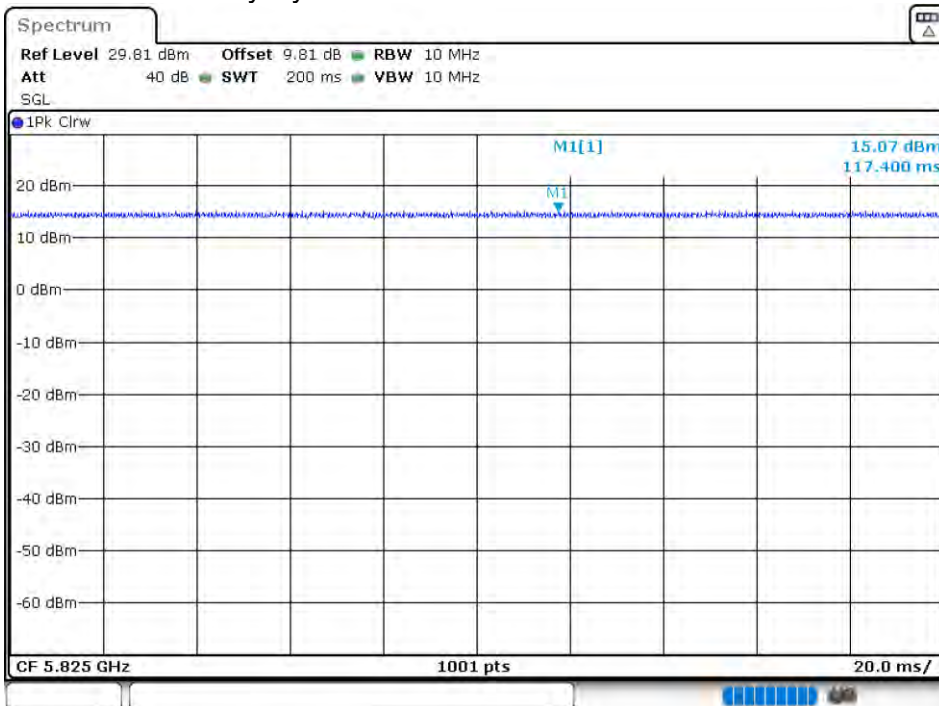


Duty Cycle NVNT 802.11ac20 5745MHz Ant 1

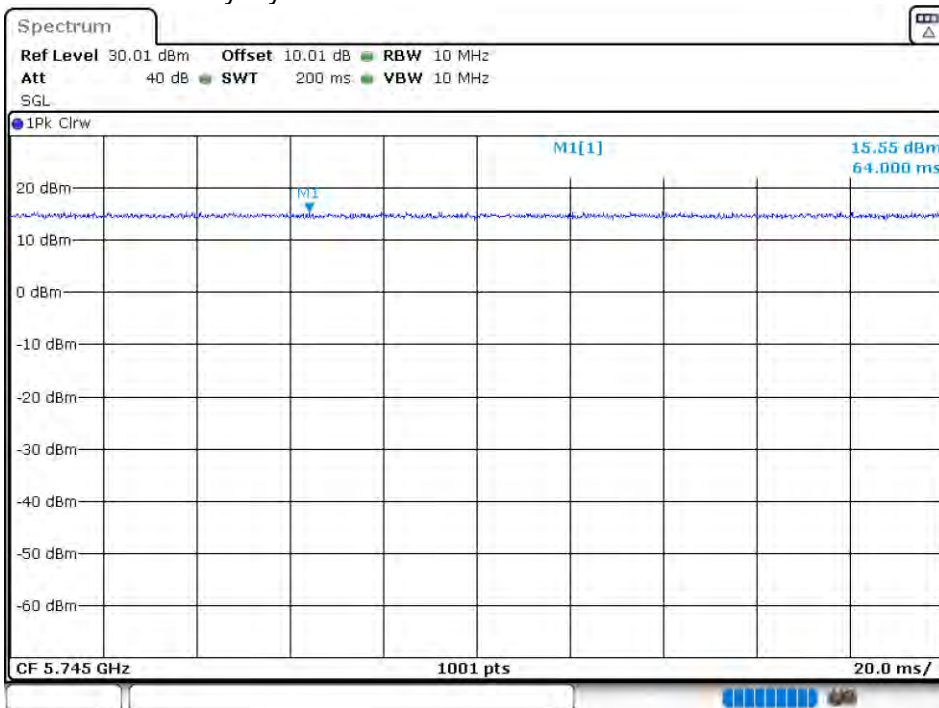


Duty Cycle NVNT 802.11ac20 5785MHz Ant 1

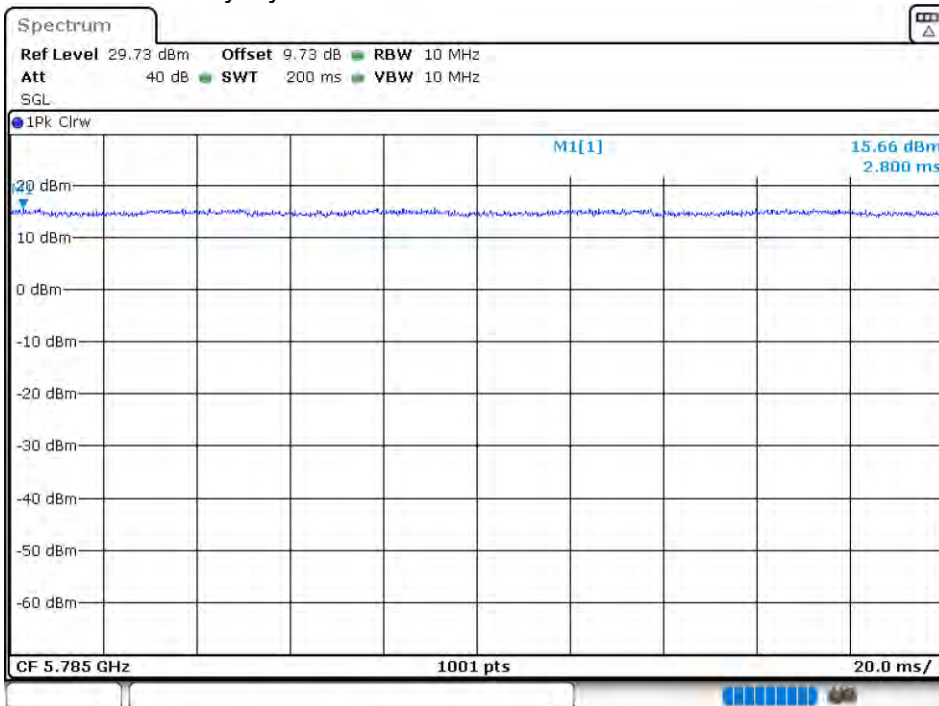


Duty Cycle NVNT 802.11ac20 5825MHz Ant 1

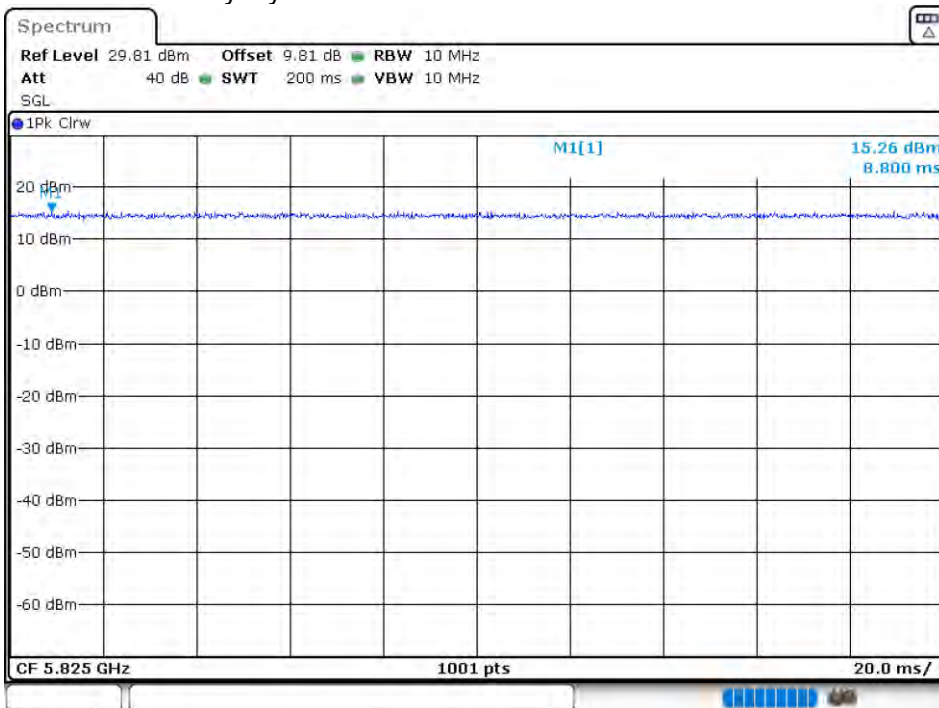


Duty Cycle NVNT 802.11ac20 5745MHz Ant 2

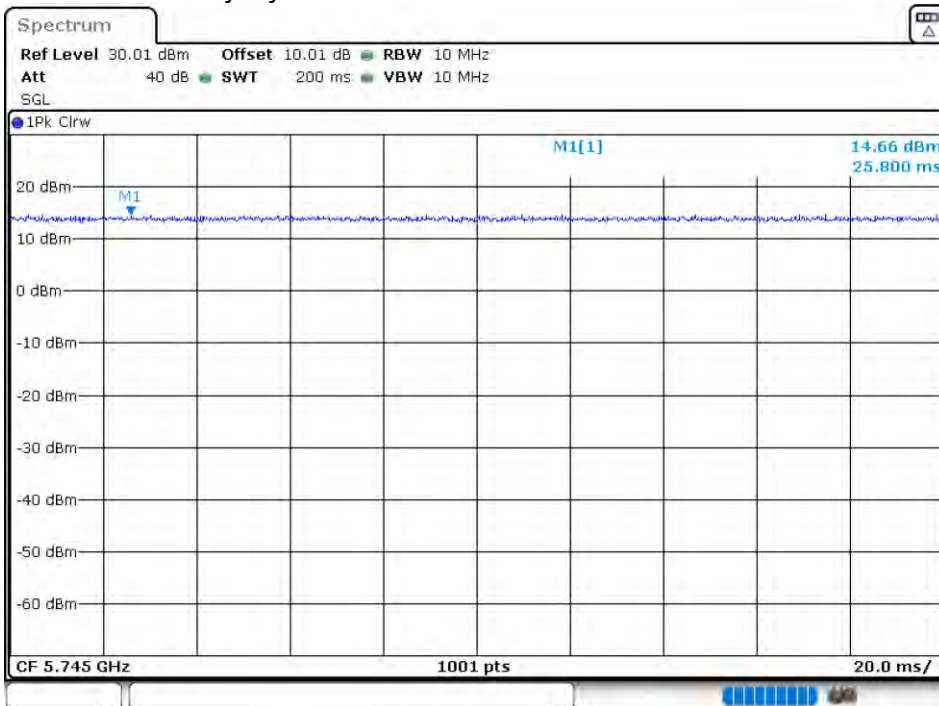


Duty Cycle NVNT 802.11ac20 5785MHz Ant 2

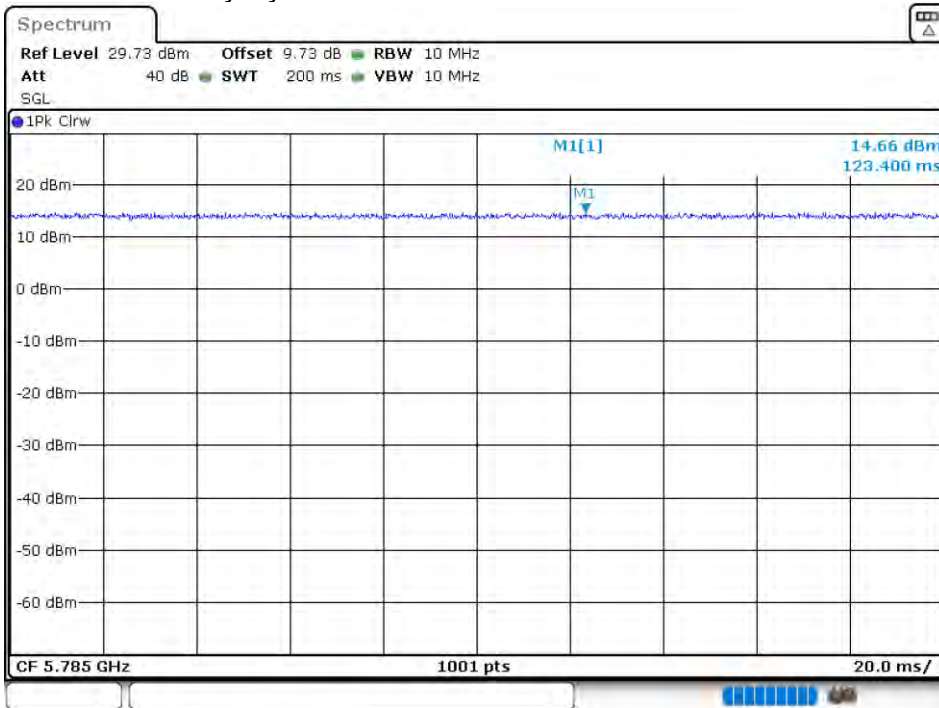


Duty Cycle NVNT 802.11ac20 5825MHz Ant 2

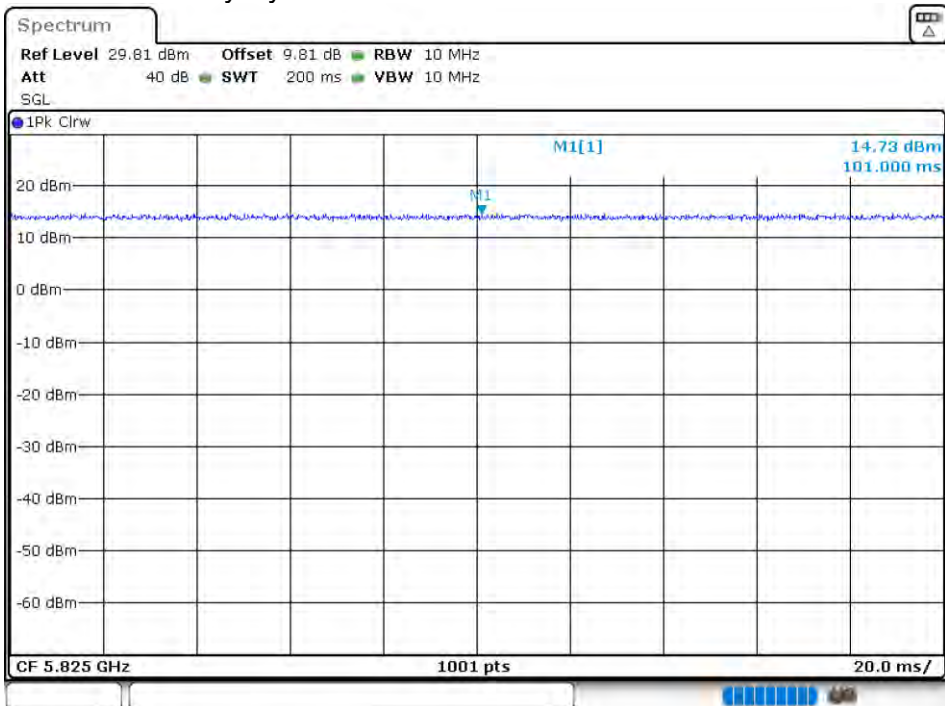


Duty Cycle NVNT 802.11ac40 5755MHz Ant 1

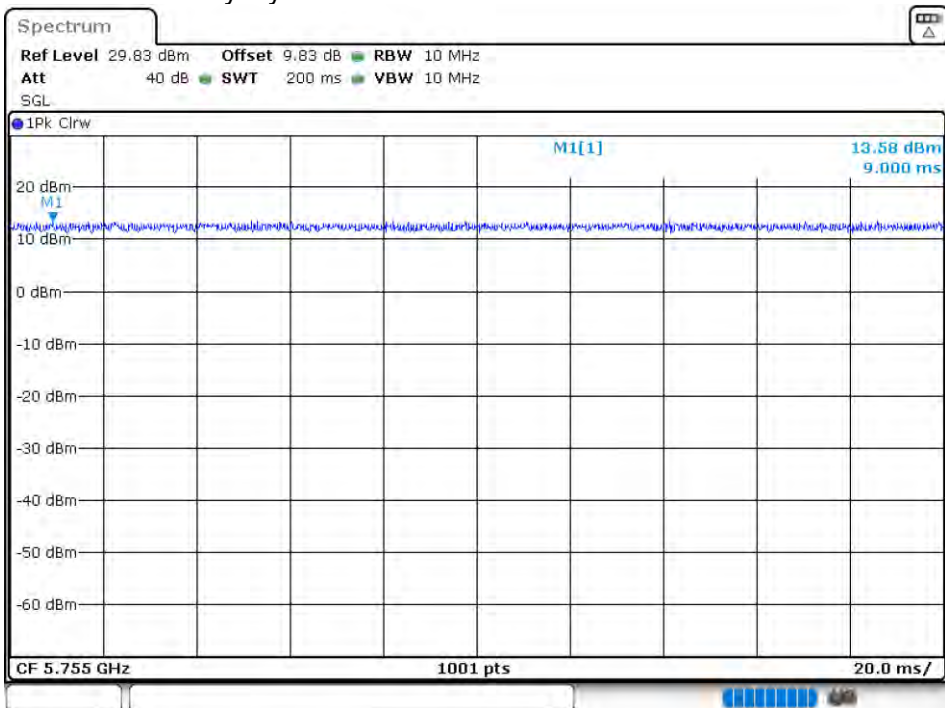


Duty Cycle NVNT 802.11ac40 5795MHz Ant 1

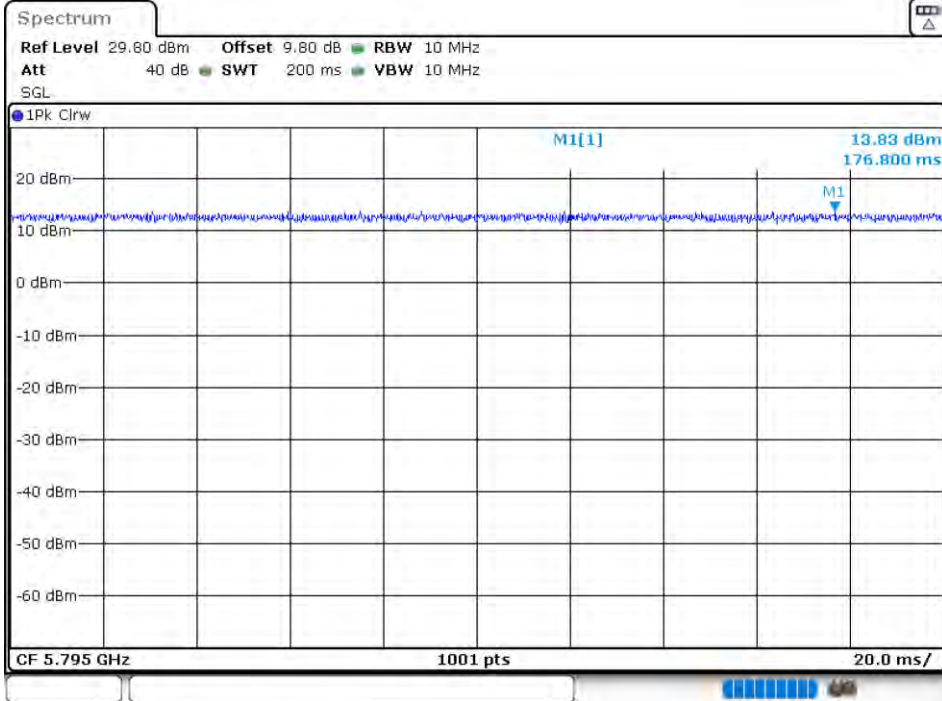


Duty Cycle NVNT 802.11ac40 5755MHz Ant 2

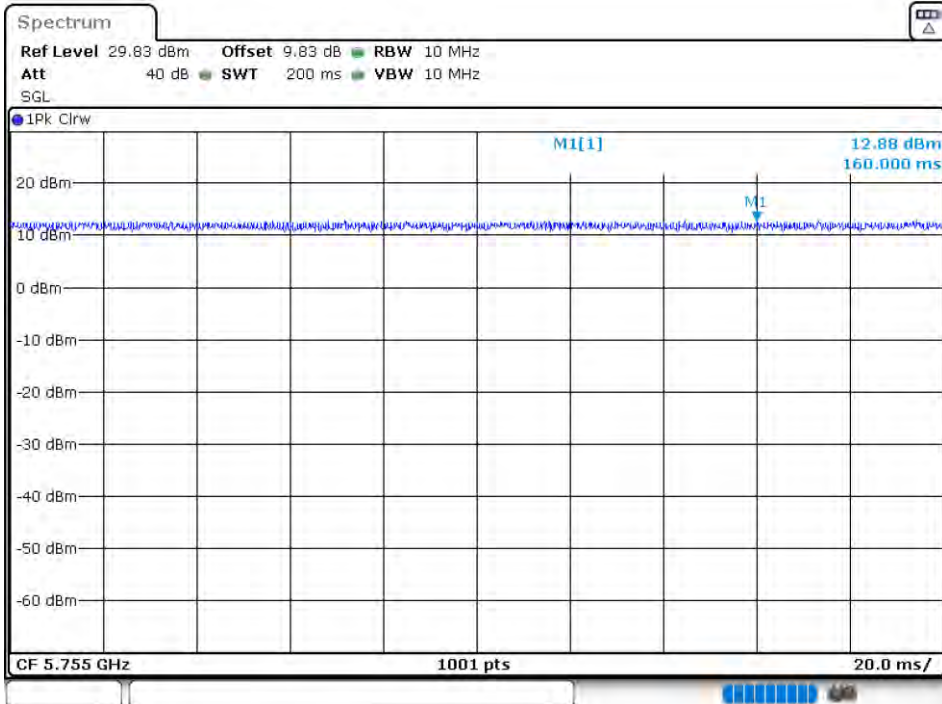


Duty Cycle NVNT 802.11ac40 5795MHz Ant 2

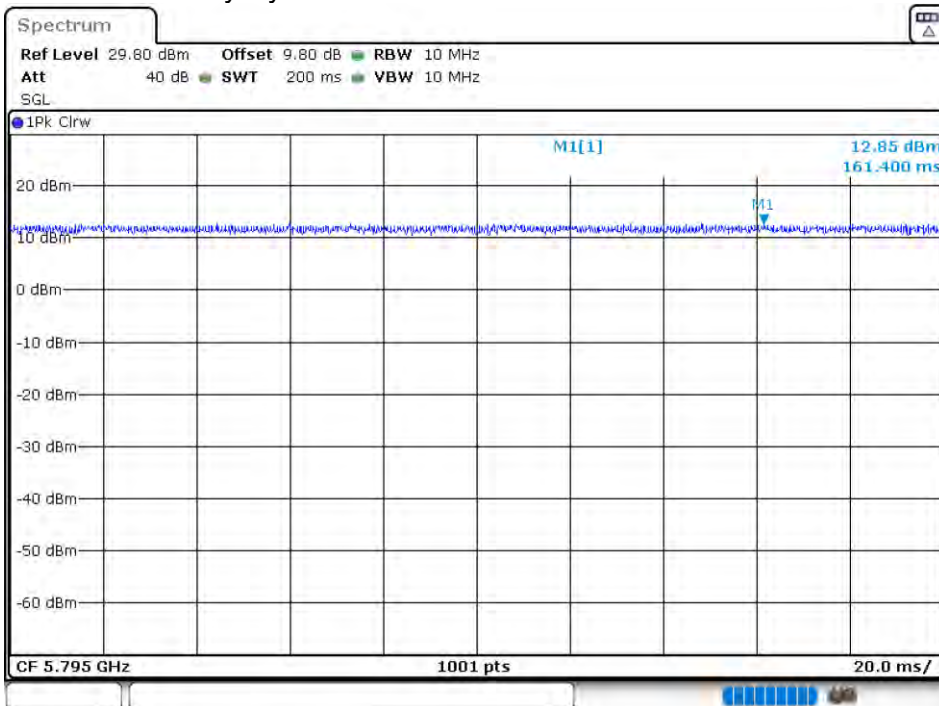


Duty Cycle NVNT 802.11ac80 5775MHz Ant 1

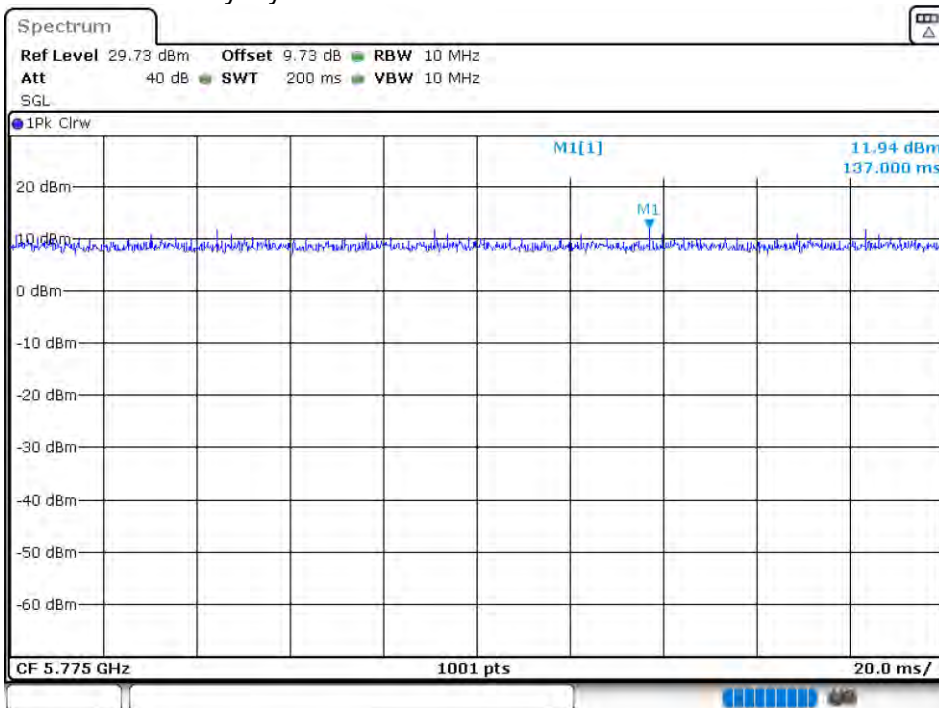


Duty Cycle NVNT 802.11ac80 5775MHz Ant 2

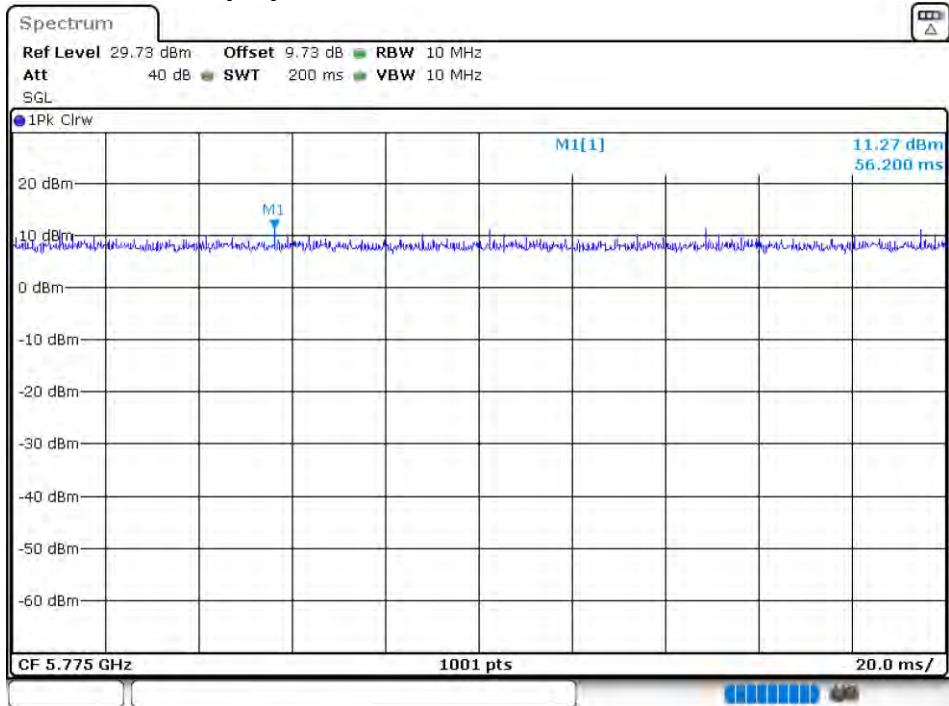


Duty Cycle NVNT 802.11n(HT20) 5745MHz Ant 1

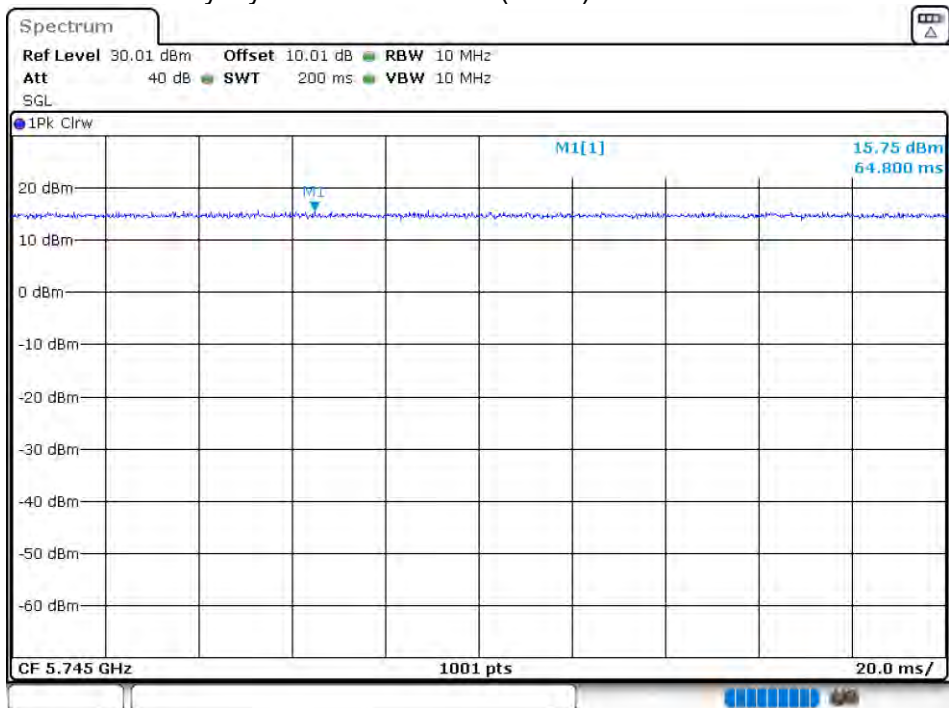


Duty Cycle NVNT 802.11n(HT20) 5785MHz Ant 1

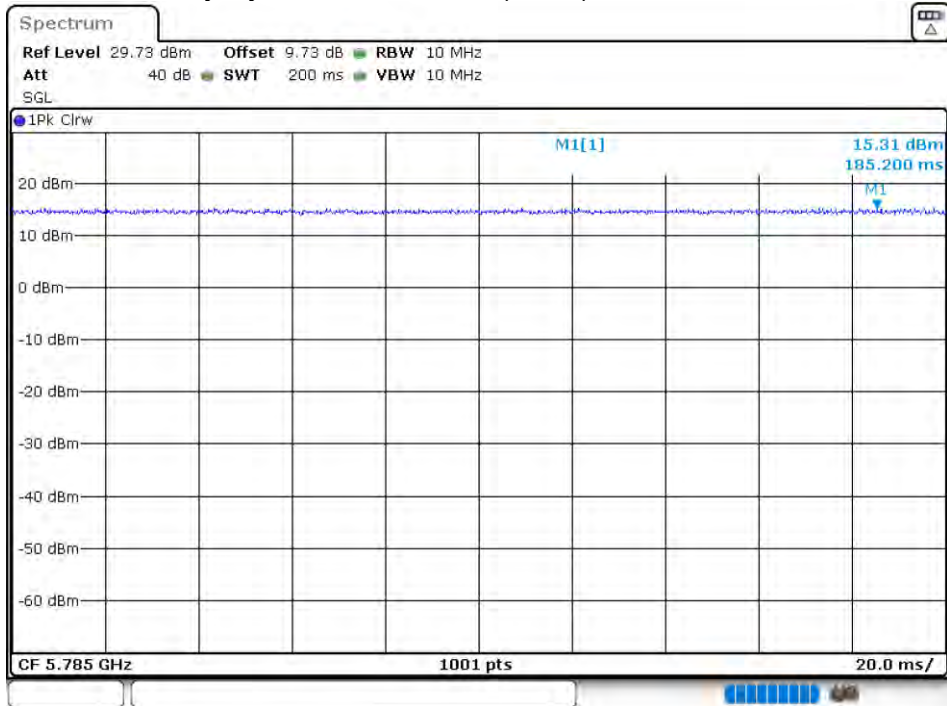


Duty Cycle NVNT 802.11n(HT20) 5825MHz Ant 1

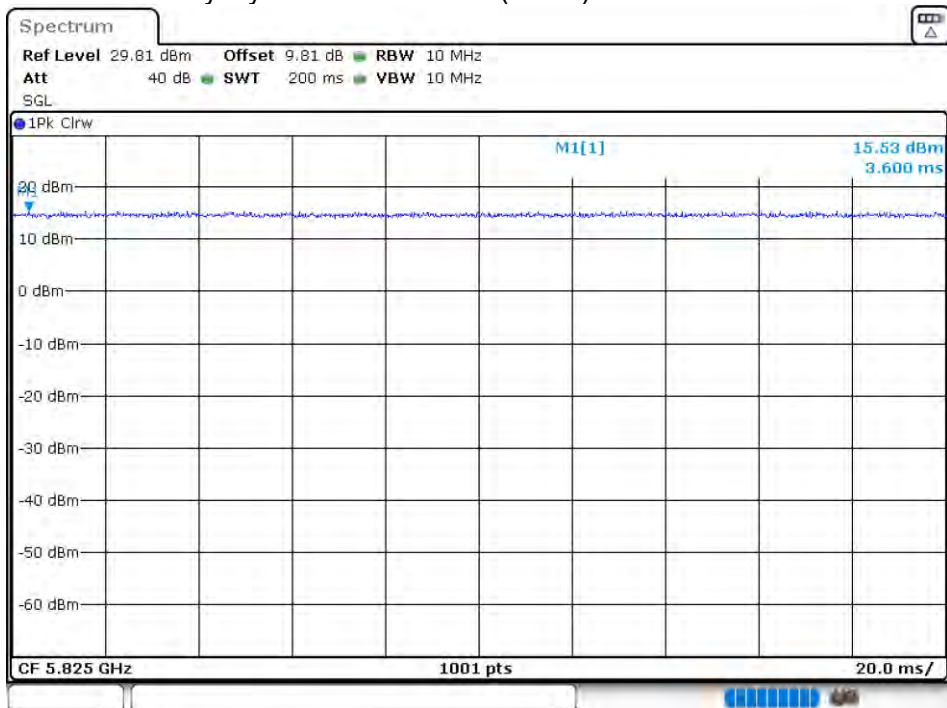


Duty Cycle NVNT 802.11n(HT20) 5745MHz Ant 2

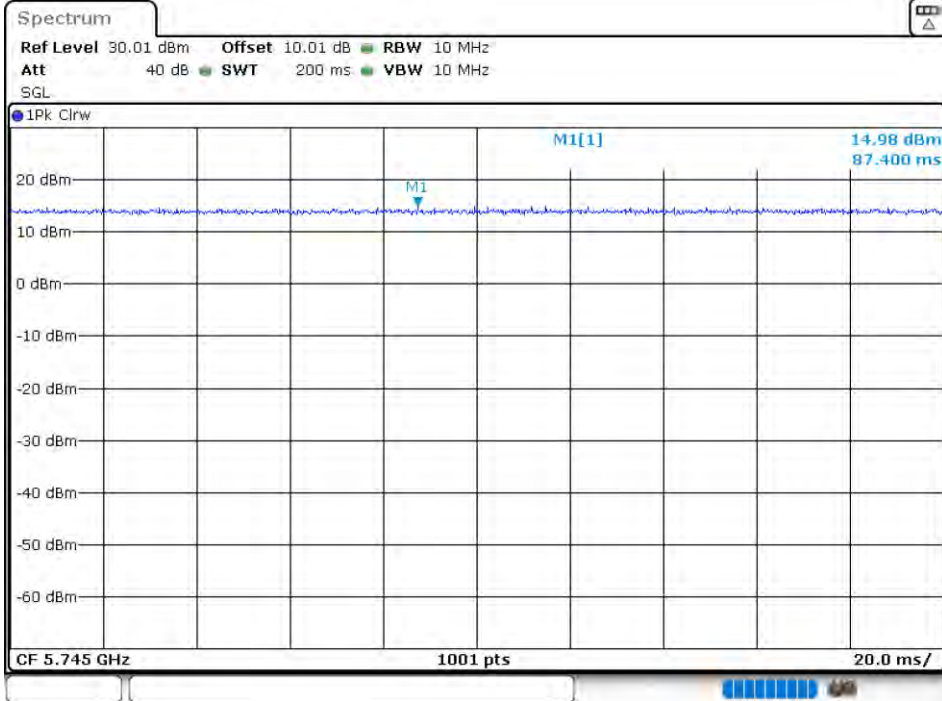


Duty Cycle NVNT 802.11n(HT20) 5785MHz Ant 2

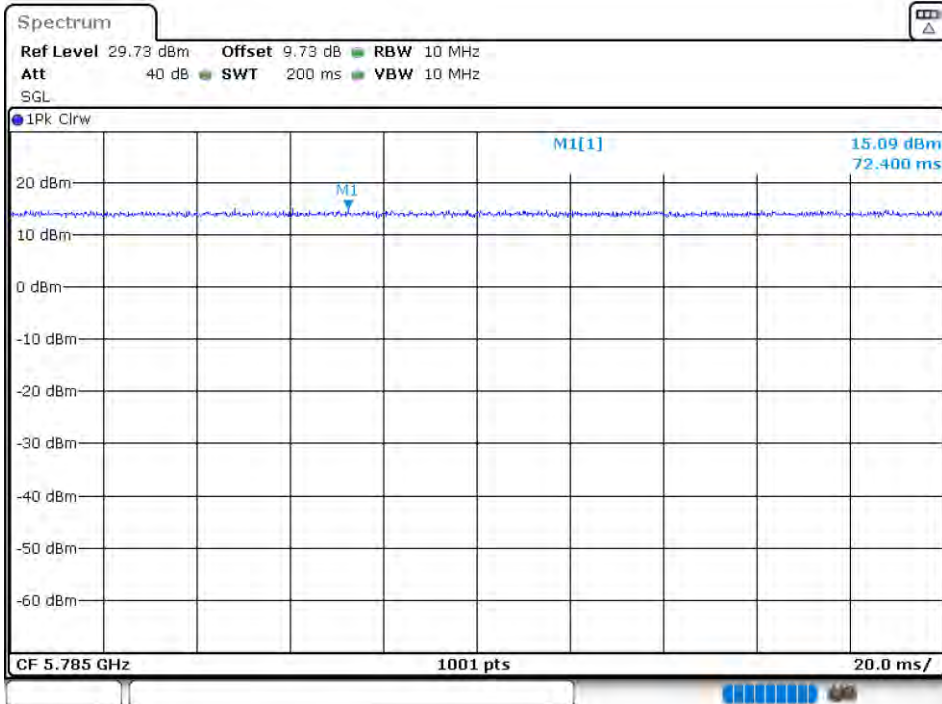


Duty Cycle NVNT 802.11n(HT20) 5825MHz Ant 2

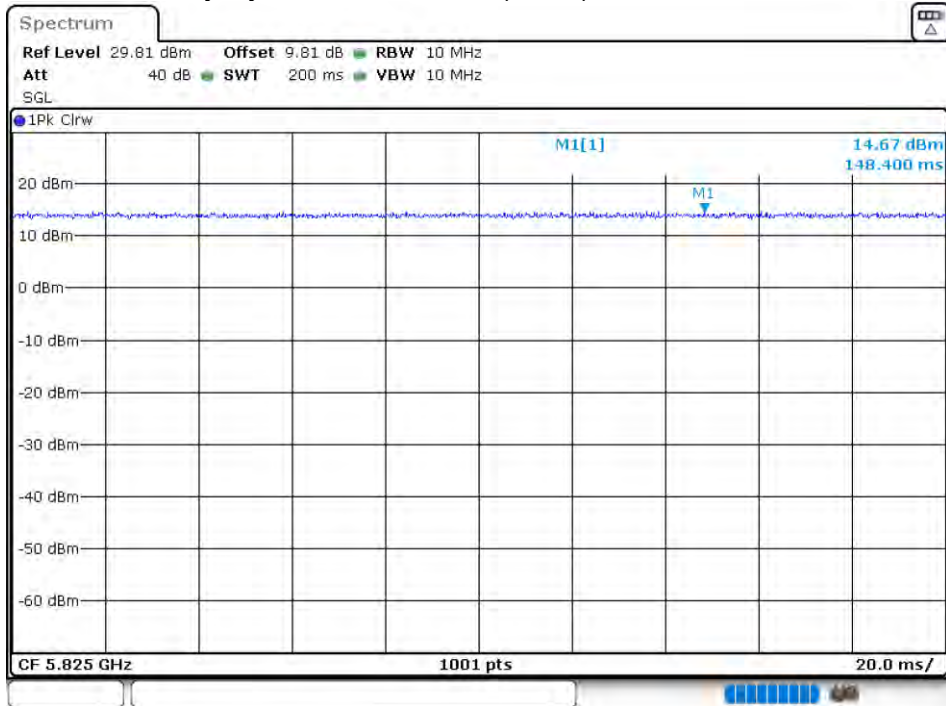


Duty Cycle NVNT 802.11n(HT40) 5755MHz Ant 1

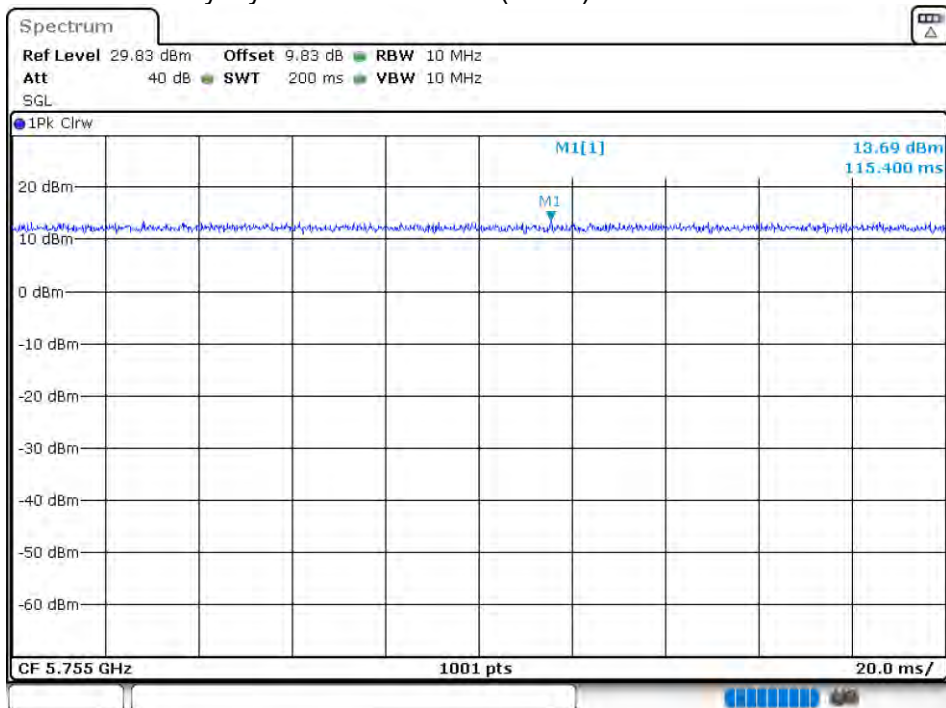


Duty Cycle NVNT 802.11n(HT40) 5795MHz Ant 1

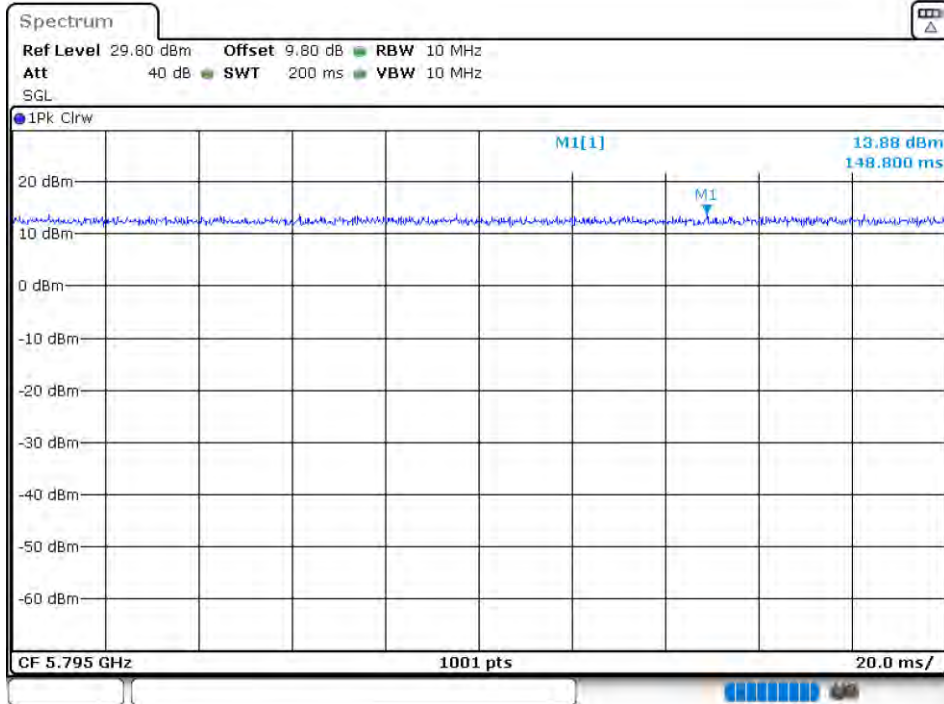

Duty Cycle NVNT 802.11n(HT40) 5755MHz Ant 2

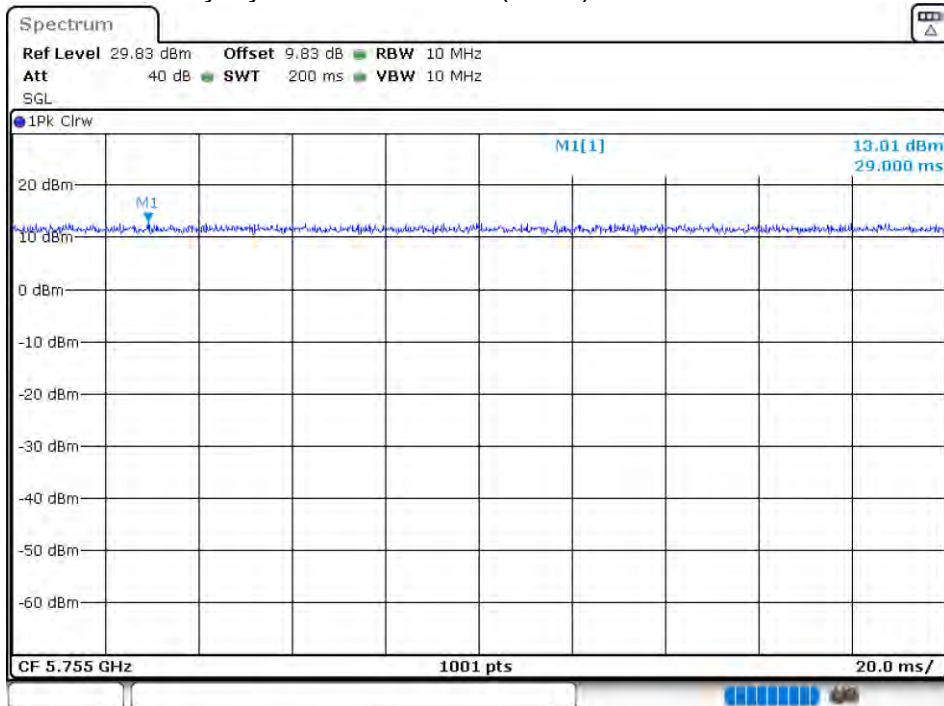

Duty Cycle NVNT 802.11n(HT40) 5795MHz Ant 2

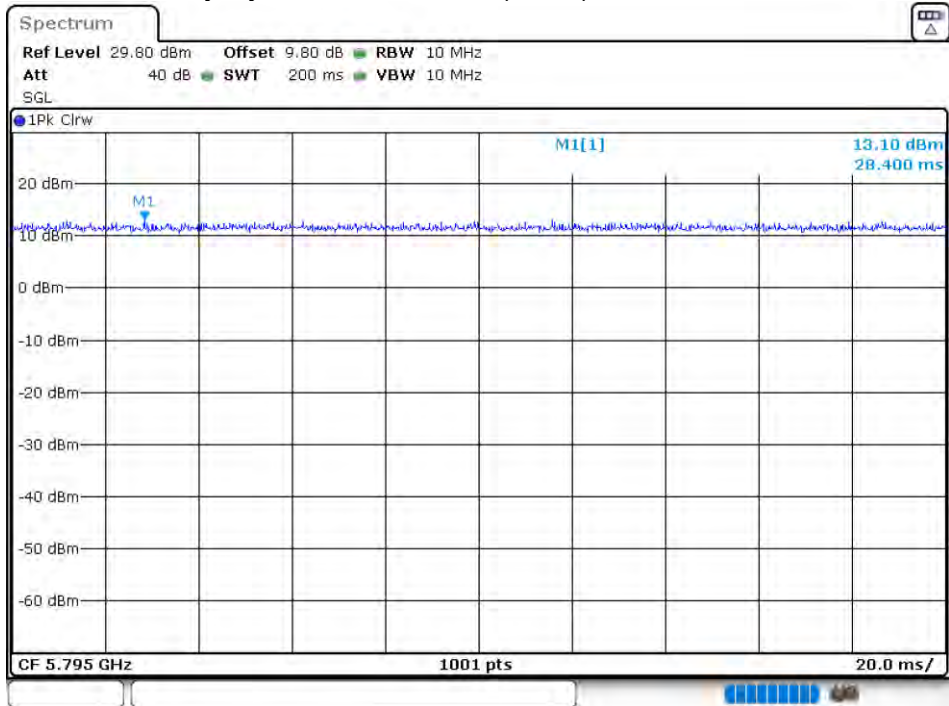


11.4.2 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11a	5745	Ant 1	9.58	-	30	Pass
NVNT	802.11a	5785	Ant 1	9.76	-	30	Pass
NVNT	802.11a	5825	Ant 1	9.62	-	30	Pass
NVNT	802.11a	5745	Ant 2	8.8	-	30	Pass
NVNT	802.11a	5785	Ant 2	8.91	-	30	Pass
NVNT	802.11a	5825	Ant 2	8.9	-	30	Pass
NVNT	802.11ac20	5745	Ant 1	9.53	12.21	27.99	Pass
NVNT	802.11ac20	5745	Ant 2	8.85		27.99	Pass
NVNT	802.11ac20	5785	Ant 1	9.54	12.15	27.99	Pass
NVNT	802.11ac20	5785	Ant 2	8.69		27.99	Pass
NVNT	802.11ac20	5825	Ant 1	9.33	12.11	27.99	Pass
NVNT	802.11ac20	5825	Ant 2	8.85		27.99	Pass
NVNT	802.11ac40	5755	Ant 1	9.18	11.87	27.99	Pass
NVNT	802.11ac40	5755	Ant 2	8.51		27.99	Pass
NVNT	802.11ac40	5795	Ant 1	9.22	11.79	27.99	Pass
NVNT	802.11ac40	5795	Ant 2	8.29		27.99	Pass
NVNT	802.11ac80	5775	Ant 1	8.78	11.45	27.99	Pass
NVNT	802.11ac80	5775	Ant 2	8.07		27.99	Pass
NVNT	802.11n(HT20)	5745	Ant 1	9.55	12.24	27.99	Pass
NVNT	802.11n(HT20)	5745	Ant 2	8.89		27.99	Pass
NVNT	802.11n(HT20)	5785	Ant 1	9.58	12.18	27.99	Pass
NVNT	802.11n(HT20)	5785	Ant 2	8.72		27.99	Pass
NVNT	802.11n(HT20)	5825	Ant 1	9.49	12.16	27.99	Pass
NVNT	802.11n(HT20)	5825	Ant 2	8.77		27.99	Pass
NVNT	802.11n(HT40)	5755	Ant 1	9.19	11.86	27.99	Pass
NVNT	802.11n(HT40)	5755	Ant 2	8.49		27.99	Pass
NVNT	802.11n(HT40)	5795	Ant 1	9.2	11.82	27.99	Pass
NVNT	802.11n(HT40)	5795	Ant 2	8.37		27.99	Pass


11.4.3 -6DB EMISSION BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11a	5745	Ant 1	16.32	0.5	Pass
NVNT	802.11a	5785	Ant 1	16.36	0.5	Pass
NVNT	802.11a	5825	Ant 1	16.32	0.5	Pass
NVNT	802.11a	5745	Ant 2	16.32	0.5	Pass
NVNT	802.11a	5785	Ant 2	16.36	0.5	Pass
NVNT	802.11a	5825	Ant 2	16.32	0.5	Pass
NVNT	802.11ac20	5745	Ant 1	17.32	0.5	Pass
NVNT	802.11ac20	5785	Ant 1	17.56	0.5	Pass
NVNT	802.11ac20	5825	Ant 1	17.6	0.5	Pass
NVNT	802.11ac20	5745	Ant 2	17.6	0.5	Pass
NVNT	802.11ac20	5785	Ant 2	17.56	0.5	Pass
NVNT	802.11ac20	5825	Ant 2	17.56	0.5	Pass
NVNT	802.11ac40	5755	Ant 1	36.08	0.5	Pass
NVNT	802.11ac40	5795	Ant 1	36.08	0.5	Pass
NVNT	802.11ac40	5755	Ant 2	35.92	0.5	Pass
NVNT	802.11ac40	5795	Ant 2	35.92	0.5	Pass
NVNT	802.11ac80	5775	Ant 1	76.32	0.5	Pass
NVNT	802.11ac80	5775	Ant 2	76	0.5	Pass
NVNT	802.11n(HT20)	5745	Ant 1	17.6	0.5	Pass
NVNT	802.11n(HT20)	5785	Ant 1	17.56	0.5	Pass
NVNT	802.11n(HT20)	5825	Ant 1	17.6	0.5	Pass
NVNT	802.11n(HT20)	5745	Ant 2	17.6	0.5	Pass
NVNT	802.11n(HT20)	5785	Ant 2	17.56	0.5	Pass
NVNT	802.11n(HT20)	5825	Ant 2	17.6	0.5	Pass
NVNT	802.11n(HT40)	5755	Ant 1	36.08	0.5	Pass
NVNT	802.11n(HT40)	5795	Ant 1	36	0.5	Pass
NVNT	802.11n(HT40)	5755	Ant 2	35.76	0.5	Pass
NVNT	802.11n(HT40)	5795	Ant 2	36.32	0.5	Pass


EBW NVNT 802.11a 5745MHz Ant 1

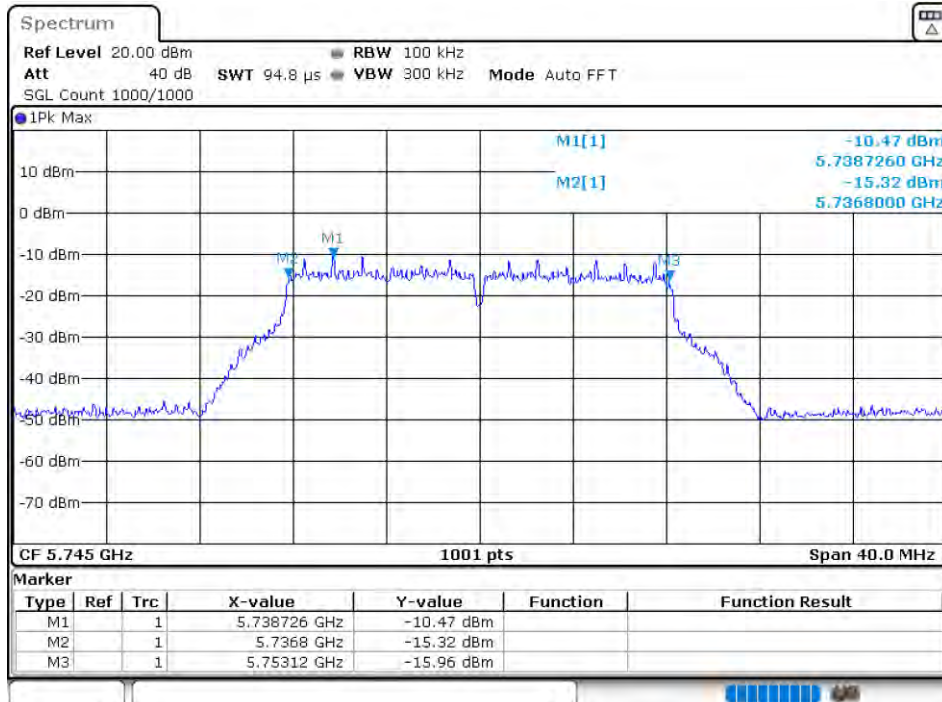


EBW NVNT 802.11a 5785MHz Ant 1

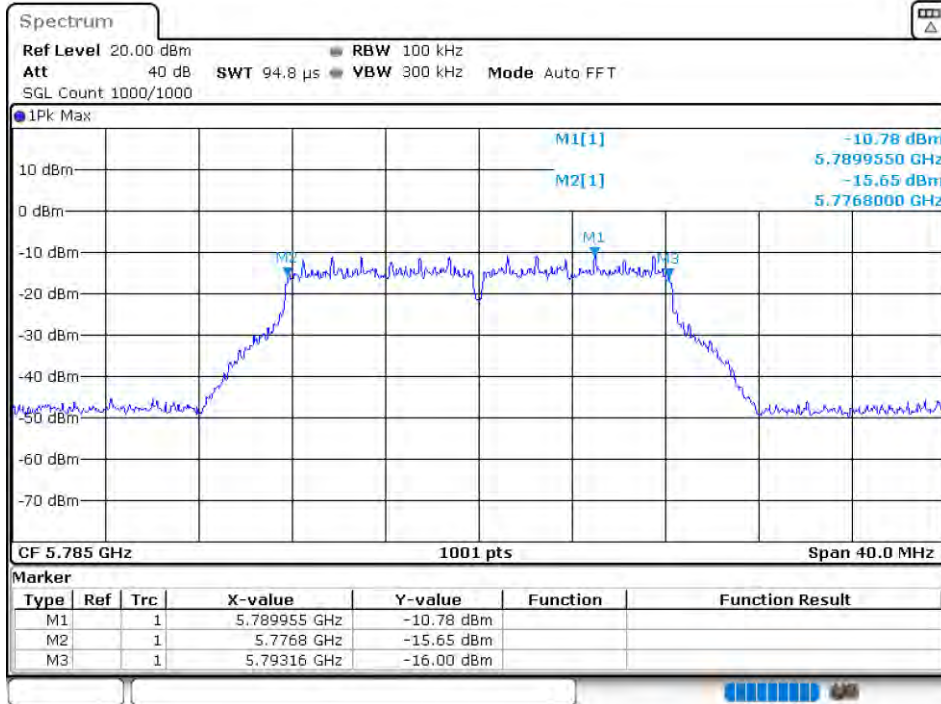


EBW NVNT 802.11a 5825MHz Ant 1

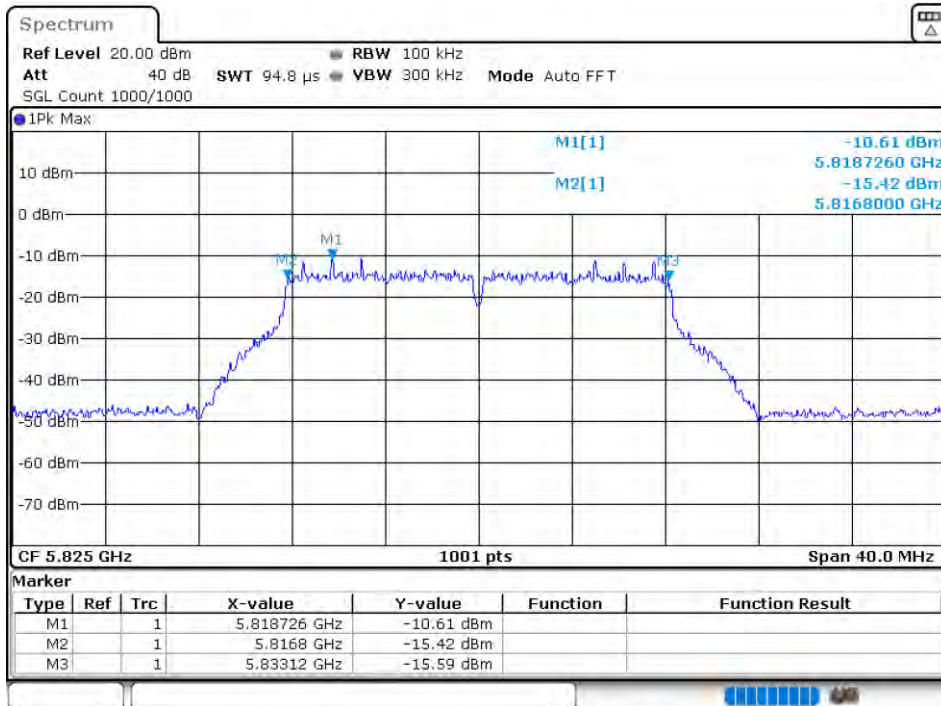


EBW NVNT 802.11a 5745MHz Ant 2

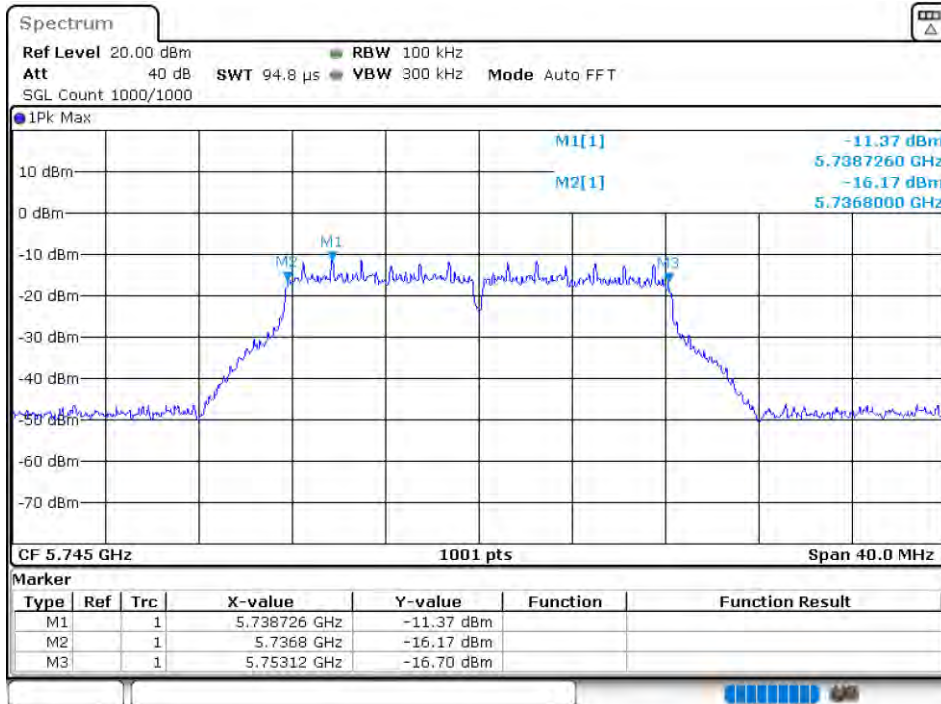


EBW NVNT 802.11a 5785MHz Ant 2

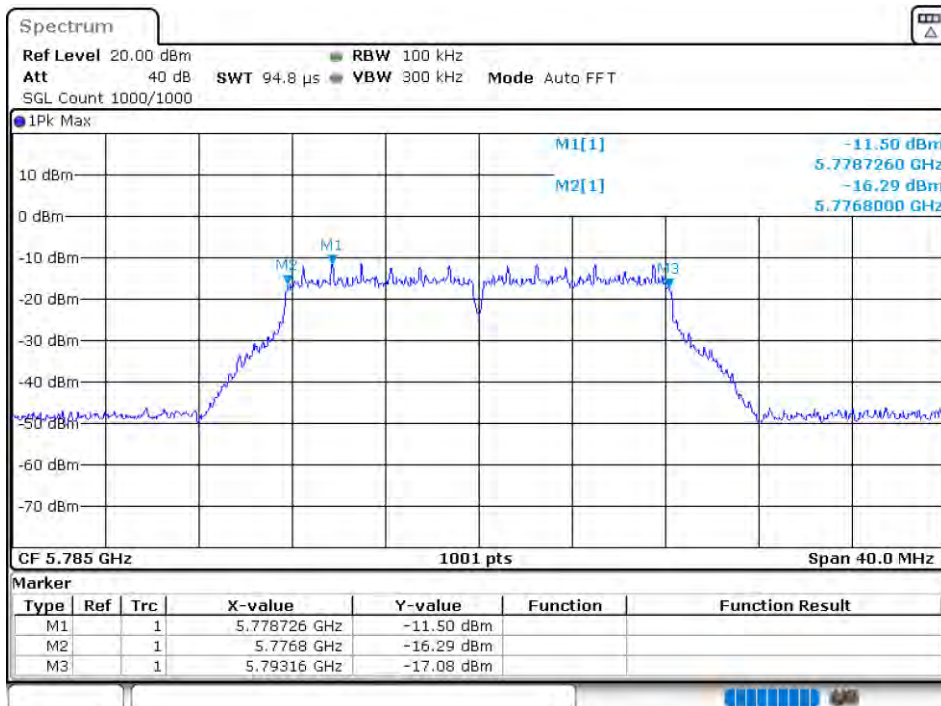


EBW NVNT 802.11a 5825MHz Ant 2

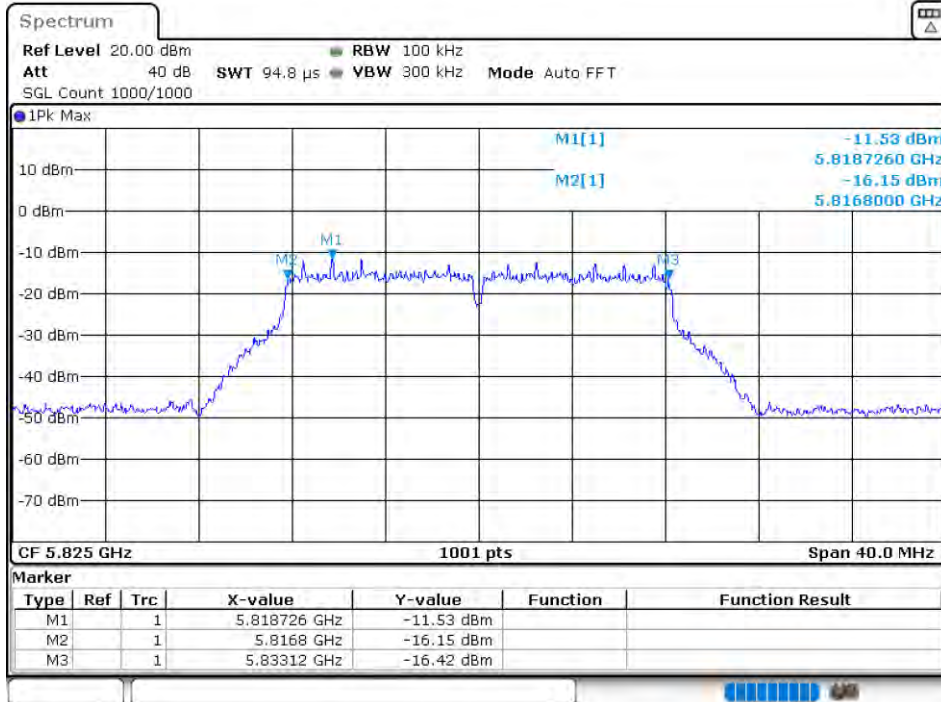


EBW NVNT 802.11ac20 5745MHz Ant 1

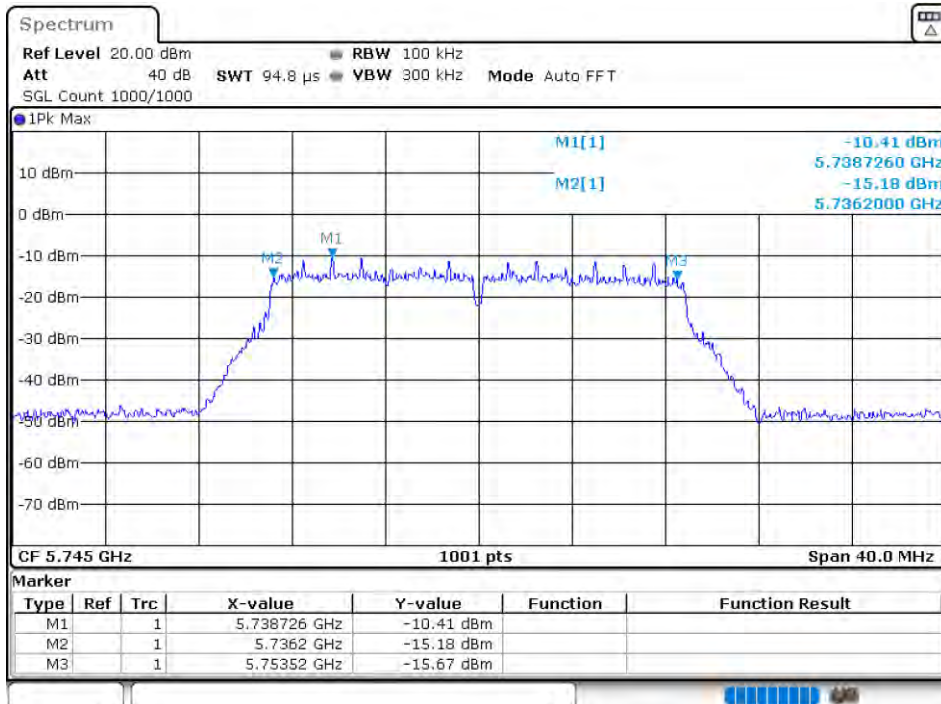


EBW NVNT 802.11ac20 5785MHz Ant 1

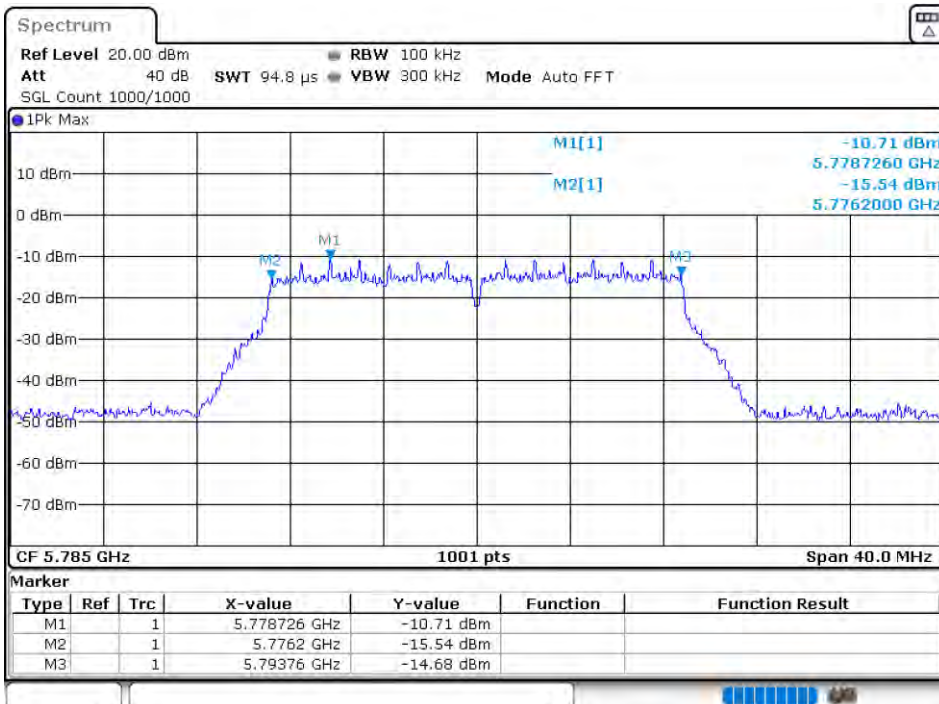


EBW NVNT 802.11ac20 5825MHz Ant 1

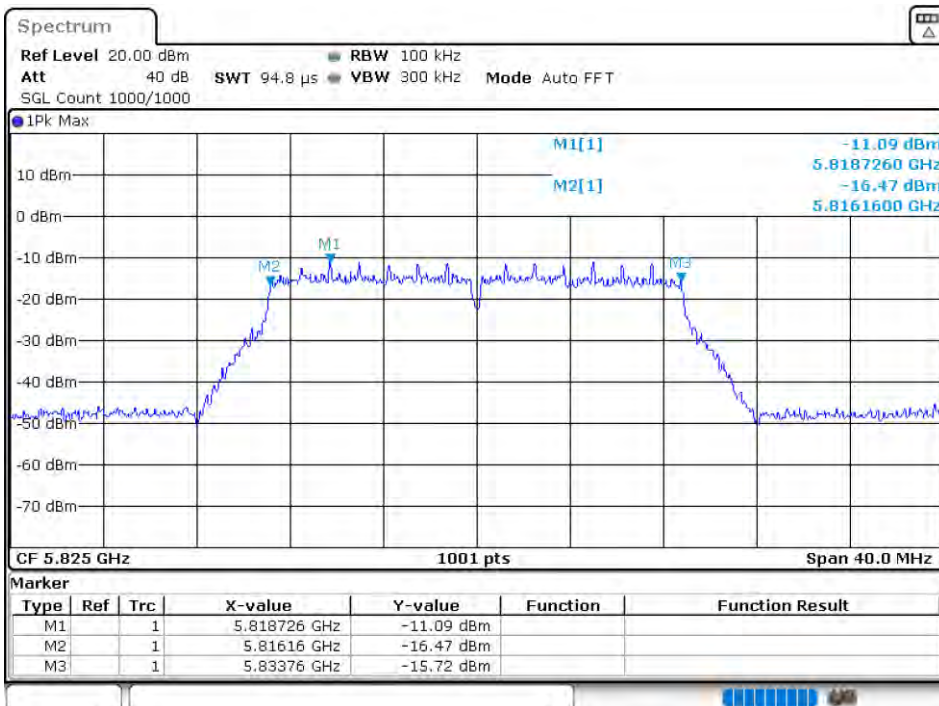


EBW NVNT 802.11ac20 5745MHz Ant 2

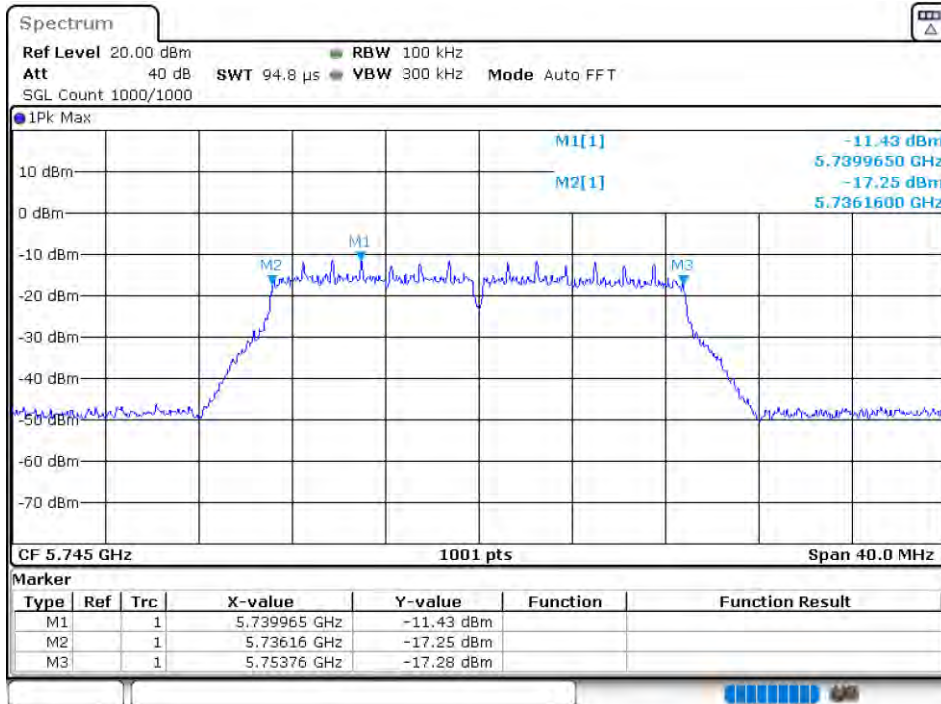


EBW NVNT 802.11ac20 5785MHz Ant 2

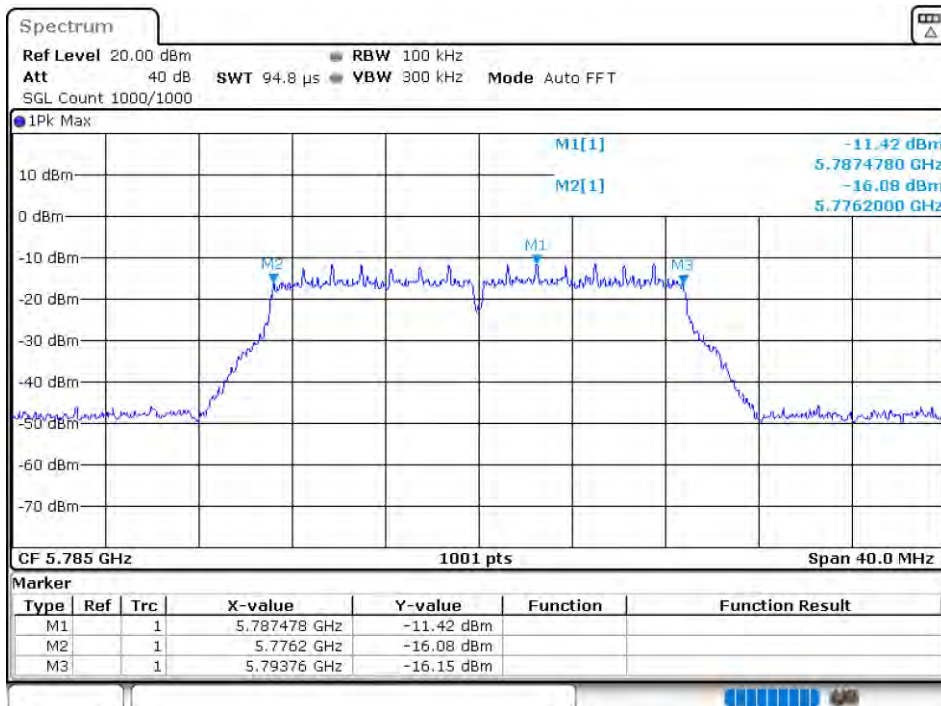


EBW NVNT 802.11ac20 5825MHz Ant 2

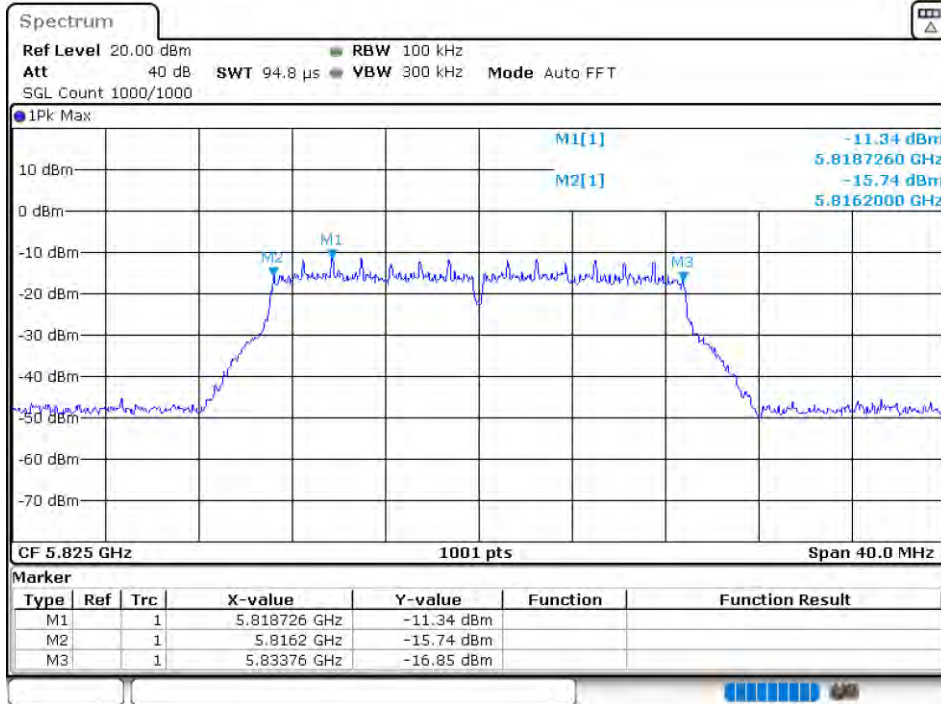


EBW NVNT 802.11ac40 5755MHz Ant 1

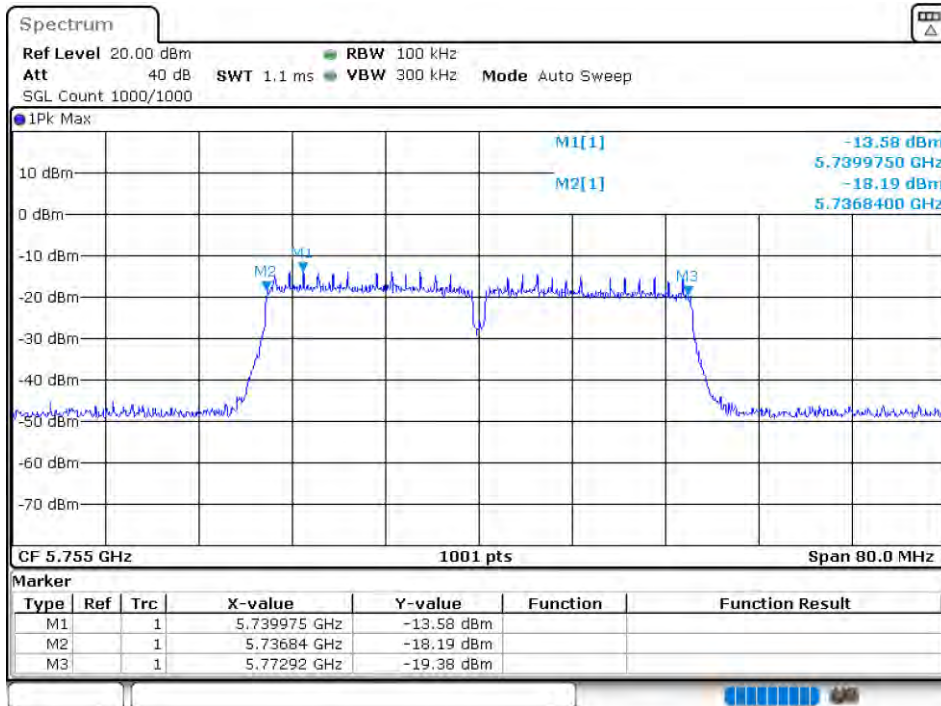


EBW NVNT 802.11ac40 5795MHz Ant 1

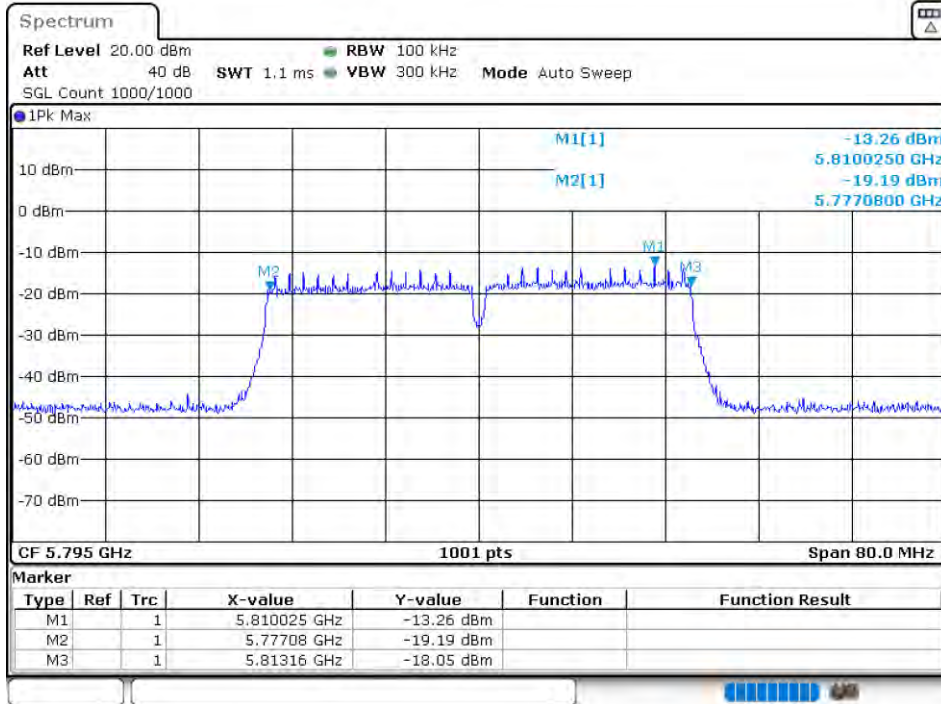


EBW NVNT 802.11ac40 5755MHz Ant 2

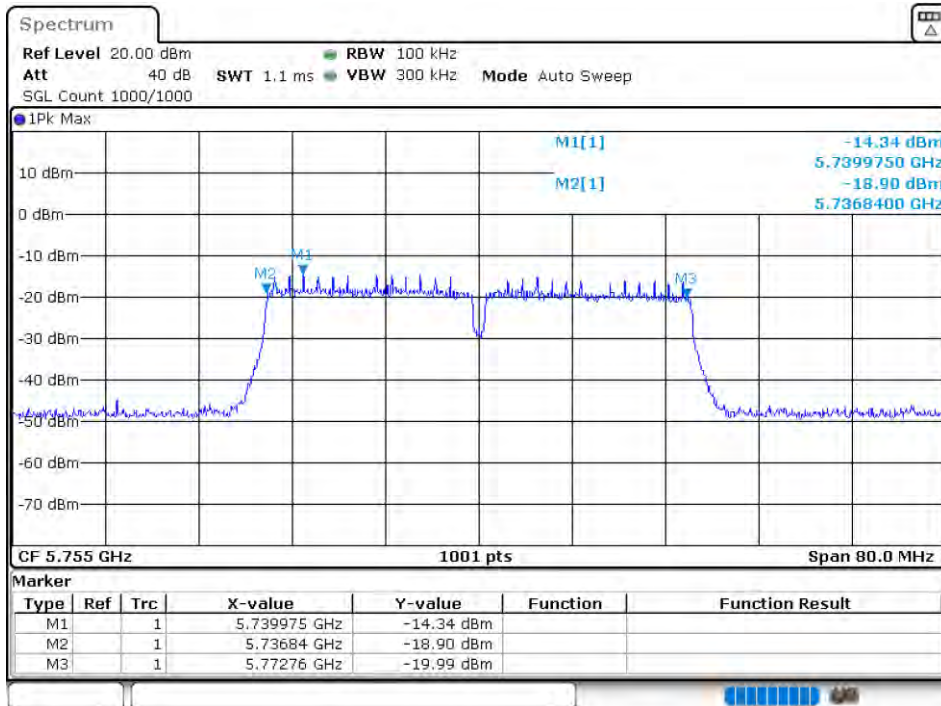


EBW NVNT 802.11ac40 5795MHz Ant 2

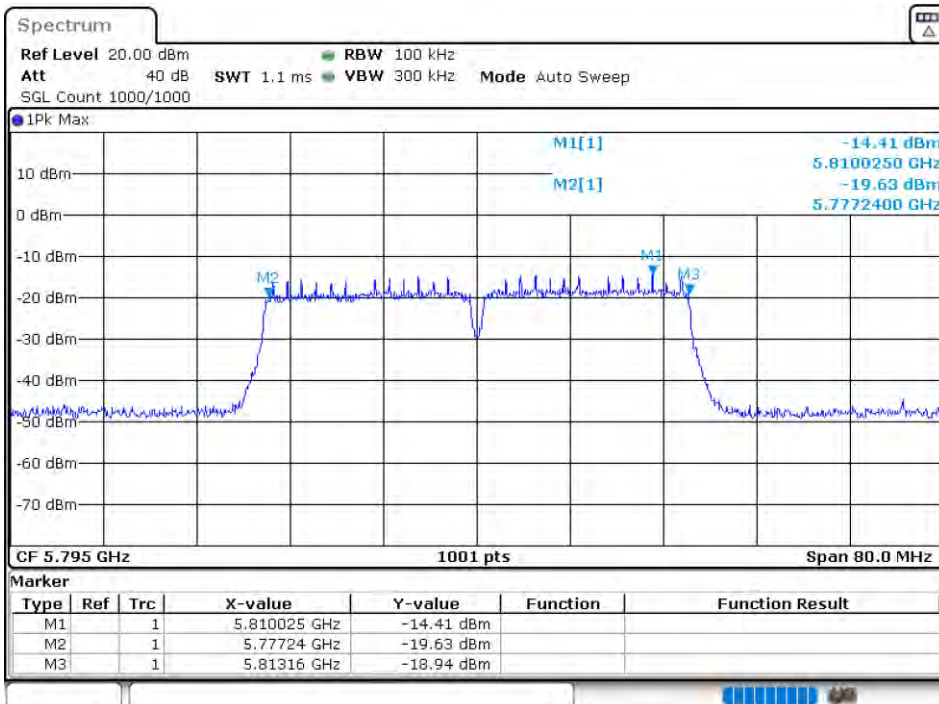


EBW NVNT 802.11ac80 5775MHz Ant 1

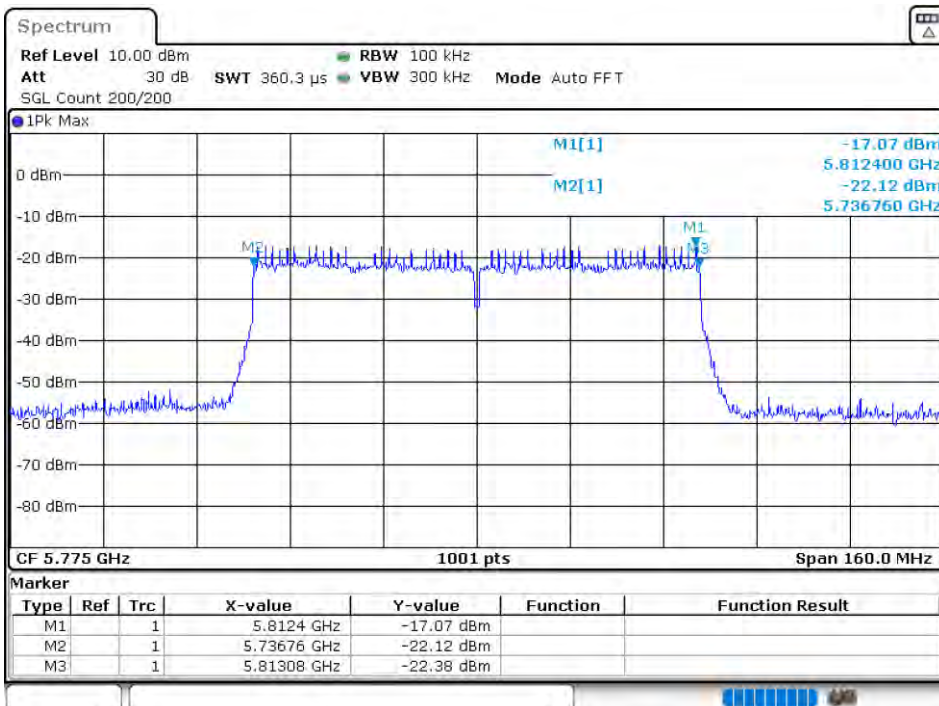


EBW NVNT 802.11ac80 5775MHz Ant 2

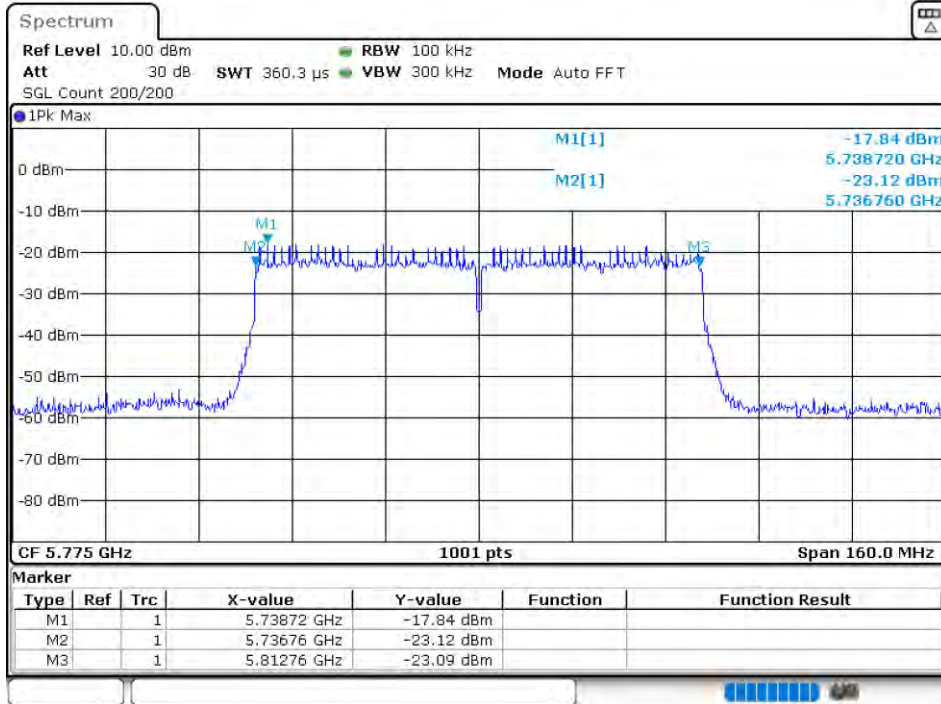


EBW NVNT 802.11n(HT20) 5745MHz Ant 1

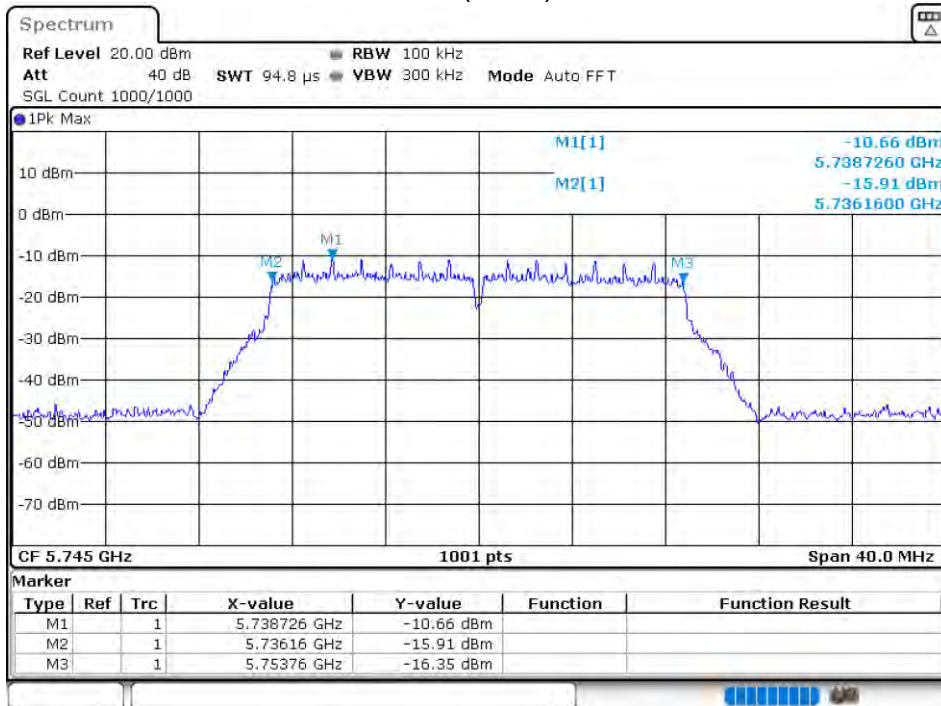


EBW NVNT 802.11n(HT20) 5785MHz Ant 1

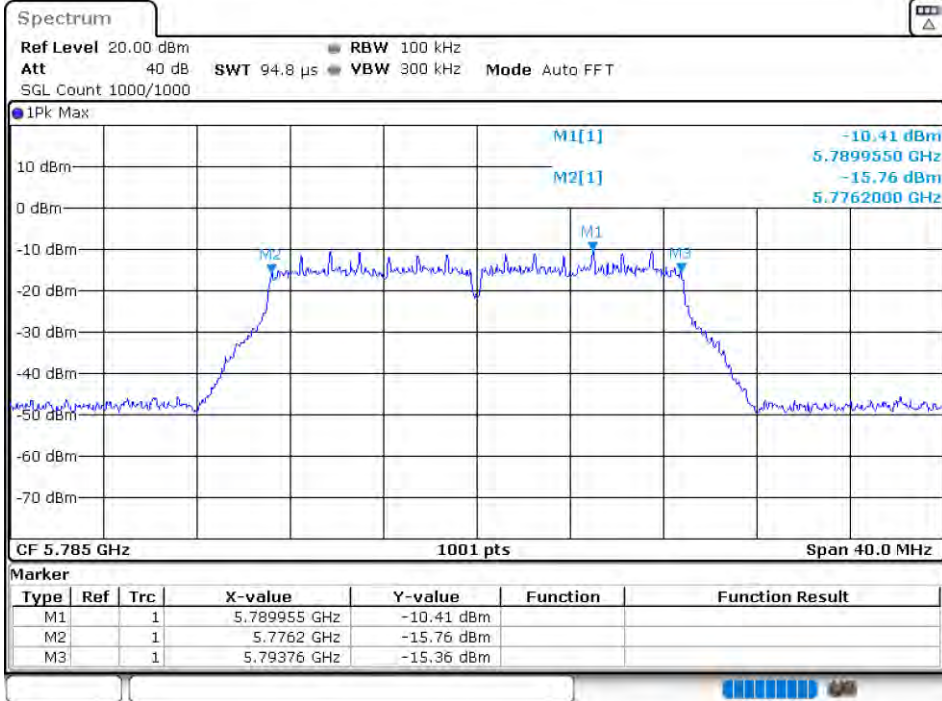


EBW NVNT 802.11n(HT20) 5825MHz Ant 1

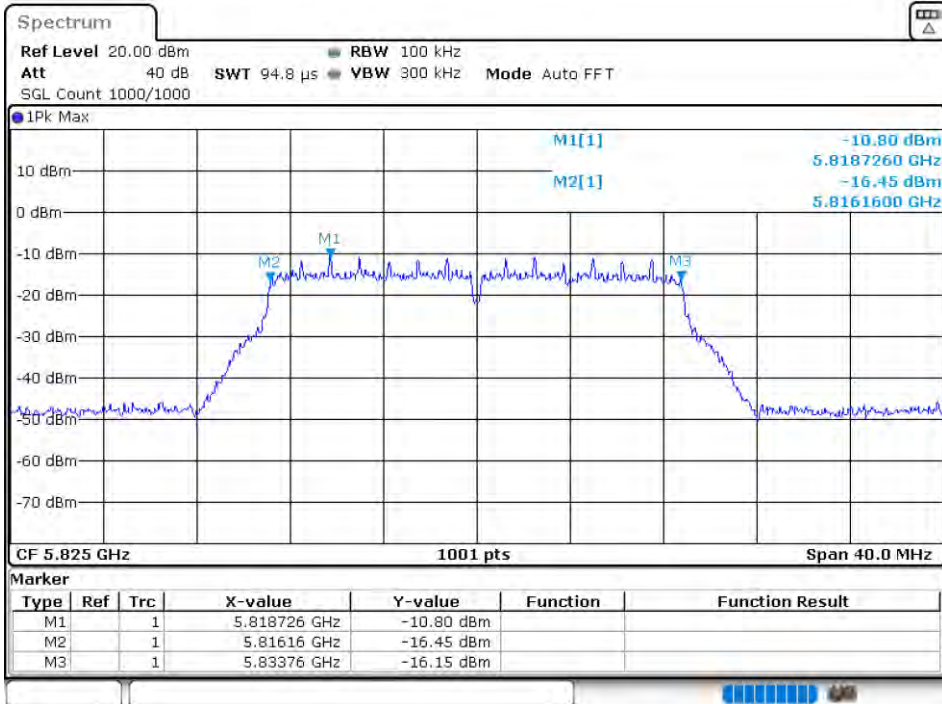


EBW NVNT 802.11n(HT20) 5745MHz Ant 2

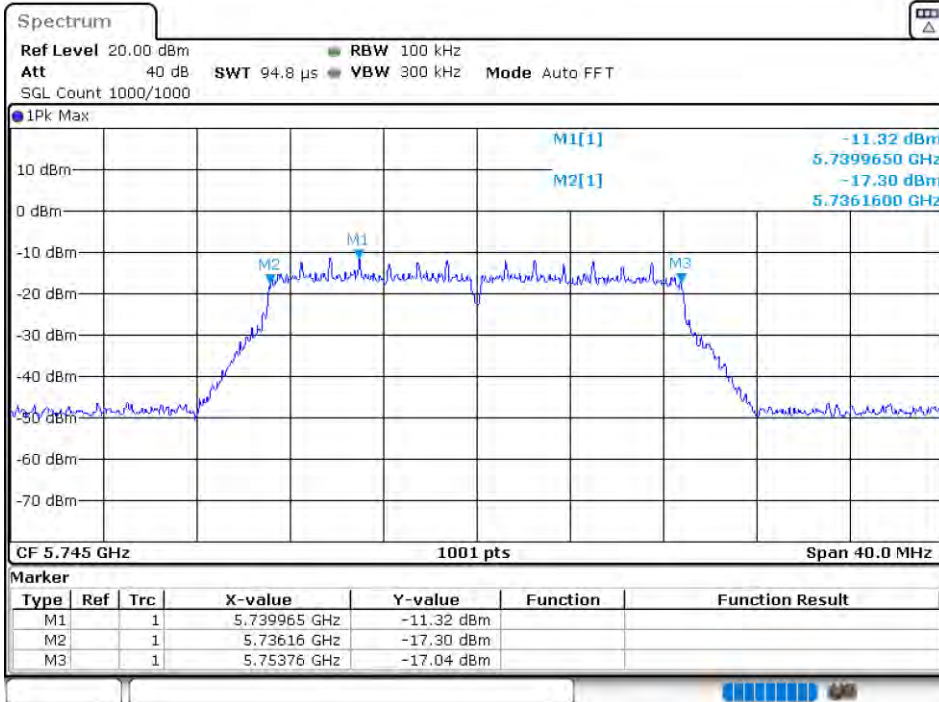


EBW NVNT 802.11n(HT20) 5785MHz Ant 2

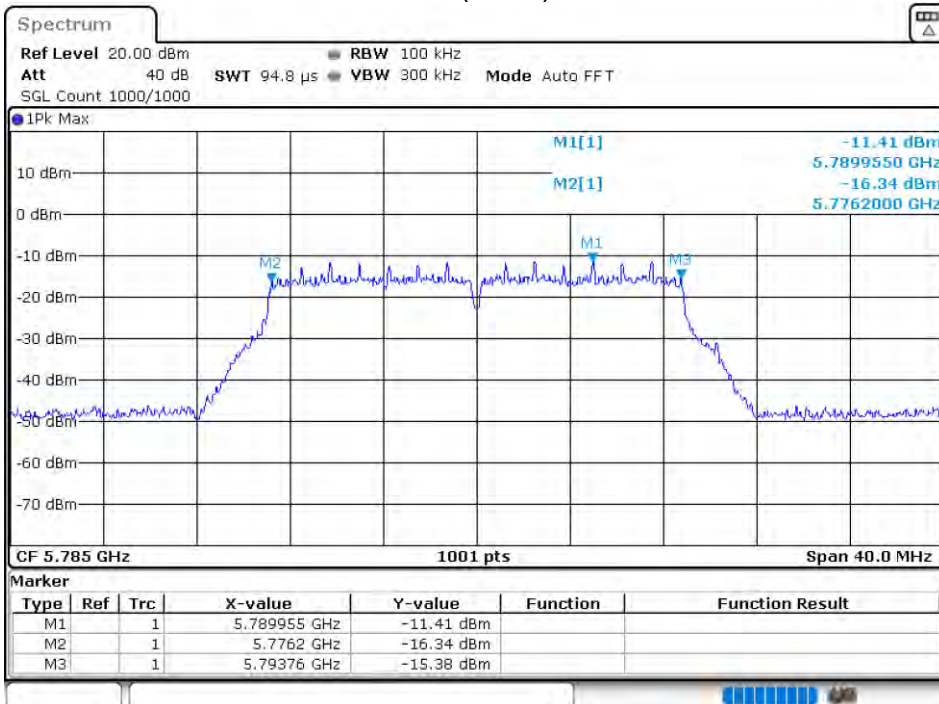


EBW NVNT 802.11n(HT20) 5825MHz Ant 2

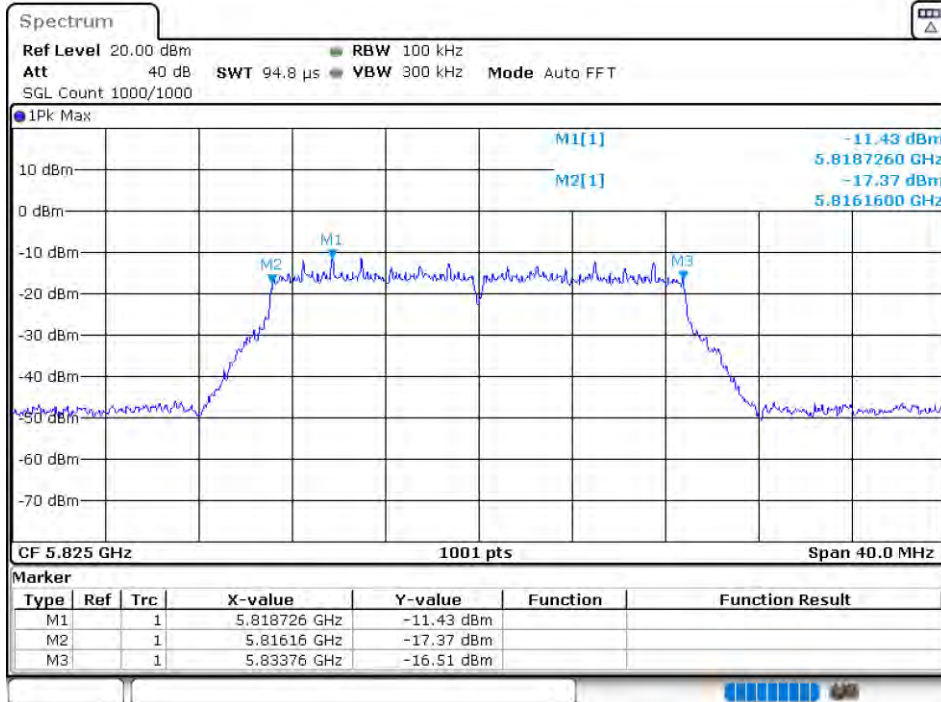

EBW NVNT 802.11n(HT40) 5755MHz Ant 1

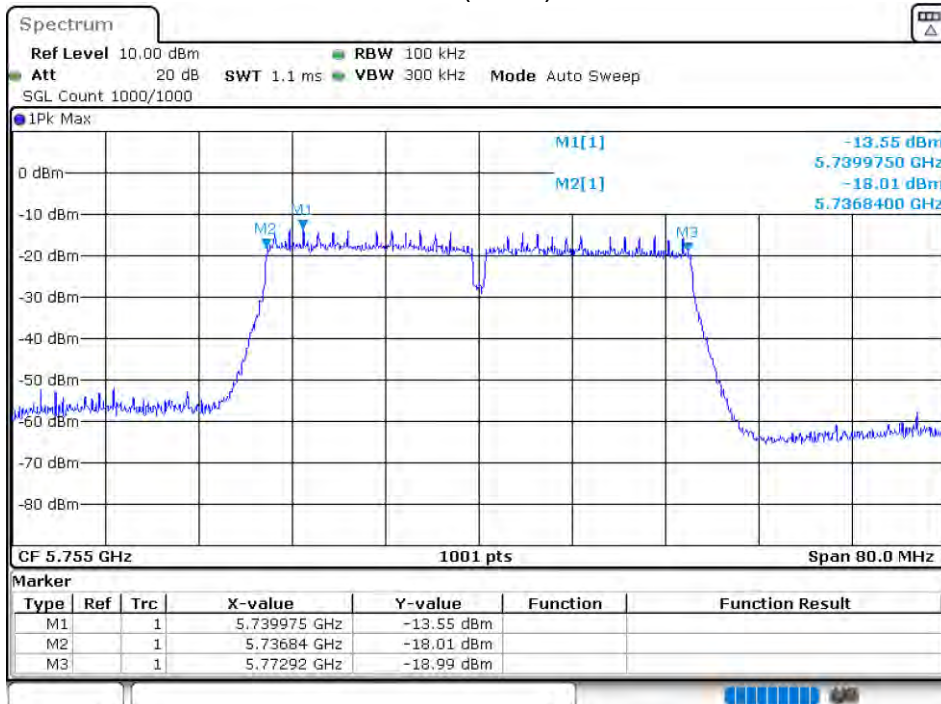

EBW NVNT 802.11n(HT40) 5795MHz Ant 1

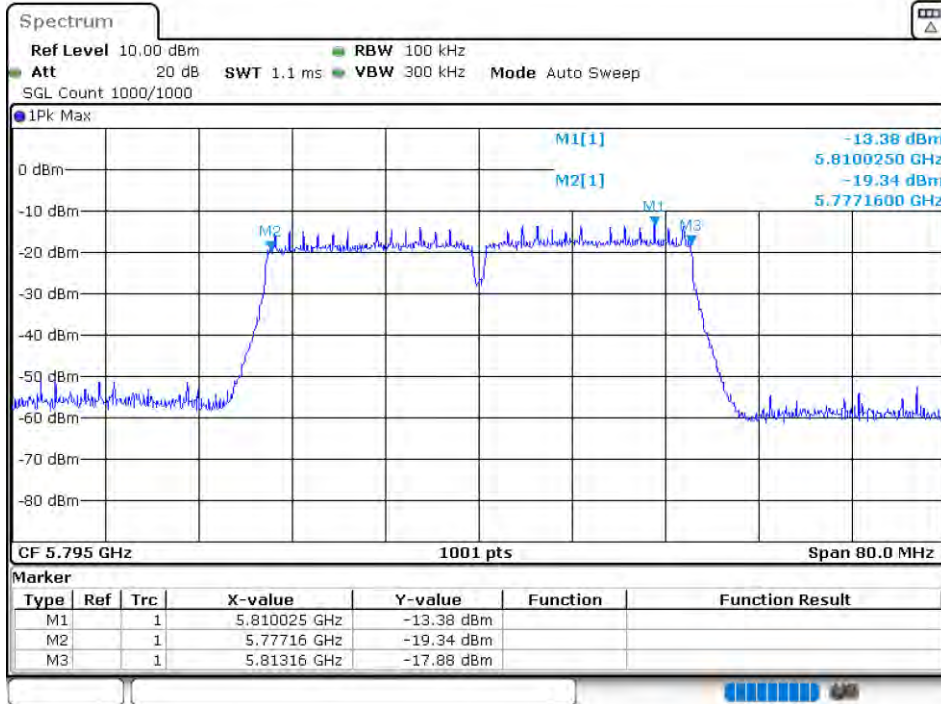

EBW NVNT 802.11n(HT40) 5755MHz Ant 2

