

Appendix B

RF Test Data for BT LE V4.2(DTS) (Conducted Measurement)

Product Name: Viewneo Diwa




Test Model: VD-CB-01

Environmental Conditions

Temperature:	23.4°C
Relative Humidity:	54.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Kay Hu
Supervised by:	Li Huan


B.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

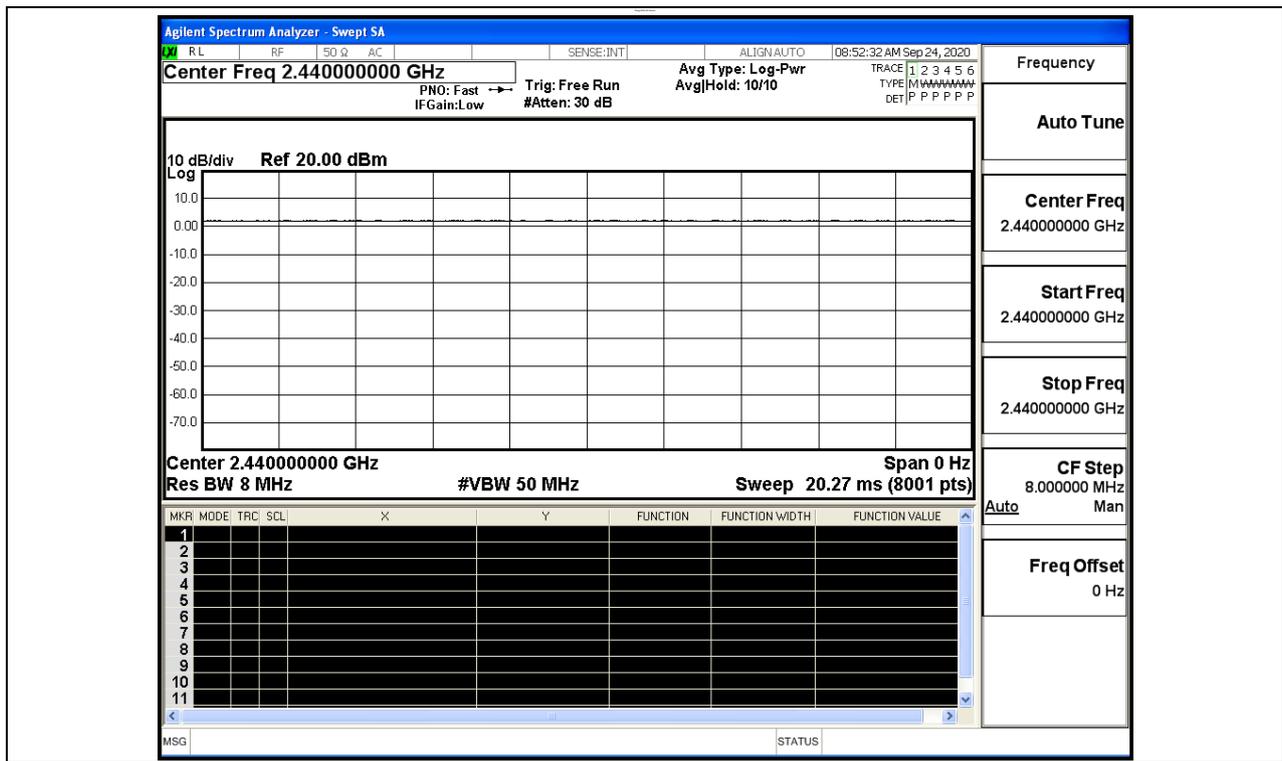


B.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	9.872	30	PASS
BT LE	MCH	10.007	30	PASS
BT LE	HCH	9.262	30	PASS

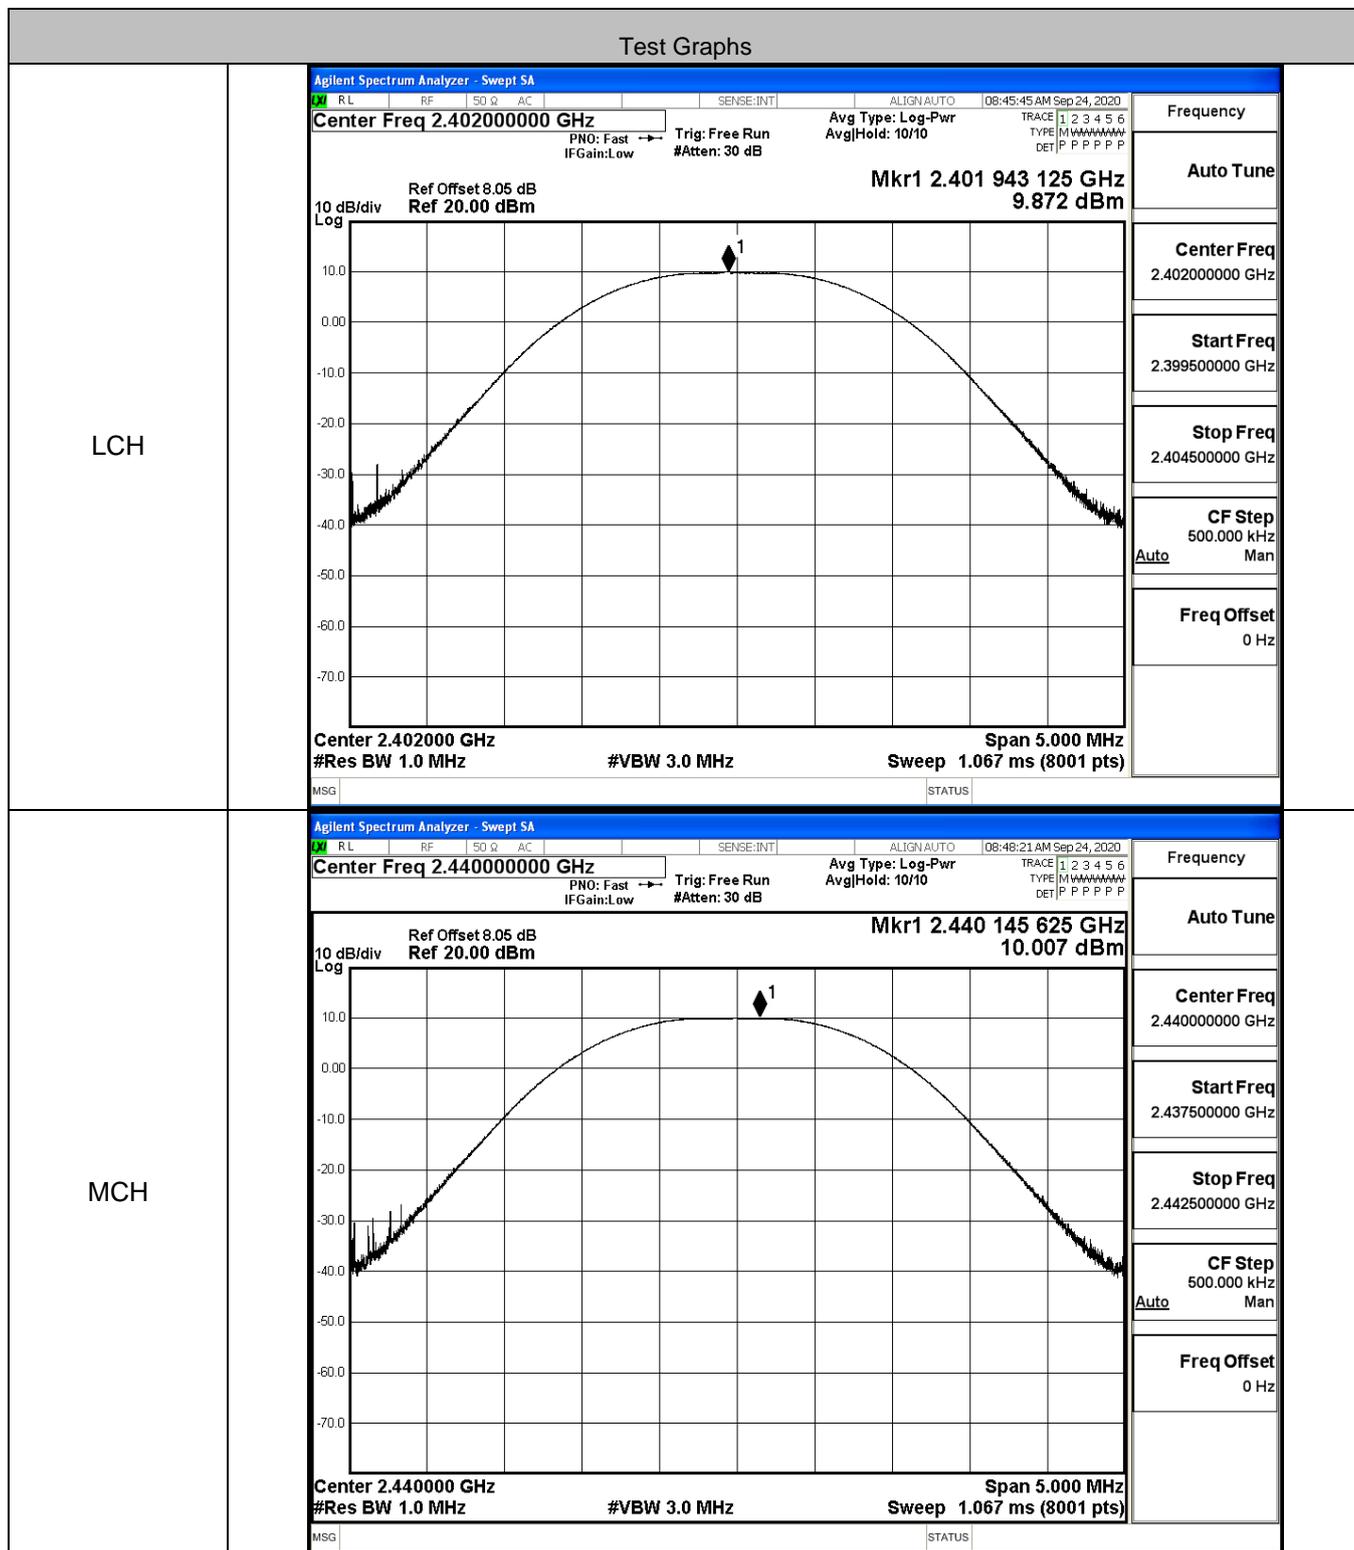

B.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-5.743	8	PASS
BT LE	MCH	-5.696	8	PASS
BT LE	HCH	-5.879	8	PASS

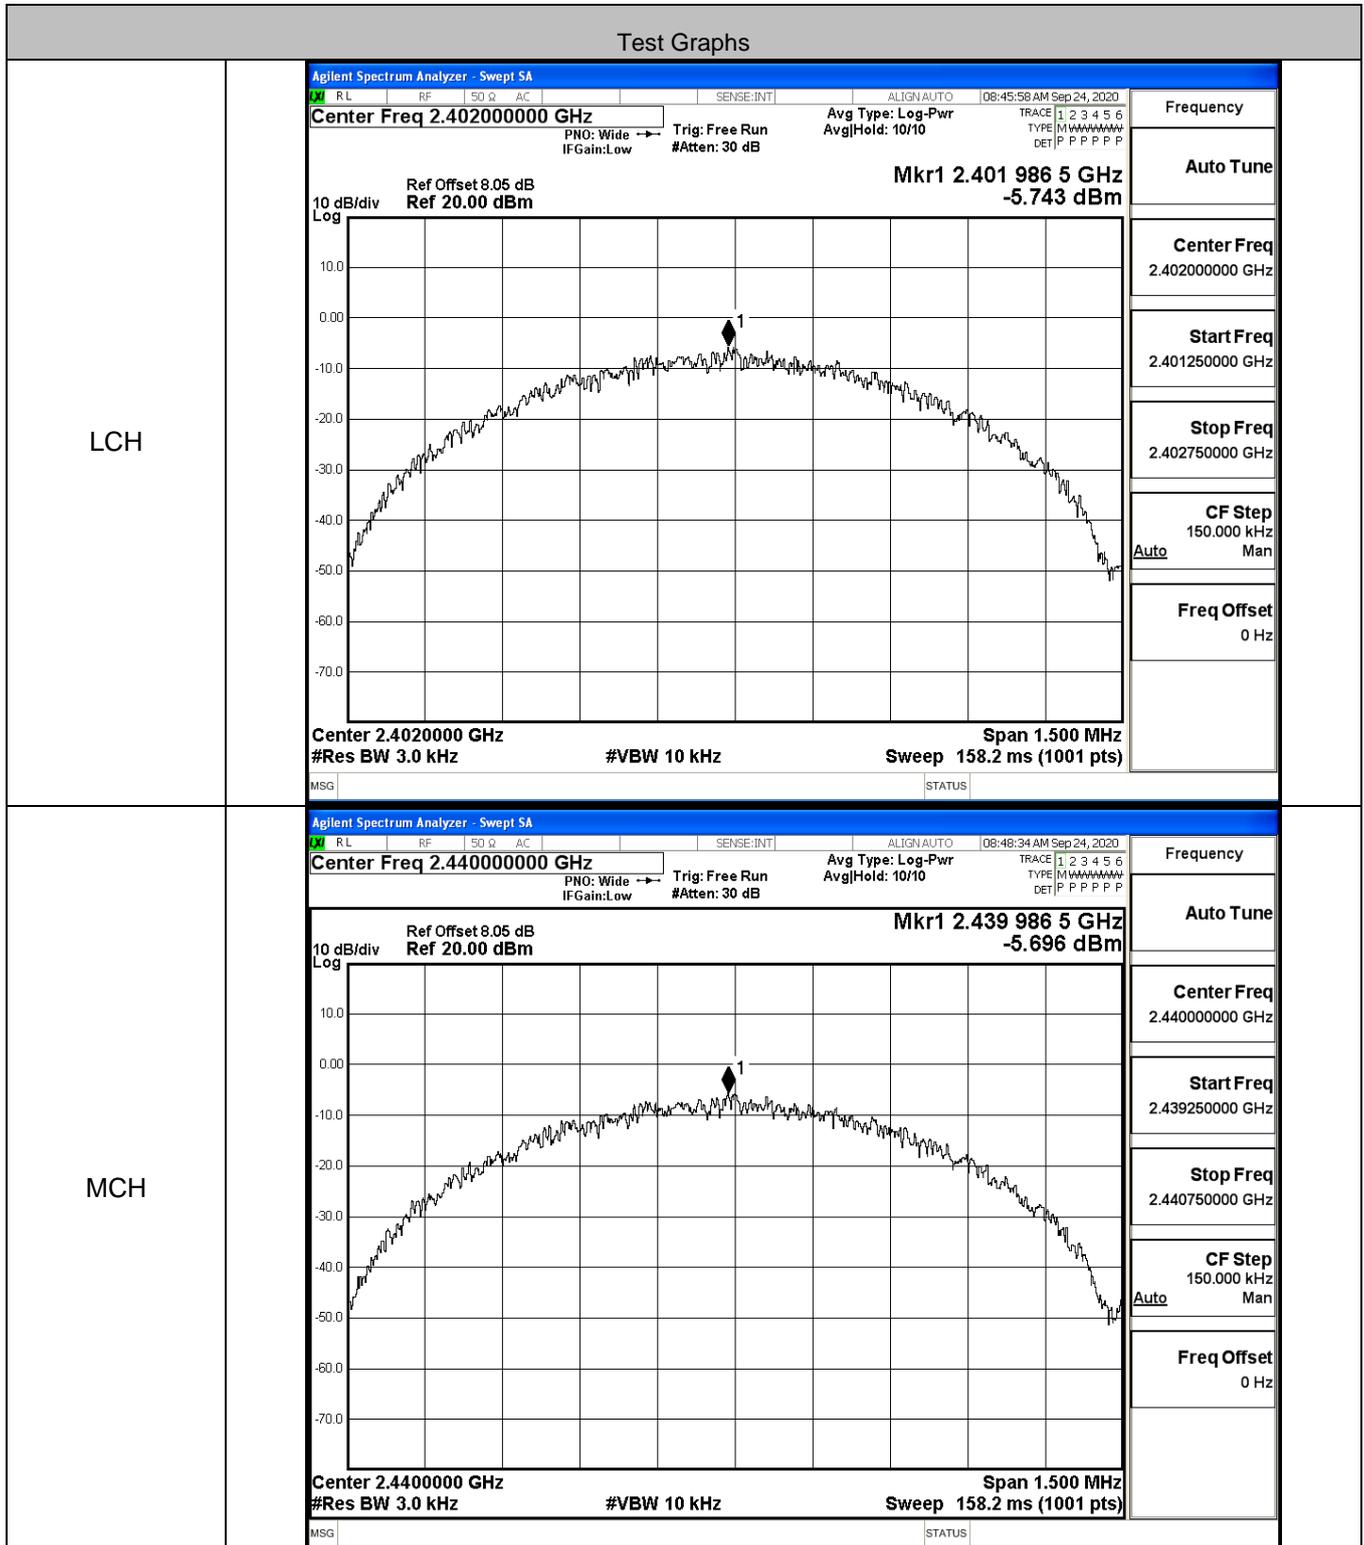

B.4 6dB Bandwidth


Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6379	≥0.5	PASS
BT LE	MCH	0.6392	≥0.5	PASS
BT LE	HCH	0.6431	≥0.5	PASS

Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Radio Std: None</p> <p>Trig: Free Run AvgHold: 1/1</p> <p>#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0215 MHz Total Power 15.9 dBm</p> <p>Transmit Freq Error -13.214 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 637.9 kHz x dB -6.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>
	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz Center Freq: 2.44000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgHold: 1/1</p> <p>#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 1.0239 MHz Total Power 16.0 dBm</p> <p>Transmit Freq Error -14.040 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 639.2 kHz x dB -6.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>


B.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	8.929	-32.555	-11.071	PASS
BT LE	MCH	9.682	-33.458	-10.318	PASS
BT LE	HCH	8.858	-34.084	-11.142	PASS

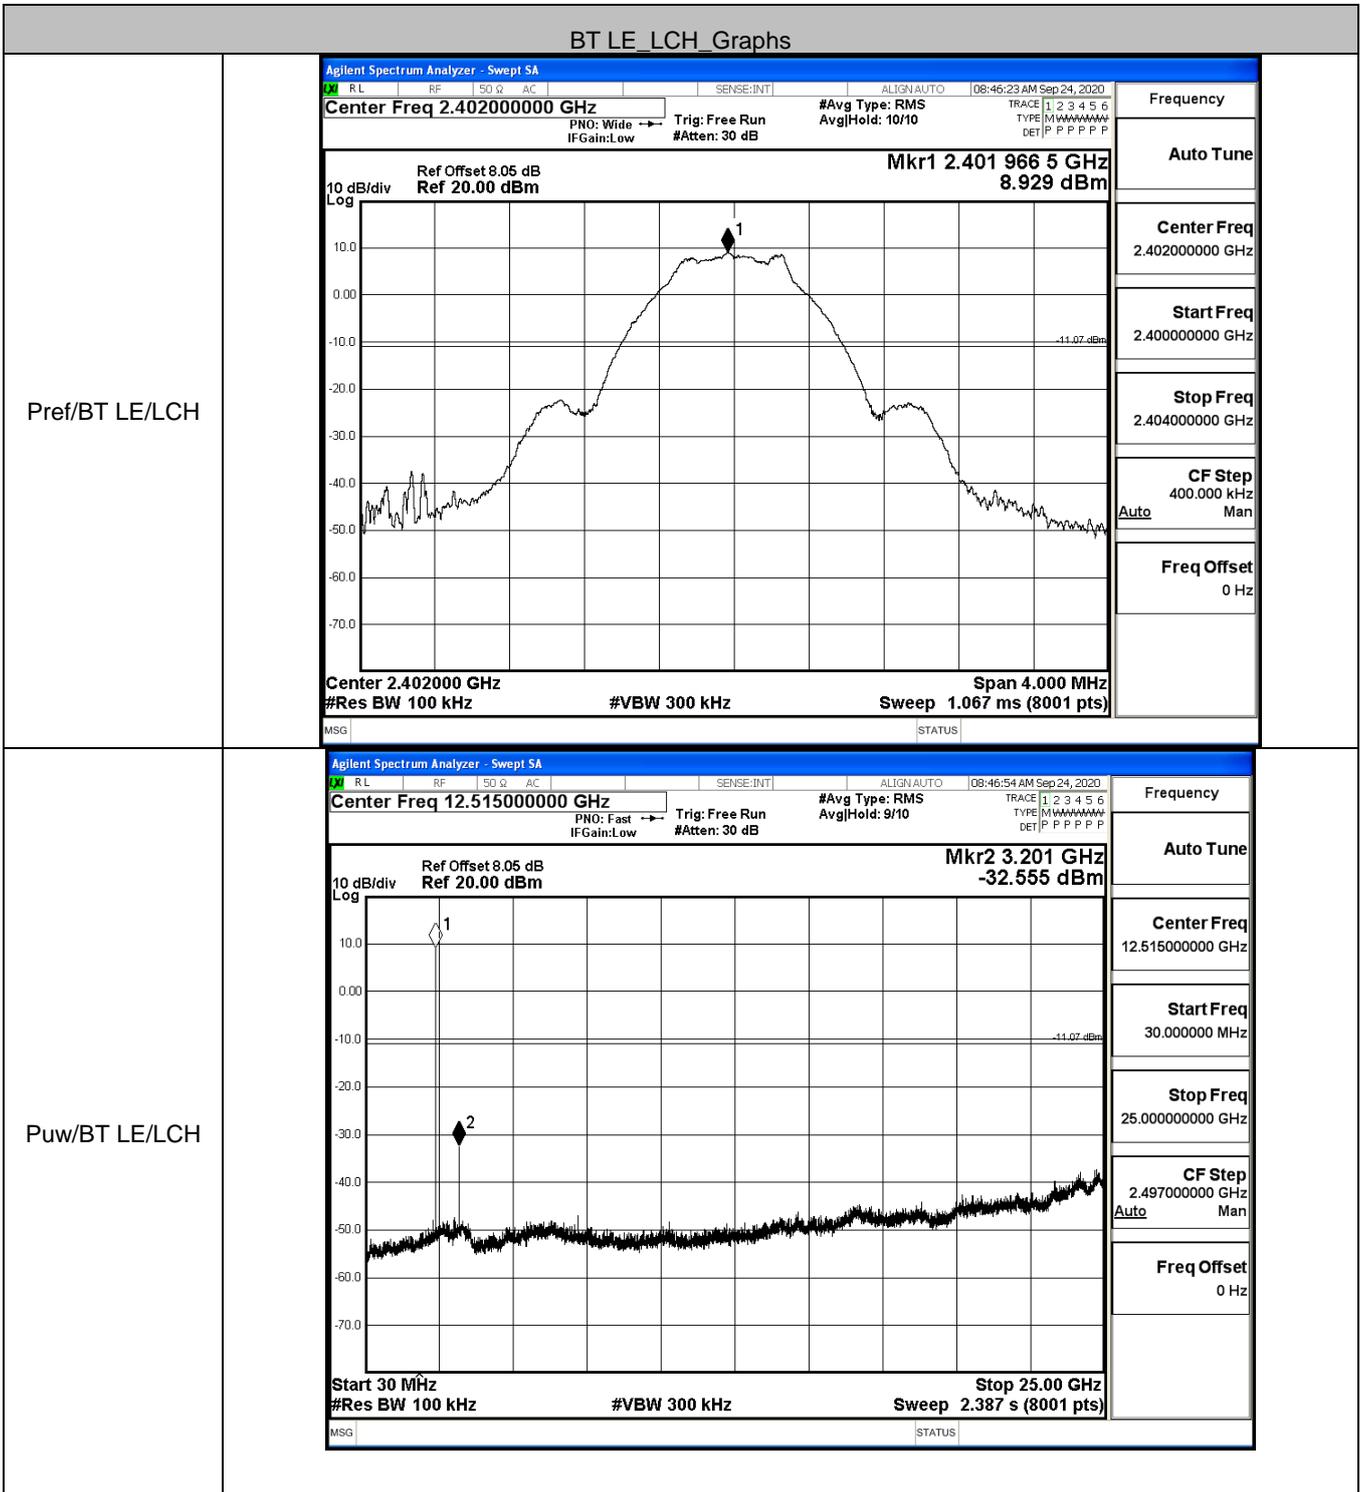


BT LE_MCH_Graphs

Pref/BT LE/MCH

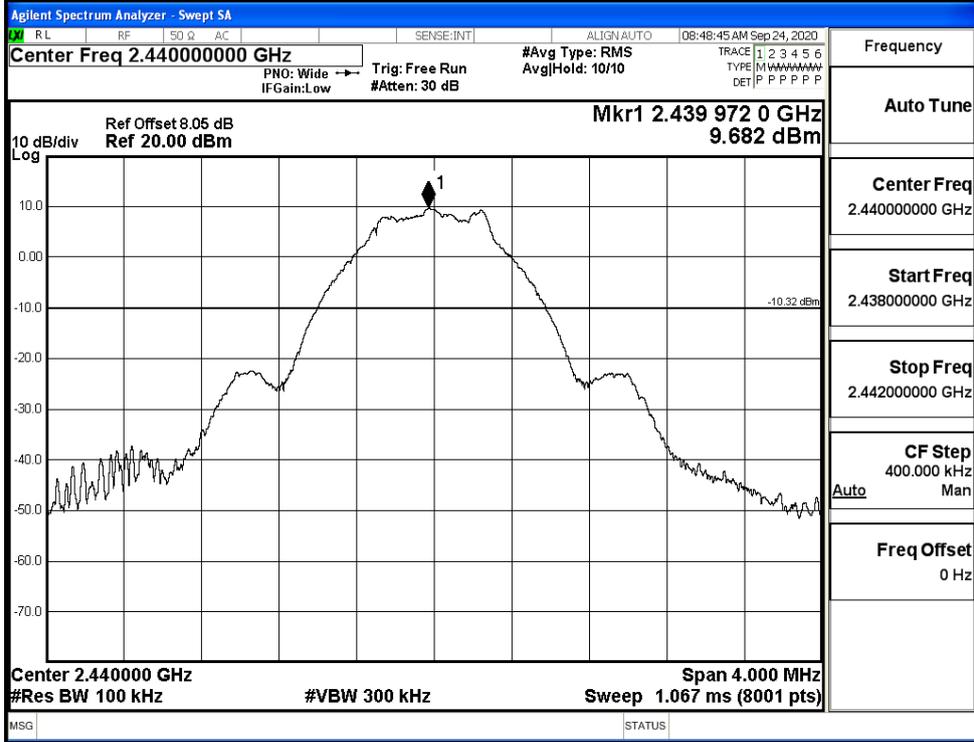


Puw/BT LE/MCH

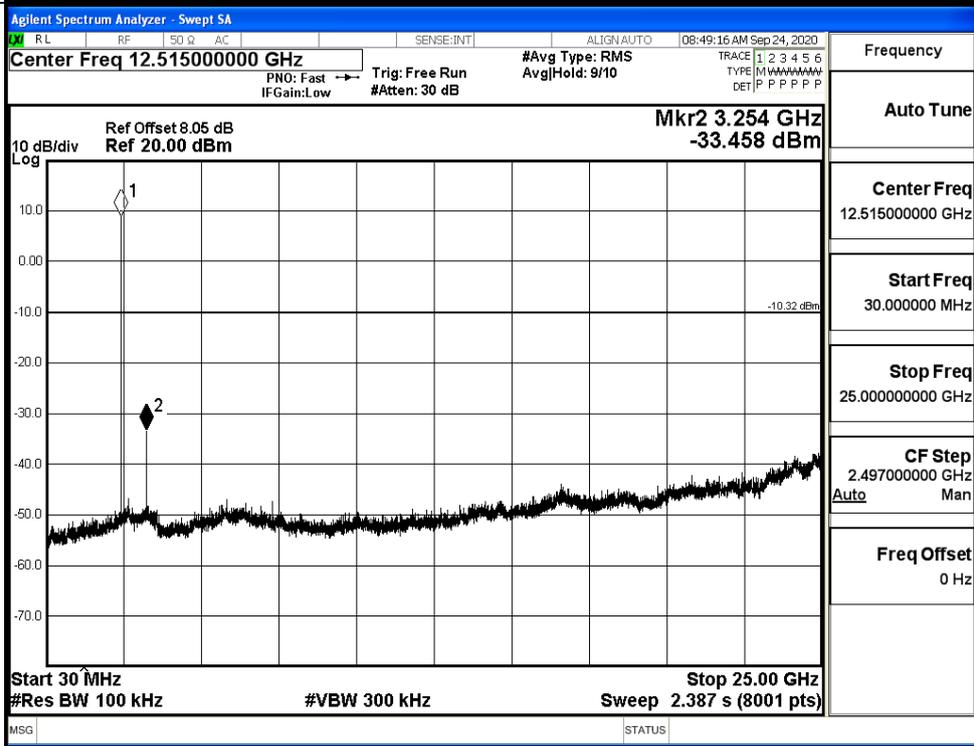


BT LE_HCH_Graphs

Pref/BT LE/HCH

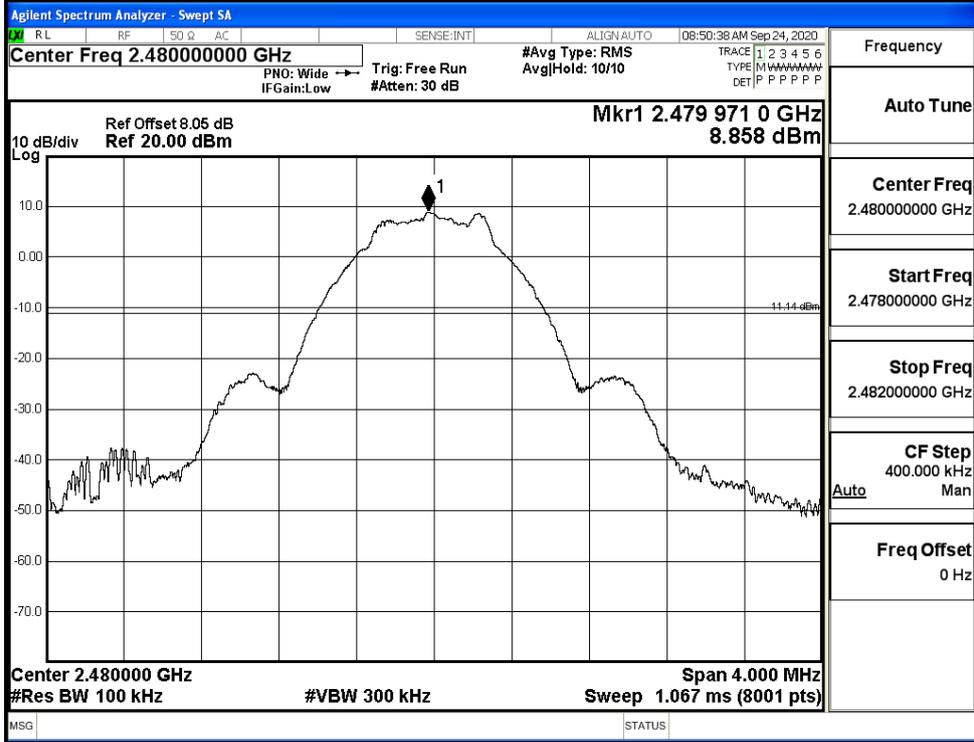

Puw/BT LE/HCH

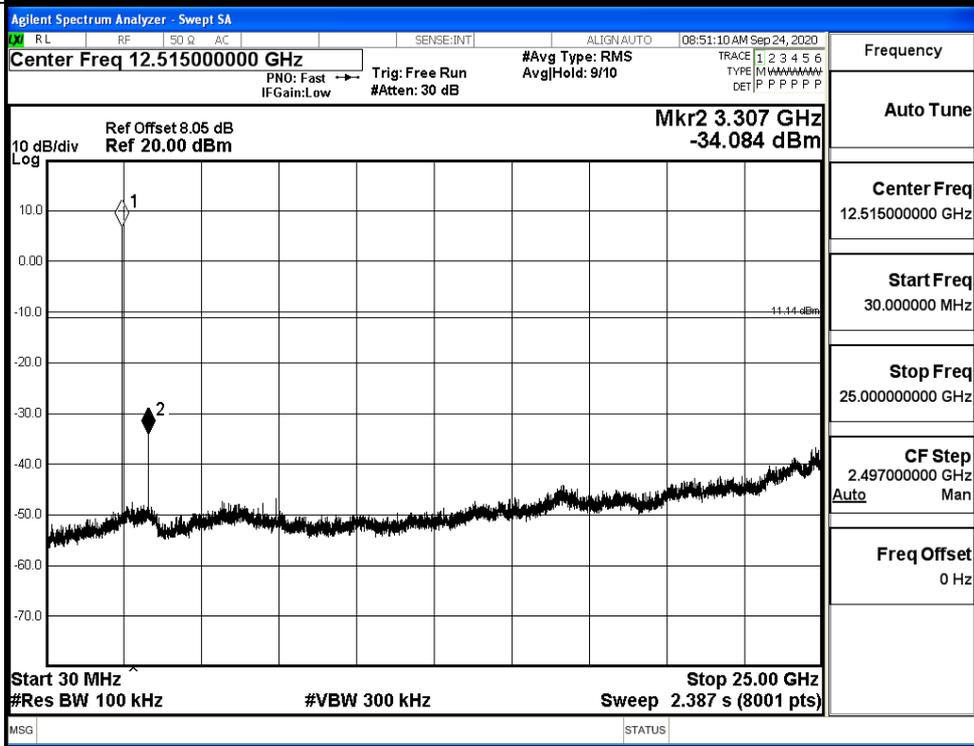

B.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	9.357	-49.805	-10.64	PASS
BT LE	HCH	8.877	-48.638	-11.12	PASS


Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.35700000 GHz Ref Offset 8.05 dB, Ref 20.00 dBm Mkr4 2.322 808 GHz -49.805 dBm Start 2.31000 GHz, Stop 2.40400 GHz #Res BW 100 kHz, #VBW 300 kHz, Sweep 9.067 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.401 979 GHz</td><td>9.357 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-48.527 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-52.453 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.322 808 GHz</td><td>-49.805 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.401 979 GHz	9.357 dBm				2	N	f		2.400 000 GHz	-48.527 dBm				3	N	f		2.390 000 GHz	-52.453 dBm				4	N	f		2.322 808 GHz	-49.805 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.35700000 GHz</p> <p>Start Freq 2.31000000 GHz</p> <p>Stop Freq 2.40400000 GHz</p> <p>CF Step 9.400000 MHz</p> <p>Freq Offset 0 Hz</p>
	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f		2.401 979 GHz	9.357 dBm																																										
2	N	f		2.400 000 GHz	-48.527 dBm																																										
3	N	f		2.390 000 GHz	-52.453 dBm																																										
4	N	f		2.322 808 GHz	-49.805 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48900000 GHz Ref Offset 8.05 dB, Ref 20.00 dBm Mkr4 2.484 424 00 GHz -48.638 dBm Start 2.47800 GHz, Stop 2.50000 GHz #Res BW 100 kHz, #VBW 300 kHz, Sweep 2.133 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.479 993 75 GHz</td><td>8.877 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-51.400 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-51.334 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.484 424 00 GHz</td><td>-48.638 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.479 993 75 GHz	8.877 dBm				2	N	f		2.483 500 00 GHz	-51.400 dBm				3	N	f		2.500 000 00 GHz	-51.334 dBm				4	N	f		2.484 424 00 GHz	-48.638 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48900000 GHz</p> <p>Start Freq 2.47800000 GHz</p> <p>Stop Freq 2.50000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>
	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f		2.479 993 75 GHz	8.877 dBm																																										
2	N	f		2.483 500 00 GHz	-51.400 dBm																																										
3	N	f		2.500 000 00 GHz	-51.334 dBm																																										
4	N	f		2.484 424 00 GHz	-48.638 dBm																																										


B.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.10	2.0	0	52.16	PEAK	74	PASS
		Ant1	2310.0	-53.25	2.0	0	42.01	AV	54	PASS
		Ant1	2390.0	-42.79	2.0	0	52.47	PEAK	74	PASS
		Ant1	2390.0	-52.87	2.0	0	42.38	AV	54	PASS
	2480	Ant1	2483.5	-41.14	2.0	0	54.12	PEAK	74	PASS
		Ant1	2483.5	-51.48	2.0	0	43.78	AV	54	PASS
		Ant1	2500.0	-41.09	2.0	0	54.17	PEAK	74	PASS
		Ant1	2500.0	-52.19	2.0	0	43.06	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

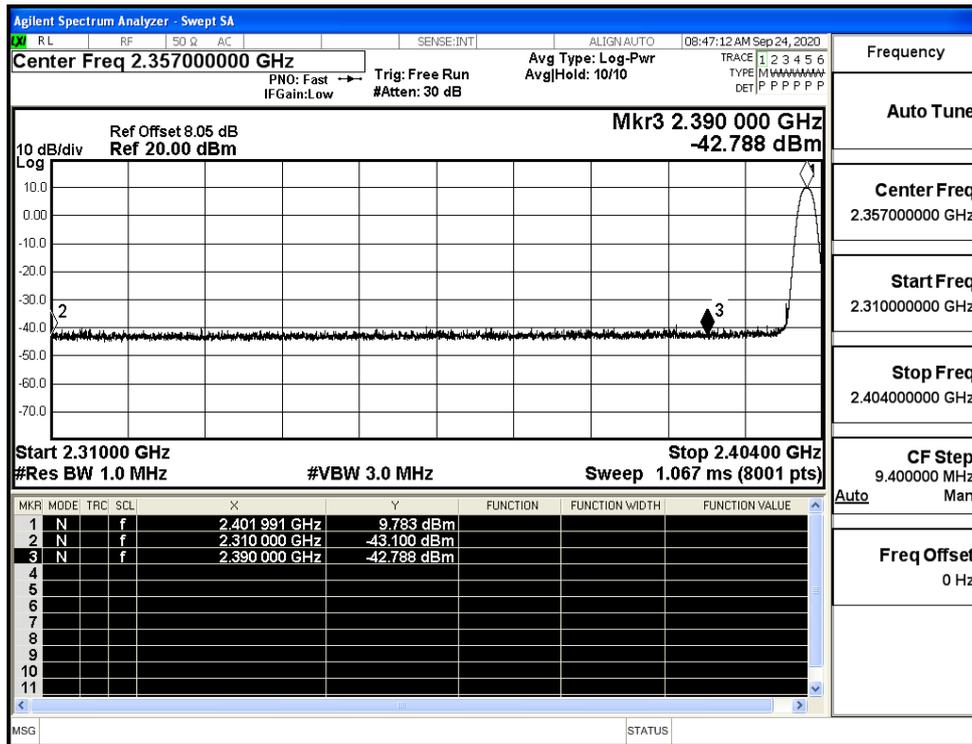

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

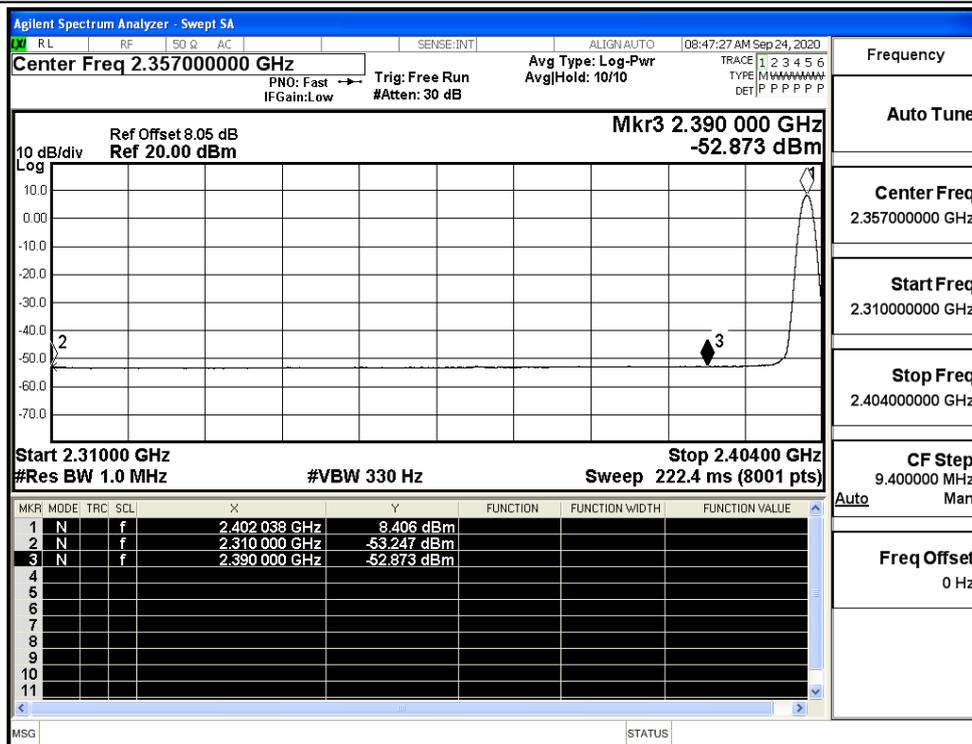

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

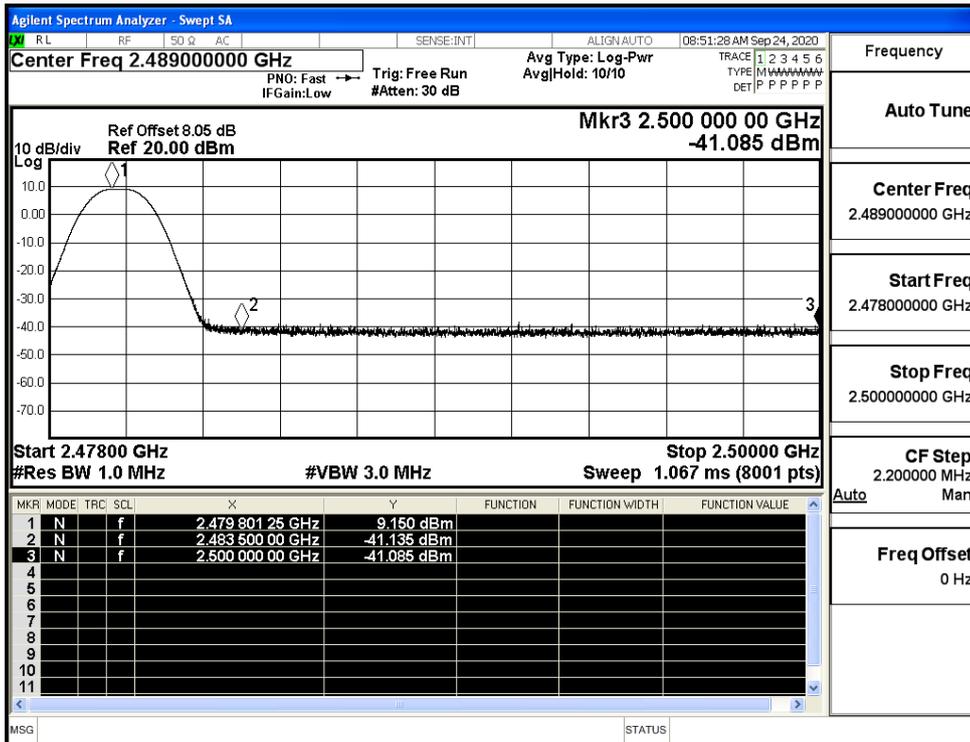

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

