

## RF Exposure Evaluation Declaration

---

**FCC ID:** 2AXJ4AX75

**APPLICANT:** TP-Link Corporation Limited

**Application Type:** Certification

**Product:** AX5400 Tri-Band Wi-Fi 6 Router

**Model No.:** Archer AX75

**Trademark:** tp-link

**FCC Classification:** Digital Transmission System (DTS)  
Unlicensed National Information Infrastructure (NII)

**Receive Date:** May 26, 2021

**Test Date:** September 28, 2021

**Reviewed By:**



( Paddy Chen )

**Approved By:**



( Chenz Ker )



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2105TW0004-U4	V1.0	Initial Report	2021-09-30	Valid

## CONTENTS

Description	Page
<b>1. INTRODUCTION.....</b>	<b>5</b>
1.1. Scope .....	5
1.2. MRT Test Location.....	5
<b>2. PRODUCT INFORMATION.....</b>	<b>6</b>
2.1. Feature of Equipment under Test.....	6
2.2. Description of Available Antennas .....	6
<b>3. RF Exposure Evaluation .....</b>	<b>7</b>
3.1. Limits .....	7
3.2. Test Result of RF Exposure Evaluation .....	8
<b>Appendix A - External Photograph .....</b>	<b>9</b>
<b>Appendix B - Internal Photograph .....</b>	<b>10</b>

**General Information**

<b>Applicant</b>	TP-Link Corporation Limited
<b>Applicant Address</b>	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
<b>Manufacturer</b>	TP-Link Corporation Limited
<b>Manufacturer Address</b>	Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong
<b>Test Site</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
<b>MRT FCC Registration No.</b>	291082
<b>Test Device Serial No.</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

**Test Facility / Accreditations**

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

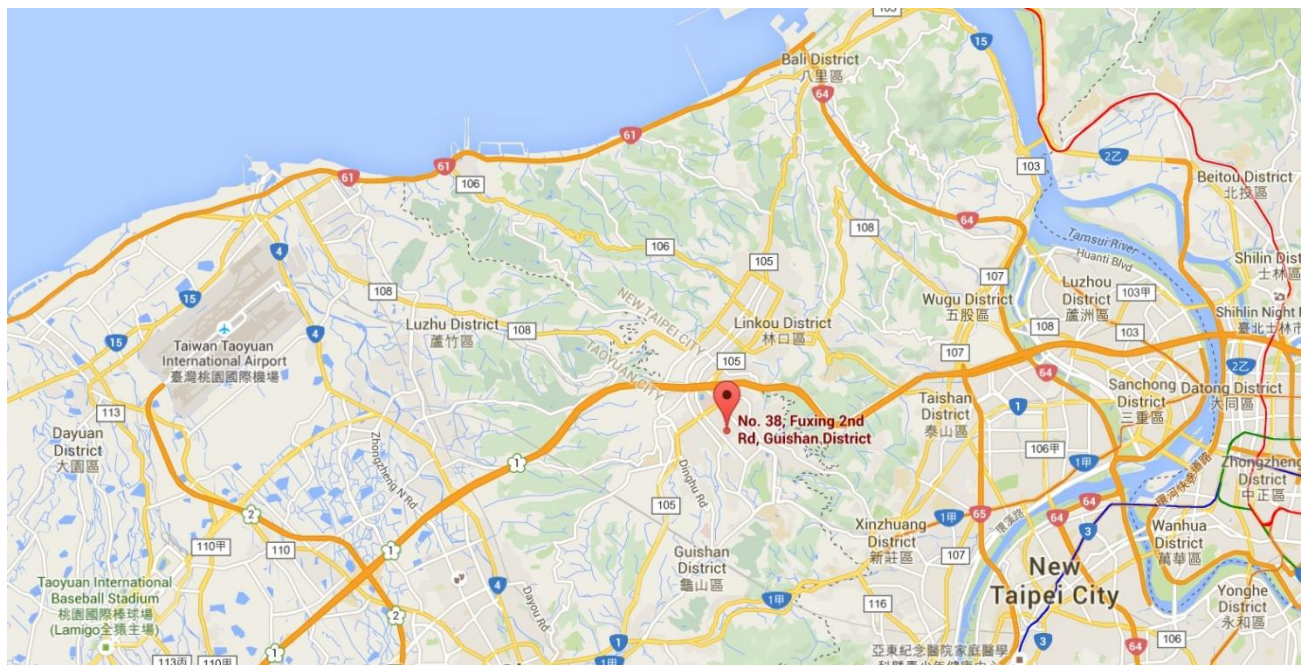

## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

Product Name:	AX5400 Tri-Band Wi-Fi 6 Router
Model No.:	Archer AX75
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac/ax
Power Type	By Adapter
Accessory	
Adapter:	Model: NBS30D120250VU INPYUT: 100-240~50/60Hz 0.8A OUTPUT: DC12.0V, 2.5A

### 2.2. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	Tx Paths	Max Antenna Gain (dBi)	Beamforming Directional Gain (dBi)	CDD Directional Gain (dBi)	
					For Power	For PSD
Wi-Fi Antenna						
Dipole Antenna	2412 ~ 2462	2	1.0	4.01	1.0	4.01
	5150 ~ 5850	2	2.0	5.01	2.0	5.01

Note:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.  
If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.
  - For power spectral density (PSD) measurements on all devices,  
Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;
  - For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax, not include 802.11a/b/g/n. BF Directional gain =  $G_{ANT} + 10 \log (N_{ANT})$ .
- All information declared by manufacturer.

### 3. RF Exposure Evaluation

#### 3.1. Limits

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	f/1500	6
1500-100,000	--	--	1	30

f= Frequency in MHz

Calculation Formula:  $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$r$  = distance between observation point and center of the radiator in cm

$P_d$  is the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance  $r$  where the MPE limit is reached.

### 3.2. Test Result of RF Exposure Evaluation

Product	AX5400 Tri-Band Wi-Fi 6 Router
Test Item	RF Exposure Evaluation

Antenna Gain: Refer to clause 2.2.

Test Mode	Frequency Band (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Maximum EIRP (dBm)
802.11b/g/n/ax	2412 ~ 2462	25.11	4.01	29.12
802.11a/n/ac/ax	5180 ~ 5240 5260 ~ 5320	29.58	5.01	34.59
802.11a/n/ac/ax	5500 ~ 5720 5745 ~ 5825	29.84	5.01	34.85

Test Mode	Frequency Band (MHz)	Maximum EIRP (dBm)	Compliance Distance (cm)	Power Density (mW/cm <sup>2</sup> )	Limit of Power Density (mW/cm <sup>2</sup> )
802.11b/g/n/ax	2412 ~ 2462	29.12	23.2	0.1207	1
802.11a/n/ac/ax	5180 ~ 5240 5260 ~ 5320	34.59	23.2	0.4254	1
802.11a/n/ac/ax	5500 ~ 5720 5745 ~ 5825	34.85	23.2	0.4517	1

#### CONCLUSION:

WLAN 2.4GHz Band and WLAN 5GHz can transmit simultaneously.

The max Power Density at R (23.2 cm) =  $0.1207\text{mW/cm}^2 + 0.4254\text{mW/cm}^2 + 0.4517\text{mW/cm}^2 = 0.9988\text{ mW/cm}^2 < 1\text{mW/cm}^2$ .

So the compliance distance is 23.2cm for device installed without any other radio equipment.

The End

## **Appendix A - External Photograph**

Refer to “2105TW0004-External Photo” file.

## **Appendix B - Internal Photograph**

Refer to “2105TW0004-Internal Photo” file.