



802.11ax-HE80 Power Spectral Density - Ant 3


Channel 42 (5210MHz)

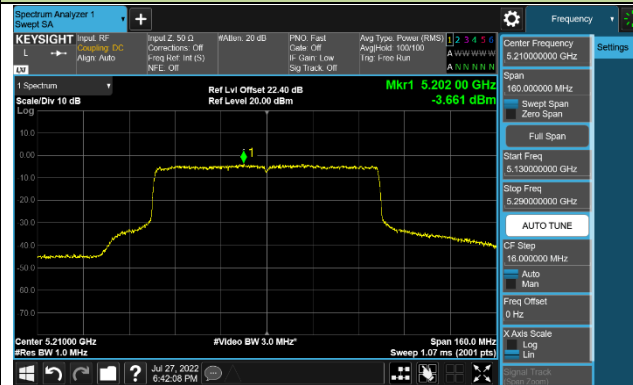


Channel 58 (5290MHz)

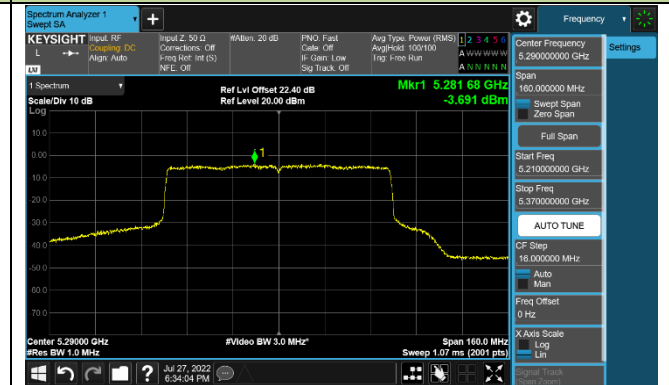


Channel 106 (5530MHz)

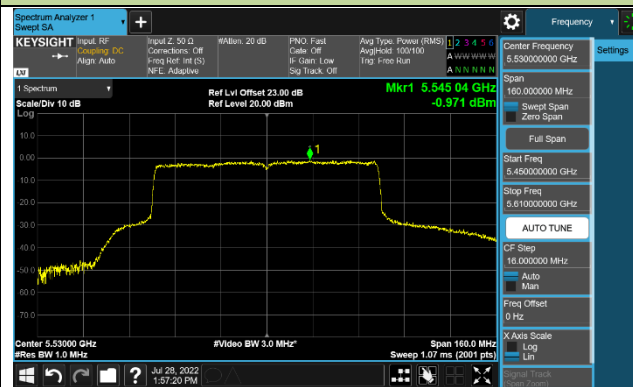


Channel 122 (5610MHz)

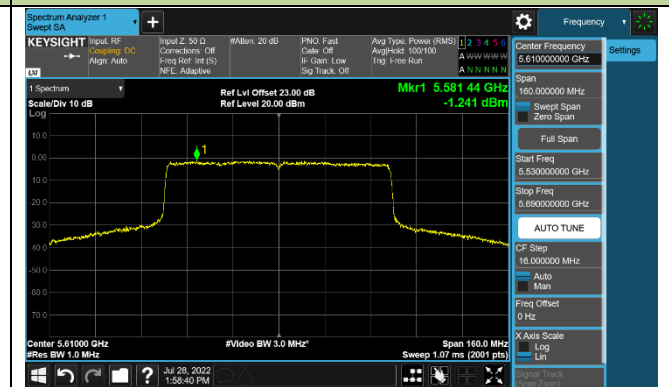

Channel 138 (5690MHz)

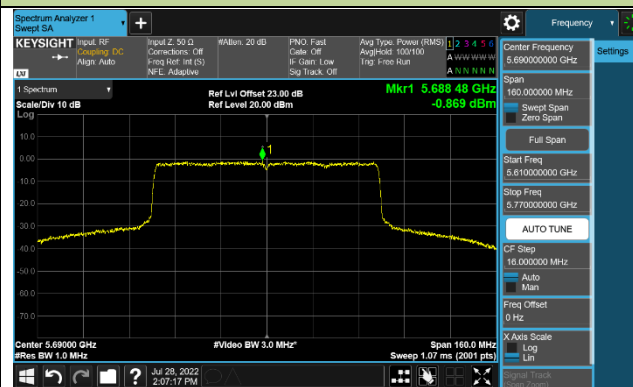


Channel 155 (5775MHz)

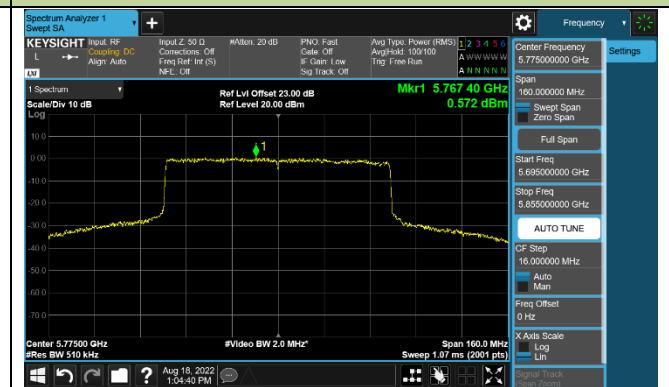


802.11ax-HE160 Power Spectral Density - Ant 3

Channel 50 (5250MHz)

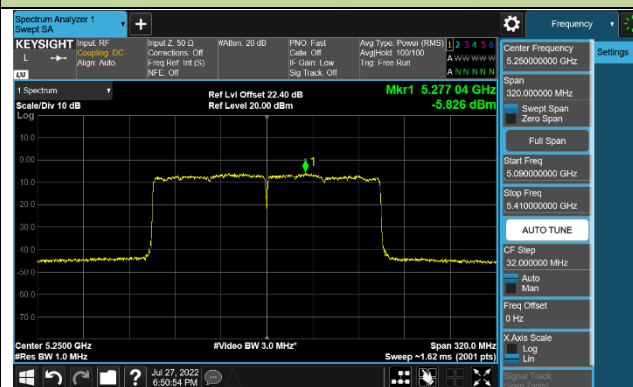

Channel 114 (5570MHz)

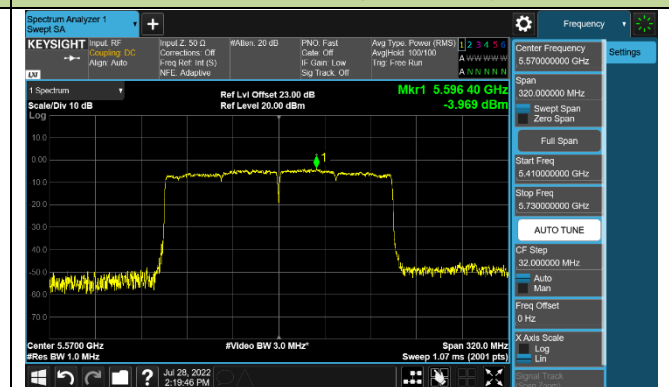

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

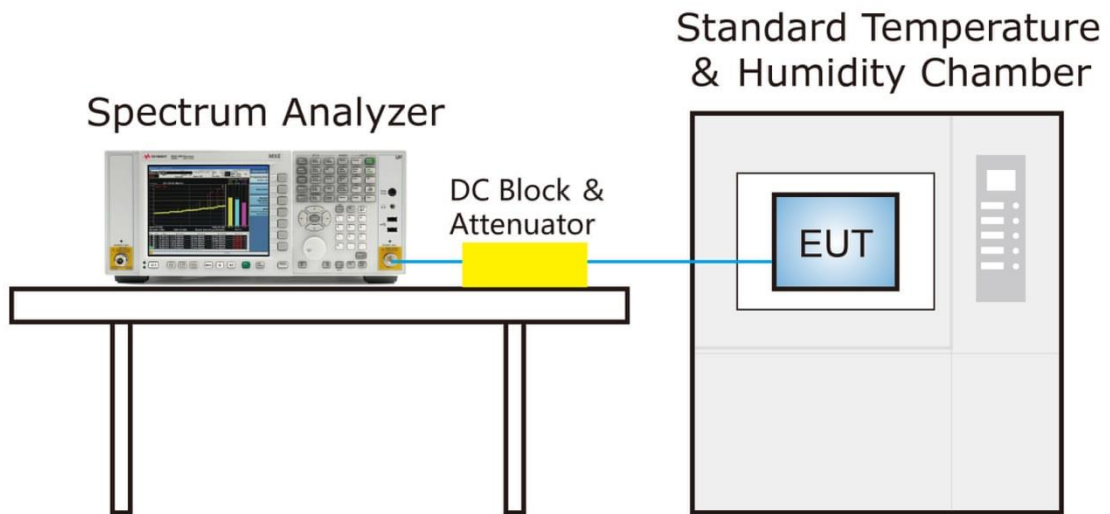

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|--|-----------------------|----------------------------|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section II) G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

| Frequency | RBW |
|---------------|---------------|
| 9 ~ 150 kHz | 200 ~ 300 Hz |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| >1000 MHz | 1 MHz |

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4. Test Setup

Below 1GHz Test Setup:

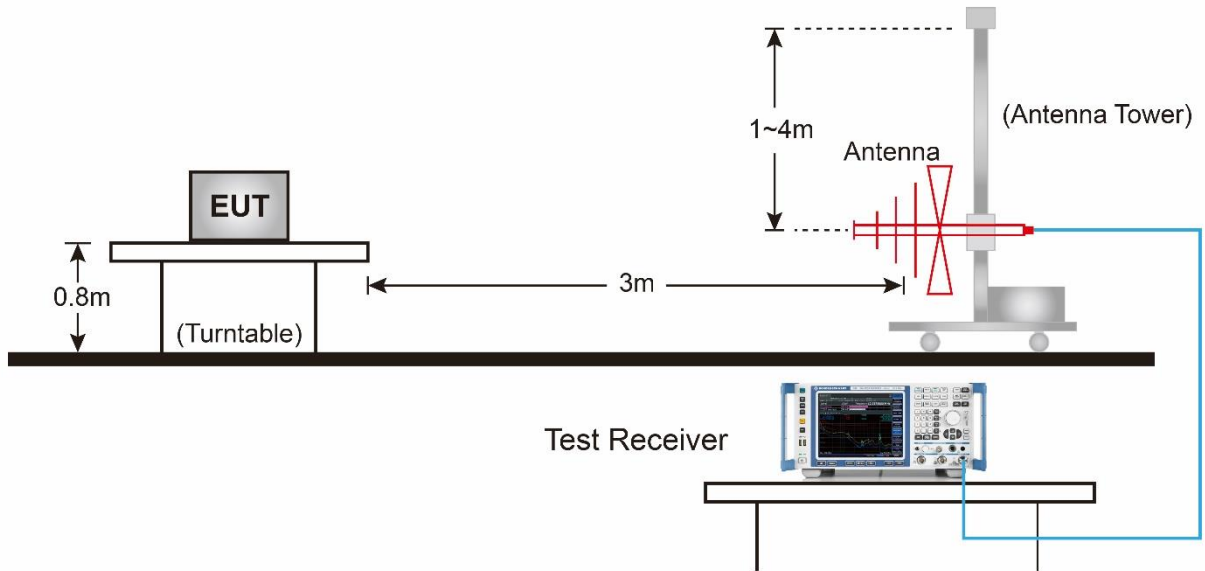


Above 1GHz Test Setup:

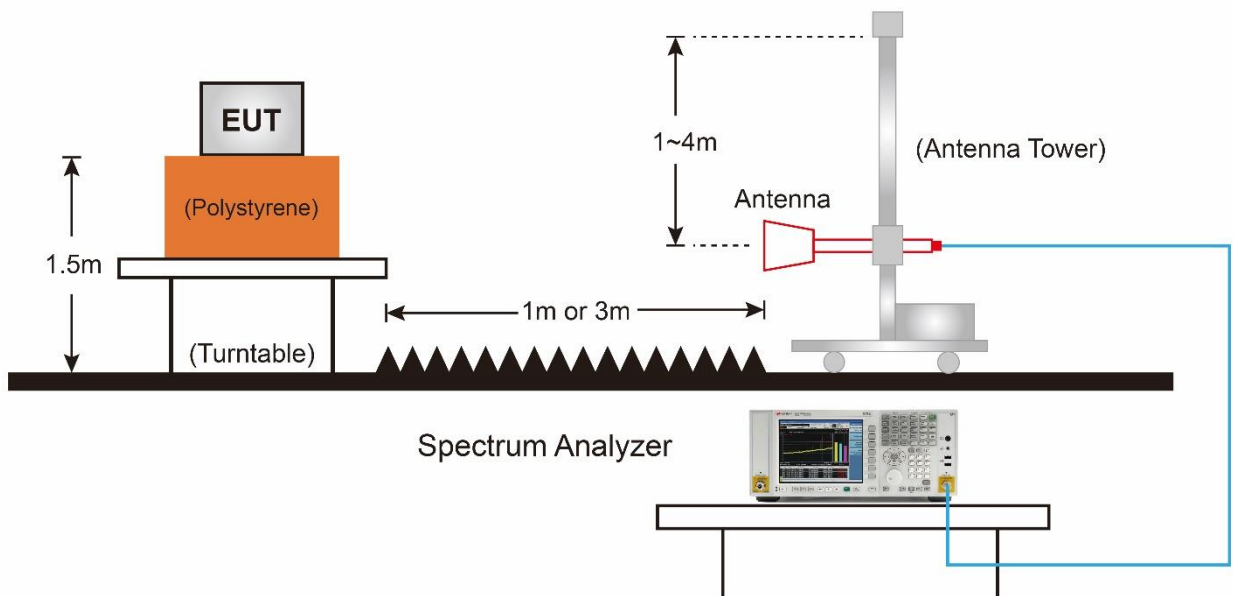

7.8.5. Test Result

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-20 |
| Factor | VULB 9162 | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

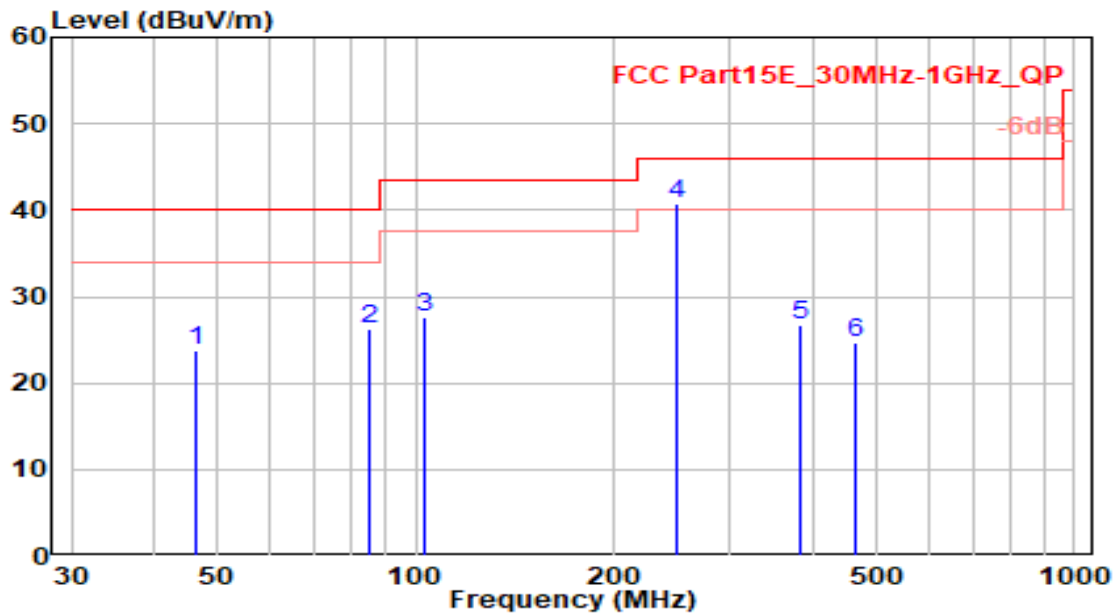


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 46.190 | 2.22 | 21.50 | 23.72 | -16.28 | 40.00 | 100 | 125 | QP |
| 2 | 85.090 | 10.18 | 15.99 | 26.17 | -13.83 | 40.00 | 100 | 85 | QP |
| 3 | 103.020 | 8.55 | 19.18 | 27.72 | -15.78 | 43.50 | 100 | 265 | QP |
| 4 | * 248.020 | 20.06 | 20.73 | 40.78 | -5.22 | 46.00 | 100 | 360 | QP |
| 5 | 382.430 | 3.12 | 23.66 | 26.78 | -19.22 | 46.00 | 100 | 300 | QP |
| 6 | 466.960 | -0.15 | 24.87 | 24.72 | -21.28 | 46.00 | 100 | 320 | QP |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-20 |
| Factor | VULB 9162 | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

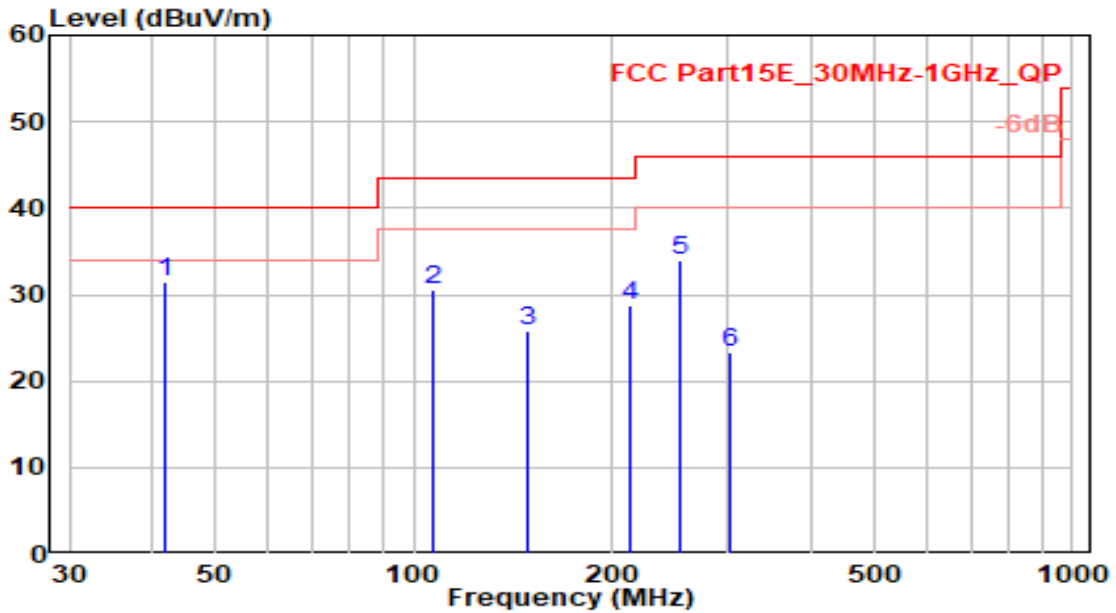


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 42.000 | 10.63 | 20.86 | 31.49 | -8.51 | 40.00 | 100 | 25 | QP |
| 2 | 107.090 | 11.50 | 18.99 | 30.48 | -13.02 | 43.50 | 100 | 340 | QP |
| 3 | 149.030 | 10.07 | 15.75 | 25.82 | -17.68 | 43.50 | 100 | 125 | QP |
| 4 | 213.530 | 9.99 | 18.78 | 28.77 | -14.73 | 43.50 | 100 | 170 | QP |
| 5 | 253.010 | 13.05 | 20.81 | 33.86 | -12.14 | 46.00 | 100 | 15 | QP |
| 6 | 300.900 | 2.00 | 21.39 | 23.39 | -22.61 | 46.00 | 100 | 230 | QP |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

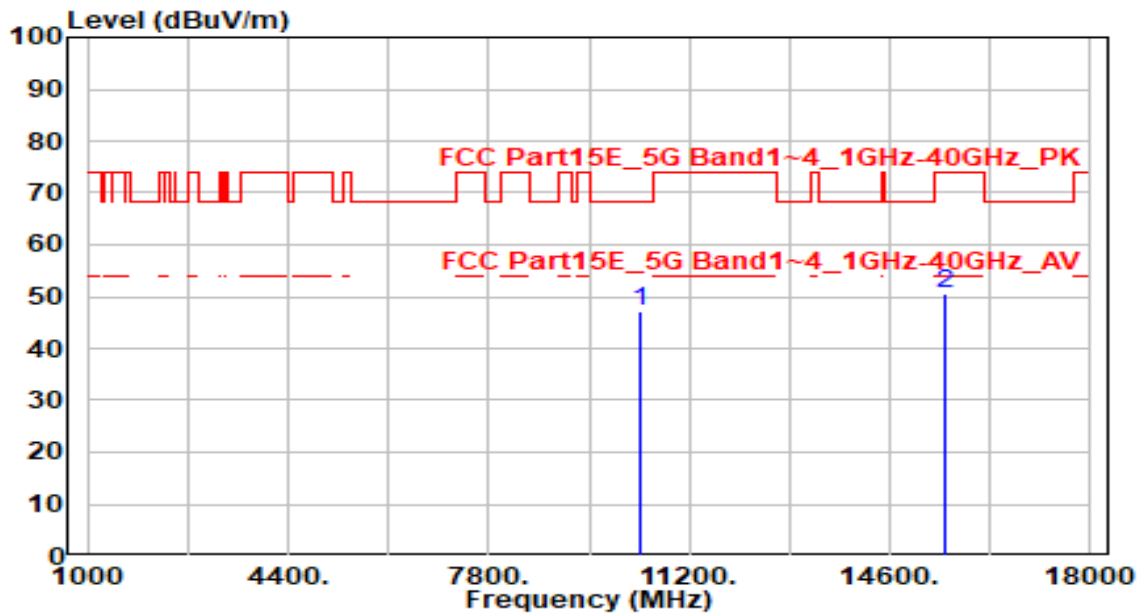


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 41.70 | 5.29 | 46.99 | -21.21 | 68.20 | 200 | 135 | Peak |
| 2 | | 44.17 | 6.41 | 50.58 | -23.42 | 74.00 | 200 | 70 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

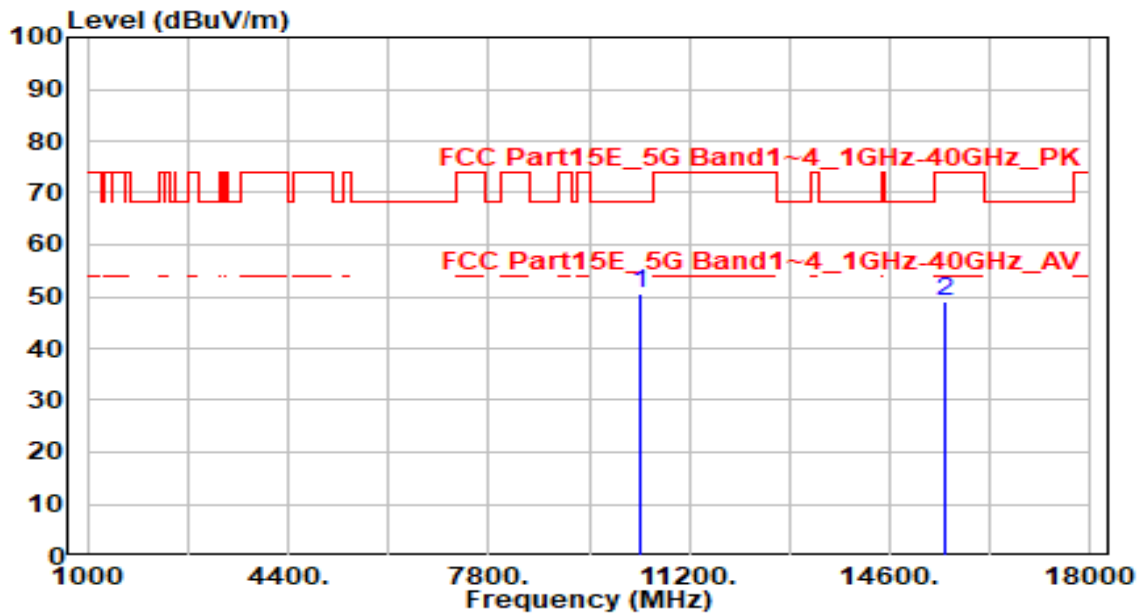


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 45.21 | 5.29 | 50.51 | -17.69 | 68.20 | 300 | 150 | Peak |
| 2 | | 42.83 | 6.41 | 49.24 | -24.76 | 74.00 | 100 | 0 | Peak |

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 44_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

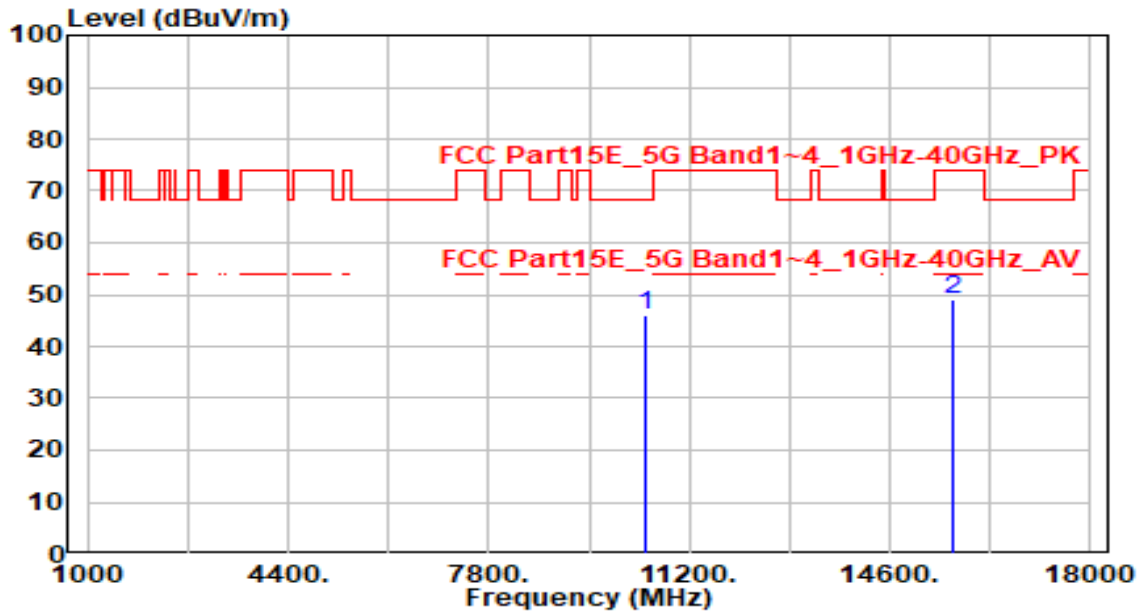


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10440.000 | 40.93 | 5.28 | 46.21 | -21.99 | 68.20 | 100 | 360 | Peak |
| 2 | 15660.000 | 42.65 | 6.56 | 49.21 | -24.79 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 44_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

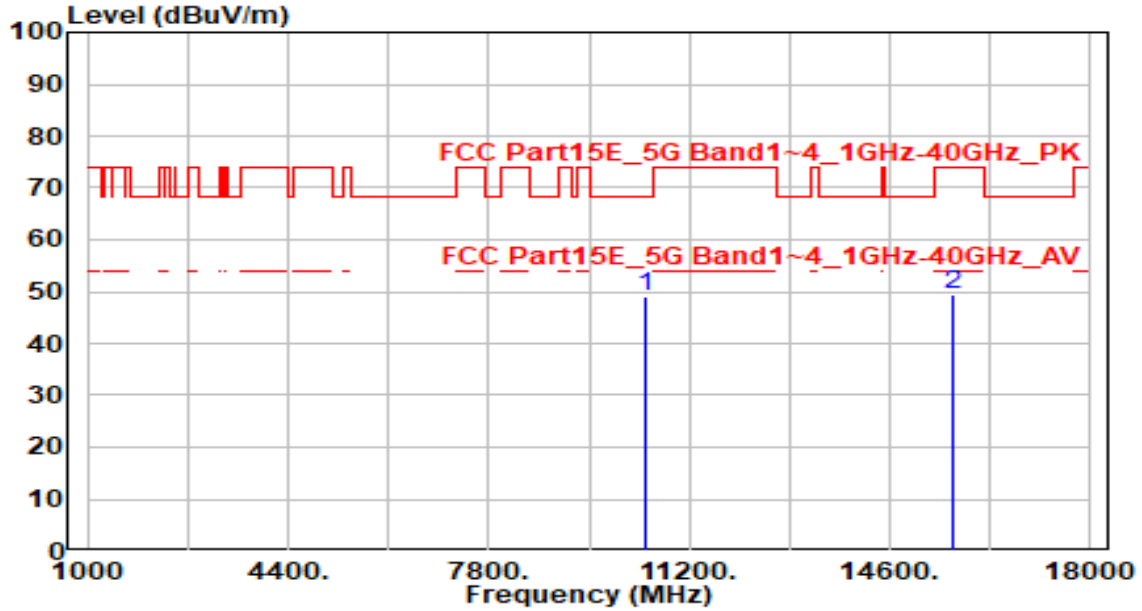


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10440.000 | 43.85 | 5.28 | 49.13 | -19.07 | 68.20 | 100 | 145 | Peak |
| 2 | 15660.000 | 42.85 | 6.56 | 49.41 | -24.59 | 74.00 | 100 | 320 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 48_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

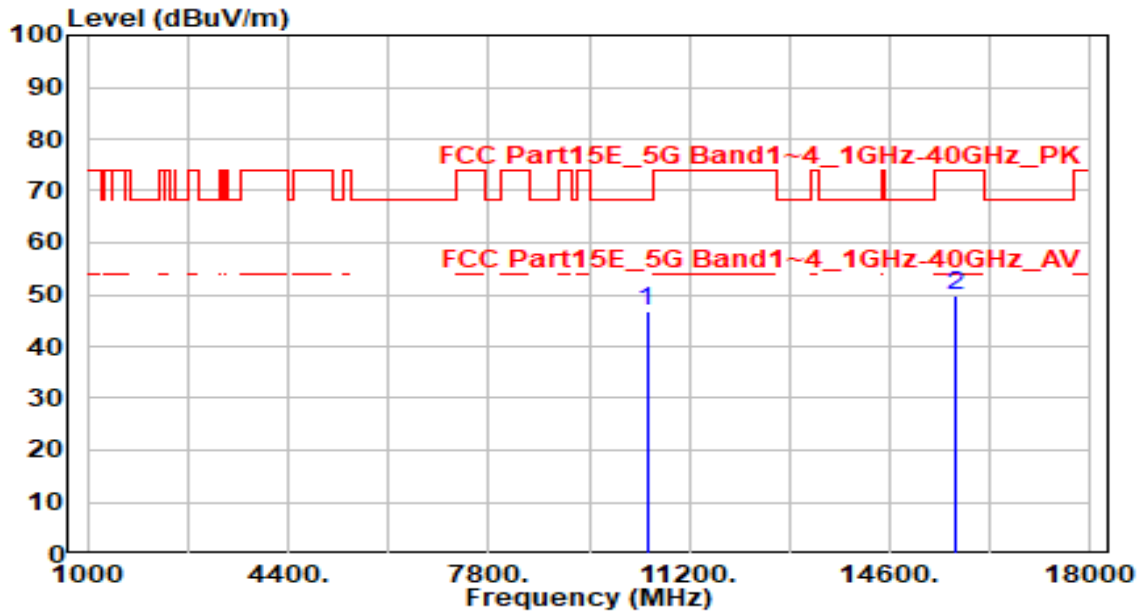


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10480.000 | 41.60 | 5.26 | 46.86 | -21.34 | 68.20 | 100 | 150 | Peak |
| 2 | 15720.000 | 42.99 | 6.69 | 49.68 | -24.32 | 74.00 | 100 | 195 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 48_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

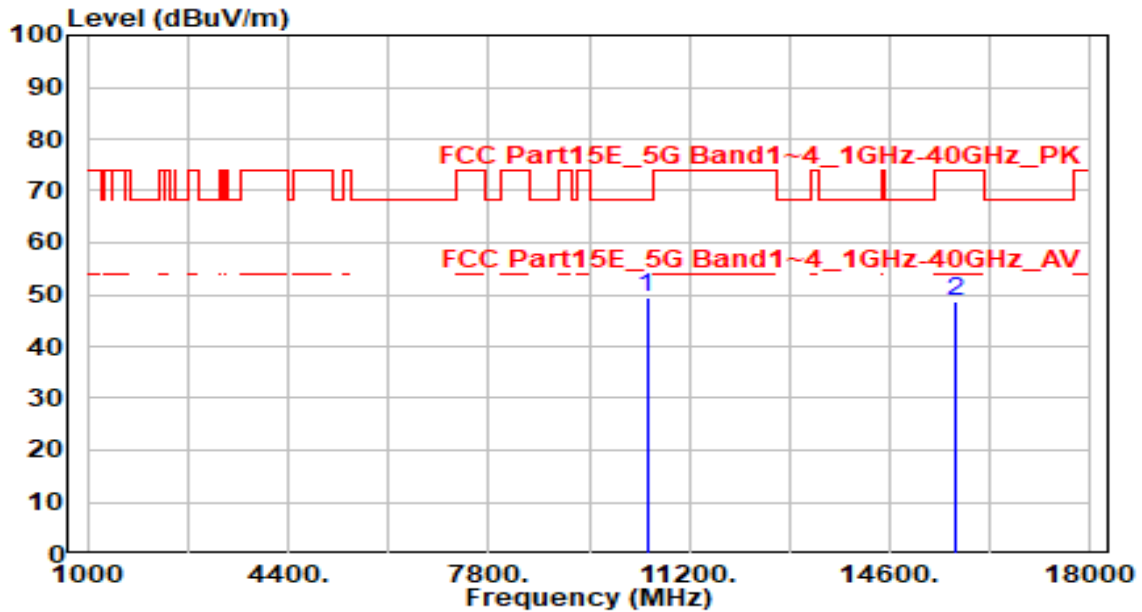


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10480.000 | 44.06 | 5.26 | 49.32 | -18.88 | 68.20 | 100 | 150 | Peak |
| 2 | 15720.000 | 42.05 | 6.69 | 48.74 | -25.26 | 74.00 | 100 | 55 | Peak |

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 52_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

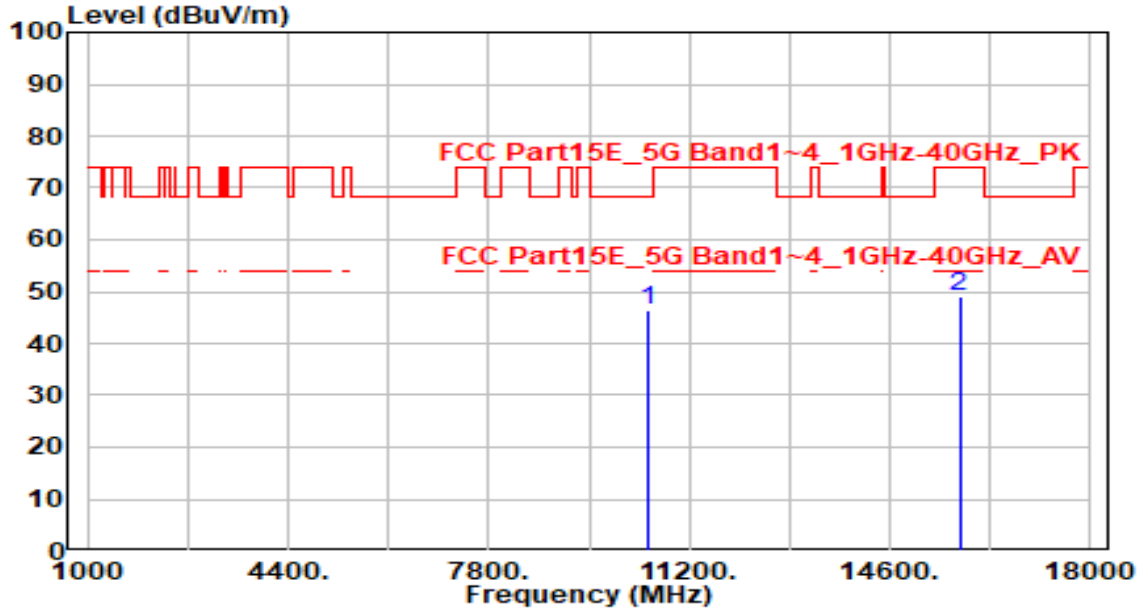


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10520.000 | 40.98 | 5.25 | 46.24 | -21.96 | 68.20 | 100 | 300 | Peak |
| 2 | 15780.000 | 42.19 | 6.83 | 49.02 | -24.98 | 74.00 | 100 | 270 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 52_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

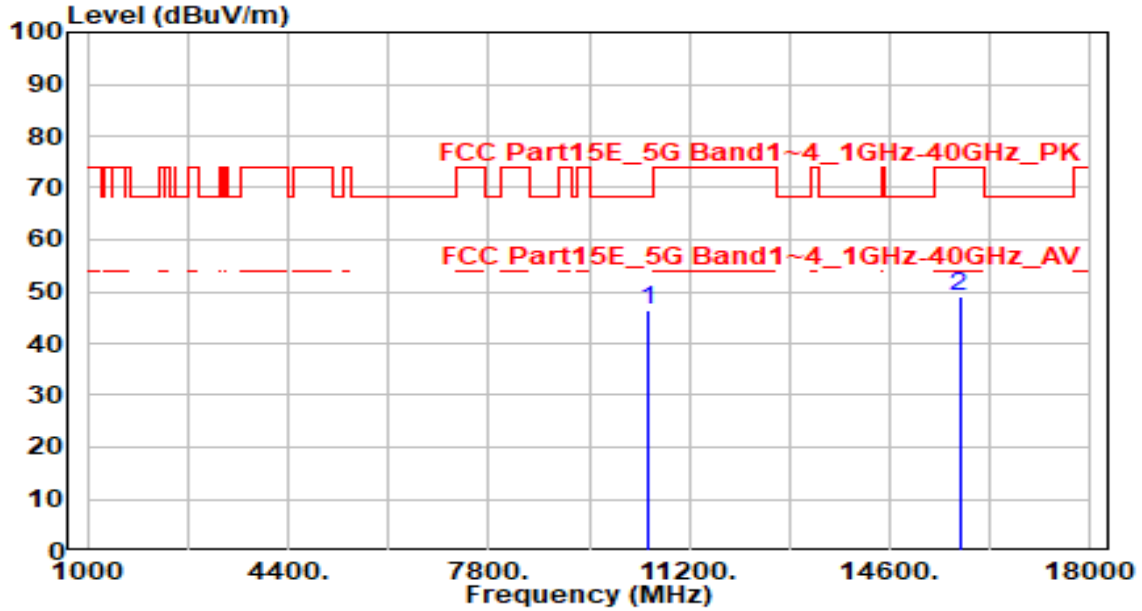


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10520.000 | 41.18 | 5.25 | 46.43 | -21.77 | 68.20 | 100 | 145 | Peak |
| 2 | 15780.000 | 42.23 | 6.83 | 49.06 | -24.94 | 74.00 | 100 | 245 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 60_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

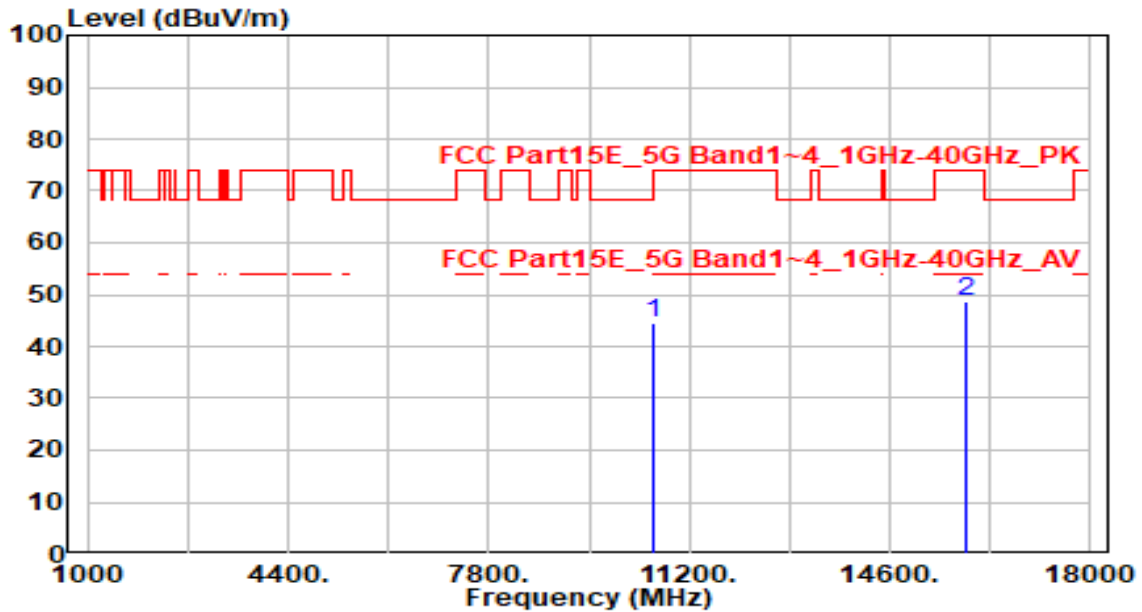


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10600.000 | 39.17 | 5.25 | 44.42 | -23.78 | 68.20 | 100 | 225 | Peak |
| 2 | 15900.000 | 41.62 | 6.95 | 48.58 | -25.42 | 74.00 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 60_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

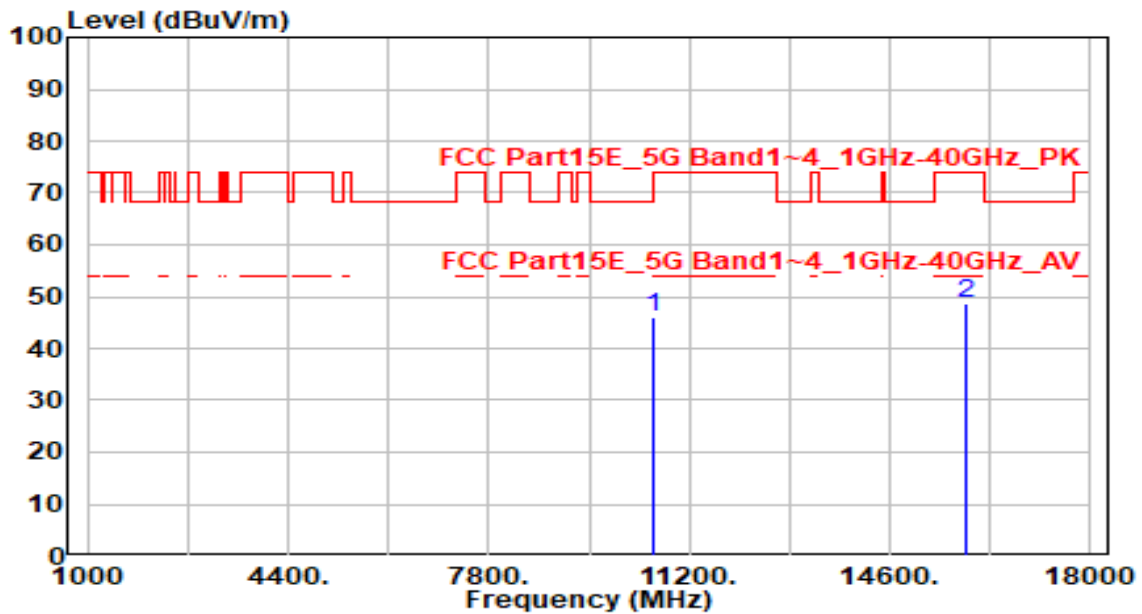


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10600.000 | 40.63 | 5.25 | 45.88 | -22.32 | 68.20 | 100 | 265 | Peak |
| 2 | 15900.000 | 41.88 | 6.95 | 48.84 | -25.16 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

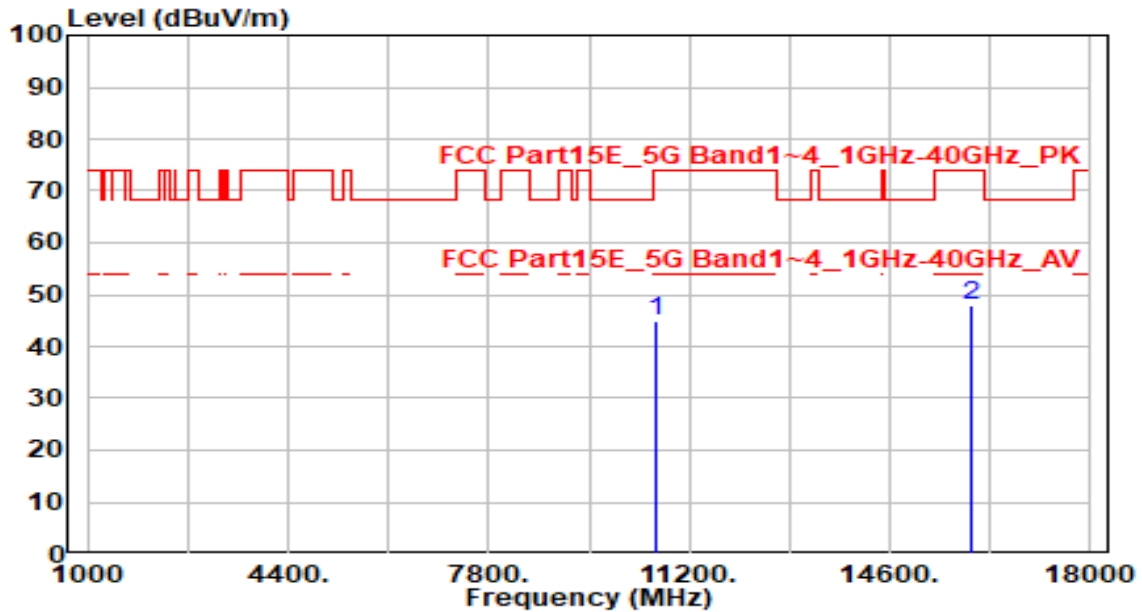


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10640.000 | 39.49 | 5.27 | 44.76 | -29.24 | 74.00 | 100 | 55 | Peak |
| 2 | * 15960.000 | 41.01 | 7.00 | 48.01 | -25.99 | 74.00 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

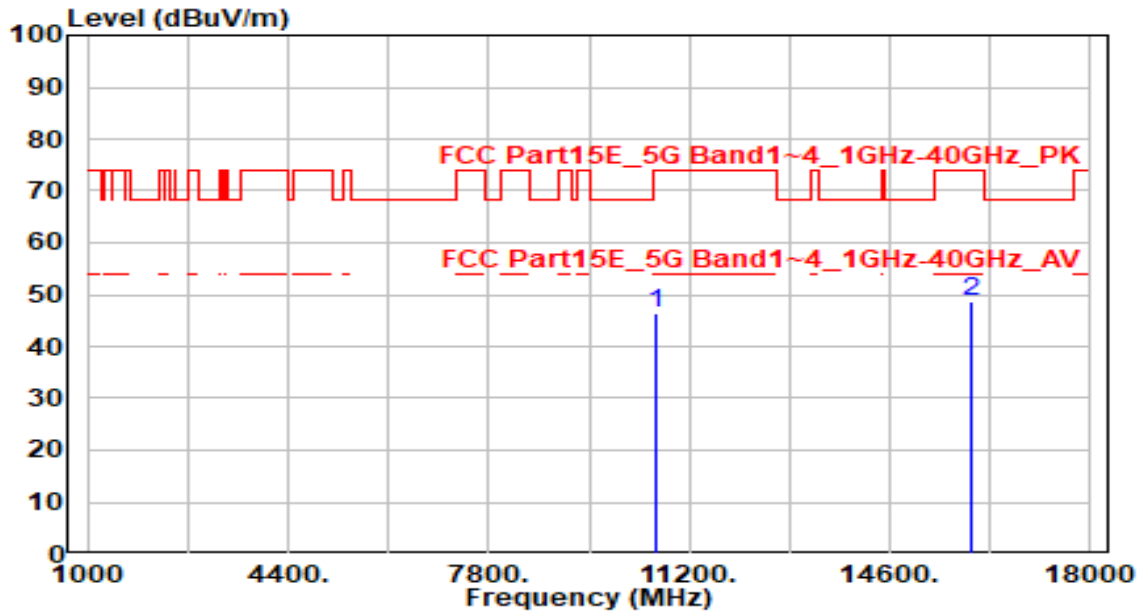


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10640.000 | 41.06 | 5.27 | 46.33 | -27.67 | 74.00 | 100 | 245 | Peak |
| 2 | * 15960.000 | 41.50 | 7.00 | 48.50 | -25.50 | 74.00 | 100 | 340 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

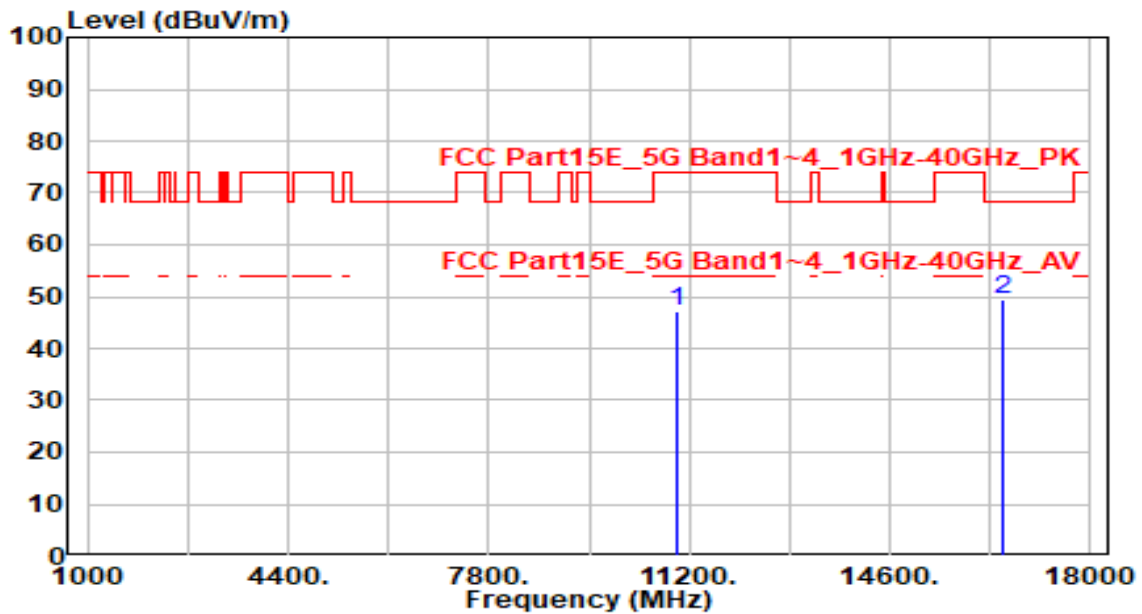


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11000.000 | 41.42 | 5.56 | 46.98 | -27.02 | 74.00 | 100 | 120 | Peak |
| 2 | * 16500.000 | 41.93 | 7.34 | 49.28 | -18.92 | 68.20 | 100 | 20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

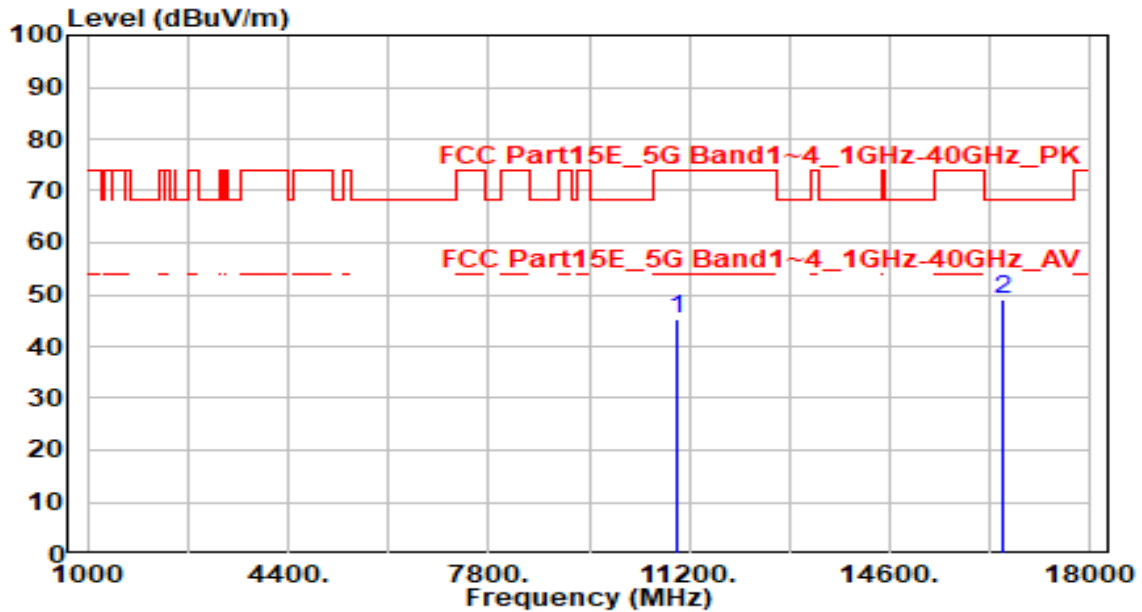


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11000.000 | 39.60 | 5.56 | 45.16 | -28.84 | 74.00 | 100 | 130 | Peak |
| 2 | * 16500.000 | 41.61 | 7.34 | 48.96 | -19.24 | 68.20 | 100 | 5 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 116_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

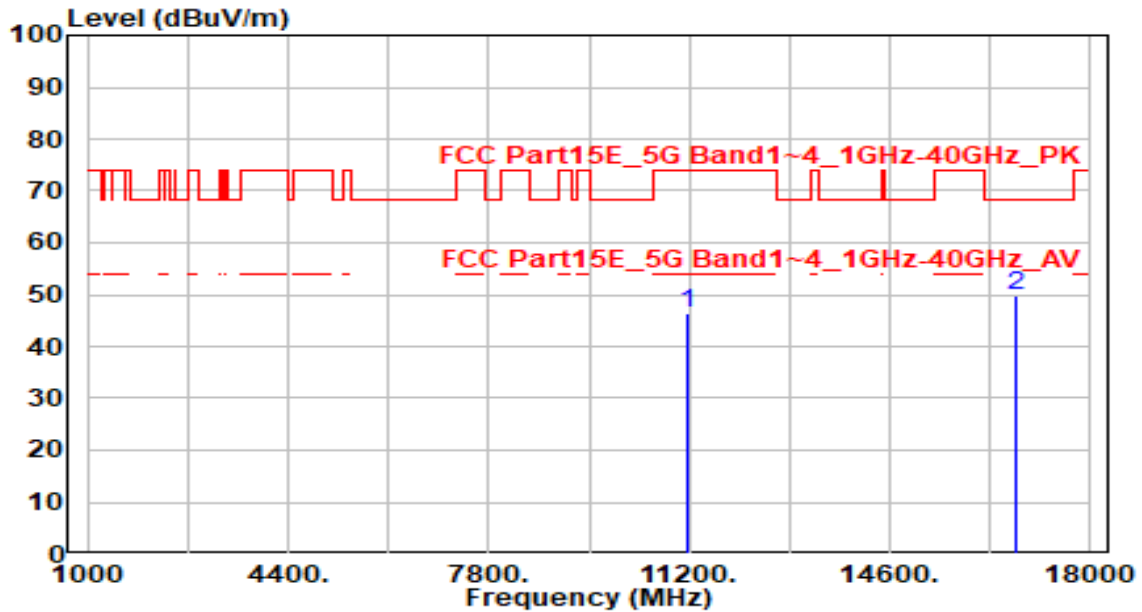


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11160.000 | 40.66 | 5.73 | 46.39 | -27.61 | 74.00 | 100 | 115 | Peak |
| 2 | * 16740.000 | 42.07 | 7.72 | 49.78 | -18.42 | 68.20 | 100 | 165 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 116_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

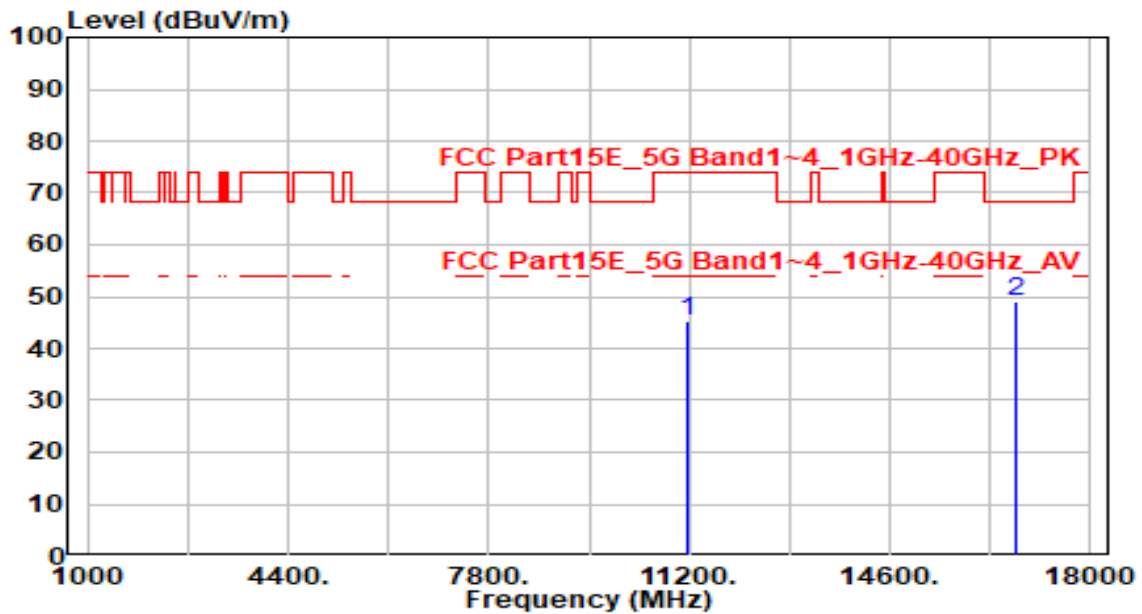


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11160.000 | 39.64 | 5.73 | 45.37 | -28.63 | 74.00 | 100 | 340 | Peak |
| 2 | * 16740.000 | 41.31 | 7.72 | 49.03 | -19.17 | 68.20 | 100 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

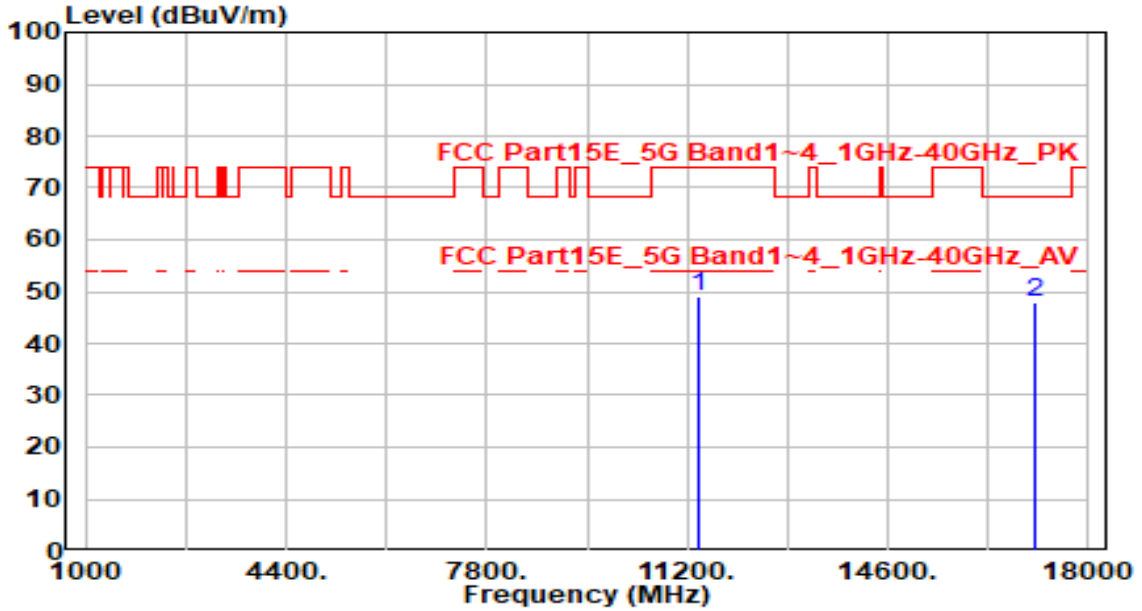


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11400.000 | 43.02 | 5.98 | 49.00 | -25.00 | 74.00 | 100 | 360 | Peak |
| 2 | * 17100.000 | 41.87 | 6.16 | 48.03 | -20.17 | 68.20 | 100 | 305 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

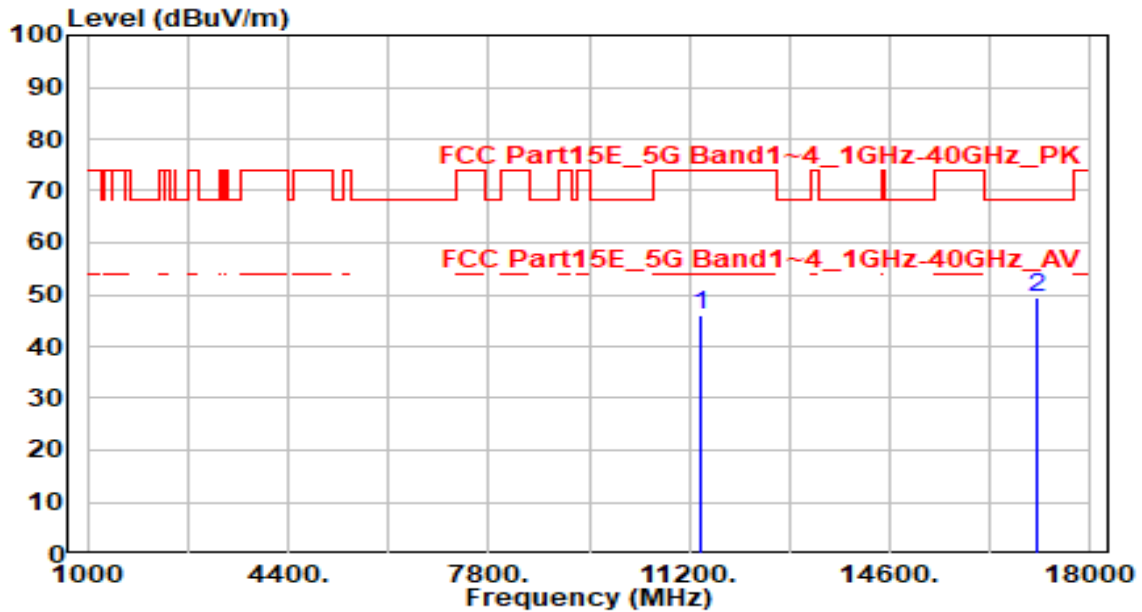


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11400.000 | 39.93 | 5.98 | 45.91 | -28.09 | 74.00 | 100 | 95 | Peak |
| 2 | * 17100.000 | 43.14 | 6.16 | 49.30 | -18.90 | 68.20 | 100 | 85 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 144_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

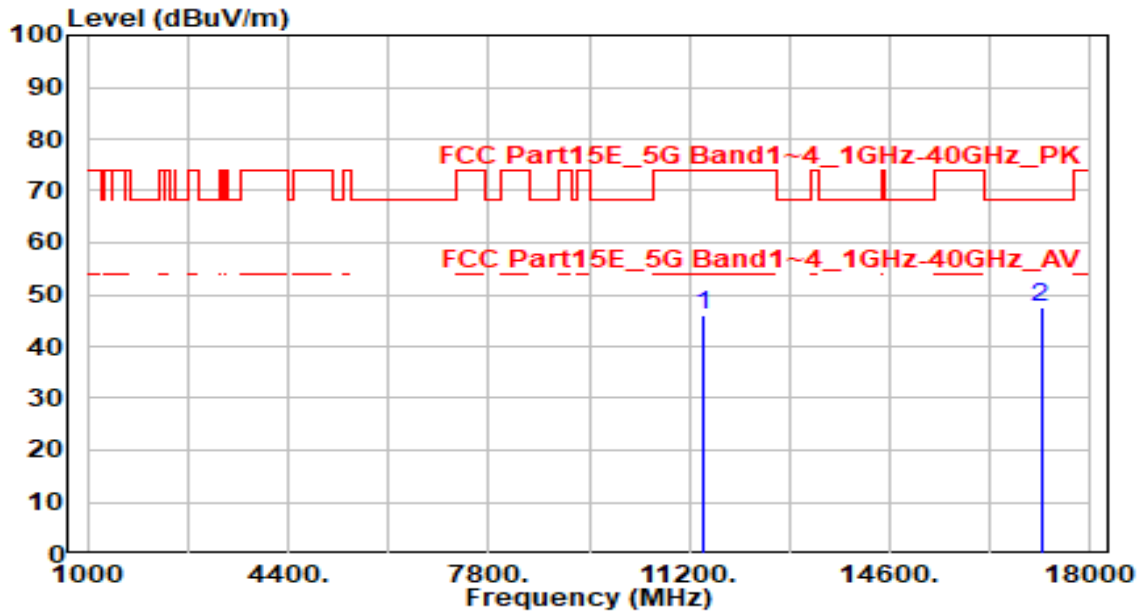


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11440.000 | 40.02 | 5.97 | 45.99 | -28.01 | 74.00 | 100 | 185 | Peak |
| 2 | * 17160.000 | 41.62 | 5.98 | 47.60 | -20.60 | 68.20 | 100 | 285 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 144_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

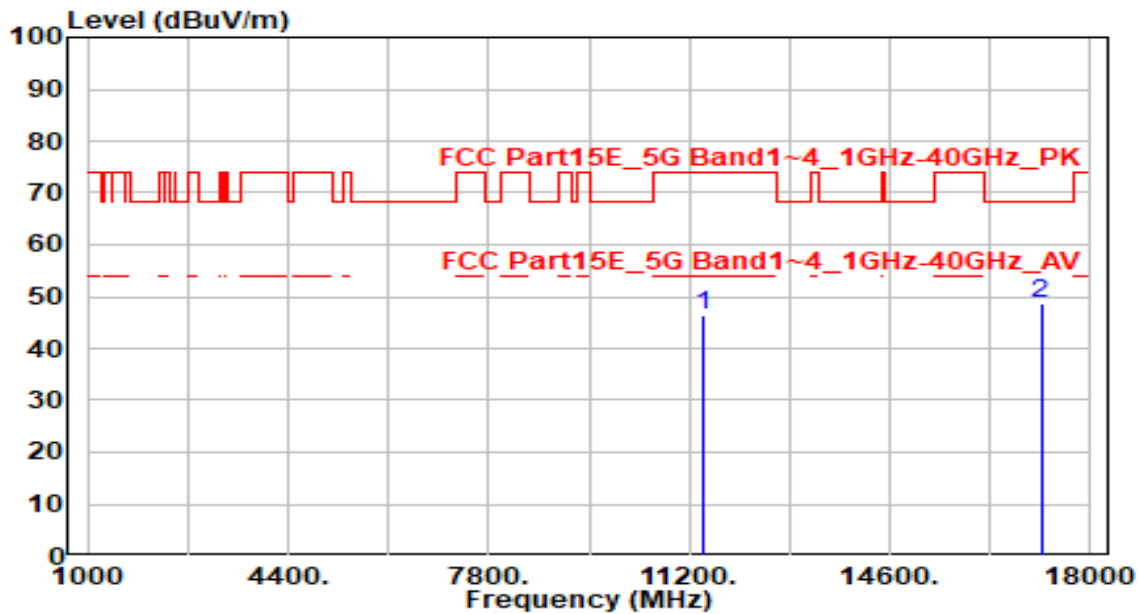


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11440.000 | 40.56 | 5.97 | 46.53 | -27.47 | 74.00 | 100 | 310 | Peak |
| 2 | * 17160.000 | 42.59 | 5.98 | 48.57 | -19.63 | 68.20 | 100 | 80 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

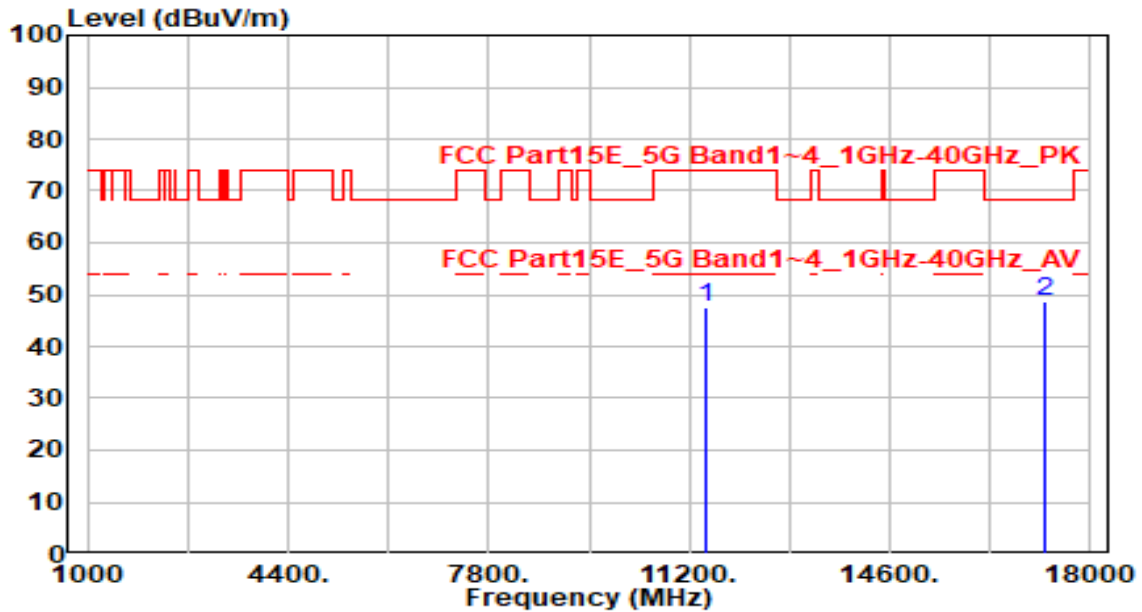


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11490.000 | 41.75 | 5.94 | 47.70 | -26.30 | 74.00 | 100 | 295 | Peak |
| 2 | * 17235.000 | 42.87 | 5.78 | 48.65 | -19.55 | 68.20 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

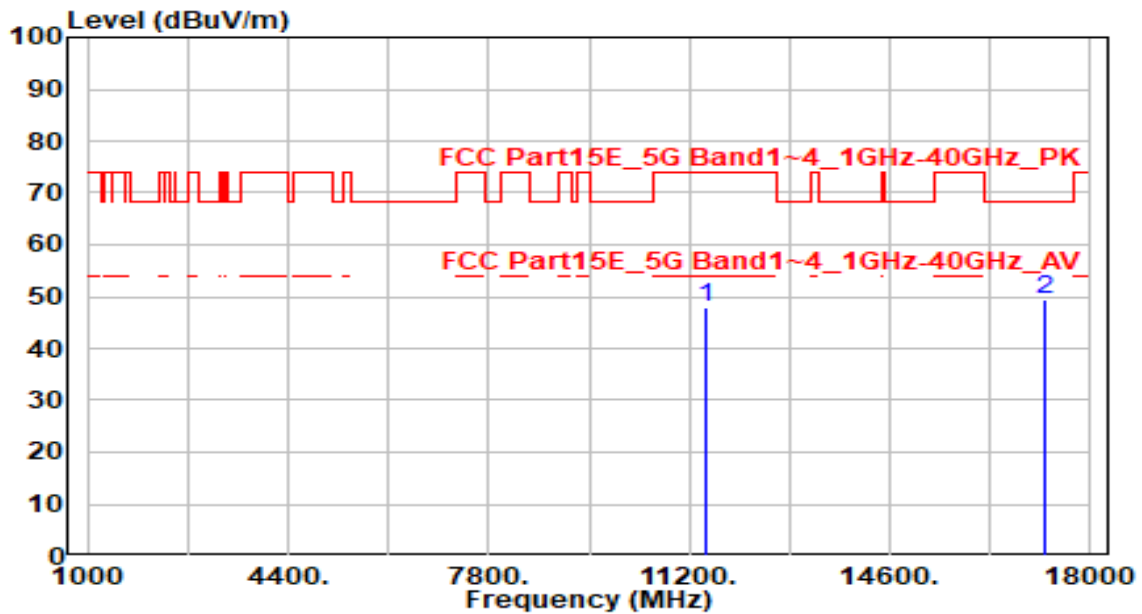


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11490.000 | 42.15 | 5.94 | 48.10 | -25.90 | 74.00 | 100 | 250 | Peak |
| 2 | * 17235.000 | 43.60 | 5.78 | 49.39 | -18.81 | 68.20 | 100 | 340 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 157_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

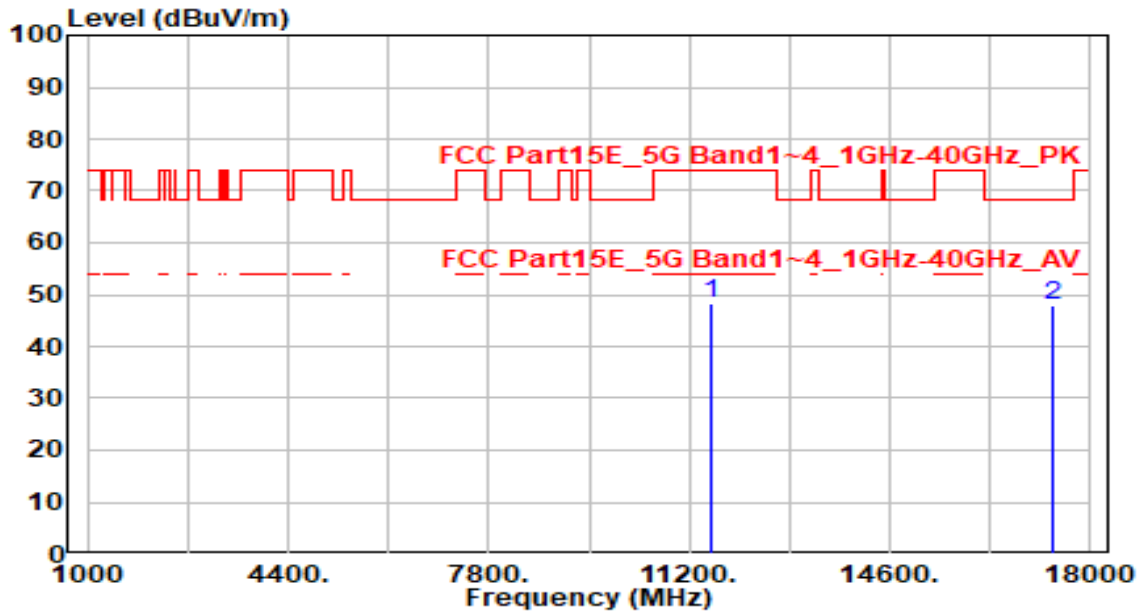


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11570.000 | 42.28 | 5.91 | 48.20 | -25.80 | 74.00 | 100 | 290 | Peak |
| 2 | * 17355.000 | 42.27 | 5.54 | 47.80 | -20.40 | 68.20 | 100 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 157_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

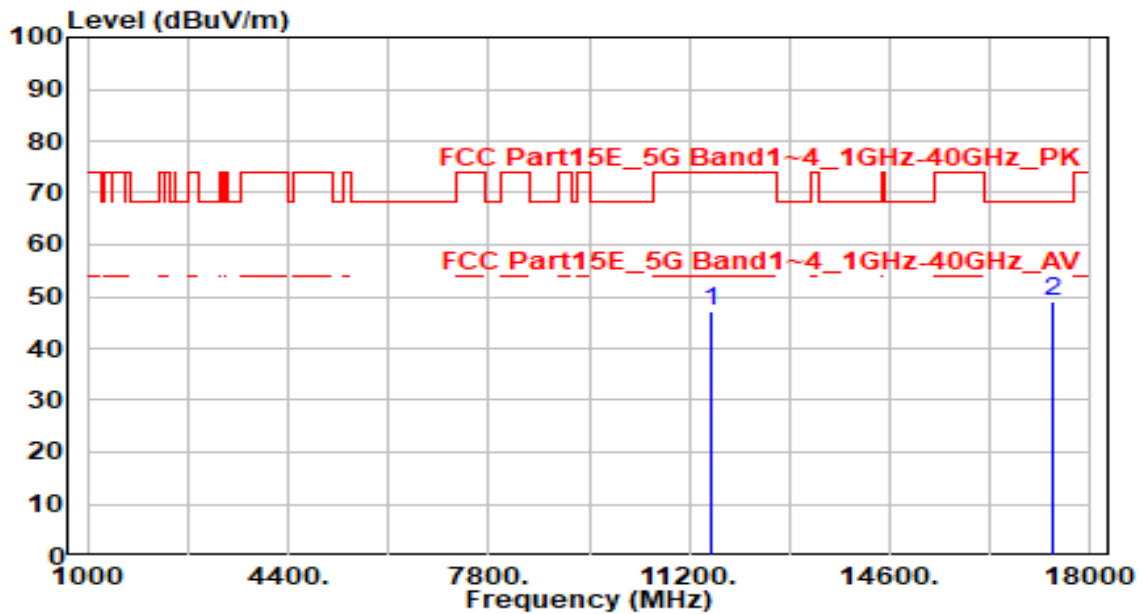


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11570.000 | 41.16 | 5.91 | 47.07 | -26.93 | 74.00 | 100 | 240 | Peak |
| 2 | * 17355.000 | 43.35 | 5.54 | 48.88 | -19.32 | 68.20 | 100 | 165 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

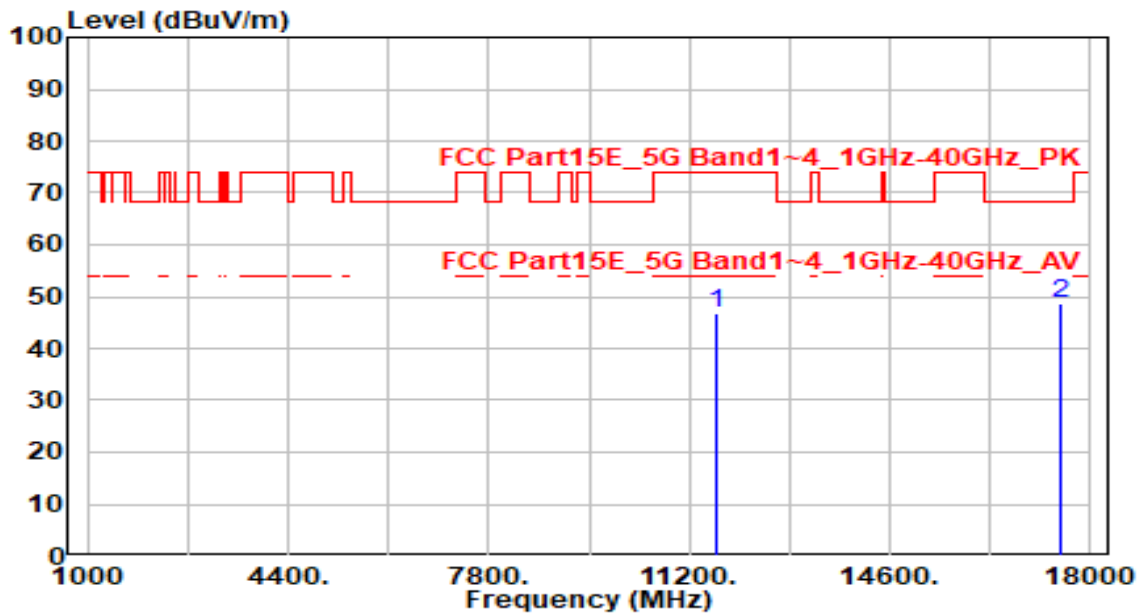


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11650.000 | 40.85 | 5.86 | 46.71 | -27.29 | 74.00 | 100 | 270 | Peak |
| 2 | * 17475.000 | 43.10 | 5.44 | 48.53 | -19.67 | 68.20 | 100 | 255 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

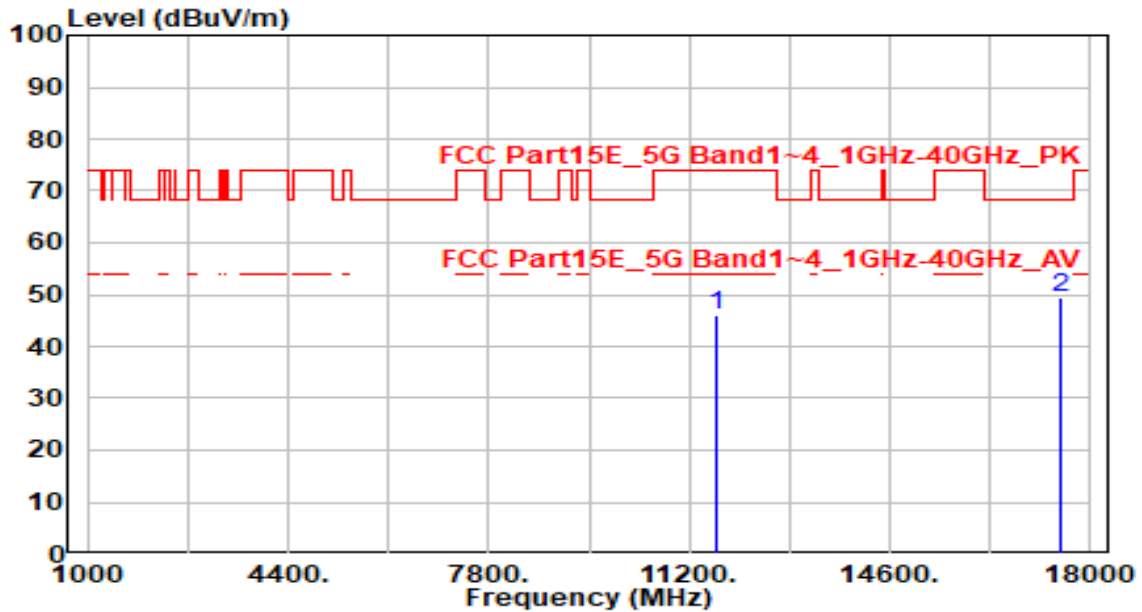


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11650.000 | 40.35 | 5.86 | 46.20 | -27.80 | 74.00 | 100 | 360 | Peak |
| 2 | * 17475.000 | 43.91 | 5.44 | 49.35 | -18.85 | 68.20 | 100 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

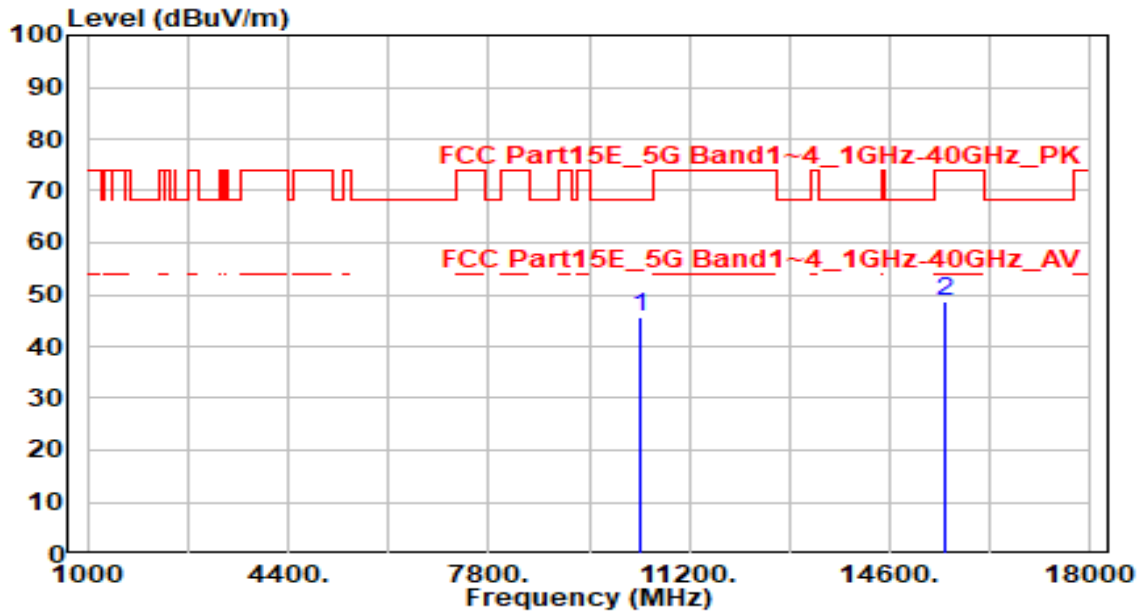


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10360.000 | 40.29 | 5.29 | 45.58 | -22.62 | 68.20 | 100 | 100 | Peak |
| 2 | 15540.000 | 42.20 | 6.41 | 48.61 | -25.39 | 74.00 | 100 | 275 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

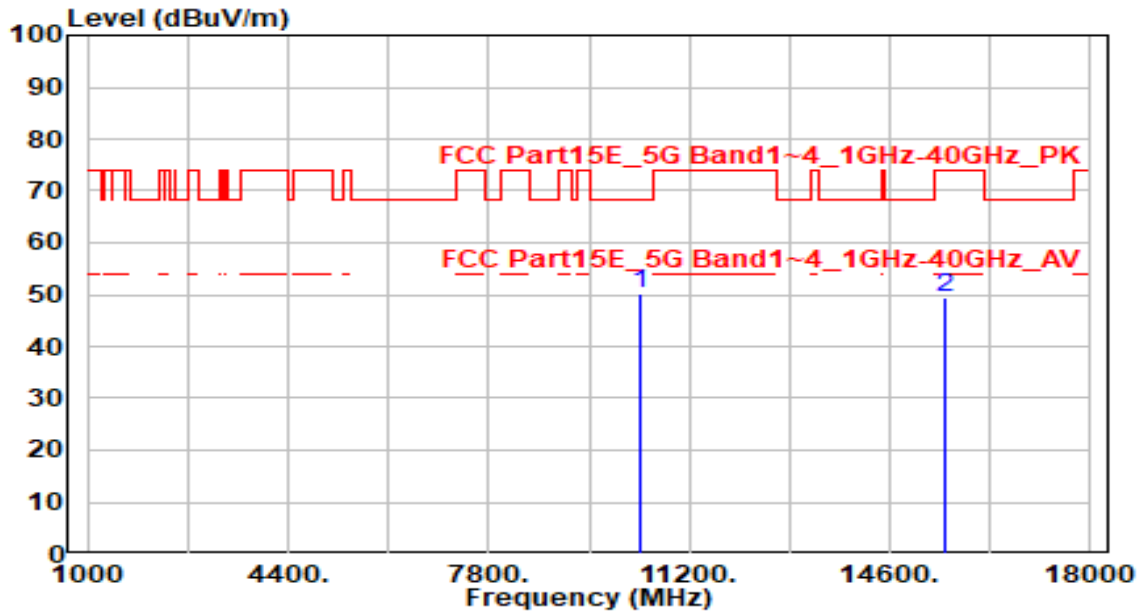


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 10360.000 | 44.94 | 5.29 | 50.23 | -17.97 | 68.20 | 100 | 140 | Peak |
| 2 | | 15540.000 | 42.97 | 6.41 | 49.37 | -24.63 | 74.00 | 100 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

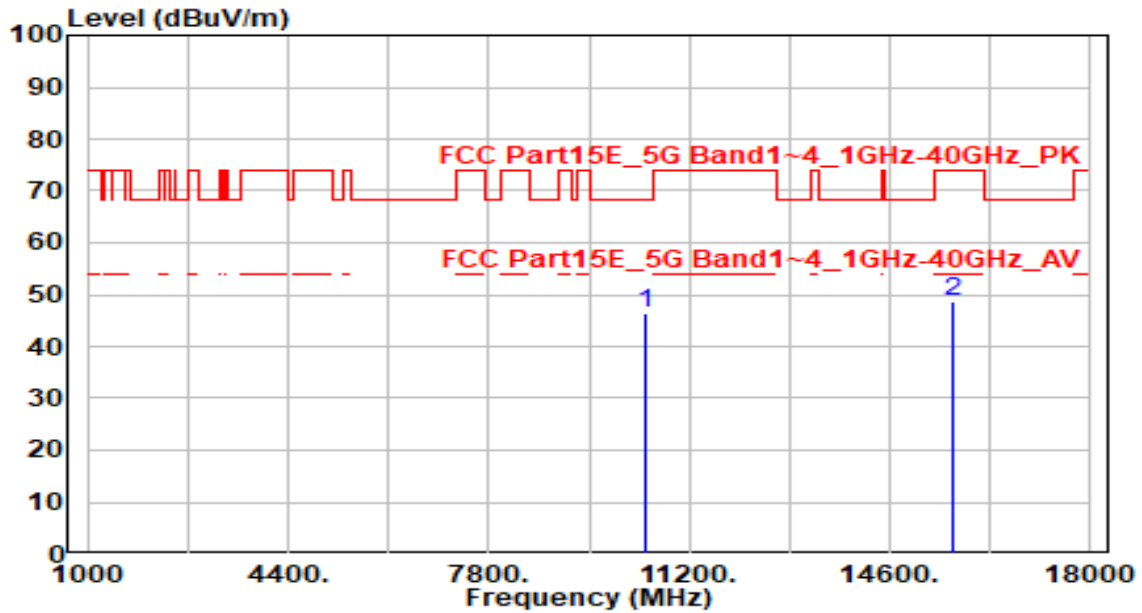


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10440.000 | 41.01 | 5.28 | 46.29 | -21.91 | 68.20 | 100 | 290 | Peak |
| 2 | 15660.000 | 42.10 | 6.56 | 48.66 | -25.34 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

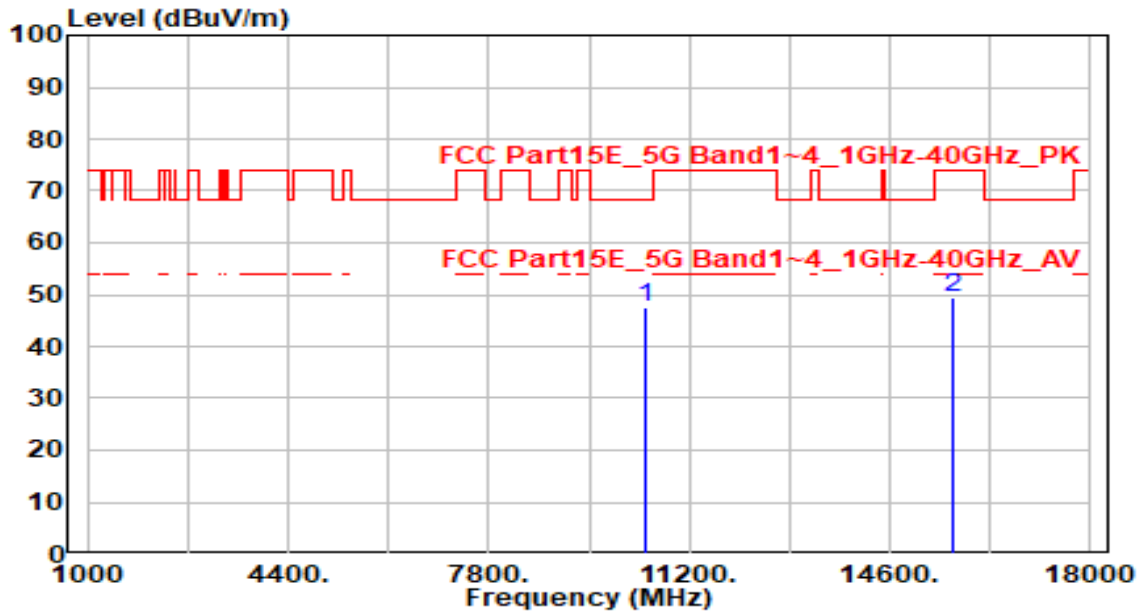


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10440.000 | 42.10 | 5.28 | 47.38 | -20.82 | 68.20 | 100 | 205 | Peak |
| 2 | 15660.000 | 42.78 | 6.56 | 49.34 | -24.66 | 74.00 | 100 | 75 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 48_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

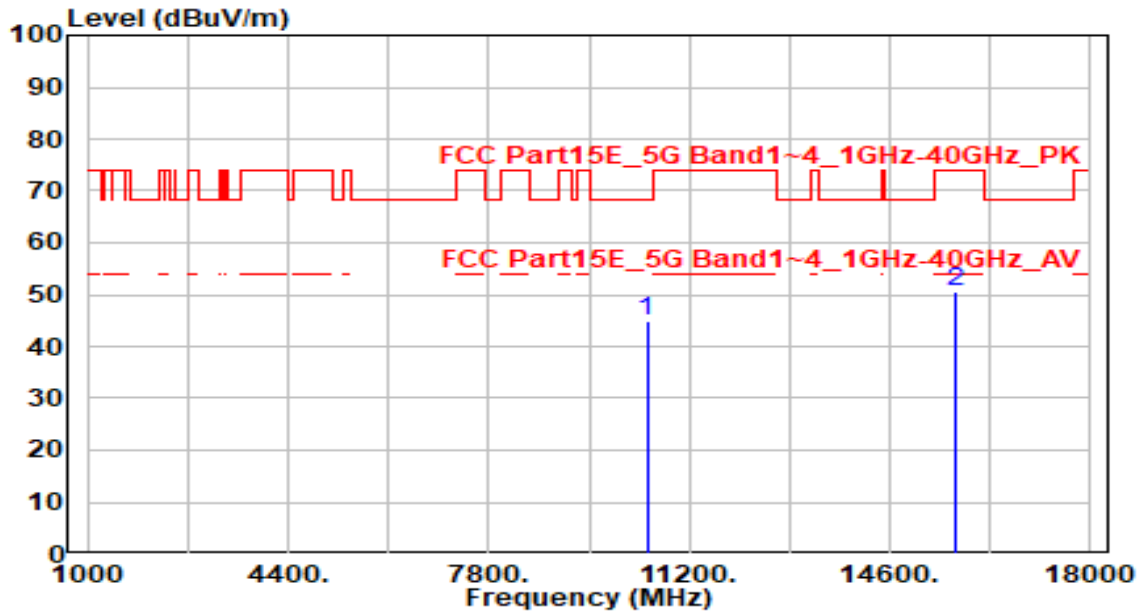


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10480.000 | 39.83 | 5.26 | 45.09 | -23.11 | 68.20 | 100 | 60 | Peak |
| 2 | 15720.000 | 43.83 | 6.69 | 50.53 | -23.47 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 48_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

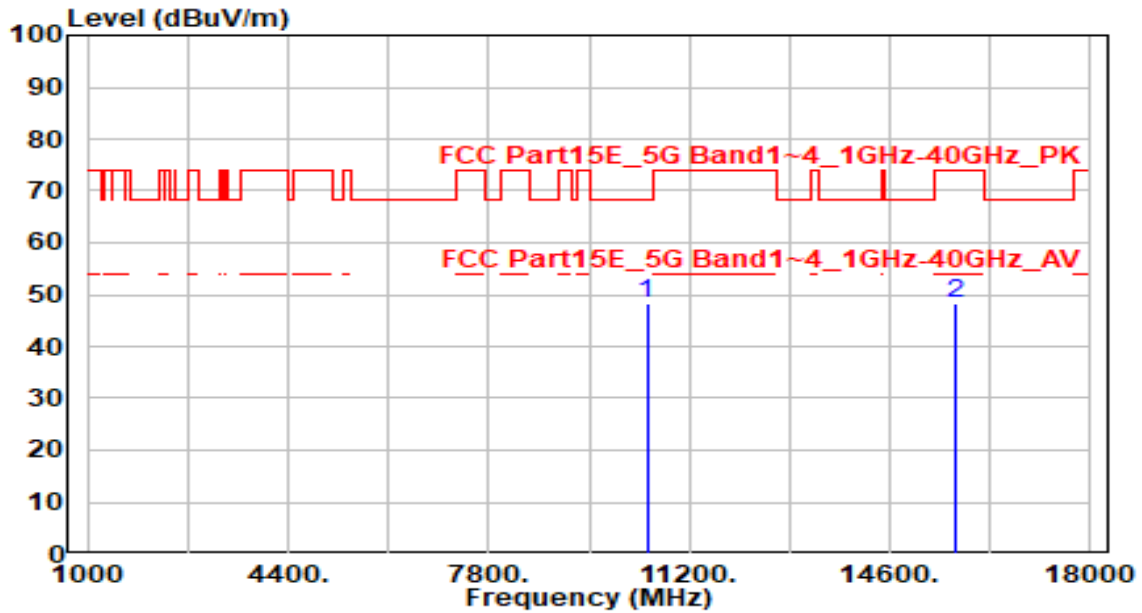


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10480.000 | 43.23 | 5.26 | 48.49 | -19.71 | 68.20 | 100 | 210 | Peak |
| 2 | 15720.000 | 41.43 | 6.69 | 48.12 | -25.88 | 74.00 | 100 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 52_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

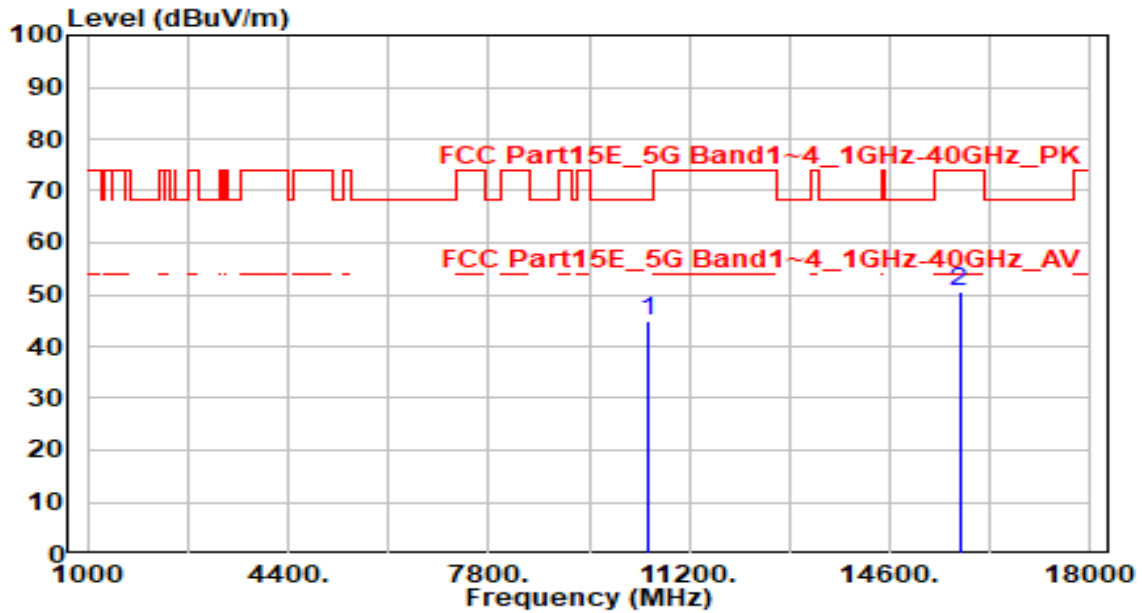


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 39.58 | 5.25 | 44.83 | -23.37 | 68.20 | 100 | 30 | Peak |
| 2 | | 43.64 | 6.83 | 50.47 | -23.53 | 74.00 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 52_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

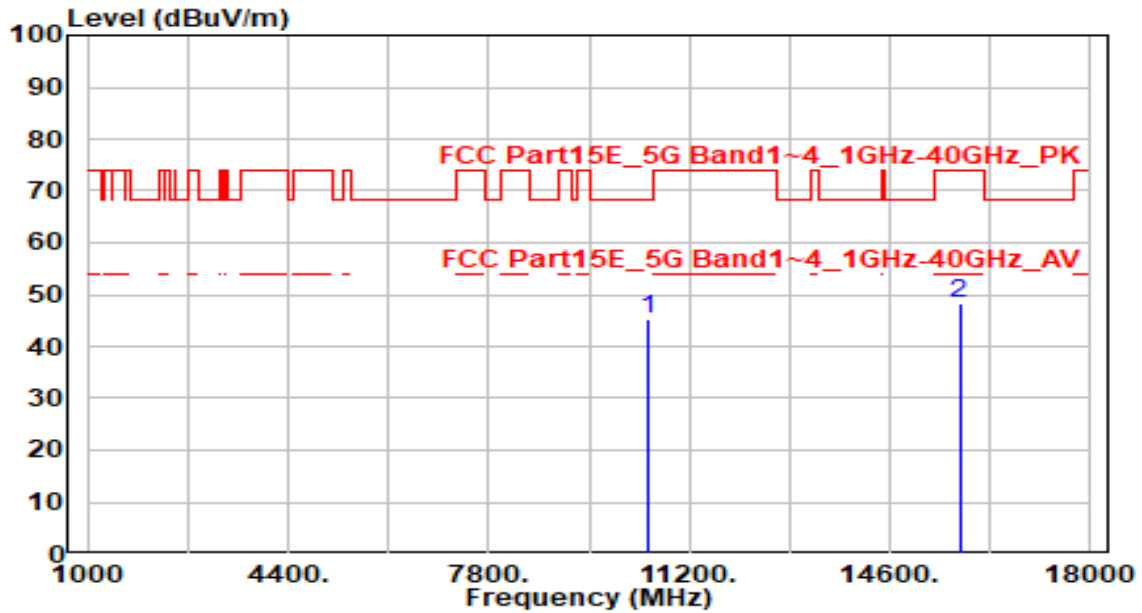


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 40.14 | 5.25 | 45.39 | -22.81 | 68.20 | 100 | 120 | Peak |
| 2 | | 41.50 | 6.83 | 48.33 | -25.67 | 74.00 | 100 | 240 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 60_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

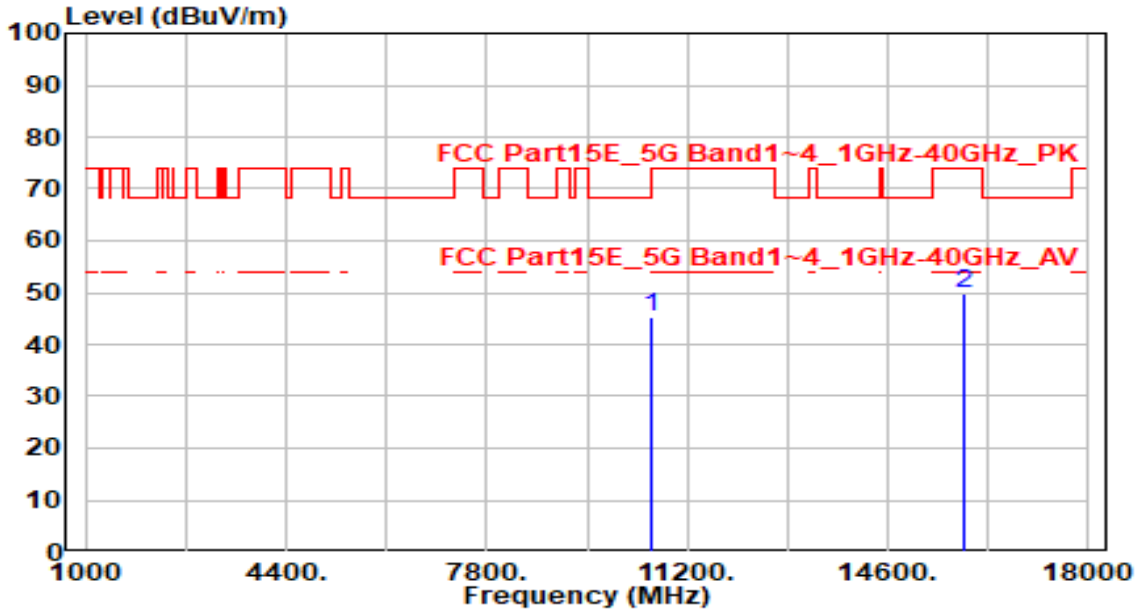


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10600.000 | 39.95 | 5.25 | 45.20 | -23.00 | 68.20 | 100 | 110 | Peak |
| 2 | 15900.000 | 42.84 | 6.95 | 49.79 | -24.21 | 74.00 | 100 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 60_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

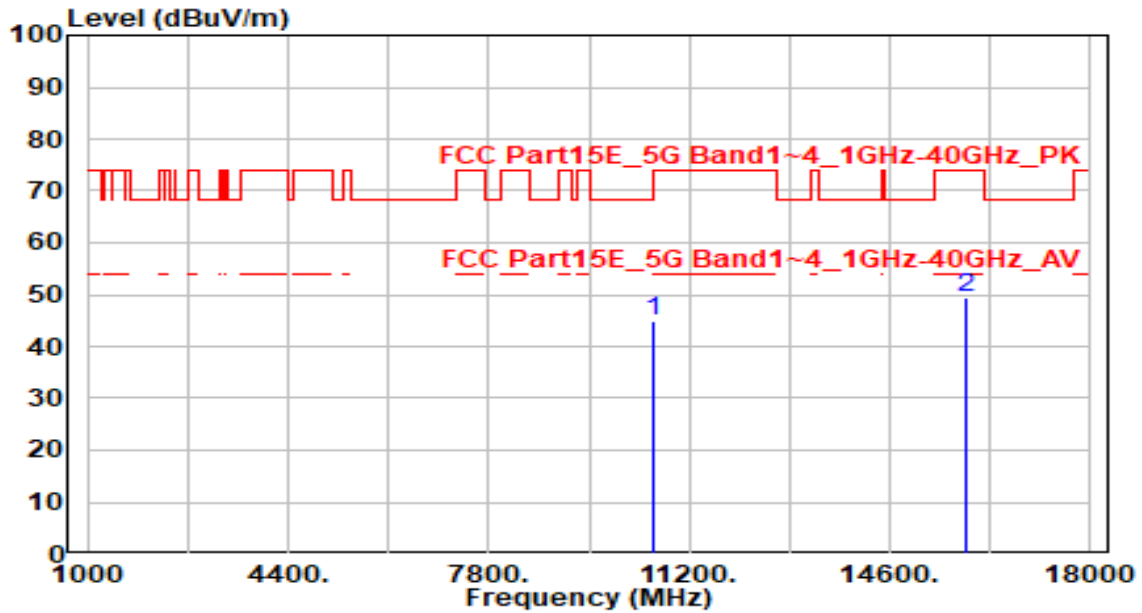


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10600.000 | 39.67 | 5.25 | 44.92 | -23.28 | 68.20 | 100 | 130 | Peak |
| 2 | 15900.000 | 42.53 | 6.95 | 49.48 | -24.52 | 74.00 | 100 | 70 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

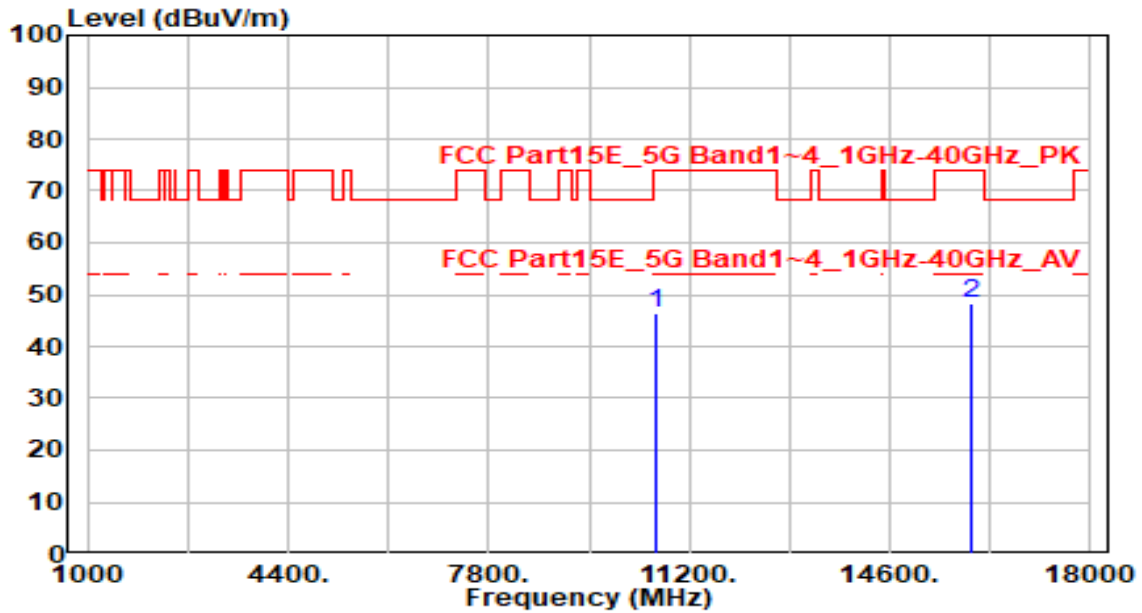


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10640.000 | 41.26 | 5.27 | 46.53 | -27.47 | 74.00 | 100 | 335 | Peak |
| 2 | * 15960.000 | 41.31 | 7.00 | 48.31 | -25.69 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

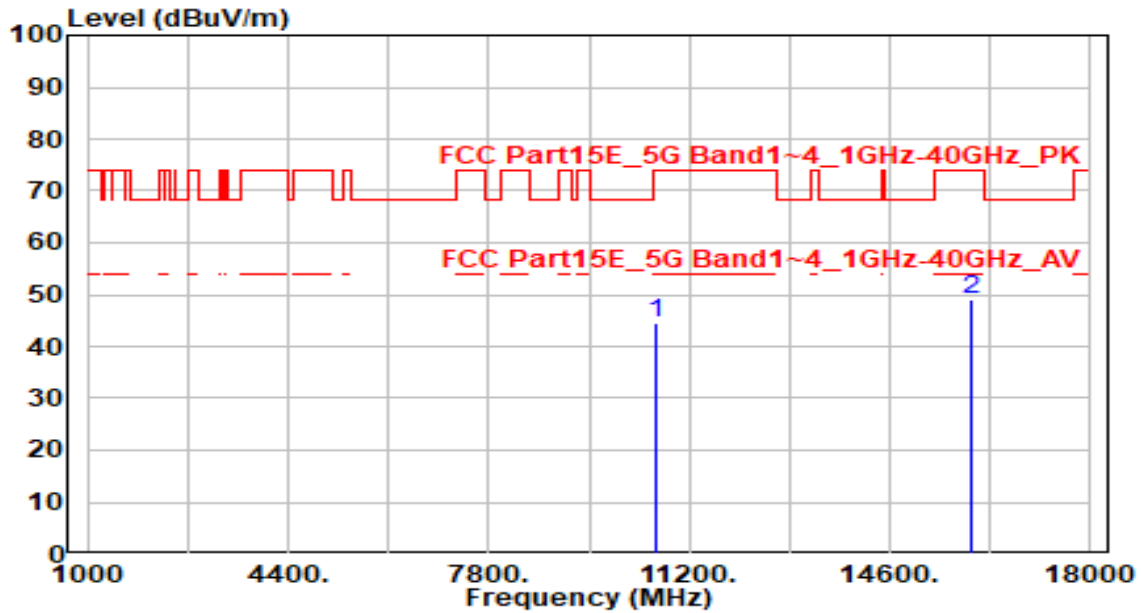


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10640.000 | 39.12 | 5.27 | 44.39 | -29.61 | 74.00 | 100 | 195 | Peak |
| 2 | * 15960.000 | 42.12 | 7.00 | 49.12 | -24.88 | 74.00 | 100 | 260 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

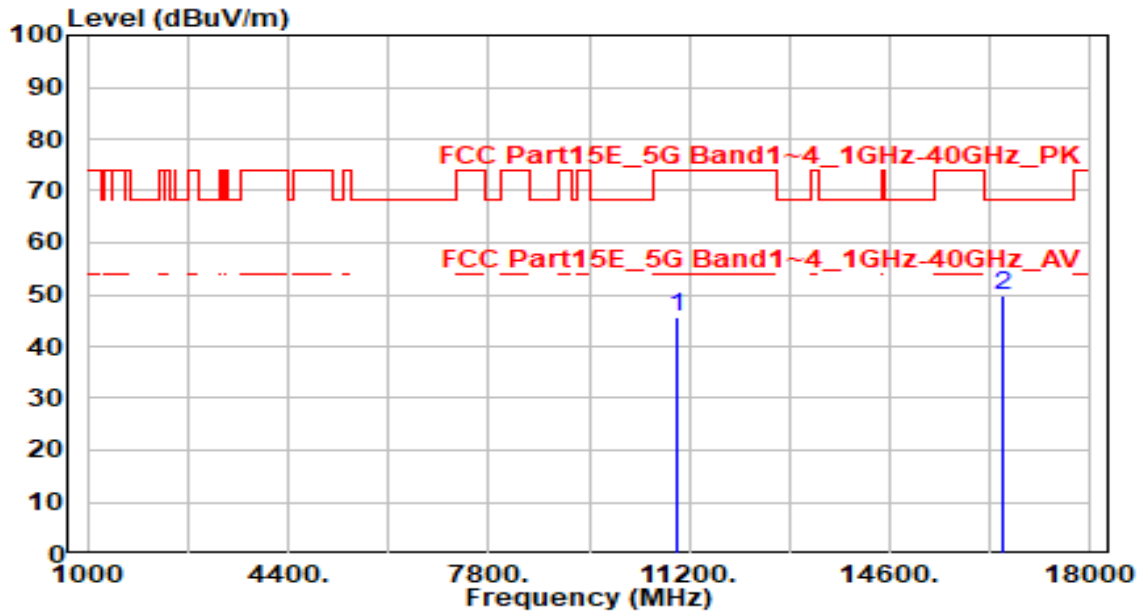


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11000.000 | 40.20 | 5.56 | 45.76 | -28.24 | 74.00 | 100 | 45 | Peak |
| 2 | * 16500.000 | 42.42 | 7.34 | 49.76 | -18.44 | 68.20 | 100 | 80 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

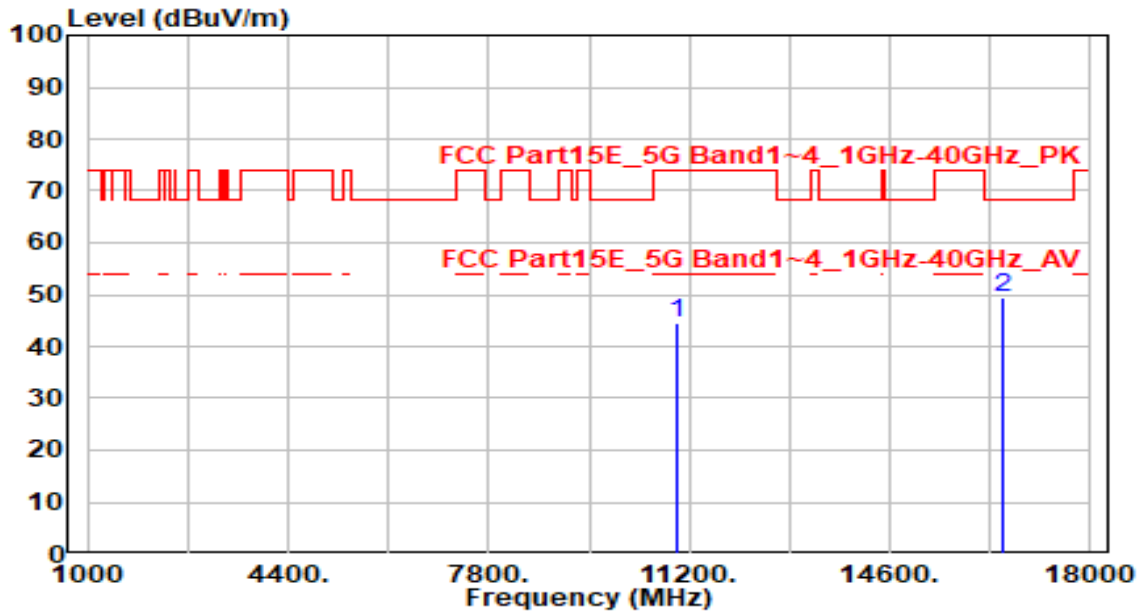


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11000.000 | 38.93 | 5.56 | 44.49 | -29.51 | 74.00 | 100 | 215 | Peak |
| 2 | * 16500.000 | 41.96 | 7.34 | 49.30 | -18.90 | 68.20 | 100 | 240 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

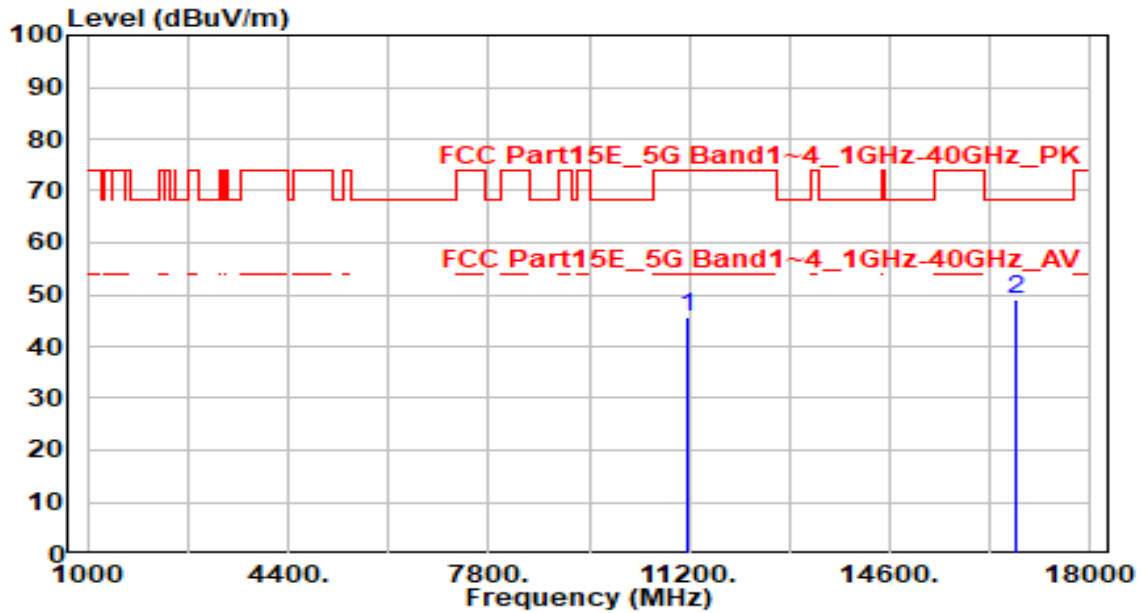


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11160.000 | 39.91 | 5.73 | 45.64 | -28.36 | 74.00 | 100 | 320 | Peak |
| 2 | * 16740.000 | 41.28 | 7.72 | 48.99 | -19.21 | 68.20 | 100 | 305 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

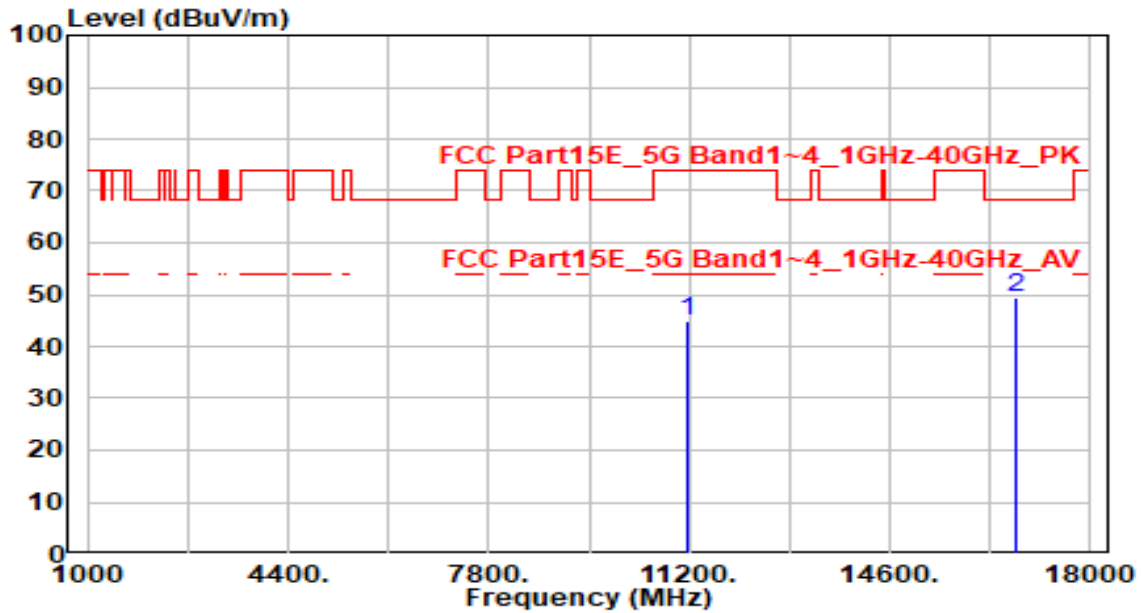


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11160.000 | 39.08 | 5.73 | 44.81 | -29.19 | 74.00 | 100 | 235 | Peak |
| 2 | * 16740.000 | 41.87 | 7.72 | 49.59 | -18.61 | 68.20 | 100 | 15 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

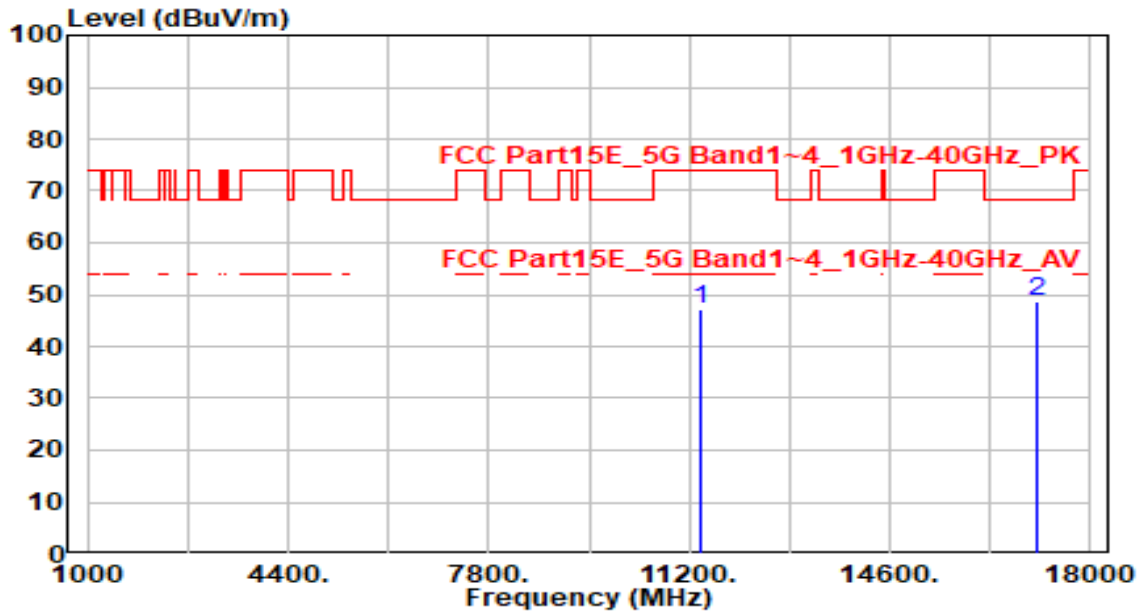


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11400.000 | 41.06 | 5.98 | 47.04 | -26.96 | 74.00 | 100 | 290 | Peak |
| 2 | * 17100.000 | 42.61 | 6.16 | 48.78 | -19.42 | 68.20 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

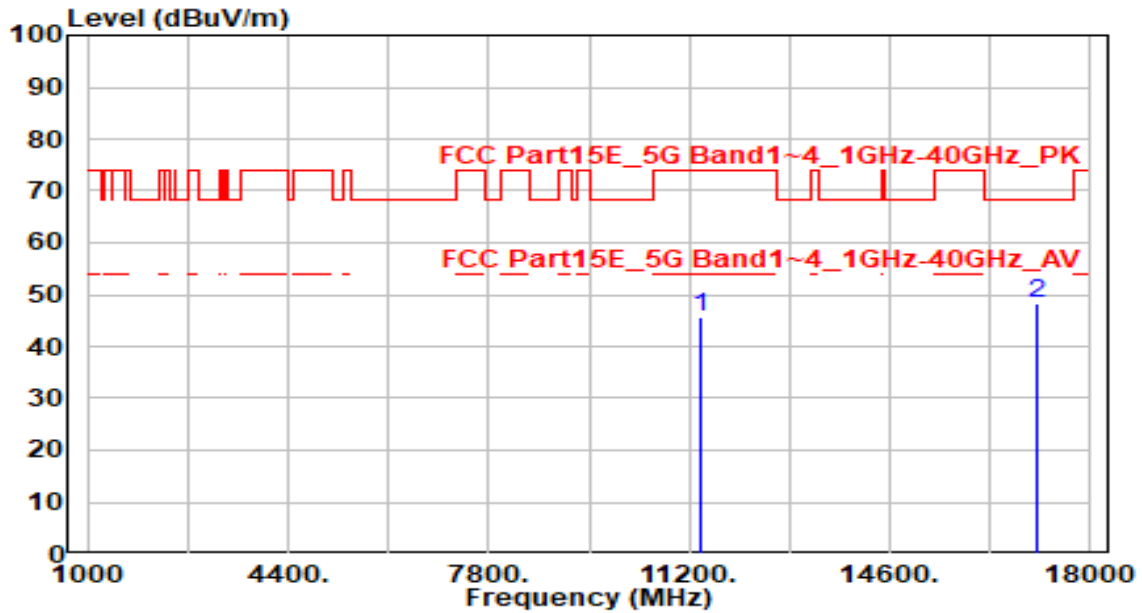


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11400.000 | 39.86 | 5.98 | 45.85 | -28.15 | 74.00 | 100 | 265 | Peak |
| 2 | * 17100.000 | 42.15 | 6.16 | 48.31 | -19.89 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

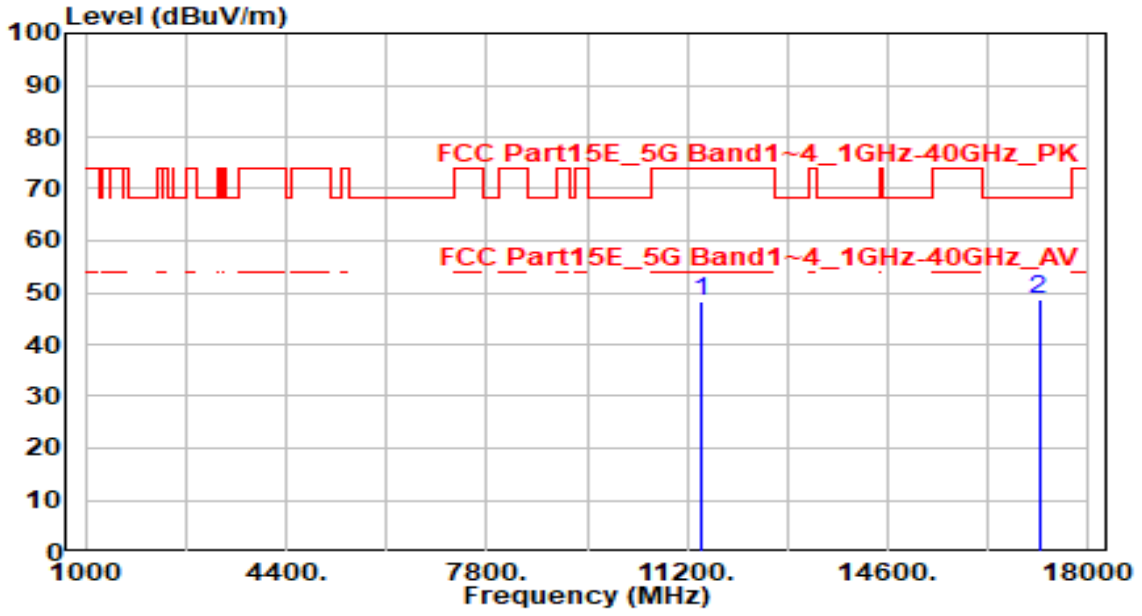


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11440.000 | 42.24 | 5.97 | 48.21 | -25.79 | 74.00 | 100 | 265 | Peak |
| 2 | * 17160.000 | 42.70 | 5.98 | 48.68 | -19.52 | 68.20 | 100 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

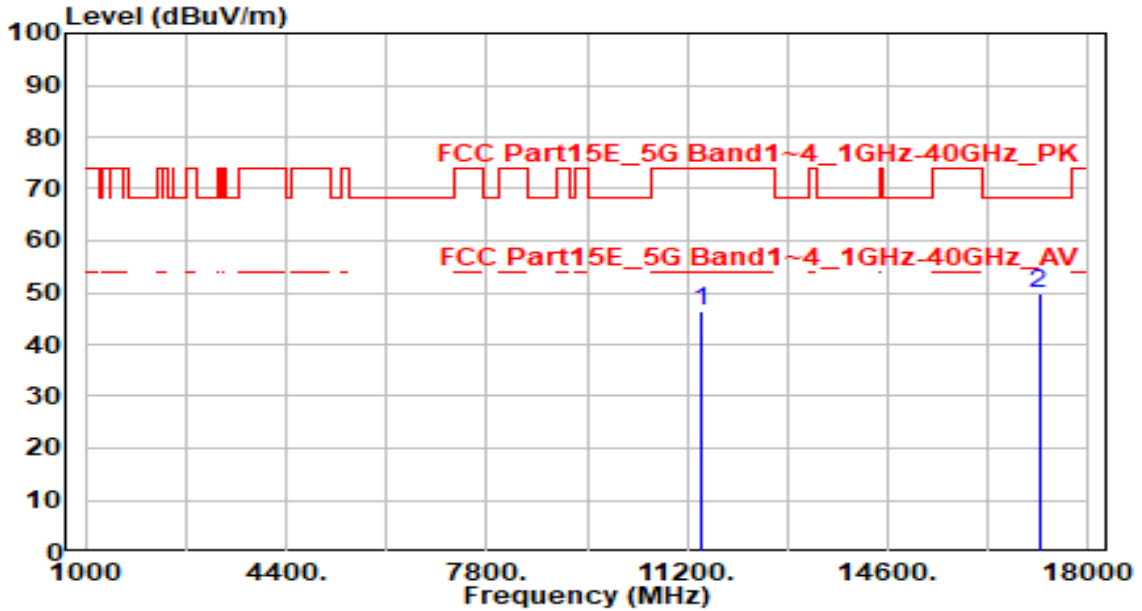


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11440.000 | 40.33 | 5.97 | 46.30 | -27.70 | 74.00 | 100 | 85 | Peak |
| 2 | * 17160.000 | 43.75 | 5.98 | 49.73 | -18.47 | 68.20 | 100 | 35 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

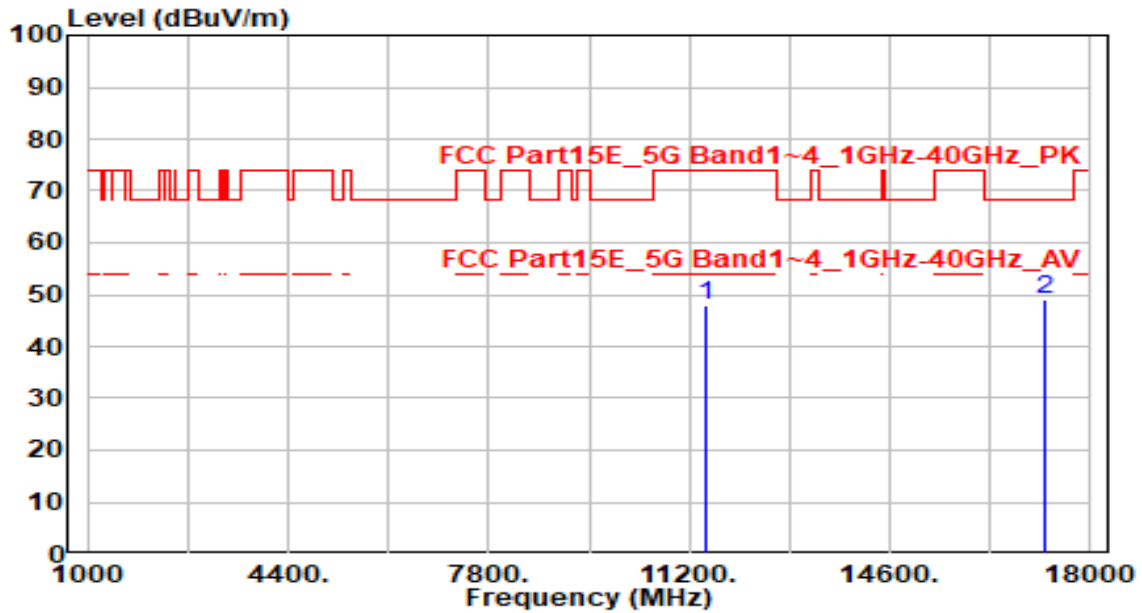


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11490.000 | 41.95 | 5.94 | 47.89 | -26.11 | 74.00 | 100 | 60 | Peak |
| 2 | * 17235.000 | 43.42 | 5.78 | 49.21 | -18.99 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

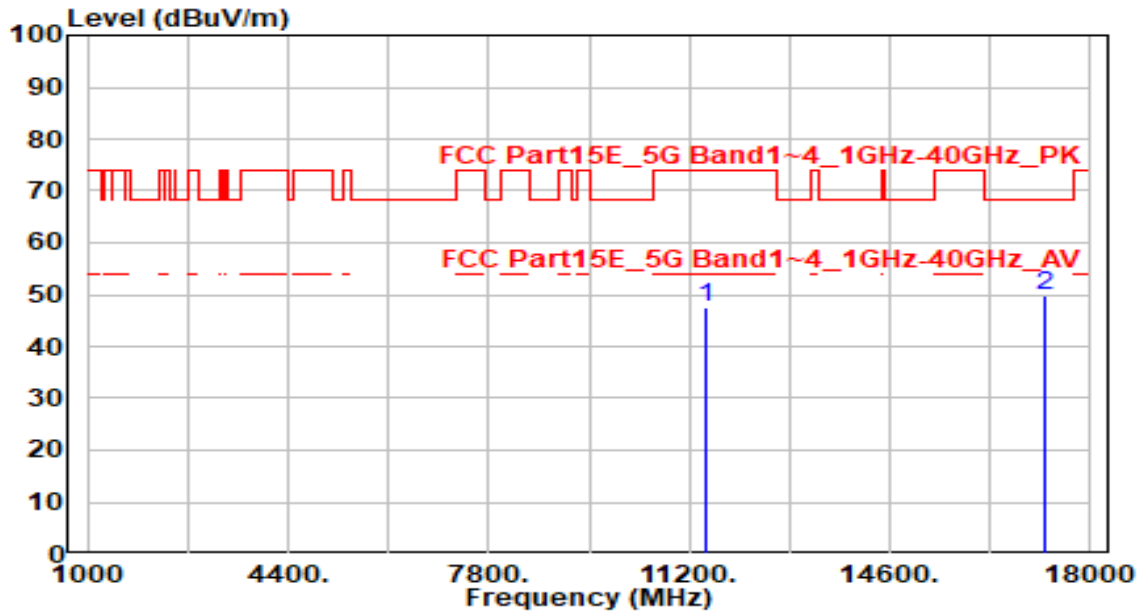


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11490.000 | 41.68 | 5.94 | 47.63 | -26.37 | 74.00 | 100 | 150 | Peak |
| 2 | * 17235.000 | 43.93 | 5.78 | 49.71 | -18.49 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

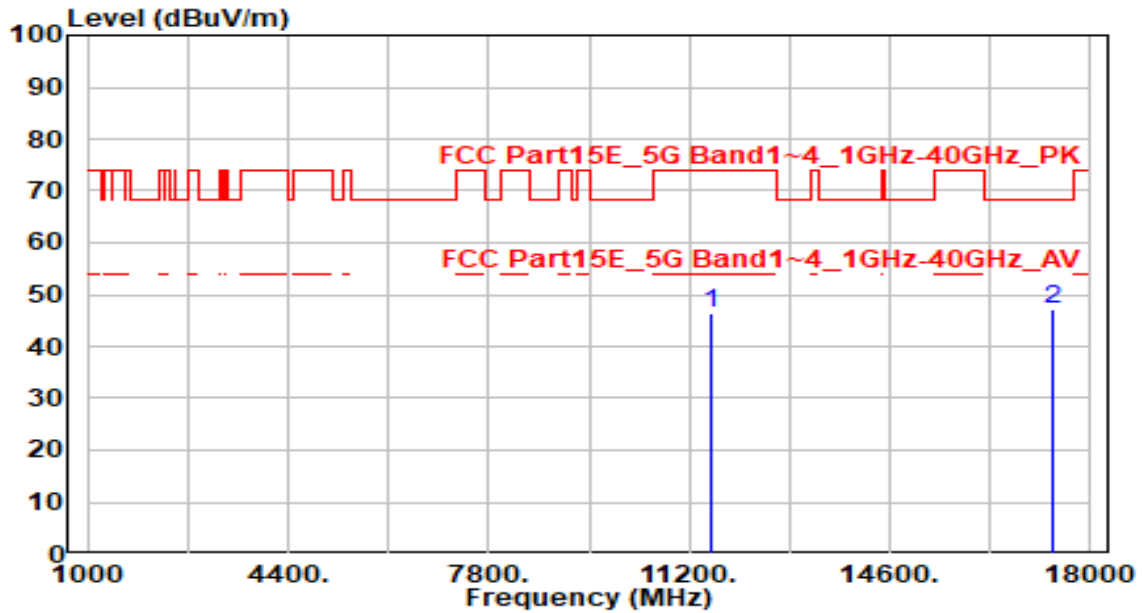


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11570.000 | 40.54 | 5.91 | 46.45 | -27.55 | 74.00 | 100 | 360 | Peak |
| 2 | * 17355.000 | 41.76 | 5.54 | 47.29 | -20.91 | 68.20 | 100 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

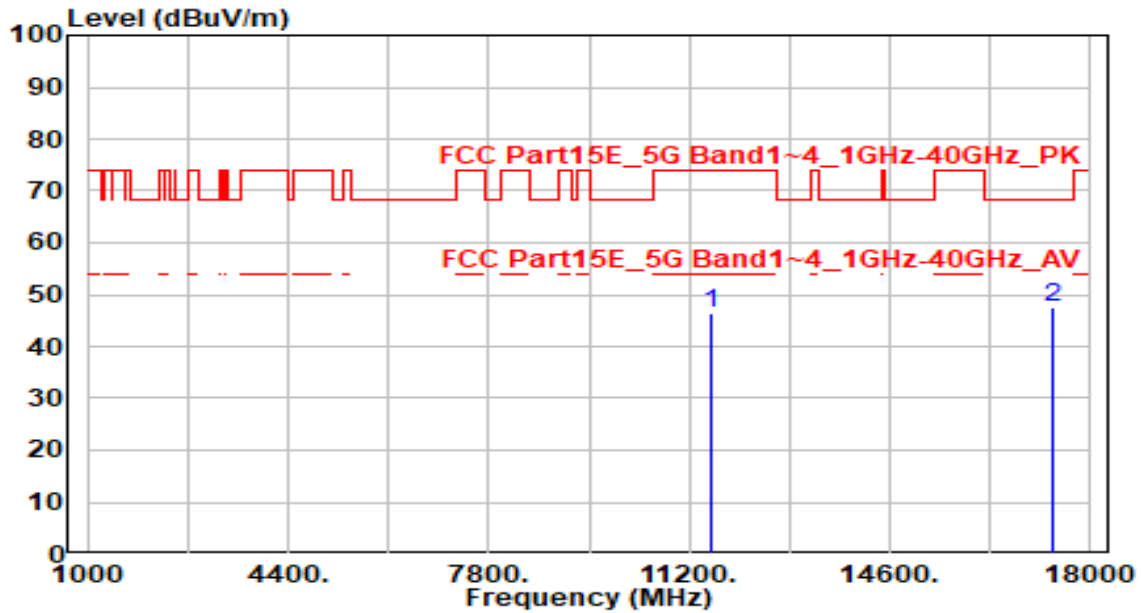


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11570.000 | 40.39 | 5.91 | 46.30 | -27.70 | 74.00 | 100 | 160 | Peak |
| 2 | * 17355.000 | 42.06 | 5.54 | 47.59 | -20.61 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

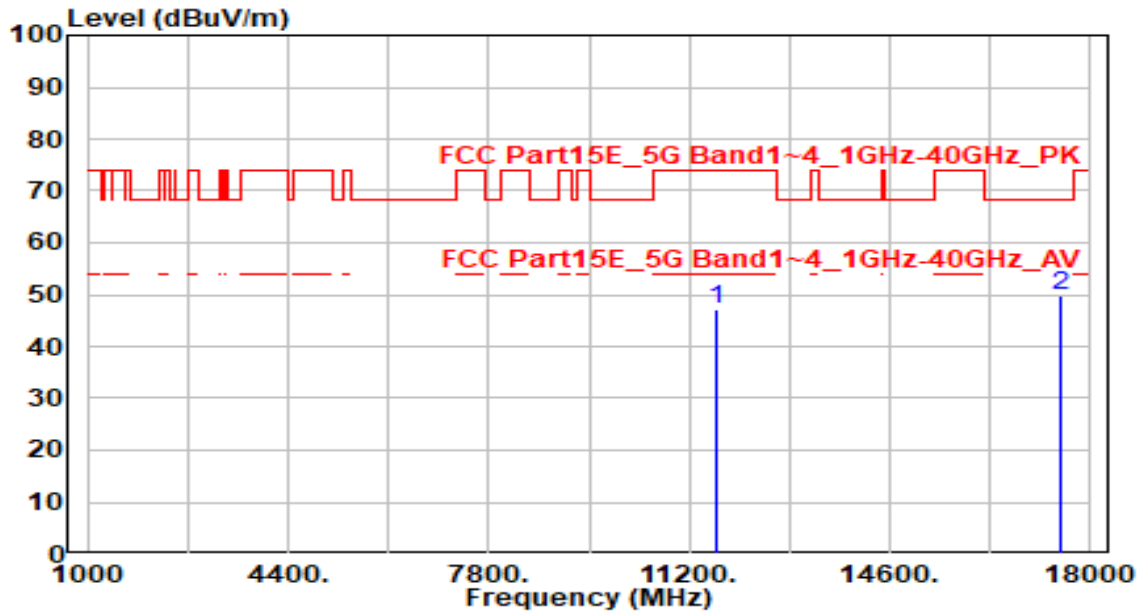


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11650.000 | 41.44 | 5.86 | 47.30 | -26.70 | 74.00 | 100 | 165 | Peak |
| 2 | * 17475.000 | 44.37 | 5.44 | 49.81 | -18.39 | 68.20 | 100 | 30 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

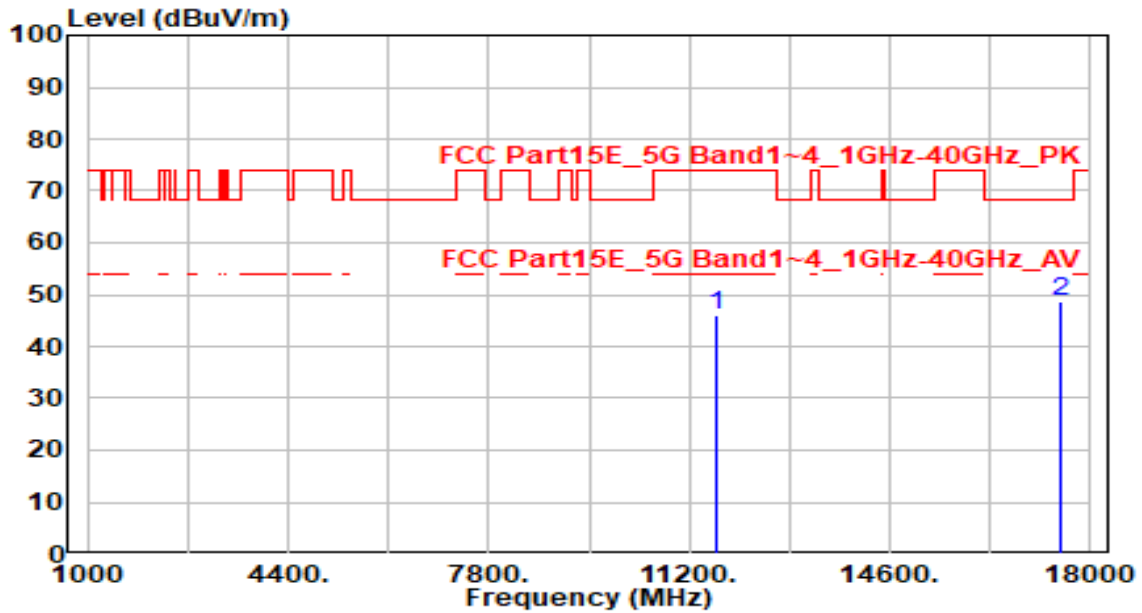


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11650.000 | 40.20 | 5.86 | 46.06 | -27.94 | 74.00 | 100 | 160 | Peak |
| 2 | * 17475.000 | 43.24 | 5.44 | 48.68 | -19.52 | 68.20 | 100 | 95 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

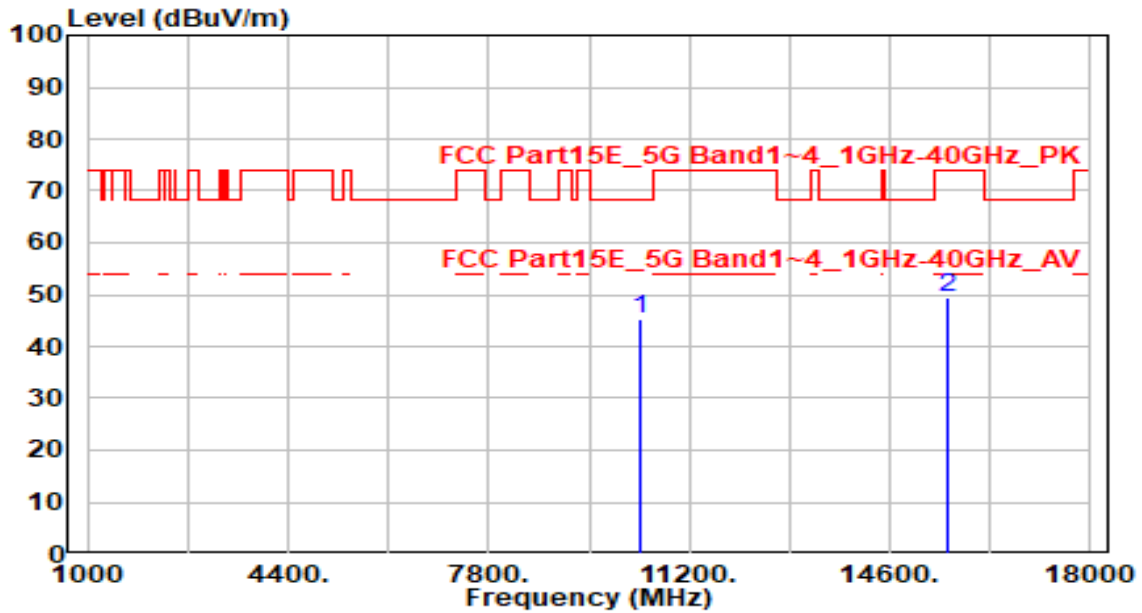


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 39.82 | 5.30 | 45.12 | -23.08 | 68.20 | 100 | 110 | Peak |
| 2 | | 42.88 | 6.41 | 49.30 | -24.70 | 74.00 | 100 | 190 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

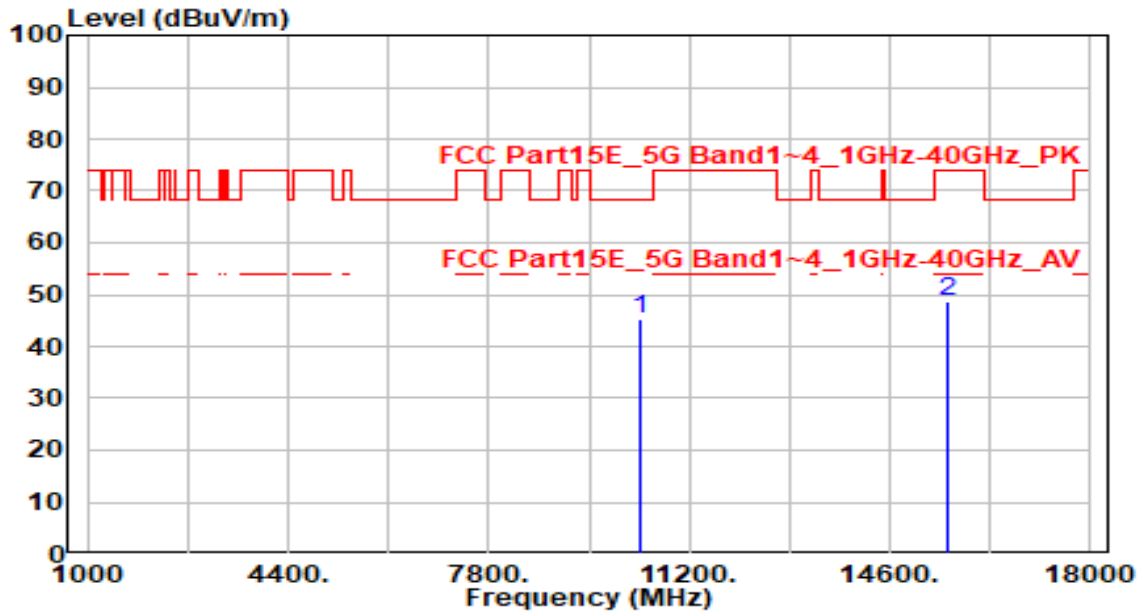


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 40.09 | 5.30 | 45.38 | -22.82 | 68.20 | 100 | 270 | Peak |
| 2 | | 42.35 | 6.41 | 48.77 | -25.23 | 74.00 | 100 | 320 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 46_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

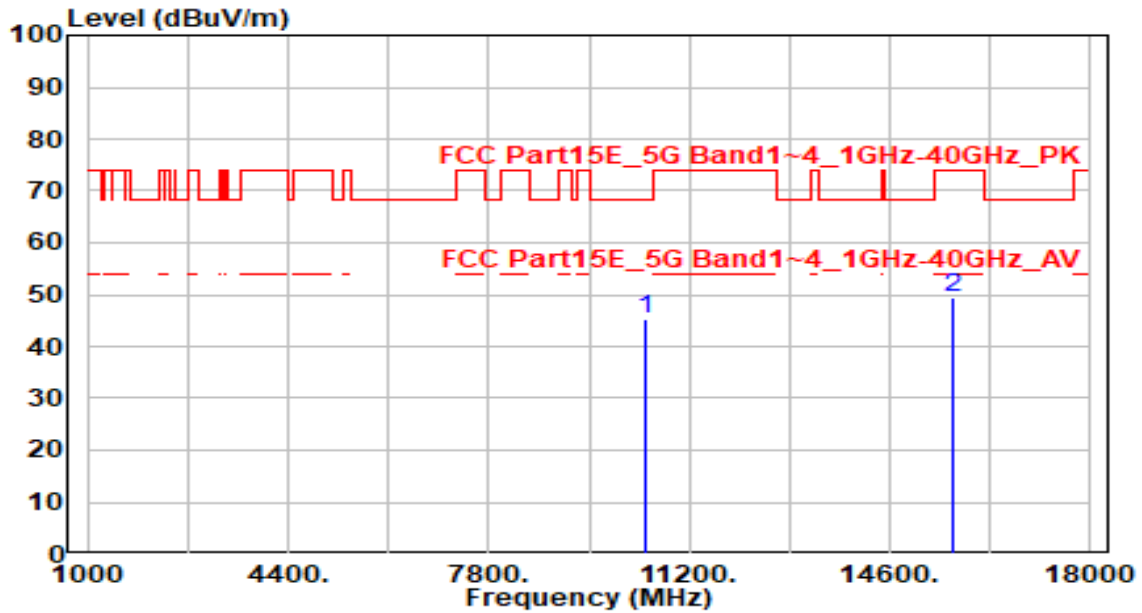


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 39.97 | 5.27 | 45.24 | -22.96 | 68.20 | 100 | 25 | Peak |
| 2 | | 42.99 | 6.63 | 49.62 | -24.38 | 74.00 | 100 | 10 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 46_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

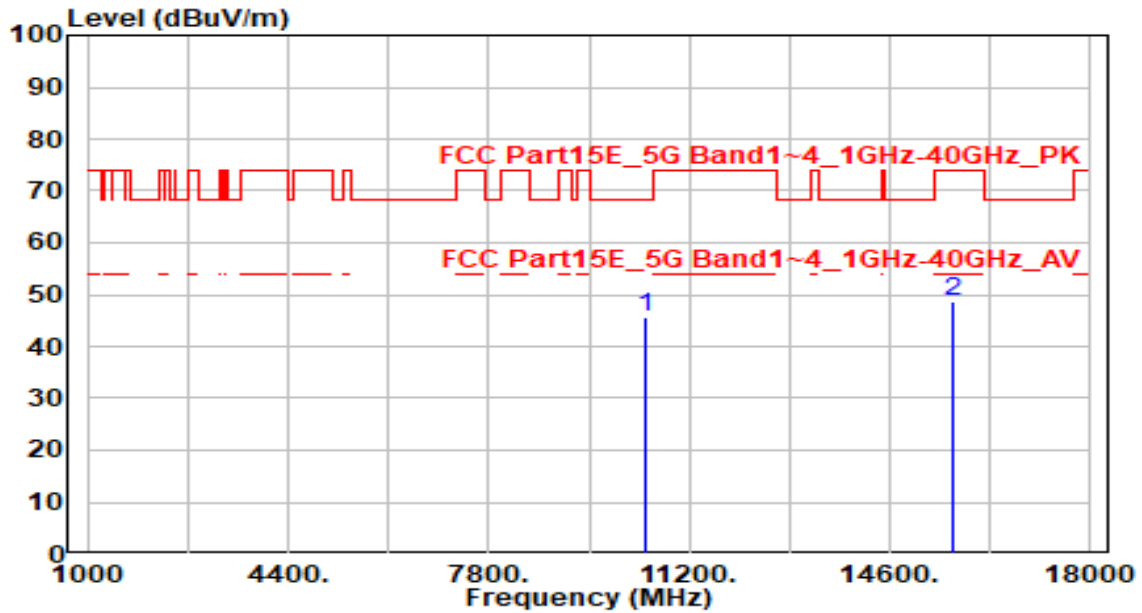


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 40.20 | 5.27 | 45.47 | -22.73 | 68.20 | 100 | 155 | Peak |
| 2 | | 42.21 | 6.63 | 48.83 | -25.17 | 74.00 | 100 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 54_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

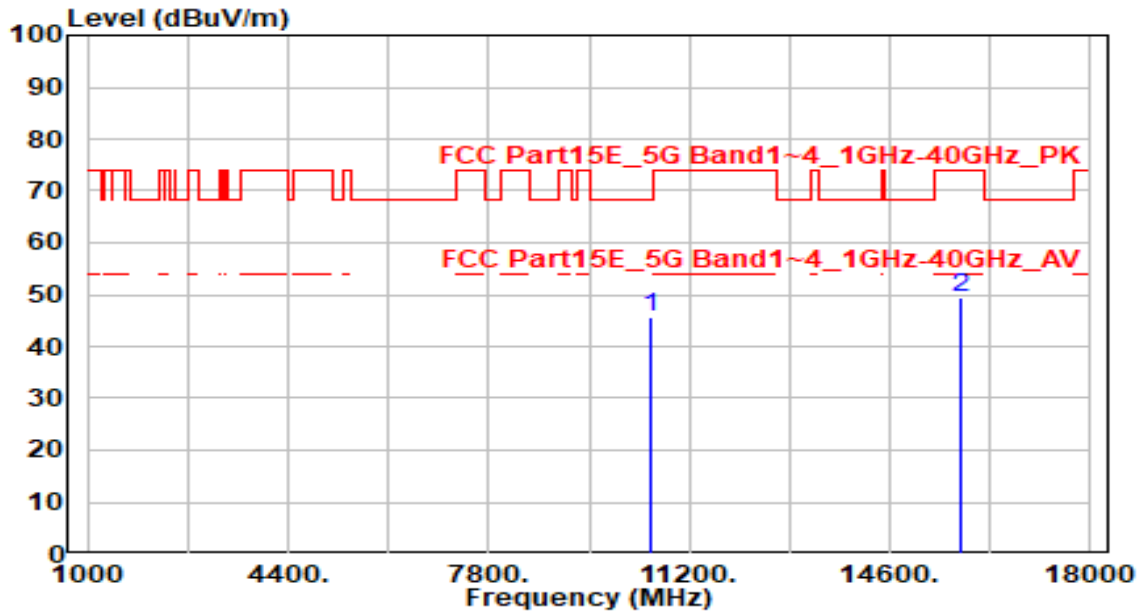


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 40.57 | 5.25 | 45.82 | -22.38 | 68.20 | 100 | 295 | Peak |
| 2 | | 42.71 | 6.88 | 49.60 | -24.40 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 54_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

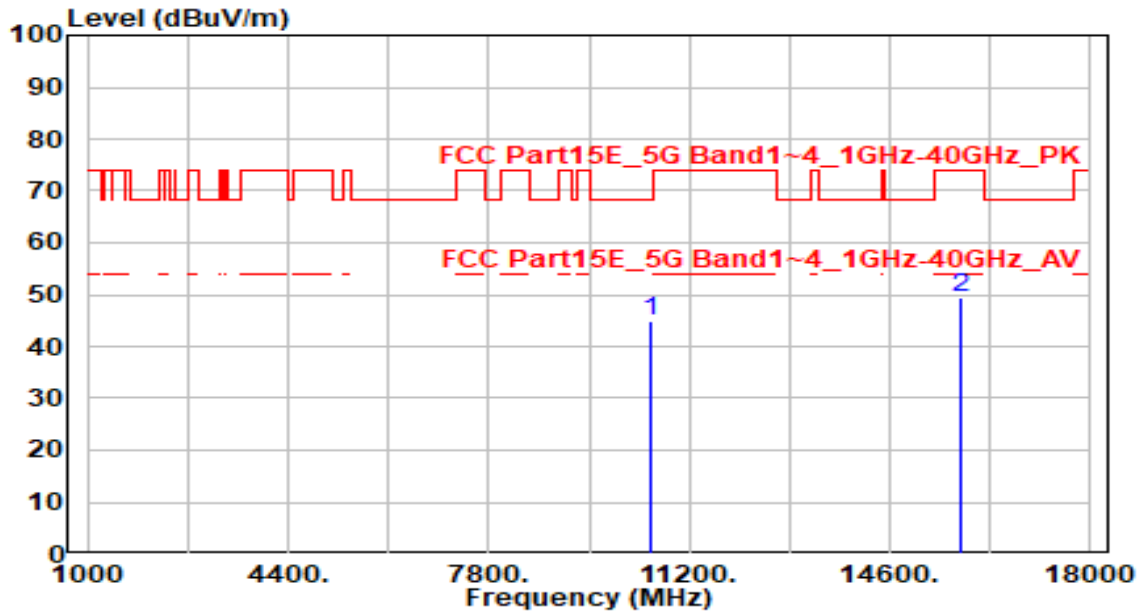


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10540.000 | 39.55 | 5.25 | 44.80 | -23.40 | 68.20 | 100 | 125 | Peak |
| 2 | 15810.000 | 42.71 | 6.88 | 49.59 | -24.41 | 74.00 | 100 | 10 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

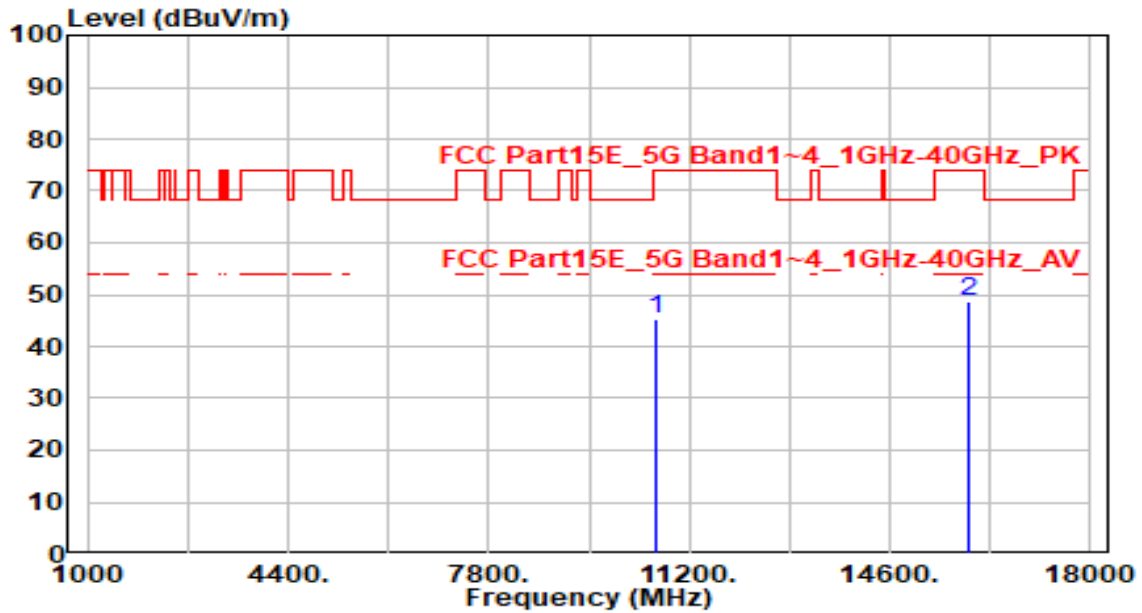


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10620.000 | 40.07 | 5.26 | 45.33 | -28.67 | 74.00 | 100 | 265 | Peak |
| 2 | * 15930.000 | 41.72 | 6.98 | 48.69 | -25.31 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

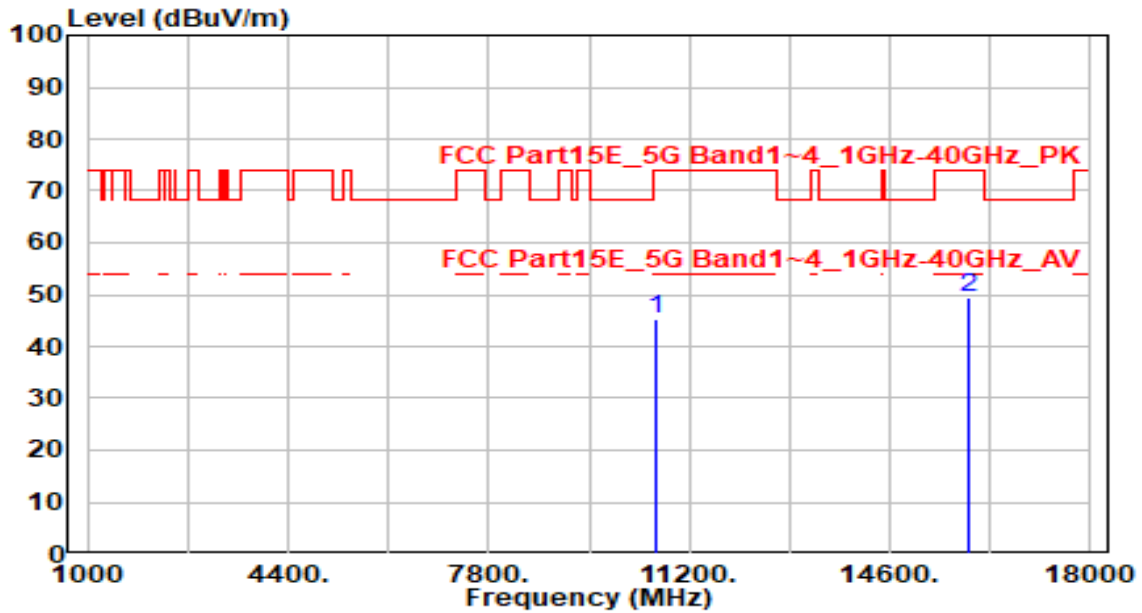


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10620.000 | 40.10 | 5.26 | 45.37 | -28.63 | 74.00 | 100 | 0 | Peak |
| 2 | * 15930.000 | 42.34 | 6.98 | 49.32 | -24.68 | 74.00 | 100 | 155 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

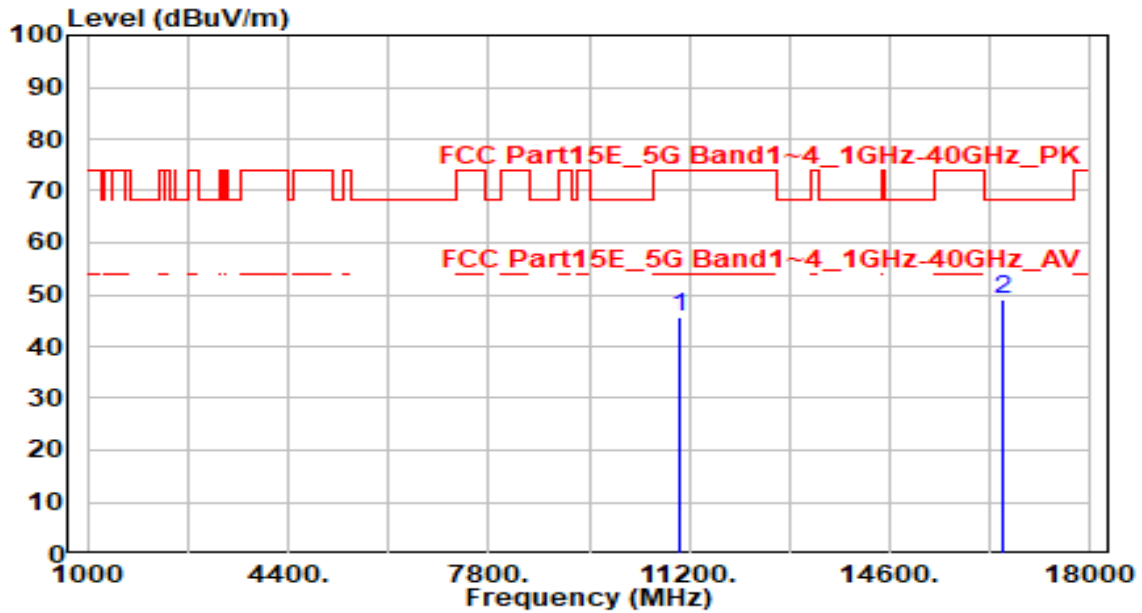


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11020.000 | 39.97 | 5.58 | 45.55 | -28.45 | 74.00 | 100 | 0 | Peak |
| 2 | * 16530.000 | 41.74 | 7.39 | 49.13 | -19.07 | 68.20 | 100 | 340 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

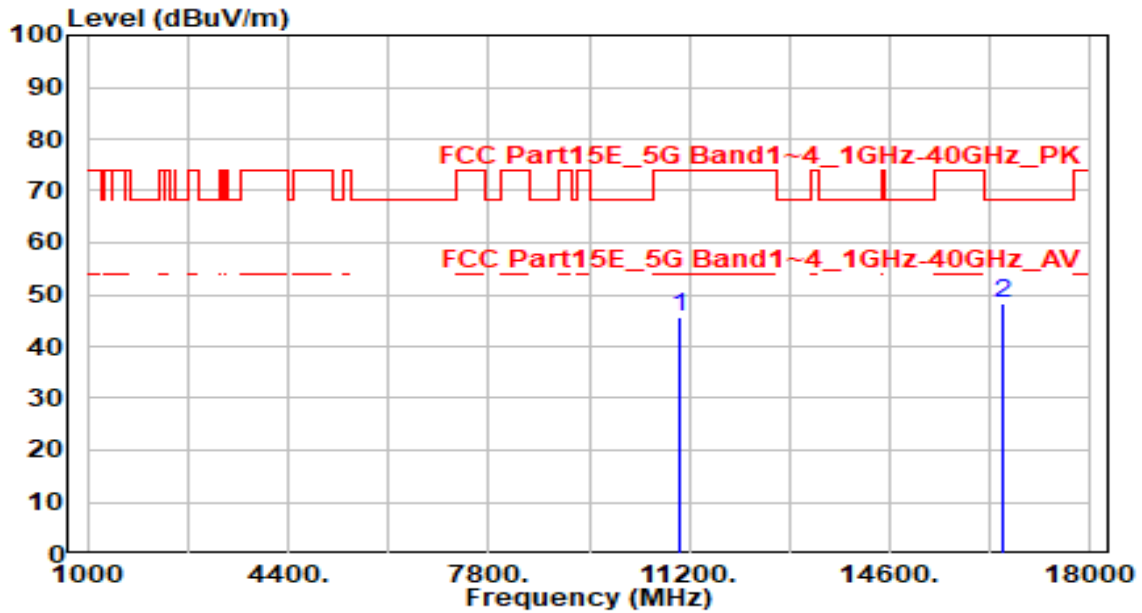


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11020.000 | 39.90 | 5.58 | 45.48 | -28.52 | 74.00 | 100 | 0 | Peak |
| 2 | * 16530.000 | 40.88 | 7.39 | 48.27 | -19.93 | 68.20 | 100 | 50 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

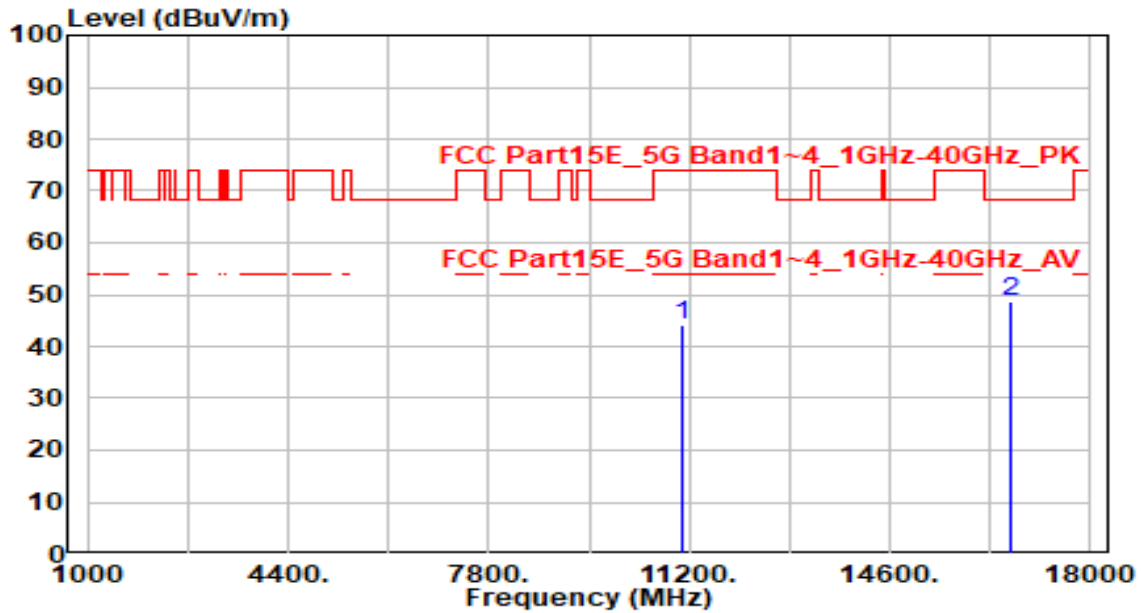


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11100.000 | 38.53 | 5.67 | 44.20 | -29.80 | 74.00 | 100 | 5 | Peak |
| 2 | * 16650.000 | 40.96 | 7.58 | 48.53 | -19.67 | 68.20 | 100 | 325 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

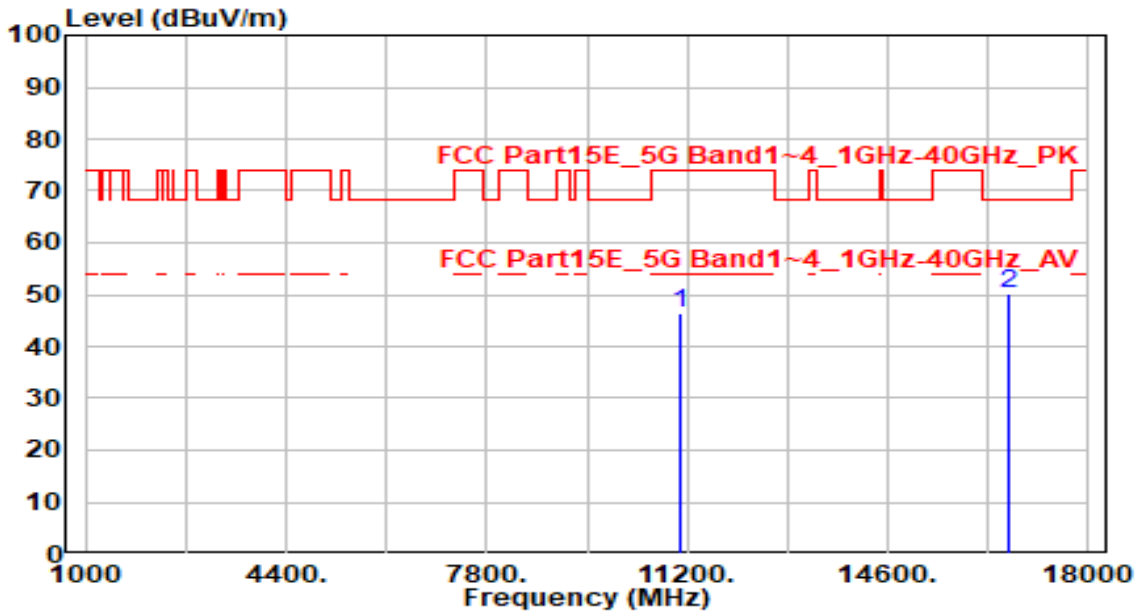


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11100.000 | 40.60 | 5.67 | 46.27 | -27.73 | 74.00 | 100 | 0 | Peak |
| 2 | * 16650.000 | 42.65 | 7.58 | 50.23 | -17.97 | 68.20 | 100 | 180 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

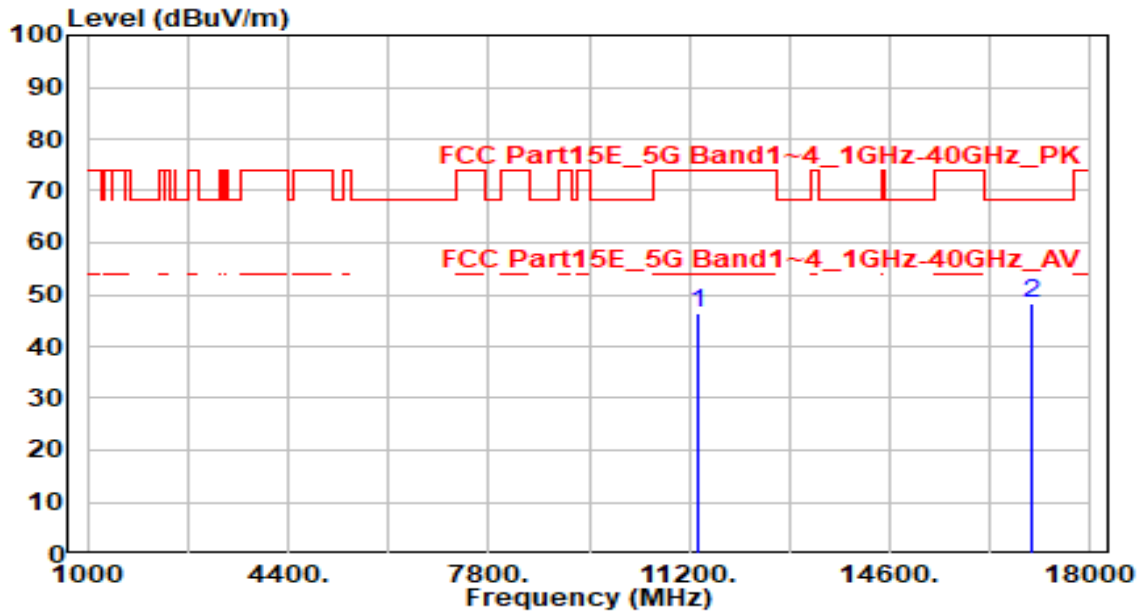


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11340.000 | 40.63 | 5.92 | 46.56 | -27.44 | 74.00 | 100 | 205 | Peak |
| 2 | * 17010.000 | 41.90 | 6.44 | 48.34 | -19.86 | 68.20 | 100 | 225 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

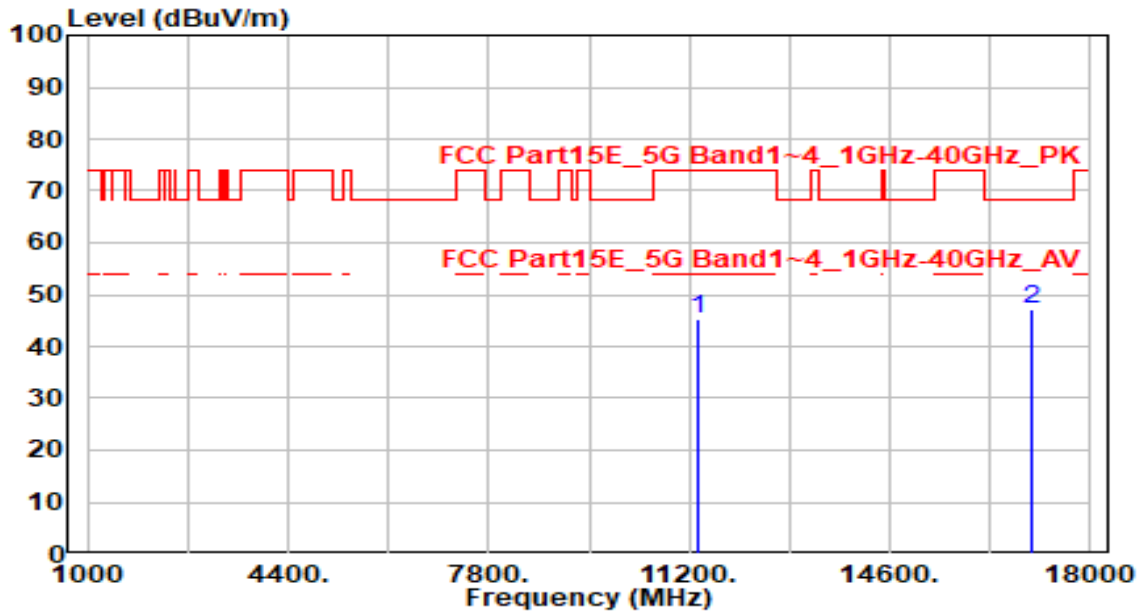


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11340.000 | 39.44 | 5.92 | 45.36 | -28.64 | 74.00 | 100 | 320 | Peak |
| 2 | * 17010.000 | 40.78 | 6.44 | 47.22 | -20.98 | 68.20 | 100 | 280 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

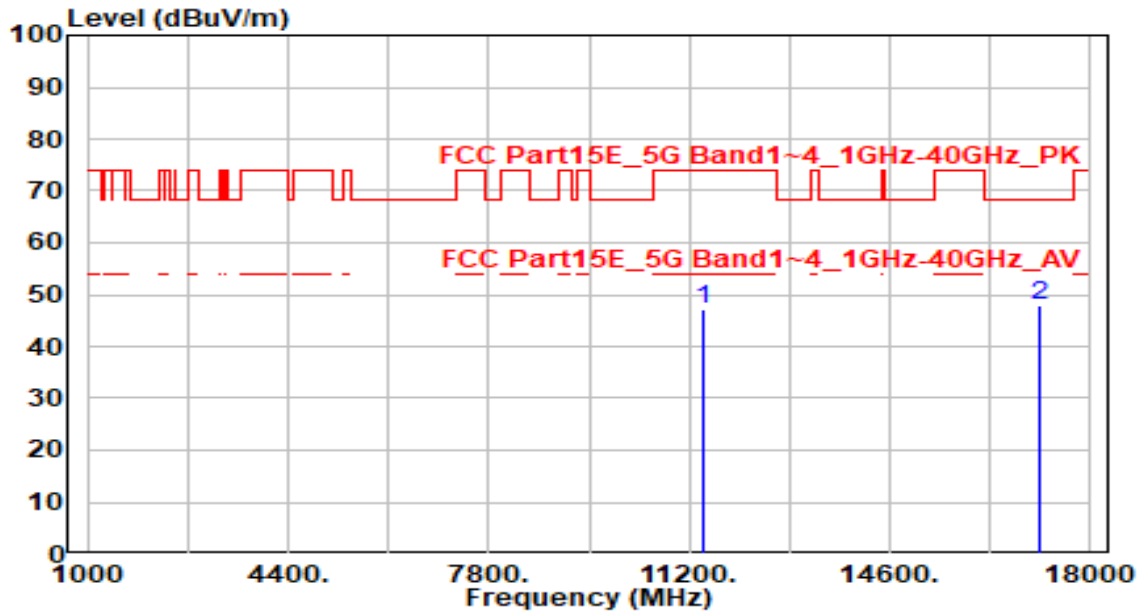


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11420.000 | 41.35 | 5.98 | 47.33 | -26.67 | 74.00 | 100 | 155 | Peak |
| 2 | * 17130.000 | 41.85 | 6.07 | 47.92 | -20.28 | 68.20 | 100 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

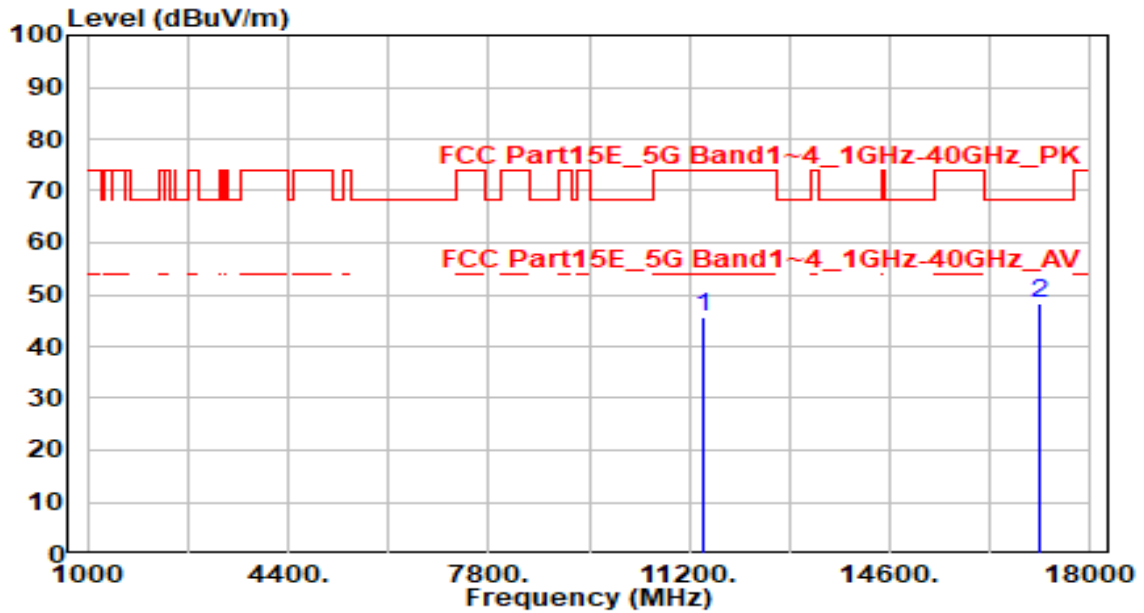


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11420.000 | 39.54 | 5.98 | 45.52 | -28.48 | 74.00 | 100 | 270 | Peak |
| 2 | * 17130.000 | 42.16 | 6.07 | 48.23 | -19.97 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

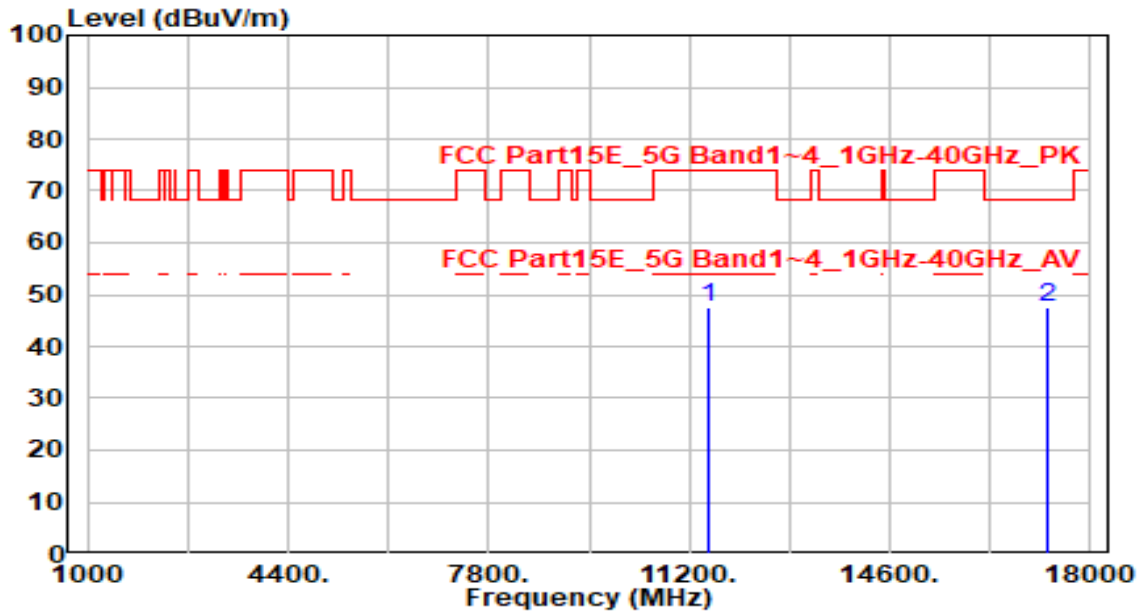


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11510.000 | 41.62 | 5.94 | 47.55 | -26.45 | 74.00 | 100 | 305 | Peak |
| 2 | * 17265.000 | 41.98 | 5.72 | 47.70 | -20.50 | 68.20 | 100 | 275 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

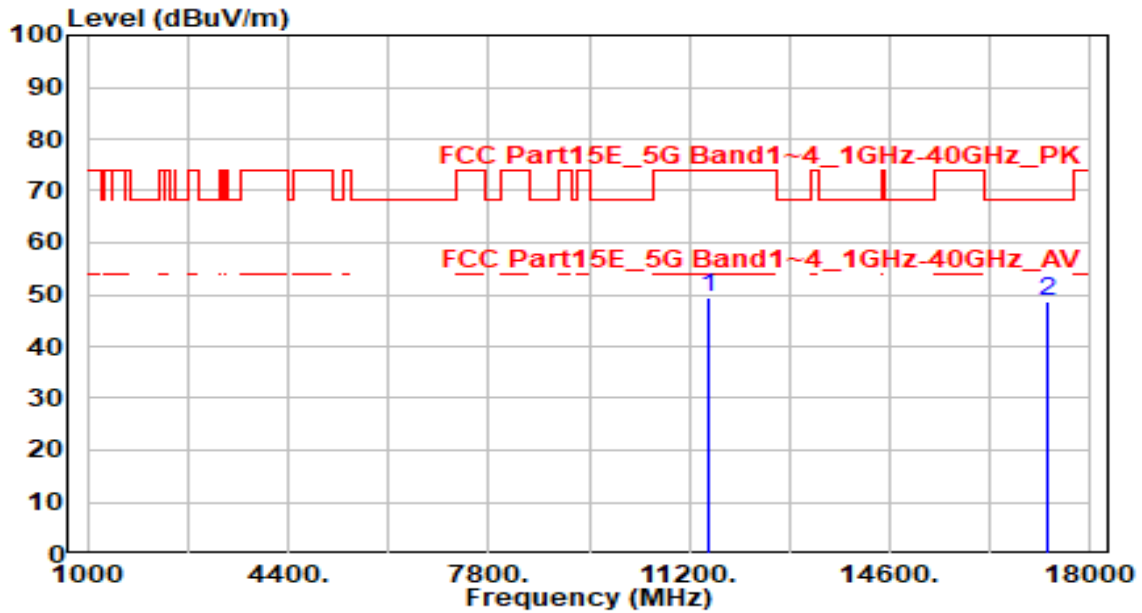


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11510.000 | 43.64 | 5.94 | 49.58 | -24.42 | 74.00 | 100 | 195 | Peak |
| 2 | * 17265.000 | 42.98 | 5.72 | 48.70 | -19.50 | 68.20 | 100 | 235 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

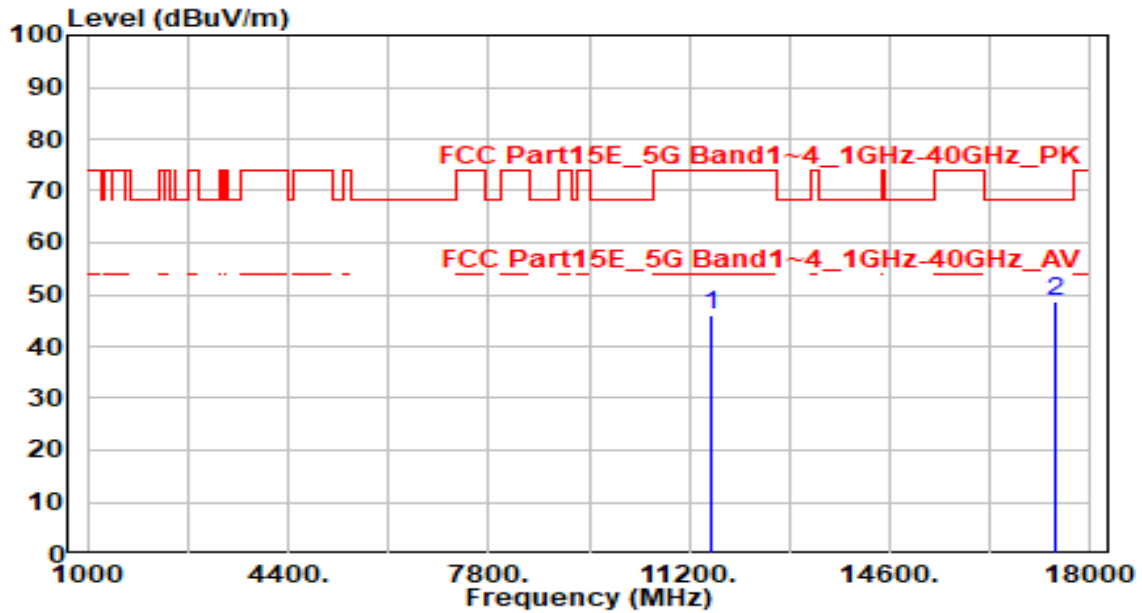


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11590.000 | 40.10 | 5.90 | 46.00 | -28.00 | 74.00 | 100 | 0 | Peak |
| 2 | * 17385.000 | 43.33 | 5.47 | 48.81 | -19.39 | 68.20 | 100 | 85 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

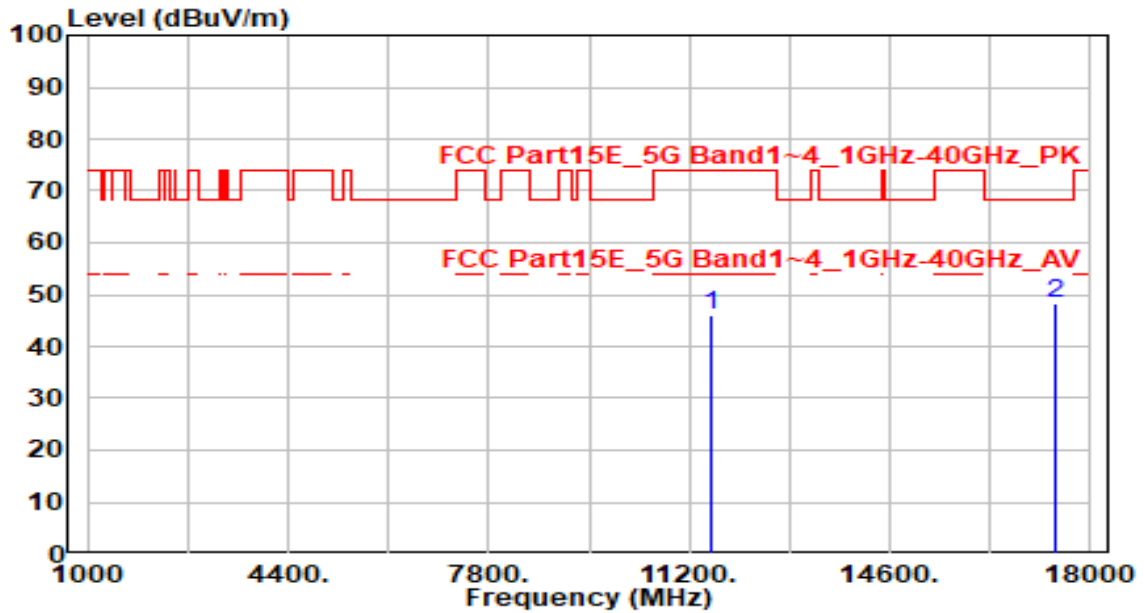


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11590.000 | 40.09 | 5.90 | 46.00 | -28.00 | 74.00 | 100 | 145 | Peak |
| 2 | * 17385.000 | 42.66 | 5.47 | 48.13 | -20.07 | 68.20 | 100 | 315 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

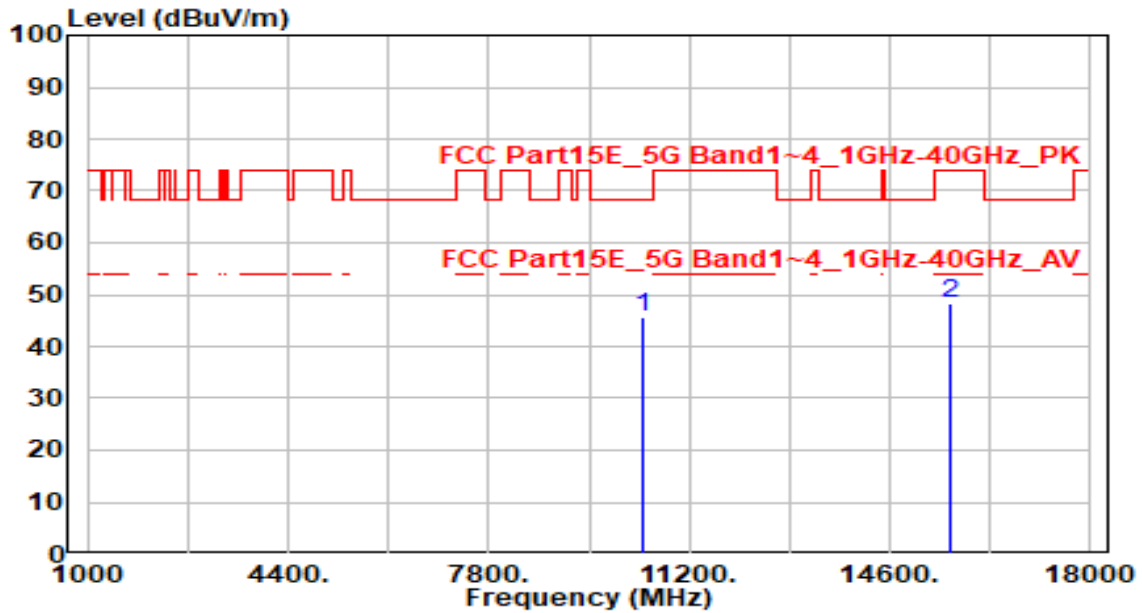


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10420.000 | 40.21 | 5.29 | 45.49 | -22.71 | 68.20 | 100 | 15 | Peak |
| 2 | 15630.000 | 41.80 | 6.49 | 48.29 | -25.71 | 74.00 | 100 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

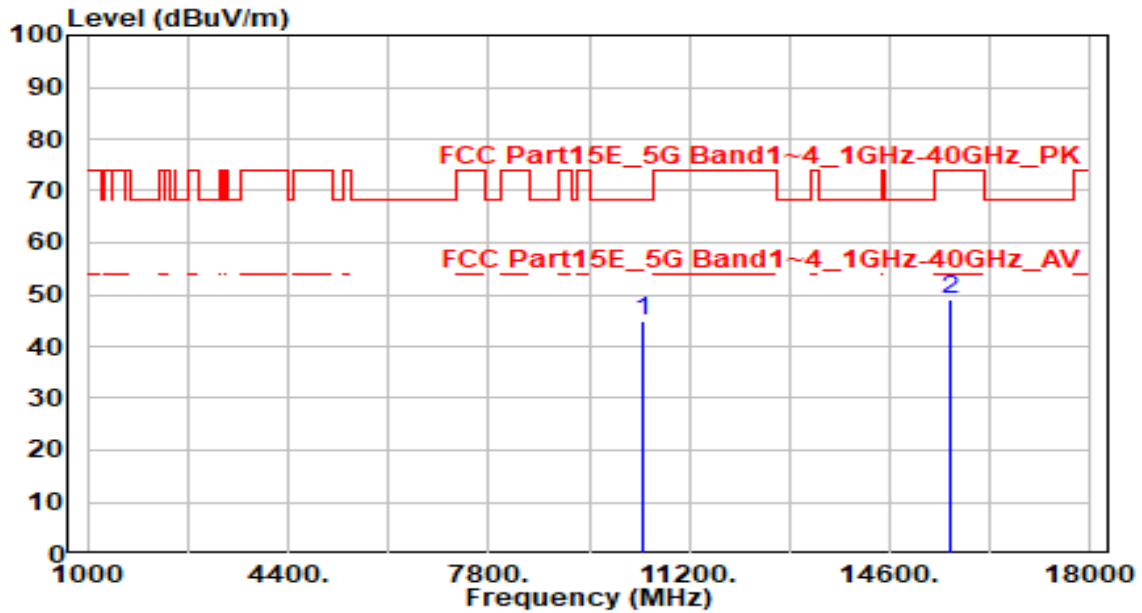


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10420.000 | 39.72 | 5.29 | 45.01 | -23.19 | 68.20 | 100 | 285 | Peak |
| 2 | 15630.000 | 42.47 | 6.49 | 48.96 | -25.04 | 74.00 | 100 | 300 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

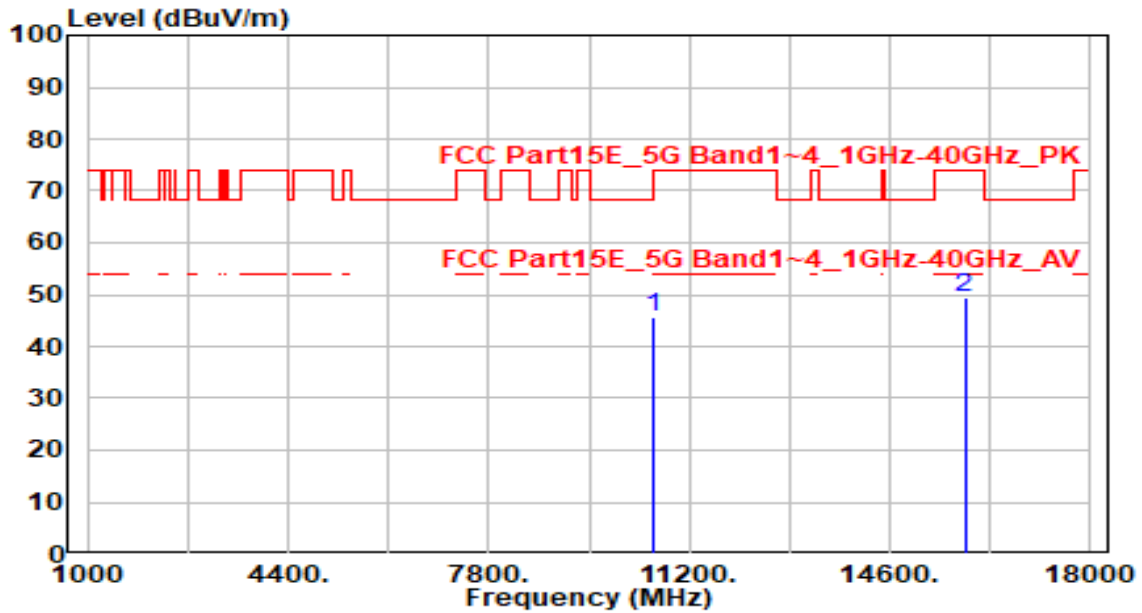


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 40.53 | 5.25 | 45.78 | -22.42 | 68.20 | 100 | 345 | Peak |
| 2 | | 42.69 | 6.93 | 49.62 | -24.38 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

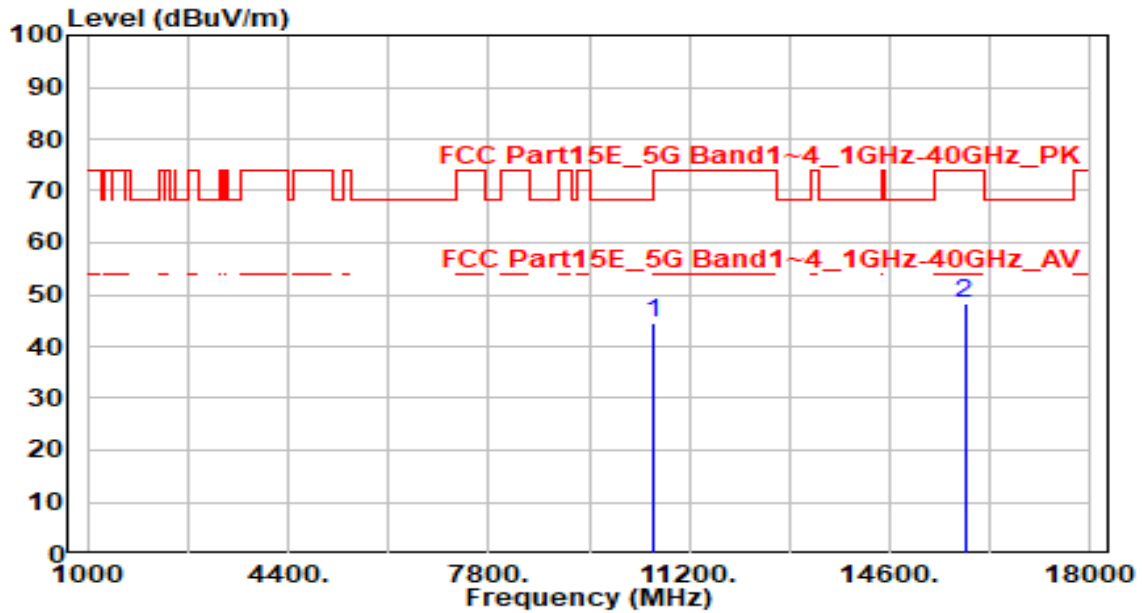


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10580.000 | 39.14 | 5.25 | 44.39 | -23.81 | 68.20 | 100 | 260 | Peak |
| 2 | 15870.000 | 41.54 | 6.93 | 48.47 | -25.53 | 74.00 | 100 | 340 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

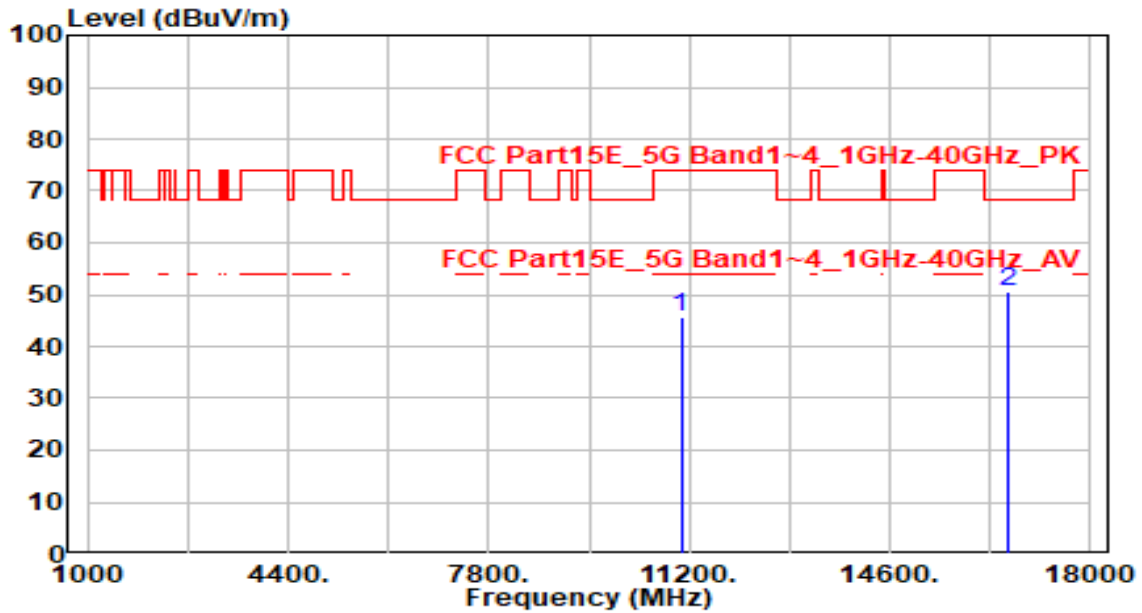


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11060.000 | 40.09 | 5.62 | 45.72 | -28.28 | 74.00 | 100 | 295 | Peak |
| 2 | * 16590.000 | 42.97 | 7.48 | 50.45 | -17.75 | 68.20 | 100 | 355 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

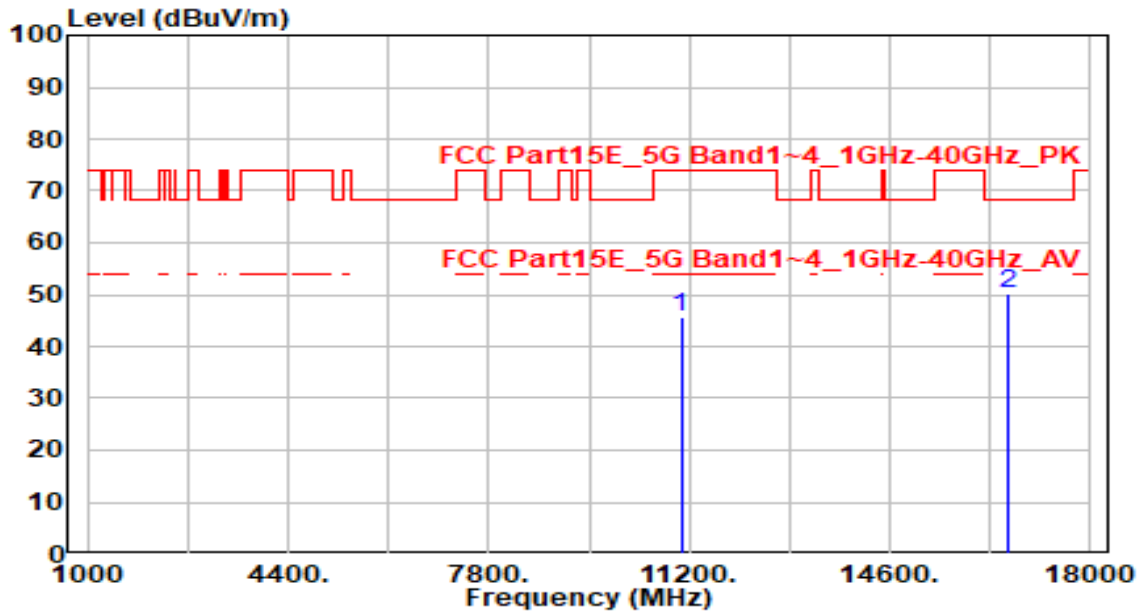


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11060.000 | 40.01 | 5.62 | 45.64 | -28.36 | 74.00 | 100 | 350 | Peak |
| 2 | * 16590.000 | 42.74 | 7.48 | 50.22 | -17.98 | 68.20 | 100 | 215 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

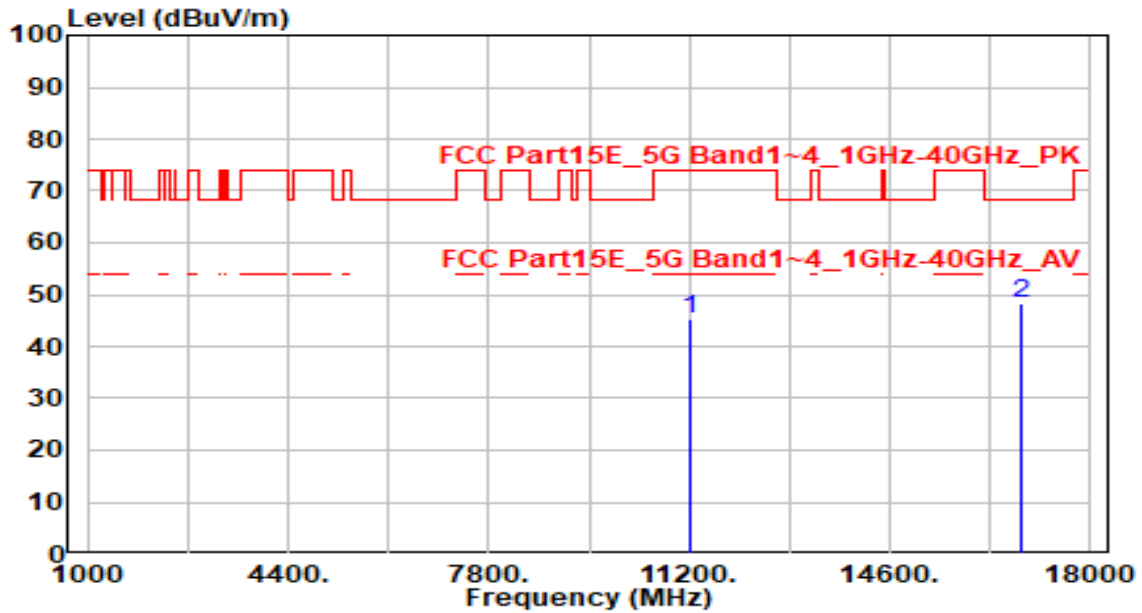


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11220.000 | 39.58 | 5.79 | 45.38 | -28.62 | 74.00 | 100 | 85 | Peak |
| 2 | * 16830.000 | 41.11 | 7.17 | 48.28 | -19.92 | 68.20 | 100 | 105 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

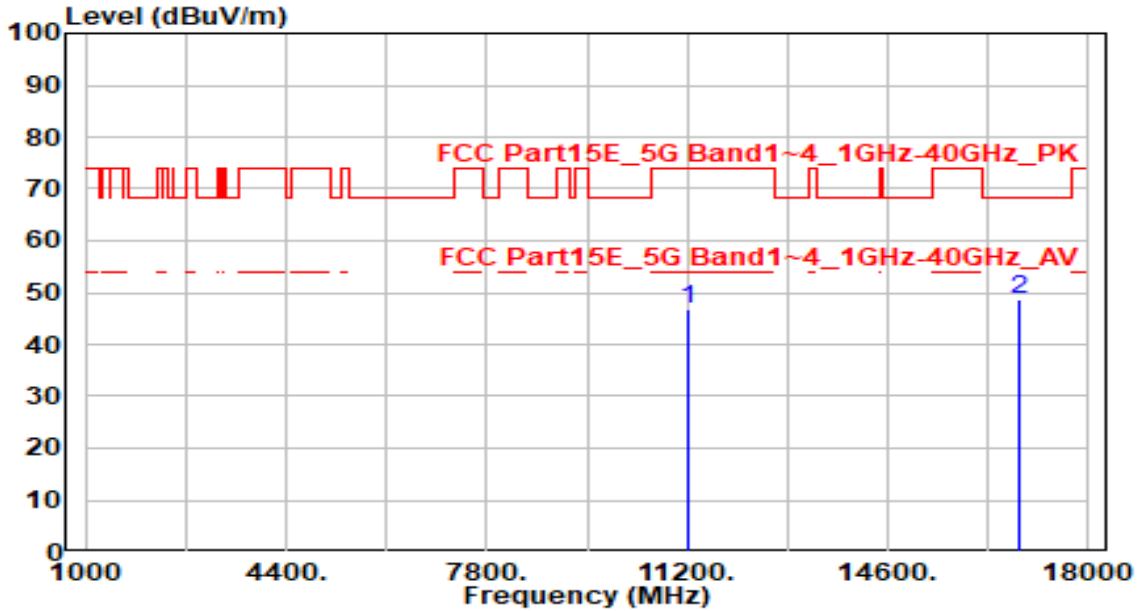


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11220.000 | 41.16 | 5.79 | 46.96 | -27.04 | 74.00 | 100 | 240 | Peak |
| 2 | * 16830.000 | 41.53 | 7.17 | 48.70 | -19.50 | 68.20 | 100 | 250 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

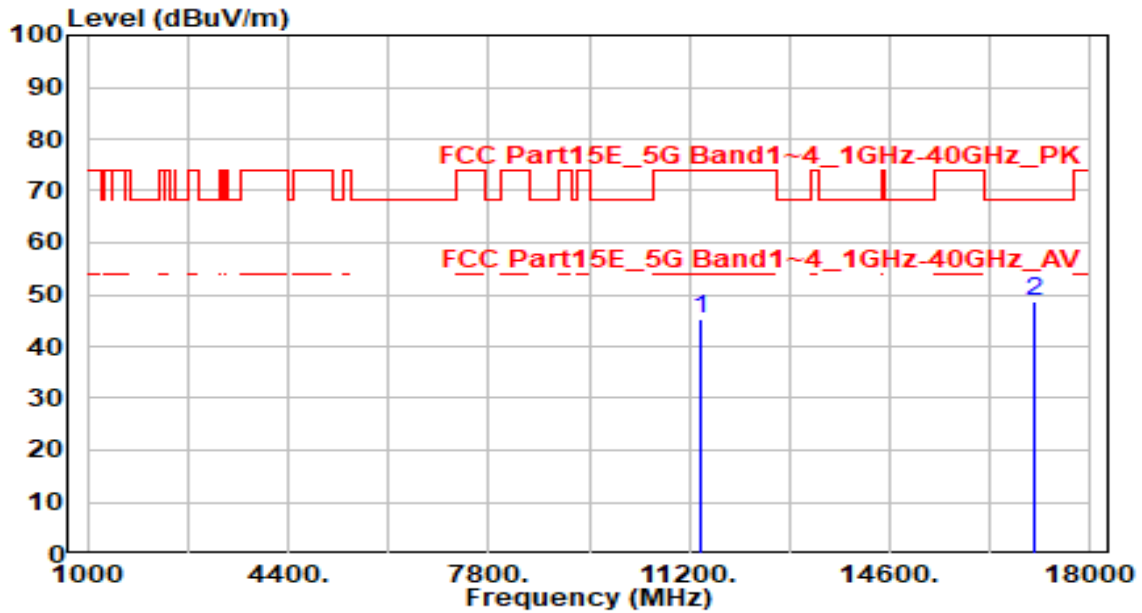


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11380.000 | 39.18 | 5.96 | 45.14 | -28.86 | 74.00 | 100 | 120 | Peak |
| 2 | * 17070.000 | 42.33 | 6.26 | 48.58 | -19.62 | 68.20 | 100 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

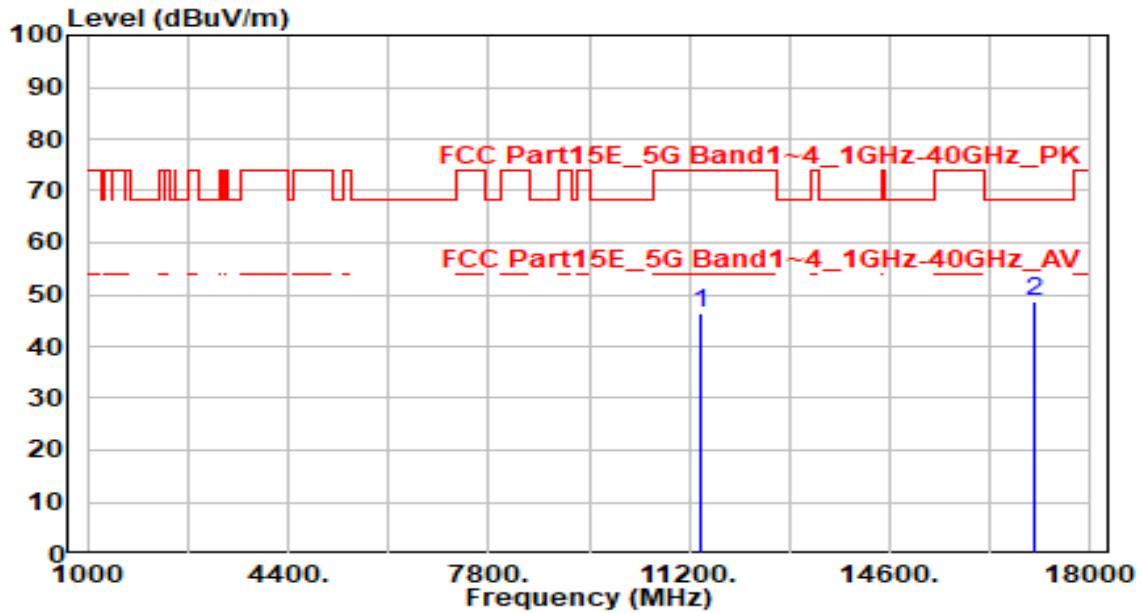


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11380.000 | 40.36 | 5.96 | 46.33 | -27.67 | 74.00 | 100 | 220 | Peak |
| 2 | * 17070.000 | 42.33 | 6.26 | 48.58 | -19.62 | 68.20 | 100 | 270 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

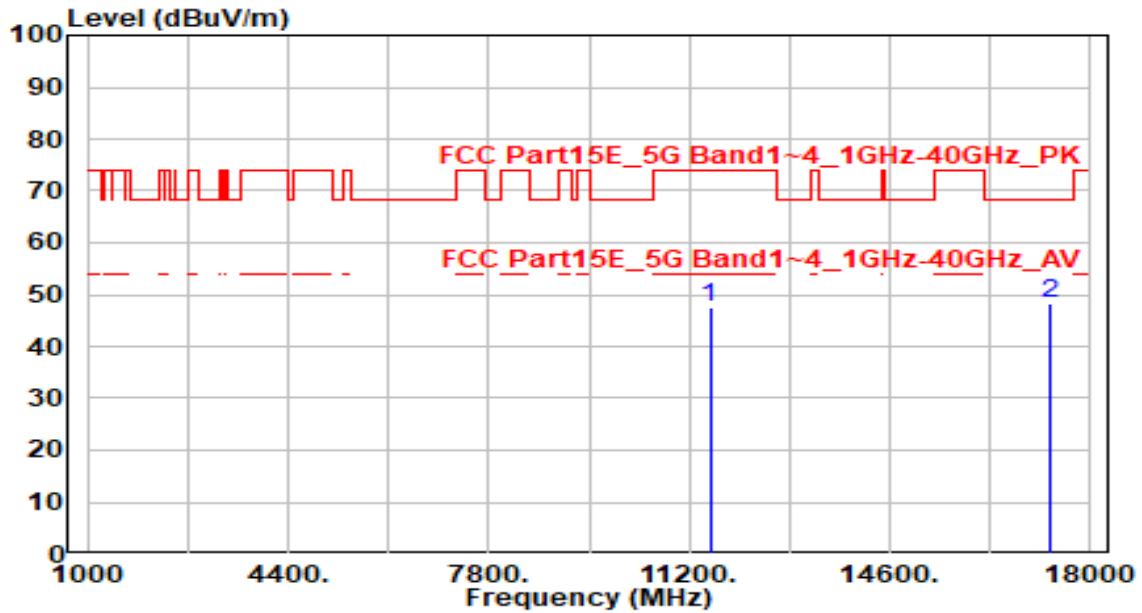


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11550.000 | 41.79 | 5.92 | 47.71 | -26.29 | 74.00 | 100 | 360 | Peak |
| 2 | * 17325.000 | 42.71 | 5.60 | 48.31 | -19.89 | 68.20 | 100 | 25 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

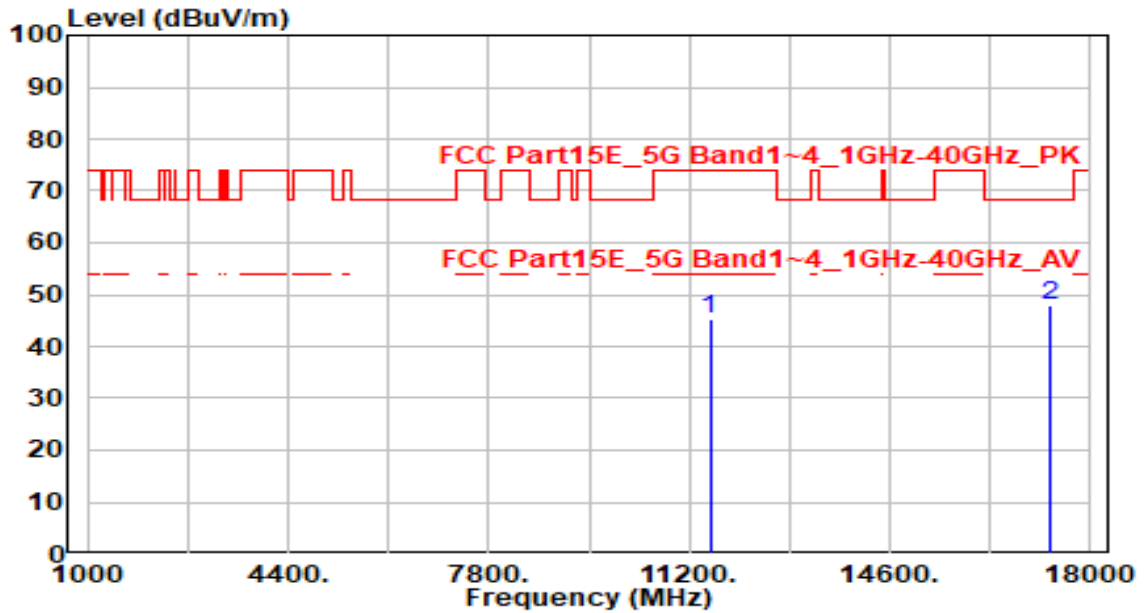


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11550.000 | 39.44 | 5.92 | 45.36 | -28.64 | 74.00 | 100 | 0 | Peak |
| 2 | * 17325.000 | 42.50 | 5.60 | 48.09 | -20.11 | 68.20 | 100 | 335 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

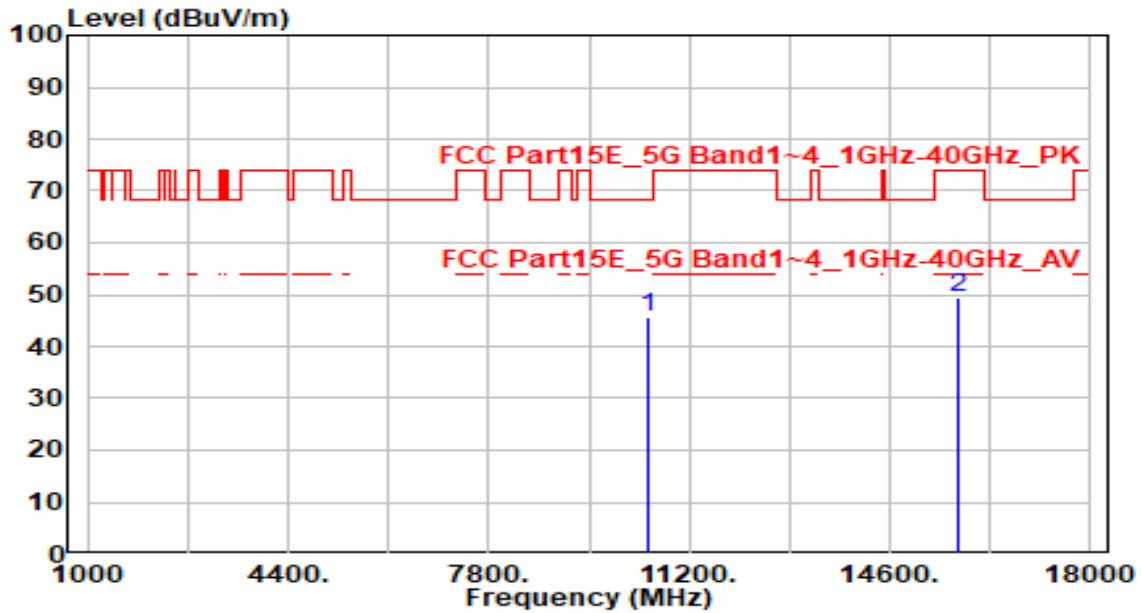


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 10500.000 | 40.42 | 5.25 | 45.67 | -22.53 | 68.20 | 100 | 160 | Peak |
| 2 | | 15750.000 | 42.77 | 6.76 | 49.54 | -24.46 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

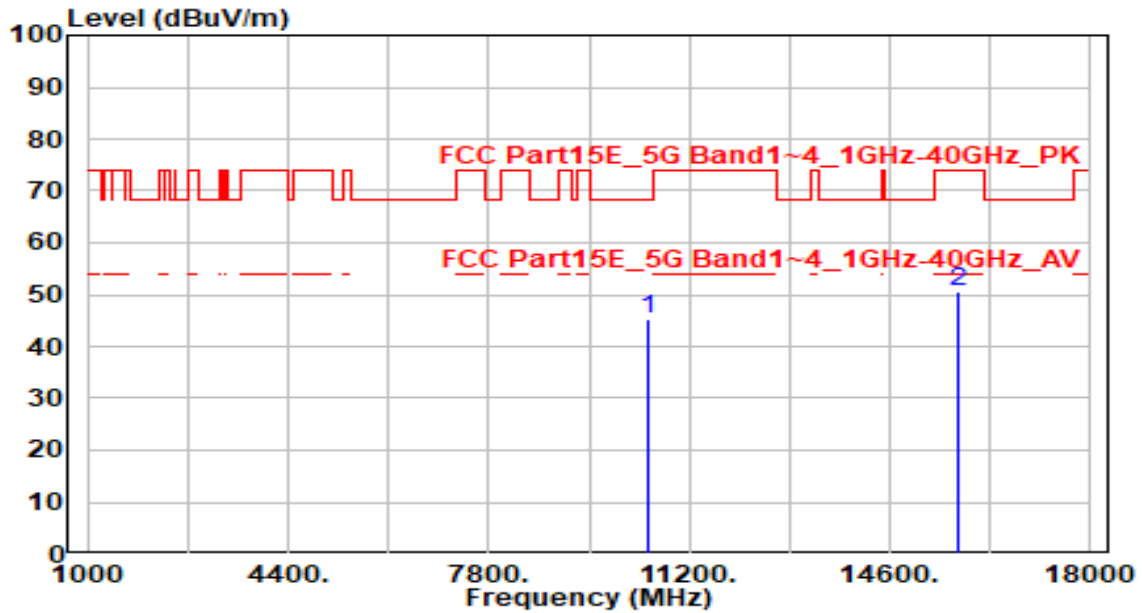


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10500.000 | 40.04 | 5.25 | 45.29 | -22.91 | 68.20 | 100 | 5 | Peak |
| 2 | 15750.000 | 43.64 | 6.76 | 50.40 | -23.60 | 74.00 | 100 | 205 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

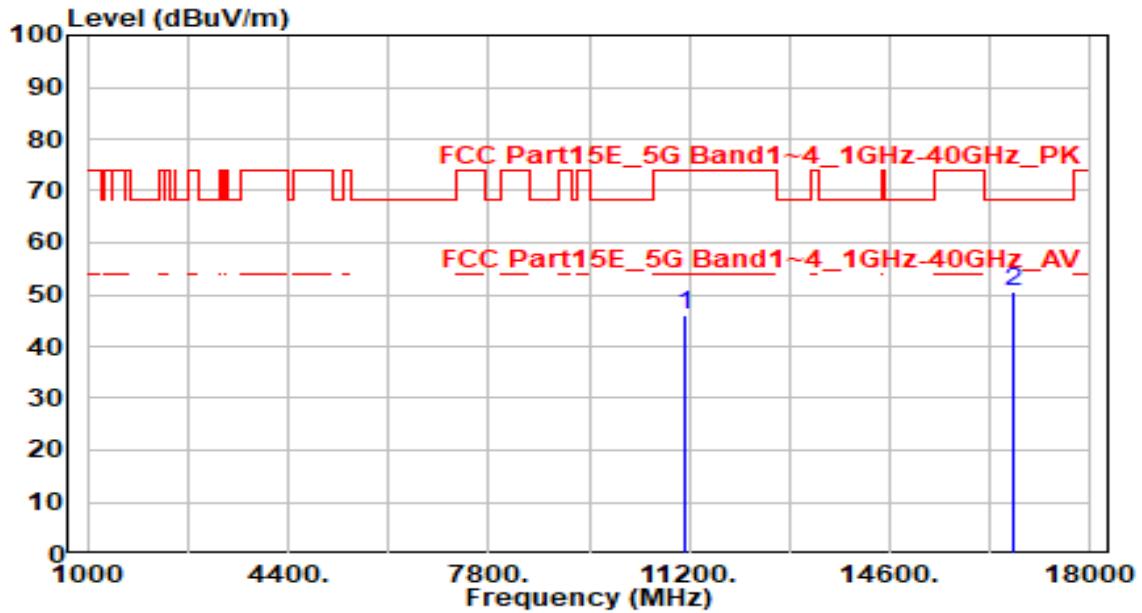


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11140.000 | 40.15 | 5.71 | 45.86 | -28.14 | 74.00 | 100 | 215 | Peak |
| 2 | * 16710.000 | 42.72 | 7.67 | 50.39 | -17.81 | 68.20 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

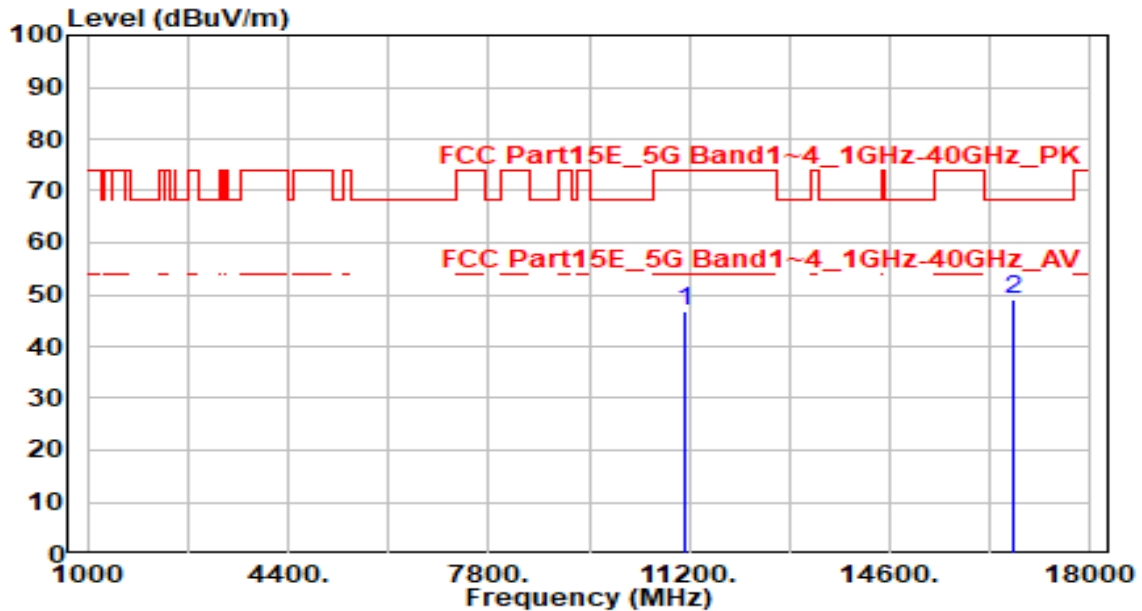


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11140.000 | 40.95 | 5.71 | 46.66 | -27.34 | 74.00 | 100 | 140 | Peak |
| 2 | * 16710.000 | 41.47 | 7.67 | 49.14 | -19.06 | 68.20 | 100 | 165 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

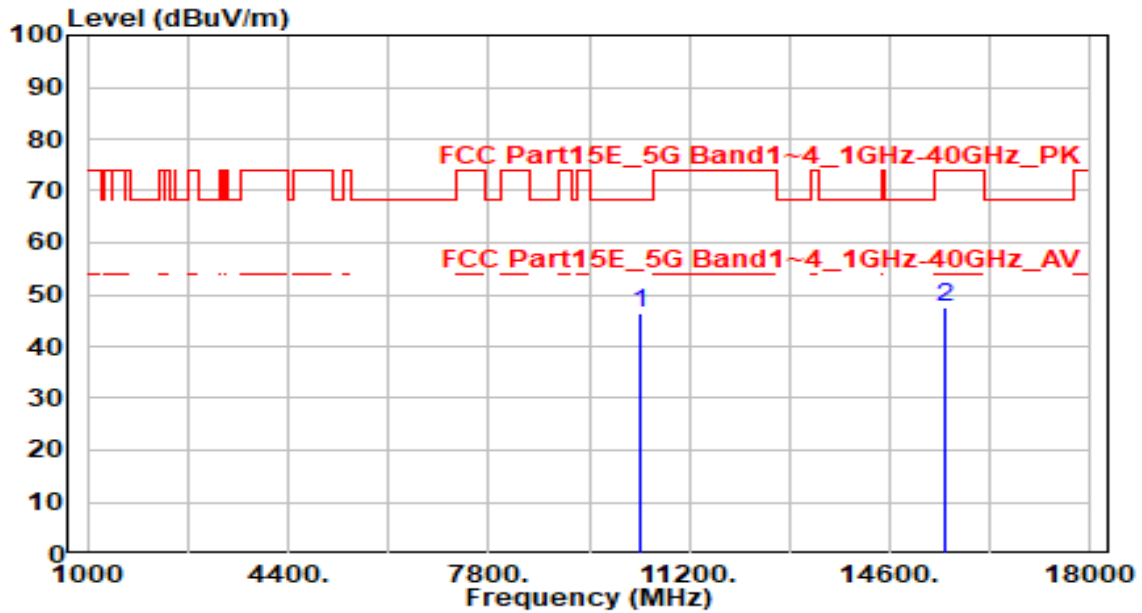


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10360.000 | 41.29 | 5.29 | 46.58 | -21.62 | 68.20 | 100 | 85 | Peak |
| 2 | 15540.000 | 41.20 | 6.41 | 47.61 | -26.39 | 74.00 | 100 | 200 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

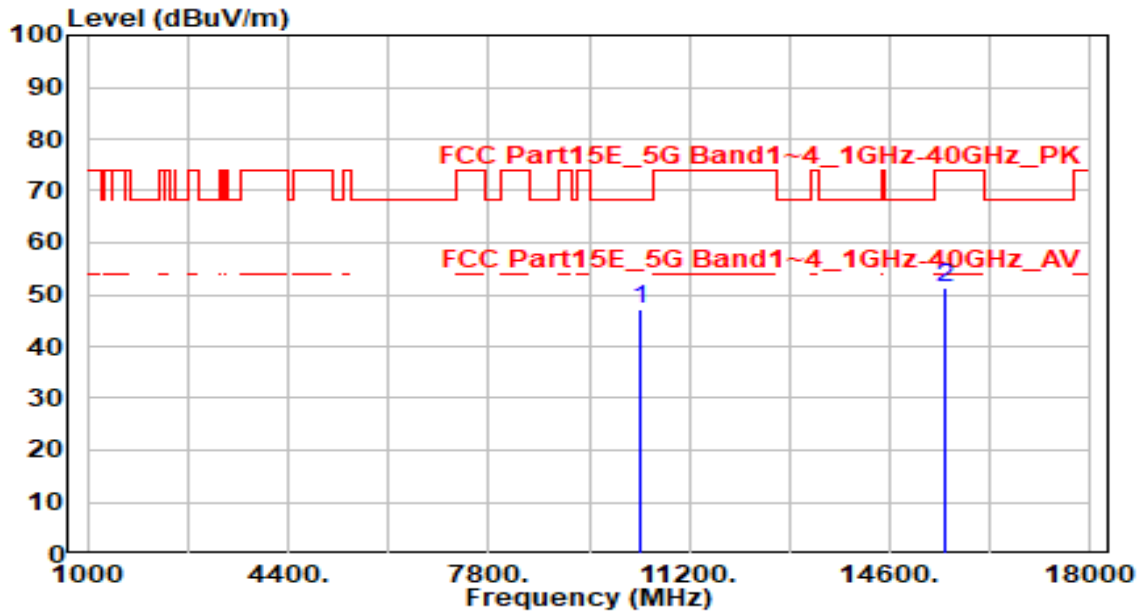


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 41.94 | 5.29 | 47.23 | -20.97 | 68.20 | 100 | 135 | Peak |
| 2 | | 44.97 | 6.41 | 51.37 | -22.63 | 74.00 | 100 | 300 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

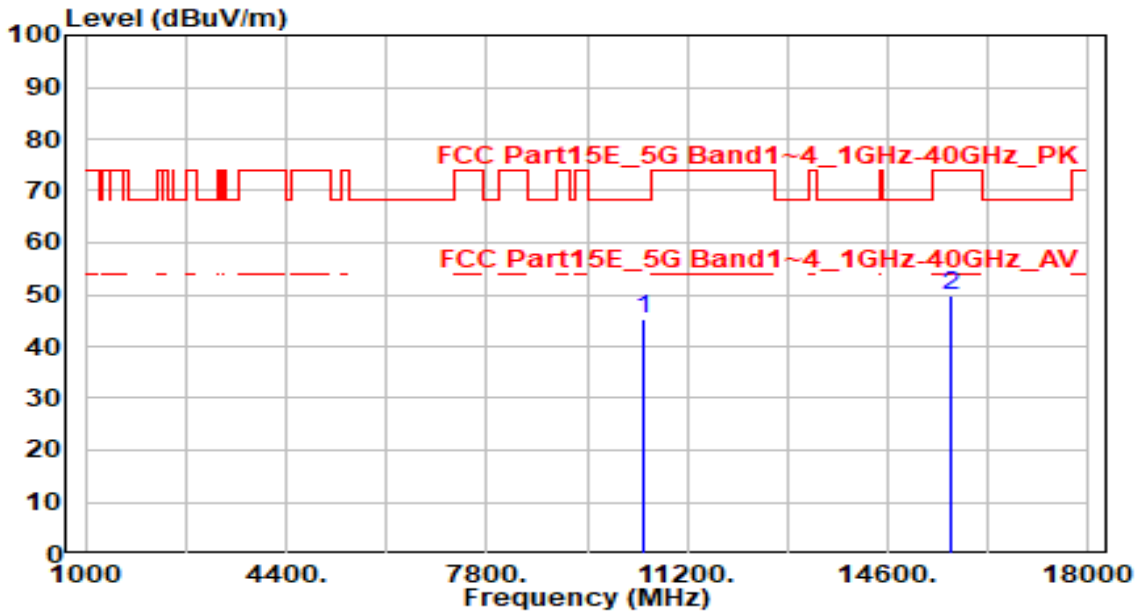


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10440.000 | 40.01 | 5.28 | 45.29 | -22.91 | 68.20 | 100 | 285 | Peak |
| 2 | 15660.000 | 43.10 | 6.56 | 49.66 | -24.34 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

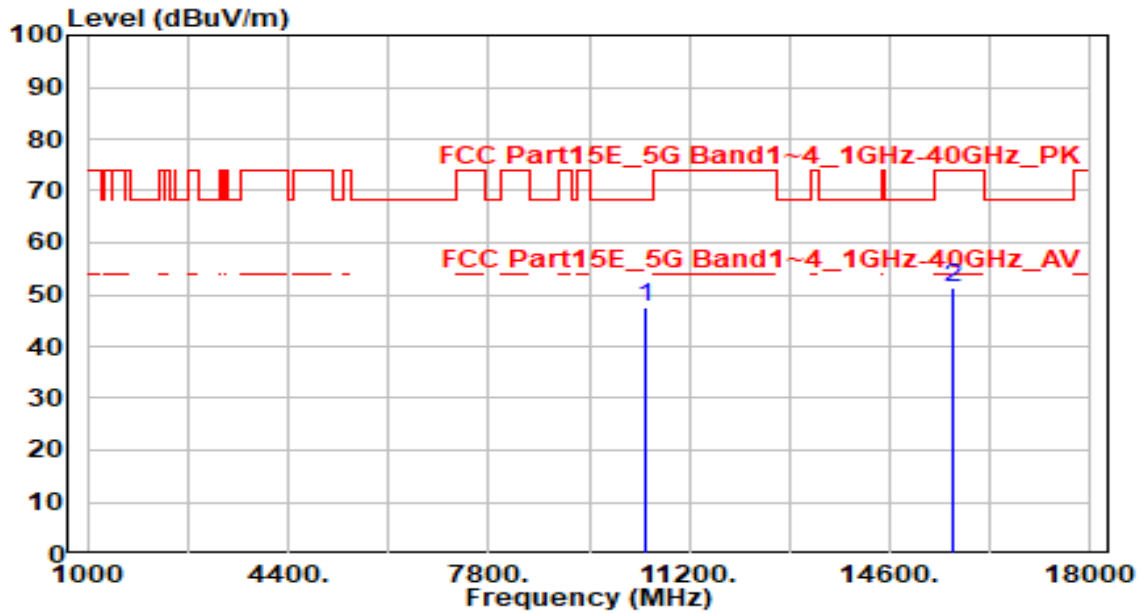


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 42.10 | 5.28 | 47.38 | -20.82 | 68.20 | 100 | 195 | Peak |
| 2 | | 44.78 | 6.56 | 51.34 | -22.66 | 74.00 | 100 | 80 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 48_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

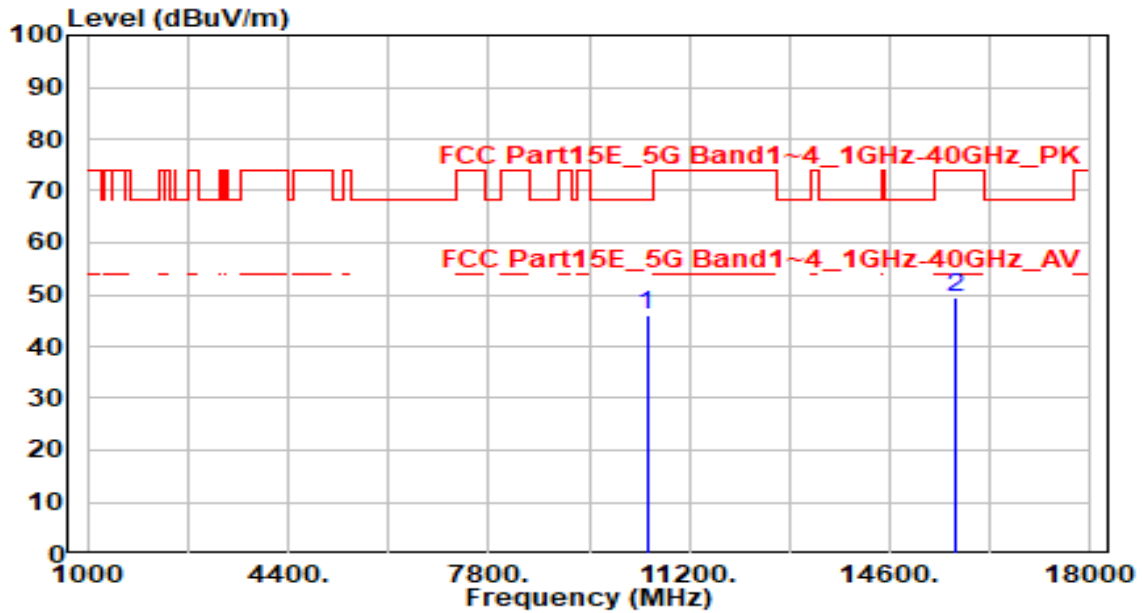


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10480.000 | 40.83 | 5.26 | 46.09 | -22.11 | 68.20 | 100 | 50 | Peak |
| 2 | 15720.000 | 42.83 | 6.69 | 49.53 | -24.47 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 48_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

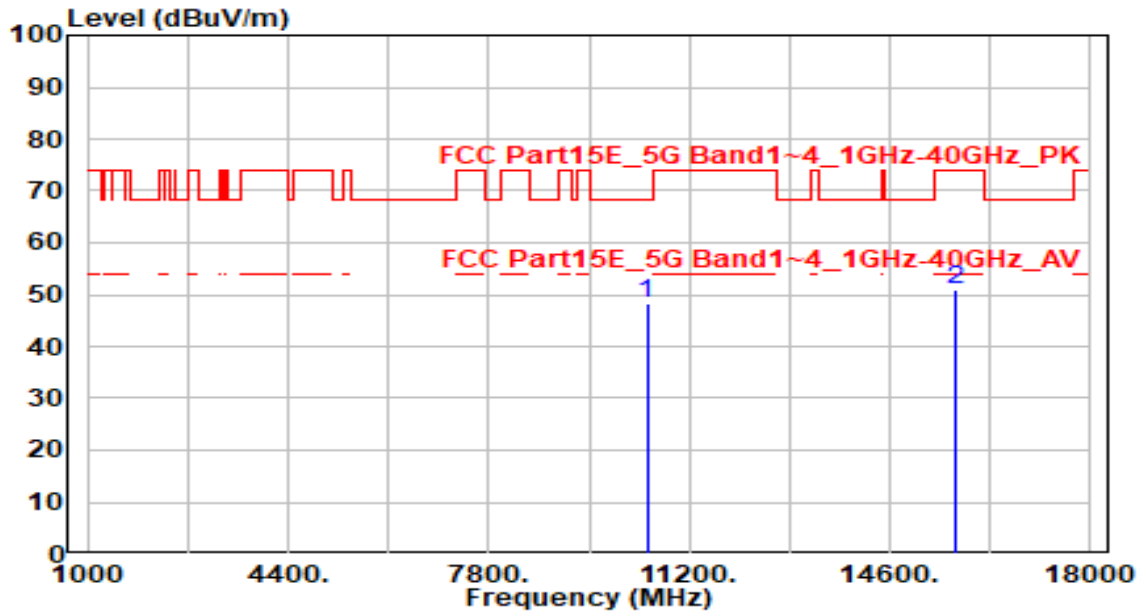


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10480.000 | 43.23 | 5.26 | 48.49 | -19.71 | 68.20 | 100 | 200 | Peak |
| 2 | 15720.000 | 44.43 | 6.69 | 51.12 | -22.88 | 74.00 | 100 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 52_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

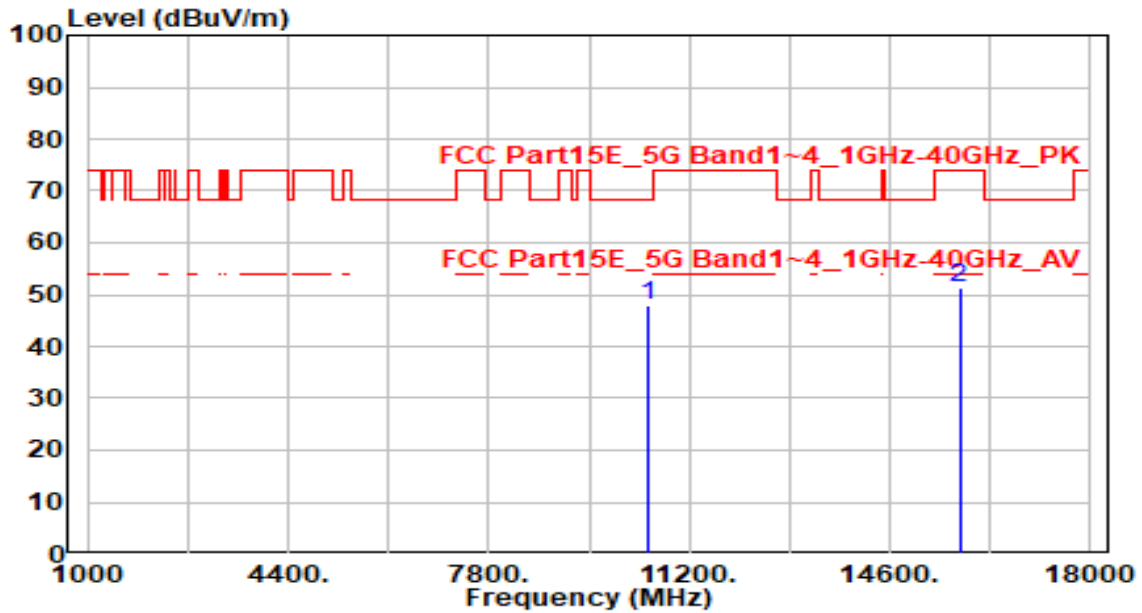


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10520.000 | 42.58 | 5.25 | 47.83 | -20.37 | 68.20 | 100 | 15 | Peak |
| 2 | 15780.000 | 44.64 | 6.83 | 51.47 | -22.53 | 74.00 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 52_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

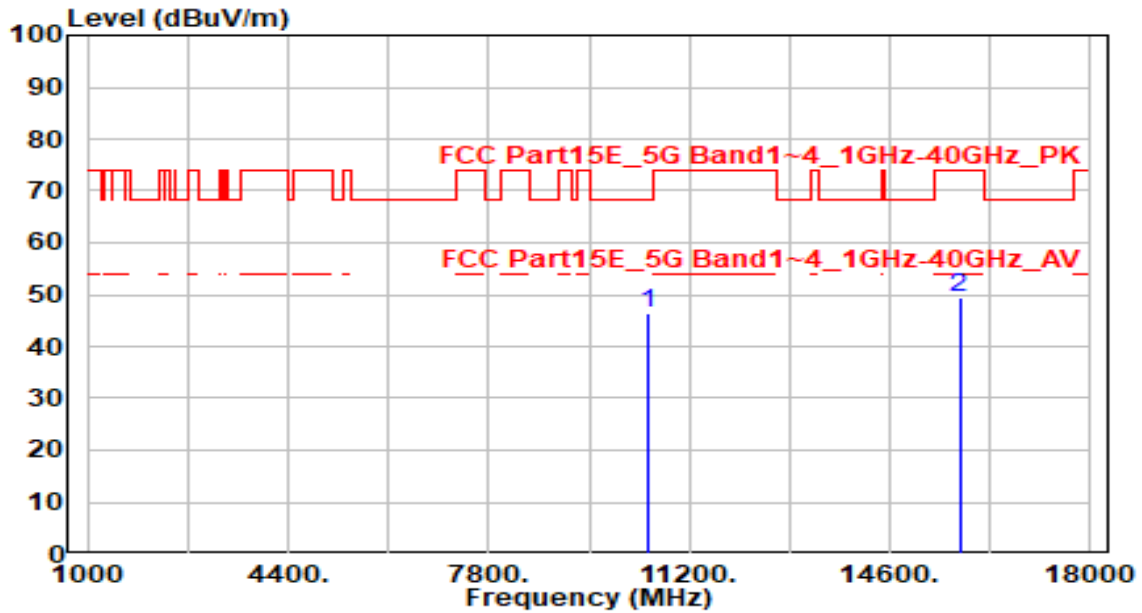


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10520.000 | 41.14 | 5.25 | 46.39 | -21.81 | 68.20 | 100 | 110 | Peak |
| 2 | 15780.000 | 42.50 | 6.83 | 49.33 | -24.67 | 74.00 | 100 | 240 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 60_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

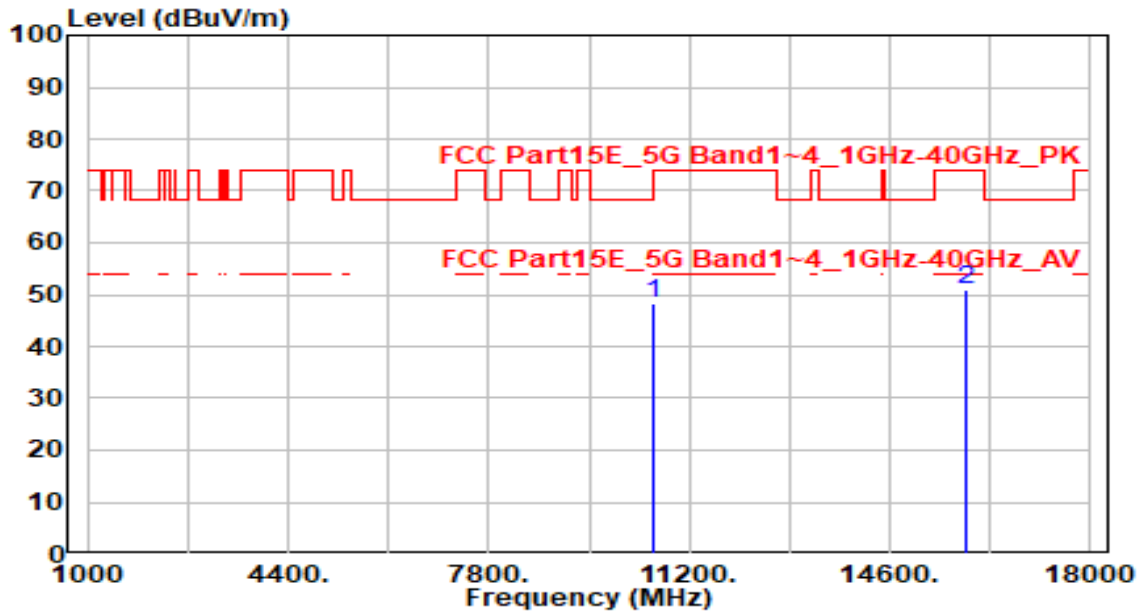


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10600.000 | 42.95 | 5.25 | 48.20 | -20.00 | 68.20 | 100 | 100 | Peak |
| 2 | 15900.000 | 43.84 | 6.95 | 50.79 | -23.21 | 74.00 | 100 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 60_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

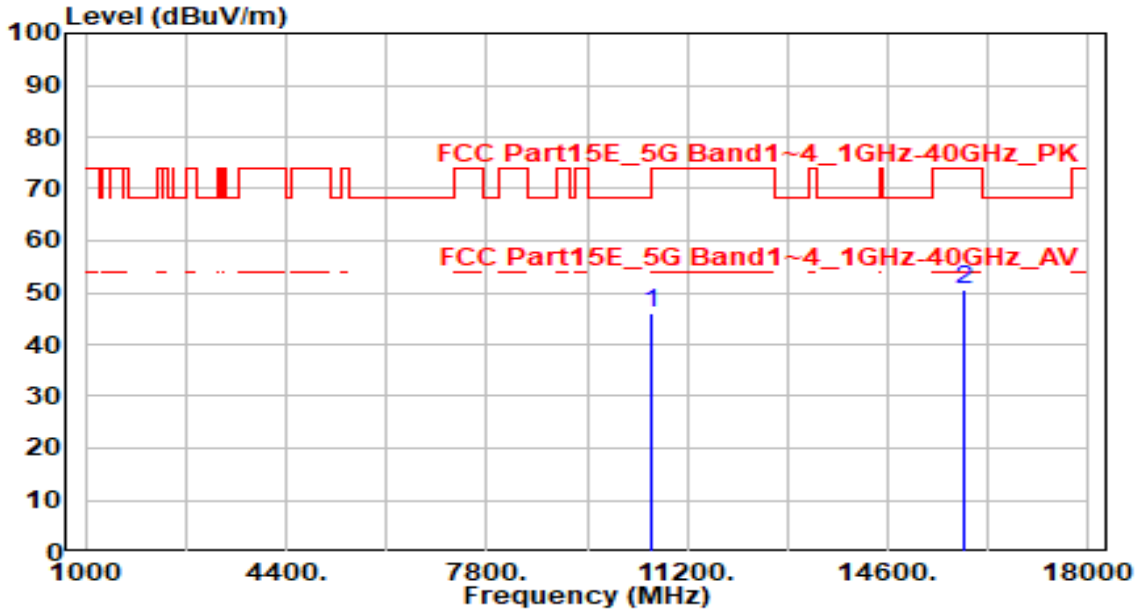


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10600.000 | 40.67 | 5.25 | 45.92 | -22.28 | 68.20 | 100 | 120 | Peak |
| 2 | 15900.000 | 43.53 | 6.95 | 50.48 | -23.52 | 74.00 | 100 | 70 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

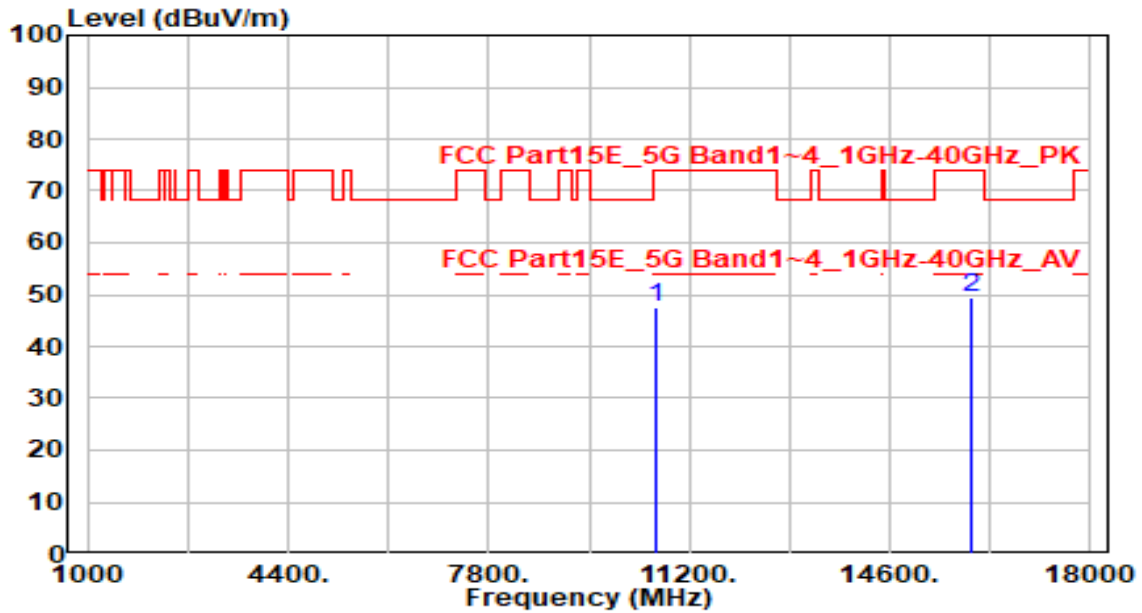


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10640.000 | 42.26 | 5.27 | 47.53 | -26.47 | 74.00 | 100 | 325 | Peak |
| 2 | * 15960.000 | 42.31 | 7.00 | 49.31 | -24.69 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

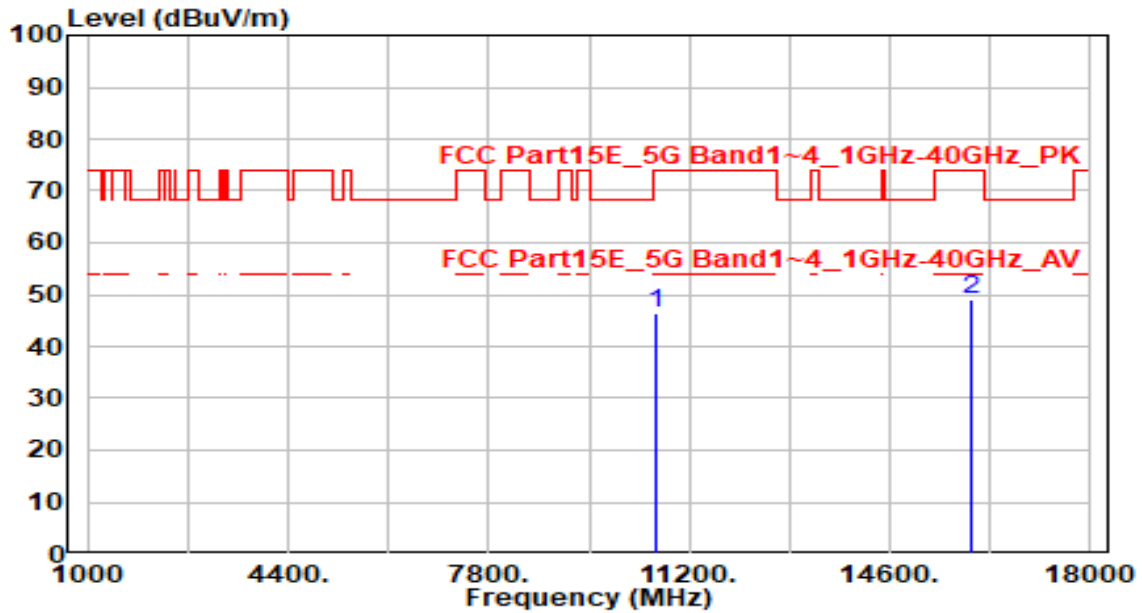


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10640.000 | 41.12 | 5.27 | 46.39 | -27.61 | 74.00 | 100 | 185 | Peak |
| 2 | * 15960.000 | 42.12 | 7.00 | 49.12 | -24.88 | 74.00 | 100 | 260 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

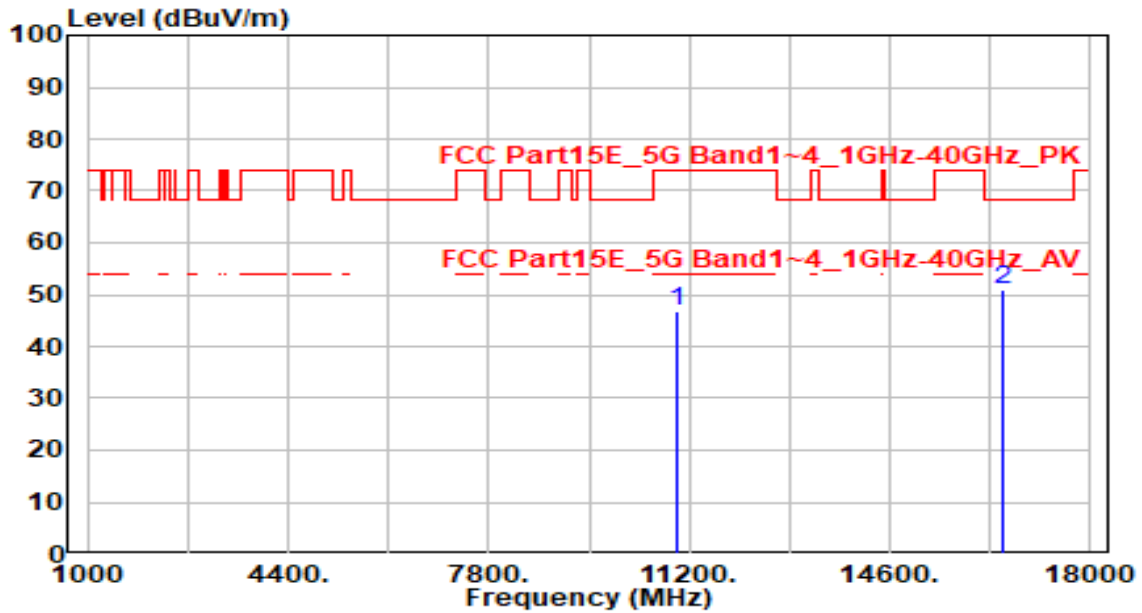


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11000.000 | 41.20 | 5.56 | 46.76 | -27.24 | 74.00 | 100 | 35 | Peak |
| 2 | * 16500.000 | 43.42 | 7.34 | 50.76 | -17.44 | 68.20 | 100 | 80 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

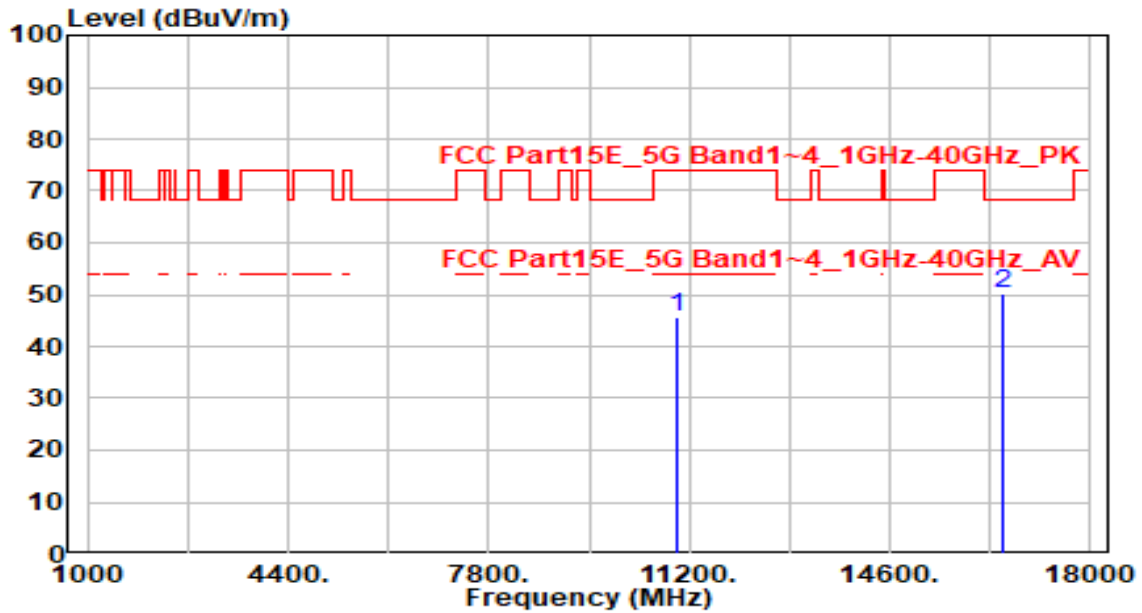


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11000.000 | 39.93 | 5.56 | 45.49 | -28.51 | 74.00 | 100 | 205 | Peak |
| 2 | * 16500.000 | 42.96 | 7.34 | 50.30 | -17.90 | 68.20 | 100 | 240 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

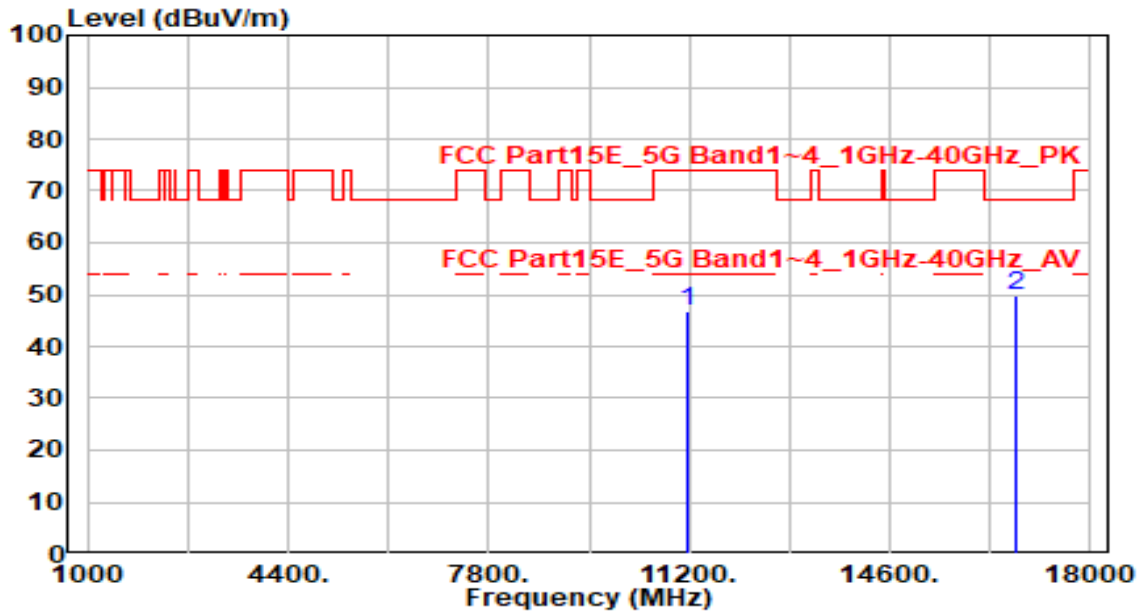


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11160.000 | 40.91 | 5.73 | 46.64 | -27.36 | 74.00 | 100 | 310 | Peak |
| 2 | * 16740.000 | 42.28 | 7.72 | 49.99 | -18.21 | 68.20 | 100 | 305 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 116_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

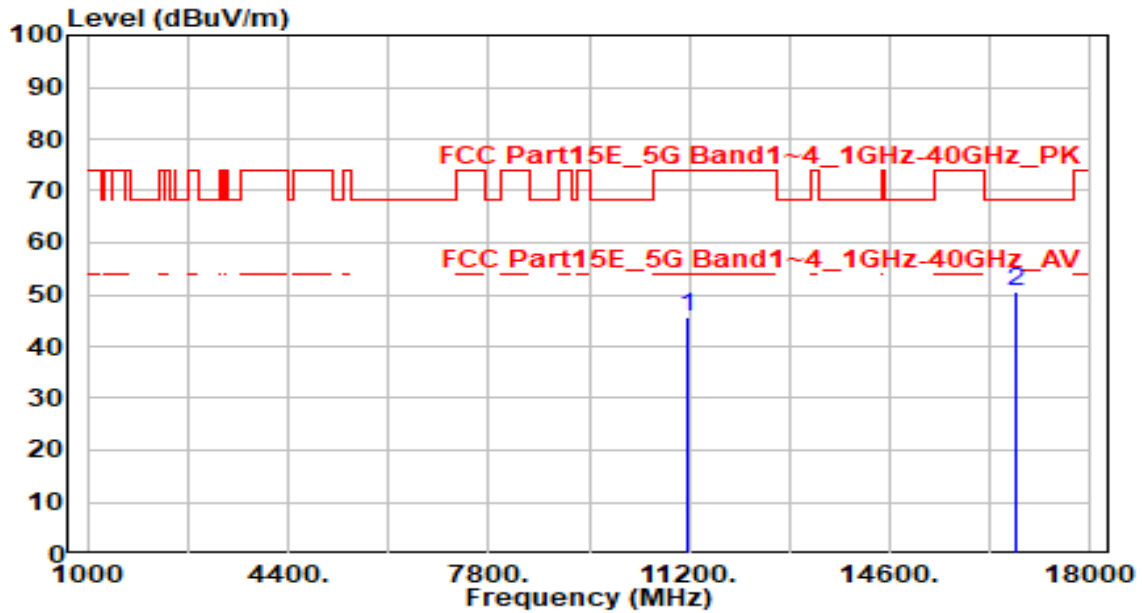


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11160.000 | 40.08 | 5.73 | 45.81 | -28.19 | 74.00 | 100 | 225 | Peak |
| 2 | * 16740.000 | 42.87 | 7.72 | 50.59 | -17.61 | 68.20 | 100 | 15 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

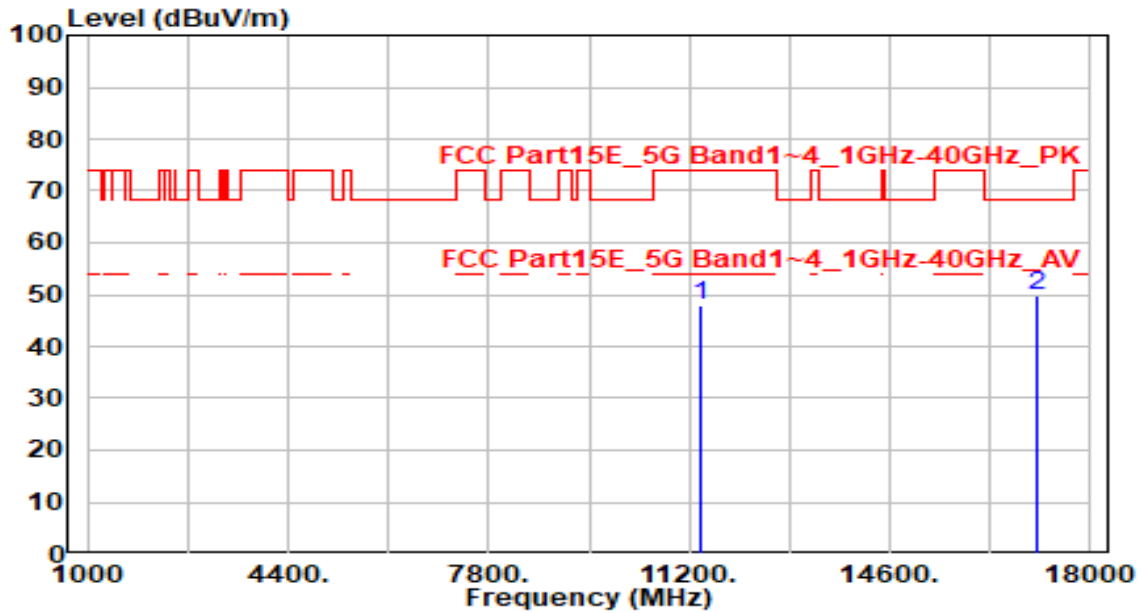


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11400.000 | 42.06 | 5.98 | 48.04 | -25.96 | 74.00 | 100 | 280 | Peak |
| 2 | * 17100.000 | 43.61 | 6.16 | 49.78 | -18.42 | 68.20 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

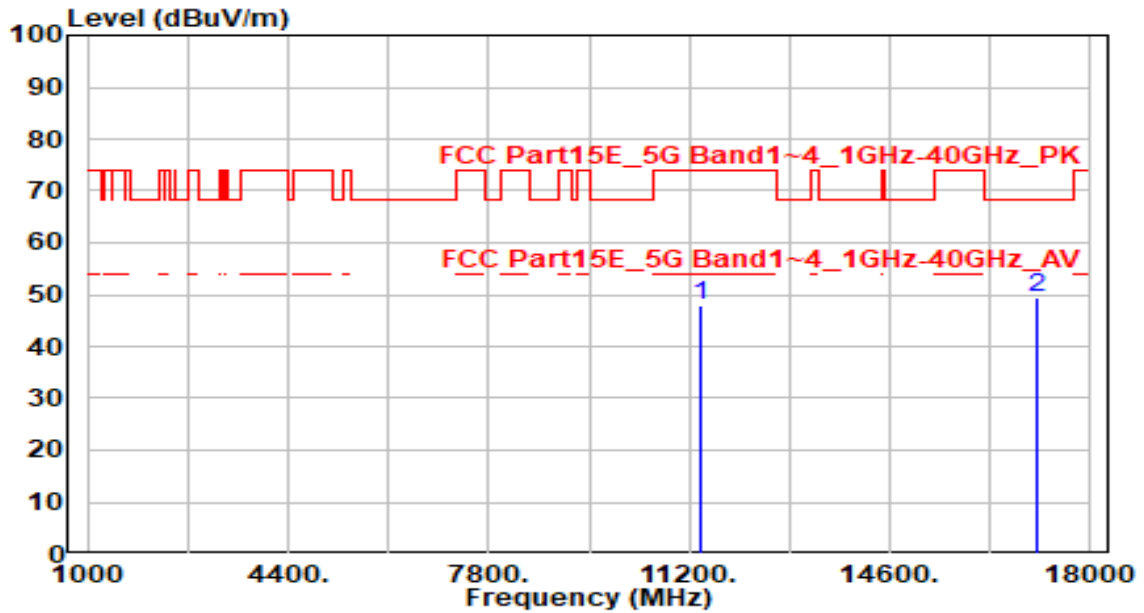


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11400.000 | 41.86 | 5.98 | 47.85 | -26.15 | 74.00 | 100 | 255 | Peak |
| 2 | * 17100.000 | 43.15 | 6.16 | 49.31 | -18.89 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

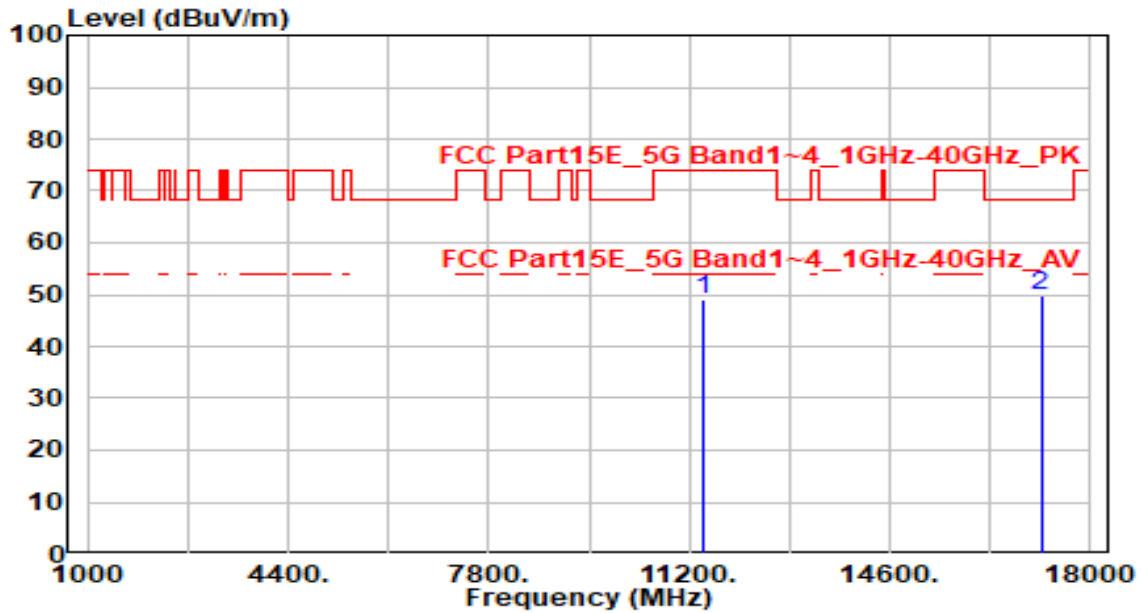


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11440.000 | 43.24 | 5.97 | 49.21 | -24.79 | 74.00 | 100 | 255 | Peak |
| 2 | * 17160.000 | 43.70 | 5.98 | 49.68 | -18.52 | 68.20 | 100 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 144_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

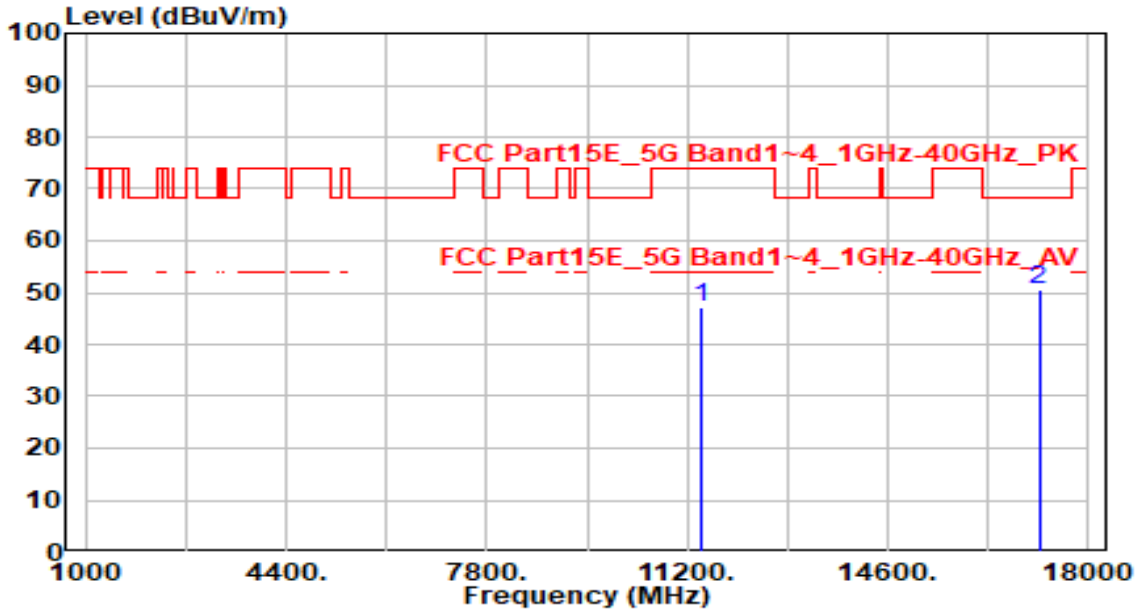


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11440.000 | 41.33 | 5.97 | 47.30 | -26.70 | 74.00 | 100 | 75 | Peak |
| 2 | * 17160.000 | 44.75 | 5.98 | 50.73 | -17.47 | 68.20 | 100 | 35 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

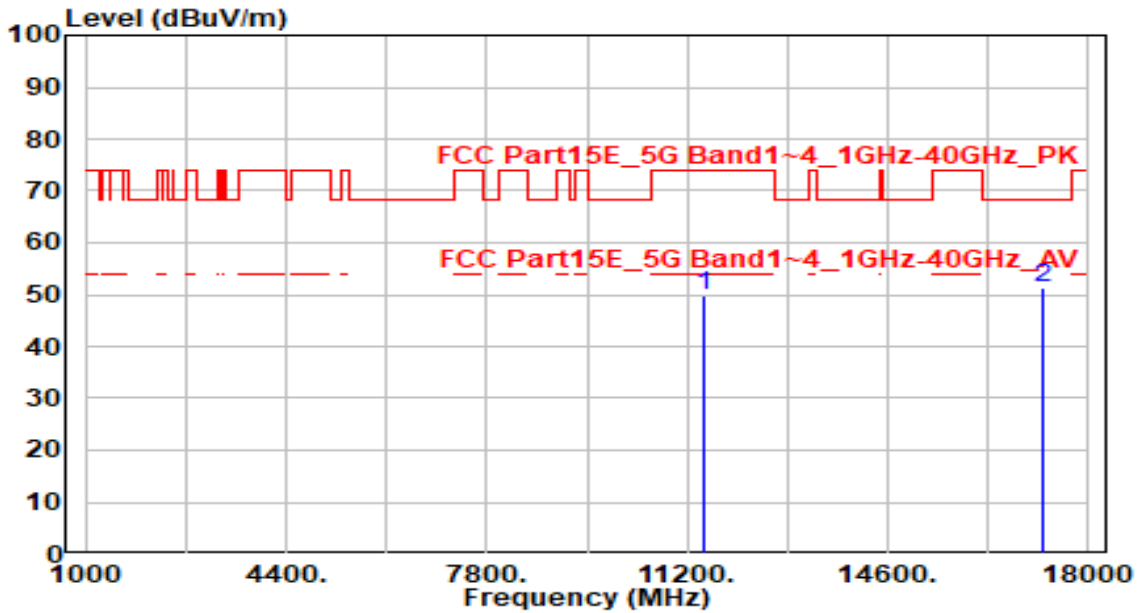


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11490.000 | 43.95 | 5.94 | 49.89 | -24.11 | 74.00 | 100 | 50 | Peak |
| 2 | * 17235.000 | 45.42 | 5.78 | 51.21 | -16.99 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

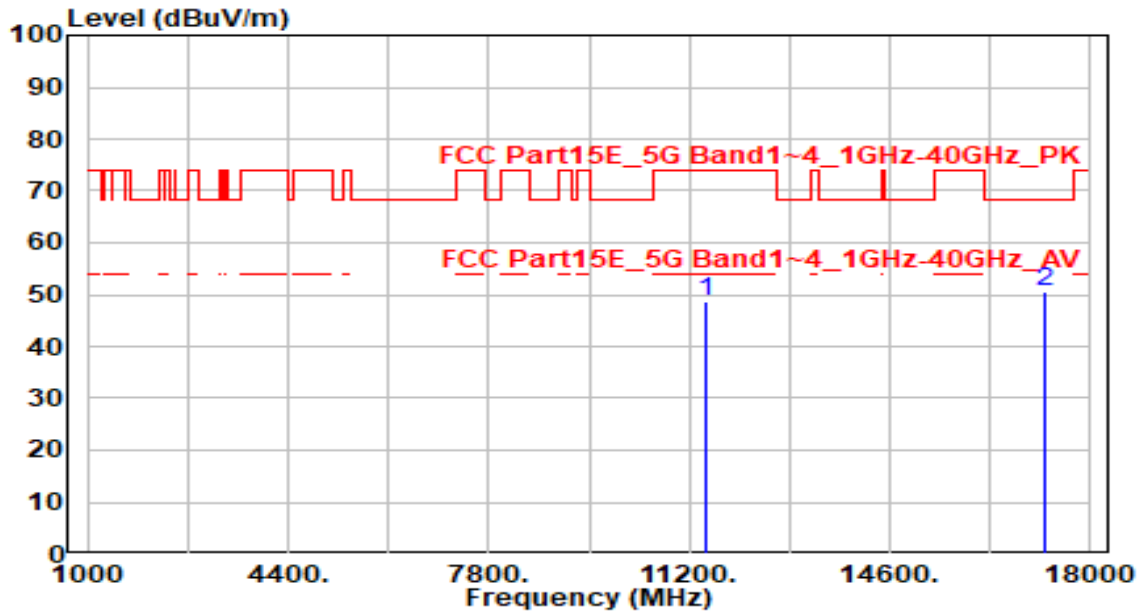


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11490.000 | 42.68 | 5.94 | 48.63 | -25.37 | 74.00 | 100 | 140 | Peak |
| 2 | * 17235.000 | 44.93 | 5.78 | 50.71 | -17.49 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

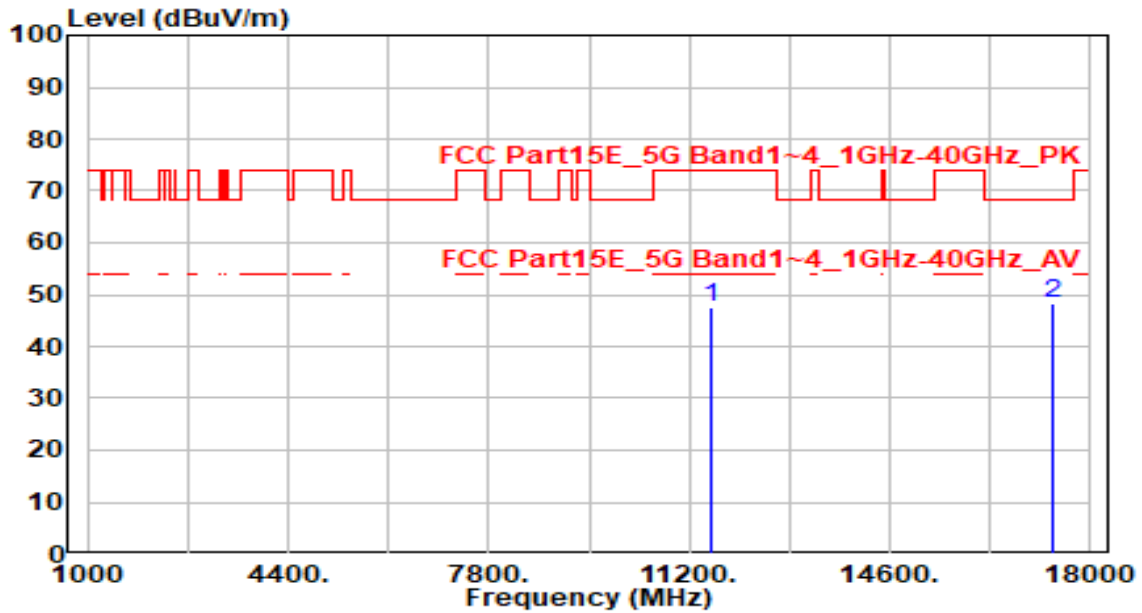


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11570.000 | 41.54 | 5.91 | 47.45 | -26.55 | 74.00 | 100 | 350 | Peak |
| 2 | * 17355.000 | 42.76 | 5.54 | 48.29 | -19.91 | 68.20 | 100 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 157_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

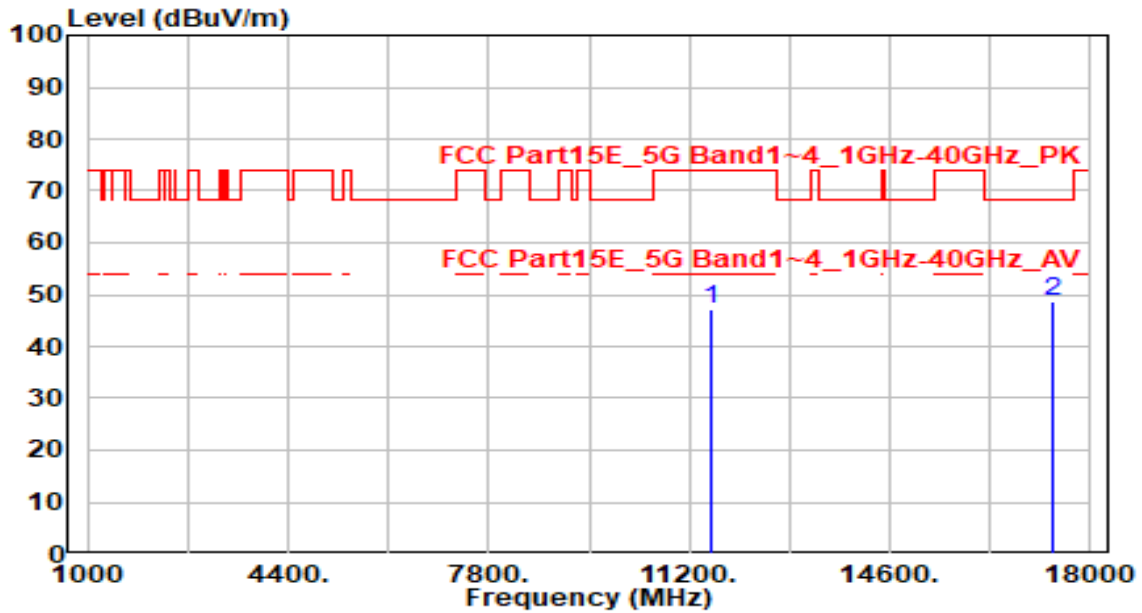


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11570.000 | 41.39 | 5.91 | 47.30 | -26.70 | 74.00 | 100 | 150 | Peak |
| 2 | * 17355.000 | 43.06 | 5.54 | 48.59 | -19.61 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

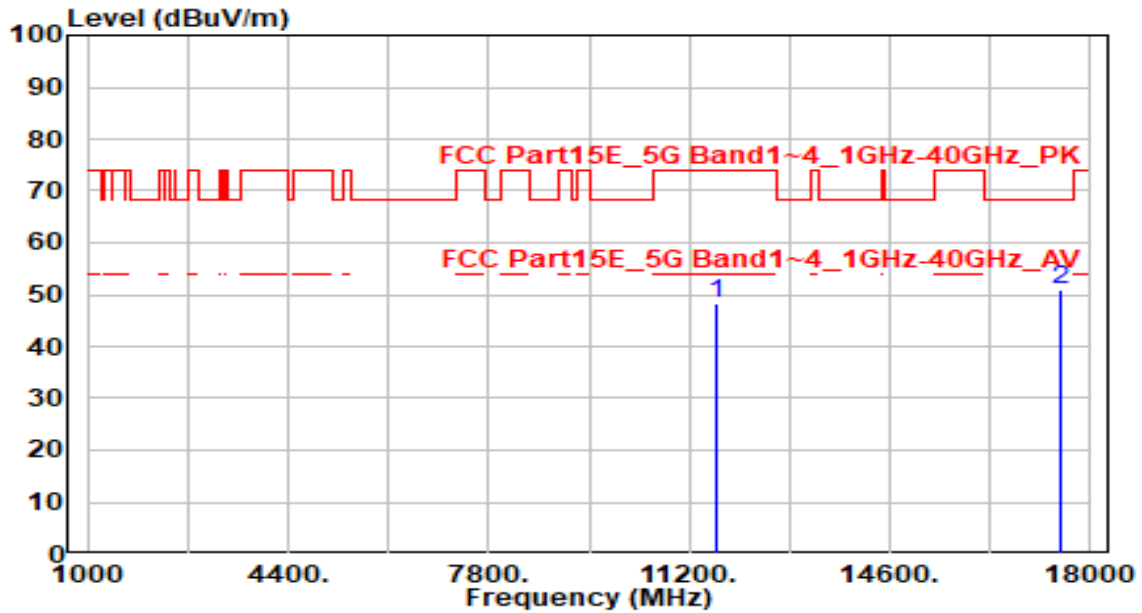


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11650.000 | 42.44 | 5.86 | 48.30 | -25.70 | 74.00 | 100 | 155 | Peak |
| 2 | * 17475.000 | 45.37 | 5.44 | 50.81 | -17.39 | 68.20 | 100 | 30 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

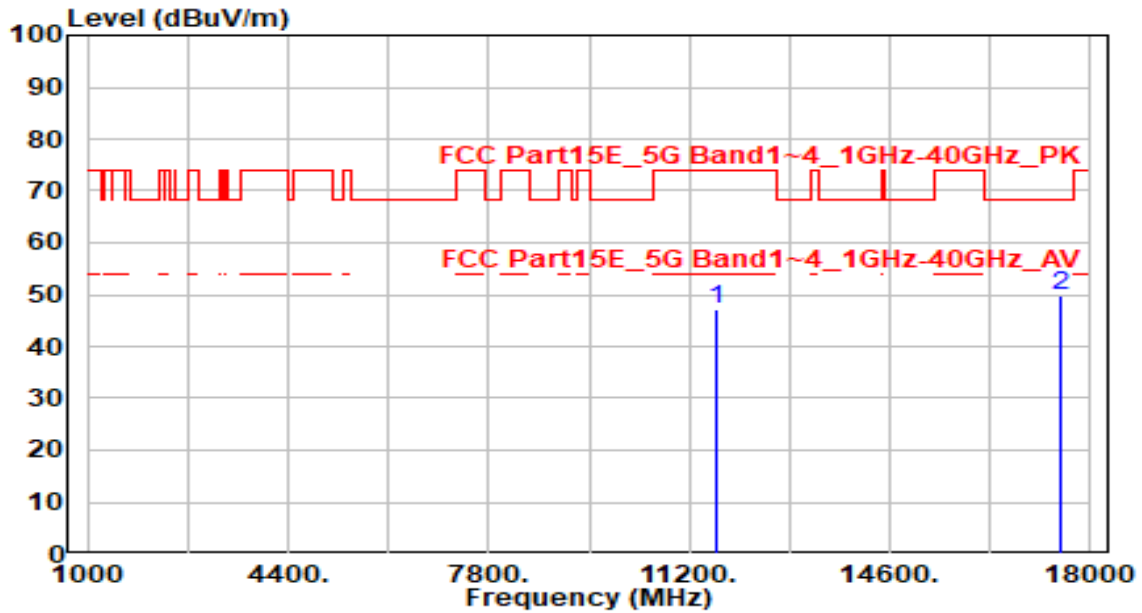


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11650.000 | 41.20 | 5.86 | 47.06 | -26.94 | 74.00 | 100 | 125 | Peak |
| 2 | * 17475.000 | 44.24 | 5.44 | 49.68 | -18.52 | 68.20 | 100 | 110 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

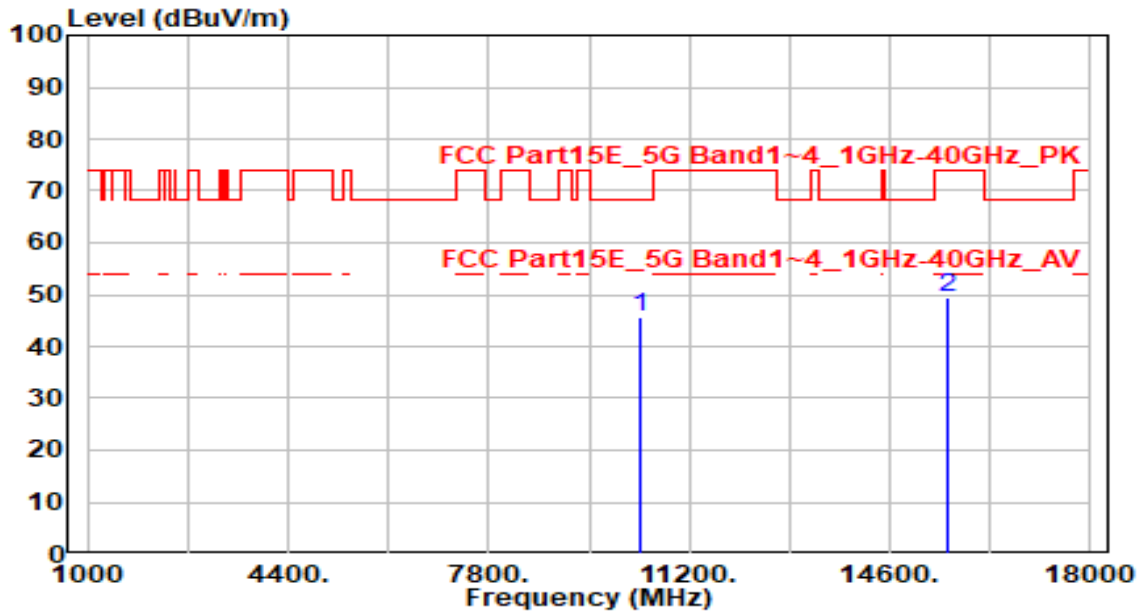


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 40.48 | 5.30 | 45.78 | -22.42 | 68.20 | 100 | 115 | Peak |
| 2 | | 42.88 | 6.41 | 49.30 | -24.70 | 74.00 | 100 | 190 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

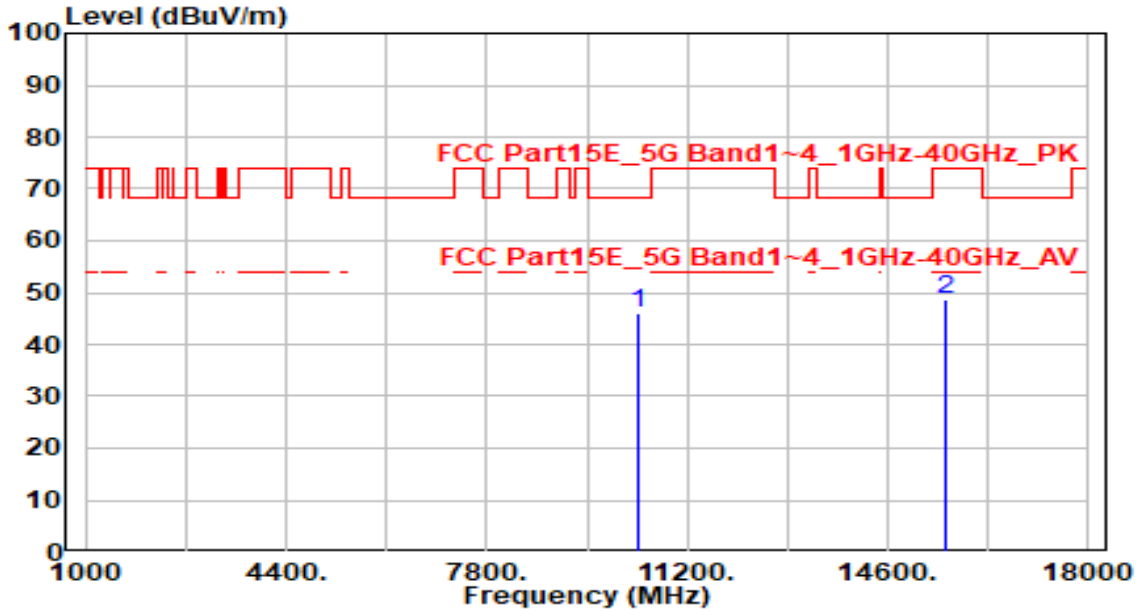


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10380.000 | 40.75 | 5.30 | 46.04 | -22.16 | 68.20 | 100 | 275 | Peak |
| 2 | 15570.000 | 42.35 | 6.41 | 48.77 | -25.23 | 74.00 | 100 | 320 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 46_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

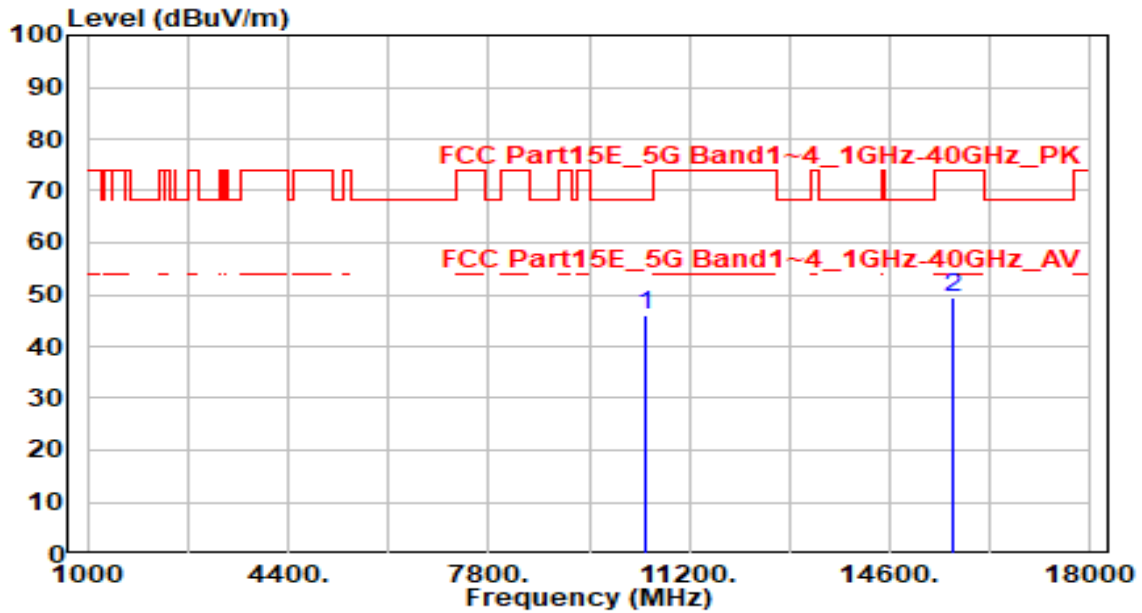


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 40.63 | 5.27 | 45.90 | -22.30 | 68.20 | 100 | 30 | Peak |
| 2 | | 42.99 | 6.63 | 49.62 | -24.38 | 74.00 | 100 | 10 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 46_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

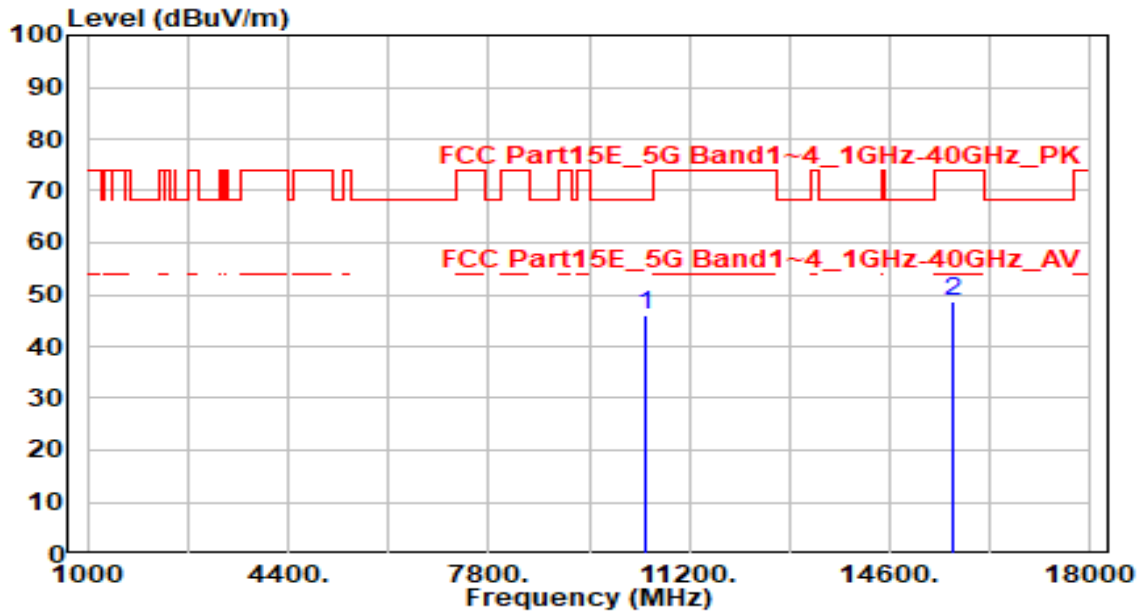


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10460.000 | 40.86 | 5.27 | 46.13 | -22.07 | 68.20 | 100 | 160 | Peak |
| 2 | 15690.000 | 42.21 | 6.63 | 48.83 | -25.17 | 74.00 | 100 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 54_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

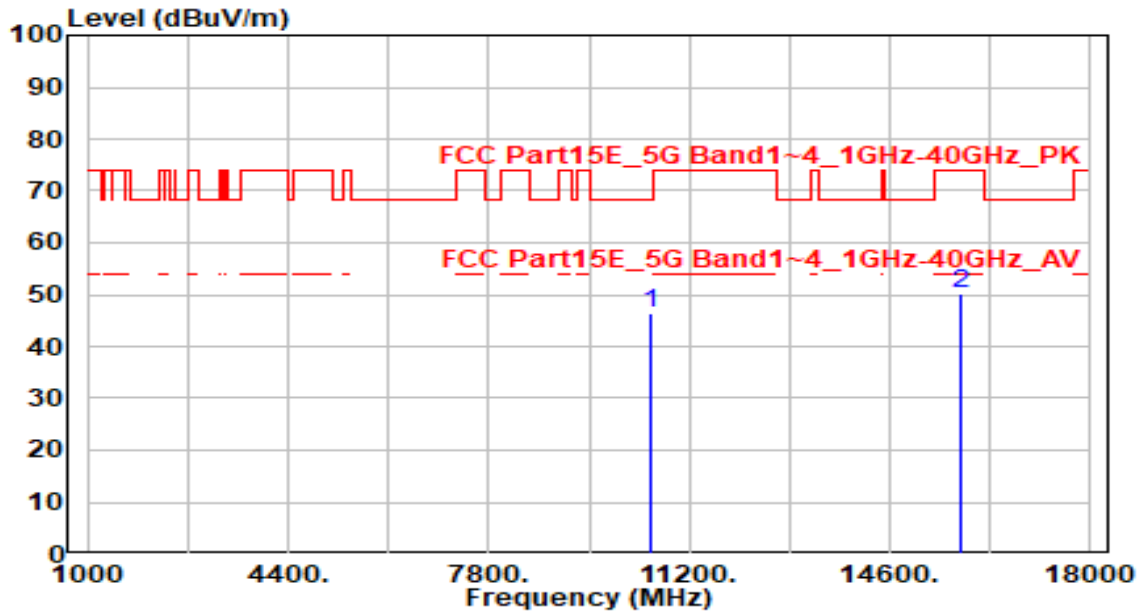


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 41.23 | 5.25 | 46.48 | -21.72 | 68.20 | 100 | 300 | Peak |
| 2 | | 43.37 | 6.88 | 50.26 | -23.74 | 74.00 | 100 | 5 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 54_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

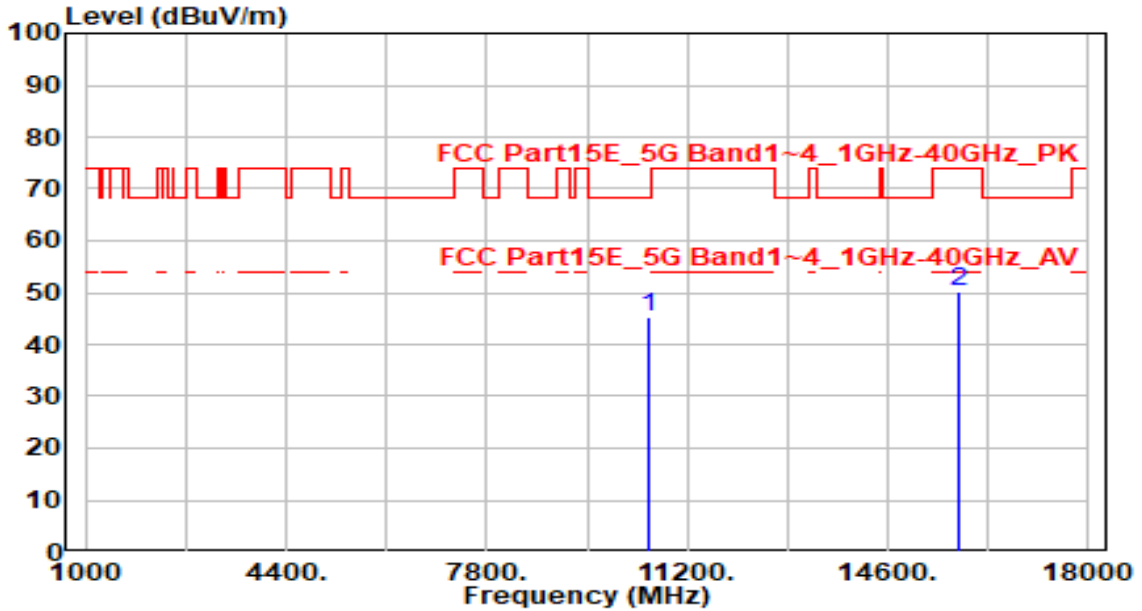


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10540.000 | 40.21 | 5.25 | 45.46 | -22.74 | 68.20 | 100 | 130 | Peak |
| 2 | 15810.000 | 43.37 | 6.88 | 50.25 | -23.75 | 74.00 | 100 | 15 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

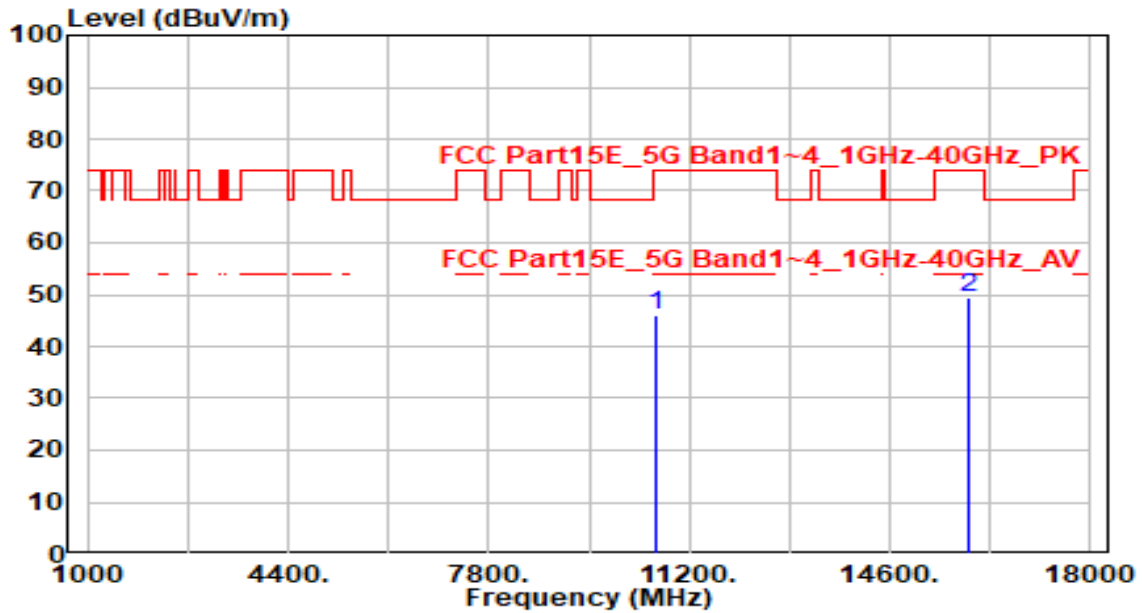


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10620.000 | 40.73 | 5.26 | 45.99 | -28.01 | 74.00 | 100 | 270 | Peak |
| 2 | * 15930.000 | 42.38 | 6.98 | 49.35 | -24.65 | 74.00 | 100 | 5 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

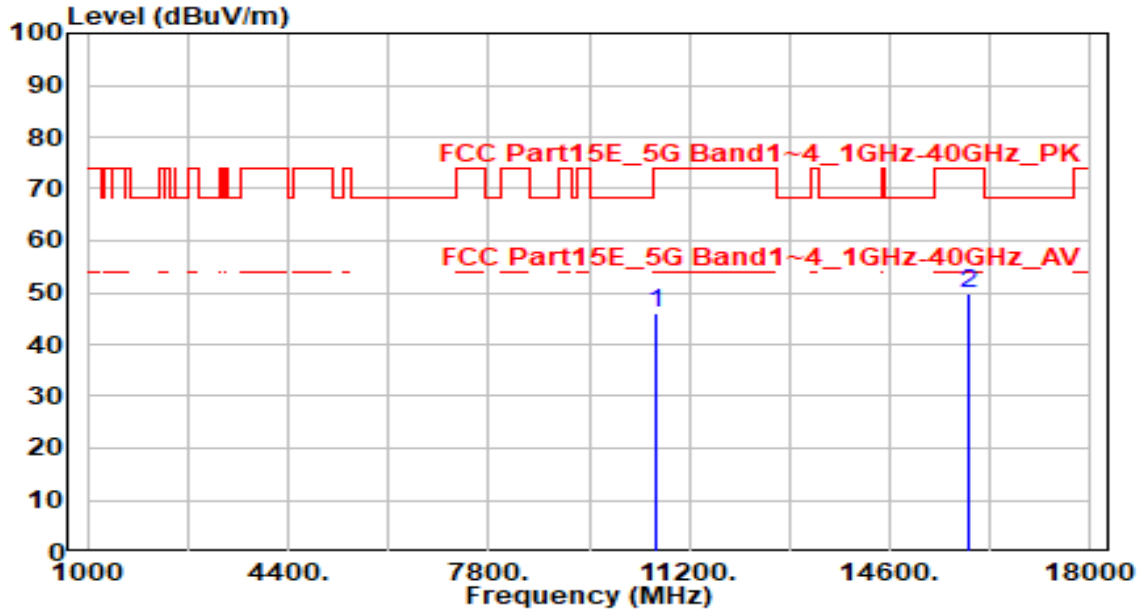


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10620.000 | 40.76 | 5.26 | 46.03 | -27.97 | 74.00 | 100 | 5 | Peak |
| 2 | * 15930.000 | 43.00 | 6.98 | 49.98 | -24.02 | 74.00 | 100 | 160 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

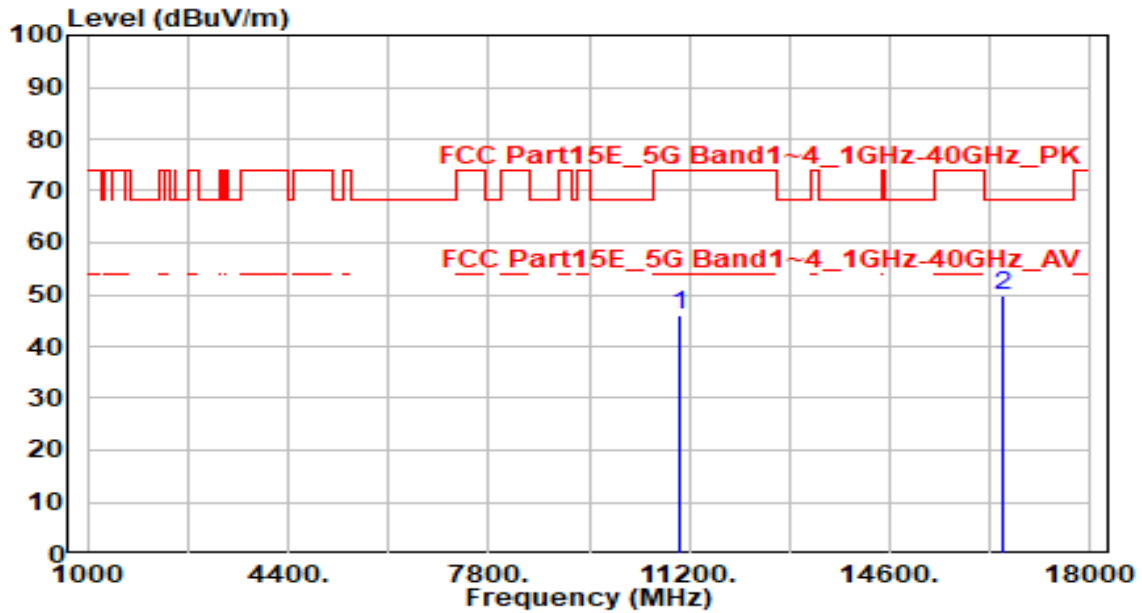


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11020.000 | 40.63 | 5.58 | 46.21 | -27.79 | 74.00 | 100 | 5 | Peak |
| 2 | * 16530.000 | 42.40 | 7.39 | 49.79 | -18.41 | 68.20 | 100 | 345 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

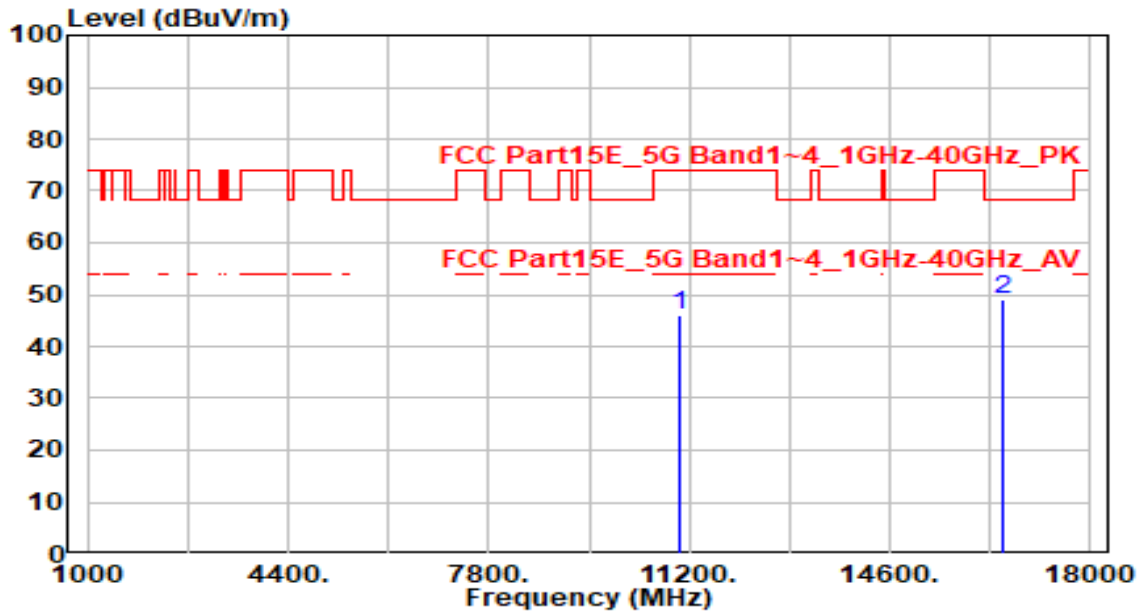


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11020.000 | 40.56 | 5.58 | 46.14 | -27.86 | 74.00 | 100 | 5 | Peak |
| 2 | * 16530.000 | 41.54 | 7.39 | 48.93 | -19.27 | 68.20 | 100 | 55 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

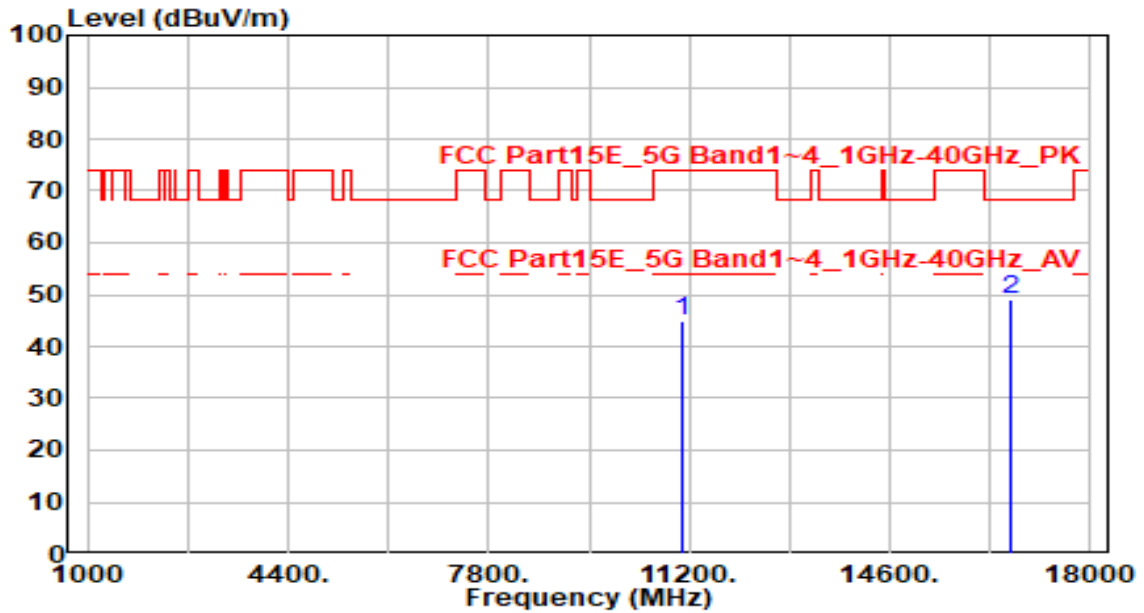


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11100.000 | 39.19 | 5.67 | 44.86 | -29.14 | 74.00 | 100 | 10 | Peak |
| 2 | * 16650.000 | 41.62 | 7.58 | 49.19 | -19.01 | 68.20 | 100 | 330 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 110_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

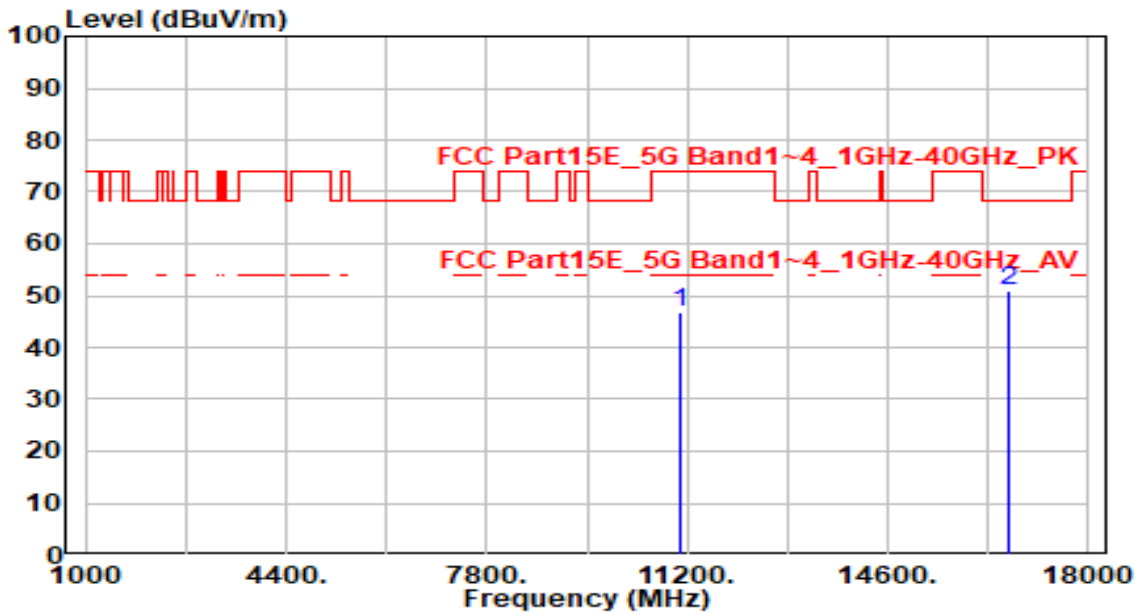


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11100.000 | 41.26 | 5.67 | 46.93 | -27.07 | 74.00 | 100 | 5 | Peak |
| 2 | * 16650.000 | 43.31 | 7.58 | 50.89 | -17.31 | 68.20 | 100 | 185 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

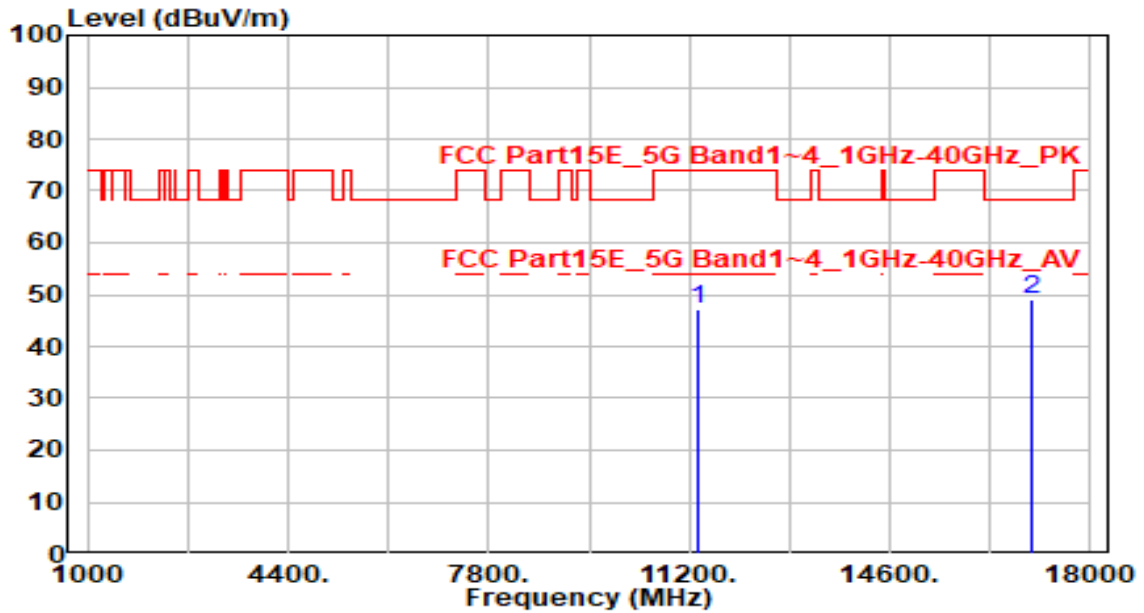


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11340.000 | 41.29 | 5.92 | 47.22 | -26.78 | 74.00 | 100 | 210 | Peak |
| 2 | * 17010.000 | 42.56 | 6.44 | 49.00 | -19.20 | 68.20 | 100 | 230 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

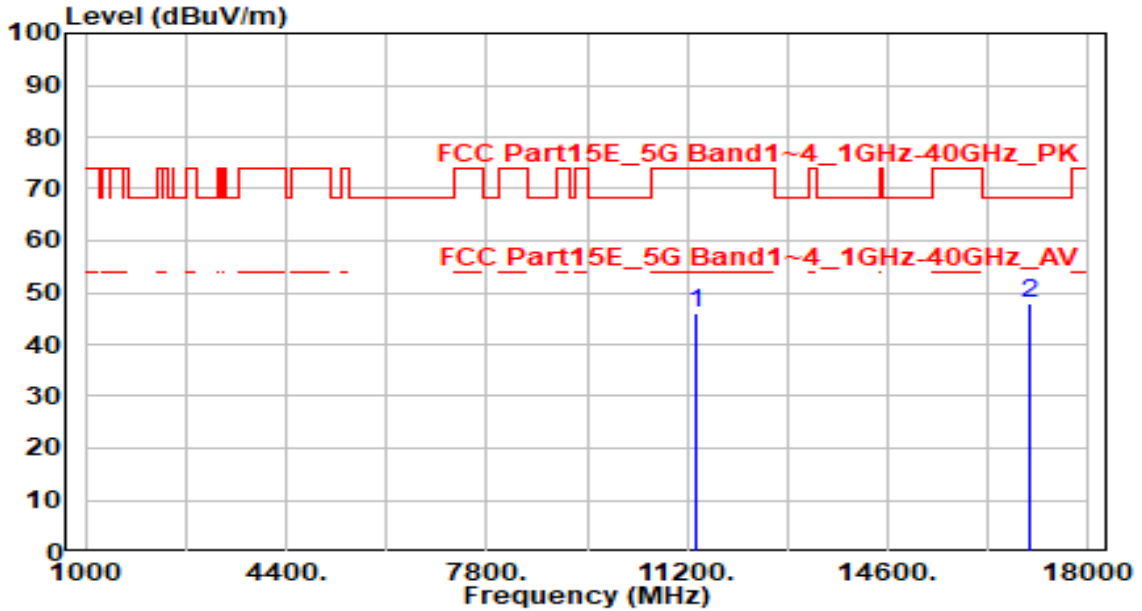


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11340.000 | 40.10 | 5.92 | 46.02 | -27.98 | 74.00 | 100 | 325 | Peak |
| 2 | * 17010.000 | 41.44 | 6.44 | 47.88 | -20.32 | 68.20 | 100 | 285 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

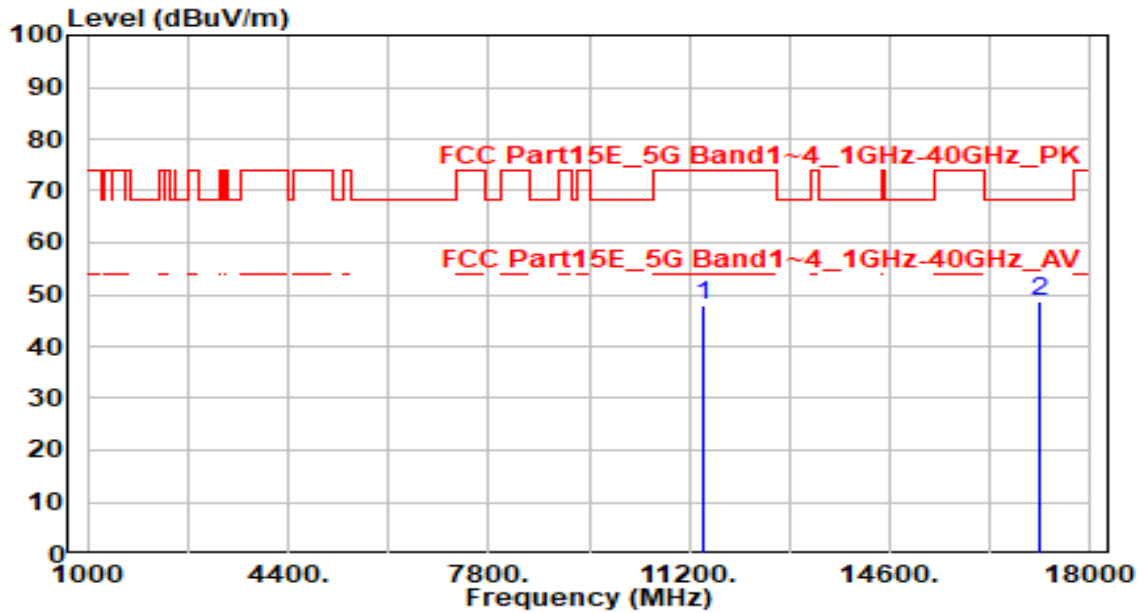


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11420.000 | 42.01 | 5.98 | 47.99 | -26.01 | 74.00 | 100 | 160 | Peak |
| 2 | * 17130.000 | 42.51 | 6.07 | 48.58 | -19.62 | 68.20 | 100 | 110 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 142_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

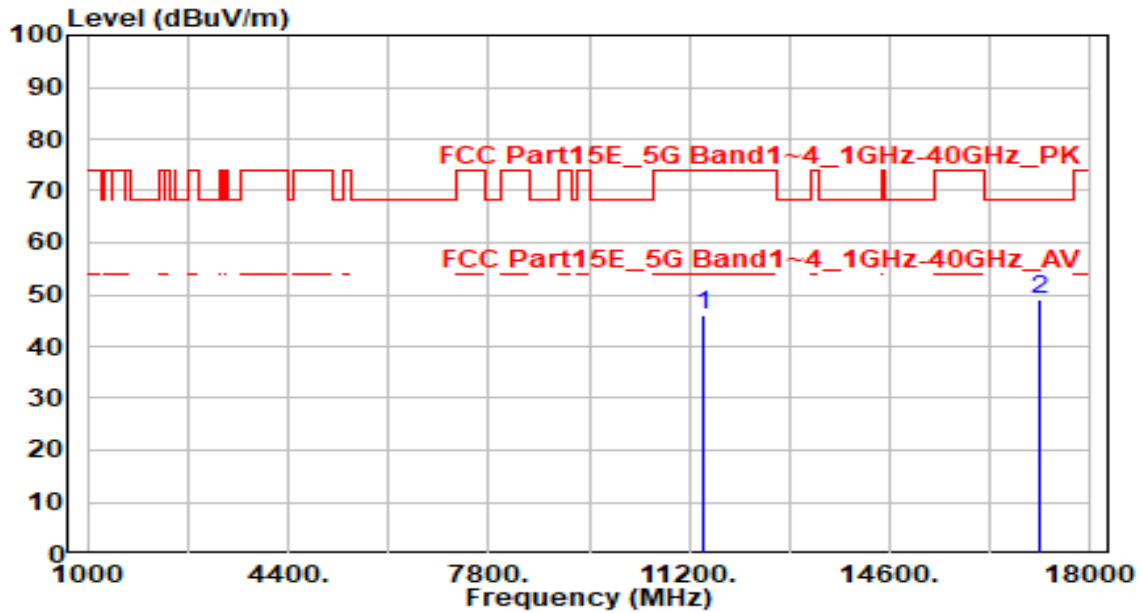


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11420.000 | 40.20 | 5.98 | 46.18 | -27.82 | 74.00 | 100 | 275 | Peak |
| 2 | * 17130.000 | 42.82 | 6.07 | 48.89 | -19.31 | 68.20 | 100 | 5 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

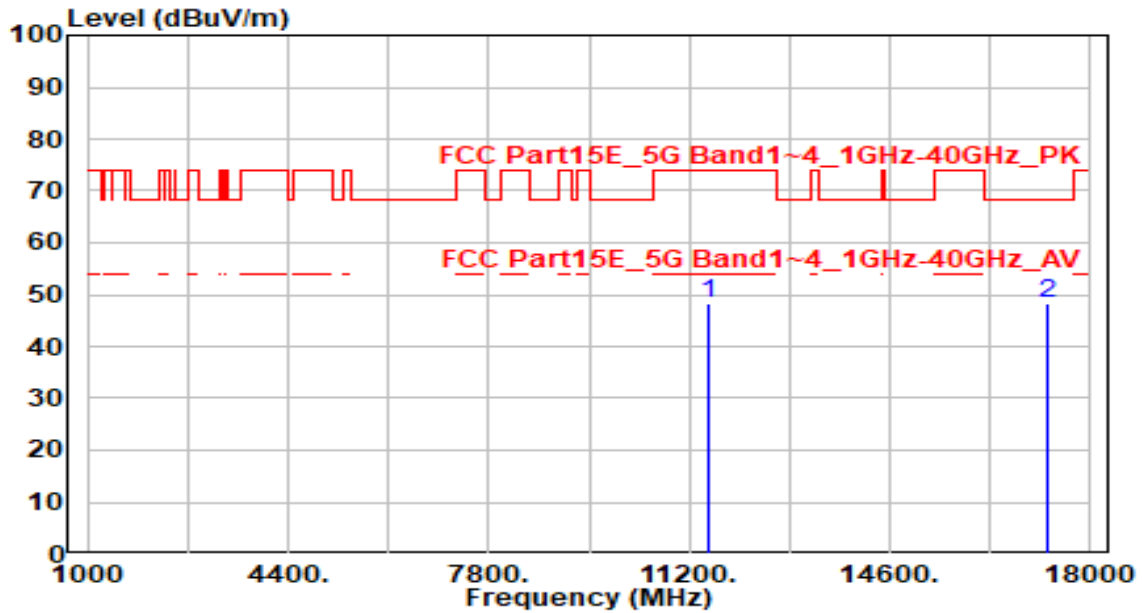


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11510.000 | 42.28 | 5.94 | 48.21 | -25.79 | 74.00 | 100 | 310 | Peak |
| 2 | * 17265.000 | 42.64 | 5.72 | 48.36 | -19.84 | 68.20 | 100 | 280 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

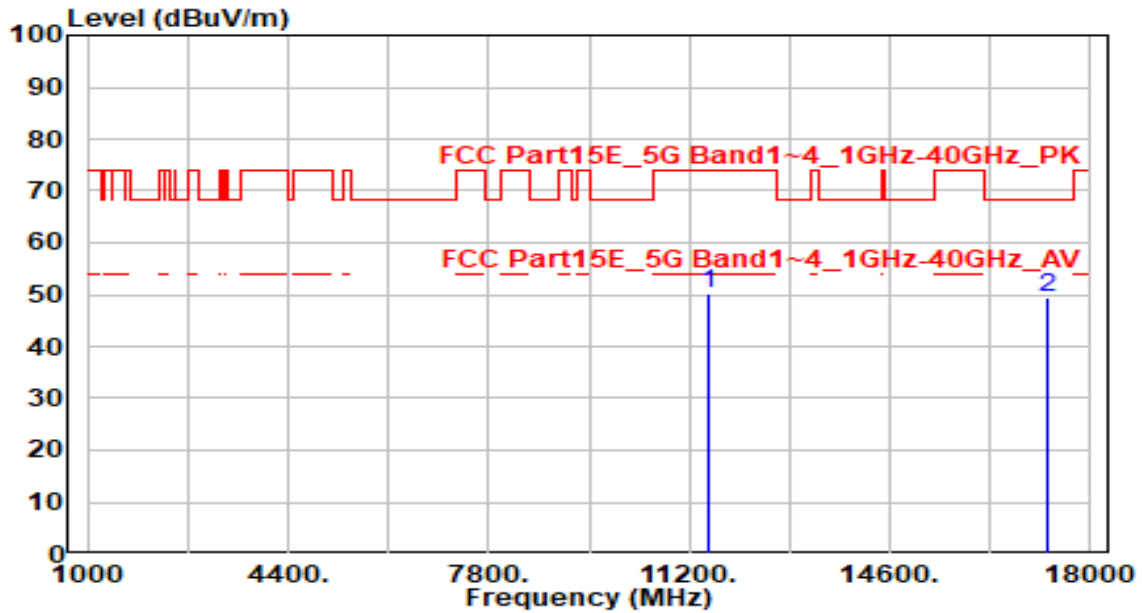


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11510.000 | 44.30 | 5.94 | 50.24 | -23.76 | 74.00 | 100 | 200 | Peak |
| 2 | * 17265.000 | 43.64 | 5.72 | 49.36 | -18.84 | 68.20 | 100 | 240 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

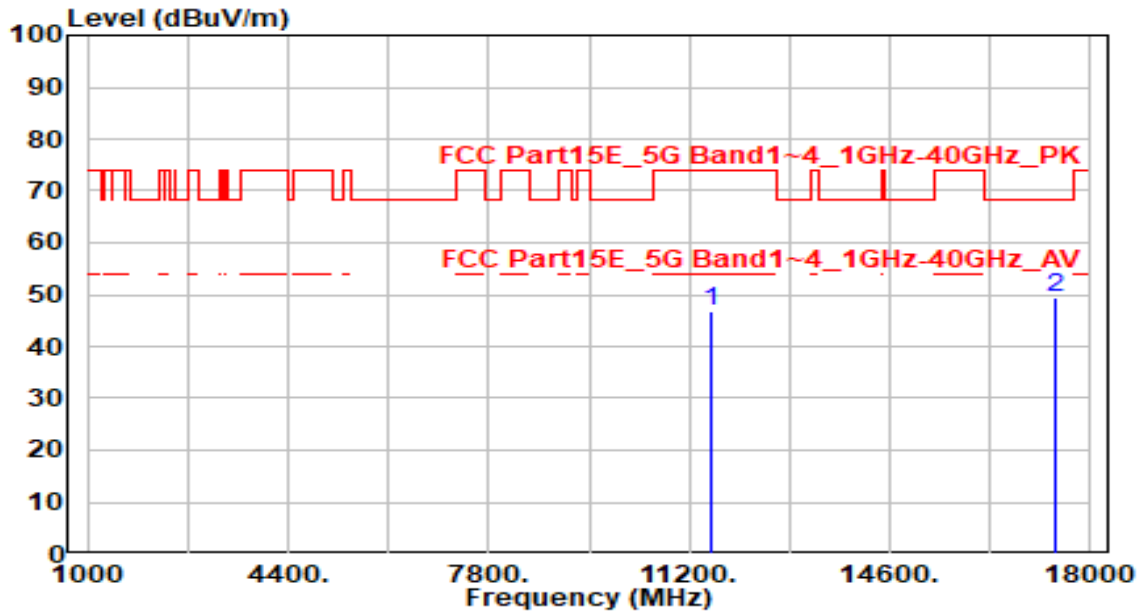


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11590.000 | 40.76 | 5.90 | 46.66 | -27.34 | 74.00 | 100 | 5 | Peak |
| 2 | * 17385.000 | 43.99 | 5.47 | 49.47 | -18.73 | 68.20 | 100 | 90 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

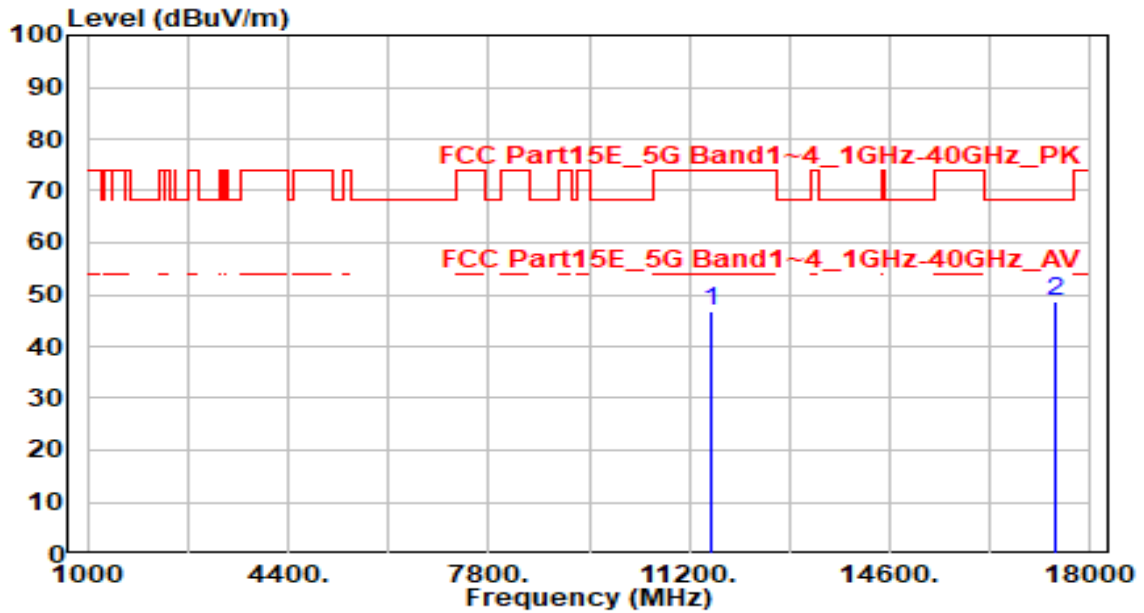


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11590.000 | 40.75 | 5.90 | 46.66 | -27.34 | 74.00 | 100 | 150 | Peak |
| 2 | * 17385.000 | 43.32 | 5.47 | 48.79 | -19.41 | 68.20 | 100 | 320 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

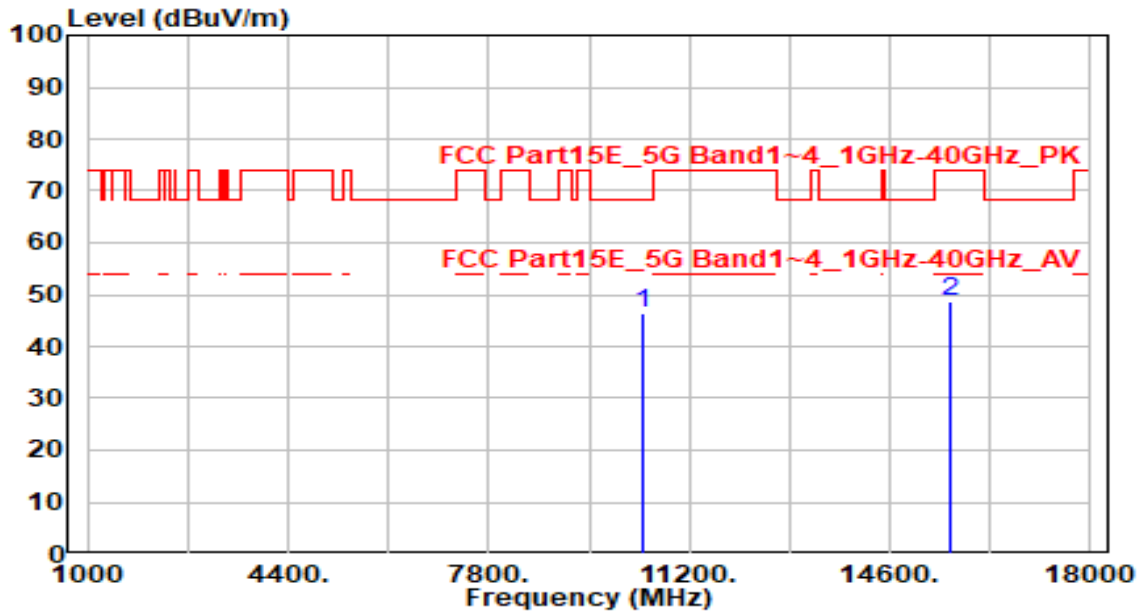


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10420.000 | 41.17 | 5.29 | 46.46 | -21.74 | 68.20 | 100 | 150 | Peak |
| 2 | 15630.000 | 42.30 | 6.49 | 48.79 | -25.21 | 74.00 | 100 | 90 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

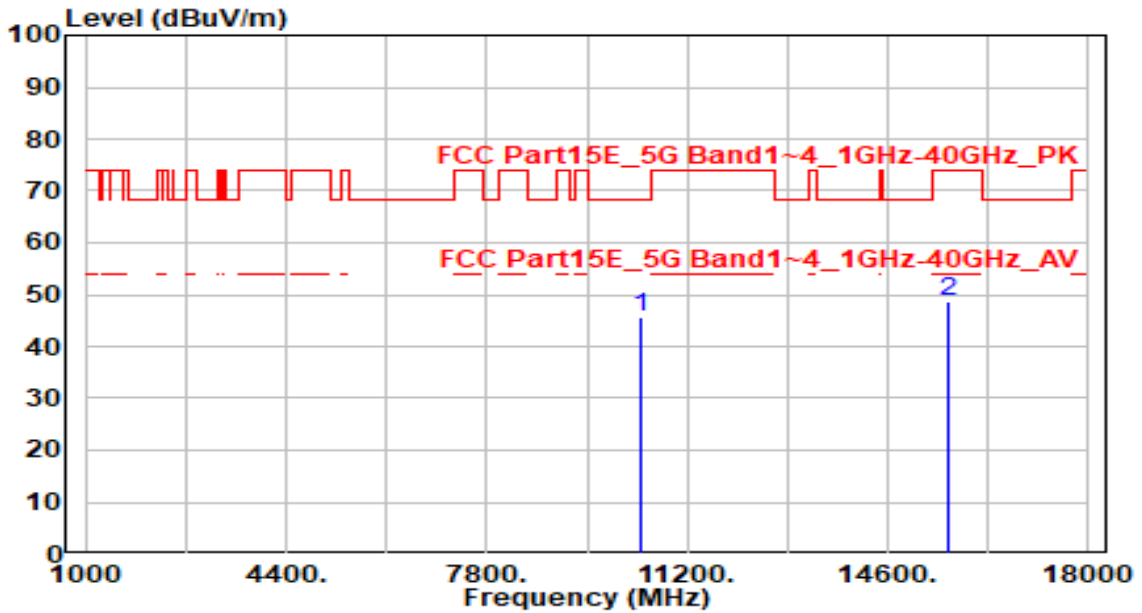


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10420.000 | 40.32 | 5.29 | 45.60 | -22.60 | 68.20 | 100 | 245 | Peak |
| 2 | 15630.000 | 42.20 | 6.49 | 48.69 | -25.31 | 74.00 | 100 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

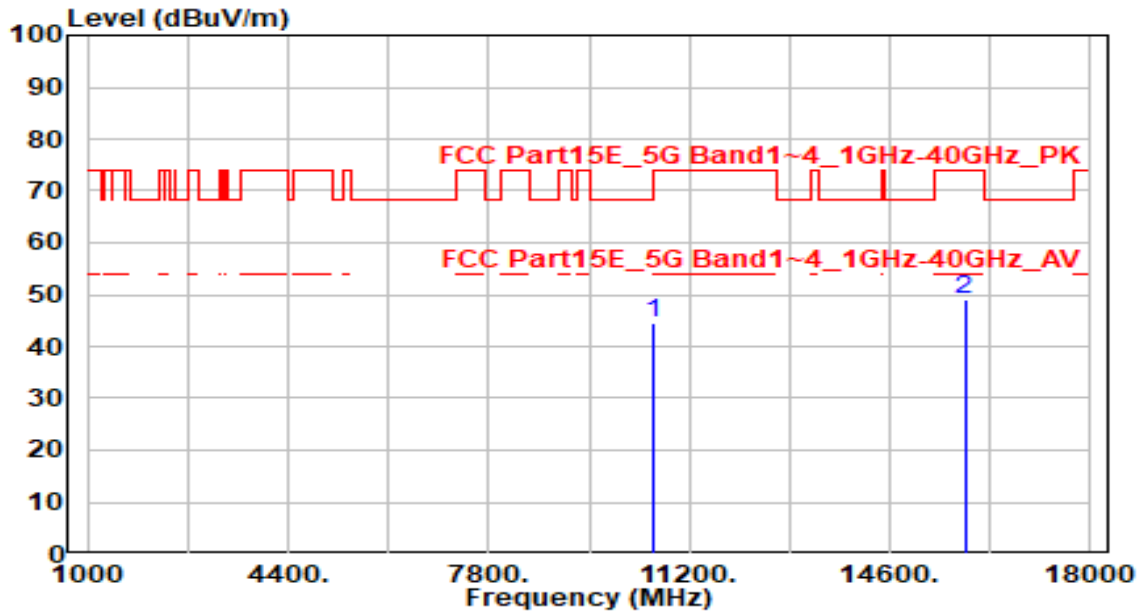


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10580.000 | 39.20 | 5.25 | 44.45 | -23.75 | 68.20 | 100 | 180 | Peak |
| 2 | 15870.000 | 42.17 | 6.93 | 49.10 | -24.90 | 74.00 | 100 | 255 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

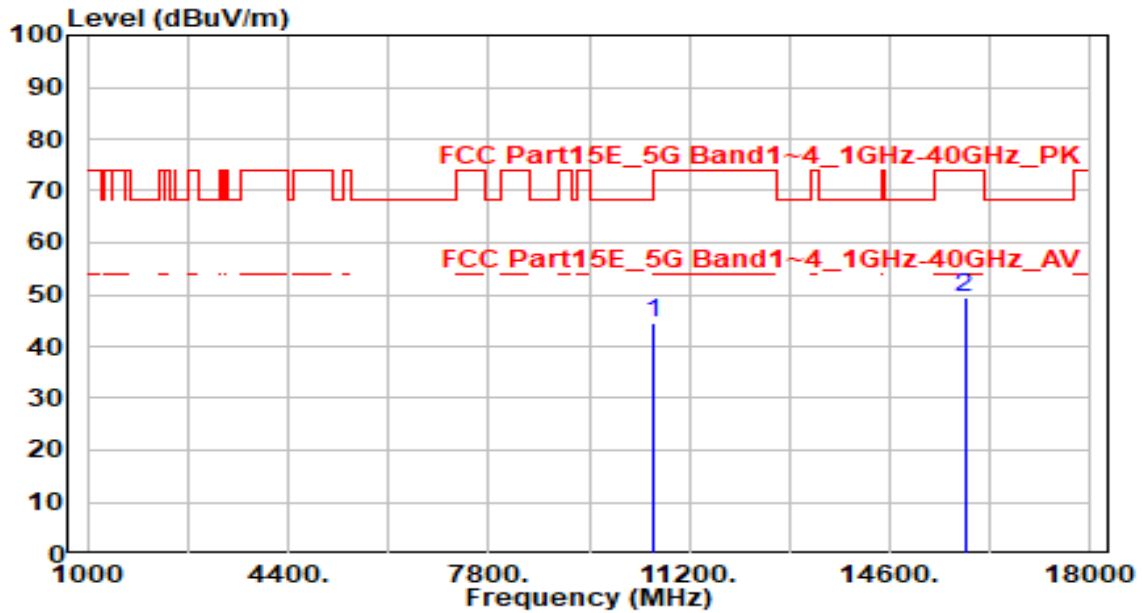


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10580.000 | 39.38 | 5.25 | 44.63 | -23.57 | 68.20 | 100 | 220 | Peak |
| 2 | 15870.000 | 42.56 | 6.93 | 49.49 | -24.51 | 74.00 | 100 | 290 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

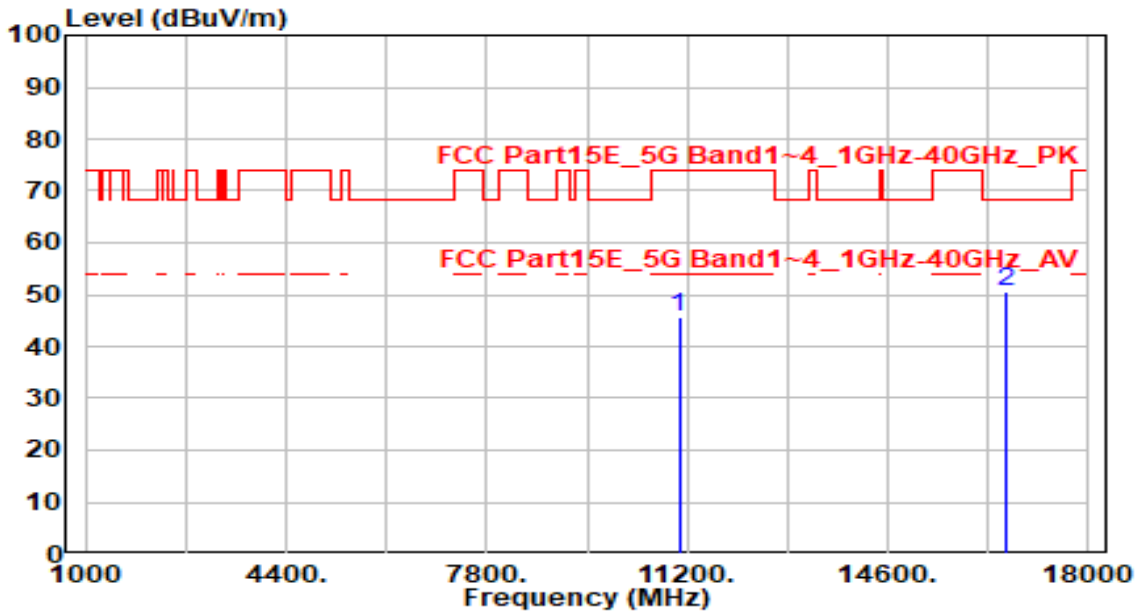


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11060.000 | 40.15 | 5.62 | 45.78 | -28.22 | 74.00 | 100 | 60 | Peak |
| 2 | * 16590.000 | 43.07 | 7.48 | 50.55 | -17.65 | 68.20 | 100 | 210 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

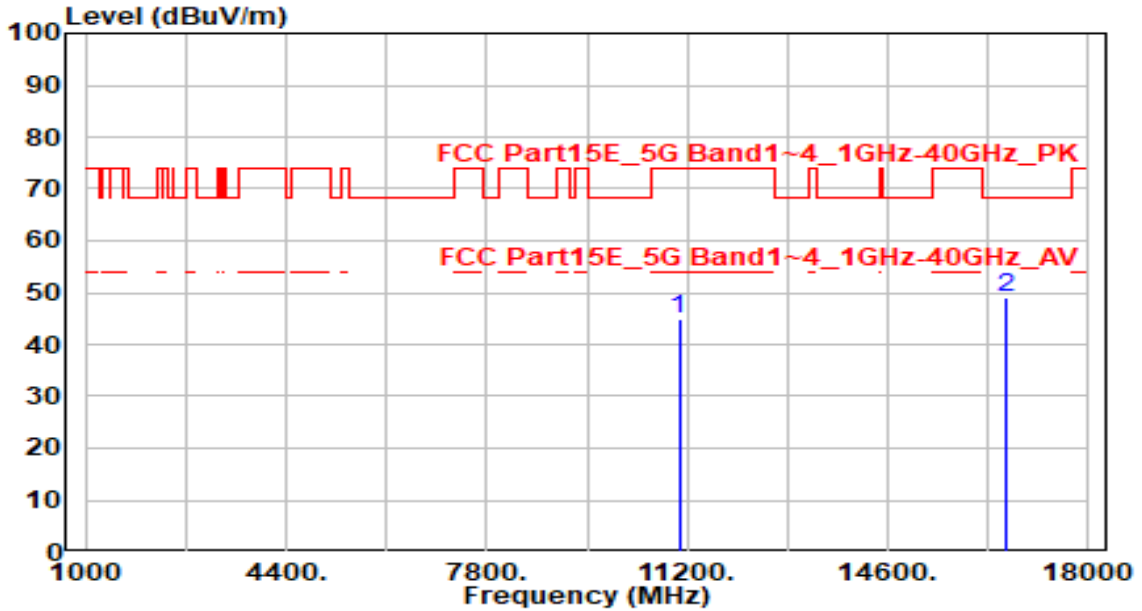


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11060.000 | 39.47 | 5.62 | 45.09 | -28.91 | 74.00 | 100 | 155 | Peak |
| 2 | * 16590.000 | 41.76 | 7.48 | 49.24 | -18.96 | 68.20 | 100 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

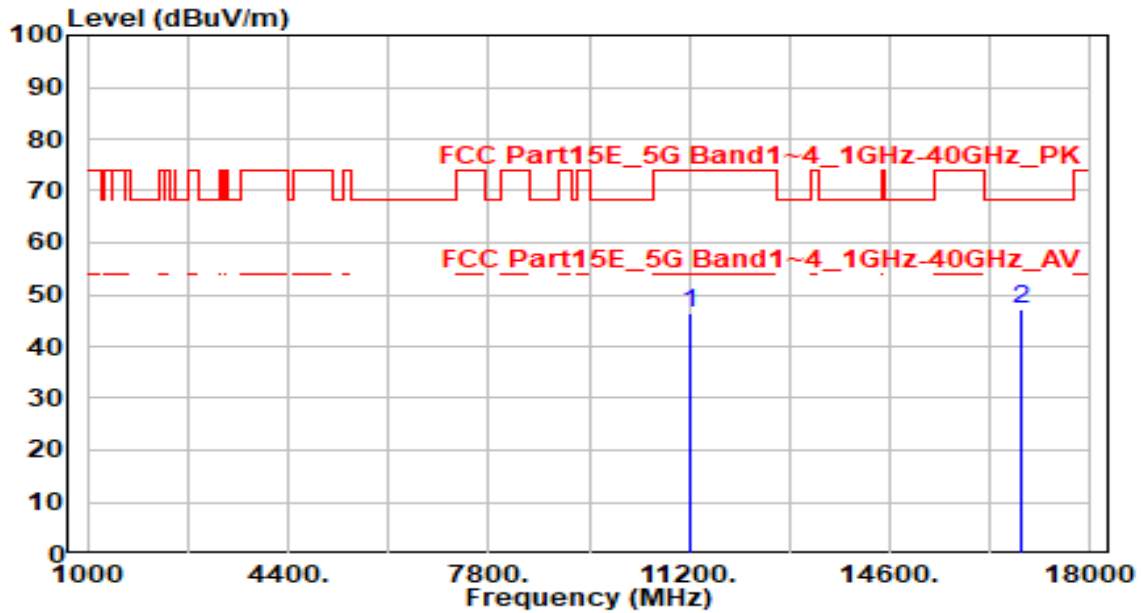


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11220.000 | 40.46 | 5.79 | 46.26 | -27.74 | 74.00 | 100 | 65 | Peak |
| 2 | * 16830.000 | 40.09 | 7.17 | 47.27 | -20.93 | 68.20 | 100 | 180 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 122_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

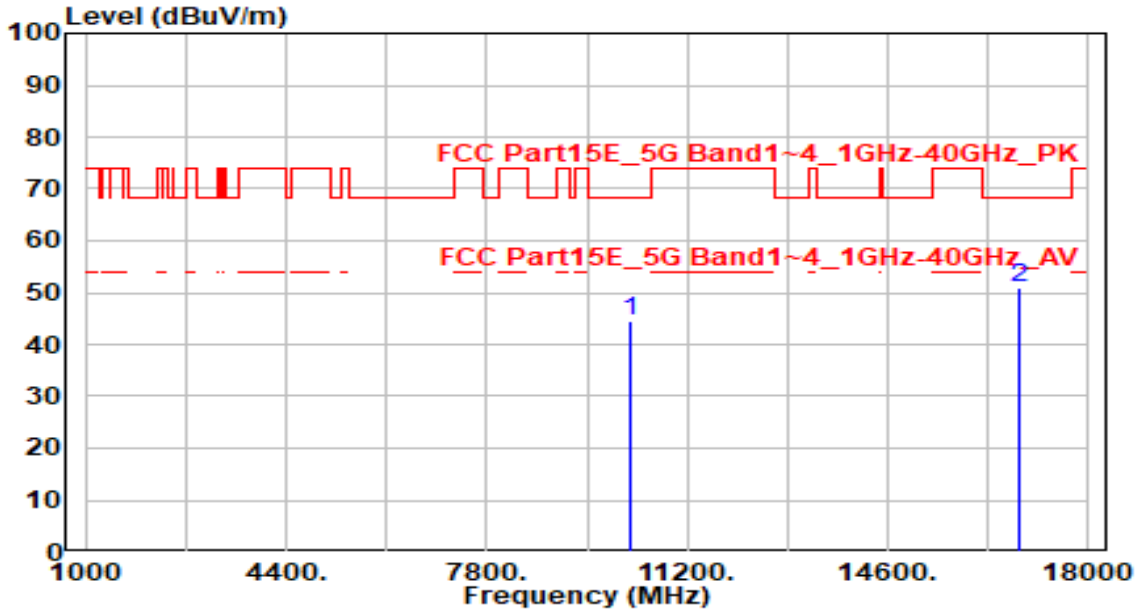


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 10220.000 | 39.16 | 5.29 | 44.45 | -23.75 | 68.20 | 100 | 225 | Peak |
| 2 | * 16830.000 | 43.79 | 7.17 | 50.96 | -17.24 | 68.20 | 100 | 130 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

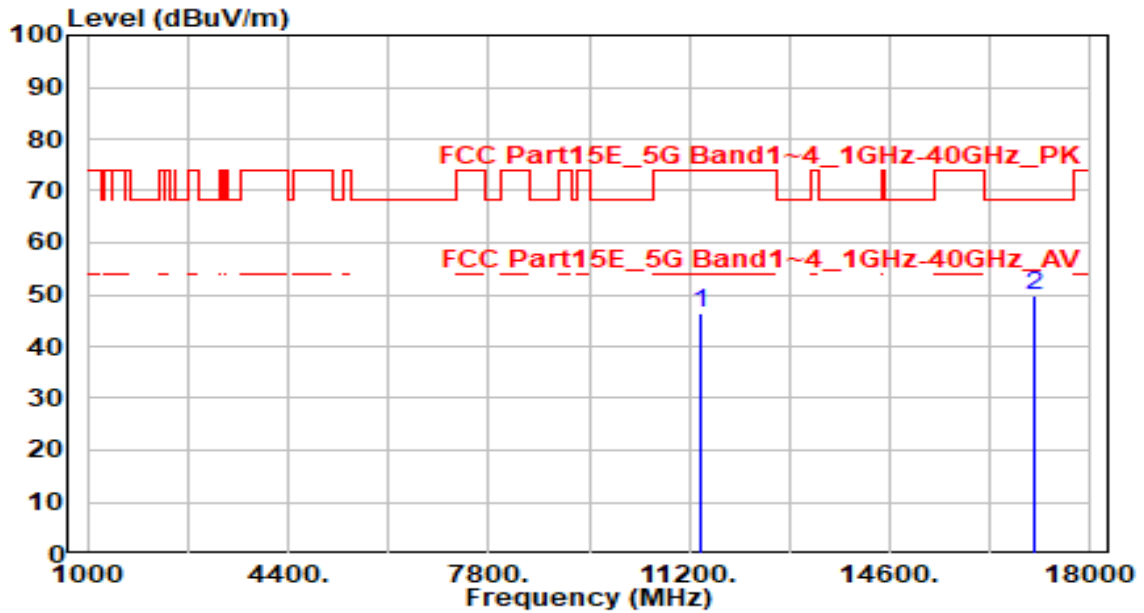


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11380.000 | 40.56 | 5.96 | 46.52 | -27.48 | 74.00 | 100 | 180 | Peak |
| 2 | * 17070.000 | 43.43 | 6.26 | 49.69 | -18.51 | 68.20 | 100 | 45 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 138_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

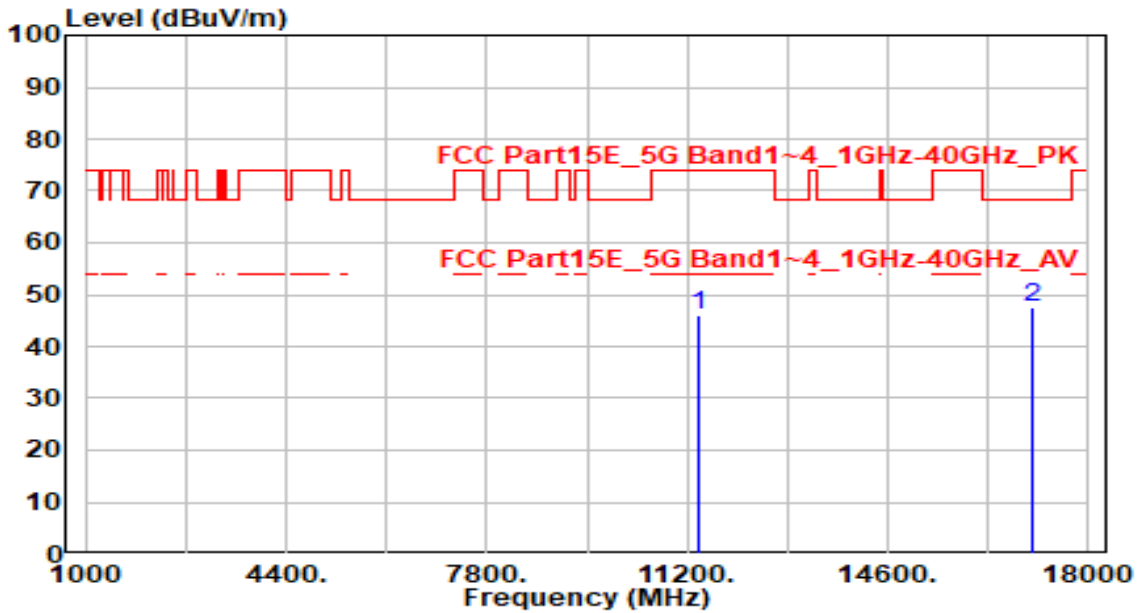


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11380.000 | 40.12 | 5.96 | 46.09 | -27.91 | 74.00 | 100 | 110 | Peak |
| 2 | * 17070.000 | 41.14 | 6.26 | 47.40 | -20.80 | 68.20 | 100 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

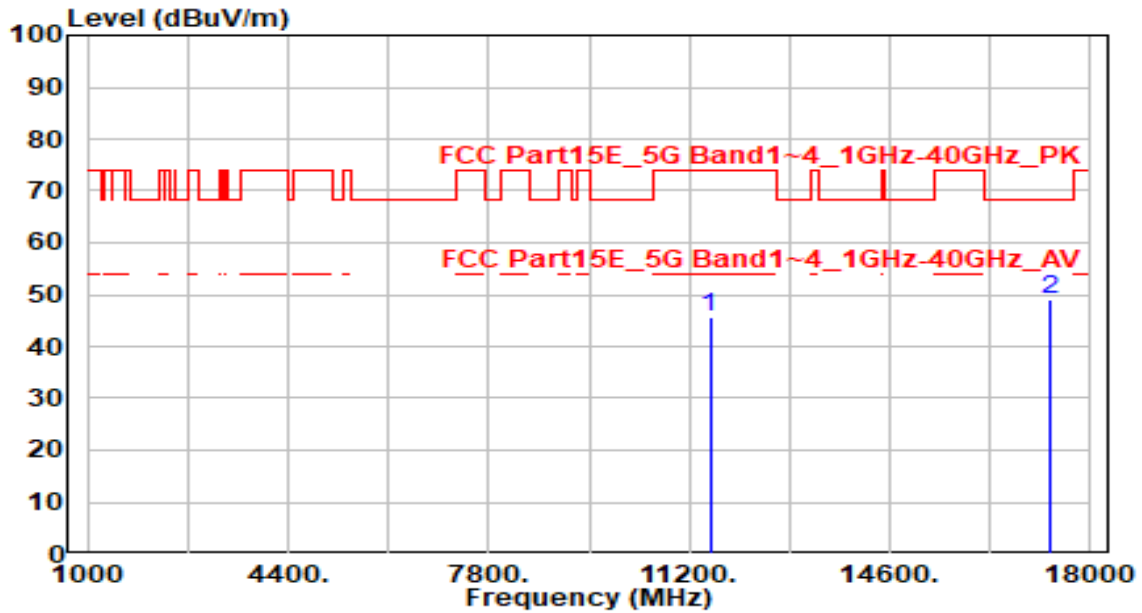


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11550.000 | 39.73 | 5.92 | 45.65 | -28.35 | 74.00 | 100 | 300 | Peak |
| 2 | * 17325.000 | 43.43 | 5.60 | 49.03 | -19.17 | 68.20 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

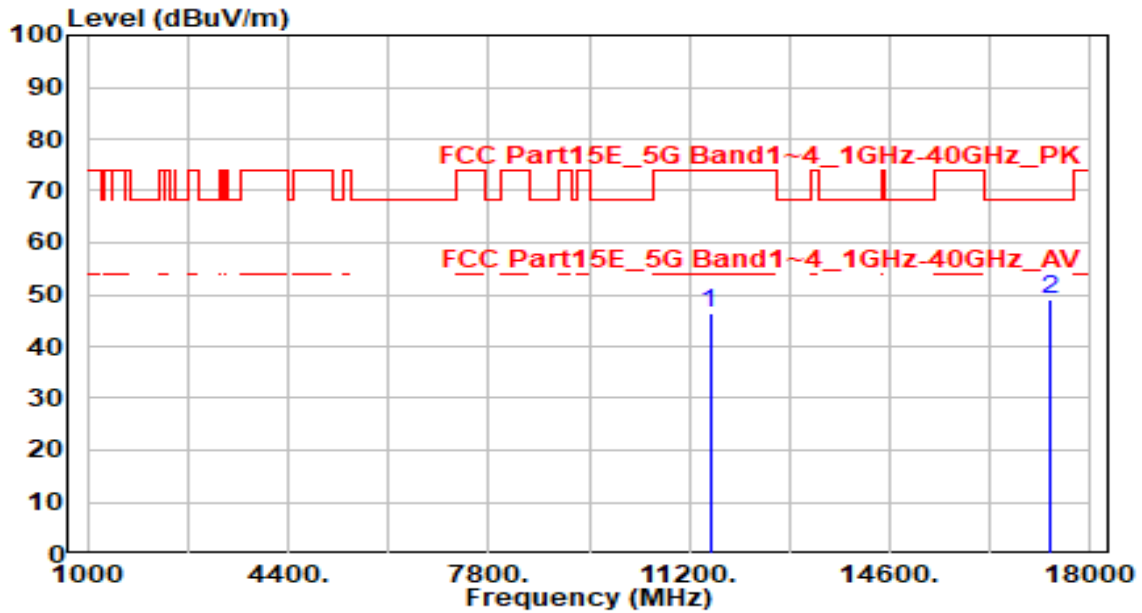


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11550.000 | 40.44 | 5.92 | 46.36 | -27.64 | 74.00 | 100 | 20 | Peak |
| 2 | * 17325.000 | 43.38 | 5.60 | 48.98 | -19.22 | 68.20 | 100 | 280 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

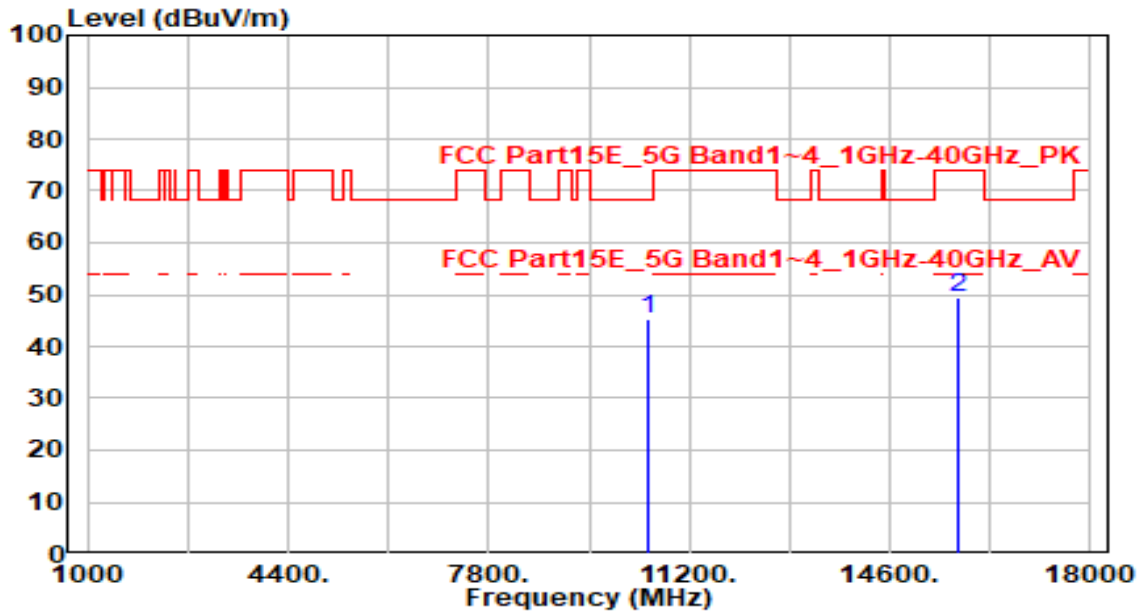


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10500.000 | 40.09 | 5.25 | 45.34 | -22.86 | 68.20 | 100 | 360 | Peak |
| 2 | 15750.000 | 42.80 | 6.76 | 49.56 | -24.44 | 74.00 | 100 | 220 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(lifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

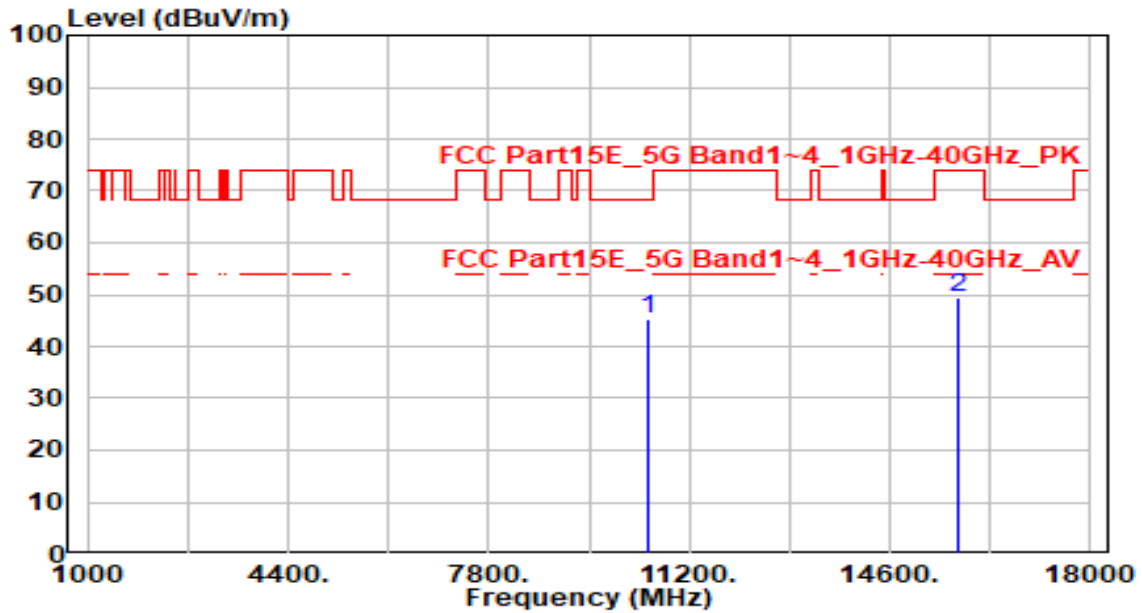


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 10500.000 | 40.14 | 5.25 | 45.39 | -22.81 | 68.20 | 100 | 350 | Peak |
| 2 | 15750.000 | 42.51 | 6.76 | 49.27 | -24.73 | 74.00 | 100 | 5 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

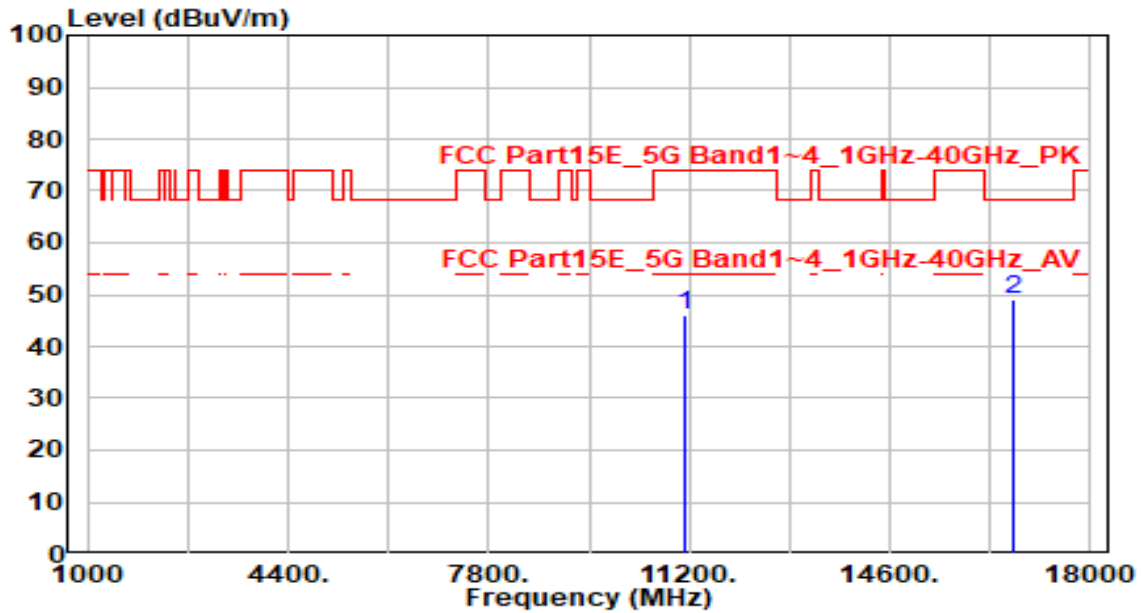


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11140.000 | 40.44 | 5.71 | 46.15 | -27.85 | 74.00 | 100 | 250 | Peak |
| 2 | * 16710.000 | 41.33 | 7.67 | 49.00 | -19.20 | 68.20 | 100 | 70 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

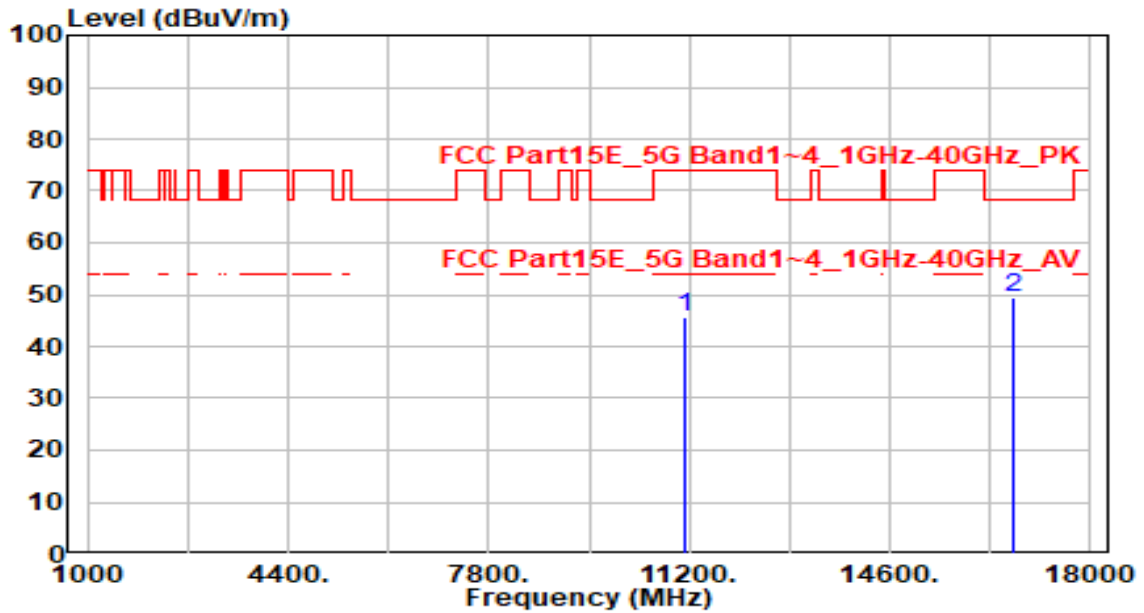


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 11140.000 | 40.07 | 5.71 | 45.78 | -28.22 | 74.00 | 100 | 0 | Peak |
| 2 | * 16710.000 | 41.80 | 7.67 | 49.47 | -18.73 | 68.20 | 100 | 115 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-15 |
| Factor | BBHA 9170 | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44 Ant 0+1+2+3 | Test Voltage | AC 120V/60Hz |

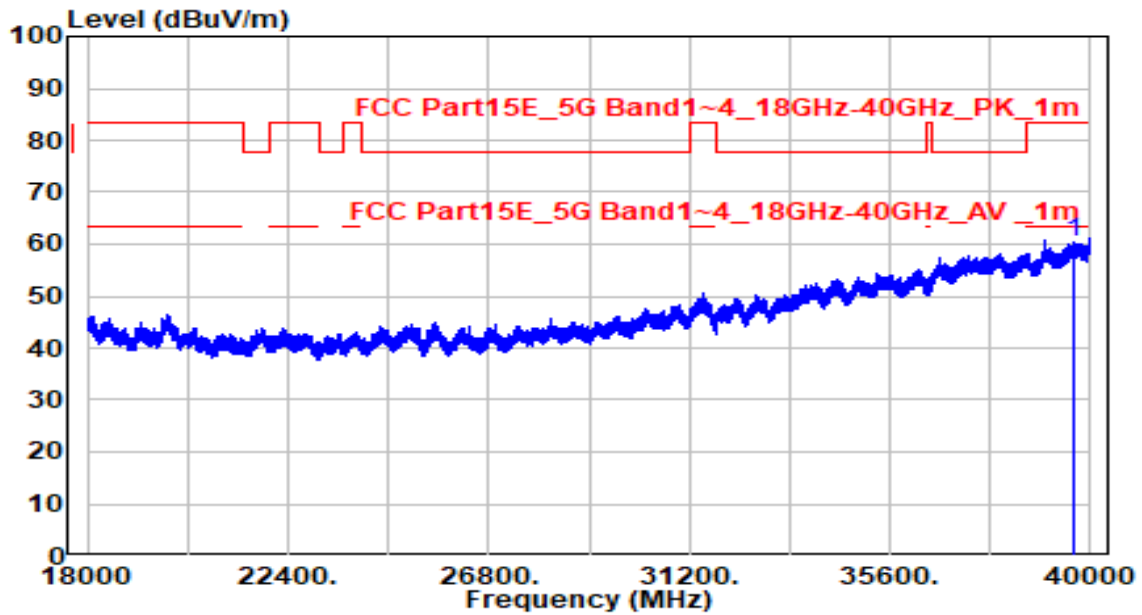


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 39653.500 | 36.64 | 23.92 | 60.56 | -22.94 | 83.50 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-15 |
| Factor | BBHA 9170 | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 44 Ant 0+1+2+3 | Test Voltage | AC 120V/60Hz |

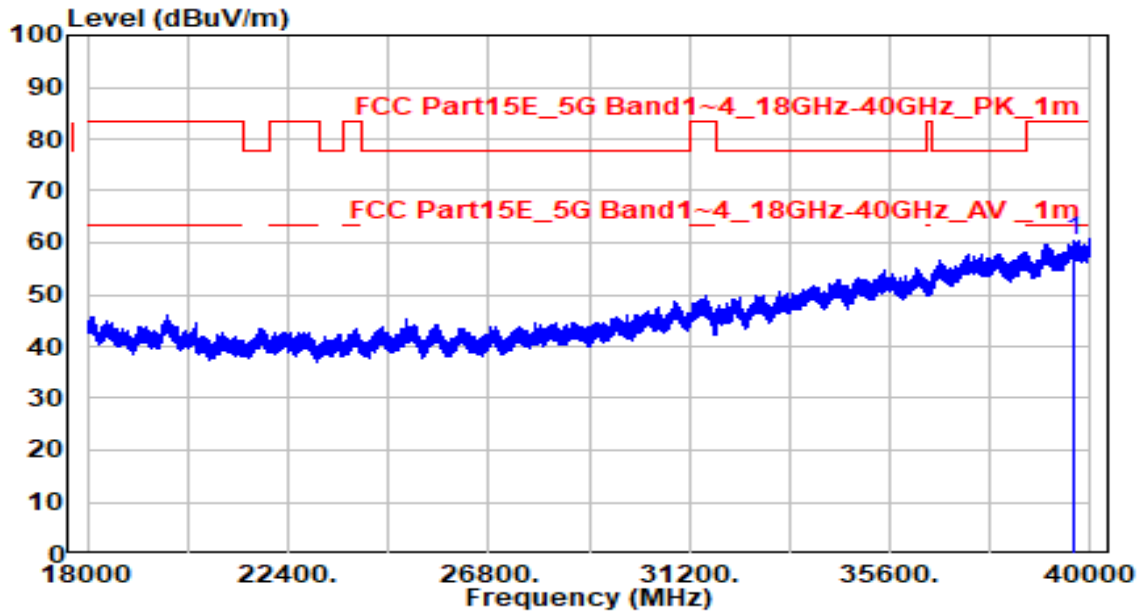

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 36.56 | 23.88 | 60.44 | -23.06 | 83.50 | 150 | 360 | Peak |

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (GHz) |
|----------------------------|-------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42-16.423 | 399.9 - 410 | 4.5-5.15 |
| ¹ 0.495 - 0.505 | 16.69475-16.69525 | 608 - 614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960 - 1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5 -25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660 - 1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123 - 138 | 2200 - 2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310 - 2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.525 | 2483.5 - 2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690 - 2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260 - 3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332 - 3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600 - 4400 | (²) |
| 13.36-13.41 | -- | -- | -- |

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|--|-----------------------|----------------------------|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section II) G

7.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

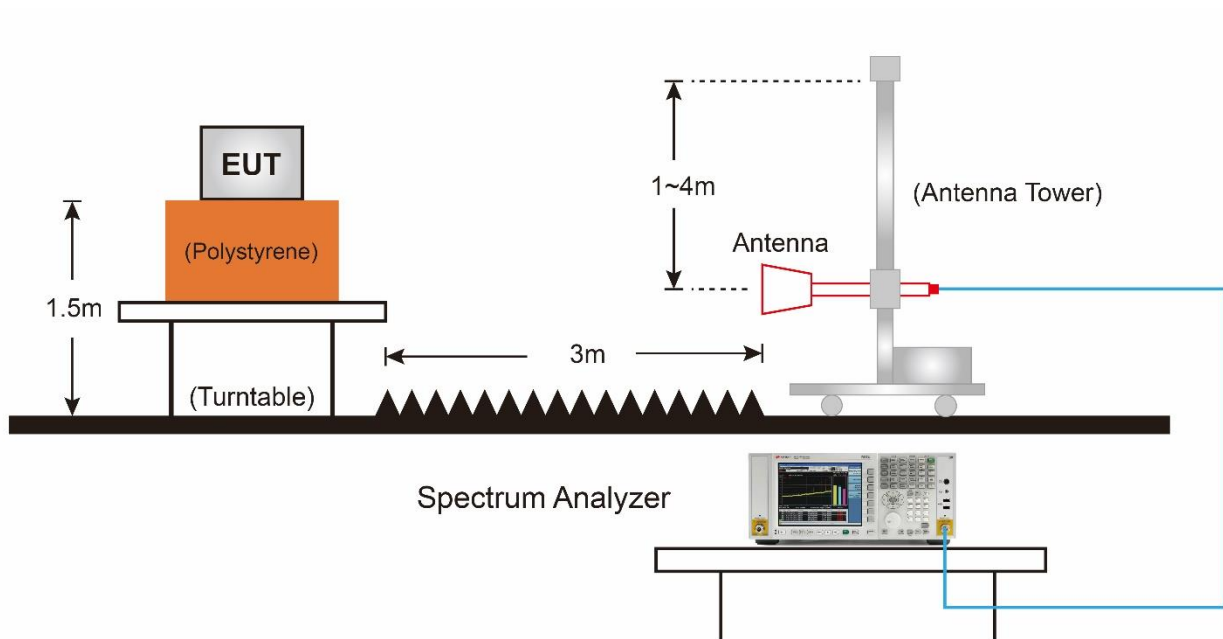

7.9.5. Test Result

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

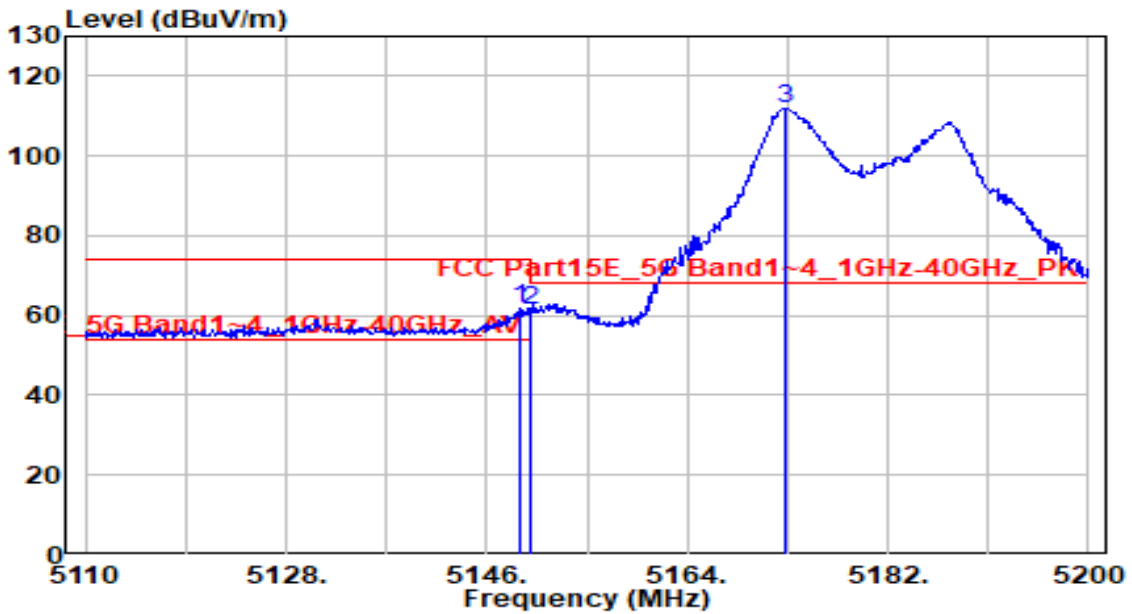


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5149.060 | 61.16 | 0.79 | 61.95 | -12.05 | 74.00 | 285 | 70 | Peak |
| 2 | 5150.000 | 60.32 | 0.80 | 61.12 | -12.88 | 74.00 | 285 | 70 | Peak |
| 3 | 5172.730 | 111.25 | 0.82 | 112.07 | N/A | N/A | 285 | 70 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

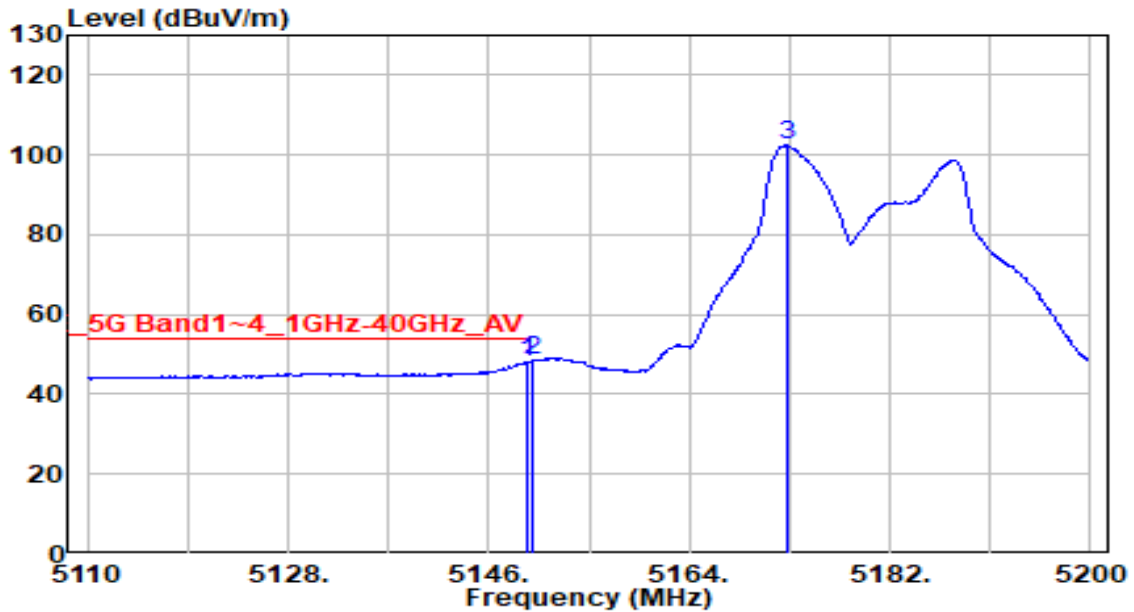


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5149.420 | 47.39 | 0.80 | 48.19 | -5.81 | 54.00 | 285 | 70 | Average |
| 2 | * 5150.000 | 47.72 | 0.80 | 48.51 | -5.49 | 54.00 | 285 | 70 | Average |
| 3 | 5172.730 | 101.64 | 0.82 | 102.46 | N/A | N/A | 285 | 70 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

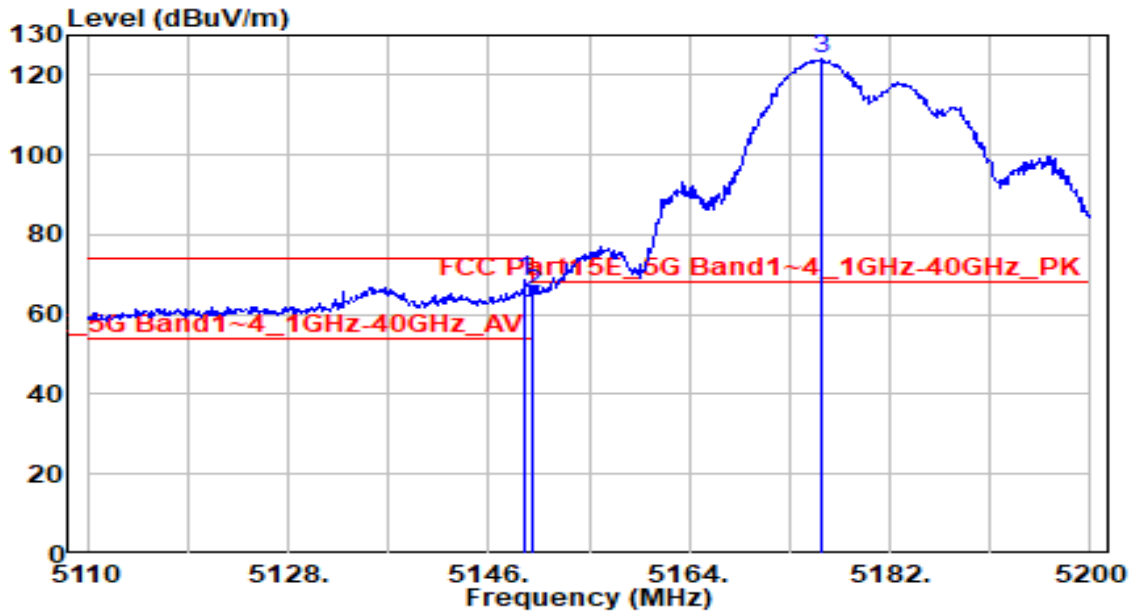


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5149.240 | 67.76 | 0.80 | 68.56 | -5.44 | 74.00 | 200 | 95 | Peak |
| 2 | 5150.000 | 64.62 | 0.80 | 65.42 | -8.58 | 74.00 | 200 | 95 | Peak |
| 3 | 5175.880 | 123.06 | 0.83 | 123.88 | N/A | N/A | 200 | 95 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

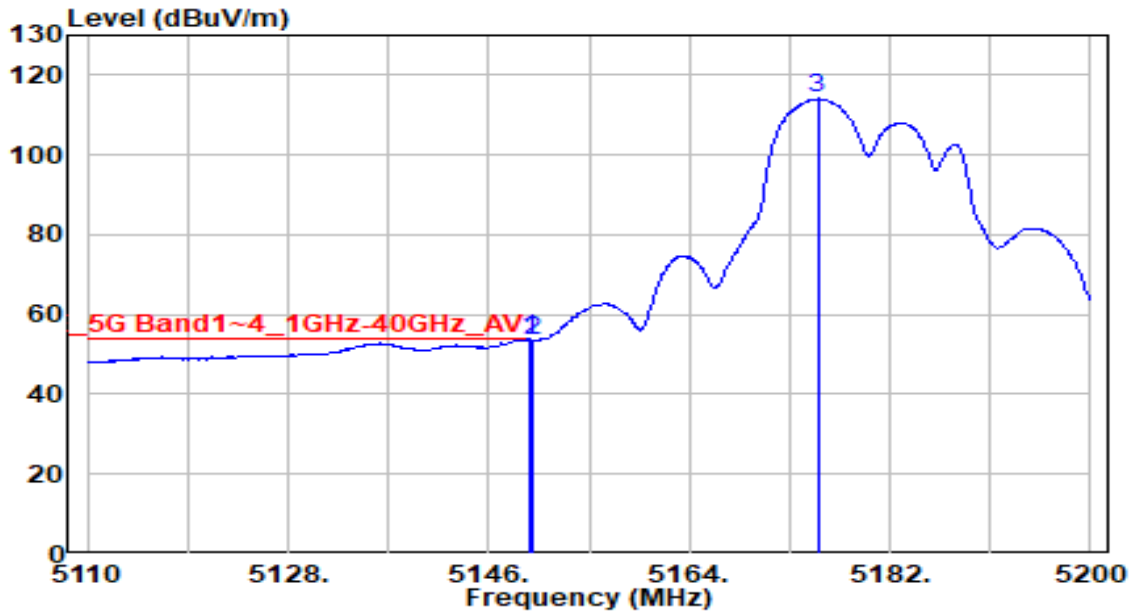


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5149.600 | 53.10 | 0.80 | 53.90 | -0.10 | 54.00 | 200 | 95 | Average |
| 2 | 5150.000 | 52.79 | 0.80 | 53.58 | -0.42 | 54.00 | 200 | 95 | Average |
| 3 | 5175.520 | 113.28 | 0.83 | 114.10 | N/A | N/A | 200 | 95 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

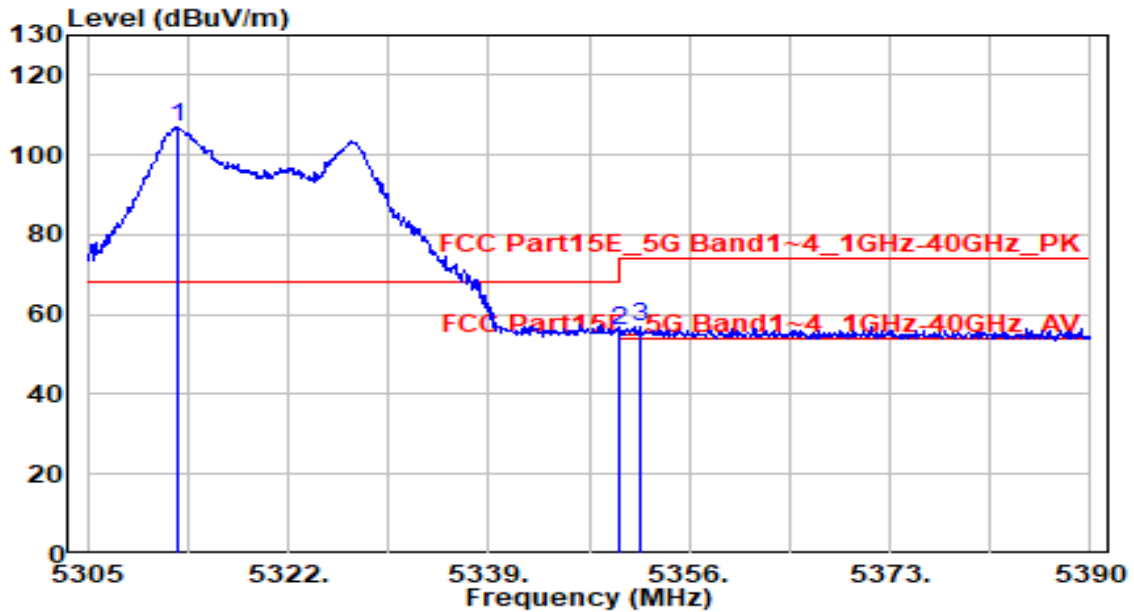


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5312.565 | 106.23 | 0.66 | 106.89 | N/A | N/A | 295 | 65 | Peak |
| 2 | 5350.000 | 55.09 | 0.59 | 55.69 | -18.31 | 74.00 | 295 | 65 | Peak |
| 3 | * 5351.835 | 56.40 | 0.59 | 56.99 | -17.01 | 74.00 | 295 | 65 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

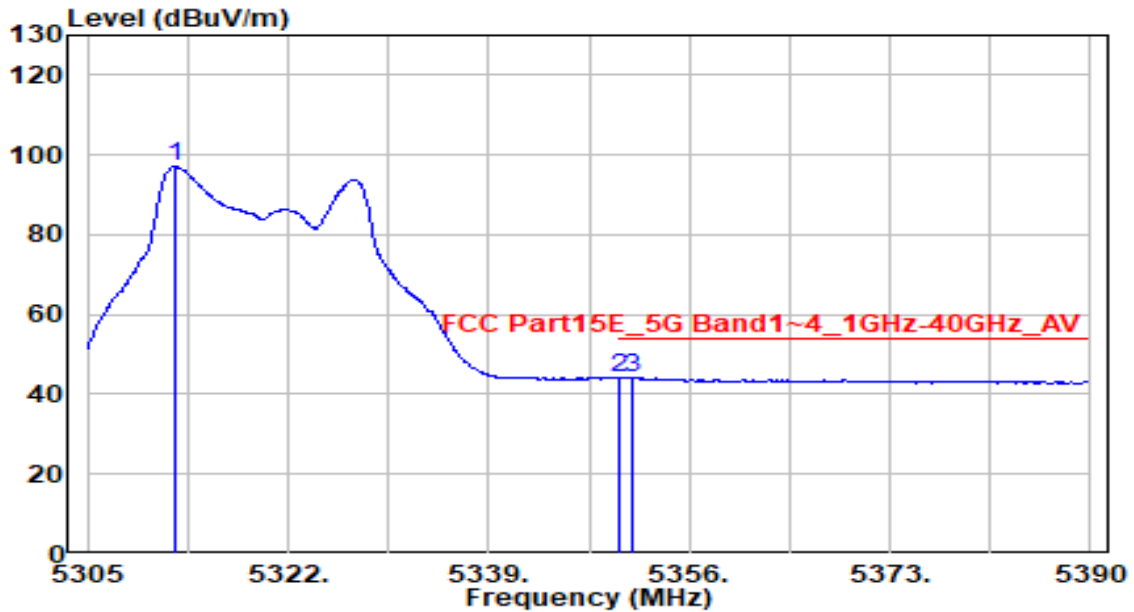


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5312.480 | 96.40 | 0.66 | 97.06 | N/A | N/A | 295 | 65 | Average |
| 2 | 5350.000 | 43.39 | 0.59 | 43.98 | -10.02 | 54.00 | 295 | 65 | Average |
| 3 | * 5351.240 | 43.69 | 0.59 | 44.28 | -9.72 | 54.00 | 295 | 65 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

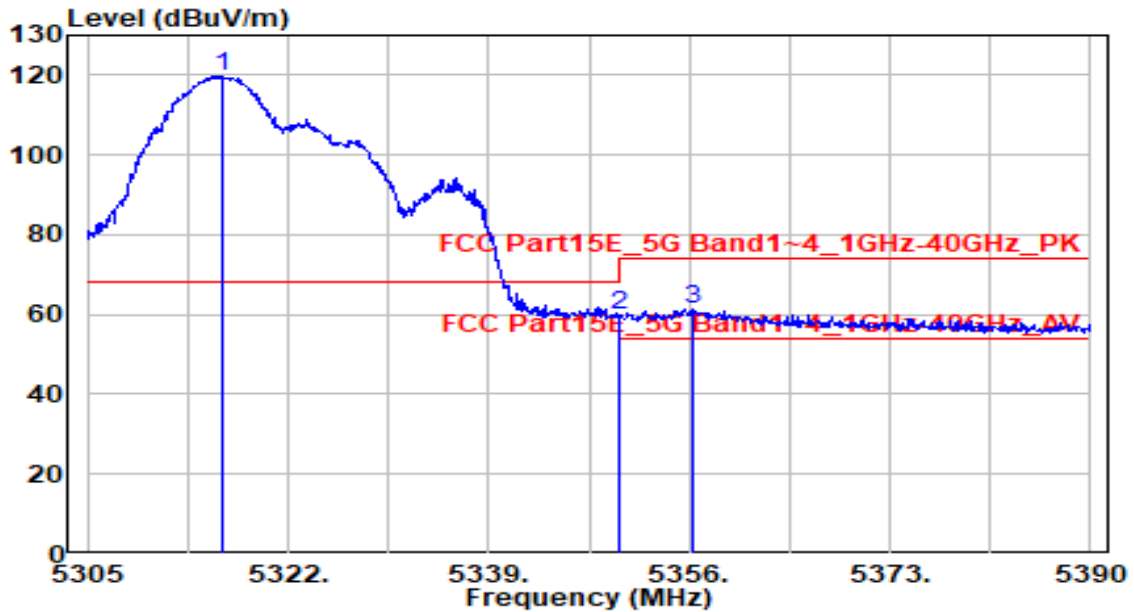


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5316.390 | 119.18 | 0.65 | 119.84 | N/A | N/A | 190 | 95 | Peak |
| 2 | 5350.000 | 59.30 | 0.59 | 59.89 | -14.11 | 74.00 | 190 | 95 | Peak |
| 3 | * 5356.255 | 60.61 | 0.58 | 61.19 | -12.81 | 74.00 | 190 | 95 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

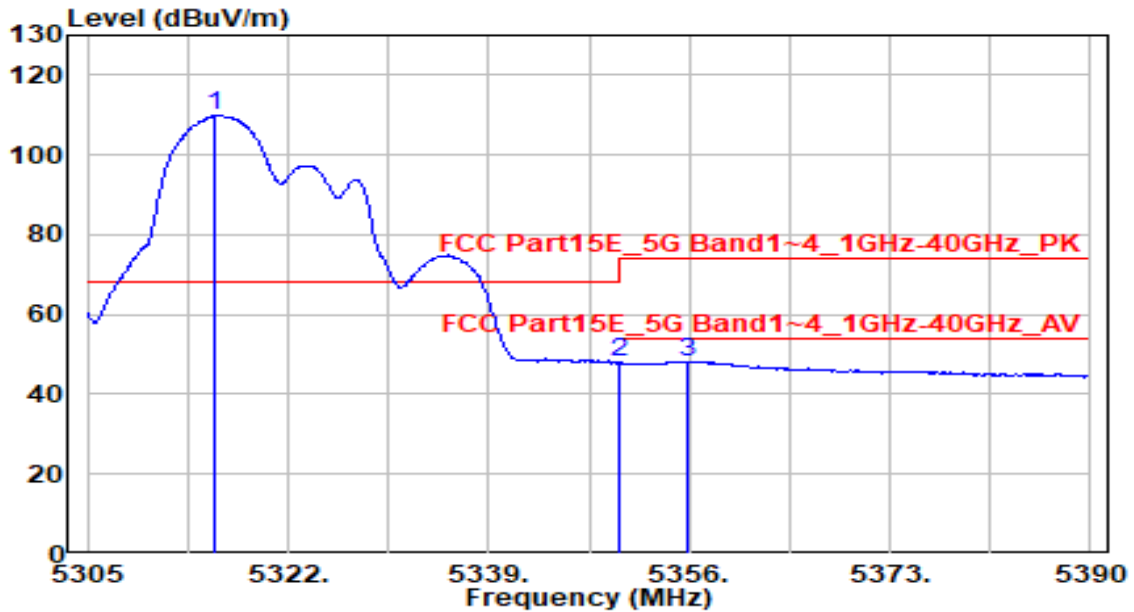


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5315.795 | 109.20 | 0.65 | 109.86 | N/A | N/A | 190 | 95 | Peak |
| 2 | 5350.000 | 47.32 | 0.59 | 47.92 | -26.08 | 74.00 | 190 | 95 | Peak |
| 3 | * 5355.915 | 47.66 | 0.58 | 48.24 | -25.76 | 74.00 | 190 | 95 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

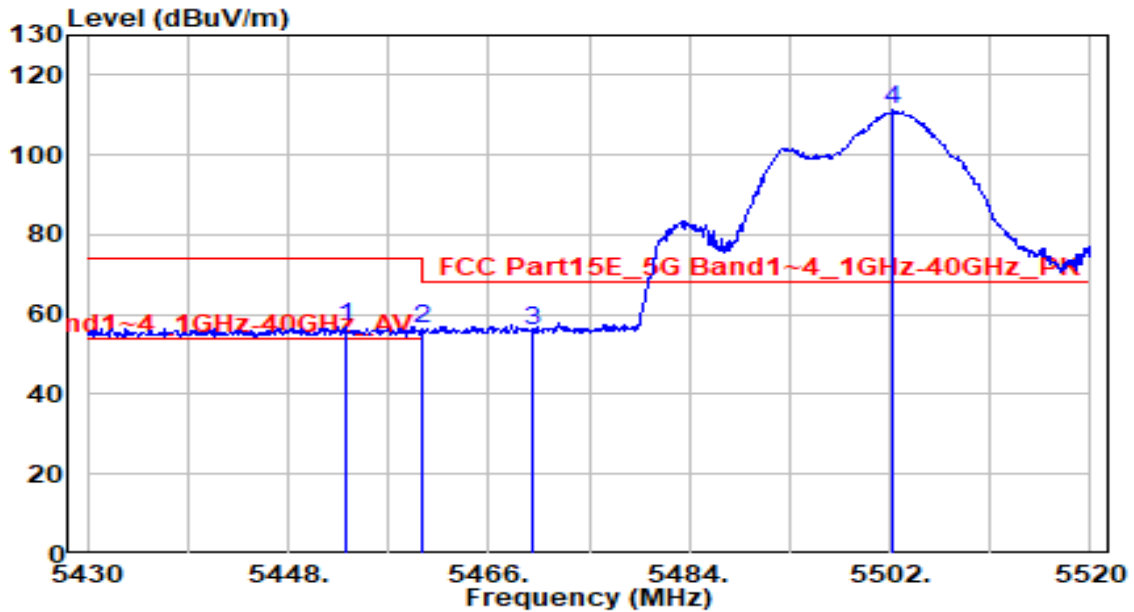


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5453.130 | 56.19 | 0.73 | 56.92 | -17.08 | 74.00 | 100 | 150 | Peak |
| 2 | 5460.000 | 55.51 | 0.76 | 56.27 | -17.73 | 74.00 | 100 | 150 | Peak |
| 3 | * 5470.000 | 55.17 | 0.80 | 55.97 | -12.23 | 68.20 | 100 | 150 | Peak |
| 4 | 5502.270 | 110.25 | 0.94 | 111.19 | N/A | N/A | 100 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

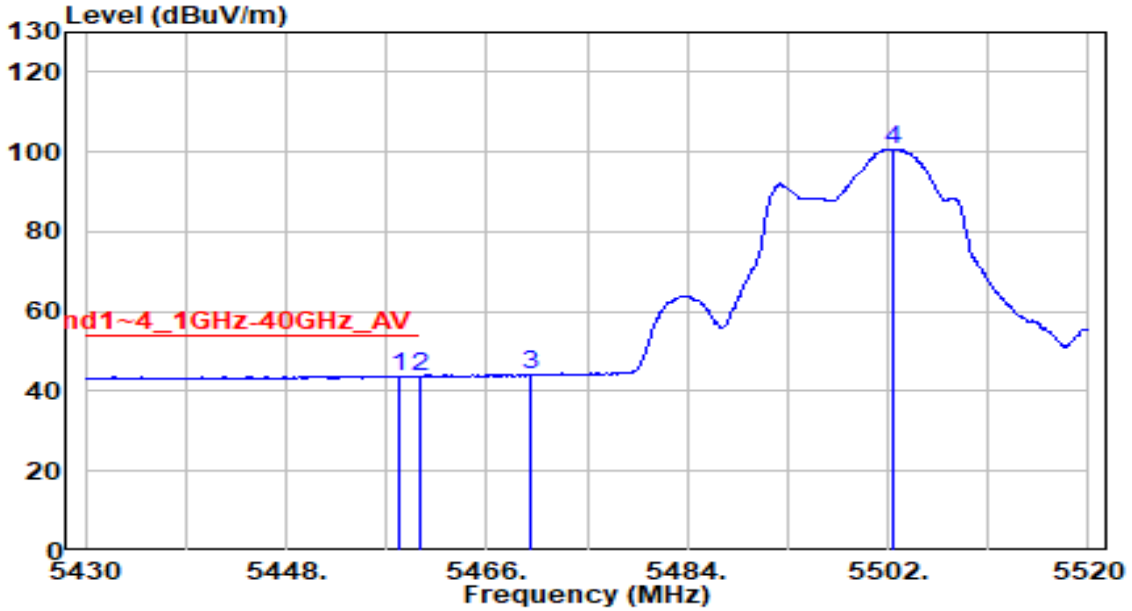


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5458.080 | 43.10 | 0.75 | 43.85 | -10.15 | 54.00 | 100 | 150 | Average |
| 2 | 5460.000 | 43.02 | 0.76 | 43.78 | -10.22 | 54.00 | 100 | 150 | Average |
| 3 | 5470.000 | 43.13 | 0.80 | 43.93 | N/A | N/A | 100 | 150 | Average |
| 4 | 5502.450 | 99.80 | 0.94 | 100.74 | N/A | N/A | 100 | 150 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

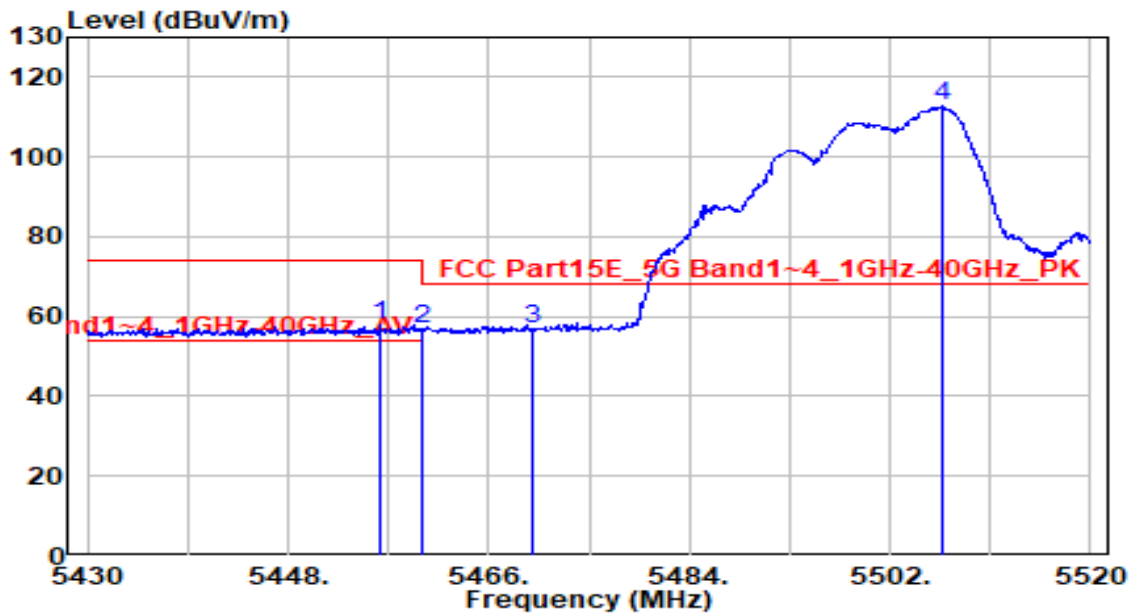


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5456.280 | 57.32 | 0.74 | 58.06 | -15.94 | 74.00 | 120 | 145 | Peak |
| 2 | 5460.000 | 56.02 | 0.76 | 56.78 | -17.22 | 74.00 | 120 | 145 | Peak |
| 3 | * 5470.000 | 56.20 | 0.80 | 57.00 | -11.20 | 68.20 | 120 | 145 | Peak |
| 4 | 5506.770 | 112.04 | 0.96 | 113.00 | N/A | N/A | 120 | 145 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

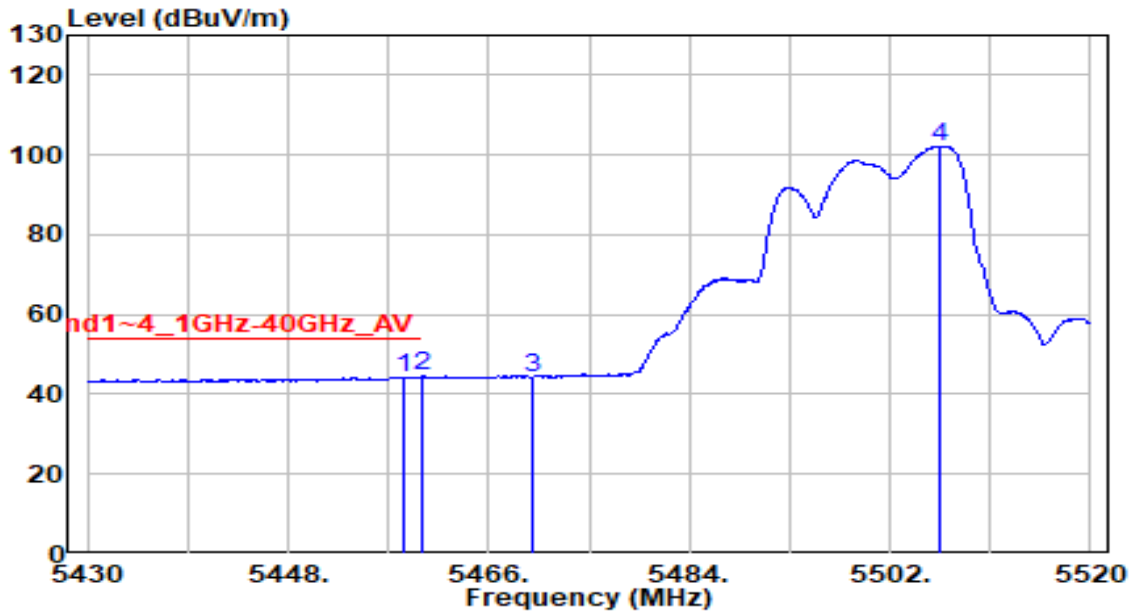


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5458.440 | 43.46 | 0.75 | 44.22 | -9.78 | 54.00 | 120 | 145 | Average |
| 2 | * 5460.000 | 43.64 | 0.76 | 44.40 | -9.60 | 54.00 | 120 | 145 | Average |
| 3 | 5470.000 | 43.57 | 0.80 | 44.37 | N/A | N/A | 120 | 145 | Average |
| 4 | 5506.410 | 101.30 | 0.96 | 102.26 | N/A | N/A | 120 | 145 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

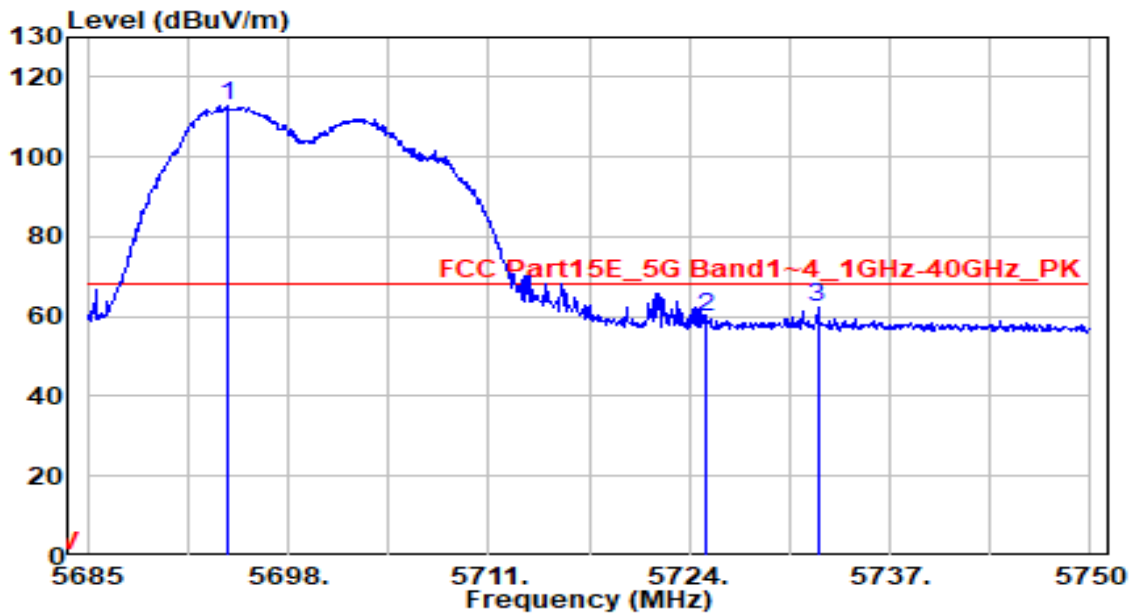


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5694.035 | 110.83 | 1.76 | 112.59 | N/A | N/A | 195 | 150 | Peak |
| 2 | 5725.000 | 58.15 | 1.89 | 60.04 | -8.16 | 68.20 | 195 | 150 | Peak |
| 3 | * 5732.320 | 60.16 | 1.92 | 62.08 | -6.12 | 68.20 | 195 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

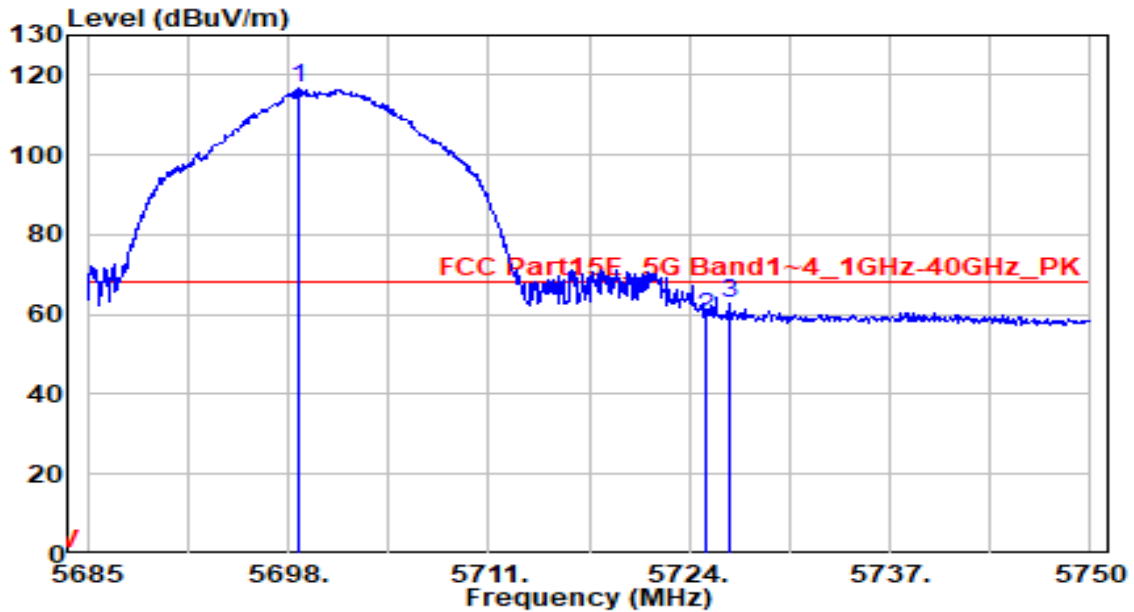


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5698.650 | 114.77 | 1.78 | 116.55 | N/A | N/A | 200 | 135 | Peak |
| 2 | 5725.000 | 57.71 | 1.89 | 59.60 | -8.60 | 68.20 | 200 | 135 | Peak |
| 3 | * 5726.535 | 60.87 | 1.90 | 62.76 | -5.44 | 68.20 | 200 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

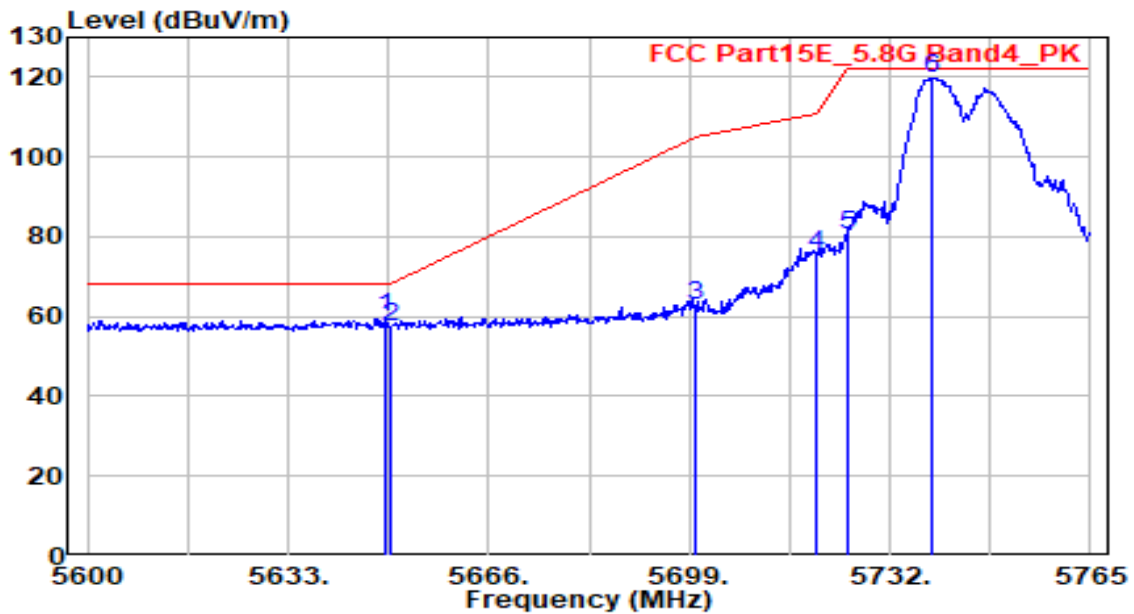


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5648.840 | 58.36 | 1.58 | 59.94 | -8.26 | 68.20 | 220 | 150 | Peak |
| 2 | 5650.000 | 55.57 | 1.59 | 57.16 | -11.04 | 68.20 | 220 | 150 | Peak |
| 3 | 5700.000 | 61.21 | 1.79 | 63.00 | -42.20 | 105.20 | 220 | 150 | Peak |
| 4 | 5720.000 | 73.52 | 1.87 | 75.39 | -35.41 | 110.80 | 220 | 150 | Peak |
| 5 | 5725.000 | 78.39 | 1.89 | 80.28 | -41.92 | 122.20 | 220 | 150 | Peak |
| 6 | 5738.930 | 117.83 | 1.95 | 119.77 | N/A | N/A | 220 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

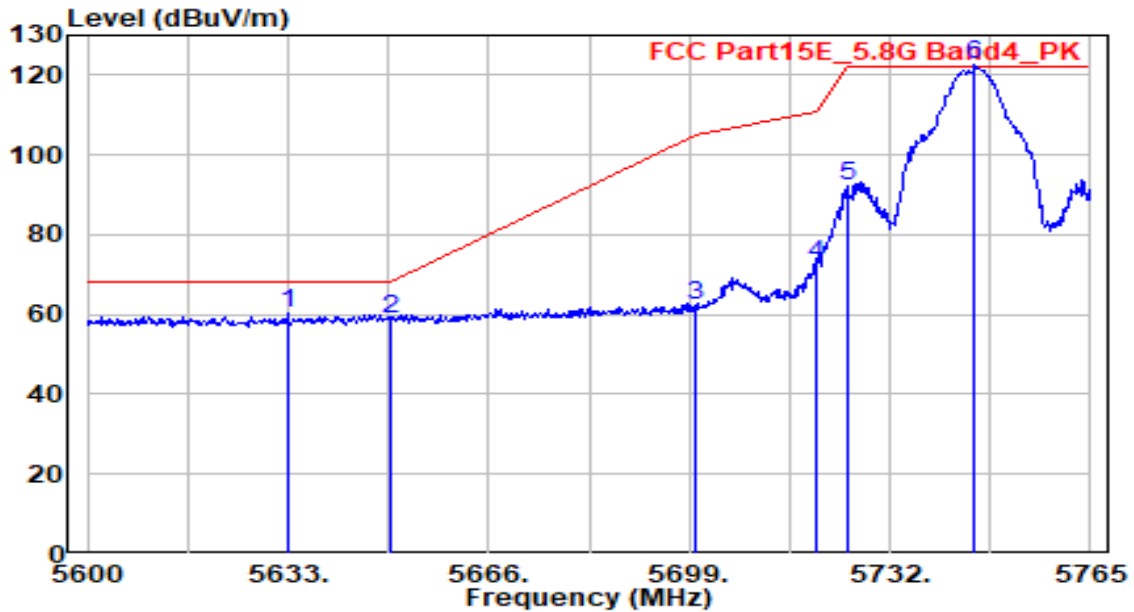


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5632.835 | 58.66 | 1.52 | 60.17 | -8.03 | 68.20 | 215 | 135 | Peak |
| 2 | 5650.000 | 57.37 | 1.59 | 58.96 | -9.24 | 68.20 | 215 | 135 | Peak |
| 3 | 5700.000 | 60.39 | 1.79 | 62.18 | -43.02 | 105.20 | 215 | 135 | Peak |
| 4 | 5720.000 | 70.92 | 1.87 | 72.78 | -38.02 | 110.80 | 215 | 135 | Peak |
| 5 | 5725.000 | 90.33 | 1.89 | 92.22 | -29.98 | 122.20 | 215 | 135 | Peak |
| 6 | 5746.025 | 120.70 | 1.97 | 122.67 | N/A | N/A | 215 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

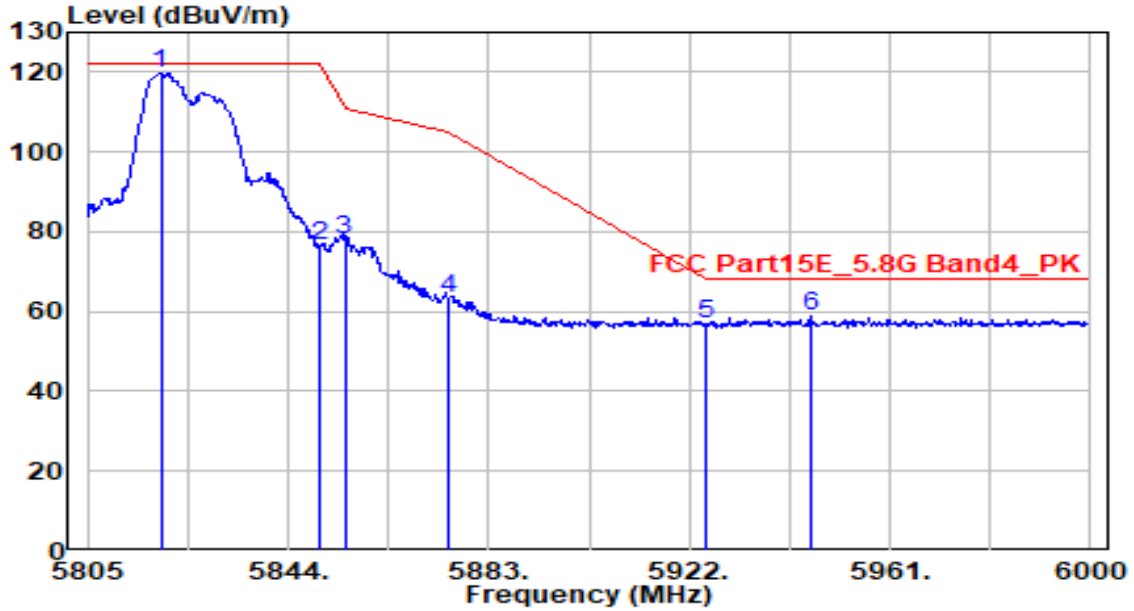


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5819.235 | 117.35 | 2.22 | 119.57 | N/A | N/A | 220 | 145 | Peak |
| 2 | 5850.000 | 74.29 | 2.27 | 76.56 | -45.64 | 122.20 | 220 | 145 | Peak |
| 3 | 5855.000 | 75.72 | 2.28 | 78.00 | -32.80 | 110.80 | 220 | 145 | Peak |
| 4 | 5875.000 | 60.76 | 2.31 | 63.07 | -42.13 | 105.20 | 220 | 145 | Peak |
| 5 | 5925.000 | 54.62 | 2.38 | 57.01 | -11.19 | 68.20 | 220 | 145 | Peak |
| 6 | * 5945.595 | 56.39 | 2.42 | 58.81 | -9.39 | 68.20 | 220 | 145 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|-------------------------------------|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

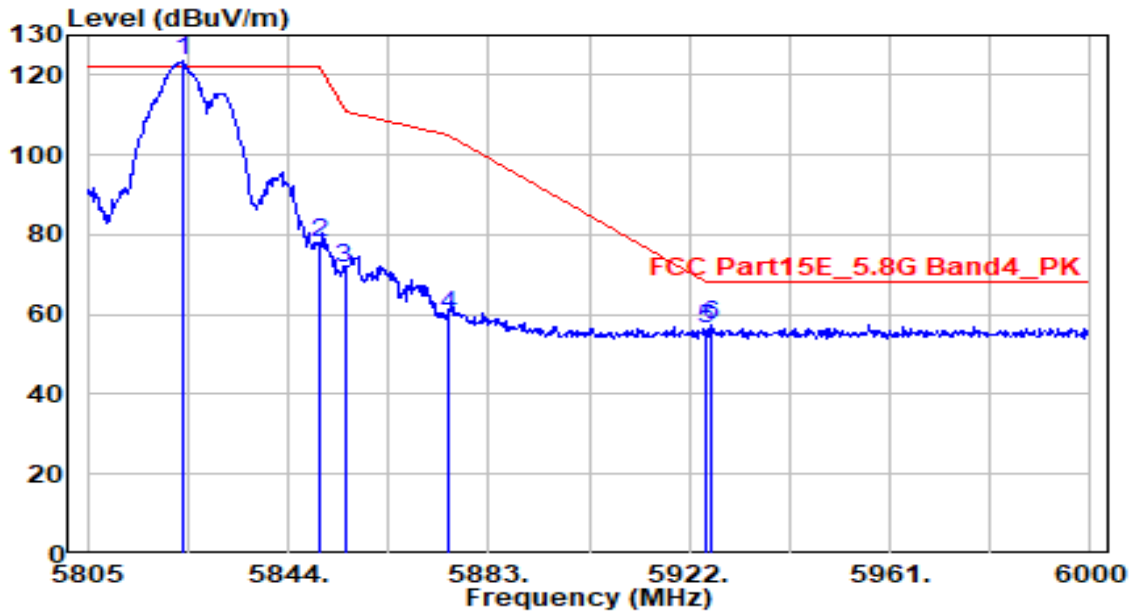


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5823.525 | 121.55 | 2.23 | 123.78 | N/A | N/A | 200 | 135 | Peak |
| 2 | 5850.000 | 75.49 | 2.27 | 77.76 | -44.44 | 122.20 | 200 | 135 | Peak |
| 3 | 5855.000 | 69.15 | 2.28 | 71.43 | -39.37 | 110.80 | 200 | 135 | Peak |
| 4 | 5875.000 | 57.75 | 2.31 | 60.06 | -45.14 | 105.20 | 200 | 135 | Peak |
| 5 | 5925.000 | 53.96 | 2.38 | 56.34 | -11.86 | 68.20 | 200 | 135 | Peak |
| 6 | * 5926.095 | 55.02 | 2.39 | 57.41 | -10.79 | 68.20 | 200 | 135 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

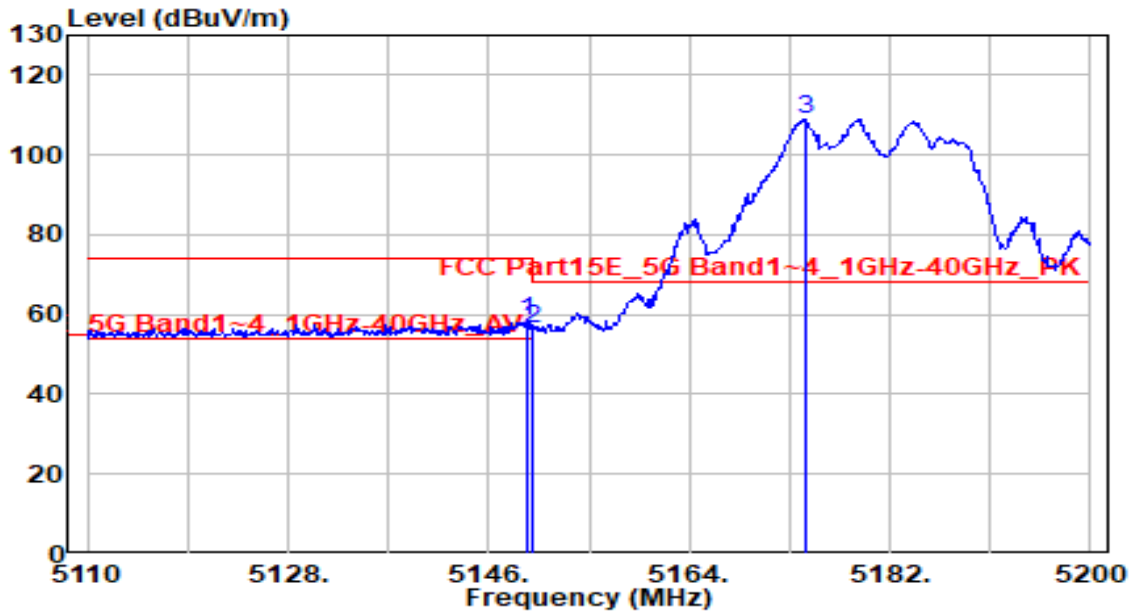


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5149.420 | 57.34 | 0.80 | 58.14 | -15.86 | 74.00 | 285 | 60 | Peak |
| 2 | | 5150.000 | 55.47 | 0.80 | 56.27 | -17.73 | 74.00 | 285 | 60 | Peak |
| 3 | | 5174.350 | 108.14 | 0.83 | 108.97 | N/A | N/A | 285 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

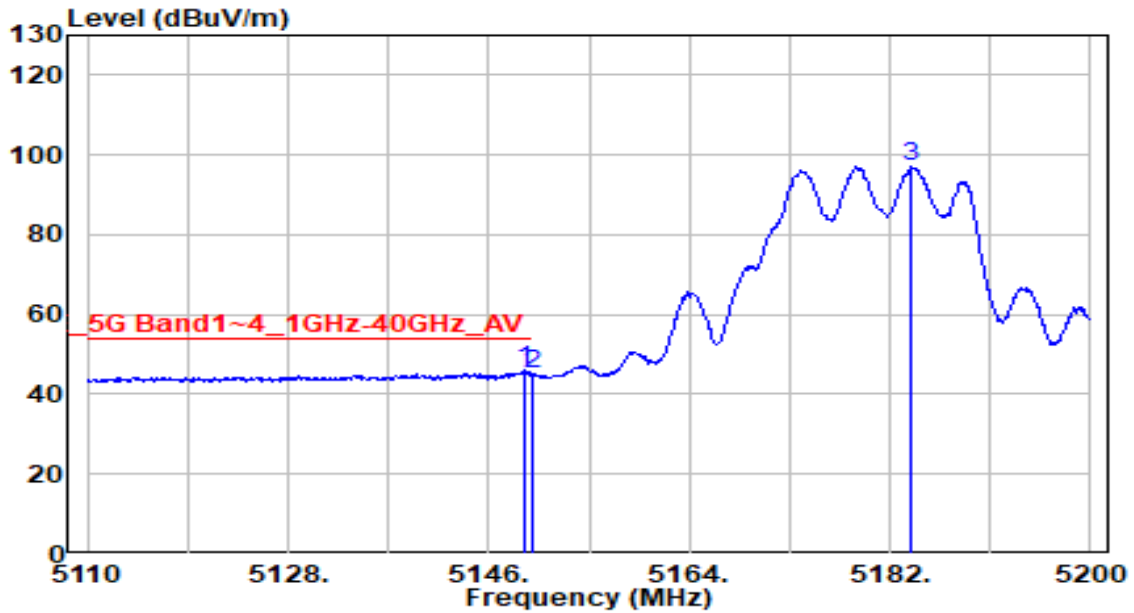


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5149.240 | 45.20 | 0.80 | 45.99 | -8.01 | 54.00 | 285 | 60 | Average |
| 2 | | 5150.000 | 44.19 | 0.80 | 44.98 | -9.02 | 54.00 | 285 | 60 | Average |
| 3 | | 5183.980 | 96.17 | 0.84 | 97.01 | N/A | N/A | 285 | 60 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

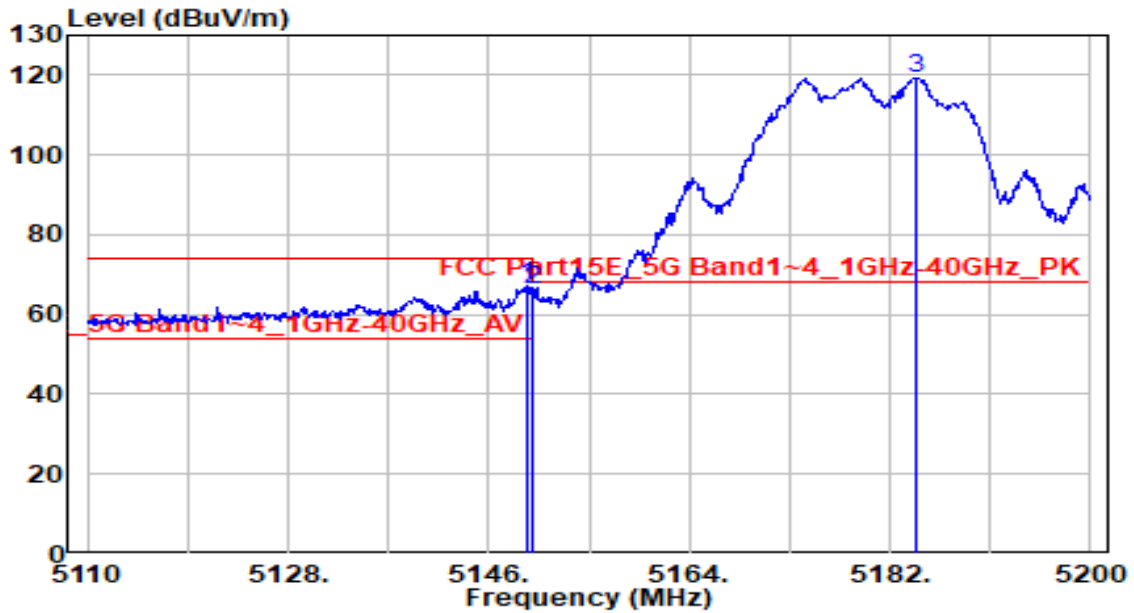


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5149.420 | 66.63 | 0.80 | 67.42 | -6.58 | 74.00 | 200 | 100 | Peak |
| 2 | | 5150.000 | 65.19 | 0.80 | 65.99 | -8.01 | 74.00 | 200 | 100 | Peak |
| 3 | | 5184.430 | 118.50 | 0.84 | 119.34 | N/A | N/A | 200 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

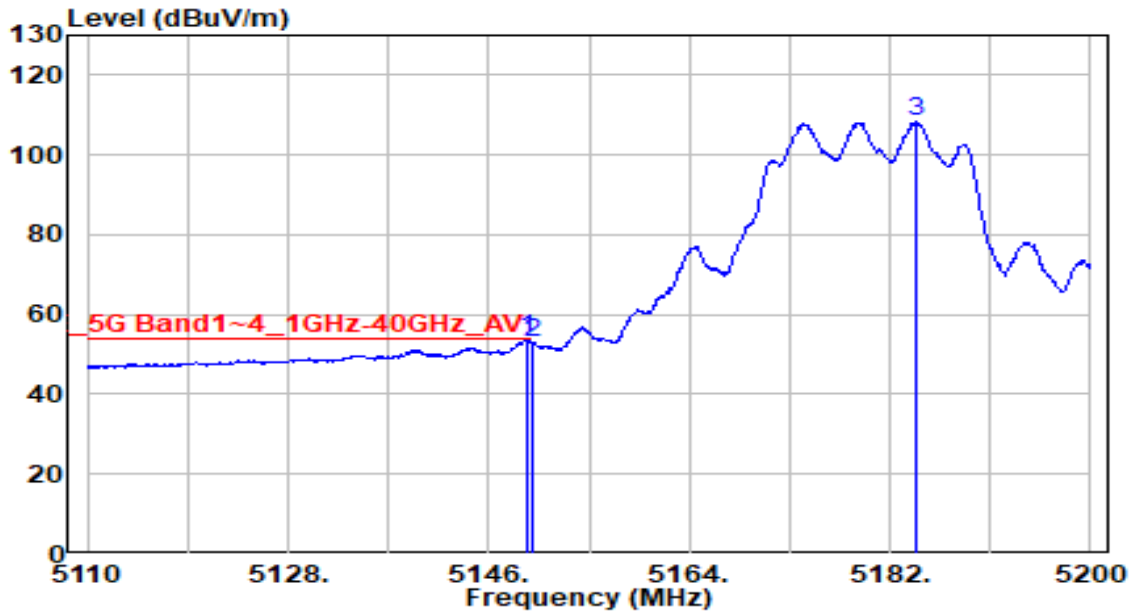


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 53.11 | 0.80 | 53.90 | -0.10 | 54.00 | 200 | 100 | Average |
| 2 | | 51.95 | 0.80 | 52.75 | -1.25 | 54.00 | 200 | 100 | Average |
| 3 | | 107.45 | 0.84 | 108.29 | N/A | N/A | 200 | 100 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

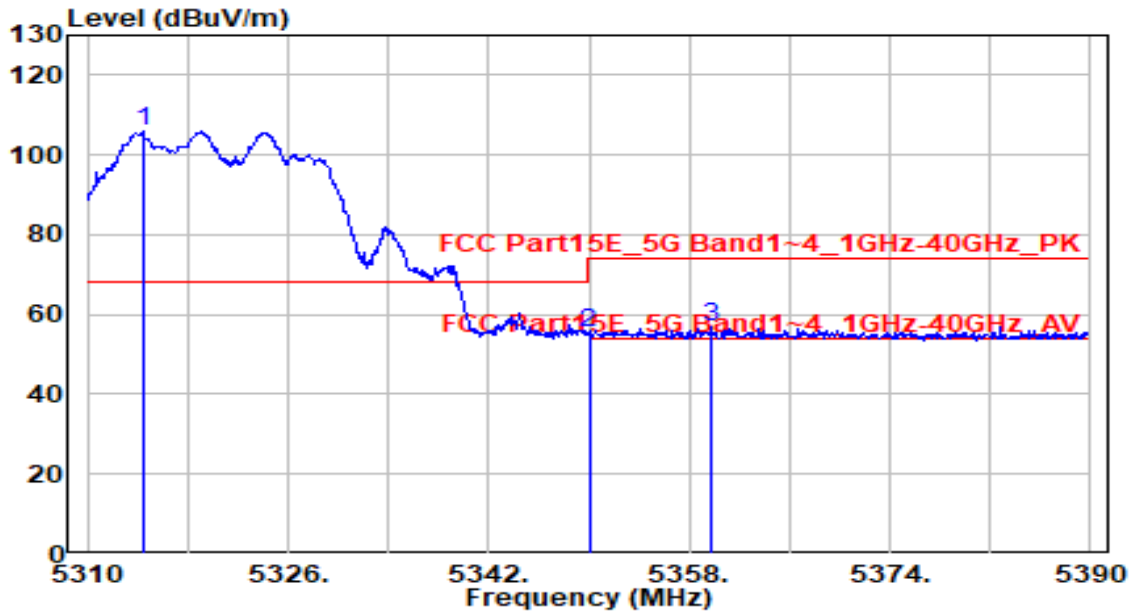


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5314.480 | 105.14 | 0.66 | 105.80 | N/A | N/A | 300 | 60 | Peak |
| 2 | 5350.000 | 54.90 | 0.59 | 55.49 | -18.51 | 74.00 | 300 | 60 | Peak |
| 3 | * 5359.760 | 56.54 | 0.58 | 57.12 | -16.88 | 74.00 | 300 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

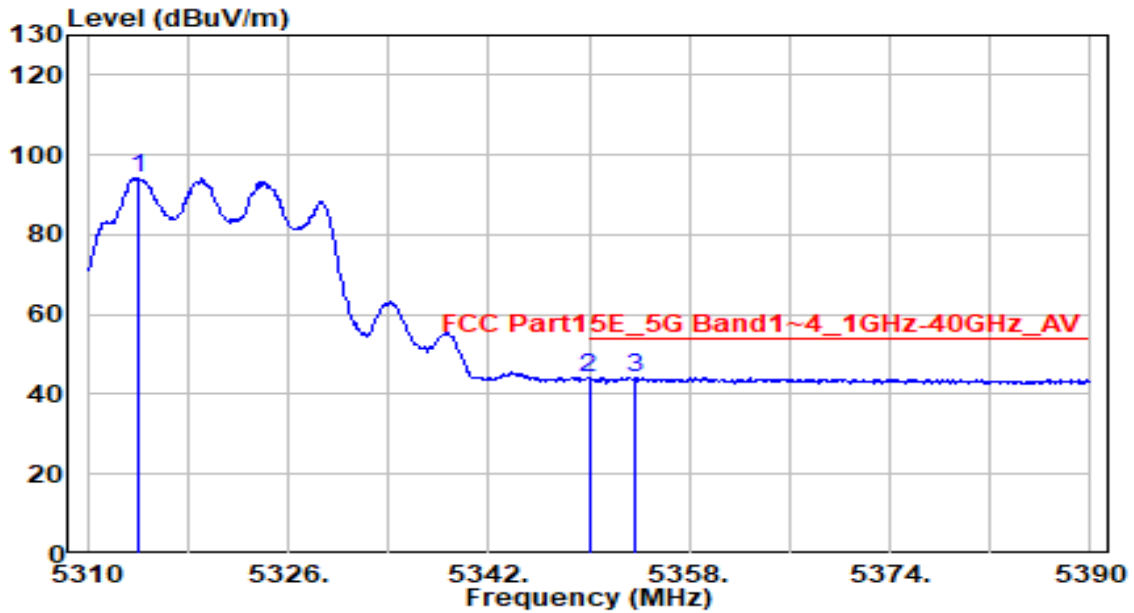


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5314.000 | 93.75 | 0.66 | 94.40 | N/A | N/A | 300 | 60 | Average |
| 2 | 5350.000 | 43.34 | 0.59 | 43.93 | -10.07 | 54.00 | 300 | 60 | Average |
| 3 | * 5353.600 | 43.63 | 0.59 | 44.22 | -9.78 | 54.00 | 300 | 60 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

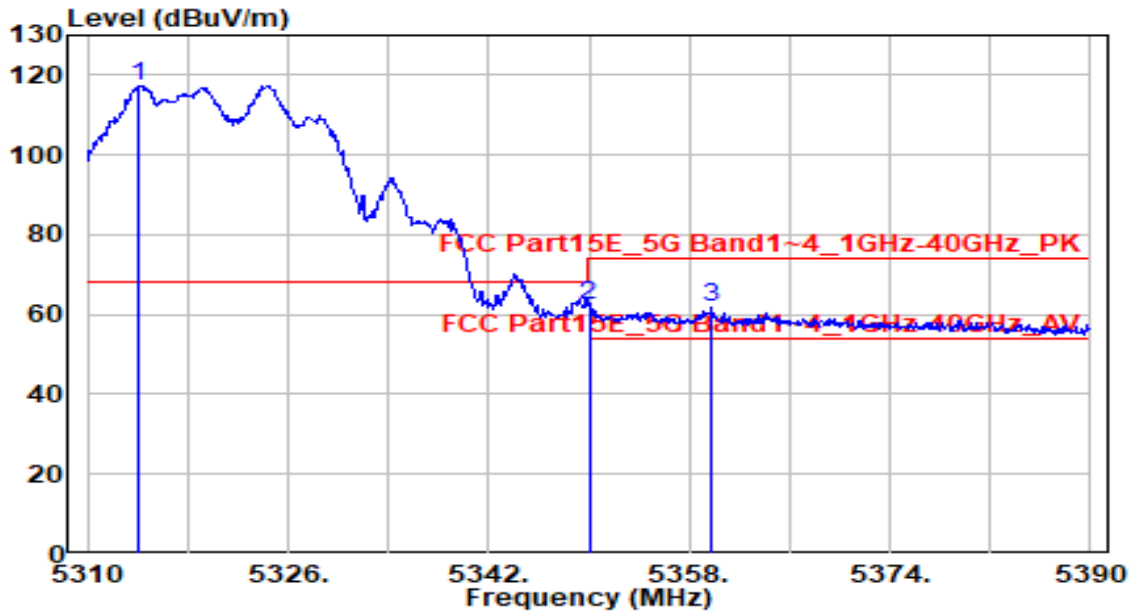


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5314.160 | 116.69 | 0.66 | 117.35 | N/A | N/A | 195 | 100 | Peak |
| 2 | * 5350.000 | 61.71 | 0.59 | 62.30 | -11.70 | 74.00 | 195 | 100 | Peak |
| 3 | 5359.840 | 61.40 | 0.58 | 61.97 | -12.03 | 74.00 | 195 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

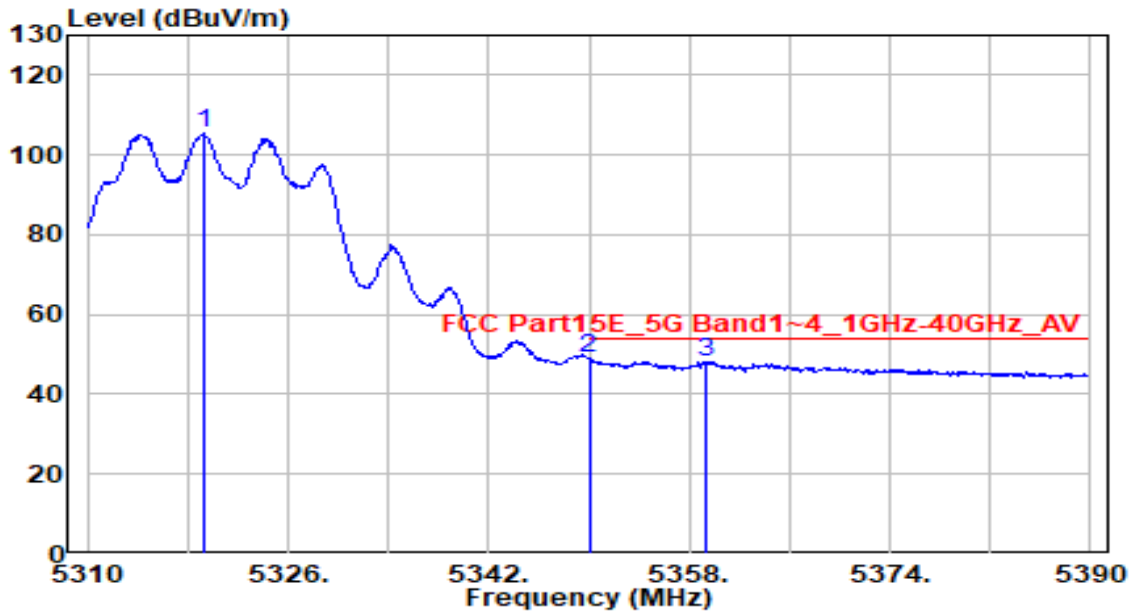


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5319.280 | 104.65 | 0.65 | 105.29 | N/A | N/A | 195 | 100 | Average |
| 2 | * 5350.000 | 48.42 | 0.59 | 49.01 | -4.99 | 54.00 | 195 | 100 | Average |
| 3 | 5359.280 | 47.61 | 0.58 | 48.18 | -5.82 | 54.00 | 195 | 100 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

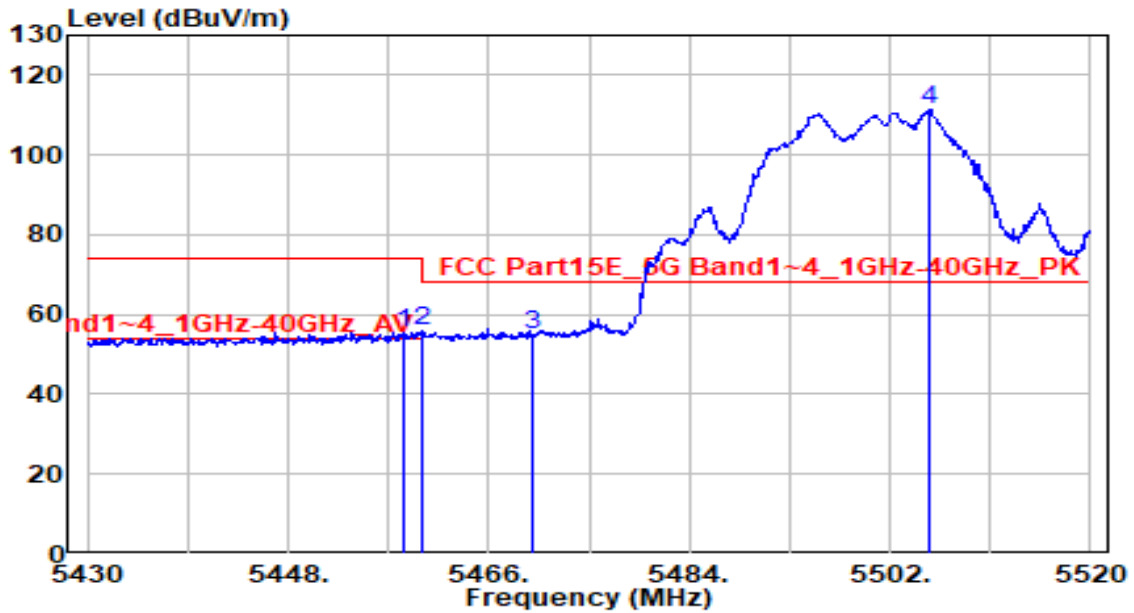


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5458.350 | 54.77 | 0.75 | 55.53 | -18.47 | 74.00 | 100 | 150 | Peak |
| 2 | 5460.000 | 55.06 | 0.76 | 55.82 | -18.18 | 74.00 | 100 | 150 | Peak |
| 3 | * 5470.000 | 53.95 | 0.80 | 54.76 | -13.44 | 68.20 | 100 | 150 | Peak |
| 4 | 5505.600 | 110.46 | 0.96 | 111.42 | N/A | N/A | 100 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

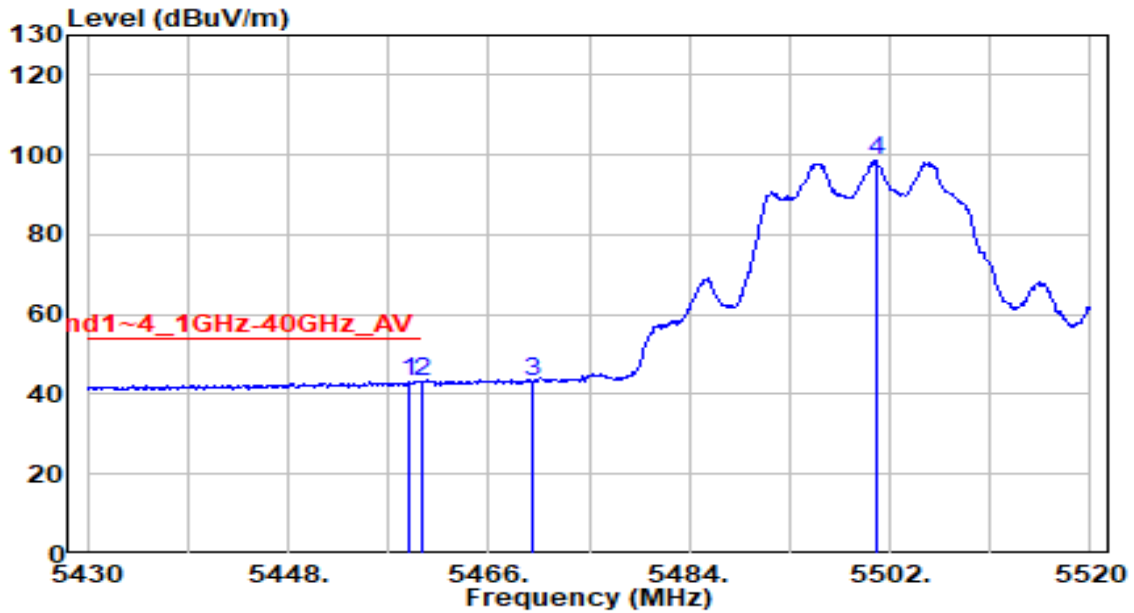


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5458.890 | 42.34 | 0.76 | 43.10 | -10.90 | 54.00 | 100 | 150 | Average |
| 2 | * 5460.000 | 42.35 | 0.76 | 43.11 | -10.89 | 54.00 | 100 | 150 | Average |
| 3 | 5470.000 | 42.17 | 0.80 | 42.97 | N/A | N/A | 100 | 150 | Average |
| 4 | 5500.830 | 97.59 | 0.93 | 98.52 | N/A | N/A | 100 | 150 | Average |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

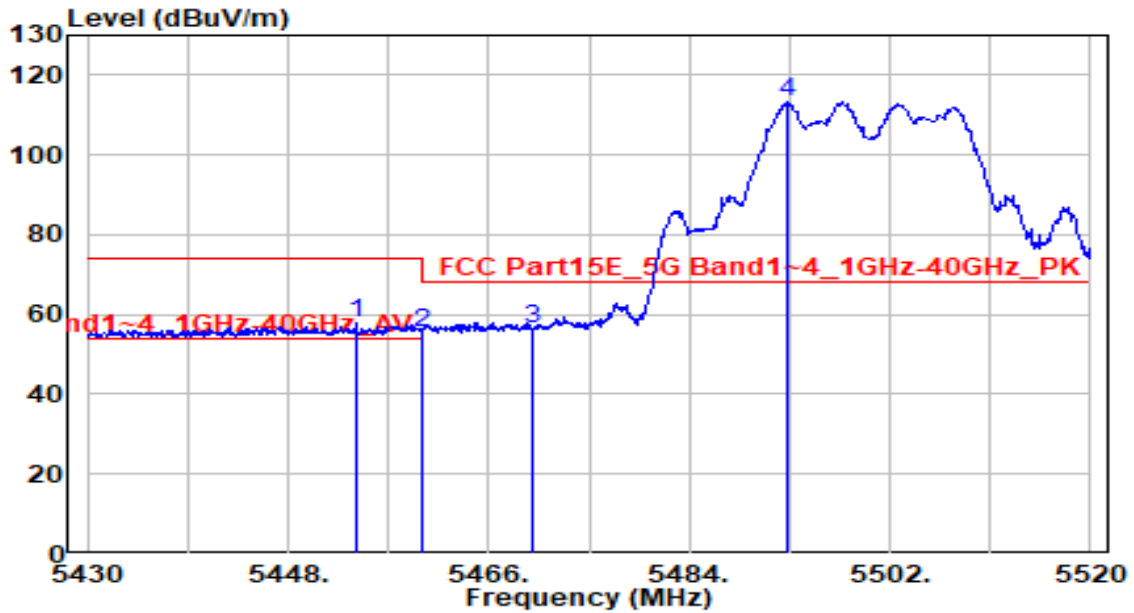


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5454.030 | 57.12 | 0.74 | 57.86 | -16.14 | 74.00 | 100 | 130 | Peak |
| 2 | 5460.000 | 54.75 | 0.76 | 55.51 | -18.49 | 74.00 | 100 | 130 | Peak |
| 3 | * 5470.000 | 55.42 | 0.80 | 56.22 | -11.98 | 68.20 | 100 | 130 | Peak |
| 4 | 5492.730 | 112.23 | 0.90 | 113.13 | N/A | N/A | 100 | 130 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

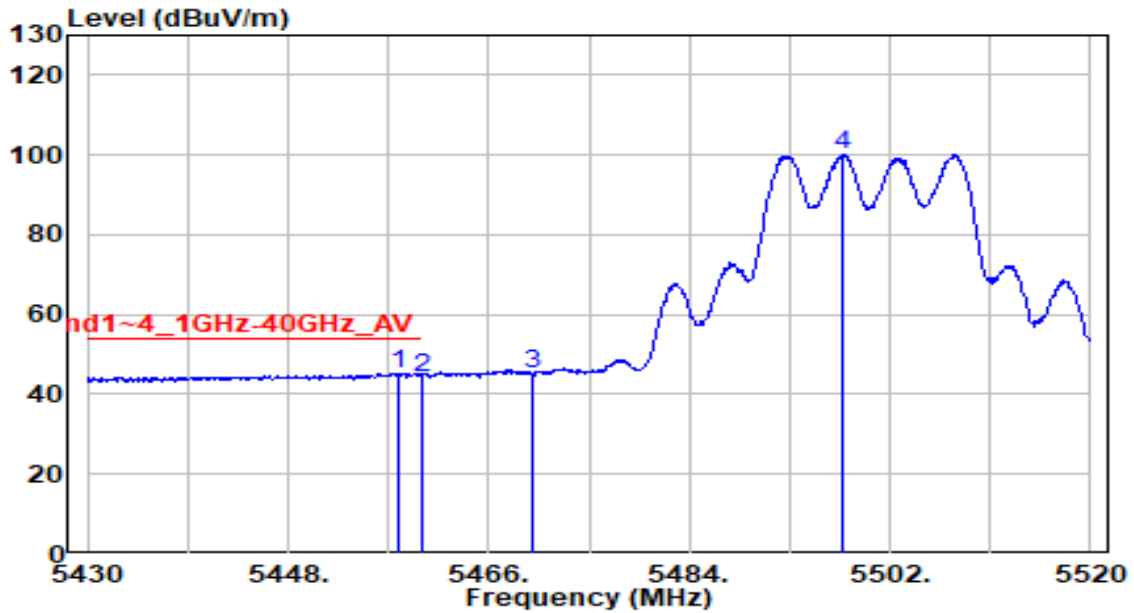


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5457.810 | 44.61 | 0.75 | 45.36 | -8.64 | 54.00 | 100 | 130 | Average |
| 2 | 5460.000 | 43.64 | 0.76 | 44.40 | -9.60 | 54.00 | 100 | 130 | Average |
| 3 | 5470.000 | 44.39 | 0.80 | 45.19 | N/A | N/A | 100 | 130 | Average |
| 4 | 5497.860 | 99.26 | 0.92 | 100.18 | N/A | N/A | 100 | 130 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

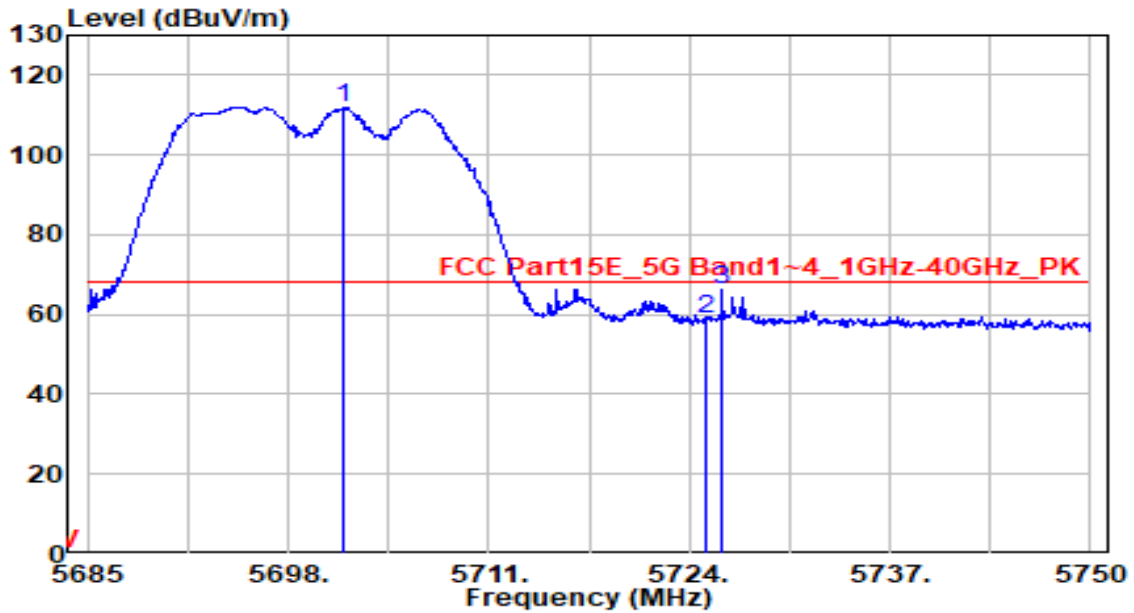


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5701.640 | 110.21 | 1.79 | 112.00 | N/A | N/A | 200 | 150 | Peak |
| 2 | 5725.000 | 57.11 | 1.89 | 58.99 | -9.21 | 68.20 | 200 | 150 | Peak |
| 3 | * 5726.080 | 64.24 | 1.89 | 66.13 | -2.07 | 68.20 | 200 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

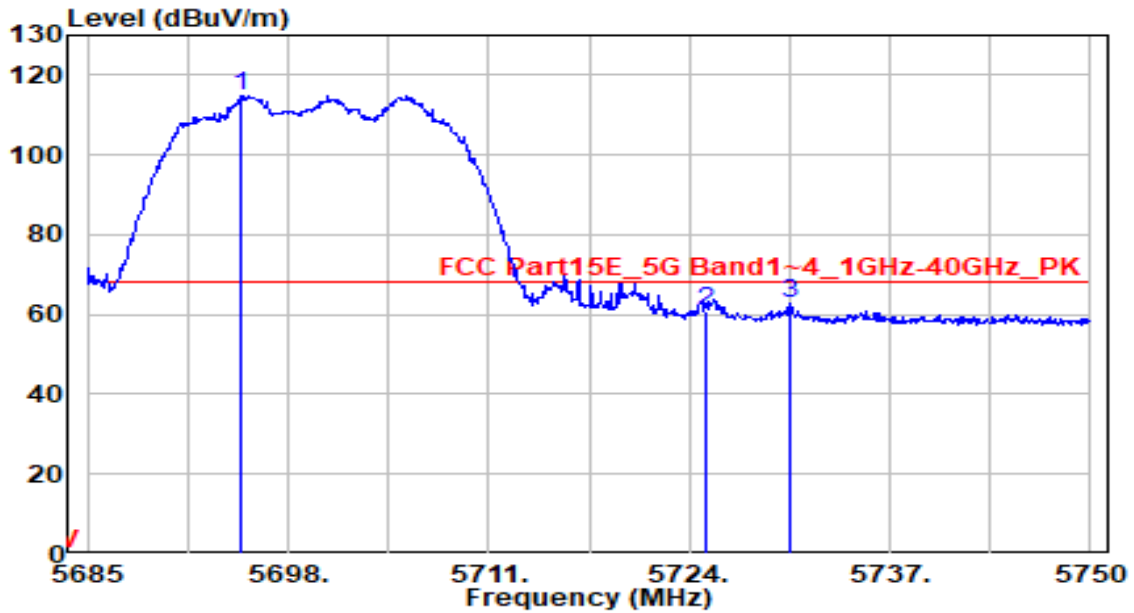


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5695.010 | 113.06 | 1.77 | 114.83 | N/A | N/A | 215 | 140 | Peak |
| 2 | 5725.000 | 58.82 | 1.89 | 60.71 | -7.49 | 68.20 | 215 | 140 | Peak |
| 3 | * 5730.565 | 60.97 | 1.91 | 62.88 | -5.32 | 68.20 | 215 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

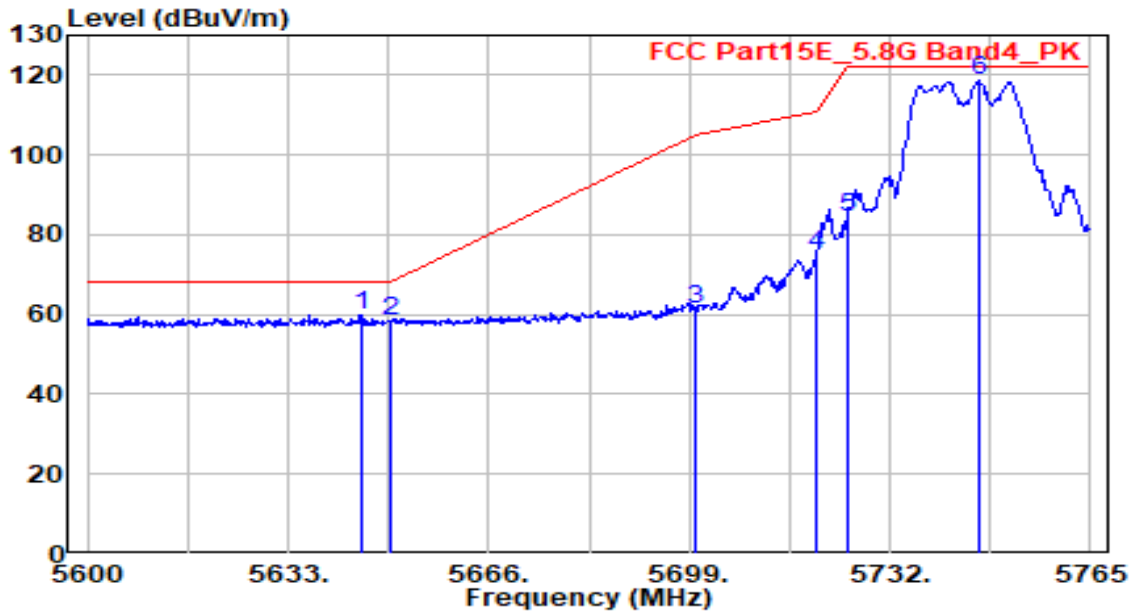


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5645.045 | 58.38 | 1.57 | 59.95 | -8.25 | 68.20 | 220 | 150 | Peak |
| 2 | 5650.000 | 56.92 | 1.59 | 58.51 | -9.69 | 68.20 | 220 | 150 | Peak |
| 3 | 5700.000 | 59.77 | 1.79 | 61.56 | -43.64 | 105.20 | 220 | 150 | Peak |
| 4 | 5720.000 | 73.42 | 1.87 | 75.29 | -35.51 | 110.80 | 220 | 150 | Peak |
| 5 | 5725.000 | 82.73 | 1.89 | 84.62 | -37.58 | 122.20 | 220 | 150 | Peak |
| 6 | 5746.520 | 116.97 | 1.98 | 118.95 | N/A | N/A | 220 | 150 | Peak |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

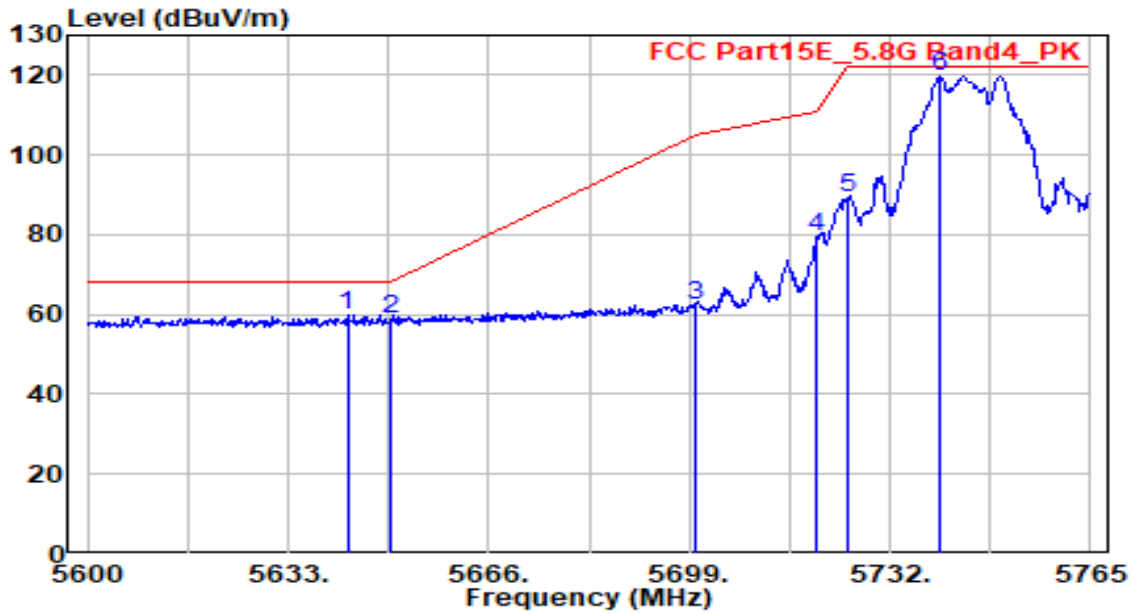


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5642.735 | 58.26 | 1.56 | 59.82 | -8.38 | 68.20 | 205 | 135 | Peak |
| 2 | 5650.000 | 57.11 | 1.59 | 58.69 | -9.51 | 68.20 | 205 | 135 | Peak |
| 3 | 5700.000 | 60.48 | 1.79 | 62.27 | -42.93 | 105.20 | 205 | 135 | Peak |
| 4 | 5720.000 | 77.74 | 1.87 | 79.61 | -31.19 | 110.80 | 205 | 135 | Peak |
| 5 | 5725.000 | 87.29 | 1.89 | 89.18 | -33.02 | 122.20 | 205 | 135 | Peak |
| 6 | 5740.250 | 117.88 | 1.95 | 119.84 | N/A | N/A | 205 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

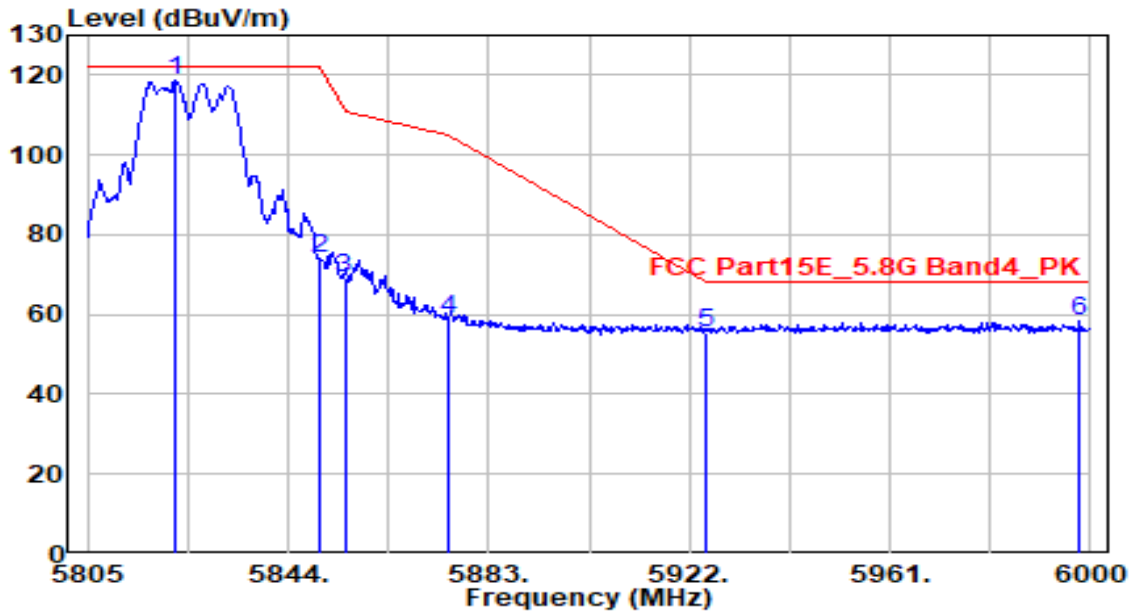


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5822.160 | 116.26 | 2.23 | 118.49 | N/A | N/A | 210 | 160 | Peak |
| 2 | 5850.000 | 71.62 | 2.27 | 73.89 | -48.31 | 122.20 | 210 | 160 | Peak |
| 3 | 5855.000 | 66.88 | 2.28 | 69.15 | -41.65 | 110.80 | 210 | 160 | Peak |
| 4 | 5875.000 | 56.79 | 2.31 | 59.09 | -46.11 | 105.20 | 210 | 160 | Peak |
| 5 | 5925.000 | 52.99 | 2.38 | 55.37 | -12.83 | 68.20 | 210 | 160 | Peak |
| 6 | * 5997.855 | 55.78 | 2.50 | 58.28 | -9.92 | 68.20 | 210 | 160 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

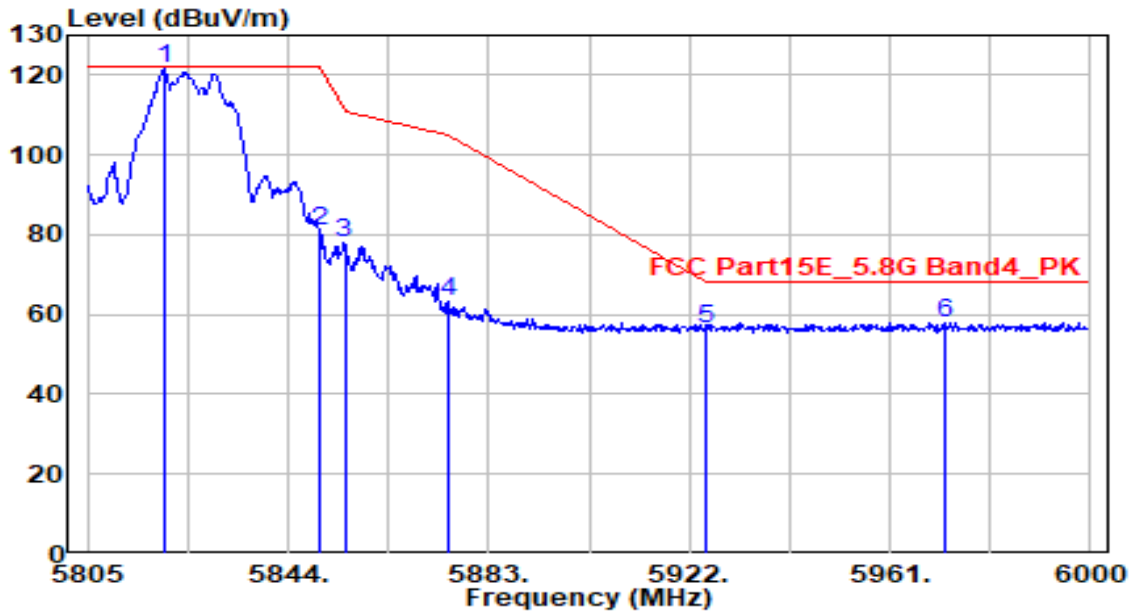


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5819.820 | 119.25 | 2.22 | 121.47 | N/A | N/A | 205 | 135 | Peak |
| 2 | 5850.000 | 78.85 | 2.27 | 81.12 | -41.08 | 122.20 | 205 | 135 | Peak |
| 3 | 5855.000 | 75.71 | 2.28 | 77.99 | -32.81 | 110.80 | 205 | 135 | Peak |
| 4 | 5875.000 | 60.77 | 2.31 | 63.08 | -42.12 | 105.20 | 205 | 135 | Peak |
| 5 | 5925.000 | 53.79 | 2.38 | 56.17 | -12.03 | 68.20 | 205 | 135 | Peak |
| 6 | * 5971.725 | 55.42 | 2.46 | 57.88 | -10.32 | 68.20 | 205 | 135 | Peak |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

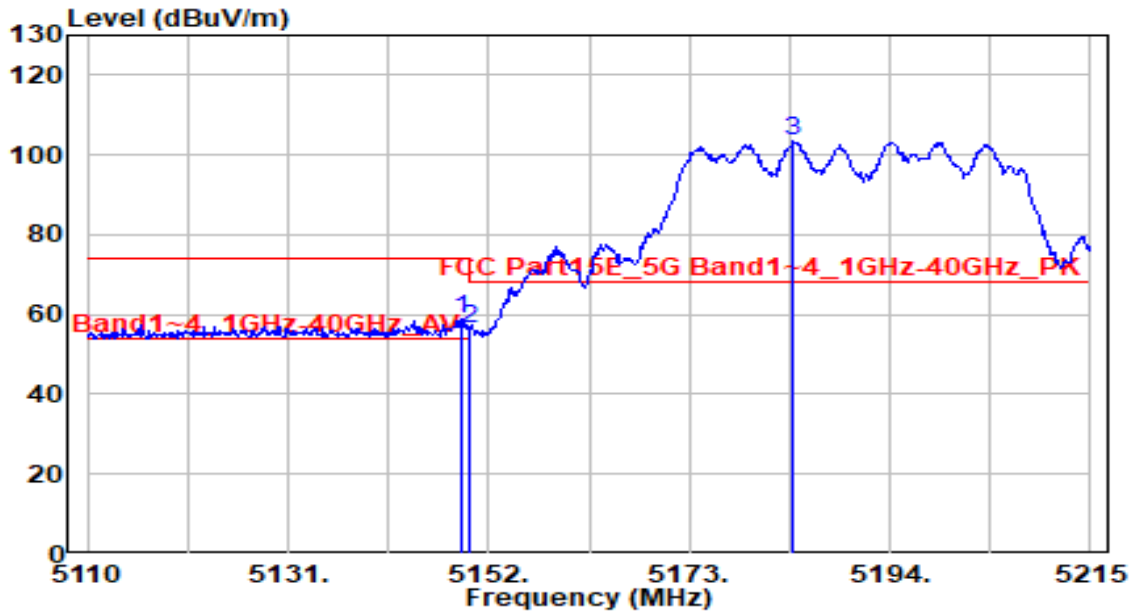


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5149.270 | 57.97 | 0.80 | 58.76 | -15.24 | 74.00 | 305 | 60 | Peak |
| 2 | | 5150.000 | 55.72 | 0.80 | 56.52 | -17.48 | 74.00 | 305 | 60 | Peak |
| 3 | | 5183.815 | 102.48 | 0.84 | 103.32 | N/A | N/A | 305 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

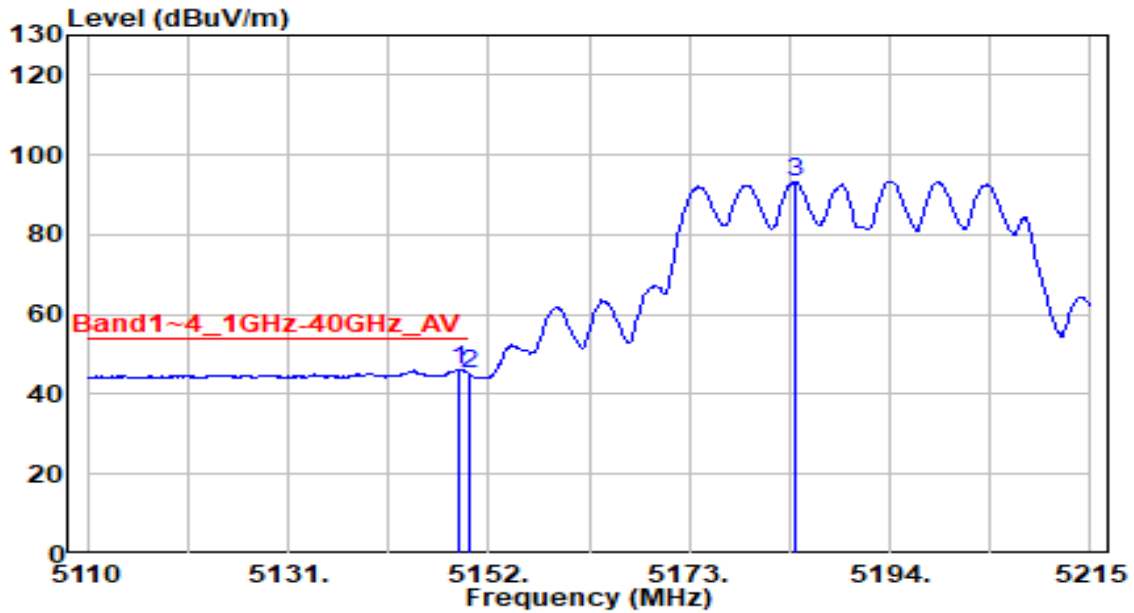


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5148.955 | 45.48 | 0.79 | 46.28 | -7.72 | 54.00 | 305 | 60 | Average |
| 2 | | 5150.000 | 44.50 | 0.80 | 45.30 | -8.70 | 54.00 | 305 | 60 | Average |
| 3 | | 5184.130 | 92.47 | 0.84 | 93.31 | N/A | N/A | 305 | 60 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

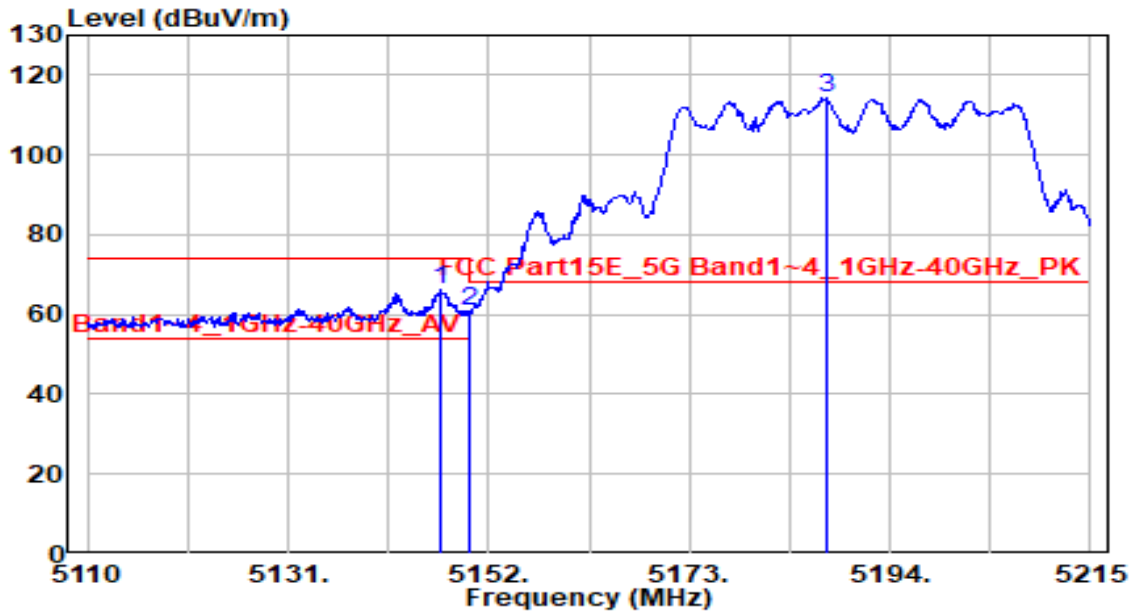


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5146.960 | 65.32 | 0.79 | 66.12 | -7.88 | 74.00 | 190 | 90 | Peak |
| 2 | | 5150.000 | 60.08 | 0.80 | 60.88 | -13.12 | 74.00 | 190 | 90 | Peak |
| 3 | | 5187.490 | 113.49 | 0.84 | 114.33 | N/A | N/A | 190 | 90 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

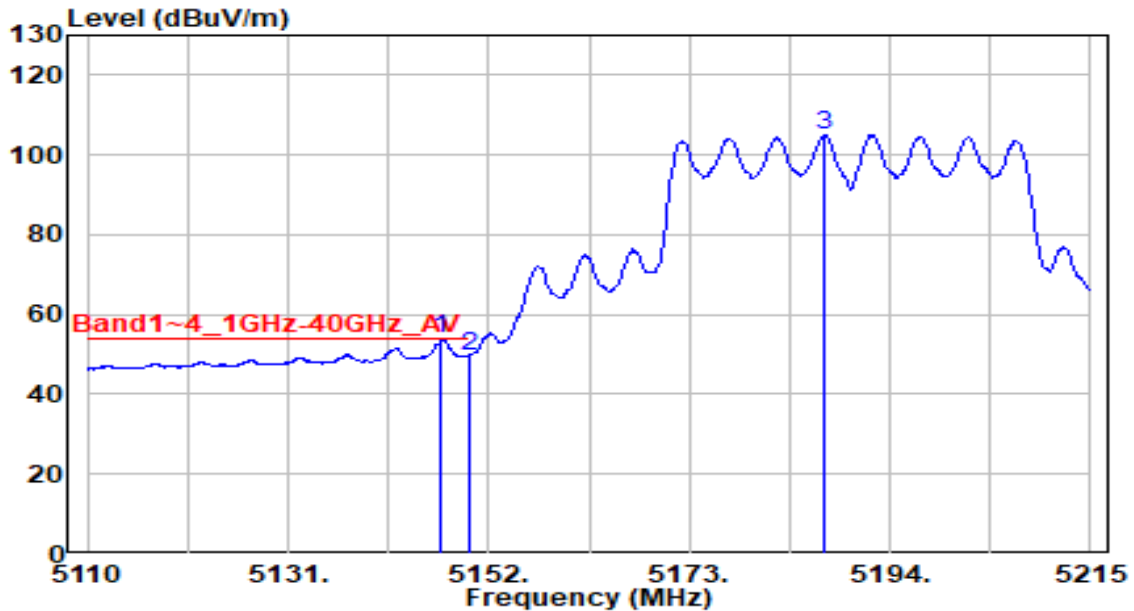


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5147.065 | 53.09 | 0.79 | 53.89 | -0.11 | 54.00 | 190 | 90 | Average |
| 2 | | 5150.000 | 48.91 | 0.80 | 49.70 | -4.30 | 54.00 | 190 | 90 | Average |
| 3 | | 5187.070 | 104.09 | 0.84 | 104.93 | N/A | N/A | 190 | 90 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

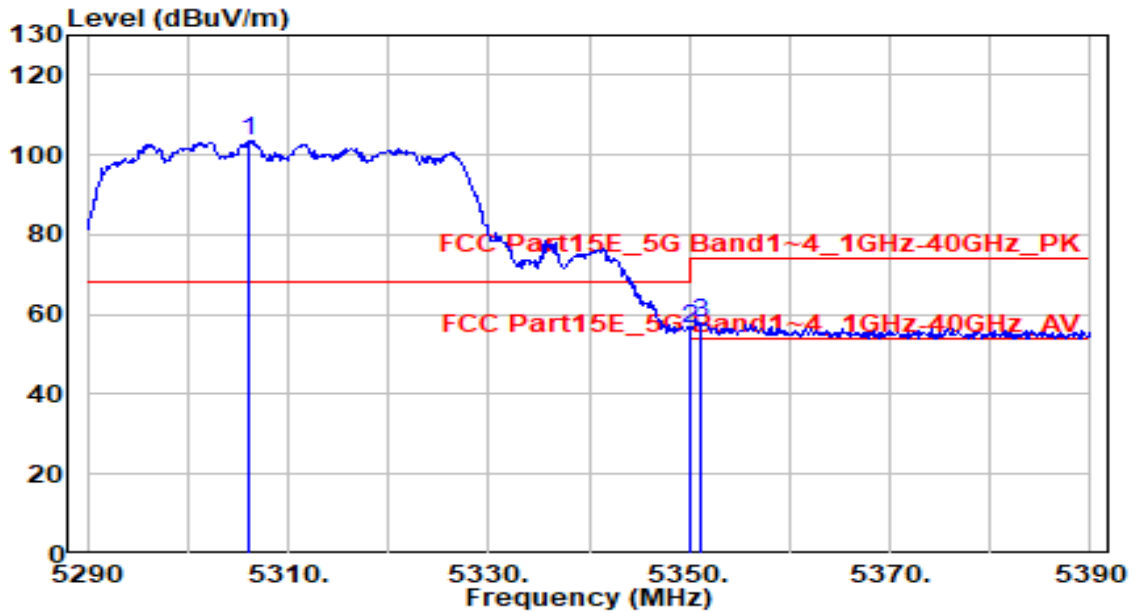


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5306.200 | 103.07 | 0.67 | 103.74 | N/A | N/A | 295 | 65 | Peak |
| 2 | 5350.000 | 55.98 | 0.59 | 56.57 | -17.43 | 74.00 | 295 | 65 | Peak |
| 3 | * 5351.200 | 57.44 | 0.59 | 58.03 | -15.97 | 74.00 | 295 | 65 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

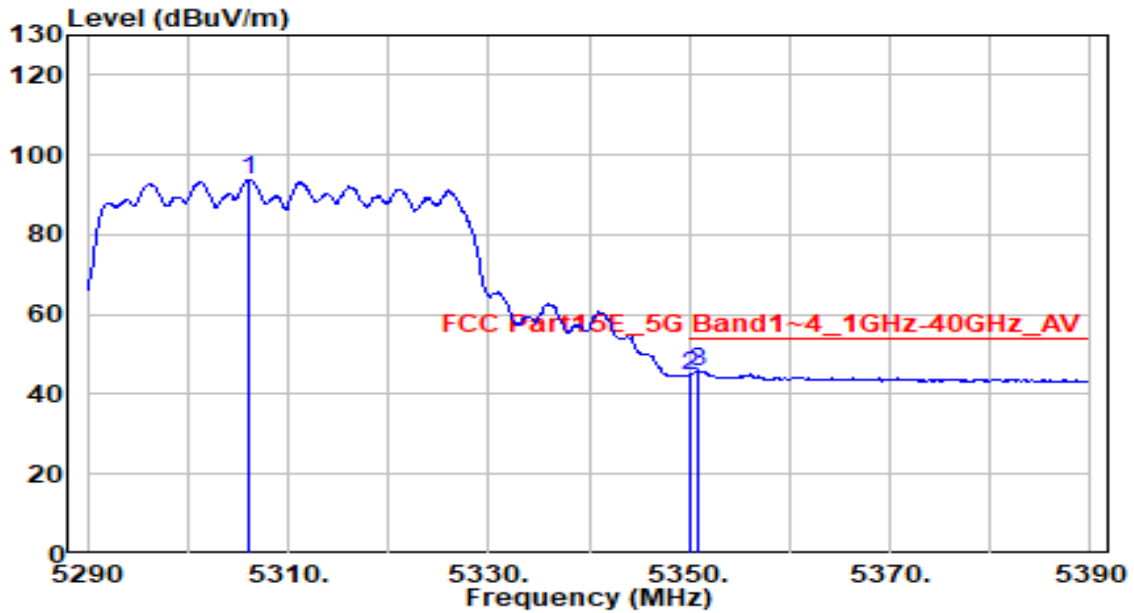


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5306.200 | 93.03 | 0.67 | 93.70 | N/A | N/A | 295 | 65 | Average |
| 2 | 5350.000 | 44.22 | 0.59 | 44.82 | -9.18 | 54.00 | 295 | 65 | Average |
| 3 | * 5351.000 | 45.24 | 0.59 | 45.84 | -8.16 | 54.00 | 295 | 65 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

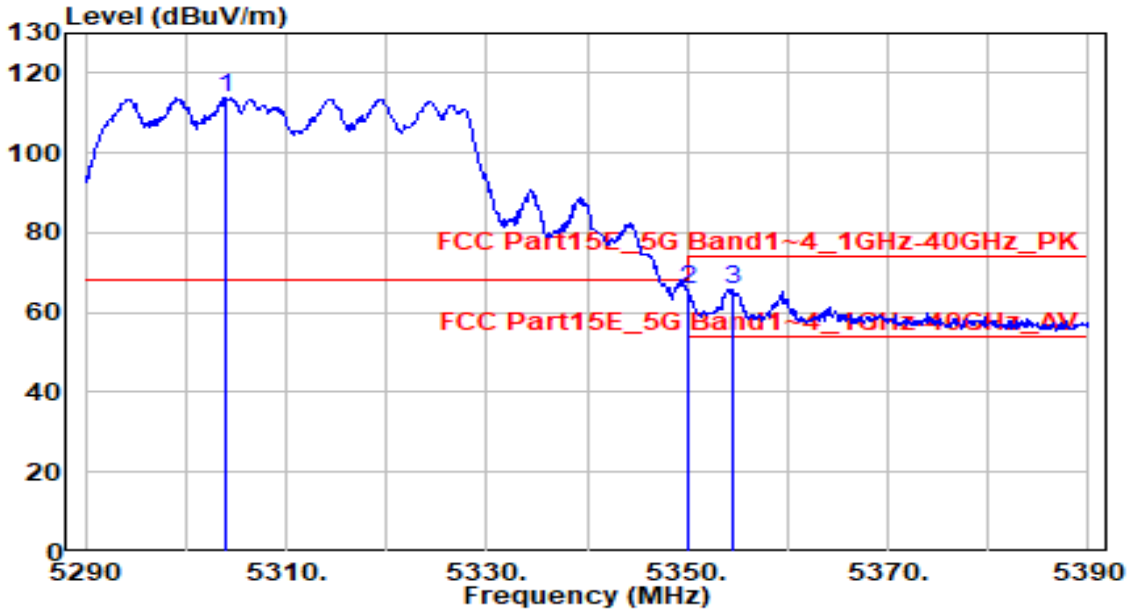


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5304.100 | 113.04 | 0.67 | 113.72 | N/A | N/A | 200 | 100 | Peak |
| 2 | 5350.000 | 65.16 | 0.59 | 65.75 | -8.25 | 74.00 | 200 | 100 | Peak |
| 3 | * 5354.600 | 65.21 | 0.59 | 65.80 | -8.20 | 74.00 | 200 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

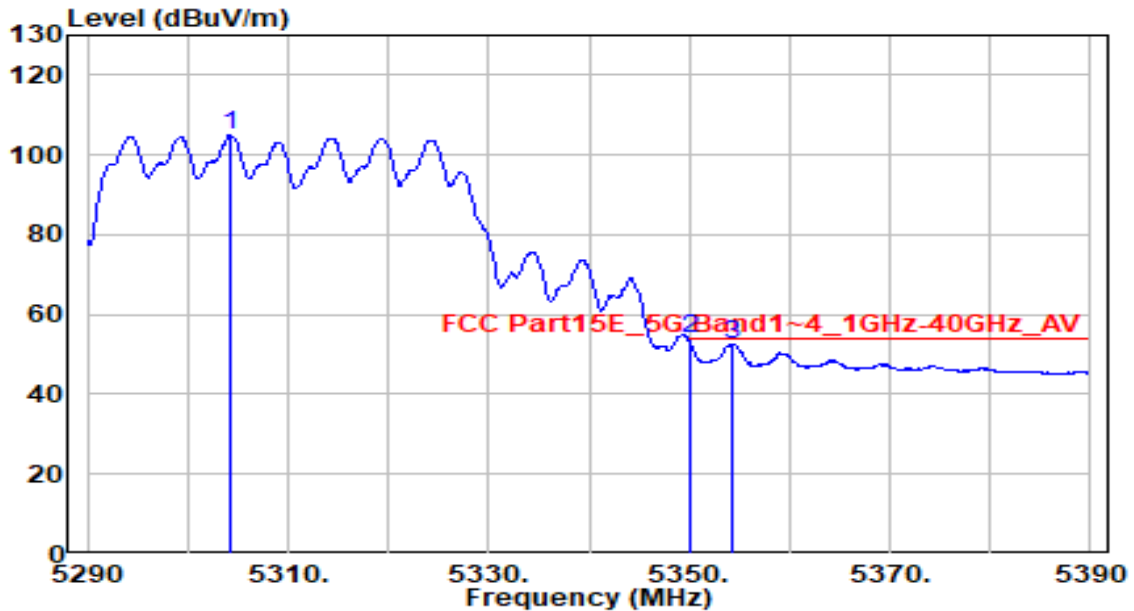


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5304.200 | 104.13 | 0.67 | 104.80 | N/A | N/A | 200 | 100 | Average |
| 2 | * 5350.000 | 53.25 | 0.59 | 53.84 | -0.16 | 54.00 | 200 | 100 | Average |
| 3 | 5354.200 | 51.96 | 0.59 | 52.55 | -1.45 | 54.00 | 200 | 100 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

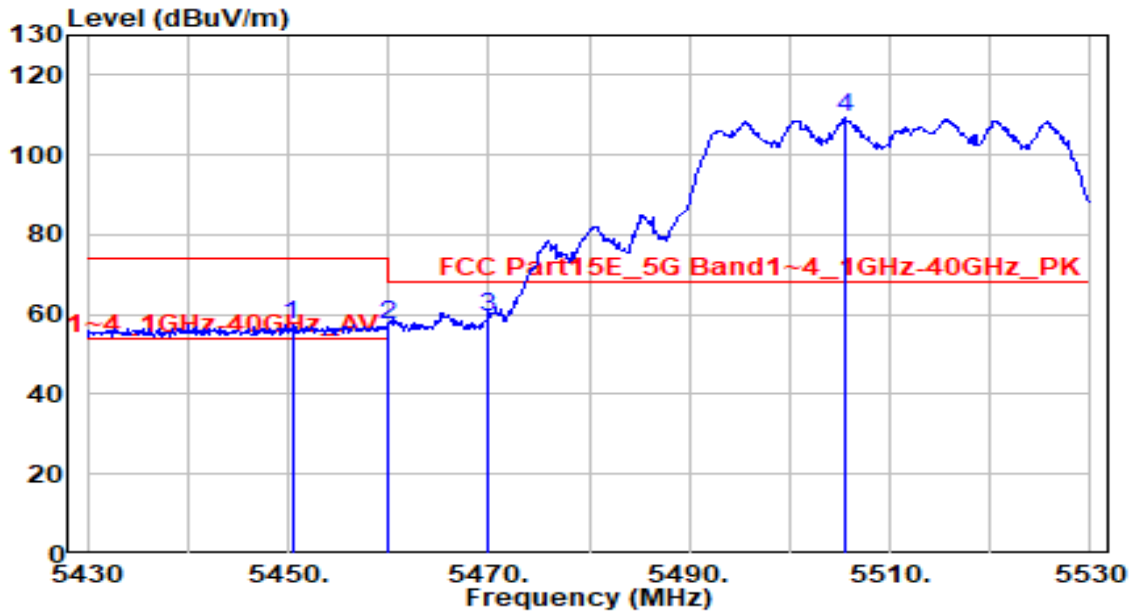


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5450.400 | 56.73 | 0.72 | 57.45 | -16.55 | 74.00 | 100 | 150 | Peak |
| 2 | 5460.000 | 56.53 | 0.76 | 57.29 | -16.71 | 74.00 | 100 | 150 | Peak |
| 3 | * 5470.000 | 58.47 | 0.80 | 59.27 | -8.93 | 68.20 | 100 | 150 | Peak |
| 4 | 5505.500 | 108.20 | 0.95 | 109.15 | N/A | N/A | 100 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

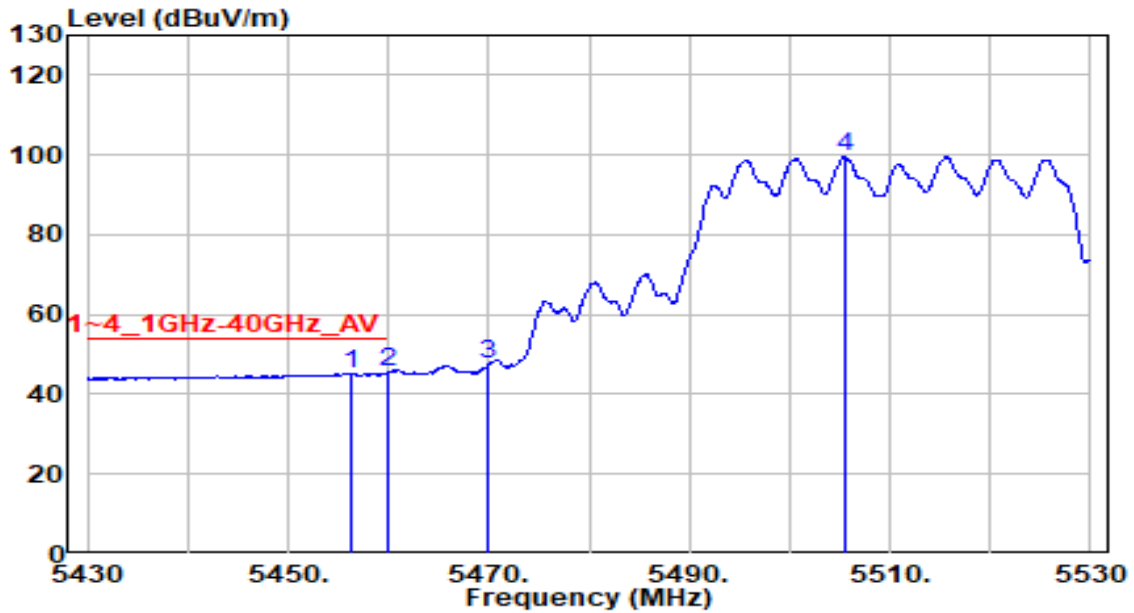


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5456.400 | 44.43 | 0.75 | 45.17 | -8.83 | 54.00 | 100 | 150 | Average |
| 2 | * 5460.000 | 44.89 | 0.76 | 45.65 | -8.35 | 54.00 | 100 | 150 | Average |
| 3 | 5470.000 | 46.62 | 0.80 | 47.42 | N/A | N/A | 100 | 150 | Average |
| 4 | 5505.500 | 98.60 | 0.95 | 99.56 | N/A | N/A | 100 | 150 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

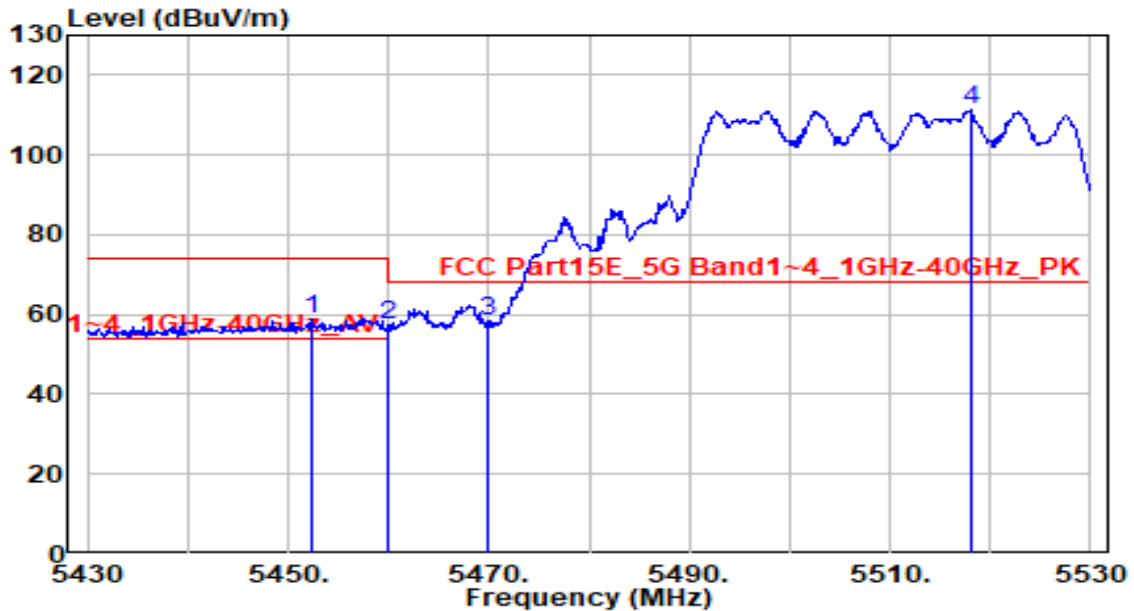


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5452.300 | 58.20 | 0.73 | 58.93 | -15.07 | 74.00 | 100 | 130 | Peak |
| 2 | 5460.000 | 56.77 | 0.76 | 57.53 | -16.47 | 74.00 | 100 | 130 | Peak |
| 3 | * 5470.000 | 57.74 | 0.80 | 58.55 | -9.65 | 68.20 | 100 | 130 | Peak |
| 4 | 5518.000 | 110.22 | 1.01 | 111.23 | 43.03 | 68.20 | 100 | 130 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

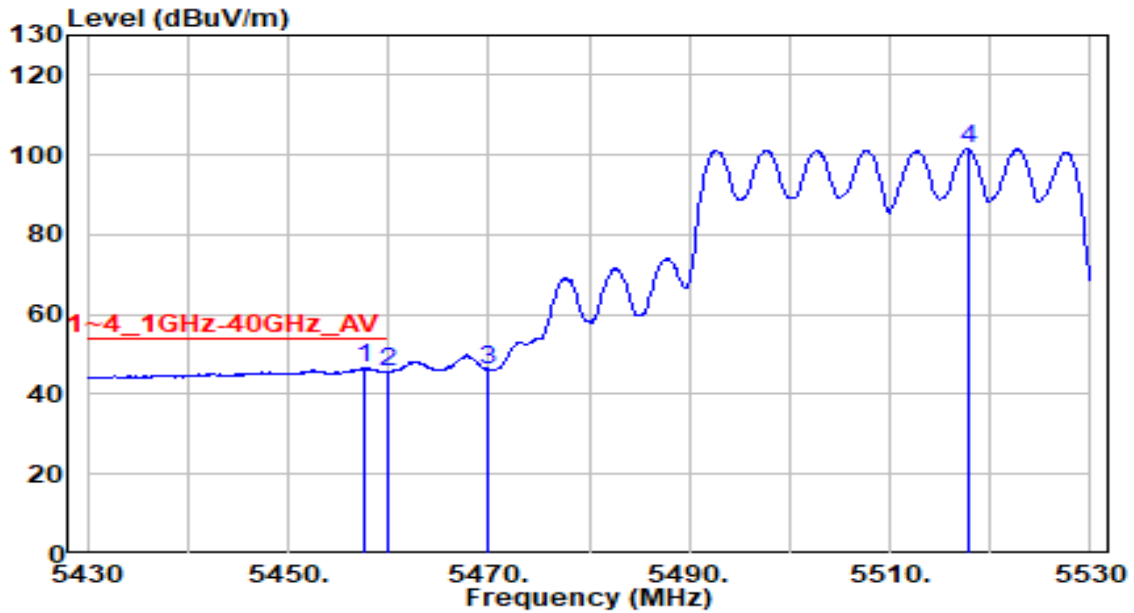


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5457.700 | 45.78 | 0.75 | 46.53 | -7.47 | 54.00 | 100 | 130 | Average |
| 2 | 5460.000 | 44.98 | 0.76 | 45.74 | -8.26 | 54.00 | 100 | 130 | Average |
| 3 | 5470.000 | 45.39 | 0.80 | 46.19 | N/A | N/A | 100 | 130 | Average |
| 4 | 5517.800 | 100.58 | 1.01 | 101.59 | N/A | N/A | 100 | 130 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

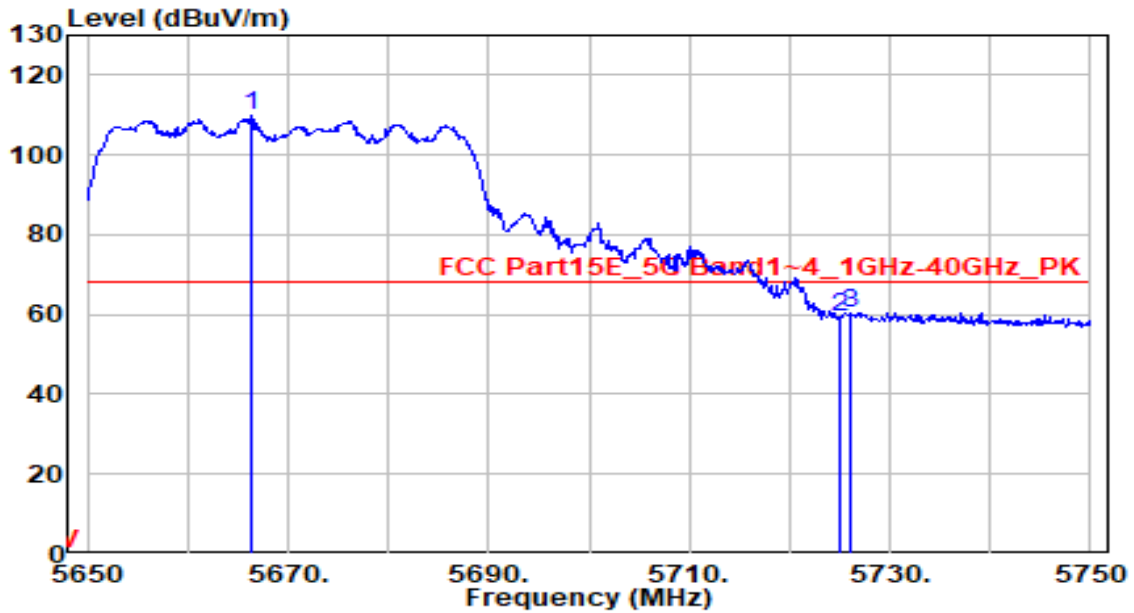


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5666.400 | 108.48 | 1.65 | 110.13 | N/A | N/A | 230 | 100 | Peak |
| 2 | 5725.000 | 57.42 | 1.89 | 59.30 | -8.90 | 68.20 | 230 | 100 | Peak |
| 3 | * 5726.000 | 58.59 | 1.89 | 60.48 | -7.72 | 68.20 | 230 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

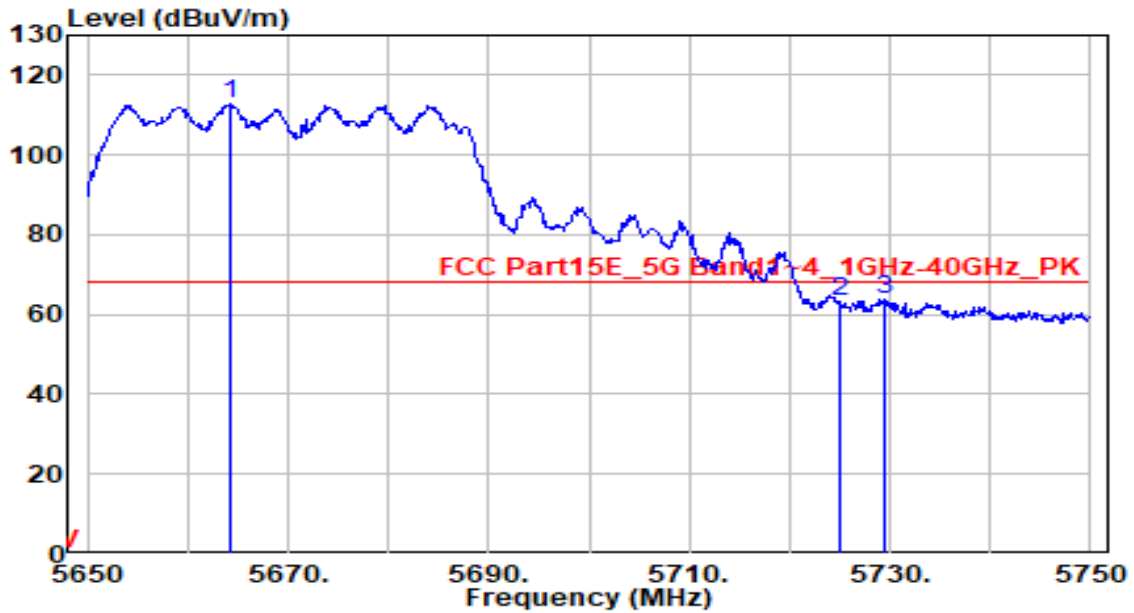


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5664.300 | 111.14 | 1.64 | 112.79 | N/A | N/A | 250 | 115 | Peak |
| 2 | 5725.000 | 61.15 | 1.89 | 63.04 | -5.16 | 68.20 | 250 | 115 | Peak |
| 3 | * 5729.500 | 62.11 | 1.91 | 64.02 | -4.18 | 68.20 | 250 | 115 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

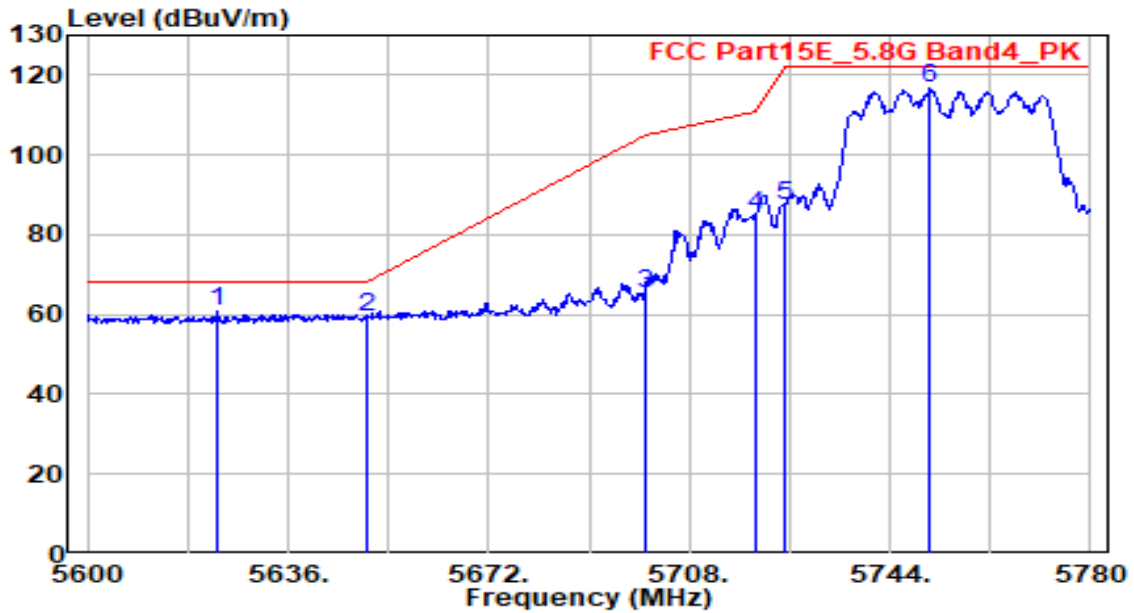


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5623.400 | 59.12 | 1.48 | 60.60 | -7.60 | 68.20 | 220 | 150 | Peak |
| 2 | 5650.000 | 57.55 | 1.59 | 59.14 | -9.06 | 68.20 | 220 | 150 | Peak |
| 3 | 5700.000 | 63.29 | 1.79 | 65.08 | -40.12 | 105.20 | 220 | 150 | Peak |
| 4 | 5720.000 | 83.07 | 1.87 | 84.94 | -25.86 | 110.80 | 220 | 150 | Peak |
| 5 | 5725.000 | 85.35 | 1.89 | 87.24 | -34.96 | 122.20 | 220 | 150 | Peak |
| 6 | 5751.200 | 114.81 | 1.99 | 116.81 | N/A | N/A | 220 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

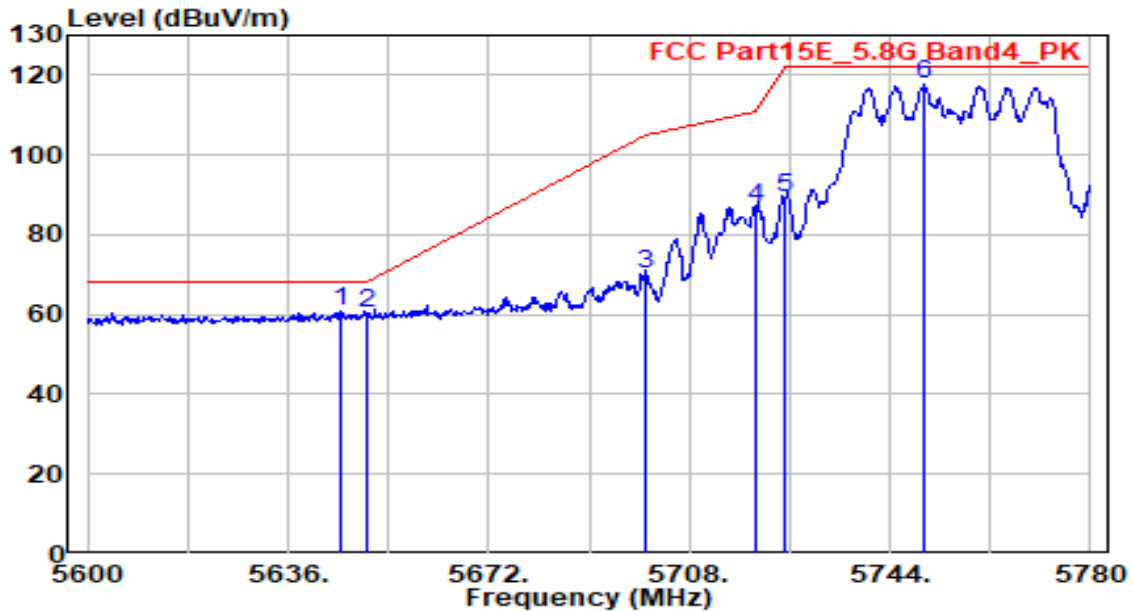


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5645.360 | 59.35 | 1.57 | 60.92 | -7.28 | 68.20 | 200 | 135 | Peak |
| 2 | 5650.000 | 58.75 | 1.59 | 60.33 | -7.87 | 68.20 | 200 | 135 | Peak |
| 3 | 5700.000 | 68.46 | 1.79 | 70.25 | -34.95 | 105.20 | 200 | 135 | Peak |
| 4 | 5720.000 | 84.72 | 1.87 | 86.59 | -24.21 | 110.80 | 200 | 135 | Peak |
| 5 | 5725.000 | 87.30 | 1.89 | 89.19 | -33.01 | 122.20 | 200 | 135 | Peak |
| 6 | 5750.120 | 115.61 | 1.99 | 117.60 | N/A | N/A | 200 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

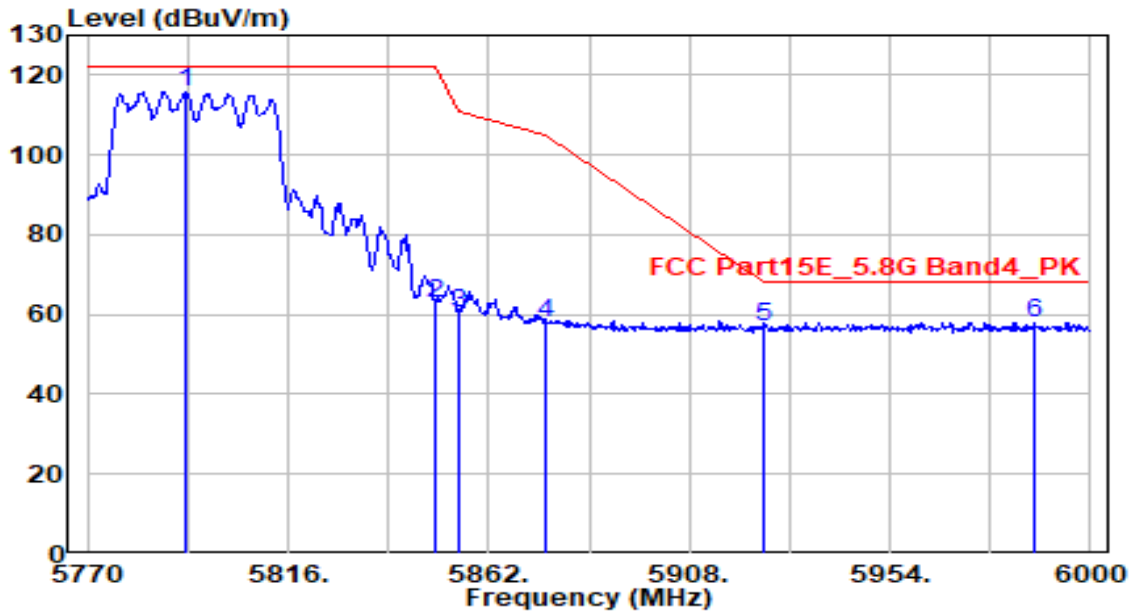


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5792.310 | 113.77 | 2.16 | 115.93 | N/A | N/A | 215 | 160 | Peak |
| 2 | 5850.000 | 60.53 | 2.27 | 62.79 | -59.41 | 122.20 | 215 | 160 | Peak |
| 3 | 5855.000 | 57.99 | 2.28 | 60.26 | -50.54 | 110.80 | 215 | 160 | Peak |
| 4 | 5875.000 | 55.33 | 2.31 | 57.64 | -47.56 | 105.20 | 215 | 160 | Peak |
| 5 | 5925.000 | 54.73 | 2.38 | 57.11 | -11.09 | 68.20 | 215 | 160 | Peak |
| 6 | * 5987.120 | 55.63 | 2.48 | 58.11 | -10.09 | 68.20 | 215 | 160 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

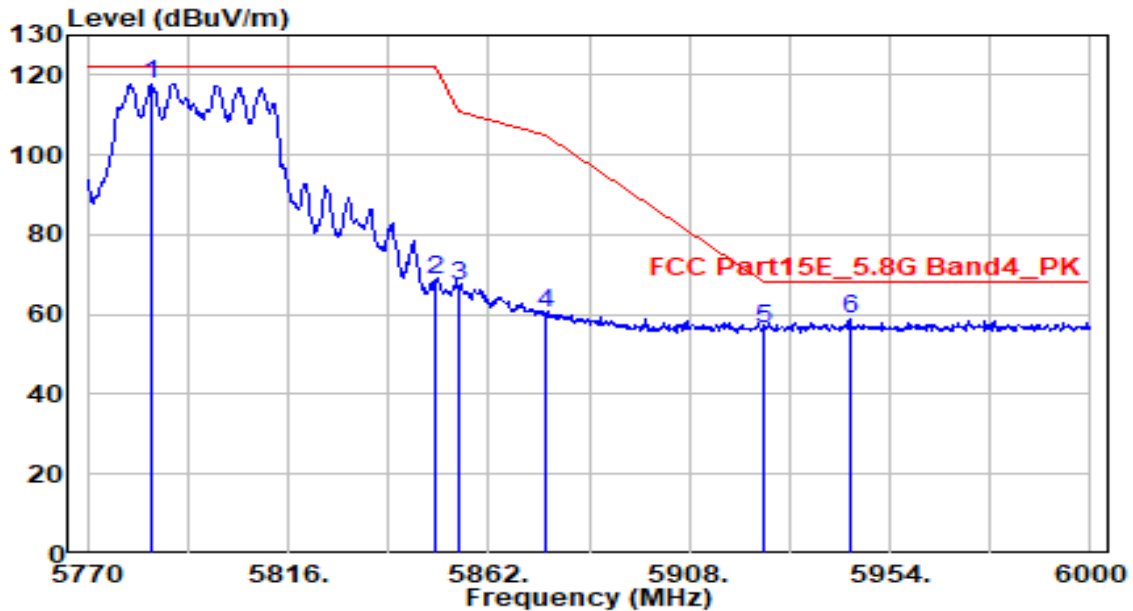


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5784.720 | 115.60 | 2.13 | 117.73 | N/A | N/A | 205 | 135 | Peak |
| 2 | 5850.000 | 66.49 | 2.27 | 68.75 | -53.45 | 122.20 | 205 | 135 | Peak |
| 3 | 5855.000 | 65.06 | 2.28 | 67.34 | -43.46 | 110.80 | 205 | 135 | Peak |
| 4 | 5875.000 | 58.16 | 2.31 | 60.47 | -44.73 | 105.20 | 205 | 135 | Peak |
| 5 | 5925.000 | 54.27 | 2.38 | 56.65 | -11.55 | 68.20 | 205 | 135 | Peak |
| 6 | * 5944.800 | 56.22 | 2.41 | 58.63 | -9.57 | 68.20 | 205 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

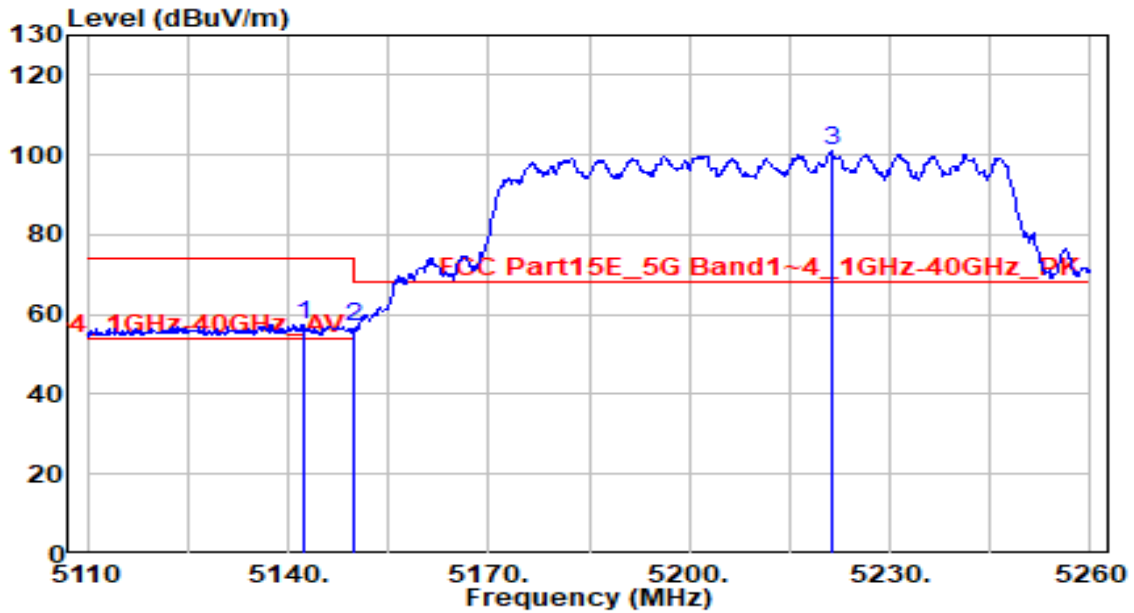


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5142.250 | 56.80 | 0.79 | 57.59 | -16.41 | 74.00 | 310 | 70 | Peak |
| 2 | | 5150.000 | 55.90 | 0.80 | 56.70 | -17.30 | 74.00 | 310 | 70 | Peak |
| 3 | | 5221.300 | 100.09 | 0.82 | 100.91 | N/A | N/A | 310 | 70 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

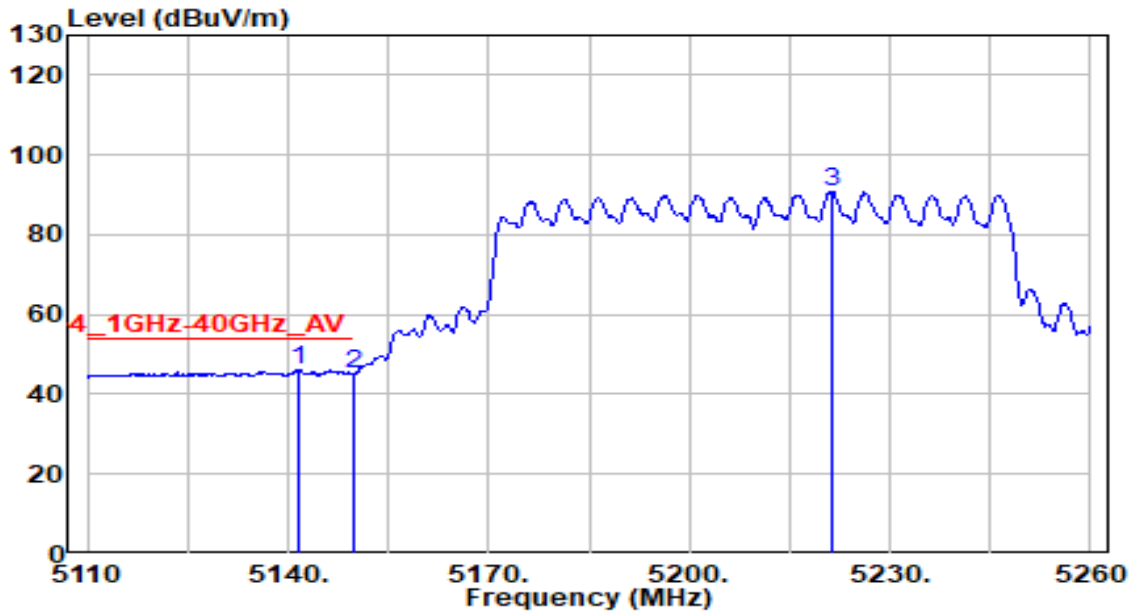


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5141.650 | 45.33 | 0.79 | 46.12 | -7.88 | 54.00 | 310 | 70 | Average |
| 2 | | 5150.000 | 44.12 | 0.80 | 44.91 | -9.09 | 54.00 | 310 | 70 | Average |
| 3 | | 5221.450 | 89.90 | 0.82 | 90.72 | N/A | N/A | 310 | 70 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

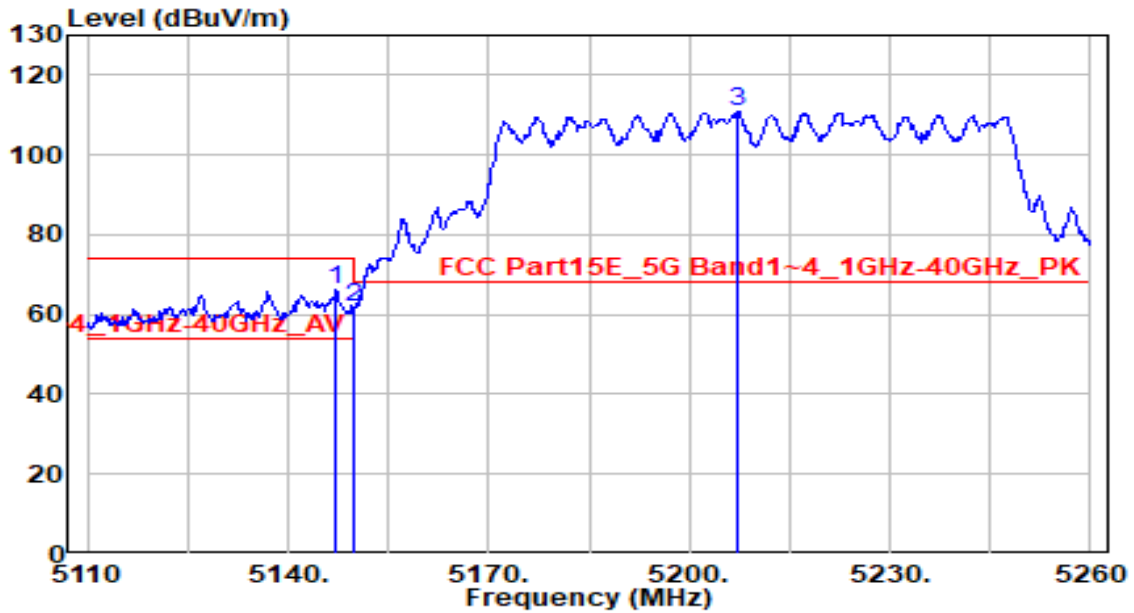


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5147.200 | 65.47 | 0.79 | 66.26 | -7.74 | 74.00 | 205 | 90 | Peak |
| 2 | | 5150.000 | 61.12 | 0.80 | 61.91 | -12.09 | 74.00 | 205 | 90 | Peak |
| 3 | | 5207.050 | 109.88 | 0.85 | 110.72 | N/A | N/A | 205 | 90 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band1_CH 42_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

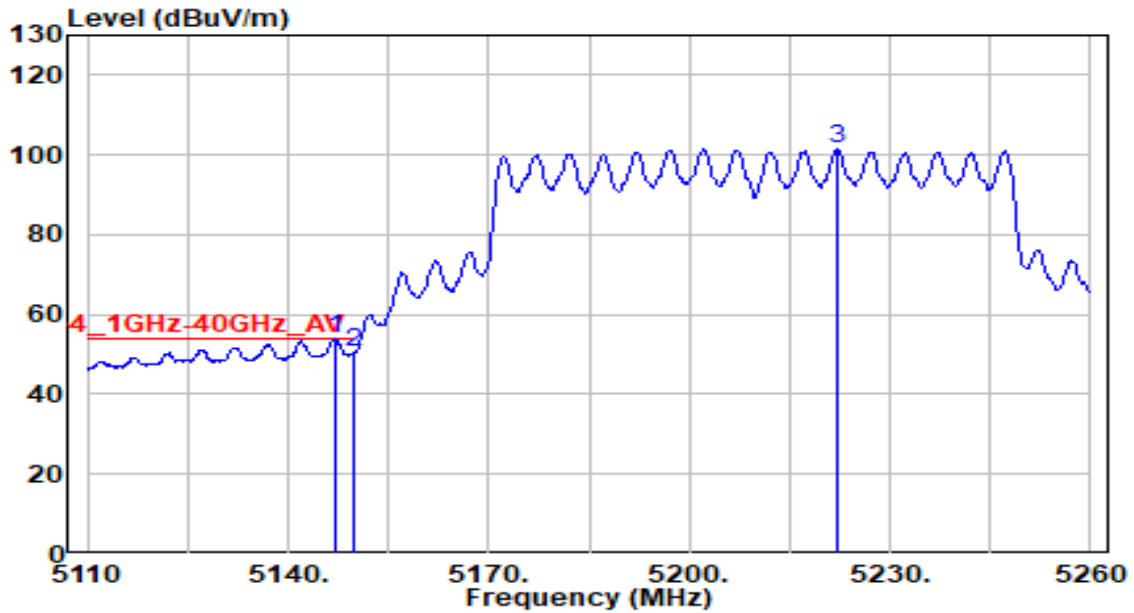


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5147.050 | 53.05 | 0.79 | 53.85 | -0.15 | 54.00 | 205 | 90 | Average |
| 2 | | 5150.000 | 49.73 | 0.80 | 50.53 | -3.47 | 54.00 | 205 | 90 | Average |
| 3 | | 5222.200 | 100.59 | 0.82 | 101.41 | N/A | N/A | 205 | 90 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

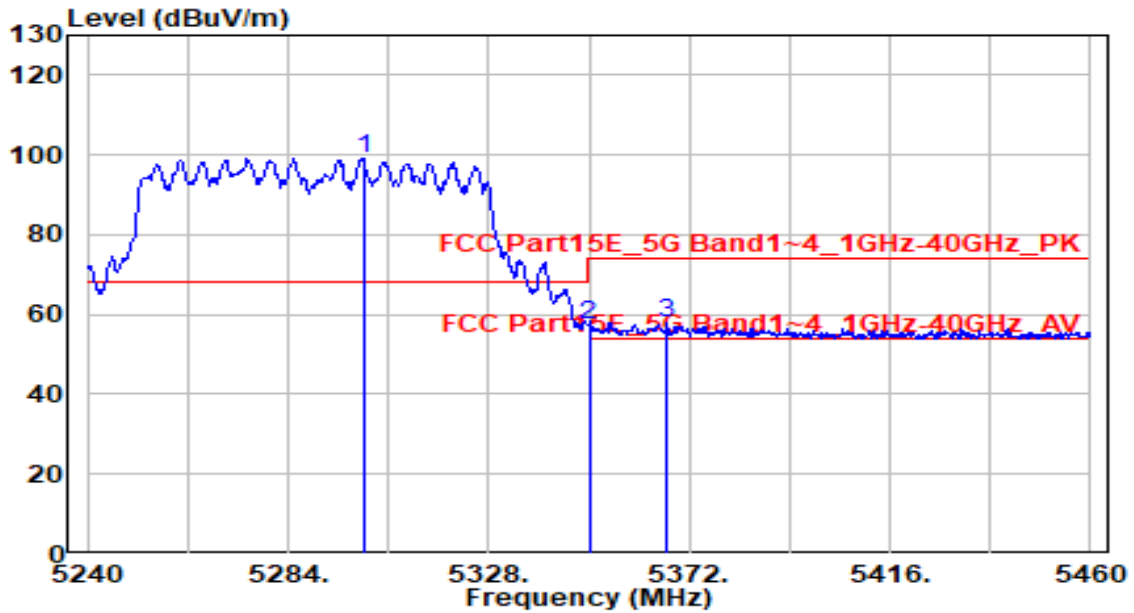


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5300.500 | 98.50 | 0.68 | 99.18 | N/A | N/A | 300 | 110 | Peak |
| 2 | 5350.000 | 56.68 | 0.59 | 57.28 | -16.72 | 74.00 | 300 | 110 | Peak |
| 3 | * 5366.940 | 57.35 | 0.56 | 57.91 | -16.09 | 74.00 | 300 | 110 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

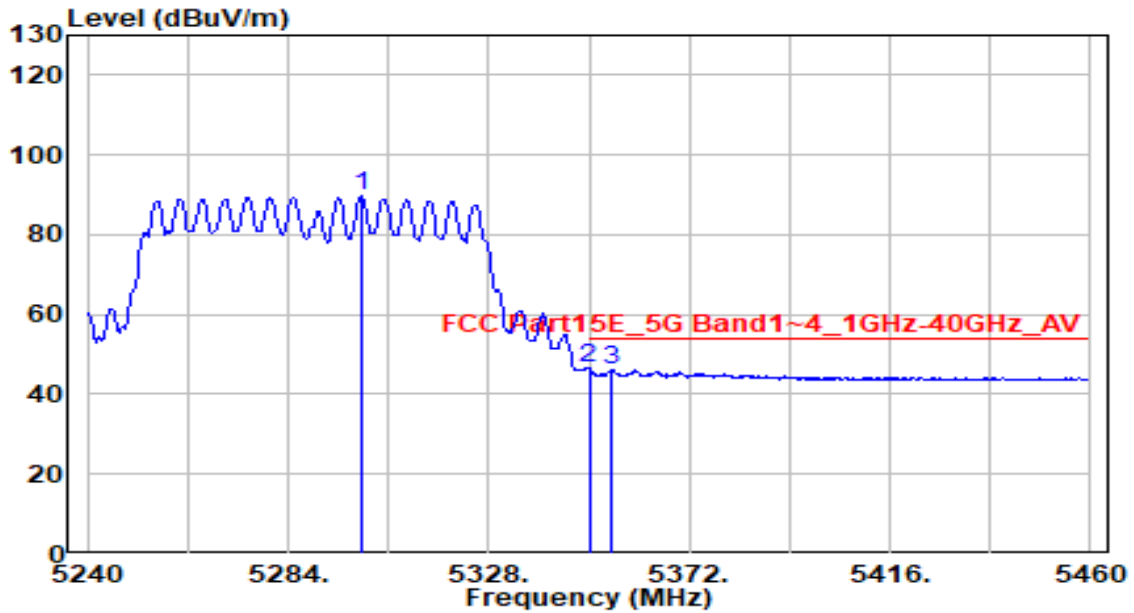


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5300.060 | 88.98 | 0.68 | 89.66 | N/A | N/A | 300 | 110 | Average |
| 2 | * 5350.000 | 46.08 | 0.59 | 46.67 | -7.33 | 54.00 | 300 | 110 | Average |
| 3 | 5354.840 | 45.54 | 0.59 | 46.13 | -7.87 | 54.00 | 300 | 110 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

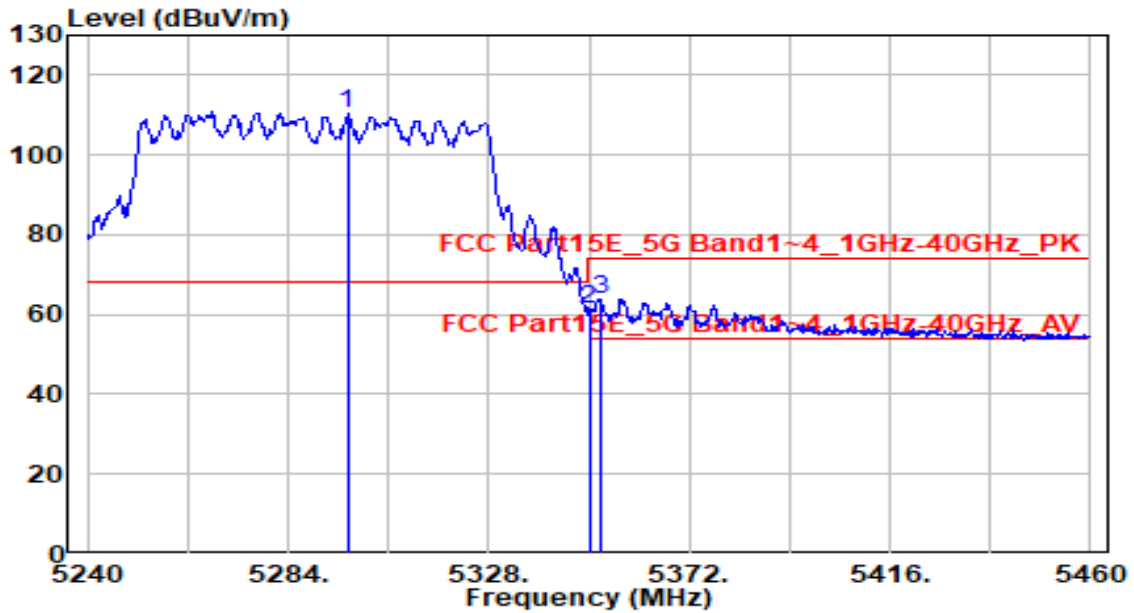


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5296.980 | 109.49 | 0.69 | 110.18 | N/A | N/A | 205 | 90 | Peak |
| 2 | 5350.000 | 60.81 | 0.59 | 61.40 | -12.60 | 74.00 | 205 | 90 | Peak |
| 3 | * 5352.420 | 63.41 | 0.59 | 64.00 | -10.00 | 74.00 | 205 | 90 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band2_CH 58_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

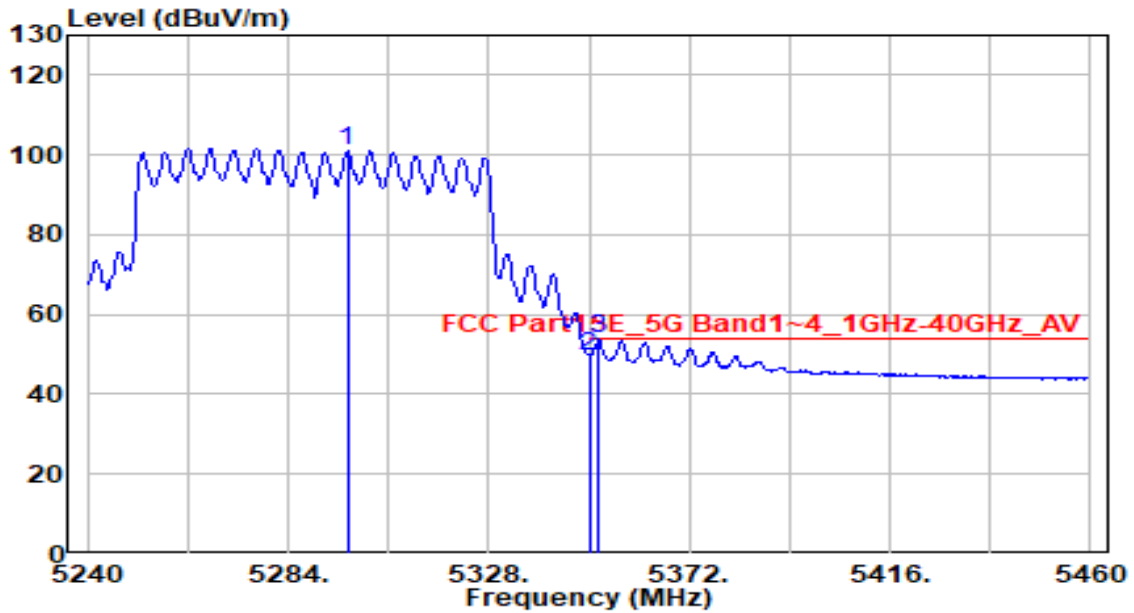


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5296.980 | 100.20 | 0.69 | 100.88 | N/A | N/A | 205 | 90 | Average |
| 2 | 5350.000 | 49.16 | 0.59 | 49.75 | -4.25 | 54.00 | 205 | 90 | Average |
| 3 | * 5352.200 | 53.25 | 0.59 | 53.84 | -0.16 | 54.00 | 205 | 90 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

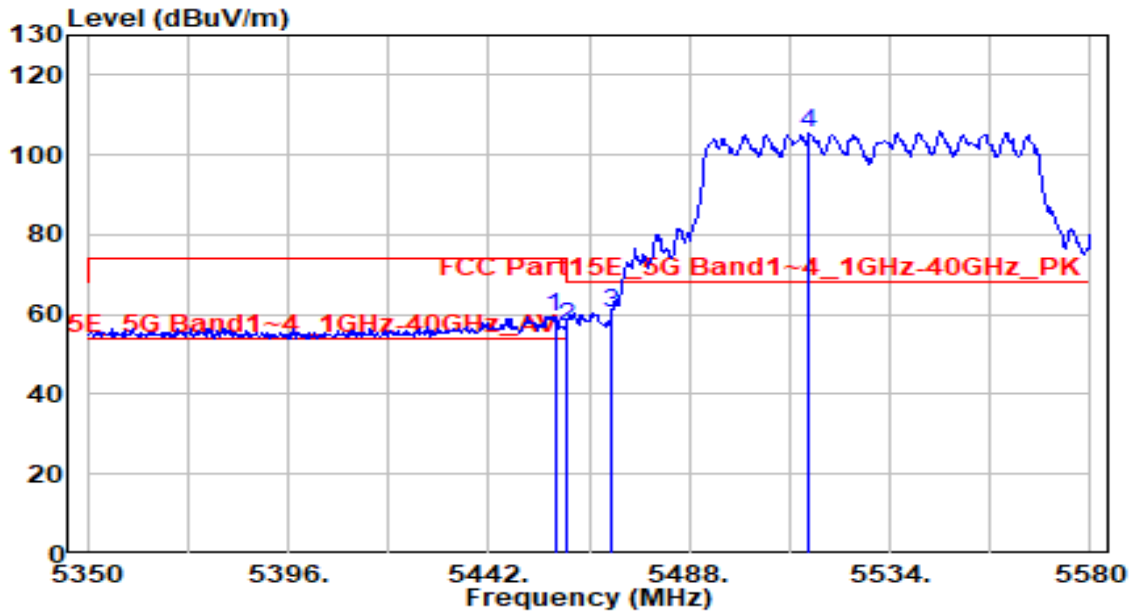


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5457.180 | 58.74 | 0.75 | 59.48 | -14.52 | 74.00 | 100 | 150 | Peak |
| 2 | 5460.000 | 56.36 | 0.76 | 57.12 | -16.88 | 74.00 | 100 | 150 | Peak |
| 3 | * 5470.000 | 59.69 | 0.80 | 60.49 | -7.71 | 68.20 | 100 | 150 | Peak |
| 4 | 5515.600 | 104.39 | 1.00 | 105.39 | N/A | N/A | 100 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

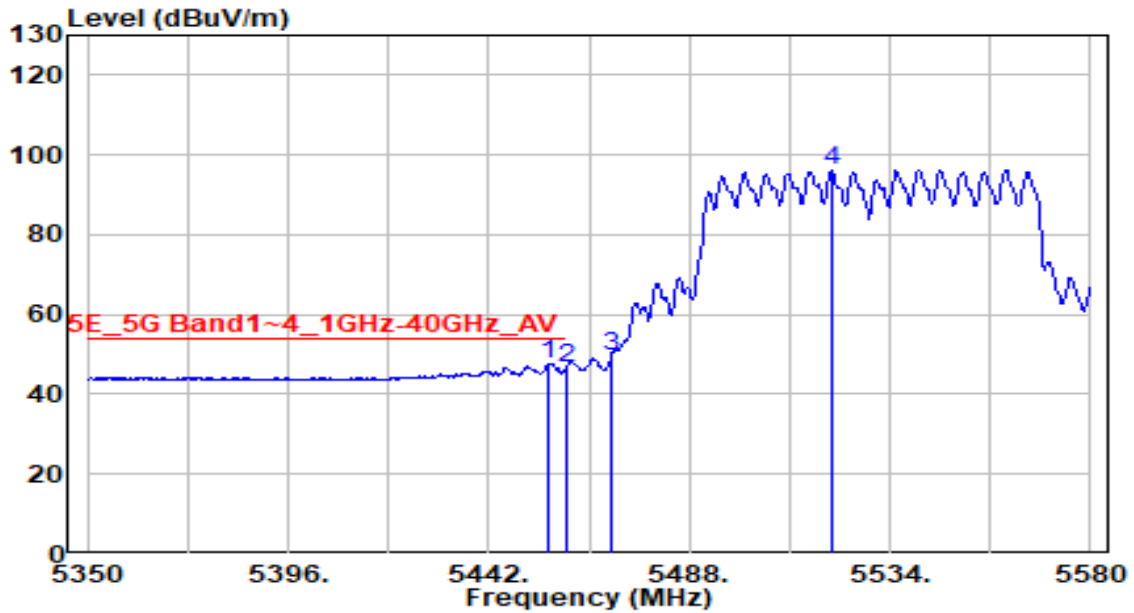


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5455.570 | 46.94 | 0.74 | 47.68 | -6.32 | 54.00 | 100 | 150 | Average |
| 2 | 5460.000 | 46.02 | 0.76 | 46.79 | -7.21 | 54.00 | 100 | 150 | Average |
| 3 | 5470.000 | 48.96 | 0.80 | 49.77 | N/A | N/A | 100 | 150 | Average |
| 4 | 5520.660 | 95.10 | 1.02 | 96.13 | N/A | N/A | 100 | 150 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

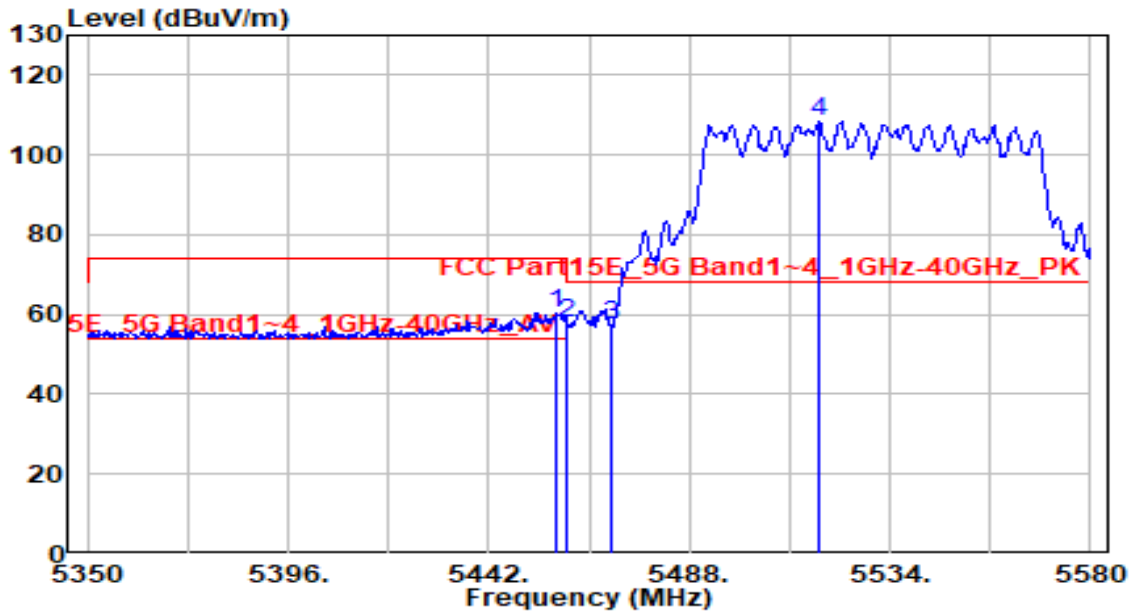


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5457.640 | 59.72 | 0.75 | 60.47 | -13.53 | 74.00 | 100 | 130 | Peak |
| 2 | 5460.000 | 57.30 | 0.76 | 58.06 | -15.94 | 74.00 | 100 | 130 | Peak |
| 3 | * 5470.000 | 56.68 | 0.80 | 57.48 | -10.72 | 68.20 | 100 | 130 | Peak |
| 4 | 5517.670 | 107.64 | 1.01 | 108.65 | N/A | N/A | 100 | 130 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band3_CH 106_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

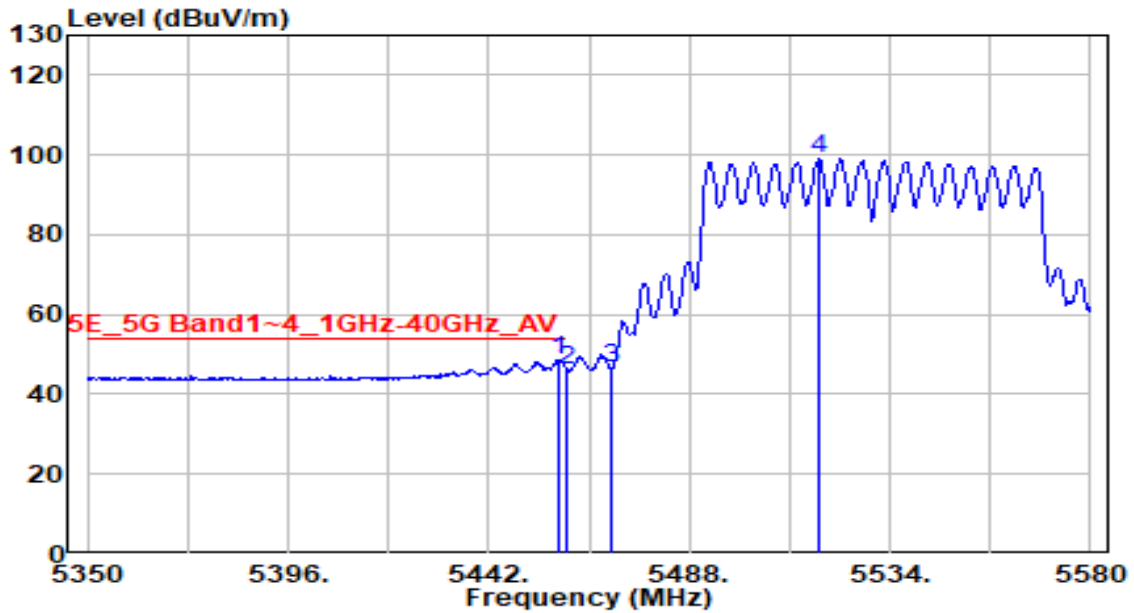


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5458.100 | 47.95 | 0.75 | 48.71 | -5.29 | 54.00 | 100 | 130 | Average |
| 2 | 5460.000 | 45.36 | 0.76 | 46.12 | -7.88 | 54.00 | 100 | 130 | Average |
| 3 | 5470.000 | 45.75 | 0.80 | 46.55 | N/A | N/A | 100 | 130 | Average |
| 4 | 5517.670 | 97.97 | 1.01 | 98.98 | N/A | N/A | 100 | 130 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

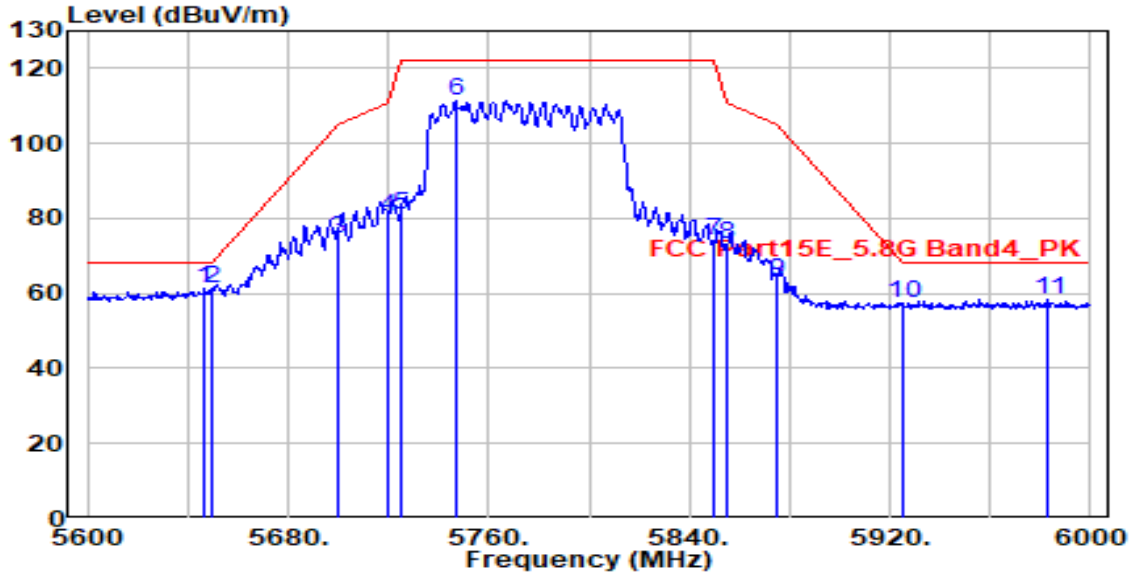


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5646.800 | 59.87 | 1.57 | 61.44 | -6.76 | 68.20 | 215 | 150 | Peak |
| 2 | * 5650.000 | 59.86 | 1.59 | 61.45 | -6.75 | 68.20 | 215 | 150 | Peak |
| 3 | 5700.000 | 72.76 | 1.79 | 74.55 | -30.65 | 105.20 | 215 | 150 | Peak |
| 4 | 5720.000 | 78.57 | 1.87 | 80.44 | -30.36 | 110.80 | 215 | 150 | Peak |
| 5 | 5725.000 | 79.08 | 1.89 | 80.97 | -41.23 | 122.20 | 215 | 150 | Peak |
| 6 | 5747.200 | 109.42 | 1.98 | 111.40 | N/A | N/A | 215 | 150 | Peak |
| 7 | 5850.000 | 71.74 | 2.27 | 74.01 | -48.19 | 122.20 | 215 | 150 | Peak |
| 8 | 5855.000 | 70.58 | 2.28 | 72.85 | -37.95 | 110.80 | 215 | 150 | Peak |
| 9 | 5875.000 | 60.75 | 2.31 | 63.06 | -42.14 | 105.20 | 215 | 150 | Peak |
| 10 | 5925.000 | 55.05 | 2.38 | 57.43 | -10.77 | 68.20 | 215 | 150 | Peak |
| 11 | 5983.200 | 55.74 | 2.47 | 58.21 | -9.99 | 68.20 | 215 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-80MHz_TX_Band4_CH 155_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

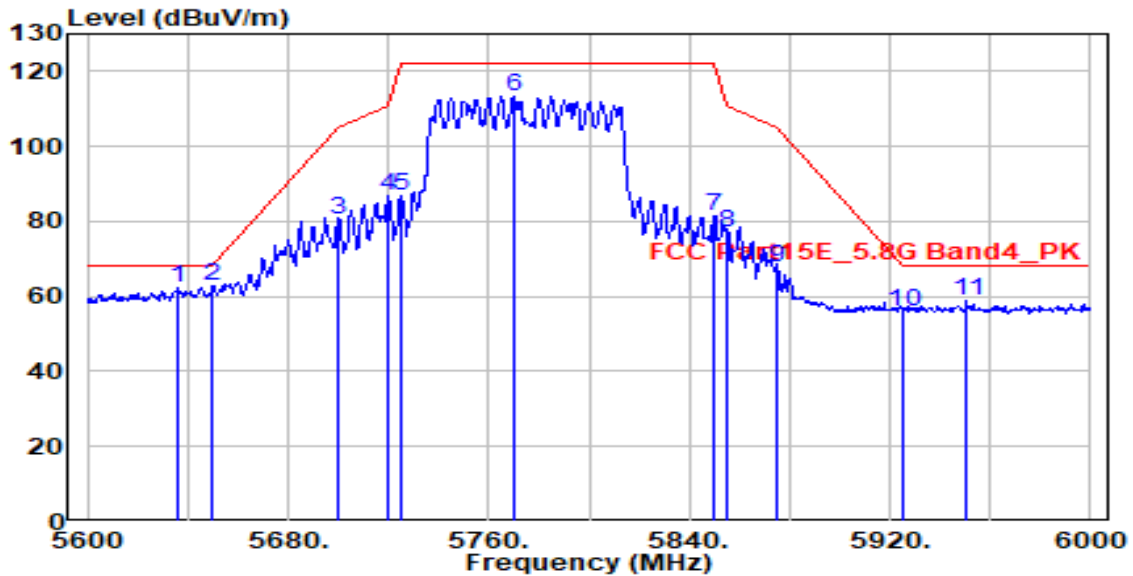


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5636.400 | 60.57 | 1.53 | 62.10 | -6.10 | 68.20 | 210 | 135 | Peak |
| 2 | * 5650.000 | 61.45 | 1.59 | 63.03 | -5.17 | 68.20 | 210 | 135 | Peak |
| 3 | 5700.000 | 78.72 | 1.79 | 80.50 | -24.70 | 105.20 | 210 | 135 | Peak |
| 4 | 5720.000 | 84.79 | 1.87 | 86.65 | -24.15 | 110.80 | 210 | 135 | Peak |
| 5 | 5725.000 | 84.99 | 1.89 | 86.88 | -35.32 | 122.20 | 210 | 135 | Peak |
| 6 | 5770.000 | 111.35 | 2.07 | 113.42 | N/A | N/A | 210 | 135 | Peak |
| 7 | 5850.000 | 79.11 | 2.27 | 81.38 | -40.82 | 122.20 | 210 | 135 | Peak |
| 8 | 5855.000 | 74.89 | 2.28 | 77.16 | -33.64 | 110.80 | 210 | 135 | Peak |
| 9 | 5875.000 | 65.47 | 2.31 | 67.78 | -37.42 | 105.20 | 210 | 135 | Peak |
| 10 | 5925.000 | 53.73 | 2.38 | 56.11 | -12.09 | 68.20 | 210 | 135 | Peak |
| 11 | 5950.800 | 56.60 | 2.42 | 59.03 | -9.17 | 68.20 | 210 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

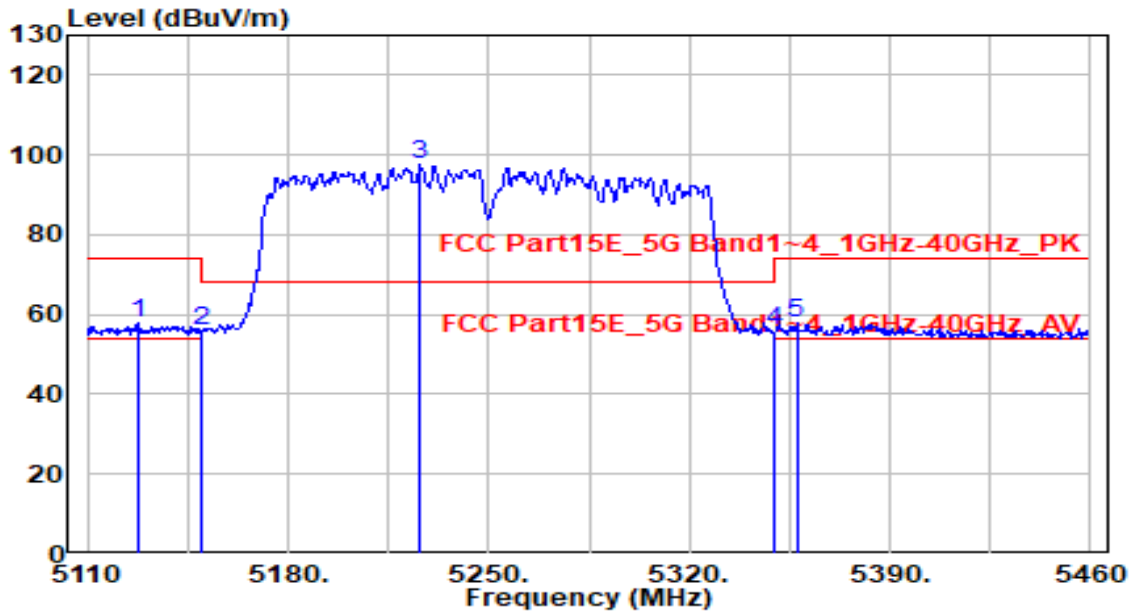


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5127.500 | 57.06 | 0.77 | 57.83 | -16.17 | 74.00 | 310 | 70 | Peak |
| 2 | 5150.000 | 55.31 | 0.80 | 56.10 | -17.90 | 74.00 | 310 | 70 | Peak |
| 3 | 5226.200 | 96.65 | 0.81 | 97.46 | N/A | N/A | 310 | 70 | Peak |
| 4 | 5350.000 | 55.56 | 0.59 | 56.16 | -17.84 | 74.00 | 310 | 70 | Peak |
| 5 | 5357.450 | 57.09 | 0.58 | 57.67 | -16.33 | 74.00 | 310 | 70 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

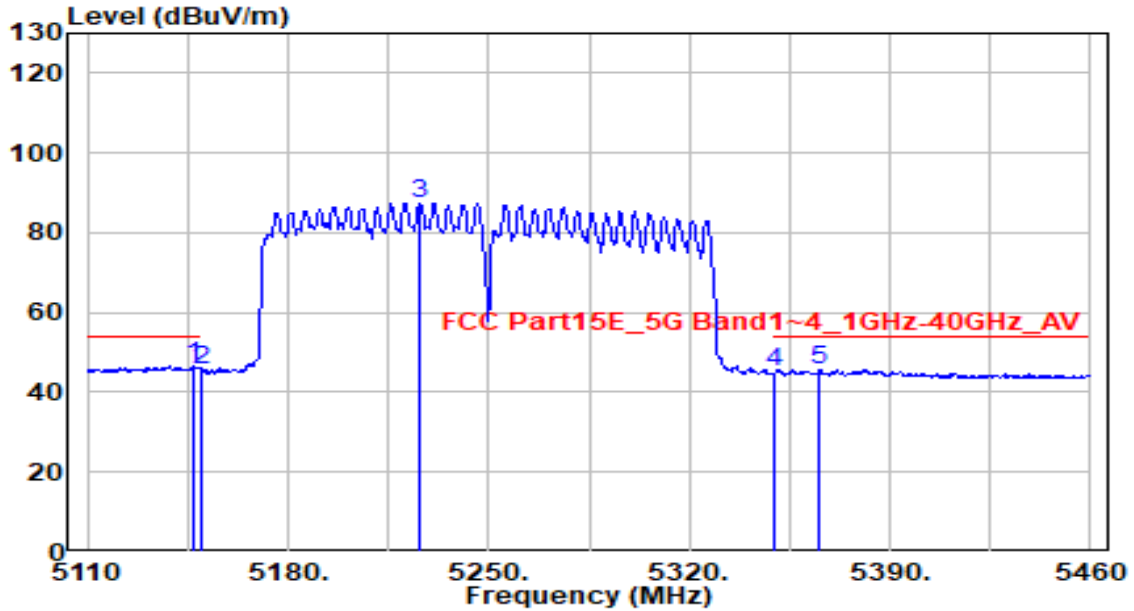


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5146.750 | 45.74 | 0.79 | 46.53 | -7.47 | 54.00 | 310 | 70 | Average |
| 2 | | 5150.000 | 44.68 | 0.80 | 45.48 | -8.52 | 54.00 | 310 | 70 | Average |
| 3 | | 5225.850 | 86.68 | 0.81 | 87.50 | N/A | N/A | 310 | 70 | Average |
| 4 | | 5350.000 | 44.69 | 0.59 | 45.29 | -8.71 | 54.00 | 310 | 70 | Average |
| 5 | | 5365.500 | 45.29 | 0.57 | 45.86 | -8.14 | 54.00 | 310 | 70 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

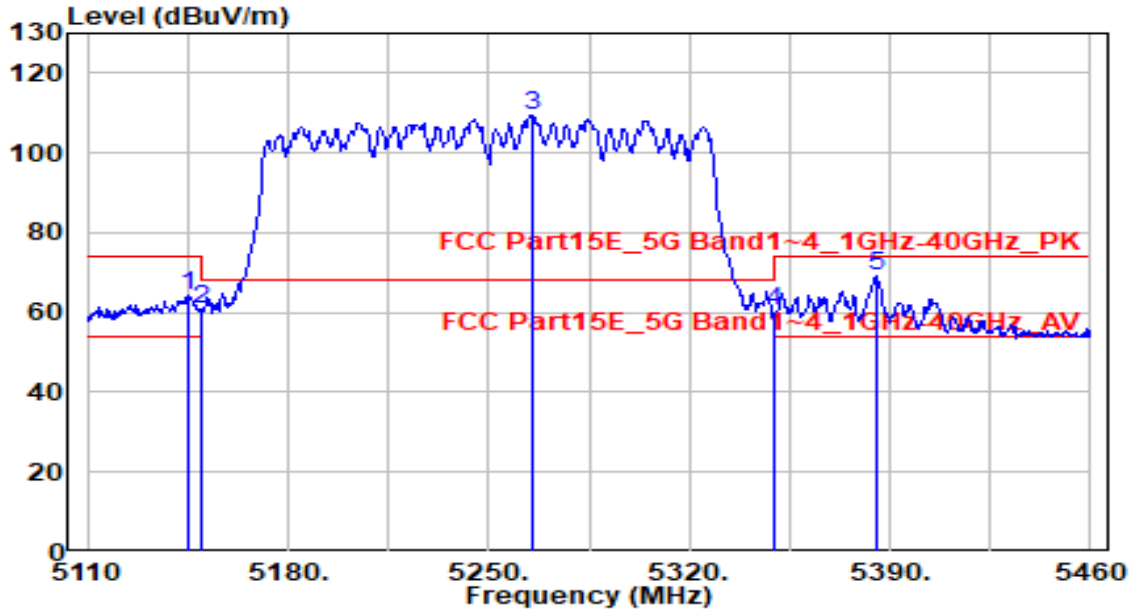


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5145.000 | 63.34 | 0.79 | 64.13 | -9.87 | 74.00 | 205 | 90 | Peak |
| 2 | 5150.000 | 60.24 | 0.80 | 61.03 | -12.97 | 74.00 | 205 | 90 | Peak |
| 3 | 5265.050 | 108.50 | 0.74 | 109.25 | N/A | N/A | 205 | 90 | Peak |
| 4 | 5350.000 | 59.78 | 0.59 | 60.38 | -13.62 | 74.00 | 205 | 90 | Peak |
| 5 | * 5385.100 | 68.60 | 0.53 | 69.13 | -4.87 | 74.00 | 205 | 90 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band1,2_CH 50_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

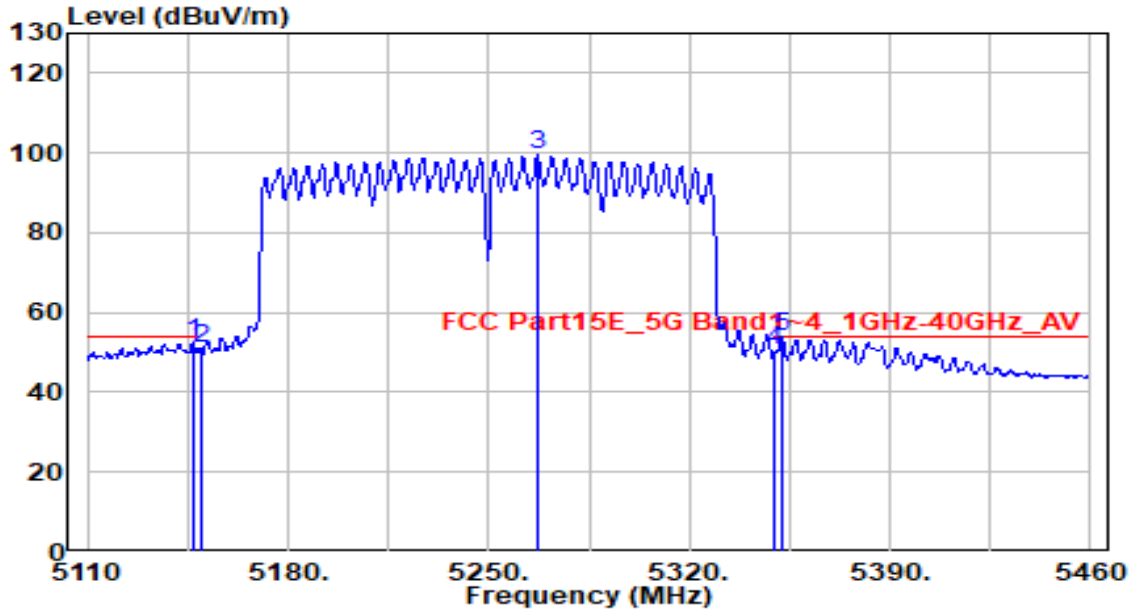


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5146.750 | 51.50 | 0.79 | 52.30 | -1.70 | 54.00 | 205 | 90 | Average |
| 2 | 5150.000 | 50.25 | 0.80 | 51.05 | -2.95 | 54.00 | 205 | 90 | Average |
| 3 | 5267.150 | 98.83 | 0.74 | 99.57 | N/A | N/A | 205 | 90 | Average |
| 4 | 5350.000 | 49.76 | 0.59 | 50.35 | -3.65 | 54.00 | 205 | 90 | Average |
| 5 | * 5352.200 | 53.25 | 0.59 | 53.84 | -0.16 | 54.00 | 205 | 90 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

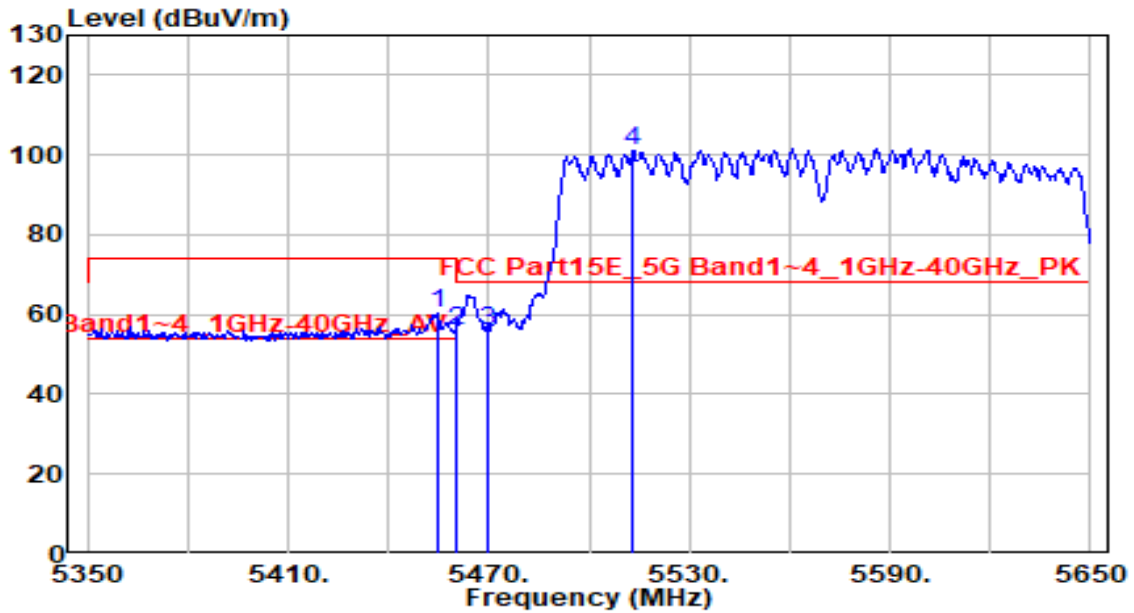


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5454.700 | 59.64 | 0.74 | 60.38 | -13.62 | 74.00 | 100 | 150 | Peak |
| 2 | 5460.000 | 55.26 | 0.76 | 56.02 | -17.98 | 74.00 | 100 | 150 | Peak |
| 3 | * 5470.000 | 55.18 | 0.80 | 55.98 | -12.22 | 68.20 | 100 | 150 | Peak |
| 4 | 5513.200 | 100.12 | 0.99 | 101.11 | N/A | N/A | 100 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

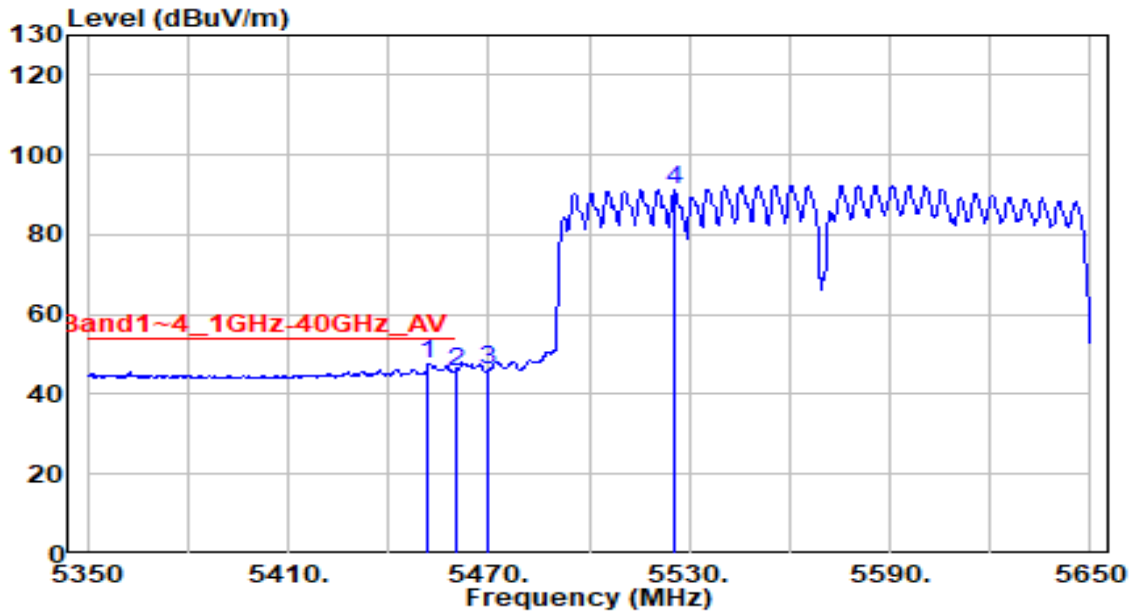


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5452.000 | 47.08 | 0.73 | 47.80 | -6.20 | 54.00 | 100 | 150 | Average |
| 2 | 5460.000 | 44.88 | 0.76 | 45.64 | -8.36 | 54.00 | 100 | 150 | Average |
| 3 | 5470.000 | 45.27 | 0.80 | 46.07 | N/A | N/A | 100 | 150 | Average |
| 4 | 5525.800 | 90.08 | 1.05 | 91.13 | N/A | N/A | 100 | 150 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

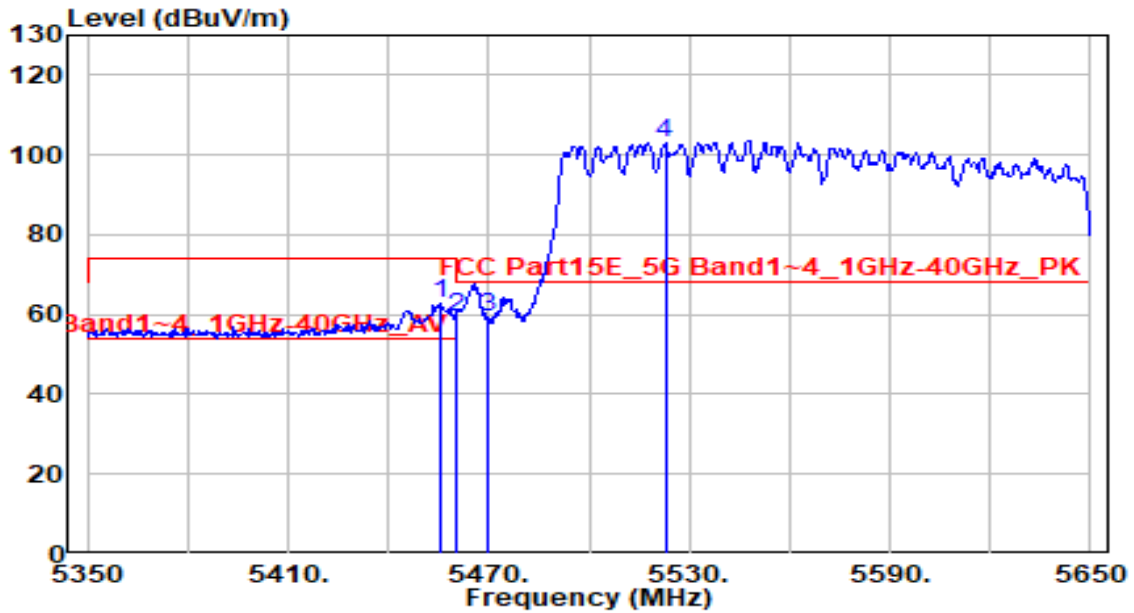


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5455.300 | 61.90 | 0.74 | 62.65 | -11.35 | 74.00 | 100 | 130 | Peak |
| 2 | 5460.000 | 58.65 | 0.76 | 59.41 | -14.59 | 74.00 | 100 | 130 | Peak |
| 3 | * 5470.000 | 58.40 | 0.80 | 59.20 | -9.00 | 68.20 | 100 | 130 | Peak |
| 4 | 5522.800 | 101.90 | 1.03 | 102.93 | N/A | N/A | 100 | 130 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ac-160MHz_TX_Band3_CH 114_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

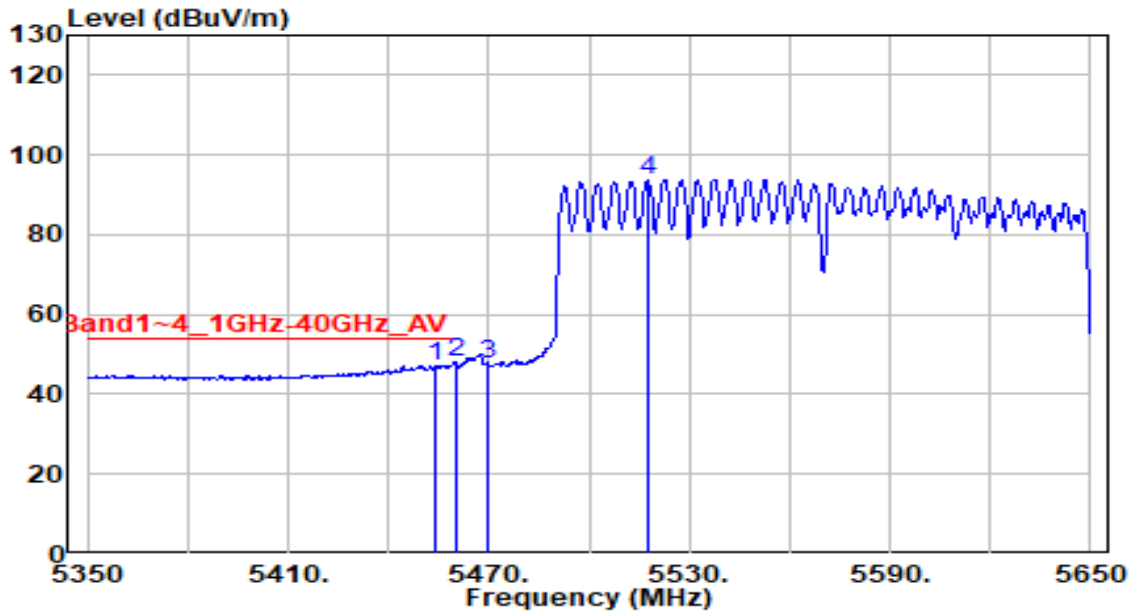


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5454.100 | 46.54 | 0.74 | 47.28 | -6.72 | 54.00 | 100 | 130 | Average |
| 2 | * 5460.000 | 47.24 | 0.76 | 48.00 | -6.00 | 54.00 | 100 | 130 | Average |
| 3 | 5470.000 | 46.64 | 0.80 | 47.44 | N/A | N/A | 100 | 130 | Average |
| 4 | 5517.700 | 92.87 | 1.01 | 93.88 | N/A | N/A | 100 | 130 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

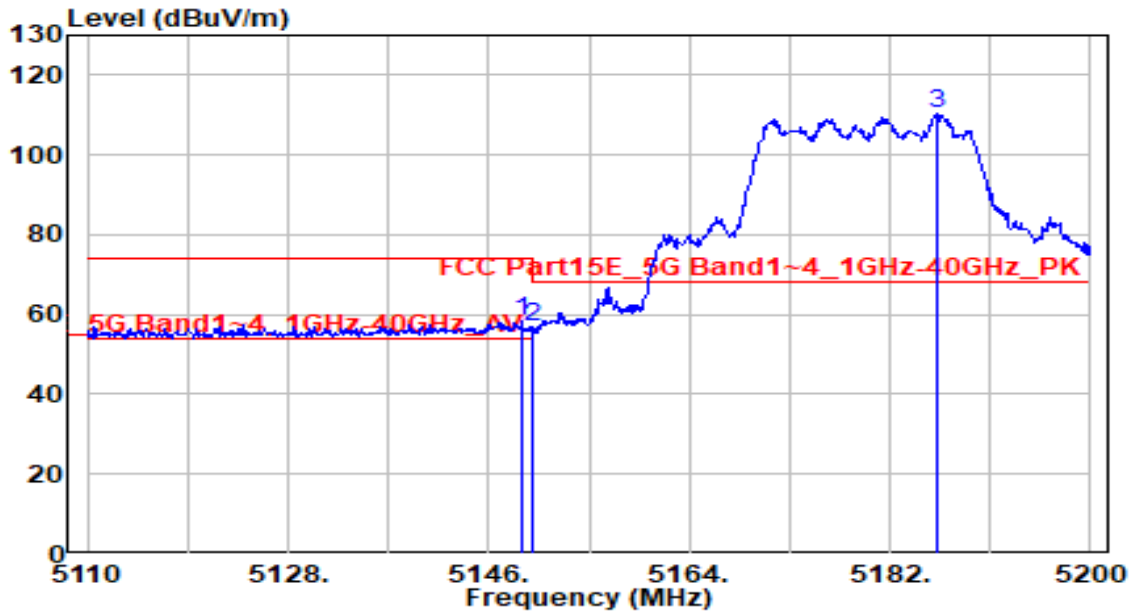


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5148.970 | 57.35 | 0.79 | 58.15 | -15.85 | 74.00 | 275 | 70 | Peak |
| 2 | | 5150.000 | 55.87 | 0.80 | 56.66 | -17.34 | 74.00 | 275 | 70 | Peak |
| 3 | | 5186.140 | 109.67 | 0.84 | 110.51 | N/A | N/A | 275 | 70 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

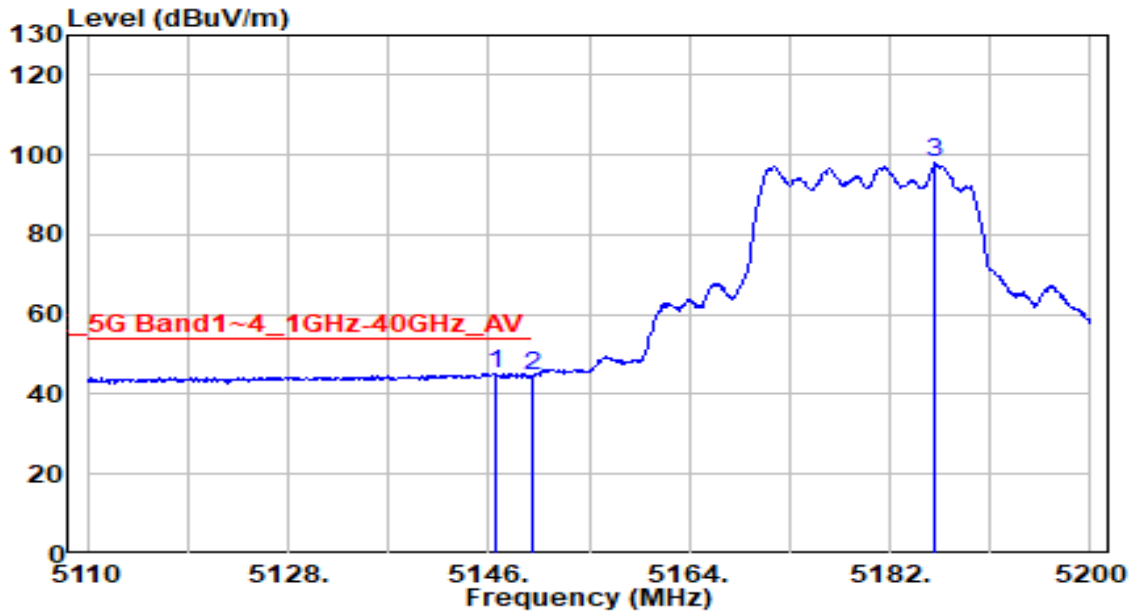


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5146.540 | 44.55 | 0.79 | 45.34 | -8.66 | 54.00 | 275 | 70 | Average |
| 2 | | 5150.000 | 43.69 | 0.80 | 44.49 | -9.51 | 54.00 | 275 | 70 | Average |
| 3 | | 5186.050 | 97.09 | 0.84 | 97.93 | N/A | N/A | 275 | 70 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

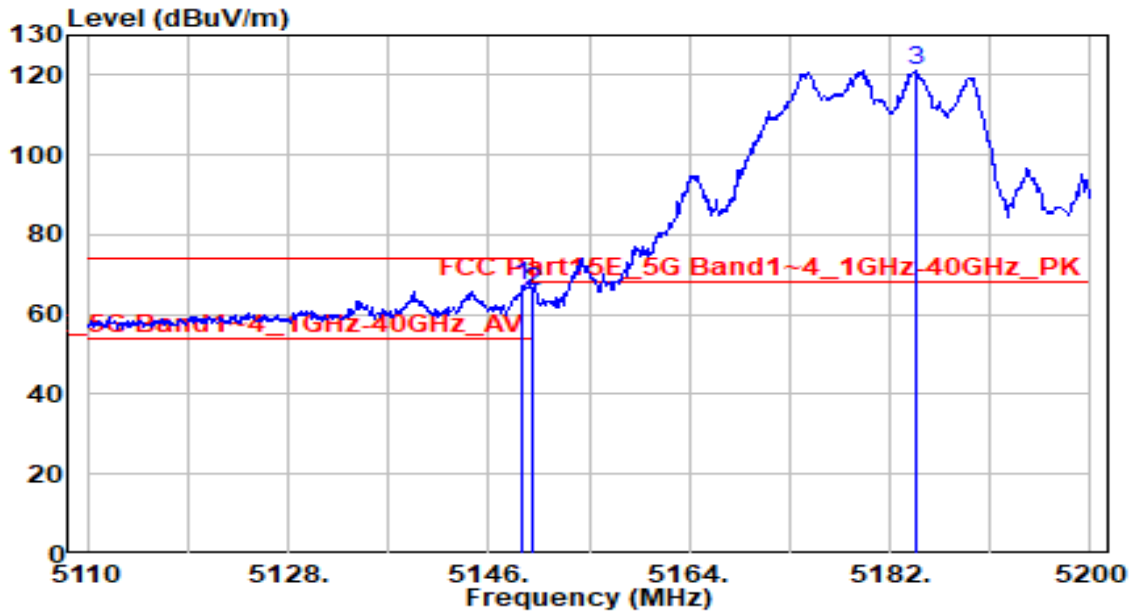


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5149.060 | 66.59 | 0.79 | 67.38 | -6.62 | 74.00 | 185 | 100 | Peak |
| 2 | | 5150.000 | 65.06 | 0.80 | 65.86 | -8.14 | 74.00 | 185 | 100 | Peak |
| 3 | | 5184.430 | 120.39 | 0.84 | 121.23 | N/A | N/A | 185 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band1_CH 36_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

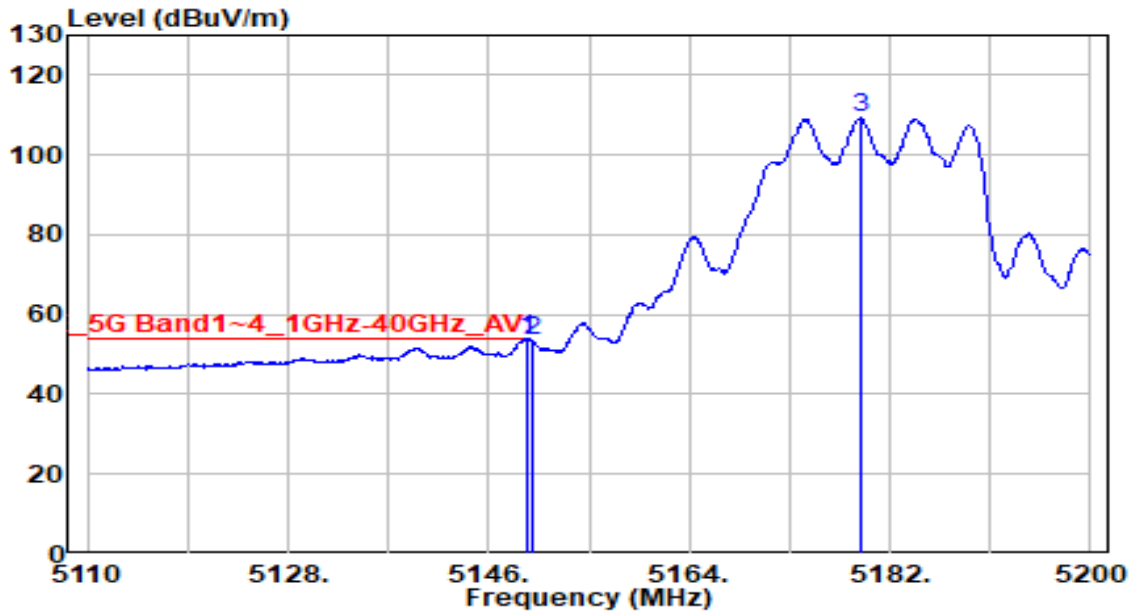


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5149.420 | 53.18 | 0.80 | 53.97 | -0.03 | 54.00 | 185 | 100 | Average |
| 2 | | 5150.000 | 52.51 | 0.80 | 53.30 | -0.70 | 54.00 | 185 | 100 | Average |
| 3 | | 5179.390 | 108.34 | 0.83 | 109.18 | N/A | N/A | 185 | 100 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

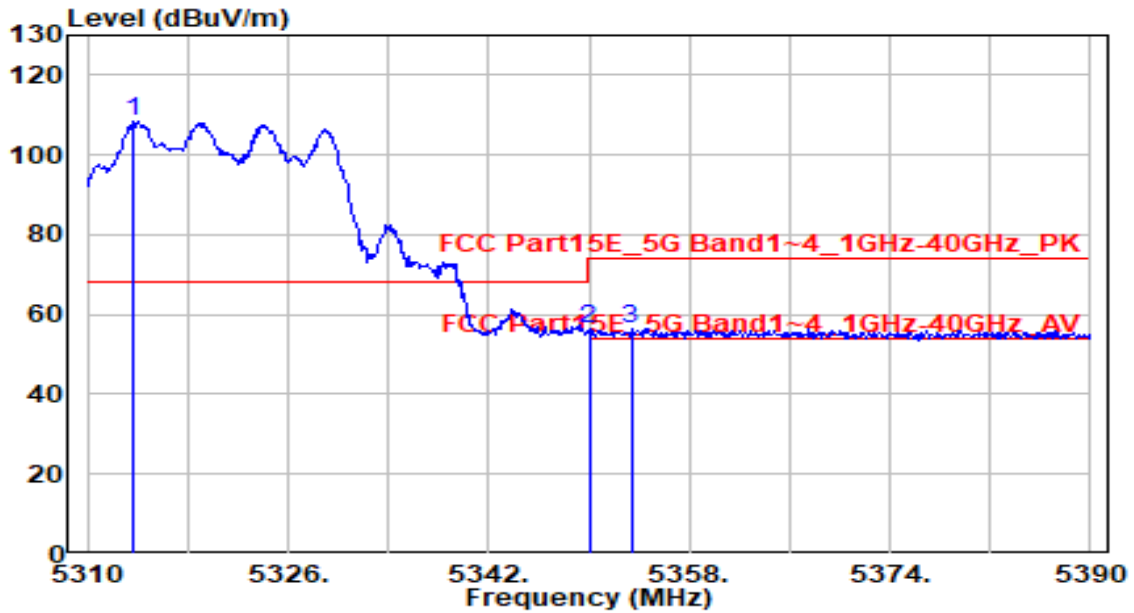


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5313.600 | 107.81 | 0.66 | 108.47 | N/A | N/A | 300 | 60 | Peak |
| 2 | 5350.000 | 55.93 | 0.59 | 56.53 | -17.47 | 74.00 | 300 | 60 | Peak |
| 3 | * 5353.360 | 56.00 | 0.59 | 56.59 | -17.41 | 74.00 | 300 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

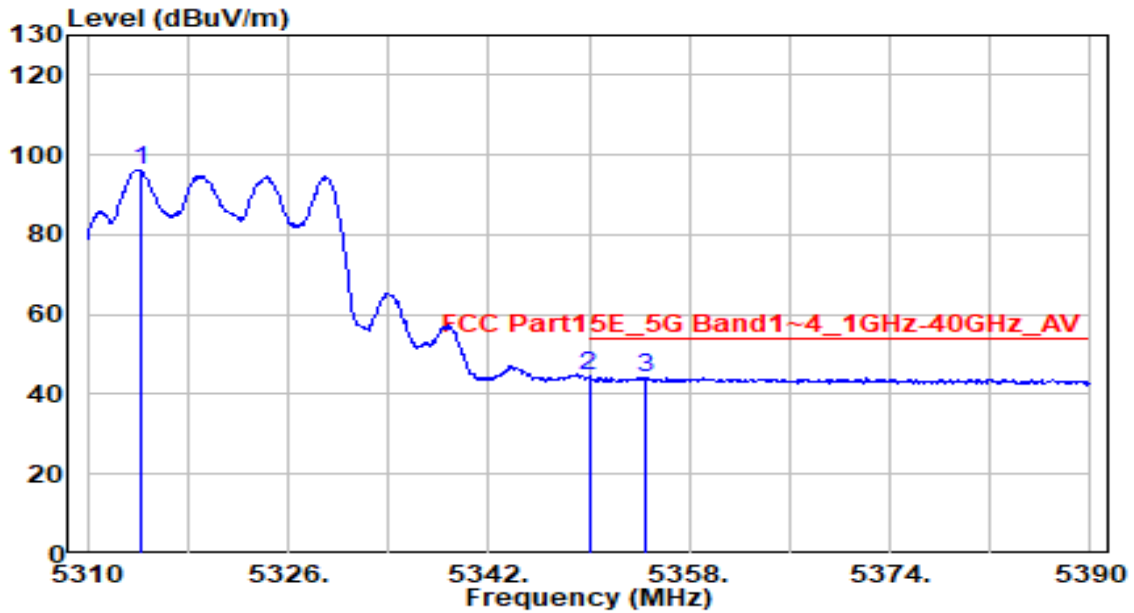


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5314.240 | 95.72 | 0.66 | 96.38 | N/A | N/A | 300 | 60 | Average |
| 2 | * 5350.000 | 43.86 | 0.59 | 44.45 | -9.55 | 54.00 | 300 | 60 | Average |
| 3 | 5354.480 | 43.64 | 0.59 | 44.22 | -9.78 | 54.00 | 300 | 60 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

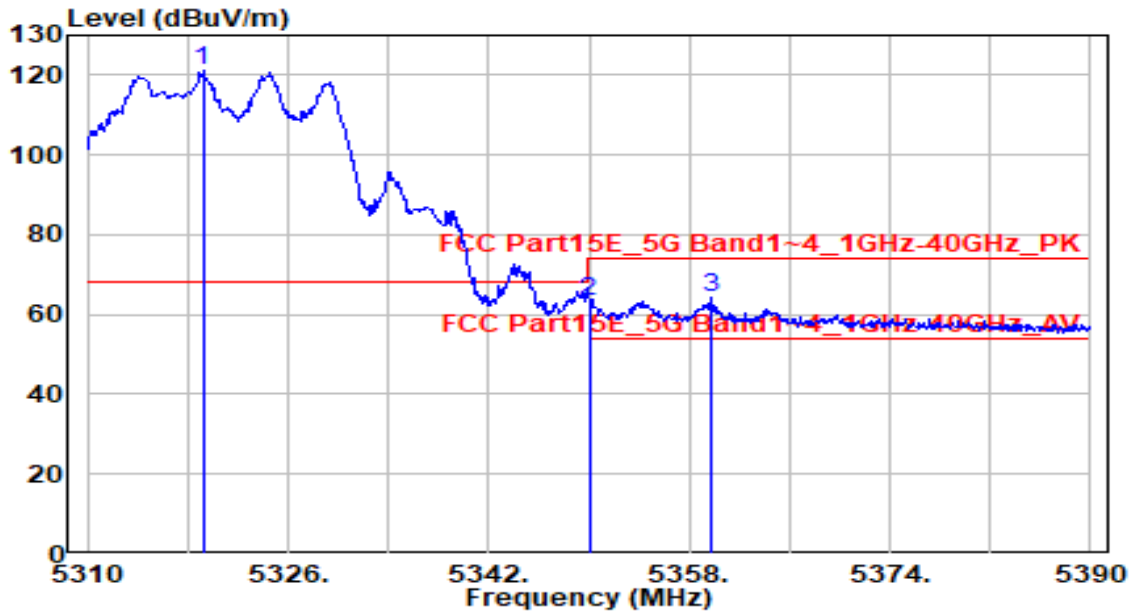


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5319.200 | 120.54 | 0.65 | 121.19 | N/A | N/A | 205 | 100 | Peak |
| 2 | 5350.000 | 62.63 | 0.59 | 63.22 | -10.78 | 74.00 | 205 | 100 | Peak |
| 3 | * 5359.760 | 63.70 | 0.58 | 64.28 | -9.72 | 74.00 | 205 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band2_CH 64_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

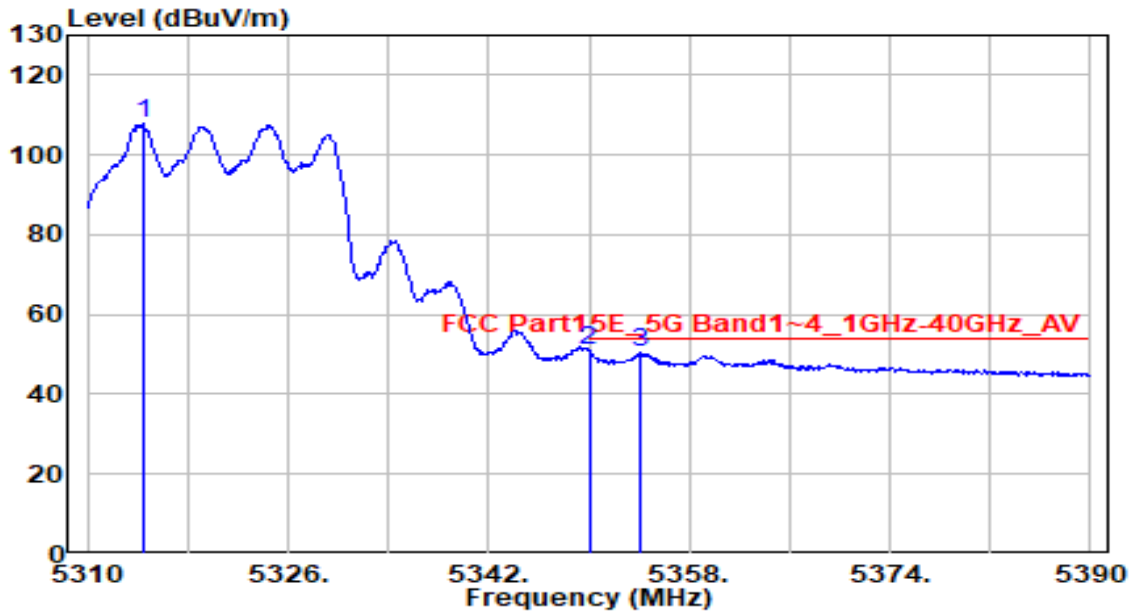


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5314.400 | 107.38 | 0.66 | 108.04 | N/A | N/A | 205 | 100 | Average |
| 2 | * 5350.000 | 50.29 | 0.59 | 50.88 | -3.12 | 54.00 | 205 | 100 | Average |
| 3 | 5354.080 | 49.93 | 0.59 | 50.52 | -3.48 | 54.00 | 205 | 100 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

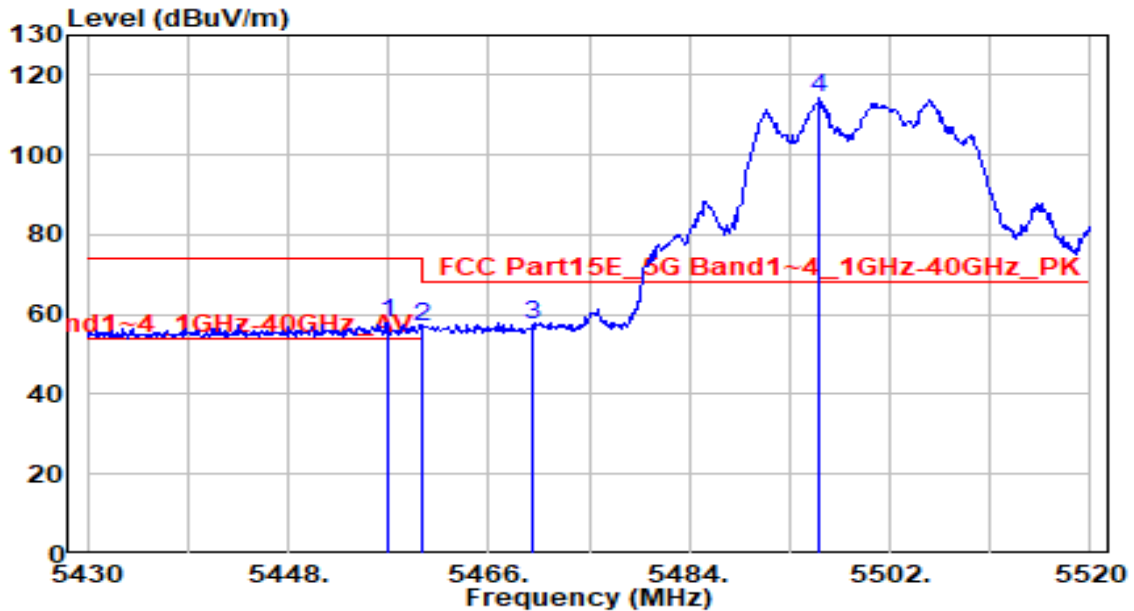


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5456.910 | 57.25 | 0.75 | 58.00 | -16.00 | 74.00 | 100 | 150 | Peak |
| 2 | 5460.000 | 56.09 | 0.76 | 56.85 | -17.15 | 74.00 | 100 | 150 | Peak |
| 3 | * 5470.000 | 56.76 | 0.80 | 57.57 | -10.63 | 68.20 | 100 | 150 | Peak |
| 4 | 5495.700 | 113.37 | 0.91 | 114.28 | N/A | N/A | 100 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

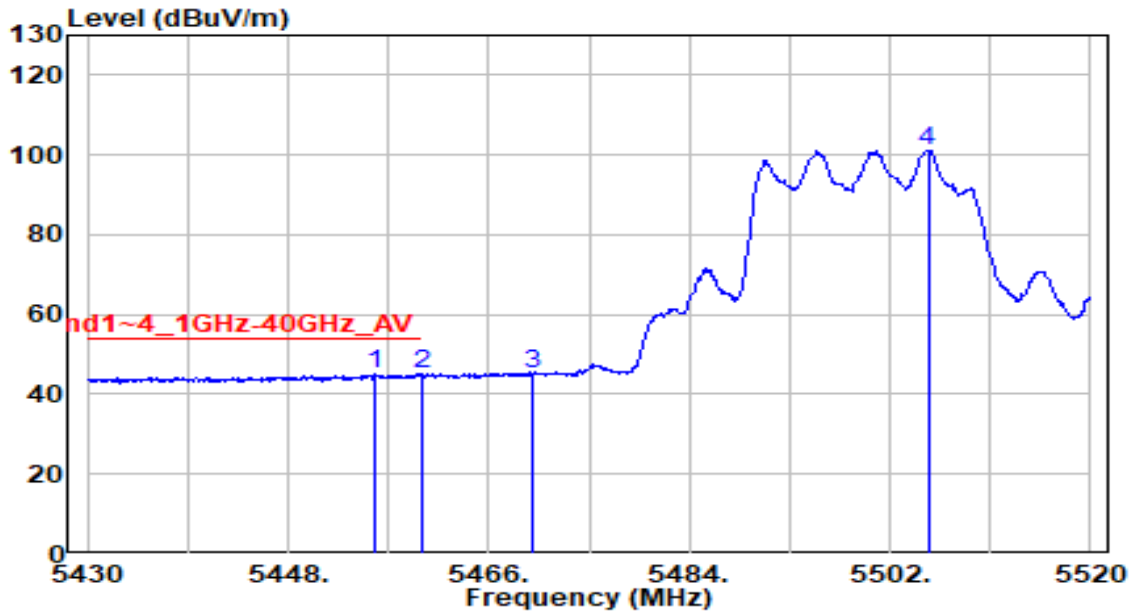


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5455.830 | 44.63 | 0.74 | 45.38 | -8.62 | 54.00 | 100 | 150 | Average |
| 2 | 5460.000 | 44.27 | 0.76 | 45.03 | -8.97 | 54.00 | 100 | 150 | Average |
| 3 | 5470.000 | 44.21 | 0.80 | 45.01 | N/A | N/A | 100 | 150 | Average |
| 4 | 5505.420 | 100.34 | 0.95 | 101.30 | N/A | N/A | 100 | 150 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

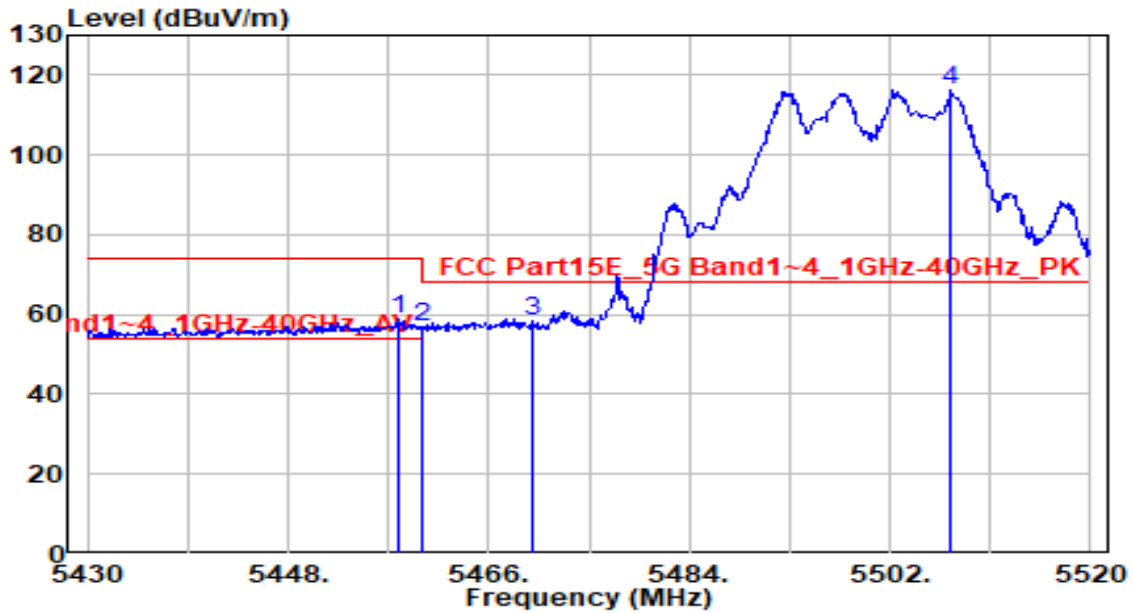


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5457.990 | 58.12 | 0.75 | 58.87 | -15.13 | 74.00 | 100 | 130 | Peak |
| 2 | 5460.000 | 56.05 | 0.76 | 56.81 | -17.19 | 74.00 | 100 | 130 | Peak |
| 3 | * 5470.000 | 57.46 | 0.80 | 58.26 | -9.94 | 68.20 | 100 | 130 | Peak |
| 4 | 5507.490 | 115.14 | 0.96 | 116.10 | N/A | N/A | 100 | 130 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 100_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

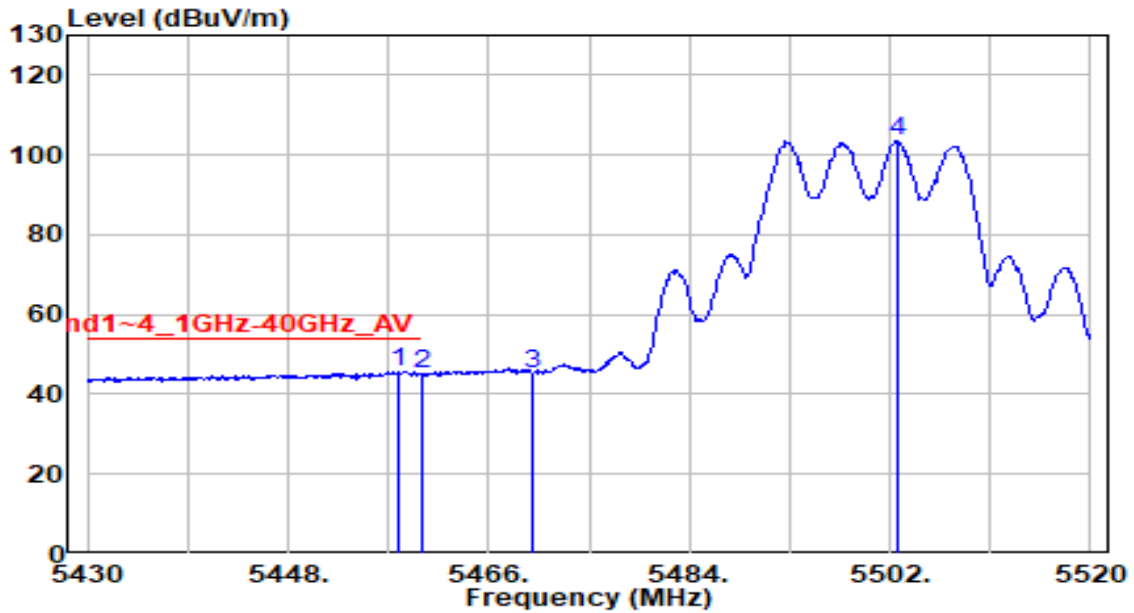


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5457.900 | 44.95 | 0.75 | 45.70 | -8.30 | 54.00 | 100 | 130 | Average |
| 2 | | 5460.000 | 44.43 | 0.76 | 45.19 | -8.81 | 54.00 | 100 | 130 | Average |
| 3 | | 5470.000 | 44.56 | 0.80 | 45.36 | N/A | N/A | 100 | 130 | Average |
| 4 | | 5502.630 | 102.62 | 0.94 | 103.56 | N/A | N/A | 100 | 130 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

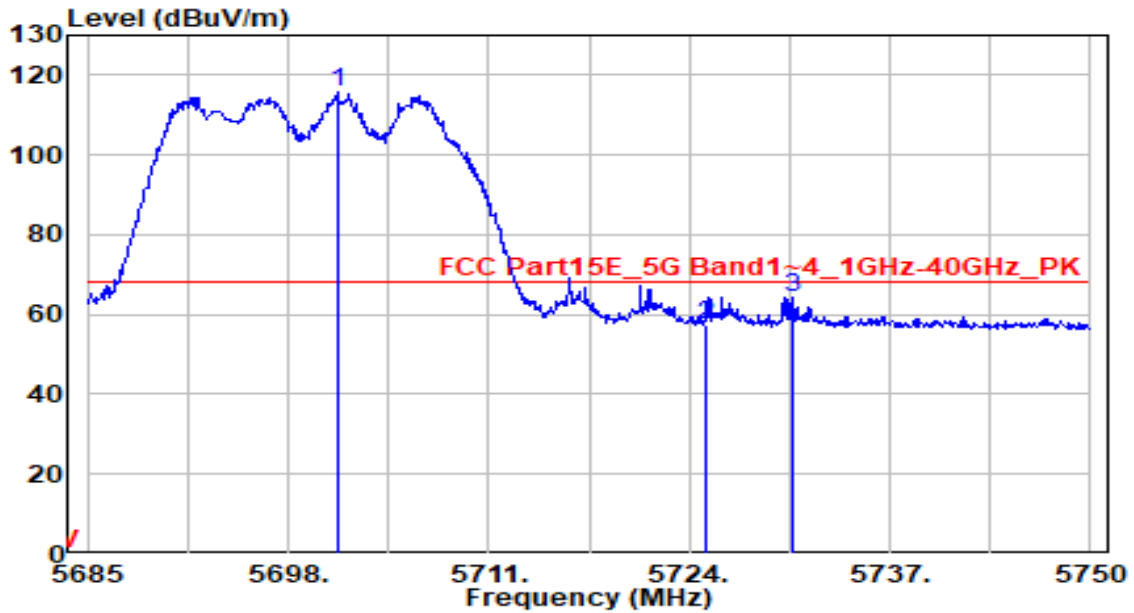


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5701.185 | 113.87 | 1.79 | 115.66 | N/A | N/A | 200 | 150 | Peak |
| 2 | 5725.000 | 55.63 | 1.89 | 57.52 | -10.68 | 68.20 | 200 | 150 | Peak |
| 3 | * 5730.760 | 62.40 | 1.91 | 64.31 | -3.89 | 68.20 | 200 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 140_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

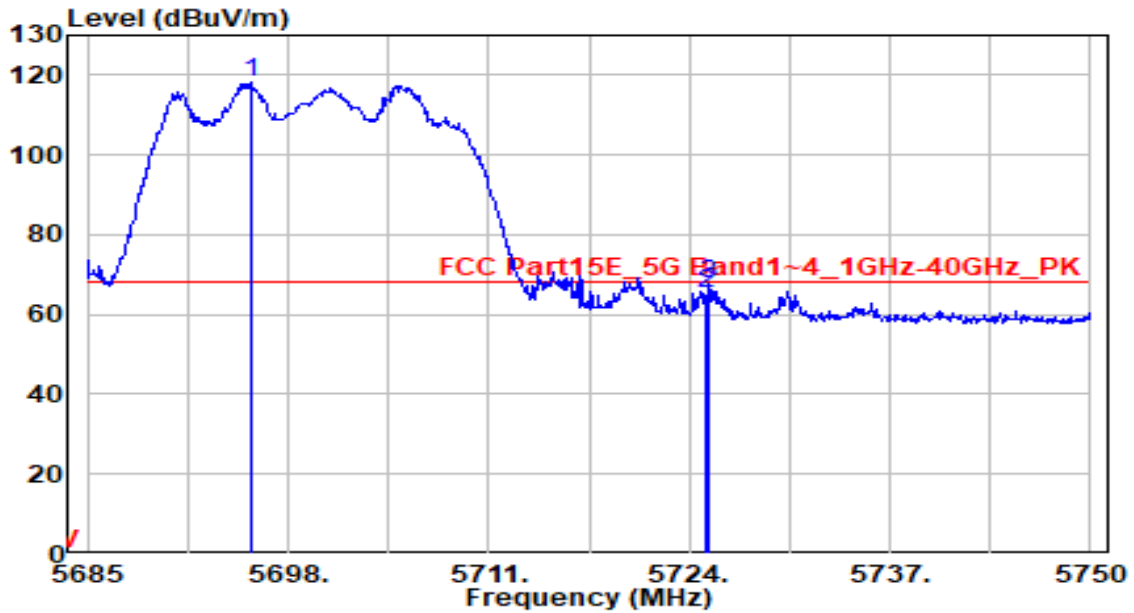


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5695.595 | 116.53 | 1.77 | 118.30 | N/A | N/A | 215 | 140 | Peak |
| 2 | 5725.000 | 63.46 | 1.89 | 65.35 | -2.85 | 68.20 | 215 | 140 | Peak |
| 3 | * 5725.300 | 65.94 | 1.89 | 67.83 | -0.37 | 68.20 | 215 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

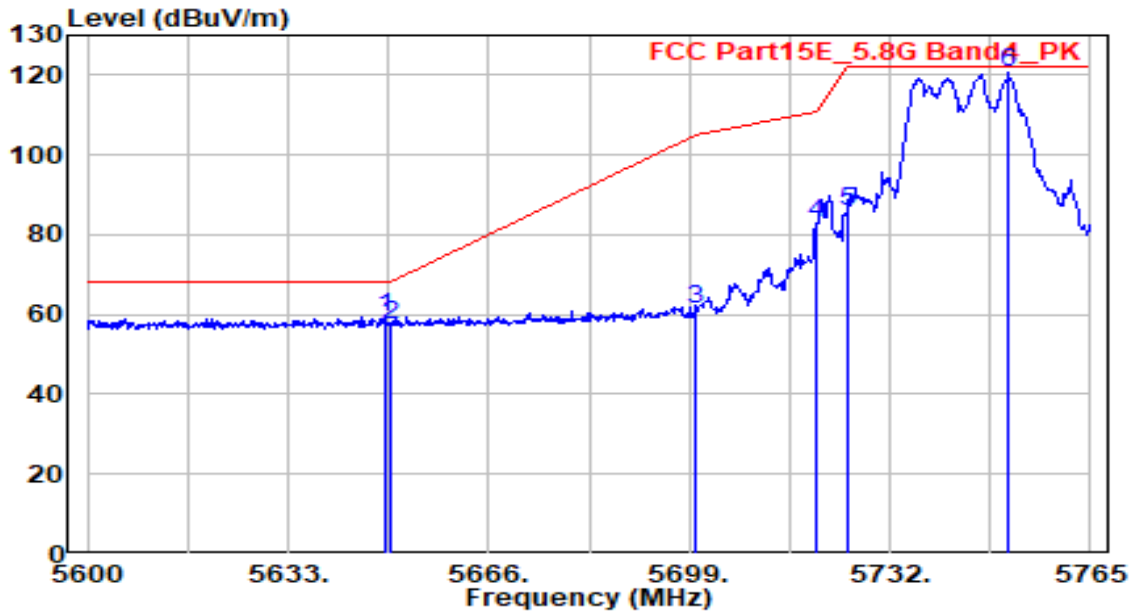


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5648.840 | 57.91 | 1.58 | 59.50 | -8.70 | 68.20 | 225 | 150 | Peak |
| 2 | 5650.000 | 55.99 | 1.59 | 57.58 | -10.62 | 68.20 | 225 | 150 | Peak |
| 3 | 5700.000 | 59.56 | 1.79 | 61.35 | -43.85 | 105.20 | 225 | 150 | Peak |
| 4 | 5720.000 | 81.27 | 1.87 | 83.14 | -27.66 | 110.80 | 225 | 150 | Peak |
| 5 | 5725.000 | 83.75 | 1.89 | 85.64 | -36.56 | 122.20 | 225 | 150 | Peak |
| 6 | 5751.635 | 118.57 | 2.00 | 120.56 | N/A | N/A | 225 | 150 | Peak |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 149_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

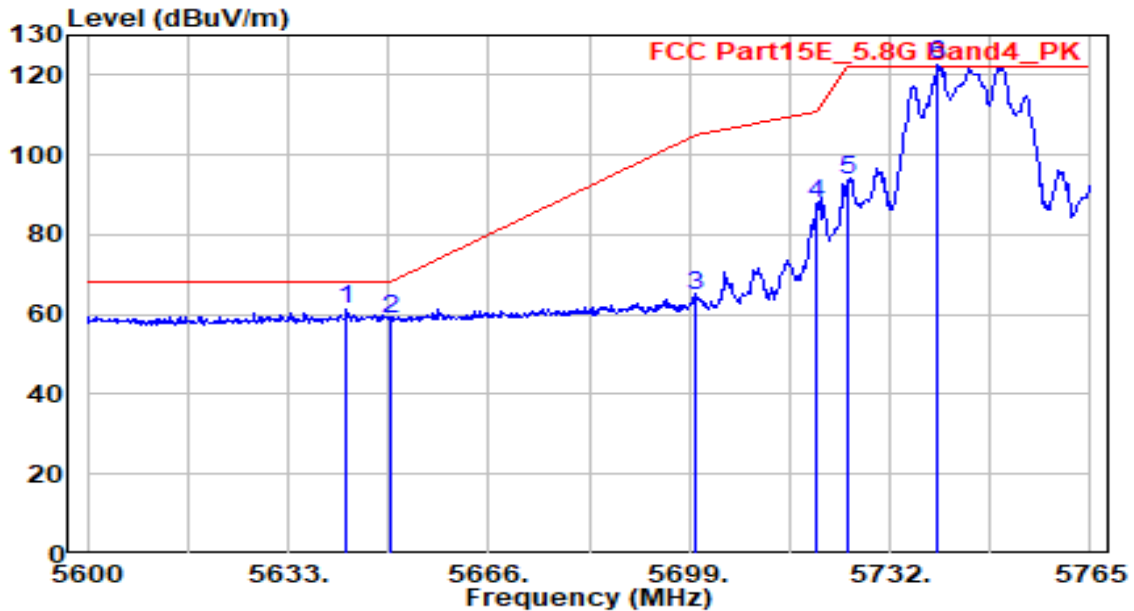


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5642.570 | 59.80 | 1.56 | 61.35 | -6.85 | 68.20 | 215 | 135 | Peak |
| 2 | 5650.000 | 57.51 | 1.59 | 59.09 | -9.11 | 68.20 | 215 | 135 | Peak |
| 3 | 5700.000 | 62.84 | 1.79 | 64.63 | -40.57 | 105.20 | 215 | 135 | Peak |
| 4 | 5720.000 | 86.01 | 1.87 | 87.88 | -22.92 | 110.80 | 215 | 135 | Peak |
| 5 | 5725.000 | 91.98 | 1.89 | 93.87 | -28.33 | 122.20 | 215 | 135 | Peak |
| 6 | 5739.920 | 120.47 | 1.95 | 122.42 | N/A | N/A | 215 | 135 | Peak |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

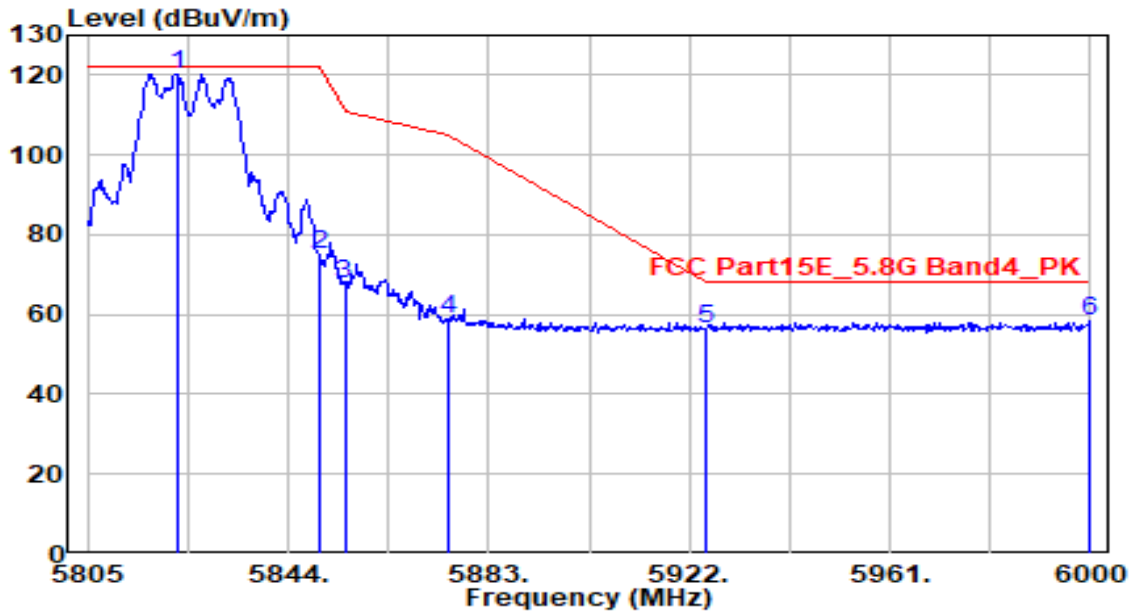


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5822.550 | 118.15 | 2.23 | 120.38 | N/A | N/A | 220 | 160 | Peak |
| 2 | 5850.000 | 72.88 | 2.27 | 75.15 | -47.05 | 122.20 | 220 | 160 | Peak |
| 3 | 5855.000 | 65.41 | 2.28 | 67.68 | -43.12 | 110.80 | 220 | 160 | Peak |
| 4 | 5875.000 | 56.71 | 2.31 | 59.02 | -46.18 | 105.20 | 220 | 160 | Peak |
| 5 | 5925.000 | 53.87 | 2.38 | 56.25 | -11.95 | 68.20 | 220 | 160 | Peak |
| 6 | * 5999.805 | 55.82 | 2.50 | 58.32 | -9.88 | 68.20 | 220 | 160 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 165_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

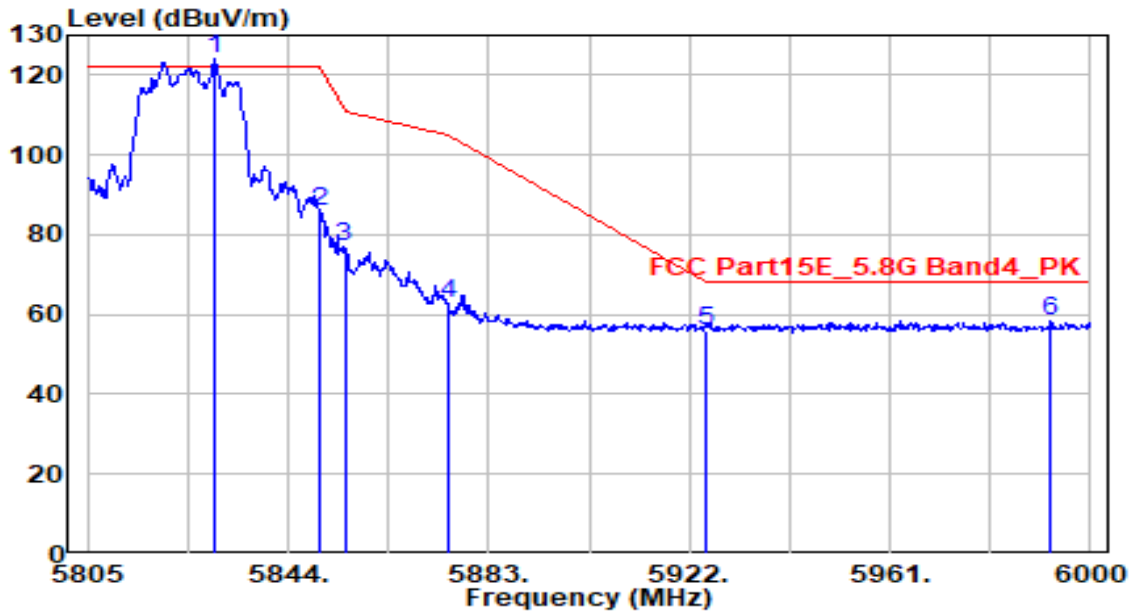


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5829.570 | 121.81 | 2.24 | 124.05 | N/A | N/A | 200 | 135 | Peak |
| 2 | 5850.000 | 83.39 | 2.27 | 85.66 | -36.54 | 122.20 | 200 | 135 | Peak |
| 3 | 5855.000 | 74.59 | 2.28 | 76.86 | -33.94 | 110.80 | 200 | 135 | Peak |
| 4 | 5875.000 | 60.46 | 2.31 | 62.77 | -42.43 | 105.20 | 200 | 135 | Peak |
| 5 | 5925.000 | 53.77 | 2.38 | 56.15 | -12.05 | 68.20 | 200 | 135 | Peak |
| 6 | * 5992.395 | 55.96 | 2.49 | 58.45 | -9.75 | 68.20 | 200 | 135 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

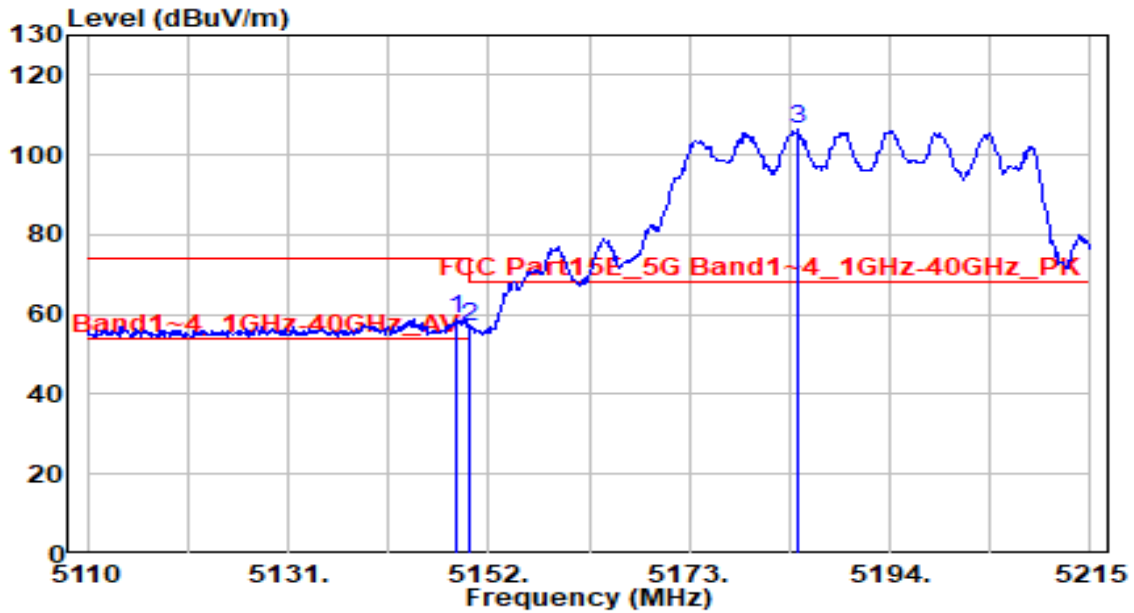


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5148.535 | 58.12 | 0.79 | 58.91 | -15.09 | 74.00 | 305 | 60 | Peak |
| 2 | | 5150.000 | 56.19 | 0.80 | 56.99 | -17.01 | 74.00 | 305 | 60 | Peak |
| 3 | | 5184.340 | 105.41 | 0.84 | 106.25 | N/A | N/A | 305 | 60 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

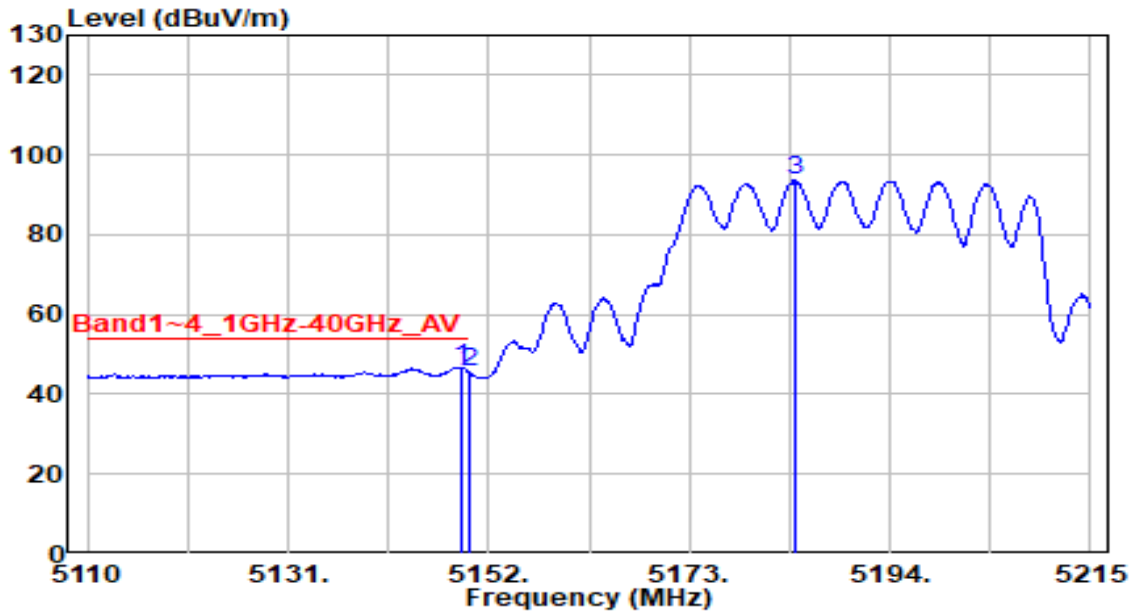


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5149.165 | 46.00 | 0.79 | 46.80 | -7.20 | 54.00 | 305 | 60 | Average |
| 2 | | 5150.000 | 44.78 | 0.80 | 45.57 | -8.43 | 54.00 | 305 | 60 | Average |
| 3 | | 5184.025 | 92.82 | 0.84 | 93.66 | N/A | N/A | 305 | 60 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

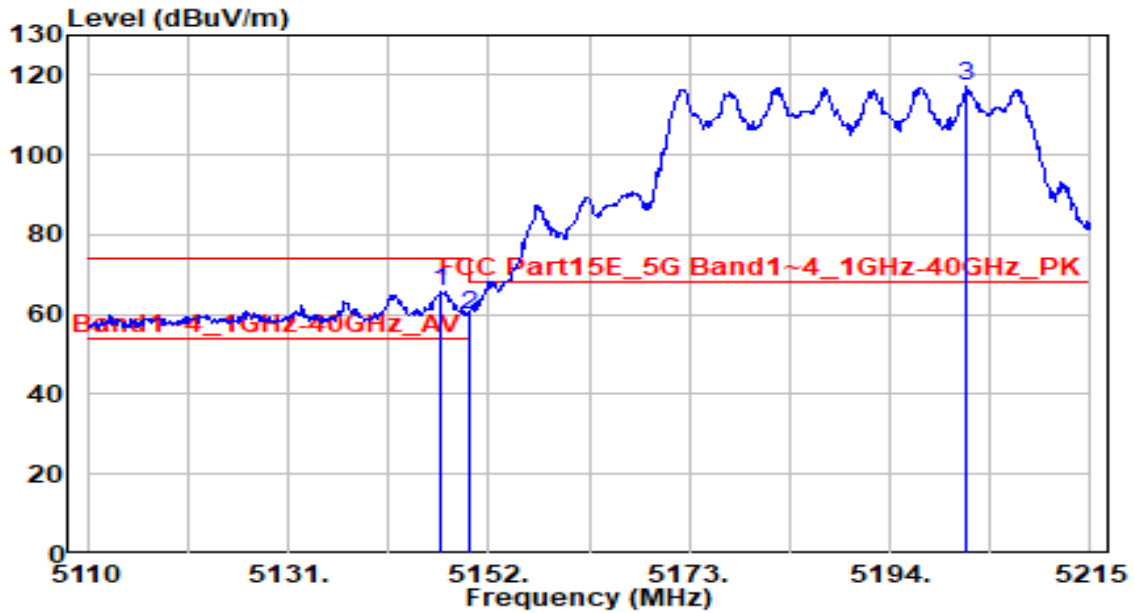


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 5146.960 | 65.13 | 0.79 | 65.92 | -8.08 | 74.00 | 200 | 90 | Peak |
| 2 | | 5150.000 | 59.20 | 0.80 | 60.00 | -14.00 | 74.00 | 200 | 90 | Peak |
| 3 | | 5202.085 | 116.56 | 0.85 | 117.42 | N/A | N/A | 200 | 90 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

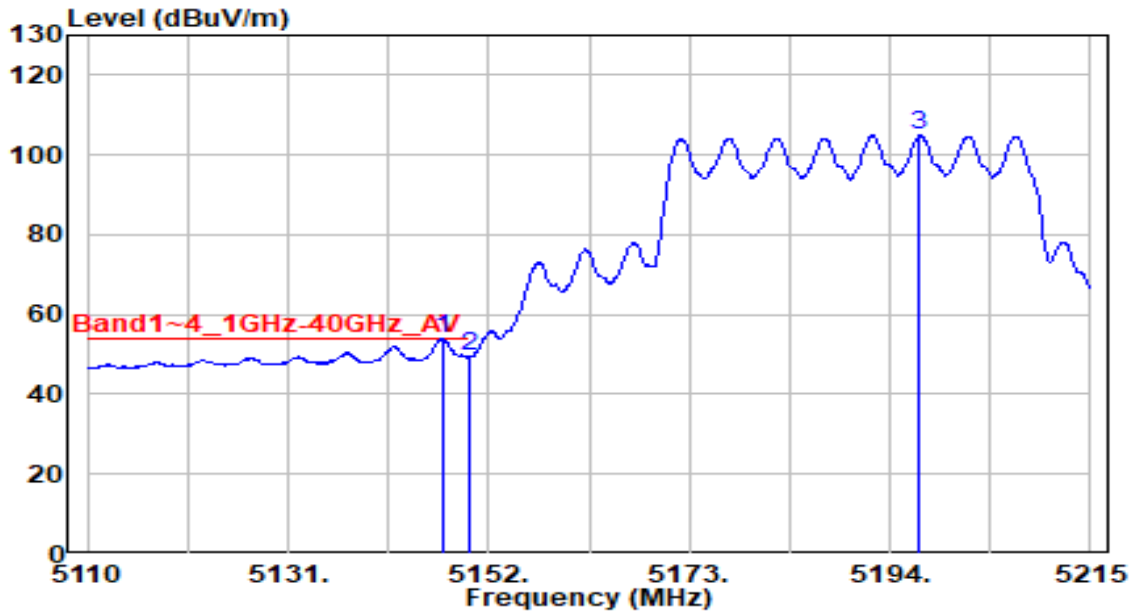


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5147.170 | 53.08 | 0.79 | 53.88 | -0.12 | 54.00 | 200 | 90 | Average |
| 2 | | 5150.000 | 48.81 | 0.80 | 49.60 | -4.40 | 54.00 | 200 | 90 | Average |
| 3 | | 5197.150 | 104.10 | 0.85 | 104.96 | N/A | N/A | 200 | 90 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

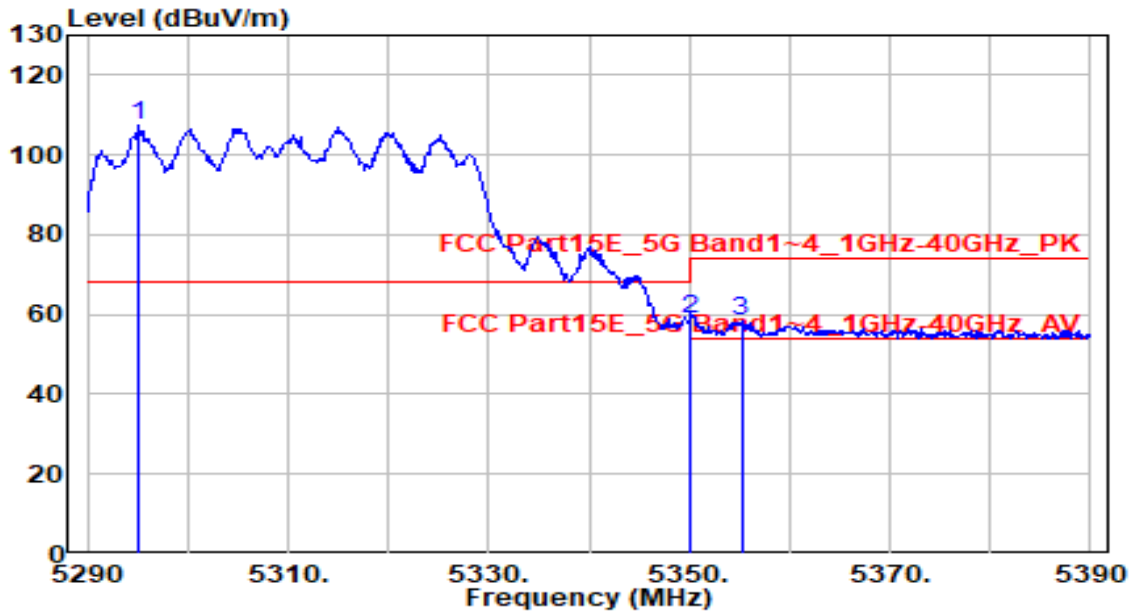


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5295.200 | 106.51 | 0.69 | 107.20 | N/A | N/A | 275 | 105 | Peak |
| 2 | * 5350.000 | 58.33 | 0.59 | 58.92 | -15.08 | 74.00 | 275 | 105 | Peak |
| 3 | 5355.200 | 57.91 | 0.58 | 58.50 | -15.50 | 74.00 | 275 | 105 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

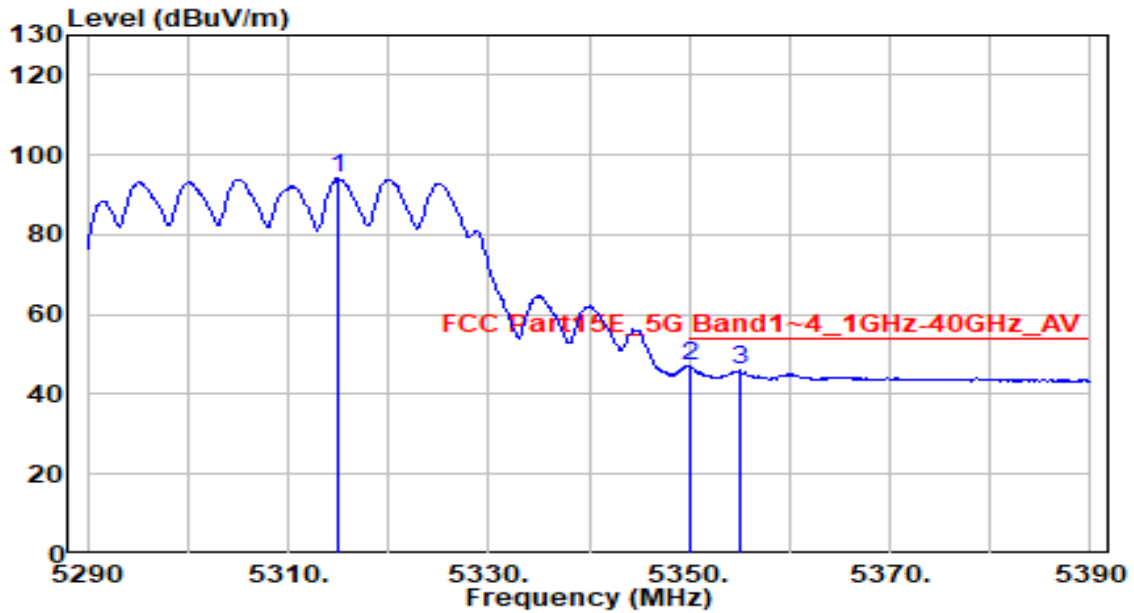


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5315.000 | 93.46 | 0.66 | 94.11 | N/A | N/A | 275 | 105 | Average |
| 2 | * 5350.000 | 46.26 | 0.59 | 46.86 | -7.14 | 54.00 | 275 | 105 | Average |
| 3 | 5355.000 | 45.29 | 0.59 | 45.87 | -8.13 | 54.00 | 275 | 105 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

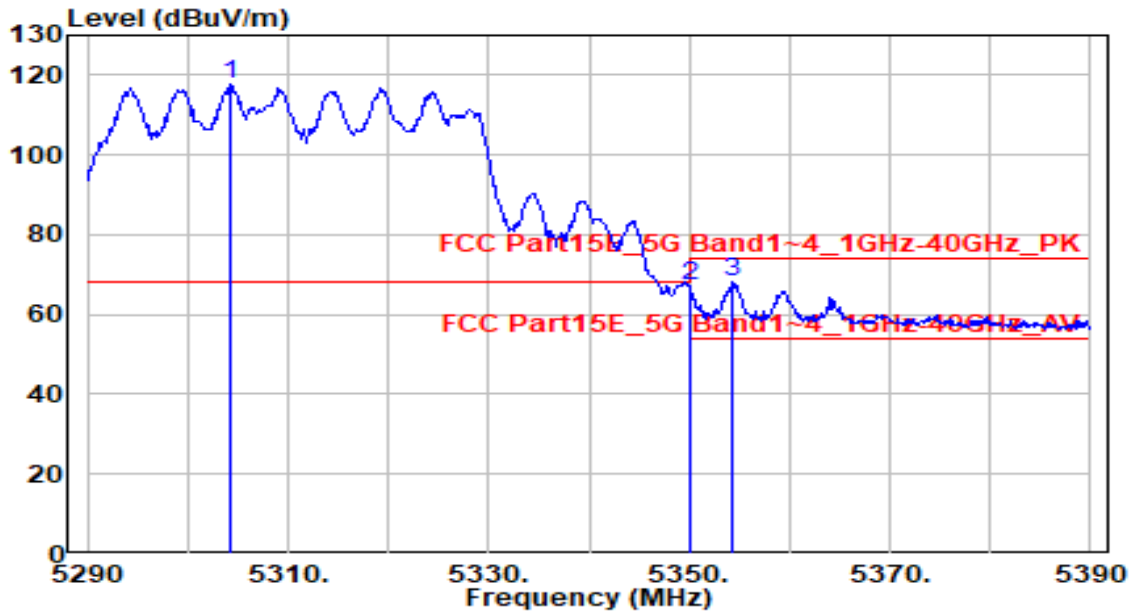


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5304.300 | 117.10 | 0.67 | 117.77 | N/A | N/A | 200 | 100 | Peak |
| 2 | 5350.000 | 66.48 | 0.59 | 67.07 | -6.93 | 74.00 | 200 | 100 | Peak |
| 3 | * 5354.400 | 67.63 | 0.59 | 68.21 | -5.79 | 74.00 | 200 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

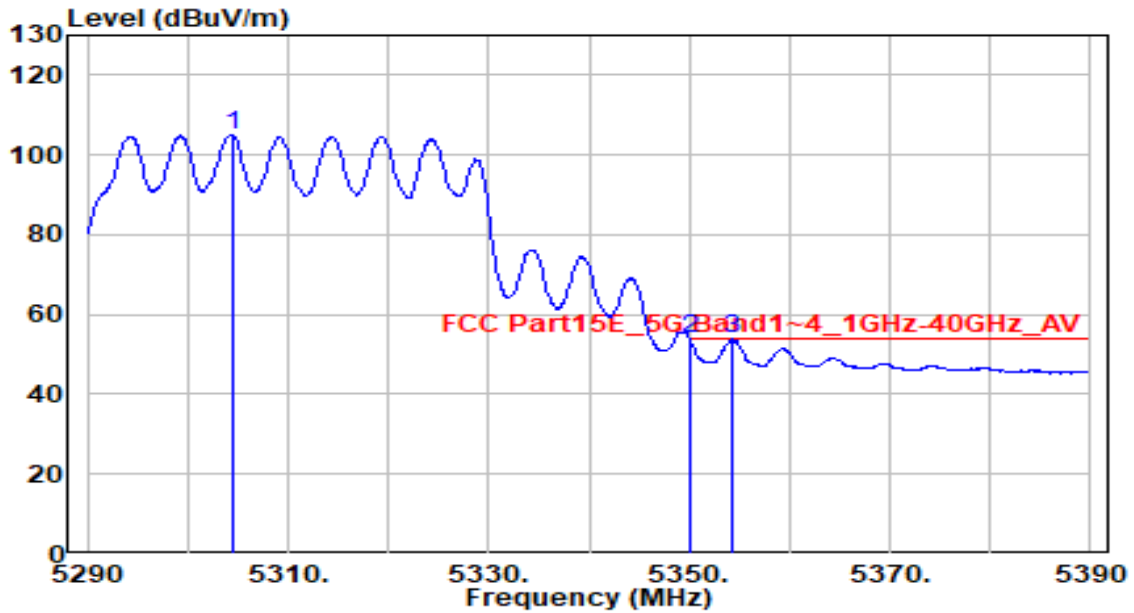


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5304.400 | 104.24 | 0.67 | 104.92 | N/A | N/A | 200 | 100 | Average |
| 2 | * 5350.000 | 53.40 | 0.59 | 53.99 | -0.01 | 54.00 | 200 | 100 | Average |
| 3 | 5354.300 | 53.13 | 0.59 | 53.72 | -0.28 | 54.00 | 200 | 100 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

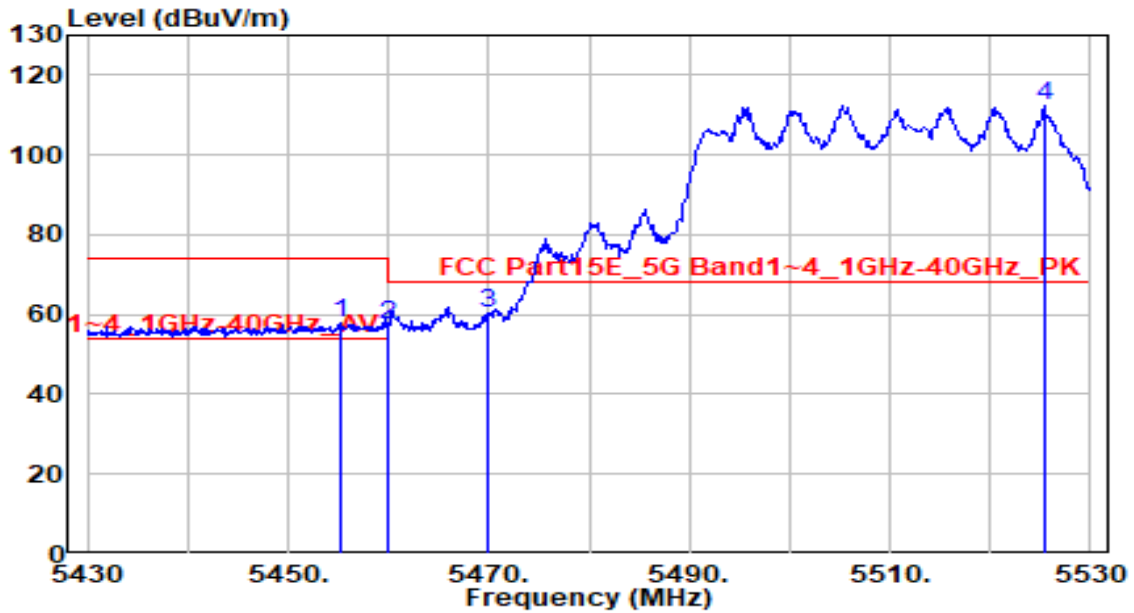


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5455.300 | 57.26 | 0.74 | 58.00 | -16.00 | 74.00 | 100 | 150 | Peak |
| 2 | 5460.000 | 56.45 | 0.76 | 57.21 | -16.79 | 74.00 | 100 | 150 | Peak |
| 3 | * 5470.000 | 59.63 | 0.80 | 60.43 | -7.77 | 68.20 | 100 | 150 | Peak |
| 4 | 5525.400 | 111.41 | 1.05 | 112.45 | N/A | N/A | 100 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

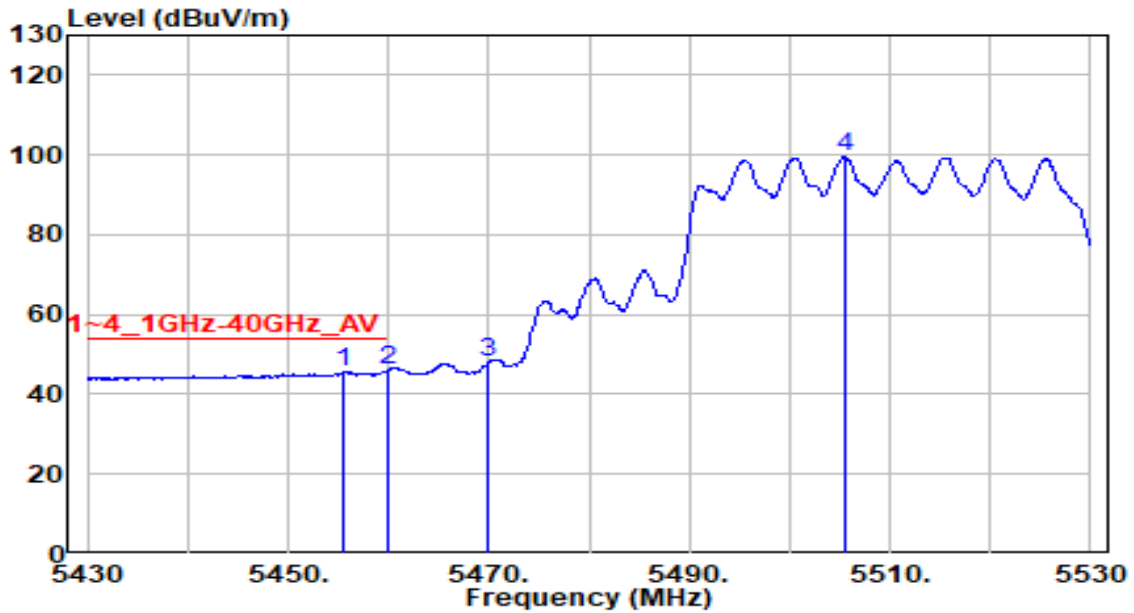


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5455.600 | 44.96 | 0.74 | 45.70 | -8.30 | 54.00 | 100 | 150 | Average |
| 2 | * 5460.000 | 45.17 | 0.76 | 45.93 | -8.07 | 54.00 | 100 | 150 | Average |
| 3 | 5470.000 | 47.06 | 0.80 | 47.86 | N/A | N/A | 100 | 150 | Average |
| 4 | 5505.500 | 98.63 | 0.95 | 99.58 | N/A | N/A | 100 | 150 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

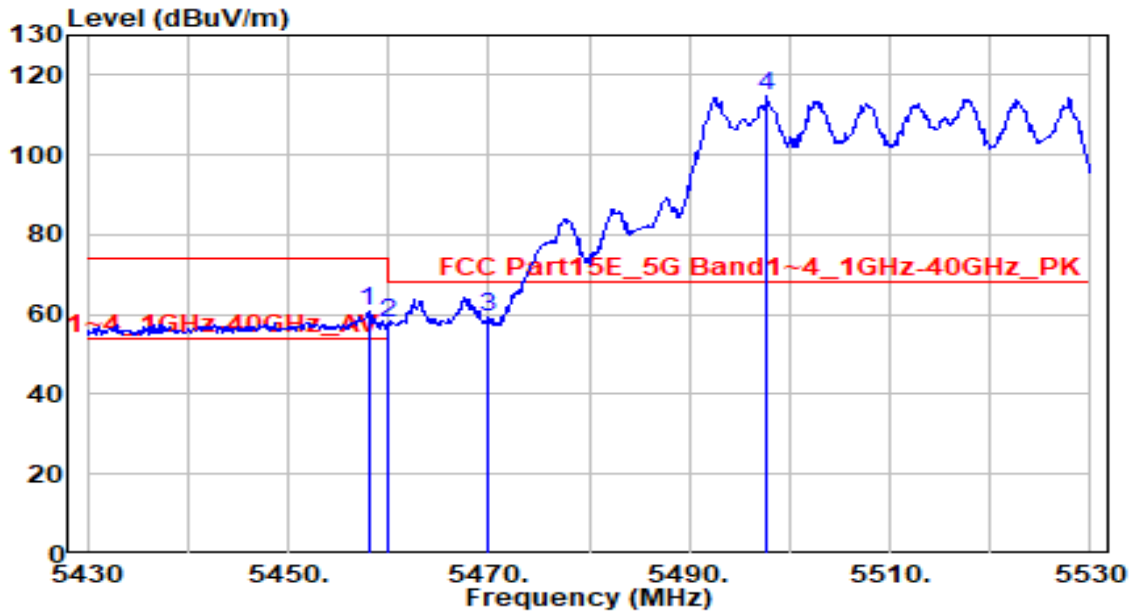


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5458.000 | 59.97 | 0.75 | 60.72 | -13.28 | 74.00 | 100 | 130 | Peak |
| 2 | 5460.000 | 56.99 | 0.76 | 57.75 | -16.25 | 74.00 | 100 | 130 | Peak |
| 3 | * 5470.000 | 58.48 | 0.80 | 59.29 | -8.91 | 68.20 | 100 | 130 | Peak |
| 4 | 5497.800 | 113.84 | 0.92 | 114.76 | N/A | N/A | 100 | 130 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

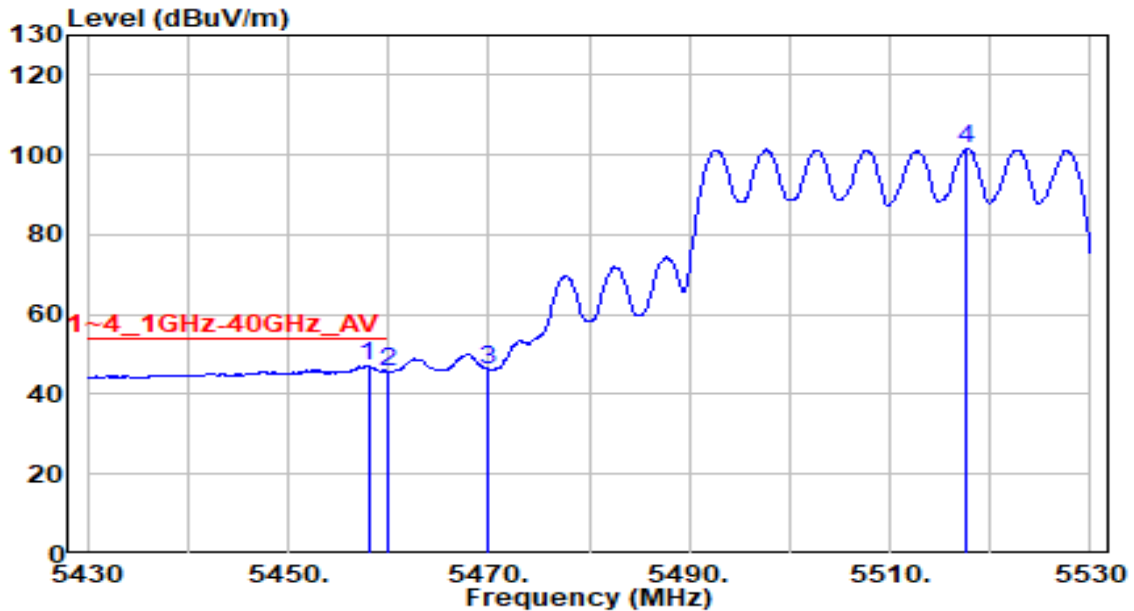


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 5458.000 | 46.28 | 0.75 | 47.04 | -6.96 | 54.00 | 100 | 130 | Average |
| 2 | | 5460.000 | 45.08 | 0.76 | 45.84 | -8.16 | 54.00 | 100 | 130 | Average |
| 3 | | 5470.000 | 45.55 | 0.80 | 46.35 | N/A | N/A | 100 | 130 | Average |
| 4 | | 5517.600 | 100.43 | 1.01 | 101.44 | N/A | N/A | 100 | 130 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

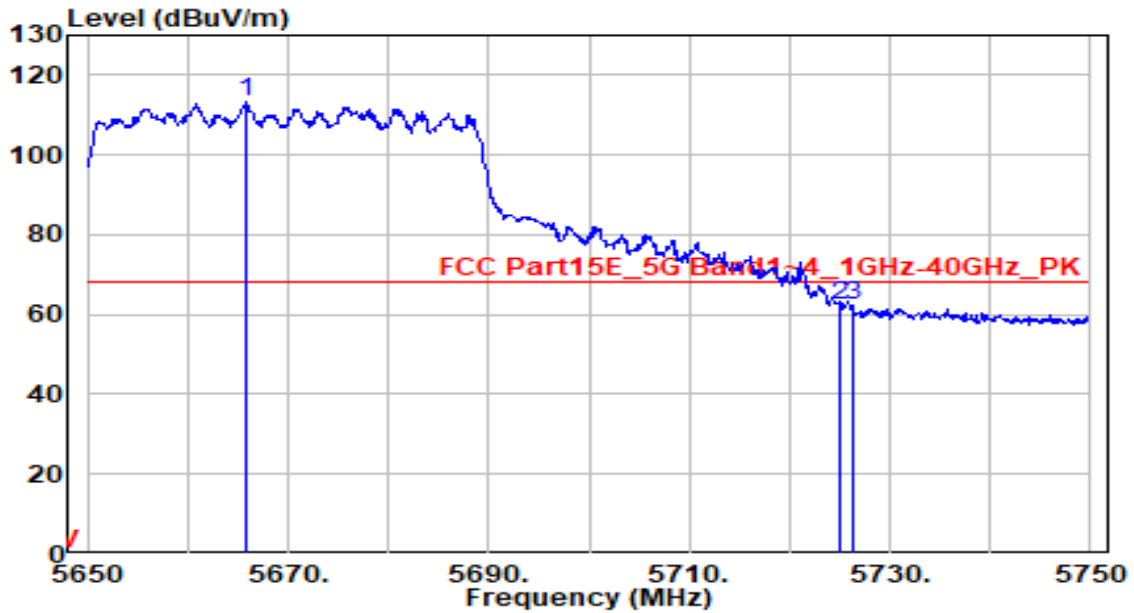


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5665.700 | 111.51 | 1.65 | 113.16 | N/A | N/A | 230 | 100 | Peak |
| 2 | 5725.000 | 60.34 | 1.89 | 62.23 | -5.97 | 68.20 | 230 | 100 | Peak |
| 3 | * 5726.300 | 60.59 | 1.89 | 62.48 | -5.72 | 68.20 | 230 | 100 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 134_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

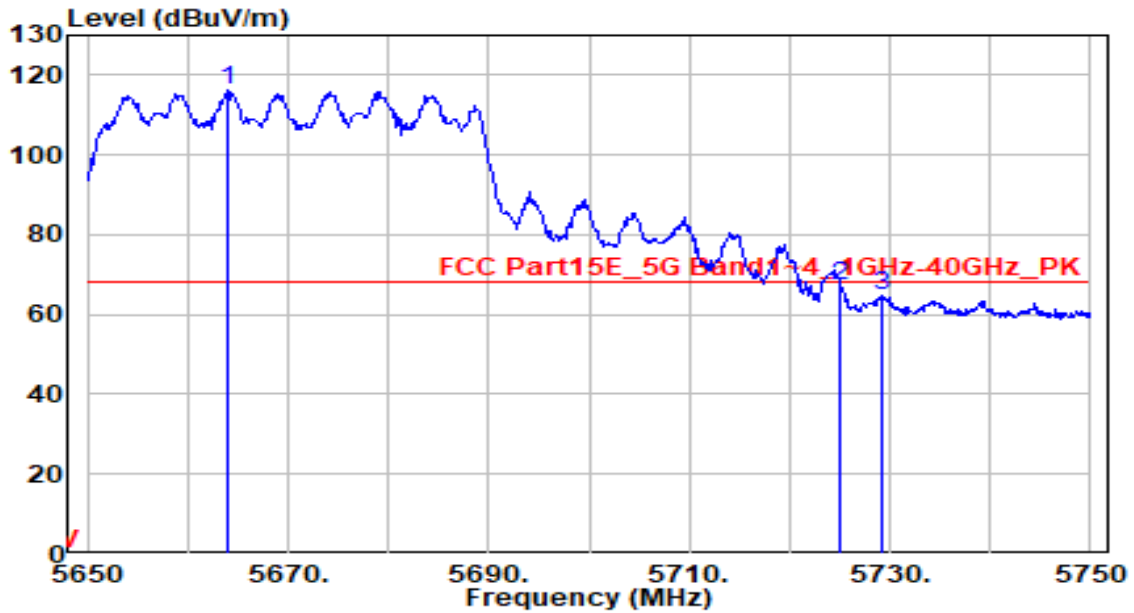


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5664.100 | 114.69 | 1.64 | 116.33 | N/A | N/A | 260 | 115 | Peak |
| 2 | * 5725.000 | 65.32 | 1.89 | 67.21 | -0.99 | 68.20 | 260 | 115 | Peak |
| 3 | 5729.100 | 62.61 | 1.91 | 64.51 | -3.69 | 68.20 | 260 | 115 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

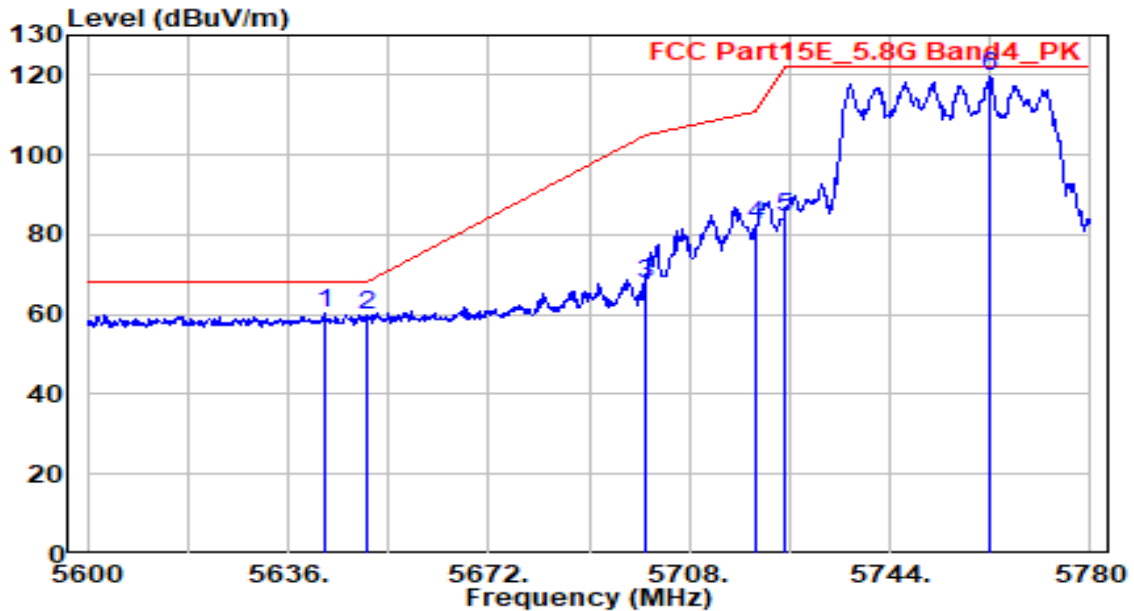


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5642.660 | 58.69 | 1.56 | 60.25 | -7.95 | 68.20 | 220 | 150 | Peak |
| 2 | 5650.000 | 58.08 | 1.59 | 59.67 | -8.53 | 68.20 | 220 | 150 | Peak |
| 3 | 5700.000 | 66.14 | 1.79 | 67.92 | -37.28 | 105.20 | 220 | 150 | Peak |
| 4 | 5720.000 | 80.58 | 1.87 | 82.44 | -28.36 | 110.80 | 220 | 150 | Peak |
| 5 | 5725.000 | 82.31 | 1.89 | 84.20 | -38.00 | 122.20 | 220 | 150 | Peak |
| 6 | 5761.820 | 117.59 | 2.04 | 119.63 | N/A | N/A | 220 | 150 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 151_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

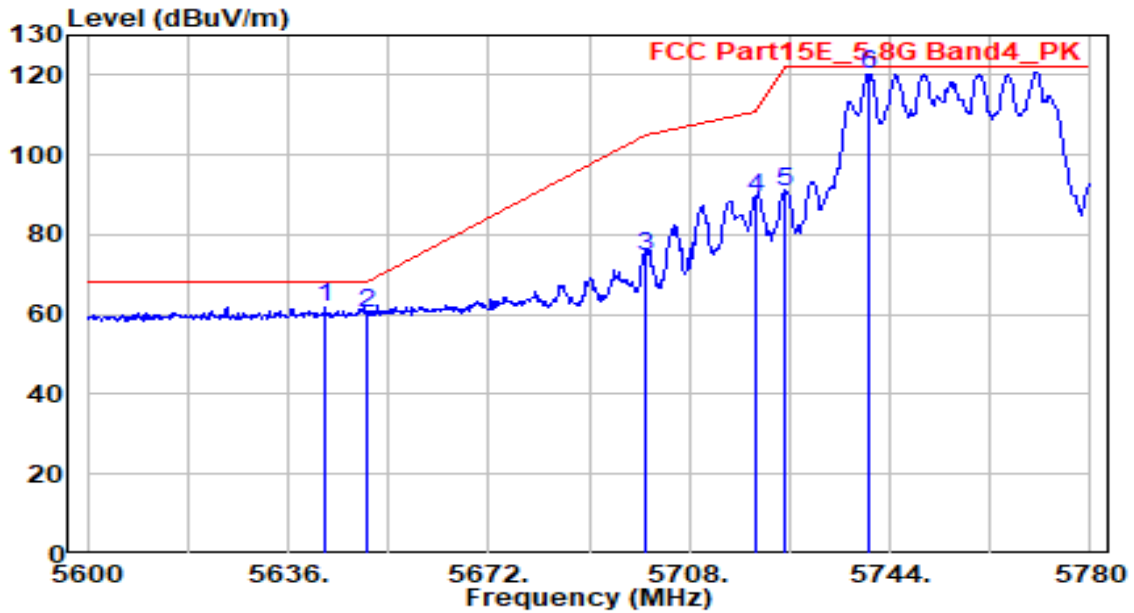


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 5642.660 | 60.26 | 1.56 | 61.82 | -6.38 | 68.20 | 200 | 135 | Peak |
| 2 | 5650.000 | 58.89 | 1.59 | 60.48 | -7.72 | 68.20 | 200 | 135 | Peak |
| 3 | 5700.000 | 72.59 | 1.79 | 74.38 | -30.82 | 105.20 | 200 | 135 | Peak |
| 4 | 5720.000 | 87.35 | 1.87 | 89.22 | -21.58 | 110.80 | 200 | 135 | Peak |
| 5 | 5725.000 | 88.78 | 1.89 | 90.67 | -31.53 | 122.20 | 200 | 135 | Peak |
| 6 | 5740.400 | 118.47 | 1.95 | 120.42 | N/A | N/A | 200 | 135 | Peak |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

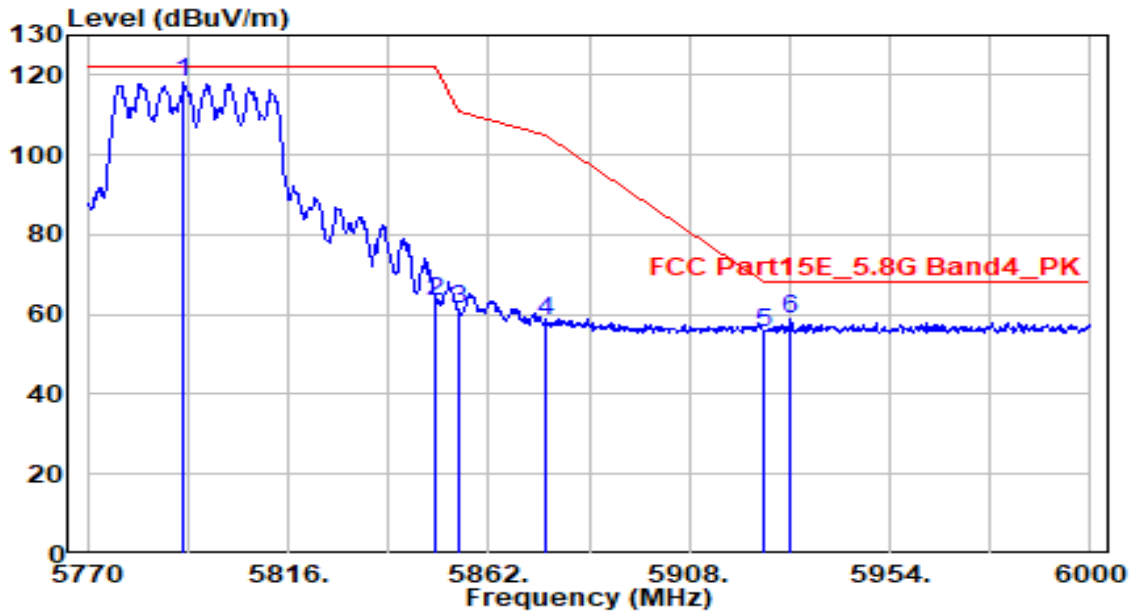


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5792.080 | 116.14 | 2.16 | 118.30 | N/A | N/A | 220 | 160 | Peak |
| 2 | 5850.000 | 61.00 | 2.27 | 63.27 | -58.93 | 122.20 | 220 | 160 | Peak |
| 3 | 5855.000 | 58.90 | 2.28 | 61.18 | -49.62 | 110.80 | 220 | 160 | Peak |
| 4 | 5875.000 | 56.03 | 2.31 | 58.34 | -46.86 | 105.20 | 220 | 160 | Peak |
| 5 | 5925.000 | 53.14 | 2.38 | 55.52 | -12.68 | 68.20 | 220 | 160 | Peak |
| 6 | * 5931.230 | 56.34 | 2.39 | 58.73 | -9.47 | 68.20 | 220 | 160 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AXE16000 Quad-Band Wi-Fi 6E Router | Date of Test | 2022-07-14 |
| Factor | DRH18-E | Temp. / Humidity | 23°C /62% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Ares |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 159_ ANT 0+1+2+3 | Test Voltage | AC 120V/60Hz |

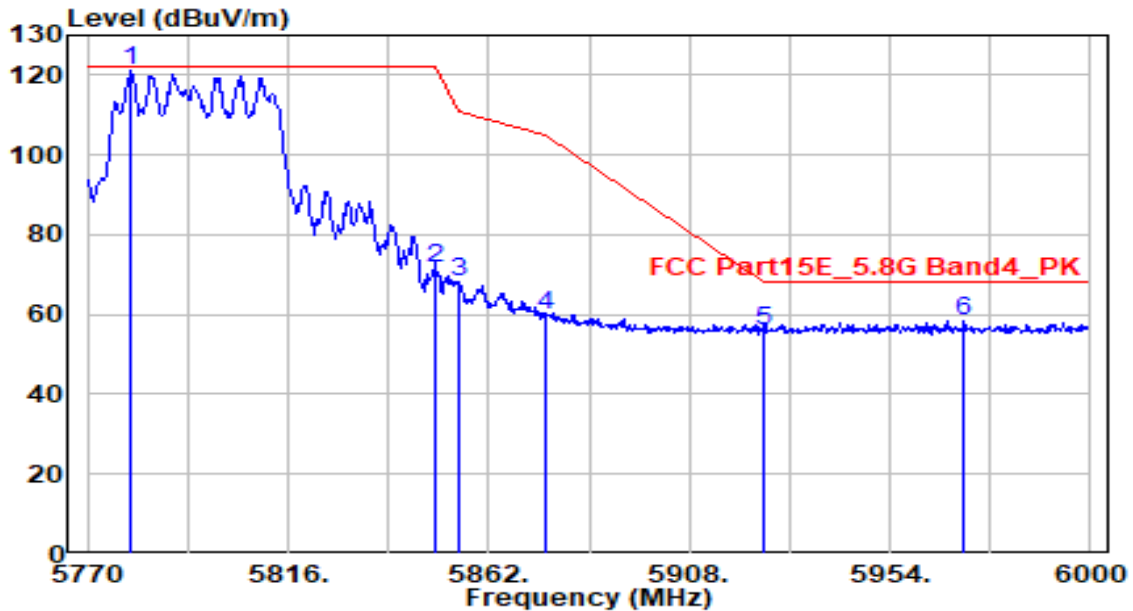

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 5780.120 | 118.89 | 2.11 | 121.00 | N/A | N/A | 205 | 135 | Peak |
| 2 | 5850.000 | 69.23 | 2.27 | 71.50 | -50.70 | 122.20 | 205 | 135 | Peak |
| 3 | 5855.000 | 65.89 | 2.28 | 68.17 | -42.63 | 110.80 | 205 | 135 | Peak |
| 4 | 5875.000 | 57.73 | 2.31 | 60.03 | -45.17 | 105.20 | 205 | 135 | Peak |
| 5 | 5925.000 | 53.34 | 2.38 | 55.72 | -12.48 | 68.20 | 205 | 135 | Peak |
| 6 | * 5970.790 | 55.89 | 2.46 | 58.35 | -9.85 | 68.20 | 205 | 135 | Peak |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.