


6.8.5.Test Result

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=1) | Test Voltage | 120V/60Hz |

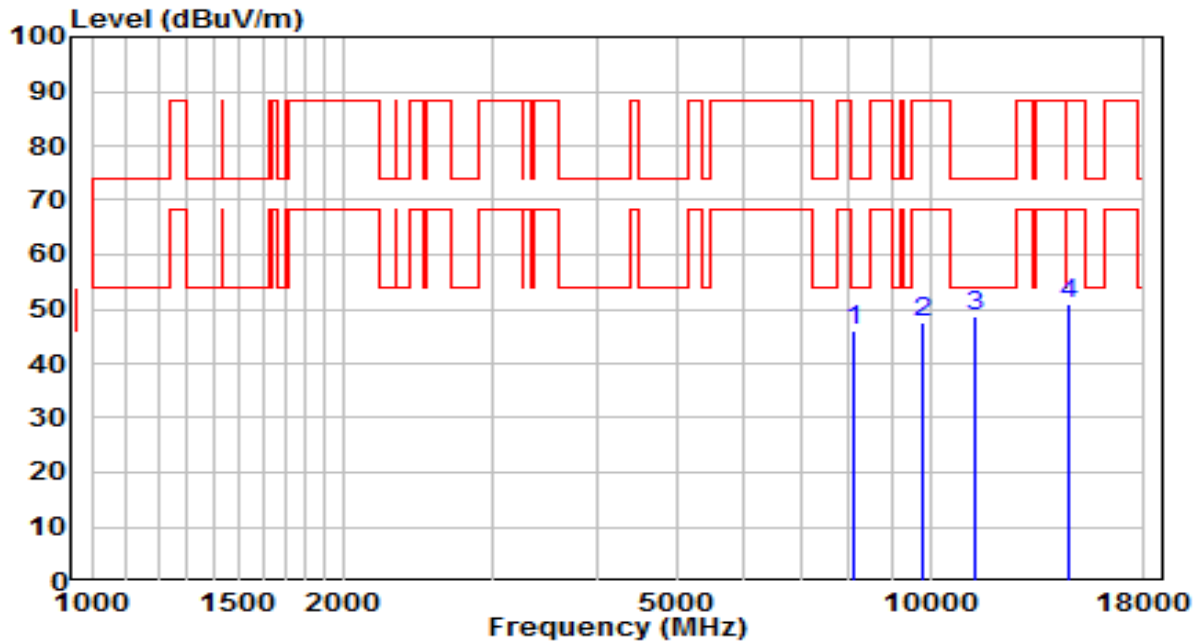


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 39.97 | 5.95 | 45.92 | -28.08 | 74.00 | Peak |
| 2 | 9823.000 | 38.27 | 9.43 | 47.70 | -40.50 | 88.20 | Peak |
| 3 | * 11327.500 | 38.32 | 10.51 | 48.83 | -25.17 | 74.00 | Peak |
| 4 | 14642.500 | 39.66 | 11.13 | 50.79 | -37.41 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=1) | Test Voltage | 120V/60Hz |

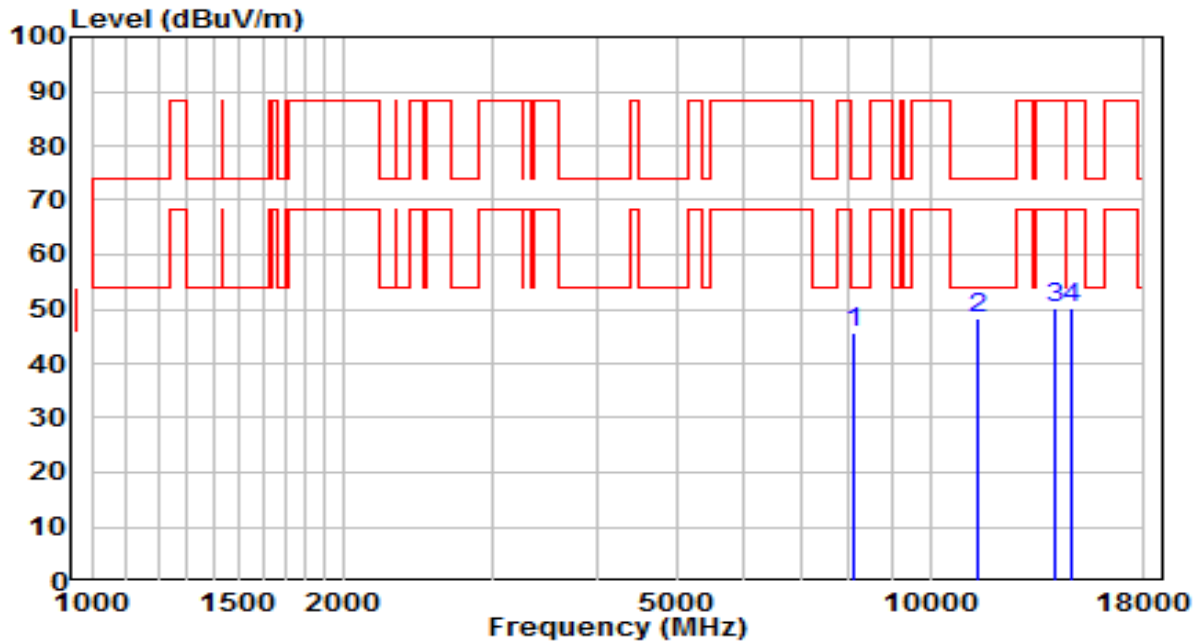


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 573.14 | -527.42 | 45.72 | -28.28 | 74.00 | Peak |
| 2 | * 11438.000 | 574.30 | -525.92 | 48.37 | -25.63 | 74.00 | Peak |
| 3 | 14056.000 | 576.08 | -525.71 | 50.37 | -37.83 | 88.20 | Peak |
| 4 | 14727.500 | 575.66 | -525.42 | 50.24 | -37.96 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6255MHz (Nss=1) | Test Voltage | 120V/60Hz |

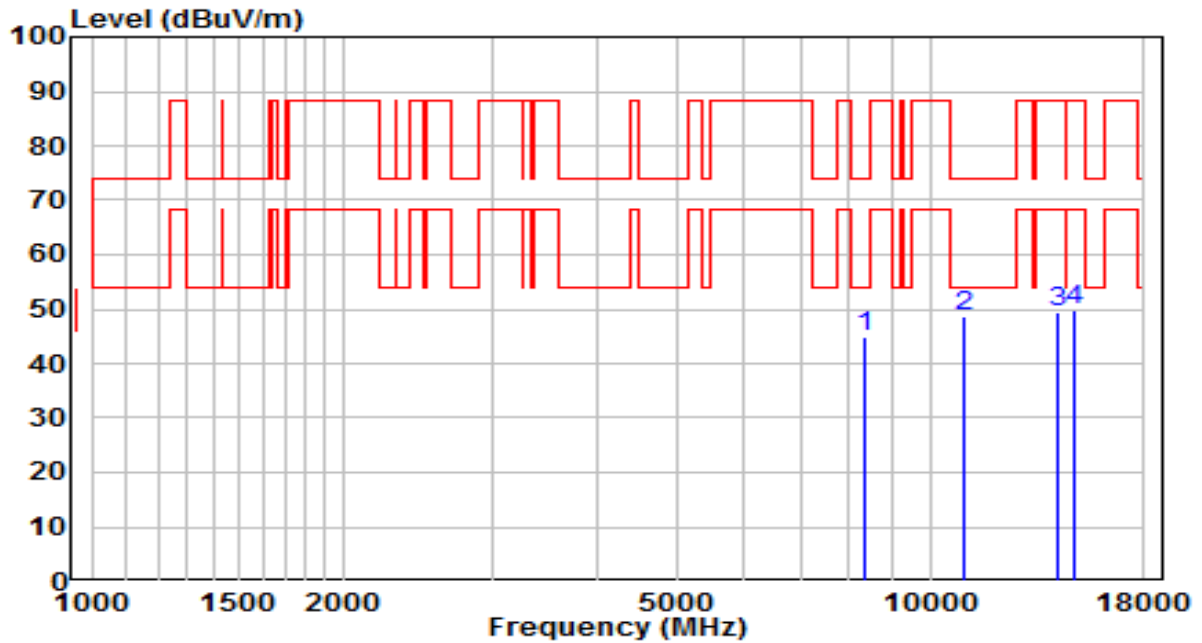


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8327.000 | 38.76 | 6.19 | 44.95 | -29.05 | 74.00 | Peak |
| 2 | * 10962.000 | 38.33 | 10.35 | 48.69 | -25.31 | 74.00 | Peak |
| 3 | 14217.500 | 38.53 | 11.01 | 49.54 | -38.66 | 88.20 | Peak |
| 4 | 14880.500 | 38.62 | 11.31 | 49.93 | -38.27 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6255MHz (Nss=1) | Test Voltage | 120V/60Hz |

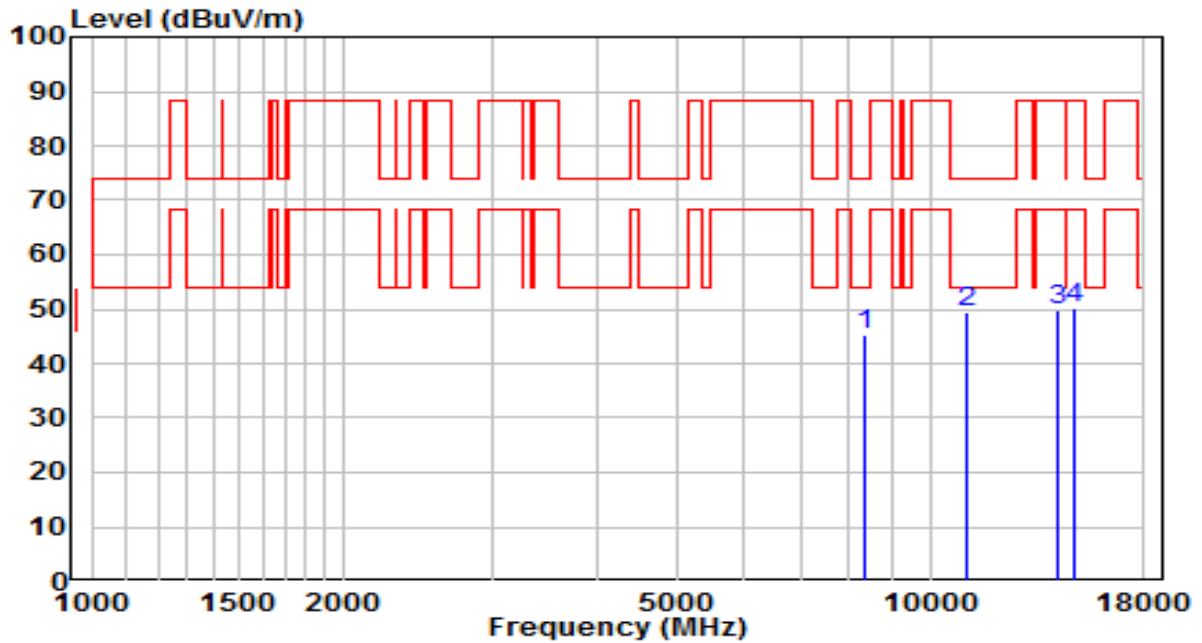


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8378.000 | 572.46 | -527.18 | 45.28 | -28.72 | 74.00 | Peak |
| 2 | * 11047.000 | 574.95 | -525.61 | 49.34 | -24.66 | 74.00 | Peak |
| 3 | 14183.500 | 575.85 | -525.87 | 49.98 | -38.22 | 88.20 | Peak |
| 4 | 14812.500 | 575.67 | -525.38 | 50.30 | -37.90 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6415MHz (Nss=1) | Test Voltage | 120V/60Hz |

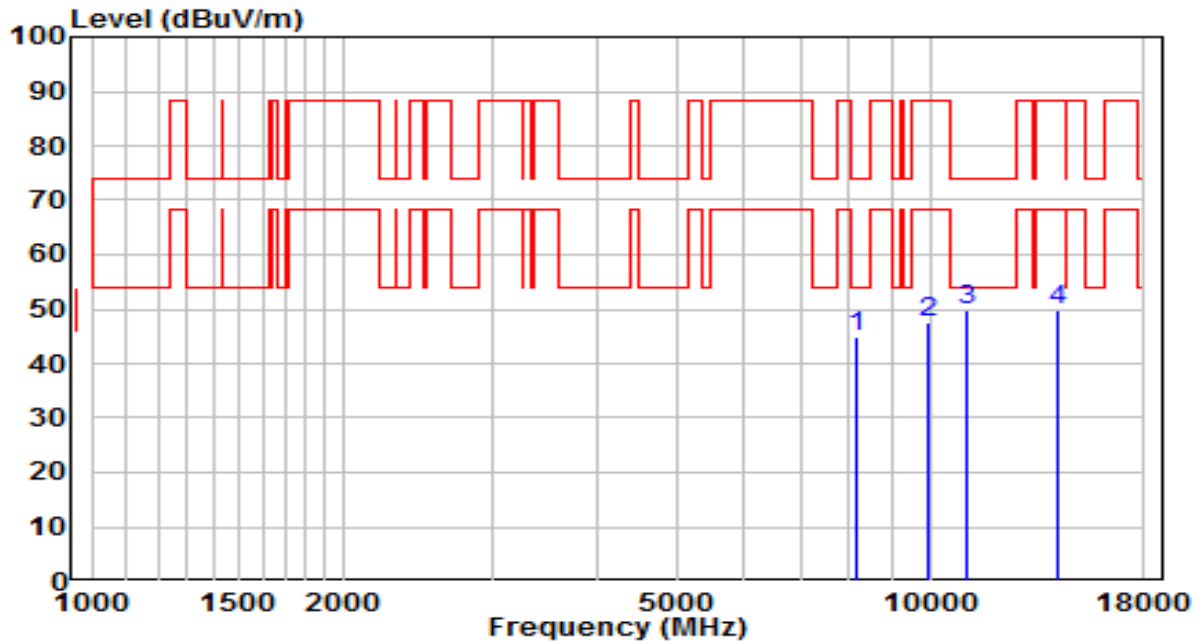


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 38.76 | 6.01 | 44.76 | -29.24 | 74.00 | Peak |
| 2 | 9933.500 | 38.14 | 9.46 | 47.60 | -40.60 | 88.20 | Peak |
| 3 | * 11072.500 | 39.05 | 10.60 | 49.65 | -24.35 | 74.00 | Peak |
| 4 | 14175.000 | 38.77 | 11.06 | 49.83 | -38.37 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6415MHz (Nss=1) | Test Voltage | 120V/60Hz |

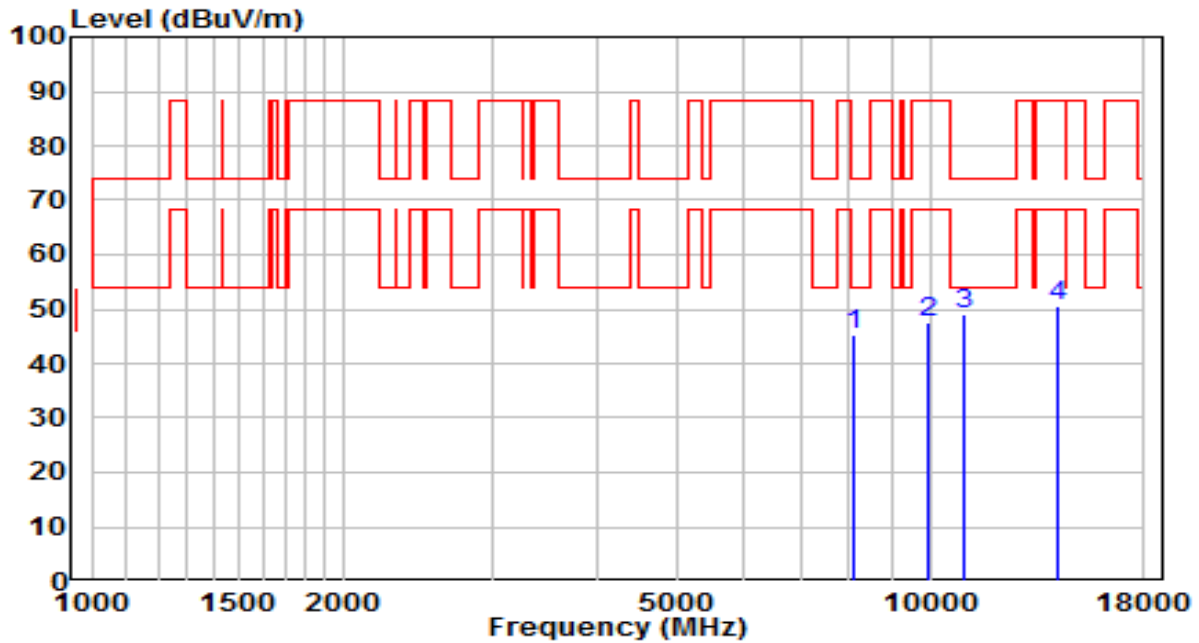


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8097.500 | 572.62 | -527.46 | 45.16 | -28.84 | 74.00 | Peak |
| 2 | 9933.500 | 573.28 | -525.68 | 47.60 | -40.60 | 88.20 | Peak |
| 3 | * 10953.500 | 574.65 | -525.69 | 48.96 | -25.04 | 74.00 | Peak |
| 4 | 14175.000 | 576.33 | -525.78 | 50.55 | -37.65 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6435MHz (Nss=1) | Test Voltage | 120V/60Hz |

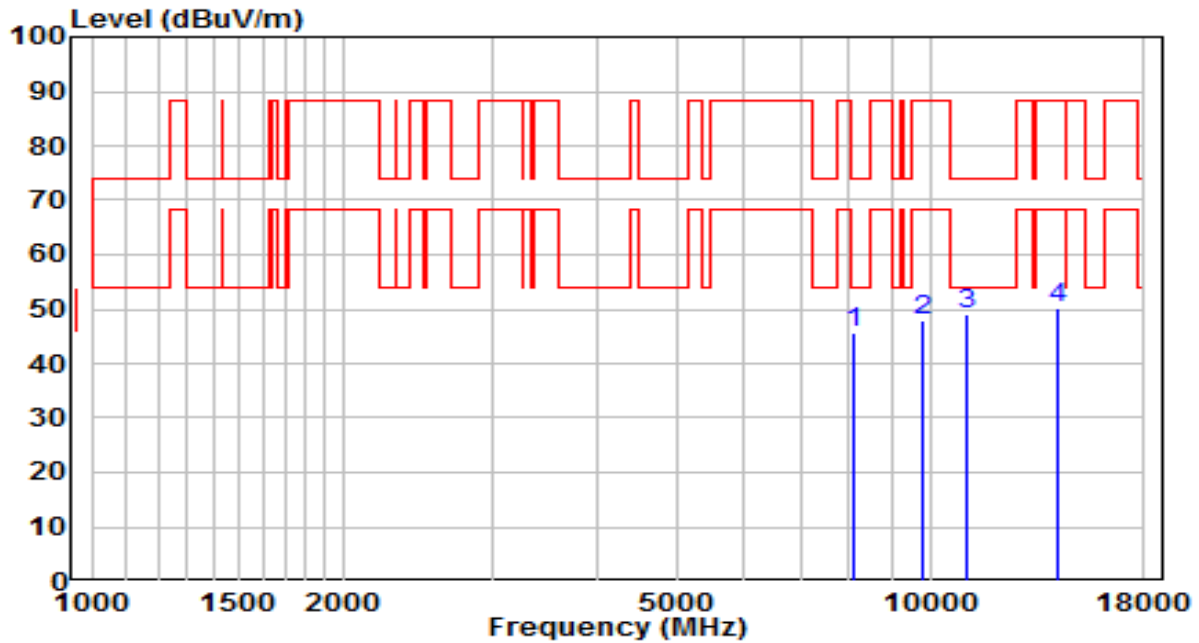


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8097.500 | 39.88 | 5.91 | 45.79 | -28.21 | 74.00 | Peak |
| 2 | 9823.000 | 38.66 | 9.43 | 48.09 | -40.11 | 88.20 | Peak |
| 3 | * 11030.000 | 38.40 | 10.54 | 48.94 | -25.06 | 74.00 | Peak |
| 4 | 14166.500 | 39.32 | 11.05 | 50.38 | -37.82 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6435MHz (Nss=1) | Test Voltage | 120V/60Hz |

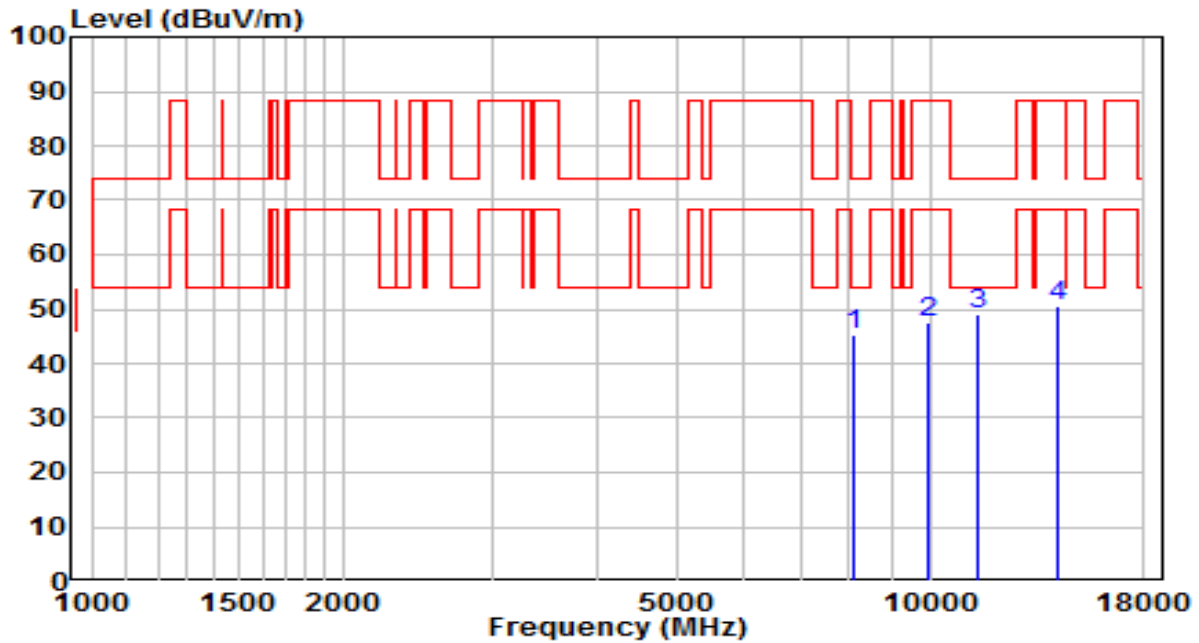


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8089.000 | 572.78 | -527.49 | 45.29 | -28.71 | 74.00 | Peak |
| 2 | 9925.000 | 572.99 | -525.63 | 47.37 | -40.83 | 88.20 | Peak |
| 3 | * 11429.500 | 575.08 | -526.02 | 49.05 | -24.95 | 74.00 | Peak |
| 4 | 14149.500 | 576.58 | -525.88 | 50.69 | -37.51 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6475MHz (Nss=1) | Test Voltage | 120V/60Hz |

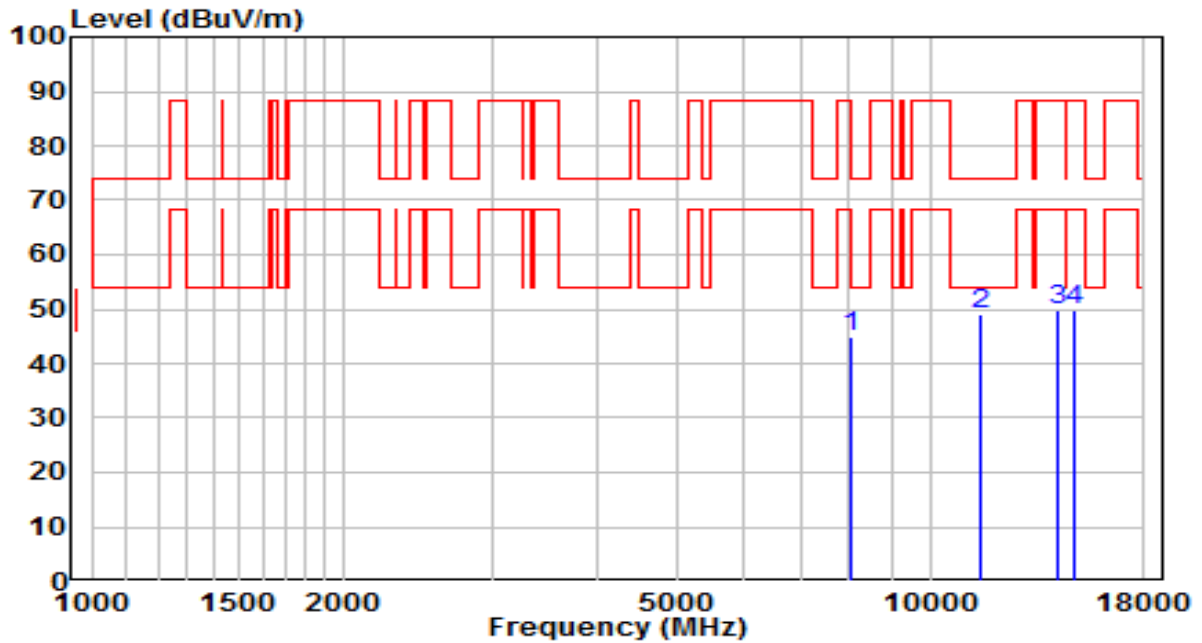


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8072.000 | 39.04 | 5.92 | 44.96 | -29.04 | 74.00 | Peak |
| 2 | * 11446.500 | 38.56 | 10.46 | 49.02 | -24.98 | 74.00 | Peak |
| 3 | 14158.000 | 38.62 | 11.03 | 49.66 | -38.54 | 88.20 | Peak |
| 4 | 14812.500 | 38.22 | 11.52 | 49.74 | -38.46 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6475MHz (Nss=1) | Test Voltage | 120V/60Hz |

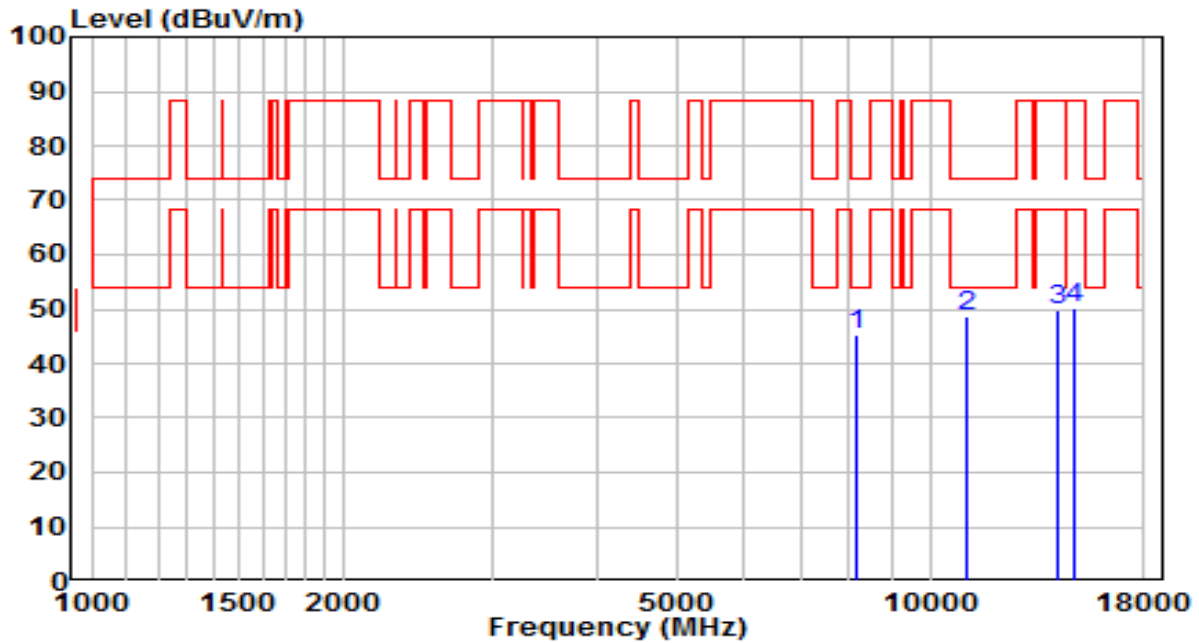


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8165.500 | 572.77 | -527.37 | 45.39 | -28.61 | 74.00 | Peak |
| 2 | * 11047.000 | 574.27 | -525.61 | 48.66 | -25.34 | 74.00 | Peak |
| 3 | 14192.000 | 575.75 | -525.96 | 49.79 | -38.41 | 88.20 | Peak |
| 4 | 14804.000 | 575.49 | -525.30 | 50.19 | -38.01 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6515MHz (Nss=1) | Test Voltage | 120V/60Hz |

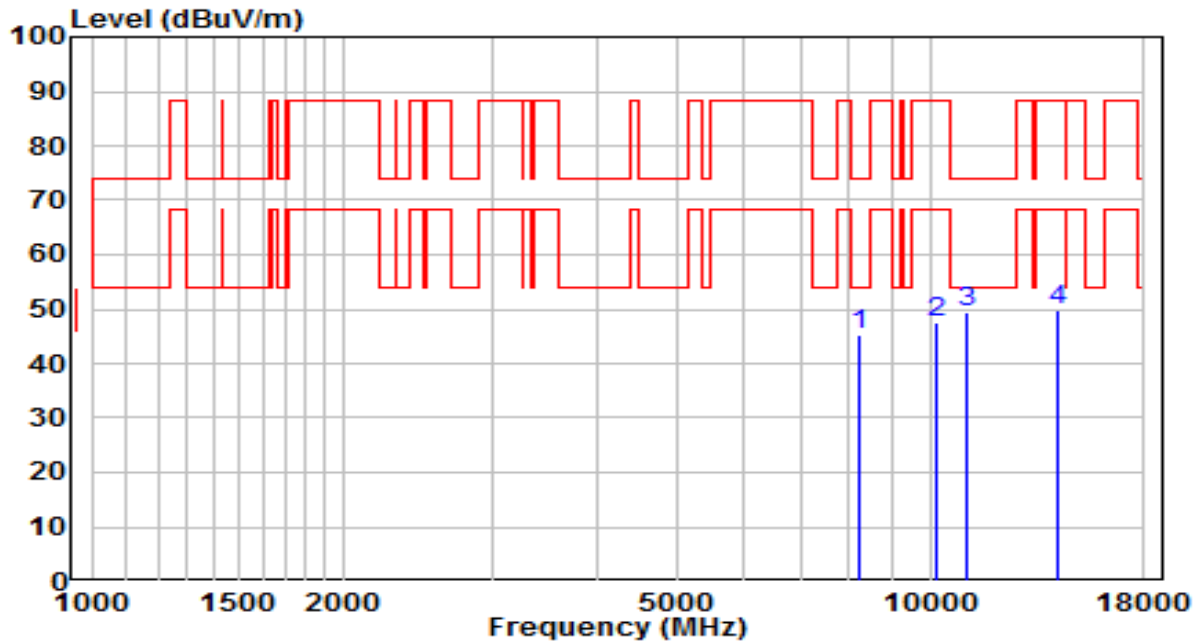


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8259.000 | 39.22 | 6.18 | 45.41 | -28.59 | 74.00 | Peak |
| 2 | 10197.000 | 38.20 | 9.41 | 47.60 | -40.60 | 88.20 | Peak |
| 3 | * 11072.500 | 38.82 | 10.60 | 49.41 | -24.59 | 74.00 | Peak |
| 4 | 14175.000 | 38.92 | 11.06 | 49.98 | -38.22 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6515MHz (Nss=1) | Test Voltage | 120V/60Hz |

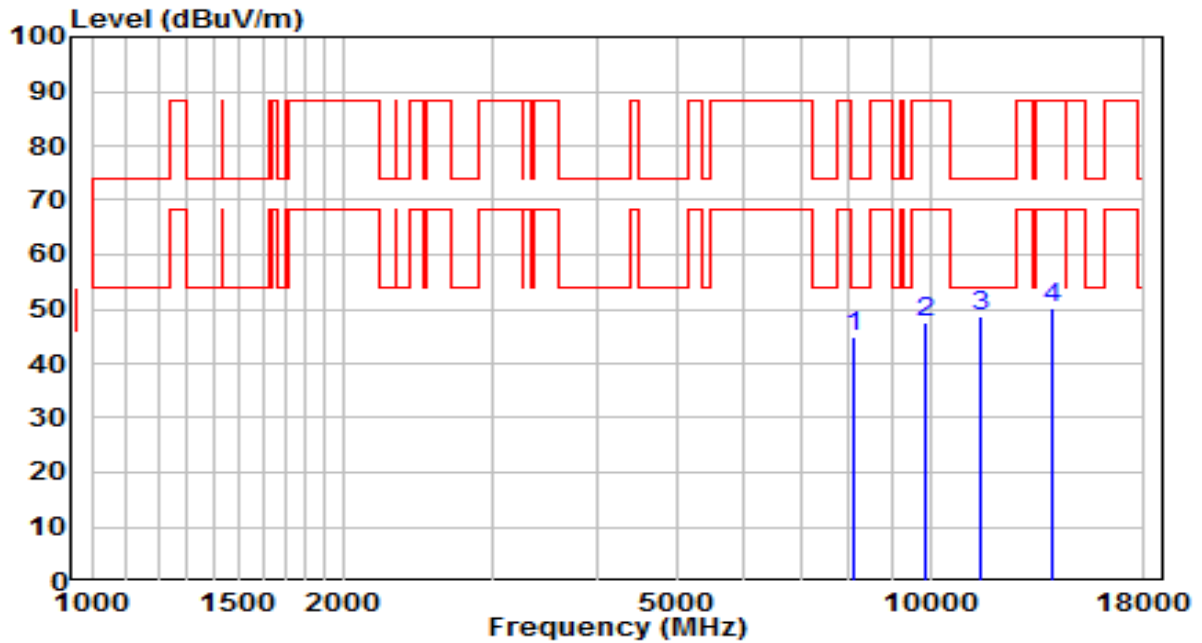


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 572.47 | -527.42 | 45.05 | -28.95 | 74.00 | Peak |
| 2 | 9848.500 | 573.36 | -525.89 | 47.47 | -40.73 | 88.20 | Peak |
| 3 | * 11514.500 | 575.01 | -526.22 | 48.79 | -25.21 | 74.00 | Peak |
| 4 | 14005.000 | 576.07 | -525.72 | 50.36 | -37.84 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6535MHz (Nss=1) | Test Voltage | 120V/60Hz |

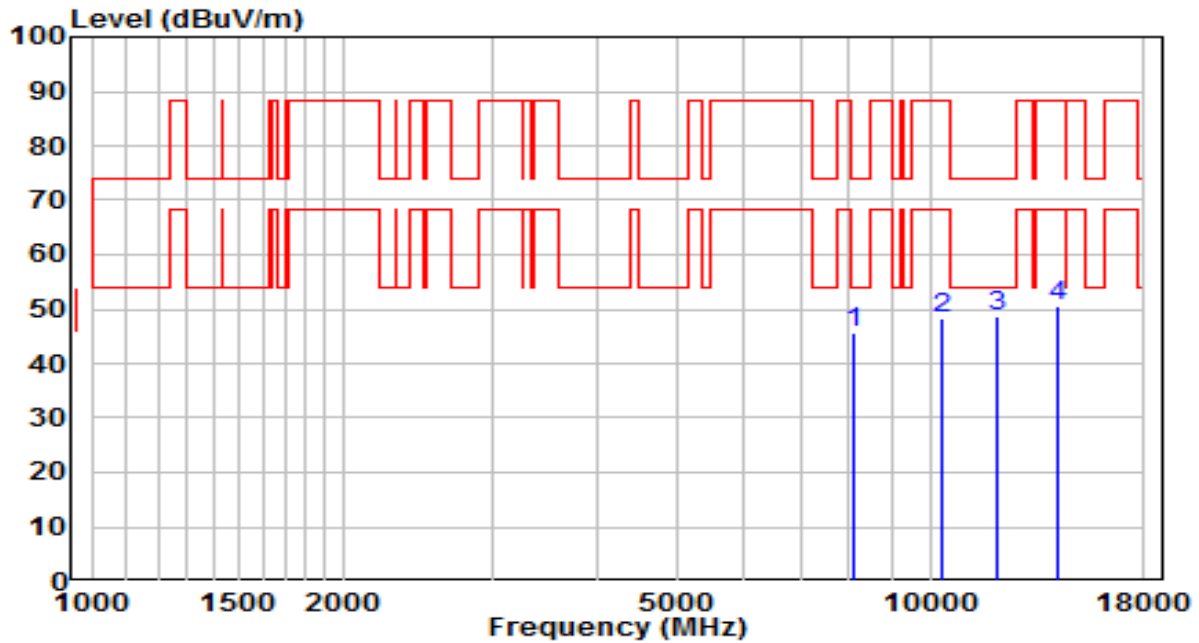


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8097.500 | 39.66 | 5.91 | 45.57 | -28.43 | 74.00 | Peak |
| 2 | 10341.500 | 38.44 | 9.73 | 48.16 | -40.04 | 88.20 | Peak |
| 3 | * 12058.500 | 38.61 | 10.03 | 48.64 | -25.36 | 74.00 | Peak |
| 4 | 14149.500 | 39.49 | 10.97 | 50.46 | -37.74 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6535MHz (Nss=1) | Test Voltage | 120V/60Hz |

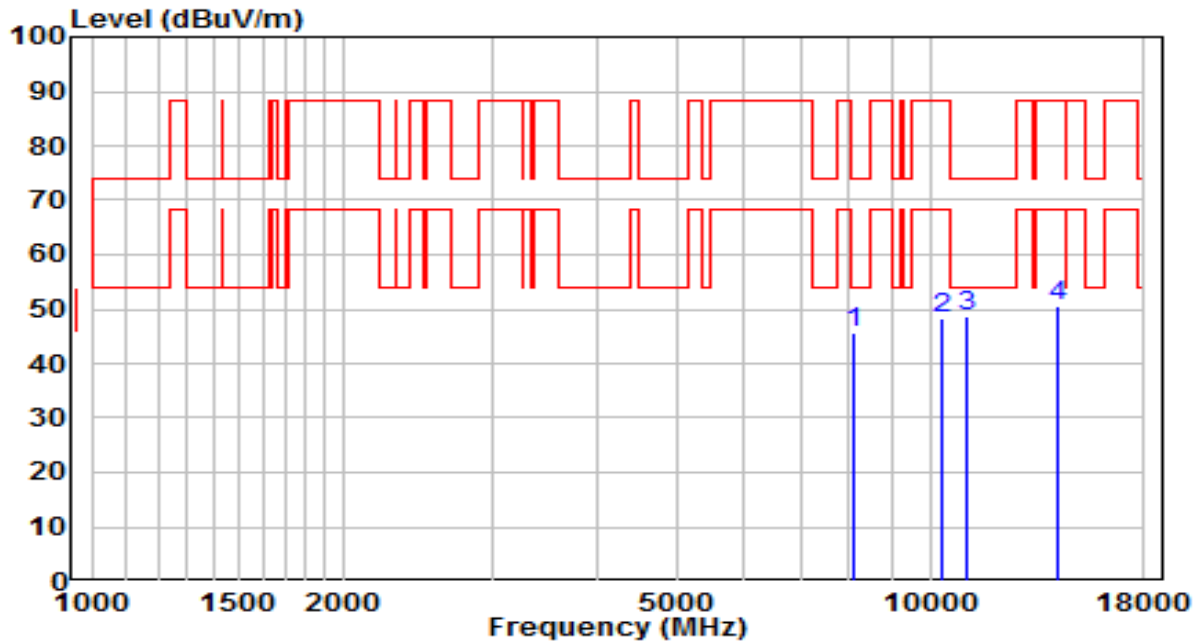


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8089.000 | 573.01 | -527.49 | 45.52 | -28.48 | 74.00 | Peak |
| 2 | 10341.500 | 573.89 | -525.60 | 48.30 | -39.90 | 88.20 | Peak |
| 3 | * 11055.500 | 574.39 | -525.63 | 48.76 | -25.24 | 74.00 | Peak |
| 4 | 14200.500 | 576.48 | -525.93 | 50.55 | -37.65 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6715MHz (Nss=1) | Test Voltage | 120V/60Hz |

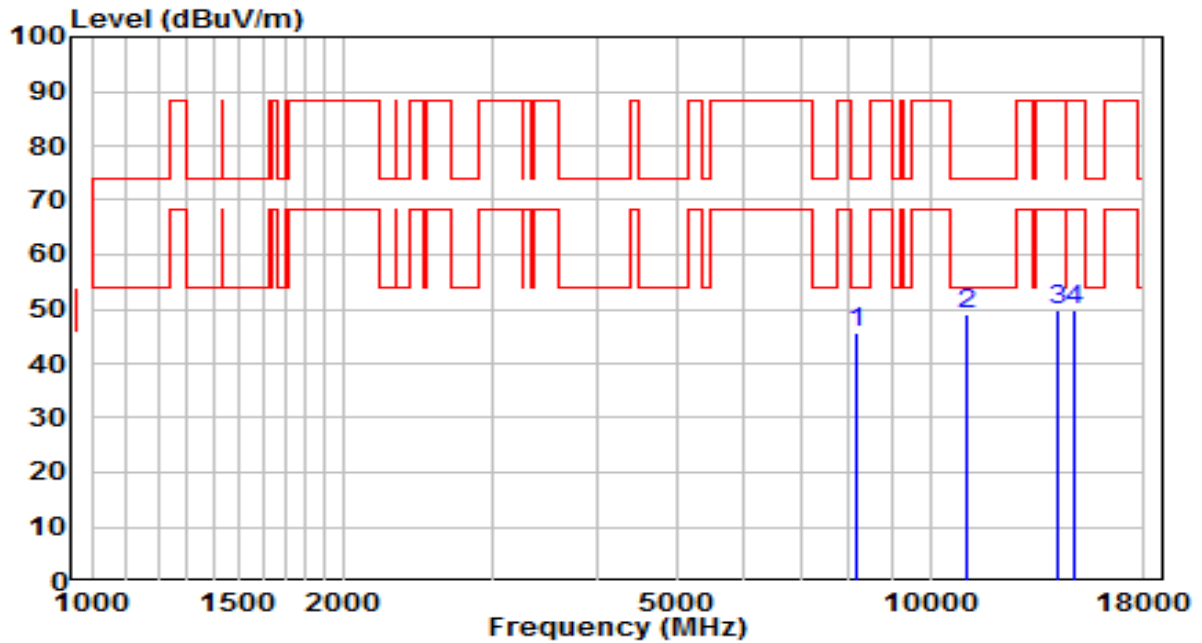


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 39.57 | 6.01 | 45.58 | -28.42 | 74.00 | Peak |
| 2 | * 11055.500 | 38.50 | 10.58 | 49.08 | -24.92 | 74.00 | Peak |
| 3 | 14166.500 | 38.80 | 11.05 | 49.86 | -38.34 | 88.20 | Peak |
| 4 | 14855.000 | 38.38 | 11.43 | 49.82 | -38.38 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6715MHz (Nss=1) | Test Voltage | 120V/60Hz |

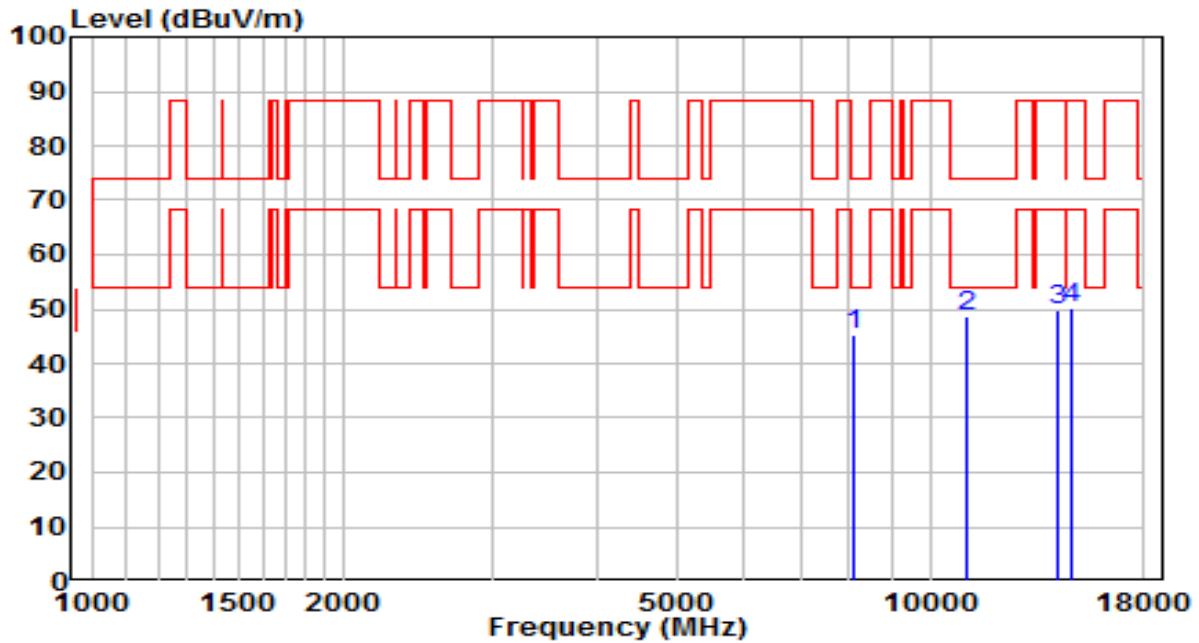


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8080.500 | 572.83 | -527.47 | 45.35 | -28.65 | 74.00 | Peak |
| 2 | * 11055.500 | 574.42 | -525.63 | 48.79 | -25.21 | 74.00 | Peak |
| 3 | 14183.500 | 575.78 | -525.87 | 49.91 | -38.29 | 88.20 | Peak |
| 4 | 14744.500 | 575.56 | -525.40 | 50.16 | -38.04 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6855MHz (Nss=1) | Test Voltage | 120V/60Hz |

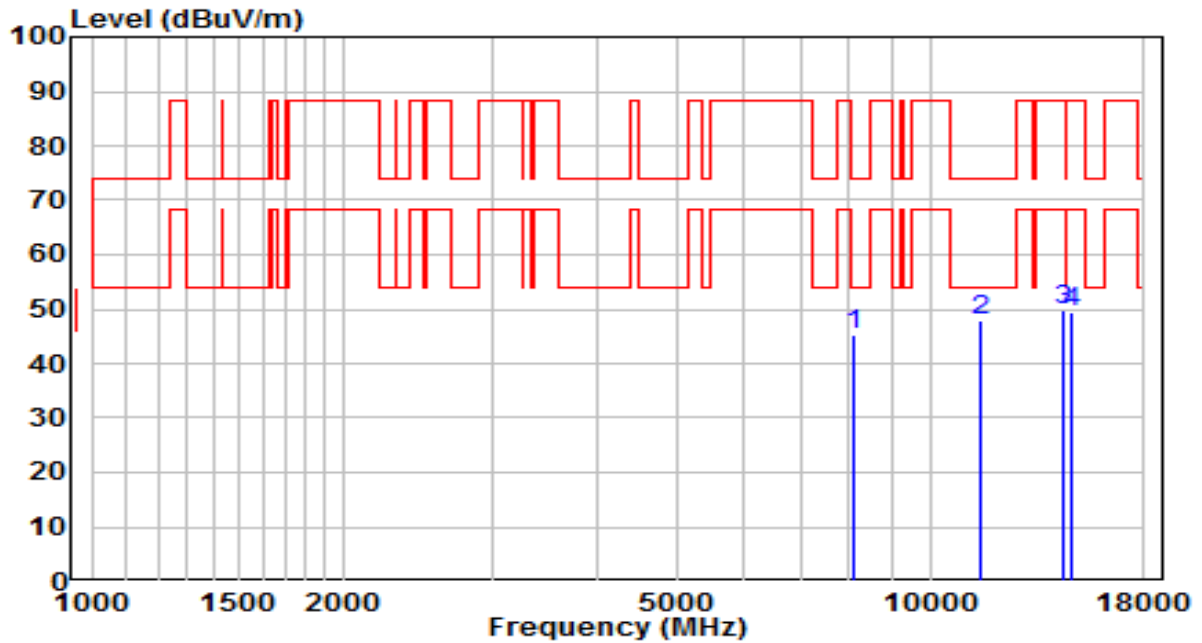


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8123.000 | 39.24 | 6.05 | 45.28 | -28.72 | 74.00 | Peak |
| 2 | * 11523.000 | 37.75 | 10.32 | 48.07 | -25.93 | 74.00 | Peak |
| 3 | 14362.000 | 38.87 | 11.05 | 49.92 | -38.28 | 88.20 | Peak |
| 4 | 14710.500 | 38.05 | 11.35 | 49.41 | -38.79 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6855MHz (Nss=1) | Test Voltage | 120V/60Hz |

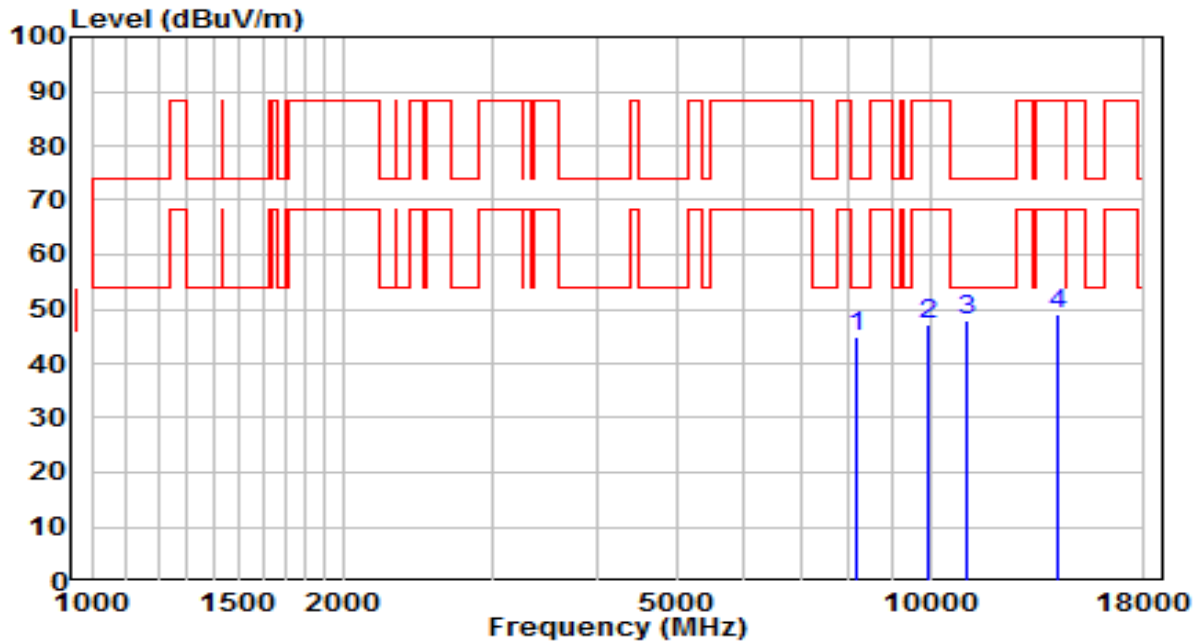


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 572.32 | -527.36 | 44.96 | -29.04 | 74.00 | Peak |
| 2 | 9959.000 | 573.07 | -525.96 | 47.11 | -41.09 | 88.20 | Peak |
| 3 | * 11072.500 | 573.54 | -525.64 | 47.90 | -26.10 | 74.00 | Peak |
| 4 | 14166.500 | 575.02 | -525.79 | 49.23 | -38.97 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6875MHz (Nss=1) | Test Voltage | 120V/60Hz |

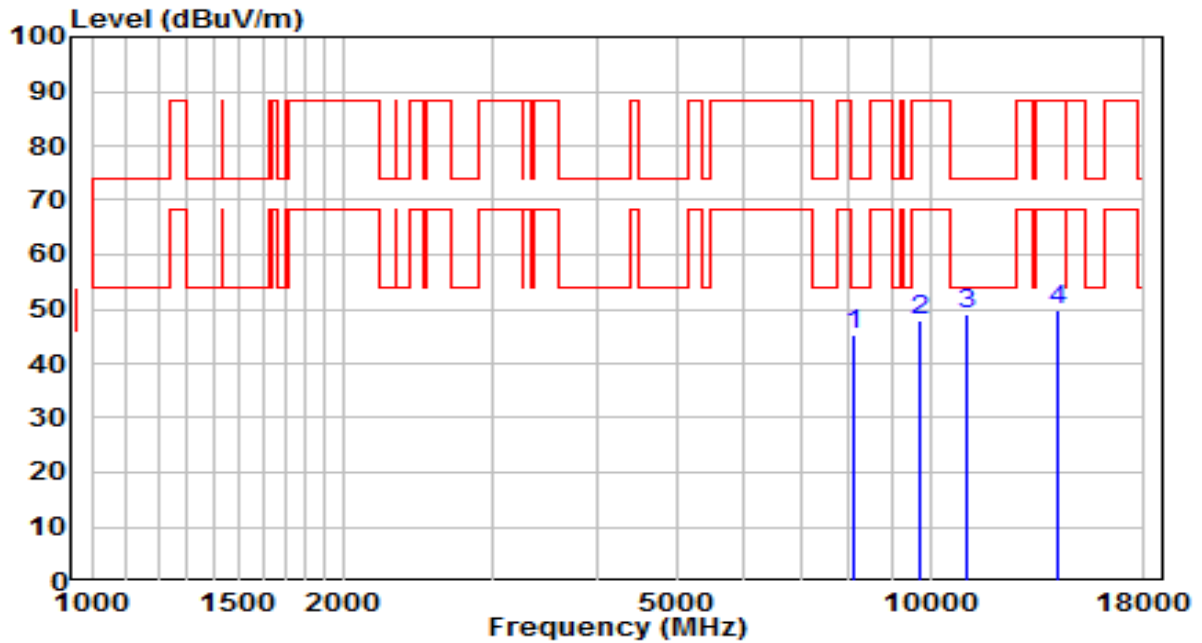


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 39.38 | 5.95 | 45.34 | -28.66 | 74.00 | Peak |
| 2 | 9746.500 | 38.80 | 9.11 | 47.91 | -40.29 | 88.20 | Peak |
| 3 | * 11030.000 | 38.53 | 10.54 | 49.07 | -24.93 | 74.00 | Peak |
| 4 | 14192.000 | 39.09 | 10.87 | 49.96 | -38.24 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6875MHz (Nss=1) | Test Voltage | 120V/60Hz |

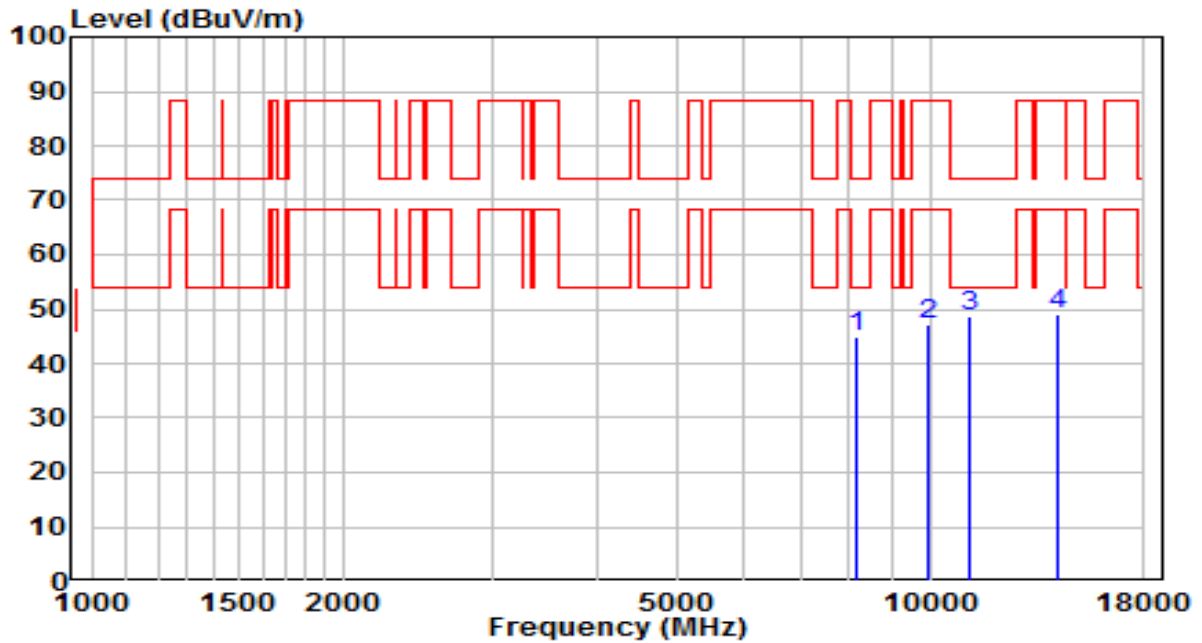


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8140.000 | 572.07 | -527.34 | 44.73 | -29.27 | 74.00 | Peak |
| 2 | 9967.500 | 573.07 | -525.80 | 47.26 | -40.94 | 88.20 | Peak |
| 3 | * 11157.500 | 574.42 | -525.91 | 48.51 | -25.49 | 74.00 | Peak |
| 4 | 14166.500 | 574.98 | -525.79 | 49.19 | -39.01 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6895MHz (Nss=1) | Test Voltage | 120V/60Hz |

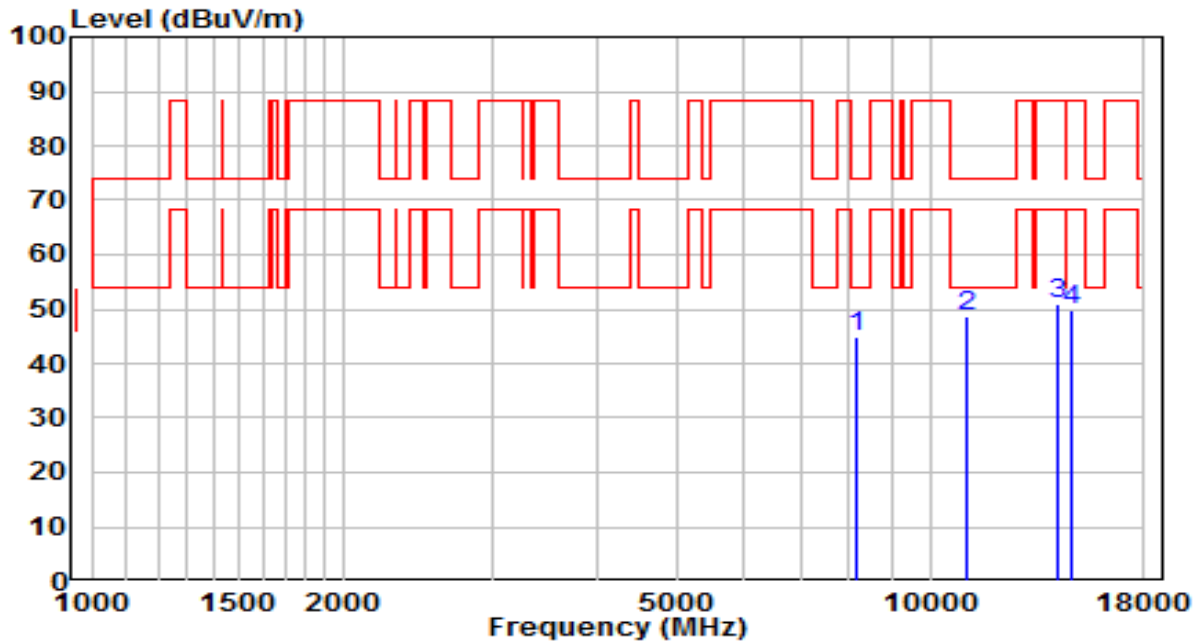


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8165.500 | 38.90 | 6.03 | 44.93 | -29.07 | 74.00 | Peak |
| 2 | * 11047.000 | 38.27 | 10.59 | 48.86 | -25.14 | 74.00 | Peak |
| 3 | 14149.500 | 39.82 | 10.97 | 50.79 | -37.41 | 88.20 | Peak |
| 4 | 14702.000 | 38.33 | 11.31 | 49.64 | -38.56 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6895MHz (Nss=1) | Test Voltage | 120V/60Hz |

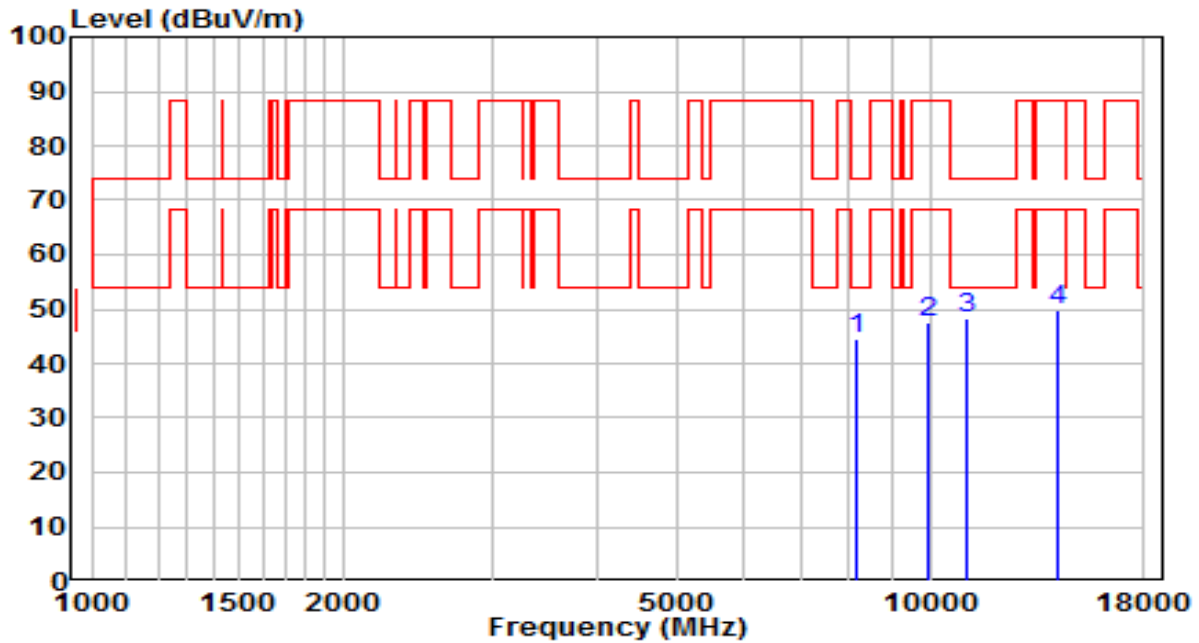


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8191.000 | 571.96 | -527.38 | 44.58 | -29.42 | 74.00 | Peak |
| 2 | 9959.000 | 573.60 | -525.96 | 47.64 | -40.56 | 88.20 | Peak |
| 3 | * 11047.000 | 573.76 | -525.61 | 48.15 | -25.85 | 74.00 | Peak |
| 4 | 14175.000 | 575.44 | -525.78 | 49.66 | -38.54 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7015MHz (Nss=1) | Test Voltage | 120V/60Hz |

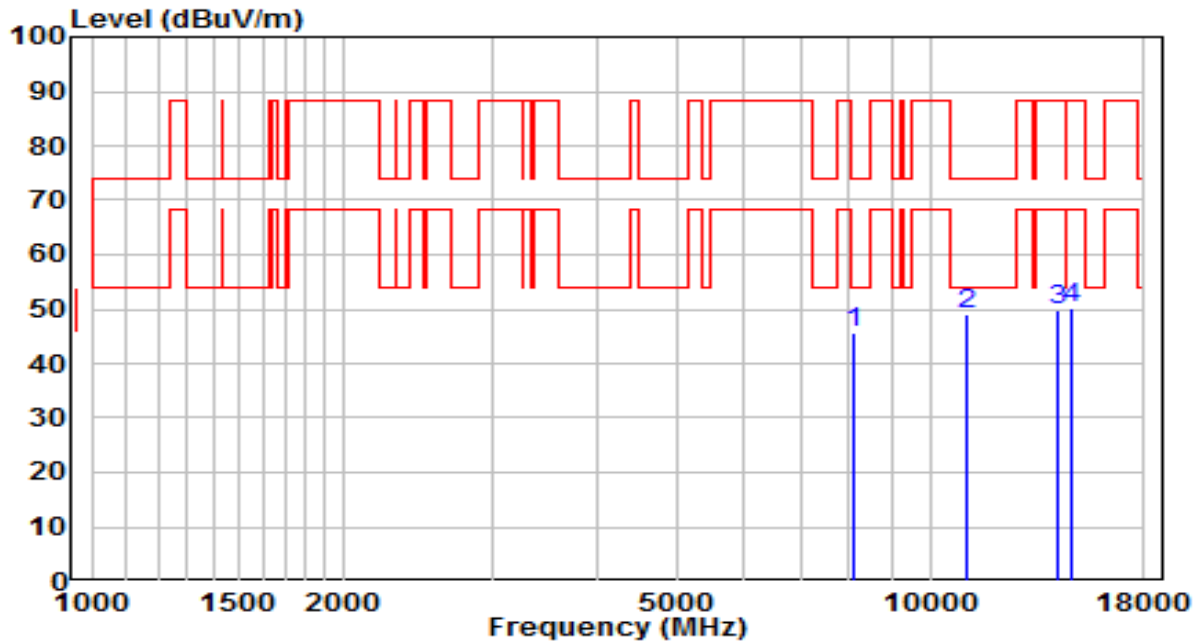


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 39.81 | 5.95 | 45.76 | -28.24 | 74.00 | Peak |
| 2 | * 11072.500 | 38.56 | 10.60 | 49.16 | -24.84 | 74.00 | Peak |
| 3 | 14183.500 | 38.75 | 10.97 | 49.72 | -38.48 | 88.20 | Peak |
| 4 | 14702.000 | 38.69 | 11.31 | 50.00 | -38.20 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7015MHz (Nss=1) | Test Voltage | 120V/60Hz |

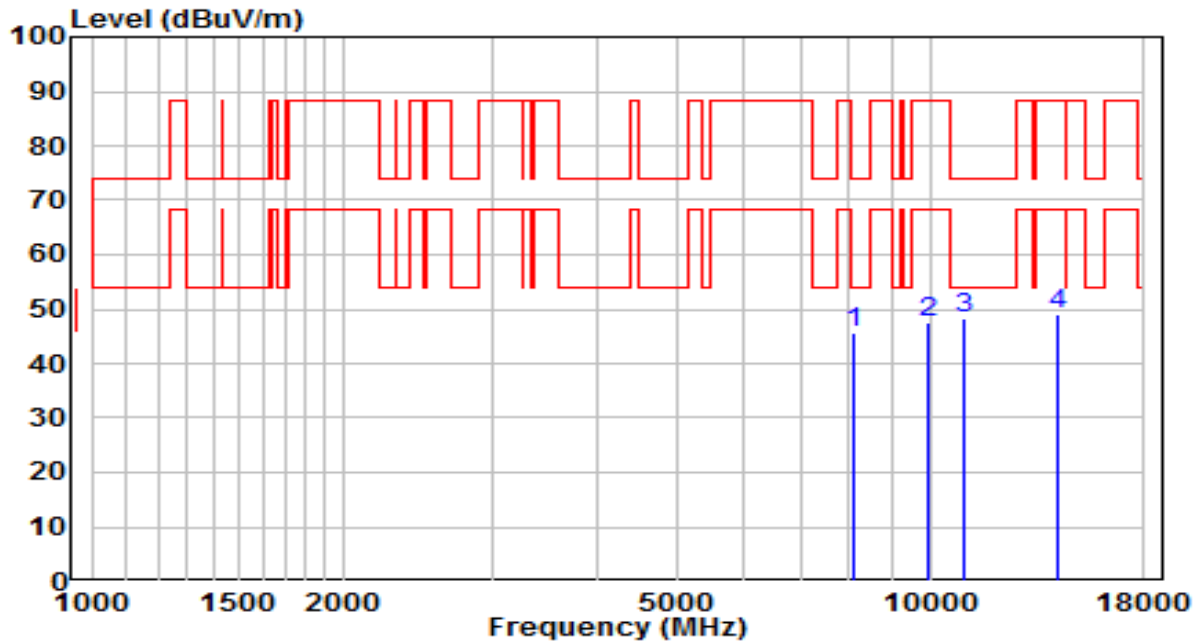


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8089.000 | 573.00 | -527.49 | 45.51 | -28.49 | 74.00 | Peak |
| 2 | 9950.500 | 573.73 | -526.04 | 47.70 | -40.50 | 88.20 | Peak |
| 3 | * 10962.000 | 574.01 | -525.73 | 48.29 | -25.71 | 74.00 | Peak |
| 4 | 14192.000 | 575.16 | -525.96 | 49.20 | -39.00 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=1) | Test Voltage | 120V/60Hz |

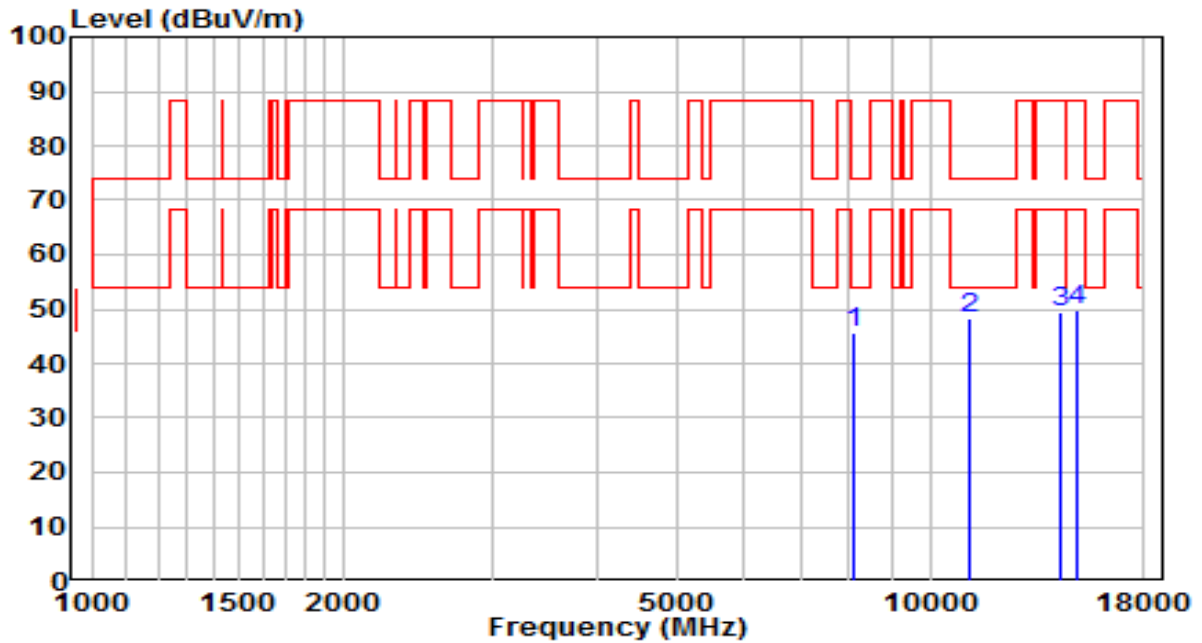


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 39.55 | 5.95 | 45.51 | -28.49 | 74.00 | Peak |
| 2 | * 11174.500 | 37.70 | 10.44 | 48.15 | -25.85 | 74.00 | Peak |
| 3 | 14260.000 | 38.45 | 11.09 | 49.55 | -38.65 | 88.20 | Peak |
| 4 | 14999.500 | 38.24 | 11.48 | 49.72 | -38.48 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=1) | Test Voltage | 120V/60Hz |

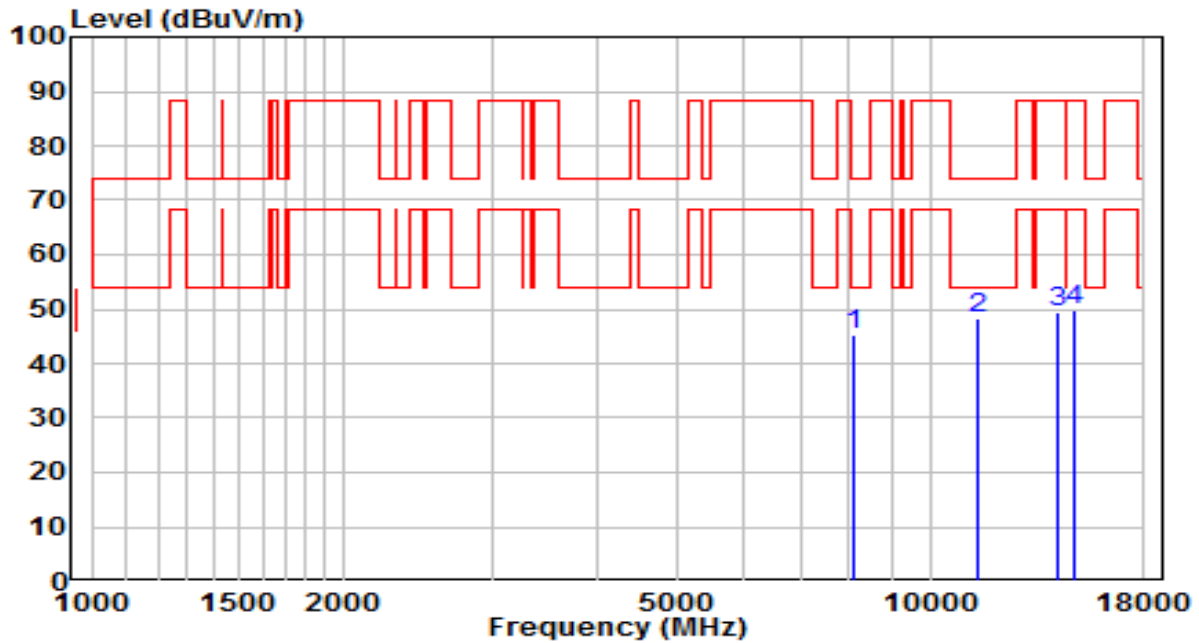


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 572.57 | -527.42 | 45.15 | -28.85 | 74.00 | Peak |
| 2 | * 11421.000 | 574.25 | -526.10 | 48.15 | -25.85 | 74.00 | Peak |
| 3 | 14158.000 | 575.29 | -525.81 | 49.48 | -38.72 | 88.20 | Peak |
| 4 | 14812.500 | 575.25 | -525.38 | 49.87 | -38.33 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=1) | Test Voltage | 120V/60Hz |

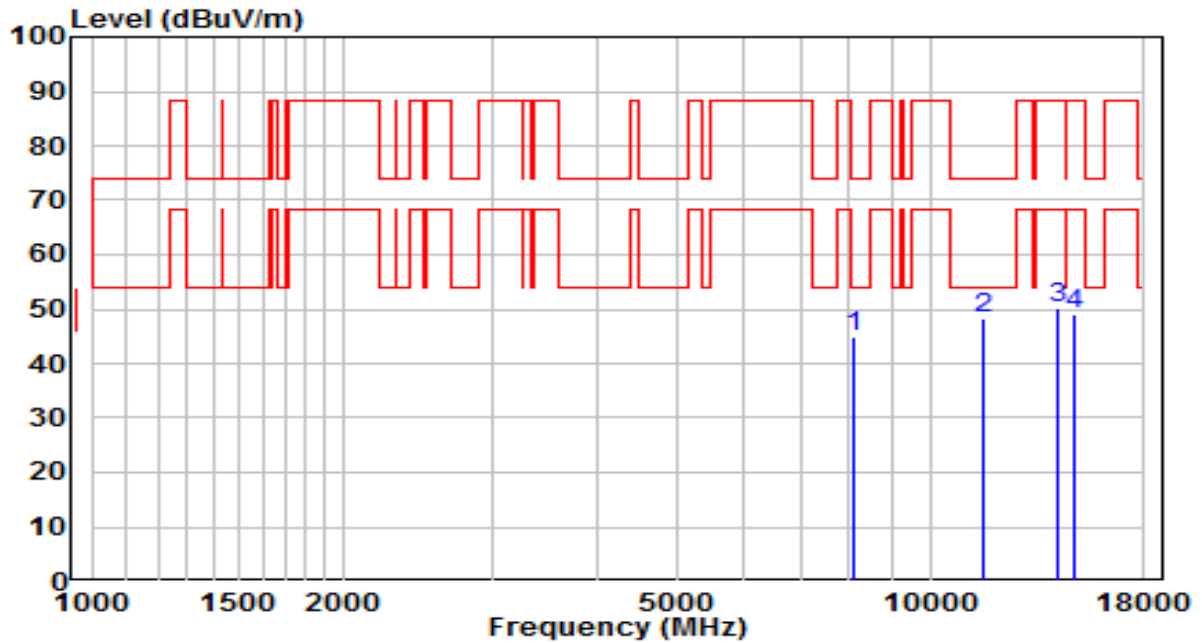


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8097.500 | 39.15 | 5.91 | 45.06 | -28.94 | 74.00 | Peak |
| 2 | * 11608.000 | 37.91 | 10.27 | 48.18 | -25.82 | 74.00 | Peak |
| 3 | 14166.500 | 39.24 | 11.05 | 50.29 | -37.91 | 88.20 | Peak |
| 4 | 14812.500 | 37.67 | 11.52 | 49.19 | -39.01 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=1) | Test Voltage | 120V/60Hz |

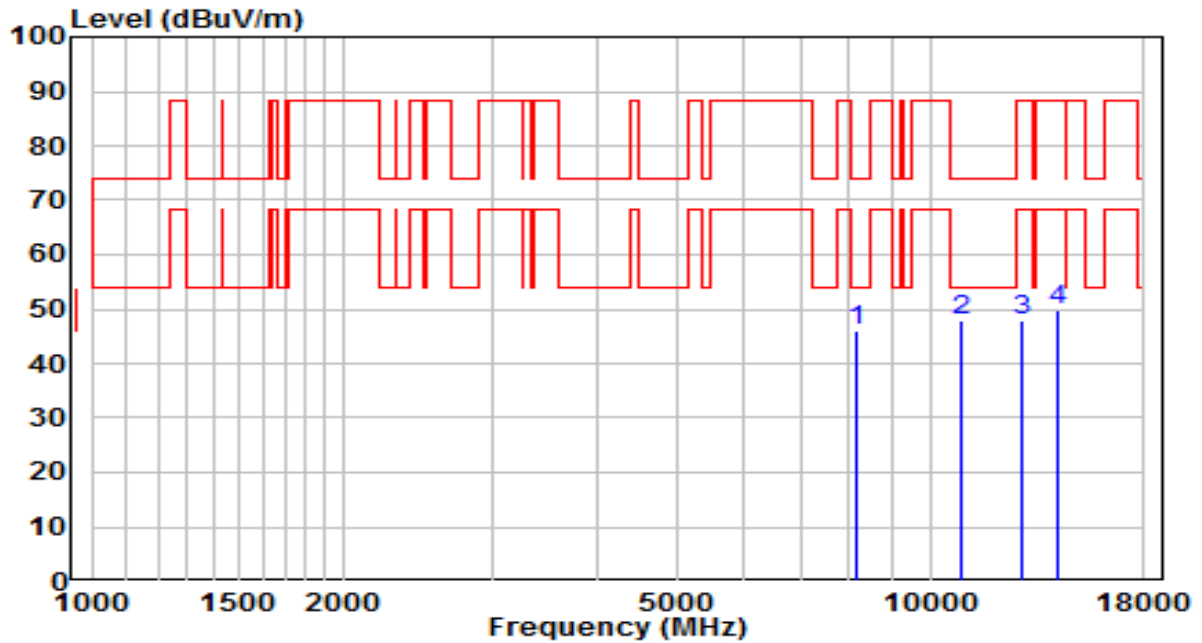


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8140.000 | 573.45 | -527.34 | 46.10 | -27.90 | 74.00 | Peak |
| 2 | * 10868.500 | 573.66 | -525.63 | 48.03 | -25.97 | 74.00 | Peak |
| 3 | 12874.500 | 573.53 | -525.77 | 47.76 | -40.44 | 88.20 | Peak |
| 4 | 14175.000 | 575.42 | -525.78 | 49.65 | -38.55 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6245MHz (Nss=1) | Test Voltage | 120V/60Hz |

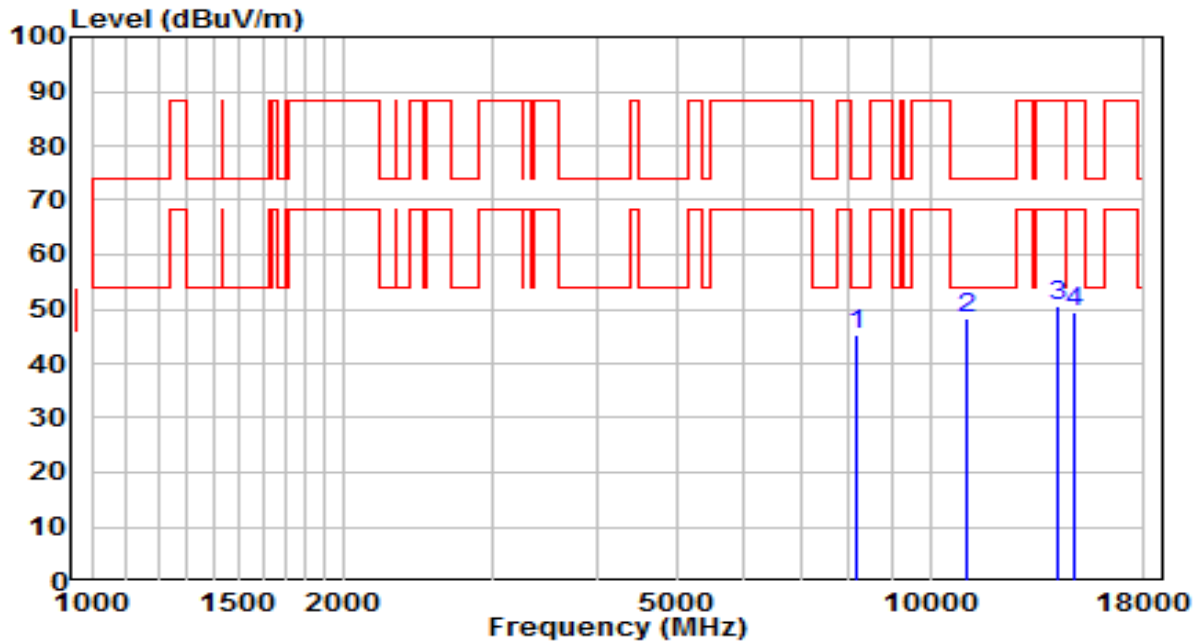


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 39.18 | 6.01 | 45.18 | -28.82 | 74.00 | Peak |
| 2 | * 11064.000 | 37.56 | 10.57 | 48.12 | -25.88 | 74.00 | Peak |
| 3 | 14192.000 | 39.78 | 10.87 | 50.65 | -37.55 | 88.20 | Peak |
| 4 | 14804.000 | 37.96 | 11.59 | 49.55 | -38.65 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6245MHz (Nss=1) | Test Voltage | 120V/60Hz |

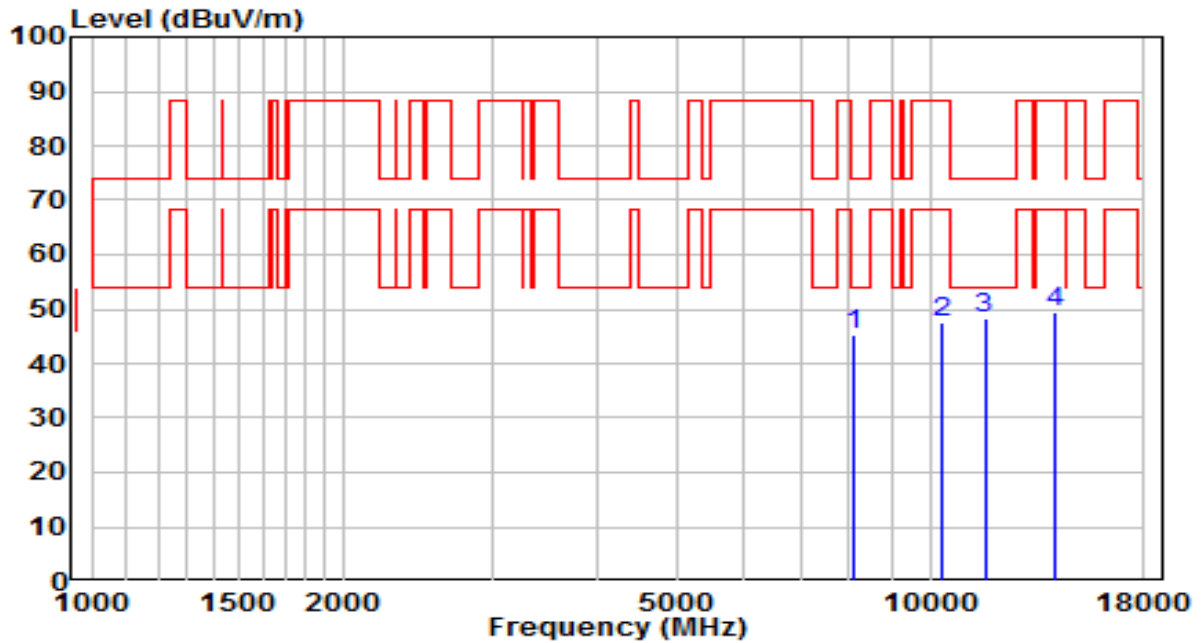


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 572.76 | -527.42 | 45.34 | -28.66 | 74.00 | Peak |
| 2 | 10324.500 | 573.15 | -525.59 | 47.56 | -40.64 | 88.20 | Peak |
| 3 | * 11616.500 | 574.62 | -526.31 | 48.31 | -25.69 | 74.00 | Peak |
| 4 | 14064.500 | 575.19 | -525.70 | 49.49 | -38.71 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6405MHz (Nss=1) | Test Voltage | 120V/60Hz |

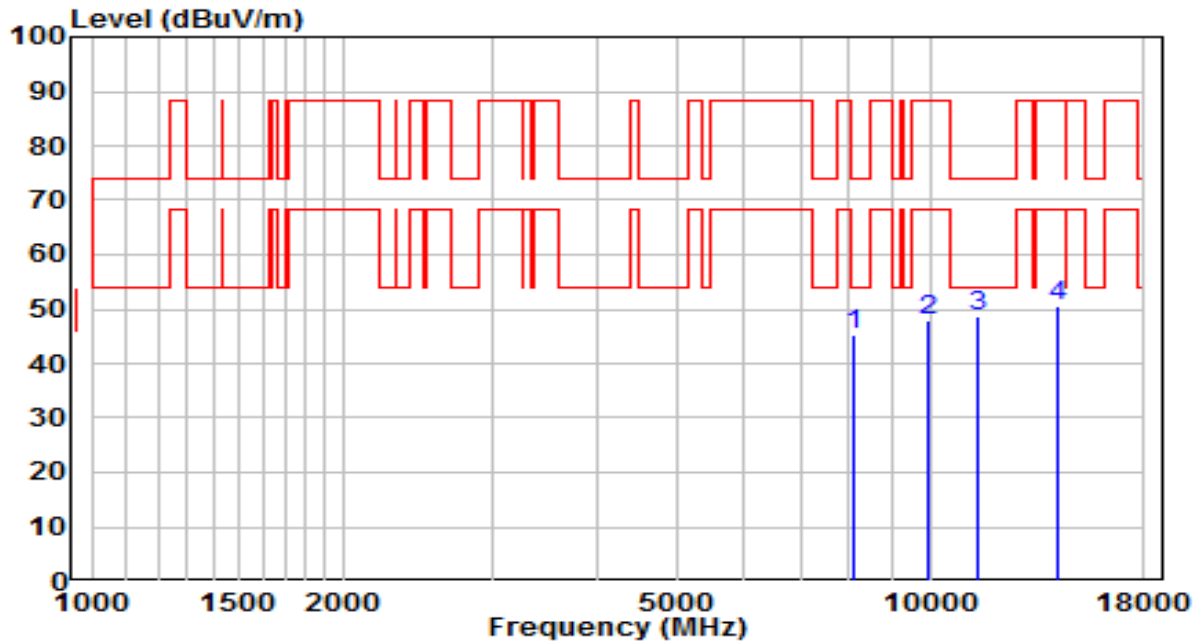


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8080.500 | 39.41 | 5.89 | 45.30 | -28.70 | 74.00 | Peak |
| 2 | 9959.000 | 38.58 | 9.19 | 47.76 | -40.44 | 88.20 | Peak |
| 3 | * 11429.500 | 38.13 | 10.45 | 48.58 | -25.42 | 74.00 | Peak |
| 4 | 14183.500 | 39.43 | 10.97 | 50.40 | -37.80 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6405MHz (Nss=1) | Test Voltage | 120V/60Hz |

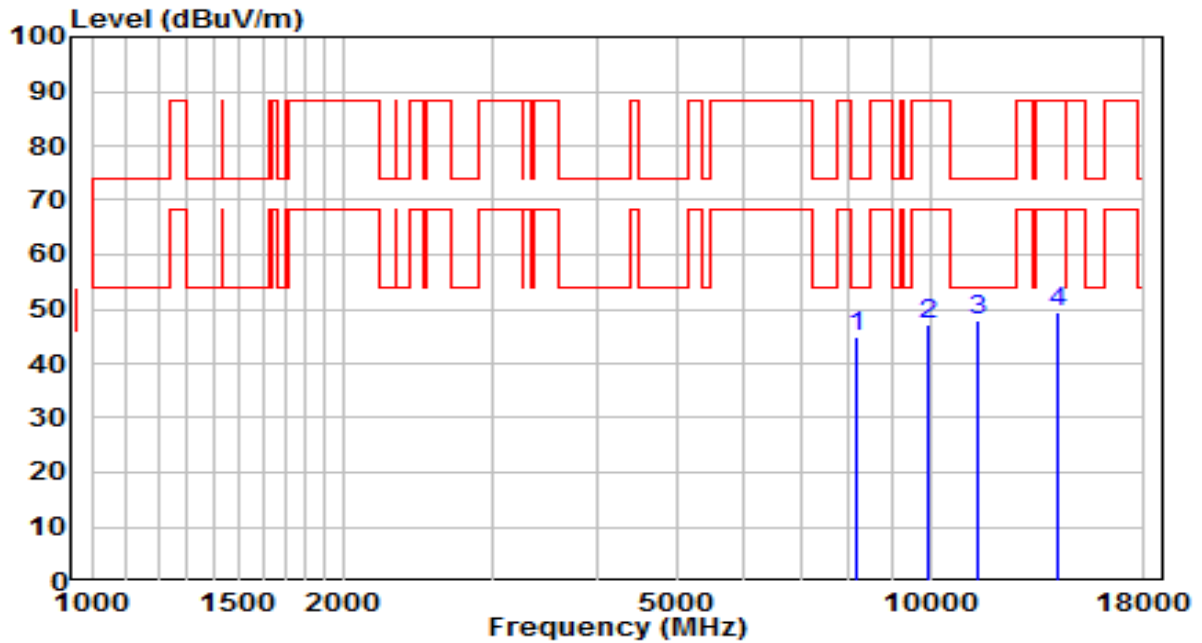


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8148.500 | 572.29 | -527.34 | 44.95 | -29.05 | 74.00 | Peak |
| 2 | 9925.000 | 572.91 | -525.63 | 47.28 | -40.92 | 88.20 | Peak |
| 3 | * 11395.500 | 574.11 | -526.05 | 48.06 | -25.94 | 74.00 | Peak |
| 4 | 14226.000 | 575.29 | -525.72 | 49.57 | -38.63 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6445MHz (Nss=1) | Test Voltage | 120V/60Hz |

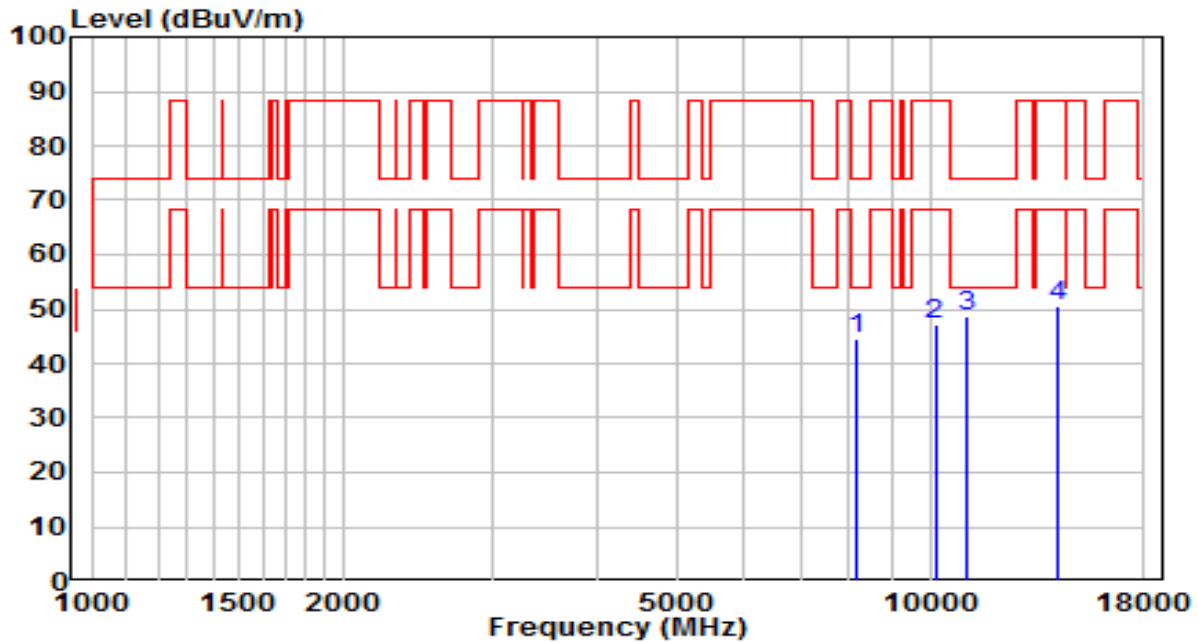


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 38.65 | 6.04 | 44.69 | -29.31 | 74.00 | Peak |
| 2 | 10137.500 | 37.67 | 9.61 | 47.28 | -40.92 | 88.20 | Peak |
| 3 | * 11072.500 | 38.20 | 10.60 | 48.80 | -25.20 | 74.00 | Peak |
| 4 | 14175.000 | 39.39 | 11.06 | 50.45 | -37.75 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6445MHz (Nss=1) | Test Voltage | 120V/60Hz |

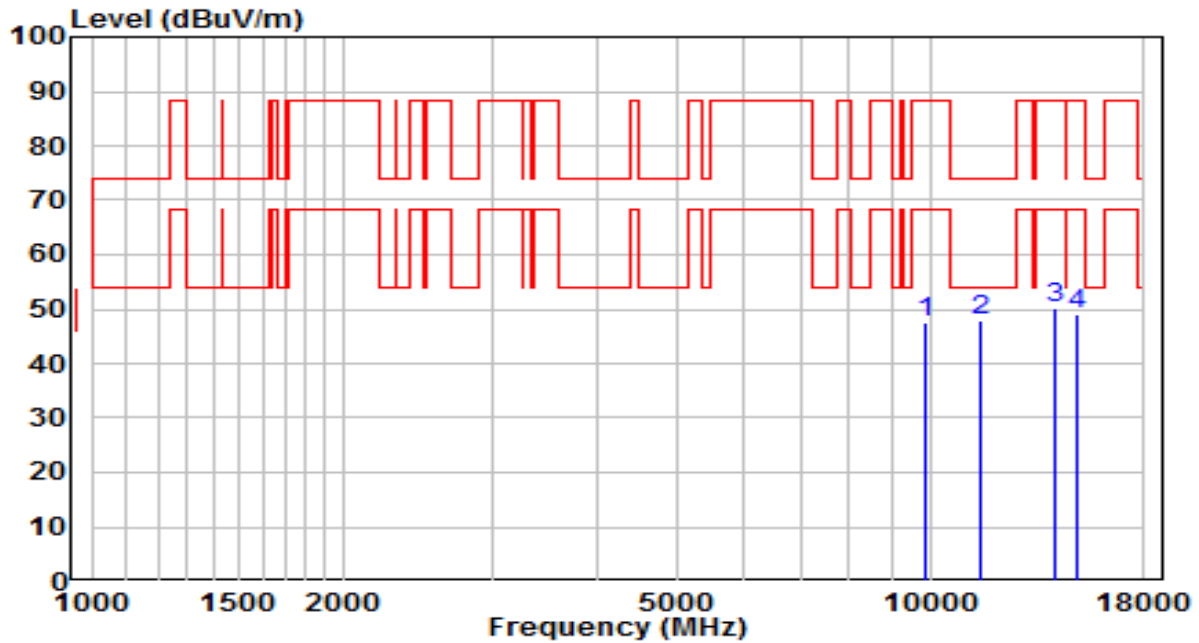


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9840.000 | 573.37 | -525.83 | 47.54 | -40.66 | 88.20 | Peak |
| 2 | * 11446.500 | 574.00 | -526.02 | 47.98 | -26.02 | 74.00 | Peak |
| 3 | 14132.500 | 576.04 | -525.94 | 50.10 | -38.10 | 88.20 | Peak |
| 4 | 14974.000 | 574.78 | -525.61 | 49.17 | -39.03 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6485MHz (Nss=1) | Test Voltage | 120V/60Hz |

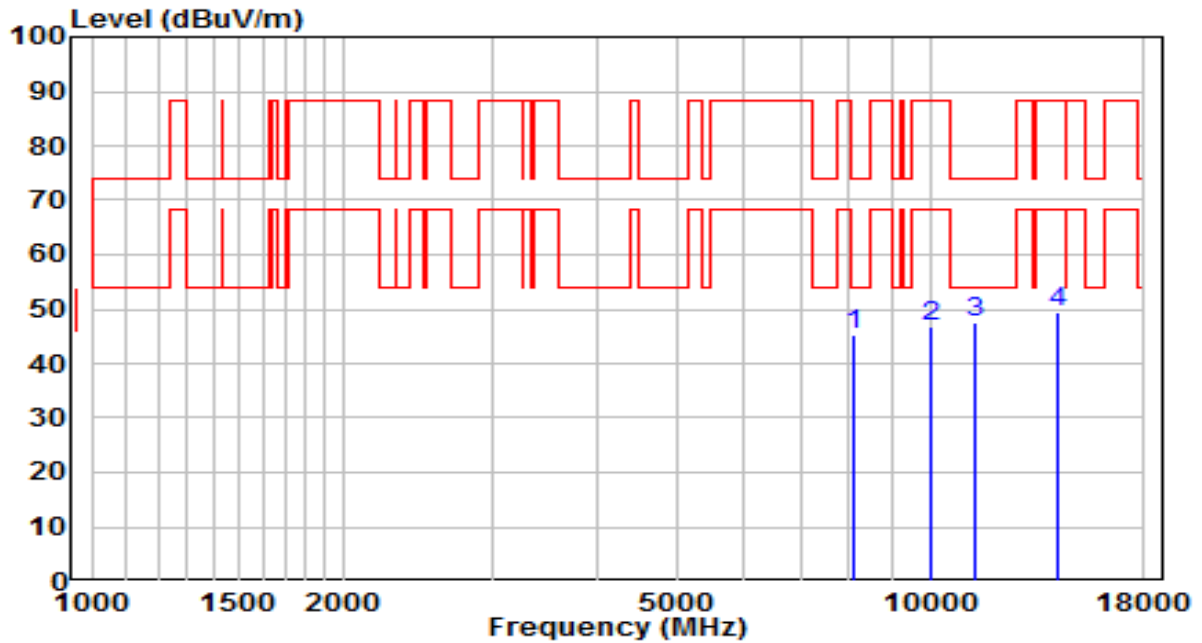


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8097.500 | 39.29 | 5.91 | 45.20 | -28.80 | 74.00 | Peak |
| 2 | 10018.500 | 37.42 | 9.49 | 46.91 | -41.29 | 88.20 | Peak |
| 3 | * 11344.500 | 37.12 | 10.48 | 47.60 | -26.40 | 74.00 | Peak |
| 4 | 14175.000 | 38.30 | 11.06 | 49.36 | -38.84 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6485MHz (Nss=1) | Test Voltage | 120V/60Hz |

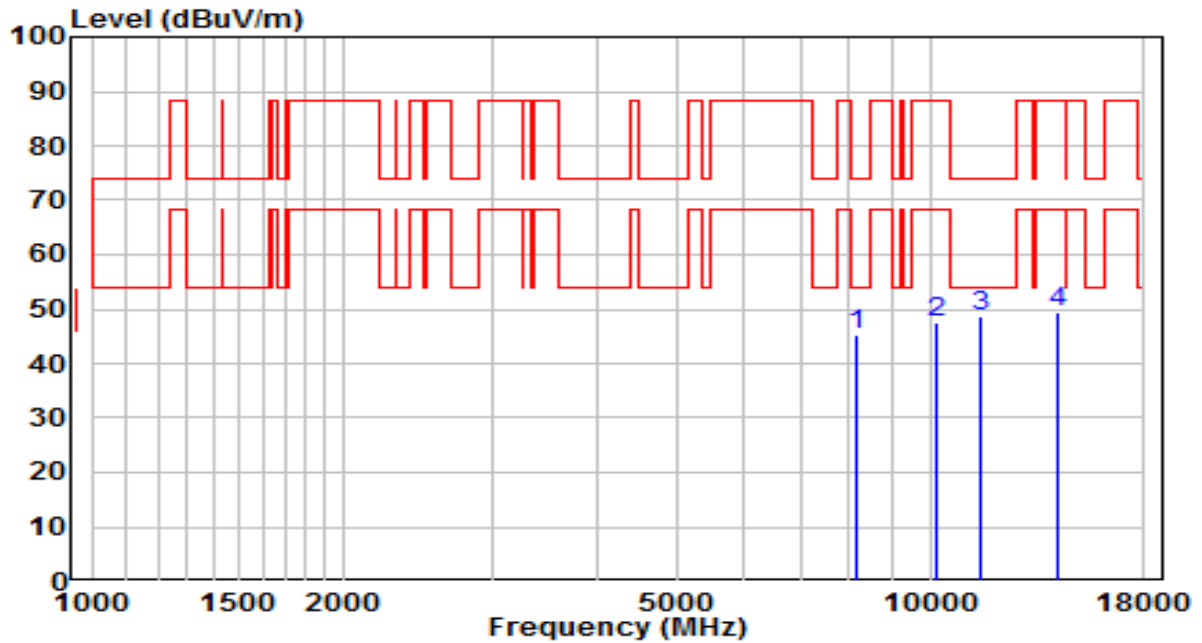


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 572.81 | -527.40 | 45.40 | -28.60 | 74.00 | Peak |
| 2 | 10146.000 | 573.35 | -525.65 | 47.70 | -40.50 | 88.20 | Peak |
| 3 | * 11506.000 | 574.82 | -526.10 | 48.72 | -25.28 | 74.00 | Peak |
| 4 | 14166.500 | 575.26 | -525.79 | 49.47 | -38.73 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6525MHz (Nss=1) | Test Voltage | 120V/60Hz |

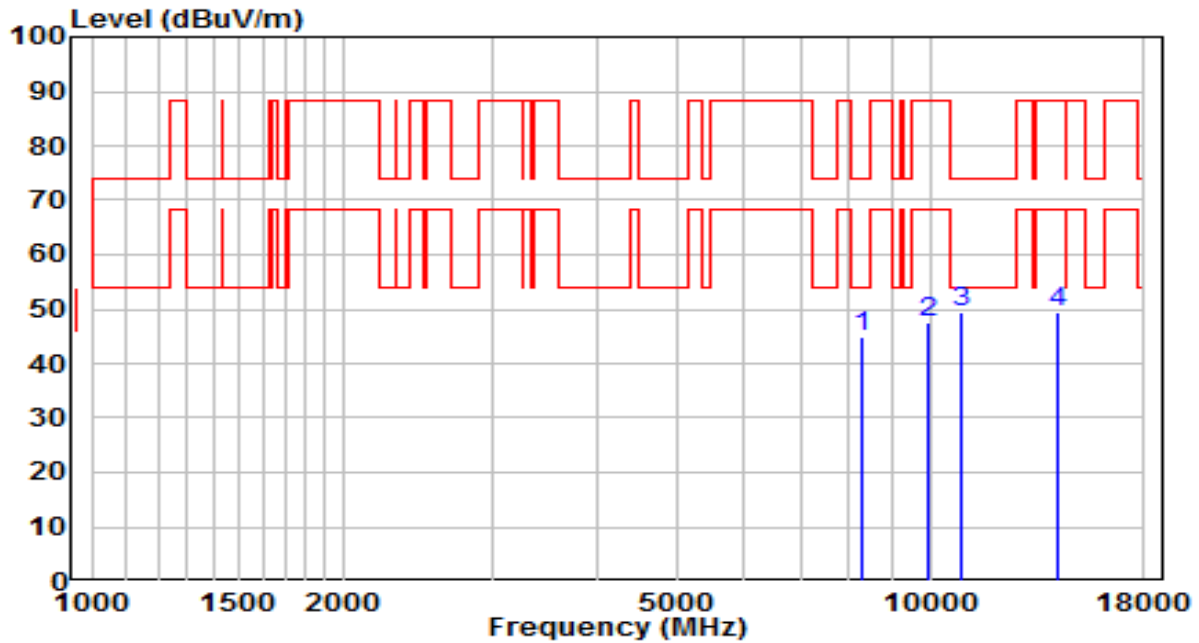


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8284.500 | 38.70 | 6.22 | 44.92 | -29.08 | 74.00 | Peak |
| 2 | 9925.000 | 38.19 | 9.51 | 47.70 | -40.50 | 88.20 | Peak |
| 3 | * 10860.000 | 39.13 | 10.28 | 49.41 | -24.59 | 74.00 | Peak |
| 4 | 14183.500 | 38.43 | 10.97 | 49.40 | -38.80 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6525MHz (Nss=1) | Test Voltage | 120V/60Hz |

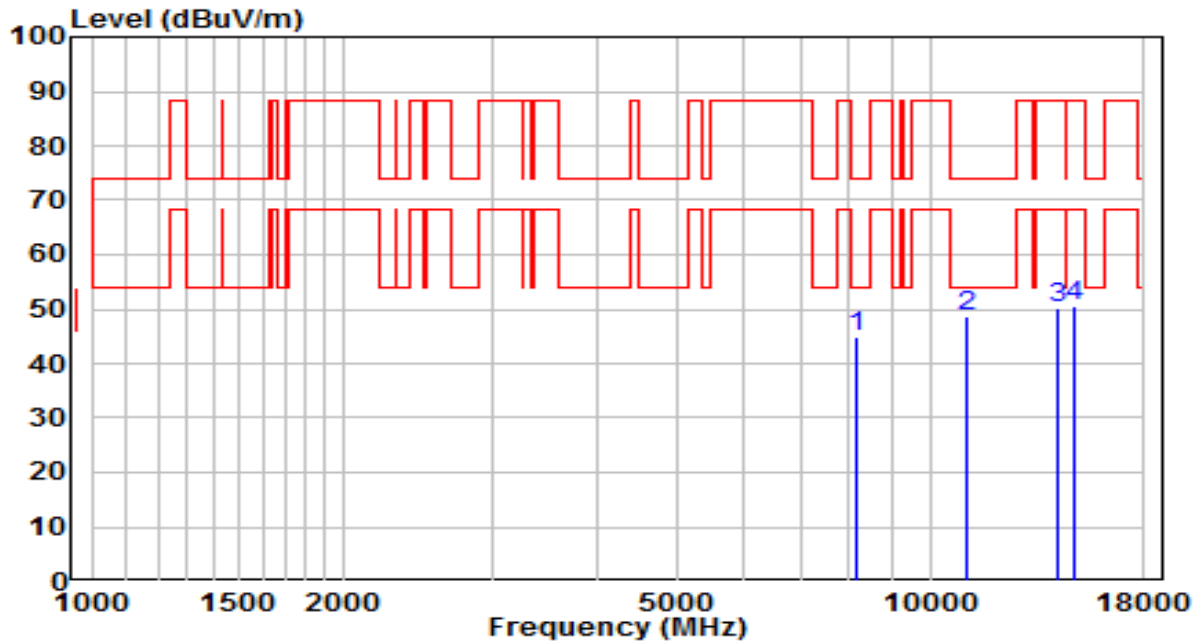


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 572.18 | -527.36 | 44.81 | -29.19 | 74.00 | Peak |
| 2 | * 11047.000 | 574.16 | -525.61 | 48.56 | -25.44 | 74.00 | Peak |
| 3 | 14234.500 | 575.92 | -525.73 | 50.19 | -38.01 | 88.20 | Peak |
| 4 | 14804.000 | 575.94 | -525.30 | 50.64 | -37.56 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6565MHz (Nss=1) | Test Voltage | 120V/60Hz |

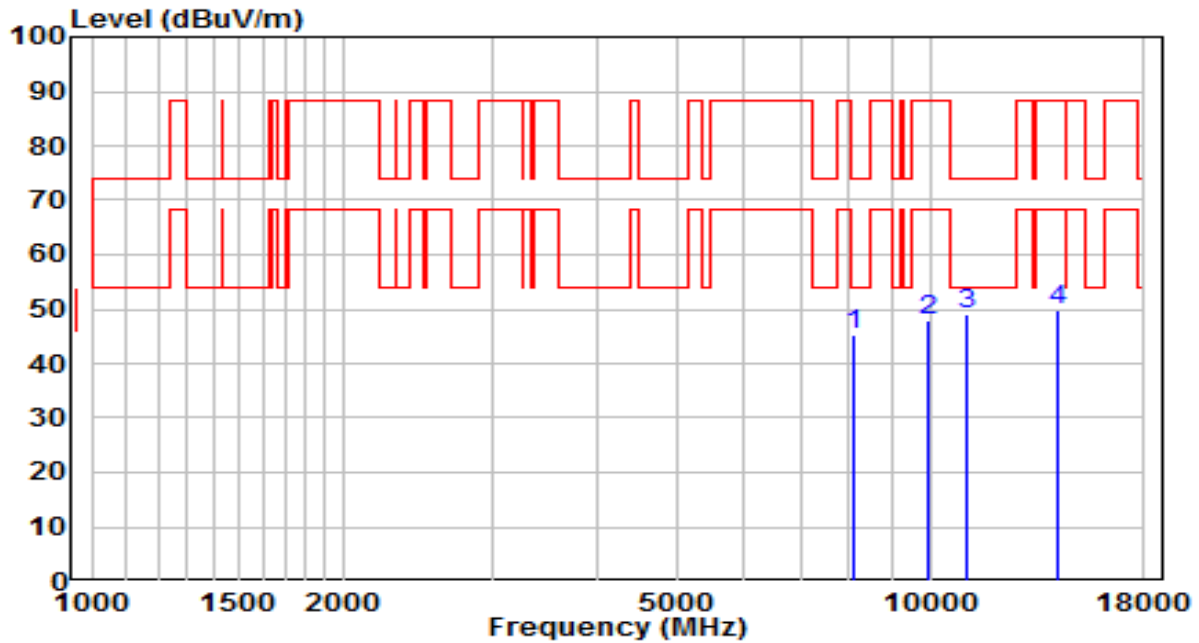


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8097.500 | 39.29 | 5.91 | 45.20 | -28.80 | 74.00 | Peak |
| 2 | 9933.500 | 38.54 | 9.46 | 48.00 | -40.20 | 88.20 | Peak |
| 3 | * 11064.000 | 38.53 | 10.57 | 49.10 | -24.90 | 74.00 | Peak |
| 4 | 14158.000 | 38.63 | 11.03 | 49.66 | -38.54 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6565MHz (Nss=1) | Test Voltage | 120V/60Hz |

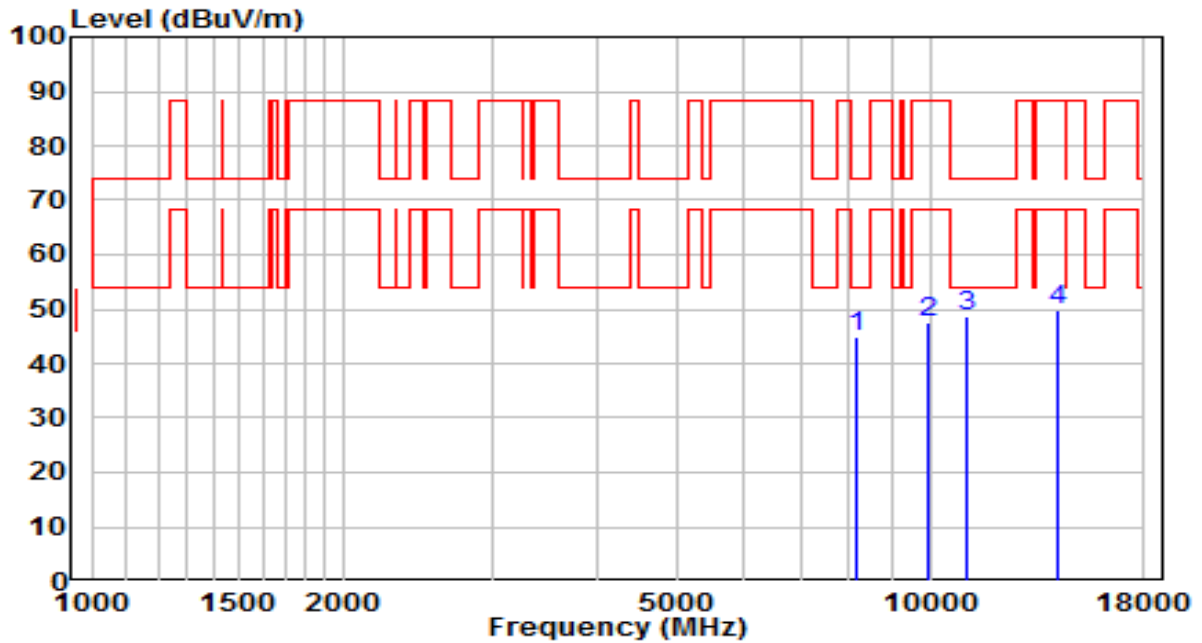


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8165.500 | 572.22 | -527.37 | 44.85 | -29.15 | 74.00 | Peak |
| 2 | 9967.500 | 573.35 | -525.80 | 47.54 | -40.66 | 88.20 | Peak |
| 3 | * 11072.500 | 574.20 | -525.64 | 48.56 | -25.44 | 74.00 | Peak |
| 4 | 14183.500 | 575.49 | -525.87 | 49.63 | -38.57 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6685MHz (Nss=1) | Test Voltage | 120V/60Hz |

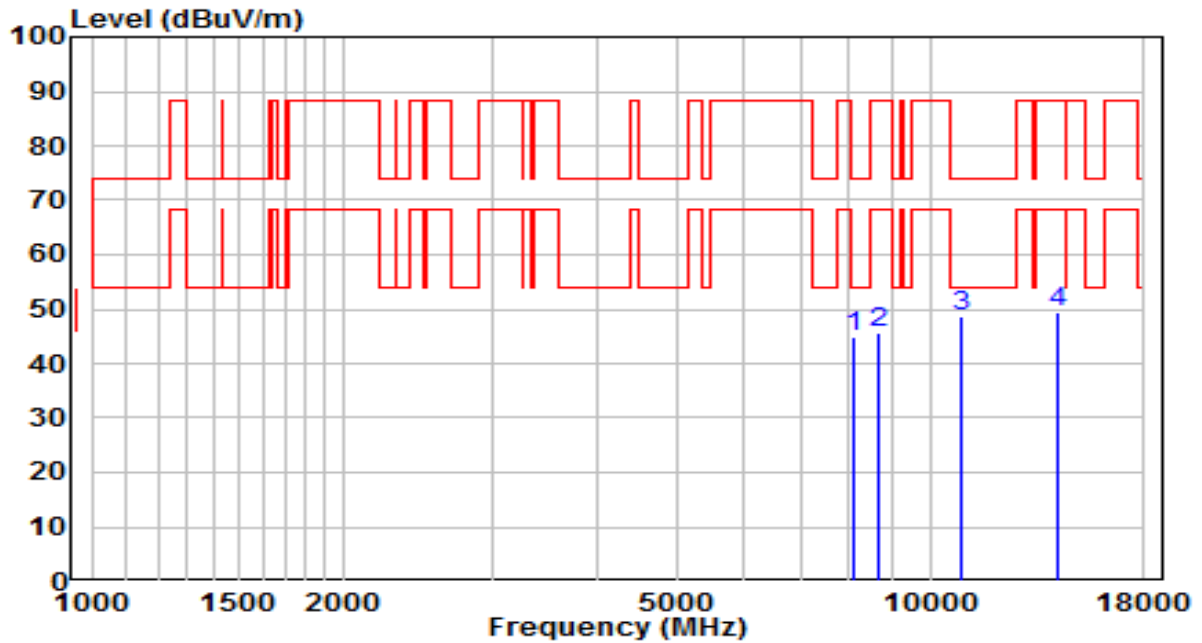


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8089.000 | 38.85 | 5.87 | 44.72 | -29.28 | 74.00 | Peak |
| 2 | 8684.000 | 38.50 | 7.05 | 45.55 | -42.65 | 88.20 | Peak |
| 3 | * 10877.000 | 38.22 | 10.34 | 48.56 | -25.44 | 74.00 | Peak |
| 4 | 14175.000 | 38.53 | 11.06 | 49.59 | -38.61 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6685MHz (Nss=1) | Test Voltage | 120V/60Hz |

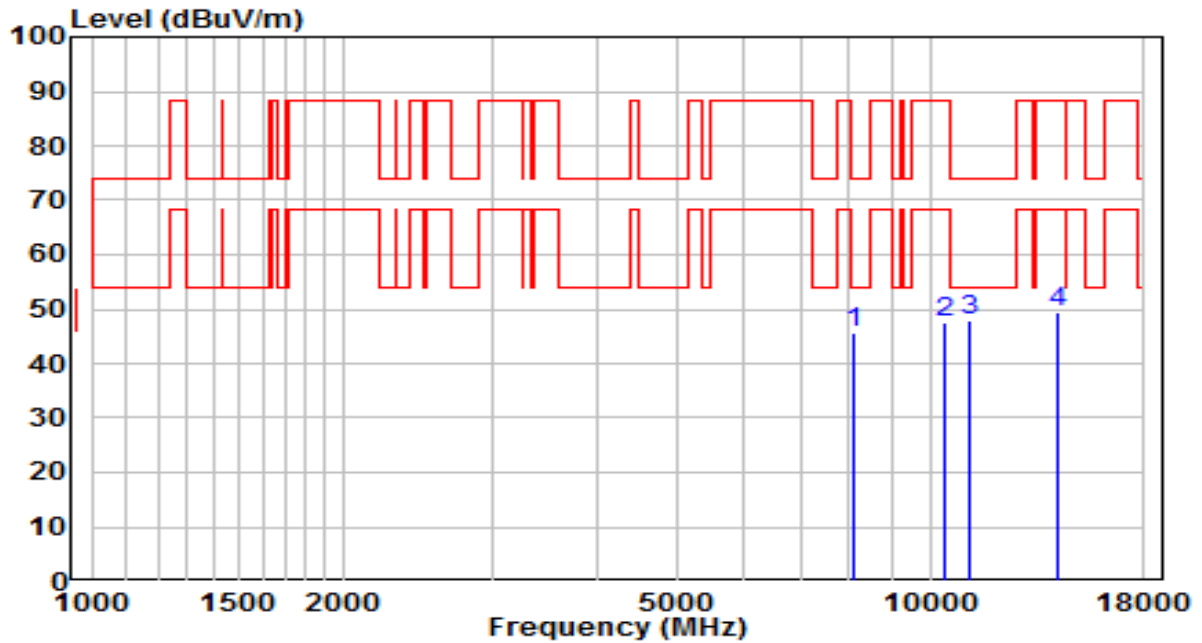


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8131.500 | 573.09 | -527.37 | 45.72 | -28.28 | 74.00 | Peak |
| 2 | 10401.000 | 573.13 | -525.60 | 47.53 | -40.67 | 88.20 | Peak |
| 3 | * 11157.500 | 573.97 | -525.91 | 48.05 | -25.95 | 74.00 | Peak |
| 4 | 14158.000 | 575.25 | -525.81 | 49.44 | -38.76 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6845MHz (Nss=1) | Test Voltage | 120V/60Hz |

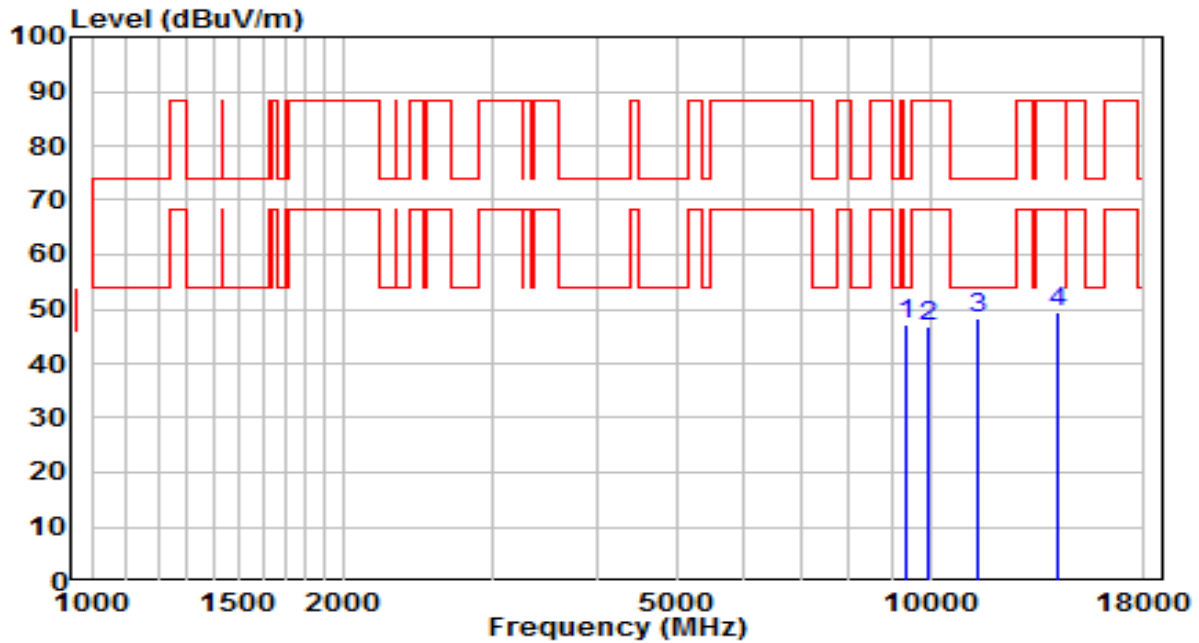


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9372.500 | 38.32 | 8.81 | 47.13 | -26.87 | 74.00 | Peak |
| 2 | 9967.500 | 37.53 | 9.34 | 46.88 | -41.32 | 88.20 | Peak |
| 3 | * 11429.500 | 38.00 | 10.45 | 48.45 | -25.55 | 74.00 | Peak |
| 4 | 14175.000 | 38.52 | 11.06 | 49.58 | -38.62 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6845MHz (Nss=1) | Test Voltage | 120V/60Hz |

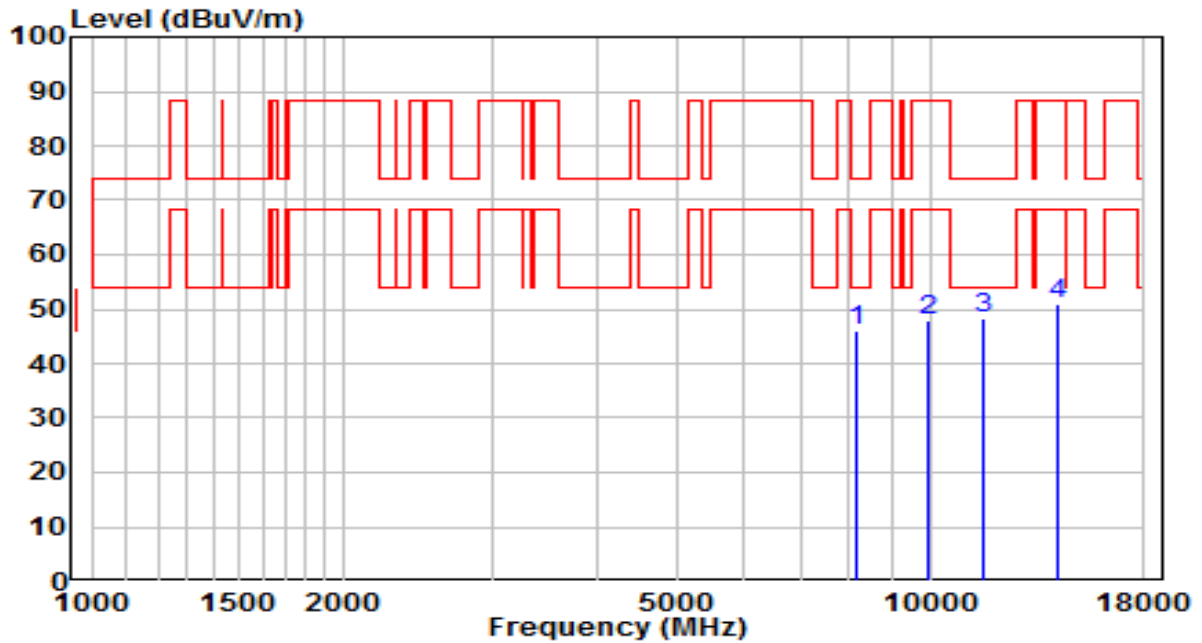


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8140.000 | 573.28 | -527.34 | 45.94 | -28.06 | 74.00 | Peak |
| 2 | 9967.500 | 573.71 | -525.80 | 47.91 | -40.29 | 88.20 | Peak |
| 3 | * 11608.000 | 574.61 | -526.20 | 48.40 | -25.60 | 74.00 | Peak |
| 4 | 14175.000 | 576.62 | -525.78 | 50.85 | -37.35 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6885MHz (Nss=1) | Test Voltage | 120V/60Hz |

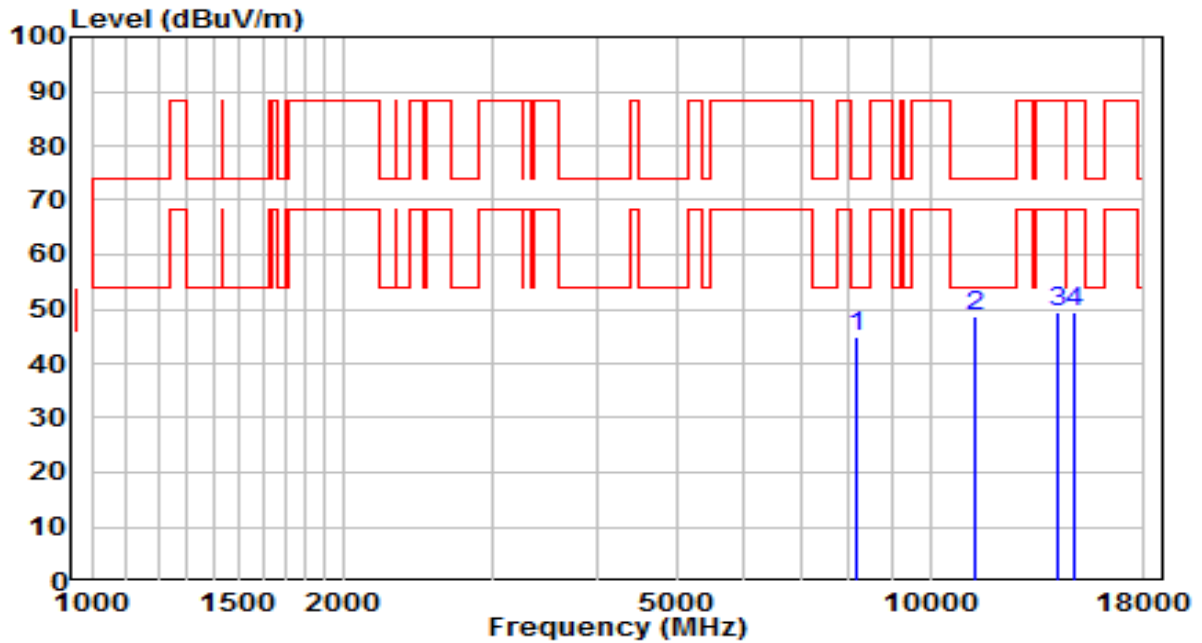


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8140.000 | 38.97 | 6.05 | 45.01 | -28.99 | 74.00 | Peak |
| 2 | * 11344.500 | 38.12 | 10.48 | 48.61 | -25.39 | 74.00 | Peak |
| 3 | 14183.500 | 38.48 | 10.97 | 49.45 | -38.75 | 88.20 | Peak |
| 4 | 14804.000 | 37.98 | 11.59 | 49.56 | -38.64 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6885MHz (Nss=1) | Test Voltage | 120V/60Hz |

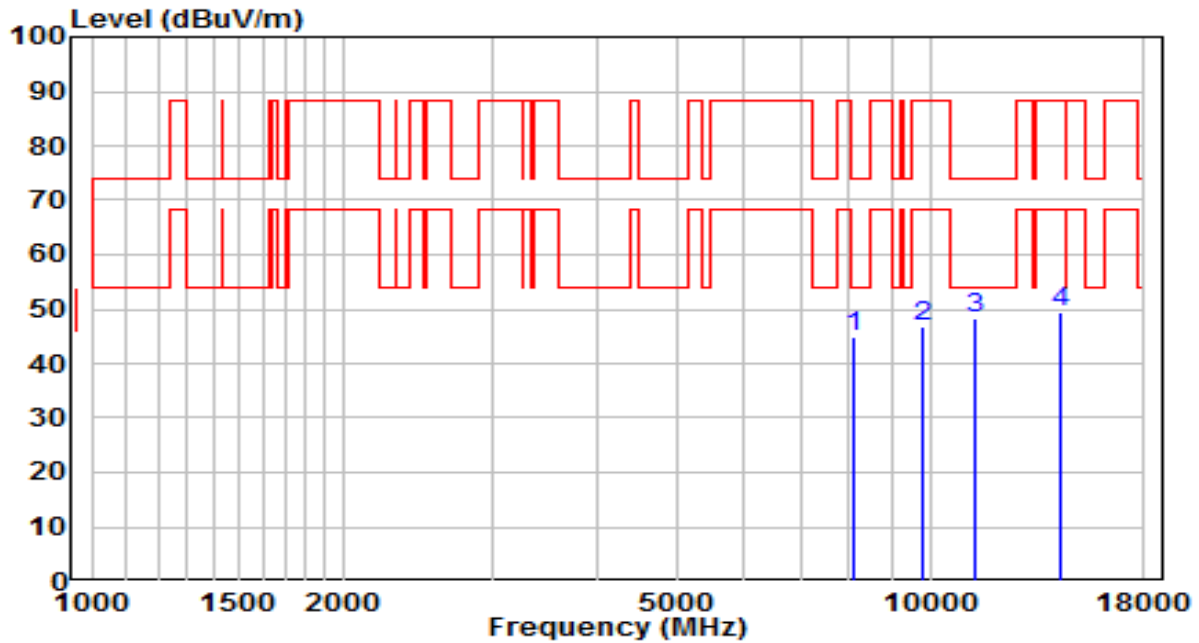


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 572.31 | -527.42 | 44.89 | -29.11 | 74.00 | Peak |
| 2 | 9780.500 | 572.78 | -525.84 | 46.94 | -41.26 | 88.20 | Peak |
| 3 | * 11285.000 | 574.13 | -525.91 | 48.22 | -25.78 | 74.00 | Peak |
| 4 | 14260.000 | 575.26 | -525.70 | 49.56 | -38.64 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6925MHz (Nss=1) | Test Voltage | 120V/60Hz |

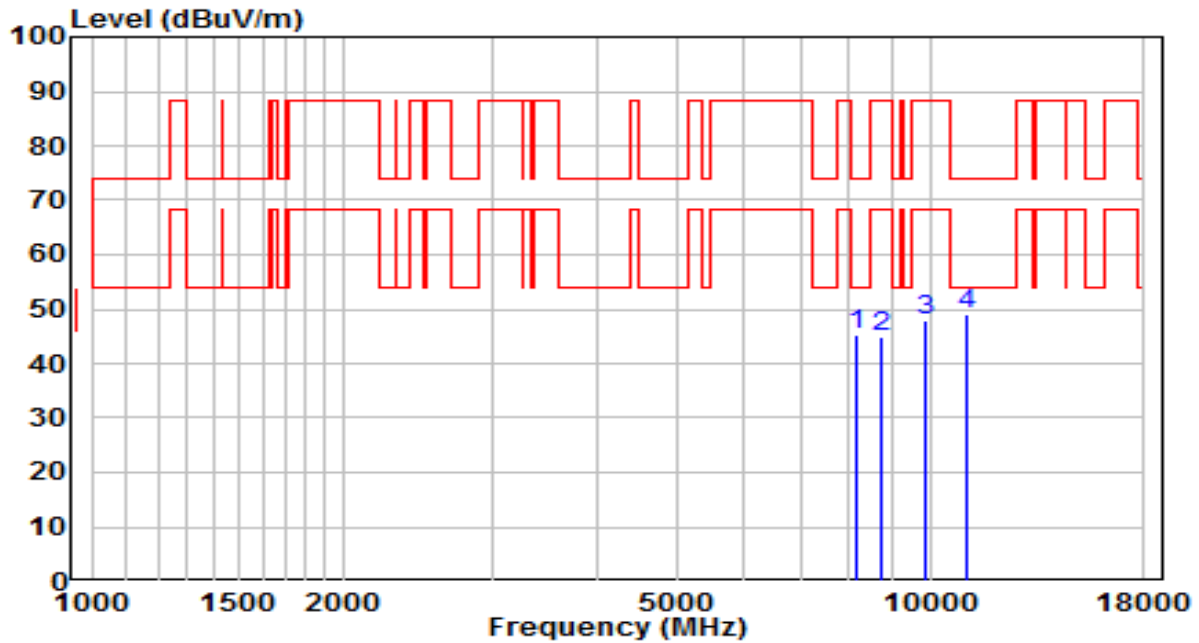


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8165.500 | 39.09 | 6.03 | 45.12 | -28.88 | 74.00 | Peak |
| 2 | 8752.000 | 37.82 | 7.18 | 45.00 | -43.20 | 88.20 | Peak |
| 3 | 9857.000 | 38.68 | 9.18 | 47.87 | -40.33 | 88.20 | Peak |
| 4 | * 11064.000 | 38.46 | 10.57 | 49.03 | -24.97 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6925MHz (Nss=1) | Test Voltage | 120V/60Hz |

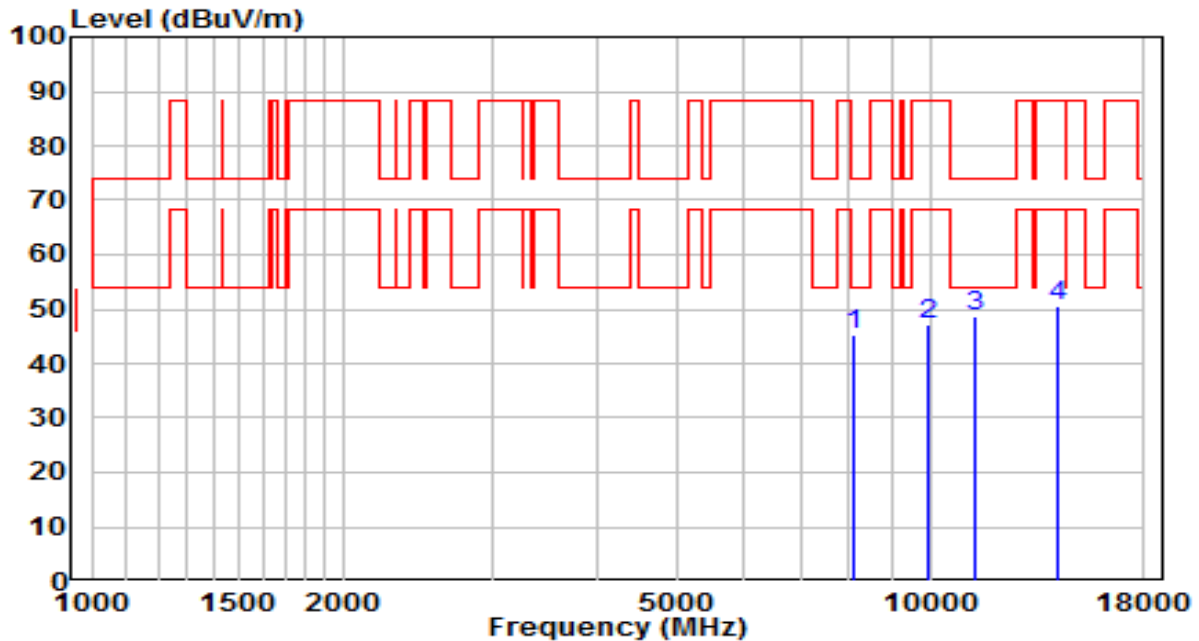


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8114.500 | 572.81 | -527.34 | 45.47 | -28.53 | 74.00 | Peak |
| 2 | 9933.500 | 572.69 | -525.68 | 47.01 | -41.19 | 88.20 | Peak |
| 3 | * 11336.000 | 574.49 | -525.89 | 48.60 | -25.40 | 74.00 | Peak |
| 4 | 14183.500 | 576.54 | -525.87 | 50.67 | -37.53 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7005MHz (Nss=1) | Test Voltage | 120V/60Hz |

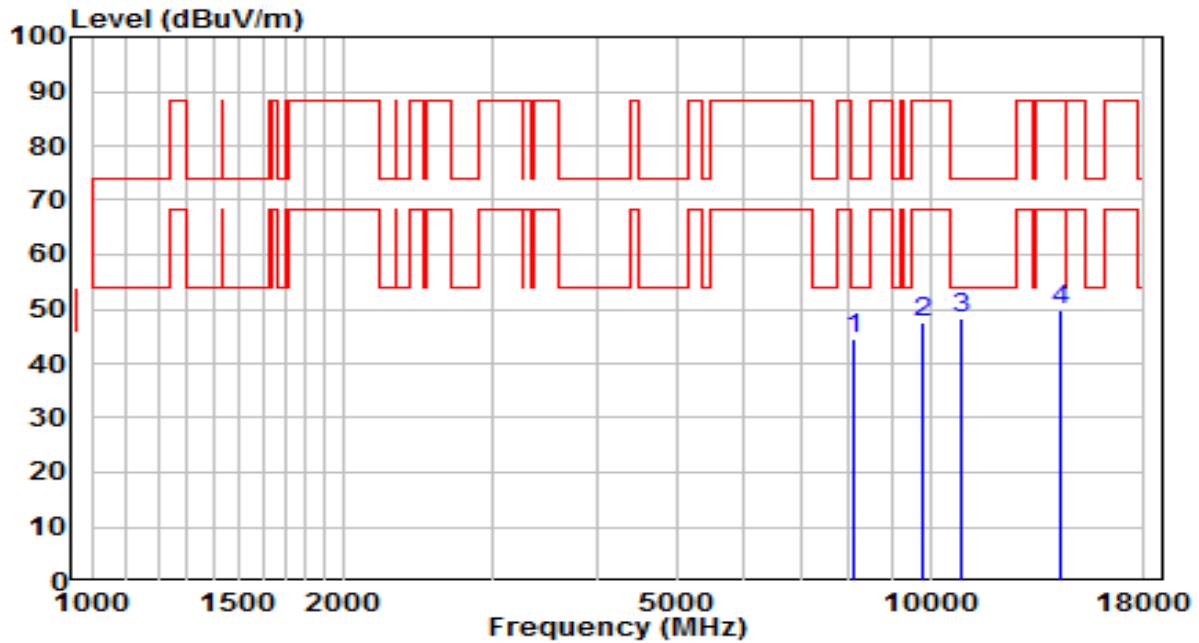


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8080.500 | 38.59 | 5.89 | 44.48 | -29.52 | 74.00 | Peak |
| 2 | 9789.000 | 38.19 | 9.25 | 47.44 | -40.76 | 88.20 | Peak |
| 3 | * 10928.000 | 37.87 | 10.41 | 48.28 | -25.72 | 74.00 | Peak |
| 4 | 14268.500 | 38.86 | 11.06 | 49.91 | -38.29 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7005MHz (Nss=1) | Test Voltage | 120V/60Hz |

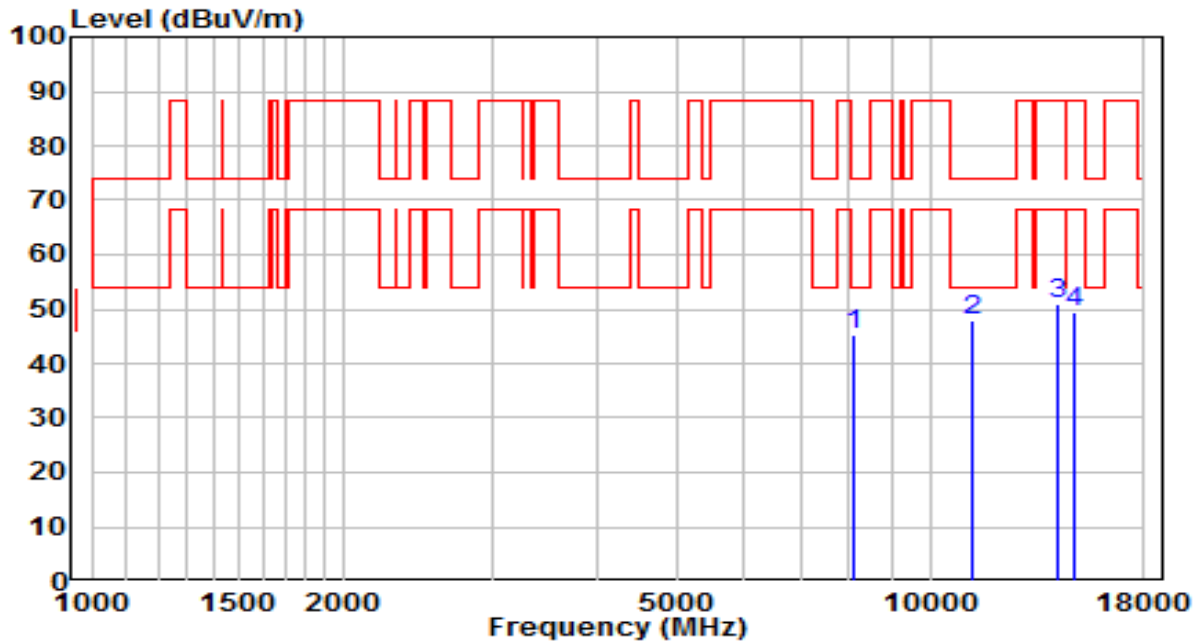


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 572.80 | -527.42 | 45.38 | -28.62 | 74.00 | Peak |
| 2 | * 11251.000 | 574.12 | -526.02 | 48.10 | -25.90 | 74.00 | Peak |
| 3 | 14166.500 | 576.68 | -525.79 | 50.89 | -37.31 | 88.20 | Peak |
| 4 | 14804.000 | 574.56 | -525.30 | 49.26 | -38.94 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=1) | Test Voltage | 120V/60Hz |

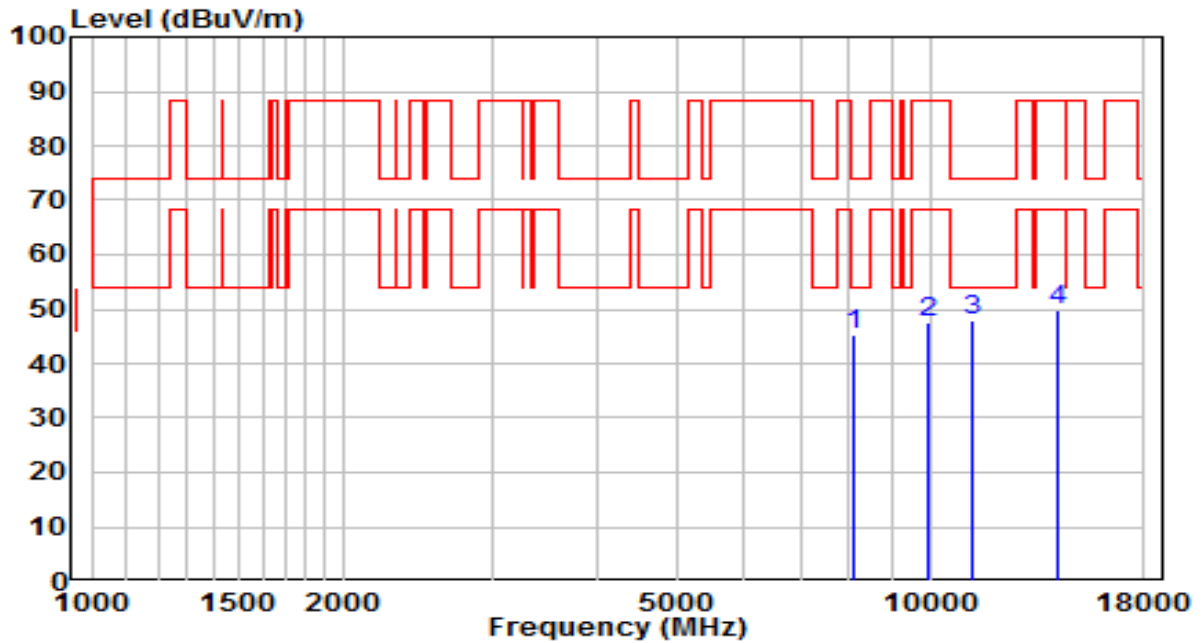


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8131.500 | 39.10 | 6.01 | 45.12 | -28.89 | 74.00 | Peak |
| 2 | 9967.500 | 38.14 | 9.34 | 47.49 | -40.71 | 88.20 | Peak |
| 3 | * 11251.000 | 37.69 | 10.39 | 48.08 | -25.92 | 74.00 | Peak |
| 4 | 14149.500 | 38.73 | 10.97 | 49.70 | -38.50 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=1) | Test Voltage | 120V/60Hz |

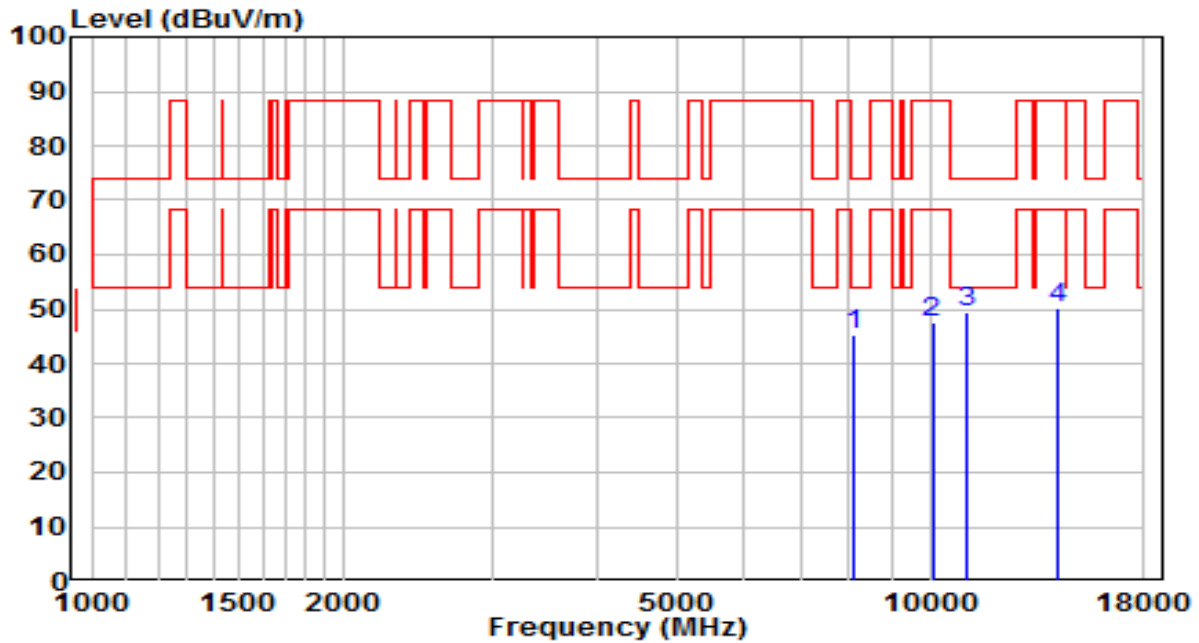


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8123.000 | 572.58 | -527.33 | 45.25 | -28.75 | 74.00 | Peak |
| 2 | 10061.000 | 573.19 | -525.77 | 47.42 | -40.78 | 88.20 | Peak |
| 3 | * 11064.000 | 574.95 | -525.65 | 49.29 | -24.71 | 74.00 | Peak |
| 4 | 14166.500 | 576.05 | -525.79 | 50.26 | -37.94 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=1) | Test Voltage | 120V/60Hz |

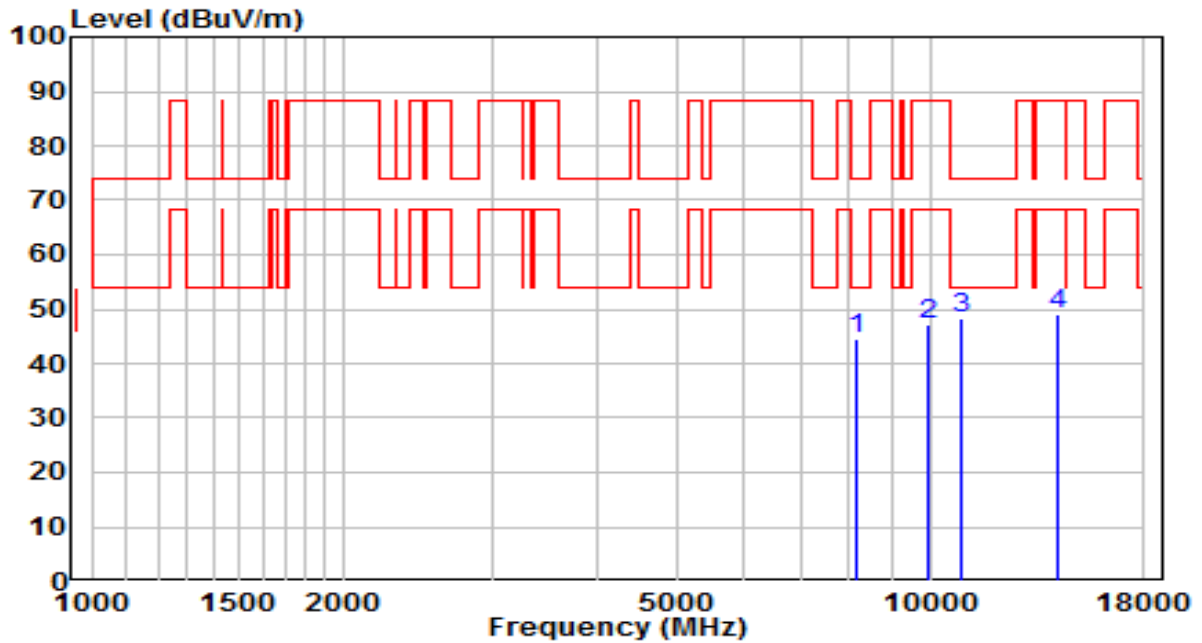


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8148.500 | 38.44 | 6.05 | 44.48 | -29.52 | 74.00 | Peak |
| 2 | 9967.500 | 37.68 | 9.34 | 47.02 | -41.18 | 88.20 | Peak |
| 3 | * 10885.500 | 38.08 | 10.34 | 48.42 | -25.58 | 74.00 | Peak |
| 4 | 14192.000 | 38.18 | 10.87 | 49.06 | -39.14 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=1) | Test Voltage | 120V/60Hz |

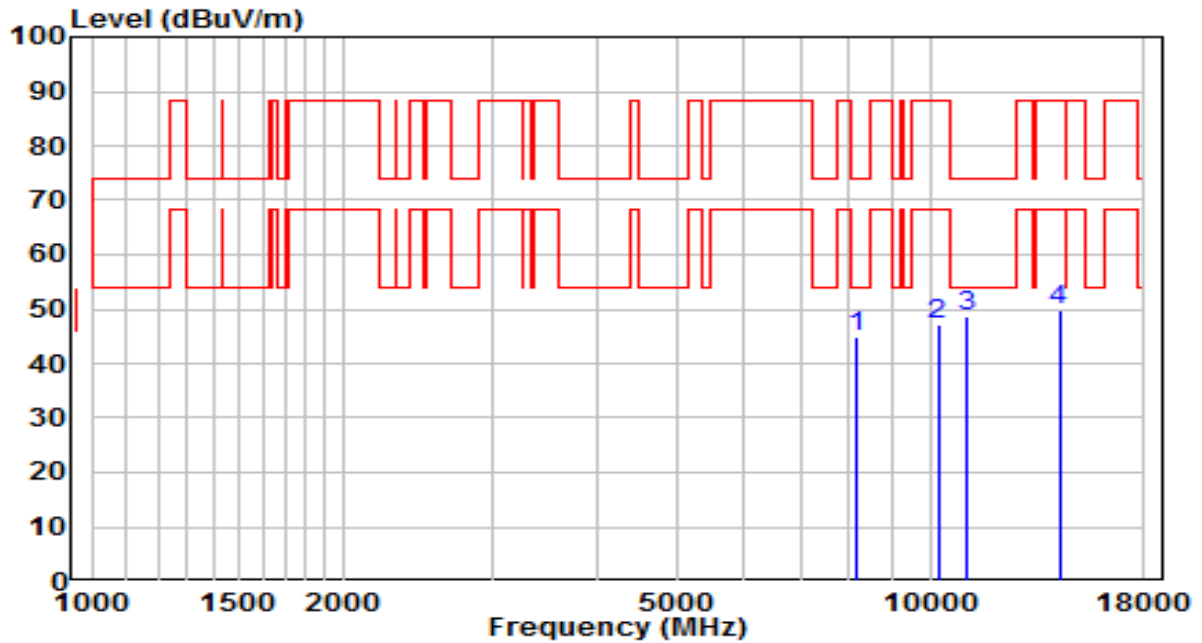


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 572.42 | -527.36 | 45.05 | -28.95 | 74.00 | Peak |
| 2 | 10214.000 | 572.88 | -525.78 | 47.10 | -41.10 | 88.20 | Peak |
| 3 | * 11055.500 | 574.33 | -525.63 | 48.70 | -25.30 | 74.00 | Peak |
| 4 | 14251.500 | 575.60 | -525.72 | 49.88 | -38.32 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6225MHz (Nss=1) | Test Voltage | 120V/60Hz |

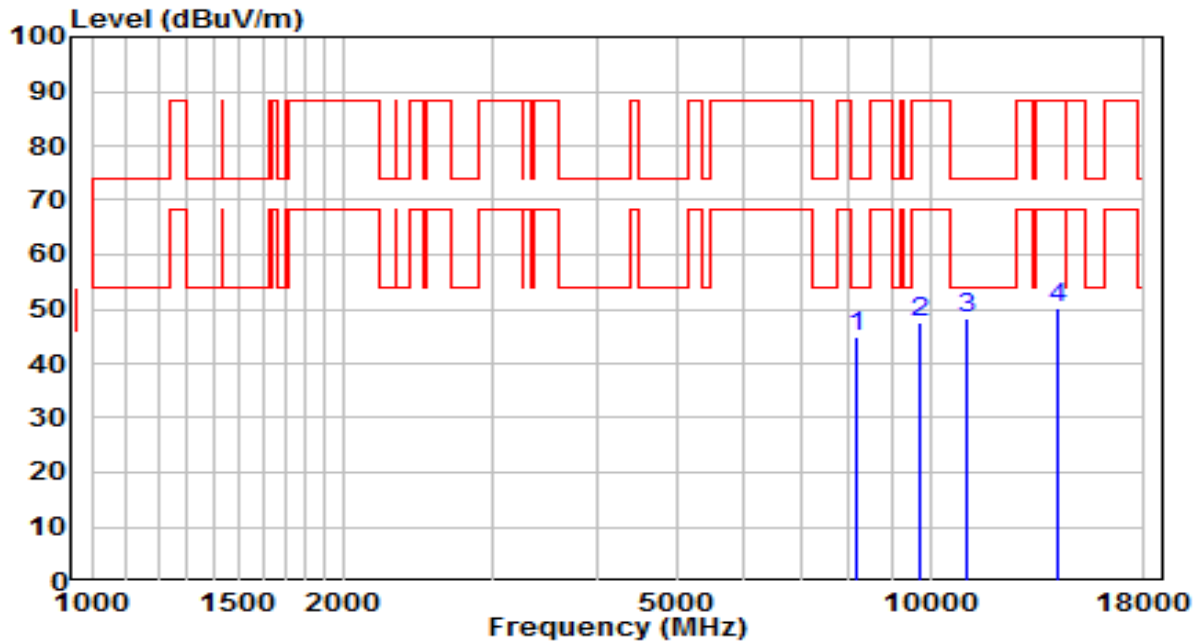


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 39.04 | 6.04 | 45.08 | -28.92 | 74.00 | Peak |
| 2 | 9755.000 | 38.30 | 9.09 | 47.39 | -40.81 | 88.20 | Peak |
| 3 | * 11047.000 | 37.69 | 10.59 | 48.28 | -25.72 | 74.00 | Peak |
| 4 | 14166.500 | 39.08 | 11.05 | 50.13 | -38.07 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6225MHz (Nss=1) | Test Voltage | 120V/60Hz |

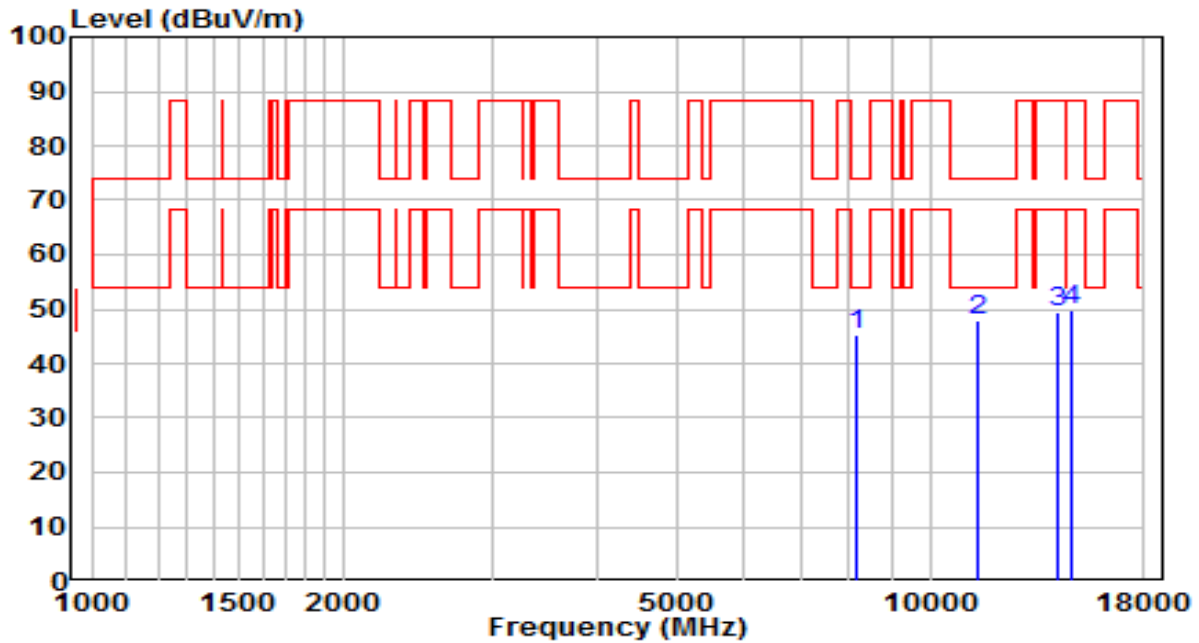


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8182.500 | 572.76 | -527.41 | 45.35 | -28.65 | 74.00 | Peak |
| 2 | * 11421.000 | 574.11 | -526.10 | 48.00 | -26.00 | 74.00 | Peak |
| 3 | 14175.000 | 575.07 | -525.78 | 49.29 | -38.91 | 88.20 | Peak |
| 4 | 14727.500 | 575.19 | -525.42 | 49.77 | -38.43 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6385MHz (Nss=1) | Test Voltage | 120V/60Hz |

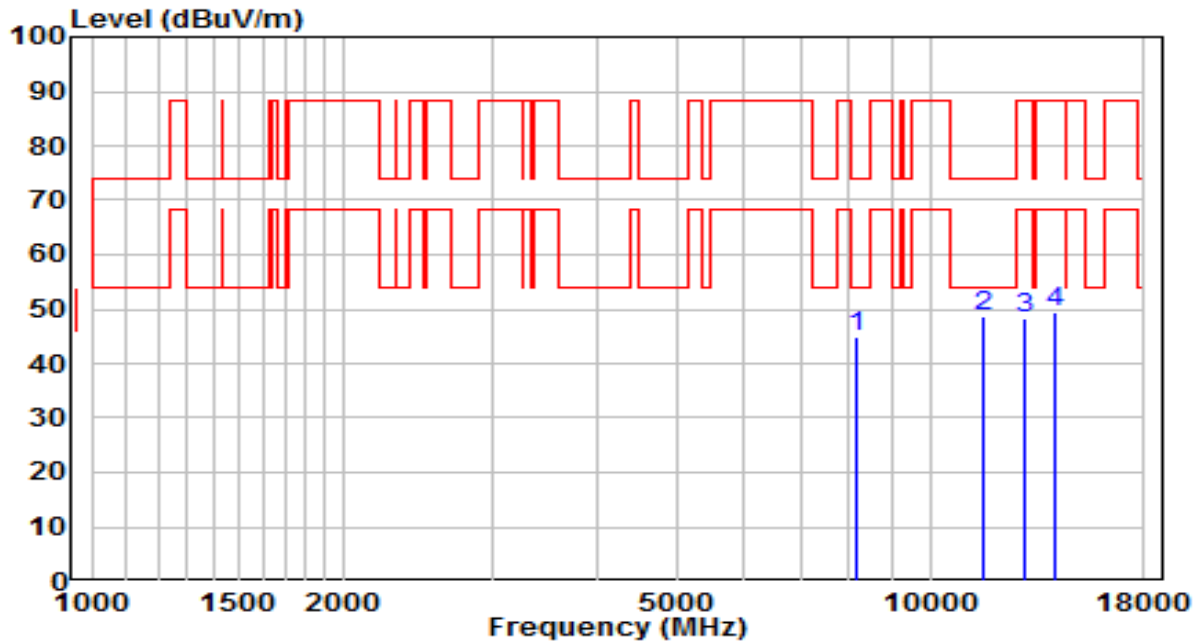


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8165.500 | 38.83 | 6.03 | 44.86 | -29.14 | 74.00 | Peak |
| 2 | * 11608.000 | 38.37 | 10.27 | 48.64 | -25.36 | 74.00 | Peak |
| 3 | 12959.500 | 37.66 | 10.72 | 48.38 | -39.82 | 88.20 | Peak |
| 4 | 14141.000 | 38.47 | 10.92 | 49.39 | -38.81 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6385MHz (Nss=1) | Test Voltage | 120V/60Hz |

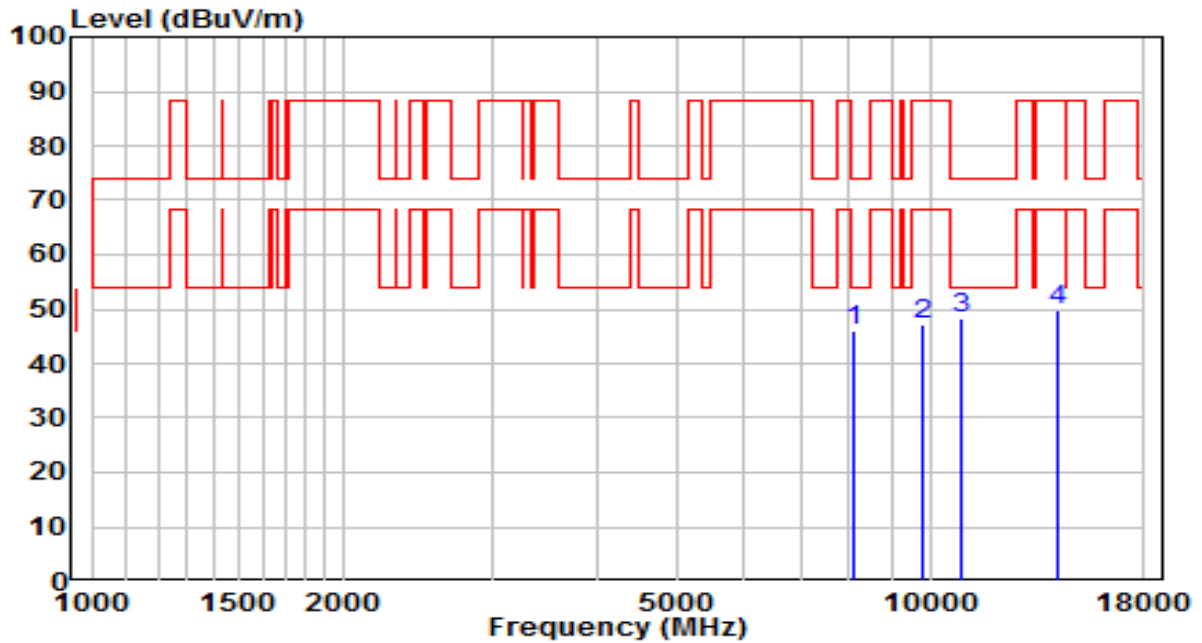


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8131.500 | 573.50 | -527.37 | 46.13 | -27.87 | 74.00 | Peak |
| 2 | 9789.000 | 573.08 | -525.86 | 47.22 | -40.98 | 88.20 | Peak |
| 3 | * 10877.000 | 574.02 | -525.62 | 48.41 | -25.59 | 74.00 | Peak |
| 4 | 14200.500 | 575.75 | -525.93 | 49.82 | -38.38 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6465MHz (Nss=1) | Test Voltage | 120V/60Hz |

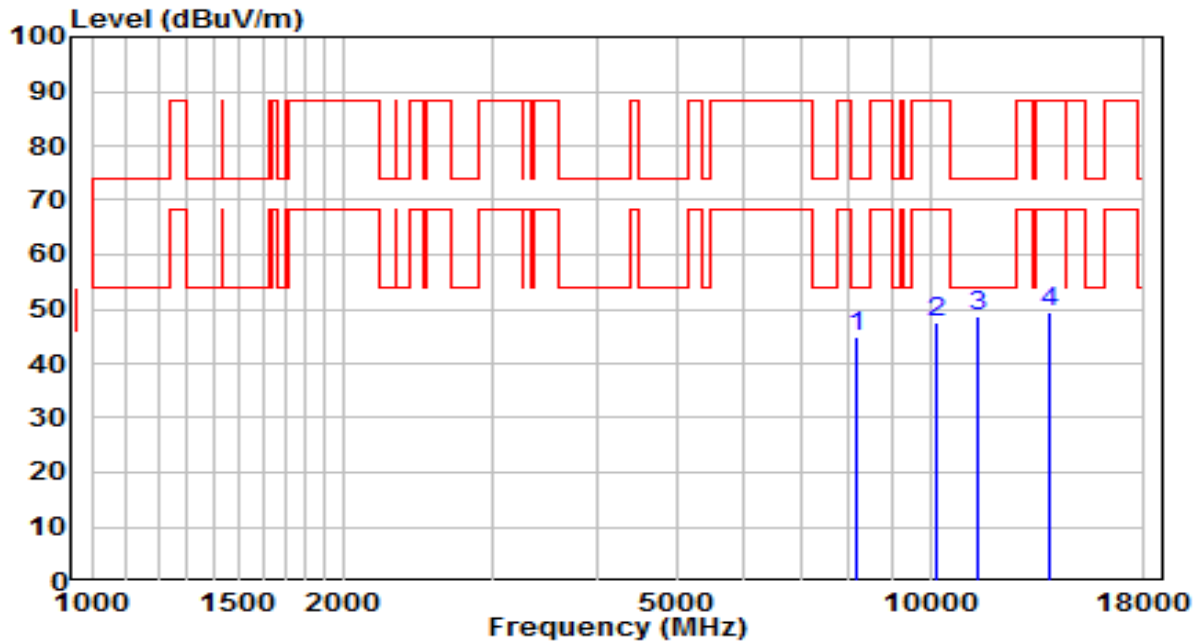


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8140.000 | 38.99 | 6.05 | 45.03 | -28.97 | 74.00 | Peak |
| 2 | 10197.000 | 38.00 | 9.41 | 47.41 | -40.79 | 88.20 | Peak |
| 3 | * 11421.000 | 38.17 | 10.37 | 48.53 | -25.47 | 74.00 | Peak |
| 4 | 13894.500 | 37.90 | 11.38 | 49.28 | -38.92 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6465MHz (Nss=1) | Test Voltage | 120V/60Hz |

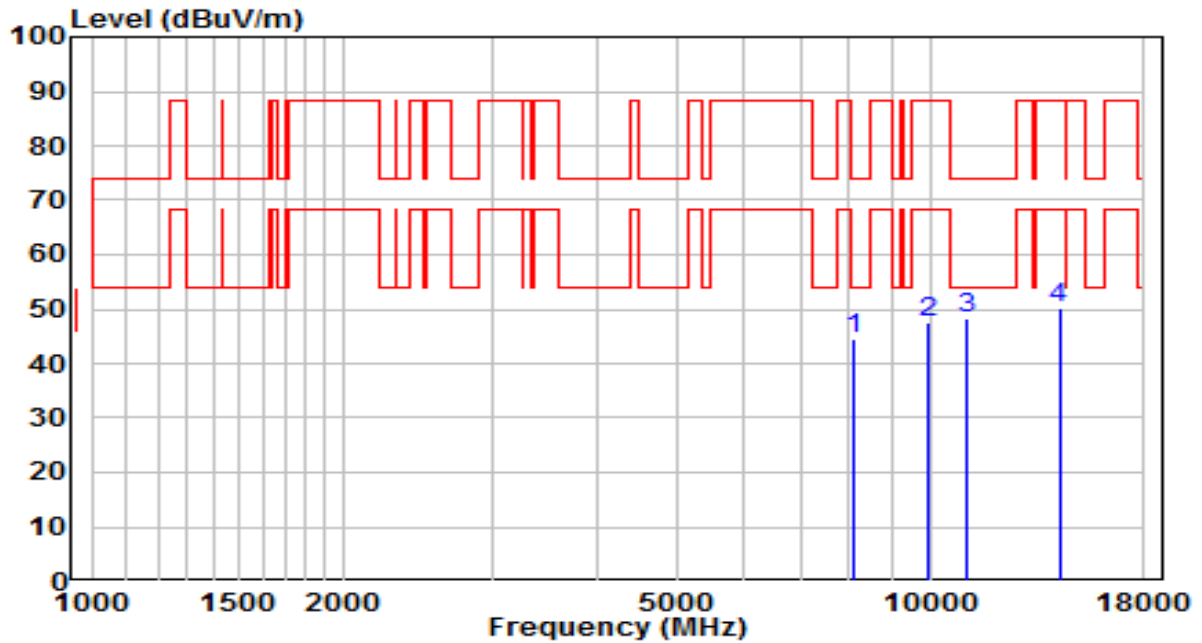


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8089.000 | 572.13 | -527.49 | 44.64 | -29.36 | 74.00 | Peak |
| 2 | 9933.500 | 573.25 | -525.68 | 47.57 | -40.63 | 88.20 | Peak |
| 3 | * 11064.000 | 573.93 | -525.65 | 48.28 | -25.72 | 74.00 | Peak |
| 4 | 14251.500 | 575.82 | -525.72 | 50.10 | -38.10 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6545MHz (Nss=1) | Test Voltage | 120V/60Hz |

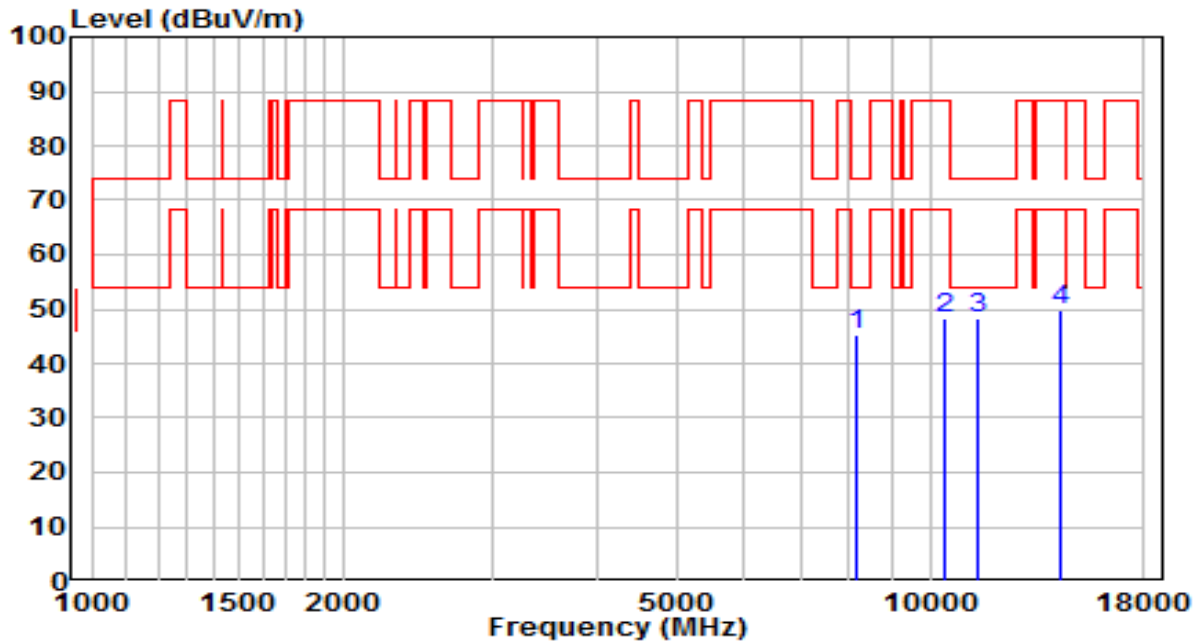


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 39.32 | 6.04 | 45.35 | -28.65 | 74.00 | Peak |
| 2 | 10426.500 | 38.42 | 9.86 | 48.28 | -39.92 | 88.20 | Peak |
| 3 | * 11421.000 | 38.00 | 10.37 | 48.37 | -25.63 | 74.00 | Peak |
| 4 | 14260.000 | 38.65 | 11.09 | 49.74 | -38.46 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6545MHz (Nss=1) | Test Voltage | 120V/60Hz |

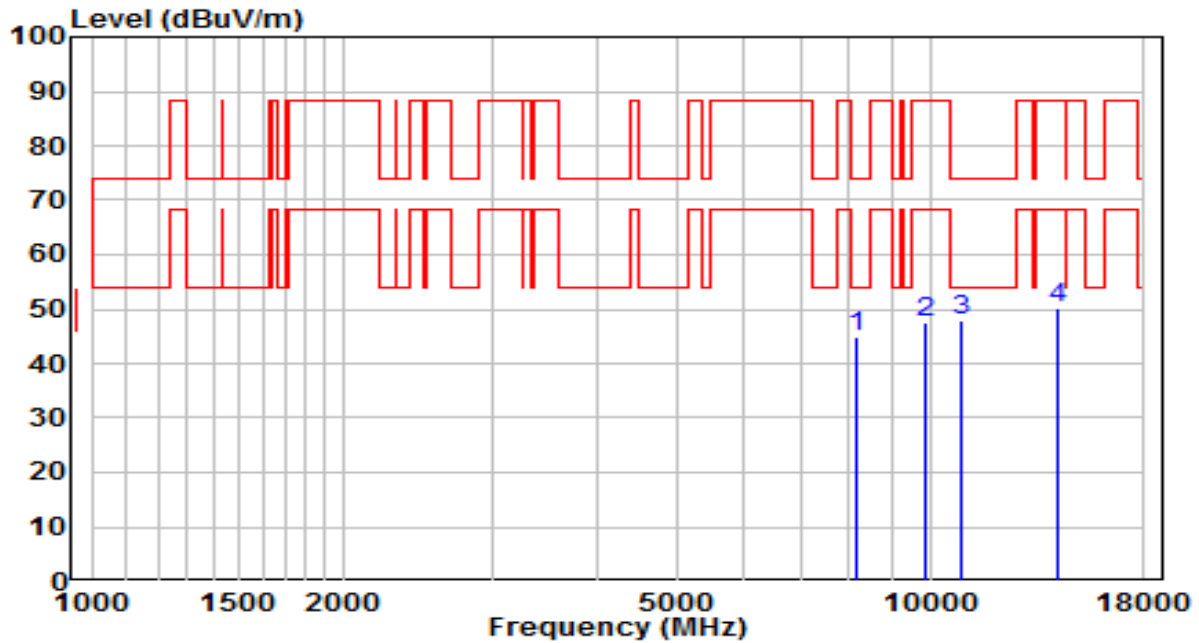


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8140.000 | 572.17 | -527.34 | 44.83 | -29.17 | 74.00 | Peak |
| 2 | 9840.000 | 573.21 | -525.83 | 47.38 | -40.82 | 88.20 | Peak |
| 3 | * 10877.000 | 573.73 | -525.62 | 48.11 | -25.89 | 74.00 | Peak |
| 4 | 14149.500 | 576.03 | -525.88 | 50.14 | -38.06 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6625MHz (Nss=1) | Test Voltage | 120V/60Hz |

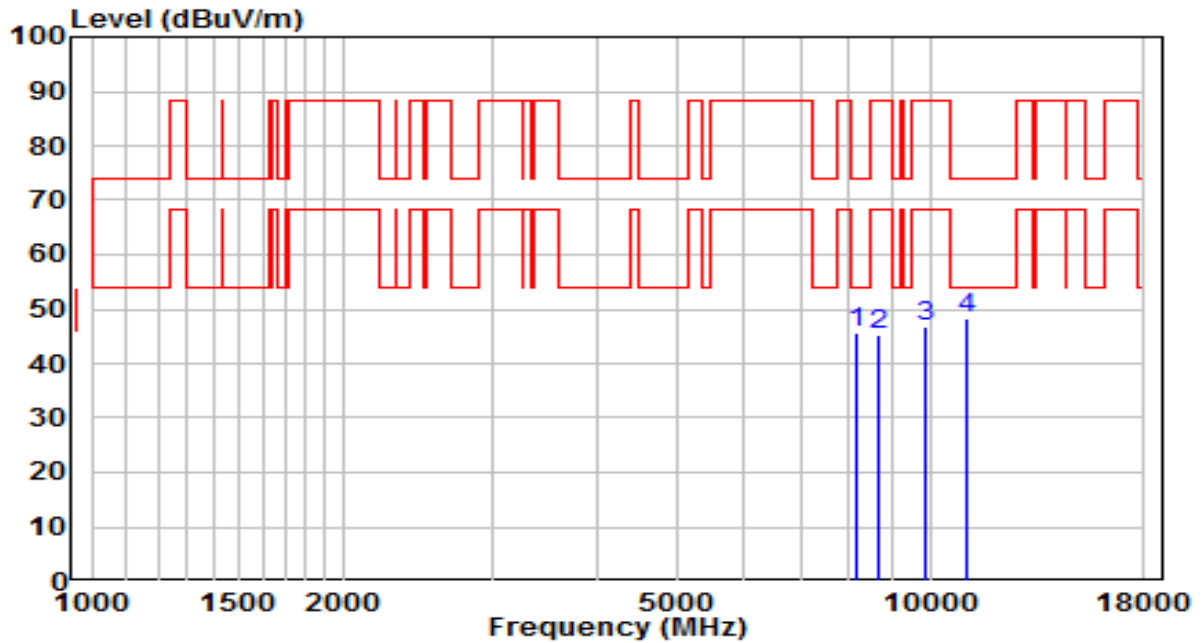


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 39.59 | 6.01 | 45.59 | -28.41 | 74.00 | Peak |
| 2 | 8658.500 | 38.47 | 6.98 | 45.45 | -42.75 | 88.20 | Peak |
| 3 | 9848.500 | 37.60 | 9.23 | 46.83 | -41.37 | 88.20 | Peak |
| 4 | * 11038.500 | 37.72 | 10.57 | 48.30 | -25.70 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6625MHz (Nss=1) | Test Voltage | 120V/60Hz |

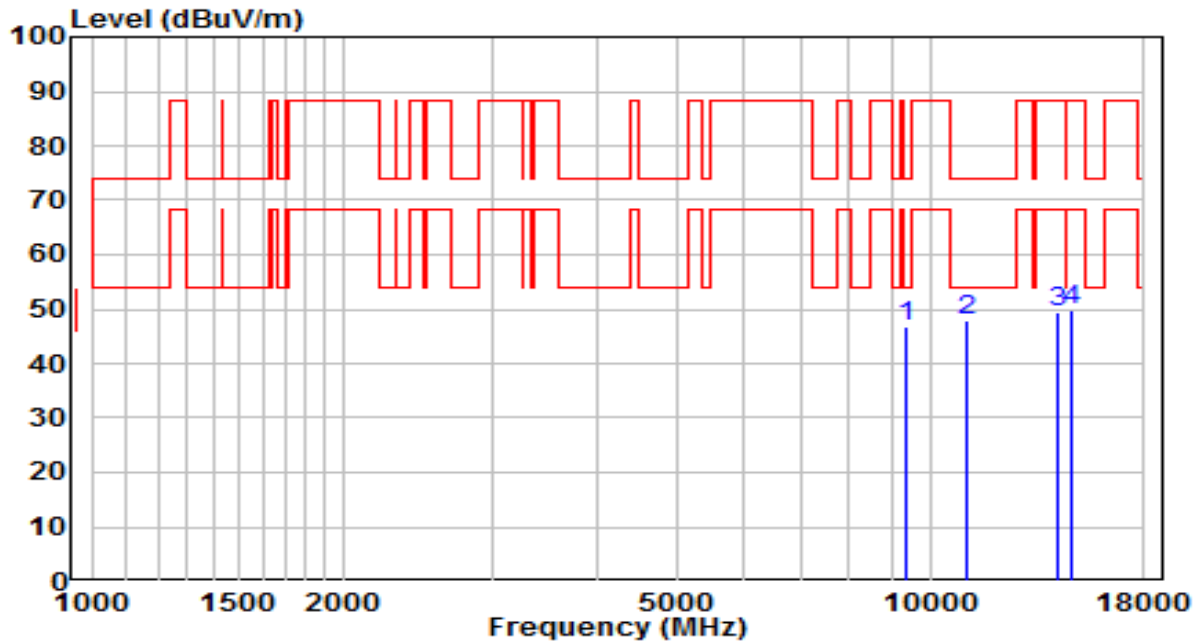


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9381.000 | 572.75 | -526.08 | 46.67 | -27.33 | 74.00 | Peak |
| 2 | * 11072.500 | 573.50 | -525.64 | 47.86 | -26.14 | 74.00 | Peak |
| 3 | 14175.000 | 575.34 | -525.78 | 49.56 | -38.64 | 88.20 | Peak |
| 4 | 14702.000 | 575.34 | -525.51 | 49.83 | -38.37 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6705MHz (Nss=1) | Test Voltage | 120V/60Hz |

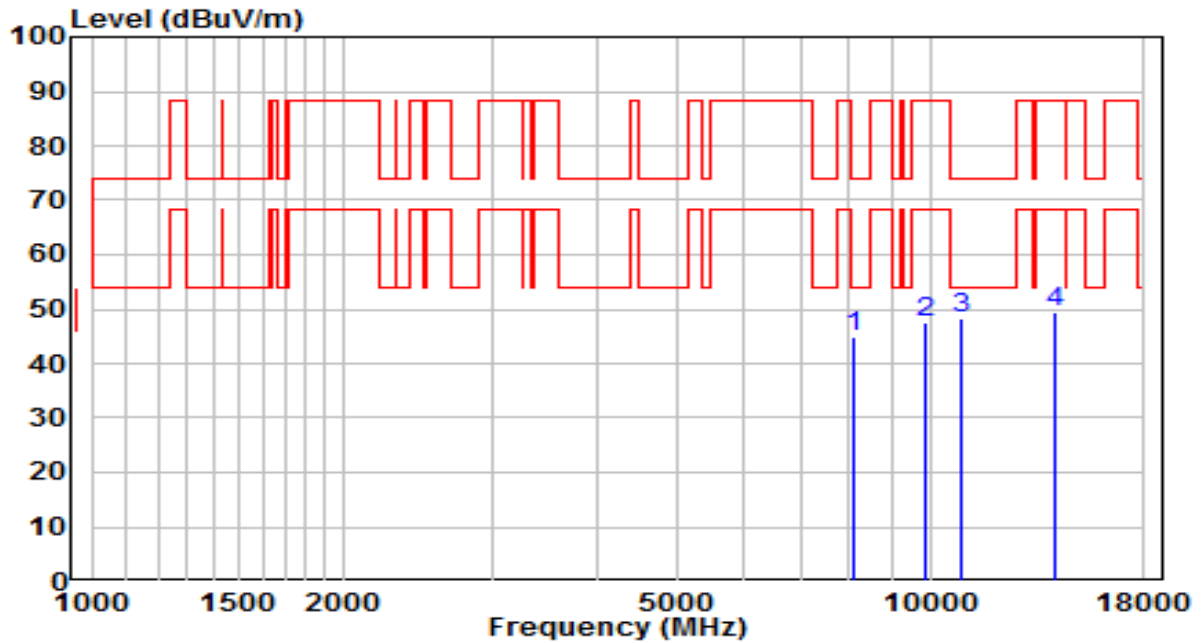


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8123.000 | 38.85 | 6.05 | 44.90 | -29.10 | 74.00 | Peak |
| 2 | 9882.500 | 38.26 | 9.40 | 47.65 | -40.55 | 88.20 | Peak |
| 3 | * 10868.500 | 38.09 | 10.31 | 48.41 | -25.59 | 74.00 | Peak |
| 4 | 14064.500 | 38.23 | 11.19 | 49.41 | -38.79 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6705MHz (Nss=1) | Test Voltage | 120V/60Hz |

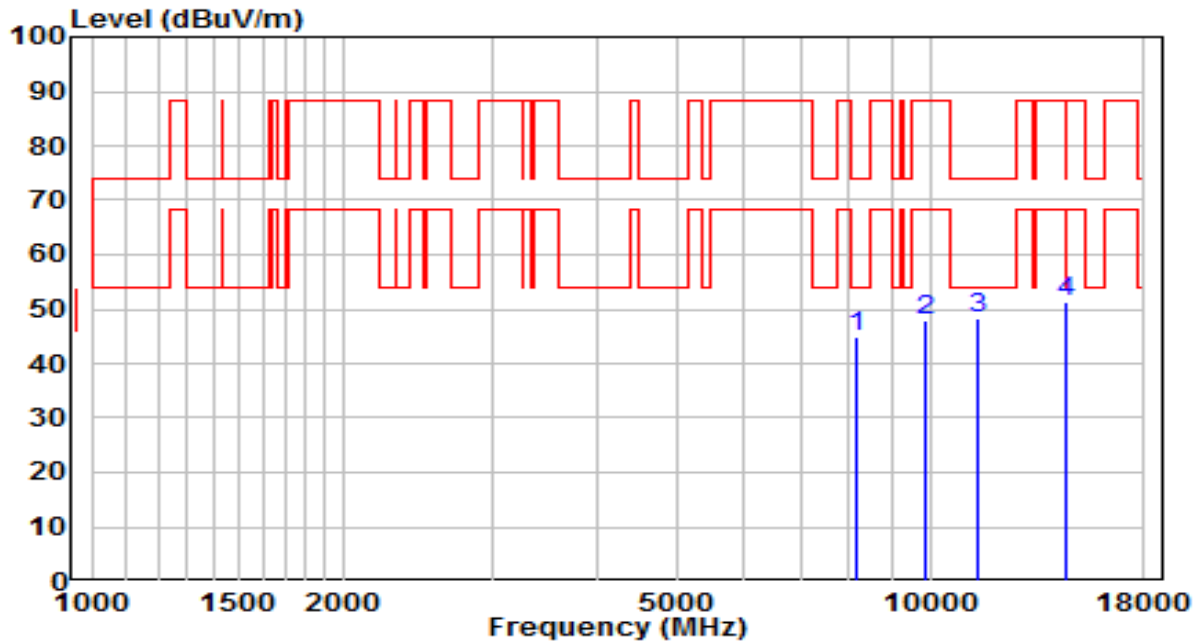


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8191.000 | 572.15 | -527.38 | 44.77 | -29.23 | 74.00 | Peak |
| 2 | 9840.000 | 573.57 | -525.83 | 47.74 | -40.46 | 88.20 | Peak |
| 3 | * 11421.000 | 574.58 | -526.10 | 48.48 | -25.52 | 74.00 | Peak |
| 4 | 14532.000 | 577.14 | -525.84 | 51.30 | -36.90 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6865MHz (Nss=1) | Test Voltage | 120V/60Hz |

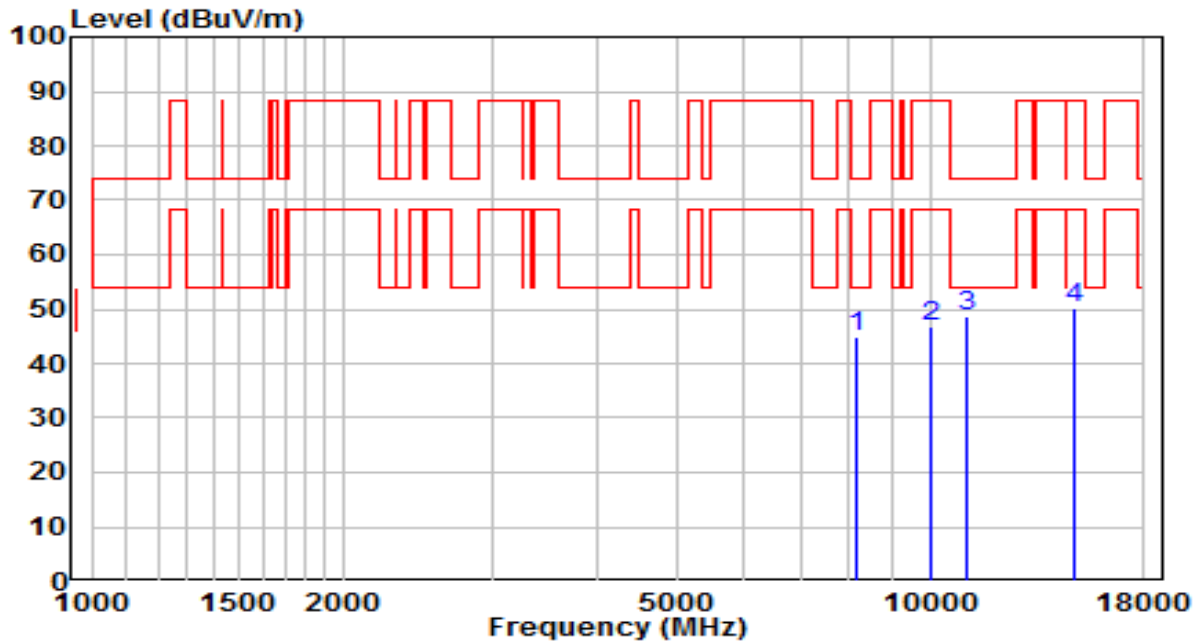


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 38.73 | 6.04 | 44.76 | -29.24 | 74.00 | Peak |
| 2 | 10001.500 | 37.58 | 9.31 | 46.89 | -41.31 | 88.20 | Peak |
| 3 | * 11047.000 | 37.97 | 10.59 | 48.57 | -25.43 | 74.00 | Peak |
| 4 | 14804.000 | 38.44 | 11.59 | 50.02 | -38.18 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6865MHz (Nss=1) | Test Voltage | 120V/60Hz |

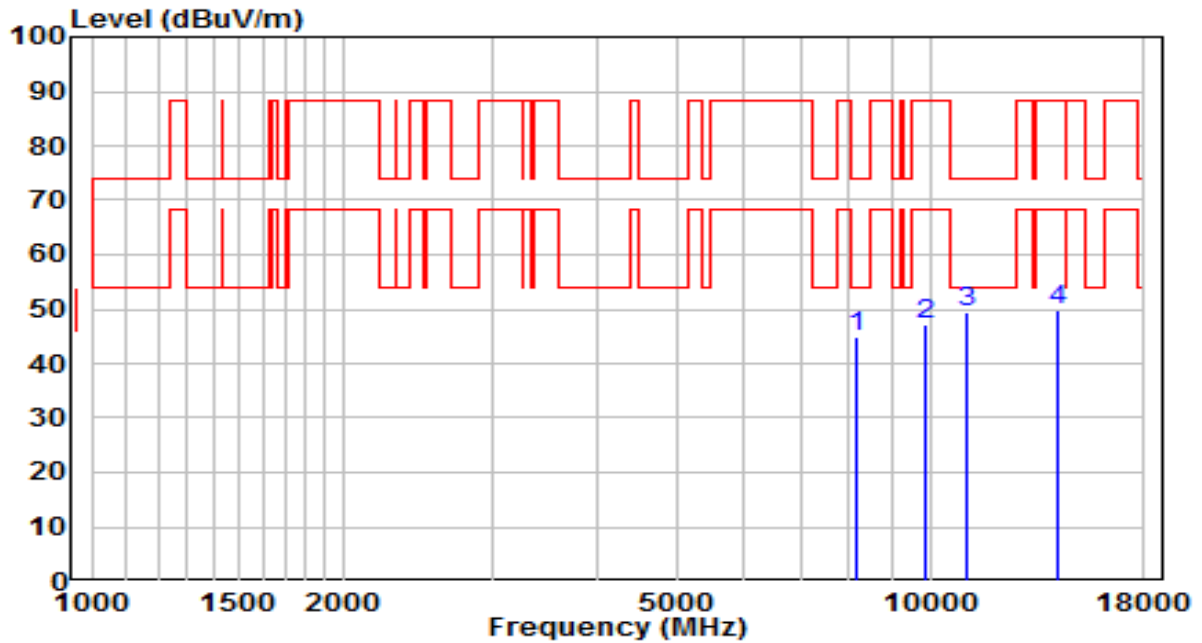


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 572.37 | -527.40 | 44.96 | -29.04 | 74.00 | Peak |
| 2 | 9891.000 | 573.00 | -525.82 | 47.18 | -41.02 | 88.20 | Peak |
| 3 | * 11055.500 | 574.88 | -525.63 | 49.25 | -24.75 | 74.00 | Peak |
| 4 | 14158.000 | 575.55 | -525.81 | 49.74 | -38.46 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6945MHz (Nss=1) | Test Voltage | 120V/60Hz |

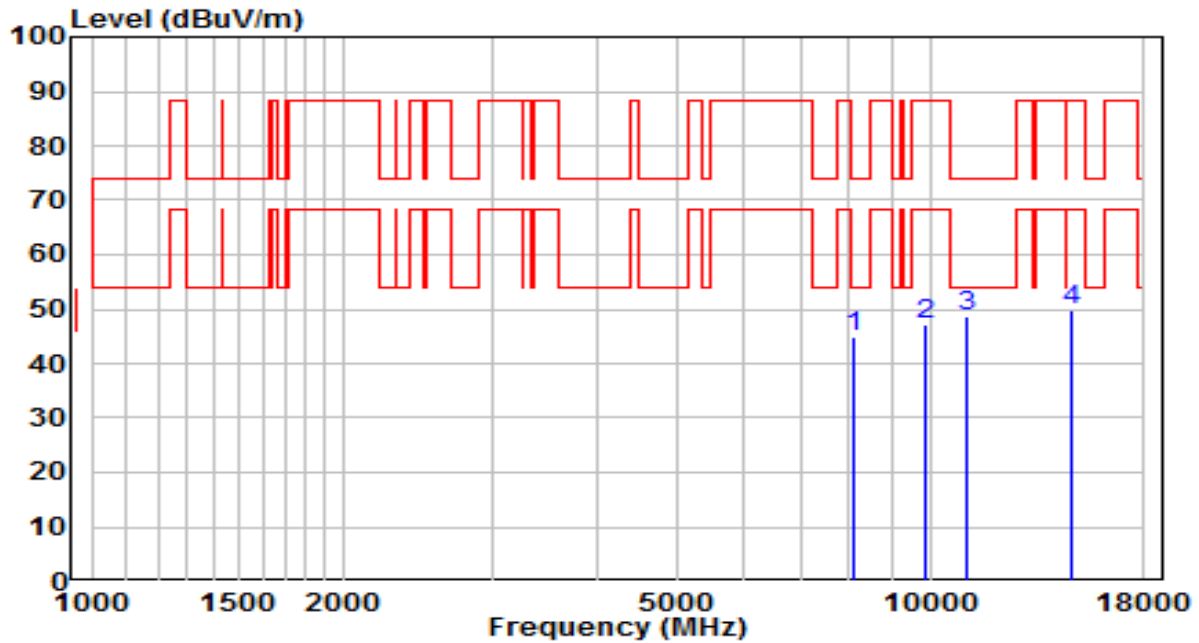


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 39.00 | 5.95 | 44.95 | -29.05 | 74.00 | Peak |
| 2 | 9891.000 | 37.74 | 9.32 | 47.06 | -41.14 | 88.20 | Peak |
| 3 | * 11064.000 | 38.21 | 10.57 | 48.78 | -25.22 | 74.00 | Peak |
| 4 | 14719.000 | 38.34 | 11.39 | 49.73 | -38.47 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6945MHz (Nss=1) | Test Voltage | 120V/60Hz |

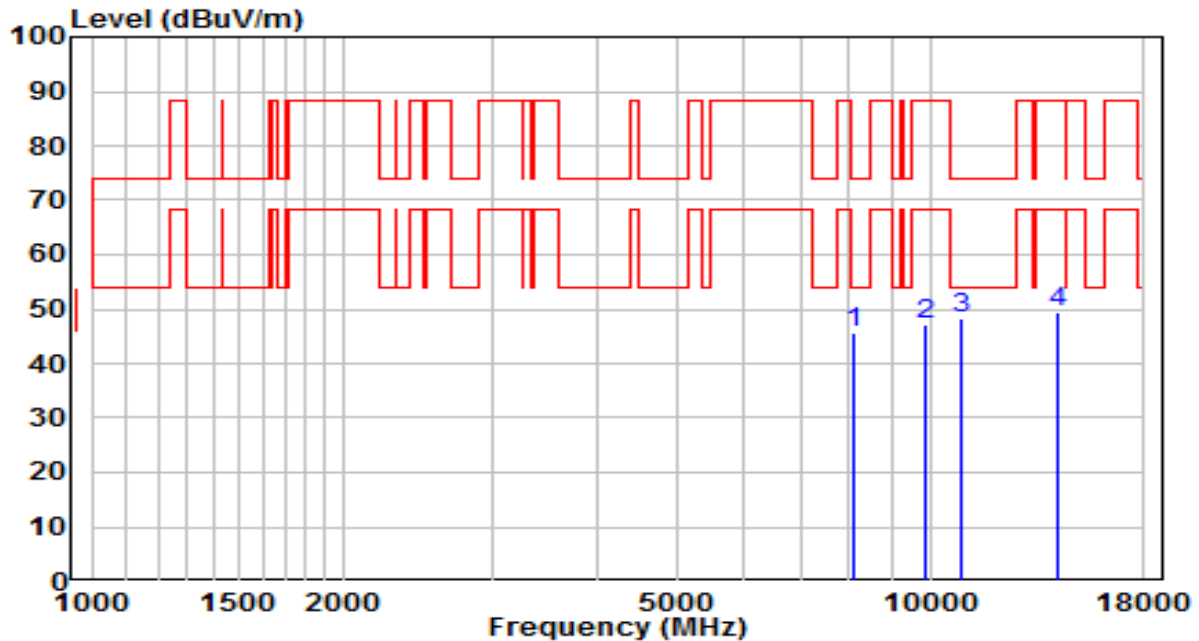


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8114.500 | 573.17 | -527.34 | 45.82 | -28.18 | 74.00 | Peak |
| 2 | 9865.500 | 573.15 | -525.87 | 47.29 | -40.91 | 88.20 | Peak |
| 3 | * 10868.500 | 574.00 | -525.63 | 48.37 | -25.63 | 74.00 | Peak |
| 4 | 14166.500 | 575.38 | -525.79 | 49.59 | -38.61 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=1) | Test Voltage | 120V/60Hz |

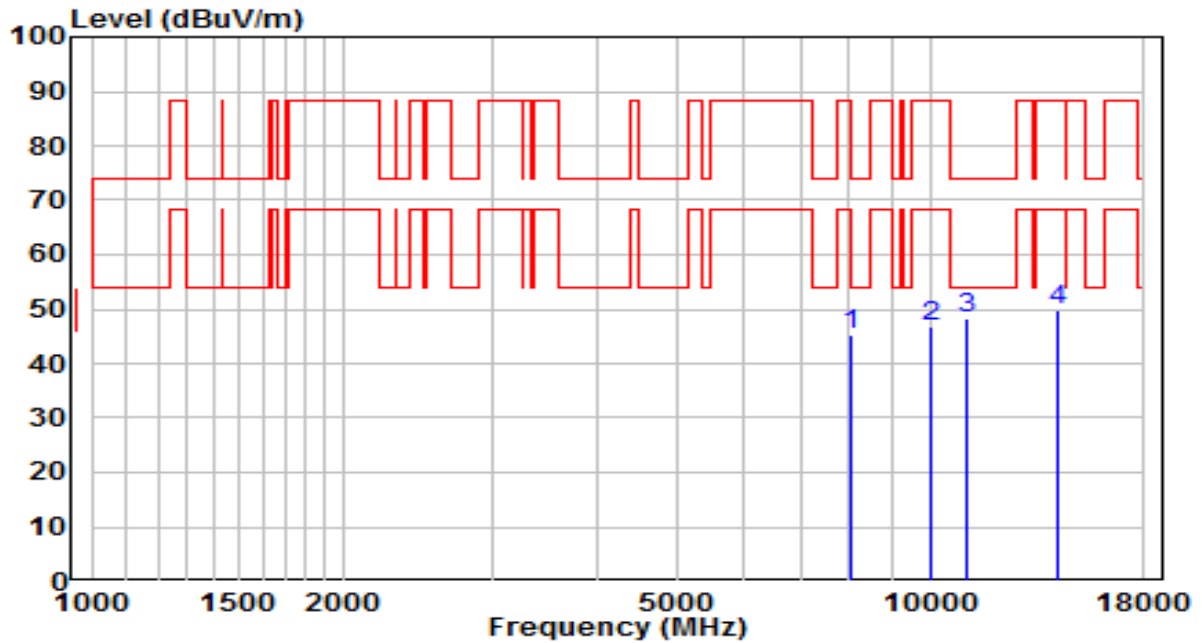


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8038.000 | 39.15 | 5.96 | 45.12 | -28.88 | 74.00 | Peak |
| 2 | 10010.000 | 37.36 | 9.39 | 46.75 | -41.45 | 88.20 | Peak |
| 3 | * 11038.500 | 37.59 | 10.57 | 48.16 | -25.84 | 74.00 | Peak |
| 4 | 14192.000 | 38.80 | 10.87 | 49.67 | -38.53 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=1) | Test Voltage | 120V/60Hz |

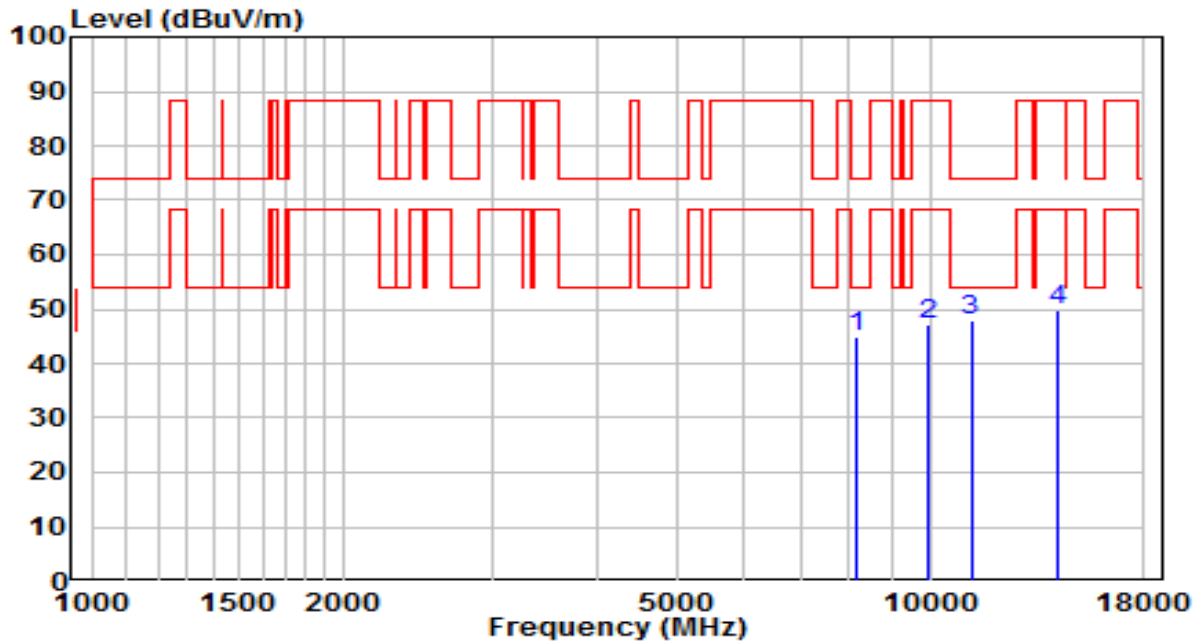


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 572.11 | -527.36 | 44.74 | -29.26 | 74.00 | Peak |
| 2 | 9976.000 | 572.88 | -525.74 | 47.14 | -41.06 | 88.20 | Peak |
| 3 | * 11183.000 | 573.71 | -525.84 | 47.86 | -26.14 | 74.00 | Peak |
| 4 | 14192.000 | 575.66 | -525.96 | 49.70 | -38.50 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=1) | Test Voltage | 120V/60Hz |

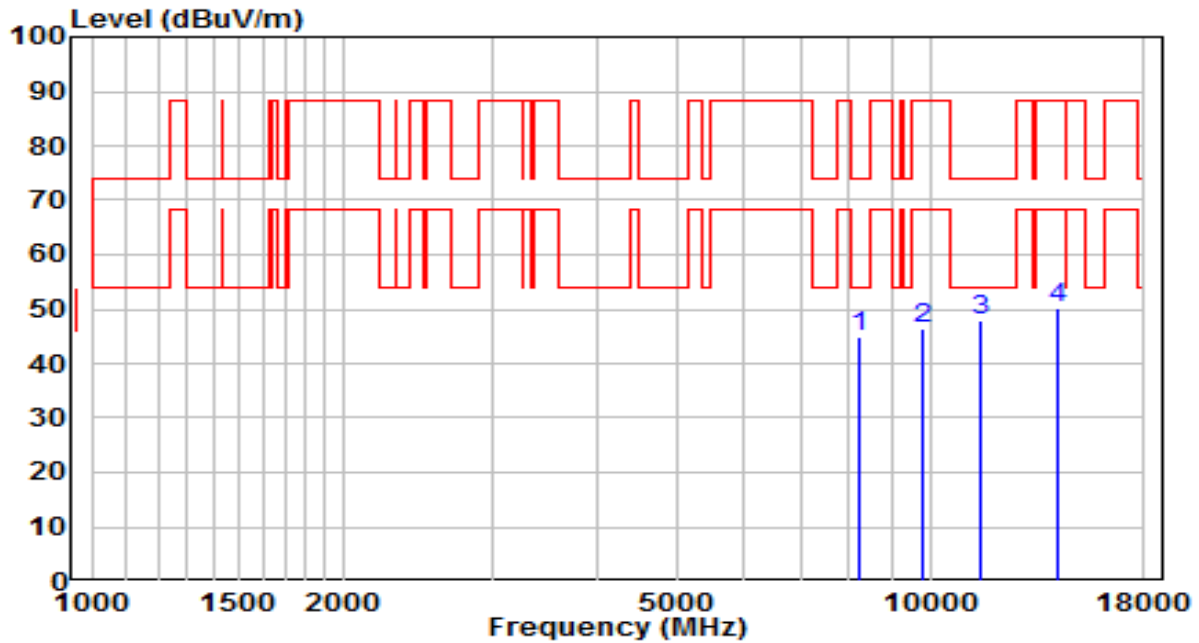


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8259.000 | 38.71 | 6.18 | 44.89 | -29.11 | 74.00 | Peak |
| 2 | 9831.500 | 36.89 | 9.37 | 46.25 | -41.95 | 88.20 | Peak |
| 3 | * 11523.000 | 37.73 | 10.32 | 48.05 | -25.95 | 74.00 | Peak |
| 4 | 14192.000 | 39.20 | 10.87 | 50.07 | -38.13 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=1) | Test Voltage | 120V/60Hz |

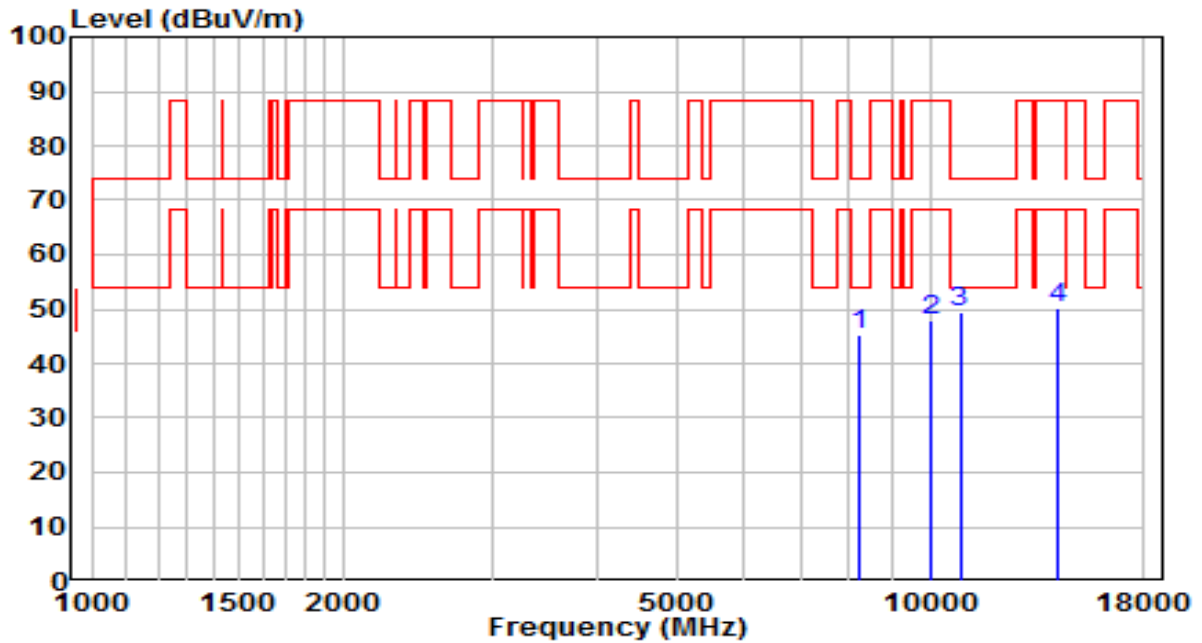


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8242.000 | 572.78 | -527.49 | 45.30 | -28.70 | 74.00 | Peak |
| 2 | 10001.500 | 573.70 | -525.84 | 47.86 | -40.34 | 88.20 | Peak |
| 3 | * 10851.500 | 575.11 | -525.65 | 49.46 | -24.54 | 74.00 | Peak |
| 4 | 14166.500 | 576.13 | -525.79 | 50.35 | -37.85 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6345MHz (Nss=1) | Test Voltage | 120V/60Hz |

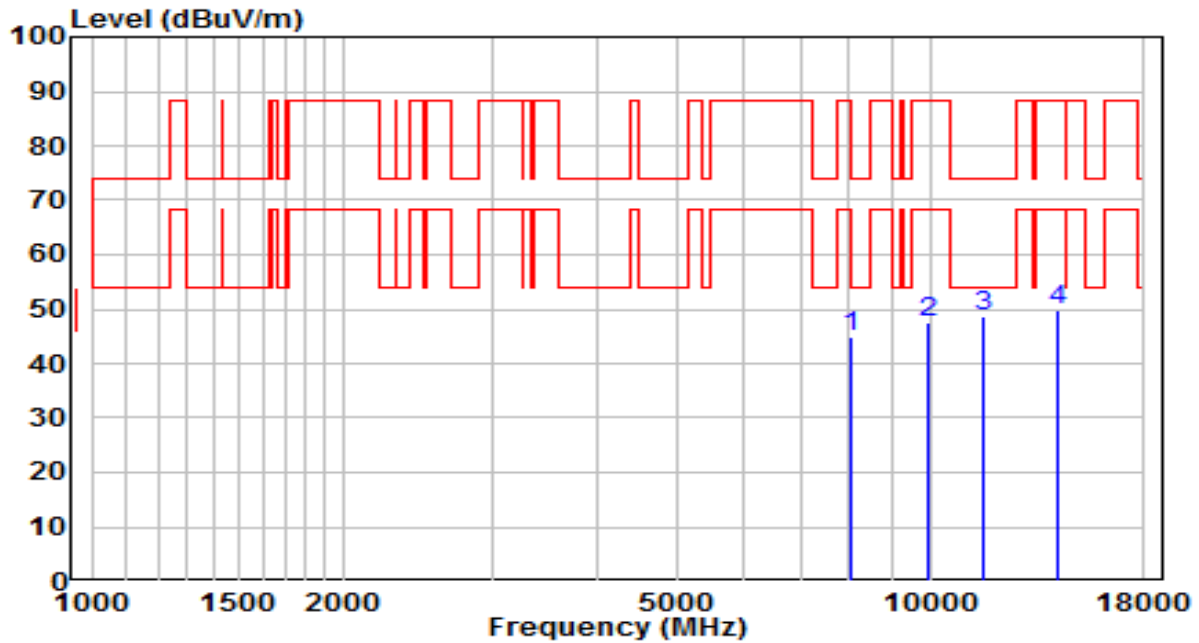


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8046.500 | 38.90 | 5.99 | 44.88 | -29.12 | 74.00 | Peak |
| 2 | 9959.000 | 38.25 | 9.19 | 47.44 | -40.76 | 88.20 | Peak |
| 3 | * 11608.000 | 38.34 | 10.27 | 48.61 | -25.39 | 74.00 | Peak |
| 4 | 14183.500 | 38.81 | 10.97 | 49.78 | -38.42 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6345MHz (Nss=1) | Test Voltage | 120V/60Hz |

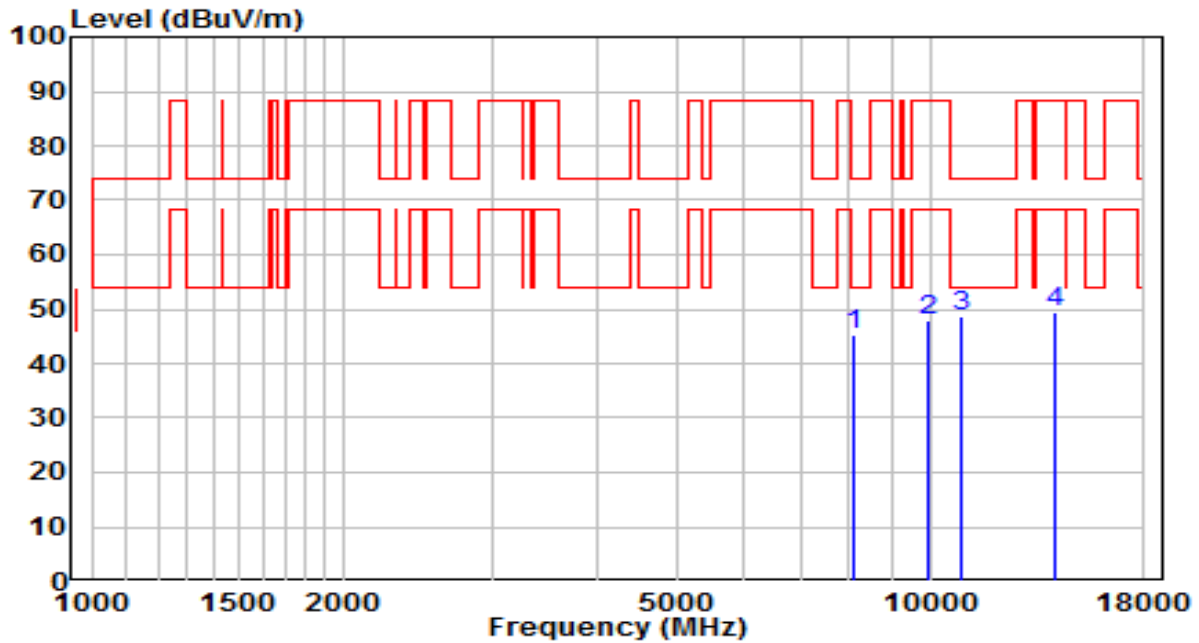


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8106.000 | 572.65 | -527.42 | 45.24 | -28.76 | 74.00 | Peak |
| 2 | 9967.500 | 573.88 | -525.80 | 48.07 | -40.13 | 88.20 | Peak |
| 3 | * 10860.000 | 574.27 | -525.65 | 48.61 | -25.39 | 74.00 | Peak |
| 4 | 14141.000 | 575.27 | -525.93 | 49.33 | -38.87 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6505MHz (Nss=1) | Test Voltage | 120V/60Hz |

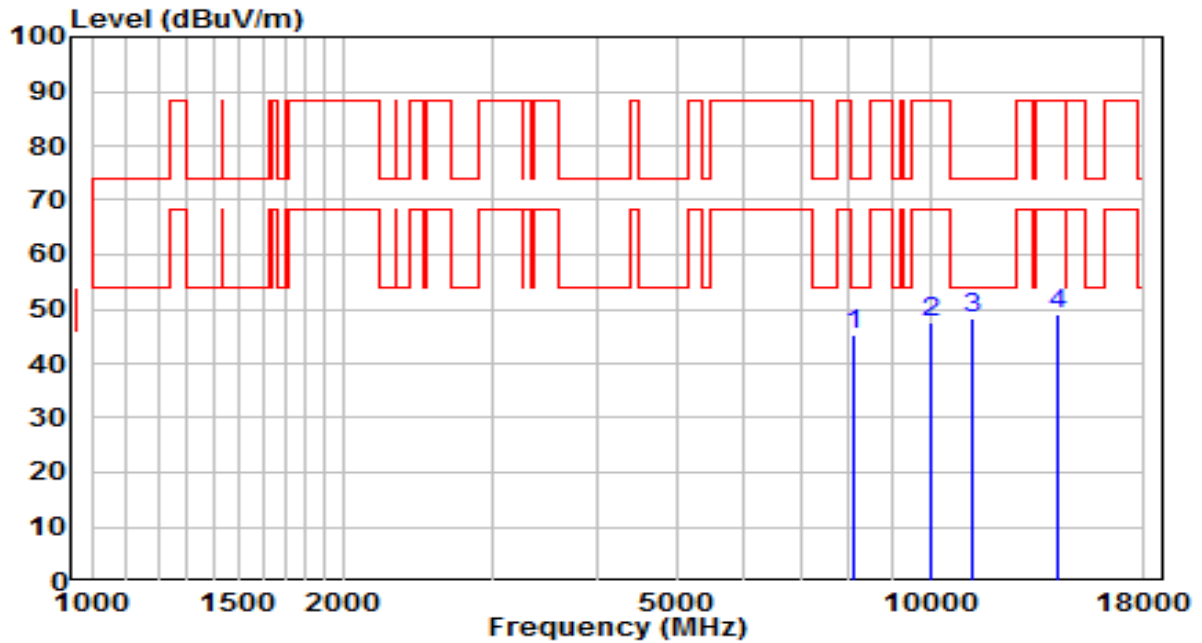


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8080.500 | 39.28 | 5.89 | 45.17 | -28.83 | 74.00 | Peak |
| 2 | 9993.000 | 38.02 | 9.44 | 47.46 | -40.74 | 88.20 | Peak |
| 3 | * 11259.500 | 38.07 | 10.30 | 48.37 | -25.63 | 74.00 | Peak |
| 4 | 14149.500 | 38.07 | 10.97 | 49.04 | -39.16 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6505MHz (Nss=1) | Test Voltage | 120V/60Hz |

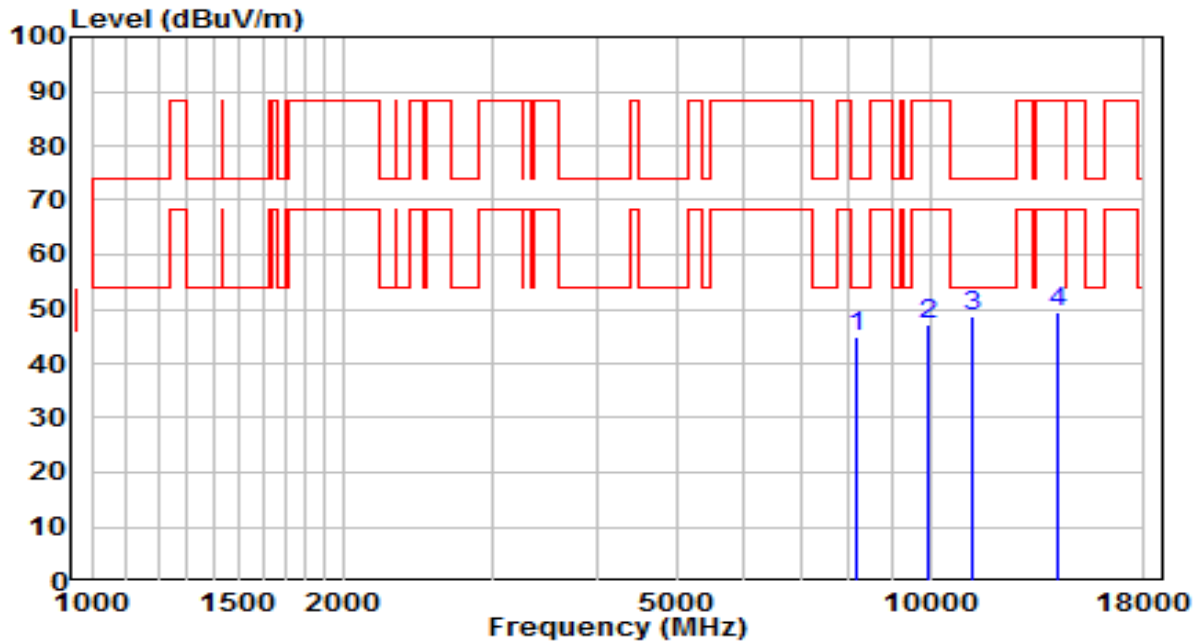


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8157.000 | 572.18 | -527.36 | 44.82 | -29.18 | 74.00 | Peak |
| 2 | 9925.000 | 572.68 | -525.63 | 47.05 | -41.15 | 88.20 | Peak |
| 3 | * 11251.000 | 574.79 | -526.02 | 48.77 | -25.23 | 74.00 | Peak |
| 4 | 14192.000 | 575.50 | -525.96 | 49.54 | -38.66 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6665MHz (Nss=1) | Test Voltage | 120V/60Hz |

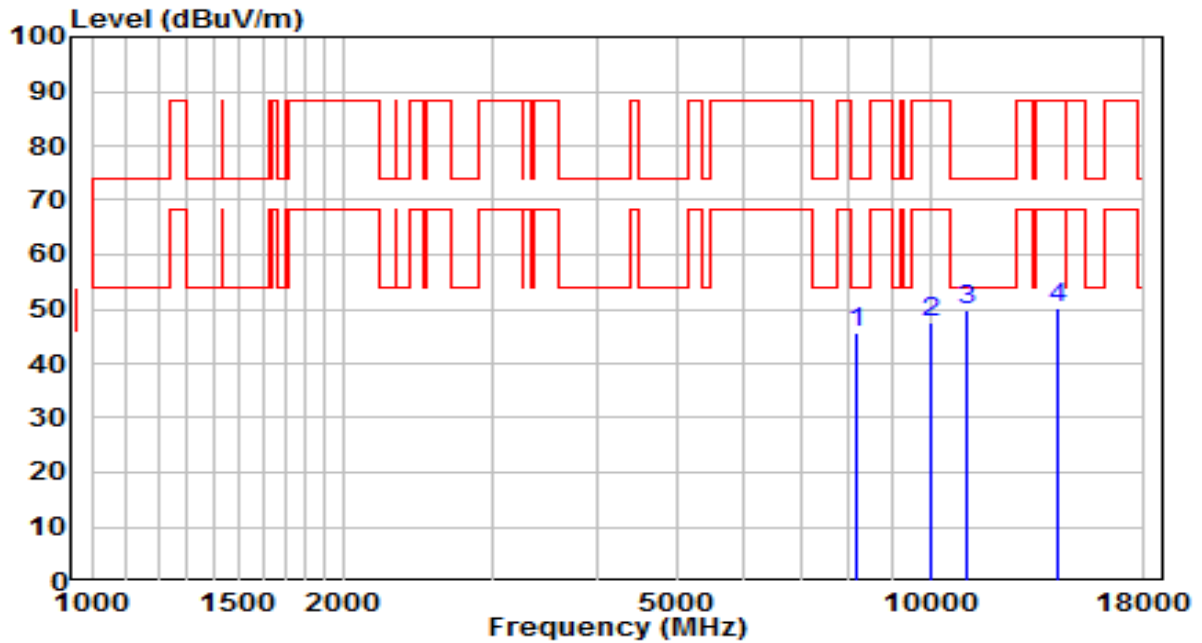


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8182.500 | 39.65 | 6.01 | 45.66 | -28.34 | 74.00 | Peak |
| 2 | 10001.500 | 38.42 | 9.31 | 47.73 | -40.47 | 88.20 | Peak |
| 3 | * 11081.000 | 39.17 | 10.62 | 49.80 | -24.20 | 74.00 | Peak |
| 4 | 14166.500 | 39.09 | 11.05 | 50.14 | -38.06 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6665MHz (Nss=1) | Test Voltage | 120V/60Hz |

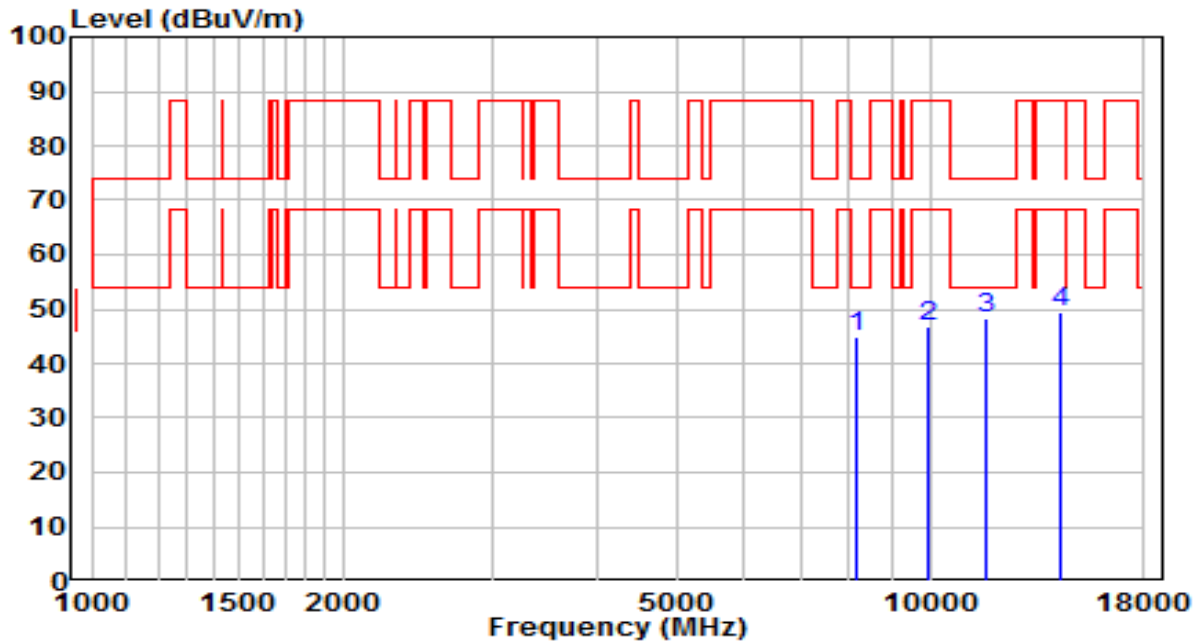


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8148.500 | 572.20 | -527.34 | 44.86 | -29.14 | 74.00 | Peak |
| 2 | 9967.500 | 572.60 | -525.80 | 46.80 | -41.40 | 88.20 | Peak |
| 3 | * 11642.000 | 574.53 | -526.11 | 48.42 | -25.58 | 74.00 | Peak |
| 4 | 14260.000 | 575.31 | -525.70 | 49.61 | -38.59 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6825MHz (Nss=1) | Test Voltage | 120V/60Hz |

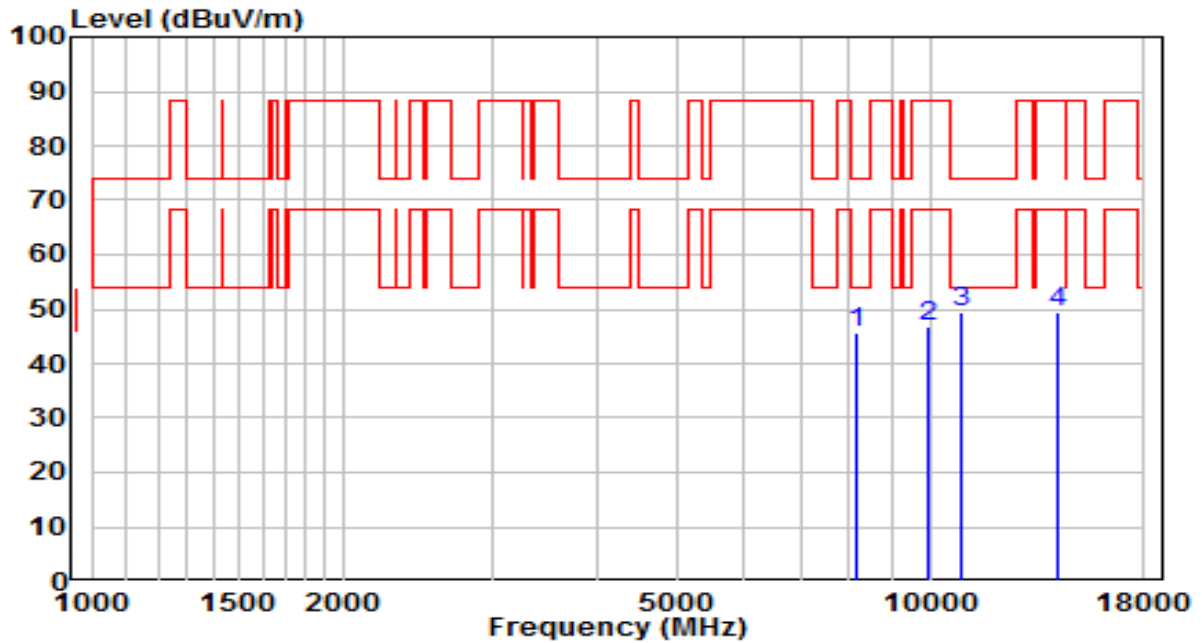


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8148.500 | 39.70 | 6.05 | 45.74 | -28.26 | 74.00 | Peak |
| 2 | 9976.000 | 37.28 | 9.41 | 46.69 | -41.51 | 88.20 | Peak |
| 3 | * 10928.000 | 38.88 | 10.41 | 49.29 | -24.71 | 74.00 | Peak |
| 4 | 14175.000 | 38.56 | 11.06 | 49.62 | -38.58 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6825MHz (Nss=1) | Test Voltage | 120V/60Hz |

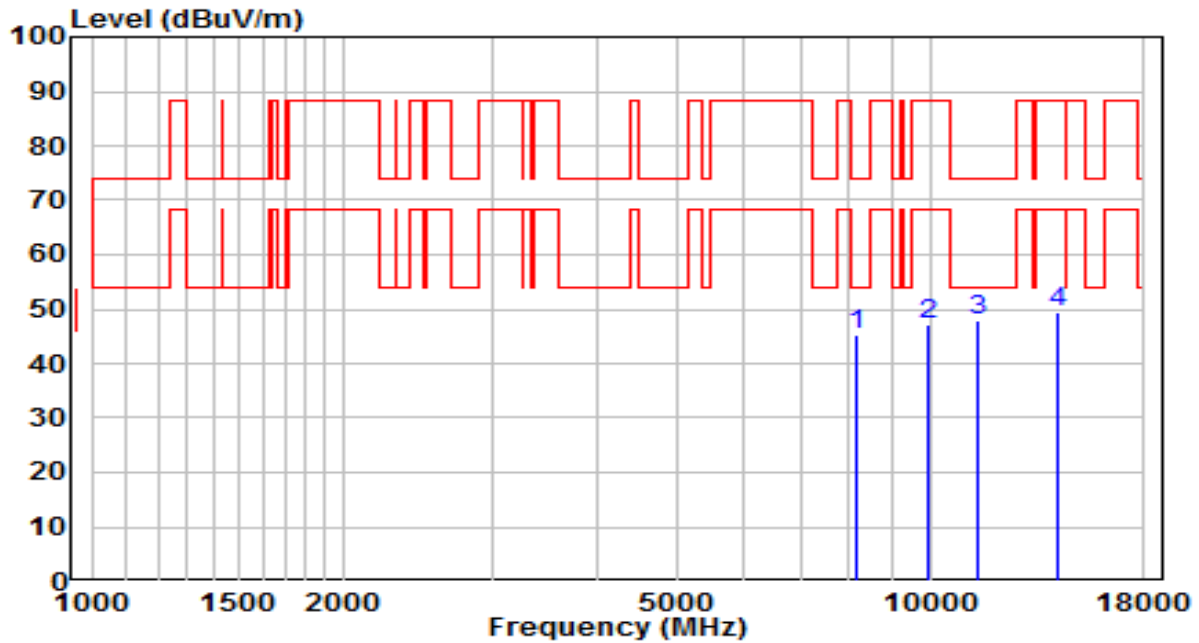


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8148.500 | 572.77 | -527.34 | 45.43 | -28.57 | 74.00 | Peak |
| 2 | 9916.500 | 572.70 | -525.64 | 47.06 | -41.14 | 88.20 | Peak |
| 3 | * 11421.000 | 574.11 | -526.10 | 48.01 | -25.99 | 74.00 | Peak |
| 4 | 14192.000 | 575.47 | -525.96 | 49.51 | -38.69 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamp(ifier)(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=1) | Test Voltage | 120V/60Hz |

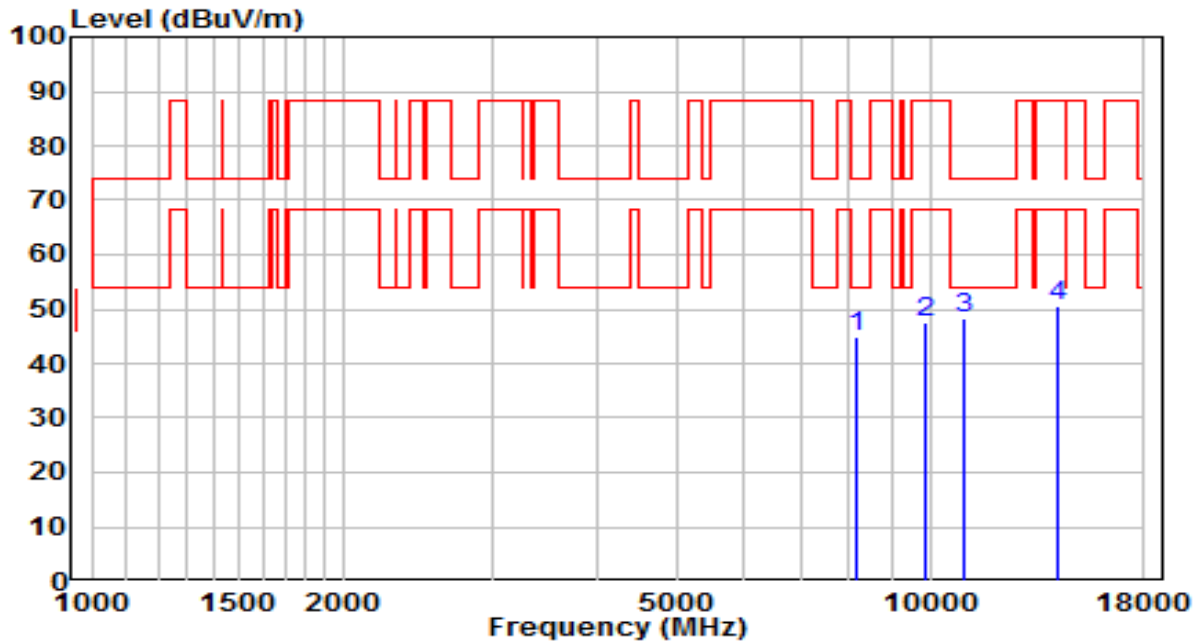


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 38.99 | 6.01 | 44.99 | -29.01 | 74.00 | Peak |
| 2 | 9857.000 | 38.23 | 9.18 | 47.41 | -40.79 | 88.20 | Peak |
| 3 | * 10945.000 | 37.97 | 10.42 | 48.39 | -25.61 | 74.00 | Peak |
| 4 | 14166.500 | 39.69 | 11.05 | 50.74 | -37.46 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-17 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=1) | Test Voltage | 120V/60Hz |

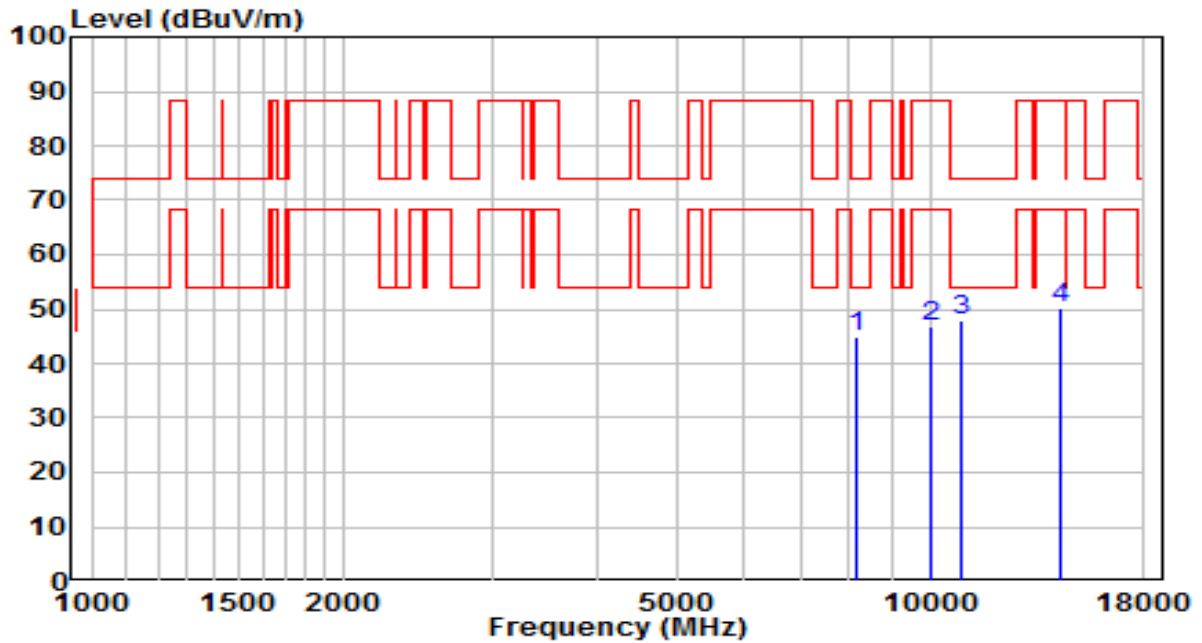


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 8174.000 | 572.42 | -527.40 | 45.02 | -28.98 | 74.00 | Peak |
| 2 | 10001.500 | 572.50 | -525.84 | 46.66 | -41.54 | 88.20 | Peak |
| 3 | * 10860.000 | 573.66 | -525.65 | 48.01 | -25.99 | 74.00 | Peak |
| 4 | 14268.500 | 575.88 | -525.73 | 50.14 | -38.06 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=2) | Test Voltage | 120V 60Hz |

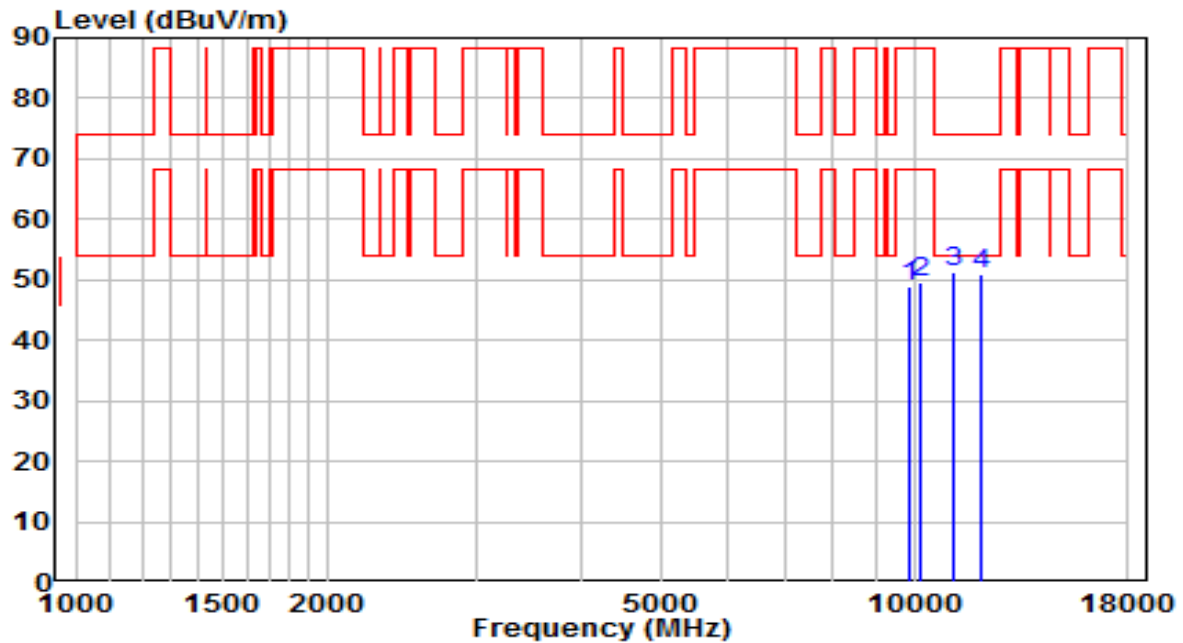


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9882.500 | 39.39 | 9.40 | 48.79 | -39.41 | 88.20 | Peak |
| 2 | 10197.000 | 40.33 | 9.41 | 49.74 | -38.46 | 88.20 | Peak |
| 3 | * 11166.000 | 40.78 | 10.43 | 51.21 | -22.79 | 74.00 | Peak |
| 4 | 12050.000 | 40.78 | 10.00 | 50.78 | -23.22 | 74.00 | Peak |

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=2) | Test Voltage | 120V 60Hz |

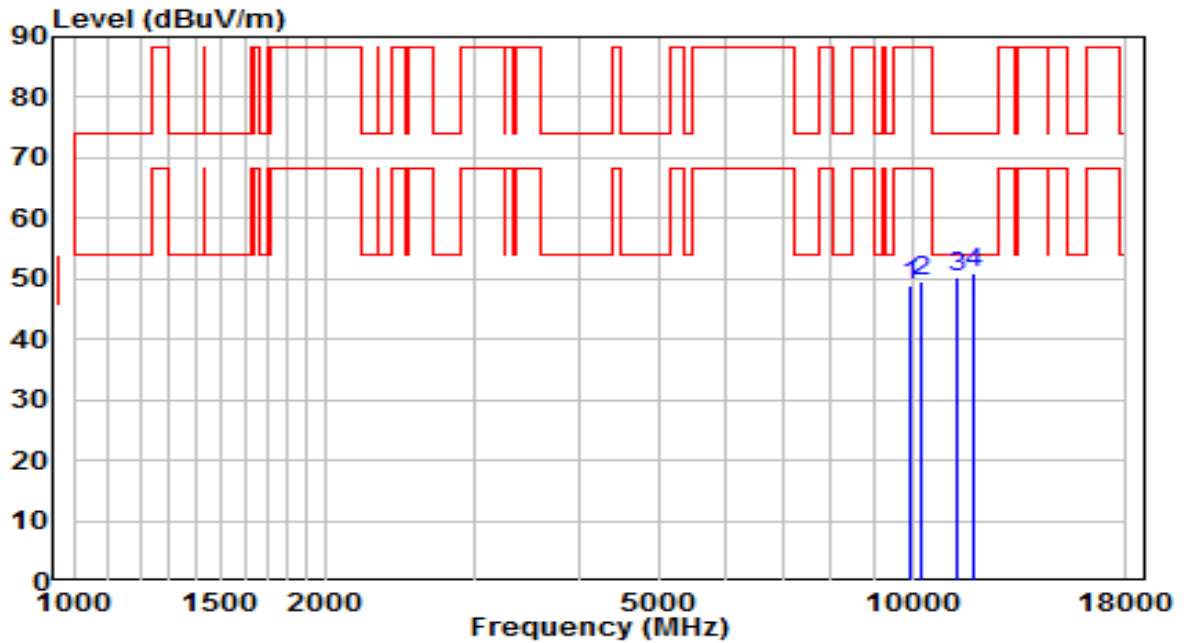


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9925.000 | 574.62 | -525.63 | 48.99 | -39.21 | 88.20 | Peak |
| 2 | 10273.500 | 575.19 | -525.64 | 49.55 | -38.65 | 88.20 | Peak |
| 3 | 11353.000 | 576.25 | -526.03 | 50.21 | -23.79 | 74.00 | Peak |
| 4 | * 11820.500 | 577.22 | -526.44 | 50.78 | -23.22 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6255MHz (Nss=2) | Test Voltage | 120V 60Hz |

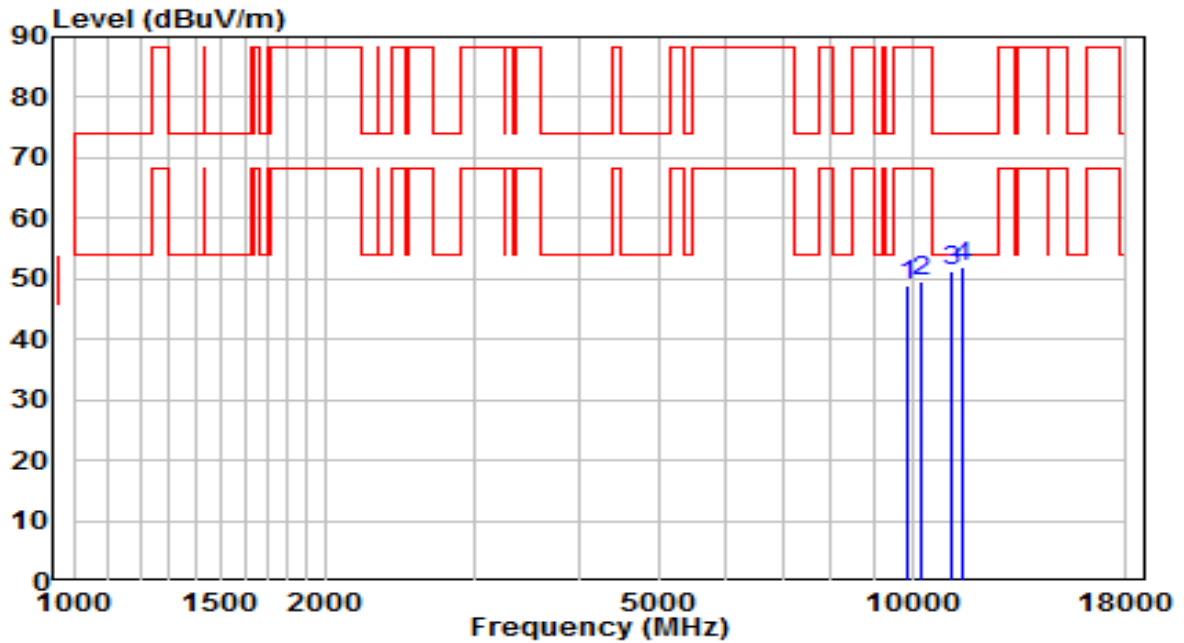


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9865.500 | 39.54 | 9.26 | 48.80 | -39.40 | 88.20 | Peak |
| 2 | 10273.500 | 40.06 | 9.65 | 49.71 | -38.49 | 88.20 | Peak |
| 3 | 11166.000 | 40.96 | 10.43 | 51.39 | -22.61 | 74.00 | Peak |
| 4 | * 11506.000 | 41.55 | 10.38 | 51.93 | -22.07 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6255MHz (Nss=2) | Test Voltage | 120V 60Hz |

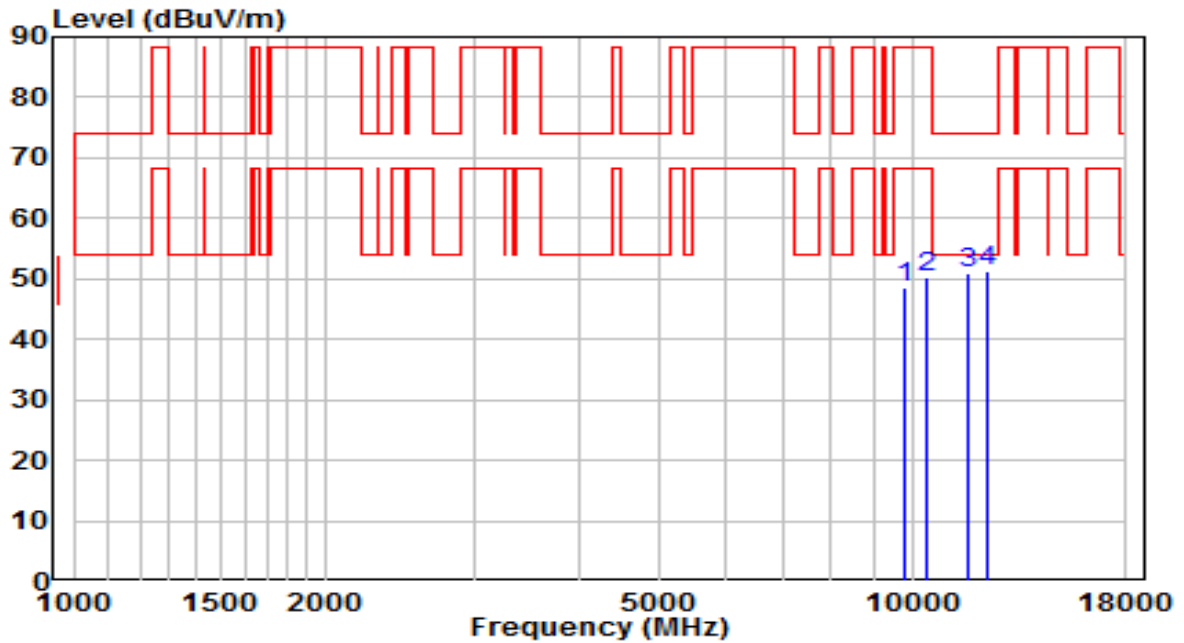


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9797.500 | 574.58 | -525.88 | 48.71 | -39.49 | 88.20 | Peak |
| 2 | 10426.500 | 575.68 | -525.52 | 50.15 | -38.05 | 88.20 | Peak |
| 3 | 11667.500 | 577.29 | -526.32 | 50.97 | -23.03 | 74.00 | Peak |
| 4 | * 12279.500 | 577.64 | -526.20 | 51.44 | -22.56 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6415MHz (Nss=2) | Test Voltage | 120V 60Hz |

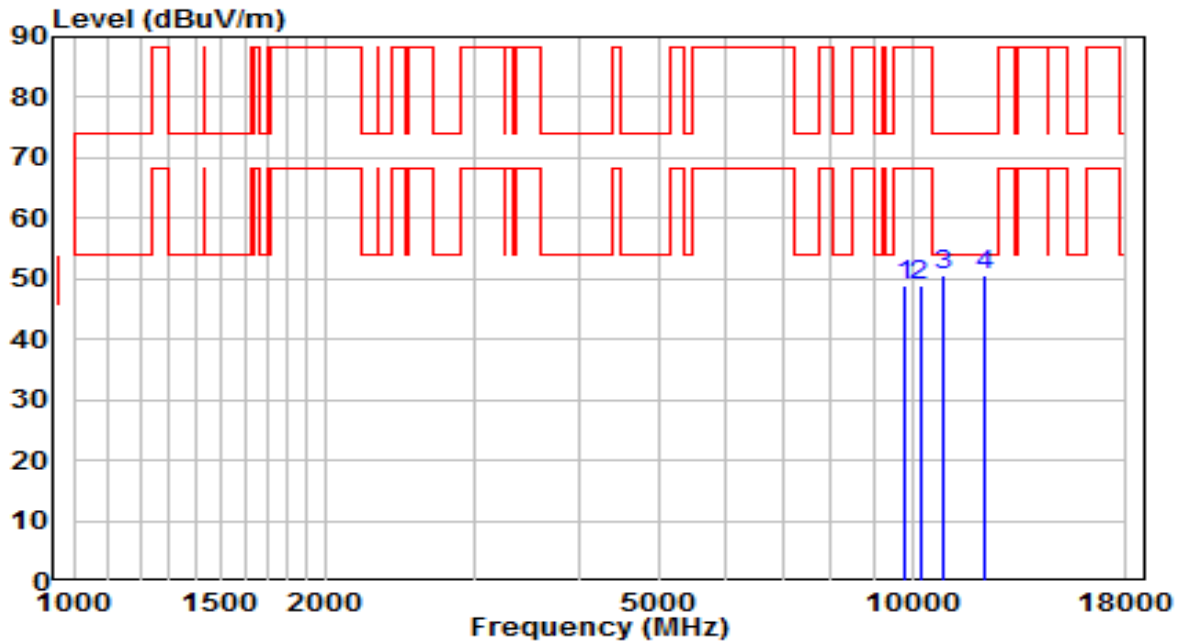


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9789.000 | 39.53 | 9.25 | 48.77 | -39.43 | 88.20 | Peak |
| 2 | 10214.000 | 39.53 | 9.47 | 48.99 | -39.21 | 88.20 | Peak |
| 3 | * 10877.000 | 40.25 | 10.34 | 50.59 | -23.41 | 74.00 | Peak |
| 4 | 12228.500 | 40.39 | 10.10 | 50.50 | -23.50 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6415MHz (Nss=2) | Test Voltage | 120V 60Hz |

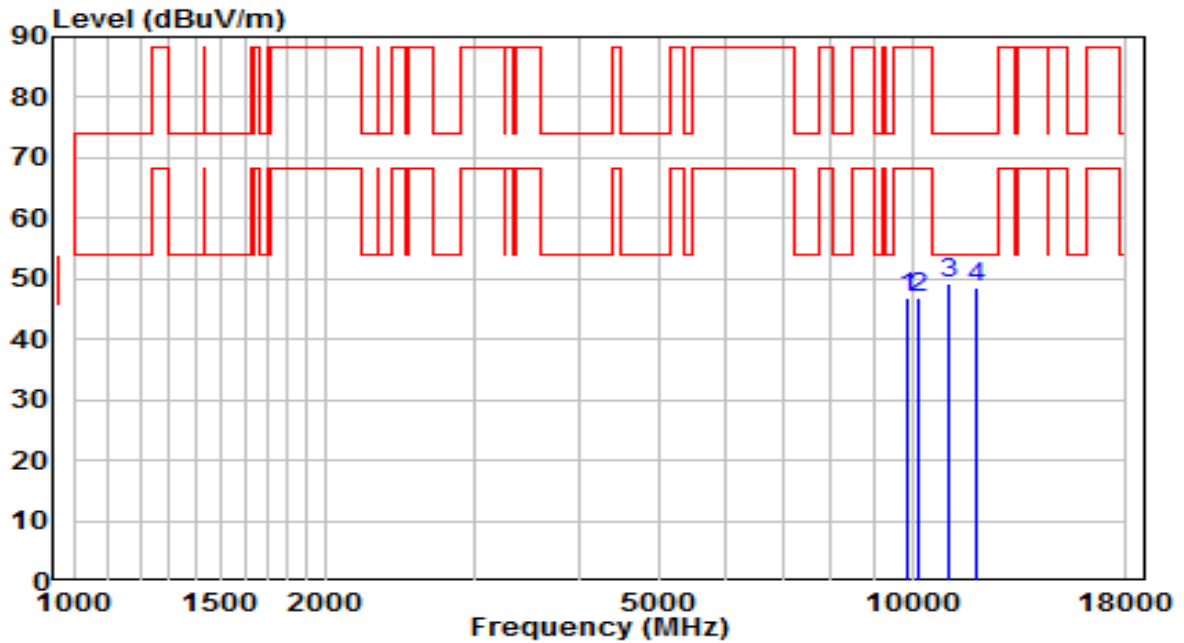


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9882.500 | 572.63 | -525.73 | 46.89 | -41.31 | 88.20 | Peak |
| 2 | 10188.500 | 572.57 | -525.59 | 46.98 | -41.22 | 88.20 | Peak |
| 3 | * 11089.500 | 575.00 | -525.71 | 49.29 | -24.71 | 74.00 | Peak |
| 4 | 11931.000 | 574.93 | -526.38 | 48.55 | -25.45 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6435MHz (Nss=2) | Test Voltage | 120V 60Hz |

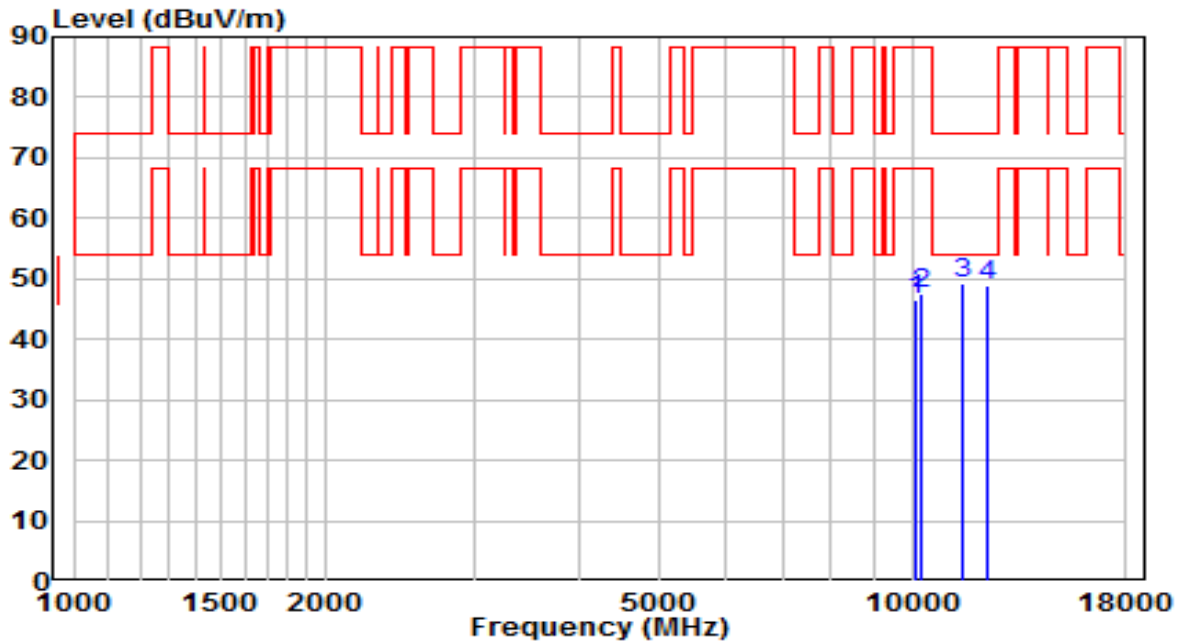


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10078.000 | 36.89 | 9.72 | 46.61 | -41.59 | 88.20 | Peak |
| 2 | 10265.000 | 37.92 | 9.60 | 47.51 | -40.69 | 88.20 | Peak |
| 3 | * 11523.000 | 38.87 | 10.32 | 49.19 | -24.81 | 74.00 | Peak |
| 4 | 12254.000 | 38.84 | 10.09 | 48.93 | -25.07 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6435MHz (Nss=2) | Test Voltage | 120V 60Hz |

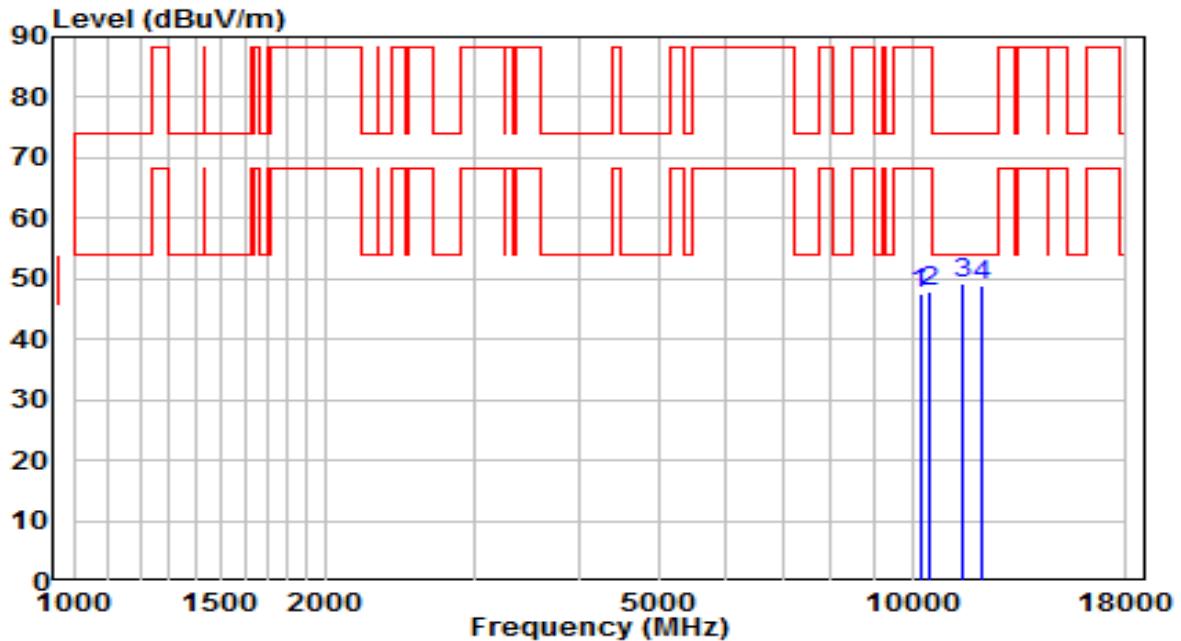


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10214.000 | 573.20 | -525.78 | 47.42 | -40.78 | 88.20 | Peak |
| 2 | 10486.000 | 573.21 | -525.45 | 47.76 | -40.44 | 88.20 | Peak |
| 3 | * 11514.500 | 575.32 | -526.22 | 49.10 | -24.90 | 74.00 | Peak |
| 4 | 12135.000 | 575.22 | -526.27 | 48.94 | -25.06 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6475MHz (Nss=2) | Test Voltage | 120V 60Hz |

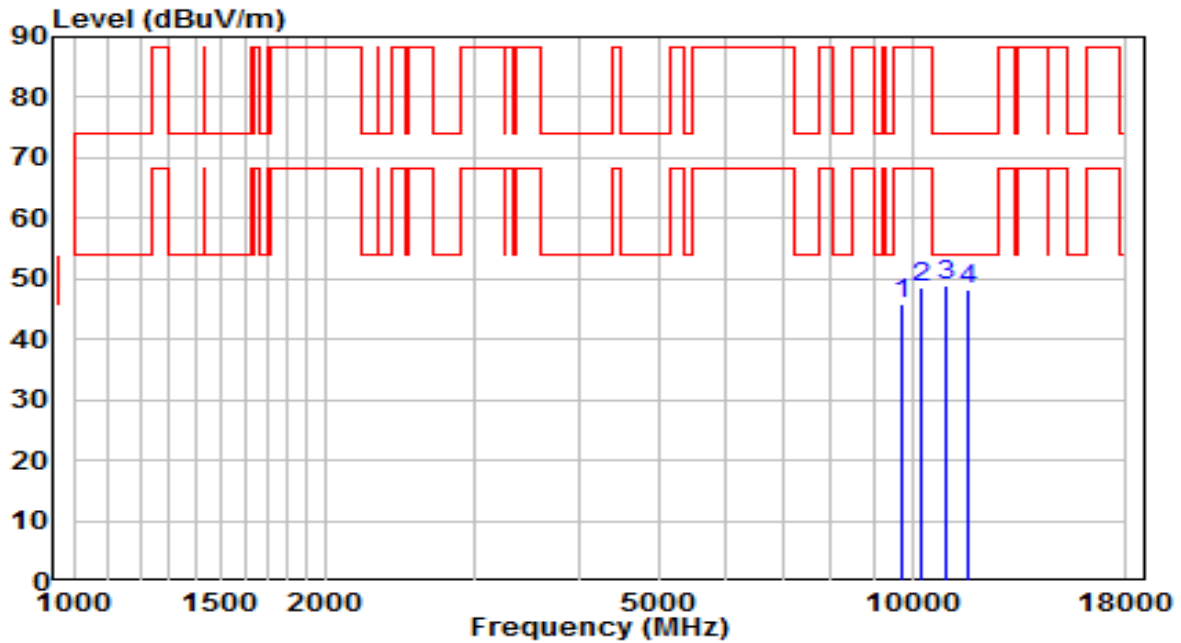


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9695.500 | 37.00 | 9.00 | 46.00 | -42.20 | 88.20 | Peak |
| 2 | 10265.000 | 38.95 | 9.60 | 48.55 | -39.65 | 88.20 | Peak |
| 3 | * 10945.000 | 38.52 | 10.42 | 48.94 | -25.06 | 74.00 | Peak |
| 4 | 11642.000 | 37.97 | 10.36 | 48.32 | -25.68 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6435MHz (Nss=2) | Test Voltage | 120V 60Hz |

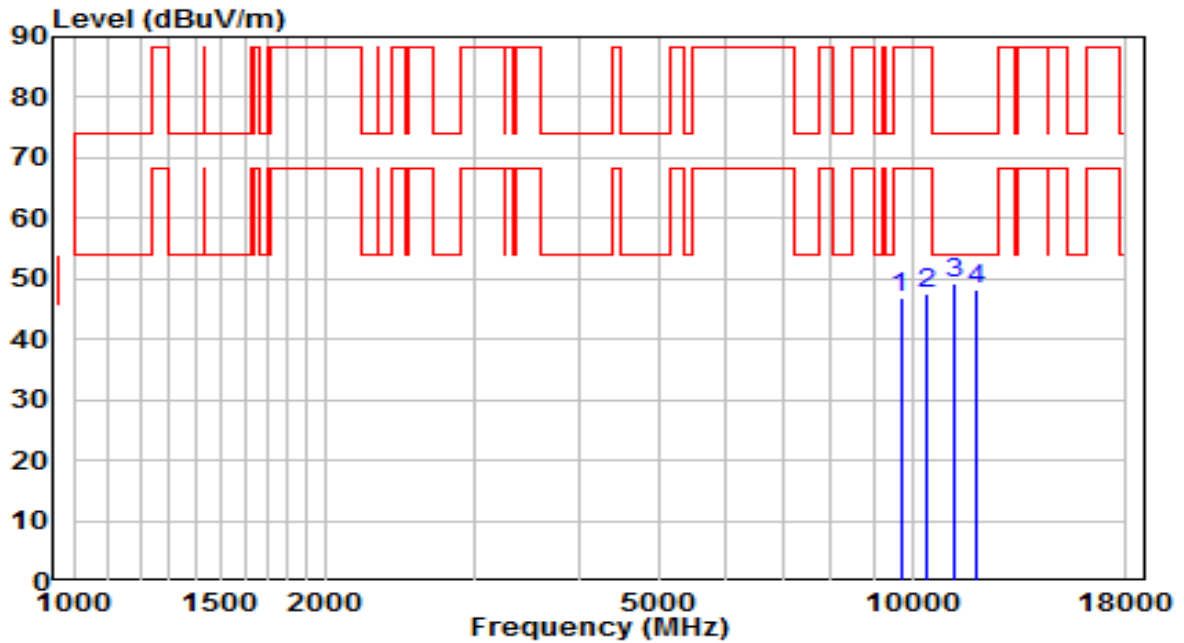


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9687.000 | 572.75 | -525.94 | 46.82 | -41.38 | 88.20 | Peak |
| 2 | 10443.500 | 573.15 | -525.66 | 47.49 | -40.71 | 88.20 | Peak |
| 3 | * 11234.000 | 575.35 | -525.97 | 49.38 | -24.62 | 74.00 | Peak |
| 4 | 11914.000 | 574.58 | -526.35 | 48.23 | -25.77 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6515MHz (Nss=2) | Test Voltage | 120V 60Hz |

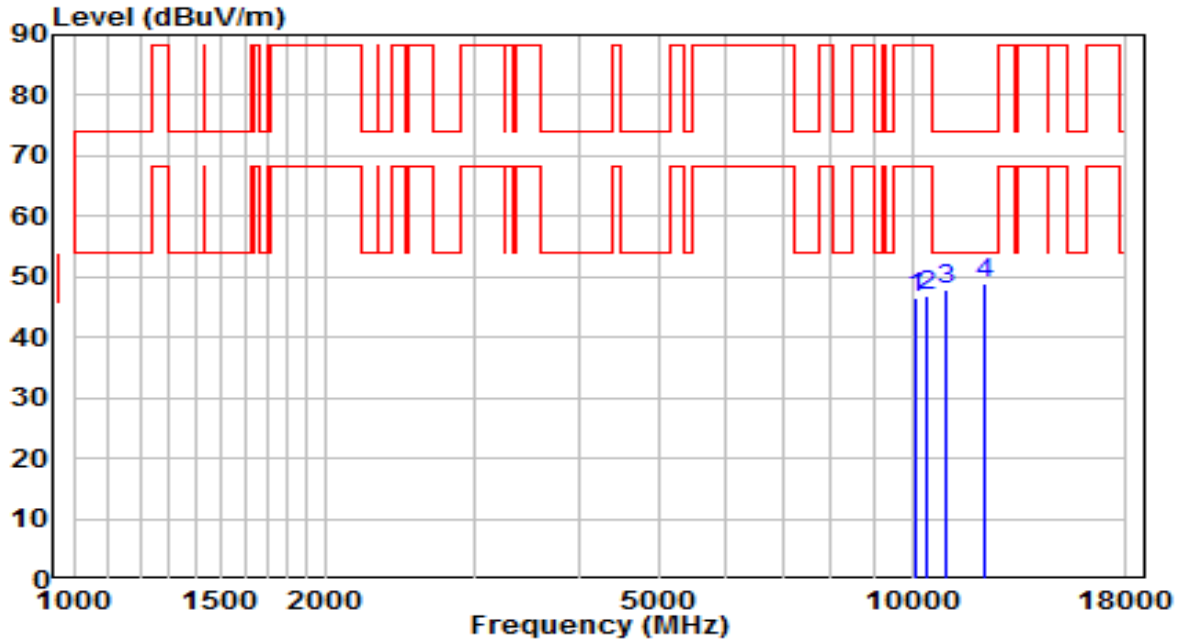


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10112.000 | 37.42 | 9.15 | 46.58 | -41.62 | 88.20 | Peak |
| 2 | 10401.000 | 37.08 | 9.76 | 46.84 | -41.36 | 88.20 | Peak |
| 3 | 11013.000 | 37.60 | 10.44 | 48.04 | -25.96 | 74.00 | Peak |
| 4 | * 12194.500 | 38.62 | 10.20 | 48.82 | -25.18 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6515MHz (Nss=2) | Test Voltage | 120V 60Hz |

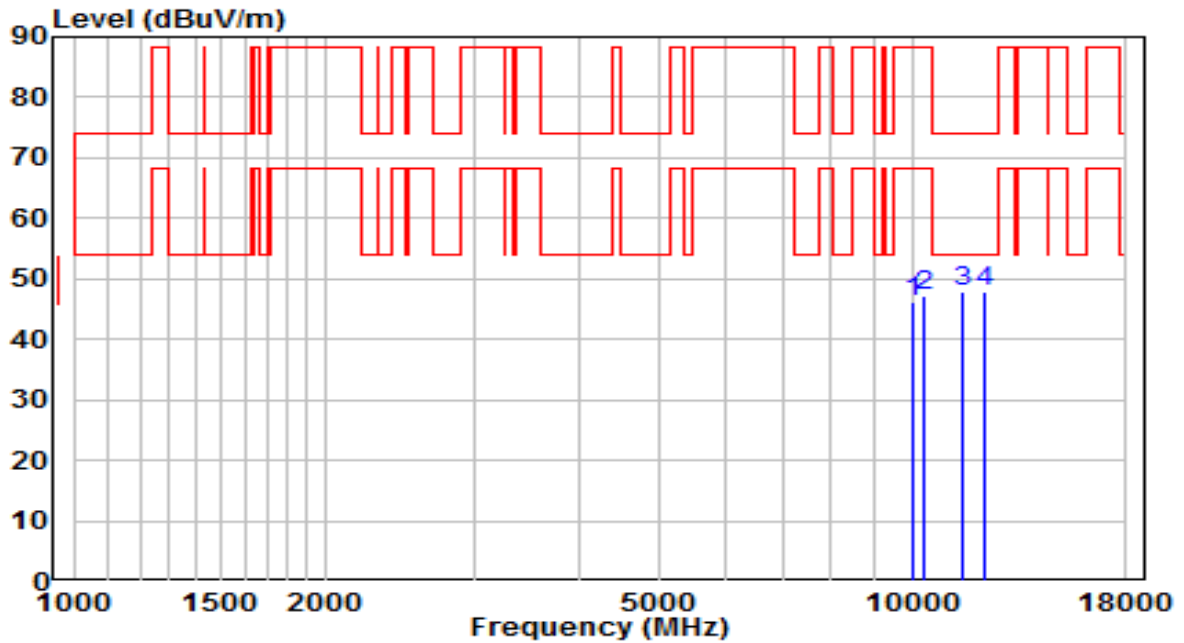


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10027.000 | 571.94 | -525.72 | 46.21 | -41.99 | 88.20 | Peak |
| 2 | 10333.000 | 572.62 | -525.57 | 47.05 | -41.15 | 88.20 | Peak |
| 3 | 11480.500 | 574.02 | -526.07 | 47.94 | -26.06 | 74.00 | Peak |
| 4 | * 12177.500 | 574.30 | -526.25 | 48.04 | -25.96 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6535MHz (Nss=2) | Test Voltage | 120V 60Hz |

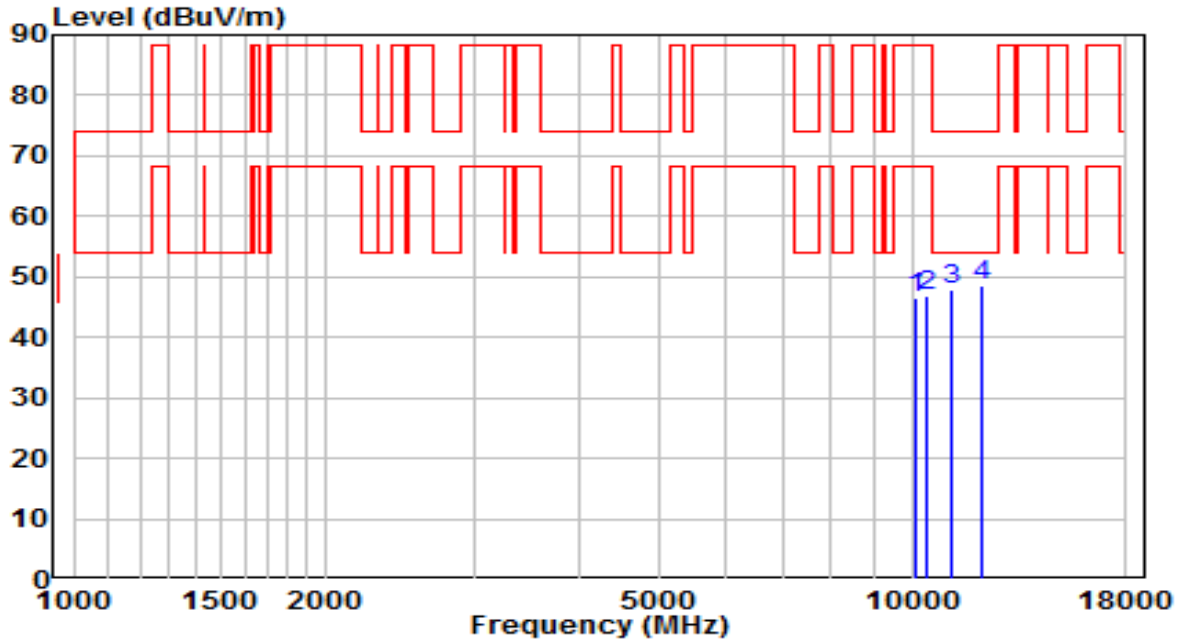


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10103.500 | 37.25 | 9.25 | 46.50 | -41.70 | 88.20 | Peak |
| 2 | 10401.000 | 37.14 | 9.76 | 46.91 | -41.29 | 88.20 | Peak |
| 3 | 11149.000 | 37.52 | 10.40 | 47.92 | -26.08 | 74.00 | Peak |
| 4 | * 12101.000 | 38.52 | 10.03 | 48.56 | -25.44 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6535MHz (Nss=2) | Test Voltage | 120V 60Hz |

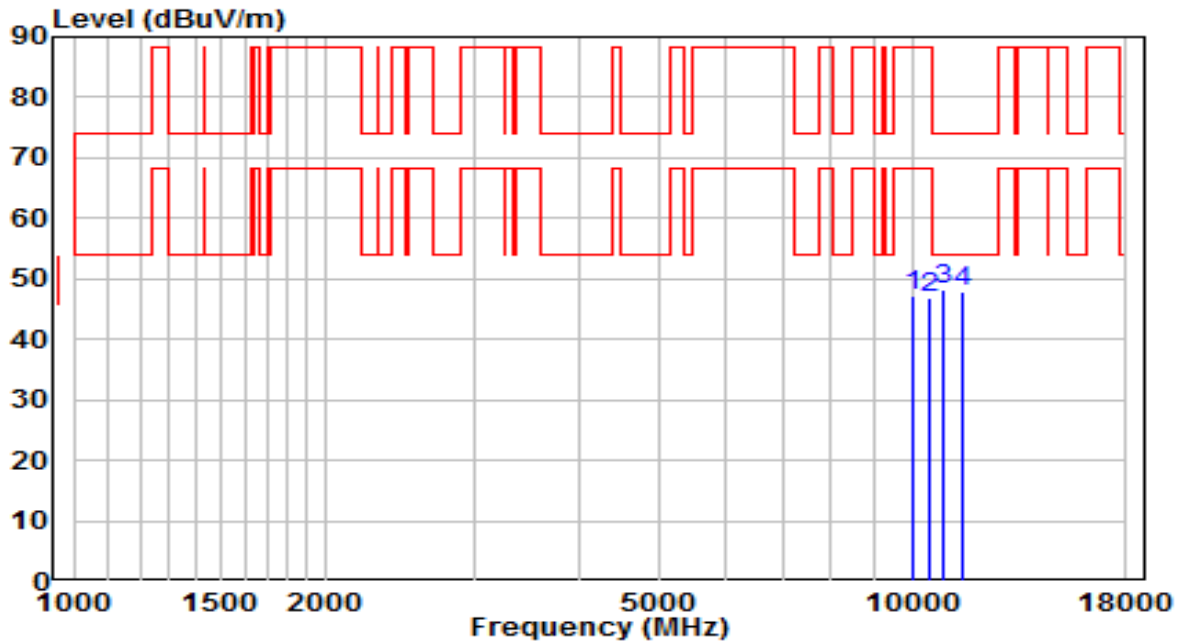


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10027.000 | 572.93 | -525.72 | 47.20 | -41.00 | 88.20 | Peak |
| 2 | 10486.000 | 572.37 | -525.45 | 46.92 | -41.28 | 88.20 | Peak |
| 3 | * 10868.500 | 573.84 | -525.63 | 48.21 | -25.79 | 74.00 | Peak |
| 4 | 11514.500 | 574.16 | -526.22 | 47.94 | -26.06 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6715MHz (Nss=2) | Test Voltage | 120V 60Hz |

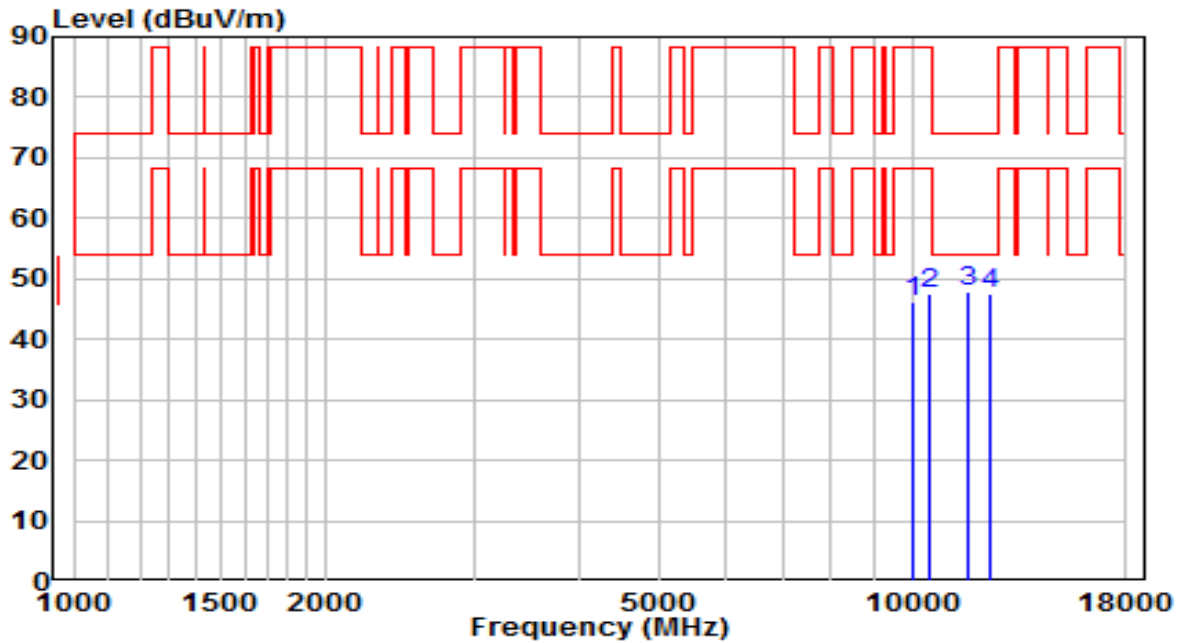


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10027.000 | 36.80 | 9.43 | 46.23 | -41.97 | 88.20 | Peak |
| 2 | 10452.000 | 37.88 | 9.62 | 47.50 | -40.70 | 88.20 | Peak |
| 3 | * 11642.000 | 37.68 | 10.36 | 48.03 | -25.97 | 74.00 | Peak |
| 4 | 12415.500 | 37.54 | 10.09 | 47.63 | -26.37 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6715MHz (Nss=2) | Test Voltage | 120V 60Hz |

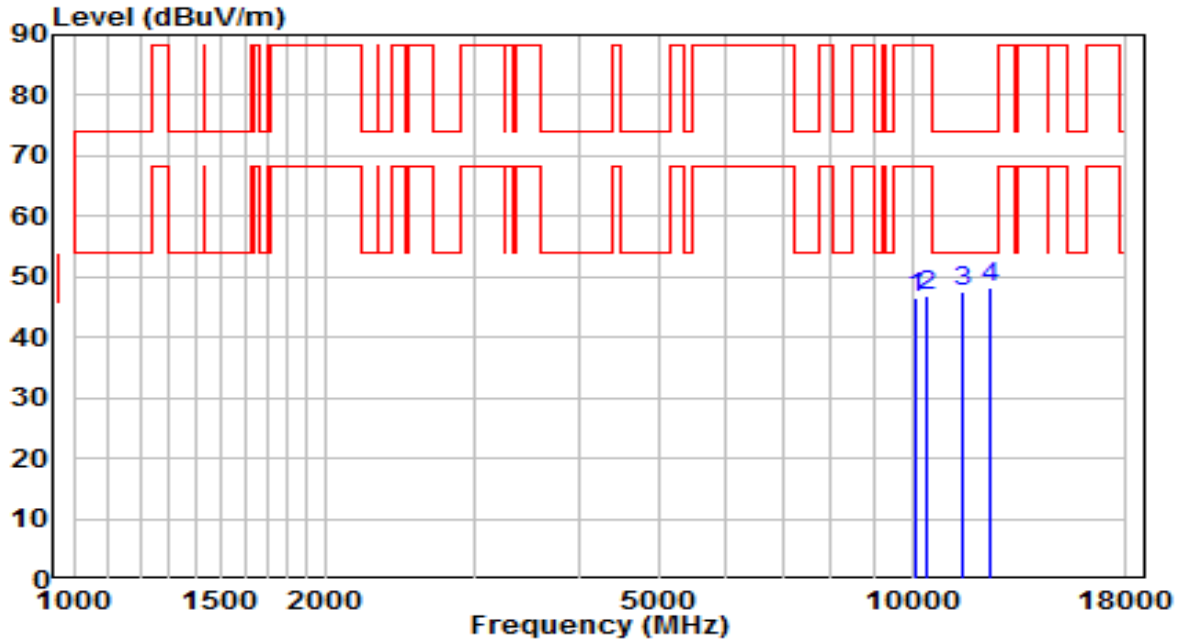


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10095.000 | 572.41 | -525.82 | 46.59 | -41.61 | 88.20 | Peak |
| 2 | 10392.500 | 572.38 | -525.60 | 46.78 | -41.42 | 88.20 | Peak |
| 3 | 11514.500 | 573.83 | -526.22 | 47.61 | -26.39 | 74.00 | Peak |
| 4 | * 12398.500 | 574.22 | -526.15 | 48.07 | -25.93 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6855MHz (Nss=2) | Test Voltage | 120V 60Hz |

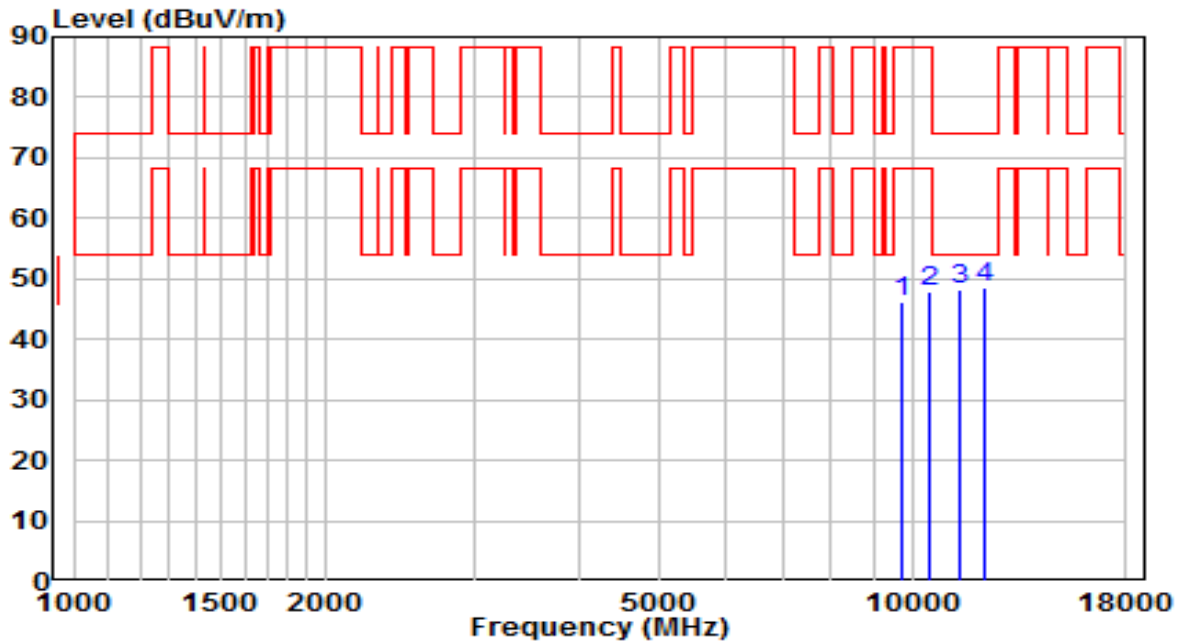


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9729.500 | 37.05 | 9.24 | 46.29 | -41.91 | 88.20 | Peak |
| 2 | 10486.000 | 37.77 | 9.98 | 47.75 | -40.45 | 88.20 | Peak |
| 3 | 11438.000 | 37.60 | 10.55 | 48.14 | -25.86 | 74.00 | Peak |
| 4 | * 12237.000 | 38.26 | 10.13 | 48.40 | -25.60 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6855MHz (Nss=2) | Test Voltage | 120V 60Hz |

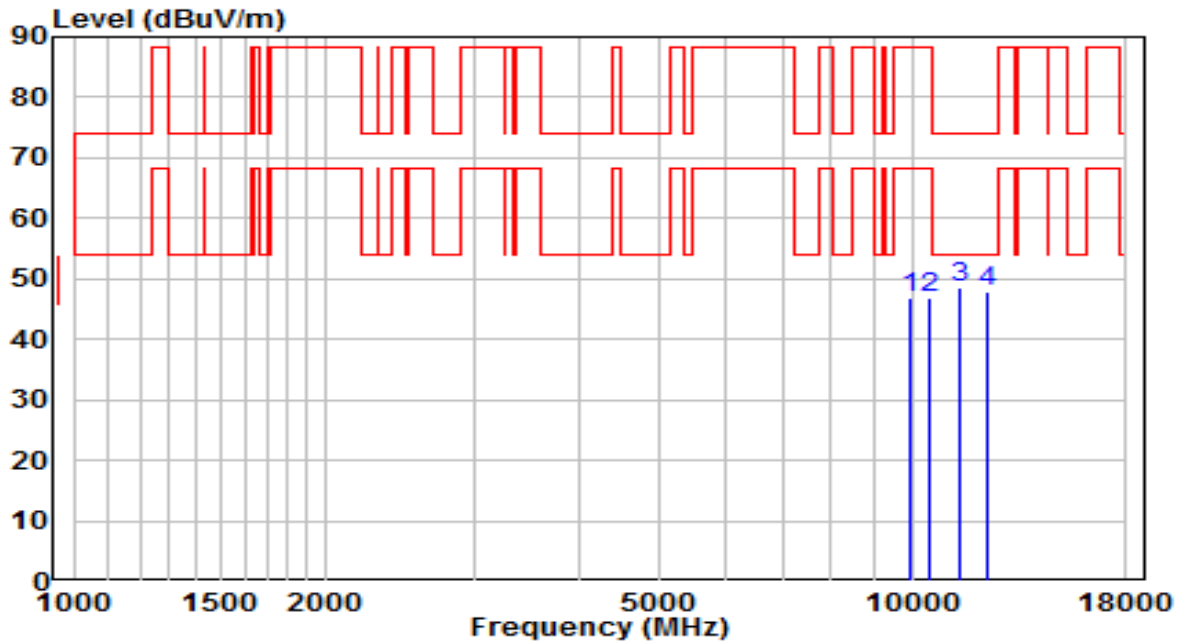


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9942.000 | 572.62 | -525.89 | 46.73 | -41.47 | 88.20 | Peak |
| 2 | 10469.000 | 572.36 | -525.45 | 46.91 | -41.29 | 88.20 | Peak |
| 3 | * 11361.500 | 574.52 | -526.10 | 48.42 | -25.58 | 74.00 | Peak |
| 4 | 12296.500 | 573.98 | -526.07 | 47.91 | -26.09 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6875MHz (Nss=2) | Test Voltage | 120V 60Hz |

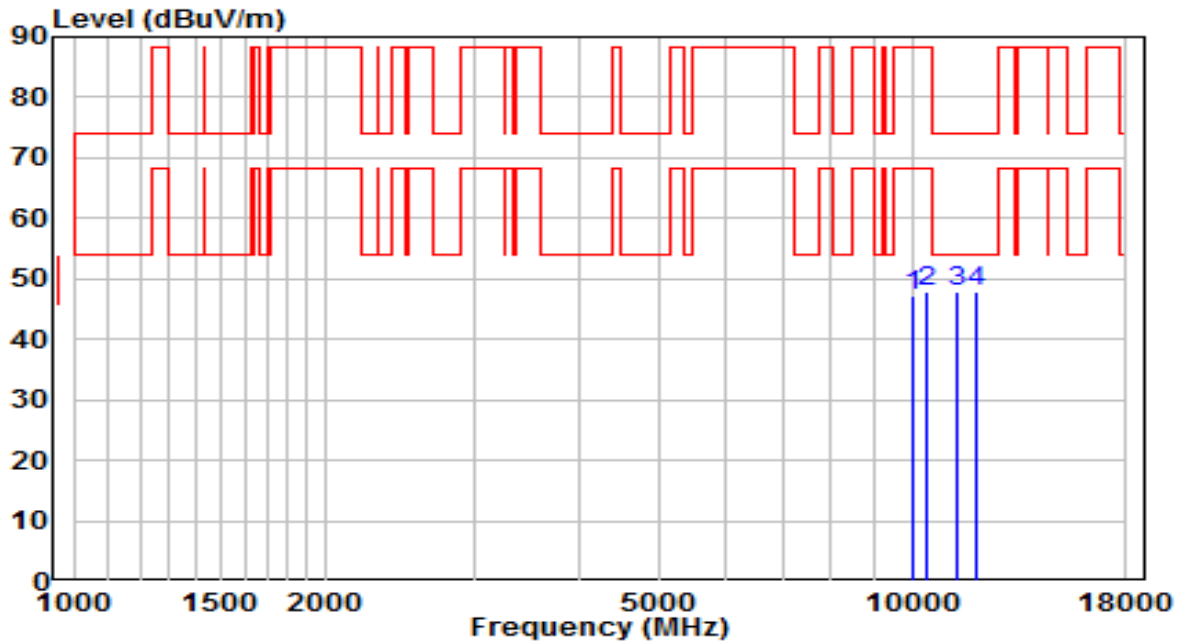


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10044.000 | 37.75 | 9.31 | 47.07 | -41.13 | 88.20 | Peak |
| 2 | 10409.500 | 37.96 | 9.82 | 47.78 | -40.42 | 88.20 | Peak |
| 3 | * 11293.500 | 37.48 | 10.52 | 47.99 | -26.01 | 74.00 | Peak |
| 4 | 11897.000 | 37.80 | 10.09 | 47.89 | -26.11 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6875MHz (Nss=2) | Test Voltage | 120V 60Hz |

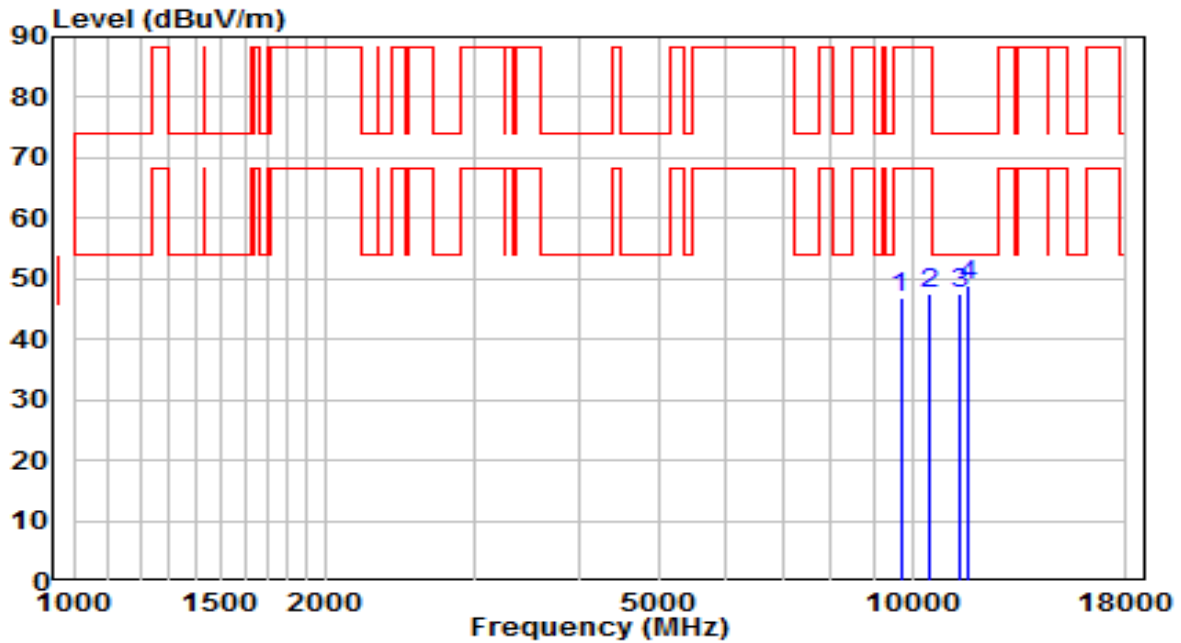


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9687.000 | 572.86 | -525.94 | 46.93 | -41.27 | 88.20 | Peak |
| 2 | 10477.500 | 572.90 | -525.43 | 47.46 | -40.74 | 88.20 | Peak |
| 3 | 11370.000 | 573.66 | -526.15 | 47.51 | -26.49 | 74.00 | Peak |
| 4 | * 11667.500 | 575.23 | -526.32 | 48.92 | -25.08 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6895MHz (Nss=2) | Test Voltage | 120V 60Hz |

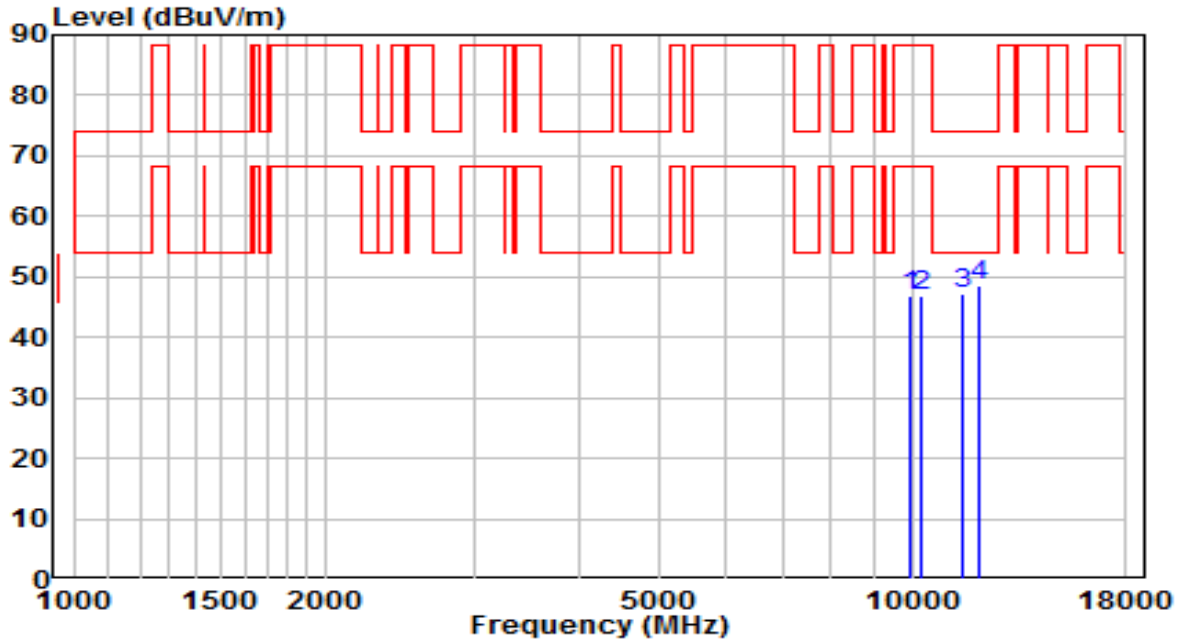


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9925.000 | 37.20 | 9.51 | 46.71 | -41.49 | 88.20 | Peak |
| 2 | 10239.500 | 36.96 | 9.82 | 46.78 | -41.42 | 88.20 | Peak |
| 3 | 11497.500 | 36.79 | 10.50 | 47.29 | -26.71 | 74.00 | Peak |
| 4 | * 12041.500 | 38.61 | 10.00 | 48.61 | -25.39 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6895MHz (Nss=2) | Test Voltage | 120V 60Hz |

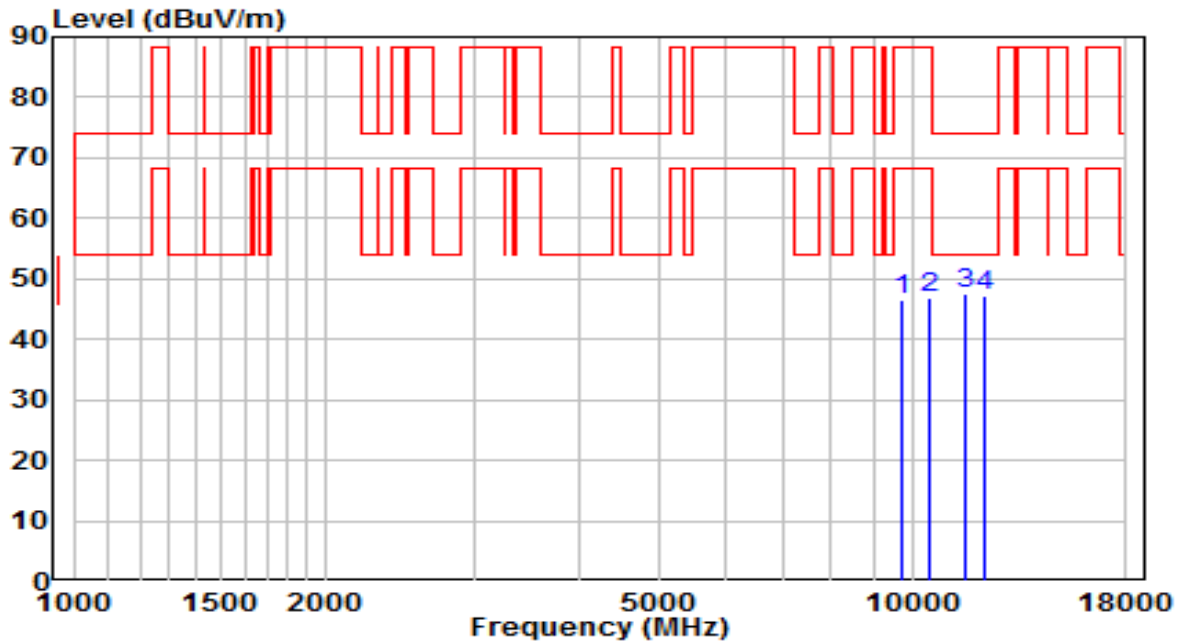


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9695.500 | 572.52 | -526.08 | 46.45 | -41.75 | 88.20 | Peak |
| 2 | 10469.000 | 572.35 | -525.45 | 46.90 | -41.30 | 88.20 | Peak |
| 3 | * 11608.000 | 573.66 | -526.20 | 47.46 | -26.54 | 74.00 | Peak |
| 4 | 12169.000 | 573.65 | -526.29 | 47.36 | -26.64 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7015MHz (Nss=2) | Test Voltage | 120V 60Hz |

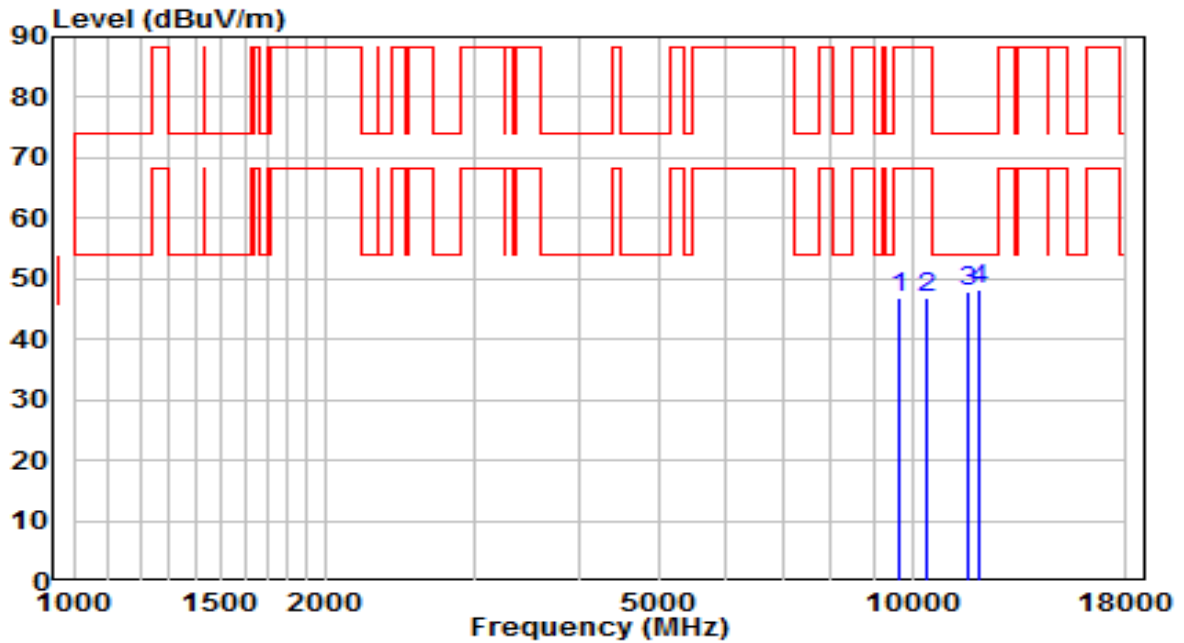


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9670.000 | 37.69 | 9.21 | 46.91 | -41.29 | 88.20 | Peak |
| 2 | 10392.500 | 37.01 | 9.75 | 46.76 | -41.44 | 88.20 | Peak |
| 3 | 11642.000 | 37.56 | 10.36 | 47.92 | -26.08 | 74.00 | Peak |
| 4 | * 12050.000 | 38.16 | 10.00 | 48.17 | -25.83 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7015MHz (Nss=2) | Test Voltage | 120V 60Hz |

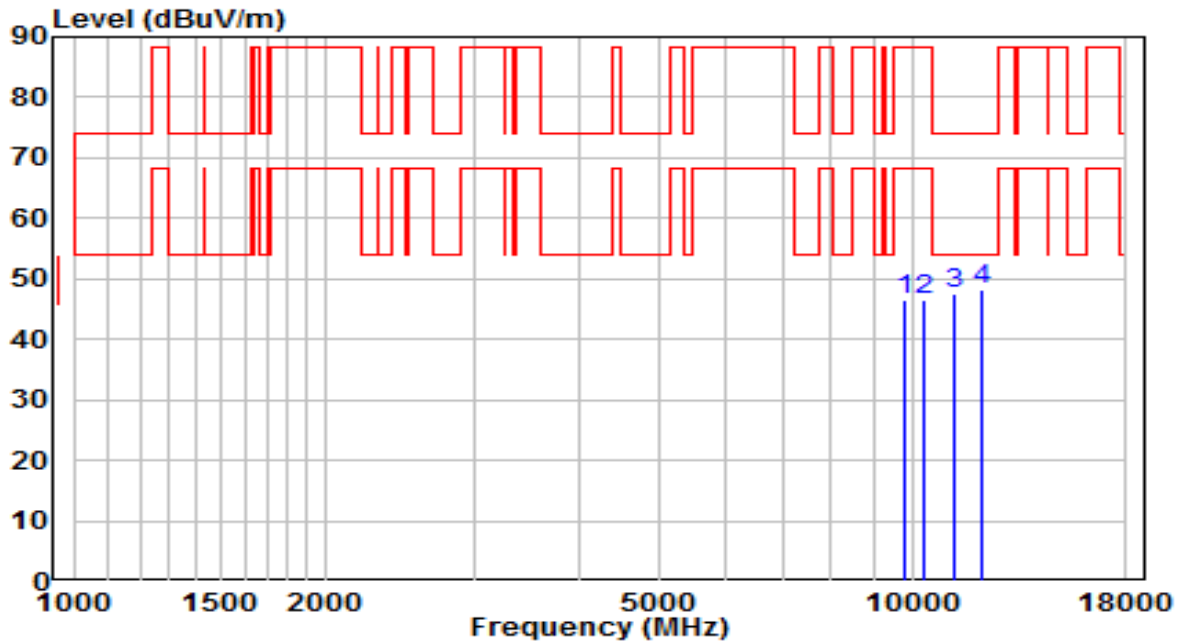


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9772.000 | 572.21 | -525.82 | 46.39 | -41.81 | 88.20 | Peak |
| 2 | 10324.500 | 572.16 | -525.59 | 46.57 | -41.63 | 88.20 | Peak |
| 3 | 11208.500 | 573.70 | -525.99 | 47.71 | -26.29 | 74.00 | Peak |
| 4 | * 12092.500 | 574.54 | -526.16 | 48.38 | -25.62 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=2) | Test Voltage | 120V 60Hz |

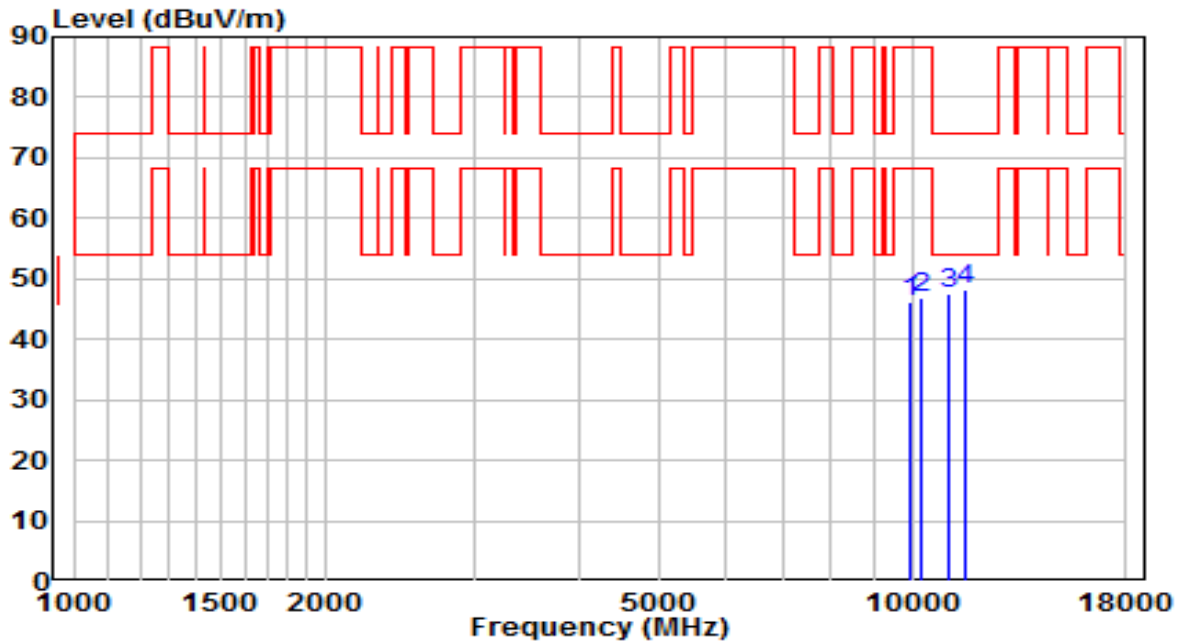


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9916.500 | 36.53 | 9.50 | 46.03 | -42.17 | 88.20 | Peak |
| 2 | 10256.500 | 37.34 | 9.58 | 46.92 | -41.28 | 88.20 | Peak |
| 3 | 11072.500 | 36.80 | 10.60 | 47.39 | -26.61 | 74.00 | Peak |
| 4 | * 11599.500 | 37.87 | 10.36 | 48.23 | -25.77 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=2) | Test Voltage | 120V 60Hz |

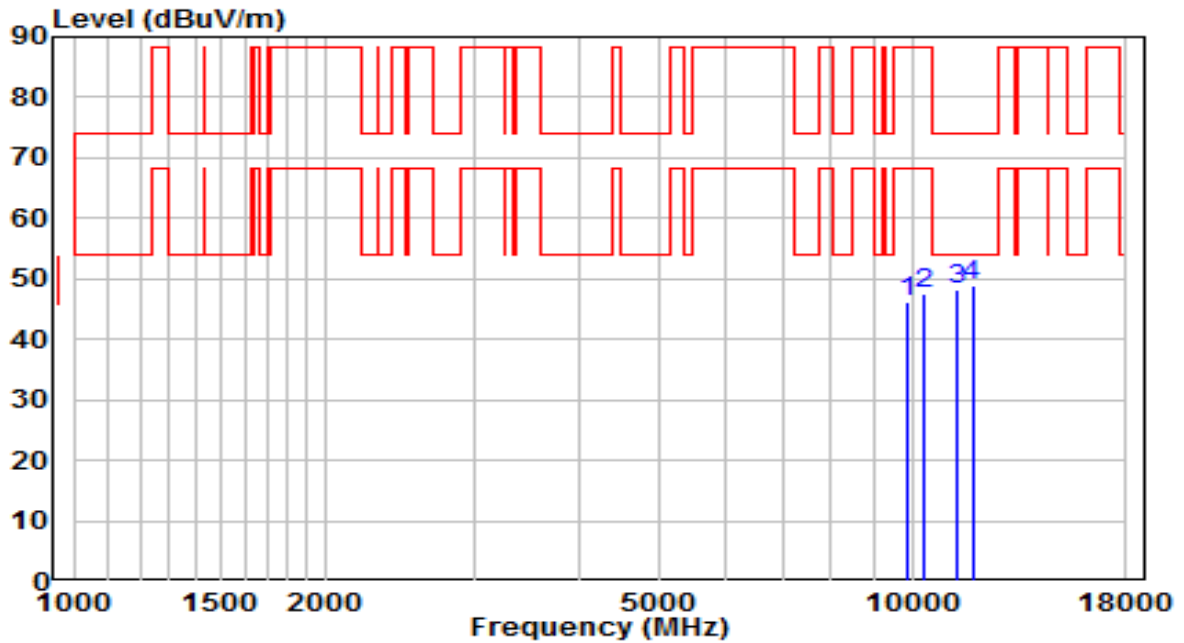


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9865.500 | 571.92 | -525.87 | 46.05 | -42.15 | 88.20 | Peak |
| 2 | 10333.000 | 573.14 | -525.57 | 47.58 | -40.62 | 88.20 | Peak |
| 3 | 11327.500 | 574.19 | -525.93 | 48.26 | -25.74 | 74.00 | Peak |
| 4 | * 11795.000 | 575.05 | -526.16 | 48.89 | -25.11 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=2) | Test Voltage | 120V 60Hz |

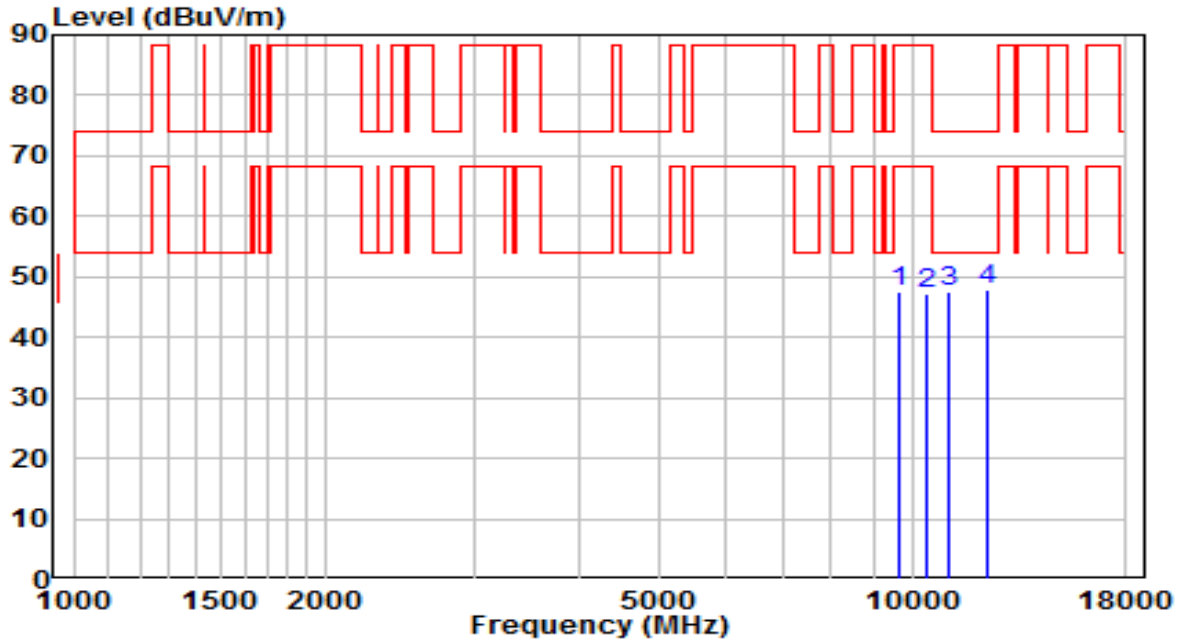


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9661.500 | 38.24 | 9.15 | 47.39 | -40.81 | 88.20 | Peak |
| 2 | 10443.500 | 37.39 | 9.73 | 47.13 | -41.07 | 88.20 | Peak |
| 3 | 11064.000 | 37.07 | 10.57 | 47.64 | -26.36 | 74.00 | Peak |
| 4 | * 12254.000 | 37.70 | 10.09 | 47.79 | -26.21 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=2) | Test Voltage | 120V 60Hz |

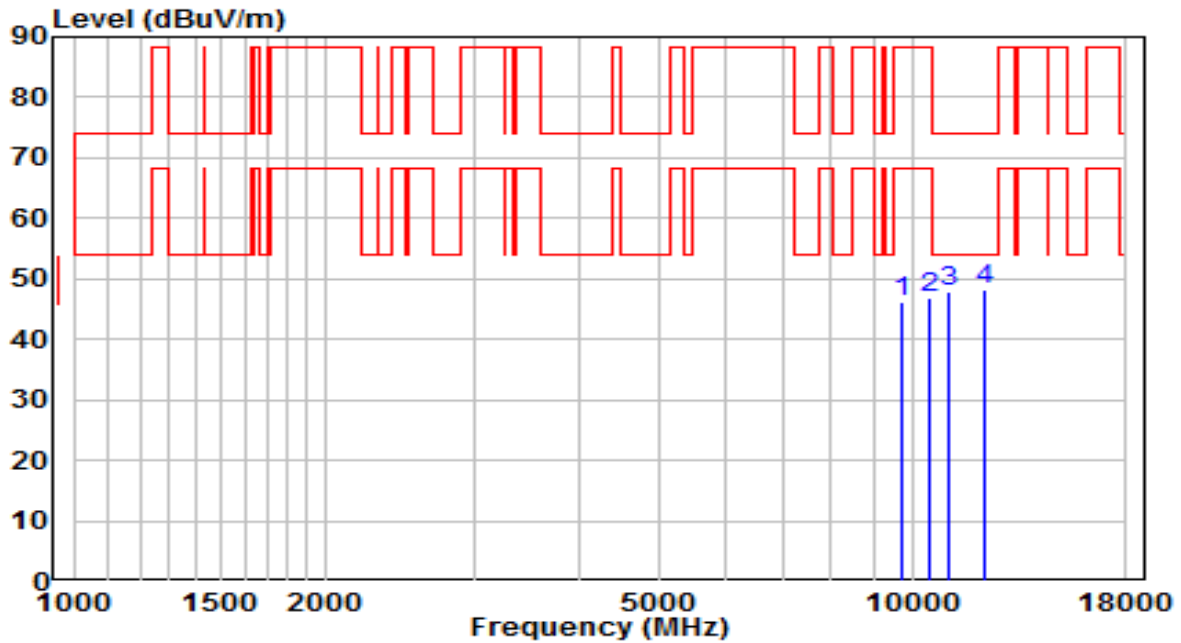


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9712.500 | 572.05 | -525.93 | 46.12 | -42.08 | 88.20 | Peak |
| 2 | 10469.000 | 572.30 | -525.45 | 46.84 | -41.36 | 88.20 | Peak |
| 3 | 11030.000 | 573.60 | -525.64 | 47.96 | -26.04 | 74.00 | Peak |
| 4 | * 12169.000 | 574.41 | -526.29 | 48.13 | -25.87 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6245MHz (Nss=2) | Test Voltage | 120V 60Hz |

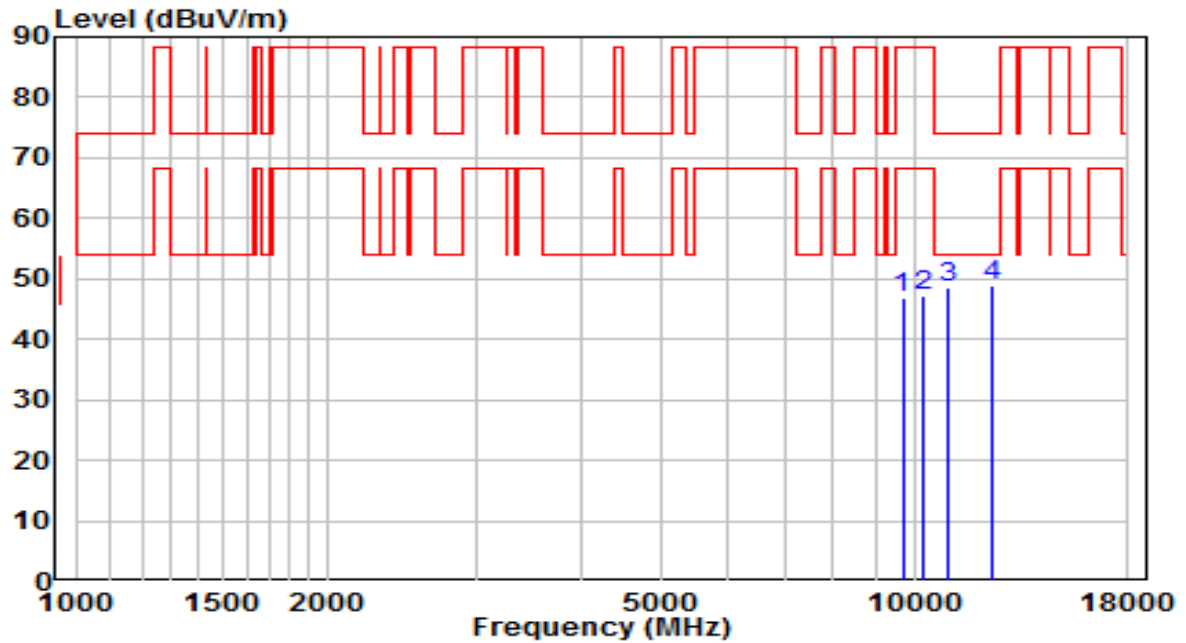


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9687.000 | 37.75 | 9.14 | 46.89 | -41.31 | 88.20 | Peak |
| 2 | 10248.000 | 37.50 | 9.71 | 47.22 | -40.98 | 88.20 | Peak |
| 3 | 10945.000 | 38.08 | 10.42 | 48.51 | -25.49 | 74.00 | Peak |
| 4 | * 12407.000 | 38.70 | 10.04 | 48.74 | -25.26 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6245MHz (Nss=2) | Test Voltage | 120V 60Hz |

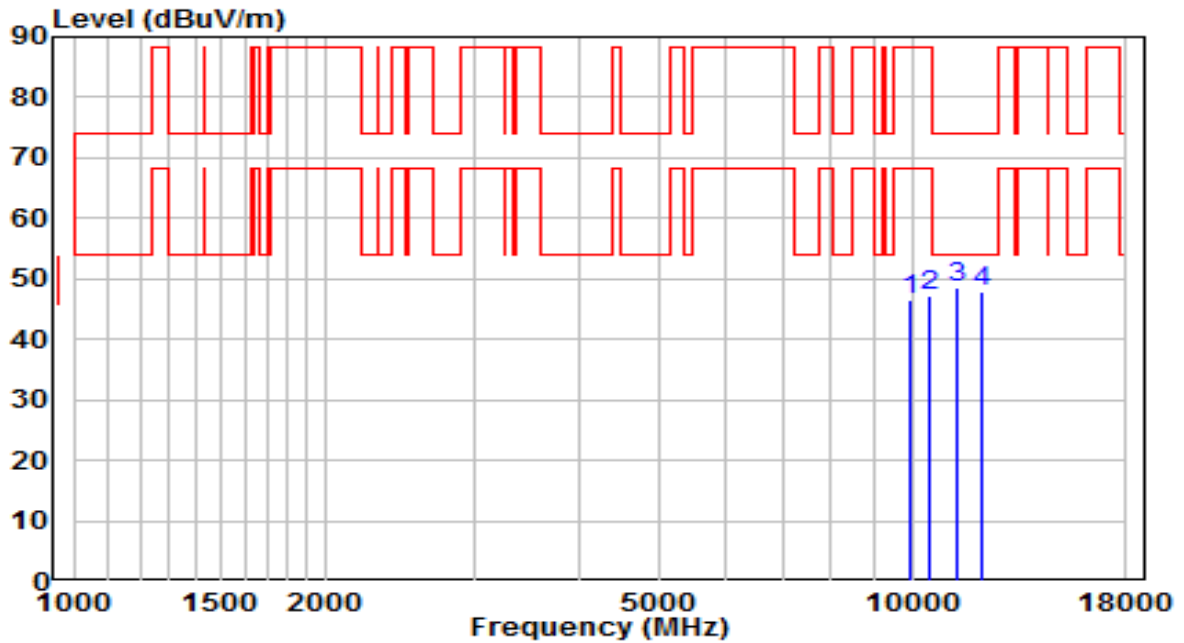


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9925.000 | 572.17 | -525.63 | 46.55 | -41.65 | 88.20 | Peak |
| 2 | 10452.000 | 573.12 | -525.79 | 47.34 | -40.86 | 88.20 | Peak |
| 3 | * 11310.500 | 574.64 | -526.00 | 48.64 | -25.36 | 74.00 | Peak |
| 4 | 12126.500 | 574.33 | -526.35 | 47.98 | -26.02 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6405MHz (Nss=2) | Test Voltage | 120V 60Hz |

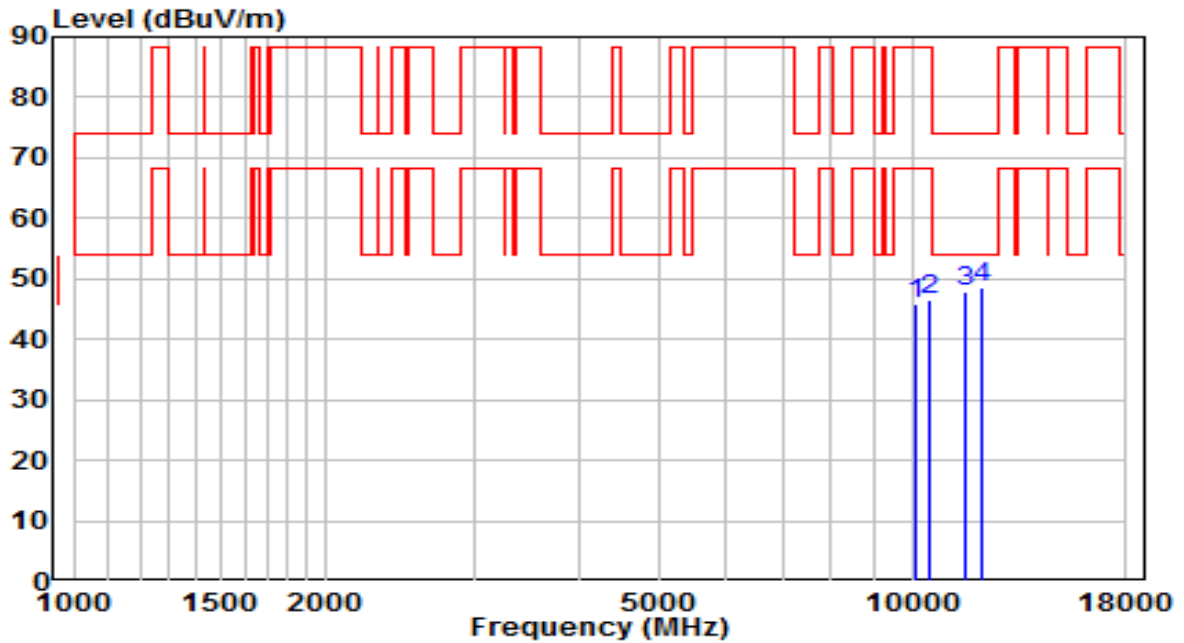


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10095.000 | 36.34 | 9.36 | 45.71 | -42.49 | 88.20 | Peak |
| 2 | 10469.000 | 36.46 | 9.97 | 46.42 | -41.78 | 88.20 | Peak |
| 3 | 11599.500 | 37.44 | 10.36 | 47.80 | -26.20 | 74.00 | Peak |
| 4 | * 12118.000 | 38.75 | 9.92 | 48.67 | -25.33 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6405MHz (Nss=2) | Test Voltage | 120V 60Hz |

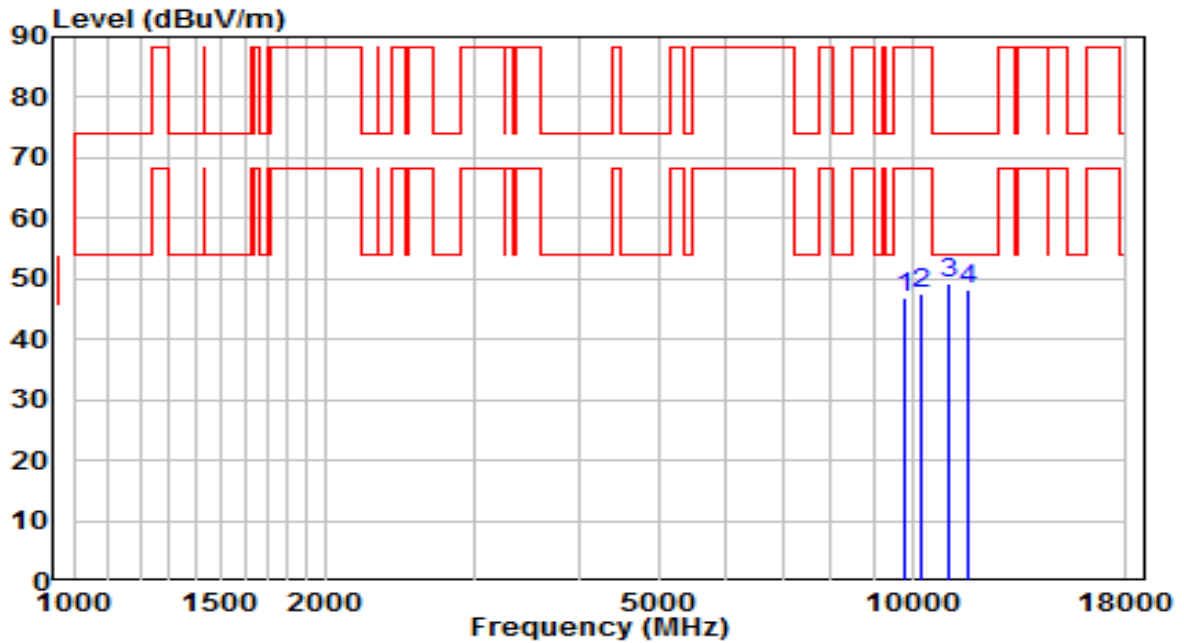


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9763.500 | 572.75 | -525.89 | 46.85 | -41.35 | 88.20 | Peak |
| 2 | 10256.500 | 573.13 | -525.69 | 47.44 | -40.76 | 88.20 | Peak |
| 3 | * 11064.000 | 574.82 | -525.65 | 49.17 | -24.83 | 74.00 | Peak |
| 4 | 11659.000 | 574.50 | -526.22 | 48.28 | -25.72 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6445MHz (Nss=2) | Test Voltage | 120V 60Hz |

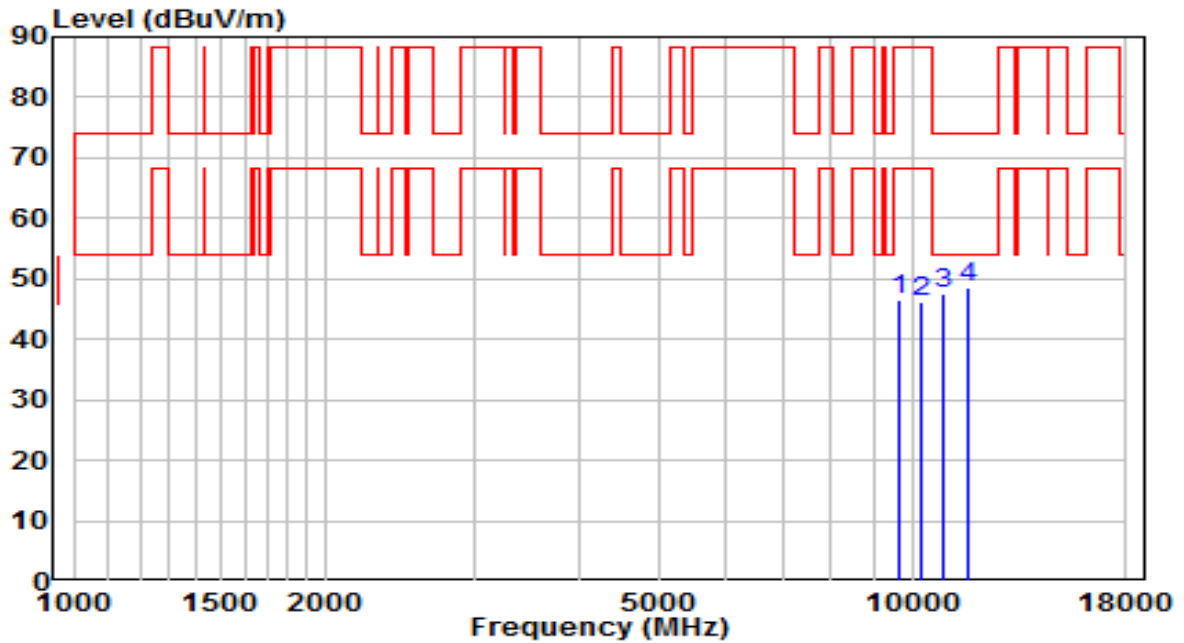


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9678.500 | 37.17 | 9.28 | 46.45 | -41.75 | 88.20 | Peak |
| 2 | 10265.000 | 36.73 | 9.60 | 46.32 | -41.88 | 88.20 | Peak |
| 3 | 10885.500 | 37.05 | 10.34 | 47.39 | -26.61 | 74.00 | Peak |
| 4 | * 11684.500 | 38.29 | 10.12 | 48.40 | -25.60 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6445MHz (Nss=2) | Test Voltage | 120V 60Hz |

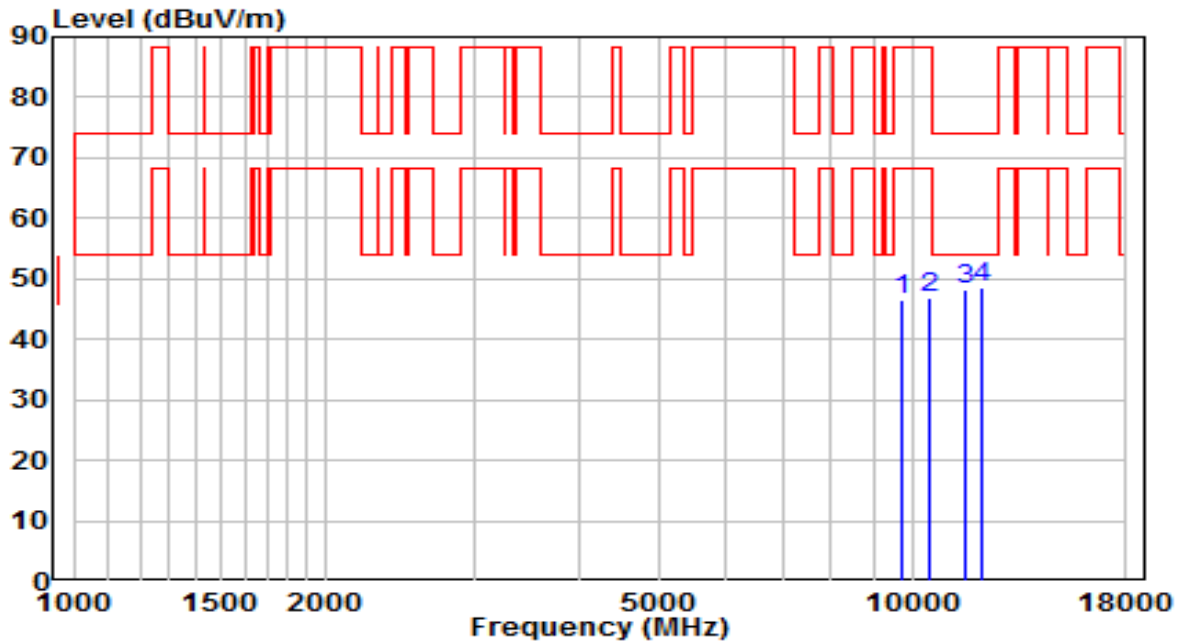


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9746.500 | 572.49 | -525.99 | 46.50 | -41.70 | 88.20 | Peak |
| 2 | 10460.500 | 572.60 | -525.63 | 46.97 | -41.23 | 88.20 | Peak |
| 3 | 11608.000 | 574.37 | -526.20 | 48.17 | -25.83 | 74.00 | Peak |
| 4 | * 12092.500 | 574.90 | -526.16 | 48.73 | -25.27 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6485MHz (Nss=2) | Test Voltage | 120V 60Hz |

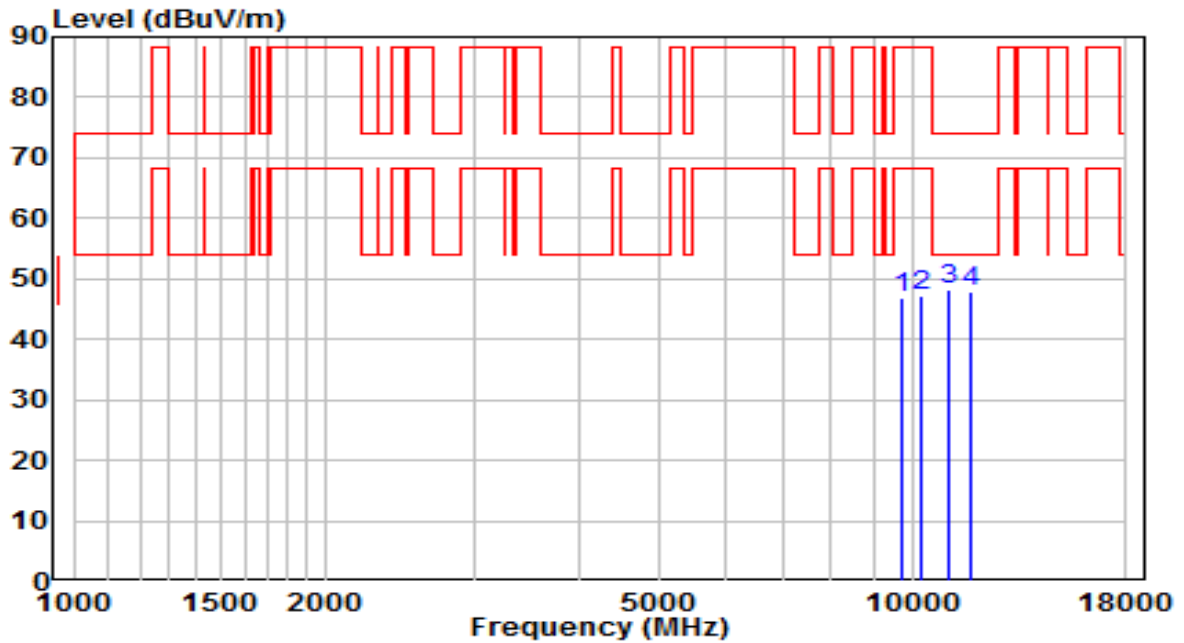


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9738.000 | 37.64 | 9.22 | 46.86 | -41.34 | 88.20 | Peak |
| 2 | 10256.500 | 37.48 | 9.58 | 47.06 | -41.14 | 88.20 | Peak |
| 3 | * 11047.000 | 37.61 | 10.59 | 48.20 | -25.80 | 74.00 | Peak |
| 4 | 11744.000 | 37.72 | 10.33 | 48.05 | -25.95 | 74.00 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6485MHz (Nss=2) | Test Voltage | 120V 60Hz |

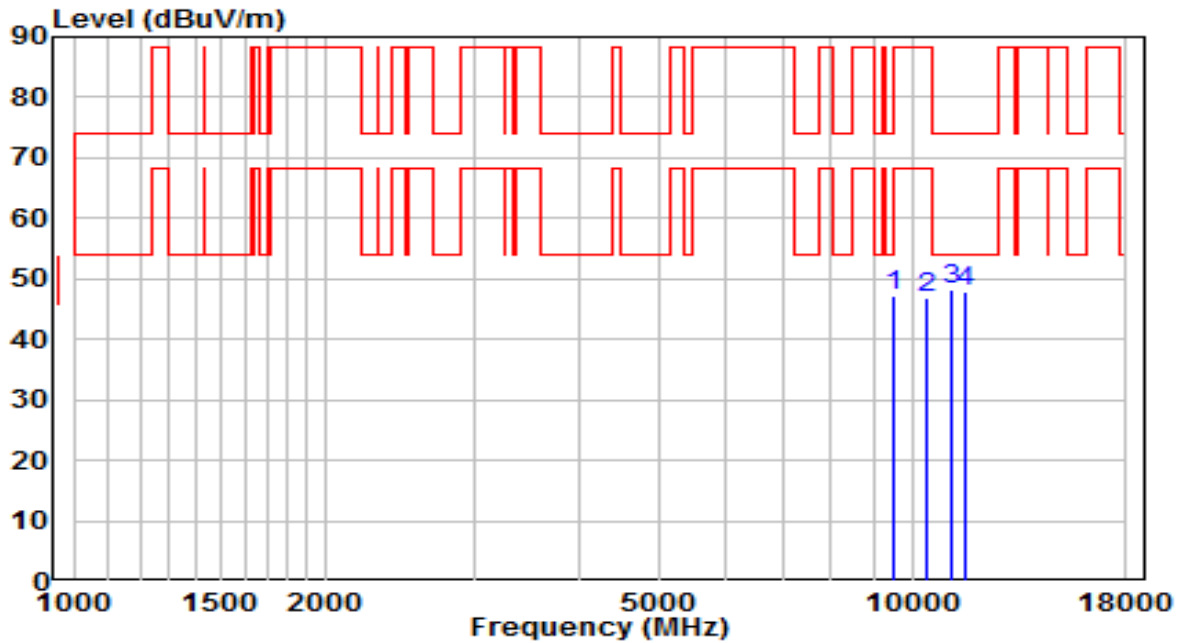


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9525.500 | 573.19 | -525.97 | 47.21 | -40.99 | 88.20 | Peak |
| 2 | 10384.000 | 572.59 | -525.57 | 47.01 | -41.19 | 88.20 | Peak |
| 3 | * 11132.000 | 574.03 | -525.95 | 48.08 | -25.92 | 74.00 | Peak |
| 4 | 11565.500 | 574.15 | -526.41 | 47.74 | -26.26 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6525MHz (Nss=2) | Test Voltage | 120V 60Hz |

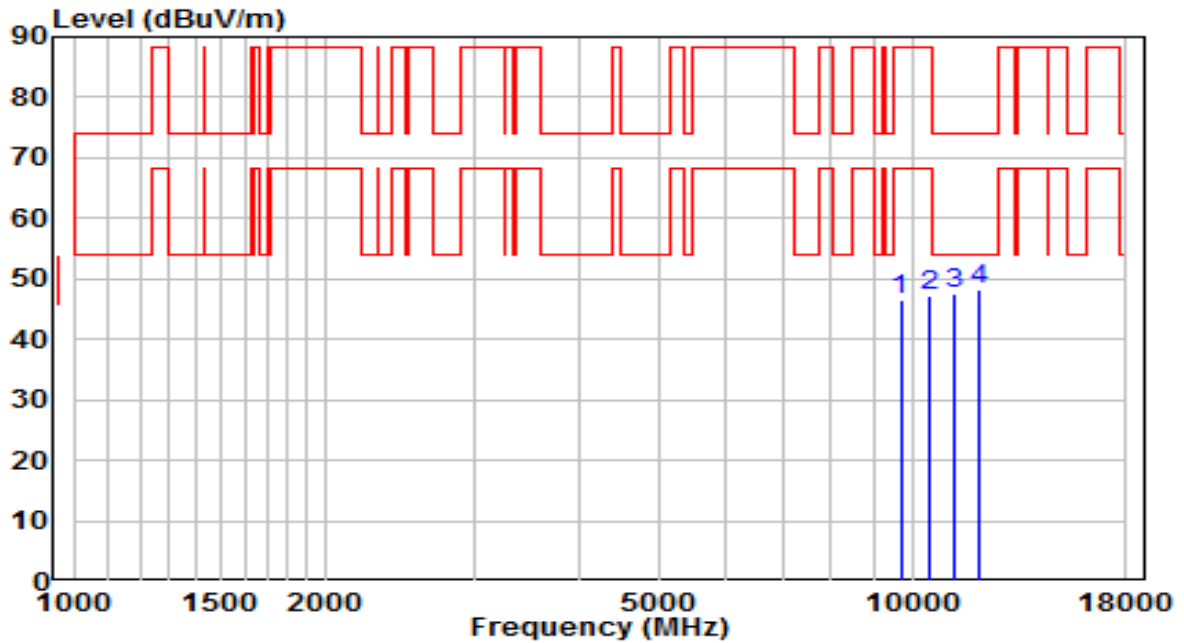


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9687.000 | 37.52 | 9.14 | 46.66 | -41.54 | 88.20 | Peak |
| 2 | 10503.000 | 37.47 | 9.78 | 47.24 | -40.96 | 88.20 | Peak |
| 3 | 11225.500 | 37.17 | 10.36 | 47.53 | -26.47 | 74.00 | Peak |
| 4 | * 12016.000 | 38.33 | 9.95 | 48.27 | -25.73 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6525MHz (Nss=2) | Test Voltage | 120V 60Hz |

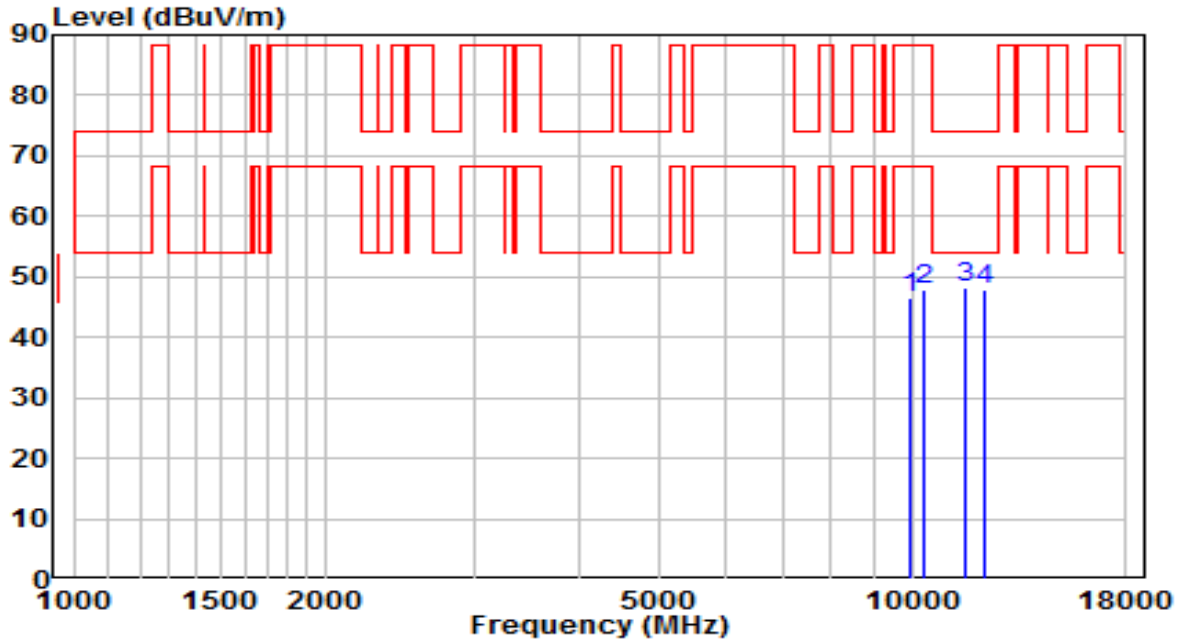


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9950.500 | 572.40 | -526.04 | 46.36 | -41.84 | 88.20 | Peak |
| 2 | 10341.500 | 573.58 | -525.60 | 47.99 | -40.21 | 88.20 | Peak |
| 3 | * 11557.000 | 574.46 | -526.33 | 48.13 | -25.87 | 74.00 | Peak |
| 4 | 12211.500 | 574.06 | -526.19 | 47.87 | -26.13 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6565MHz (Nss=2) | Test Voltage | 120V 60Hz |

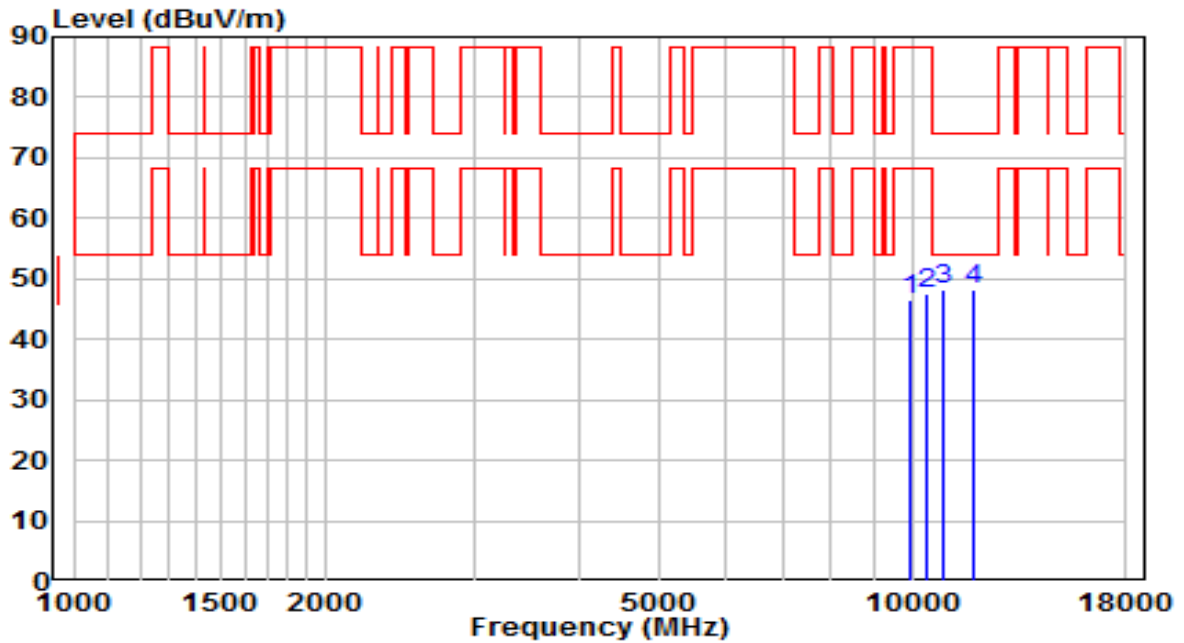


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9950.500 | 37.33 | 9.11 | 46.44 | -41.76 | 88.20 | Peak |
| 2 | 10375.500 | 37.78 | 9.77 | 47.55 | -40.65 | 88.20 | Peak |
| 3 | 10928.000 | 37.75 | 10.41 | 48.16 | -25.84 | 74.00 | Peak |
| 4 | * 11880.000 | 38.29 | 10.04 | 48.33 | -25.67 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6565MHz (Nss=2) | Test Voltage | 120V 60Hz |

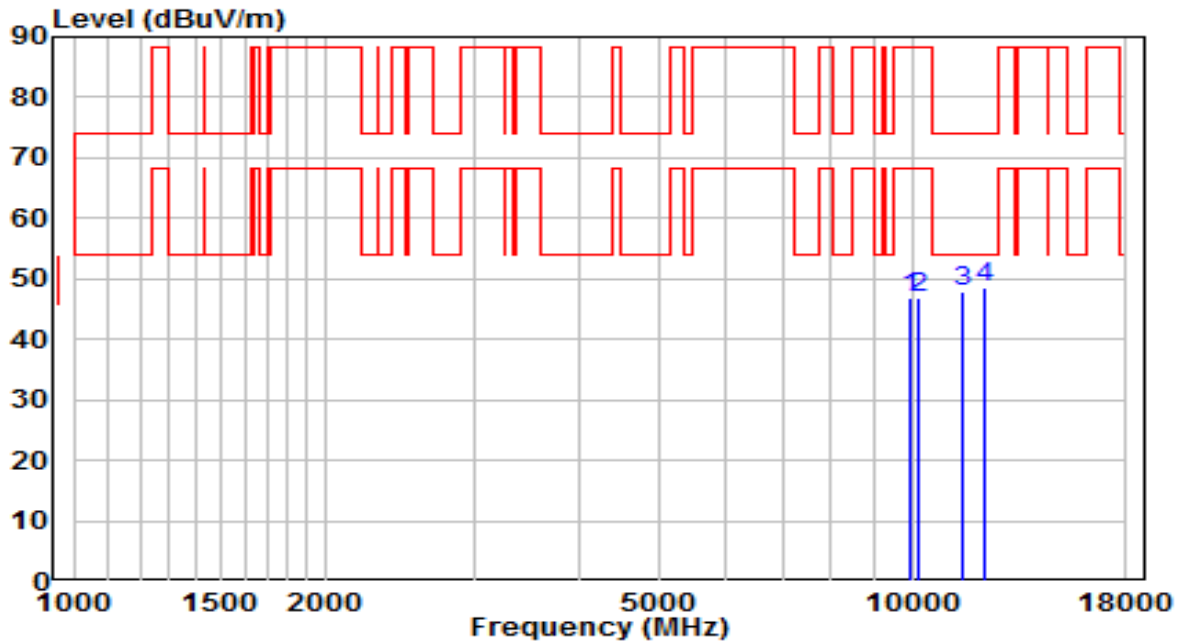


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9967.500 | 572.71 | -525.80 | 46.90 | -41.30 | 88.20 | Peak |
| 2 | 10163.000 | 572.43 | -525.53 | 46.90 | -41.30 | 88.20 | Peak |
| 3 | 11506.000 | 574.12 | -526.10 | 48.02 | -25.98 | 74.00 | Peak |
| 4 | * 12211.500 | 574.83 | -526.19 | 48.64 | -25.36 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6685MHz (Nss=2) | Test Voltage | 120V 60Hz |

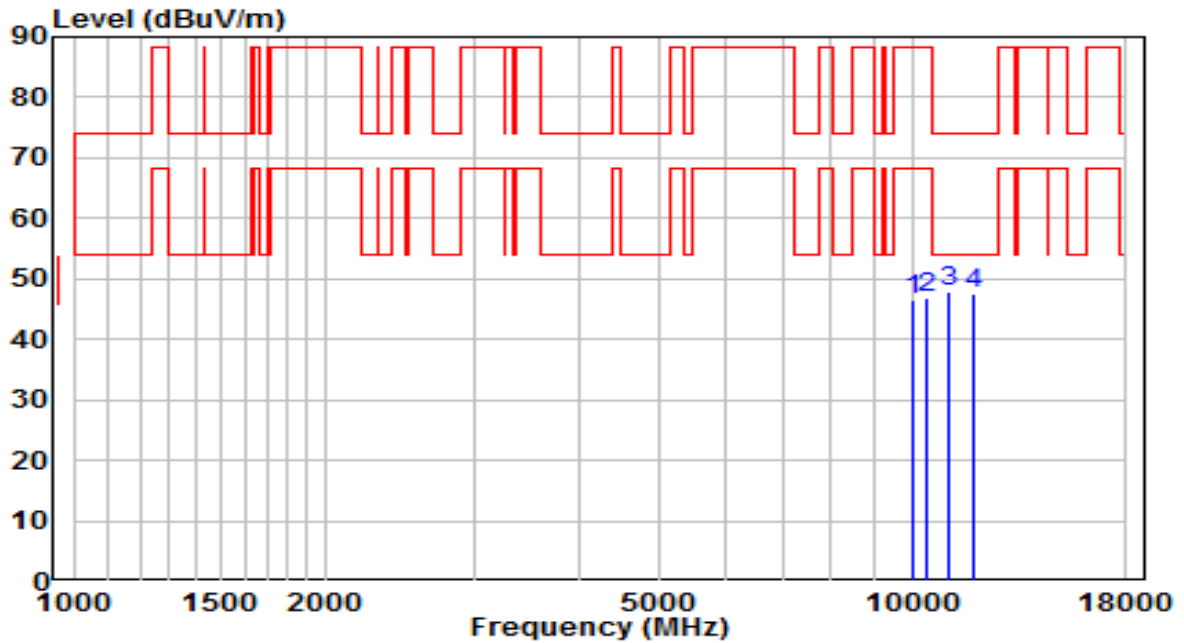


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10001.500 | 37.19 | 9.31 | 46.49 | -41.71 | 88.20 | Peak |
| 2 | 10401.000 | 37.26 | 9.76 | 47.02 | -41.18 | 88.20 | Peak |
| 3 | * 11081.000 | 37.33 | 10.62 | 47.96 | -26.04 | 74.00 | Peak |
| 4 | 11803.500 | 37.43 | 10.18 | 47.61 | -26.39 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6685MHz (Nss=2) | Test Voltage | 120V 60Hz |

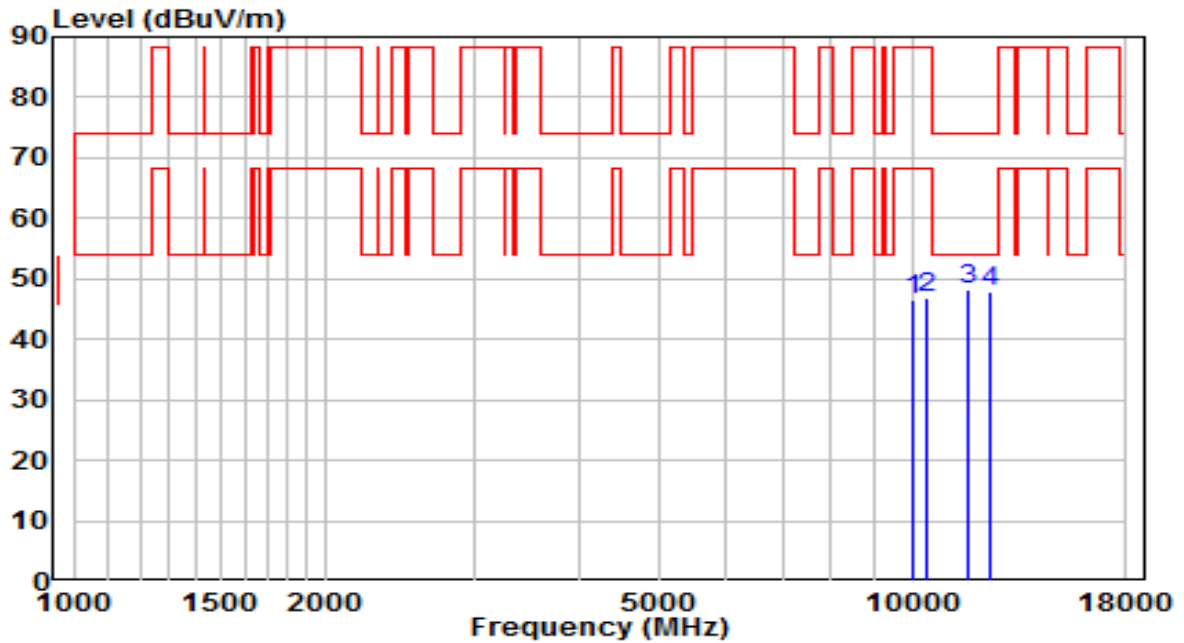


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10001.500 | 572.43 | -525.84 | 46.59 | -41.61 | 88.20 | Peak |
| 2 | 10426.500 | 572.55 | -525.52 | 47.02 | -41.18 | 88.20 | Peak |
| 3 | * 11633.500 | 574.29 | -526.16 | 48.13 | -25.87 | 74.00 | Peak |
| 4 | 12347.500 | 574.00 | -526.14 | 47.87 | -26.13 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6845MHz (Nss=2) | Test Voltage | 120V 60Hz |

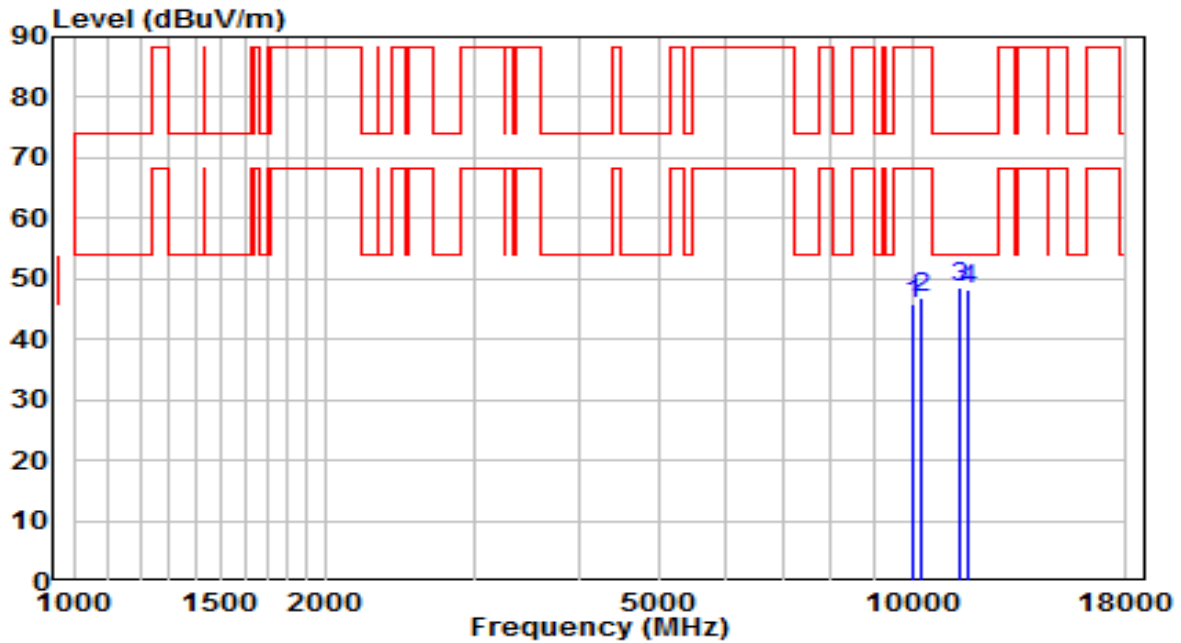


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10035.500 | 36.58 | 9.39 | 45.97 | -42.23 | 88.20 | Peak |
| 2 | 10256.500 | 37.46 | 9.58 | 47.04 | -41.16 | 88.20 | Peak |
| 3 | * 11421.000 | 38.15 | 10.37 | 48.52 | -25.48 | 74.00 | Peak |
| 4 | 11642.000 | 37.96 | 10.36 | 48.31 | -25.69 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6845MHz (Nss=2) | Test Voltage | 120V 60Hz |

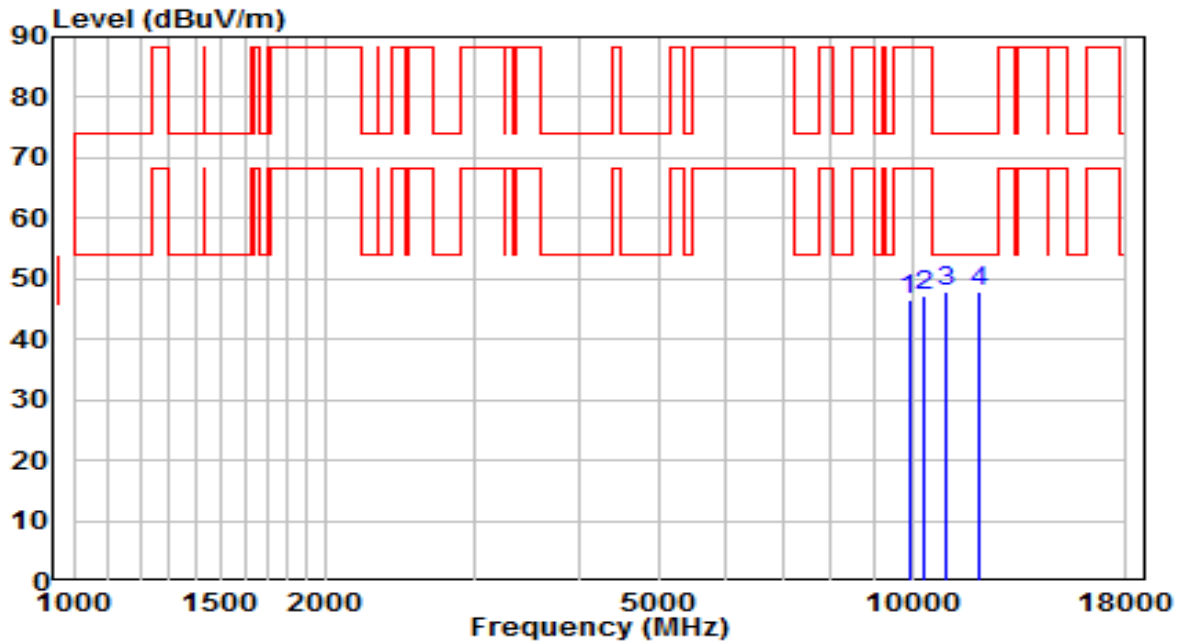


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9908.000 | 572.04 | -525.67 | 46.37 | -41.83 | 88.20 | Peak |
| 2 | 10367.000 | 572.71 | -525.62 | 47.09 | -41.11 | 88.20 | Peak |
| 3 | 11004.500 | 573.46 | -525.71 | 47.75 | -26.25 | 74.00 | Peak |
| 4 | * 12058.500 | 574.13 | -526.30 | 47.83 | -26.17 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6885MHz (Nss=2) | Test Voltage | 120V 60Hz |

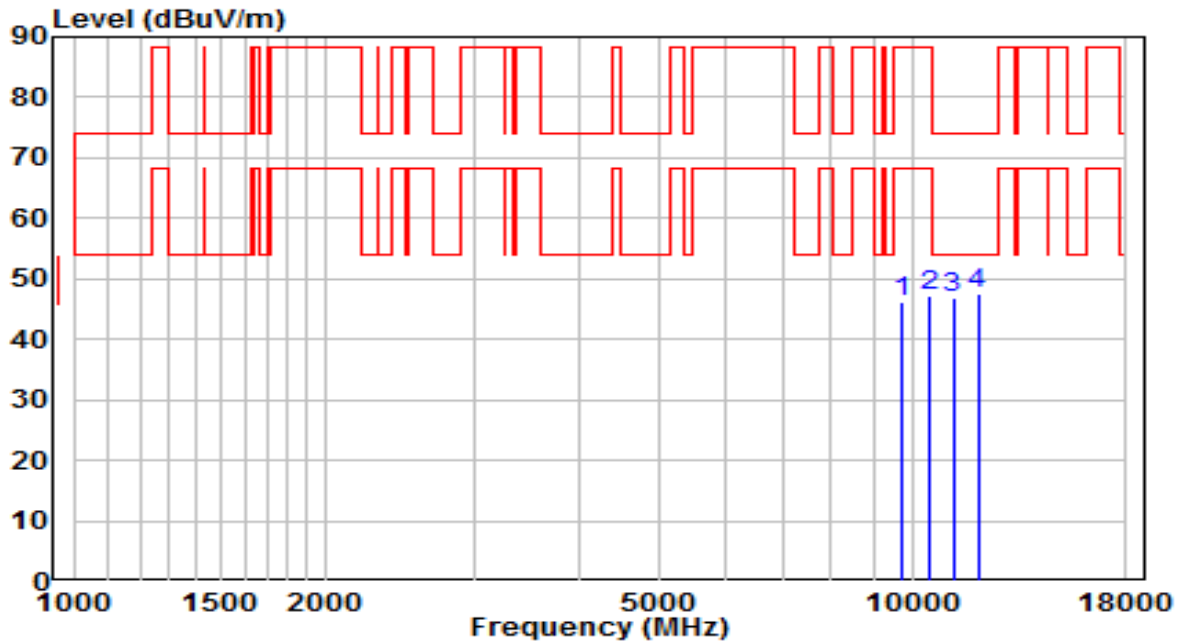


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9746.500 | 37.09 | 9.11 | 46.20 | -42.00 | 88.20 | Peak |
| 2 | 10460.500 | 37.53 | 9.78 | 47.32 | -40.88 | 88.20 | Peak |
| 3 | 11183.000 | 36.39 | 10.51 | 46.89 | -27.11 | 74.00 | Peak |
| 4 | * 11973.500 | 37.58 | 9.97 | 47.56 | -26.44 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6885MHz (Nss=2) | Test Voltage | 120V 60Hz |

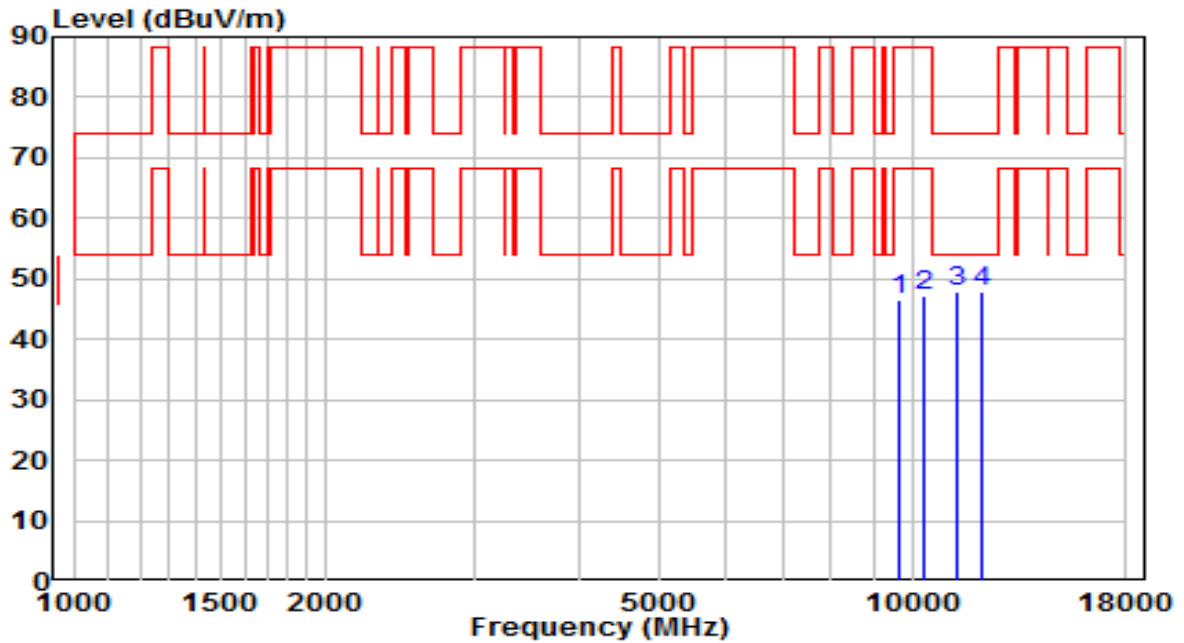


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9653.000 | 572.35 | -525.94 | 46.41 | -41.79 | 88.20 | Peak |
| 2 | 10367.000 | 572.94 | -525.62 | 47.32 | -40.88 | 88.20 | Peak |
| 3 | * 11327.500 | 573.89 | -525.93 | 47.96 | -26.04 | 74.00 | Peak |
| 4 | 12118.000 | 574.27 | -526.37 | 47.90 | -26.10 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6925MHz (Nss=2) | Test Voltage | 120V 60Hz |

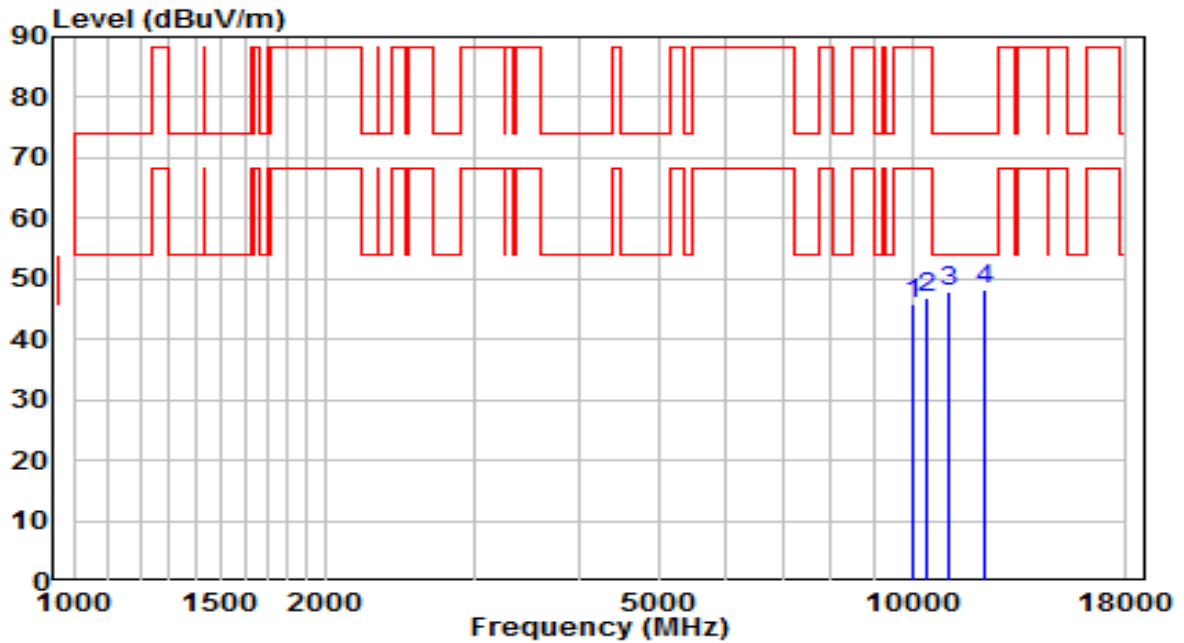


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10001.500 | 36.67 | 9.31 | 45.98 | -42.22 | 88.20 | Peak |
| 2 | 10435.000 | 37.14 | 9.85 | 46.98 | -41.22 | 88.20 | Peak |
| 3 | 11072.500 | 37.16 | 10.60 | 47.76 | -26.24 | 74.00 | Peak |
| 4 | * 12160.500 | 38.40 | 9.97 | 48.37 | -25.63 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6925MHz (Nss=2) | Test Voltage | 120V 60Hz |

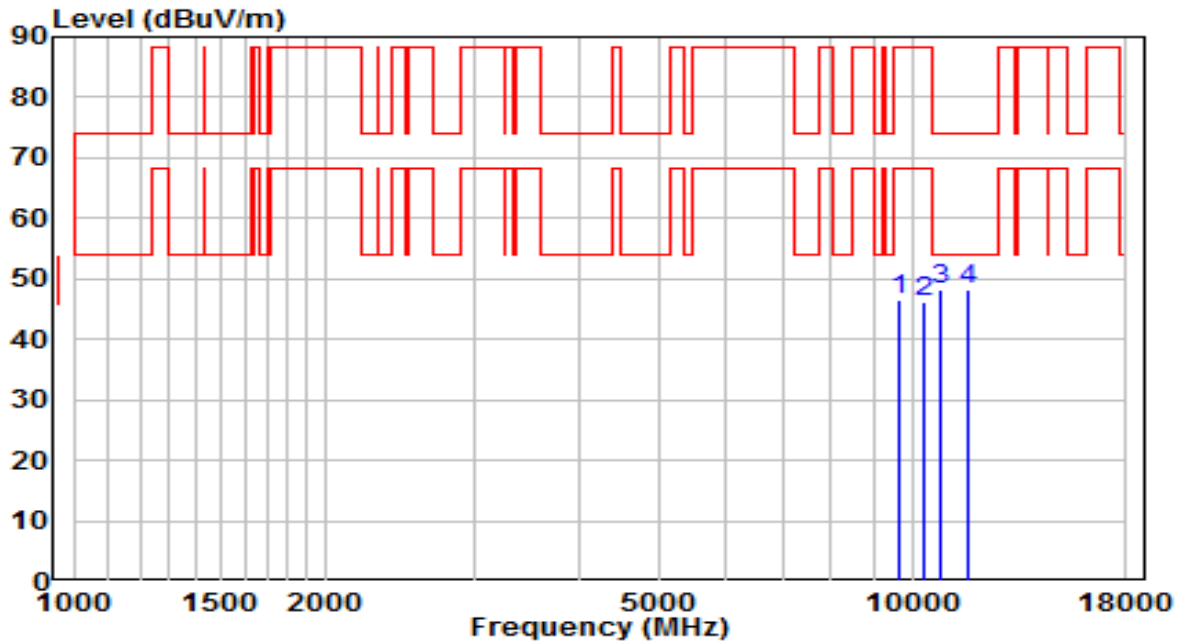


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9678.500 | 572.31 | -525.79 | 46.52 | -41.68 | 88.20 | Peak |
| 2 | 10367.000 | 571.92 | -525.62 | 46.30 | -41.90 | 88.20 | Peak |
| 3 | * 10834.500 | 573.93 | -525.61 | 48.32 | -25.68 | 74.00 | Peak |
| 4 | 11642.000 | 574.41 | -526.11 | 48.30 | -25.70 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7005MHz (Nss=2) | Test Voltage | 120V 60Hz |

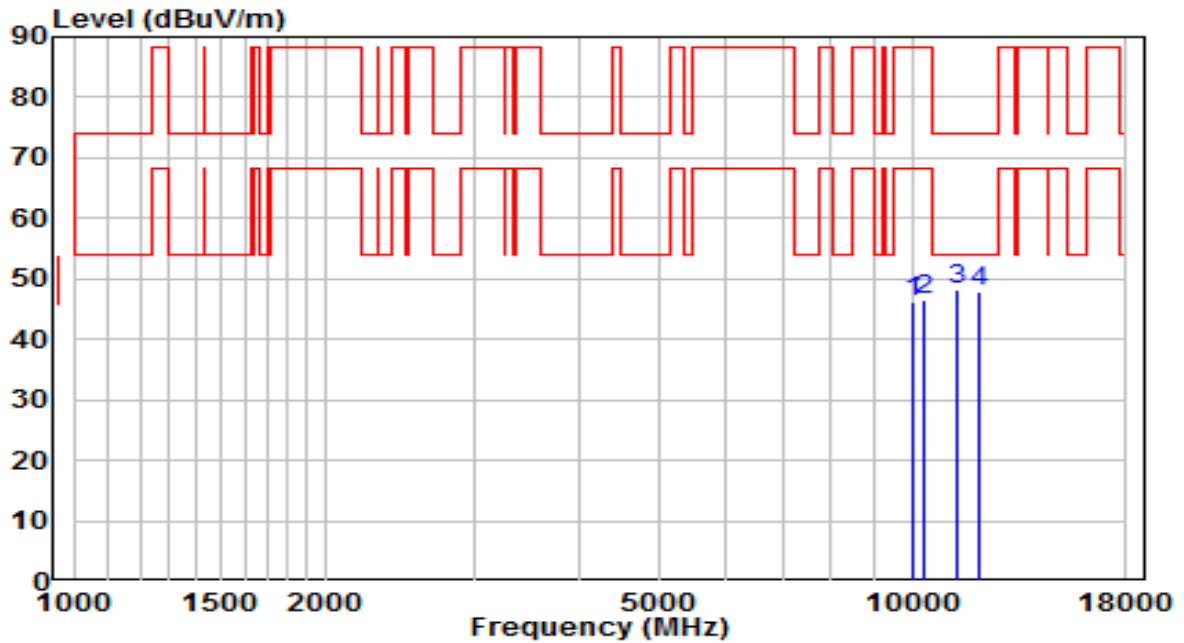


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10035.500 | 36.80 | 9.39 | 46.19 | -42.01 | 88.20 | Peak |
| 2 | 10316.000 | 36.76 | 9.63 | 46.39 | -41.81 | 88.20 | Peak |
| 3 | * 11302.000 | 37.61 | 10.50 | 48.12 | -25.88 | 74.00 | Peak |
| 4 | 12016.000 | 38.03 | 9.95 | 47.98 | -26.02 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7005MHz (Nss=2) | Test Voltage | 120V 60Hz |

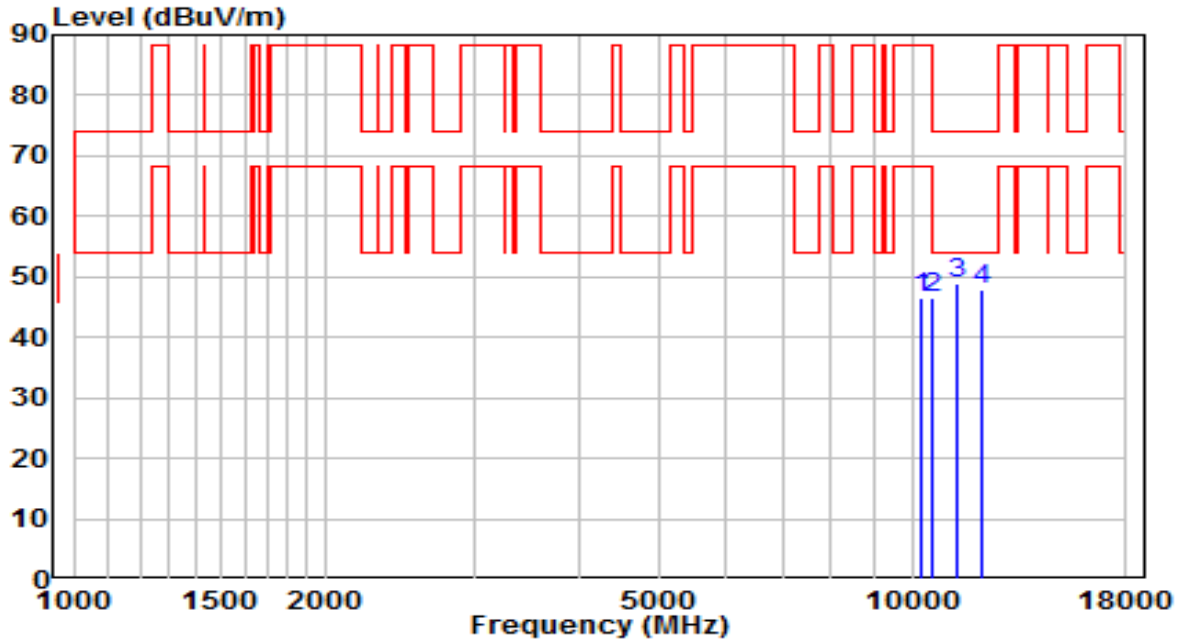


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10248.000 | 572.02 | -525.55 | 46.47 | -41.73 | 88.20 | Peak |
| 2 | 10554.000 | 572.25 | -525.70 | 46.55 | -41.65 | 88.20 | Peak |
| 3 | * 11310.500 | 574.85 | -526.00 | 48.85 | -25.15 | 74.00 | Peak |
| 4 | 12135.000 | 574.26 | -526.27 | 47.99 | -26.01 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=2) | Test Voltage | 120V 60Hz |

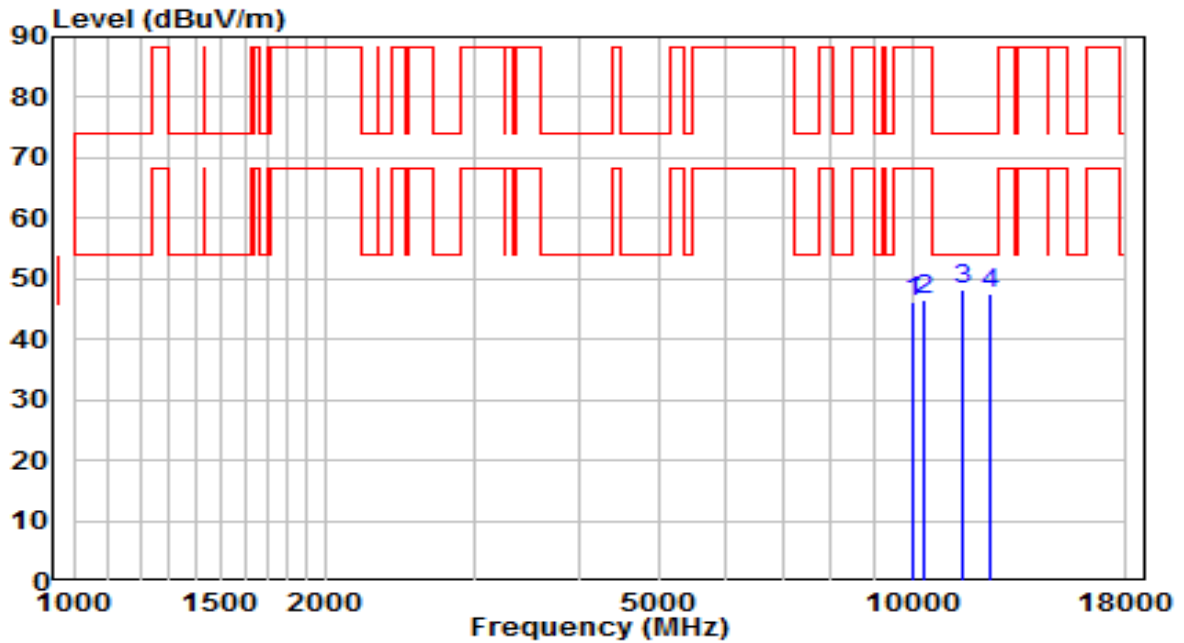


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9993.000 | 36.62 | 9.44 | 46.05 | -42.15 | 88.20 | Peak |
| 2 | 10316.000 | 36.97 | 9.63 | 46.60 | -41.60 | 88.20 | Peak |
| 3 | * 11472.000 | 38.02 | 10.32 | 48.33 | -25.67 | 74.00 | Peak |
| 4 | 12424.000 | 37.52 | 10.11 | 47.64 | -26.36 | 74.00 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=2) | Test Voltage | 120V 60Hz |

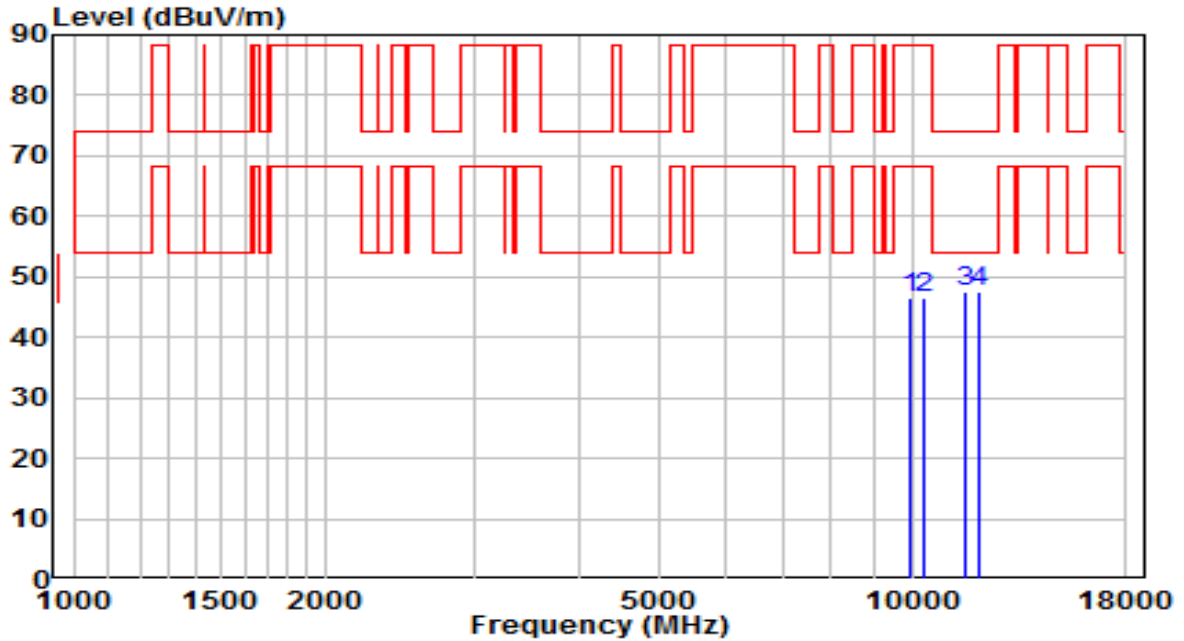


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9942.000 | 572.46 | -525.89 | 46.57 | -41.63 | 88.20 | Peak |
| 2 | 10307.500 | 572.42 | -525.73 | 46.69 | -41.51 | 88.20 | Peak |
| 3 | 11540.000 | 573.80 | -526.20 | 47.60 | -26.40 | 74.00 | Peak |
| 4 | * 12058.500 | 573.95 | -526.30 | 47.65 | -26.35 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=2) | Test Voltage | 120V 60Hz |

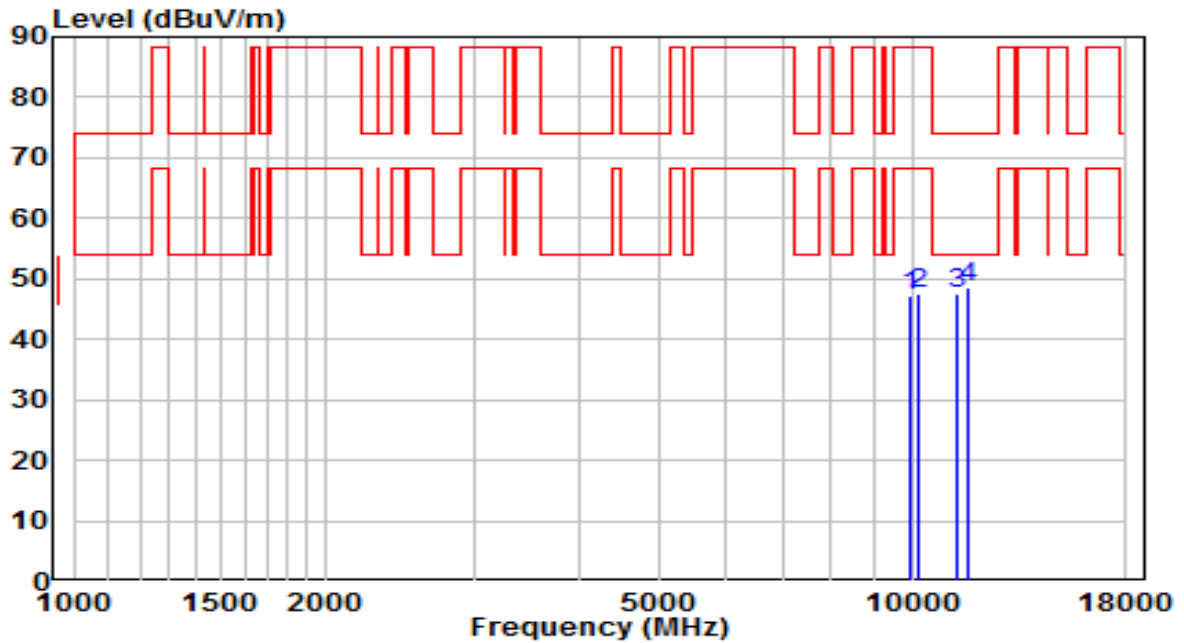


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9942.000 | 37.96 | 9.25 | 47.21 | -40.99 | 88.20 | Peak |
| 2 | 10188.500 | 38.03 | 9.64 | 47.68 | -40.52 | 88.20 | Peak |
| 3 | 11302.000 | 37.21 | 10.50 | 47.72 | -26.28 | 74.00 | Peak |
| 4 | * 11659.000 | 38.18 | 10.24 | 48.42 | -25.58 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=2) | Test Voltage | 120V 60Hz |

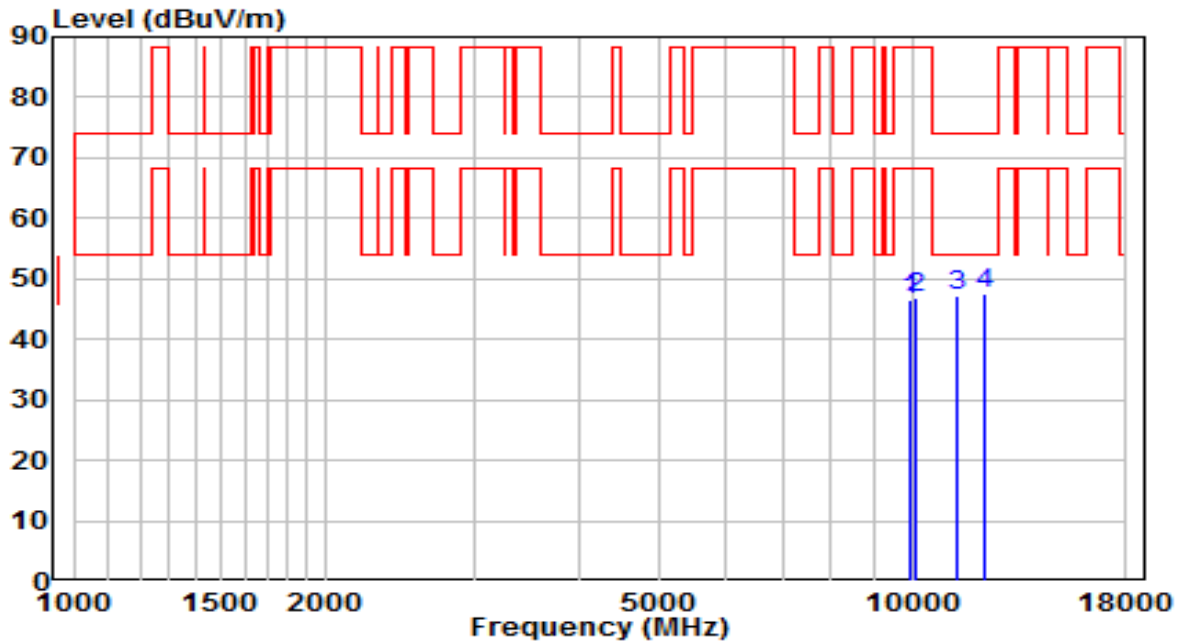


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9942.000 | 572.45 | -525.89 | 46.56 | -41.64 | 88.20 | Peak |
| 2 | 10086.500 | 572.57 | -525.65 | 46.92 | -41.28 | 88.20 | Peak |
| 3 | 11276.500 | 573.03 | -525.93 | 47.09 | -26.91 | 74.00 | Peak |
| 4 | * 12220.000 | 573.68 | -526.16 | 47.51 | -26.49 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6225MHz (Nss=2) | Test Voltage | 120V 60Hz |

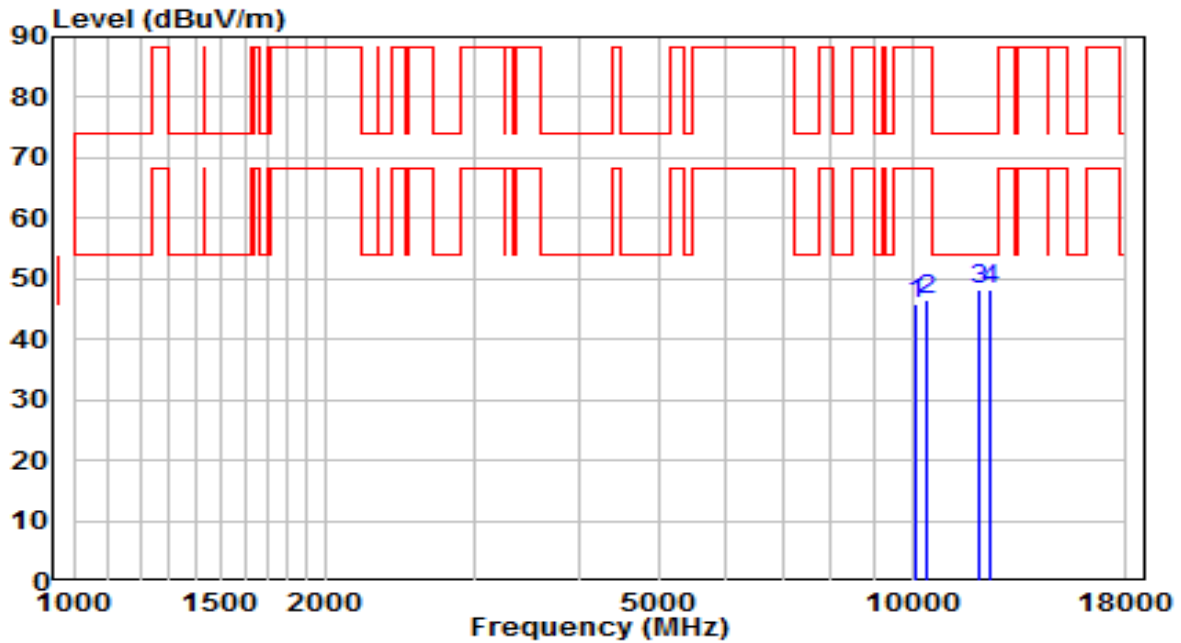


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10078.000 | 36.12 | 9.72 | 45.84 | -42.36 | 88.20 | Peak |
| 2 | 10401.000 | 36.63 | 9.76 | 46.39 | -41.81 | 88.20 | Peak |
| 3 | 12033.000 | 38.15 | 10.00 | 48.15 | -25.85 | 74.00 | Peak |
| 4 | * 12432.500 | 38.07 | 10.12 | 48.19 | -25.81 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6225MHz (Nss=2) | Test Voltage | 120V 60Hz |

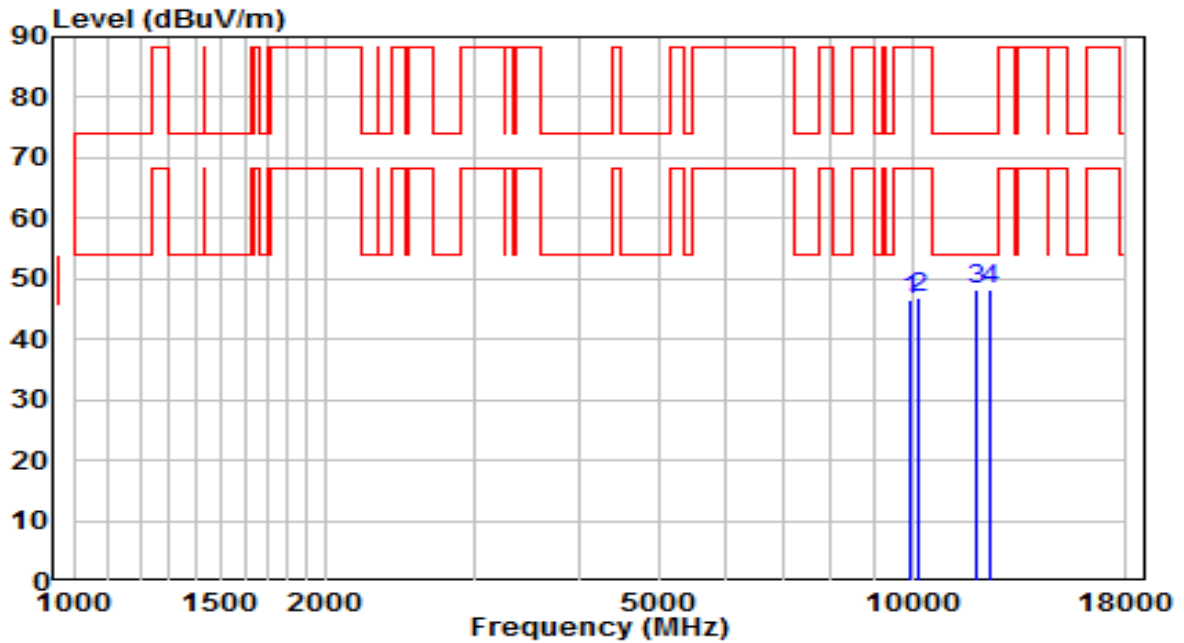


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9959.000 | 572.39 | -525.96 | 46.43 | -41.77 | 88.20 | Peak |
| 2 | 10163.000 | 572.49 | -525.53 | 46.96 | -41.24 | 88.20 | Peak |
| 3 | * 11888.500 | 574.54 | -526.28 | 48.27 | -25.73 | 74.00 | Peak |
| 4 | 12415.500 | 574.35 | -526.09 | 48.26 | -25.74 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6385MHz (Nss=2) | Test Voltage | 120V 60Hz |

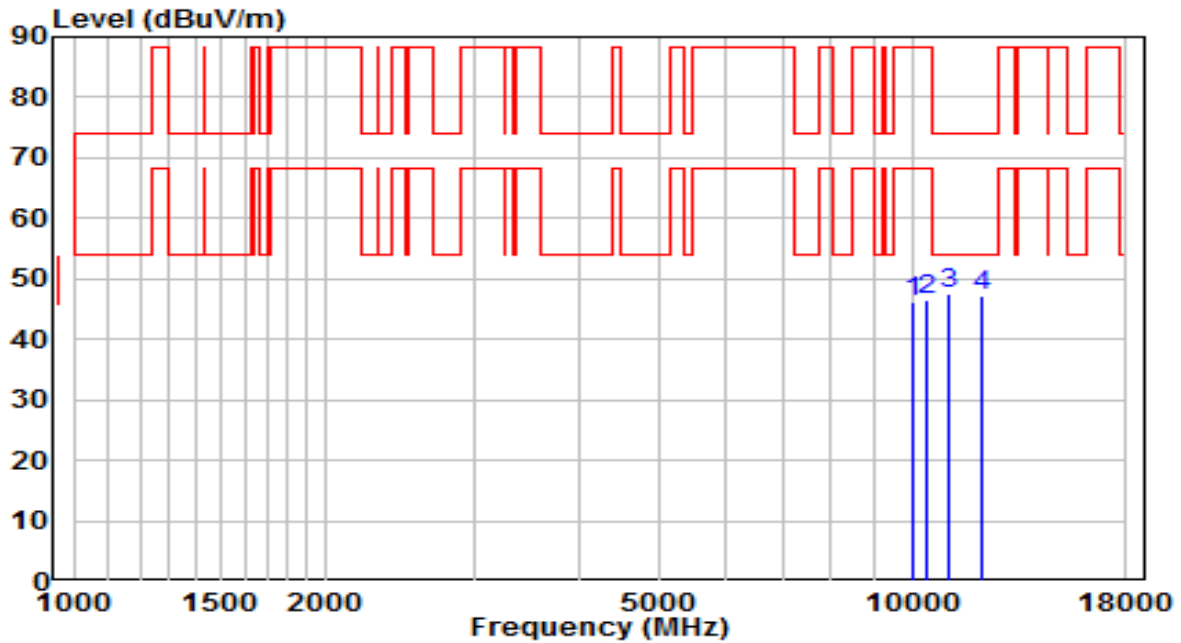


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10001.500 | 36.79 | 9.31 | 46.10 | -42.10 | 88.20 | Peak |
| 2 | 10401.000 | 36.80 | 9.76 | 46.56 | -41.64 | 88.20 | Peak |
| 3 | * 11098.000 | 37.19 | 10.46 | 47.65 | -26.35 | 74.00 | Peak |
| 4 | 12075.500 | 37.15 | 10.10 | 47.25 | -26.75 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6385MHz (Nss=2) | Test Voltage | 120V 60Hz |

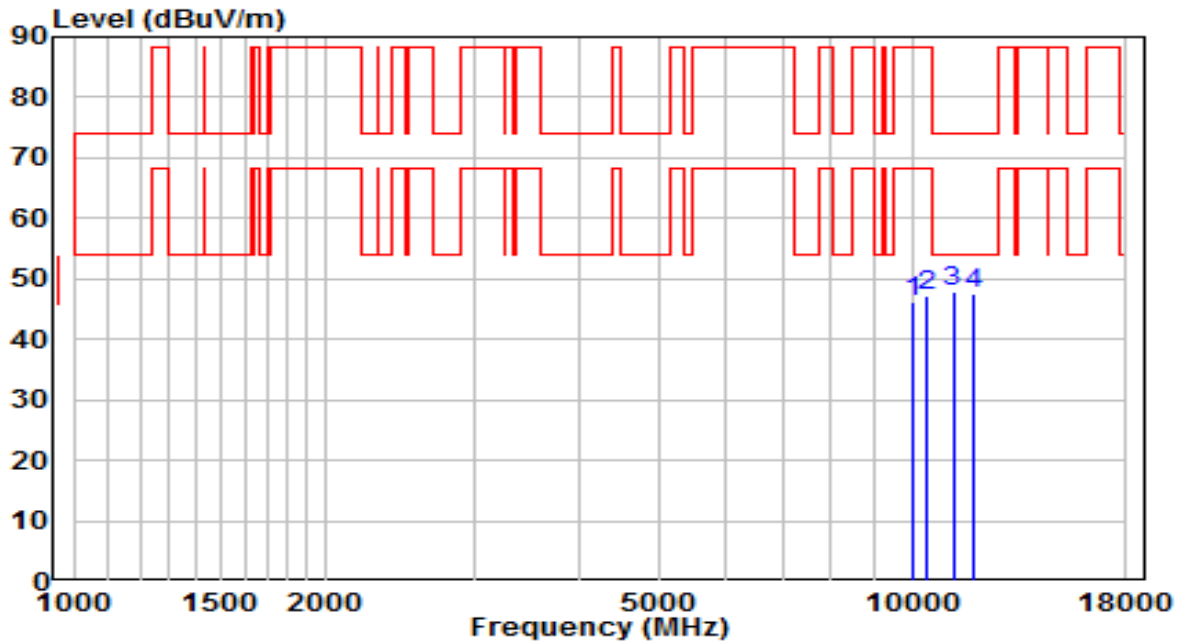


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10052.500 | 571.90 | -525.87 | 46.03 | -42.17 | 88.20 | Peak |
| 2 | 10392.500 | 572.93 | -525.60 | 47.33 | -40.87 | 88.20 | Peak |
| 3 | * 11183.000 | 573.75 | -525.84 | 47.91 | -26.09 | 74.00 | Peak |
| 4 | 11812.000 | 574.00 | -526.39 | 47.61 | -26.39 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6465MHz (Nss=2) | Test Voltage | 120V 60Hz |

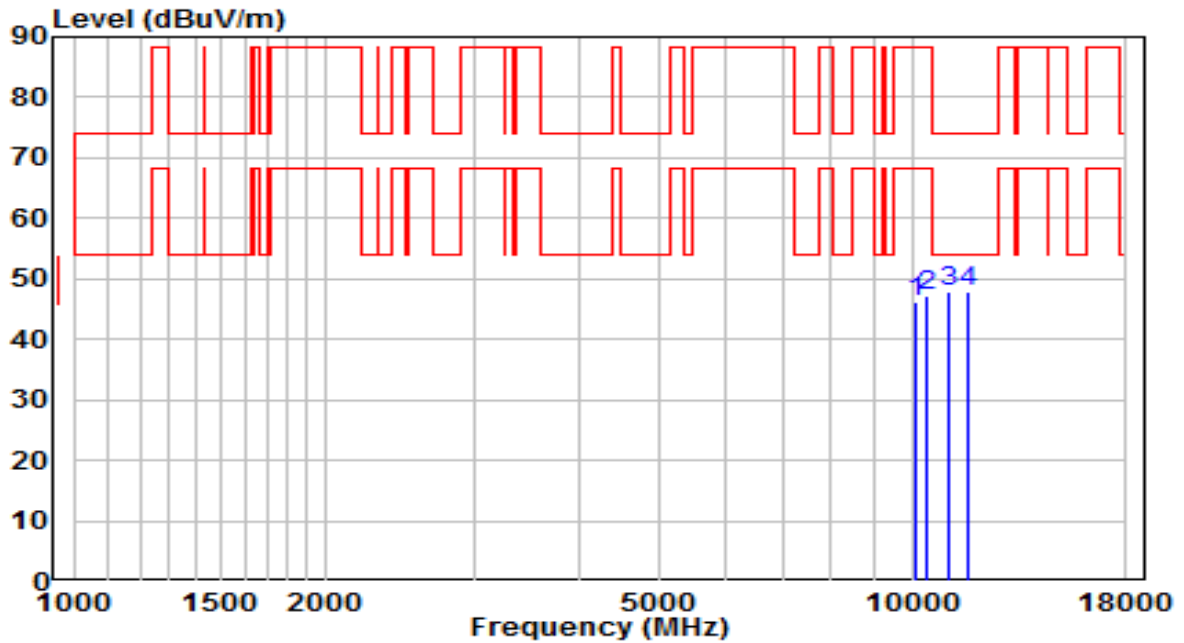


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10086.500 | 36.53 | 9.53 | 46.06 | -42.14 | 88.20 | Peak |
| 2 | 10418.000 | 37.24 | 9.87 | 47.11 | -41.09 | 88.20 | Peak |
| 3 | * 11072.500 | 37.33 | 10.60 | 47.93 | -26.07 | 74.00 | Peak |
| 4 | 11659.000 | 37.67 | 10.24 | 47.91 | -26.09 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6465MHz (Nss=2) | Test Voltage | 120V 60Hz |

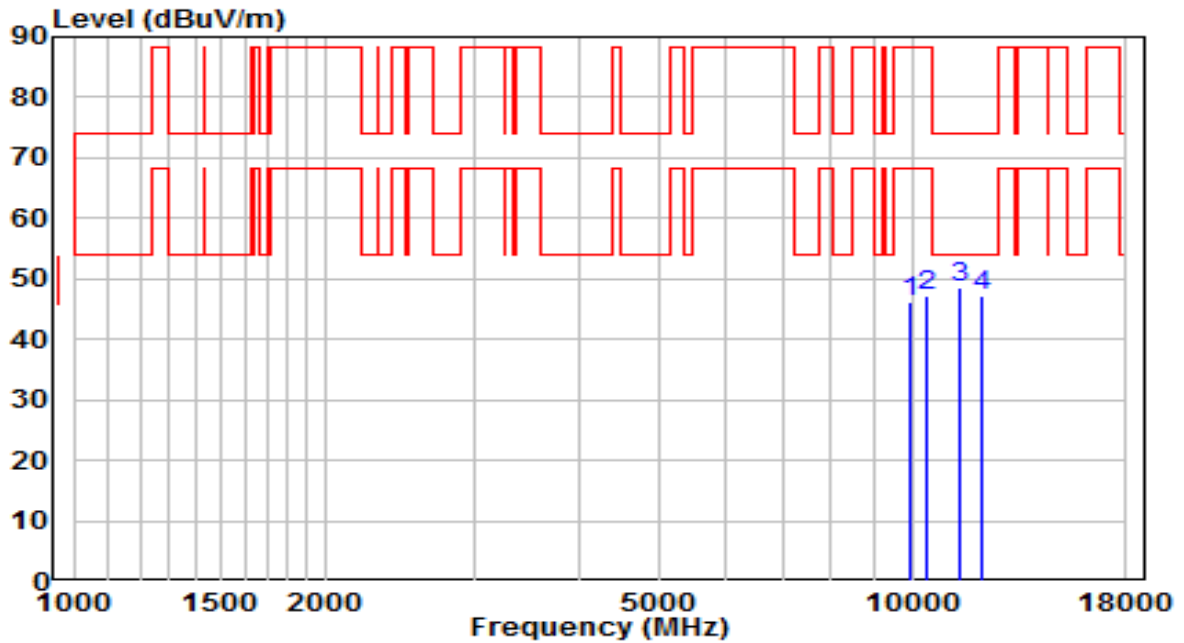


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9925.000 | 571.87 | -525.63 | 46.25 | -41.95 | 88.20 | Peak |
| 2 | 10384.000 | 572.80 | -525.57 | 47.22 | -40.98 | 88.20 | Peak |
| 3 | * 11370.000 | 574.61 | -526.15 | 48.46 | -25.54 | 74.00 | Peak |
| 4 | 12118.000 | 573.55 | -526.37 | 47.18 | -26.82 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6545MHz (Nss=2) | Test Voltage | 120V 60Hz |

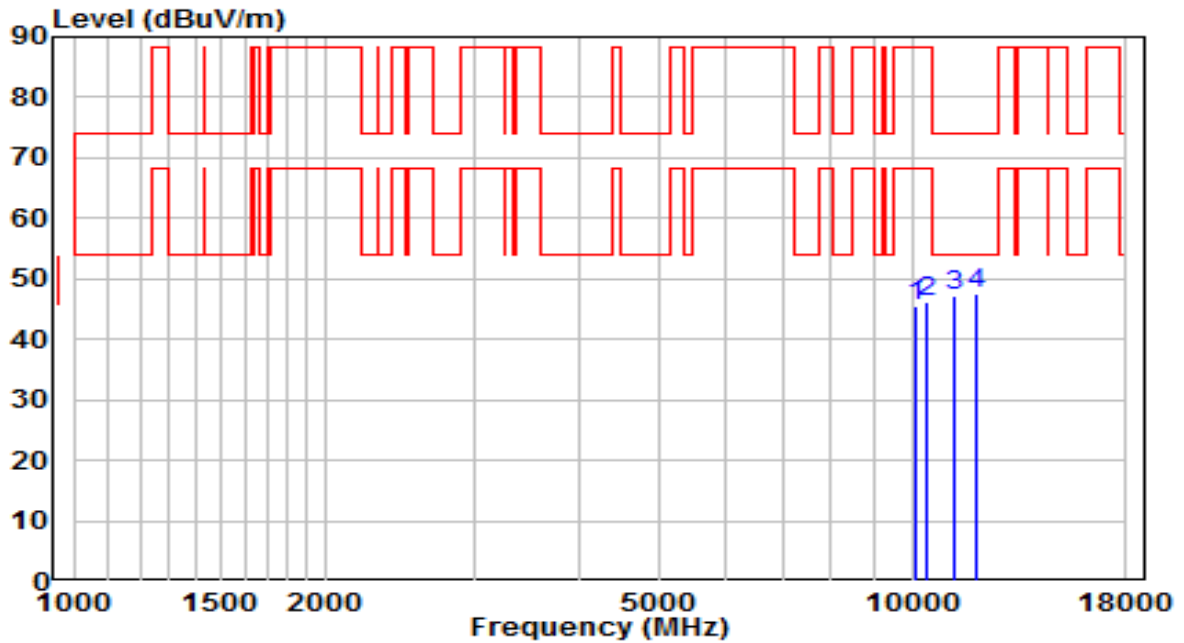


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10103.500 | 36.28 | 9.25 | 45.53 | -42.67 | 88.20 | Peak |
| 2 | 10409.500 | 36.49 | 9.82 | 46.31 | -41.89 | 88.20 | Peak |
| 3 | 11225.500 | 36.71 | 10.36 | 47.07 | -26.93 | 74.00 | Peak |
| 4 | * 11965.000 | 37.51 | 9.99 | 47.50 | -26.50 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6545MHz (Nss=2) | Test Voltage | 120V 60Hz |

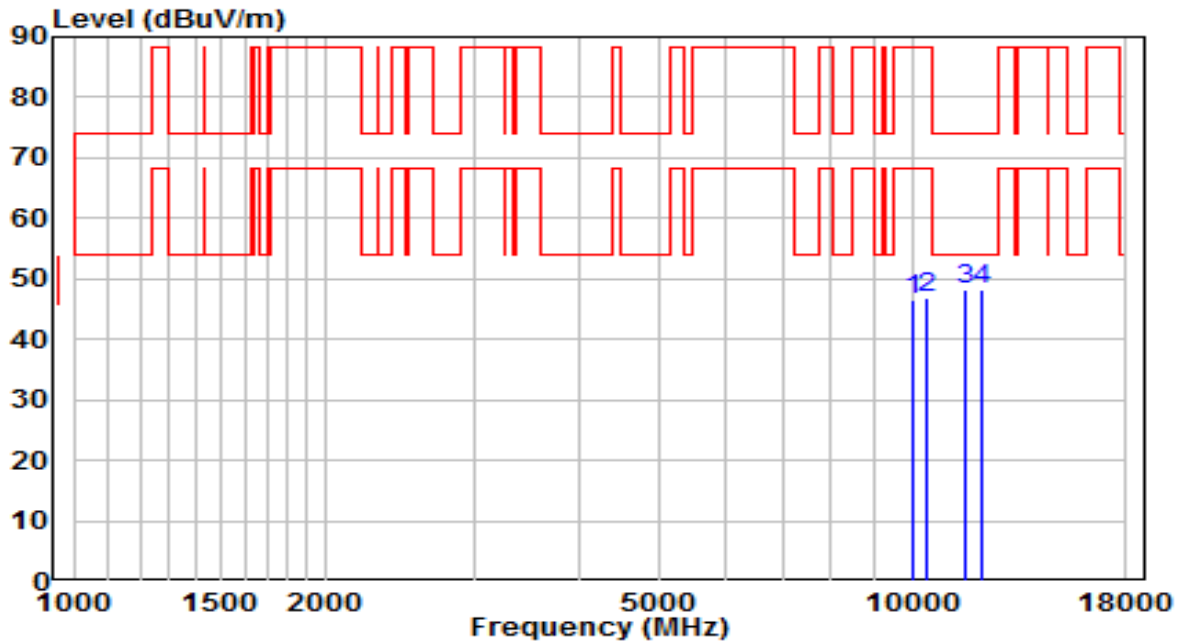


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10018.500 | 572.27 | -525.66 | 46.60 | -41.60 | 88.20 | Peak |
| 2 | 10375.500 | 572.30 | -525.58 | 46.73 | -41.47 | 88.20 | Peak |
| 3 | 11599.500 | 574.19 | -526.12 | 48.08 | -25.92 | 74.00 | Peak |
| 4 | * 12143.500 | 574.42 | -526.21 | 48.22 | -25.78 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6625MHz (Nss=2) | Test Voltage | 120V 60Hz |

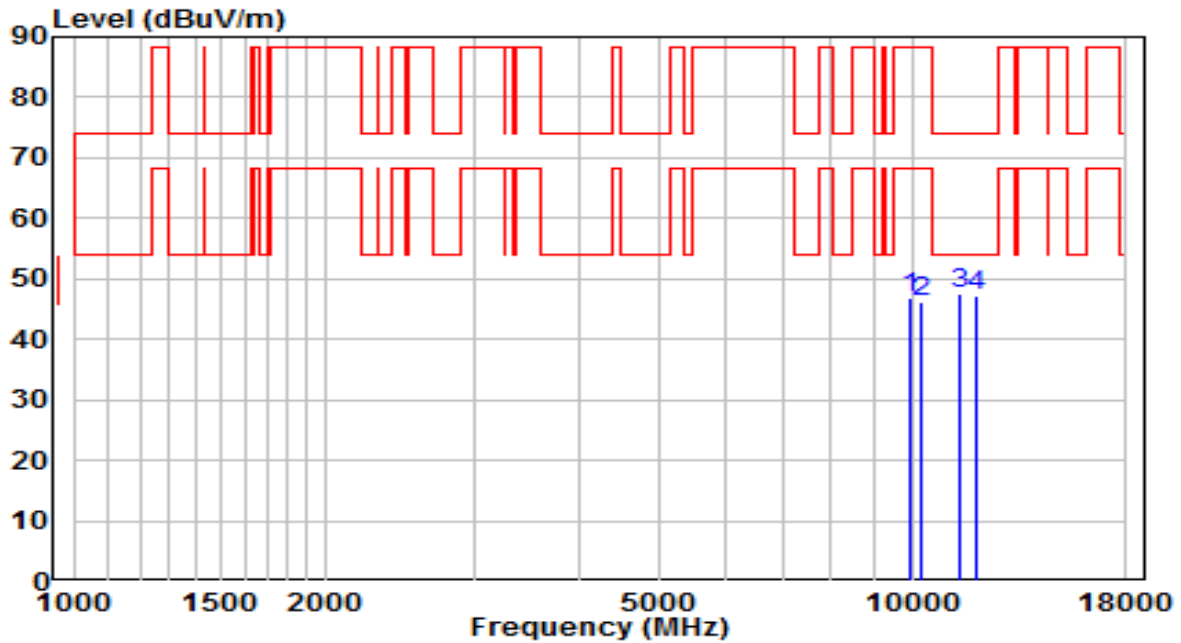


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9942.000 | 37.52 | 9.25 | 46.77 | -41.43 | 88.20 | Peak |
| 2 | 10265.000 | 36.62 | 9.60 | 46.21 | -41.99 | 88.20 | Peak |
| 3 | * 11387.000 | 37.01 | 10.48 | 47.49 | -26.51 | 74.00 | Peak |
| 4 | 11897.000 | 37.22 | 10.09 | 47.32 | -26.68 | 74.00 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6625MHz (Nss=2) | Test Voltage | 120V 60Hz |

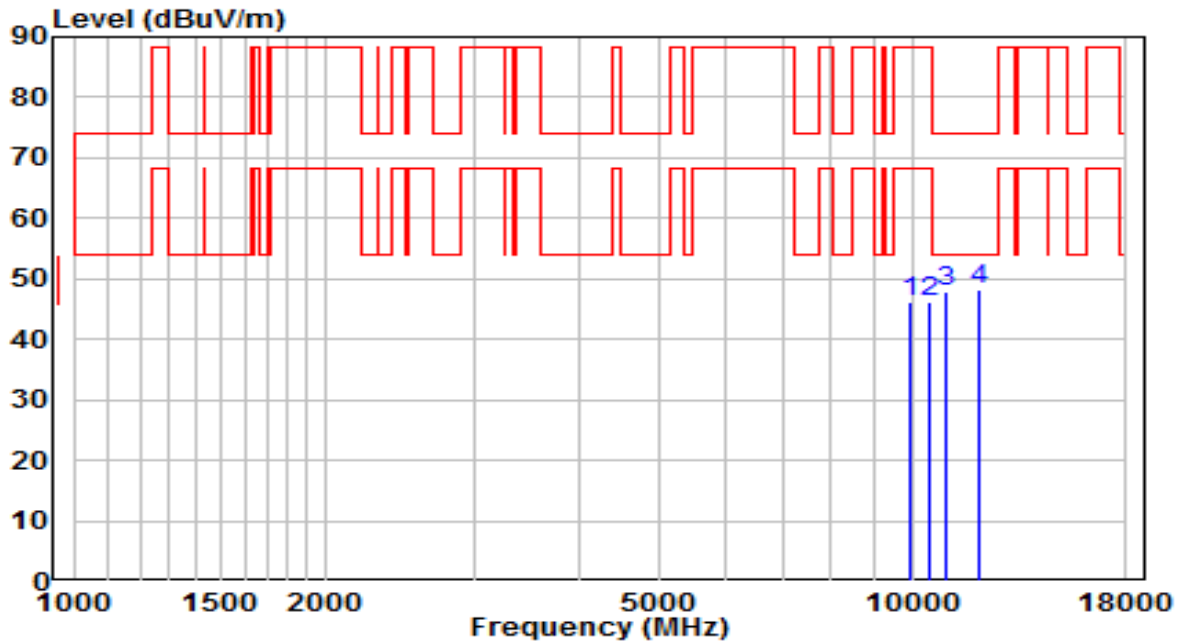


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9942.000 | 572.01 | -525.89 | 46.12 | -42.08 | 88.20 | Peak |
| 2 | 10503.000 | 572.02 | -525.67 | 46.36 | -41.84 | 88.20 | Peak |
| 3 | 10996.000 | 573.46 | -525.66 | 47.80 | -26.20 | 74.00 | Peak |
| 4 | * 12024.500 | 574.61 | -526.37 | 48.24 | -25.76 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6705MHz (Nss=2) | Test Voltage | 120V 60Hz |

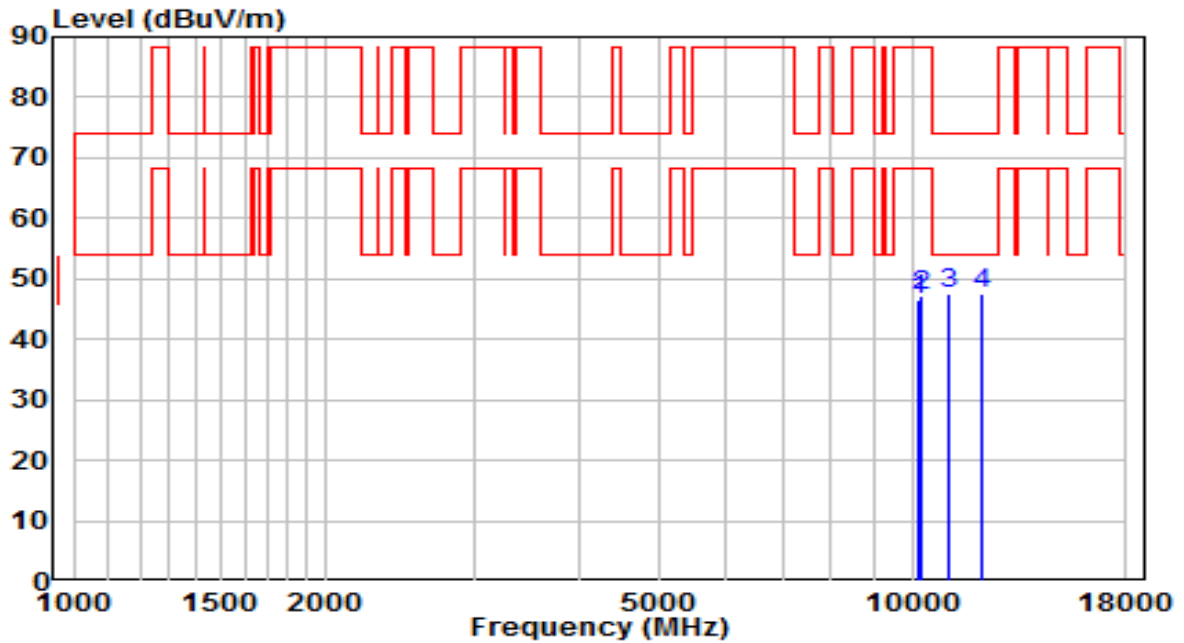


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10171.500 | 36.75 | 9.72 | 46.47 | -41.73 | 88.20 | Peak |
| 2 | 10248.000 | 37.53 | 9.71 | 47.24 | -40.96 | 88.20 | Peak |
| 3 | 11081.000 | 36.85 | 10.62 | 47.47 | -26.53 | 74.00 | Peak |
| 4 | * 12135.000 | 37.64 | 10.01 | 47.65 | -26.35 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6705MHz (Nss=2) | Test Voltage | 120V 60Hz |

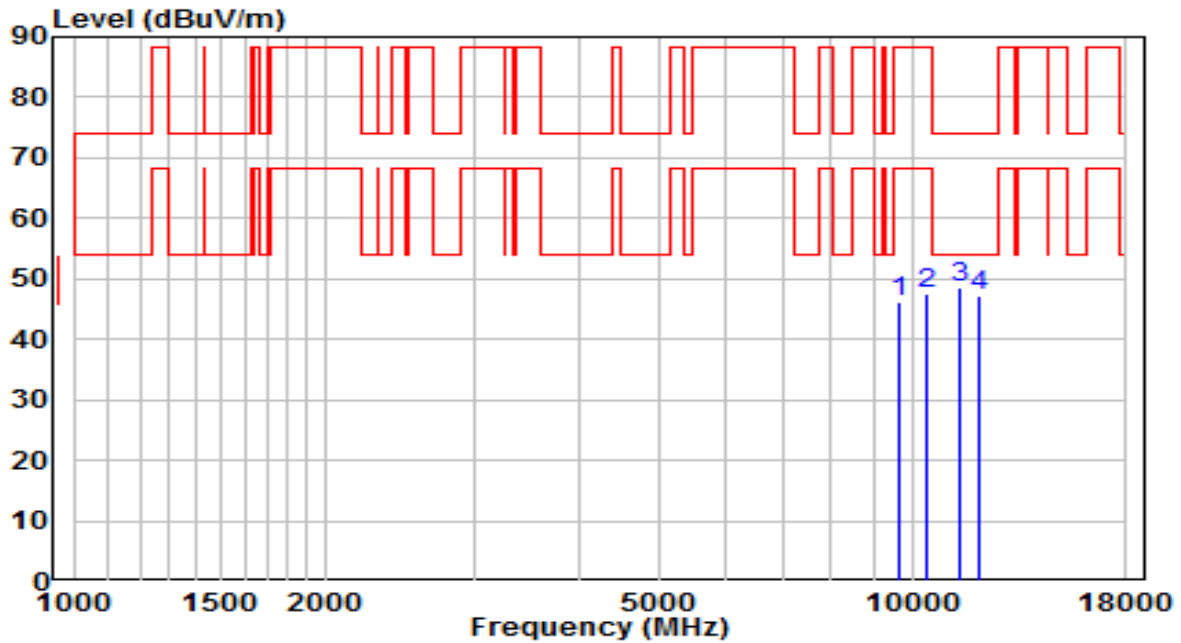


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9678.500 | 572.06 | -525.79 | 46.27 | -41.93 | 88.20 | Peak |
| 2 | 10392.500 | 573.04 | -525.60 | 47.44 | -40.76 | 88.20 | Peak |
| 3 | * 11438.000 | 574.36 | -525.92 | 48.43 | -25.57 | 74.00 | Peak |
| 4 | 12033.000 | 573.67 | -526.34 | 47.33 | -26.67 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6865MHz (Nss=2) | Test Voltage | 120V 60Hz |

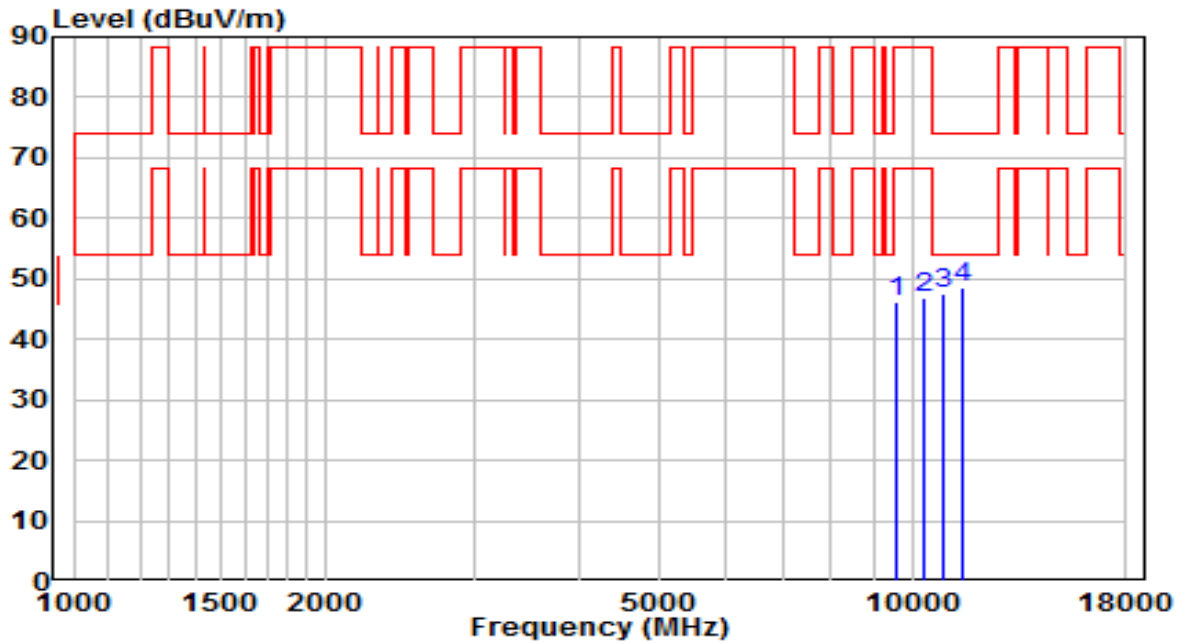


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9610.500 | 37.05 | 9.12 | 46.16 | -42.04 | 88.20 | Peak |
| 2 | 10333.000 | 37.13 | 9.75 | 46.88 | -41.32 | 88.20 | Peak |
| 3 | 10919.500 | 37.33 | 10.33 | 47.66 | -26.34 | 74.00 | Peak |
| 4 | * 11523.000 | 38.34 | 10.32 | 48.66 | -25.34 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6865MHz (Nss=2) | Test Voltage | 120V 60Hz |

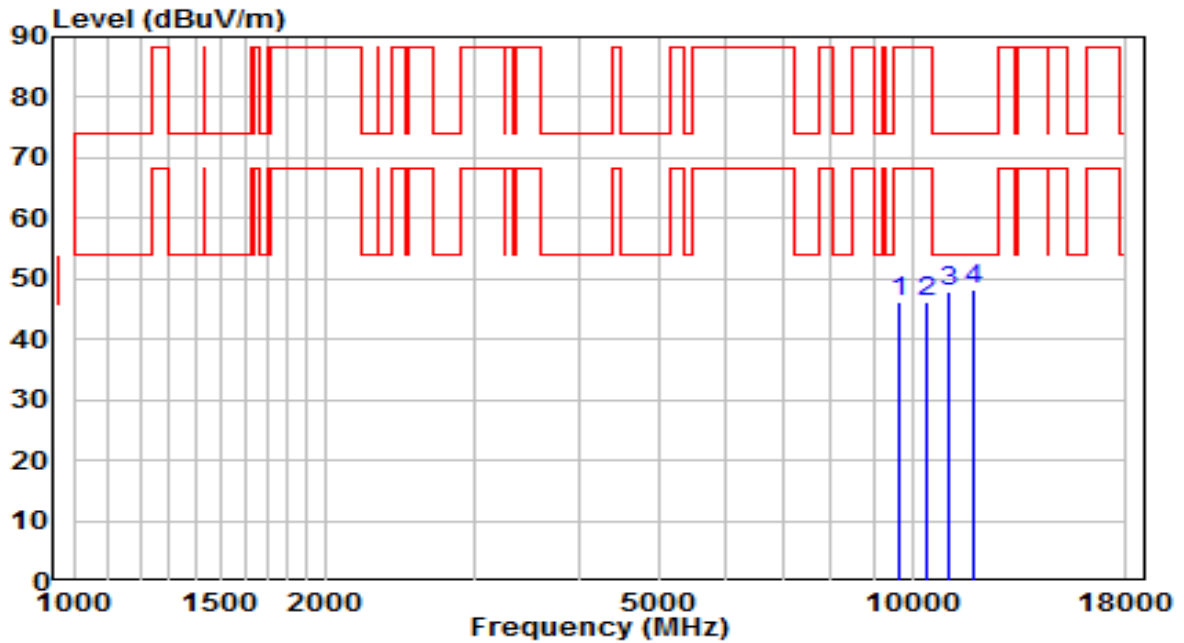


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9644.500 | 572.21 | -526.05 | 46.16 | -42.04 | 88.20 | Peak |
| 2 | 10426.500 | 571.77 | -525.52 | 46.25 | -41.95 | 88.20 | Peak |
| 3 | 11089.500 | 573.56 | -525.71 | 47.84 | -26.16 | 74.00 | Peak |
| 4 | * 11803.500 | 574.59 | -526.23 | 48.36 | -25.64 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6945MHz (Nss=2) | Test Voltage | 120V 60Hz |

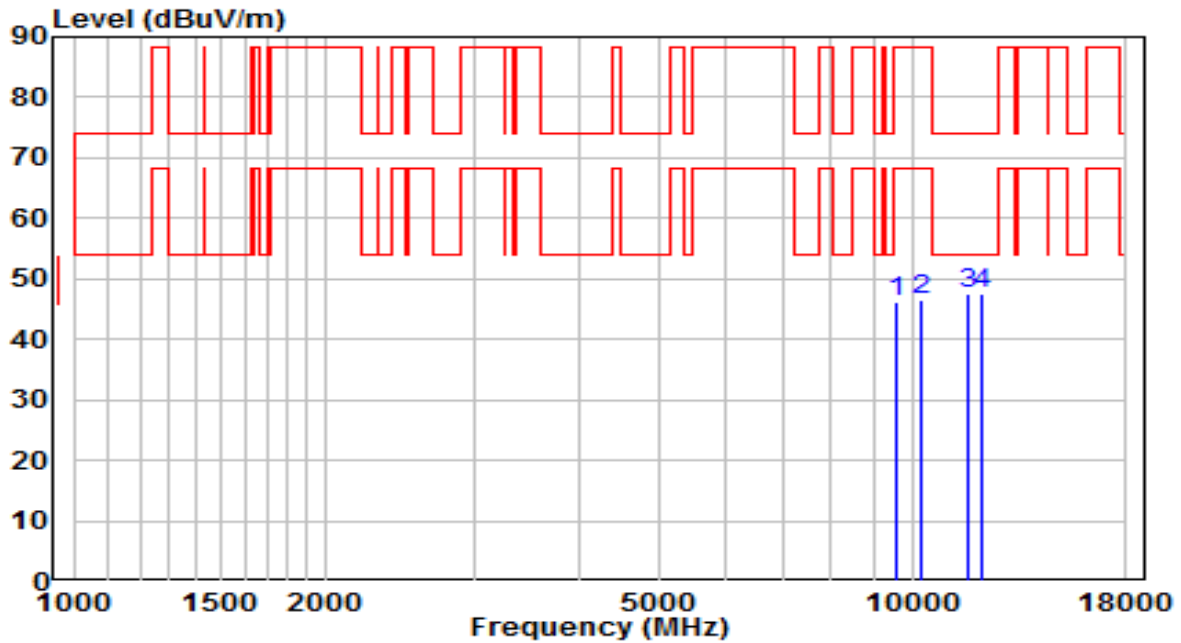


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9610.500 | 37.09 | 9.12 | 46.21 | -41.99 | 88.20 | Peak |
| 2 | 10282.000 | 36.88 | 9.67 | 46.55 | -41.65 | 88.20 | Peak |
| 3 | * 11642.000 | 37.26 | 10.36 | 47.61 | -26.39 | 74.00 | Peak |
| 4 | 12126.500 | 37.53 | 9.94 | 47.47 | -26.53 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6945MHz (Nss=2) | Test Voltage | 120V 60Hz |

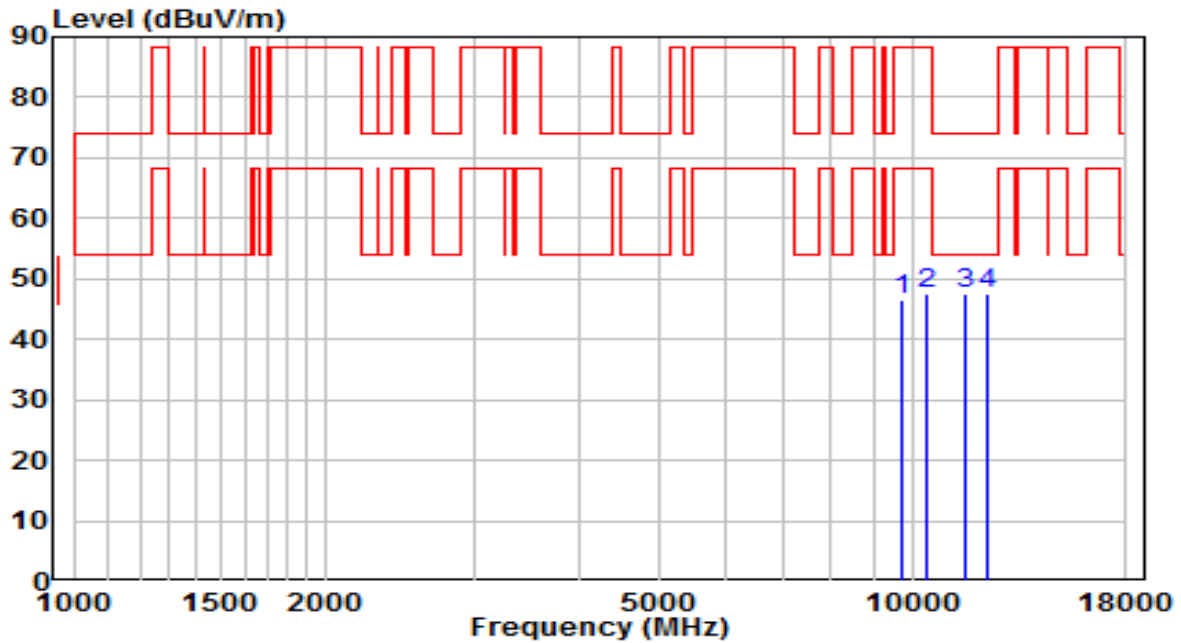


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9721.000 | 572.31 | -525.87 | 46.45 | -41.75 | 88.20 | Peak |
| 2 | 10418.000 | 572.98 | -525.51 | 47.47 | -40.73 | 88.20 | Peak |
| 3 | * 11557.000 | 573.99 | -526.33 | 47.66 | -26.34 | 74.00 | Peak |
| 4 | 12322.000 | 573.65 | -526.20 | 47.45 | -26.55 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=2) | Test Voltage | 120V 60Hz |

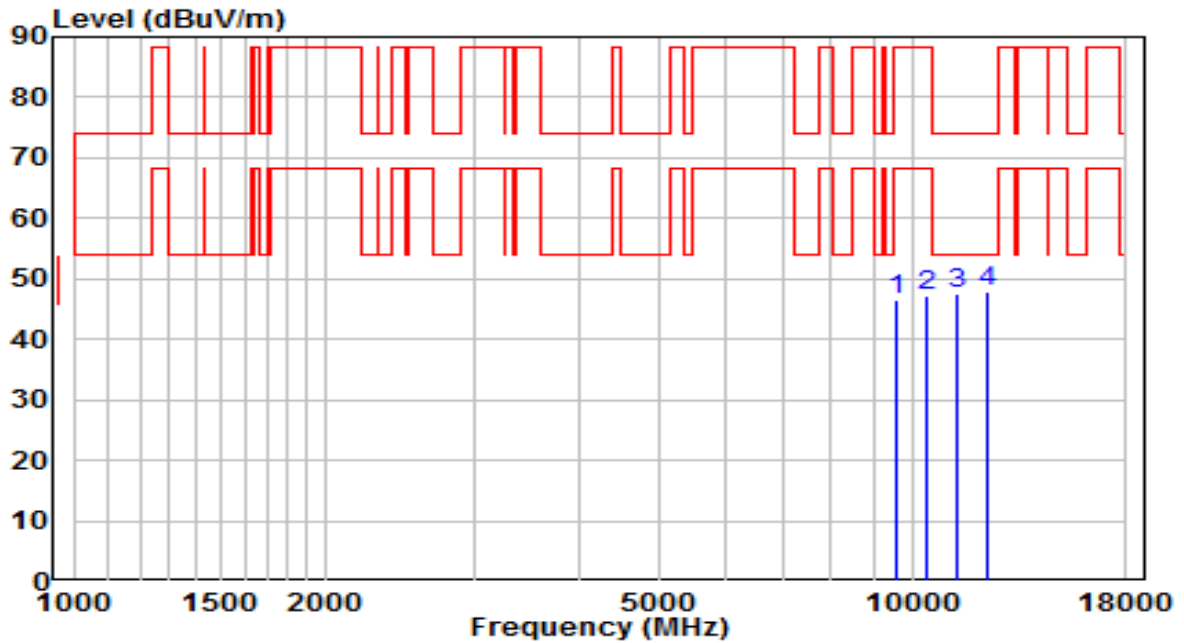


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9610.500 | 37.27 | 9.12 | 46.39 | -41.81 | 88.20 | Peak |
| 2 | 10401.000 | 37.55 | 9.76 | 47.32 | -40.88 | 88.20 | Peak |
| 3 | 11344.500 | 37.16 | 10.48 | 47.64 | -26.36 | 74.00 | Peak |
| 4 | * 12271.000 | 37.83 | 9.93 | 47.75 | -26.25 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=2) | Test Voltage | 120V 60Hz |

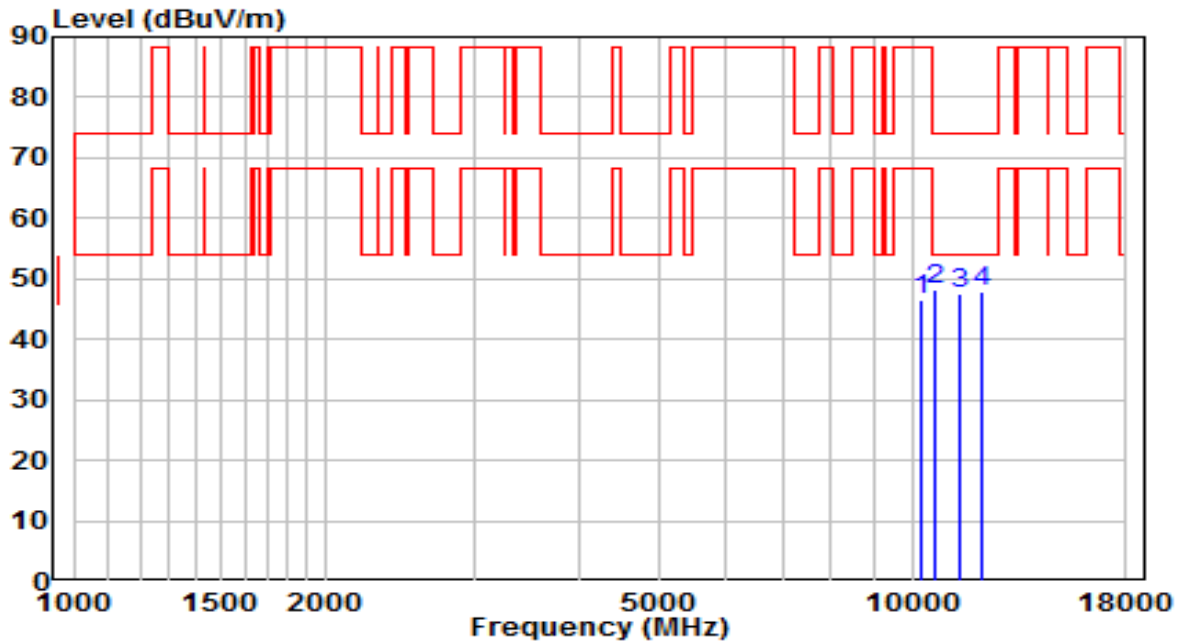


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10265.000 | 572.15 | -525.68 | 46.47 | -41.73 | 88.20 | Peak |
| 2 | * 10630.500 | 573.92 | -525.69 | 48.23 | -25.77 | 74.00 | Peak |
| 3 | 11438.000 | 573.54 | -525.92 | 47.61 | -26.39 | 74.00 | Peak |
| 4 | 12109.500 | 574.16 | -526.34 | 47.82 | -26.18 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=2) | Test Voltage | 120V 60Hz |

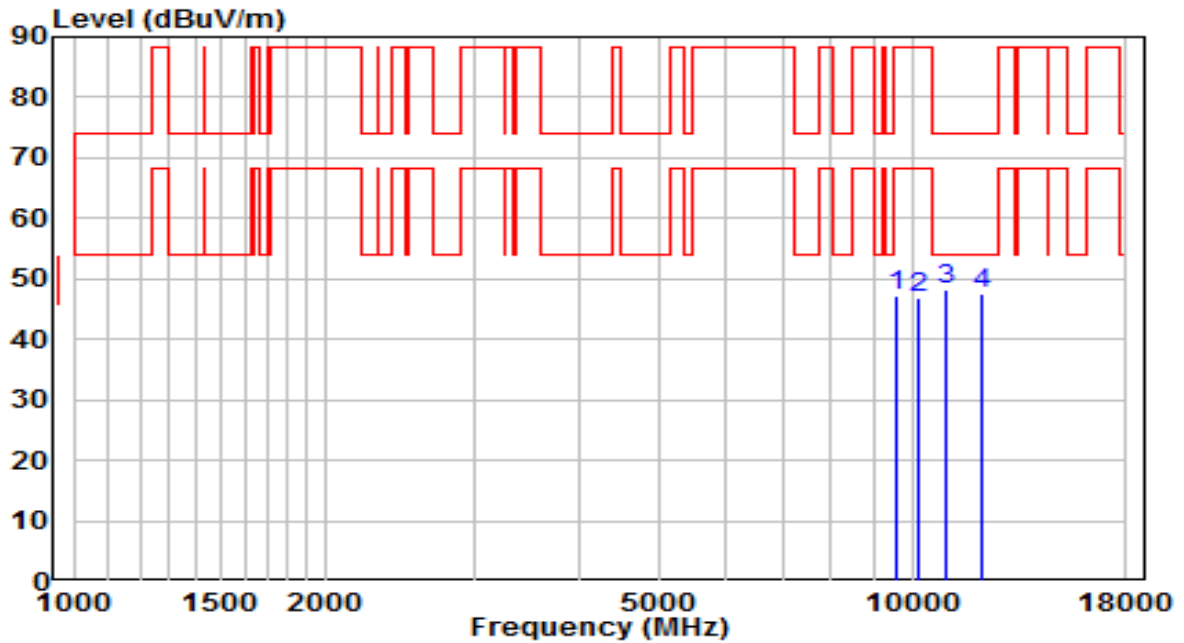


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9585.000 | 38.09 | 9.07 | 47.16 | -41.04 | 88.20 | Peak |
| 2 | 10171.500 | 37.15 | 9.72 | 46.86 | -41.34 | 88.20 | Peak |
| 3 | * 10936.500 | 37.74 | 10.46 | 48.20 | -25.80 | 74.00 | Peak |
| 4 | 12118.000 | 37.63 | 9.92 | 47.55 | -26.45 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=2) | Test Voltage | 120V 60Hz |

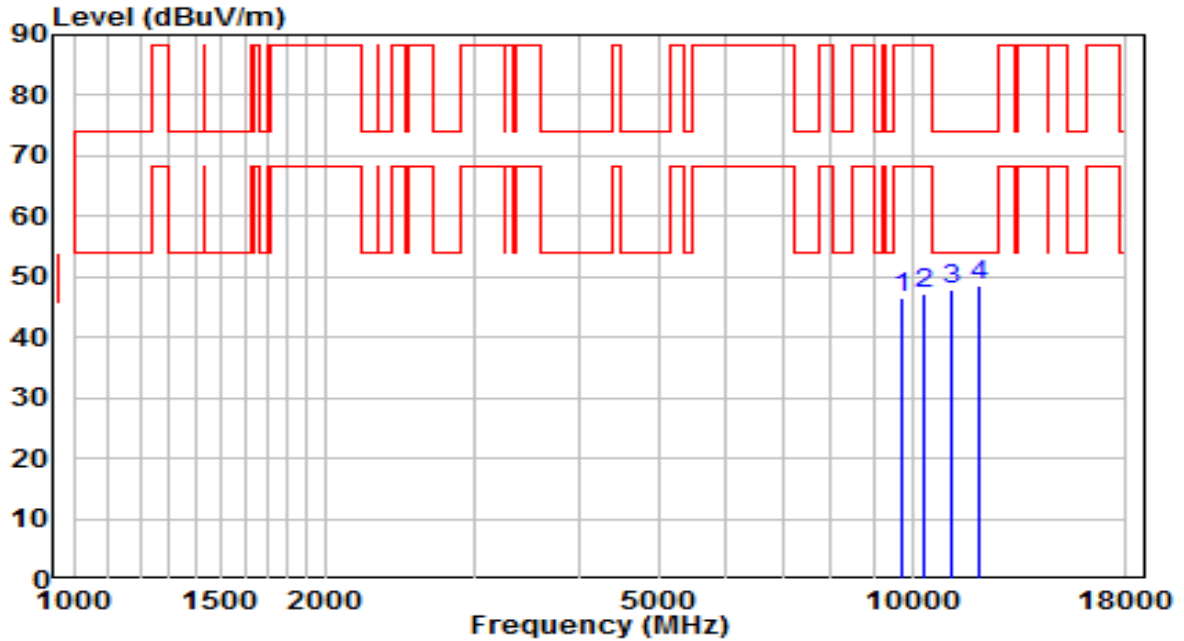


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9695.500 | 572.60 | -526.08 | 46.52 | -41.68 | 88.20 | Peak |
| 2 | 10350.000 | 572.71 | -525.62 | 47.09 | -41.11 | 88.20 | Peak |
| 3 | 11123.500 | 573.66 | -525.90 | 47.77 | -26.23 | 74.00 | Peak |
| 4 | * 12058.500 | 574.71 | -526.30 | 48.41 | -25.59 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6345MHz (Nss=2) | Test Voltage | 120V 60Hz |

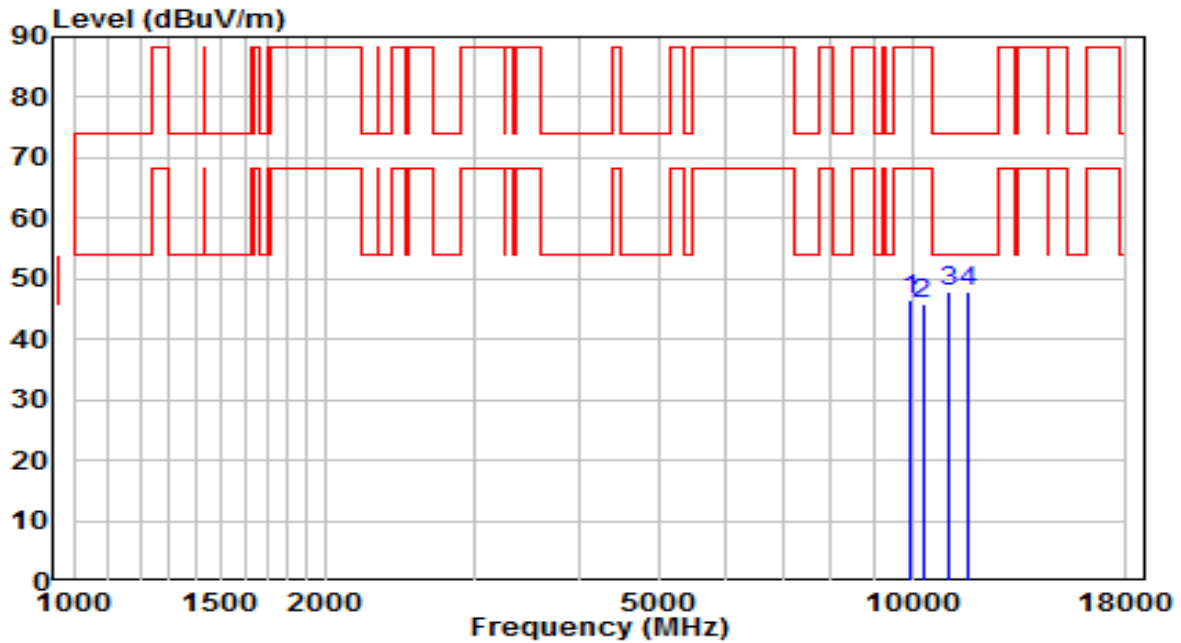


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9925.000 | 37.00 | 9.51 | 46.51 | -41.69 | 88.20 | Peak |
| 2 | 10290.500 | 36.17 | 9.74 | 45.90 | -42.30 | 88.20 | Peak |
| 3 | * 11072.500 | 37.22 | 10.60 | 47.82 | -26.18 | 74.00 | Peak |
| 4 | 11625.000 | 37.58 | 10.17 | 47.75 | -26.25 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6345MHz (Nss=2) | Test Voltage | 120V 60Hz |

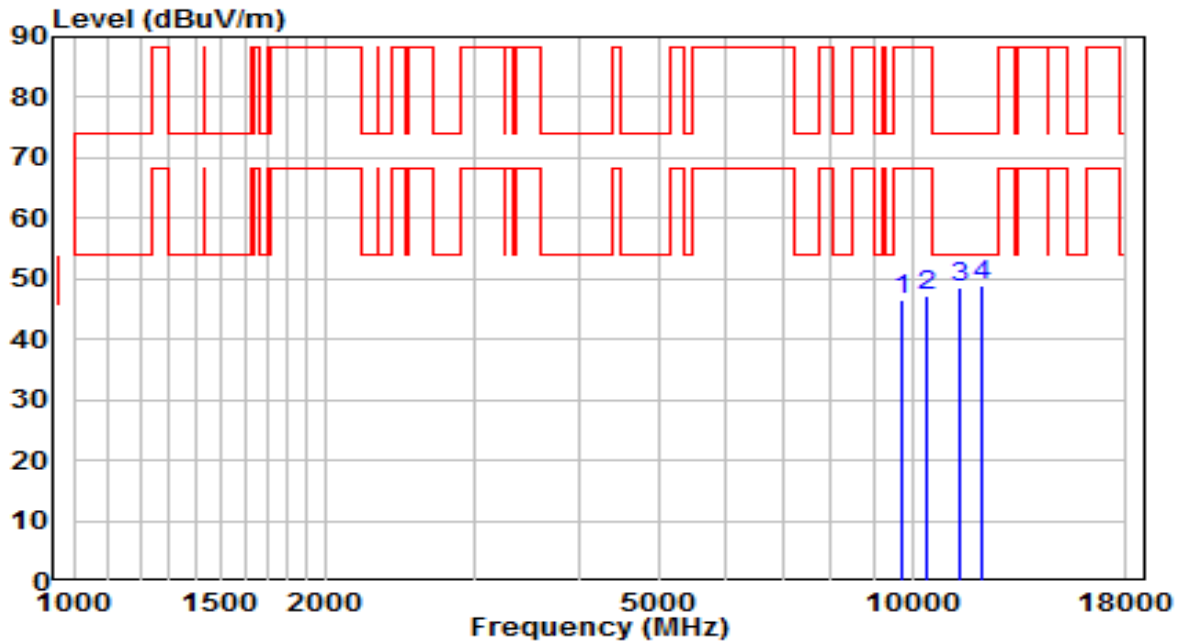


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9695.500 | 572.76 | -526.08 | 46.68 | -41.52 | 88.20 | Peak |
| 2 | 10384.000 | 572.83 | -525.57 | 47.25 | -40.95 | 88.20 | Peak |
| 3 | 11429.500 | 574.50 | -526.02 | 48.48 | -25.52 | 74.00 | Peak |
| 4 | * 12135.000 | 575.17 | -526.27 | 48.90 | -25.10 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6505MHz (Nss=2) | Test Voltage | 120V 60Hz |

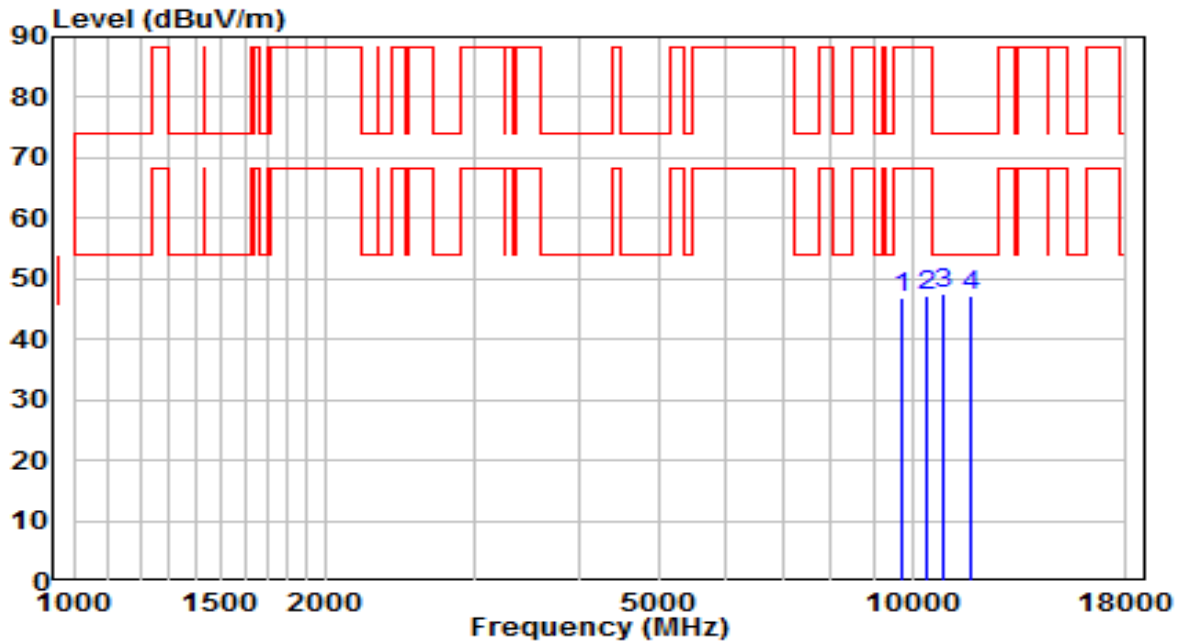


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9695.500 | 37.78 | 9.00 | 46.78 | -41.42 | 88.20 | Peak |
| 2 | 10401.000 | 37.35 | 9.76 | 47.12 | -41.08 | 88.20 | Peak |
| 3 | * 10919.500 | 37.21 | 10.33 | 47.54 | -26.46 | 74.00 | Peak |
| 4 | 11752.500 | 37.07 | 10.28 | 47.34 | -26.66 | 74.00 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6505MHz (Nss=2) | Test Voltage | 120V 60Hz |

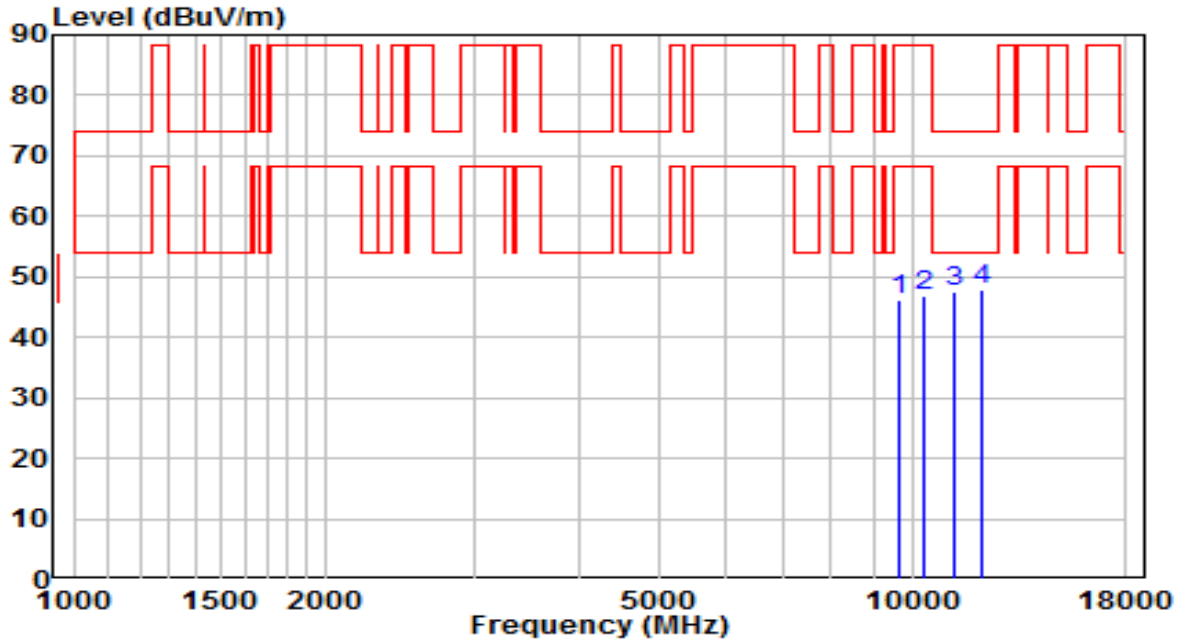


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9619.000 | 572.13 | -525.92 | 46.21 | -41.99 | 88.20 | Peak |
| 2 | 10324.500 | 572.31 | -525.59 | 46.72 | -41.48 | 88.20 | Peak |
| 3 | 11251.000 | 573.66 | -526.02 | 47.64 | -26.36 | 74.00 | Peak |
| 4 | * 12109.500 | 574.14 | -526.34 | 47.80 | -26.20 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6665MHz (Nss=2) | Test Voltage | 120V 60Hz |

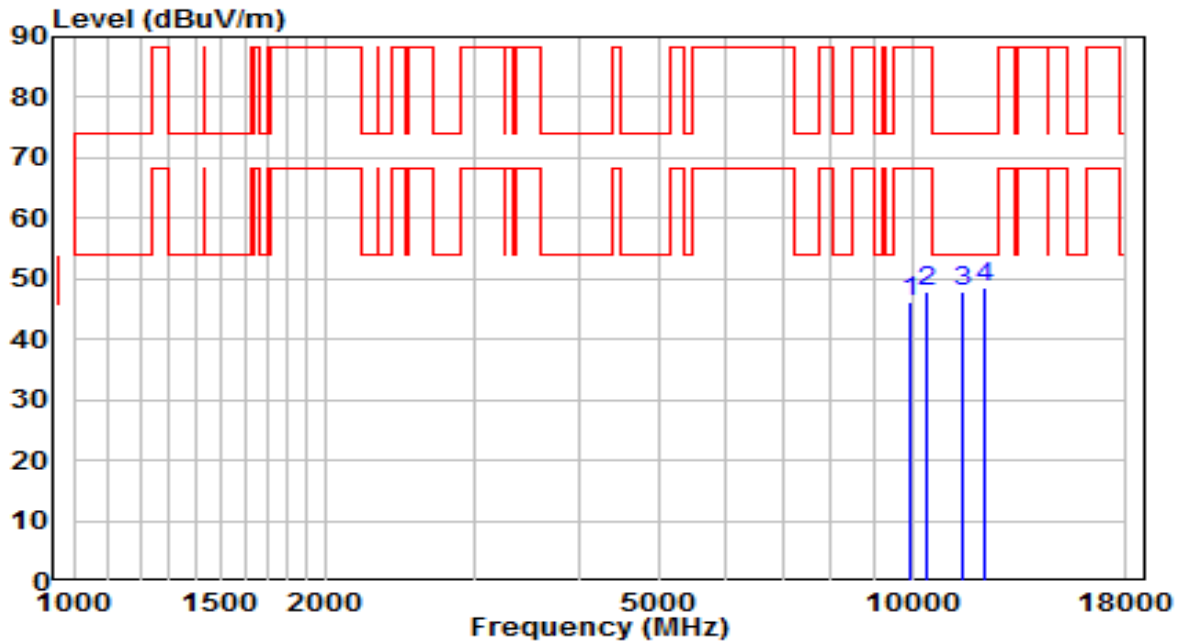


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9959.000 | 37.07 | 9.19 | 46.25 | -41.95 | 88.20 | Peak |
| 2 | 10409.500 | 38.14 | 9.82 | 47.96 | -40.24 | 88.20 | Peak |
| 3 | 11455.000 | 37.74 | 10.29 | 48.03 | -25.97 | 74.00 | Peak |
| 4 | * 12245.500 | 38.44 | 10.15 | 48.58 | -25.42 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6665MHz (Nss=2) | Test Voltage | 120V 60Hz |

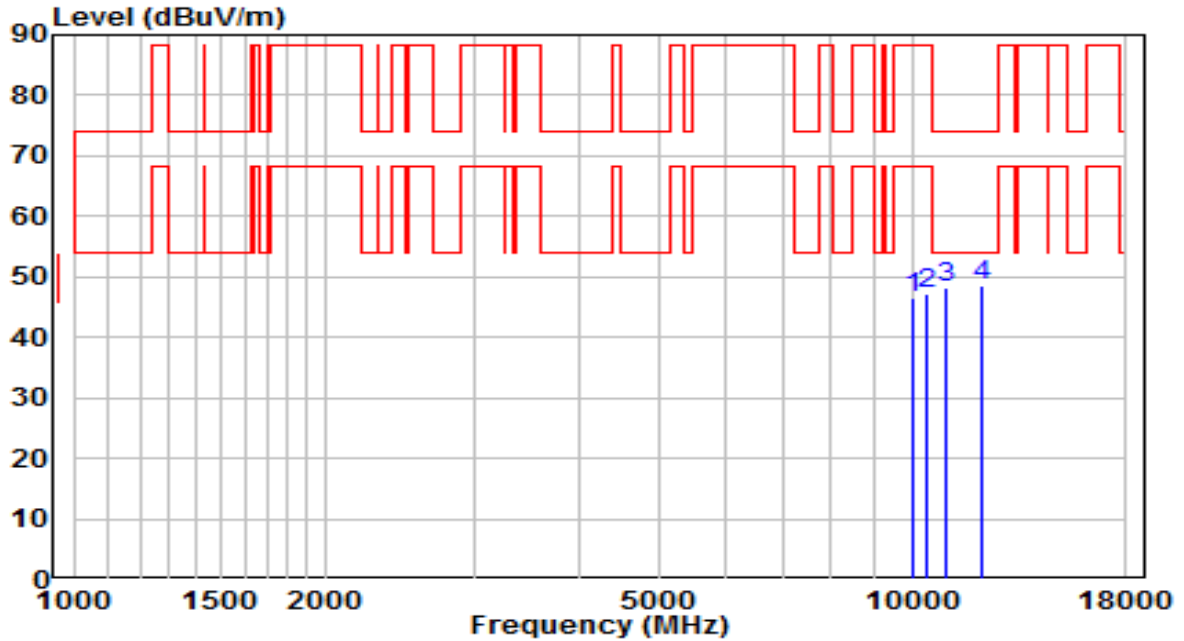


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10018.500 | 572.34 | -525.66 | 46.68 | -41.52 | 88.20 | Peak |
| 2 | 10384.000 | 572.95 | -525.57 | 47.37 | -40.83 | 88.20 | Peak |
| 3 | 10996.000 | 573.90 | -525.66 | 48.24 | -25.76 | 74.00 | Peak |
| 4 | * 12118.000 | 575.04 | -526.37 | 48.67 | -25.33 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6825MHz (Nss=2) | Test Voltage | 120V 60Hz |

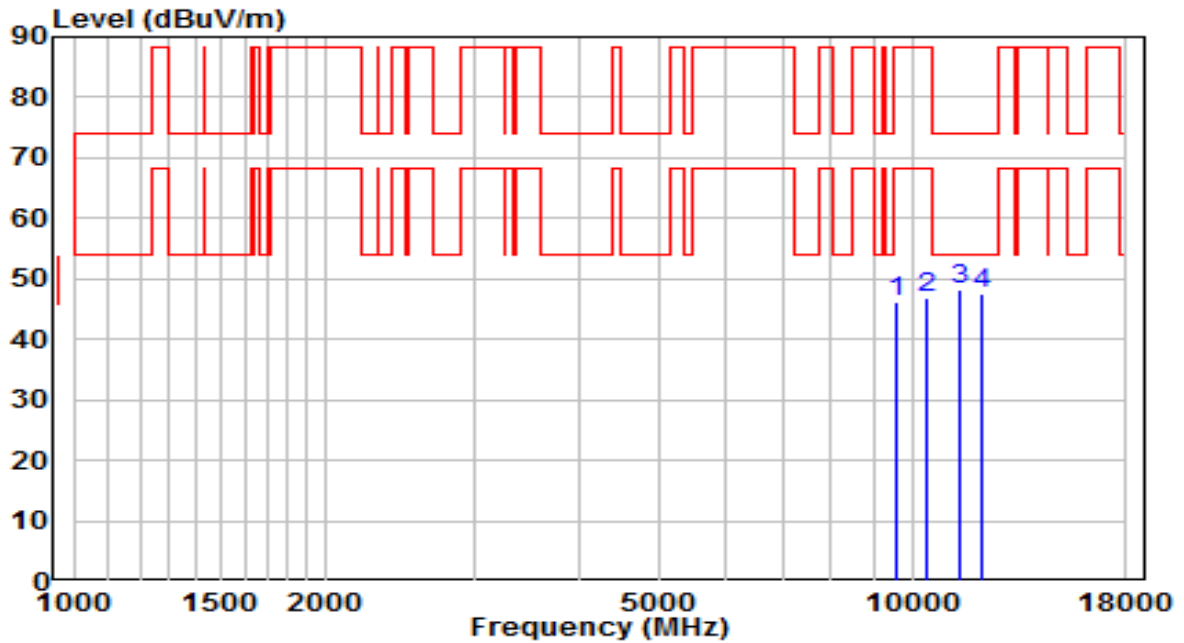


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9602.000 | 37.05 | 9.08 | 46.12 | -42.08 | 88.20 | Peak |
| 2 | 10401.000 | 37.05 | 9.76 | 46.82 | -41.38 | 88.20 | Peak |
| 3 | * 11387.000 | 37.67 | 10.48 | 48.15 | -25.85 | 74.00 | Peak |
| 4 | 12075.500 | 37.51 | 10.10 | 47.61 | -26.39 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6825MHz (Nss=2) | Test Voltage | 120V 60Hz |

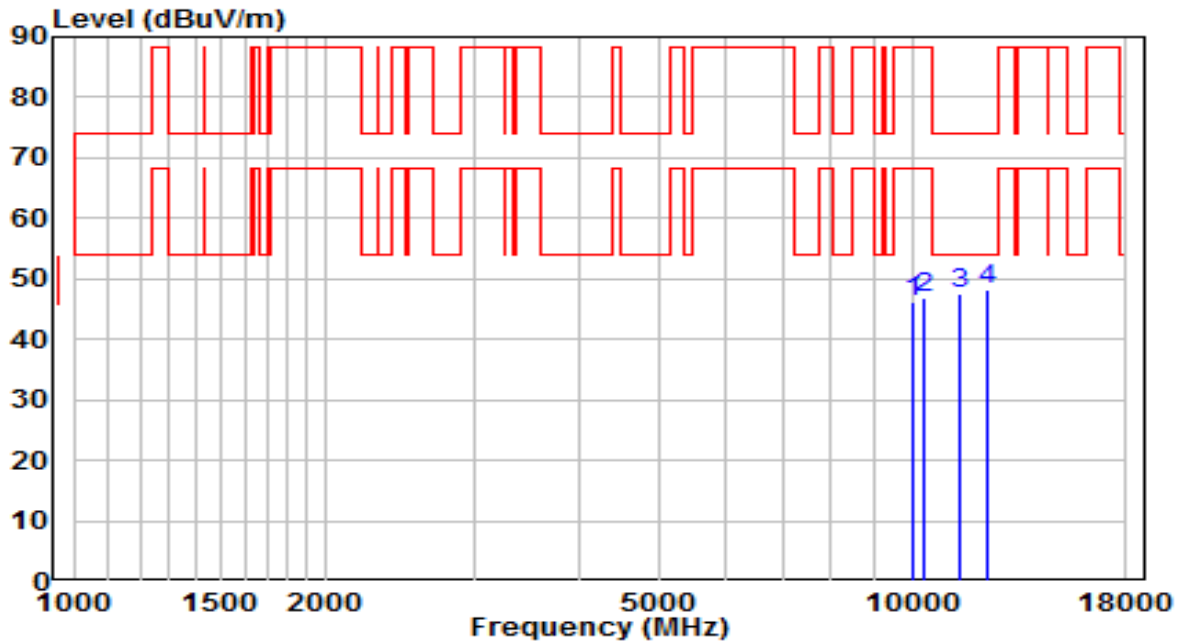


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 10035.500 | 571.94 | -525.77 | 46.18 | -42.02 | 88.20 | Peak |
| 2 | 10367.000 | 572.36 | -525.62 | 46.74 | -41.46 | 88.20 | Peak |
| 3 | 11387.000 | 573.65 | -525.98 | 47.67 | -26.33 | 74.00 | Peak |
| 4 | * 12330.500 | 574.43 | -526.17 | 48.26 | -25.74 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=2) | Test Voltage | 120V 60Hz |

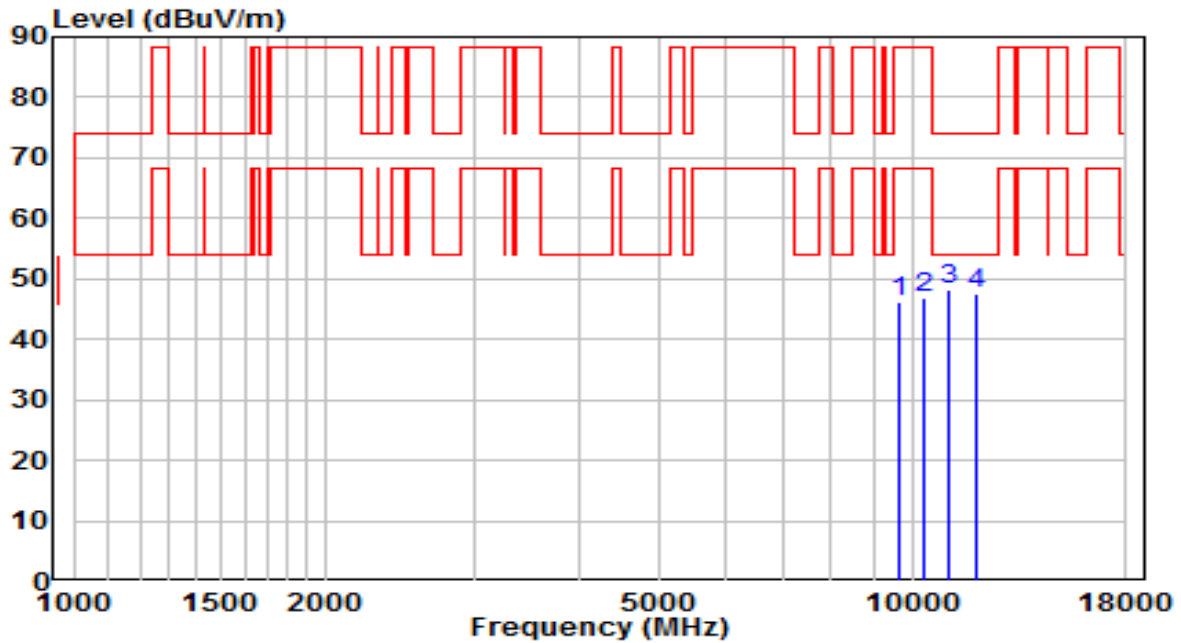


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9627.500 | 36.85 | 9.20 | 46.05 | -42.15 | 88.20 | Peak |
| 2 | 10333.000 | 37.16 | 9.75 | 46.91 | -41.29 | 88.20 | Peak |
| 3 | * 11064.000 | 37.74 | 10.57 | 48.31 | -25.69 | 74.00 | Peak |
| 4 | 11905.500 | 37.41 | 10.07 | 47.48 | -26.52 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Pre-amplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-11-04 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 23.2°C/37% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Bob Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=2) | Test Voltage | 120V 60Hz |

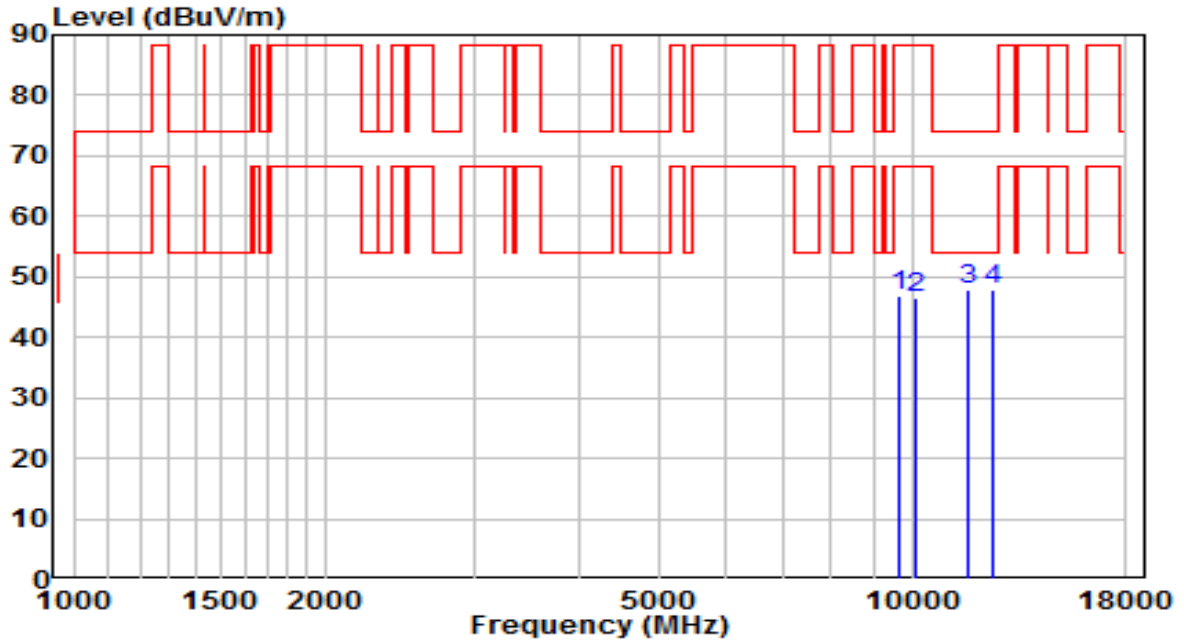


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 9678.500 | 572.66 | -525.79 | 46.87 | -41.33 | 88.20 | Peak |
| 2 | 10129.000 | 572.10 | -525.55 | 46.55 | -41.65 | 88.20 | Peak |
| 3 | 11650.500 | 573.91 | -526.17 | 47.74 | -26.26 | 74.00 | Peak |
| 4 | * 12466.500 | 573.96 | -526.21 | 47.75 | -26.25 | 74.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

The Worst Case of Radiated Emission below 1GHz:

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AX11000 Tri-Band Wi-Fi 6 Gaming Router | Date of Test | 2021-10-13 |
| Factor | VULB 9162 | Temp. / Humidity | 25°C /54% |
| Polarity | Horizontal | Site / Test Engineer | AC1 / Jay |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6145MHz (N _{ss} =2) | Test Voltage | AC 120V/60Hz |

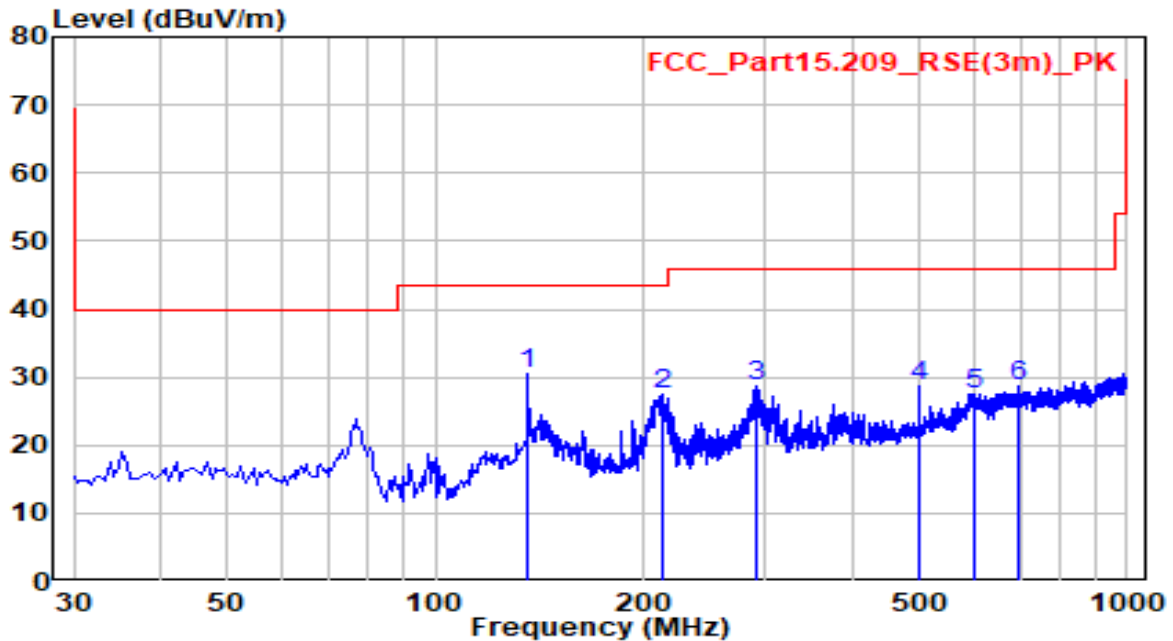


| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 135.730 | 14.23 | 16.14 | 30.37 | -13.13 | 43.50 | Peak |
| 2 | 212.360 | 8.46 | 18.89 | 27.35 | -16.15 | 43.50 | Peak |
| 3 | 291.900 | 7.37 | 21.31 | 28.68 | -17.32 | 46.00 | Peak |
| 4 | 499.965 | 2.46 | 26.22 | 28.68 | -17.32 | 46.00 | Peak |
| 5 | 599.390 | -0.29 | 27.79 | 27.50 | -18.50 | 46.00 | Peak |
| 6 | 697.845 | -0.63 | 29.29 | 28.66 | -17.34 | 46.00 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 5.The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | AX11000 Tri-Band Wi-Fi 6 Gaming Router | Date of Test | 2021-10-13 |
| Factor | VULB 9162 | Temp. / Humidity | 25°C /54% |
| Polarity | Vertical | Site / Test Engineer | AC1 / Jay |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6145MHz (N _{ss} =2) | Test Voltage | AC 120V/60Hz |

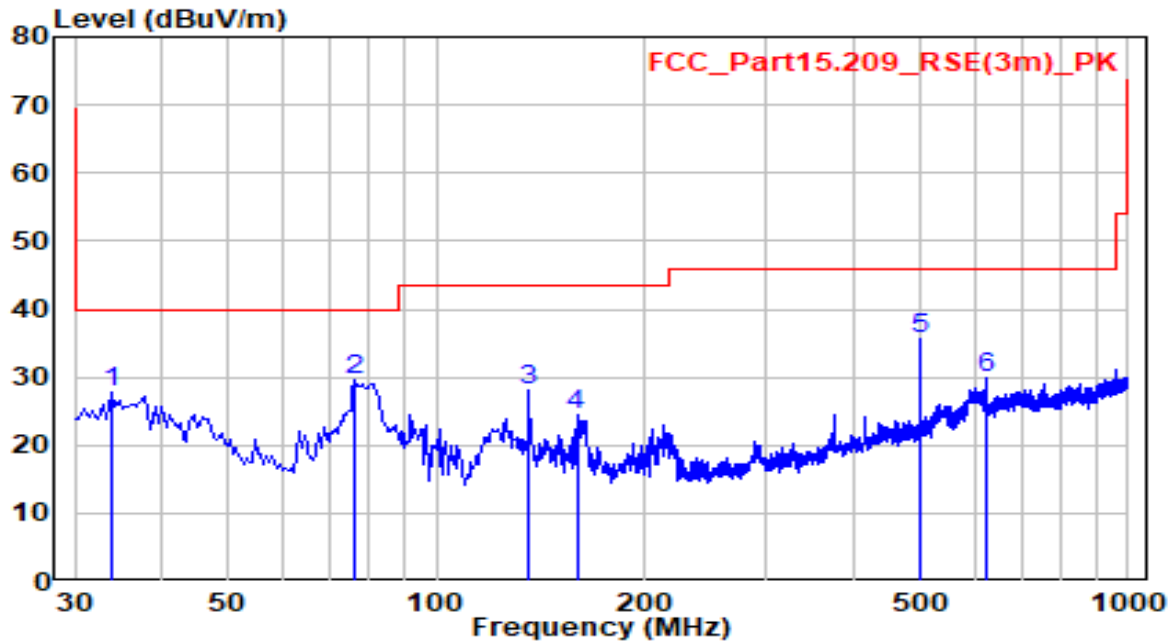

| No | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 33.880 | 8.69 | 19.11 | 27.80 | -12.20 | 40.00 | Peak |
| 2 | * 76.075 | 14.30 | 15.38 | 29.68 | -10.32 | 40.00 | Peak |
| 3 | 136.215 | 11.98 | 16.13 | 28.10 | -15.40 | 43.50 | Peak |
| 4 | 159.495 | 8.12 | 16.30 | 24.42 | -19.08 | 43.50 | Peak |
| 5 | 499.965 | 9.40 | 26.22 | 35.62 | -10.38 | 46.00 | Peak |
| 6 | 625.095 | 1.70 | 28.21 | 29.91 | -16.09 | 46.00 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (GHz) |
|----------------------------|-------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42-16.423 | 399.9 - 410 | 4.5-5.15 |
| ¹ 0.495 - 0.505 | 16.69475-16.69525 | 608 - 614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960 - 1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5 -25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660 - 1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123 - 138 | 2200 - 2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310 - 2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.525 | 2483.5 - 2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690 - 2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260 - 3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332 - 3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600 - 4400 | (²) |
| 13.36-13.41 | -- | -- | -- |

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G - Unwanted Emission

Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|--|-----------------------|----------------------------|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.9.2.Test Procedure Used

KDB 789033 D02v02r01 – Section G

6.9.3.Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

6.9.4.Test Setup

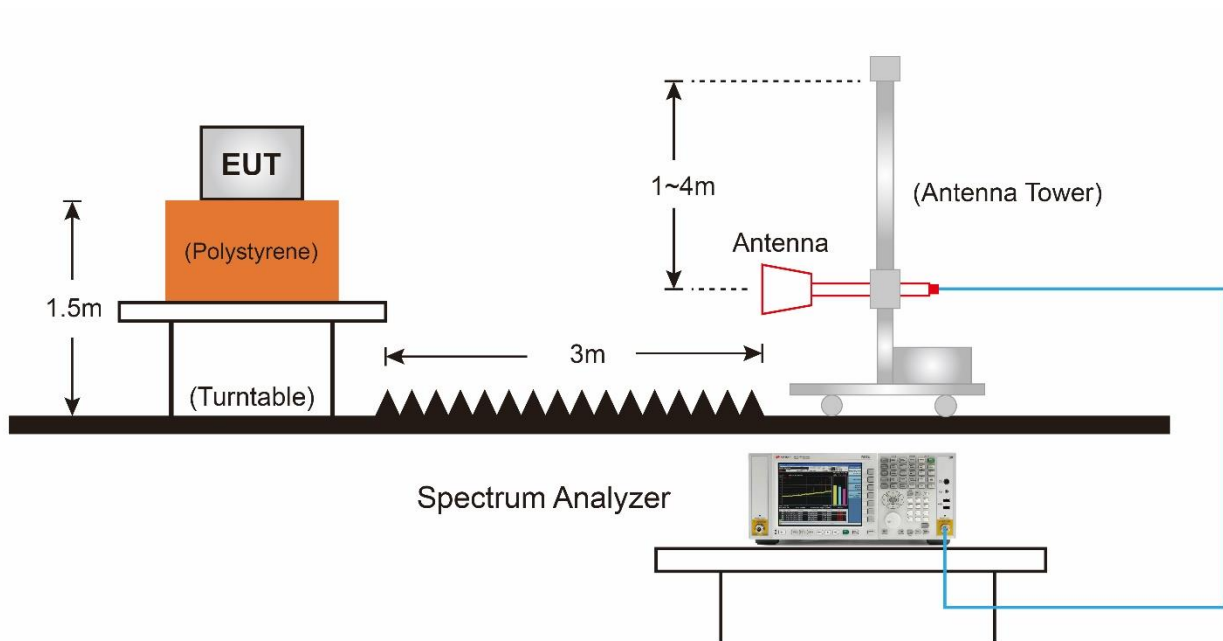

6.9.5. Test Result

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 6115MHz (Nss=1) | Test Voltage | 120V/60Hz |

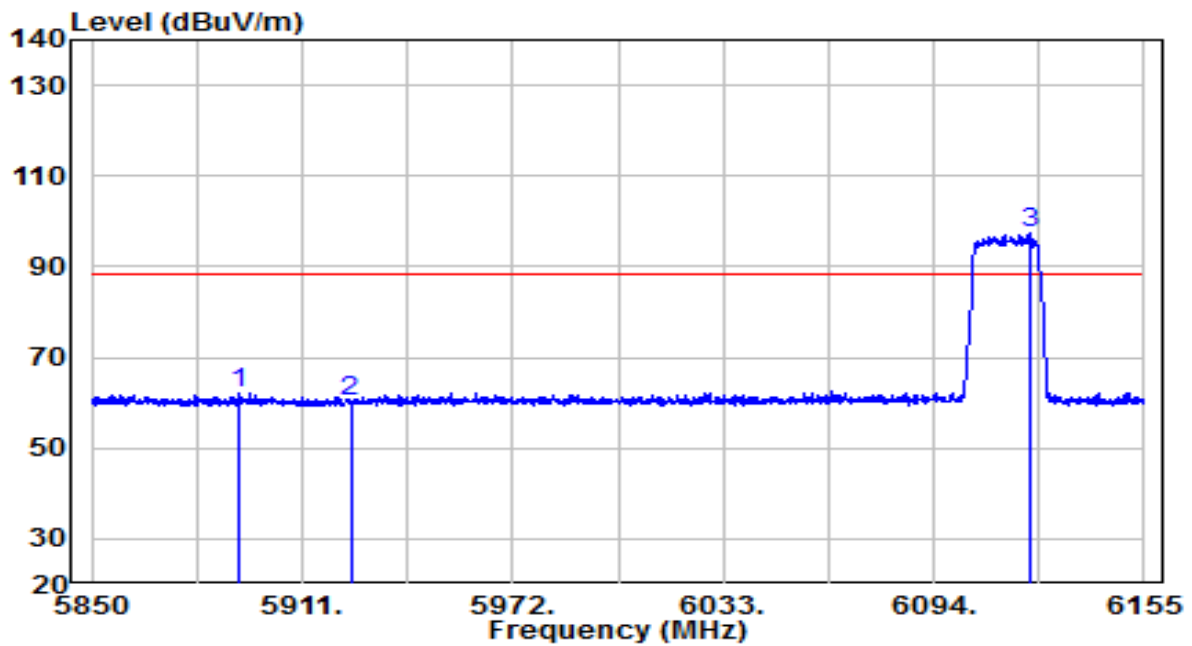


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5892.853 | 69.41 | -7.33 | 62.08 | -26.12 | 88.20 | Peak |
| 2 | 5925.000 | 67.72 | -7.19 | 60.53 | -27.67 | 88.20 | Peak |
| 3 | * 6121.755 | 104.08 | -6.46 | 97.63 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 6115MHz (Nss=1) | Test Voltage | 120V/60Hz |

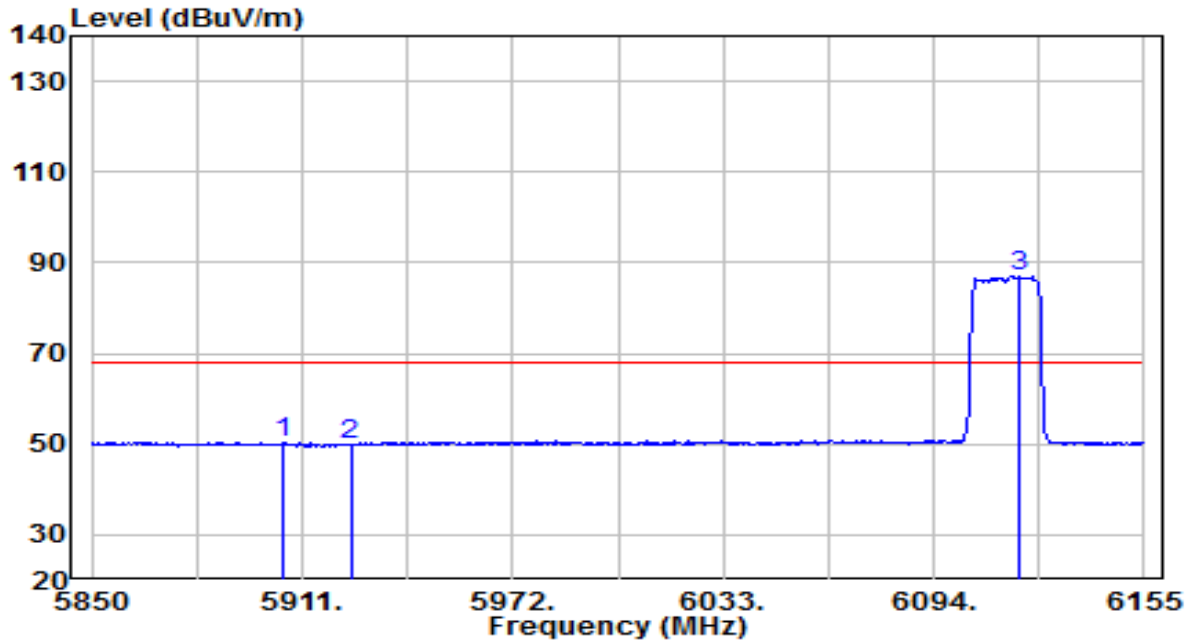


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5905.815 | 57.79 | -7.39 | 50.40 | -17.80 | 68.20 | Average |
| 2 | 5925.000 | 57.10 | -7.19 | 49.91 | -18.29 | 68.20 | Average |
| 3 | * 6118.400 | 93.37 | -6.48 | 86.89 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 6115MHz (Nss=1) | Test Voltage | 120V/60Hz |

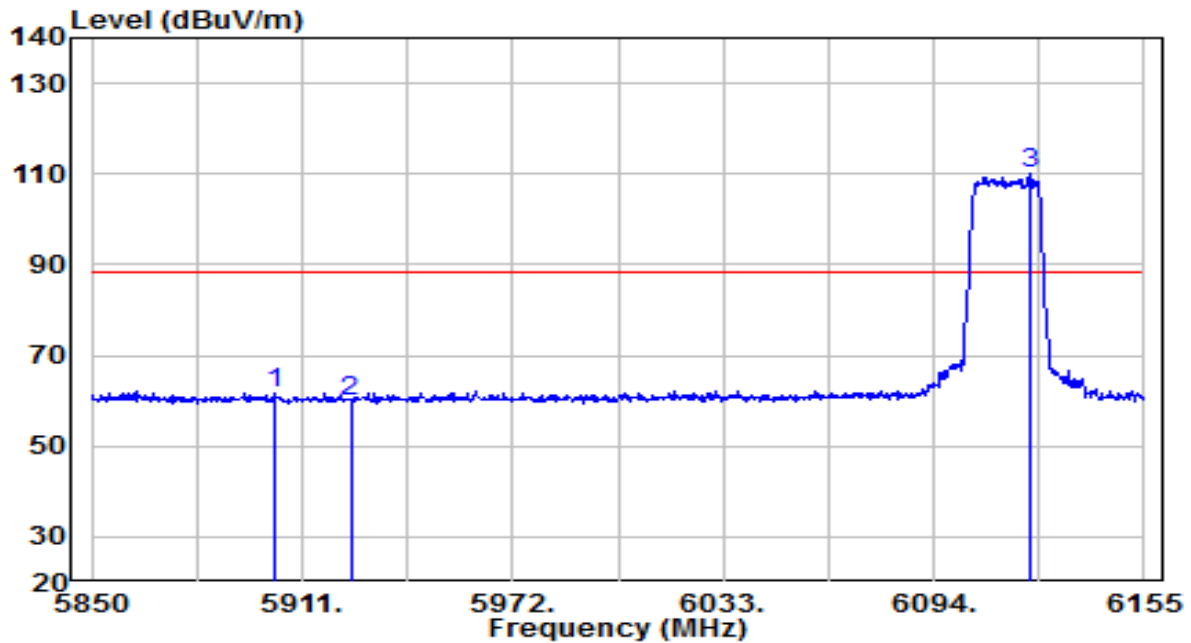


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5902.765 | 69.24 | -7.36 | 61.89 | -26.31 | 88.20 | Peak |
| 2 | 5925.000 | 67.15 | -7.19 | 59.96 | -28.24 | 88.20 | Peak |
| 3 | * 6122.060 | 116.37 | -6.46 | 109.91 | N/A | N/A | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 6115MHz (Nss=1) | Test Voltage | 120V/60Hz |

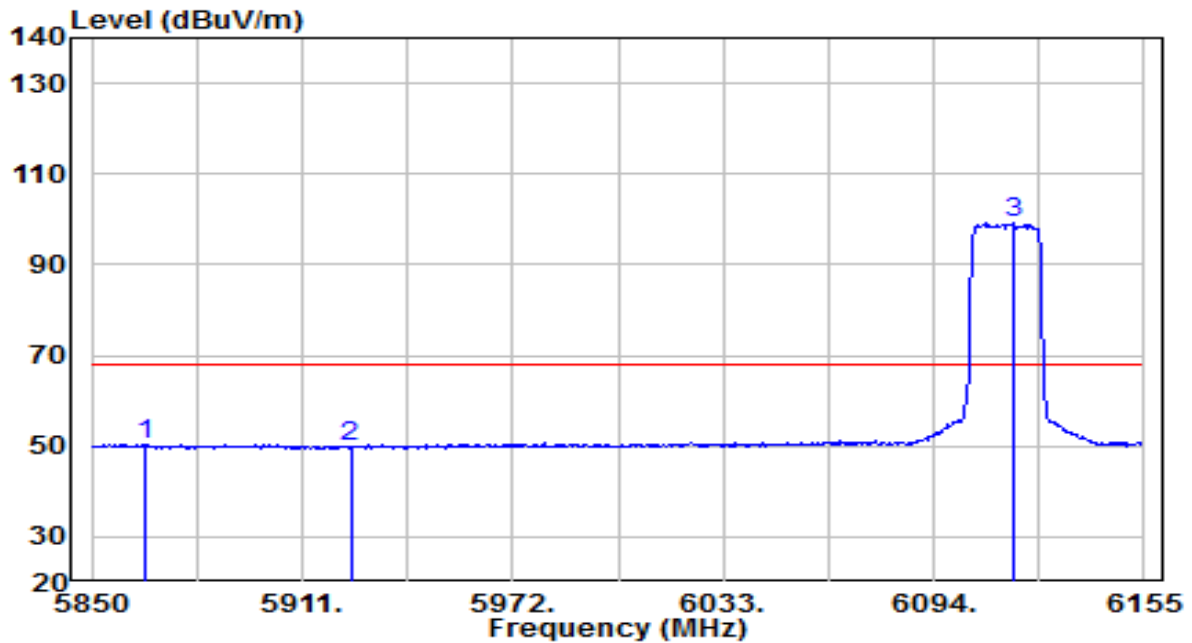


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5865.860 | 57.81 | -7.44 | 50.38 | -17.82 | 68.20 | Average |
| 2 | 5925.000 | 56.96 | -7.19 | 49.77 | -18.43 | 68.20 | Average |
| 3 | * 6116.875 | 105.68 | -6.49 | 99.20 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 7095MHz (Nss=1) | Test Voltage | 120V/60Hz |

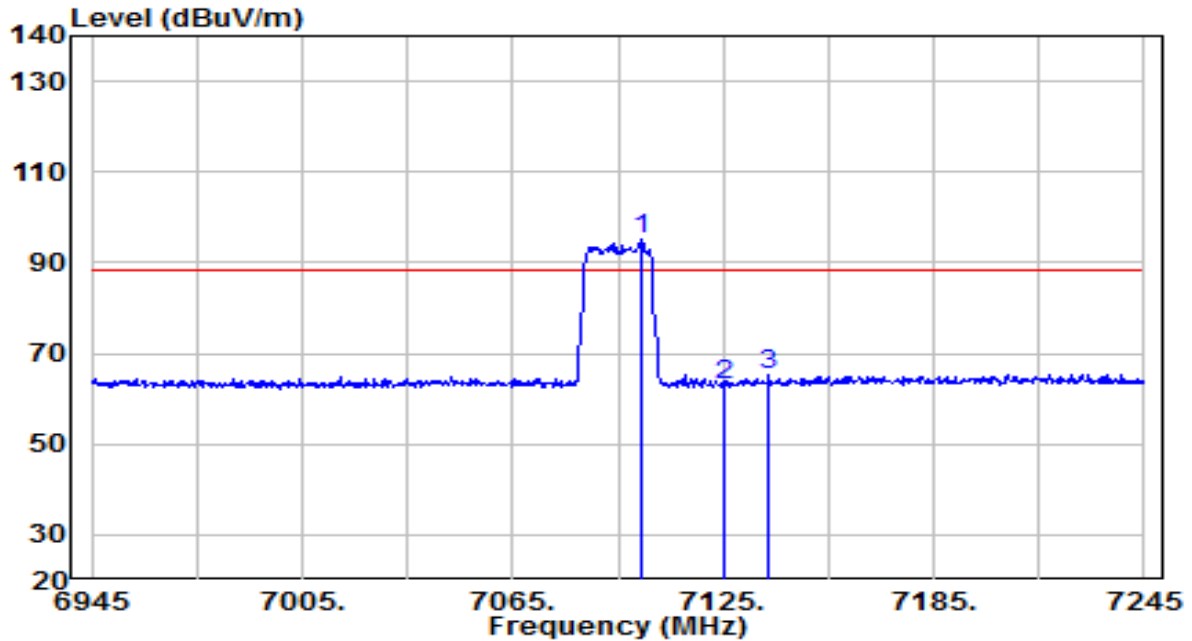


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7101.600 | 98.11 | -2.85 | 95.26 | N/A | N/A | Peak |
| 2 | 7125.000 | 65.63 | -2.83 | 62.80 | -25.40 | 88.20 | Peak |
| 3 | 7138.200 | 68.00 | -2.61 | 65.39 | -22.81 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 7095MHz (Nss=1) | Test Voltage | 120V/60Hz |

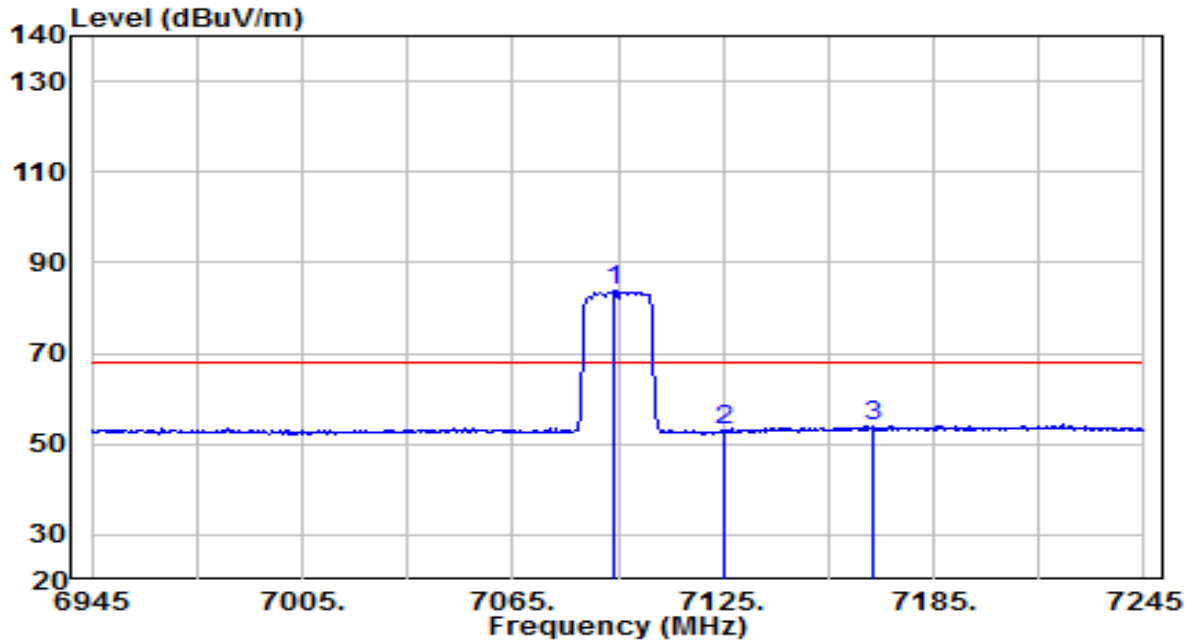


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7093.800 | 86.69 | -2.88 | 83.81 | N/A | N/A | Average |
| 2 | 7125.000 | 55.70 | -2.83 | 52.87 | -15.33 | 68.20 | Average |
| 3 | 7167.900 | 56.32 | -2.35 | 53.97 | -14.23 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 7095MHz (Nss=1) | Test Voltage | 120V/60Hz |

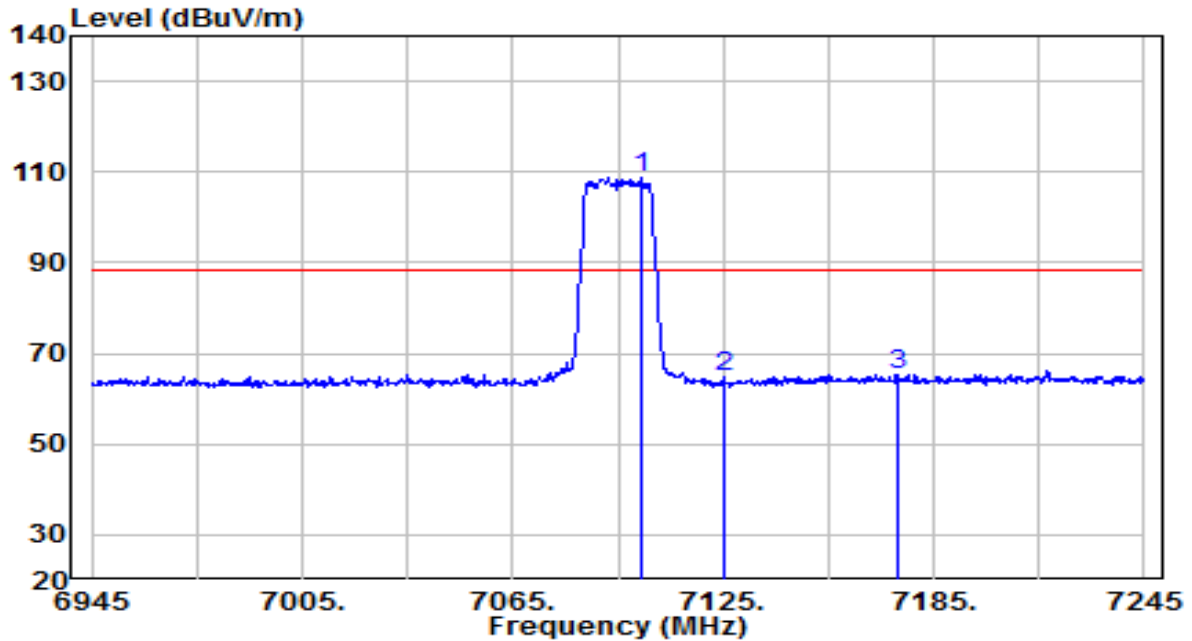


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7101.600 | 111.81 | -2.85 | 108.96 | N/A | N/A | Peak |
| 2 | 7125.000 | 67.44 | -2.83 | 64.61 | -23.59 | 88.20 | Peak |
| 3 | 7174.800 | 67.62 | -2.30 | 65.32 | -22.88 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE20 at channel 7095MHz (Nss=1) | Test Voltage | 120V/60Hz |

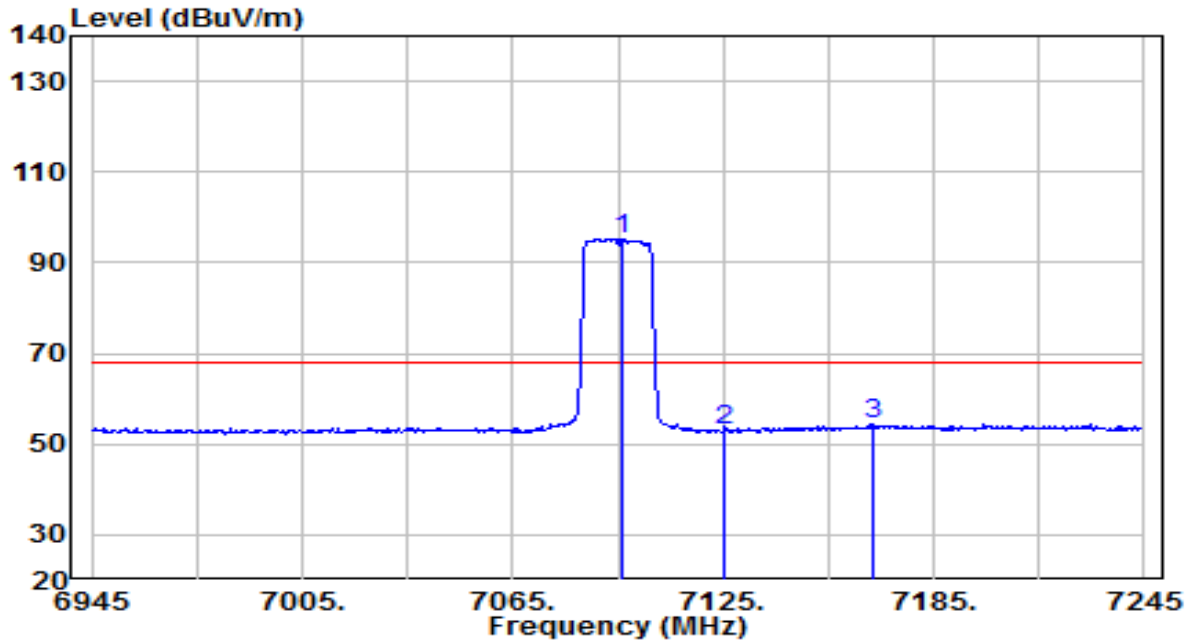


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7096.500 | 98.17 | -2.87 | 95.30 | N/A | N/A | Average |
| 2 | 7125.000 | 55.95 | -2.83 | 53.12 | -15.08 | 68.20 | Average |
| 3 | 7167.600 | 56.67 | -2.36 | 54.31 | -13.89 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 6125MHz (Nss=1) | Test Voltage | 120V/60Hz |

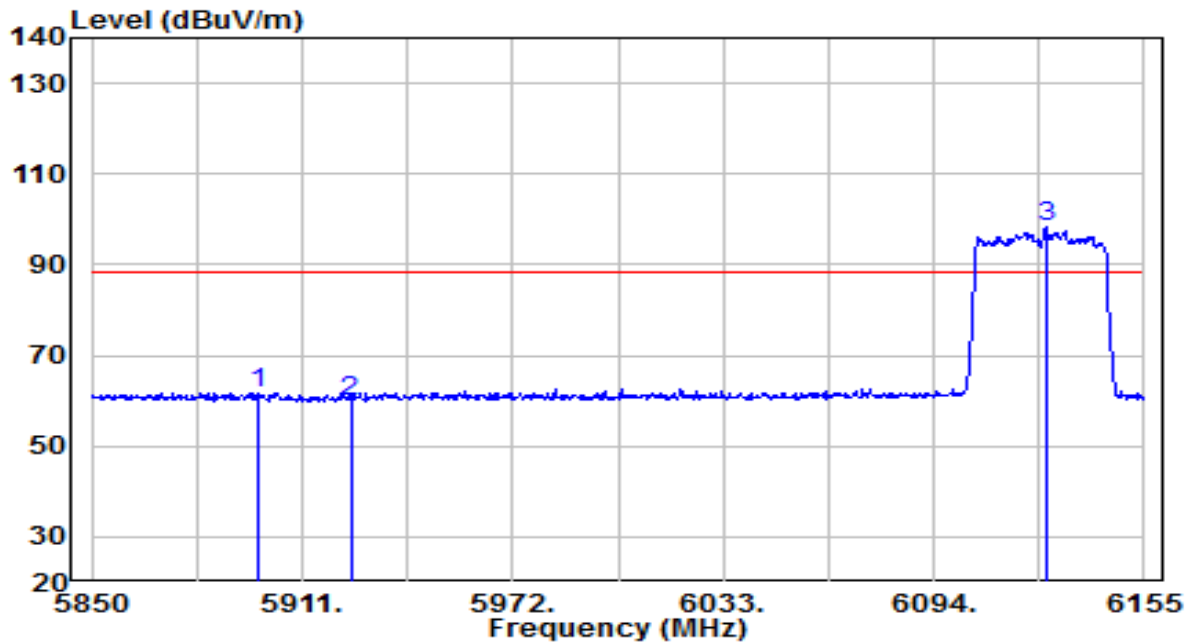


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5897.885 | 69.19 | -7.31 | 61.88 | -26.32 | 88.20 | Peak |
| 2 | 5925.000 | 67.19 | -7.19 | 60.00 | -28.20 | 88.20 | Peak |
| 3 | * 6126.635 | 104.60 | -6.43 | 98.17 | N/A | N/A | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 6125MHz (Nss=1) | Test Voltage | 120V/60Hz |

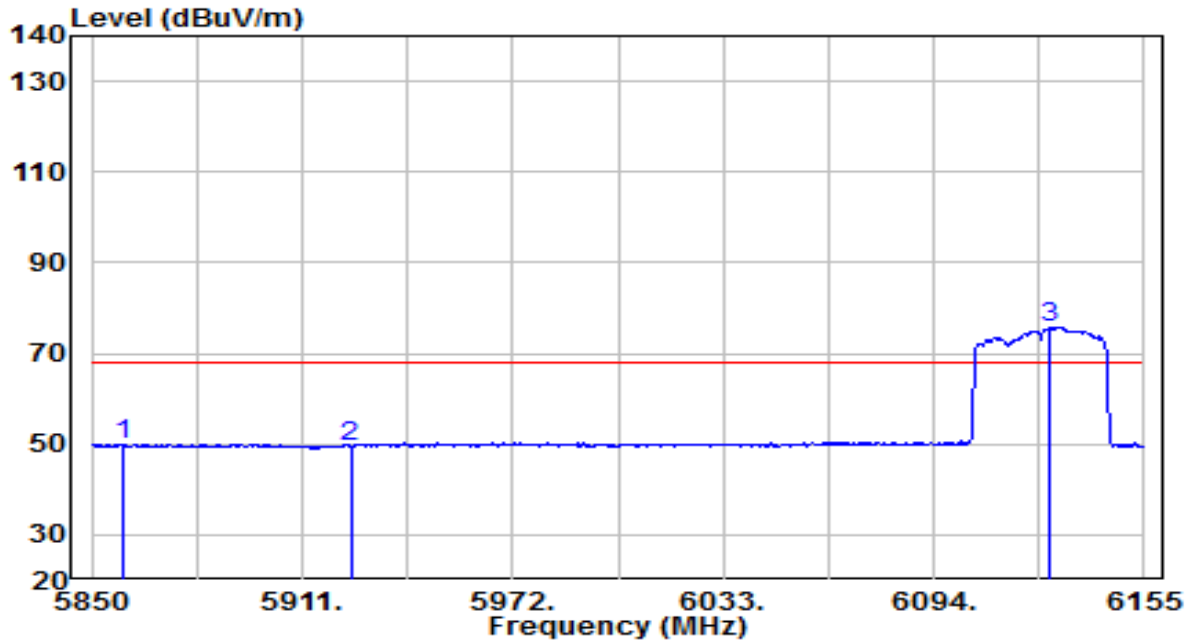


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5859.455 | 57.52 | -7.44 | 50.08 | -18.12 | 68.20 | Average |
| 2 | 5925.000 | 56.64 | -7.19 | 49.45 | -18.75 | 68.20 | Average |
| 3 | * 6127.550 | 82.10 | -6.42 | 75.68 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 6125MHz (Nss=1) | Test Voltage | 120V/60Hz |

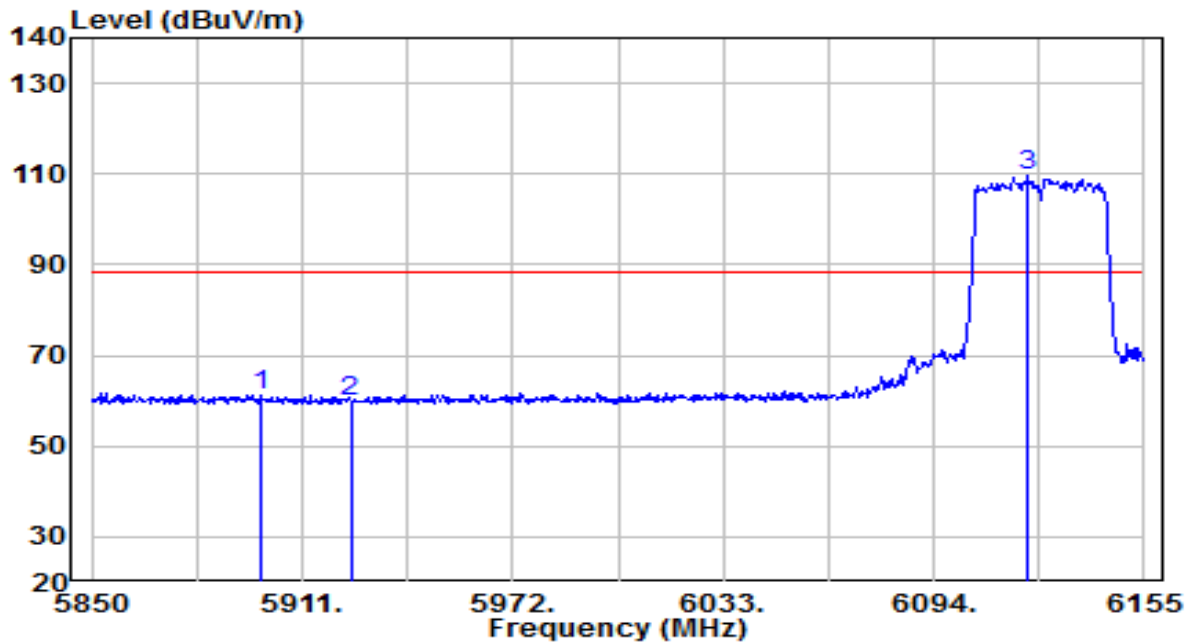


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5899.105 | 68.59 | -7.32 | 61.27 | -26.93 | 88.20 | Peak |
| 2 | 5925.000 | 67.05 | -7.19 | 59.86 | -28.34 | 88.20 | Peak |
| 3 | * 6121.145 | 116.11 | -6.46 | 109.65 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 6125MHz (Nss=1) | Test Voltage | 120V/60Hz |

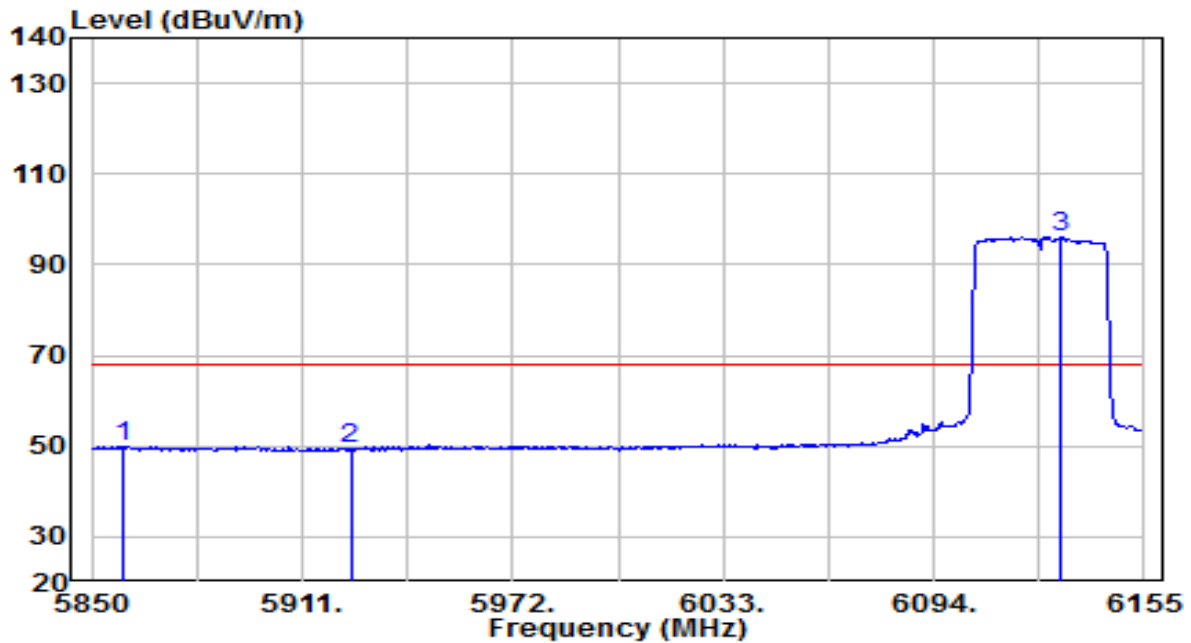


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5859.455 | 57.48 | -7.44 | 50.04 | -18.16 | 68.20 | Average |
| 2 | 5925.000 | 56.76 | -7.19 | 49.57 | -18.63 | 68.20 | Average |
| 3 | * 6130.905 | 102.67 | -6.40 | 96.27 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 7085MHz (Nss=1) | Test Voltage | 120V/60Hz |

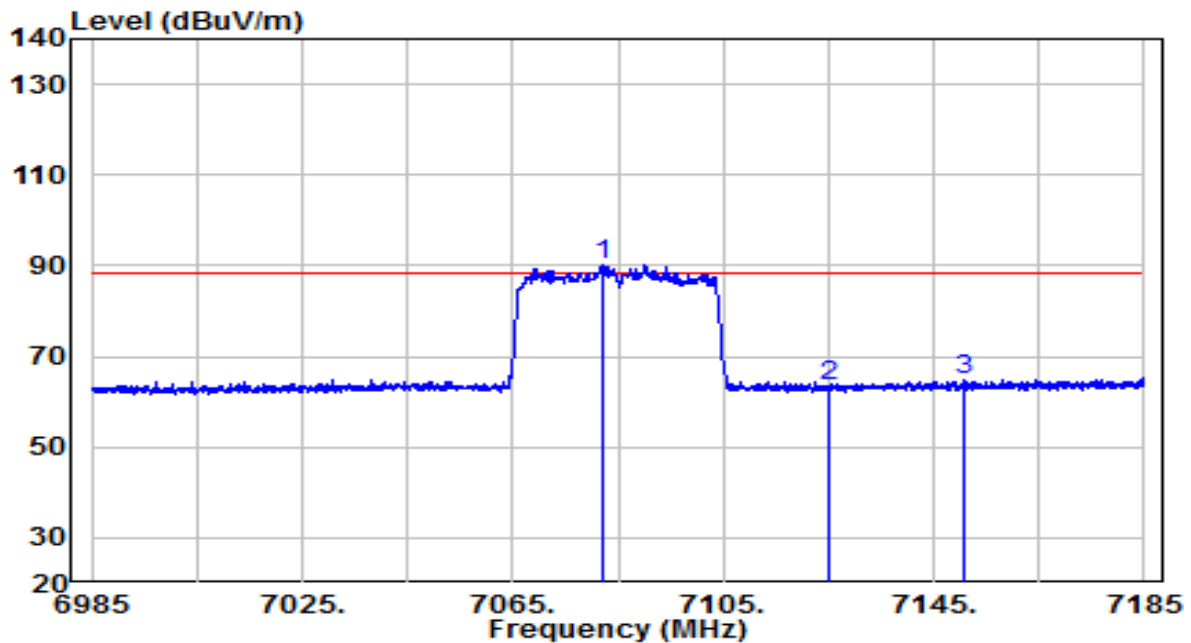


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7082.300 | 93.15 | -2.89 | 90.26 | N/A | N/A | Peak |
| 2 | 7125.000 | 66.34 | -2.83 | 63.51 | -24.69 | 88.20 | Peak |
| 3 | 7150.900 | 67.29 | -2.52 | 64.77 | -23.43 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 7085MHz (Nss=1) | Test Voltage | 120V/60Hz |

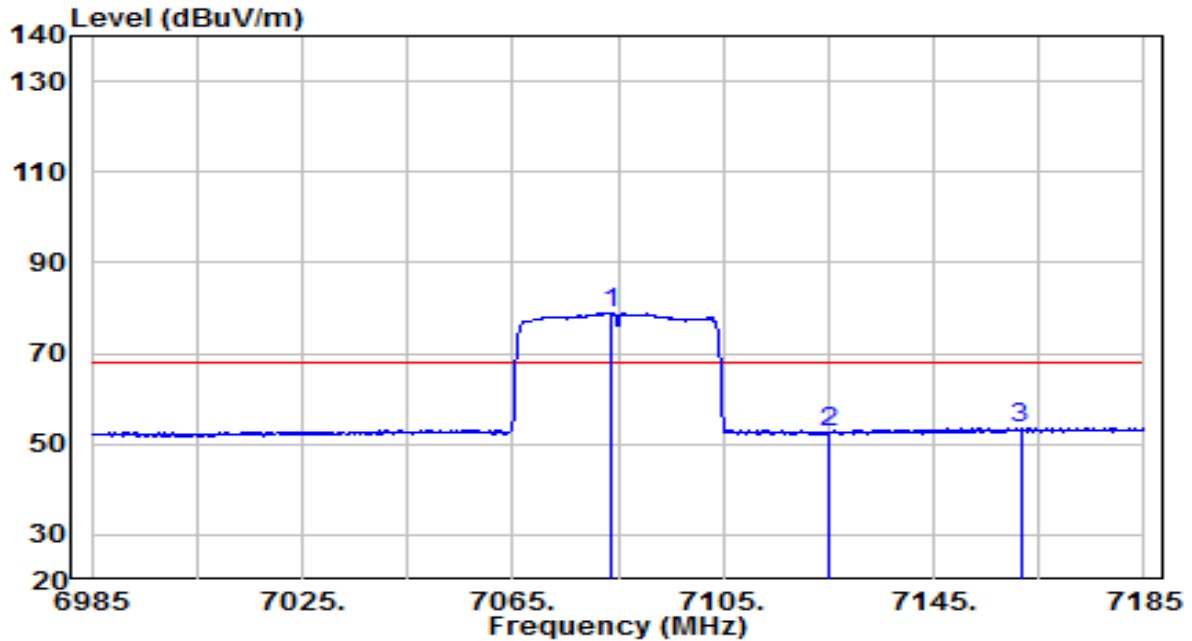


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7083.500 | 81.73 | -2.89 | 78.83 | N/A | N/A | Average |
| 2 | 7125.000 | 55.30 | -2.83 | 52.47 | -15.73 | 68.20 | Average |
| 3 | 7161.500 | 55.91 | -2.42 | 53.49 | -14.71 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 7085MHz (Nss=1) | Test Voltage | 120V/60Hz |

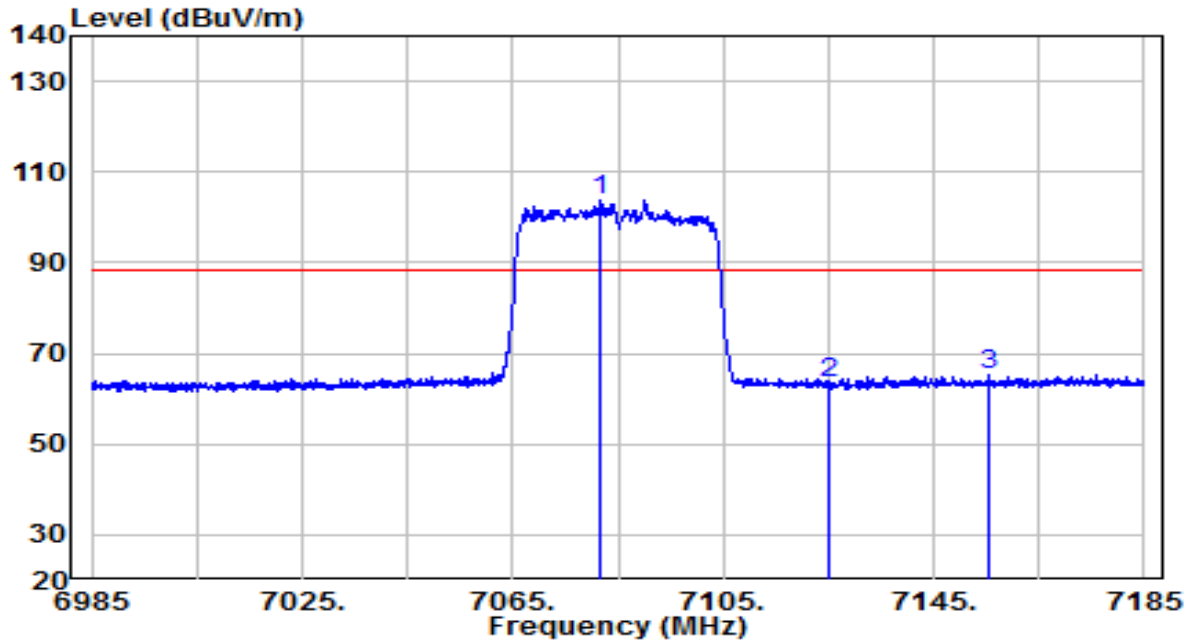


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7081.800 | 106.75 | -2.89 | 103.86 | N/A | N/A | Peak |
| 2 | 7125.000 | 66.30 | -2.83 | 63.47 | -24.73 | 88.20 | Peak |
| 3 | 7155.400 | 67.73 | -2.48 | 65.25 | -22.95 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE40 at channel 7085MHz (Nss=1) | Test Voltage | 120V/60Hz |

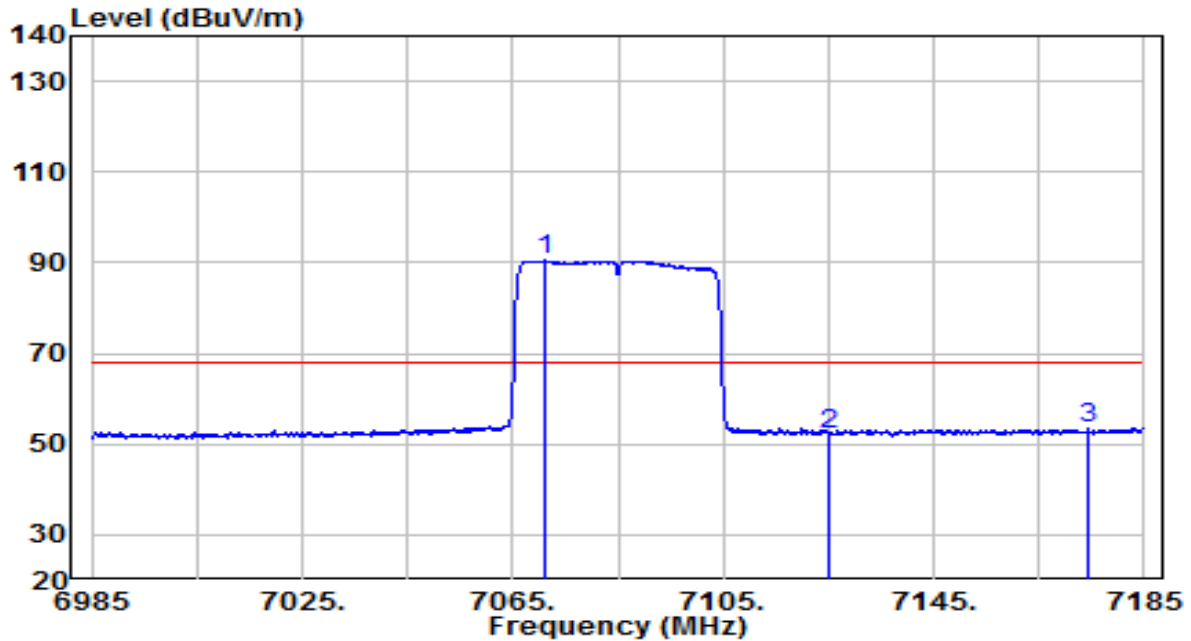


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7070.900 | 93.27 | -2.85 | 90.42 | N/A | N/A | Average |
| 2 | 7125.000 | 55.10 | -2.83 | 52.27 | -15.93 | 68.20 | Average |
| 3 | 7174.300 | 55.65 | -2.30 | 53.35 | -14.85 | 68.20 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 6145MHz (Nss=1) | Test Voltage | 120V/60Hz |

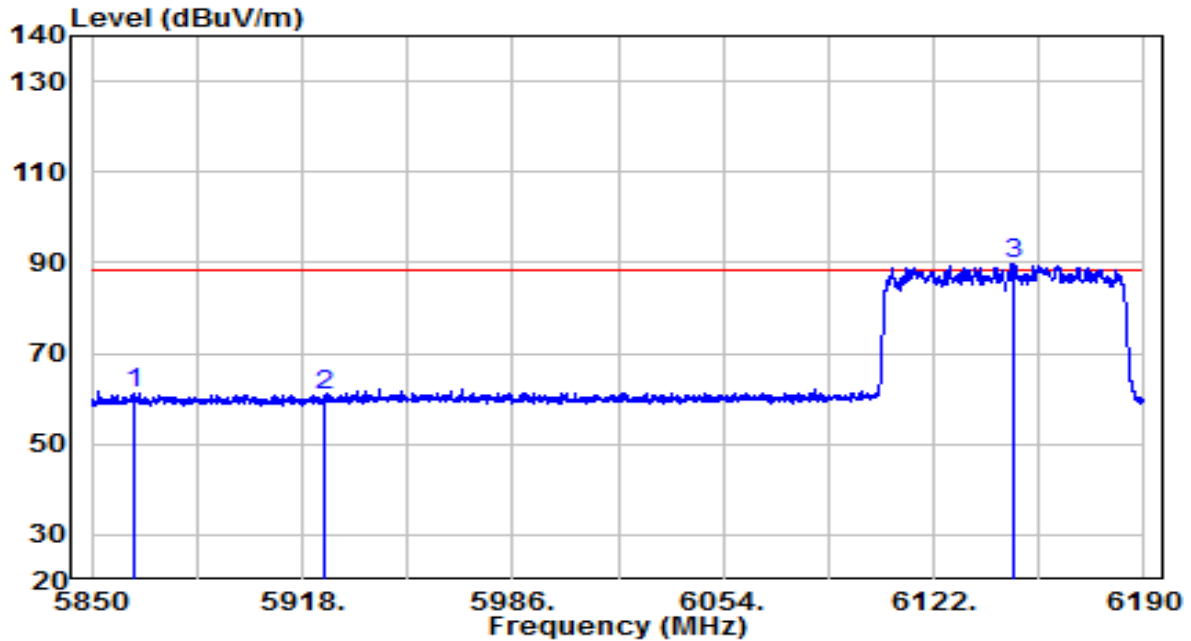


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5863.430 | 68.57 | -7.43 | 61.14 | -27.06 | 88.20 | Peak |
| 2 | 5925.000 | 67.76 | -7.19 | 60.57 | -27.63 | 88.20 | Peak |
| 3 | * 6148.180 | 96.44 | -6.57 | 89.88 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 6145MHz (Nss=1) | Test Voltage | 120V/60Hz |

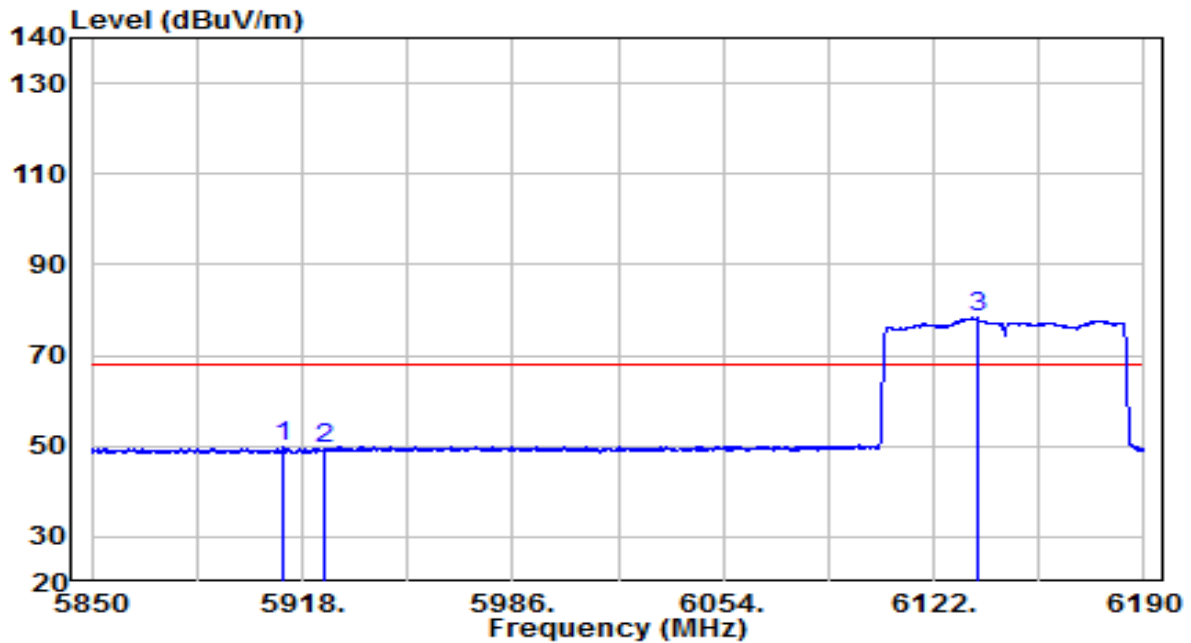


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5911.540 | 57.16 | -7.44 | 49.72 | -18.48 | 68.20 | Average |
| 2 | 5925.000 | 56.46 | -7.19 | 49.27 | -18.93 | 68.20 | Average |
| 3 | * 6135.940 | 84.64 | -6.41 | 78.23 | N/A | N/A | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 6145MHz (Nss=1) | Test Voltage | 120V/60Hz |

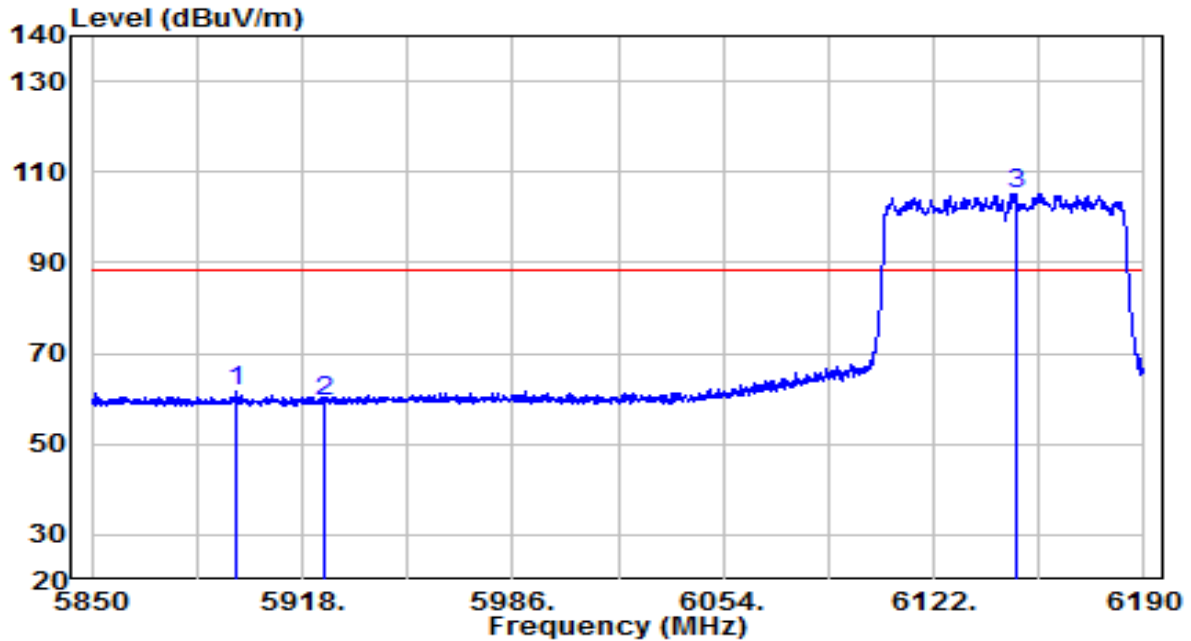


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5896.240 | 69.03 | -7.29 | 61.74 | -26.46 | 88.20 | Peak |
| 2 | 5925.000 | 66.64 | -7.19 | 59.45 | -28.75 | 88.20 | Peak |
| 3 | * 6148.350 | 111.84 | -6.57 | 105.27 | N/A | N/A | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 6145MHz (Nss=1) | Test Voltage | 120V/60Hz |

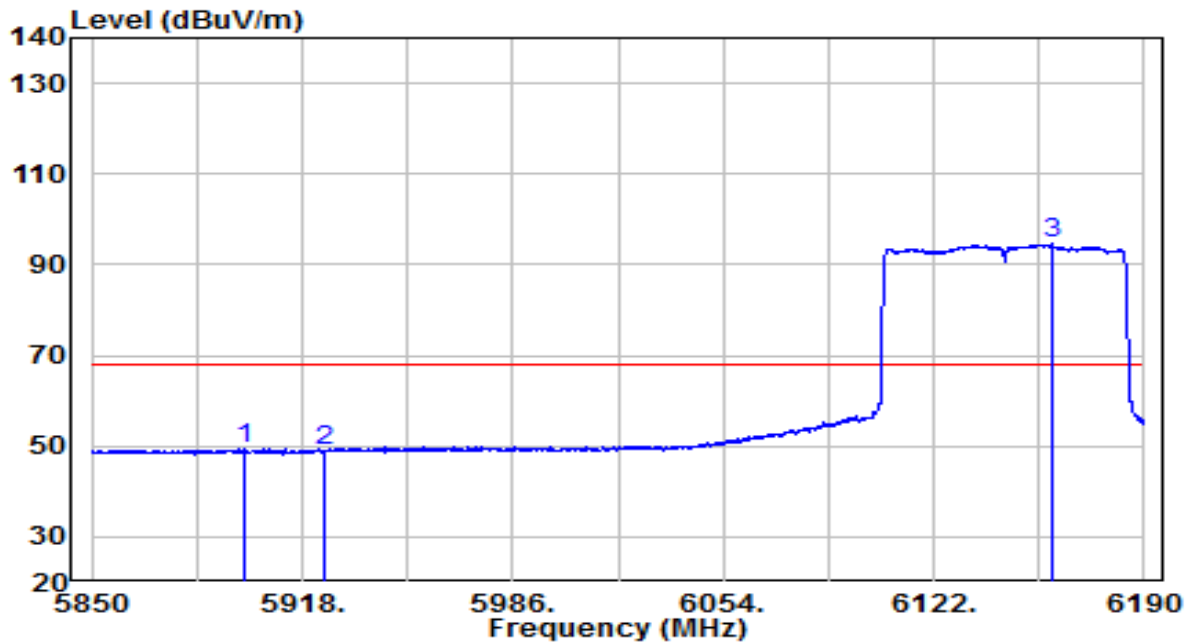


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5899.300 | 56.77 | -7.32 | 49.45 | -18.75 | 68.20 | Average |
| 2 | 5925.000 | 56.19 | -7.19 | 49.00 | -19.20 | 68.20 | Average |
| 3 | * 6159.910 | 101.18 | -6.68 | 94.49 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 7025MHz (Nss=1) | Test Voltage | 120V/60Hz |

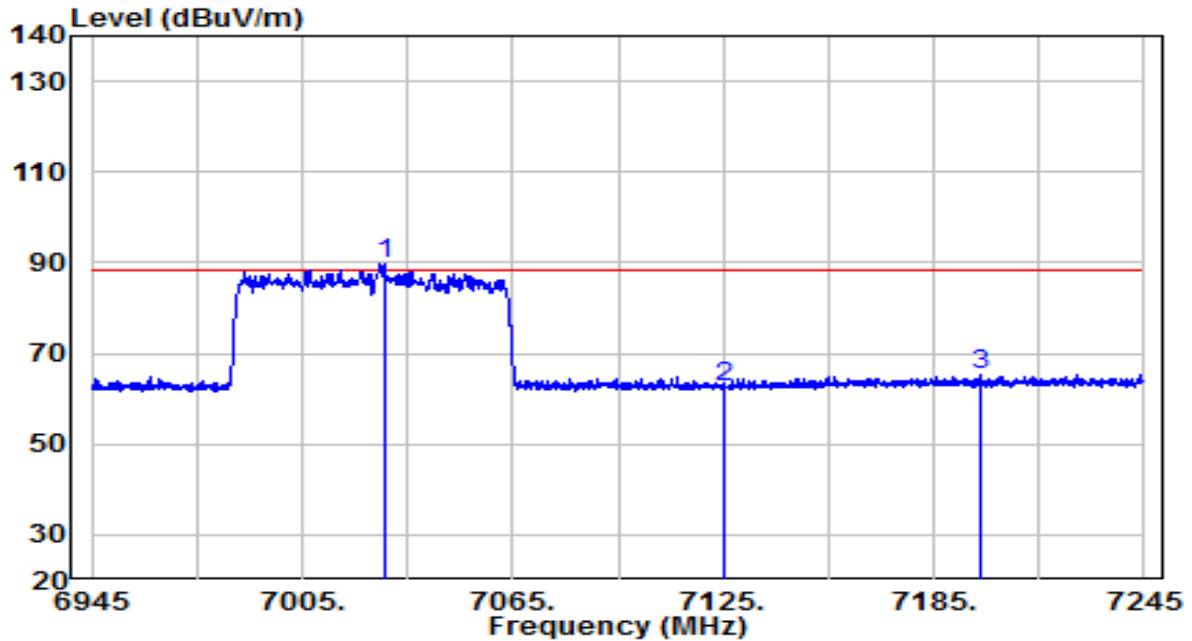


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7028.250 | 92.94 | -2.99 | 89.95 | N/A | N/A | Peak |
| 2 | 7125.000 | 65.31 | -2.83 | 62.48 | -25.72 | 88.20 | Peak |
| 3 | 7198.650 | 67.26 | -2.20 | 65.06 | -23.14 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 7025MHz (Nss=1) | Test Voltage | 120V/60Hz |

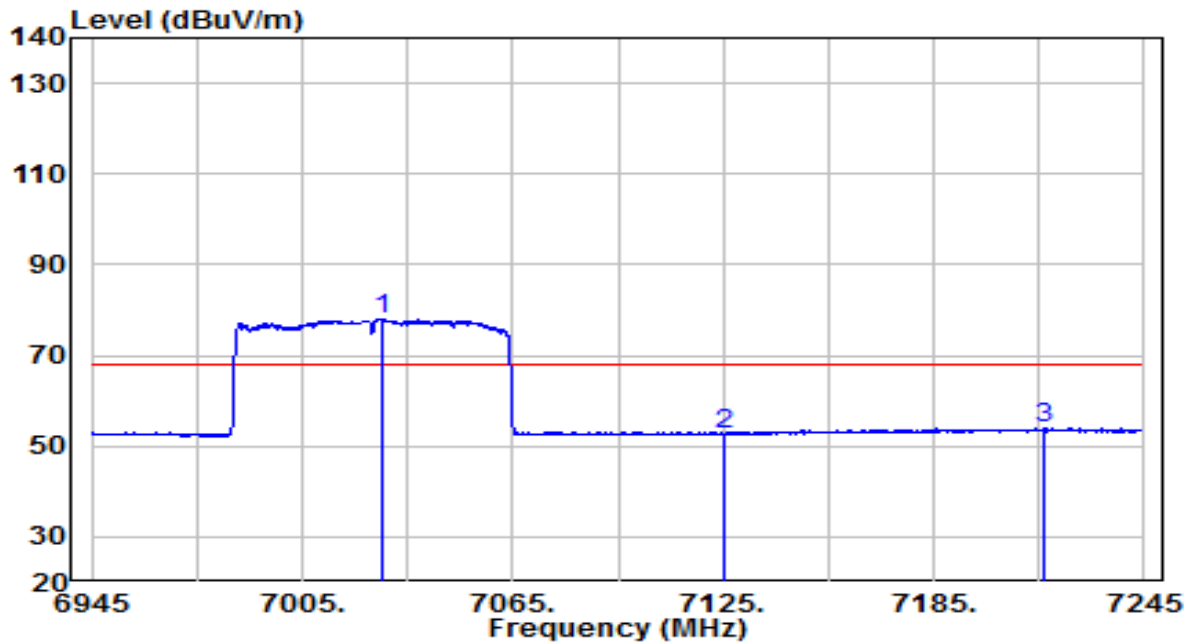


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7027.950 | 80.96 | -2.99 | 77.97 | N/A | N/A | Average |
| 2 | 7125.000 | 55.49 | -2.83 | 52.66 | -15.54 | 68.20 | Average |
| 3 | 7216.350 | 56.01 | -2.09 | 53.92 | -14.28 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 7025MHz (Nss=1) | Test Voltage | 120V/60Hz |

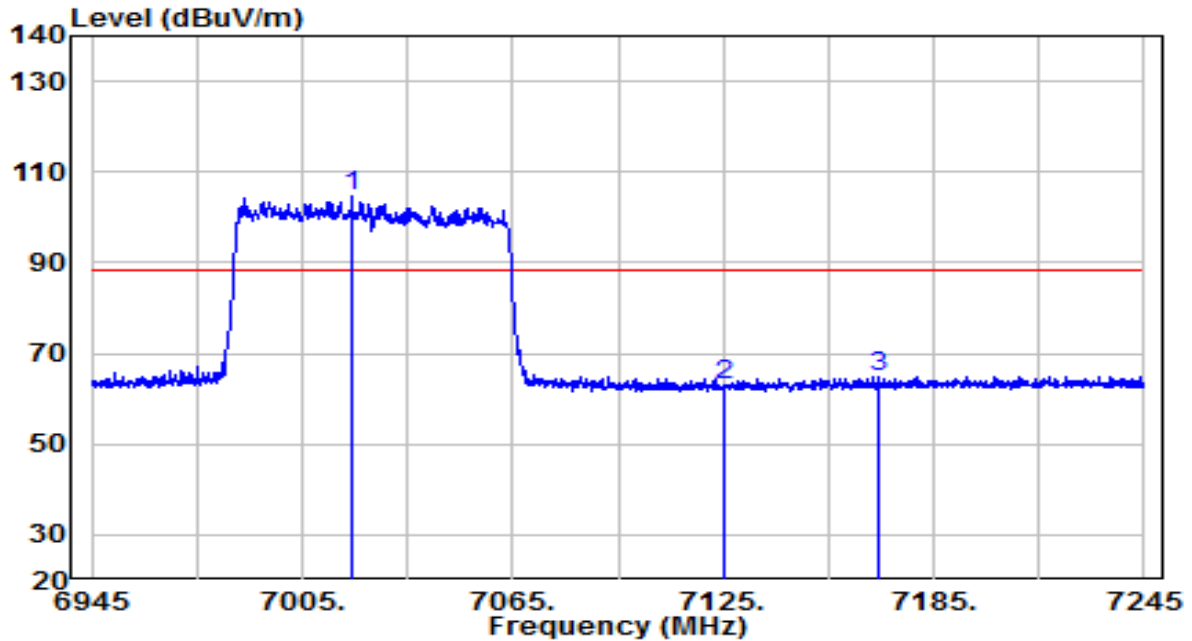


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|------|
| 1 | * | 7018.950 | 107.61 | -3.04 | 104.57 | N/A | N/A | Peak |
| 2 | | 7125.000 | 65.91 | -2.83 | 63.08 | -25.12 | 88.20 | Peak |
| 3 | | 7169.400 | 67.22 | -2.34 | 64.88 | -23.32 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE80 at channel 7025MHz (Nss=1) | Test Voltage | 120V/60Hz |

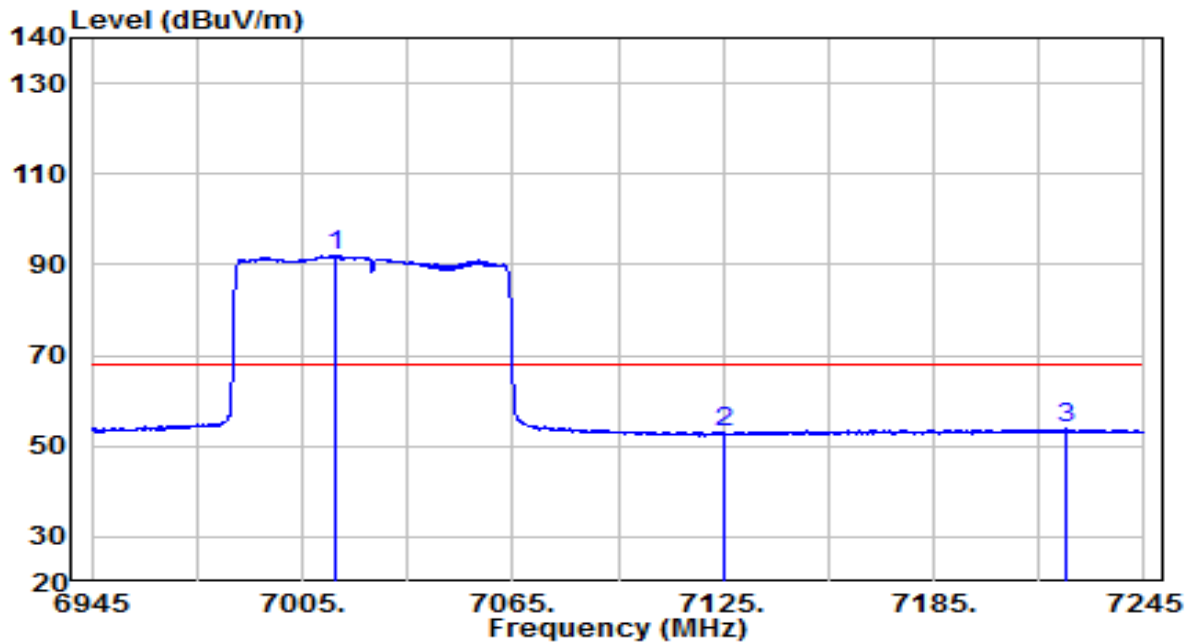


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7014.450 | 95.03 | -3.10 | 91.94 | N/A | N/A | Average |
| 2 | 7125.000 | 55.68 | -2.83 | 52.85 | -15.35 | 68.20 | Average |
| 3 | 7222.500 | 55.86 | -2.04 | 53.82 | -14.38 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6185MHz (Nss=1) | Test Voltage | 120V/60Hz |

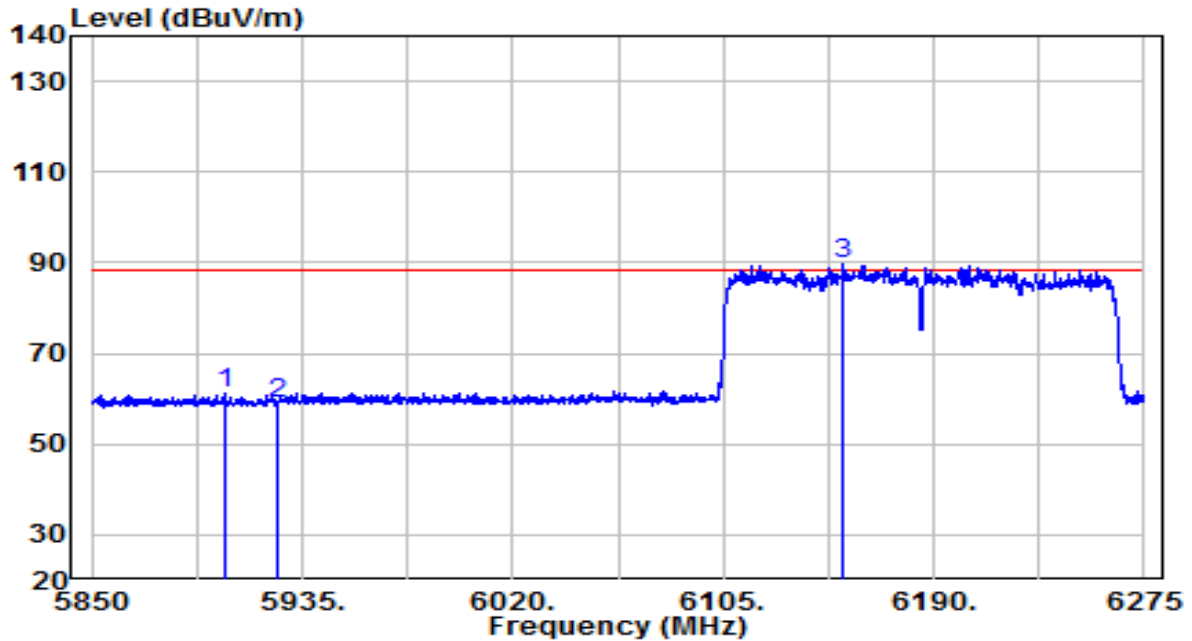


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5903.975 | 68.69 | -7.37 | 61.32 | -26.88 | 88.20 | Peak |
| 2 | 5925.013 | 66.29 | -7.19 | 59.10 | -29.10 | 88.20 | Peak |
| 3 | * 6153.663 | 96.48 | -6.63 | 89.85 | N/A | N/A | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6185MHz (Nss=1) | Test Voltage | 120V/60Hz |

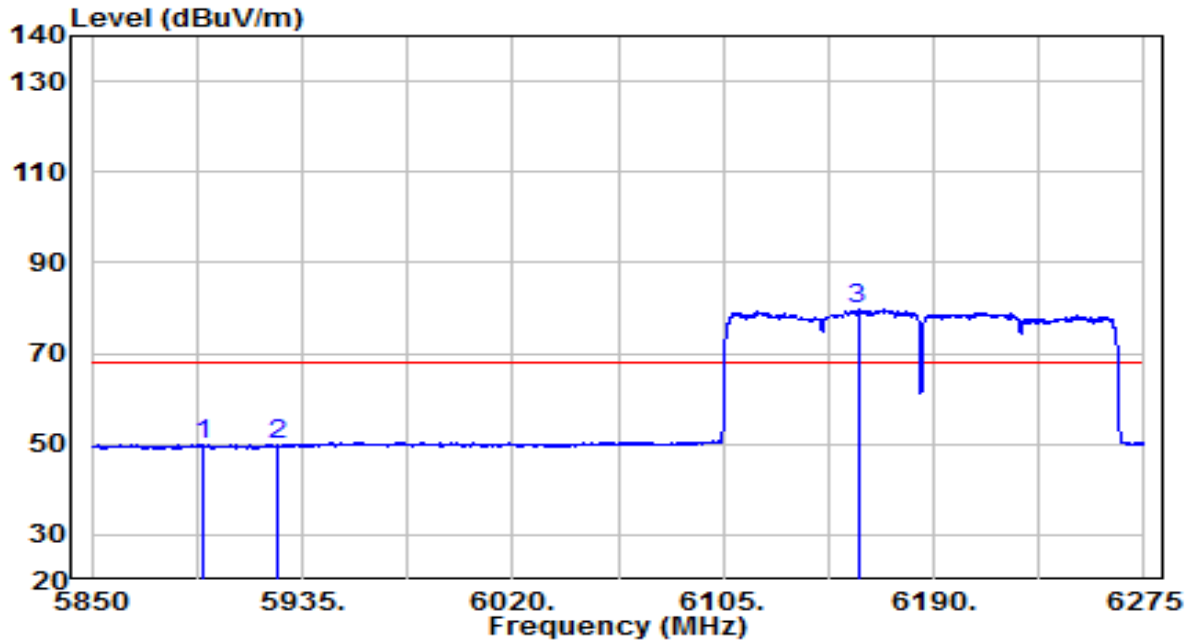


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5894.625 | 57.22 | -7.31 | 49.91 | -18.29 | 68.20 | Average |
| 2 | 5925.000 | 56.99 | -7.19 | 49.80 | -18.40 | 68.20 | Average |
| 3 | * 6159.400 | 86.26 | -6.68 | 79.58 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6185MHz (Nss=1) | Test Voltage | 120V/60Hz |

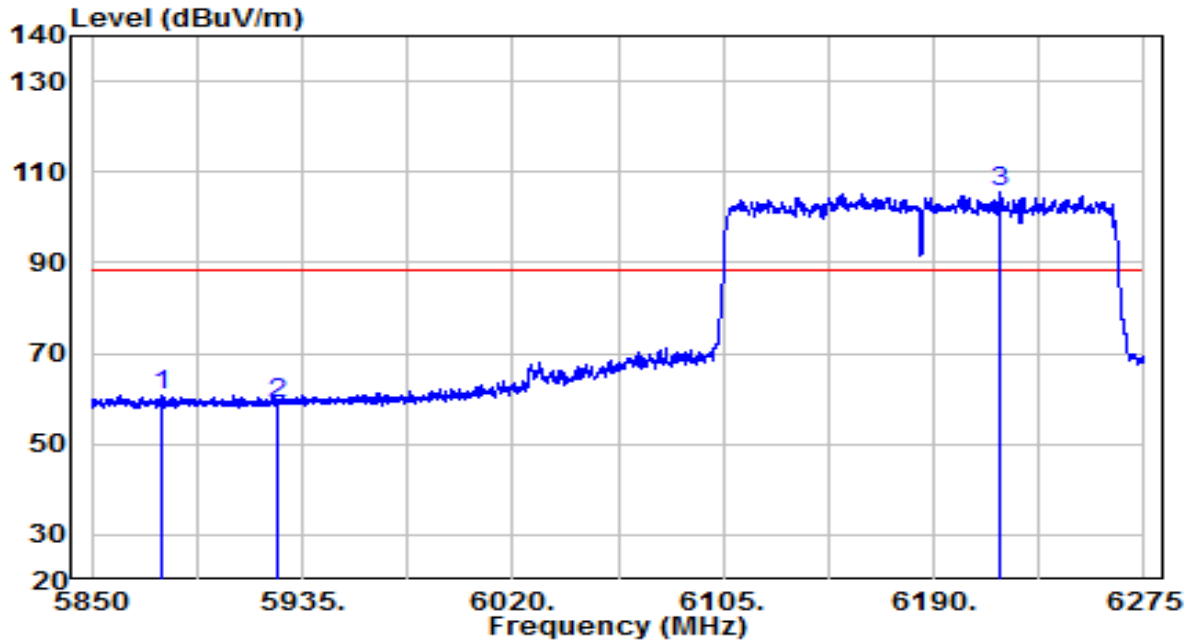


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5877.837 | 68.39 | -7.48 | 60.91 | -27.29 | 88.20 | Peak |
| 2 | 5925.000 | 66.16 | -7.19 | 58.97 | -29.23 | 88.20 | Peak |
| 3 | * 6217.200 | 112.24 | -6.66 | 105.58 | N/A | N/A | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6185MHz (Nss=1) | Test Voltage | 120V/60Hz |

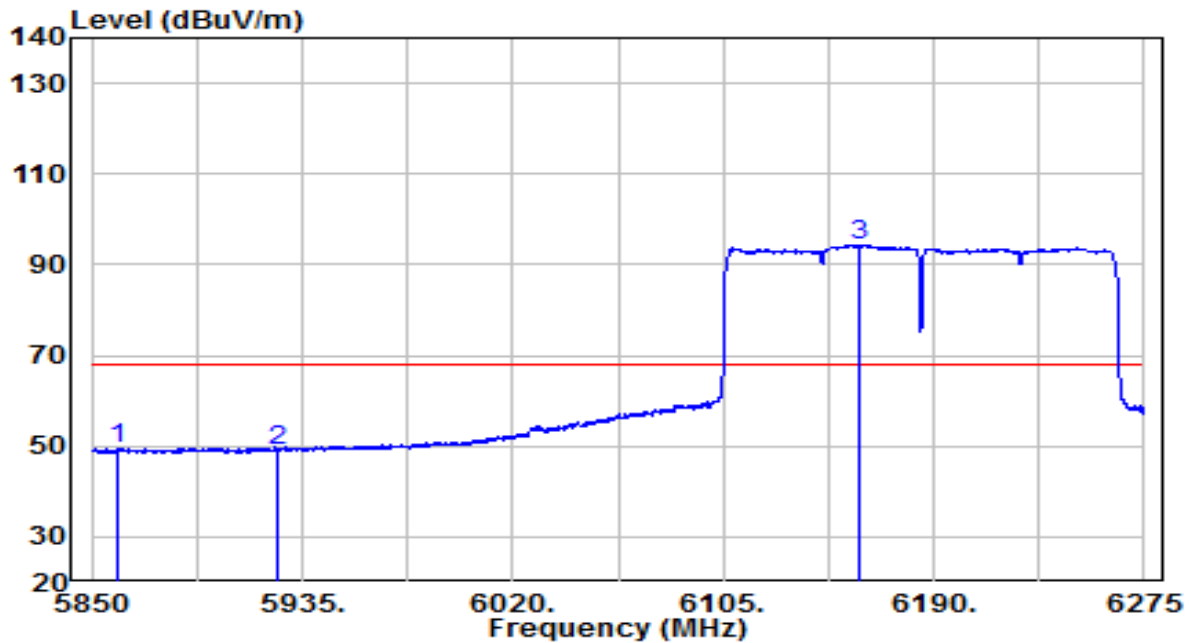


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5860.413 | 57.05 | -7.44 | 49.62 | -18.58 | 68.20 | Average |
| 2 | 5925.013 | 56.37 | -7.19 | 49.18 | -19.02 | 68.20 | Average |
| 3 | * 6160.038 | 101.07 | -6.68 | 94.39 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6985MHz (Nss=1) | Test Voltage | 120V/60Hz |

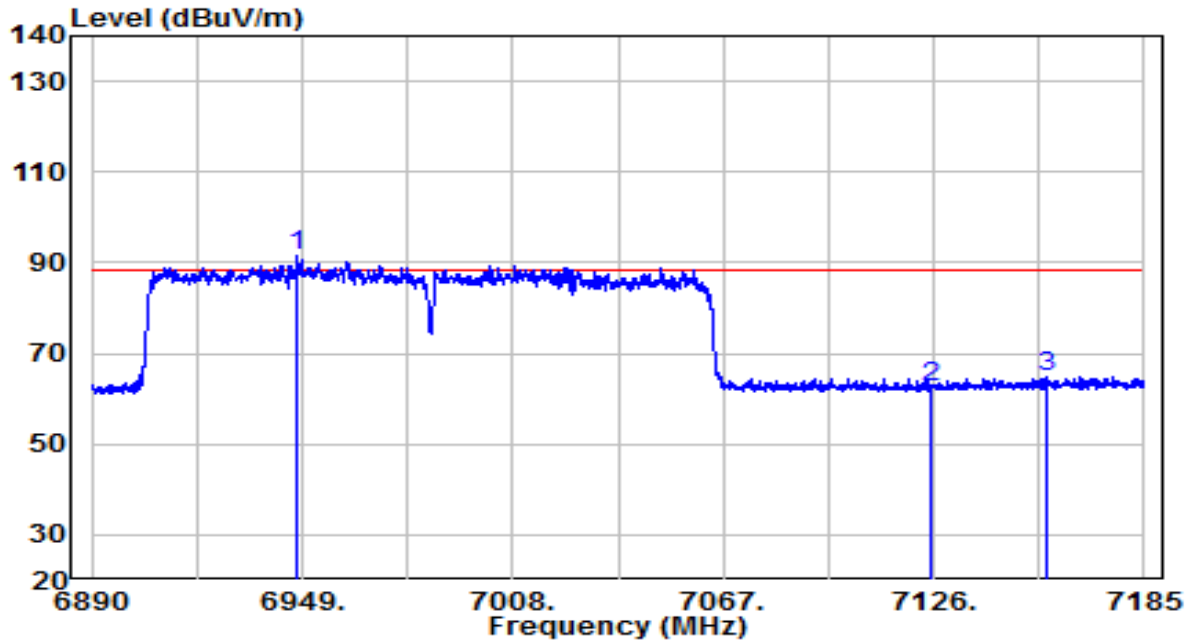


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 6947.525 | 94.50 | -2.88 | 91.62 | N/A | N/A | Peak |
| 2 | 7124.967 | 65.37 | -2.83 | 62.54 | -25.66 | 88.20 | Peak |
| 3 | 7158.007 | 67.08 | -2.46 | 64.62 | -23.58 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6985MHz (Nss=1) | Test Voltage | 120V/60Hz |

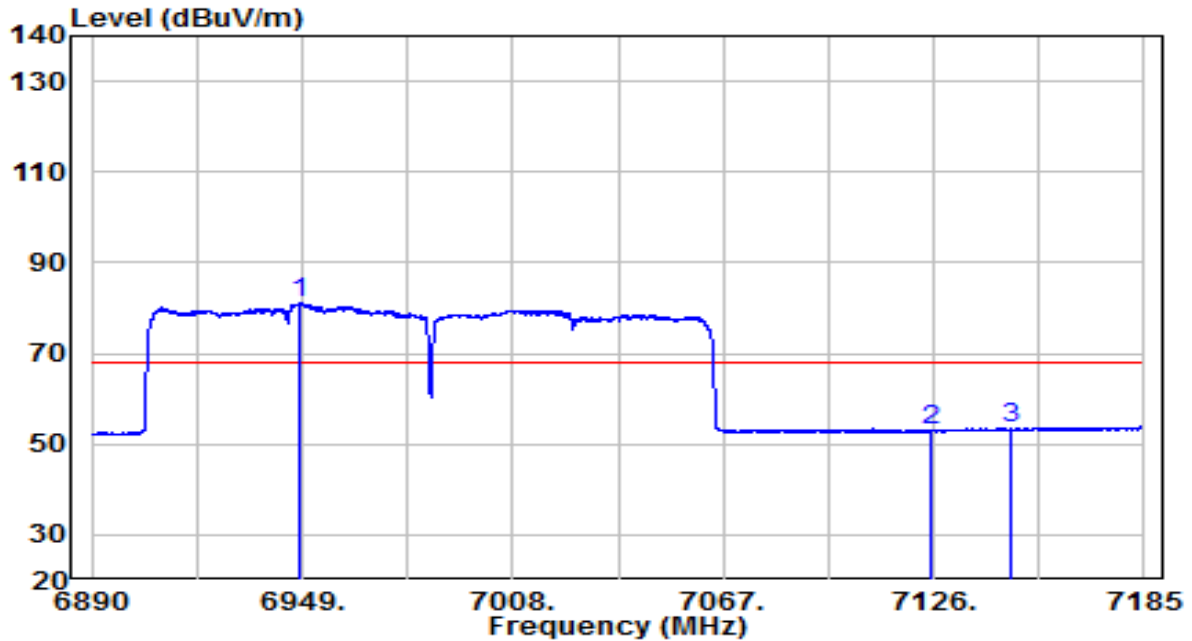


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 6948.558 | 84.03 | -2.87 | 81.16 | N/A | N/A | Average |
| 2 | 7125.000 | 55.78 | -2.83 | 52.95 | -15.25 | 68.20 | Average |
| 3 | 7147.978 | 56.21 | -2.54 | 53.67 | -14.53 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6985MHz (Nss=1) | Test Voltage | 120V/60Hz |

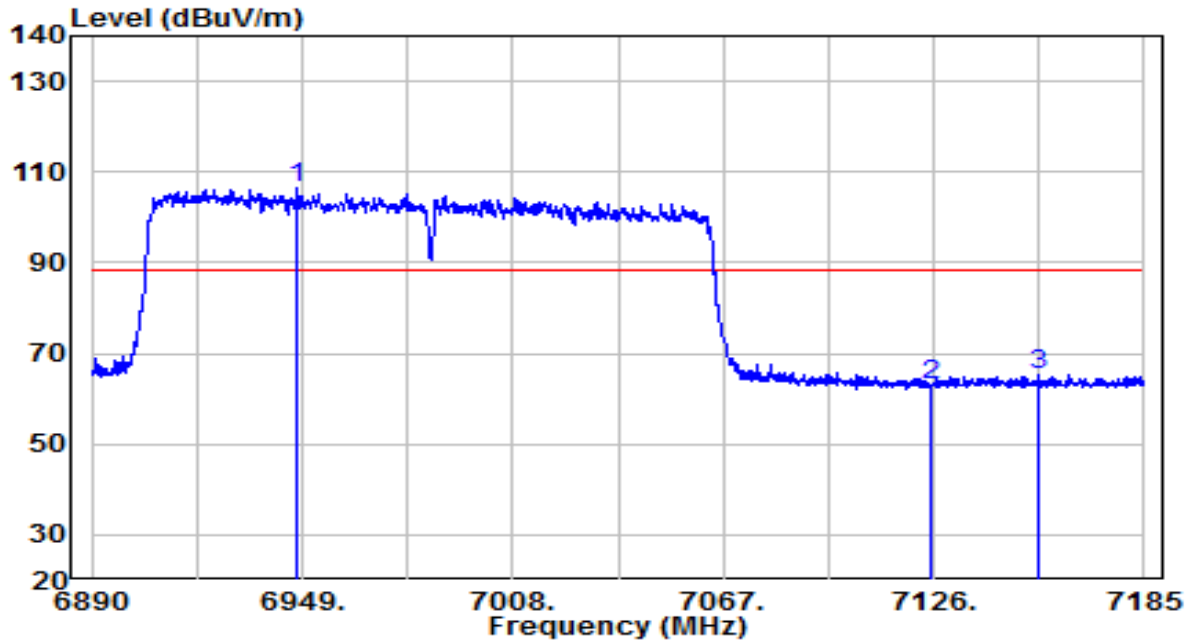


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 6947.525 | 109.23 | -2.88 | 106.35 | N/A | N/A | Peak |
| 2 | 7125.000 | 66.06 | -2.83 | 63.23 | -24.97 | 88.20 | Peak |
| 3 | 7155.205 | 67.80 | -2.48 | 65.31 | -22.89 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|-----------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | SIP-AC2_BBHA9120D_1-18GHz | Temp. / Humidity | 25°C/54% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC2 / Edward Zhang |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6985MHz (Nss=1) | Test Voltage | 120V/60Hz |

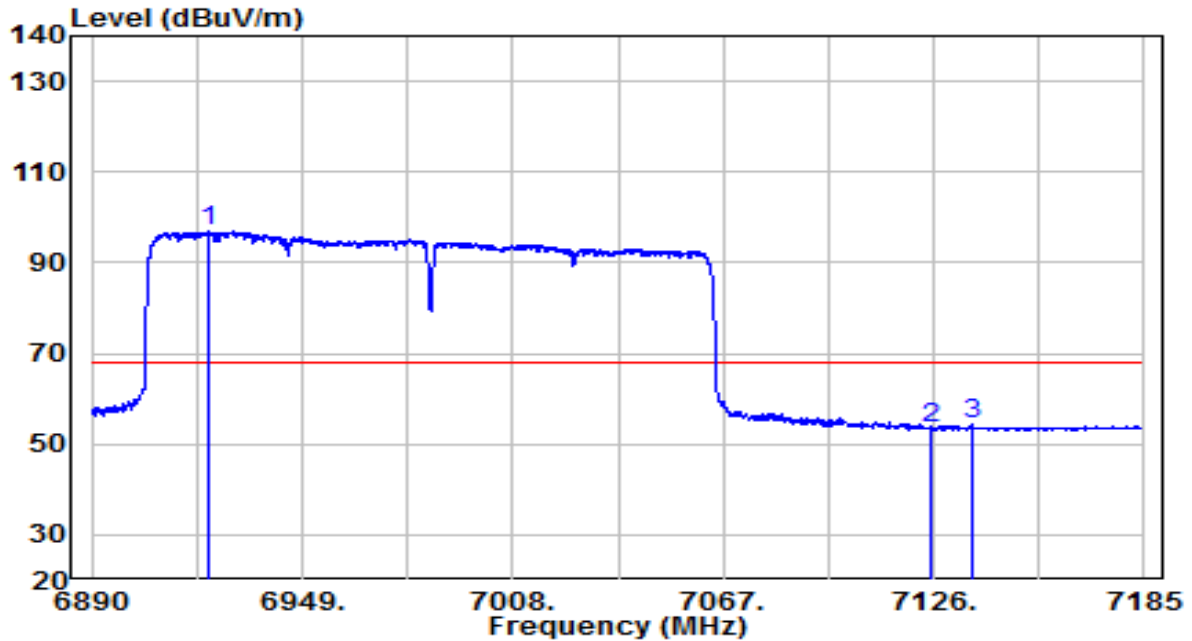


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 6922.893 | 99.89 | -3.11 | 96.77 | N/A | N/A | Average |
| 2 | 7125.000 | 56.20 | -2.83 | 53.37 | -14.83 | 68.20 | Average |
| 3 | 7136.620 | 56.85 | -2.62 | 54.23 | -13.97 | 68.20 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=2) | Test Voltage | 120V/60Hz |

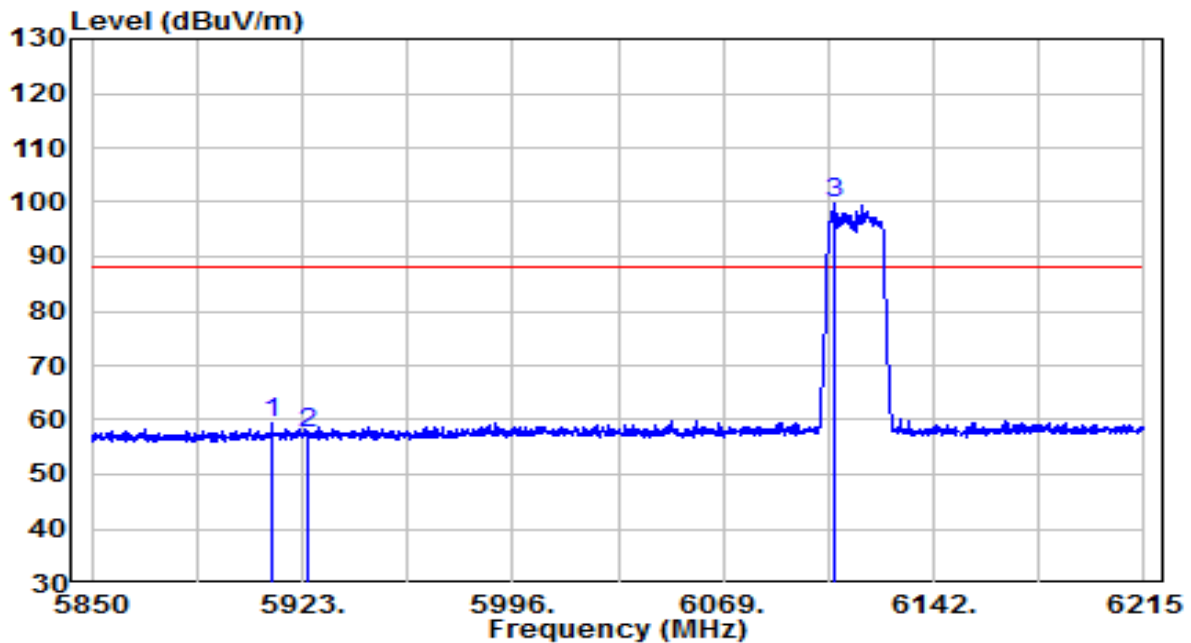


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5912.598 | 37.48 | 21.82 | 59.30 | -28.90 | 88.20 | Peak |
| 2 | 5925.007 | 35.45 | 21.95 | 57.40 | -30.80 | 88.20 | Peak |
| 3 | * 6107.325 | 77.96 | 21.79 | 99.74 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=2) | Test Voltage | 120V/60Hz |

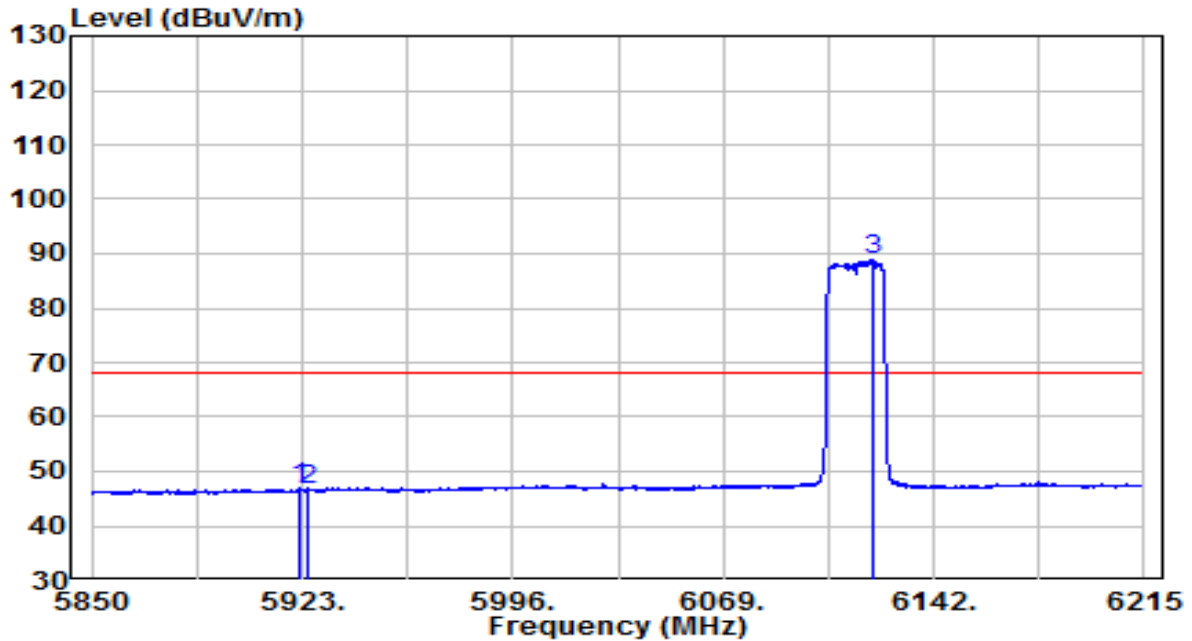


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5922.453 | 24.97 | 21.93 | 46.90 | -21.30 | 68.20 | Average |
| 2 | 5925.007 | 24.77 | 21.95 | 46.71 | -21.49 | 68.20 | Average |
| 3 | * 6121.013 | 66.99 | 21.81 | 88.81 | N/A | N/A | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=2) | Test Voltage | 120V/60Hz |

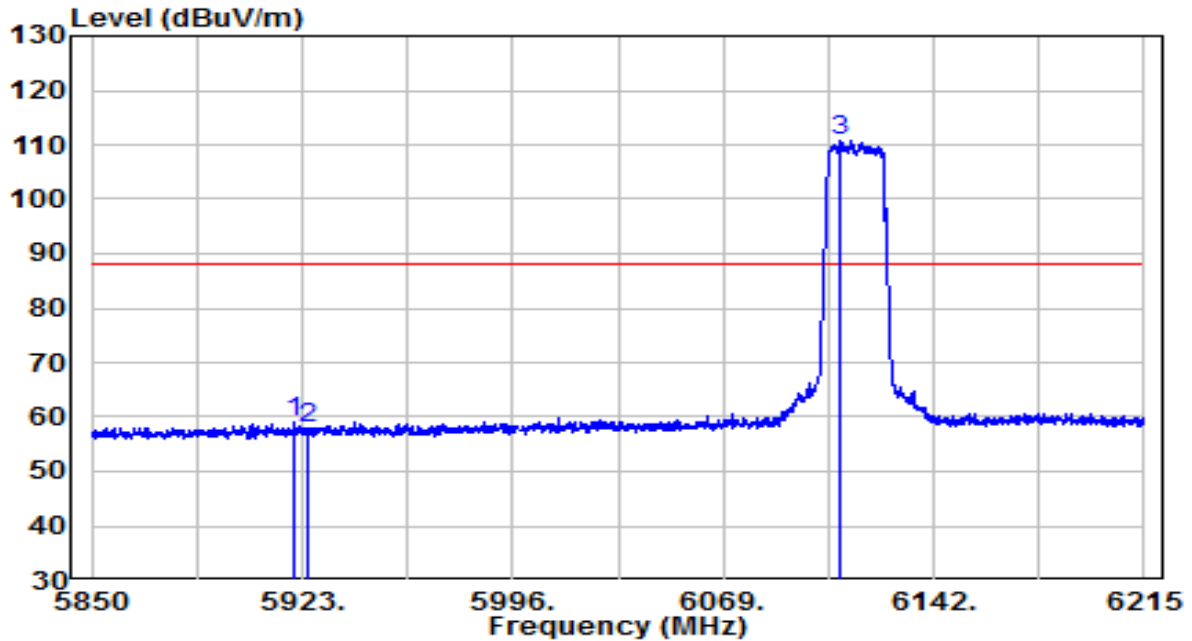


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5920.263 | 37.01 | 21.91 | 58.92 | -29.28 | 88.20 | Peak |
| 2 | 5925.007 | 35.86 | 21.95 | 57.81 | -30.39 | 88.20 | Peak |
| 3 | * 6109.333 | 89.05 | 21.79 | 110.84 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 6115MHz (Nss=2) | Test Voltage | 120V/60Hz |

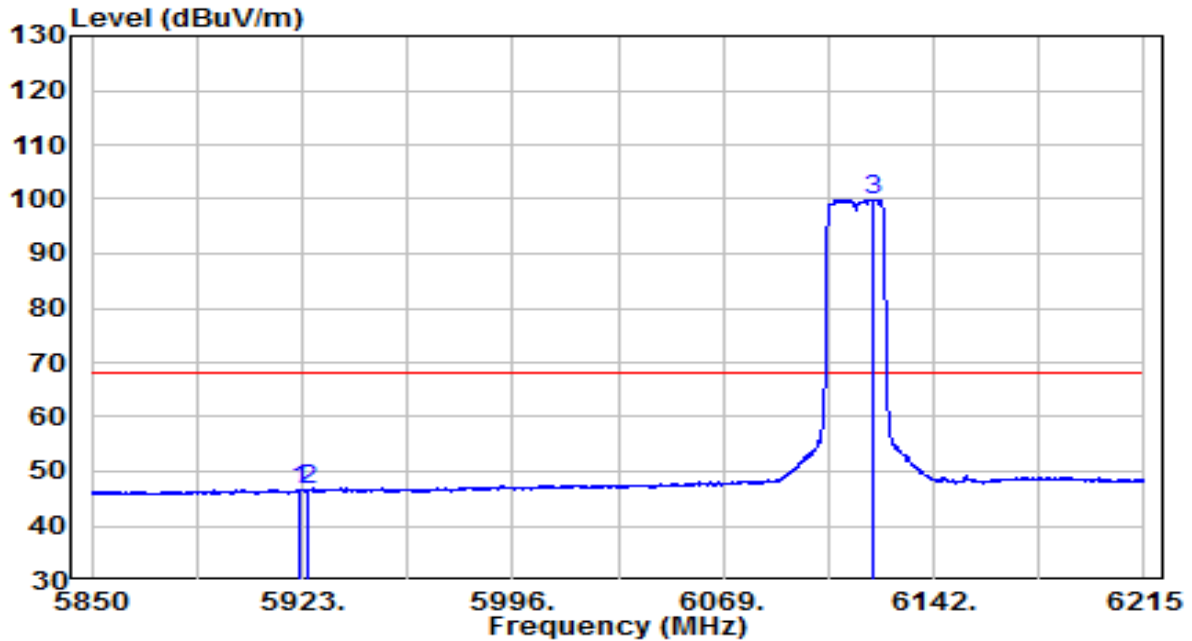


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5921.905 | 24.84 | 21.92 | 46.76 | -21.44 | 68.20 | Average |
| 2 | 5925.007 | 24.70 | 21.95 | 46.64 | -21.56 | 68.20 | Average |
| 3 | * 6120.647 | 78.11 | 21.81 | 99.92 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=2) | Test Voltage | 120V/60Hz |

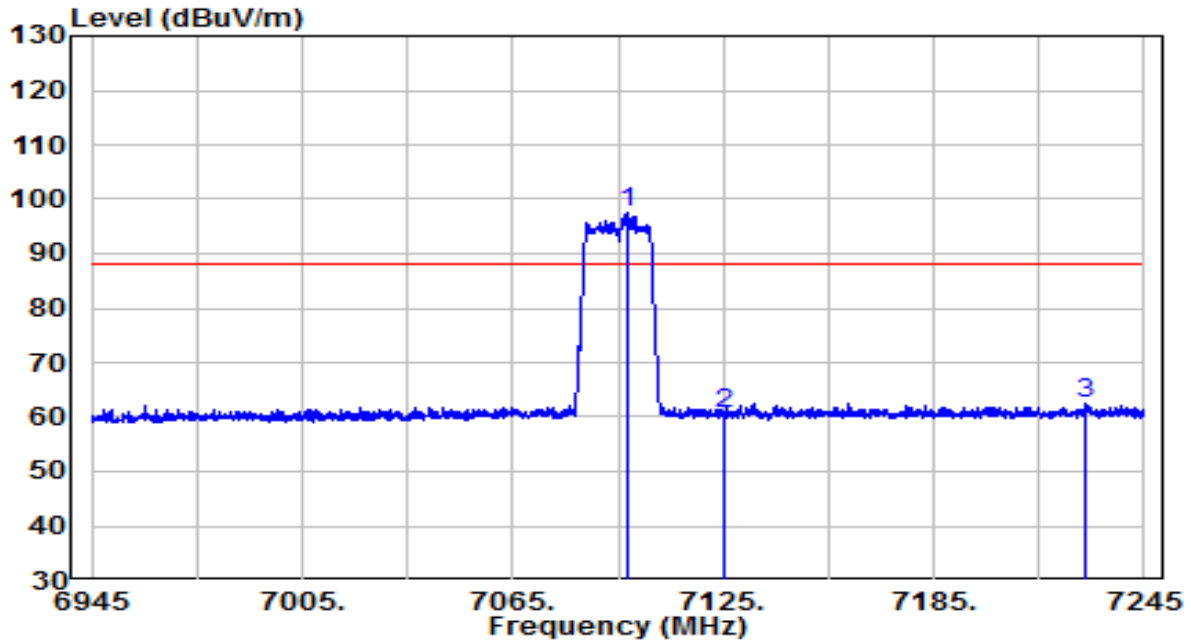


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * | 72.77 | 24.74 | 97.51 | N/A | N/A | Peak |
| 2 | | 35.67 | 24.79 | 60.45 | -27.75 | 88.20 | Peak |
| 3 | | 37.31 | 25.16 | 62.47 | -25.73 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=2) | Test Voltage | 120V/60Hz |

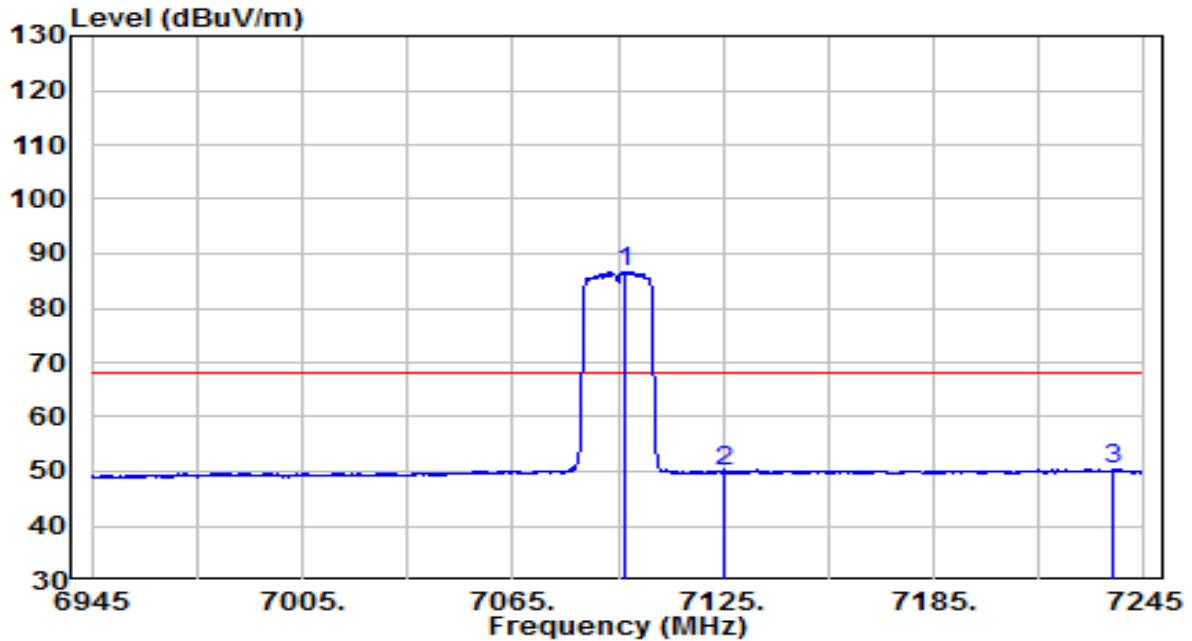


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * | 61.87 | 24.74 | 86.62 | N/A | N/A | Average |
| 2 | | 25.27 | 24.79 | 50.06 | -18.14 | 68.20 | Average |
| 3 | | 25.13 | 25.25 | 50.39 | -17.81 | 68.20 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=2) | Test Voltage | 120V/60Hz |

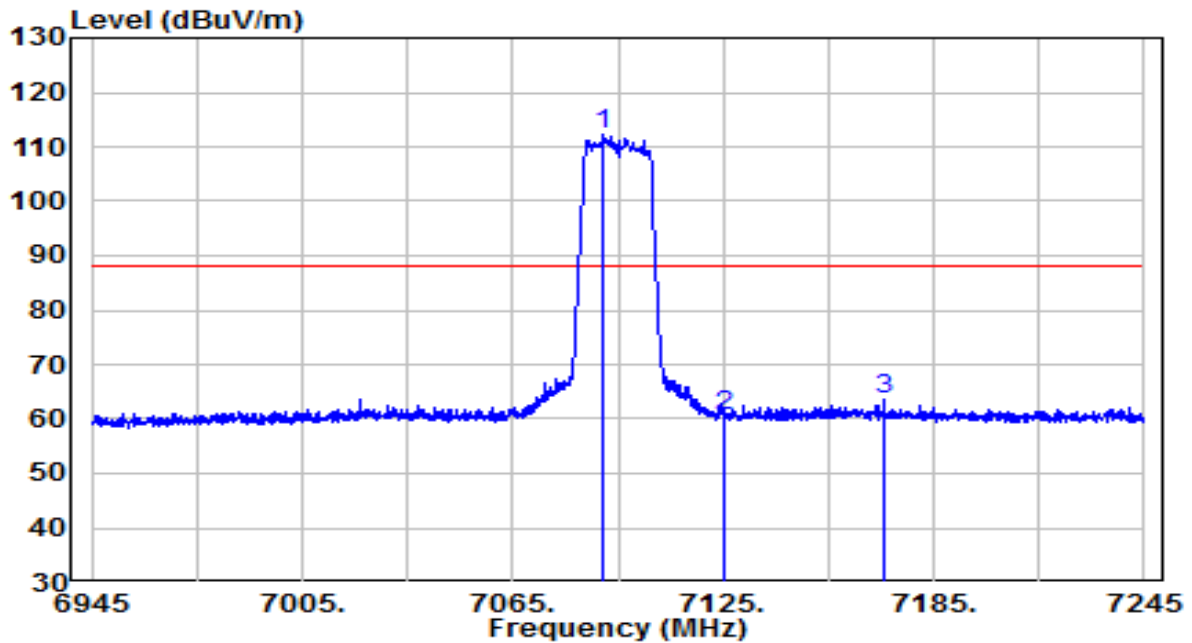


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7090.800 | 87.32 | 24.79 | 112.11 | N/A | N/A | Peak |
| 2 | 7125.000 | 35.87 | 24.79 | 60.66 | -27.54 | 88.20 | Peak |
| 3 | 7170.900 | 38.48 | 25.05 | 63.53 | -24.67 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 7095MHz (Nss=2) | Test Voltage | 120V/60Hz |

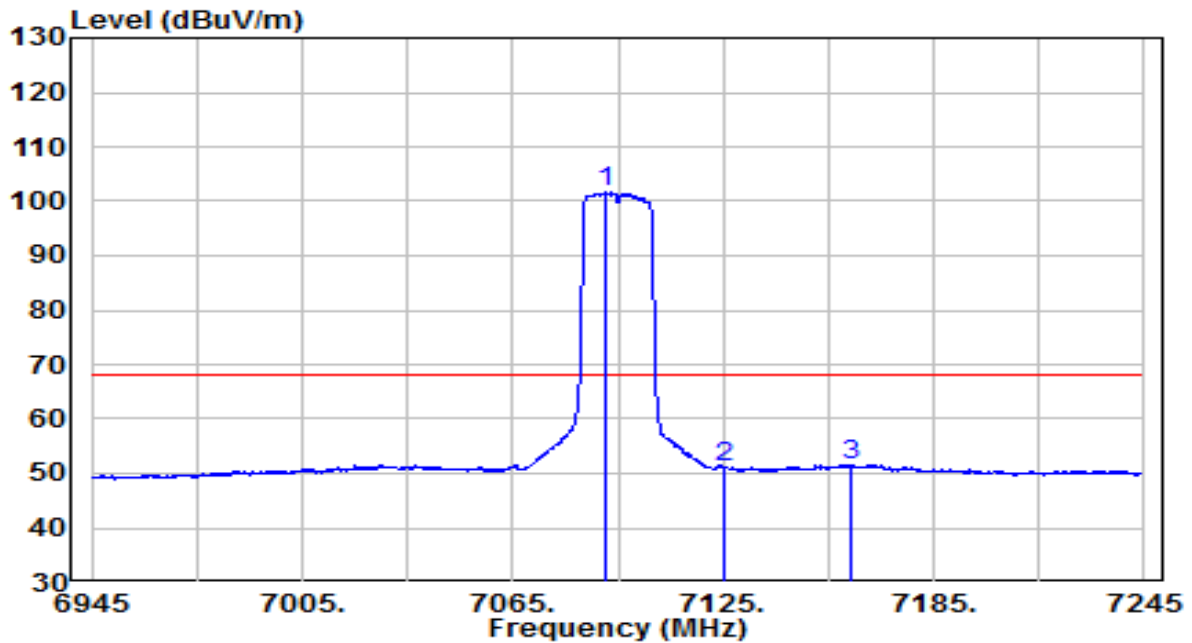


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7091.400 | 76.81 | 24.79 | 101.60 | N/A | N/A | Average |
| 2 | 7125.000 | 26.41 | 24.79 | 51.20 | -17.00 | 68.20 | Average |
| 3 | 7161.750 | 26.50 | 25.05 | 51.55 | -16.65 | 68.20 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=2) | Test Voltage | 120V/60Hz |

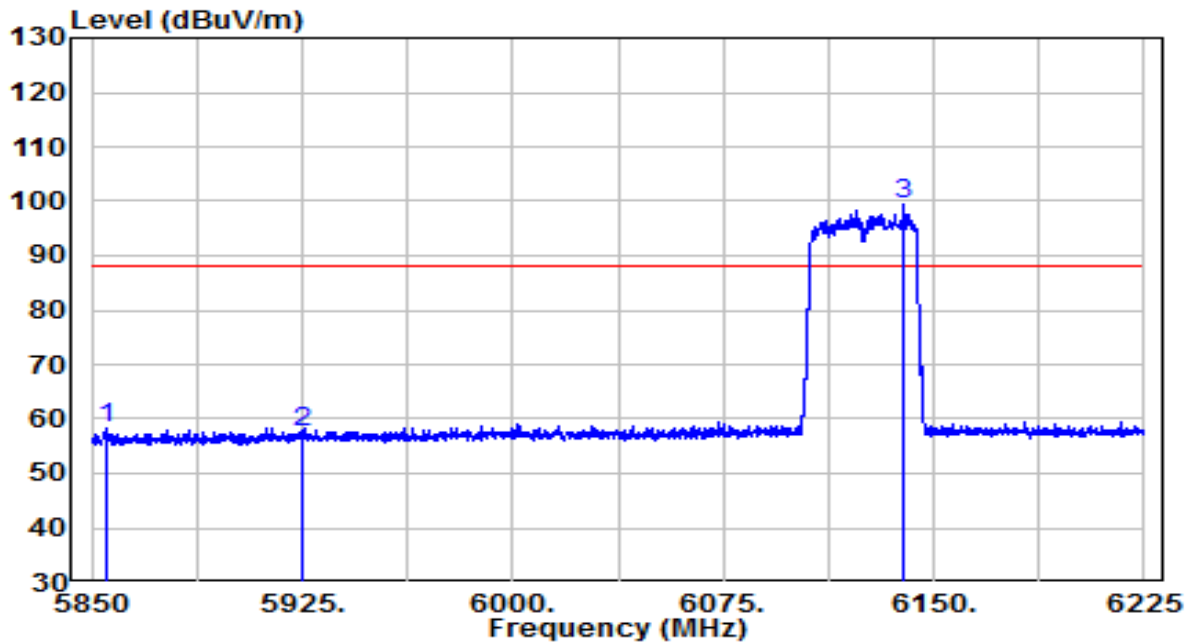


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5855.250 | 36.59 | 21.72 | 58.31 | -29.89 | 88.20 | Peak |
| 2 | 5925.000 | 35.45 | 21.95 | 57.39 | -30.81 | 88.20 | Peak |
| 3 | * 6139.500 | 77.82 | 21.80 | 99.62 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=2) | Test Voltage | 120V/60Hz |

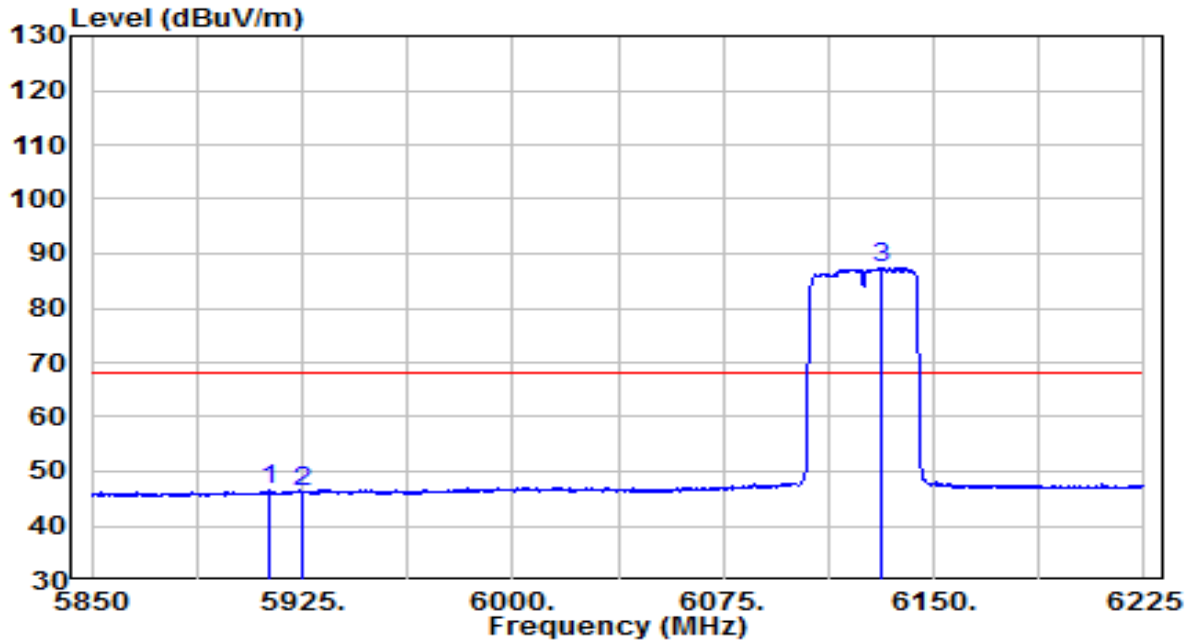


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5913.000 | 24.79 | 21.83 | 46.62 | -21.58 | 68.20 | Average |
| 2 | 5925.000 | 24.38 | 21.95 | 46.33 | -21.87 | 68.20 | Average |
| 3 | * 6131.438 | 65.70 | 21.78 | 87.48 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=2) | Test Voltage | 120V/60Hz |

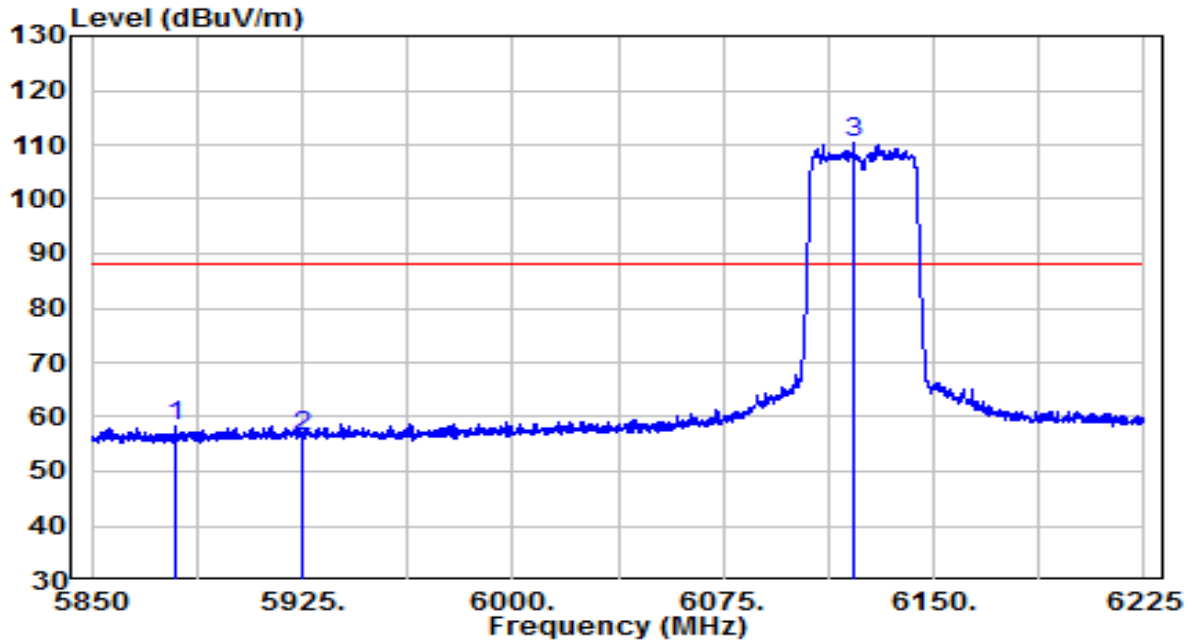


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5880.000 | 36.69 | 21.66 | 58.36 | -29.84 | 88.20 | Peak |
| 2 | 5925.000 | 34.28 | 21.95 | 56.23 | -31.97 | 88.20 | Peak |
| 3 | * 6121.500 | 88.40 | 21.82 | 110.22 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 6125MHz (Nss=2) | Test Voltage | 120V/60Hz |

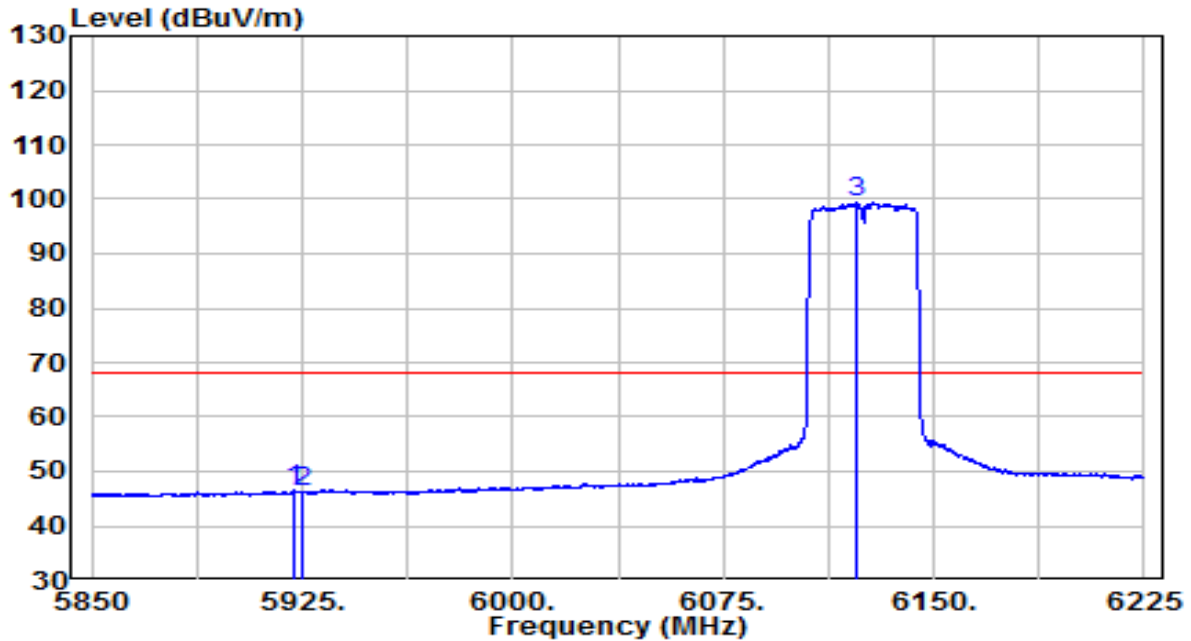


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5922.188 | 24.54 | 21.93 | 46.46 | -21.74 | 68.20 | Average |
| 2 | 5925.000 | 24.30 | 21.95 | 46.25 | -21.95 | 68.20 | Average |
| 3 | * 6122.063 | 77.63 | 21.82 | 99.45 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=2) | Test Voltage | 120V/60Hz |

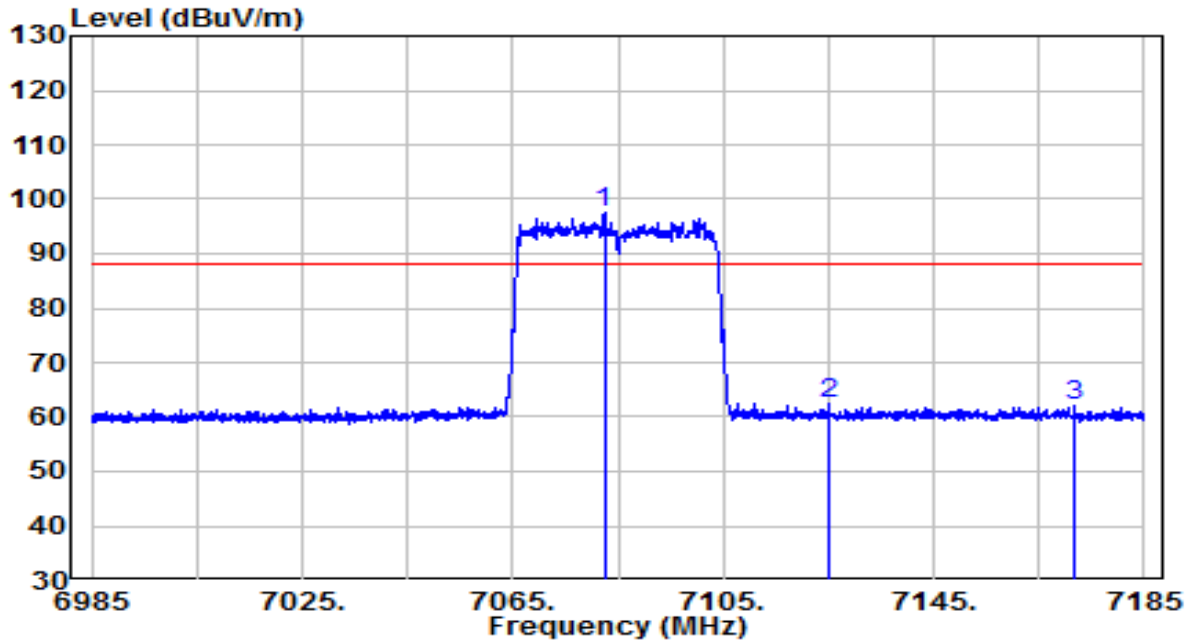


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7082.400 | 72.88 | 24.80 | 97.67 | N/A | N/A | Peak |
| 2 | 7125.000 | 37.57 | 24.79 | 62.35 | -25.85 | 88.20 | Peak |
| 3 | 7171.700 | 36.86 | 25.04 | 61.90 | -26.30 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=2) | Test Voltage | 120V/60Hz |

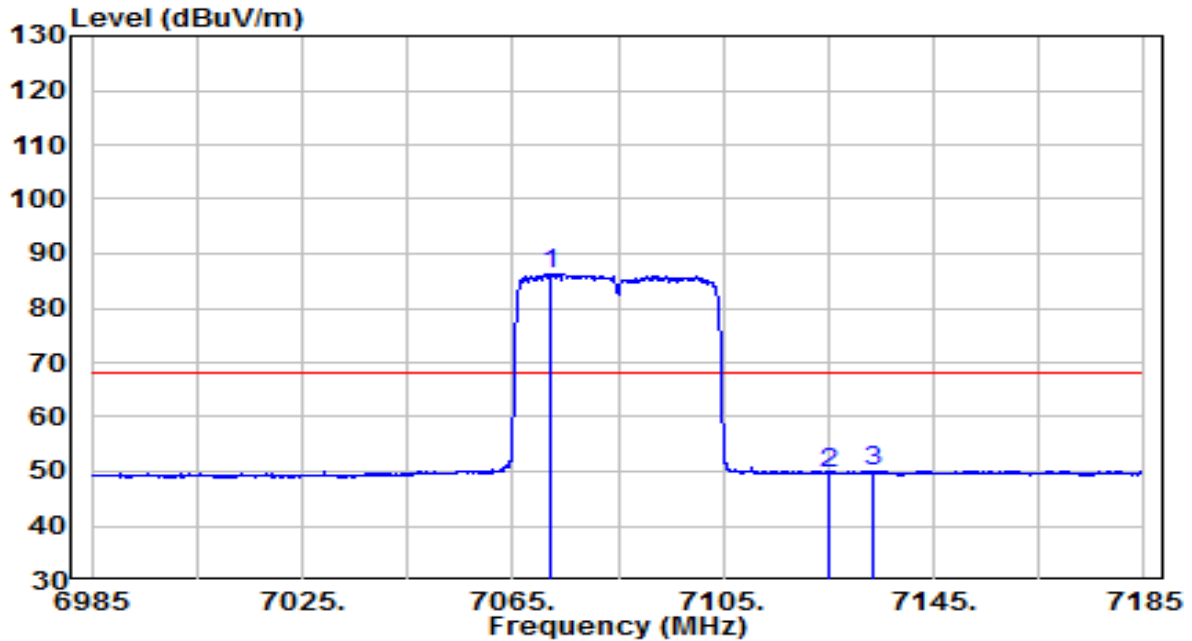


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7072.200 | 61.58 | 24.77 | 86.35 | N/A | N/A | Average |
| 2 | 7125.000 | 24.98 | 24.79 | 49.77 | -18.43 | 68.20 | Average |
| 3 | 7133.500 | 25.18 | 24.90 | 50.09 | -18.11 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=2) | Test Voltage | 120V/60Hz |

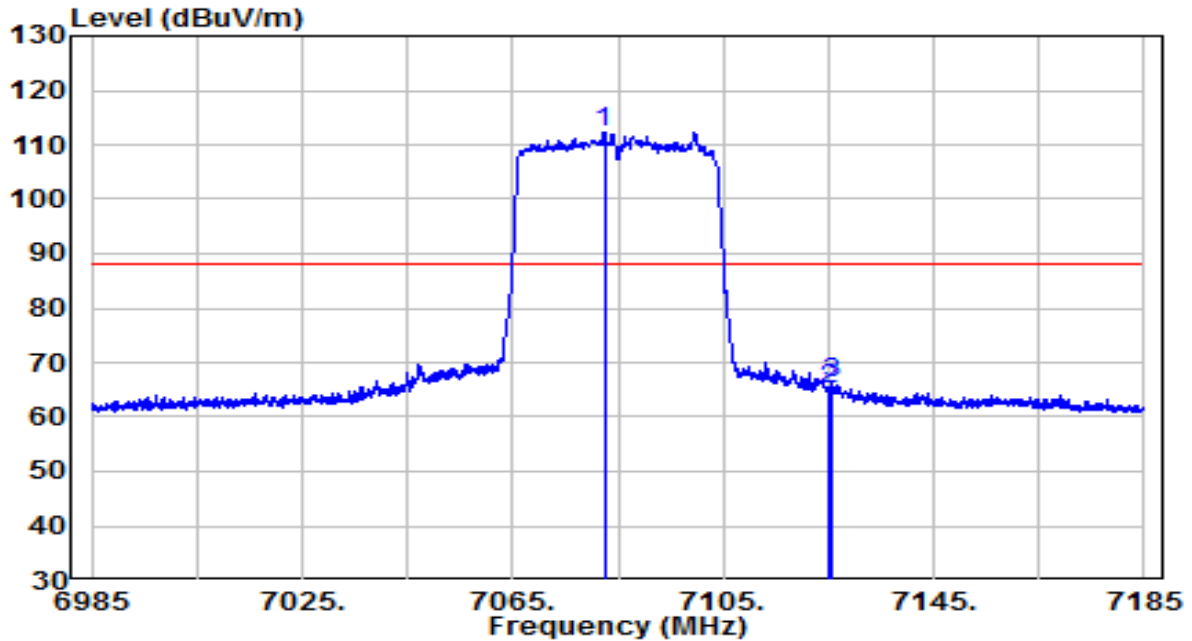


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7082.400 | 87.58 | 24.80 | 112.38 | N/A | N/A | Peak |
| 2 | 7125.000 | 40.36 | 24.79 | 65.14 | -23.06 | 88.20 | Peak |
| 3 | 7125.700 | 41.30 | 24.80 | 66.10 | -22.10 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 7085MHz (Nss=2) | Test Voltage | 120V/60Hz |

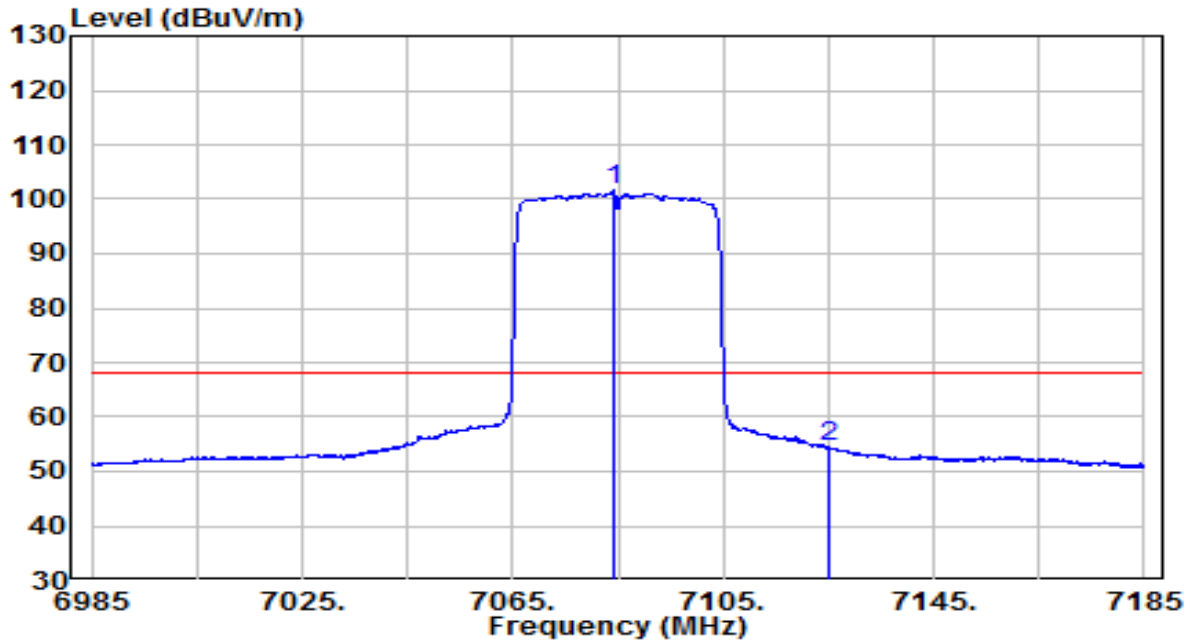


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7084.100 | 76.78 | 24.80 | 101.58 | N/A | N/A | Average |
| 2 | 7125.000 | 29.60 | 24.79 | 54.38 | -13.82 | 68.20 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=2) | Test Voltage | 120V/60Hz |

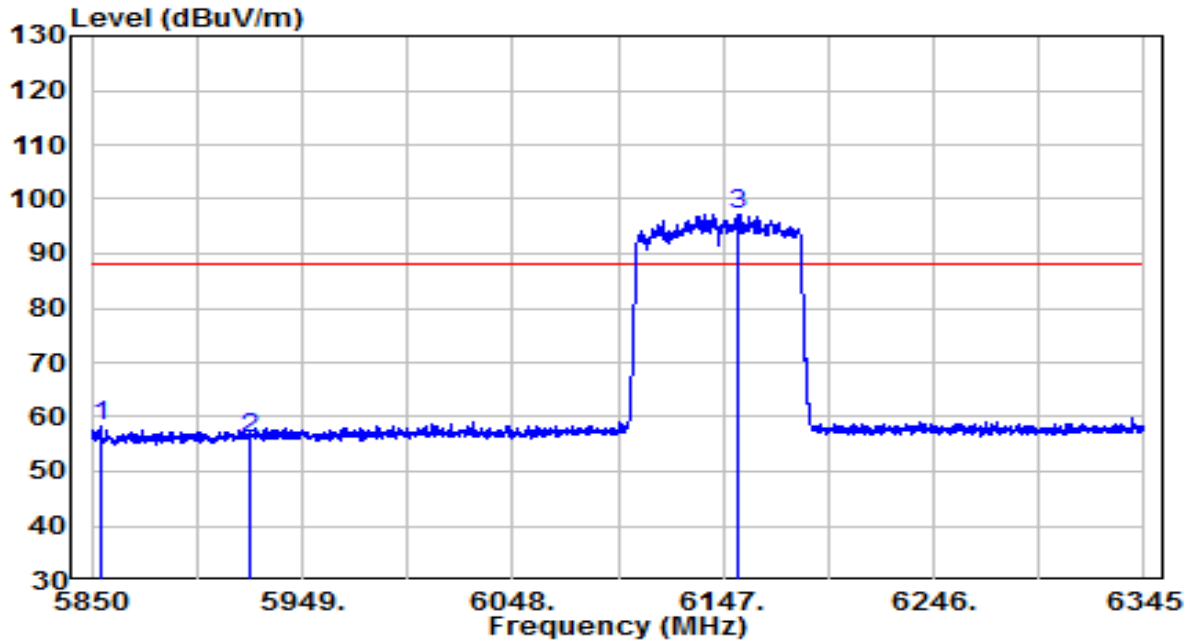


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5854.455 | 36.47 | 21.72 | 58.19 | -30.01 | 88.20 | Peak |
| 2 | 5924.993 | 34.18 | 21.95 | 56.12 | -32.08 | 88.20 | Peak |
| 3 | * 6153.435 | 75.46 | 21.89 | 97.35 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=2) | Test Voltage | 120V/60Hz |

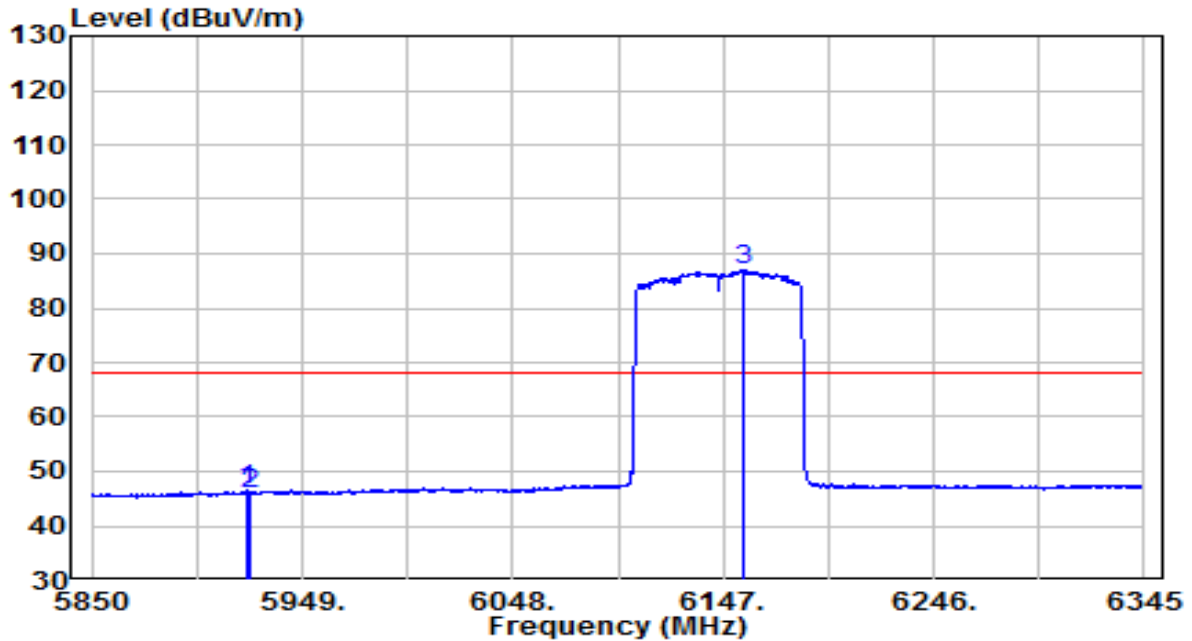


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5923.260 | 24.68 | 21.94 | 46.62 | -21.58 | 68.20 | Average |
| 2 | 5924.993 | 24.08 | 21.95 | 46.03 | -22.17 | 68.20 | Average |
| 3 | * 6155.910 | 65.23 | 21.91 | 87.14 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=2) | Test Voltage | 120V/60Hz |

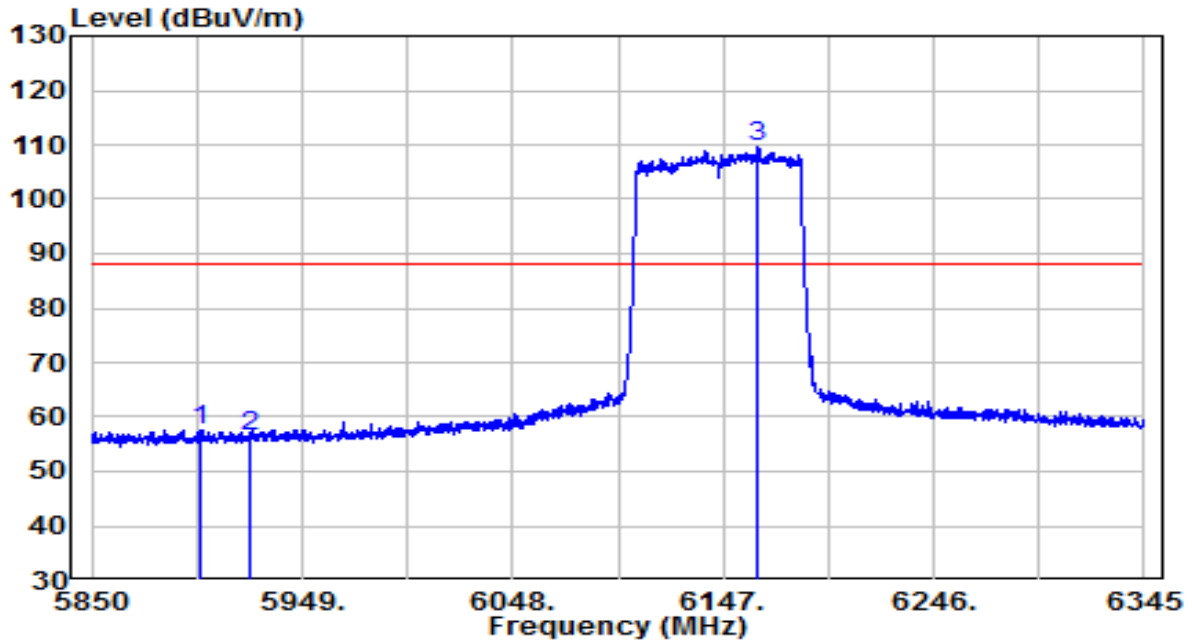


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5900.737 | 35.74 | 21.70 | 57.44 | -30.76 | 88.20 | Peak |
| 2 | 5924.993 | 34.42 | 21.95 | 56.37 | -31.83 | 88.20 | Peak |
| 3 | * 6163.583 | 87.64 | 22.00 | 109.63 | N/A | N/A | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 6145MHz (Nss=2) | Test Voltage | 120V/60Hz |

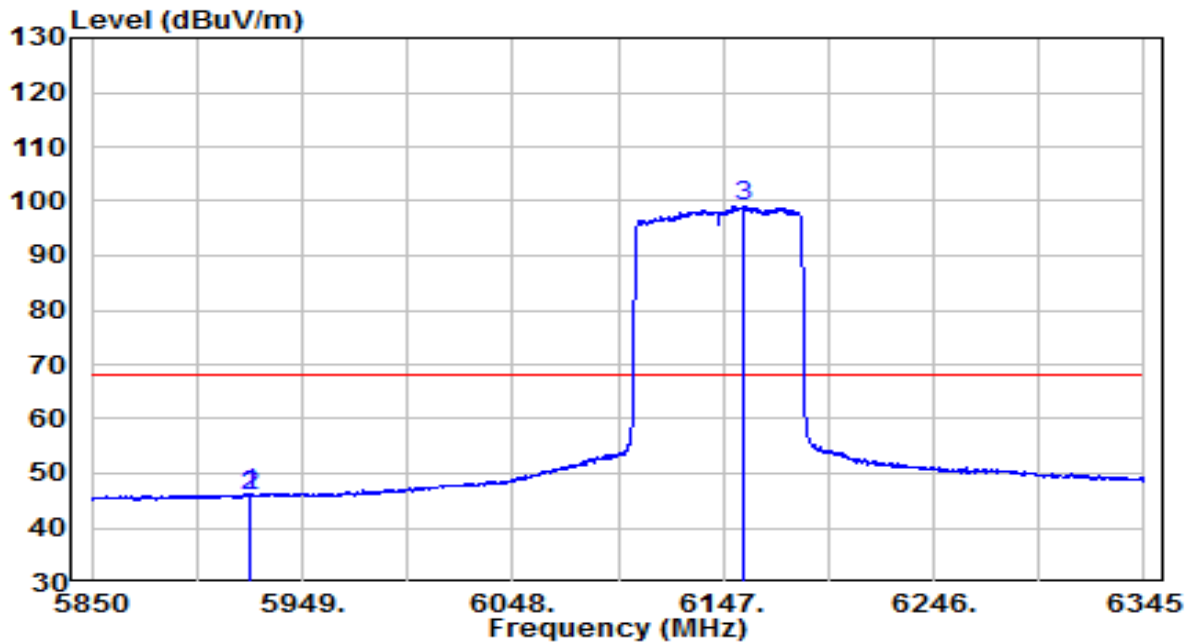


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5924.498 | 24.42 | 21.95 | 46.37 | -21.83 | 68.20 | Average |
| 2 | 5924.993 | 24.00 | 21.95 | 45.95 | -22.25 | 68.20 | Average |
| 3 | * 6157.147 | 77.15 | 21.92 | 99.07 | N/A | N/A | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=2) | Test Voltage | 120V/60Hz |

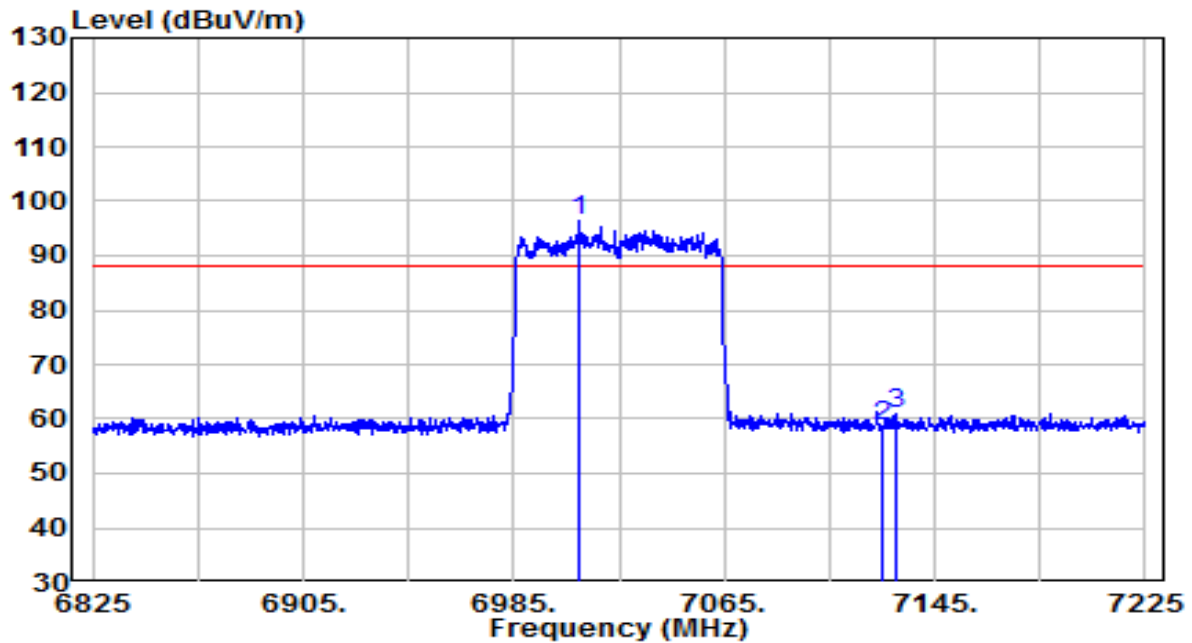


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * | 72.19 | 24.36 | 96.55 | N/A | N/A | Peak |
| 2 | | 33.76 | 24.79 | 58.54 | -29.66 | 88.20 | Peak |
| 3 | | 35.94 | 24.87 | 60.80 | -27.40 | 88.20 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=2) | Test Voltage | 120V/60Hz |

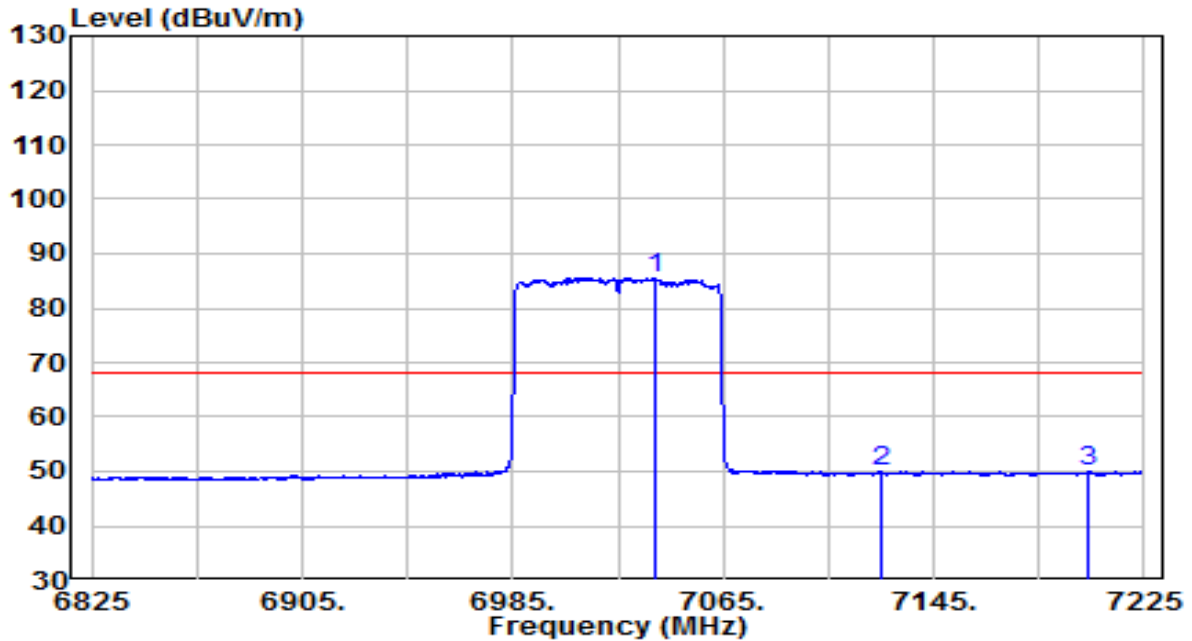


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7039.000 | 61.14 | 24.43 | 85.57 | N/A | N/A | Average |
| 2 | 7125.000 | 25.11 | 24.79 | 49.90 | -18.30 | 68.20 | Average |
| 3 | 7204.000 | 25.13 | 25.01 | 50.14 | -18.06 | 68.20 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=2) | Test Voltage | 120V/60Hz |

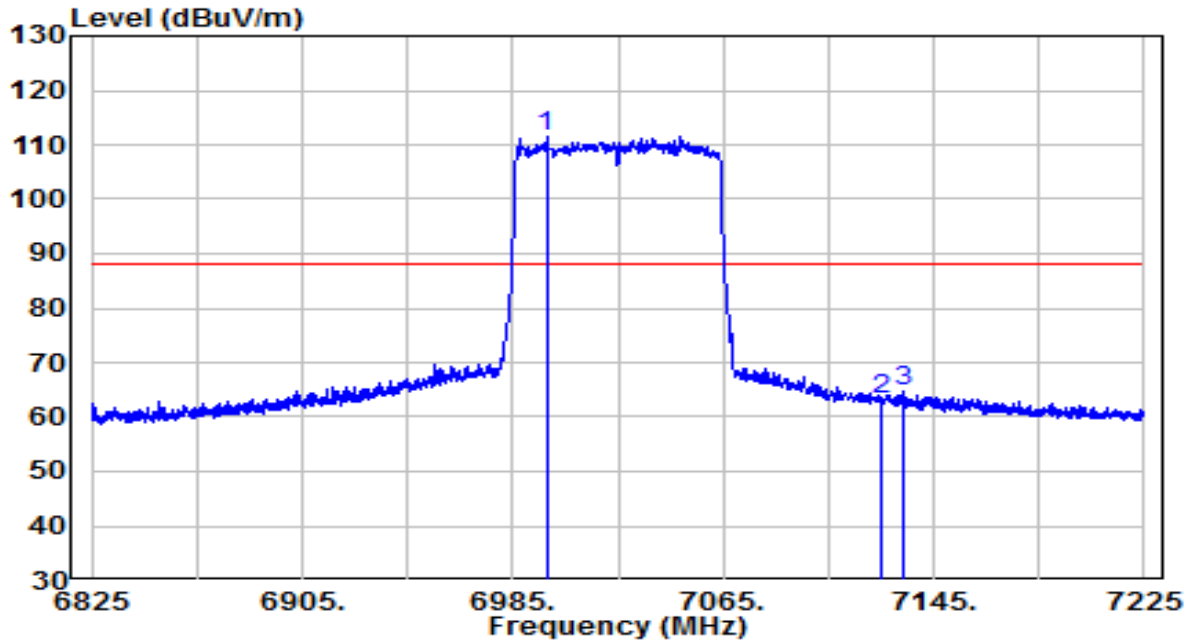


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 6997.800 | 87.08 | 24.40 | 111.47 | N/A | N/A | Peak |
| 2 | 7125.000 | 38.51 | 24.79 | 63.30 | -24.90 | 88.20 | Peak |
| 3 | 7133.200 | 39.72 | 24.90 | 64.62 | -23.58 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 7025MHz (Nss=2) | Test Voltage | 120V/60Hz |

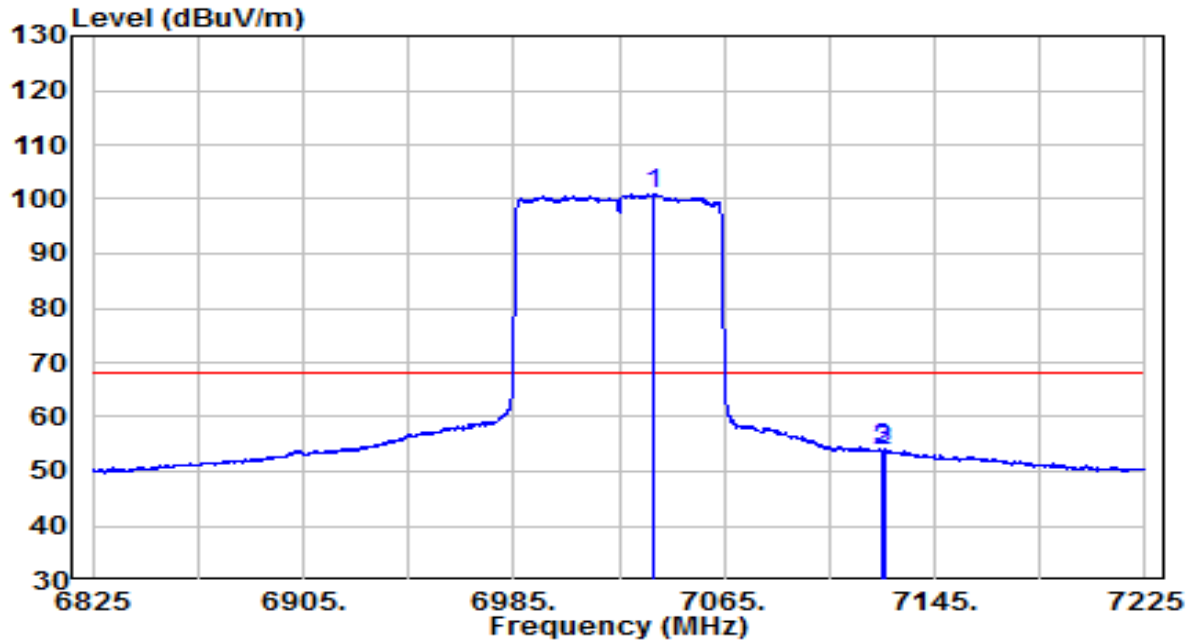


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7037.800 | 76.43 | 24.41 | 100.85 | N/A | N/A | Average |
| 2 | 7125.000 | 28.94 | 24.79 | 53.72 | -14.48 | 68.20 | Average |
| 3 | 7125.600 | 29.20 | 24.80 | 54.00 | -14.20 | 68.20 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB) + 23dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=2) | Test Voltage | 120V/60Hz |

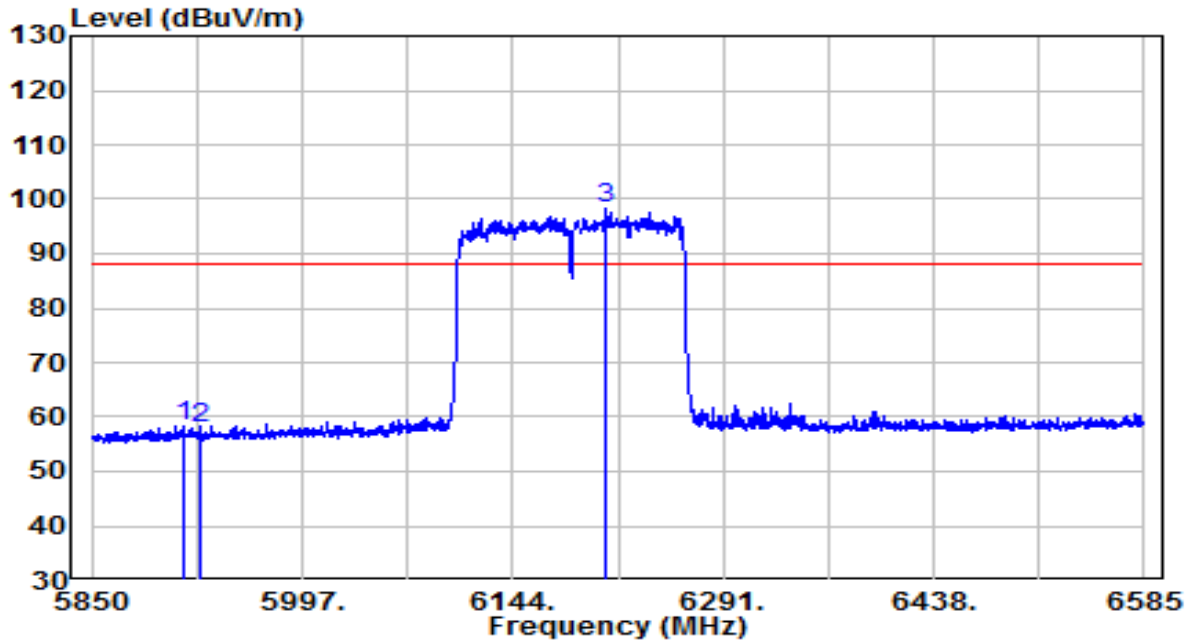


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5914.680 | 36.60 | 21.85 | 58.45 | -29.75 | 88.20 | Peak |
| 2 | 5924.970 | 35.88 | 21.95 | 57.83 | -30.37 | 88.20 | Peak |
| 3 | * 6209.415 | 76.46 | 21.93 | 98.39 | N/A | N/A | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=2) | Test Voltage | 120V/60Hz |

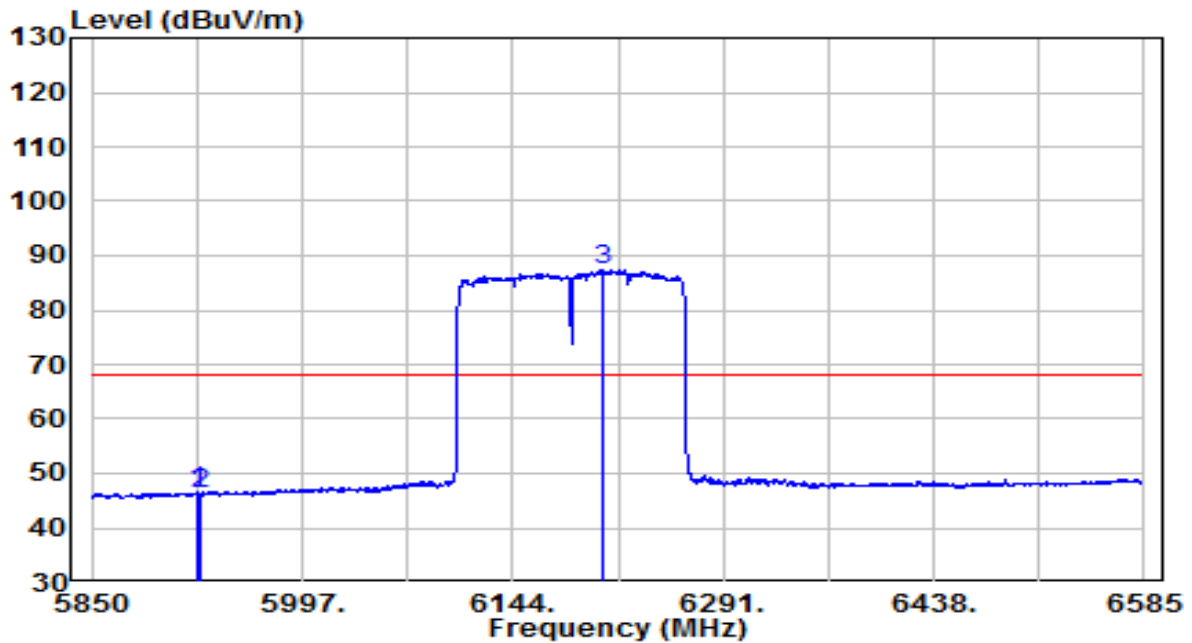


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5924.235 | 24.67 | 21.95 | 46.62 | -21.58 | 68.20 | Average |
| 2 | 5924.970 | 24.46 | 21.95 | 46.41 | -21.79 | 68.20 | Average |
| 3 | * 6206.475 | 65.34 | 21.93 | 87.27 | N/A | N/A | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=2) | Test Voltage | 120V/60Hz |

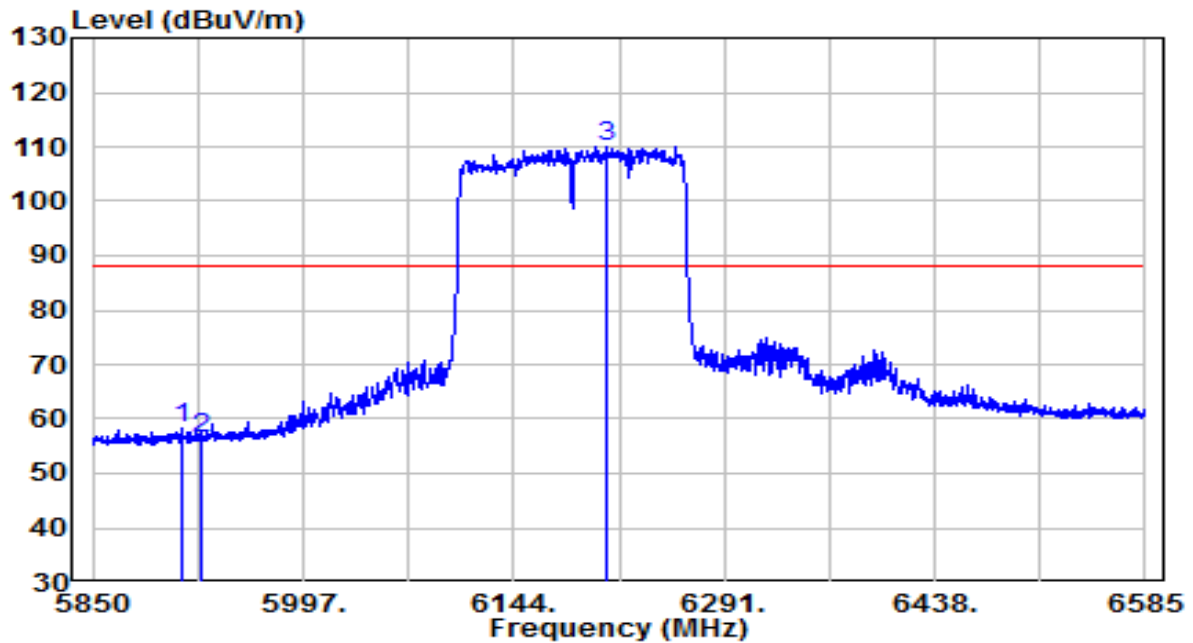


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5911.740 | 36.60 | 21.81 | 58.41 | -29.79 | 88.20 | Peak |
| 2 | 5924.970 | 34.53 | 21.95 | 56.48 | -31.72 | 88.20 | Peak |
| 3 | * 6209.047 | 88.06 | 21.93 | 109.99 | N/A | N/A | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6185MHz (Nss=2) | Test Voltage | 120V/60Hz |

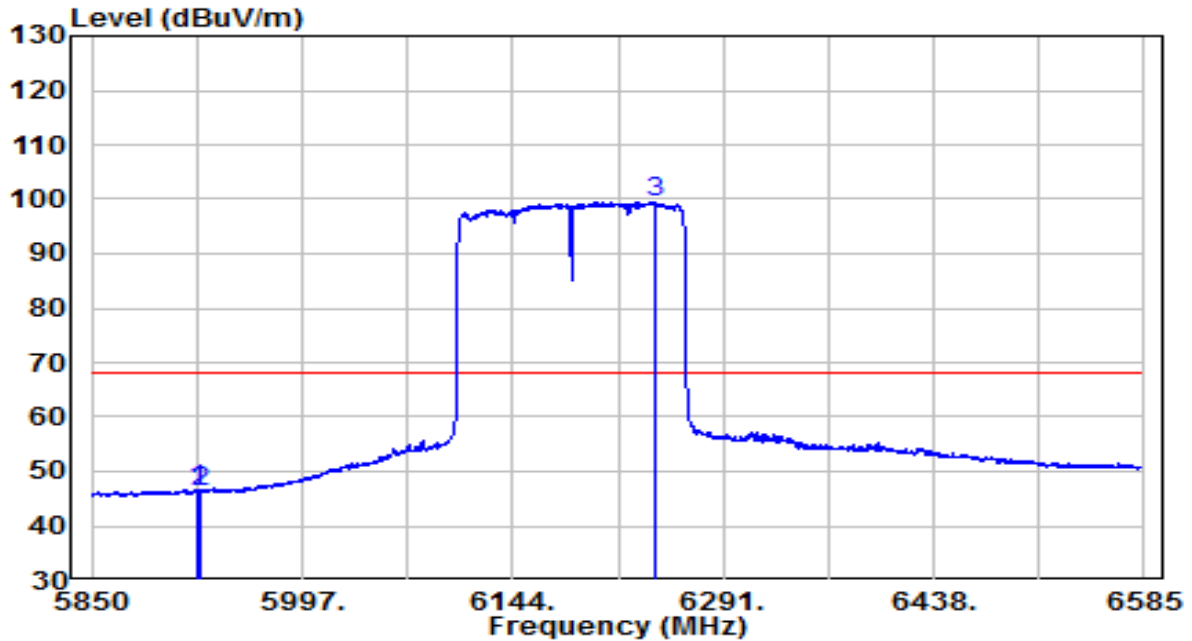


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | 5924.603 | 24.74 | 21.95 | 46.69 | -21.51 | 68.20 | Average |
| 2 | 5924.970 | 24.37 | 21.95 | 46.32 | -21.88 | 68.20 | Average |
| 3 | * 6243.225 | 77.40 | 22.17 | 99.57 | N/A | N/A | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=2) | Test Voltage | 120V/60Hz |

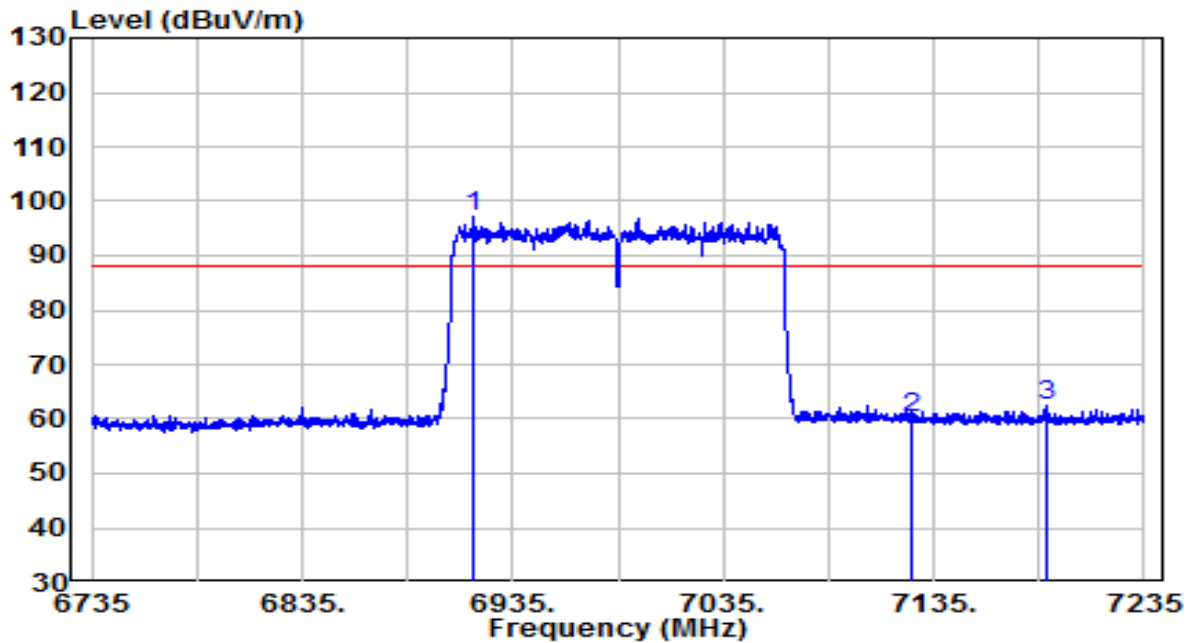


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * | 73.00 | 24.11 | 97.11 | N/A | N/A | Peak |
| 2 | | 35.42 | 24.79 | 60.20 | -28.00 | 88.20 | Peak |
| 3 | | 37.52 | 25.02 | 62.54 | -25.66 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Horizontal | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=2) | Test Voltage | 120V/60Hz |

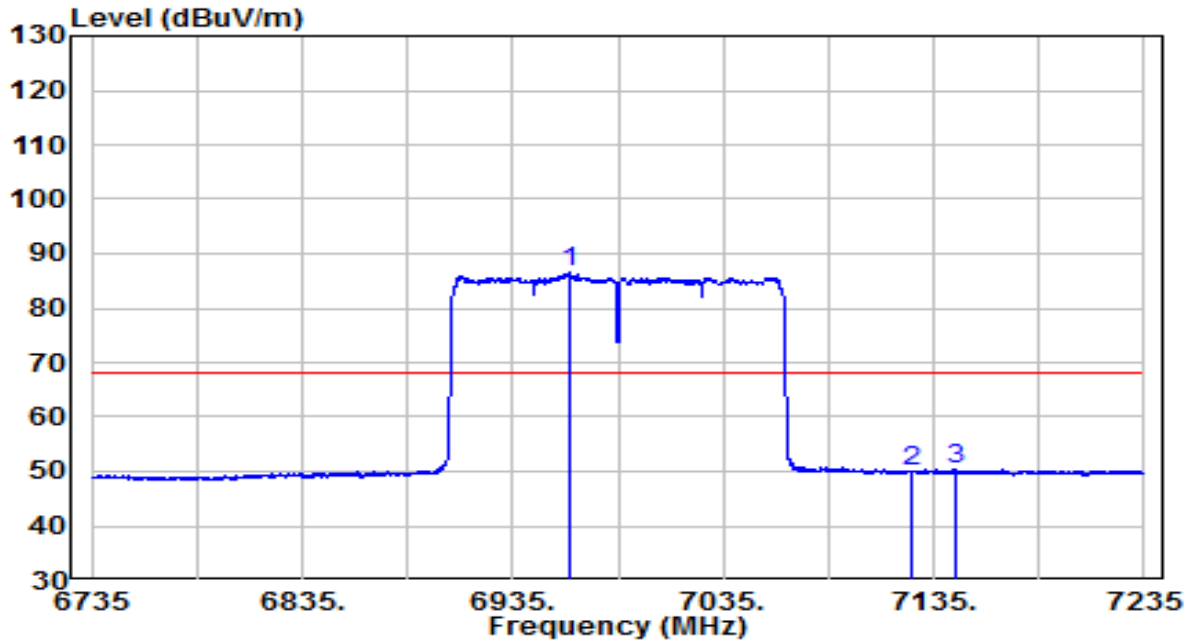


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 6962.000 | 62.31 | 24.13 | 86.44 | N/A | N/A | Average |
| 2 | 7125.000 | 25.04 | 24.79 | 49.83 | -18.37 | 68.20 | Average |
| 3 | 7145.750 | 25.30 | 25.03 | 50.32 | -17.88 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=2) | Test Voltage | 120V/60Hz |

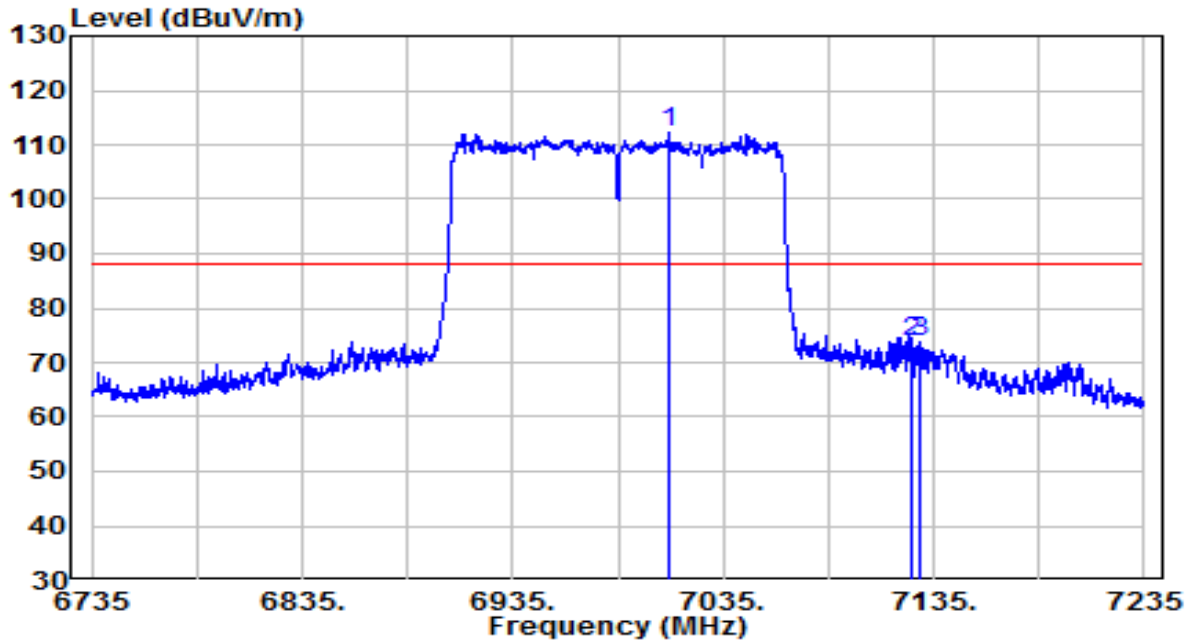


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 7009.250 | 87.73 | 24.36 | 112.09 | N/A | N/A | Peak |
| 2 | 7125.000 | 48.83 | 24.79 | 73.62 | -14.58 | 88.20 | Peak |
| 3 | 7129.000 | 48.87 | 24.84 | 73.71 | -14.49 | 88.20 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|---------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-29 |
| Factor | AC1_BBHA9120D_1-18GHz | Temp. / Humidity | 27.5°C/39.4% |
| Polarity | Vertical | Site / Test Engineer | WZ-AC1 / Lucas Wang |
| Test Mode | Transmit by 802.11ax-HE160 at Channel 6985MHz (Nss=2) | Test Voltage | 120V/60Hz |

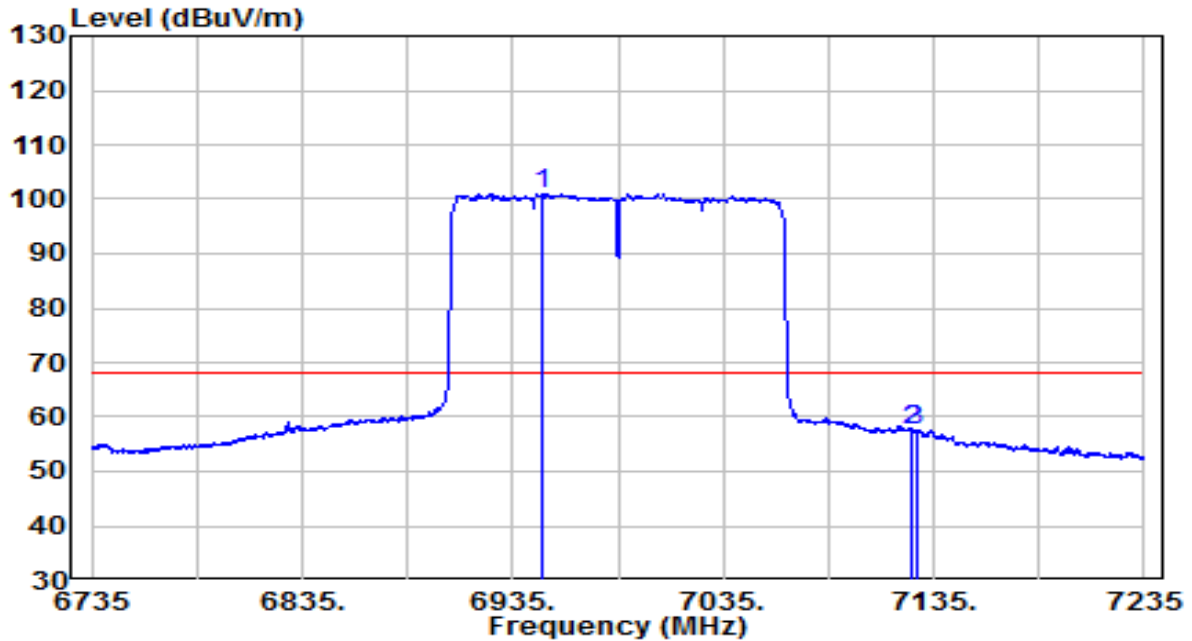

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1 | * 6949.000 | 77.06 | 24.06 | 101.11 | N/A | N/A | Average |
| 2 | 7125.000 | 32.79 | 24.79 | 57.58 | -10.62 | 68.20 | Average |
| 3 | 7126.500 | 32.92 | 24.81 | 57.73 | -10.47 | 68.20 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 23dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

| FCC Part 15.207 Limits | | |
|------------------------|-----------------|-----------------|
| Frequency (MHz) | QP (dB μ V) | AV (dB μ V) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

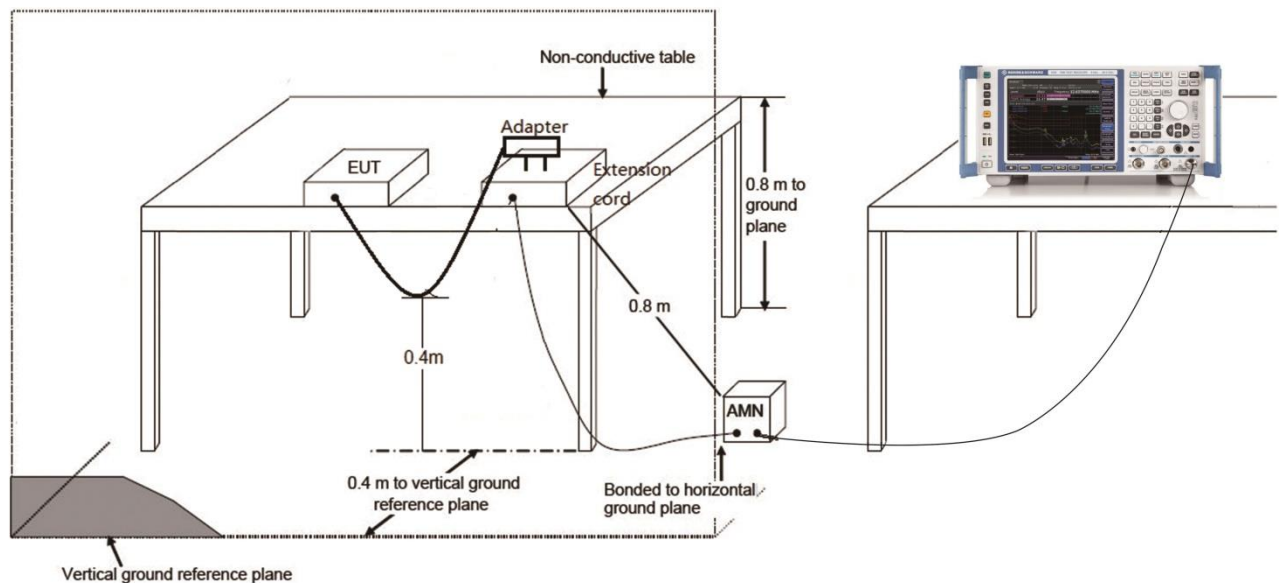

6.10.3.Test Result

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | ENV216_101683_L1_Filter Off_E | Temp. / Humidity | 23.6°C/60.9% |
| Polarity | Line1 | Site / Test Engineer | WZ-SR2 / Helen Han |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6145MHz (Nss=2) | Test Voltage | 120V/60Hz |

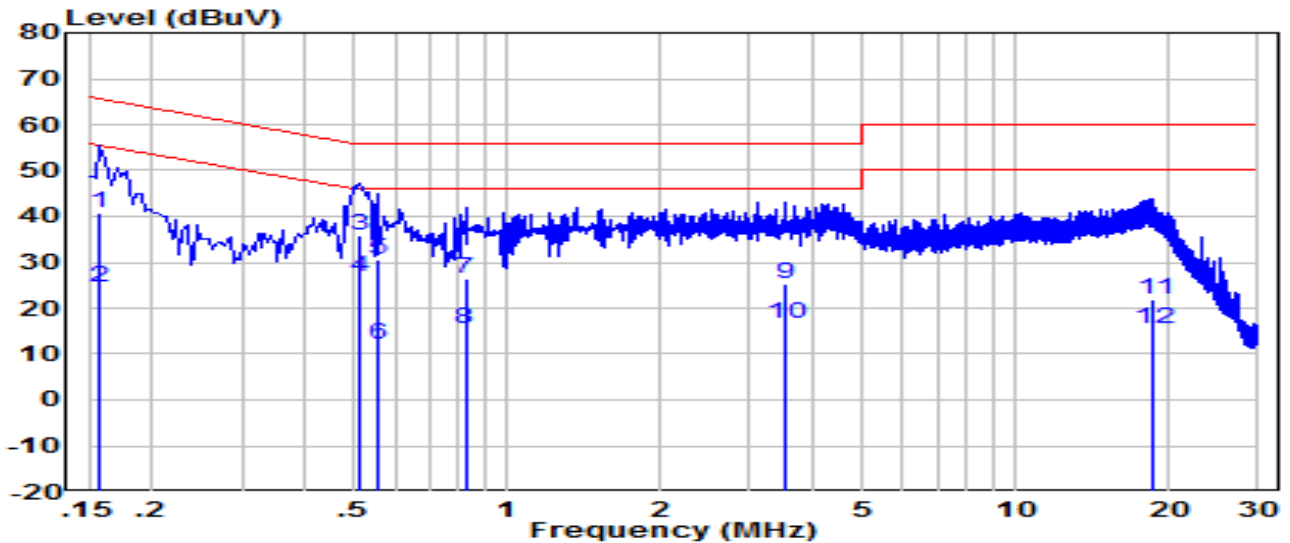


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.158 | 31.00 | 9.80 | 40.80 | -24.77 | 65.57 | QP |
| 2 | 0.158 | 14.80 | 9.80 | 24.60 | -30.97 | 55.57 | Average |
| 3 | 0.514 | 26.05 | 9.85 | 35.90 | -20.10 | 56.00 | QP |
| 4 | * 0.514 | 16.95 | 9.85 | 26.80 | -19.20 | 46.00 | Average |
| 5 | 0.554 | 20.65 | 9.85 | 30.50 | -25.50 | 56.00 | QP |
| 6 | 0.554 | 2.05 | 9.85 | 11.90 | -34.10 | 46.00 | Average |
| 7 | 0.826 | 16.50 | 9.90 | 26.40 | -29.60 | 56.00 | QP |
| 8 | 0.826 | 5.70 | 9.90 | 15.60 | -30.40 | 46.00 | Average |
| 9 | 3.530 | 14.81 | 10.29 | 25.10 | -30.90 | 56.00 | QP |
| 10 | 3.530 | 6.41 | 10.29 | 16.70 | -29.30 | 46.00 | Average |
| 11 | 18.730 | 6.98 | 15.02 | 22.00 | -38.00 | 60.00 | QP |
| 12 | 18.730 | 0.58 | 15.02 | 15.60 | -34.40 | 50.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = ISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------------|
| EUT | AXE5400 Tri-Band Wi-Fi 6E Router | Date of Test | 2021-10-15 |
| Factor | ENV216_101683_N_Filter Off_E. | Temp. / Humidity | 23.6°C/60.9% |
| Polarity | Neutral | Site / Test Engineer | WZ-SR2 / Helen Han |
| Test Mode | Transmit by 802.11ax-HE160 at channel 6145MHz (Nss=2) | Test Voltage | 120V/60Hz |

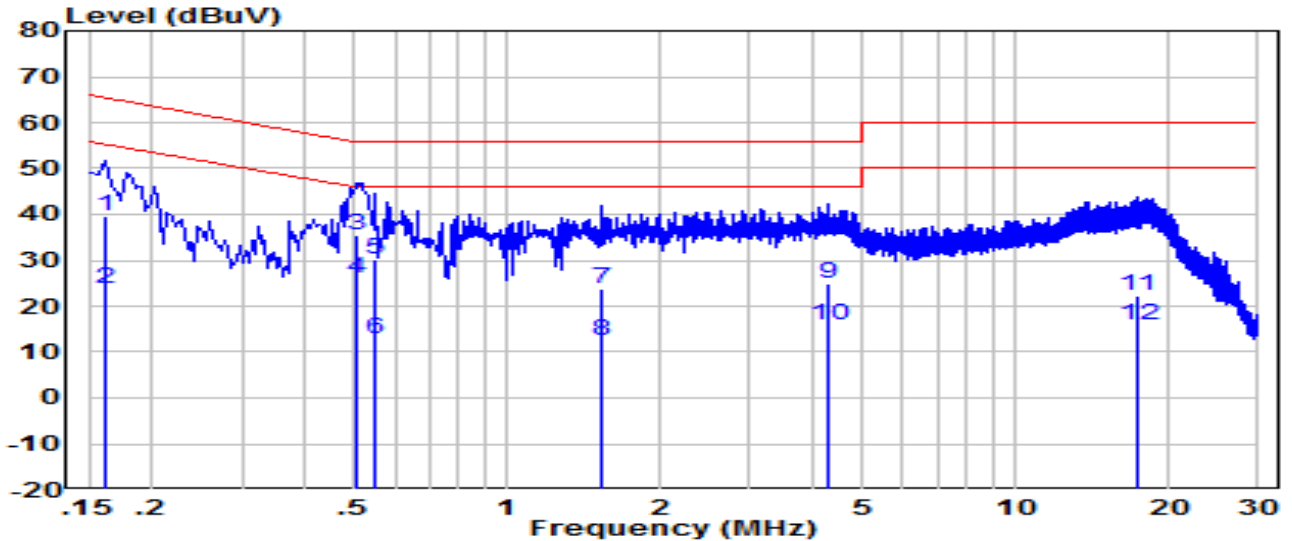

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.162 | 29.86 | 9.84 | 39.70 | -25.66 | 65.36 | QP |
| 2 | 0.162 | 13.86 | 9.84 | 23.70 | -31.66 | 55.36 | Average |
| 3 | 0.506 | 25.52 | 9.88 | 35.40 | -20.60 | 56.00 | QP |
| 4 | * | 16.22 | 9.88 | 26.10 | -19.90 | 46.00 | Average |
| 5 | 0.550 | 20.42 | 9.88 | 30.30 | -25.70 | 56.00 | QP |
| 6 | 0.550 | 2.92 | 9.88 | 12.80 | -33.20 | 46.00 | Average |
| 7 | 1.530 | 13.89 | 10.01 | 23.90 | -32.10 | 56.00 | QP |
| 8 | 1.530 | 2.39 | 10.01 | 12.40 | -33.60 | 46.00 | Average |
| 9 | 4.290 | 14.36 | 10.44 | 24.80 | -31.20 | 56.00 | QP |
| 10 | 4.290 | 5.26 | 10.44 | 15.70 | -30.30 | 46.00 | Average |
| 11 | 17.360 | 7.77 | 14.43 | 22.20 | -37.80 | 60.00 | QP |
| 12 | 17.360 | 1.37 | 14.43 | 15.80 | -34.20 | 50.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = ISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV) = Reading(dBuV) + C.F (Correction Factor).

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "Setup Photo" file.

Appendix B - External Photograph

Refer to "External Photo" file.

Appendix C - Internal Photograph

Refer to "Internal Photo" file.