


正

MC001 Wireless Lavalier Microphone

User's Manual

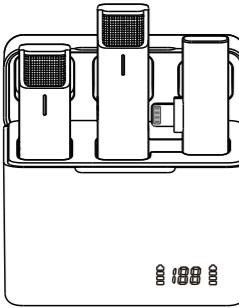

Quick Operation Guide

Product Description


Thank you for choosing our product. This product is a smart wireless microphone that provides professional-level recording output. Right now Plug and play, no APP is required.

Multiple uses: webcast, Vlog shooting Filming, program interviews, interview recordings, video teaching, and other occasions.


Package List

1. Microphone Transmitter	2pcs
2. Microphone Receiver	1pcs
3. Charging Case	1pcs
4. Type-C Charging Cable	1pcs
5. Cleaning Eraser	1pcs
6. User's Manual	1pcs

Outline Picture and Function Description




1. Receiver lighting charging port

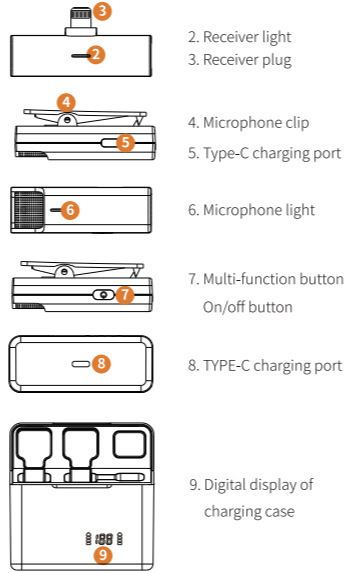


2. Receiver light
3. Receiver plug
4. Microphone clip
5. Type-C charging port
6. Microphone light
7. Multi-function button On/off button
8. TYPE-C charging port
9. Digital display of charging case

Instructions


Step 1:
Plug the receiver into your device and you'll see a flashing blue light.



Step 2:
Take out the microphone, the microphone will automatically power on, and the indicator light will display a pink-purple light.



Step 3:
If the blue light for the receiver and pink-purple or blue light for transmitter always keeps on, it means they are paired successfully. Then open the phone camera, live app, or other apps to start recording.



Indicator Light Description

Microphone transmitter

Functional status	Key operation	Lighting effect
Start up	Automatically power on	Alternately flashing red and blue lights
Shutdown	Long press the power button for 3S	All lights off
Not connected		Alternately flashing red and blue lights
Connected		The pink-purple or blue light is always on
	Opened by default	The pink-purple light is always on
Noise reduction switch	Click the multi-functional button once to close	The blue light is always on
Reverberation	Press the multi-functional button three times in a row	The light flashes once

Mute	Double-click the multi-function button MIC to mute, double-click again to restore the radio state	Blue light flashes
Charge		The red light is always on
Full charge		All lights off
Low battery		The red light flashes once for 3S

Receiver

Functional status	No button	Lighting effect
Start up	Plug into phone port to power on	Flashing red light
Shutdown	Dial out the mobile phone port to power off	
Not connected		Flashing red light
Connected		Steady blue light

反


Charging

For Microphone Transmitter:

- Put the microphone transmitter into the fully charged microphone charging case to charge.
- Or connect the microphone transmitter with the USB cable for charging
- When charging, the front red light on the microphone will be on and will go off when it is fully charged.

For Receiver:

The receiver itself has no need to be charged, but you can charge your smartphone through the receiver while you are recording and the mobile phone is in low-power status. Just plug the charging cable of your phone into the interface port of the receiver, and the mobile phone can be charged through the interface.



Cleaning

When the receiver is plugged into the mobile phone and there is poor contact, it may be caused by dirt and dust on the receiver plug. At this time, please use the cleaning eraser we provided to clean the receiver plug.

Technical specifications

Product Weight:	79.2g
Product Material:	ABS+PC
Headphone Monitoring:	Support
Reverberation:	Support
Transmission Distance:	20m/65ft
One for Two:	1 Receiver with 2 microphones
Noise Cancellation:	Support 3rd Level Noise Cancellation
Sound Delay:	≤25ms
Microphone:	-42dB±2dB Omnidirectional
SNR:	≥92dB
Battery Life:	6~7H
Transmitter Battery Capacity:	80mAh
Rechargeable Case Battery Capacity:	500mAh
Adapter:	5V/1A

Safety information

- This device does not have a power adapter. When charging is required, please use a power adapter that has obtained the CE certificate and complies with relevant standards.
- Please use this equipment within the temperature range of 0°C-40°C, and store the equipment and accessories within the temperature range of -20°C to +45°C. When the ambient temperature is too high or too low, it may cause equipment failure.
- Do not expose the device to high temperatures or around heating devices, such as sunlight, heaters, microwave ovens, ovens or water heaters, etc.
- When charging is complete or not charging, please disconnect the charger from the device and unplug the charger from the power.
- The device is equipped with a non-removable built-in battery, please do not replace the battery yourself to avoid damage to the device.
- Please dispose of this equipment, batteries, and related accessories following local regulations, and do not dispose of them as domestic waste.

Special Notice

- Please make sure your device is unlocked and the blue light is always on after the receiver is plugged into your smartphone.
- To ensure sound quality, please put the microphone at a proper distance and do not put it too close to your mouth. If you want to hold the microphone in your hand, please hold the bottom of it and do not cover the windbreak on the top.
- Any time when you see the red light & blue light flash alternately, it means the connection is failed and you need to restart.
- Press and hold the power switch for about 3 seconds to power off the microphone.

Frequently Questions & Answers

Q: Does this mic require video recording on the phone, or can I use it for audio only through a different app?
A: This microphone works with the apps like a recorder, and camera on phone. It also works with apps TikTok, YouTube, and Facebook for video.

Q: How about the sound quality of this wireless microphone?
A: PRSCFUM wireless microphone uses an upgraded noise cancellation chip, designed to provide you with clearer audio.

Q: Can two microphones be used at the same time?
A: Yes, two microphones can be used simultaneously.

Q: Is the noise canceling mode turned on automatically?
A: Yes, the wireless microphone's noise-canceling function is enabled by default. Upon removing the microphone from the charging case, it will automatically power on with noise-canceling activated.

If in a quiet indoor environment, you may press the multi-function button once to disable the noise reduction function.

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.