

FCC REPORT

(WIFI)

Applicant: CHITECH SHENZHEN TECHNOLOGY CO., LTD

Address of Applicant: Chitech industrial Park,NO.48,Xiashijia Road, Gongming Town, Guangming Dist., Shenzhen, China

Equipment Under Test (EUT)

Product Name: 4G TABLET PC

Model No.: 102S

Trade mark: hatch

FCC ID: 2AXUI-102S

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 13 Oct., 2020

Date of Test: 14 Oct., to 03 Nov., 2020

Date of report issued: 04 Nov., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | 04 Nov., 2020 | Original |
| | | |
| | | |
| | | |
| | | |

Tested by:

Janet Wei
Test Engineer

Date:

04 Nov., 2020

Reviewed by:

Winner Zhang
Project Engineer

Date:

04 Nov., 2020

3 Contents

| | Page |
|--|-----------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION..... | 5 |
| 5.2 GENERAL DESCRIPTION OF E.U. T. | 5 |
| 5.3 TEST ENVIRONMENT AND MODE | 6 |
| 5.4 DESCRIPTION OF SUPPORT UNITS | 6 |
| 5.5 MEASUREMENT UNCERTAINTY..... | 6 |
| 5.6 LABORATORY FACILITY | 6 |
| 5.7 LABORATORY LOCATION..... | 6 |
| 5.8 TEST INSTRUMENTS LIST | 7 |
| 6 TEST RESULTS AND MEASUREMENT DATA | 8 |
| 6.1 ANTENNA REQUIREMENT | 8 |
| 6.2 CONDUCTED EMISSION..... | 9 |
| 6.3 CONDUCTED OUTPUT POWER | 12 |
| 6.4 OCCUPY BANDWIDTH..... | 13 |
| 6.5 POWER SPECTRAL DENSITY | 14 |
| 6.6 BAND EDGE..... | 15 |
| 6.6.1 Conducted Emission Method | 15 |
| 6.6.2 Radiated Emission Method..... | 16 |
| 6.7 SPURIOUS EMISSION | 33 |
| 6.7.1 Conducted Emission Method | 33 |
| 6.7.2 Radiated Emission Method..... | 34 |
| 7 TEST SETUP PHOTO | 44 |
| 8 EUT CONSTRUCTIONAL DETAILS | 45 |
| APPENDIX A - WIFI | 46 |

4 Test Summary

| Test Items | Section in CFR 47 | Result |
|--|--|--------|
| Antenna requirement | 15.203 & 15.247 (b) | Pass |
| AC Power Line Conducted Emission | 15.207 | Pass |
| Conducted Peak Output Power | 15.247 (b)(3) | Pass |
| 6dB Emission Bandwidth 99% Occupied Bandwidth | 15.247 (a)(2) | Pass |
| Power Spectral Density | 15.247 (e) | Pass |
| Band Edge | 15.247 (d) | Pass |
| Spurious Emission | 15.205 & 15.209 | Pass |
| <p>Remark:</p> <ol style="list-style-type: none"> 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer). | | |
| Test Method: | ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02 | |

5 General Information

5.1 Client Information

| | |
|------------------------|--|
| Applicant: | CHITECH SHENZHEN TECHNOLOGY CO., LTD |
| Address: | Chitech industrial Park, NO.48, Xishijia Road, Gongming Town, Guangming Dist., Shenzhen, China |
| Manufacturer/ Factory: | CHITECH SHENZHEN TECHNOLOGY CO., LTD |
| Address: | Chitech industrial Park, NO.48, Xishijia Road, Gongming Town, Guangming Dist., Shenzhen, China |

5.2 General Description of E.U.T.

| | |
|--|---|
| Product Name: | 4G TABLET PC |
| Model No.: | 102S |
| Operation Frequency: | 2412MHz~2462MHz: 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz: 802.11n(HT40) |
| Channel numbers: | 11: 802.11b/802.11g/802.11(HT20) 7: 802.11n(HT40) |
| Channel separation: | 5MHz |
| Modulation technology: (IEEE 802.11b) | Direct Sequence Spread Spectrum (DSSS) |
| Modulation technology: (IEEE 802.11g/802.11n) | Orthogonal Frequency Division Multiplexing(OFDM) |
| Data speed (IEEE 802.11b): | 1Mbps, 2Mbps, 5.5Mbps, 11Mbps |
| Data speed (IEEE 802.11g): | 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps |
| Data speed (IEEE 802.11n): | Up to 150Mbps |
| Antenna Type: | Internal Antenna |
| Antenna gain: | 0.64dBi |
| Power supply: | Rechargeable Li-ion Battery DC3.7V, 8000mAh |
| AC adapter: | Model: AS1201A-0502000USU Input: AC100-240V, 50/60Hz, 0.35A Output: DC 5.0V, 2000mA |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

| Operation Frequency each of channel for 802.11b/g/n(HT20) | | | | | | | |
|---|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2412MHz | 4 | 2427MHz | 7 | 2442MHz | 10 | 2457MHz |
| 2 | 2417MHz | 5 | 2432MHz | 8 | 2447MHz | 11 | 2462MHz |
| 3 | 2422MHz | 6 | 2437MHz | 9 | 2452MHz | | |

Note:

- For 802.11n-HT40 mode, the channel number is from 3 to 9;
- Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel. Channel 3, 6 & 9 selected for 802.11n-HT40 as Lowest, Middle and Highest Channel.

5.3 Test environment and mode

| | |
|---|---|
| Operating Environment: | |
| Temperature: | 24.0 °C |
| Humidity: | 54 % RH |
| Atmospheric Pressure: | 1010 mbar |
| Test mode: | |
| Transmitting mode | Keep the EUT in continuous transmitting with modulation |
| <p>Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p> | |
| Per-scan all kind of data rate, the follow list were the worst case. | |
| Mode | Data rate |
| 802.11b | 1Mbps |
| 802.11g | 6Mbps |
| 802.11n(HT20) | 6.5Mbps |
| 802.11n(HT40) | 13.5Mbps |

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

| Parameters | Expanded Uncertainty |
|-------------------------------------|----------------------|
| Conducted Emission (9kHz ~ 30MHz) | ±1.60 dB (k=2) |
| Radiated Emission (9kHz ~ 30MHz) | ±3.12 dB (k=2) |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.32 dB (k=2) |
| Radiated Emission (1GHz ~ 18GHz) | ±5.16 dB (k=2) |
| Radiated Emission (18GHz ~ 40GHz) | ±3.20 dB (k=2) |

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Designation No.: CN1211**
 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.
- ISED – CAB identifier.: CN0021**
 The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- A2LA - Registration No.: 4346.01**
 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.8 Test Instruments list

| Radiated Emission: | | | | | |
|---------------------------|---------------------|------------------|--------------------|-----------------------------|---------------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | SAEMC | 9m*6m*6m | 966 | 07-21-2020 | 07-20-2021 |
| Loop Antenna | SCHWARZBECK | FMZB1519B | 044 | 03-07-2020 | 03-06-2021 |
| BiConiLog Antenna | SCHWARZBECK | VULB9163 | 497 | 03-07-2020 | 03-06-2021 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 916 | 03-07-2020 | 03-06-2021 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 1805 | 06-20-2020 | 06-19-2021 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170582 | 11-18-2019 | 11-17-2020 |
| EMI Test Software | AUDIX | E3 | Version: 6.110919b | | |
| Pre-amplifier | HP | 8447D | 2944A09358 | 03-07-2020 | 03-06-2021 |
| Pre-amplifier | CD | PAP-1G18 | 11804 | 03-07-2020 | 03-06-2021 |
| Spectrum analyzer | Rohde & Schwarz | FSP30 | 101454 | 03-05-2020 | 03-04-2021 |
| Spectrum analyzer | Rohde & Schwarz | FSP40 | 100363 | 11-18-2019 | 11-17-2020 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | 101070 | 03-05-2020 | 03-04-2021 |
| Cable | ZDECL | Z108-NJ-NJ-81 | 1608458 | 03-07-2020 | 03-06-2021 |
| Cable | MICRO-COAX | MFR64639 | K10742-5 | 03-07-2020 | 03-06-2021 |
| Cable | SUHNER | SUCOFLEX100 | 58193/4PE | 03-07-2020 | 03-06-2021 |
| RF Switch Unit | MWRFTTEST | MW200 | N/A | N/A | N/A |
| Test Software | MWRFTTEST | MTS8200 | Version: 2.0.0.0 | | |


| Conducted Emission: | | | | | |
|----------------------------|---------------------|------------------|--------------------|-----------------------------|---------------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| EMI Test Receiver | Rohde & Schwarz | ESCI | 101189 | 03-05-2020 | 03-04-2021 |
| Pulse Limiter | SCHWARZBECK | OSRAM 2306 | 9731 | 03-05-2020 | 03-04-2021 |
| LISN | CHASE | MN2050D | 1447 | 03-05-2020 | 03-04-2021 |
| LISN | Rohde & Schwarz | ESH3-Z5 | 8438621/010 | 06-18-2020 | 07-17-2021 |
| Cable | HP | 10503A | N/A | 03-05-2020 | 03-04-2021 |
| EMI Test Software | AUDIX | E3 | Version: 6.110919b | | |

6 Test results and Measurement Data

6.1 Antenna requirement


| | |
|--|--------------------------------------|
| Standard requirement: | FCC Part 15 C Section 15.203 /247(b) |
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> | |
| E.U.T Antenna: | |
| <p>The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 0.64 dBi.</p> | |

6.2 Conducted Emission
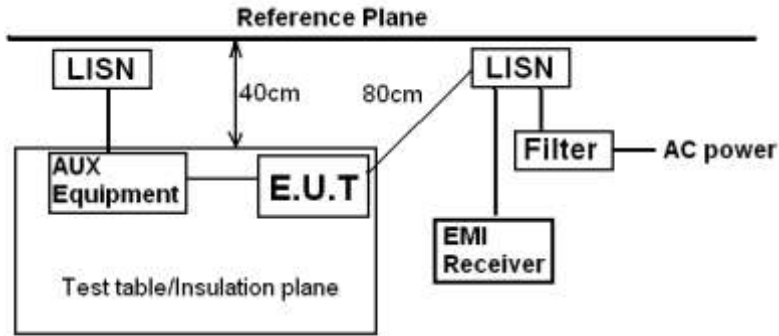
| | | | |
|-----------------------|--|--------------|-----------|
| Test Requirement: | FCC Part 15 C Section 15.207 | | |
| Test Frequency Range: | 150 kHz to 30 MHz | | |
| Class / Severity: | Class B | | |
| Receiver setup: | RBW=9 kHz, VBW=30 kHz | | |
| Limit: | Frequency range (MHz) | Limit (dBuV) | |
| | | Quasi-peak | Average |
| | 0.15-0.5 | 66 to 56* | 56 to 46* |
| | 0.5-5 | 56 | 46 |
| | 5-30 | 60 | 50 |
| | * Decreases with the logarithm of the frequency. | | |
| Test procedure | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement. | | |
| Test setup: |  <p><i>Remark</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p> | | |
| Test Instruments: | Refer to section 5.9 for details | | |
| Test mode: | Refer to section 5.3 for details | | |
| Test results: | Passed | | |

Measurement Data:

| | | | |
|-----------------|------------------|----------------|------------------------|
| Product name: | 4G TABLET PC | Product model: | 102S |
| Test by: | Janet | Test mode: | Wi-Fi Tx mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Line |
| Test voltage: | AC 120 V/60 Hz | Environment: | Temp: 22.5°C Humi: 55% |

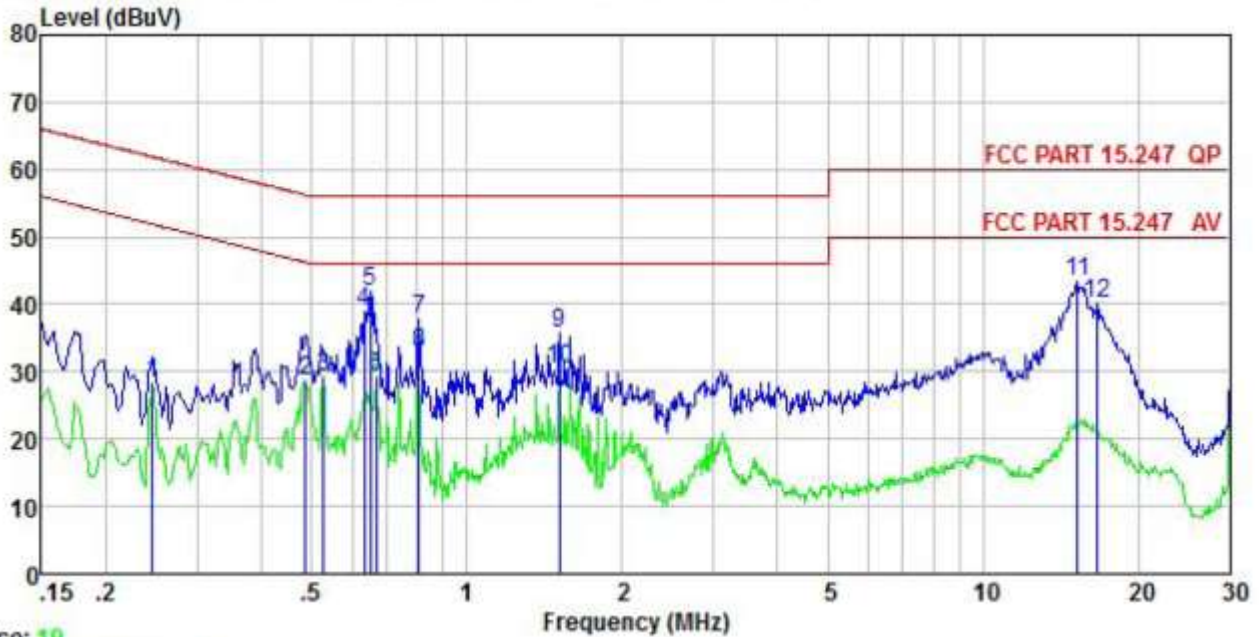


| | Read | LISN | Aux | Cable | Level | Limit | Over | Remark |
|-------|--------|--------|--------|-------|-------|-------|-------|----------------|
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| Freq | Level | Factor | Factor | Loss | Level | Line | Limit | |
| MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.246 | 18.24 | -0.57 | -0.21 | 10.75 | 28.21 | 51.91 | -23.70 Average |
| 2 | 0.486 | 18.48 | -0.44 | -0.26 | 10.76 | 28.54 | 46.23 | -17.69 Average |
| 3 | 0.527 | 19.20 | -0.45 | -0.36 | 10.76 | 29.15 | 46.00 | -16.85 Average |
| 4 | 0.634 | 29.10 | -0.50 | -0.38 | 10.77 | 38.99 | 56.00 | -17.01 QP |
| 5 | 0.651 | 32.04 | -0.51 | -0.39 | 10.77 | 41.91 | 56.00 | -14.09 QP |
| 6 | 0.668 | 19.30 | -0.52 | -0.39 | 10.77 | 29.16 | 46.00 | -16.84 Average |
| 7 | 0.809 | 27.50 | -0.57 | -0.05 | 10.81 | 37.69 | 56.00 | -18.31 QP |
| 8 | 0.809 | 22.57 | -0.57 | -0.05 | 10.81 | 32.76 | 46.00 | -13.24 Average |
| 9 | 1.511 | 25.27 | -0.55 | -0.01 | 10.92 | 35.63 | 56.00 | -20.37 QP |
| 10 | 1.511 | 20.09 | -0.55 | -0.01 | 10.92 | 30.45 | 46.00 | -15.55 Average |
| 11 | 15.226 | 29.71 | -0.70 | 3.53 | 10.90 | 43.44 | 60.00 | -16.56 QP |
| 12 | 16.661 | 27.22 | -0.75 | 2.68 | 10.91 | 40.06 | 60.00 | -19.94 QP |

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level=Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

| | | | |
|-----------------|------------------|----------------|------------------------|
| Product name: | 4G TABLET PC | Product model: | 102S |
| Test by: | Janet | Test mode: | Wi-Fi Tx mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Neutral |
| Test voltage: | AC 120 V/60 Hz | Environment: | Temp: 22.5°C Huni: 55% |

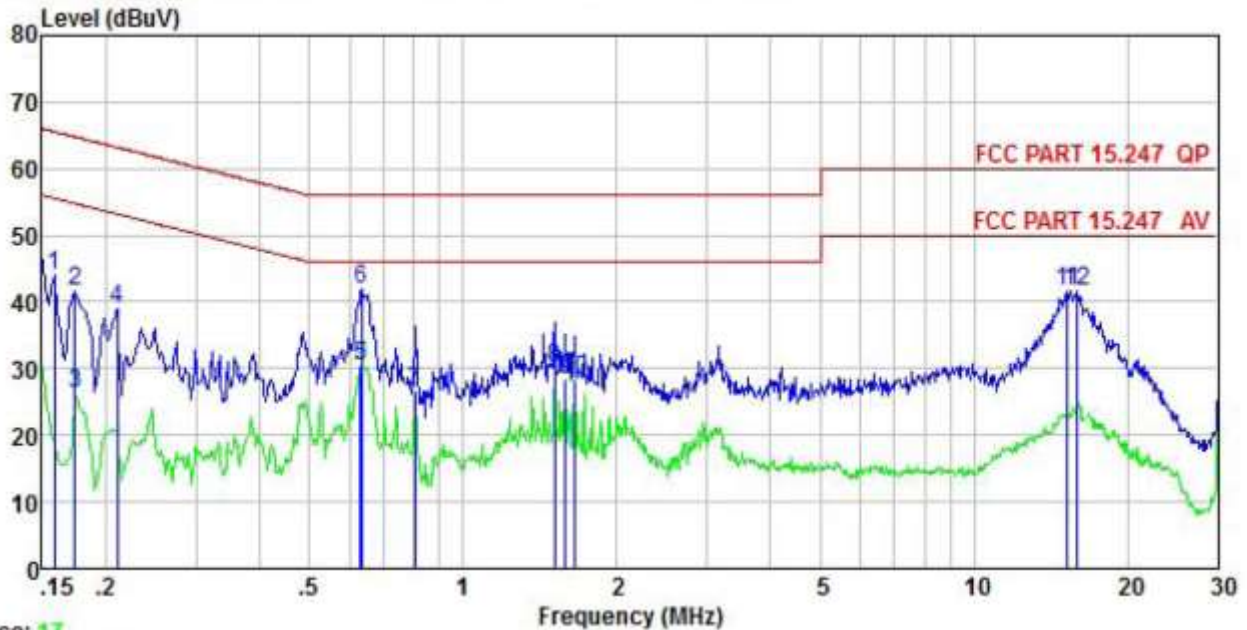


| | Freq | Read Level | LISN Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------|------------|-------------|------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.158 | 33.79 | -0.69 | 0.01 | 10.77 | 43.88 | 65.56 | -21.68 | QP |
| 2 | 0.174 | 31.63 | -0.68 | 0.00 | 10.77 | 41.72 | 64.77 | -23.05 | QP |
| 3 | 0.174 | 16.29 | -0.68 | 0.00 | 10.77 | 26.38 | 54.77 | -28.39 | Average |
| 4 | 0.211 | 28.88 | -0.67 | 0.00 | 10.76 | 38.97 | 63.18 | -24.21 | QP |
| 5 | 0.630 | 20.22 | -0.64 | 0.04 | 10.77 | 30.39 | 46.00 | -15.61 | Average |
| 6 | 0.634 | 31.78 | -0.64 | 0.04 | 10.77 | 41.95 | 56.00 | -14.05 | QP |
| 7 | 0.804 | 16.48 | -0.66 | 0.06 | 10.81 | 26.69 | 46.00 | -19.31 | Average |
| 8 | 1.511 | 19.63 | -0.70 | 0.13 | 10.92 | 29.98 | 46.00 | -16.02 | Average |
| 9 | 1.585 | 18.07 | -0.70 | 0.14 | 10.93 | 28.44 | 46.00 | -17.56 | Average |
| 10 | 1.654 | 18.03 | -0.70 | 0.15 | 10.94 | 28.42 | 46.00 | -17.58 | Average |
| 11 | 15.226 | 28.44 | -0.82 | 3.04 | 10.90 | 41.56 | 60.00 | -18.44 | QP |
| 12 | 15.885 | 29.11 | -0.90 | 2.54 | 10.91 | 41.66 | 60.00 | -18.34 | QP |

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

6.3 Conducted Output Power
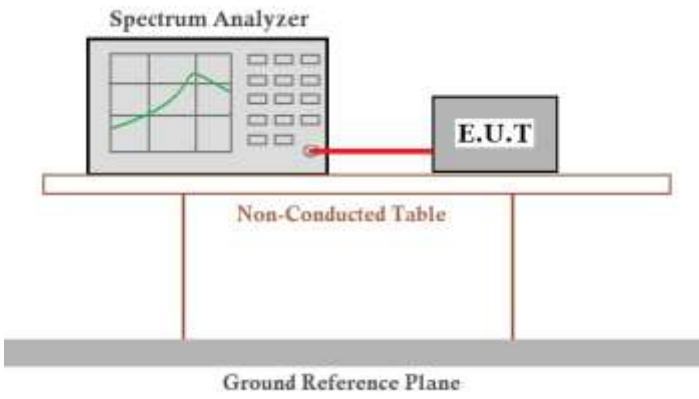
| | |
|-------------------|--|
| Test Requirement: | FCC Part 15 C Section 15.247 (b)(3) |
| Limit: | 30dBm |
| Test setup: |  |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |


Measurement Data: Refer to Appendix A - WIFI

6.4 Occupy Bandwidth
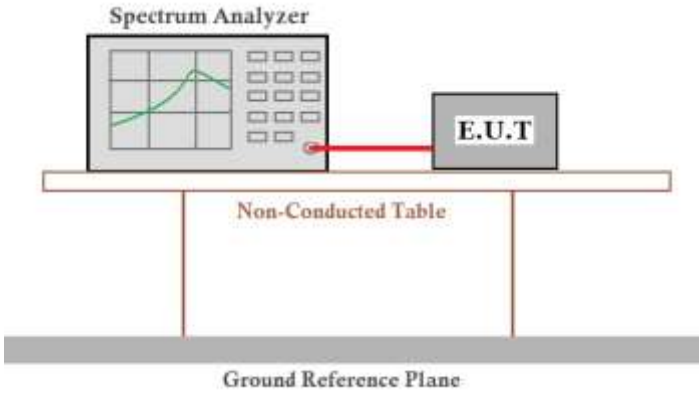
| | |
|-------------------|---|
| Test Requirement: | FCC Part 15 C Section 15.247 (a)(2) |
| Limit: | >500kHz |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data: Refer to Appendix A - WIFI


6.5 Power Spectral Density
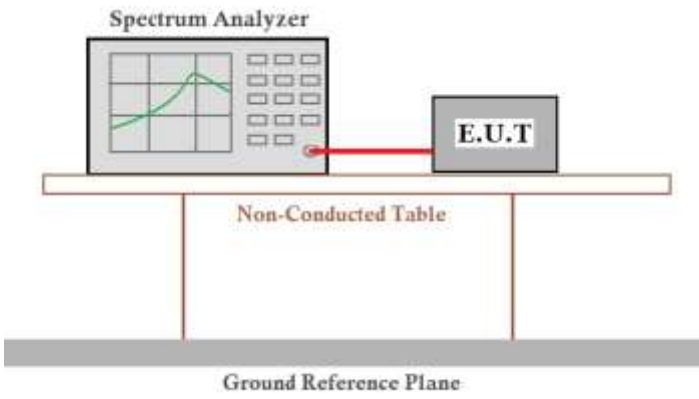
| | |
|-------------------|--|
| Test Requirement: | FCC Part 15 C Section 15.247 (e) |
| Limit: | 8dBm/3kHz |
| Test setup: |  |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data: Refer to Appendix A - WIFI


6.6 Band Edge

6.6.1 Conducted Emission Method
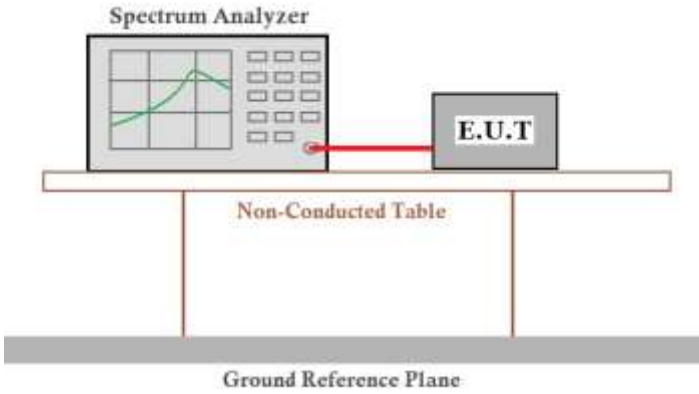
| | |
|-------------------|--|
| Test Requirement: | FCC Part 15 C Section 15.247 (d) |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. |
| Test setup: |  |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |


Measurement Data: Refer to Appendix A - WIFI

6.6.2 Radiated Emission Method
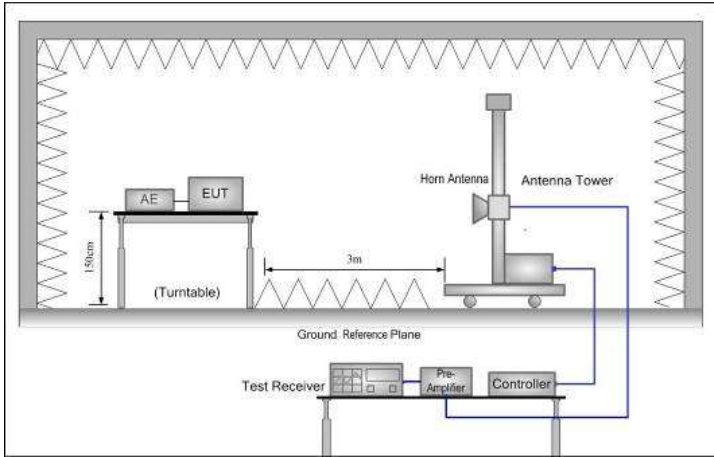
| | | | | | |
|-----------------------|---|--------------------|--------------|-----------------------------|-----------------------------|
| Test Requirement: | FCC Part 15 C Section 15.209 and 15.205 | | | | |
| Test Frequency Range: | 2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz | | | | |
| Test Distance: | 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | Above 1GHz | Peak RMS | 1MHz 1MHz | 3MHz 3MHz | Peak Value Average Value |
| Limit: | Frequency | Limit (dBuV/m @3m) | | Remark | |
| | Above 1GHz | 54.00 74.00 | | Average Value Peak Value | |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | |
| Test setup: |  | | | | |
| Test Instruments: | Refer to section 5.9 for details | | | | |
| Test mode: | Refer to section 5.3 for details | | | | |
| Test results: | Passed | | | | |

802.11b mode:

| | | | |
|---------------|----------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11b Tx mode |
| Test Channel: | Lowest channel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24 °C Humi: 57% |

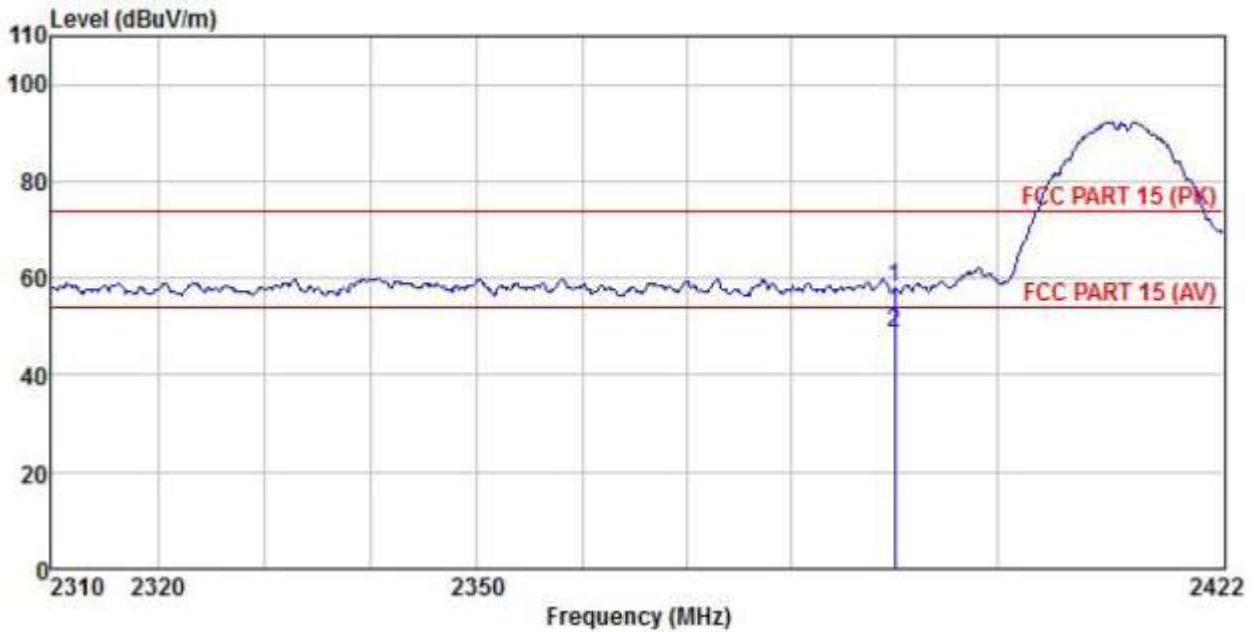


| | Read | Antenna | Cable | Aux | Preamp | Level | Limit | Over | Remark |
|---|----------|---------|-------|--------|--------|-------|--------|--------|---------------|
| | Freq | Level | Loss | Factor | Factor | Level | Line | Limit | |
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB |
| 1 | 2390.000 | 24.99 | 27.03 | 4.28 | 1.68 | 0.00 | 57.98 | 74.00 | -16.02 Peak |
| 2 | 2390.000 | 15.73 | 27.03 | 4.28 | 1.68 | 0.00 | 48.72 | 54.00 | -5.28 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|----------------|----------------|----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11b Tx mode |
| Test Channel: | Lowest channel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Humi: 57% |

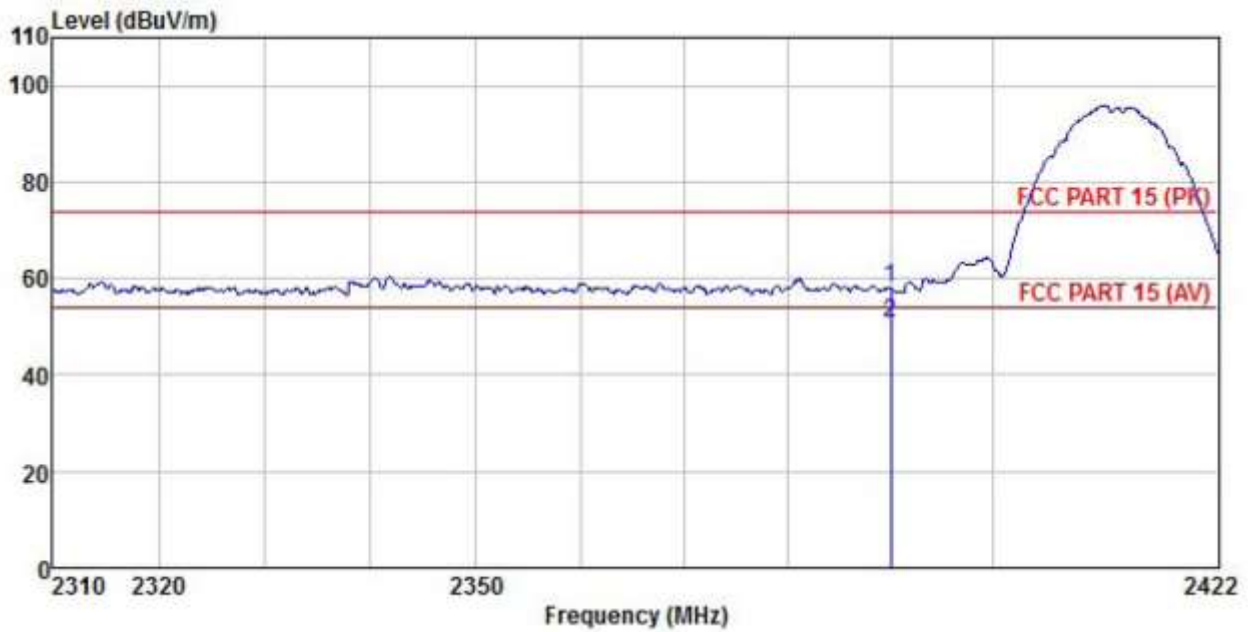


| | ReadAntenna | Cable | Aux | Preamp | Level | Limit | Over | Remark | |
|------|-------------|-------|--------|--------|-------|--------|--------|--------|---------------|
| Freq | Level | Loss | Factor | Factor | Level | Line | Limit | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2390.000 | 25.16 | 27.03 | 4.28 | 1.68 | 0.00 | 58.15 | 74.00 | -15.85 Peak |
| 2 | 2390.000 | 17.63 | 27.03 | 4.28 | 1.68 | 0.00 | 50.62 | 54.00 | -3.38 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|----------------|----------------|-------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11b Tx mode |
| Test Channel: | Highestchannel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Huni:57% |

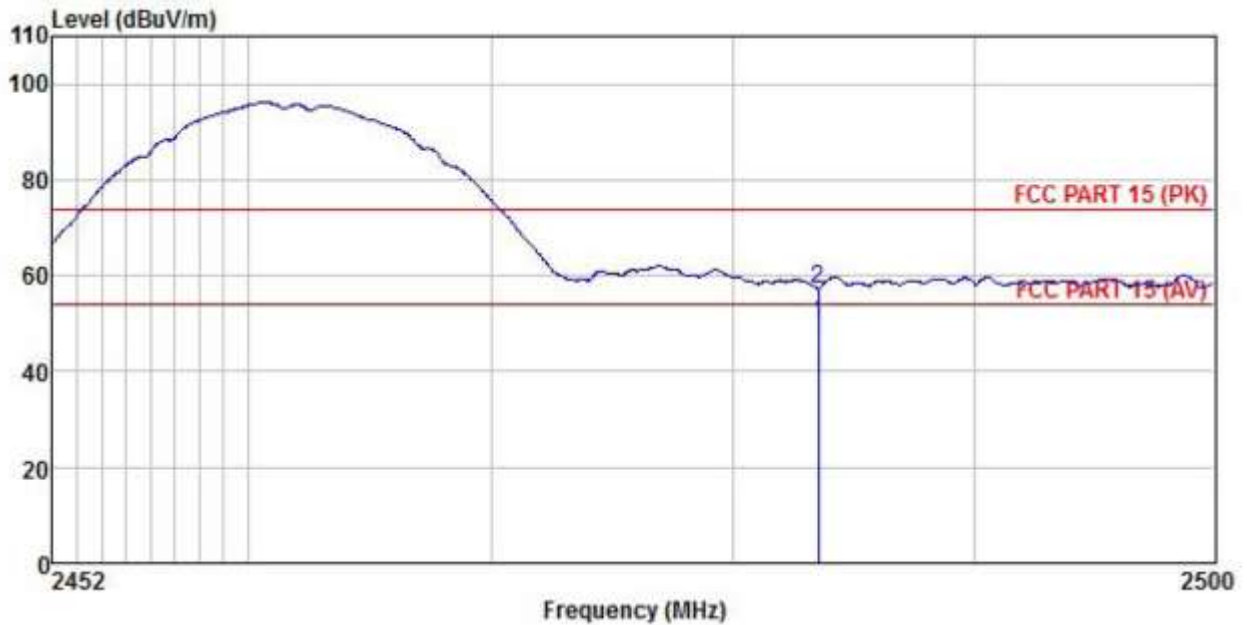


| | Read Freq | Antenna Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level | Limit | Over | Remark |
|---|-----------|---------------|----------------|------------|------------|---------------|--------|--------|--------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2483.500 | 16.38 | 27.27 | 4.38 | 1.70 | 0.00 | 49.73 | 54.00 | -4.27 | Average |
| 2 | 2483.527 | 23.91 | 27.27 | 4.38 | 1.70 | 0.00 | 57.26 | 74.00 | -16.74 | |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|----------------------|----------------|-----------------------|-------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11b Tx mode |
| Test Channel: | Highestchannel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Huni:57% |

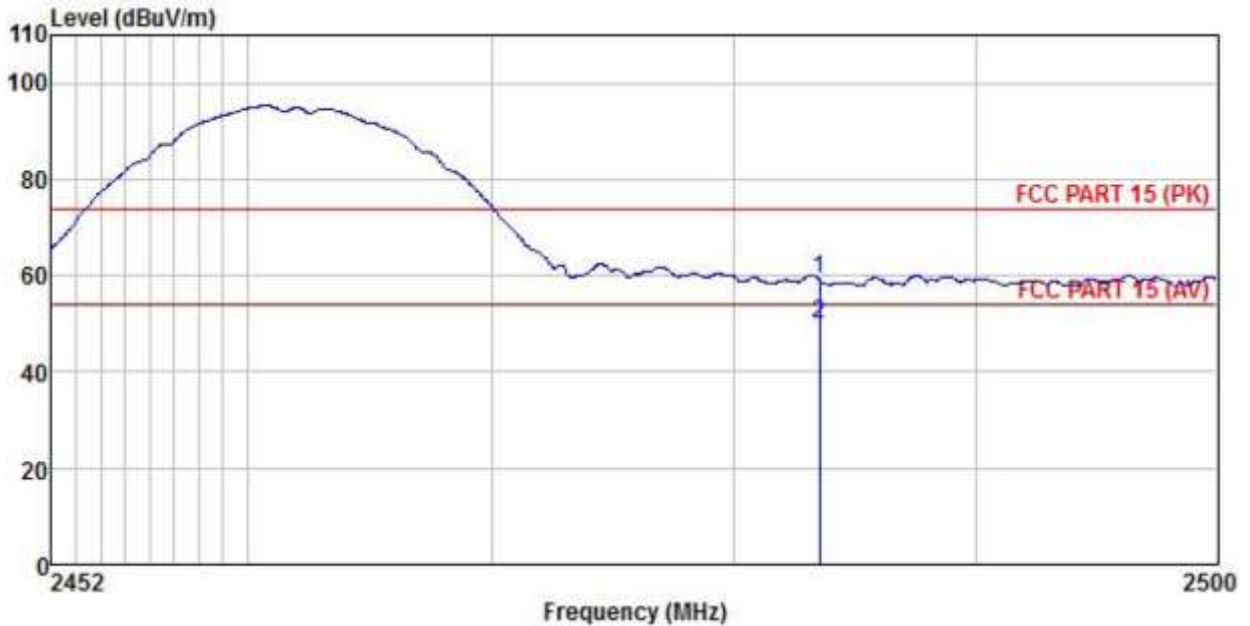


| | Freq | Read Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|----------|------------|----------------|------------|------------|---------------|--------|------------|------------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2483.500 | 25.73 | 27.27 | 4.38 | 1.70 | 0.00 | 59.08 | 74.00 | -14.92 | Peak |
| 2 | 2483.500 | 16.65 | 27.27 | 4.38 | 1.70 | 0.00 | 50.00 | 54.00 | -4.00 | Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11g mode:

| | | | |
|---------------|---------------|----------------|--------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11g Tx mode |
| Test Channel: | Lowestchannel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24°C Humi:57% |

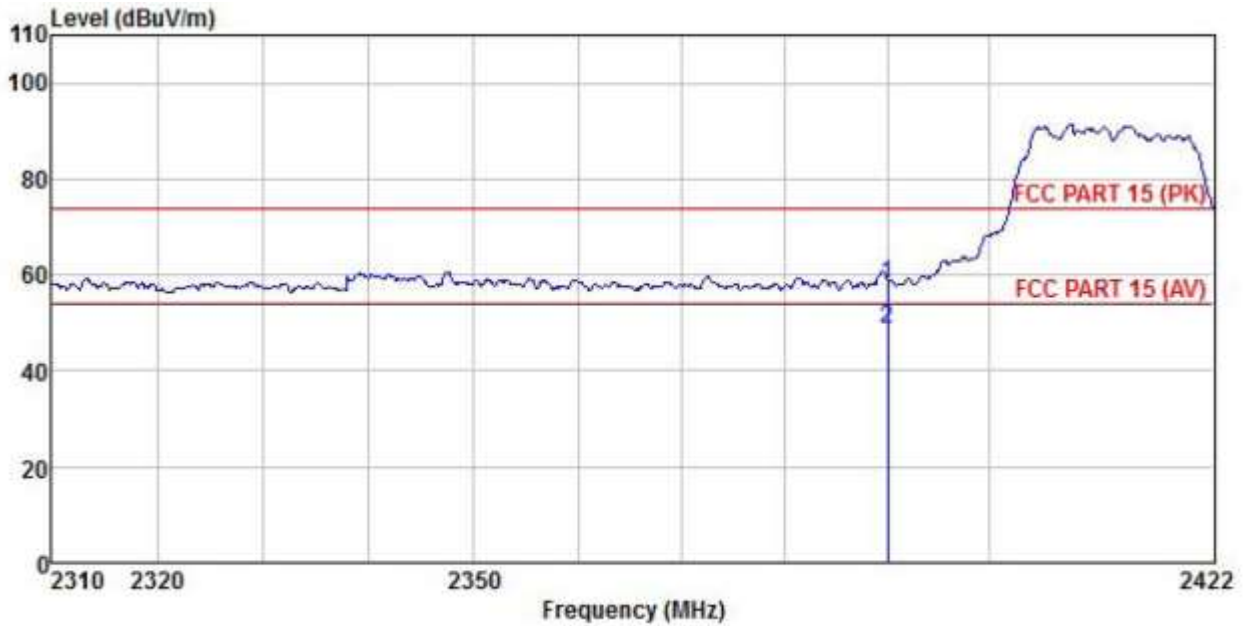


| | Freq | ReadAntenna | Cable | Aux | Preamp | Level | Limit | Over | Remark |
|---|----------|-------------|--------|------|--------|--------|--------|--------|---------------|
| | MHz | Level | Factor | Loss | Factor | Factor | Line | Limit | |
| | | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB |
| 1 | 2390.000 | 25.20 | 27.03 | 4.28 | 1.68 | 0.00 | 58.19 | 74.00 | -15.81 Peak |
| 2 | 2390.000 | 15.91 | 27.03 | 4.28 | 1.68 | 0.00 | 48.90 | 54.00 | -5.10 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|---------------|----------------|----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11g Tx mode |
| Test Channel: | Lowestchannel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Huni: 57% |

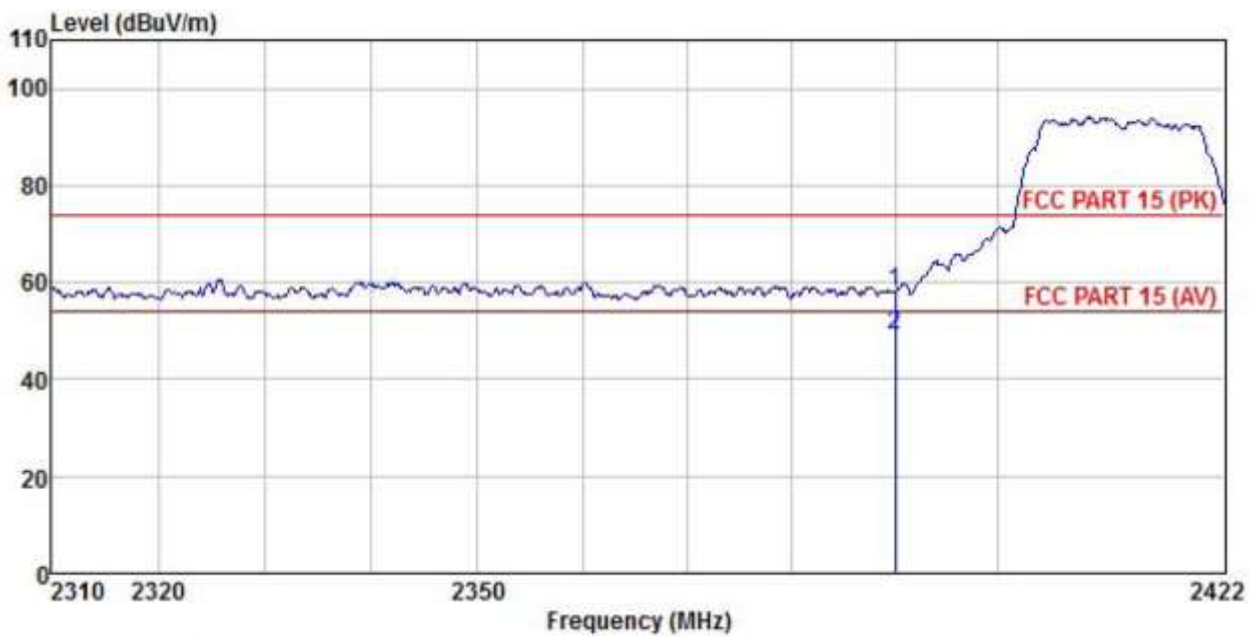


| | ReadAntenna | Cable | Aux | Preamp | Level | Limit | Over | | |
|------|-------------|--------|-------|--------|--------|--------|--------|--------|---------------|
| Freq | Level | Factor | Loss | Factor | Factor | Line | Limit | Remark | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2390.000 | 25.11 | 27.03 | 4.28 | 1.68 | 0.00 | 58.10 | 74.00 | -15.90 Peak |
| 2 | 2390.000 | 15.96 | 27.03 | 4.28 | 1.68 | 0.00 | 48.95 | 54.00 | -5.05 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|-----------------|----------------|-------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11g Tx mode |
| Test Channel: | Highest channel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Huni:57% |

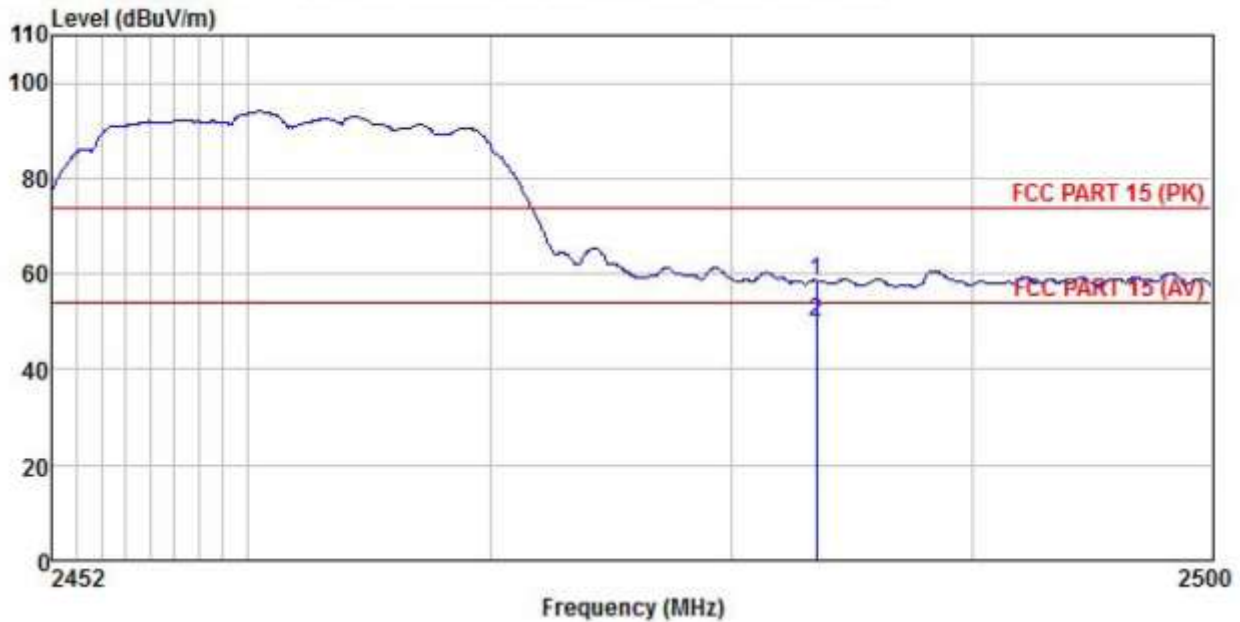


| | Freq | ReadAntenna | Cable | Aux | Preamp | Level | Limit | Over | Remark |
|---|----------|-------------|-------|--------|--------|--------|--------|-------|---------------|
| | MHz | Level | Loss | Factor | Factor | dBuV/m | dBuV/m | Limit | |
| | | dBuV | dB | | dB | | | dB | |
| 1 | 2483.500 | 25.25 | 27.27 | 4.38 | 1.70 | 0.00 | 58.60 | 74.00 | -15.40 Peak |
| 2 | 2483.500 | 16.53 | 27.27 | 4.38 | 1.70 | 0.00 | 49.88 | 54.00 | -4.12 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|----------------|----------------|--------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11g Tx mode |
| Test Channel: | Highestchannel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24°C Huni:57% |

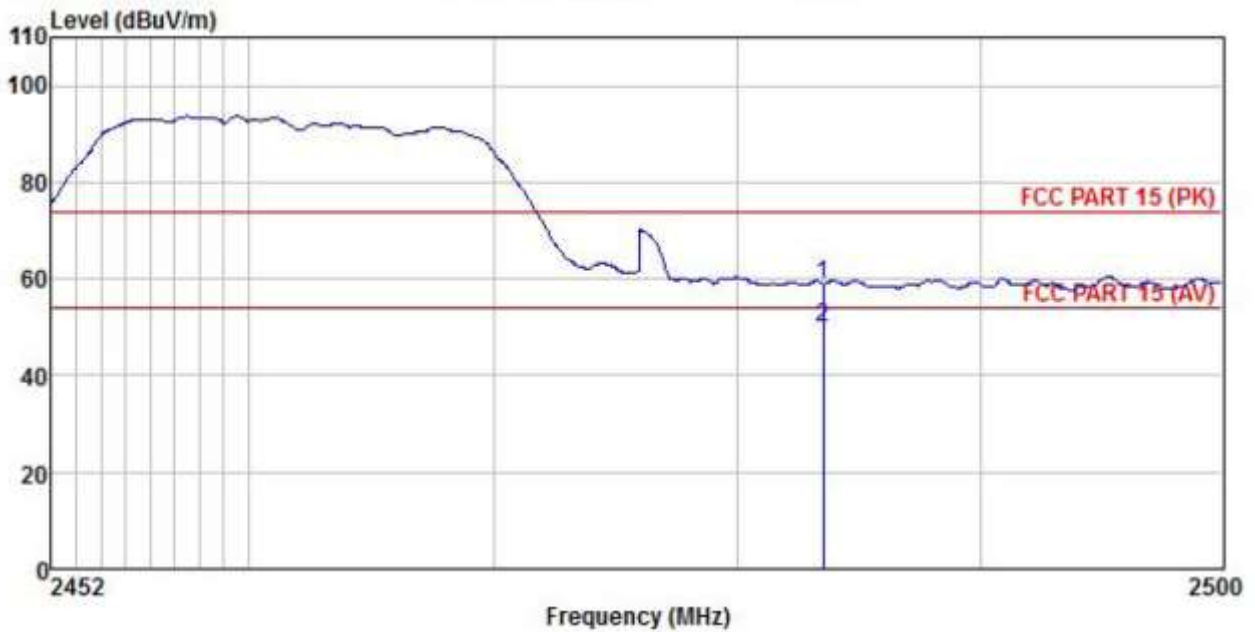


| | Freq | Read Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|----------|------------|----------------|------------|------------|---------------|--------|------------|------------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2483.500 | 25.62 | 27.27 | 4.38 | 1.70 | 0.00 | 58.97 | 74.00 | -15.03 | Peak |
| 2 | 2483.500 | 16.48 | 27.27 | 4.38 | 1.70 | 0.00 | 49.83 | 54.00 | -4.17 | Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT20):

| | | | |
|---------------|----------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT20) Tx mode |
| Test Channel: | Lowest channel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Huni:57% |

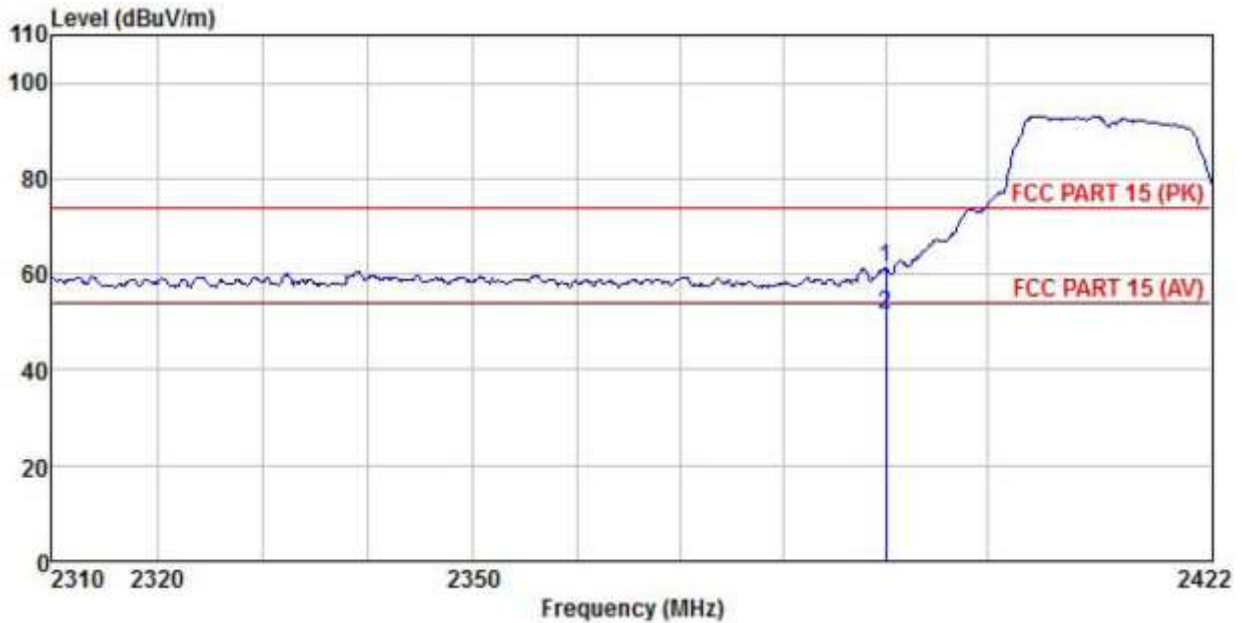


| | ReadAntenna | Cable | Aux | Preamp | Limit | Over | | |
|------------|-------------|--------|-------|--------|--------|--------|--------|---------------|
| Freq | Level | Factor | Loss | Factor | Factor | Level | Line | Limit Remark |
| ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- | ----- |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB |
| 1 2390.000 | 28.10 | 27.03 | 4.28 | 1.68 | 0.00 | 61.09 | 74.00 | -12.91 Peak |
| 2 2390.000 | 18.58 | 27.03 | 4.28 | 1.68 | 0.00 | 51.57 | 54.00 | -2.43 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|---------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT20) Tx mode |
| Test Channel: | Lowestchannel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Huni:57% |

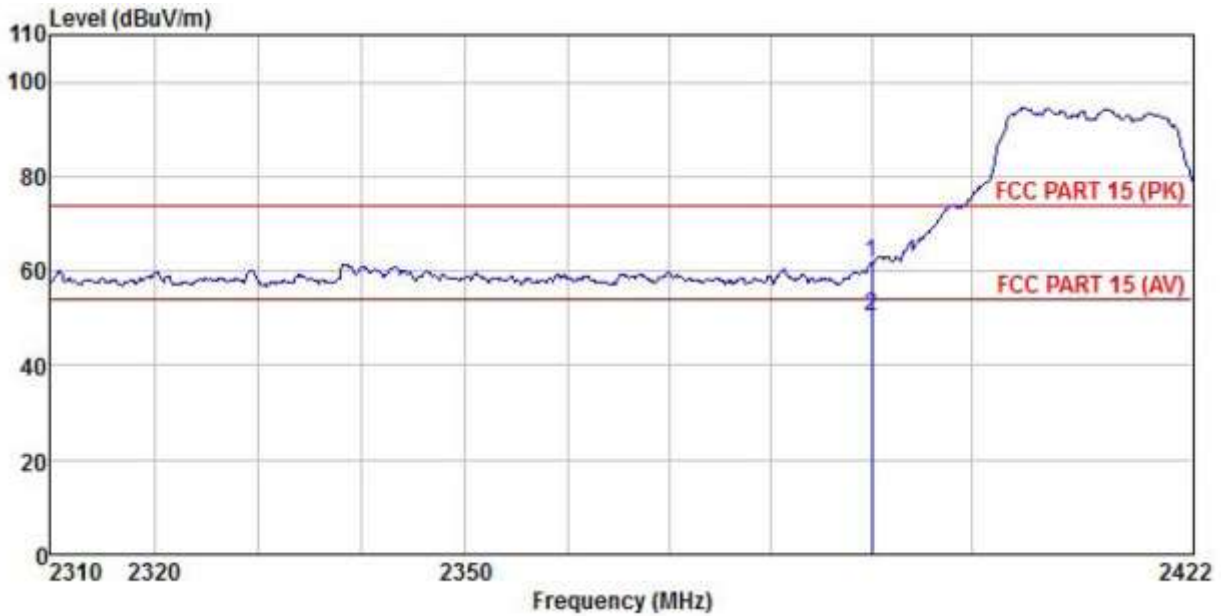


| | Read | Antenna | Cable | Aux | Preamp | Level | Limit | Over | Remark |
|------|----------|---------|-------|--------|--------|--------|--------|-------|---------------|
| Freq | Level | Factor | Loss | Factor | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2390.000 | 28.59 | 27.03 | 4.28 | 1.68 | 0.00 | 61.58 | 74.00 | -12.42 Peak |
| 2 | 2390.000 | 17.23 | 27.03 | 4.28 | 1.68 | 0.00 | 50.22 | 54.00 | -3.78 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|-----------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT20) Tx mode |
| Test Channel: | Highest channel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Humi: 57% |

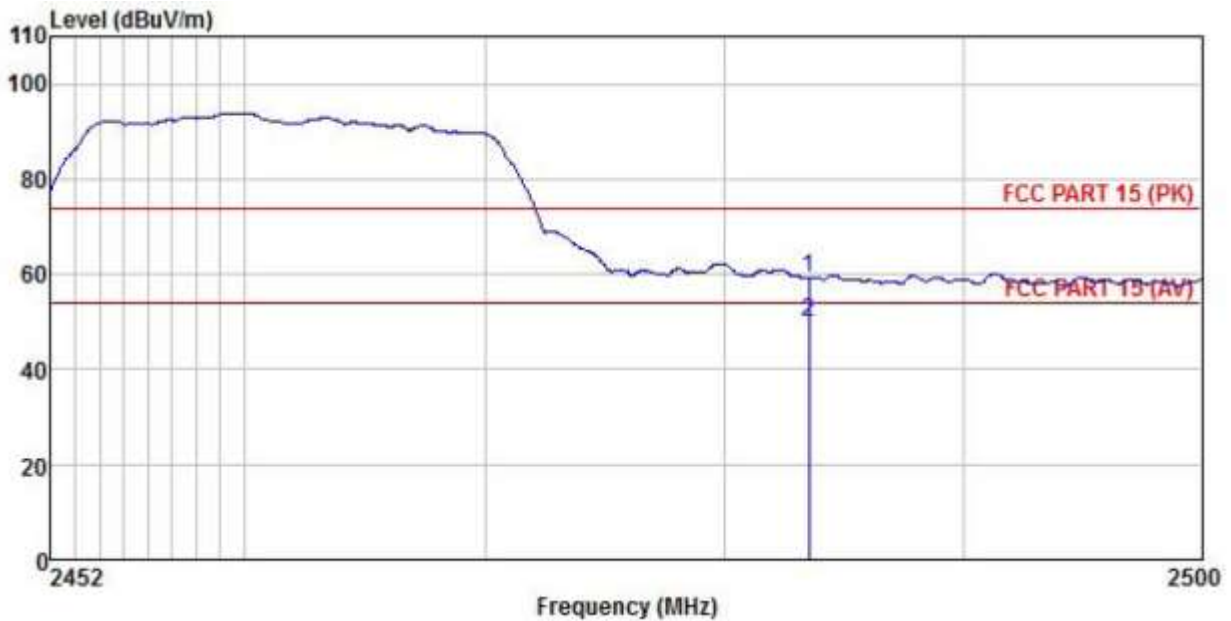


| | Read | Antenna | Cable | Aux | Preamp | Limit | Over | | |
|------|----------|---------|-------|--------|--------|--------|--------|--------|---------------|
| Freq | Level | Factor | Loss | Factor | Factor | Line | Limit | Remark | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2483.500 | 25.77 | 27.27 | 4.38 | 1.70 | 0.00 | 59.12 | 74.00 | -14.88 Peak |
| 2 | 2483.500 | 16.71 | 27.27 | 4.38 | 1.70 | 0.00 | 50.06 | 54.00 | -3.94 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|----------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT20) Tx mode |
| Test Channel: | Highestchannel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Humi: 57% |

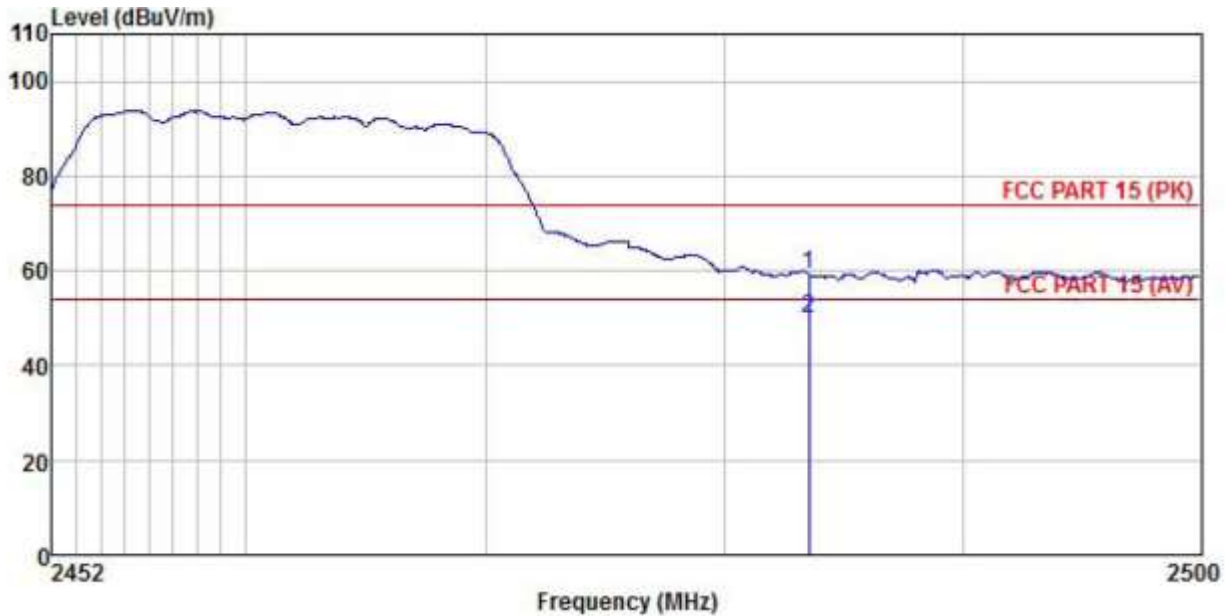


| | Freq | ReadAntenna | Cable | Aux | Preamp | Level | Limit | Over | Remark |
|---|----------|-------------|--------|------|--------|-------|--------|--------|---------------|
| | MHz | Level | Factor | Loss | Factor | Level | Line | Limit | |
| | | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB |
| 1 | 2483.500 | 25.98 | 27.27 | 4.38 | 1.70 | 0.00 | 59.33 | 74.00 | -14.67 Peak |
| 2 | 2483.500 | 16.40 | 27.27 | 4.38 | 1.70 | 0.00 | 49.75 | 54.00 | -4.25 Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

802.11n(HT40):

| | | | |
|---------------|---------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT40) Tx mode |
| Test Channel: | Lowestchannel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Humi: 57% |

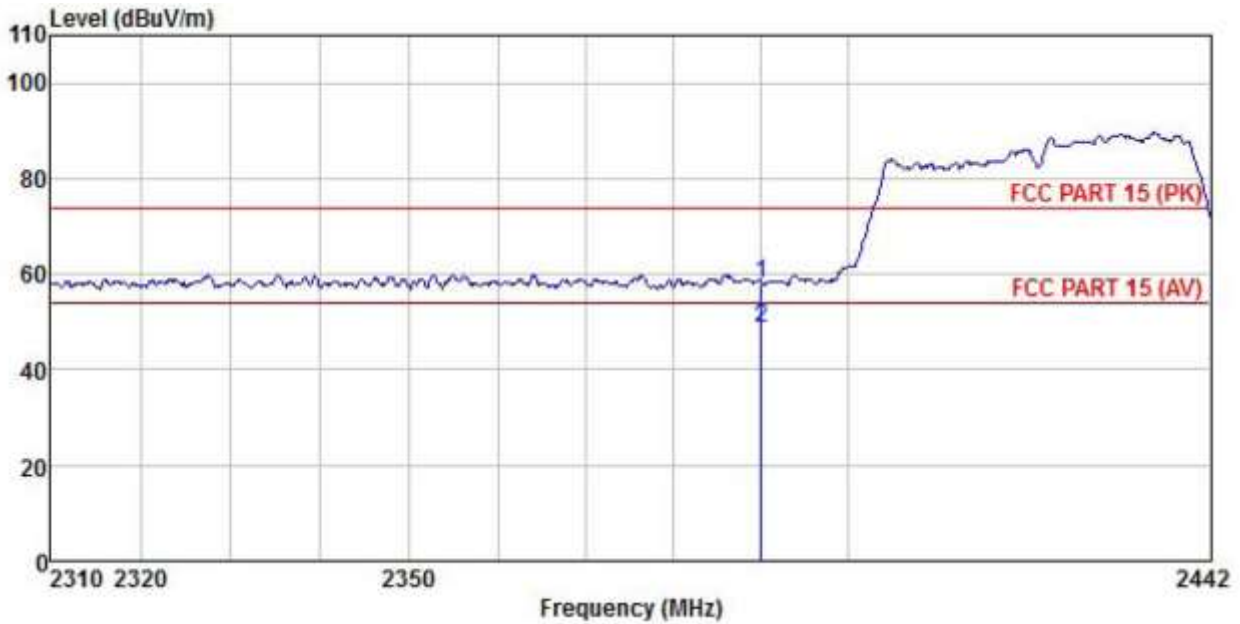


| | Freq | Read Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|----------|------------|----------------|------------|------------|---------------|--------|------------|------------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2390.000 | 24.86 | 27.03 | 4.28 | 1.68 | 0.00 | 57.85 | 74.00 | -16.15 | Peak |
| 2 | 2390.000 | 15.88 | 27.03 | 4.28 | 1.68 | 0.00 | 48.87 | 54.00 | -5.13 | Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|---------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT40) Tx mode |
| Test Channel: | Lowestchannel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Huni:57% |

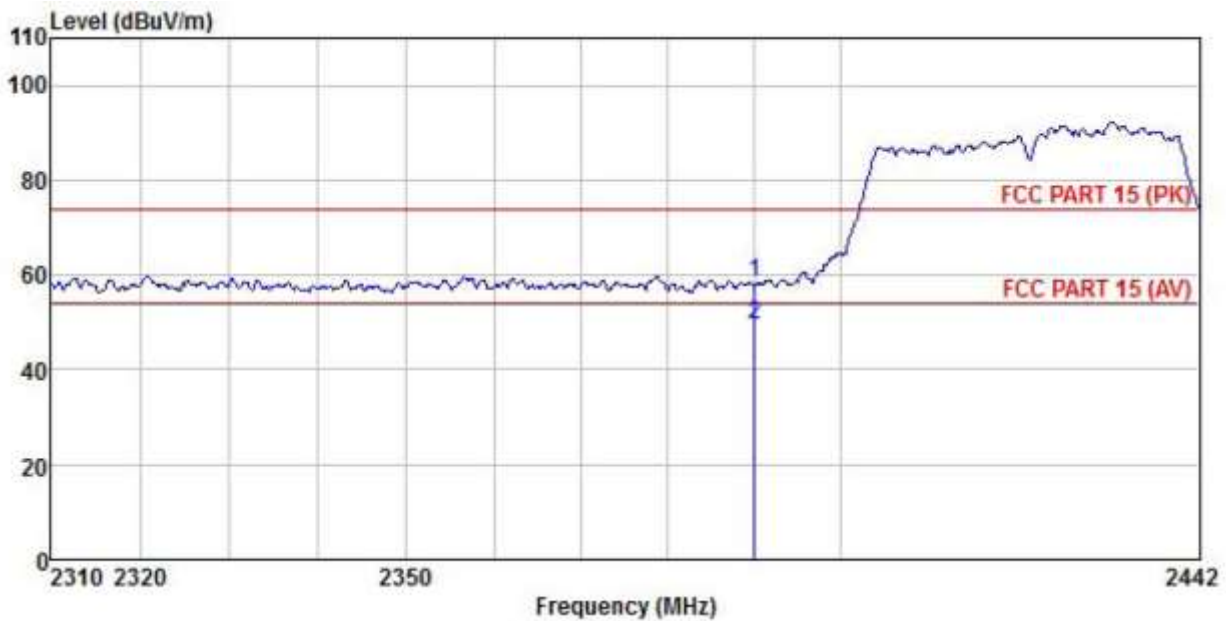


| | ReadAntenna | Cable | Aux Preamp | Limit | Over | | | | | |
|------|-------------|-------|------------|-------|-------|--------|-------|-------|--------|---------|
| Freq | Level | Loss | Factor | Line | Limit | Remark | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dB | | | | |
| 1 | 2390.000 | 25.31 | 27.03 | 4.28 | 1.68 | 0.00 | 58.30 | 74.00 | -15.70 | Peak |
| 2 | 2390.000 | 16.56 | 27.03 | 4.28 | 1.68 | 0.00 | 49.55 | 54.00 | -4.45 | Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|----------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT40) Tx mode |
| Test Channel: | Highestchannel | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Humi:57% |

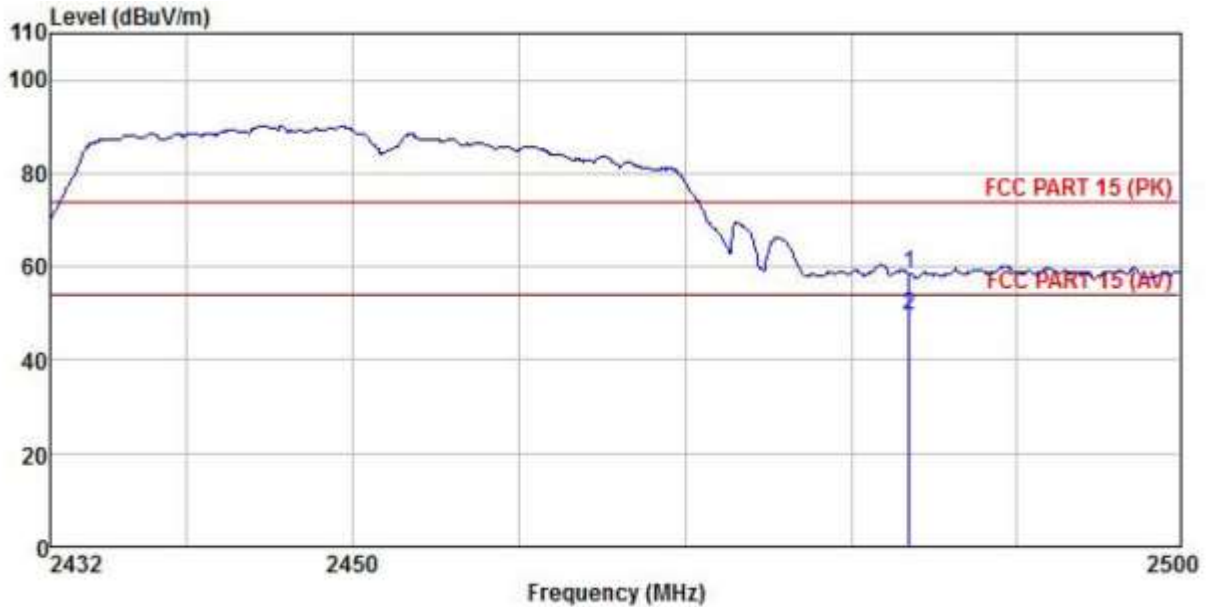


| | Freq | ReadAntenna Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|----------|-------------------|----------------|------------|------------|---------------|--------|------------|------------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2483.500 | 25.25 | 27.27 | 4.38 | 1.70 | 0.00 | 58.60 | 74.00 | -15.40 | Peak |
| 2 | 2483.500 | 16.27 | 27.27 | 4.38 | 1.70 | 0.00 | 49.62 | 54.00 | -4.38 | Average |

Remark:

1. Final Level= Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

| | | | |
|---------------|----------------|----------------|-----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | 802.11n(HT40) Tx mode |
| Test Channel: | Highestchannel | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp:24℃ Huni:57% |

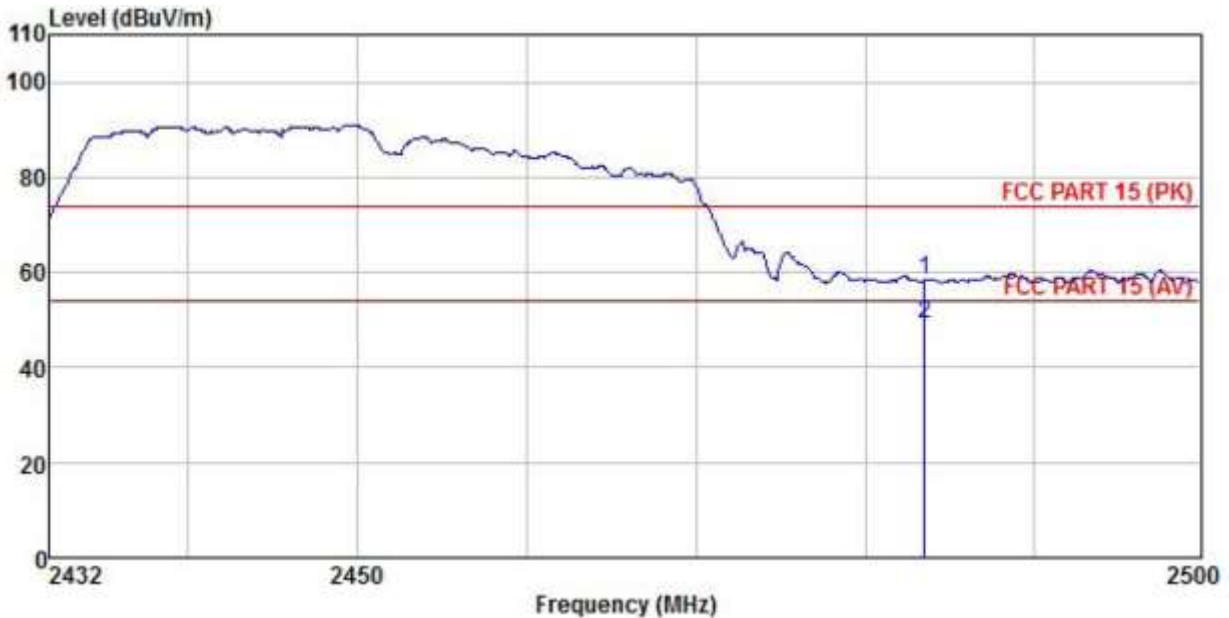


| | Read Freq | Antenna Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|-----------|---------------|----------------|------------|------------|---------------|--------|------------|------------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 2483.500 | 24.95 | 27.27 | 4.38 | 1.70 | 0.00 | 58.30 | 74.00 | -15.70 | Peak |
| 2 | 2483.500 | 15.68 | 27.27 | 4.38 | 1.70 | 0.00 | 49.03 | 54.00 | -4.97 | Average |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

6.7 Spurious Emission


6.7.1 Conducted Emission Method
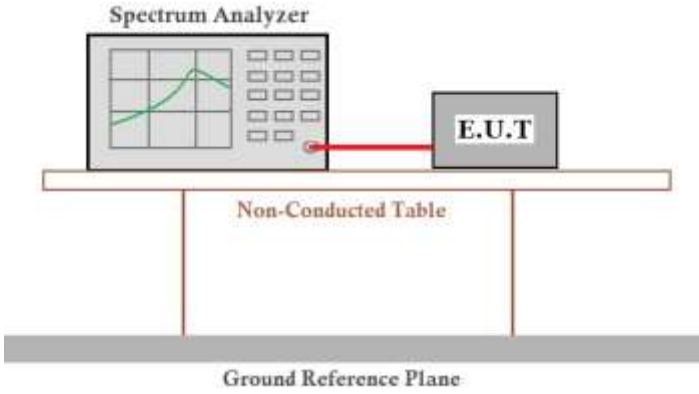
| | |
|-------------------|--|
| Test Requirement: | FCC Part 15 C Section 15.247 (d) |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. |
| Test setup: |  |
| Test Instruments: | Refer to section 5.9 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data: Refer to Appendix A - WIFI

6.7.2 Radiated Emission Method


| | | | | | |
|-----------------------|---|--------------------|--------|------------------|------------------|
| Test Requirement: | FCC Part 15 C Section 15.209 and 15.205 | | | | |
| Test Frequency Range: | 9kHz to 25GHz | | | | |
| Test Distance: | 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| RMS | | 1MHz | 3MHz | Average Value | |
| Limit: | Frequency | Limit (dBuV/m @3m) | | Remark | |
| | 30MHz-88MHz | 40.0 | | Quasi-peak Value | |
| | 88MHz-216MHz | 43.5 | | Quasi-peak Value | |
| | 216MHz-960MHz | 46.0 | | Quasi-peak Value | |
| | Above 1GHz | 54.0 | | Average Value | |
| 74.0 | | Peak Value | | | |
| Test Procedure: | <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | |
| Test setup: | <p>Below 1GHz</p> <p>Above 1GHz</p> | | | | |
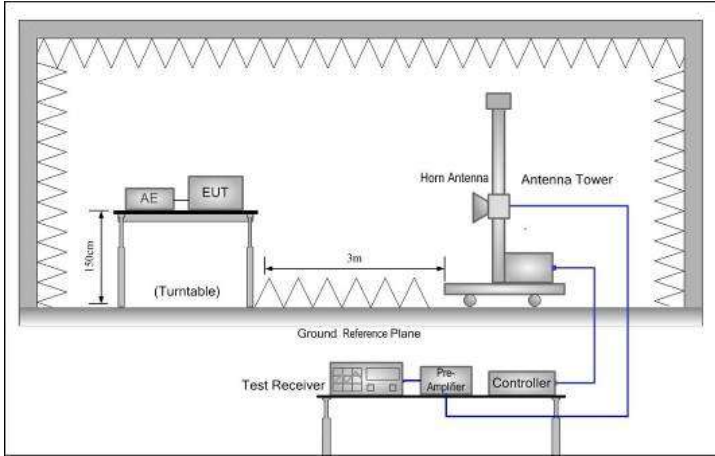
| | |
|--------------------------|---|
| |  |
| <p>Test Instruments:</p> | <p>Refer to section 5.9 for details</p> |
| <p>Test mode:</p> | <p>Refer to section 5.3 for details</p> |
| <p>Test results:</p> | <p>Passed</p> |
| <p>Remark:</p> | <ol style="list-style-type: none"> 1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report. |

Measurement Data (worst case):

Below 1GHz:

| | | | |
|-----------------|----------------|----------------|----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | Wi-Fi Tx mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Humi: 57% |

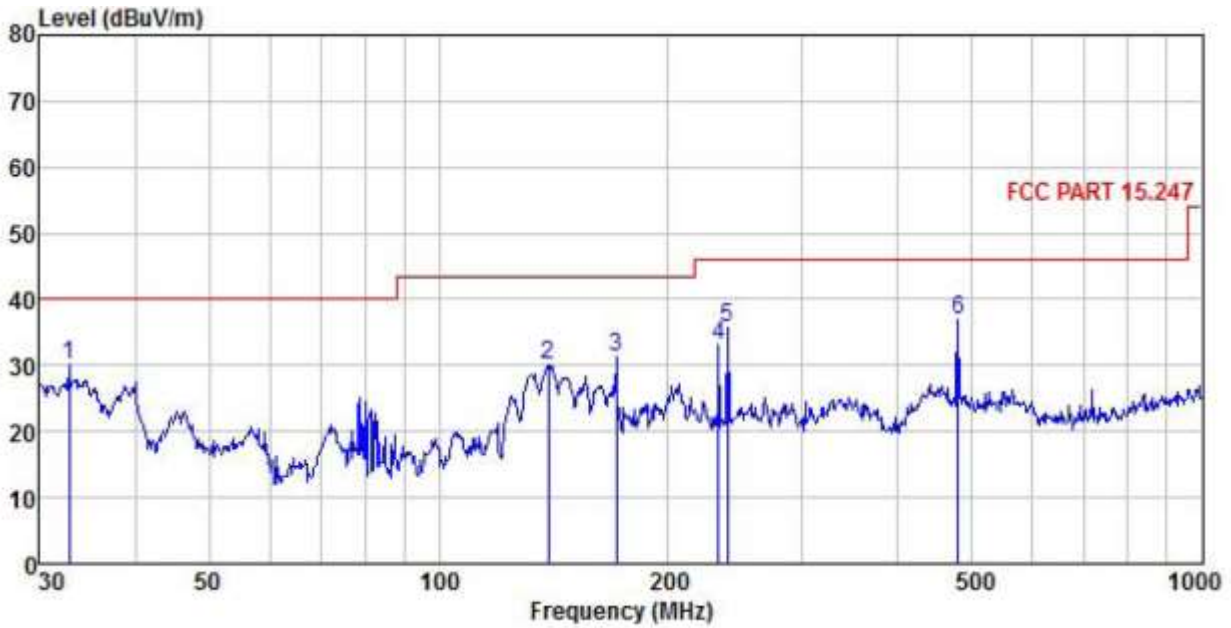


| | ReadAntenna | Cable | Aux | Preamp | Level | Limit | Over | Remark | |
|------|-------------|-------|--------|--------|-------|--------|--------|--------|-----------|
| Freq | Level | Loss | Factor | Factor | Level | Line | Limit | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 32.749 | 47.57 | 12.25 | 0.37 | 0.00 | 29.96 | 30.23 | 40.00 | -9.77 QP |
| 2 | 139.361 | 44.95 | 13.77 | 0.60 | 0.00 | 29.28 | 30.04 | 43.50 | -13.46 QP |
| 3 | 170.793 | 43.07 | 16.54 | 0.66 | 0.00 | 29.04 | 31.23 | 43.50 | -12.27 QP |
| 4 | 232.532 | 42.51 | 18.43 | 0.75 | 0.00 | 28.64 | 33.05 | 46.00 | -12.95 QP |
| 5 | 239.147 | 45.12 | 18.46 | 0.76 | 0.00 | 28.60 | 35.74 | 46.00 | -10.26 QP |
| 6 | 478.846 | 45.30 | 19.32 | 1.08 | 0.00 | 28.92 | 36.78 | 46.00 | -9.22 QP |

Remark:

1. Final Level= Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

| | | | |
|-----------------|----------------|----------------|----------------------|
| Product Name: | 4G TABLET PC | Product Model: | 102S |
| Test By: | Janet | Test mode: | Wi-Fi Tx mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Horizontal |
| Test Voltage: | AC 120/60Hz | Environment: | Temp: 24°C Huni: 57% |

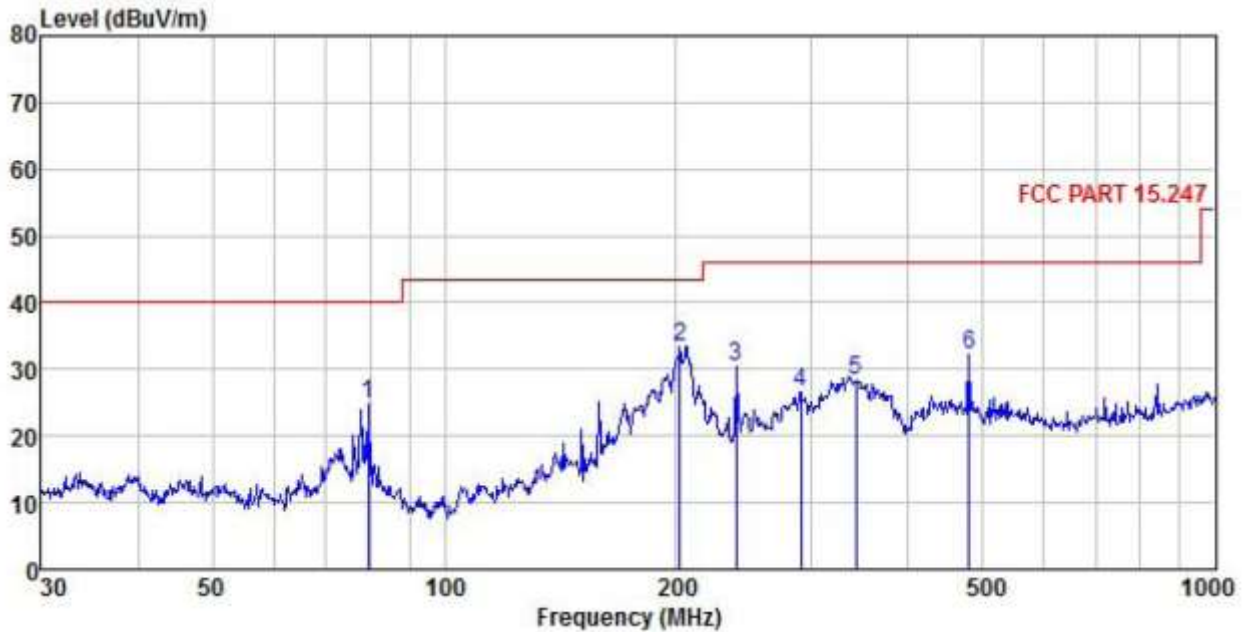

| | Freq | Read Level | Antenna Factor | Cable Loss | Aux Factor | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|----------------|------------|------------|---------------|--------|------------|------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 79.521 | 41.43 | 12.66 | 0.47 | 0.00 | 29.64 | 24.92 | 40.00 | -15.08 | QP |
| 2 | 202.100 | 43.14 | 18.31 | 0.72 | 0.00 | 28.82 | 33.35 | 43.50 | -10.15 | QP |
| 3 | 239.147 | 39.68 | 18.46 | 0.76 | 0.00 | 28.60 | 30.30 | 46.00 | -15.70 | QP |
| 4 | 290.017 | 35.59 | 18.66 | 0.85 | 0.00 | 28.47 | 26.63 | 46.00 | -19.37 | QP |
| 5 | 341.979 | 37.14 | 18.78 | 0.92 | 0.00 | 28.54 | 28.30 | 46.00 | -17.70 | QP |
| 6 | 478.846 | 40.80 | 19.32 | 1.08 | 0.00 | 28.92 | 32.28 | 46.00 | -13.72 | QP |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Above 1GHz

| 802.11b | | | | | | | | | |
|---|-------------------|-----------------------|-----------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Test channel: Lowest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4824.00 | 49.44 | 30.81 | 6.81 | 2.46 | 41.82 | 47.70 | 74.00 | -26.30 | Vertical |
| 4824.00 | 48.47 | 30.81 | 6.81 | 2.46 | 41.82 | 46.73 | 74.00 | -27.27 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4824.00 | 41.64 | 30.81 | 6.81 | 2.46 | 41.82 | 39.90 | 54.00 | -14.10 | Vertical |
| 4824.00 | 40.65 | 30.81 | 6.81 | 2.46 | 41.82 | 38.91 | 54.00 | -15.09 | Horizontal |
| Test channel: Middle channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 49.53 | 30.93 | 6.85 | 2.47 | 41.84 | 47.94 | 74.00 | -26.06 | Vertical |
| 4874.00 | 48.24 | 30.93 | 6.85 | 2.47 | 41.84 | 46.65 | 74.00 | -27.35 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 41.32 | 30.93 | 6.85 | 2.47 | 41.84 | 39.73 | 54.00 | -14.27 | Vertical |
| 4874.00 | 40.15 | 30.93 | 6.85 | 2.47 | 41.84 | 38.56 | 54.00 | -15.44 | Horizontal |
| Test channel: Highest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4924.00 | 49.85 | 31.05 | 6.89 | 2.48 | 41.86 | 48.41 | 74.00 | -25.59 | Vertical |
| 4924.00 | 48.24 | 31.05 | 6.89 | 2.48 | 41.86 | 46.80 | 74.00 | -27.20 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4924.00 | 41.38 | 31.05 | 6.89 | 2.48 | 41.86 | 39.94 | 54.00 | -14.06 | Vertical |
| 4924.00 | 40.21 | 31.05 | 6.89 | 2.48 | 41.86 | 38.77 | 54.00 | -15.23 | Horizontal |
| <i>Remark:</i> | | | | | | | | | |
| 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.</i> | | | | | | | | | |
| 2. <i>The emission levels of other frequencies are lower than the limit 20dB and not show in test report.</i> | | | | | | | | | |

| 802.11g | | | | | | | | | |
|---|-------------------|-----------------------|-----------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Test channel: Lowest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4824.00 | 49.36 | 30.81 | 6.81 | 2.46 | 41.82 | 47.62 | 74.00 | -26.38 | Vertical |
| 4824.00 | 48.85 | 30.81 | 6.81 | 2.46 | 41.82 | 47.11 | 74.00 | -26.89 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4824.00 | 41.21 | 30.81 | 6.81 | 2.46 | 41.82 | 39.47 | 54.00 | -14.53 | Vertical |
| 4824.00 | 40.86 | 30.81 | 6.81 | 2.46 | 41.82 | 39.12 | 54.00 | -14.88 | Horizontal |
| Test channel: Middle channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 49.71 | 30.93 | 6.85 | 2.47 | 41.84 | 48.12 | 74.00 | -25.88 | Vertical |
| 4874.00 | 48.62 | 30.93 | 6.85 | 2.47 | 41.84 | 47.03 | 74.00 | -26.97 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 41.22 | 30.93 | 6.85 | 2.47 | 41.84 | 39.63 | 54.00 | -14.37 | Vertical |
| 4874.00 | 40.33 | 30.93 | 6.85 | 2.47 | 41.84 | 38.74 | 54.00 | -15.26 | Horizontal |
| Test channel: Highest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4924.00 | 49.84 | 31.05 | 6.89 | 2.48 | 41.86 | 48.40 | 74.00 | -25.60 | Vertical |
| 4924.00 | 48.37 | 31.05 | 6.89 | 2.48 | 41.86 | 46.93 | 74.00 | -27.07 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4924.00 | 41.24 | 31.05 | 6.89 | 2.48 | 41.86 | 39.80 | 54.00 | -14.20 | Vertical |
| 4924.00 | 40.52 | 31.05 | 6.89 | 2.48 | 41.86 | 39.08 | 54.00 | -14.92 | Horizontal |
| <i>Remark:</i> | | | | | | | | | |
| 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.</i> | | | | | | | | | |
| 2. <i>The emission levels of other frequencies are lower than the limit 20dB and not show in test report.</i> | | | | | | | | | |

| 802.11n(HT20) | | | | | | | | | |
|---|-------------------|-----------------------|-----------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Test channel: Lowest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4824.00 | 49.51 | 30.81 | 6.81 | 2.46 | 41.82 | 47.77 | 74.00 | -26.23 | Vertical |
| 4824.00 | 48.43 | 30.81 | 6.81 | 2.46 | 41.82 | 46.69 | 74.00 | -27.31 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4824.00 | 41.97 | 30.81 | 6.81 | 2.46 | 41.82 | 40.23 | 54.00 | -13.77 | Vertical |
| 4824.00 | 40.31 | 30.81 | 6.81 | 2.46 | 41.82 | 38.57 | 54.00 | -15.43 | Horizontal |
| Test channel: Middle channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 49.87 | 30.93 | 6.85 | 2.47 | 41.84 | 48.28 | 74.00 | -25.72 | Vertical |
| 4874.00 | 48.51 | 30.93 | 6.85 | 2.47 | 41.84 | 46.92 | 74.00 | -27.08 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 41.38 | 30.93 | 6.85 | 2.47 | 41.84 | 39.79 | 54.00 | -14.21 | Vertical |
| 4874.00 | 40.22 | 30.93 | 6.85 | 2.47 | 41.84 | 38.63 | 54.00 | -15.37 | Horizontal |
| Test channel: Highest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4924.00 | 49.71 | 31.05 | 6.89 | 2.48 | 41.86 | 48.27 | 74.00 | -25.73 | Vertical |
| 4924.00 | 48.32 | 31.05 | 6.89 | 2.48 | 41.86 | 46.88 | 74.00 | -27.12 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4924.00 | 41.62 | 31.05 | 6.89 | 2.48 | 41.86 | 40.18 | 54.00 | -13.82 | Vertical |
| 4924.00 | 40.87 | 31.05 | 6.89 | 2.48 | 41.86 | 39.43 | 54.00 | -14.57 | Horizontal |
| <i>Remark:</i> | | | | | | | | | |
| 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.</i> | | | | | | | | | |
| 2. <i>The emission levels of other frequencies are lower than the limit 20dB and not show in test report.</i> | | | | | | | | | |

| 802.11n(HT40) | | | | | | | | | |
|---|-------------------|-----------------------|-----------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| Test channel: Lowest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4844.00 | 49.83 | 30.87 | 6.83 | 2.46 | 41.83 | 48.16 | 74.00 | -25.84 | Vertical |
| 4844.00 | 48.21 | 30.87 | 6.83 | 2.46 | 41.83 | 46.54 | 74.00 | -27.46 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4844.00 | 41.35 | 30.87 | 6.83 | 2.46 | 41.83 | 39.68 | 54.00 | -14.32 | Vertical |
| 4844.00 | 40.22 | 30.87 | 6.83 | 2.46 | 41.83 | 38.55 | 54.00 | -15.45 | Horizontal |
| Test channel: Middle channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 49.26 | 30.93 | 6.85 | 2.47 | 41.84 | 47.67 | 74.00 | -26.33 | Vertical |
| 4874.00 | 48.71 | 30.93 | 6.85 | 2.47 | 41.84 | 47.12 | 74.00 | -26.88 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4874.00 | 41.29 | 30.93 | 6.85 | 2.47 | 41.84 | 39.70 | 54.00 | -14.30 | Vertical |
| 4874.00 | 40.54 | 30.93 | 6.85 | 2.47 | 41.84 | 38.95 | 54.00 | -15.05 | Horizontal |
| Test channel: Highest channel | | | | | | | | | |
| Detector: Peak Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4904.00 | 49.34 | 30.99 | 6.87 | 2.48 | 41.85 | 47.83 | 74.00 | -26.17 | Vertical |
| 4904.00 | 48.87 | 30.99 | 6.87 | 2.48 | 41.85 | 47.36 | 74.00 | -26.64 | Horizontal |
| Detector: Average Value | | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Aux Factor (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 4904.00 | 41.26 | 30.99 | 6.87 | 2.48 | 41.85 | 39.75 | 54.00 | -14.25 | Vertical |
| 4904.00 | 40.37 | 30.99 | 6.87 | 2.48 | 41.85 | 38.86 | 54.00 | -15.14 | Horizontal |
| <i>Remark:</i> | | | | | | | | | |
| 1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.</i> | | | | | | | | | |
| 2. <i>The emission levels of other frequencies are lower than the limit 20dB and not show in test report.</i> | | | | | | | | | |

Appendix A - WIFI

Duty Cycle

| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) |
|-----------|------|-----------------|---------|----------------|------------------------|
| NVNT | b | 2412 | Ant1 | 100 | 0 |
| NVNT | b | 2437 | Ant1 | 100 | 0 |
| NVNT | b | 2462 | Ant1 | 100 | 0 |
| NVNT | g | 2412 | Ant1 | 100 | 0 |
| NVNT | g | 2437 | Ant1 | 100 | 0 |
| NVNT | g | 2462 | Ant1 | 100 | 0 |
| NVNT | n20 | 2412 | Ant1 | 100 | 0 |
| NVNT | n20 | 2437 | Ant1 | 100 | 0 |
| NVNT | n20 | 2462 | Ant1 | 100 | 0 |
| NVNT | n40 | 2422 | Ant1 | 100 | 0 |
| NVNT | n40 | 2437 | Ant1 | 100 | 0 |
| NVNT | n40 | 2452 | Ant1 | 100 | 0 |


Duty Cycle NVNT b 2412MHz Ant1




Duty Cycle NVNT b 2437MHz Ant1




Duty Cycle NVNT b 2462MHz Ant1

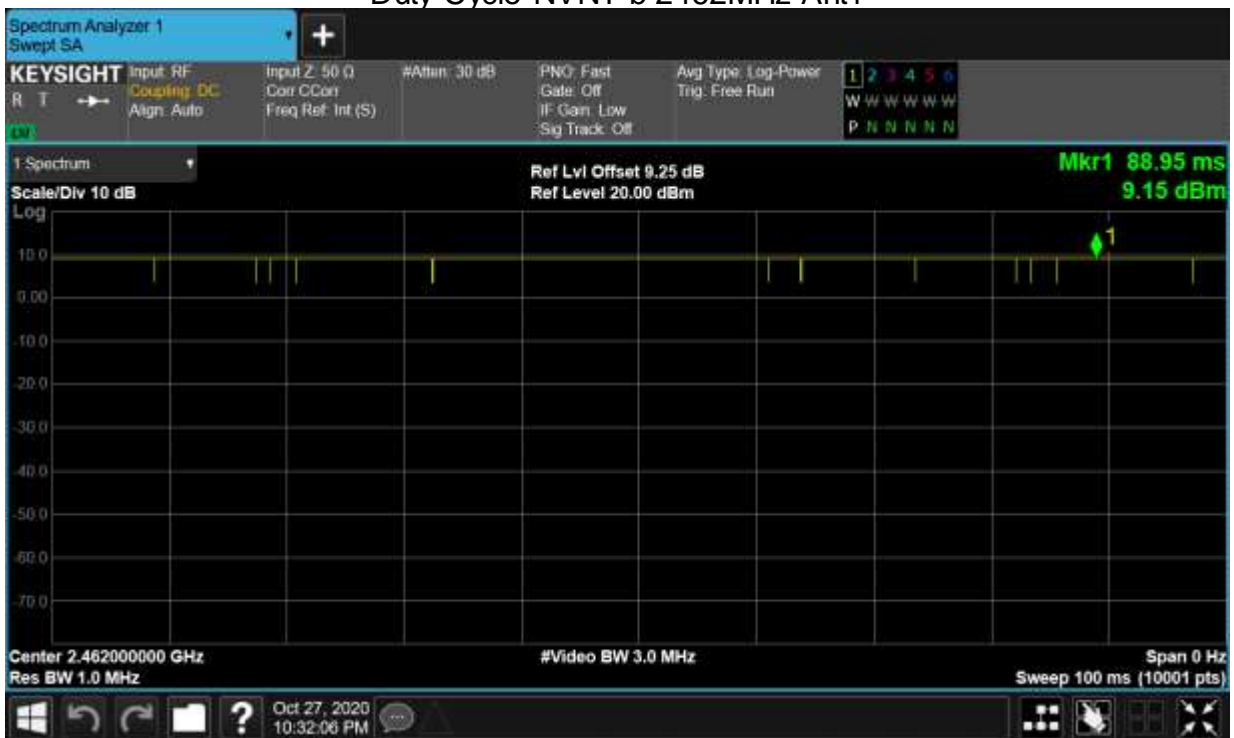

Duty Cycle NVNT g 2412MHz Ant1

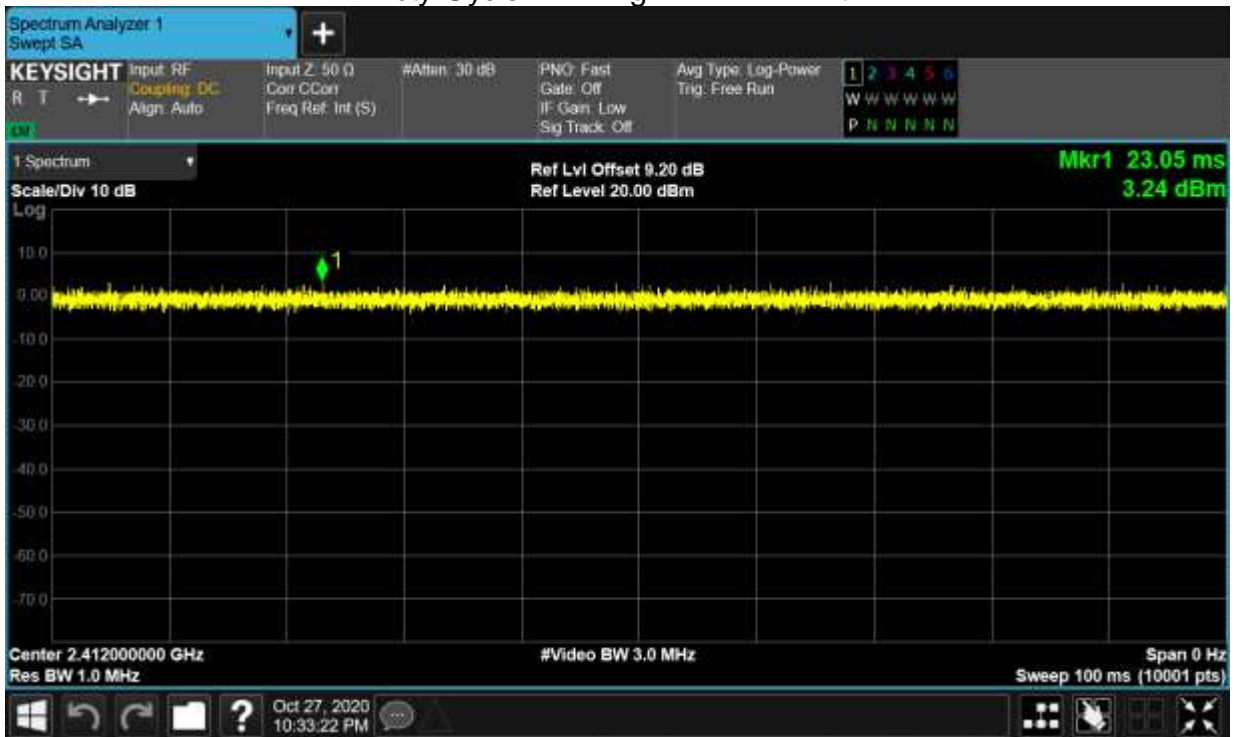


Duty Cycle NVNT g 2437MHz Ant1

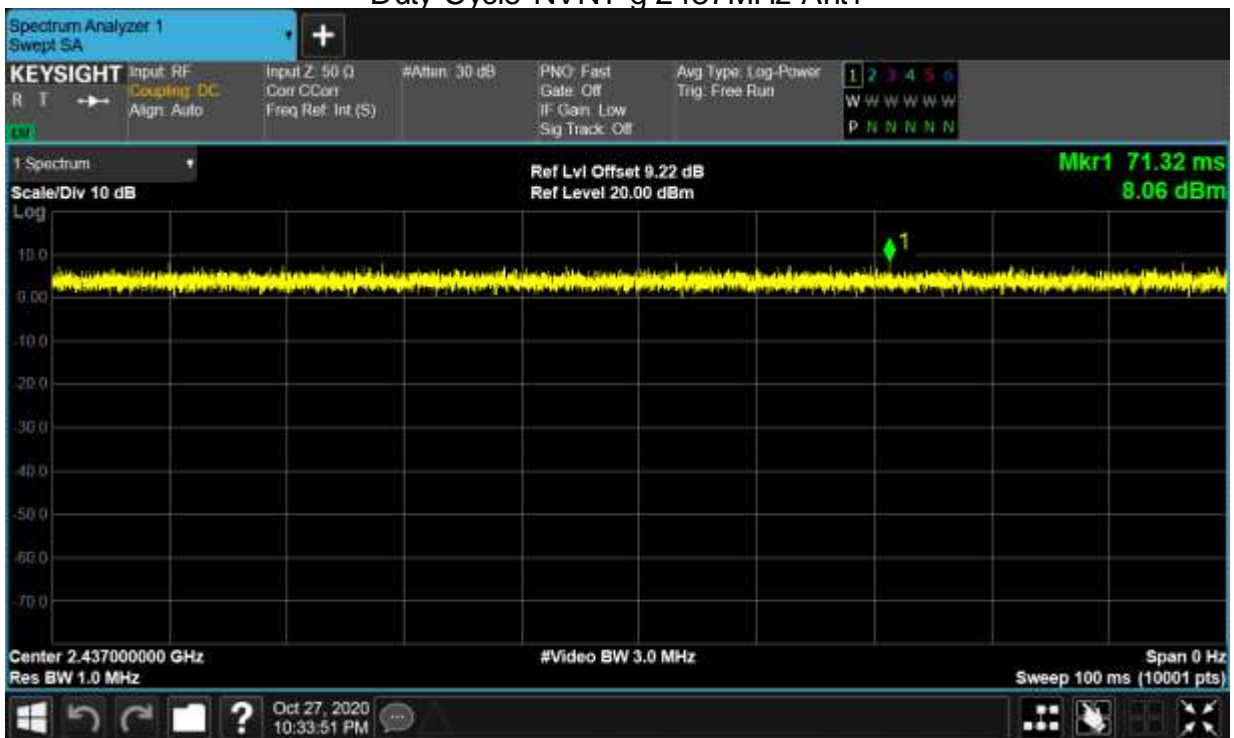

Duty Cycle NVNT g 2462MHz Ant1



Duty Cycle NVNT n20 2412MHz Ant1

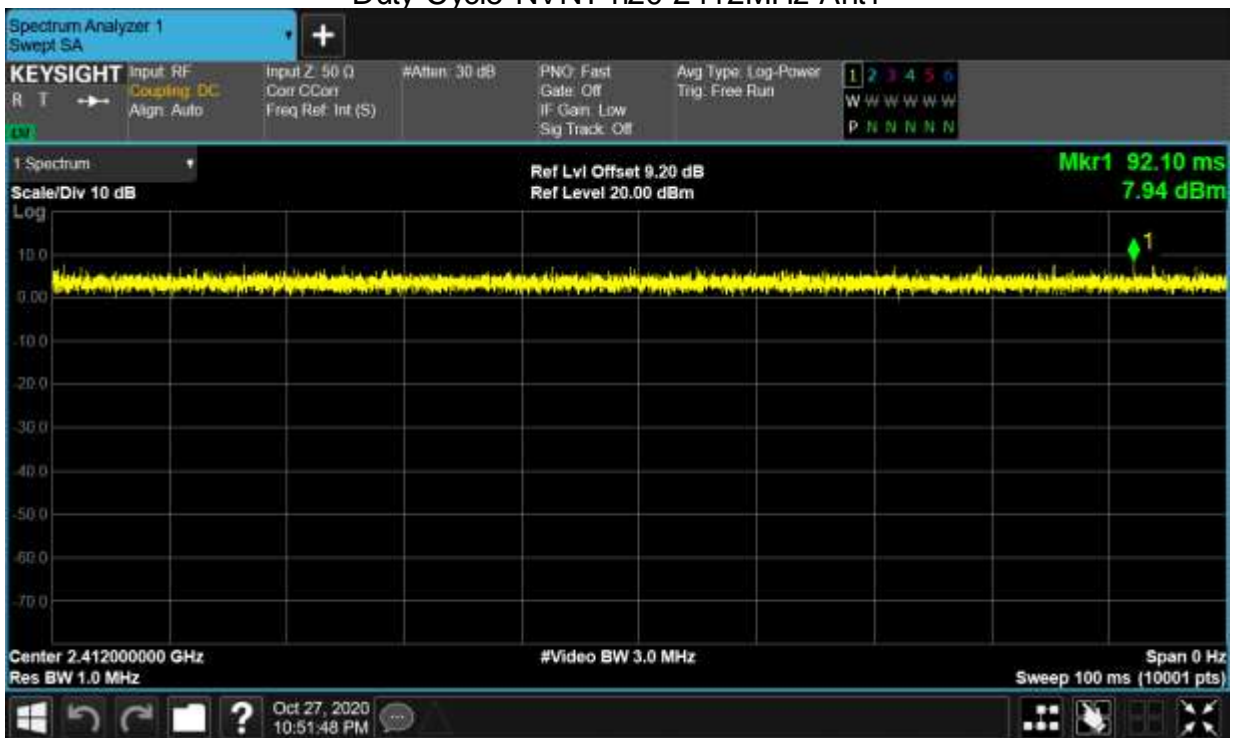


Duty Cycle NVNT n20 2437MHz Ant1




Duty Cycle NVNT n20 2462MHz Ant1




Duty Cycle NVNT n40 2422MHz Ant1

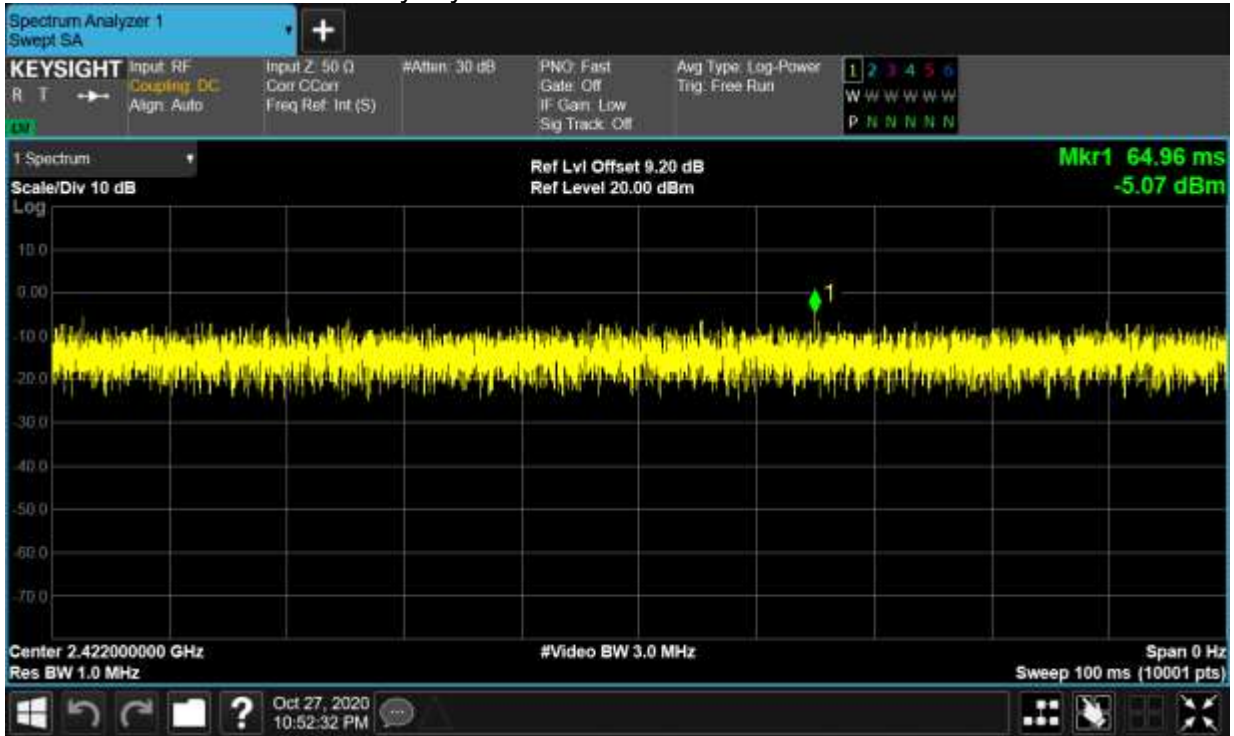

Duty Cycle NVNT n40 2437MHz Ant1

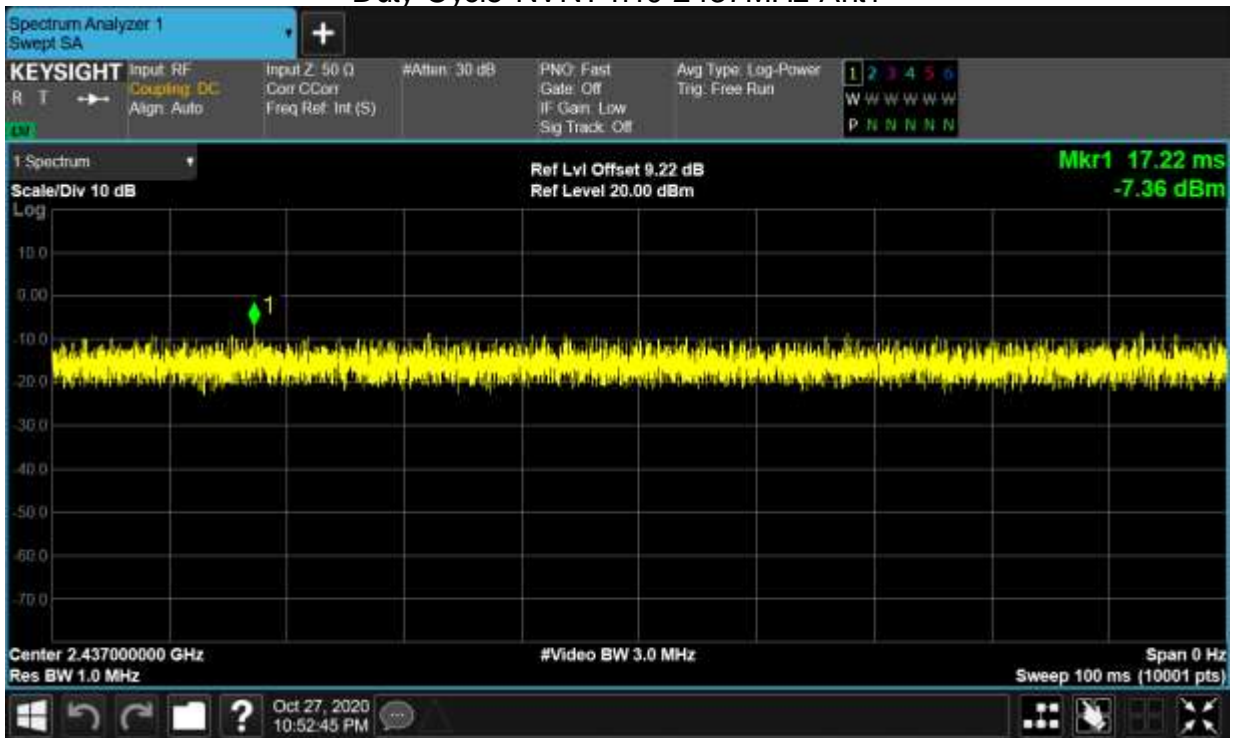

Duty Cycle NVNT n40 2452MHz Ant1

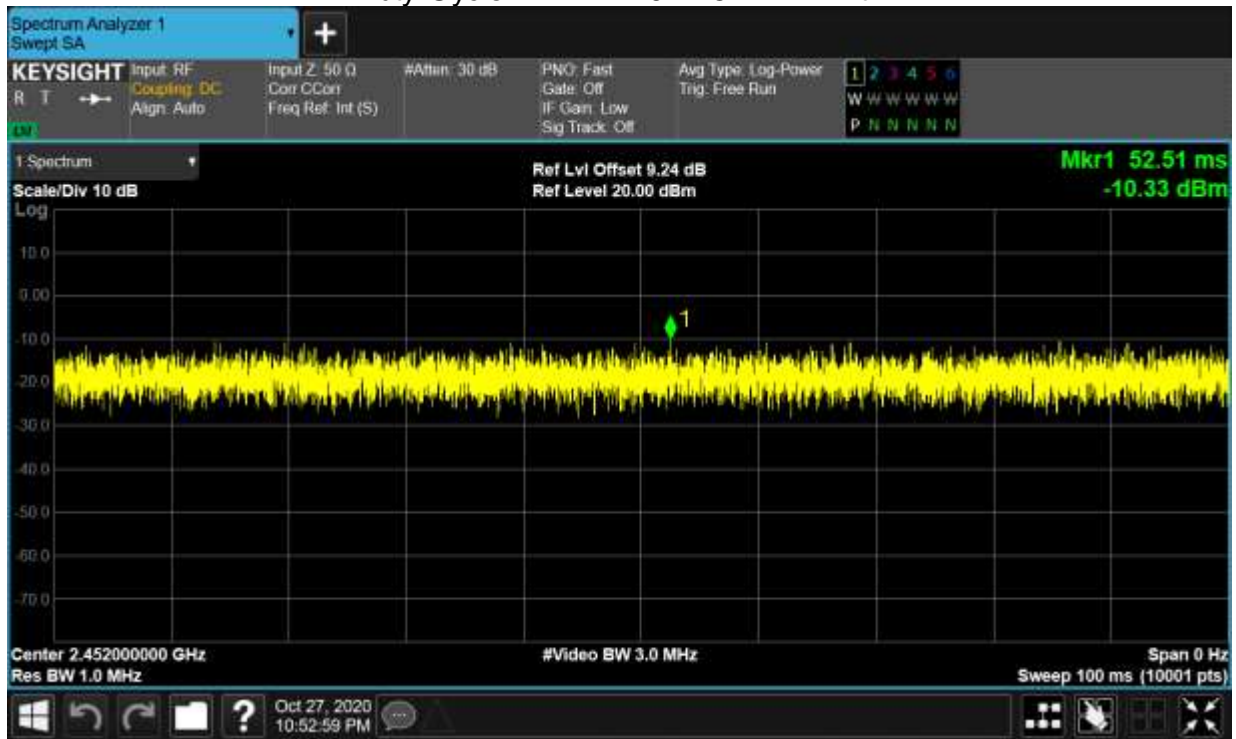

Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | 13.42 | 0 | 13.42 | 30 | Pass |
| NVNT | b | 2437 | Ant1 | 12.71 | 0 | 12.71 | 30 | Pass |
| NVNT | b | 2462 | Ant1 | 14.45 | 0 | 14.45 | 30 | Pass |
| NVNT | g | 2412 | Ant1 | 11.38 | 0 | 11.38 | 30 | Pass |
| NVNT | g | 2437 | Ant1 | 10.98 | 0 | 10.98 | 30 | Pass |
| NVNT | g | 2462 | Ant1 | 11.92 | 0 | 11.92 | 30 | Pass |
| NVNT | n20 | 2412 | Ant1 | 11.37 | 0 | 11.37 | 30 | Pass |
| NVNT | n20 | 2437 | Ant1 | 10.61 | 0 | 10.61 | 30 | Pass |
| NVNT | n20 | 2462 | Ant1 | 11.9 | 0 | 11.9 | 30 | Pass |
| NVNT | n40 | 2422 | Ant1 | 11.78 | 0 | 11.78 | 30 | Pass |
| NVNT | n40 | 2437 | Ant1 | 11.46 | 0 | 11.46 | 30 | Pass |
| NVNT | n40 | 2452 | Ant1 | 10.92 | 0 | 10.92 | 30 | Pass |

-6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT | b | 2412 | Ant1 | 9.083 | 0.5 | Pass |
| NVNT | b | 2437 | Ant1 | 9.073 | 0.5 | Pass |

| | | | | | | |
|------|-----|------|------|--------|-----|------|
| NVNT | b | 2462 | Ant1 | 8.079 | 0.5 | Pass |
| NVNT | g | 2412 | Ant1 | 15.672 | 0.5 | Pass |
| NVNT | g | 2437 | Ant1 | 9.428 | 0.5 | Pass |
| NVNT | g | 2462 | Ant1 | 13.235 | 0.5 | Pass |
| NVNT | n20 | 2412 | Ant1 | 15.069 | 0.5 | Pass |
| NVNT | n20 | 2437 | Ant1 | 11.307 | 0.5 | Pass |
| NVNT | n20 | 2462 | Ant1 | 13.805 | 0.5 | Pass |
| NVNT | n40 | 2422 | Ant1 | 7.498 | 0.5 | Pass |
| NVNT | n40 | 2437 | Ant1 | 10.059 | 0.5 | Pass |
| NVNT | n40 | 2452 | Ant1 | 36.334 | 0.5 | Pass |

-6dB Bandwidth NVNT b 2412MHz Ant1



-6dB Bandwidth NVNT b 2437MHz Ant1



-6dB Bandwidth NVNT b 2462MHz Ant1



-6dB Bandwidth NVNT g 2412MHz Ant1



-6dB Bandwidth NVNT g 2437MHz Ant1



-6dB Bandwidth NVNT g 2462MHz Ant1



-6dB Bandwidth NVNT n20 2412MHz Ant1



-6dB Bandwidth NVNT n20 2437MHz Ant1



-6dB Bandwidth NVNT n20 2462MHz Ant1



-6dB Bandwidth NVNT n40 2422MHz Ant1



-6dB Bandwidth NVNT n40 2437MHz Ant1



-6dB Bandwidth NVNT n40 2452MHz Ant1



Occupied Channel Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT | b | 2412 | Ant1 | 15.1604956 |
| NVNT | b | 2437 | Ant1 | 13.91900889 |
| NVNT | b | 2462 | Ant1 | 13.69428231 |
| NVNT | g | 2412 | Ant1 | 17.08903214 |
| NVNT | g | 2437 | Ant1 | 16.80977373 |
| NVNT | g | 2462 | Ant1 | 16.52159805 |
| NVNT | n20 | 2412 | Ant1 | 18.0094238 |
| NVNT | n20 | 2437 | Ant1 | 17.61912631 |
| NVNT | n20 | 2462 | Ant1 | 17.56232284 |
| NVNT | n40 | 2422 | Ant1 | 34.30574111 |
| NVNT | n40 | 2437 | Ant1 | 34.43817295 |
| NVNT | n40 | 2452 | Ant1 | 37.94048492 |

OBW NVNT b 2412MHz Ant1



OBW NVNT b 2437MHz Ant1



OBW NVNT b 2462MHz Ant1



OBW NVNT g 2412MHz Ant1



OBW NVNT g 2437MHz Ant1



OBW NVNT g 2462MHz Ant1



OBW NVNT n20 2412MHz Ant1



OBW NVNT n20 2437MHz Ant1



OBW NVNT n20 2462MHz Ant1



OBW NVNT n40 2422MHz Ant1



OBW NVNT n40 2437MHz Ant1



OBW NVNT n40 2452MHz Ant1



Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Max PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | -18.856 | 8 | Pass |
| NVNT | b | 2437 | Ant1 | -19.255 | 8 | Pass |
| NVNT | b | 2462 | Ant1 | -16.992 | 8 | Pass |
| NVNT | g | 2412 | Ant1 | -22.614 | 8 | Pass |

| | | | | | | |
|------|-----|------|------|---------|---|------|
| NVNT | g | 2437 | Ant1 | -20.421 | 8 | Pass |
| NVNT | g | 2462 | Ant1 | -20.594 | 8 | Pass |
| NVNT | n20 | 2412 | Ant1 | -22.715 | 8 | Pass |
| NVNT | n20 | 2437 | Ant1 | -21.487 | 8 | Pass |
| NVNT | n20 | 2462 | Ant1 | -21.034 | 8 | Pass |
| NVNT | n40 | 2422 | Ant1 | -21.632 | 8 | Pass |
| NVNT | n40 | 2437 | Ant1 | -22.014 | 8 | Pass |
| NVNT | n40 | 2452 | Ant1 | -25.106 | 8 | Pass |

PSD NVNT b 2412MHz Ant1



PSD NVNT b 2437MHz Ant1




PSD NVNT b 2462MHz Ant1



PSD NVNT g 2412MHz Ant1




PSD NVNT g 2437MHz Ant1

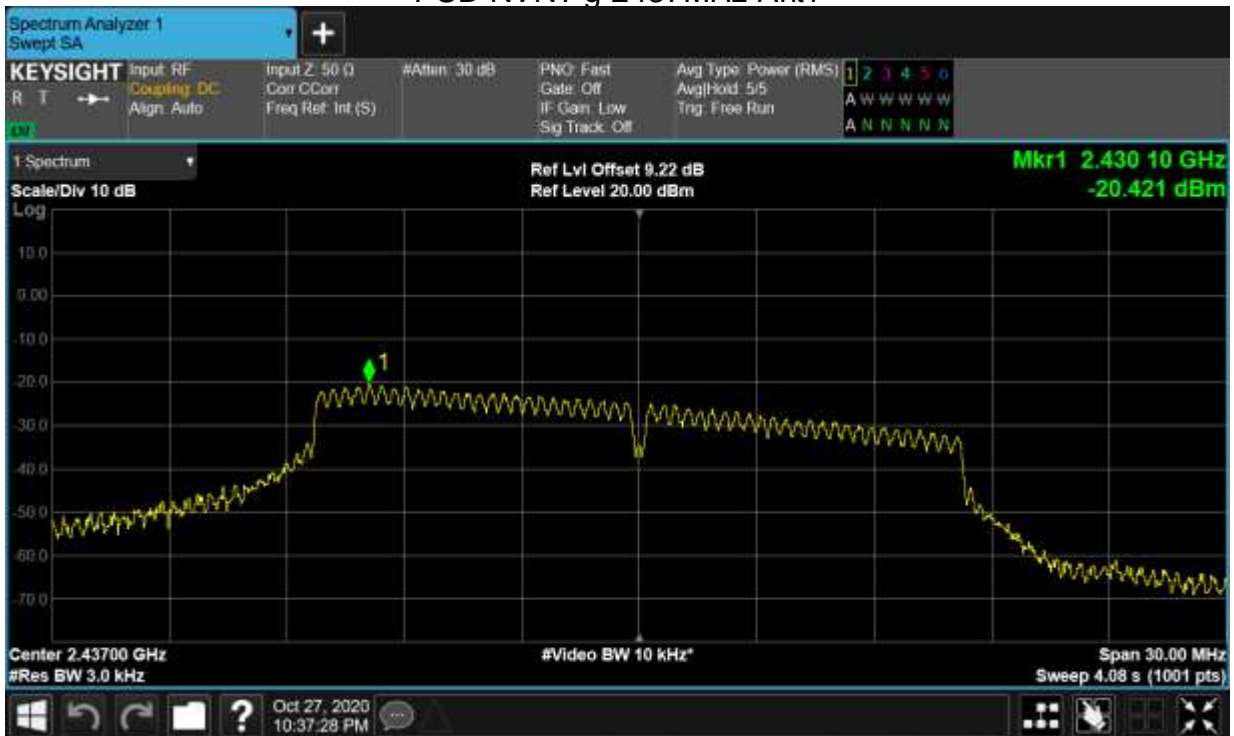

PSD NVNT g 2462MHz Ant1




PSD NVNT n20 2412MHz Ant1

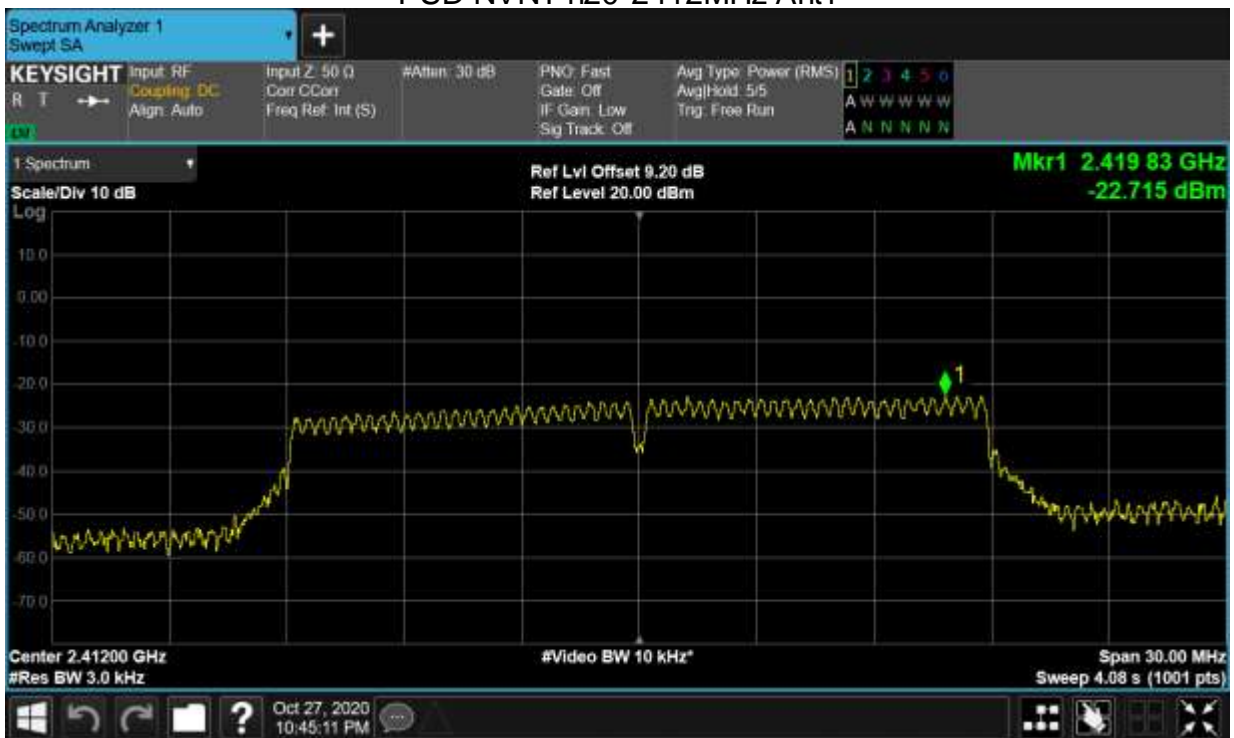

PSD NVNT n20 2437MHz Ant1




PSD NVNT n20 2462MHz Ant1

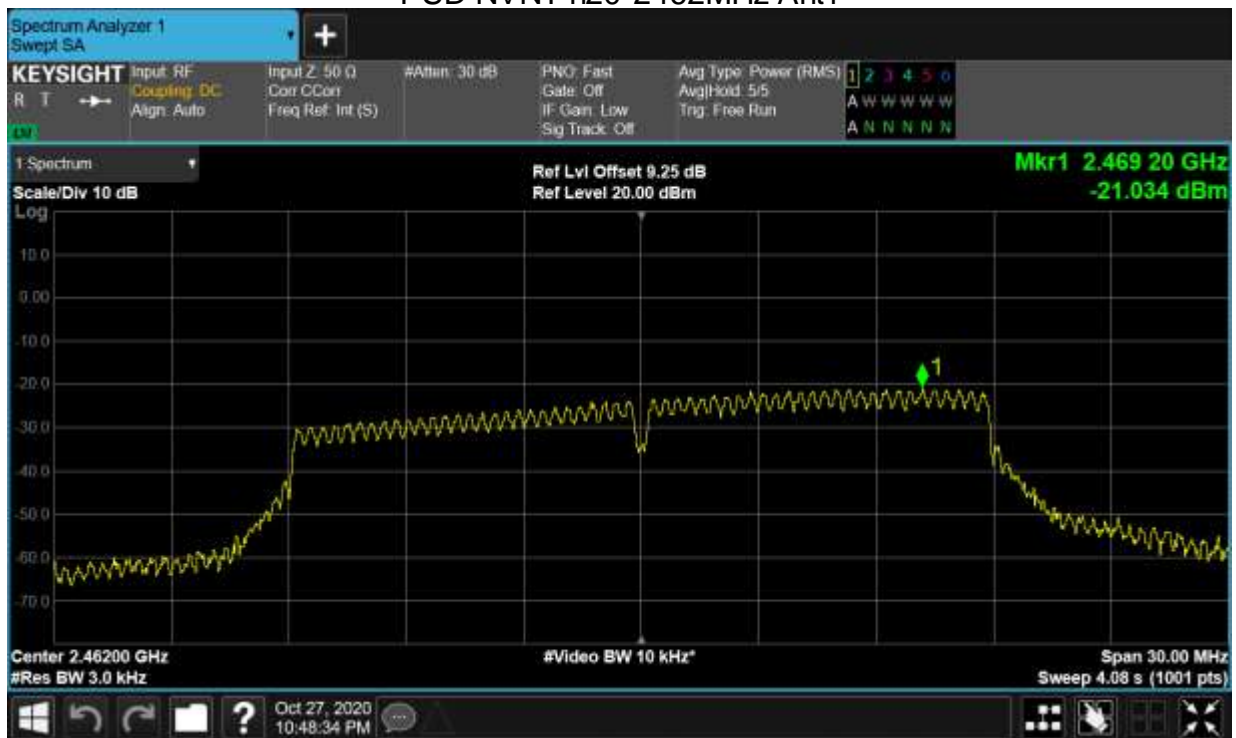


PSD NVNT n40 2422MHz Ant1



PSD NVNT n40 2437MHz Ant1

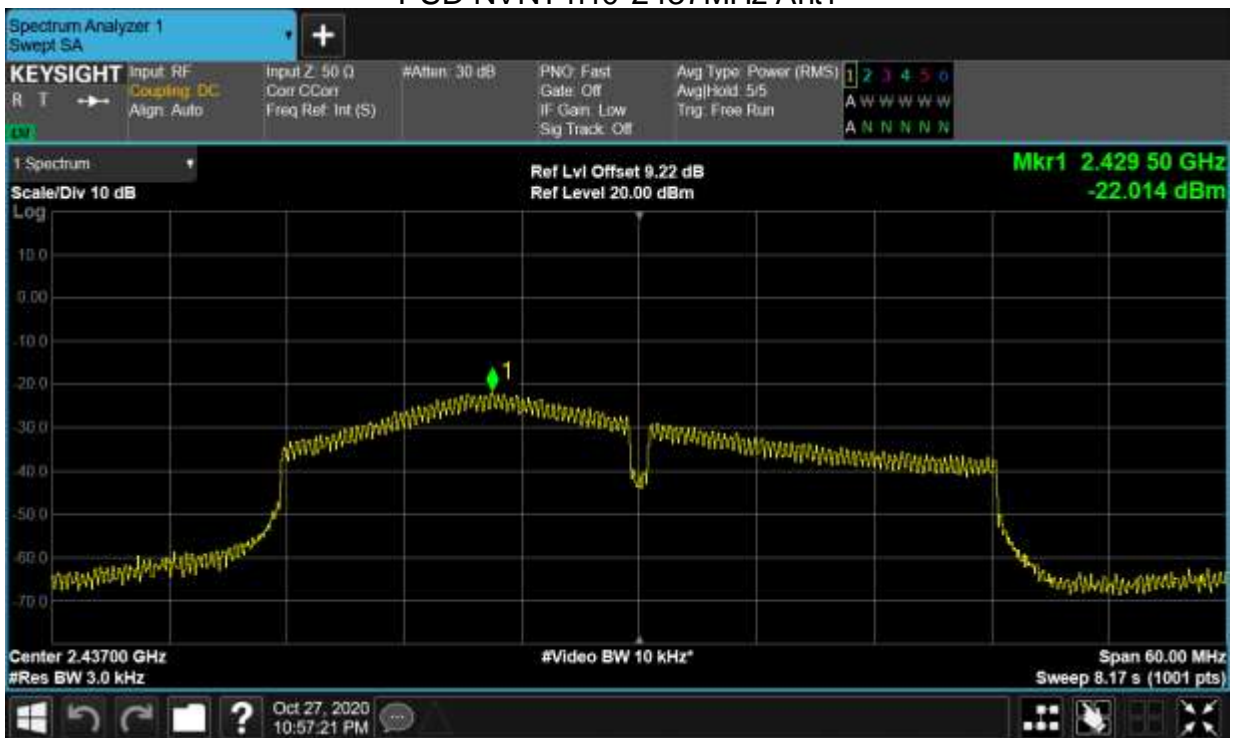

PSD NVNT n40 2452MHz Ant1

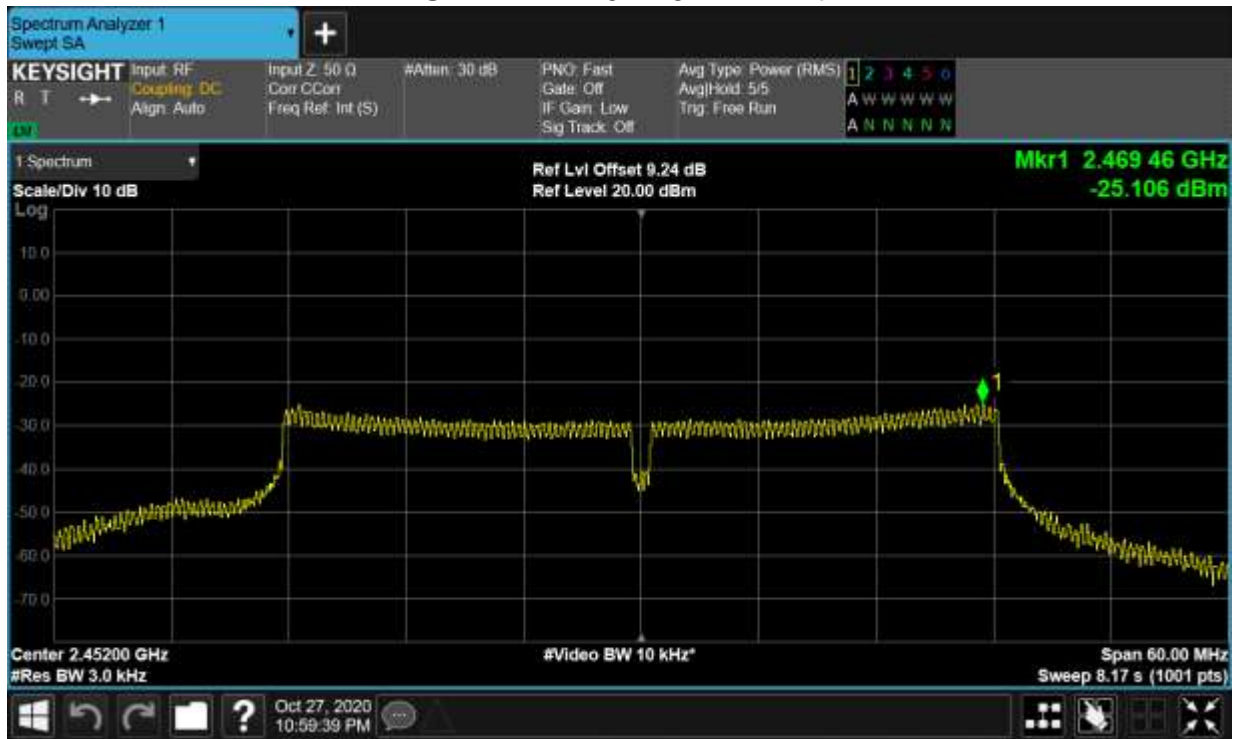

Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | -51.97 | -30 | Pass |
| NVNT | b | 2462 | Ant1 | -53.34 | -30 | Pass |
| NVNT | g | 2412 | Ant1 | -42.92 | -30 | Pass |
| NVNT | g | 2462 | Ant1 | -48.57 | -30 | Pass |
| NVNT | n20 | 2412 | Ant1 | -41.14 | -30 | Pass |
| NVNT | n20 | 2462 | Ant1 | -48.34 | -30 | Pass |
| NVNT | n40 | 2422 | Ant1 | -44.91 | -30 | Pass |
| NVNT | n40 | 2452 | Ant1 | -35.15 | -30 | Pass |

Band Edge NVNT b 2412MHz Ant1 Ref



Band Edge NVNT b 2412MHz Ant1 Emission



Band Edge NVNT b 2462MHz Ant1 Ref



Band Edge NVNT b 2462MHz Ant1 Emission



Band Edge NVNT g 2412MHz Ant1 Ref



Band Edge NVNT g 2412MHz Ant1 Emission




Band Edge NVNT g 2462MHz Ant1 Ref



Band Edge NVNT g 2462MHz Ant1 Emission




Band Edge NVNT n20 2412MHz Ant1 Ref

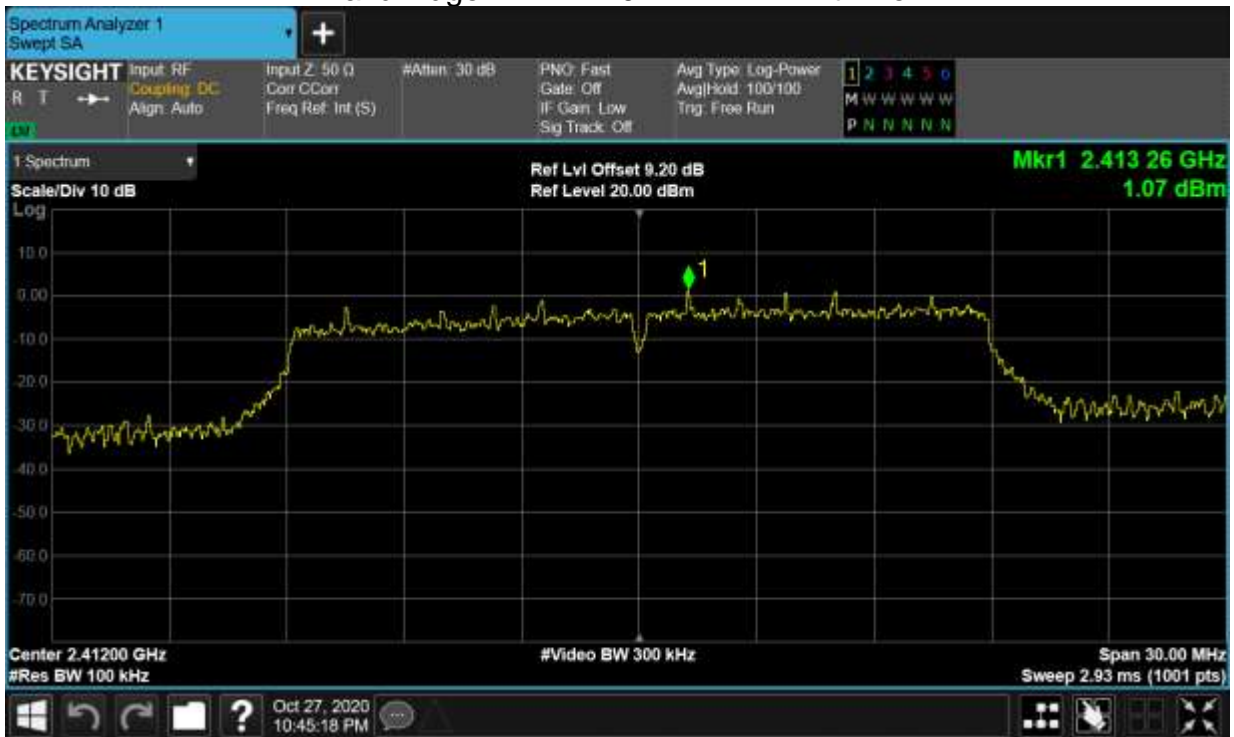

Band Edge NVNT n20 2412MHz Ant1 Emission



Band Edge NVNT n20 2462MHz Ant1 Ref

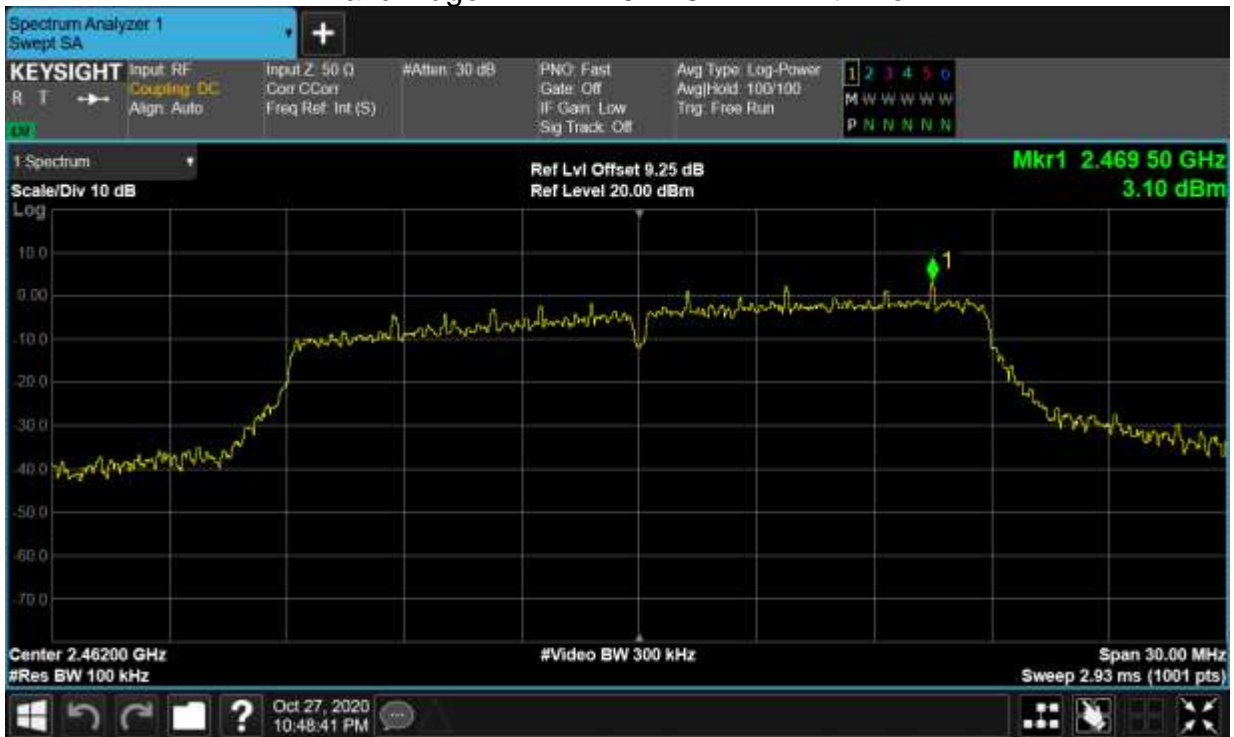

Band Edge NVNT n20 2462MHz Ant1 Emission



Band Edge NVNT n40 2422MHz Ant1 Ref




Band Edge NVNT n40 2422MHz Ant1 Emission



Band Edge NVNT n40 2452MHz Ant1 Ref



Band Edge NVNT n40 2452MHz Ant1 Emission

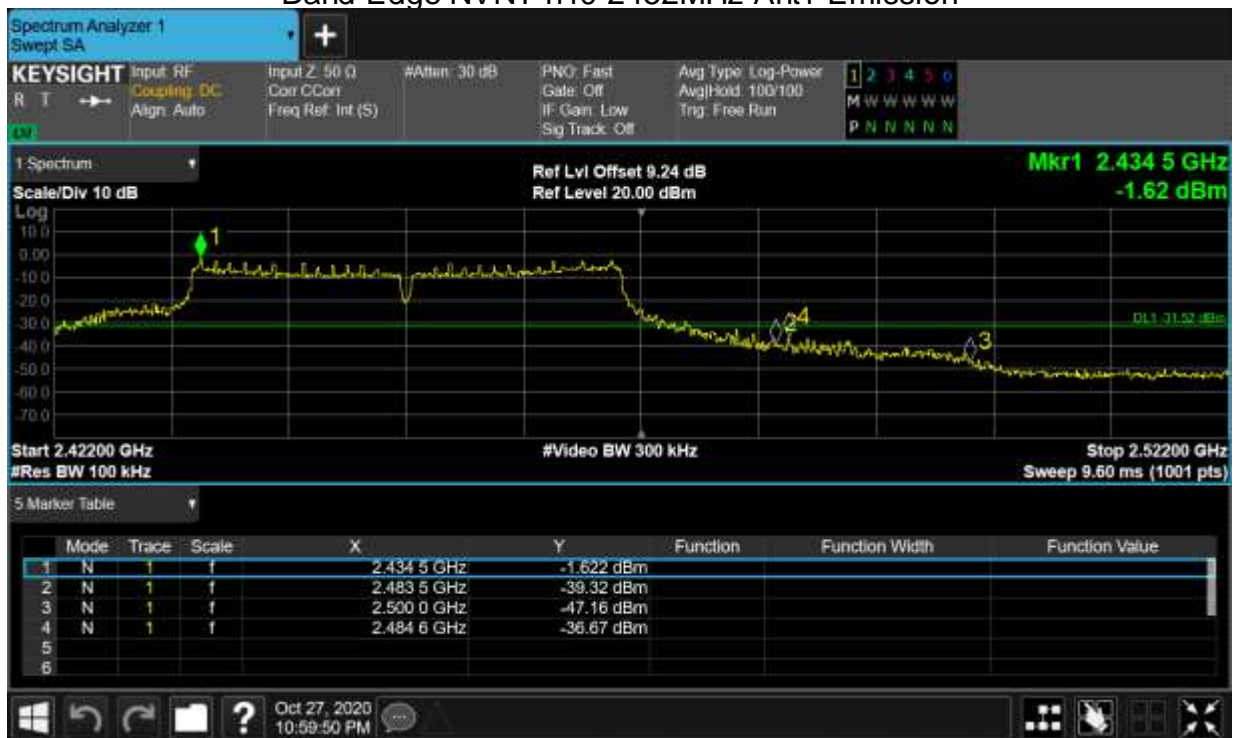

Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT | b | 2412 | Ant1 | -44.01 | -30 | Pass |
| NVNT | b | 2437 | Ant1 | -45.74 | -30 | Pass |
| NVNT | b | 2462 | Ant1 | -44.39 | -30 | Pass |
| NVNT | g | 2412 | Ant1 | -44.66 | -30 | Pass |

| | | | | | | |
|------|-----|------|------|--------|-----|------|
| NVNT | g | 2437 | Ant1 | -46.78 | -30 | Pass |
| NVNT | g | 2462 | Ant1 | -47.23 | -30 | Pass |
| NVNT | n20 | 2412 | Ant1 | -44.76 | -30 | Pass |
| NVNT | n20 | 2437 | Ant1 | -52.57 | -30 | Pass |
| NVNT | n20 | 2462 | Ant1 | -44.87 | -30 | Pass |
| NVNT | n40 | 2422 | Ant1 | -45.61 | -30 | Pass |
| NVNT | n40 | 2437 | Ant1 | -46.49 | -30 | Pass |
| NVNT | n40 | 2452 | Ant1 | -37.77 | -30 | Pass |


Tx. Spurious NVNT b 2412MHz Ant1 Ref



Tx. Spurious NVNT b 2412MHz Ant1 Emission



Tx. Spurious NVNT b 2437MHz Ant1 Ref

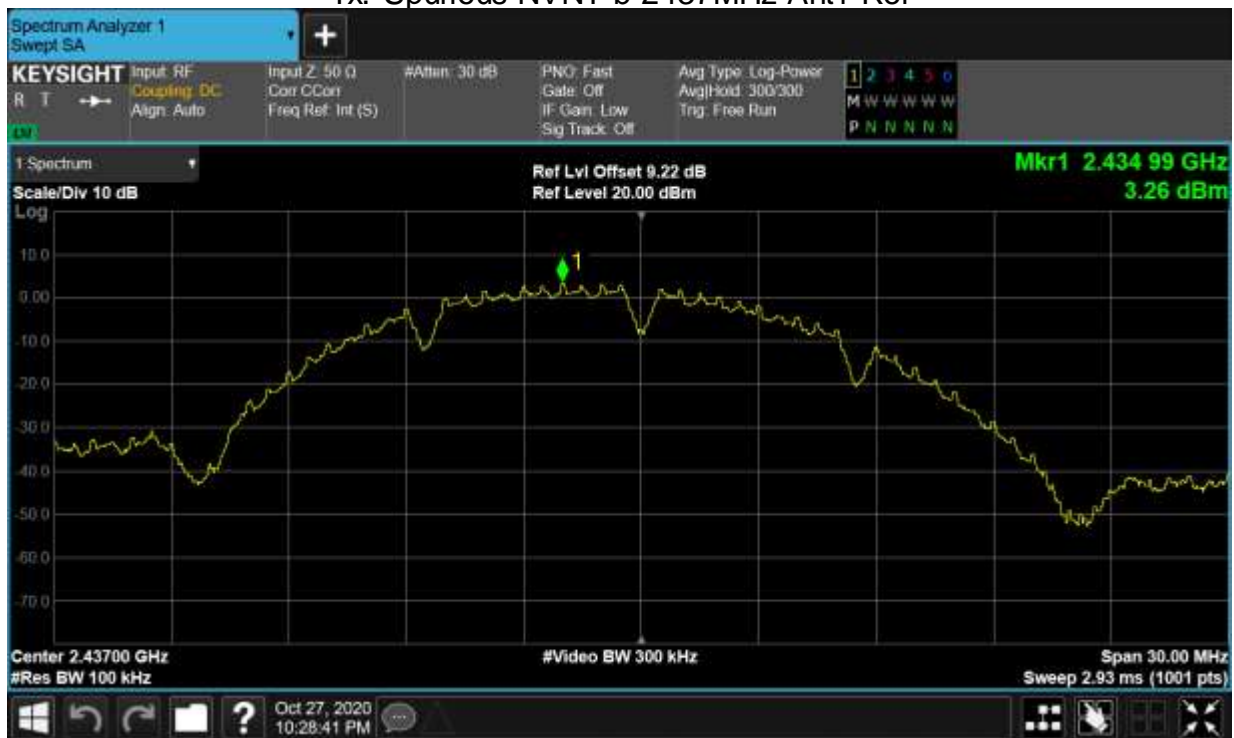

Tx. Spurious NVNT b 2437MHz Ant1 Emission



Tx. Spurious NVNT b 2462MHz Ant1 Ref



Tx. Spurious NVNT b 2462MHz Ant1 Emission




Tx. Spurious NVNT g 2412MHz Ant1 Ref




Tx. Spurious NVNT g 2412MHz Ant1 Emission




Tx. Spurious NVNT g 2437MHz Ant1 Ref

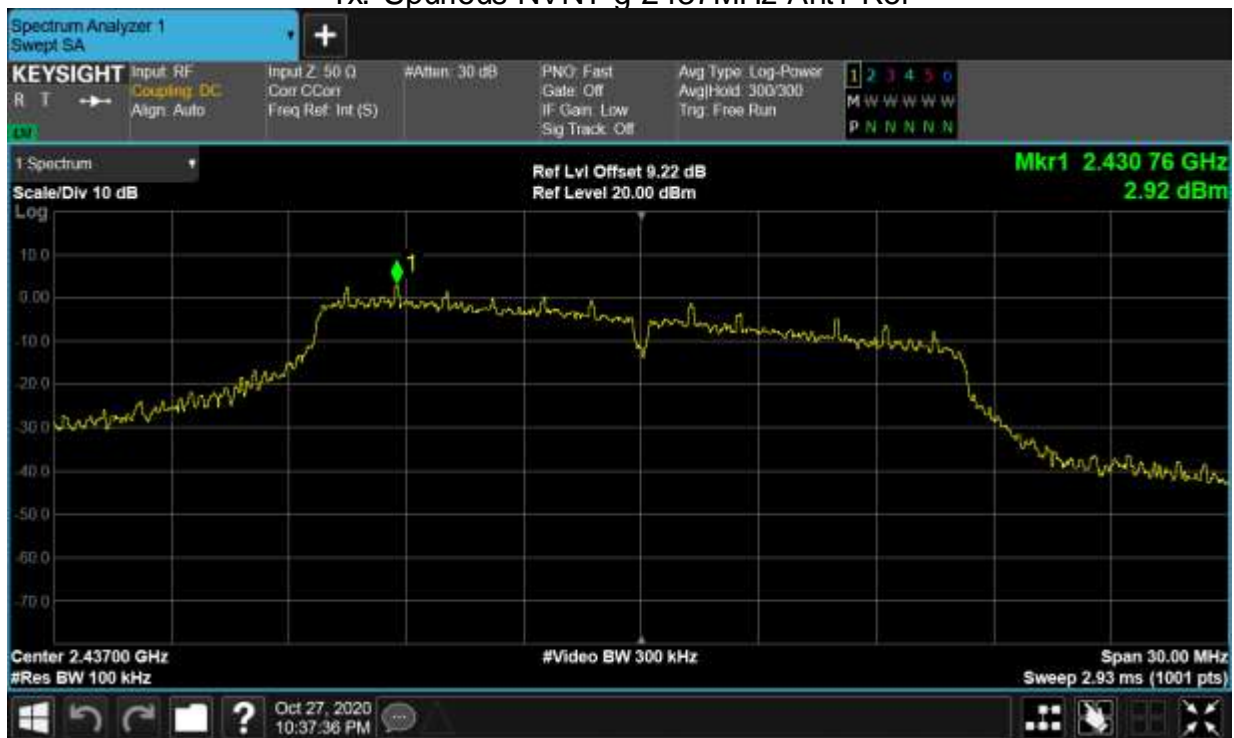

Tx. Spurious NVNT g 2437MHz Ant1 Emission

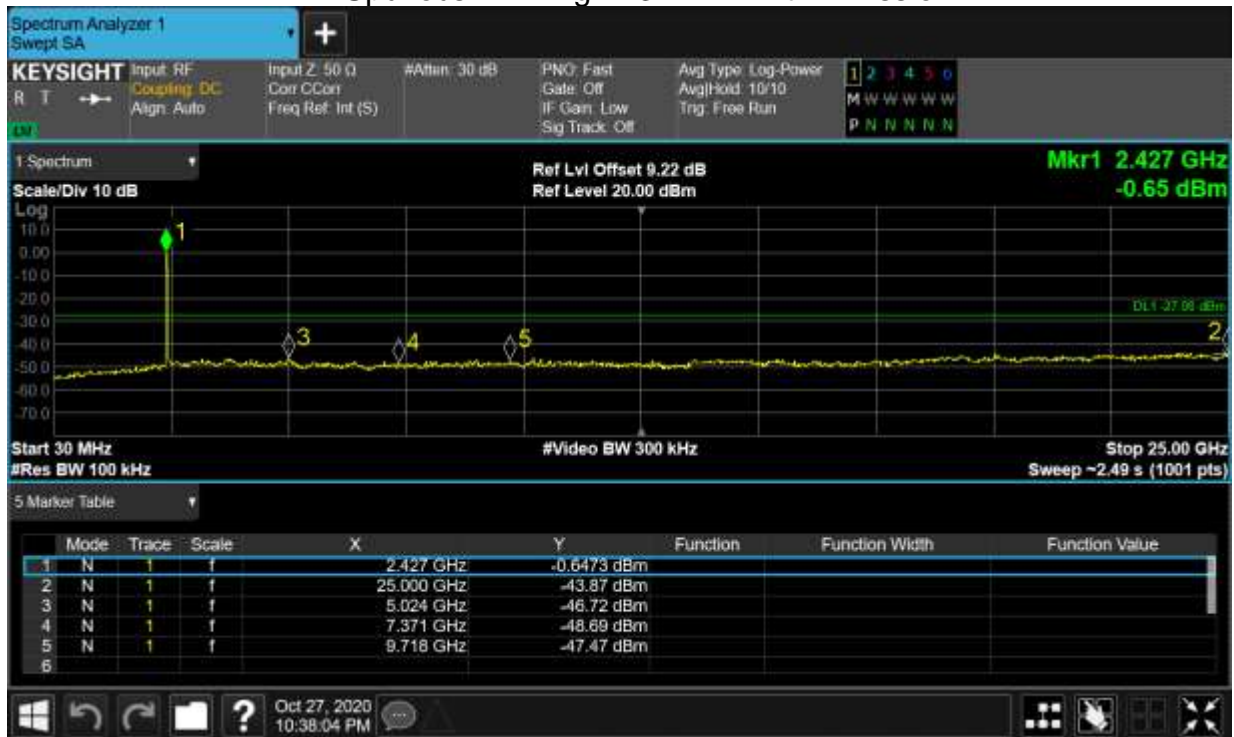

Tx. Spurious NVNT g 2462MHz Ant1 Ref

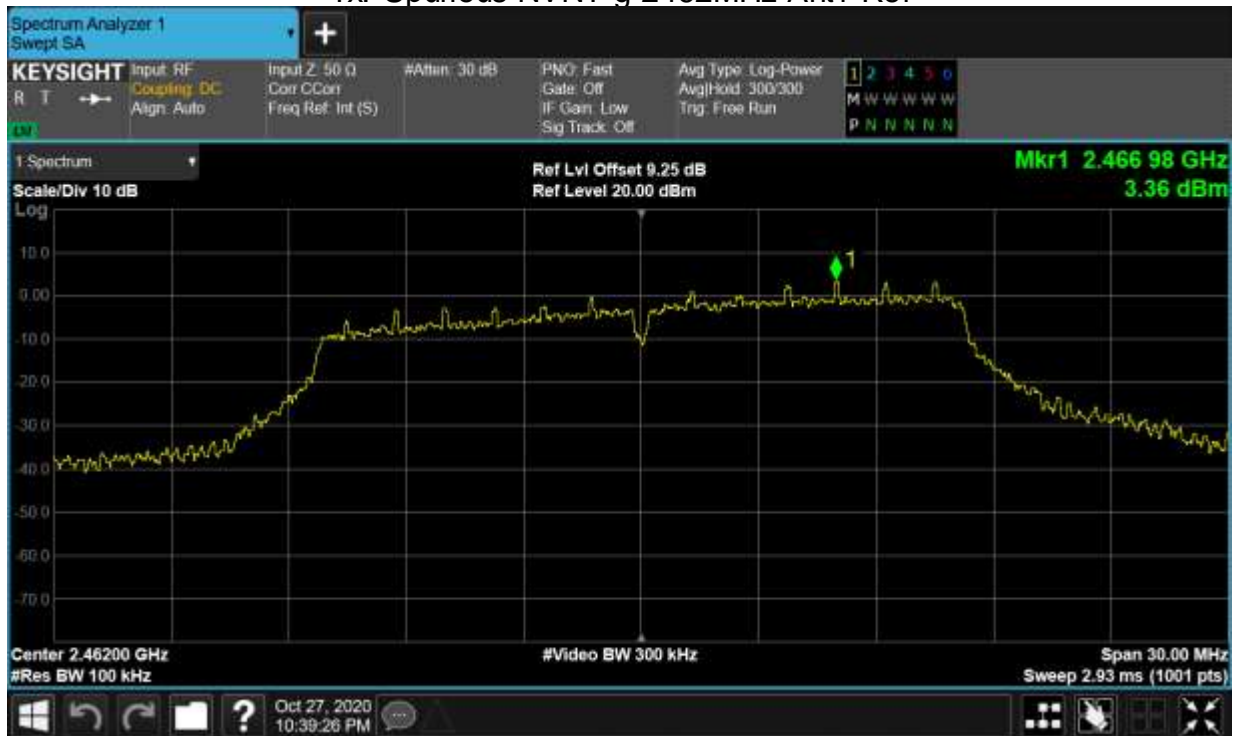

Tx. Spurious NVNT g 2462MHz Ant1 Emission



Tx. Spurious NVNT n20 2412MHz Ant1 Ref




Tx. Spurious NVNT n20 2412MHz Ant1 Emission



Tx. Spurious NVNT n20 2437MHz Ant1 Ref



Tx. Spurious NVNT n20 2437MHz Ant1 Emission

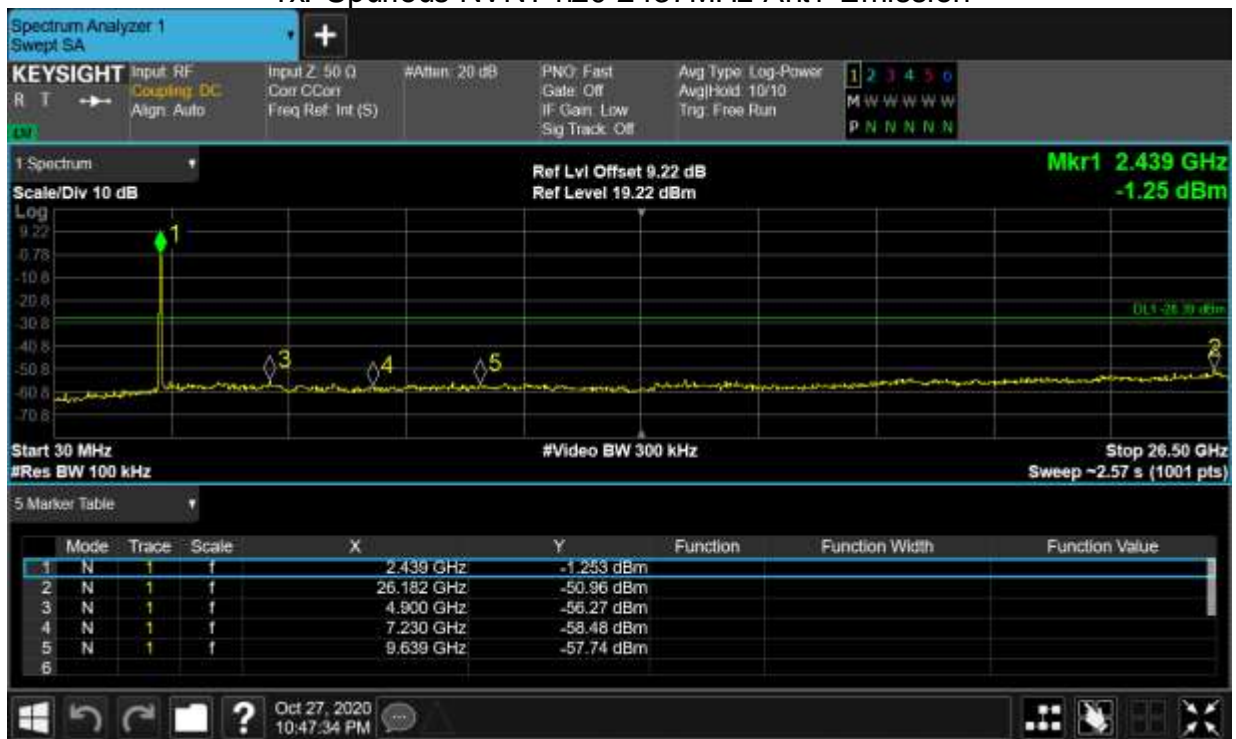

Tx. Spurious NVNT n20 2462MHz Ant1 Ref



Tx. Spurious NVNT n20 2462MHz Ant1 Emission



Tx. Spurious NVNT n40 2422MHz Ant1 Ref




Tx. Spurious NVNT n40 2422MHz Ant1 Emission



Tx. Spurious NVNT n40 2437MHz Ant1 Ref



Tx. Spurious NVNT n40 2437MHz Ant1 Emission

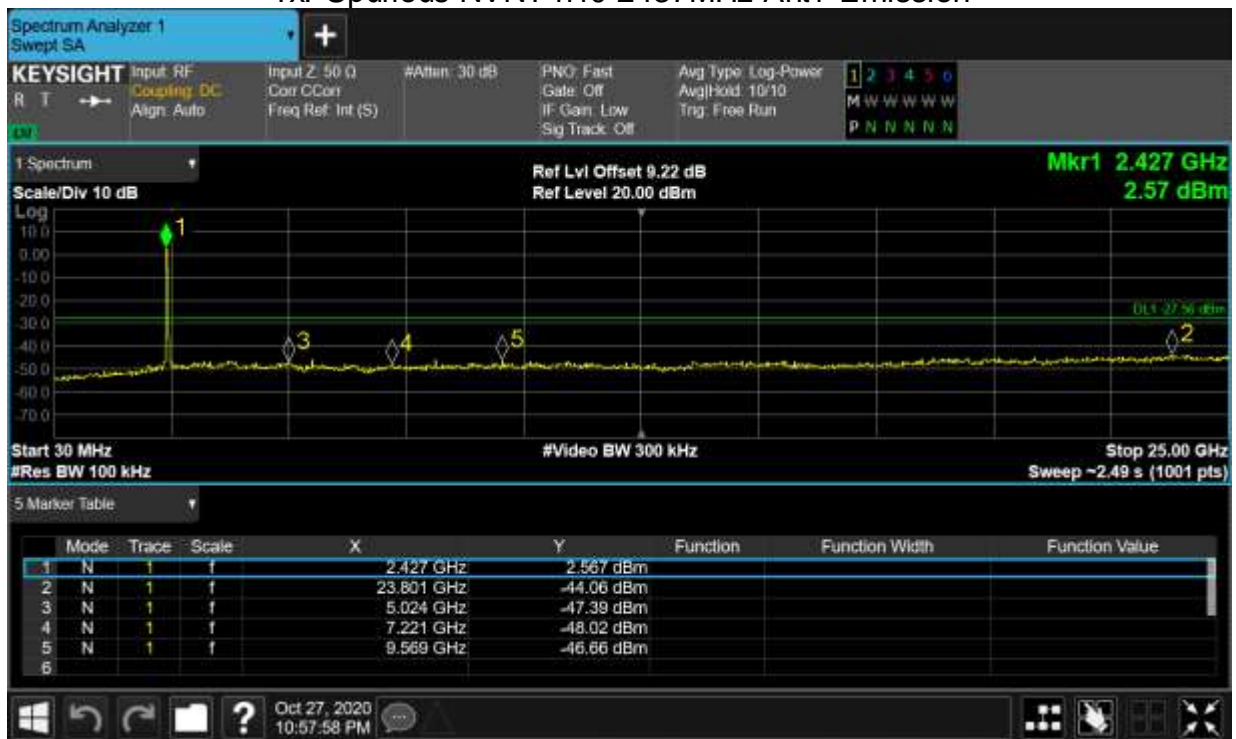

Tx. Spurious NVNT n40 2452MHz Ant1 Ref



Tx. Spurious NVNT n40 2452MHz Ant1 Emission



-----End of report-----