



Certificate # 2861.01



Page 1 of 236

# Test Report

Verified code: 724460

Report No.: E202206154388-1

Customer: TowerIQ, Inc.  
Address: 13723 Riverport Drive C/O Potter Electric Signal Company Saint Louis, MO 63043  
Sample Name: Public safety signal booster  
Sample Model: GuardianB1/2W  
Receive Sample Date: Jun.17,2022  
Test Date: Jun.20,2022 ~ Jul.02,2022  
Reference Document: FCC PART 90-- PRIVATE LAND MOBILE RADIO SERVICES  
Test Result: Pass  
FCC ID: 2AXVJGUARDBHUL

Prepared by: *Huang Lifang* Reviewed by: *Wu Haoting* Approved by: *Xiao Liang*

GUANGZHOU GRG METROLOGY & TEST CO., LTD.

Issued Date: 2022-07-18

GUANGZHOU GRG METROLOGY & TEST CO., LTD.

Address: No.163,Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China  
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



## Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. Without the agreement of the laboratory, the client is not authorized to use the test results for unapproved propaganda.
6. The test report without CMA approval mark is only used for scientific research, teaching, internal quality control and other purposes.

## TABLE OF CONTENTS

1. Applicant information.....	5
1.1. Client information.....	5
1.2. Manufacturer and Factory.....	5
2. General description of EUT.....	5
2.1. Basic description of EUT.....	5
2.2. Test signal modulation description.....	6
2.2.1. Analog signals.....	6
2.2.2. Digital signals.....	6
2.3. Signal Booster control process.....	8
2.3.1. System block.....	8
2.3.2. Signal control process.....	8
3. Related documents.....	9
4. Test result summary.....	10
5. About Signal Booster.....	11
5.1.1. KDB 935210 D02 APPENDIX A3.1.....	11
5.1.2. FCC part 90.219 (a) Definitions.....	11
6. Test modes.....	12
7. Laboratory.....	13
7.1. Laboratory.....	13
7.2. Accreditations.....	13
8. Measurements uncertainty.....	14
9. Equipments used during test.....	15
10. Radio technical requirement specification.....	16
10.1. Test Frequencies.....	16
10.1.1. Requirements.....	16
10.1.2. Result.....	17
10.2. Input Signals.....	18
10.2.1. Requirements.....	18
10.2.2. Result:.....	18
10.2.3. Input Signals screenshot.....	19
10.3. AGC Threshold.....	44
10.3.1. Requirements.....	44
10.3.2. Test configuration.....	44
10.3.3. Test procedures.....	44
10.3.4. Test results.....	45
10.4. Out-of-band rejection.....	63
10.4.1. Requirements.....	63
10.4.2. Test configuration.....	63
10.4.3. Test procedures.....	63
10.4.4. Test results.....	64
10.4.5. Test screenshot.....	65
10.5. Input VS output Comparison.....	67
10.5.1. Requirements.....	67

10.5.2.	Test configuration .....	71
10.5.3.	Test procedures .....	71
10.5.4.	Test results .....	72
10.5.5.	Test screenshot.....	83
10.6.	Mean power and amplifier/booster gain .....	146
10.6.1.	Requirements .....	146
10.6.2.	Test configuration .....	146
10.6.3.	Test procedures .....	147
10.6.4.	Test results .....	148
10.7.	Noise figure.....	158
10.7.1.	Requirements .....	158
10.7.2.	Test configuration .....	158
10.7.3.	Test procedures .....	159
10.7.4.	Test results .....	160
10.7.5.	Test screenshot.....	161
10.8.	Out-of-band/out-of-block emissions .....	164
10.8.1.	Requirements .....	164
10.8.2.	Test configuration .....	165
10.8.3.	Test procedures .....	166
10.8.4.	Test results .....	167
10.8.5.	Test screenshot.....	171
10.9.	Conducted spurious emissions .....	195
10.9.1.	Limit.....	195
10.9.2.	Test configuration .....	195
10.9.3.	Test procedures .....	196
10.9.4.	Test results .....	197
10.9.5.	Test screenshot.....	199
10.10.	Frequency stability.....	207
10.10.1.	Limit.....	207
10.10.2.	Test configuration .....	208
10.10.3.	Test procedures .....	208
10.10.4.	Test results .....	210
10.11.	Radiated spurious emissions .....	216
10.11.1.	Requirements .....	216
10.11.2.	Test configuration .....	218
10.11.3.	Test procedures .....	218
10.11.4.	Test results .....	221
APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM .....		229
APPENDIX B. PHOTOGRAPHS OF EUT .....		233
B.1	External photos .....	233

## 1. Applicant information

### 1.1. Client information

Name: TowerIQ, Inc.  
Address: 13723 Riverport Drive C/O Potter Electric Signal Company Saint Louis, MO 63043

### 1.2. Manufacturer and Factory

Manufacture Name: TowerIQ, Inc. (Shenzhen Office)  
Address: NO 8403A 4th floor, Xixiang Innovation Park Commercial Building, Qianmu Property, Guxing Community, Xixiang Street, Bao 'an District, Shenzhen  
Factory: TowerIQ, Inc.  
Address: 13723 Riverport Drive C/O Potter Electric Signal Company Saint Louis, MO 63043

## 2. General description of EUT

### 2.1. Basic description of EUT

Product Name: Public safety signal booster  
Product Model: GuardianB1/2W  
Adding Model: /  
Trade Name: TowerIQ  
Power Supply: Typical working voltage: AC 110V, 50/60Hz  
Power cord: AC power cord  
Frequency Band: 700MHz Band:  
Downlink: 758MHz ~ 775MHz, Uplink: 788MHz ~ 805MHz  
800MHz Band:  
Downlink: 851MHz ~ 861MHz, Uplink: 806MHz ~ 816MHz  
Nominal Output Power: Downlink: 27dBm  
Uplink: 27dBm  
Nominal System Gain: Downlink: 80dB  
Uplink: 80dB  
EUT Operating Temperature: -20 °C to +50 °C  
Operating Humidity: 5% to 95%  
Antenna Type: N/A<sup>①</sup>

NOTE 1: This EUT is a Broadband device, which belongs to Class B signal booster.

NOTE 2: <sup>①</sup>It's an indoor device, the EUT does not provide antenna by manufacturer's statement, but it is required that the sum of antenna gain and cable loss shall not exceed 9dBi for downlink and 9dBi for uplink when the project is used by manufacturer's statement.

## 2.2. Test signal modulation description

Reference to FCC PART 2.202 (g), Table of necessary bandwidths follow:

## 2.2.1. Analog signals

Emission Designator	Description	Modulation type	M (modulation Freq, kHz)	R (Rate, baud)	D (Deviation, kHz)	K (numeric constant)	S (Symbols)	Bandwidth Calculation	Necessary Bandwidth
11K0F3E	Narrowband Analog FM Voice	FM	3.0	--	2.5	1.0	--	$B_n=2M+2DK$	11.0
16K0F3E	Wideband Analog FM Voice	FM	3.0	--	5.0	1.0	--	$B_n=2M+2DK$	16.0

## 2.2.2. Digital signals

Emission Designator	Description	Modulation type	M (modulation Freq, kHz)	R (Rate, baud)	D (Deviation, kHz)	K (numeric constant)	S (Symbols)	Bandwidth Calculation	Necessary Bandwidth
8K10F1E	P25 Phase I C4FM Voice	4FSK	--	9600	1.8	0.916	4	$B_n=(R/\log_2S)+2DK$	8.1
8K10F1D	P25 Phase I C4FM Data	4FSK	--	9600	1.8	0.916	4	$B_n=(R/\log_2S)+2DK$	8.1
8K10F1W	P25 Phase II H-CPM Voice/Data	4FSK	--	9600	1.8	0.916	4	$B_n=(R/\log_2S)+2DK$	8.1
9K80F1E	P25 Phase II H-DQPSK Voice	QPSK	--	12000	--	0.817	4	$B_n=2RK/\log_2S$	9.8
9K80F1D	P25 Phase II H-DQPSK Data	QPSK	--	12000	--	0.817	4	$B_n=2RK/\log_2S$	9.8
21K0F1E	Tetra Voice	$\pi/4$ DQPSK	--	9600	--	2.188	4	$B_n=2RK/\log_2S$	21.0
21K0F1D	Tetra Data	$\pi/4$ DQPSK	--	9600	--	2.188	4	$B_n=2RK/\log_2S$	21.0
5M00G7D	Public Safety LTE	8PSK	--	5000	--	1	4	$B_n=2RK/\log_2S$	5000
10M0G7D	Public Safety LTE	8PSK	--	10000	--	1	4	$B_n=2RK/\log_2S$	10000
5M00G7W	Public Safety LTE	QAM	--	5000	--	--	4	$B_n=2R/\log_2S$	5000
10M0G7W	Public Safety LTE	QAM	--	10000	--	--	4	$B_n=2R/\log_2S$	10000
5M00W7D	Public Safety LTE	OFDM	--	-	--	16	--	$B_n=312.5*K$	5000
10M0W7D	Public Safety LTE	OFDM	--	-	--	32	--	$B_n=312.5*K$	10000
5M00F9W	Public Safety LTE	QPSK	--	5000	--	1	4	$B_n=2RK/\log_2S$	5000
10M0F9W	Public Safety LTE	QPSK	--	10000	--	1	4	$B_n=2RK/\log_2S$	10000

NOTE: In the above test signal modes, the typical signal and the worst mode signal are used as representatives in this test. The specific test signal types are as follows:

Emission Designator	Description	Modulation type	M (modulation Freq, kHz)	R (Rate, baud)	D (Deviation, kHz)	K (numeric constant)	S (Symbols)	Bandwidth Calculation	Necessary Bandwidth
16K0F3E	Wideband Analog FM Voice	FM	3.0	--	5.0	1.0	--	$B_n=2M+2DK$	16.0
8K10F1D	P25 Phase I C4FM Data	4FSK	--	9600	1.8	0.916	4	$B_n=(R/\log_2S)+2DK$	8.1
9K80F1D	P25 Phase II H-DQPSK Data	QPSK	--	12000	--	0.817	4	$B_n=2RK/\log_2S$	9.8
21K0F1D	Tetra Data	$\pi/4$ DQPSK	--	9600	--	2.188	4	$B_n=2RK/\log_2S$	21.0
5M00F9W	Public Safety LTE	QPSK	--	5000	--	1	4	$B_n=2RK/\log_2S$	5000
10M0F9W	Public Safety LTE	QPSK	--	10000	--	1	4	$B_n=2RK/\log_2S$	10000

----- The following blanks -----

## 2.3. Signal Booster control process

### 2.3.1. System block

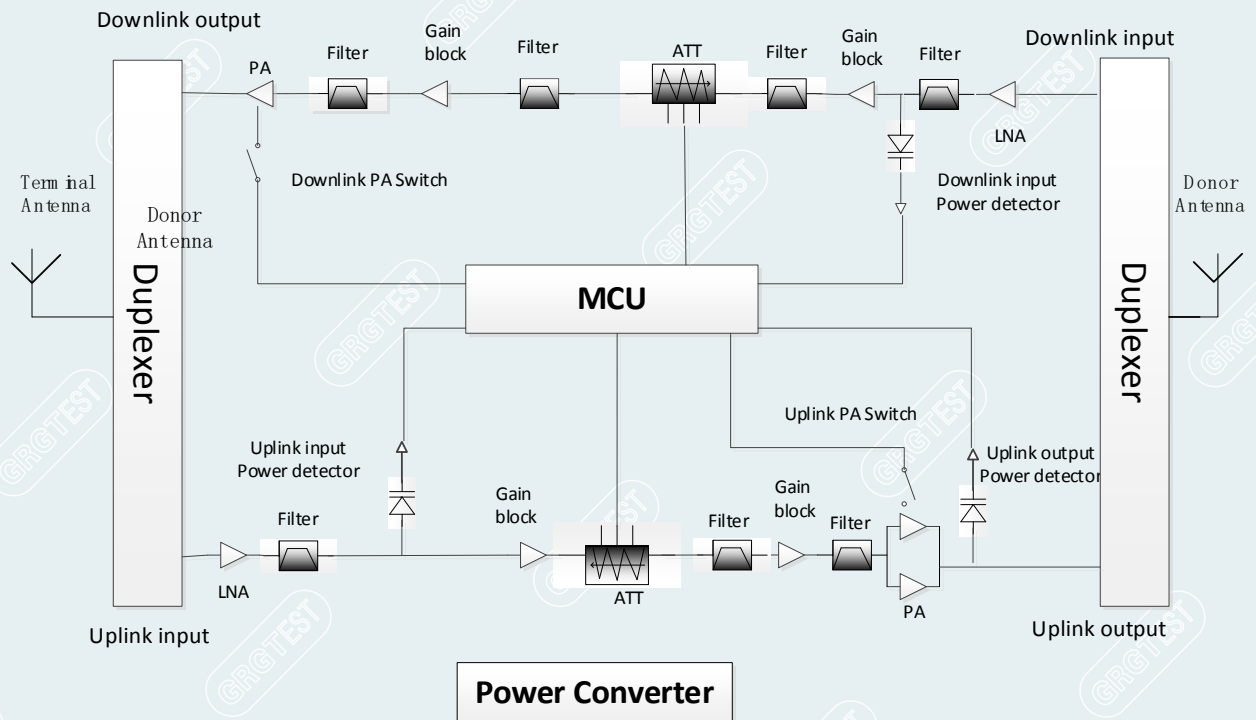


Figure 2-1 System block diagram

The block diagram is composed of the following units:

- Uplink input Power detector;
- Uplink output Power detector;
- Uplink PA switch integrated in PA;
- Downlink input Power detector;
- Downlink PA switch integrated in PA, and so on

### 2.3.2. Signal control process

Above is the system block diagram, this system can enhance mobile communication signal. In the downlink, the BTS signals are received by donor antenna of the repeater. After the duplexer, the signals are sent to the LNA module for pre-amplification and digital RF integrated module for digital filtering and frequency conversion.

Then the DL signals will be sent to downlink PA to amplify power and filter via duplexer. After amplification, the signals are transmitted via the MT port to the service antenna.

In the uplink, the mobile signals are received by the service antenna. After the MT port integrated duplexer, the signals are sent to the LNA, integrated module for digital filtering, then to PA for power amplification and to duplexer.

After that, the uplink signals are sent to the donor antenna for transmission back to the BTS.



**3. Related documents**

FCC PART 2(6/22/2022)

FCC PART 90 (6/22/2022)

KDB 935210 D05 Indus Booster Basic Meas v01r04

KDB 935210 D02 Signal Boosters Certification v04r02

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA 603-E-2016

ANSI/TIA-102.CAAA-E-2016

ANSI C63.26-2015

----- **The following blanks** -----

**4. Test result summary**

Test Item	Test Requirements	Test Method	Reported	N/A
Test Frequency	KDB 935210 D02 APPENDIX D/Table D.3, FCC PART 2.1057, ANSI C63.26-2015 Clause 5.1.2	/	Reported only	
Input Signals	KDB 935210 D05 clause 4.1	/	Reported only	
AGC Threshold	KDB 935210 D05 clause 4.2	/	Reported only	
Out of Band Rejection	FCC PART 90.219 (a) FCC PART 90.219 (d)((7))	KDB 935210 D05 clause 4.3	<input checked="" type="checkbox"/>	
Input VS output Comparison	KDB 935210 D05 clause 4.4 FCC PART 2.1049(c) FCC PART 90.210 FCC PART 90.219 (e)(4)(ii) FCC PART 90.219 (e)(4)(iii)	KDB 935210 D05 clause 4.4	<input checked="" type="checkbox"/>	
Mean power and amplifier/booster gain	KDB 935210 D05 clause 4.5 FCC PART 90.219 (e)(1)	KDB 935210 D05 clause 4.5	<input checked="" type="checkbox"/>	
Noise Figure	KDB 935210 D05 clause 4.6 FCC PART 90.219 (e)(2)	KDB 935210 D05 clause 4.6	<input checked="" type="checkbox"/>	
Out-of-band/out-of-block emissions	KDB 935210 D05 clause 4.7.2 FCC PART 2.1051 FCC PART 90.219 (d)(6)(i) FCC PART 90.219 (e)(3)	KDB 935210 D05 clause 4.7.2	<input checked="" type="checkbox"/>	
Conducted spurious emissions	KDB 935210 D05 clause 4.7.3 FCC PART 2.1051 FCC PART 90.219 (e)(3)	KDB 935210 D05 clause 4.7.3	<input checked="" type="checkbox"/>	
Frequency stability	KDB 935210 D05 clause 4.8 FCC PART 2 1055(a)(2) FCC PART 90.213 and 90.539 FCC PART 90.219 (e)(4)(i)	KDB 935210 D05/4.8 FCC PART 2 1055(b)	<input checked="" type="checkbox"/>	
Radiated spurious emissions	KDB 935210 D05 clause 4.9 FCC PART 2.1053 FCC PART 90.219 (e)(3)	KDB 935210 D05 clause 4.9 ANSIC63.26-2015/5.5 ANSI/TIA 603-E-2016 ANSI/TIA-102.CAAA-E-2016	<input checked="" type="checkbox"/>	

NOTE:  mean that test needs to be performed.

## 5. About Signal Booster

According to the basic information of EUT and FCC part 90.219 (a) and KDB 935210 D02 APPENDIXA3.1 rules, this EUT belongs to PART 90 class B Industrial signal booster and it is a non SMR.

### 5.1.1. KDB 935210 D02 APPENDIXA3.1

#### A.3.1 Signal Booster (Section 90.219)

A **Signal Booster (Section 90.219)** is a device or system that automatically receives, amplifies, and retransmits signals from wireless stations into and out of building interiors, tunnels, shielded outdoor areas and other locations where these signals would otherwise be too weak for reliable communications. Signal booster systems may contain both Class A and Class B signal boosters as components. [Section 90.219(a)]

All **Section 90.219 boosters** are a type of Industrial Signal Booster, and are classified as either **Class A boosters** (narrowband) or **Class B boosters** (wideband). [R11] [Order, ¶ 15]

Note also that Consumer Signal Boosters are not defined for PLMRS or PSRS because licensees are considered to operate private services. Part 90 PLMR licensees typically obtain authorizations for individual narrowband channels or groups of channels to satisfy their own communication needs. Moreover, many Part 90 channels are interleaved and a licensee's channels may not be adjacent to one another, which presents unique considerations for signal boosters used with Part 90 PLMR services. [Order, ¶ 144]

**a) Class A signal booster:** A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz. [Section 90.219(a)]

**b) Class B signal booster:** A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz. [Section 90.219(a)]

Class B signal boosters may be deployed only at fixed locations; mobile operation of Class B signal boosters is prohibited (after November 1, 2014). [Section 90.219(d)(4)]

Except for signal boosters incorporating distributed antenna systems (DAS) and installed in buildings, the passband of a Class B booster shall not encompass both commercial services (such as ESMR and Cellular Radiotelephone) and Part 90 Land Mobile and Public Safety Services. [Section 90.219(d)(7)]

### 5.1.2. FCC part 90.219 (a) Definitions

#### §90.219 Use of signal boosters.

This section contains technical and operational rules allowing the use of signal boosters in the Private Land Mobile Radio Services (PLMRS). Rules for signal booster operation in the Commercial Mobile Radio Services under part 90 are found in §20.21 of this chapter.

<https://www.ecfr.gov/cgi-bin/text-idx?SID=2097cbedce8abb94d012e95530a44e05&mc=true&node=pt47.5.90&rgn=div5>

2020/6/15

Electronic Code of Federal Regulations (eCFR)

(a) *Definitions.* The definitions in this paragraph apply only to the rules in this section.

*Class A signal booster.* A signal booster designed to retransmit signals on one or more specific channels. A signal booster is deemed to be a Class A signal booster if none of its passbands exceed 75 kHz.

*Class B signal booster.* A signal booster designed to retransmit any signals within a wide frequency band. A signal booster is deemed to be a Class B signal booster if it has a passband that exceeds 75 kHz.

**6. Test modes**

Test modes	<p>Downlink mode: “OUTSIDE” port of the EUT is connected to the signal generator, “INSIDE” port is connected to the spectrum analyzer through attenuator, and the power of the EUT is turned on and signal is sent.</p> <p>Uplink mode: “INSIDE” port of the EUT is connected to the signal generator, “OUTSIDE” port is connected to the spectrum analyzer through attenuator, and the power of the EUT is turned on and signal is sent.</p>
------------	---

----- The following blanks -----

## 7. Laboratory

### 7.1. Laboratory

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of Guangzhou GRG Metrology & Test Co., Ltd.

<b>Add.:</b>	No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District Shenzhen, 518110, People's Republic of China.
<b>P.C.:</b>	518110
<b>Tel :</b>	0755-61180008
<b>Fax:</b>	0755-61180008

### 7.2. Accreditations

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

**USA** A2LA(Certificate #2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

**Canada** ISED (Company Number: 24897, CAB identifier:CN0069)

**USA** FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.grgtest.com>

----- The following blanks -----

### 8. Measurements uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	30MHz~1000MHz	4.3dB
	Horizontal	1GHz~18GHz	5.6dB
	Vertical	30MHz~1000MHz	4.3dB
	Vertical	1GHz~18GHz	5.6dB

Measurement	Uncertainty
RF frequency	$6.0 \times 10^{-6}$
RF power conducted	0.78dB
Occupied channel bandwidth	0.40%
Unwanted emission, conducted	0.68dB
Humidity	6.0%
Temperature	2.0°C

Note: This uncertainty represents an expanded uncertainty factor of  $k=2$ .

----- The following blanks -----

**9. Equipments used during test**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Vector Signal Generator	Agilent	N5182A	MY50142870	2022-09-04
Vector Signal Generator	R&S	SMBV 100B	101965	2022-08-10
Vector Signal Generator	R&S	SMBV 100A	260996	2022-12-29
Signal Generator	R&S	SMB 100A	109290	2022-12-16
Signal Generator	Aglient	E4438C	MY42082200	2023-01-26
Spectrum analyzer	R&S	FSV30	104381	2022-12-10
Spectrum analyzer	R&S	FSV30	103264	2022-10-31
Power splitter	WEINSCHEL	1580	SL767	2023-02-10
NFA Series Noise Figure Analyzer	Agilent	34N8975A	MY45272551	2022-12-16
SNS Series Noise Source	Agilent	N4000A	MY53232432	2023-04-12
Frequency meter	Suin	SS7300	6E5042030	2023-02-09
Voltage regulator	Qingdaoqingzhi	TDGC2J-5	GRGTAG2013026	/
AC variable frequency power supply	GuangzhouYUXI	YT-11010	4550	2023-03-28
Isolator	China guangshun	TG101A 700~800	121003889	/
Attenuation	Shanghaihua xiang	TS5-40dB-4G	04062229	/
Temp & Humidity chamber	HOSON	ZB-TY800H	180810001	2022-07-20
<b>Radiated emissions</b>				
Receiver	R&S	ESU26	100526	2023-01-20
Receiver	R&S	ESU40	100106	2022-10-10
Bi-log Antenna	Schwarzbeck	VULB 9160	9160-3402	2022-10-27
Bi-Log Antenna	ETS-lindgren	3142C	75971	2022-12-14
Horn Antenna	Schwarzbeck	BBHA9120	286	2022-09-11
Horn Antenna	ETS	3117 C	00075824	2023-01-15
Broadband Amplifiers	Schwarzbeck	BBV9718	00246	2022-08-16
Semi-anechoic chamber	ETS-lindgren	966(RFD-F/A-100)	3730	2022-09-19

**10. Radio technical requirement specification**

10.1. Test Frequencies

Test requirement: KDB 935210 D02 APPENDIX D/Table D.3  
 FCC PART 2.1057  
 ANSI C63.26-2015 Clause 5.1.2

10.1.1. Requirements

According to FCC regulations, FCC part 2.1057, ANSI C63.26-2015 clause 5.1.2 and KDB 935210 D02 Appendix D / table D.3 have relevant frequency band requirements.

(1) FCC PART 2.1057

**§2.1057 Frequency spectrum to be investigated.**

(a) In all of the measurements set forth in §§2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

- (1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the equipment operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the equipment operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

(2) ANSI C63.26-2015 Clause 5.1.2

**5.1.2 Number of fundamental frequencies to be tested in EUT transmit band**

**5.1.2.1 General requirement**

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

<sup>24</sup> See 47 CFR 2.1057.

23  
 Copyright © 2016 IEEE. All rights reserved.

Authorized licensed use limited to: University of Waterloo. Downloaded on April 08, 2016 at 00:41:03 UTC from IEEE Xplore. Restrictions apply.

ANSI C63.26-2015  
 American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

**Table 2—Number of frequencies to be tested**

Frequency range over which EUT operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom



(3) KDB 935210 D02 APPENDIX D/Table D.3

<b>Section 90.219 purposes (for info only – see rules for details, also KDB Publication 634817 [R14])</b>				
Fl. (MHz)	–	Fl. (MHz)	Rule(s)	Misc. Notes
150	–	150.05	Federal (non-FCC)	
150.05	–	150.8	90.265	
150.8	–	162.0125	90	
162.0125	–	173.2	90.265	
173.2	–	173.4	90	
173.4	–	174	Federal (non-FCC)	
406.1	–	420	90.265	
420	–	421	ULS presently shows no licensees for 420-420.9 MHz	
421	–	430	90	
430	–	450	Not available under 90 Subparts B, C land mobile service	
450	–	470	90 (selected bands)	
470	–	512	90	
746	–	757	27.5(b)(3) Block C; 90 not available	
757	–	758	27.5(b)(1) Block A; 90 not available	
758	–	768	90-R, Public Safety (PS) Broadband (FirstNet)	B9B (LTE)
768	–	769	PS Guardband	
769	–	775	PS Narrowband	
775	–	776	27.5(b)(2) Block B; 90 not available	
776	–	787	27.5(b)(3) Block C; 90 not available	
787	–	788	27.5(b)(1) Block A; 90 not available	
788	–	798	90-R, Public Safety (PS) Broadband (FirstNet)	B9B (LTE)
798	–	799	PS Guardband	
799	–	805	PS Narrowband	
805	–	806	27.5(b)(2) Block B; 90 not available	
806	–	809	90 NPSPAC (PS) [90.617(a)(1)]	B9B/B9A
809	–	815	90 Interleaved PS; B/ILT; SMR [90.614(a); 90.613 ch. nos. 1-470] <sup>a</sup>	B9B/B9A
815	–	816	90 Expansion B/ILT; SMR [90.614(a); 90.613 ch. nos. 470-550] <sup>a</sup>	B9B/B9A
816	–	817	90 Guardband	B9B/B9A
817	–	824	CMRS 90 ESMR [90.614(b); 90.613 ch. nos. 551-830]	B21 90-S
824	–	849	22 H; 90 not available	B21
849	–	851	22 G; 90 not available	BOS
851	–	854	90 NPSPAC (PS) [90.617(a)(1)]	B9B/B9A
854	–	860	90 Interleaved PS; B/ILT; SMR [90.614(a); 90.613 ch. nos. 1-470] <sup>a</sup>	B9B/B9A
860	–	861	90 Expansion B/ILT; SMR [90.614(a); 90.613 ch. nos. 470-550] <sup>a</sup>	B9B/B9A
861	–	862	90 Guardband	B9B/B9A
862	–	869	CMRS 90 ESMR [90.614(b); 90.613 ch. nos. 551-830]	B21 90-S
869	–	894	22-H; 90 not available	B21
894	–	896	22-G; 90 not available	BOS
896	–	901	90 Interleaved B/ILT [90.617(c)] and SMR [90.617(f)]; UL (donor)	B21 90-S & B9B/B9A 90-S
901	–	902	24-D; 90 not available	B21
928	–	929	101; 90 not available <sup>b,c</sup>	BOS
929	–	930	90 <sup>d,e</sup>	B9B/B9A
930	–	931	24-D; 90 not available	B21
931	–	932	22-E; 90 not available	B21
932	–	935	101; 90 not available	BOS
935	–	940	90 Interleaved B/ILT [90.617(c)] and SMR [90.617(f)]; DL (server)	B21 90-S & B9B/B9A 90-S

The EUT will utilize bands:

700MHz Band: Downlink: 758MHz ~ 775MHz, Uplink: 788MHz ~805MHz
800MHz Band: Downlink: 851MHz ~861MHz, Uplink: 806MHz ~ 816MHz

10.1.2. Result

This project is only reported and checked, the frequency range of this EUT meets the above regulatory requirements.

## 10.2. Input Signals

Test requirement: KDB 935210 D05 clause 4.1

### 10.2.1. Requirements

KDB 935210 D05 clause 4.1

The procedures in this clause are specific to EUTs intended for operating in the Private Land Mobile Radio Services (PLMRS) and Public Safety Radio Services (PSRS)<sup>5</sup>, which are governed under the provisions and requirements of the Part 90 rules (i.e., Section 90.219 applies).

Table 1 depicts signal types associated with PLMRS operations, which are to be considered as test signals to be used in performing compliance testing on PLMRS amplifiers, repeaters, and industrial boosters. Not all of the procedures in this clause will require using each of the signals listed in Table 1, because for

<sup>5</sup> As explained in § 90.16, Public Safety Radio Services is part of the Public Safety Radio Pool, also known as the Public Safety Pool.

many EUTs a CW tone can adequately model the narrowband signals typically encountered within these services. For EUTs supporting digitally modulated signals, the intended operating signal types should be tested (e.g., P25 Phase 1, P25 Phase 2, TETRA, etc.), especially for PSRS devices. Devices intended for use in 700 MHz Public Safety Broadband spectrum shall be tested using a representative band-limited AWGN signal (99 % OBW of 4.1 MHz) or the applicable signal type (e.g., LTE).

**Table 1—Test signals for PLMRS devices**

<b>Emission Designator</b>	<b>Modulation</b>	<b>Occupied Bandwidth</b>	<b>Channel Bandwidth</b>	<b>Audio Frequency</b>
16K0F3E	FM	16 kHz	25 kHz	1 kHz
11K3F3E	FM	11.3 kHz	12.5 kHz	1 kHz
4K00F1E	FM	4 kHz	6.25 kHz	1 kHz
N/A	CW	N/A	N/A	N/A

### 10.2.2. Result:

Test Date (yy-mm-dd): 2022-06-20

Normal condition: Temp:24.5°C, Humid: 45%, Atmospheric Pressure:101kpa

Supply Voltage: AC 110V, 50Hz


This project is only reported and checked.

10.2.3. Input Signals screenshot


10.2.3.1. 700MHz Band

10.2.3.1.1. LTE 5MHz


10.2.3.1.1.1. Downlink

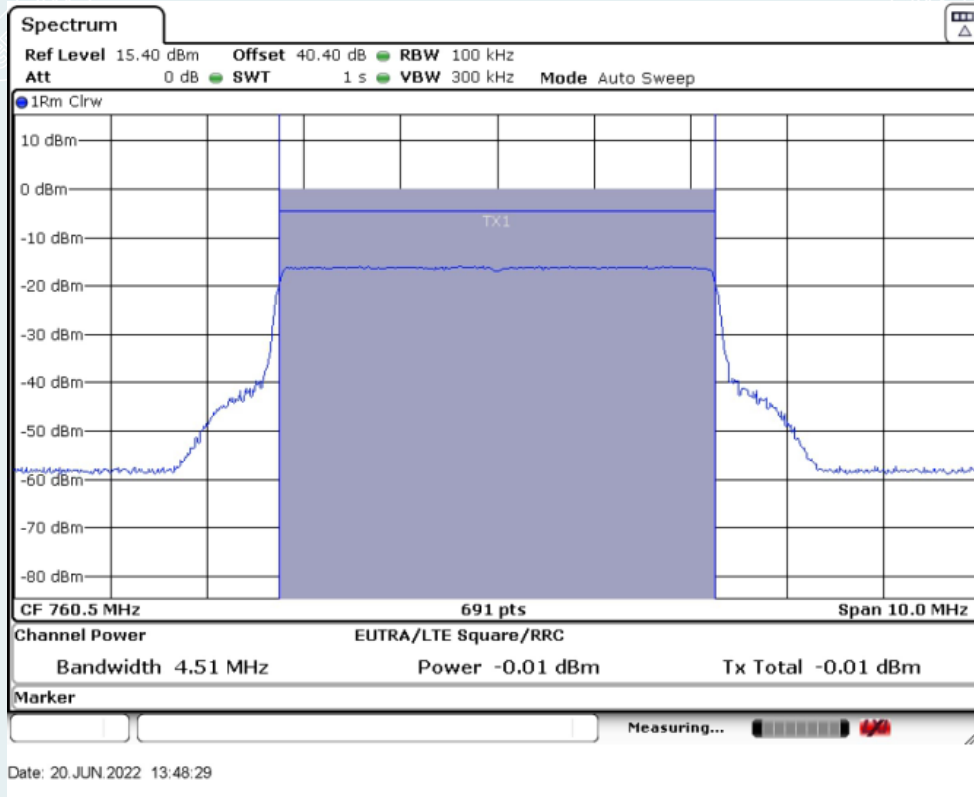

Low Frequency: 760.5MHz

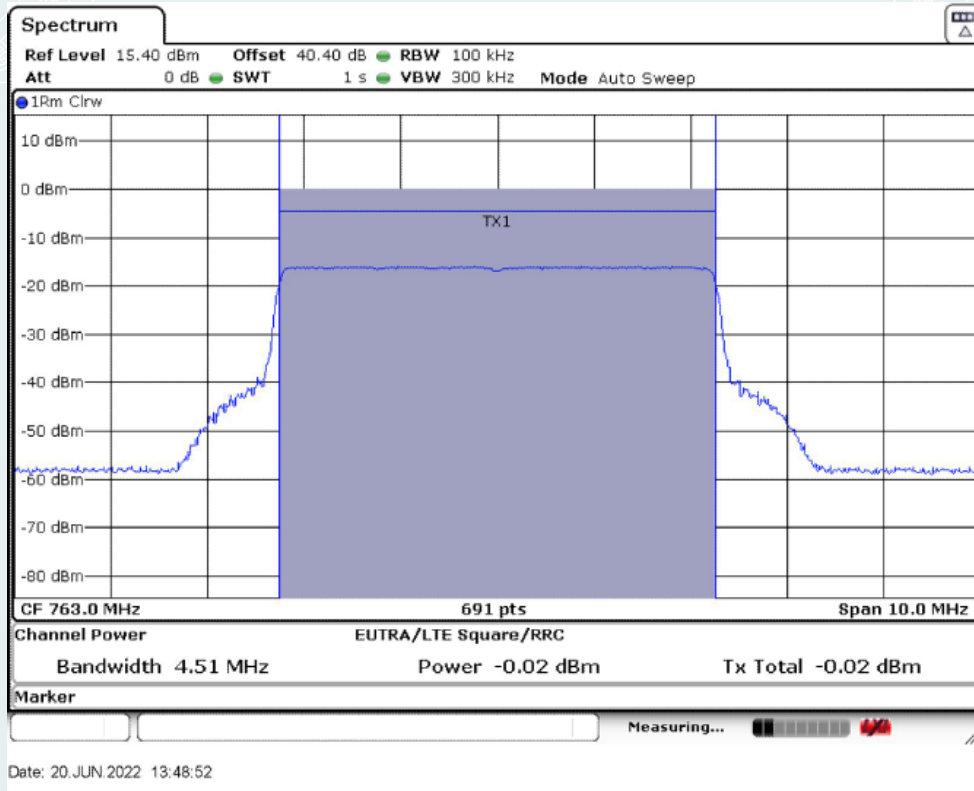


Middle Frequency: 763.0MHz

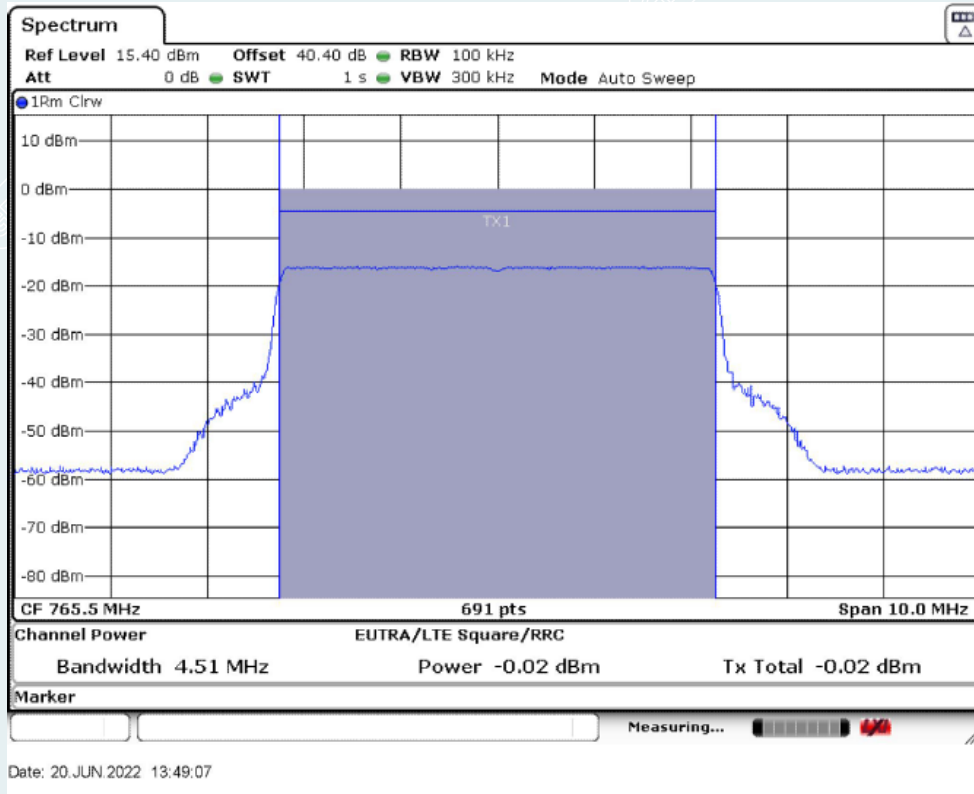


High Frequency: 765.5MHz


10.2.3.1.1.2. Uplink

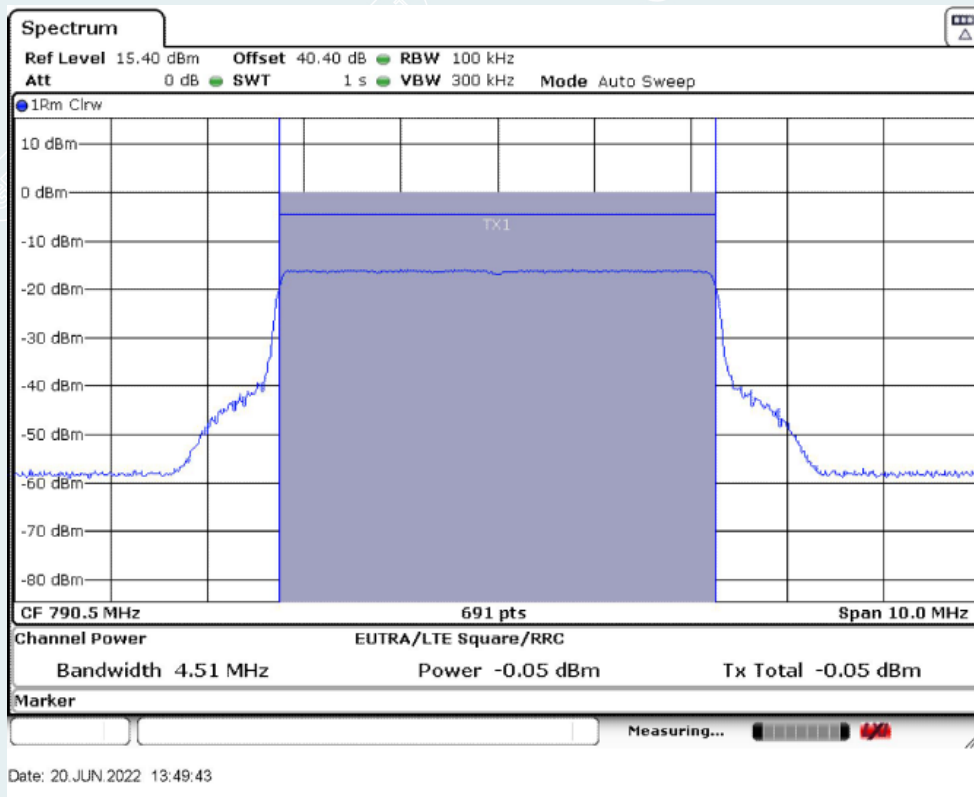

Low Frequency: 790.5MHz

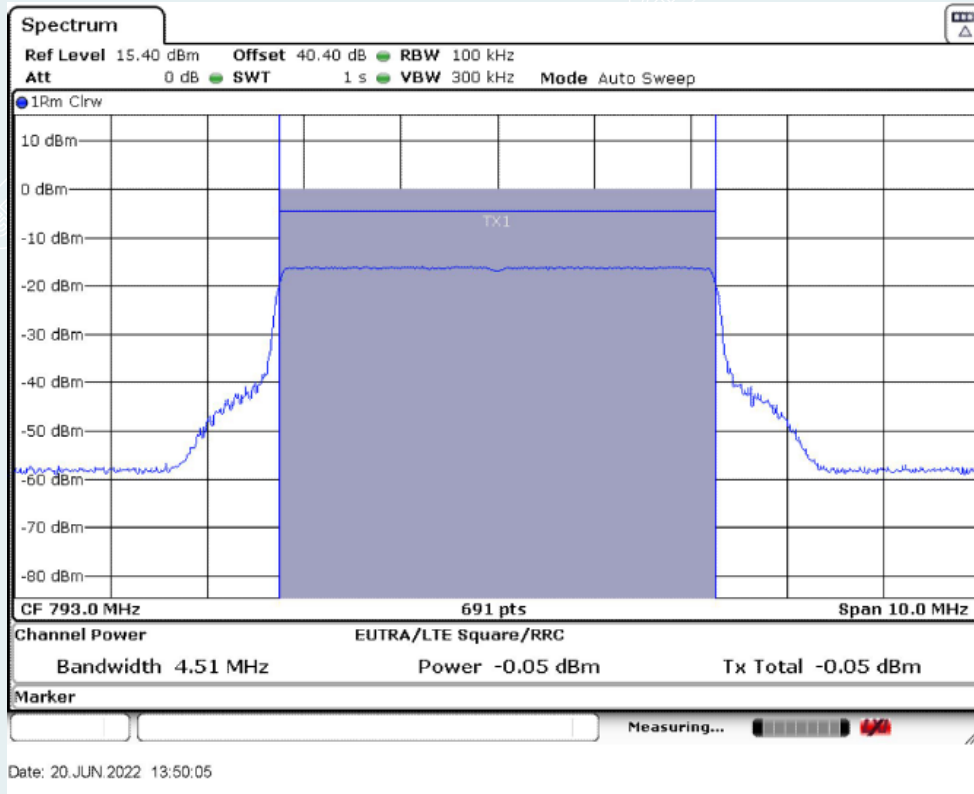


Middle Frequency: 793.0MHz

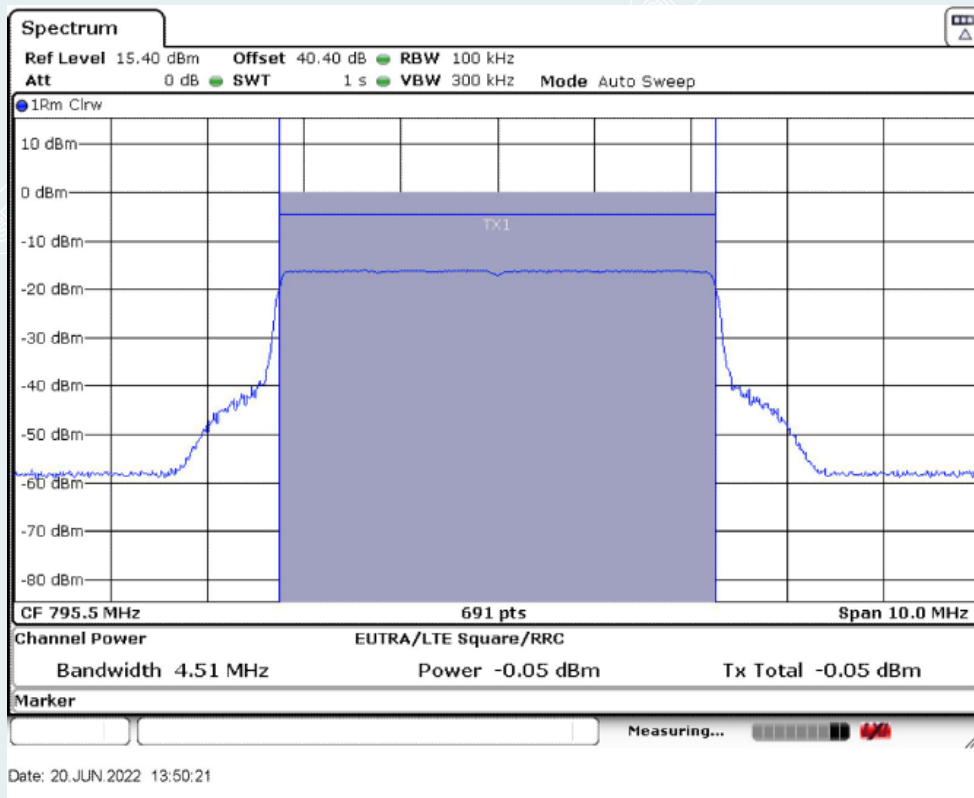

High Frequency: 795.5MHz


10.2.3.1.2. LTE 10MHz

10.2.3.1.2.1. Downlink

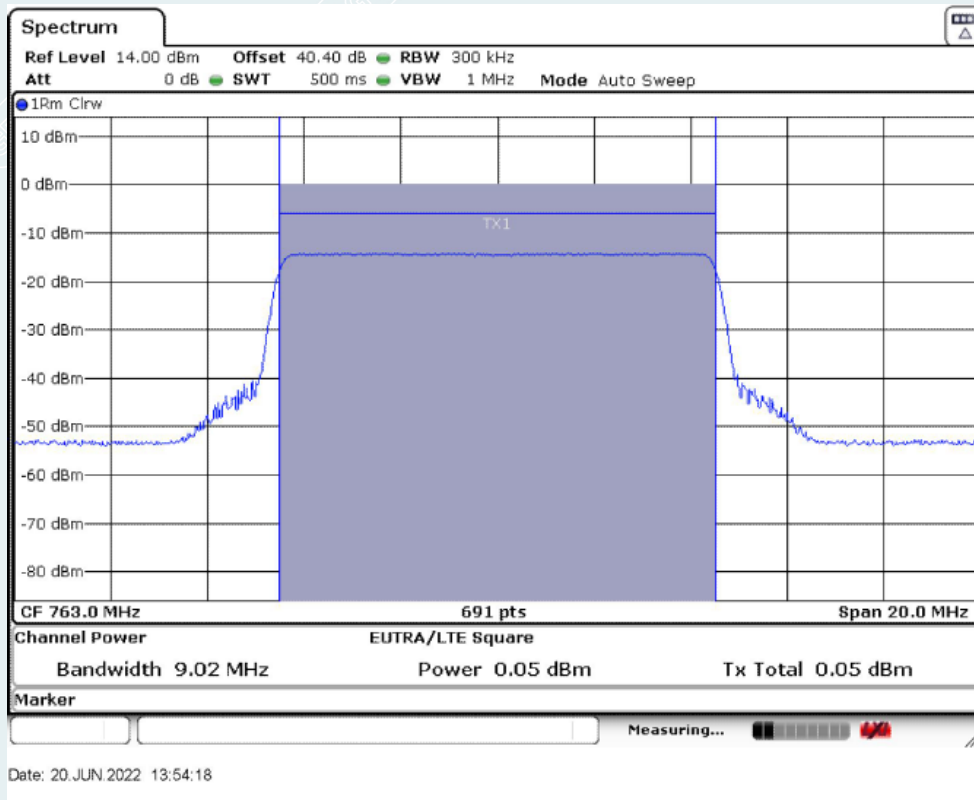

Middle Frequency: 763.0MHz


10.2.3.1.2.2. Uplink

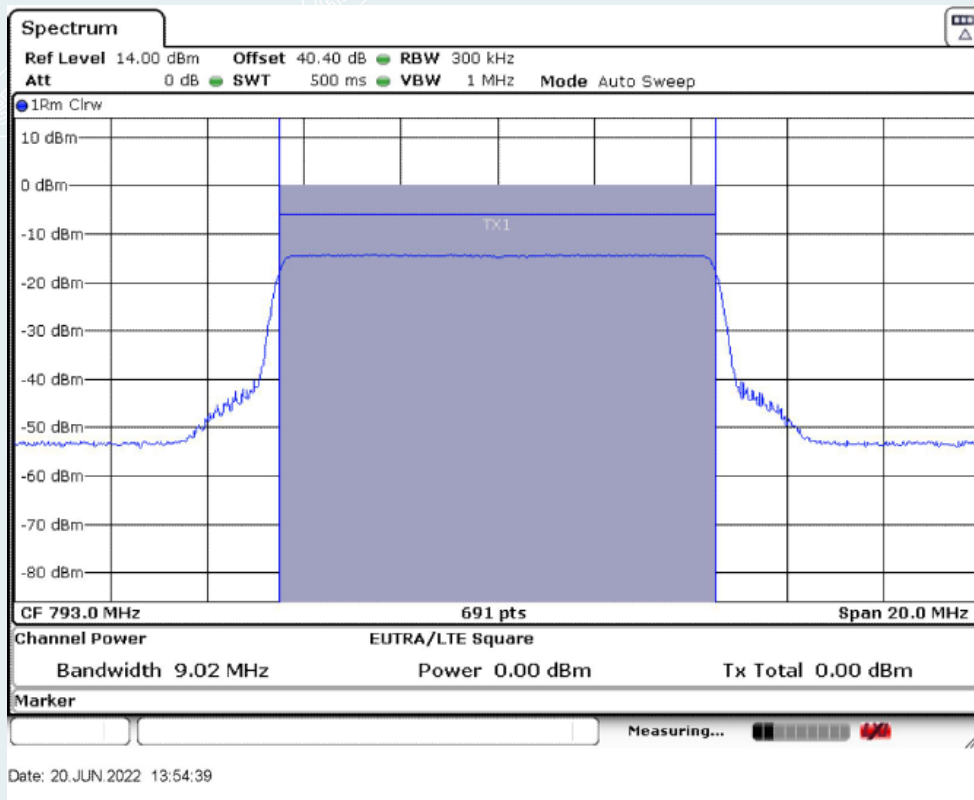


Middle Frequency: 793.0MHz

10.2.3.1.3. P25 Phase I(C4FM)


10.2.3.1.3.1. Downlink

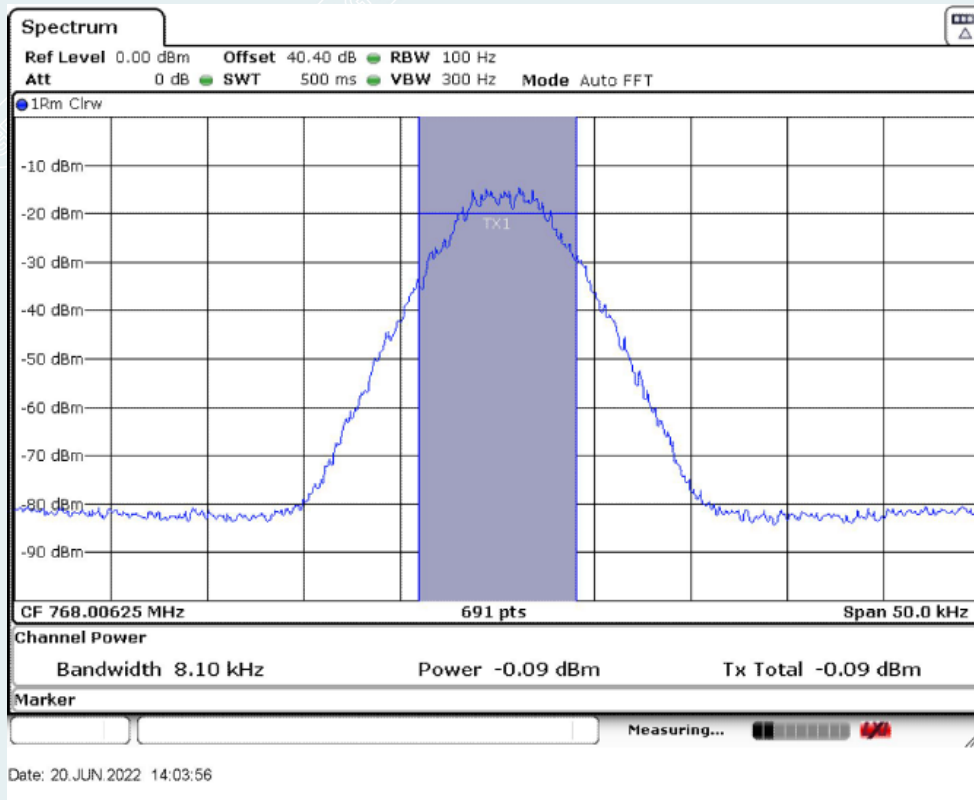

Low Frequency: 768.00625MHz

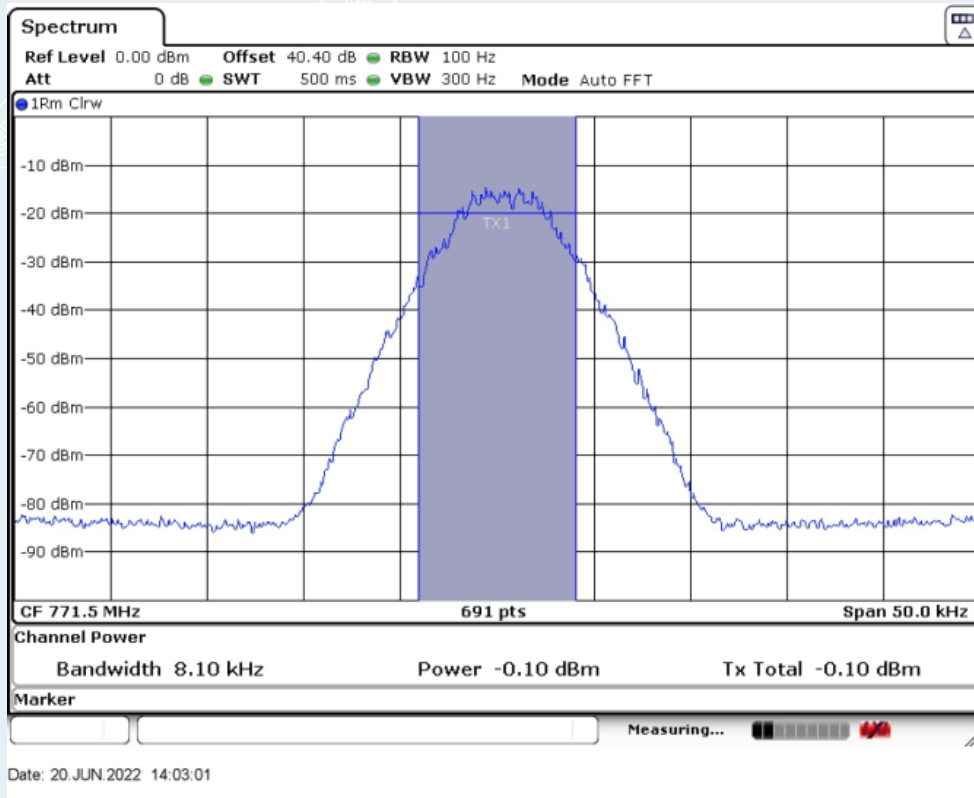


Middle Frequency: 771.5MHz

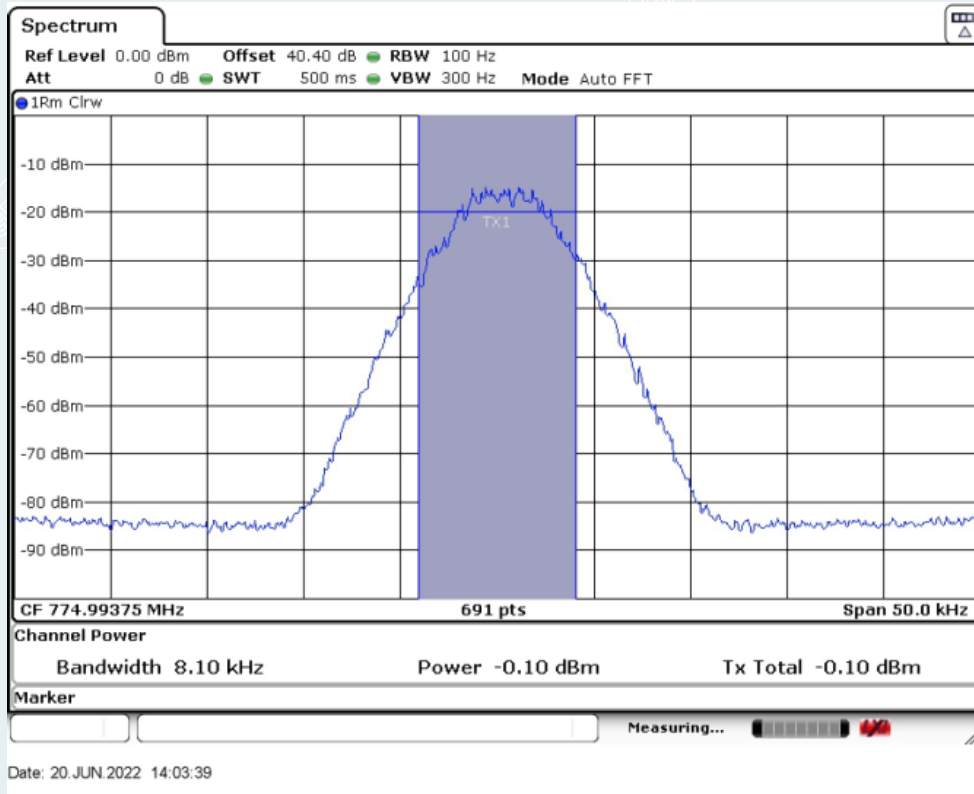


High Frequency: 774.99375MHz

10.2.3.1.3.2. Uplink

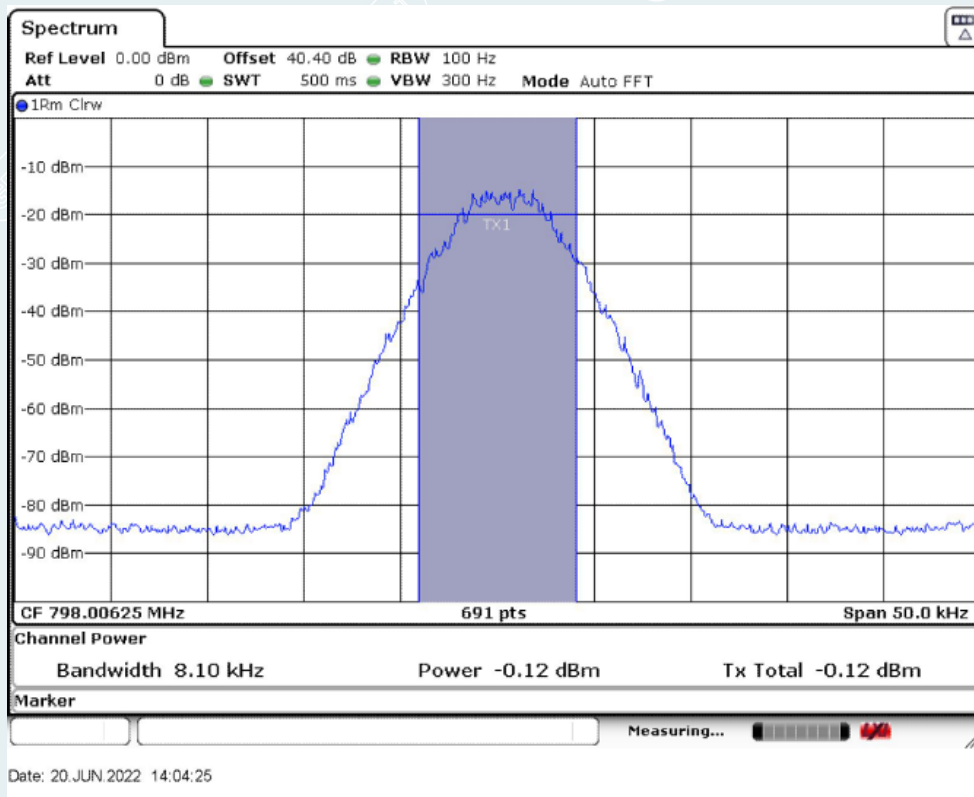


Low Frequency: 798.00625MHz



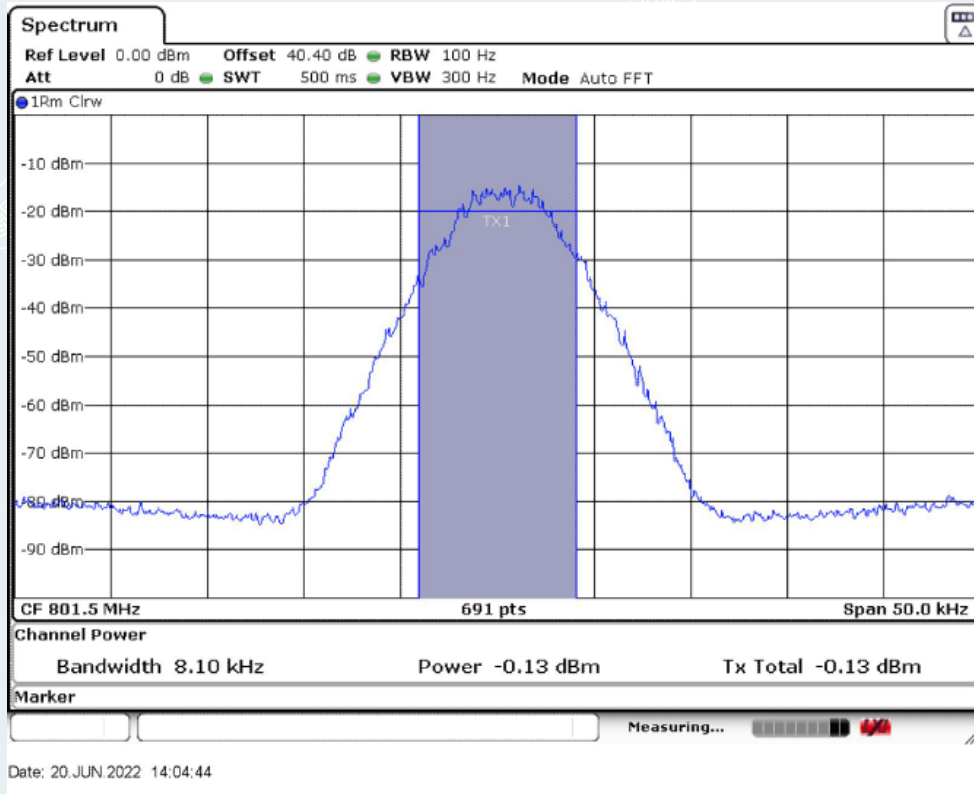


Middle Frequency: 801.5MHz

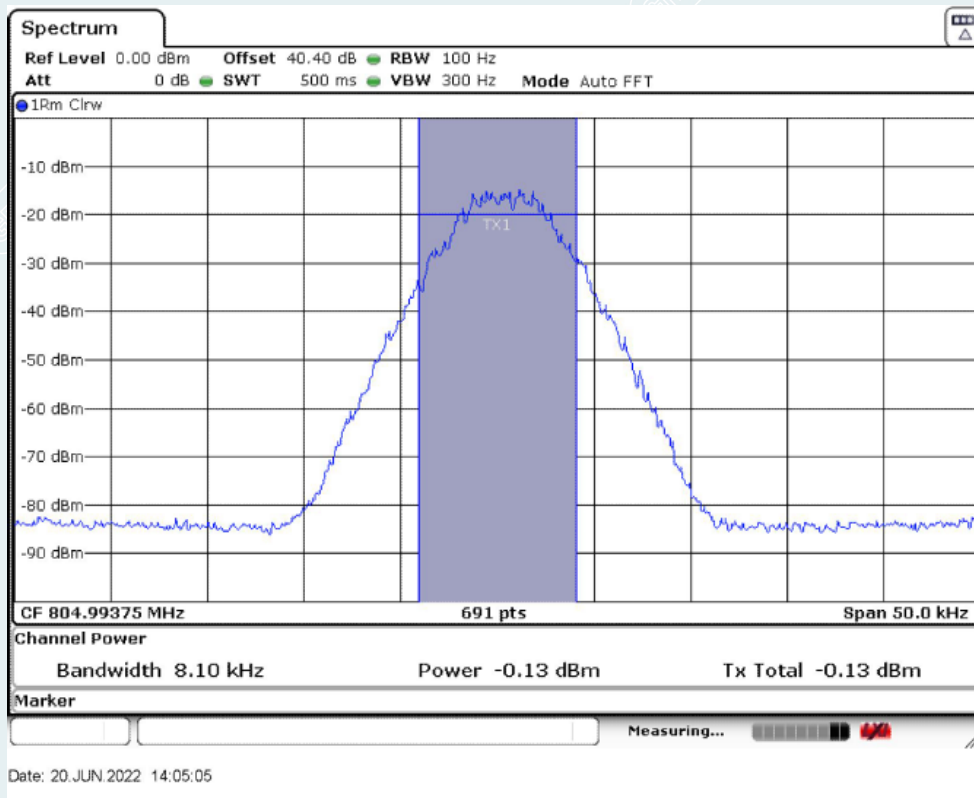


High Frequency: 804.99375MHz

10.2.3.1.4. P25 Phase II(H-DQPSK)


10.2.3.1.4.1. Downlink

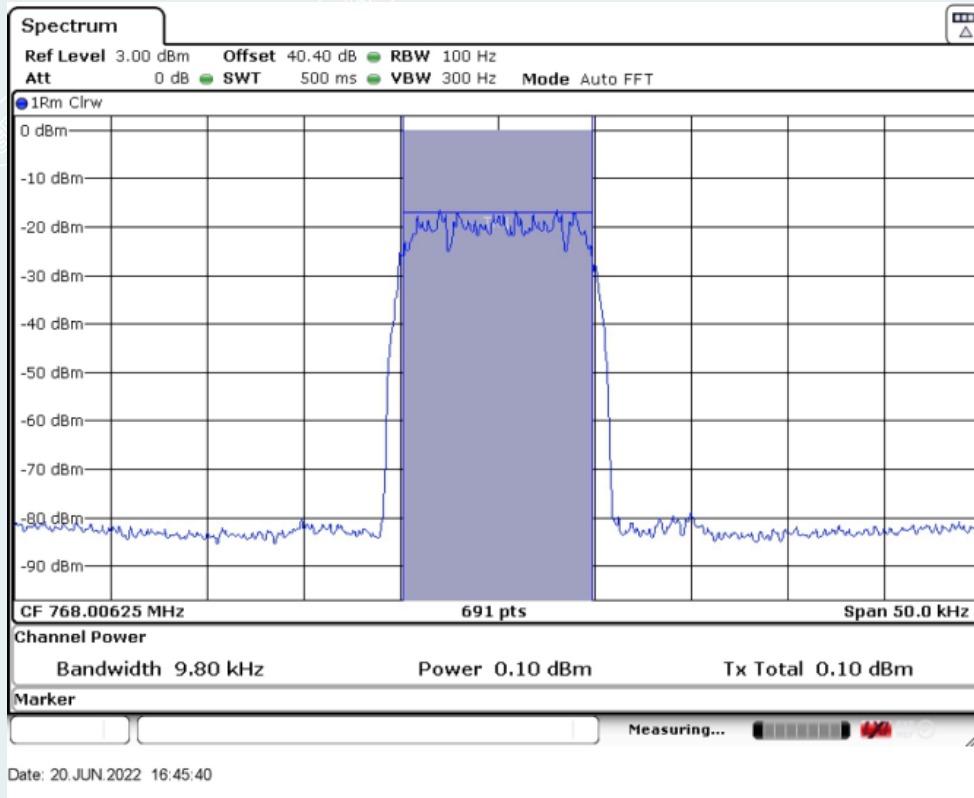

Low Frequency: 768.00625MHz

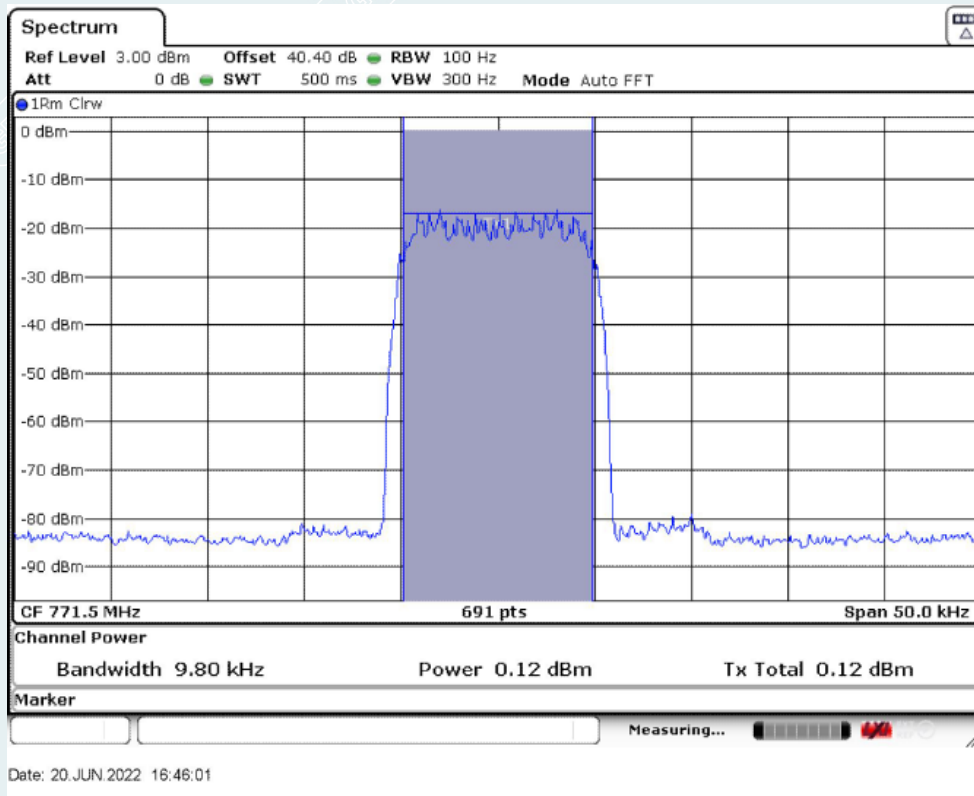


Middle Frequency: 771.5MHz

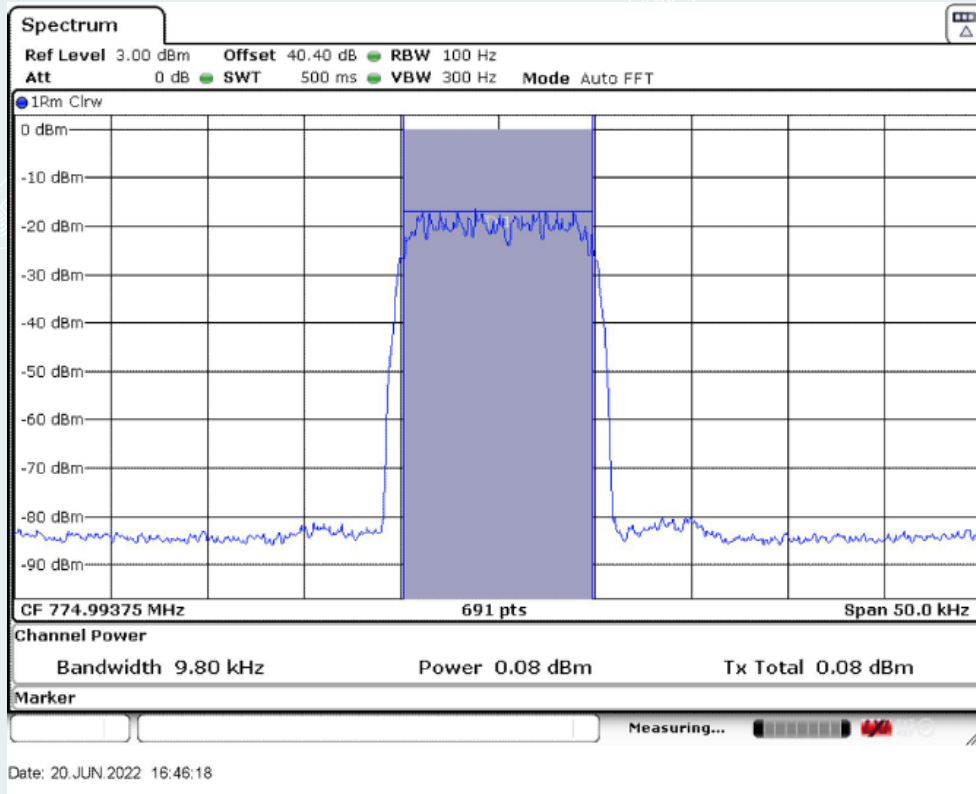


High Frequency: 774.99375MHz


10.2.3.1.4.2. Uplink

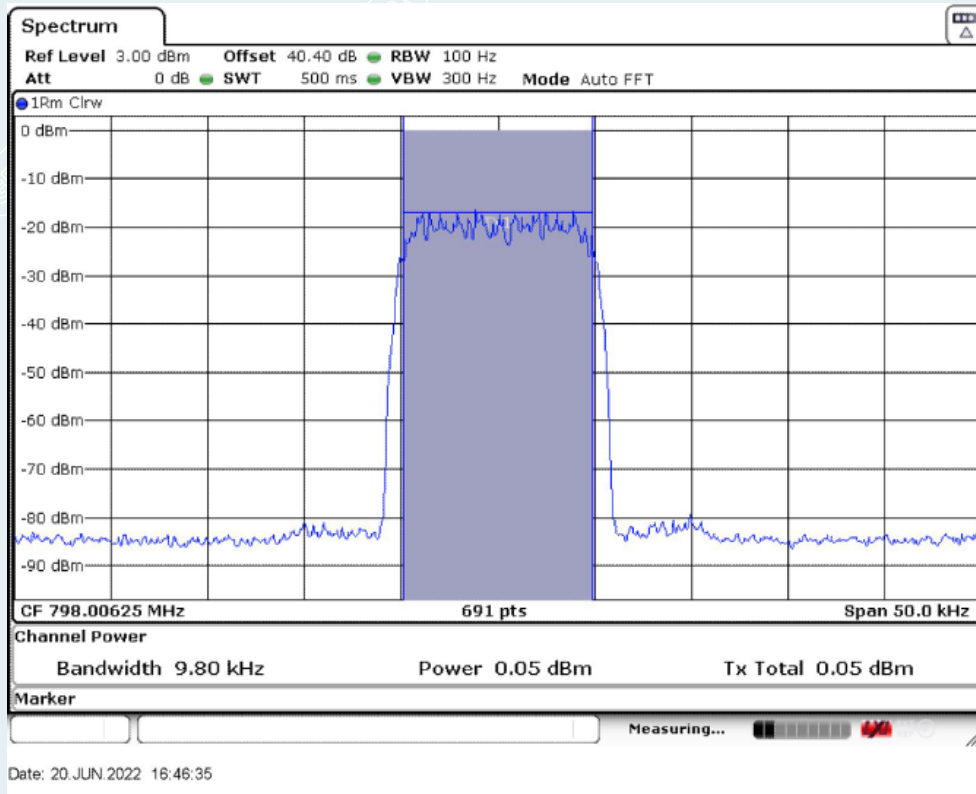

Low Frequency: 798.00625MHz

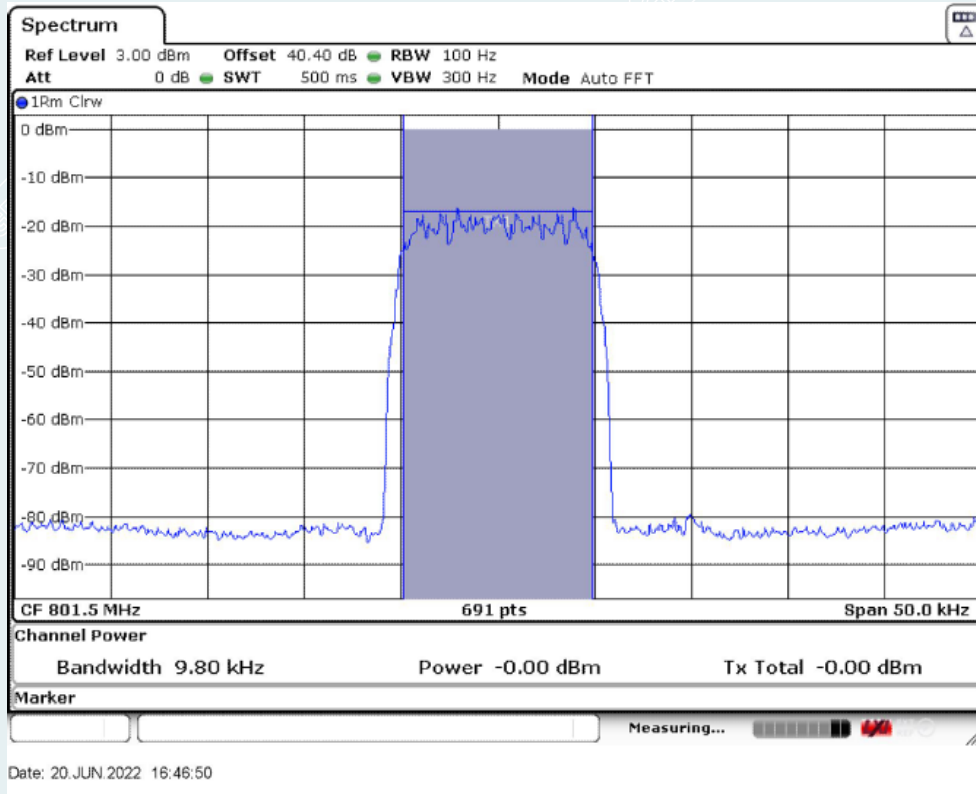


Middle Frequency: 801.5MHz

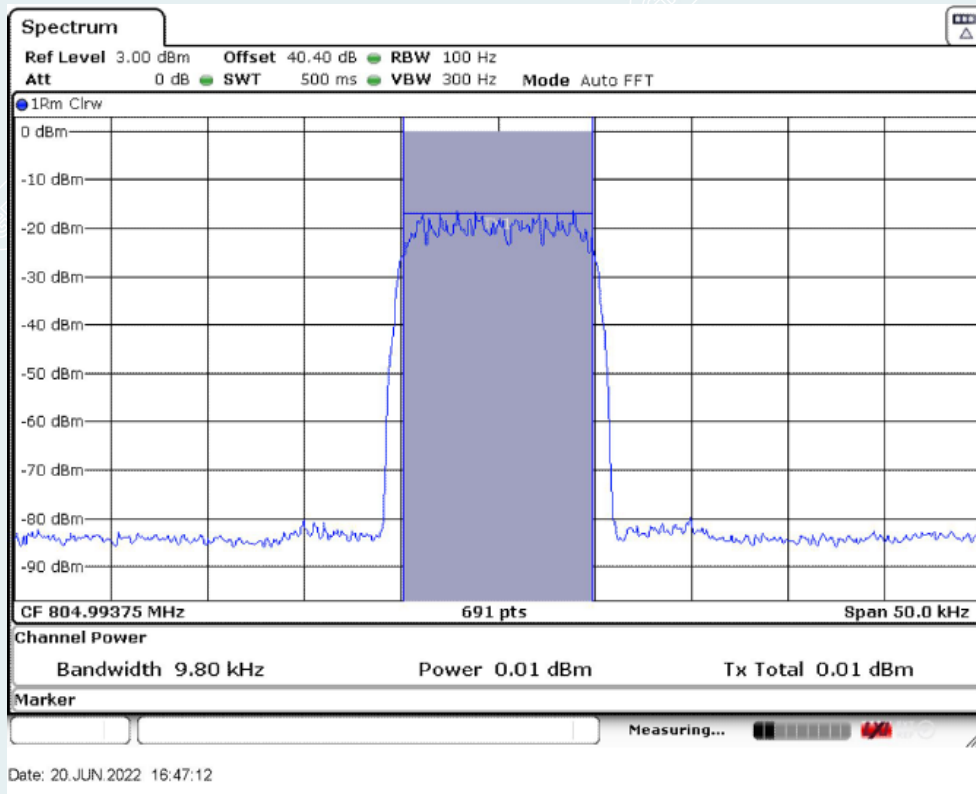


High Frequency: 804.99375MHz

10.2.3.1.5. Analog FM


10.2.3.1.5.1. Downlink

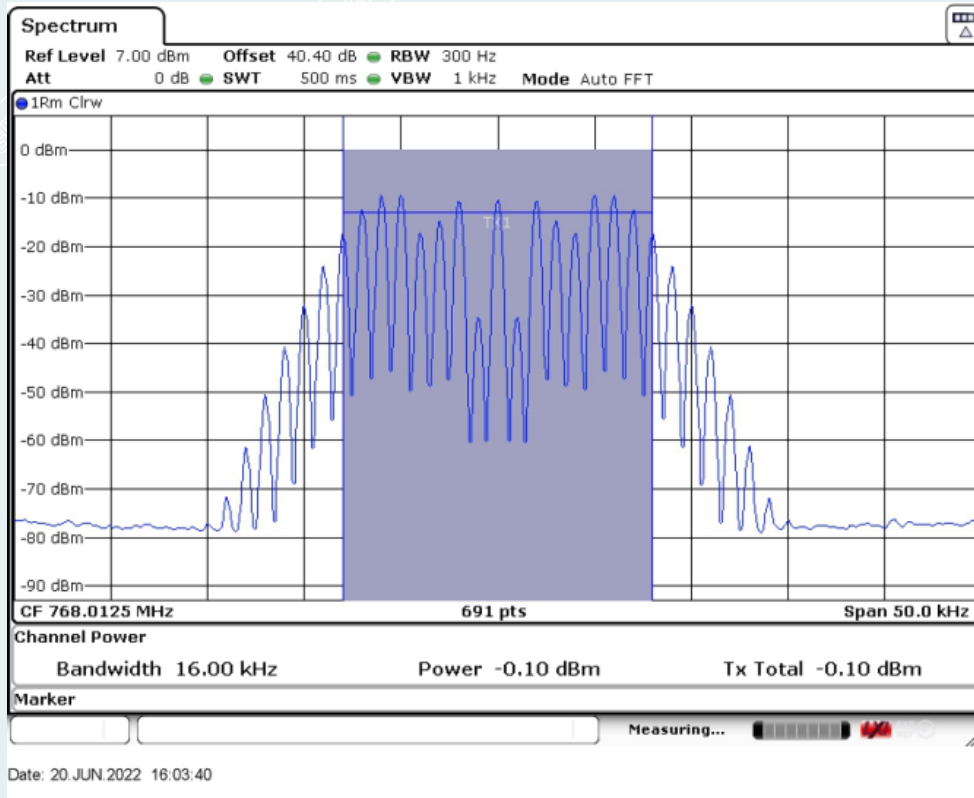

Low Frequency: 768.0125MHz

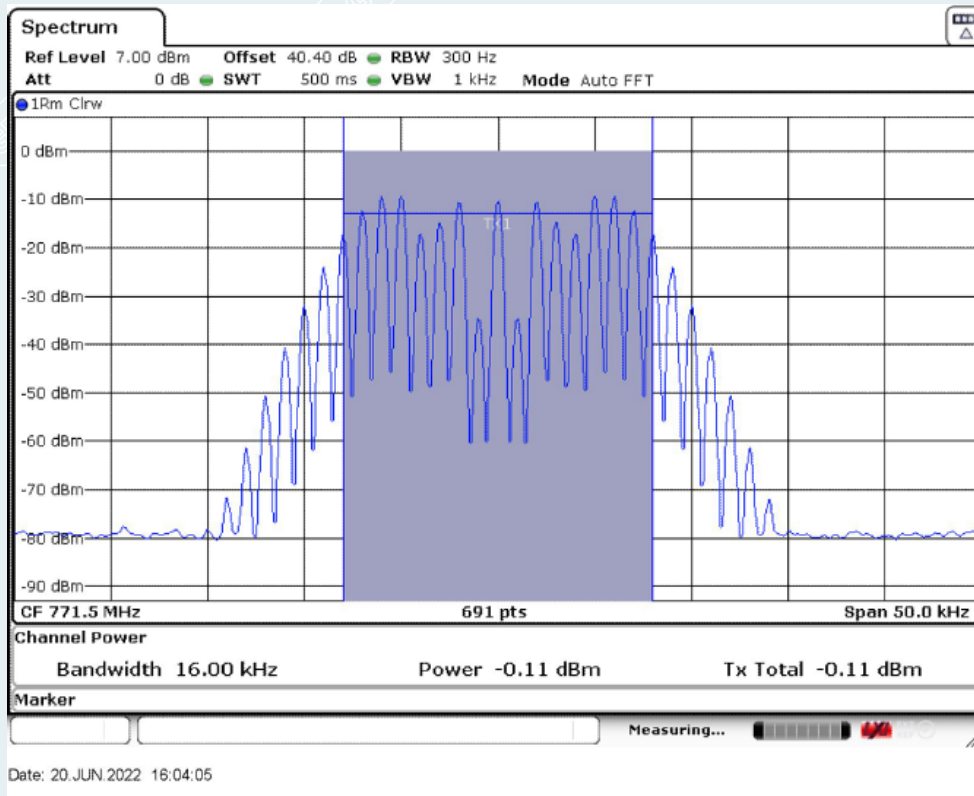


Middle Frequency: 771.5MHz

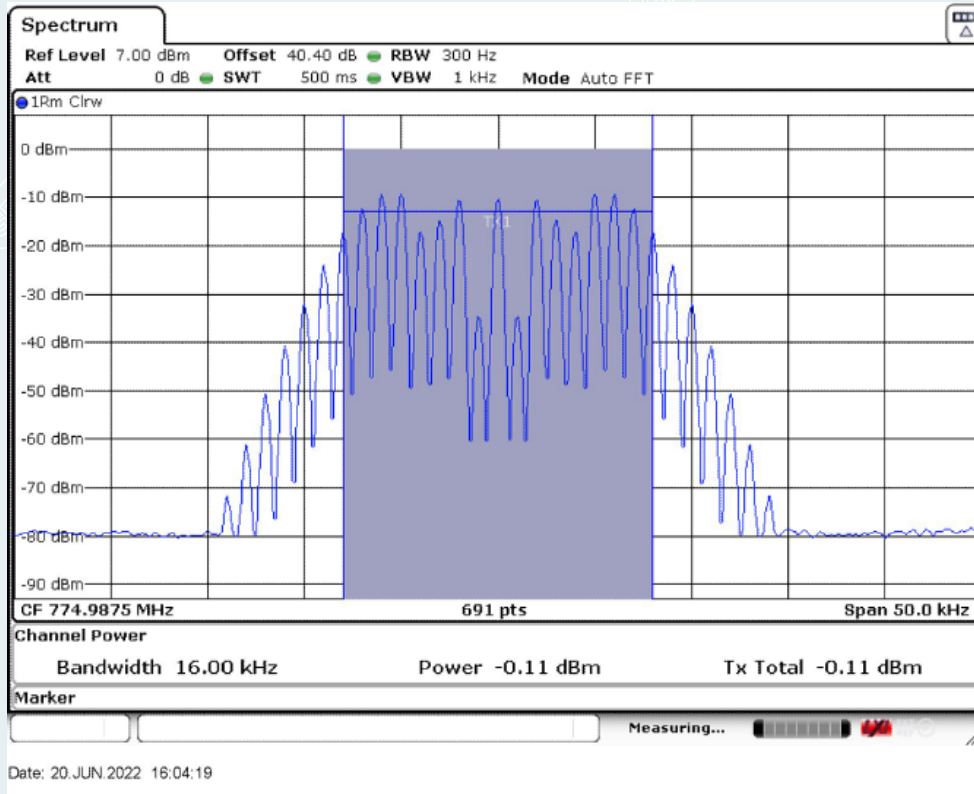

High Frequency: 774.9875MHz

10.2.3.1.5.2. Uplink

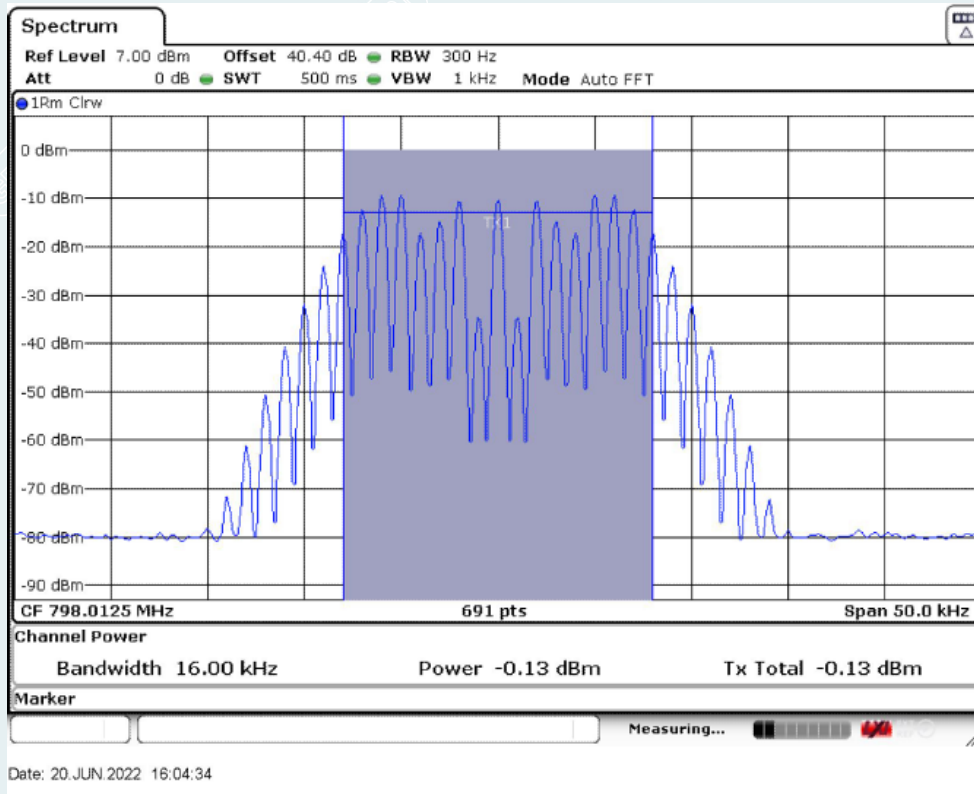

Low Frequency: 798.0125MHz