


部件名称: 线圈绕组

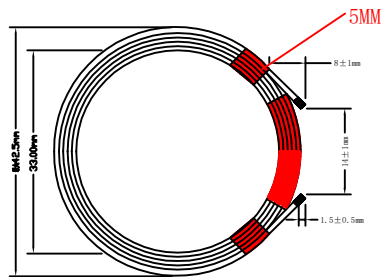

Instructions:

Φ0.08mm enamelled wire, 65 strands stranded;

∞ Alpha winding method, two layers, each layer 5 turns.

Shenzhen Nito Power Source Technology Co., Ltd.

201, No. 8 Building, No. 49 WuheNan Rd., Jinfanghua Electricity Industrial Park, Bantian St., Longgang District, Shenzhen

ELECTRICAL SPEDIFICATION@25 C

PARAMETERS	UNIT	LIMIT
Inductance,LS@100KHz,1.0V , Φ0.08mm*65 ~ 5Turns*2	uH	6.20 ± 10%
Q	--	45 ± 10%
DCR	m Ω	55 ± 10%

ERP CODE:	
DESCRIPTION	U15QT-7430
Dimensions	mm
Modified version	1:10
Modified by	David
Modified Date	2023-05-05