

Appendix A

RF Test Data for BT V5.0(BLE) (Conducted Measurement)

Product Name: BUTTON TAG

Trade Mark: tracesafe


Test Model: TTAT

Environmental Conditions

Temperature:	24.6 ° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Li
Supervised by:	Li Huan


A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

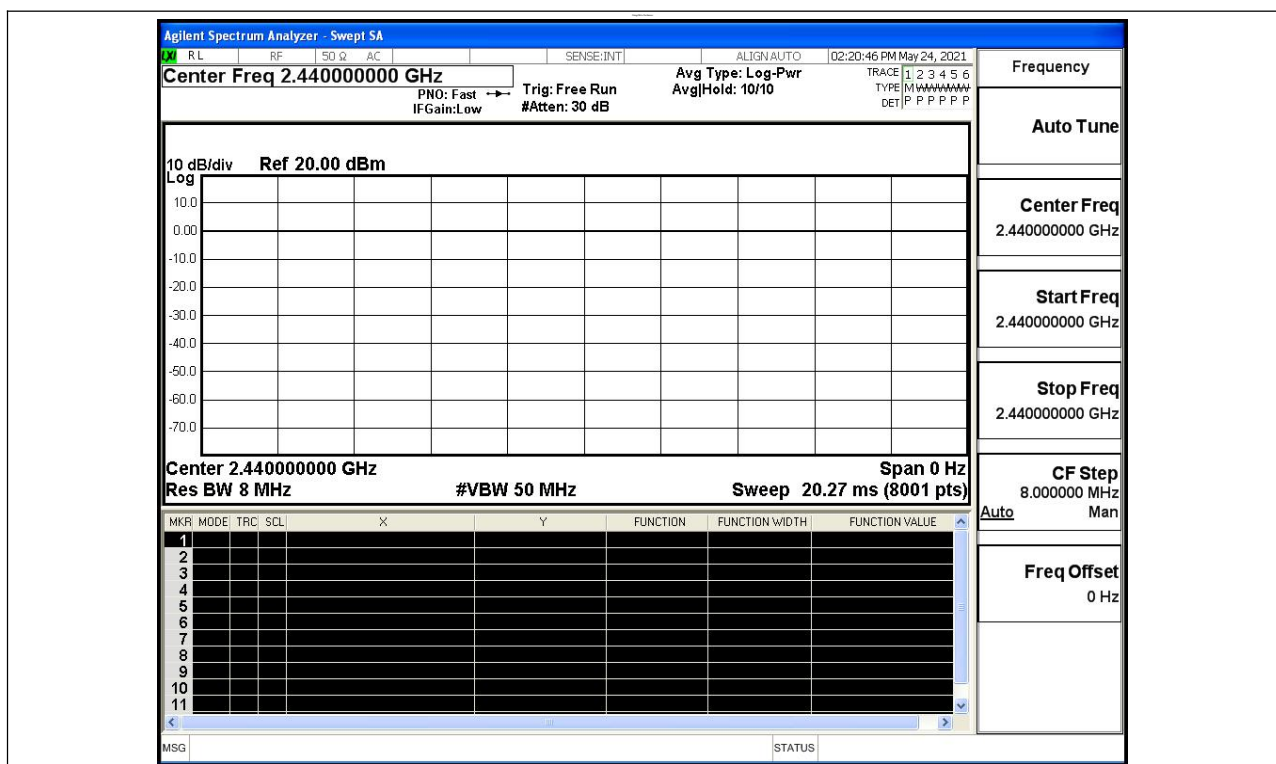


A.2 Maximum Conducted Peak Output Power


Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.454	30	PASS
BT LE	MCH	-0.406	30	PASS
BT LE	HCH	0.233	30	PASS

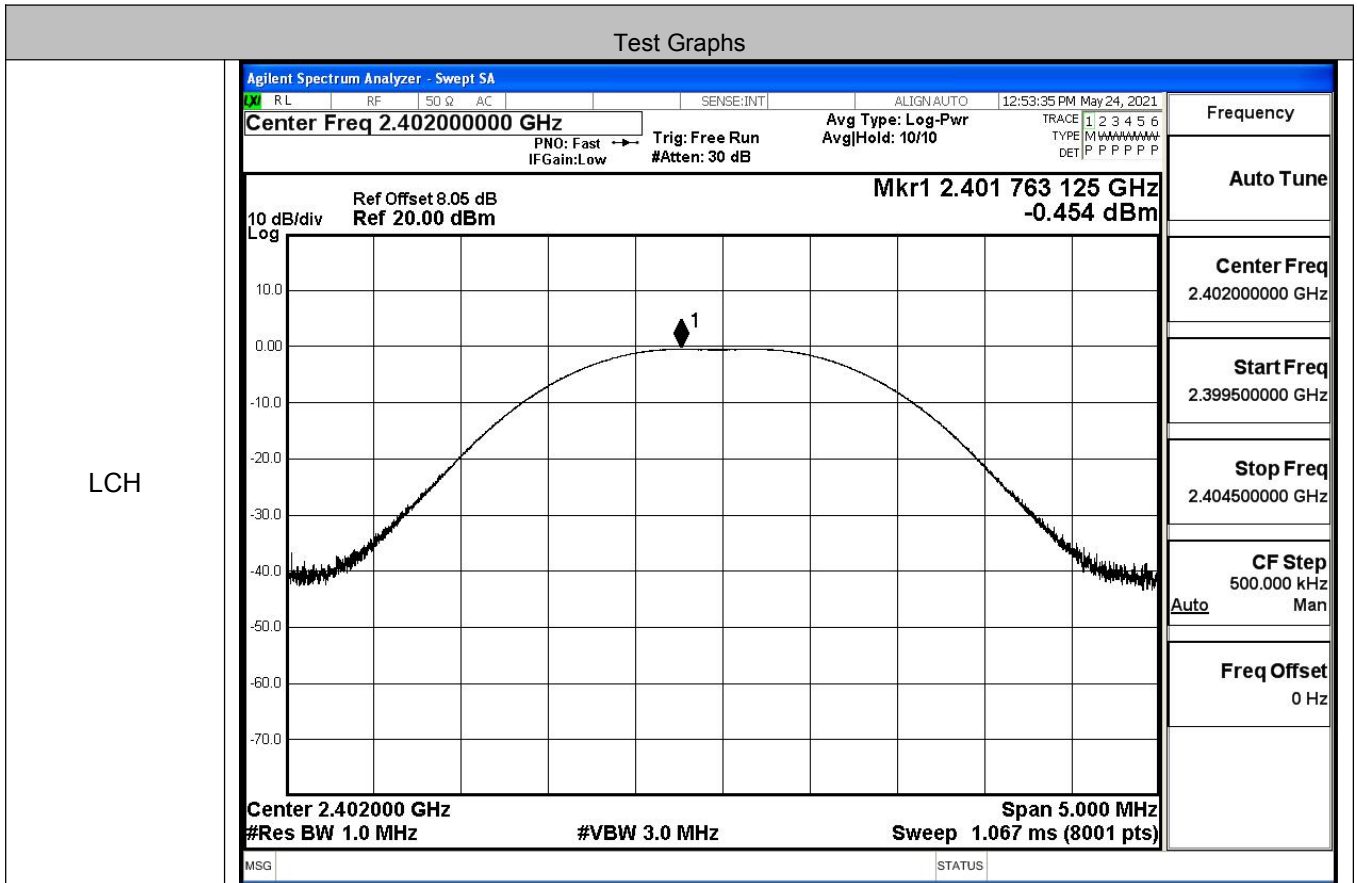

MCH

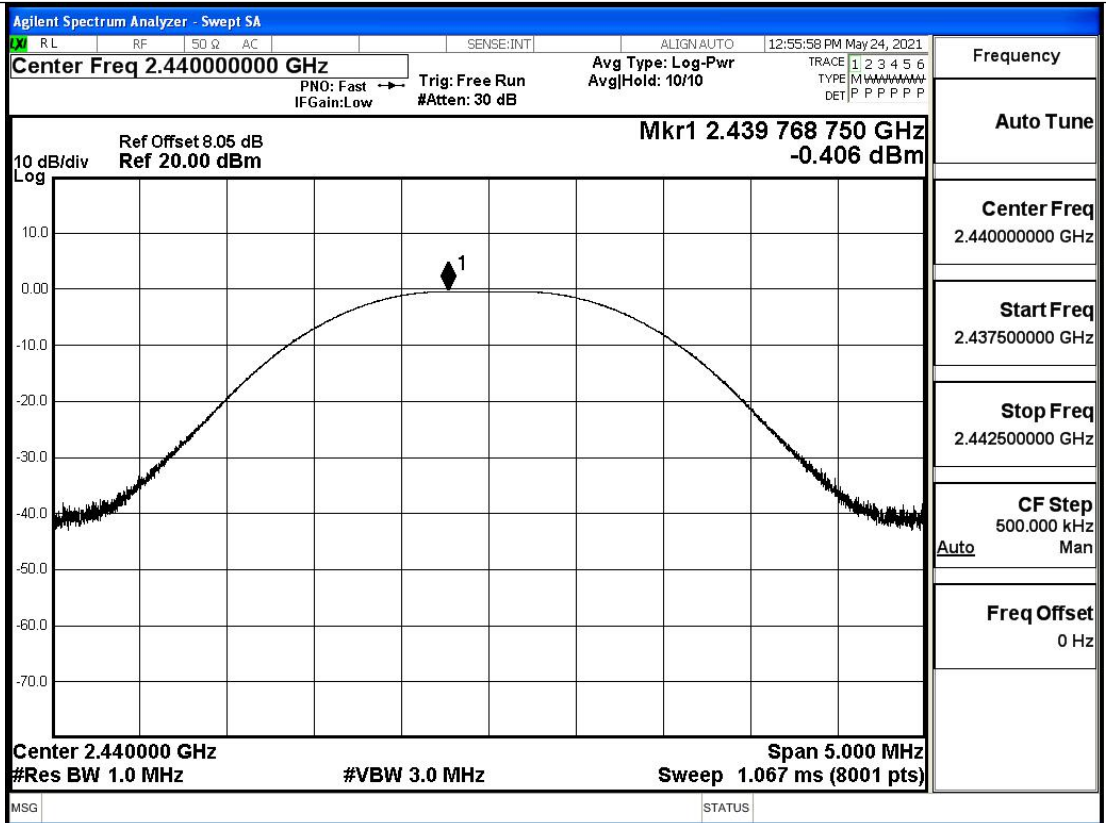


HCH

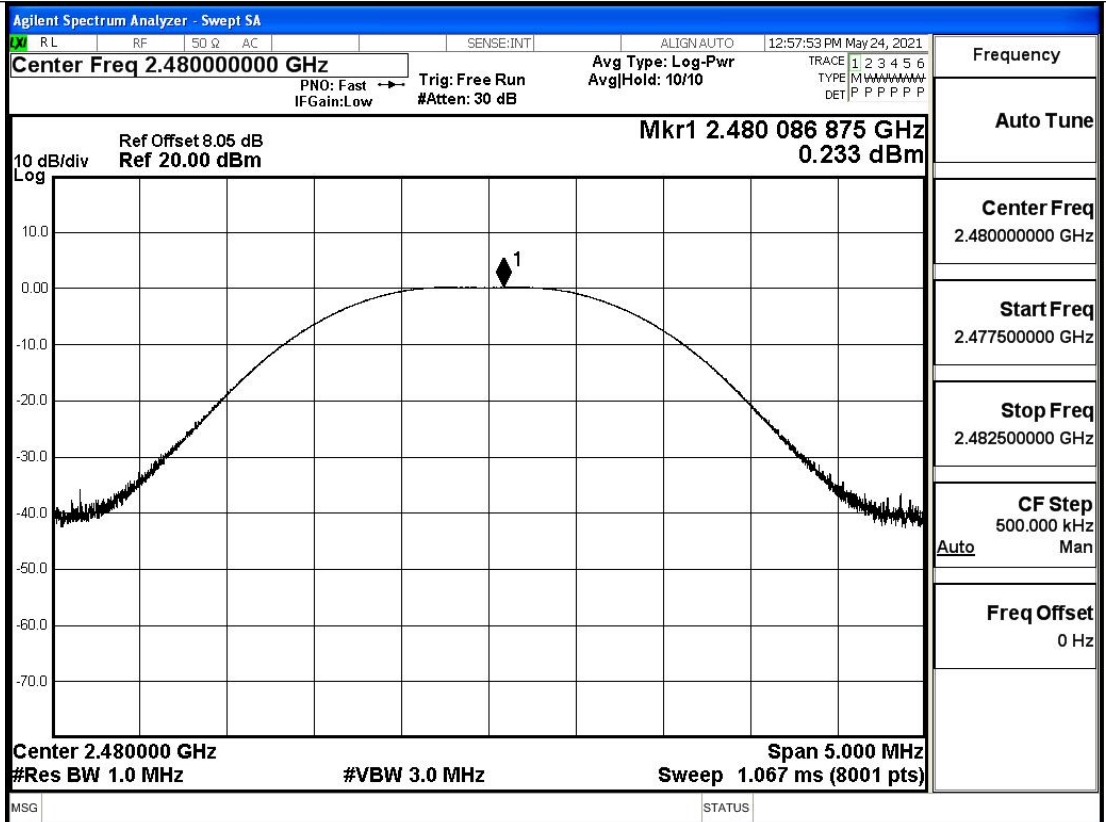


A.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-8.543	8	PASS
BT LE	MCH	-7.023	8	PASS
BT LE	HCH	-8.421	8	PASS

Test Graphs

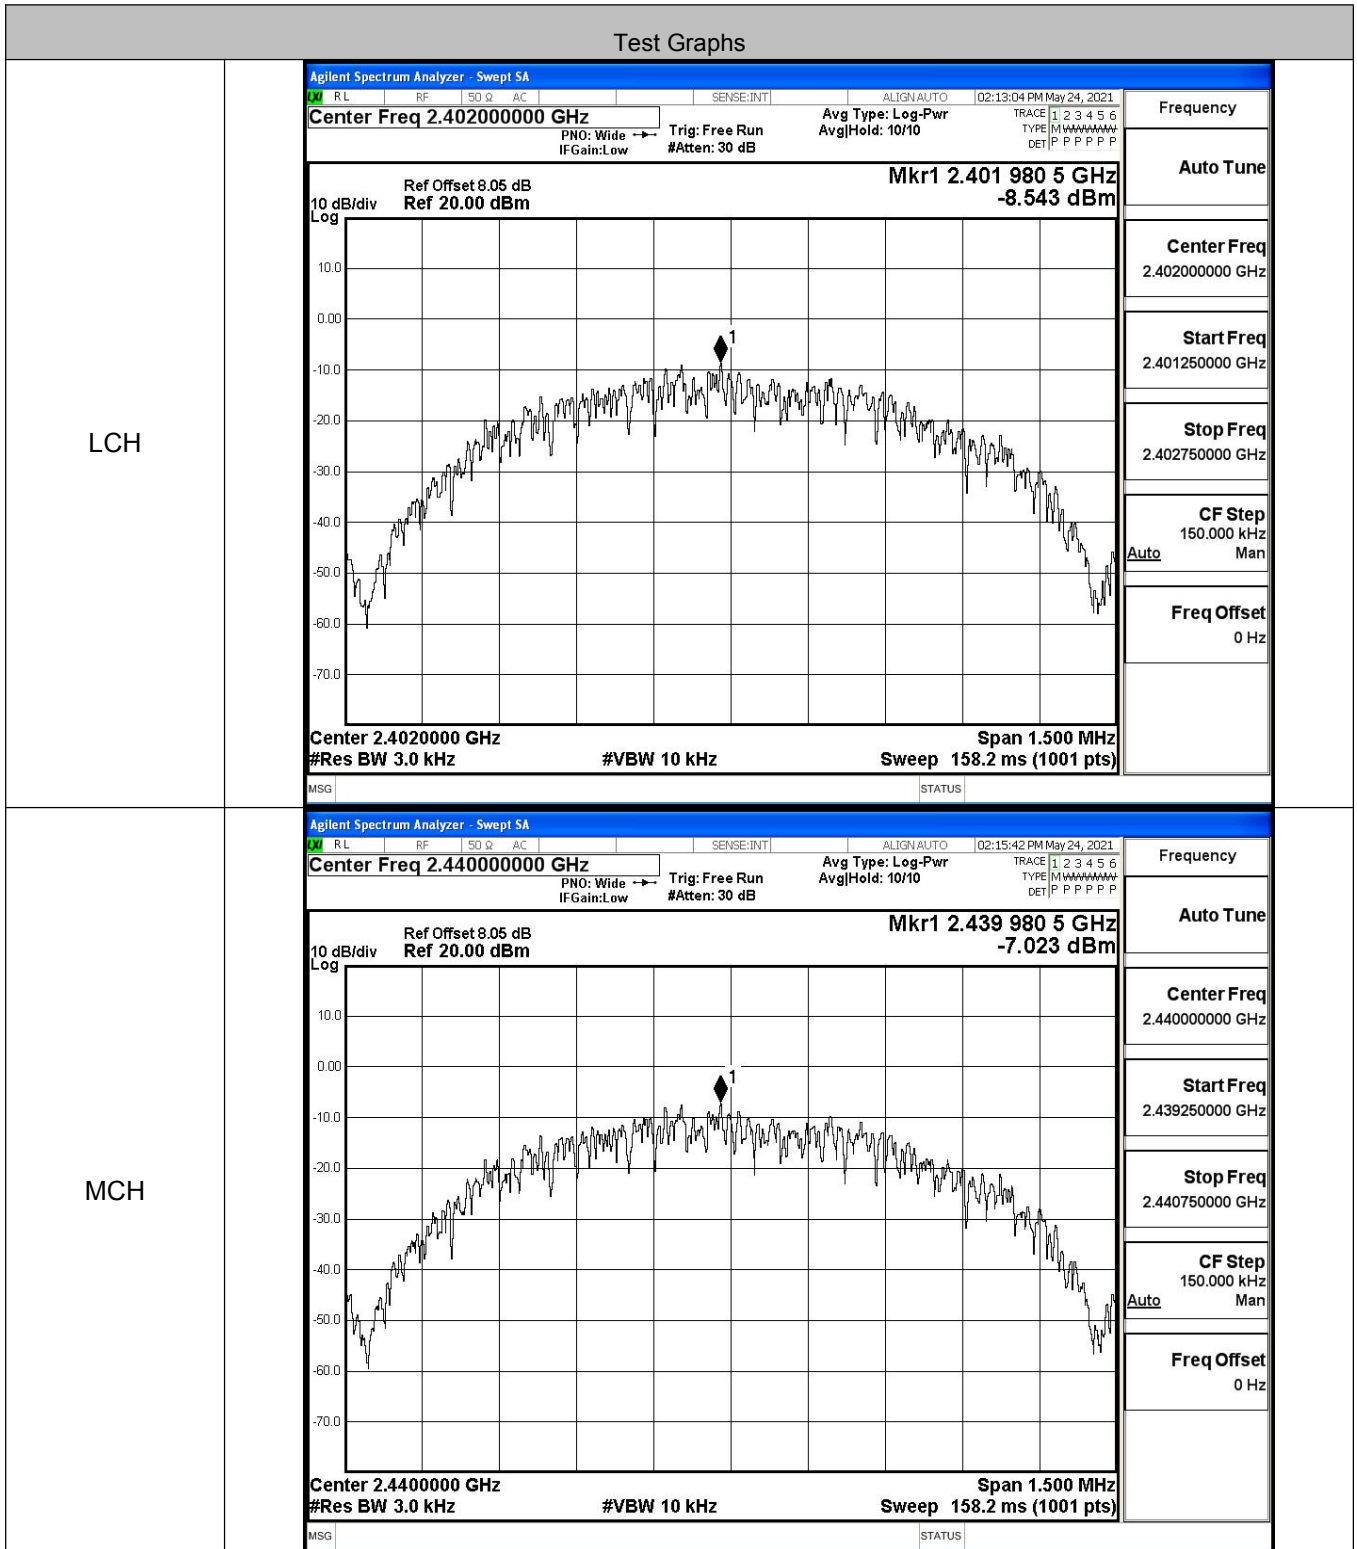

HCH

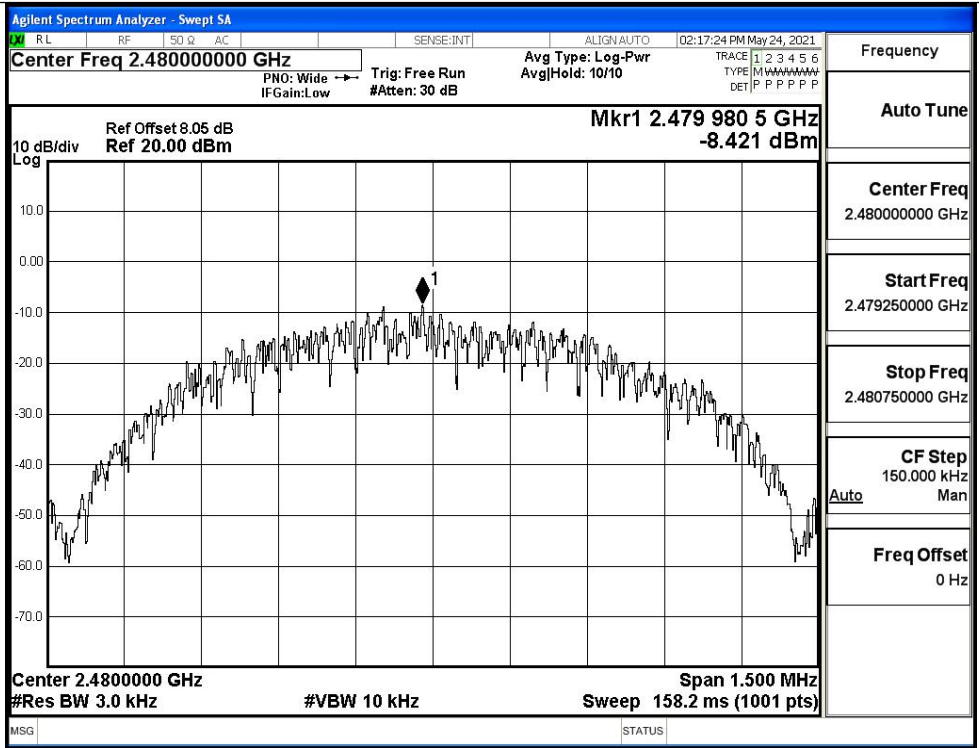



Frequency
Auto Tune
Center Freq 2.480000000 GHz
Start Freq 2.479250000 GHz
Stop Freq 2.480750000 GHz
CF Step 150.000 kHz Auto Man
Freq Offset 0 Hz


A.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6670	≥0.5	PASS
BT LE	MCH	0.6672	≥0.5	PASS
BT LE	HCH	0.6692	≥0.5	PASS

Test Graphs

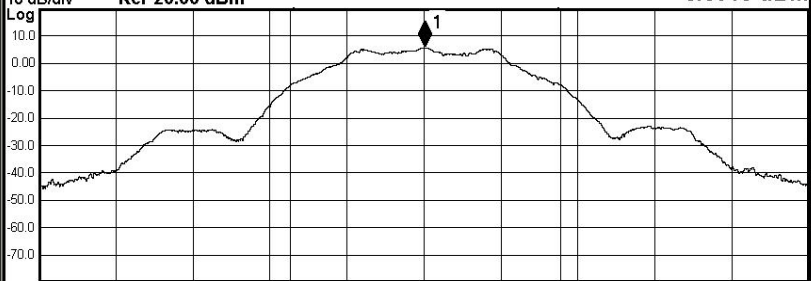
LCH	<p style="font-size: small; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: x-small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 02:12:40 PM May 24, 2021</p> <p style="font-size: small; margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p style="font-size: x-small; margin: 0;">Trig: Free Run AvgHold>1/1</p> <p style="font-size: x-small; margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 8.05 dB Mkr1 2.4020045 GHz</p> <p style="font-size: x-small; margin: 0;">Log Ref 20.00 dBm 5.6915 dBm</p>  </div> <p style="font-size: x-small; margin: 0;">Center 2.402 GHz Span 3 MHz</p> <p style="font-size: x-small; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">12.5 dBm</td> </tr> <tr> <td style="text-align: center;">1.0490 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>8.231 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>667.0 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p>	Occupied Bandwidth	Total Power	12.5 dBm	1.0490 MHz			Transmit Freq Error	8.231 kHz	OBW Power	x dB Bandwidth	667.0 kHz	x dB			99.00 %			-6.00 dB	<p>Frequency</p> <hr/> <p>Center Freq 2.402000000 GHz</p> <hr/> <p>CF Step 300.000 kHz Auto Man</p> <hr/> <p>Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	12.5 dBm																	
	1.0490 MHz																			
	Transmit Freq Error	8.231 kHz	OBW Power																	
x dB Bandwidth	667.0 kHz	x dB																		
		99.00 %																		
		-6.00 dB																		

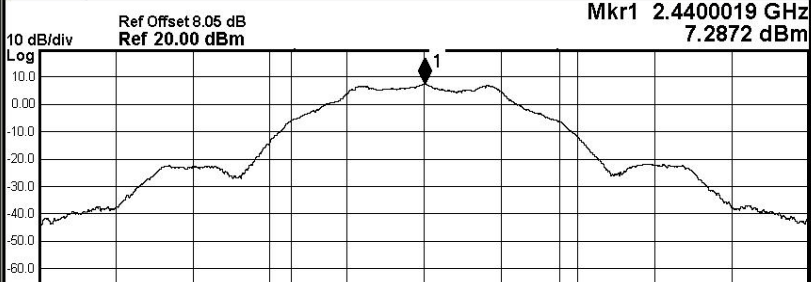MCH	<p style="font-size: small; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: x-small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 02:15:18 PM May 24, 2021</p> <p style="font-size: small; margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None</p> <p style="font-size: x-small; margin: 0;">Trig: Free Run AvgHold>1/1</p> <p style="font-size: x-small; margin: 0;">#IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 8.05 dB Mkr1 2.4400019 GHz</p> <p style="font-size: x-small; margin: 0;">Log Ref 20.00 dBm 7.2872 dBm</p>  </div> <p style="font-size: x-small; margin: 0;">Center 2.44 GHz Span 3 MHz</p> <p style="font-size: x-small; margin: 0;">#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">14.1 dBm</td> </tr> <tr> <td style="text-align: center;">1.0476 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>6.137 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>667.2 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin: 0;">MSG STATUS</p>	Occupied Bandwidth	Total Power	14.1 dBm	1.0476 MHz			Transmit Freq Error	6.137 kHz	OBW Power	x dB Bandwidth	667.2 kHz	x dB			99.00 %			-6.00 dB	<p>Frequency</p> <hr/> <p>Center Freq 2.440000000 GHz</p> <hr/> <p>CF Step 300.000 kHz Auto Man</p> <hr/> <p>Freq Offset 0 Hz</p>
	Occupied Bandwidth	Total Power	14.1 dBm																	
	1.0476 MHz																			
	Transmit Freq Error	6.137 kHz	OBW Power																	
x dB Bandwidth	667.2 kHz	x dB																		
		99.00 %																		
		-6.00 dB																		

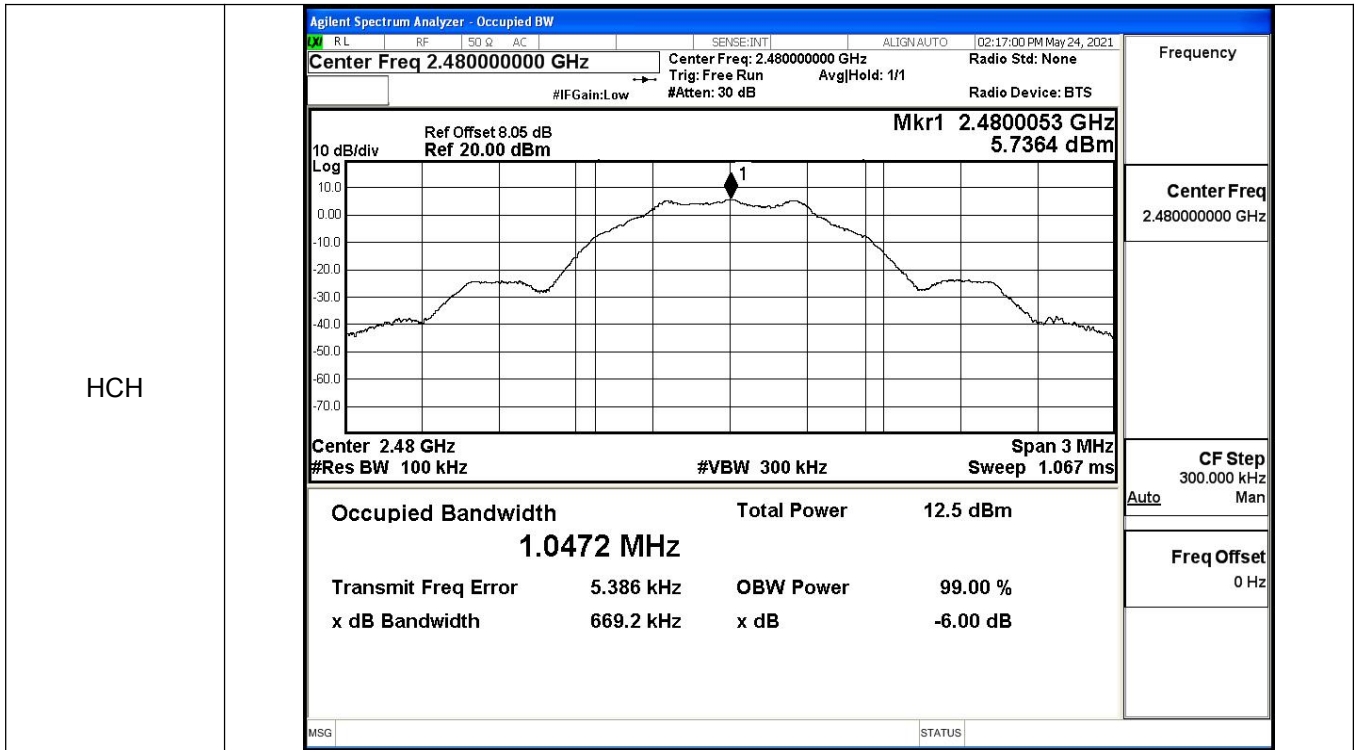


A.5 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	5.697	-37.879	-14.303	PASS
BT LE	MCH	7.277	-37.066	-12.723	PASS
BT LE	HCH	5.757	-36.960	-14.243	PASS

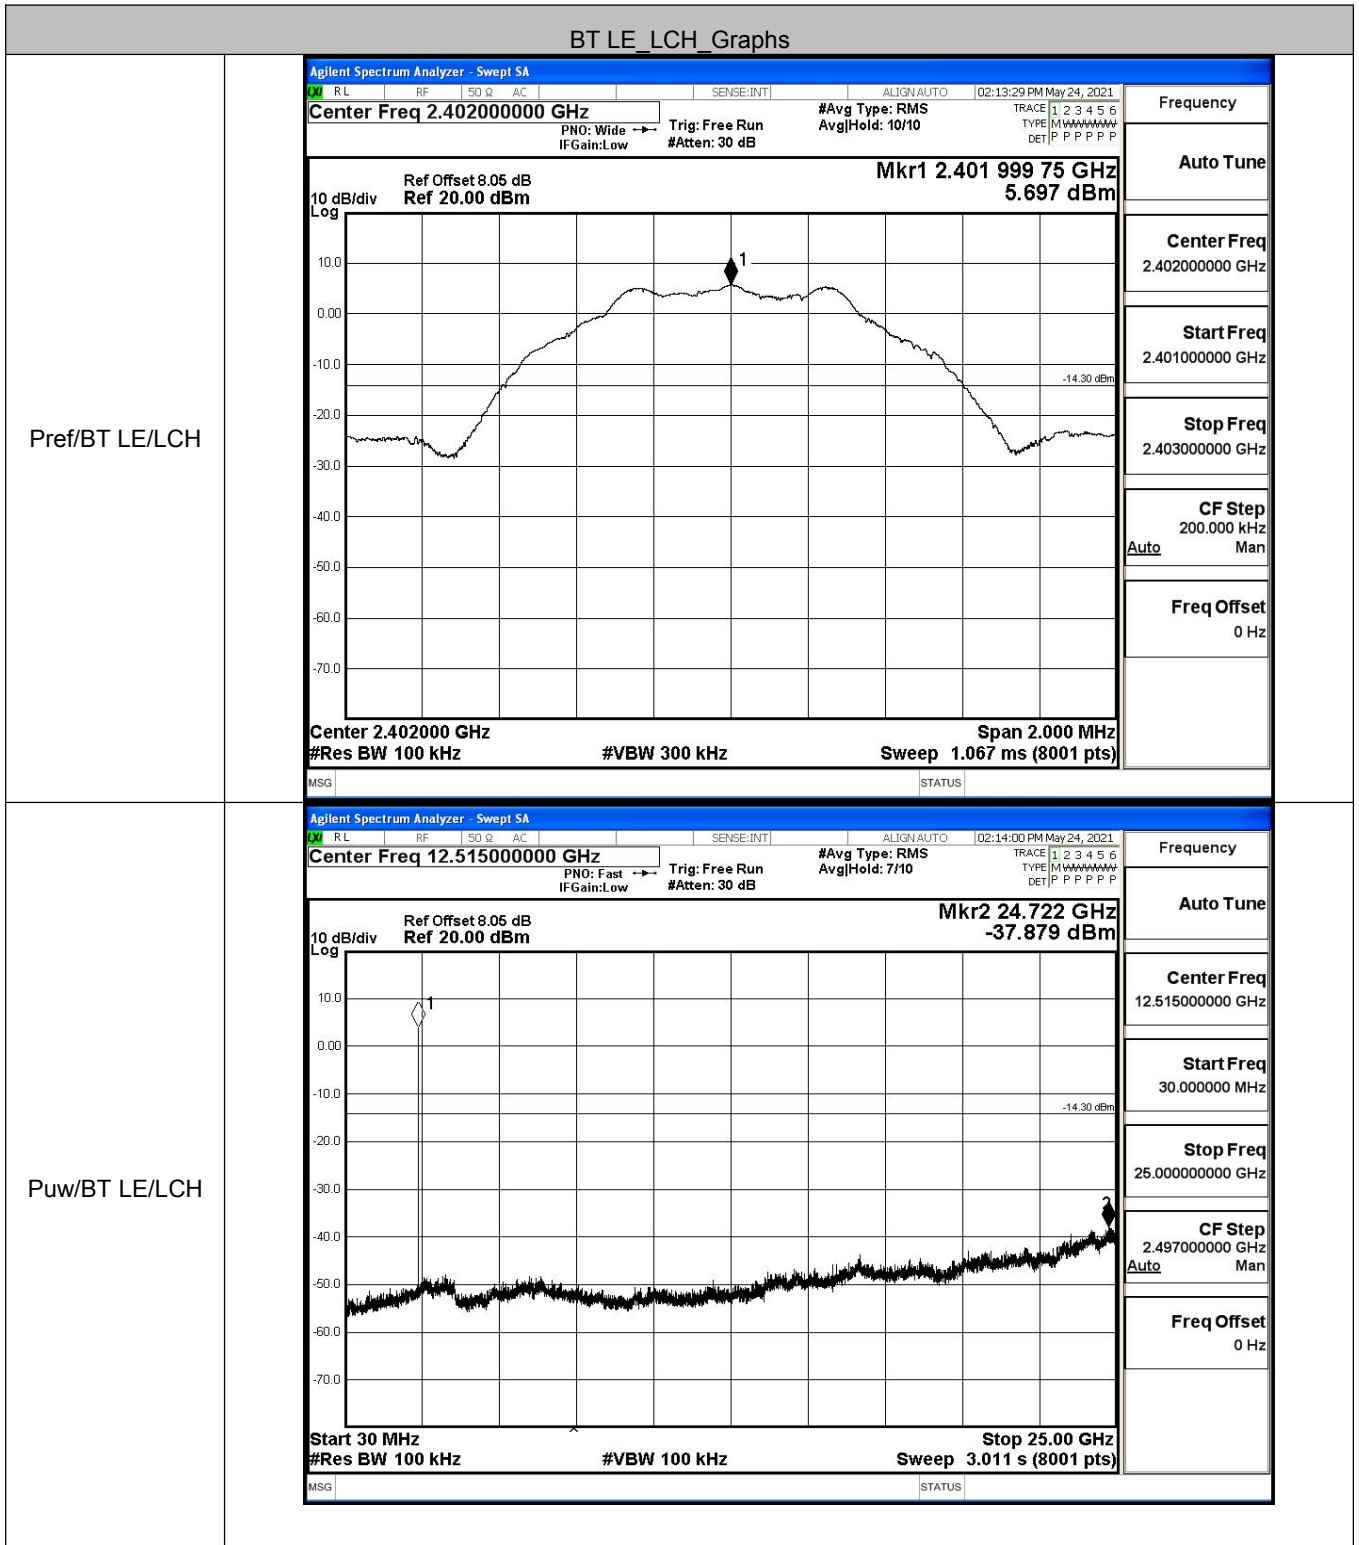

BT LE MCH Graphs

Pref/BT LE/MCH

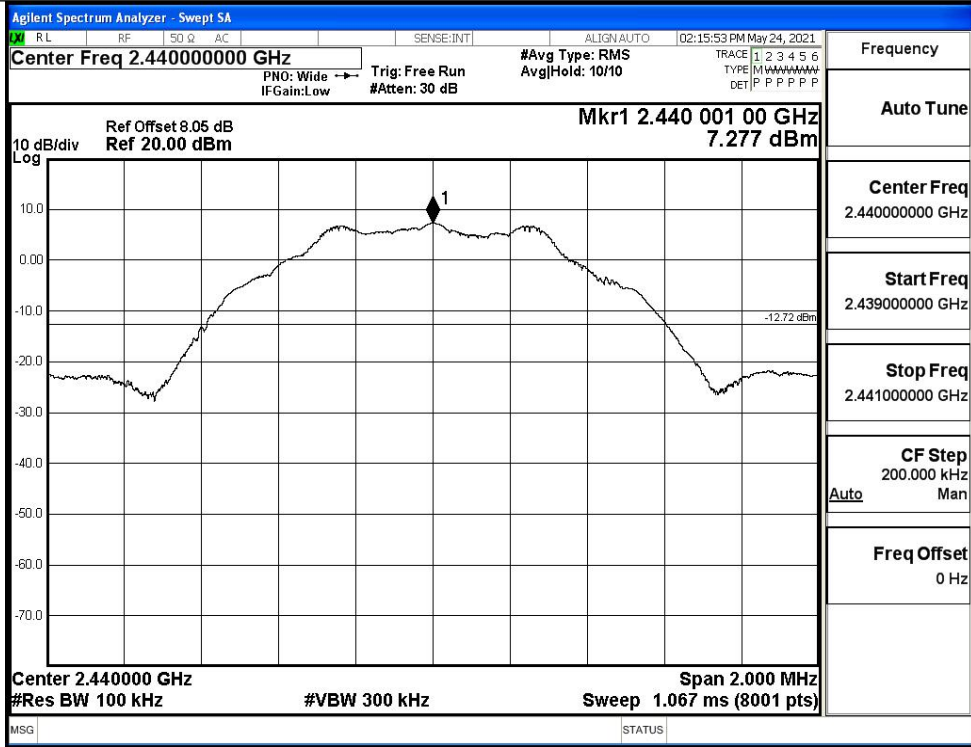


Puw/BT LE/MCH




BT LE HCH Graphs

Pref/BT LE/HCH

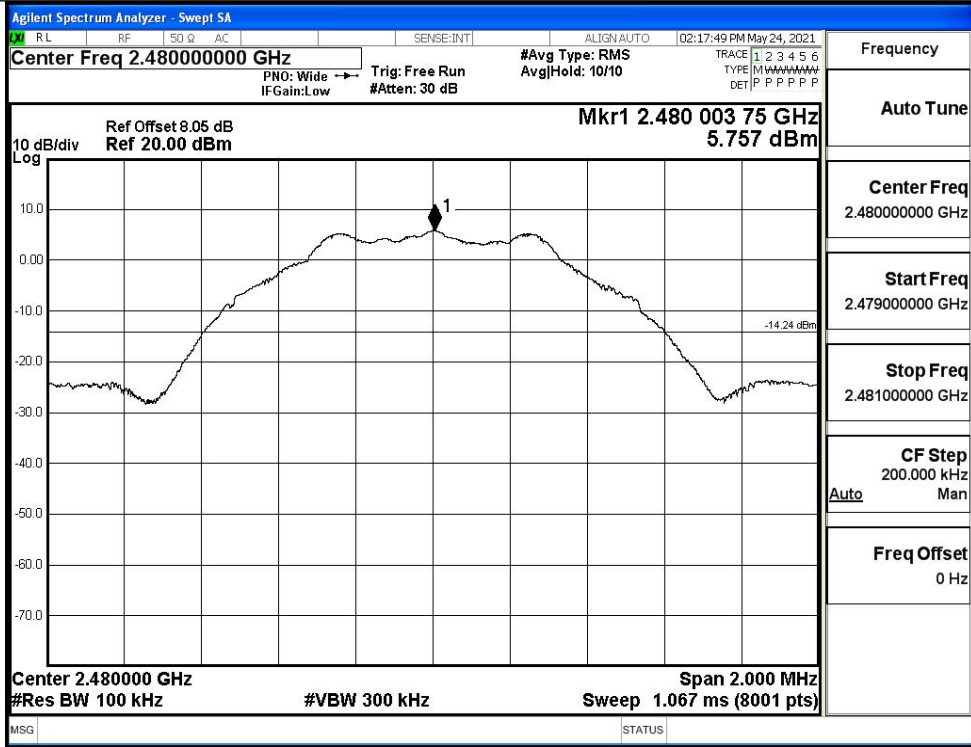



Puw/BT LE/HCH

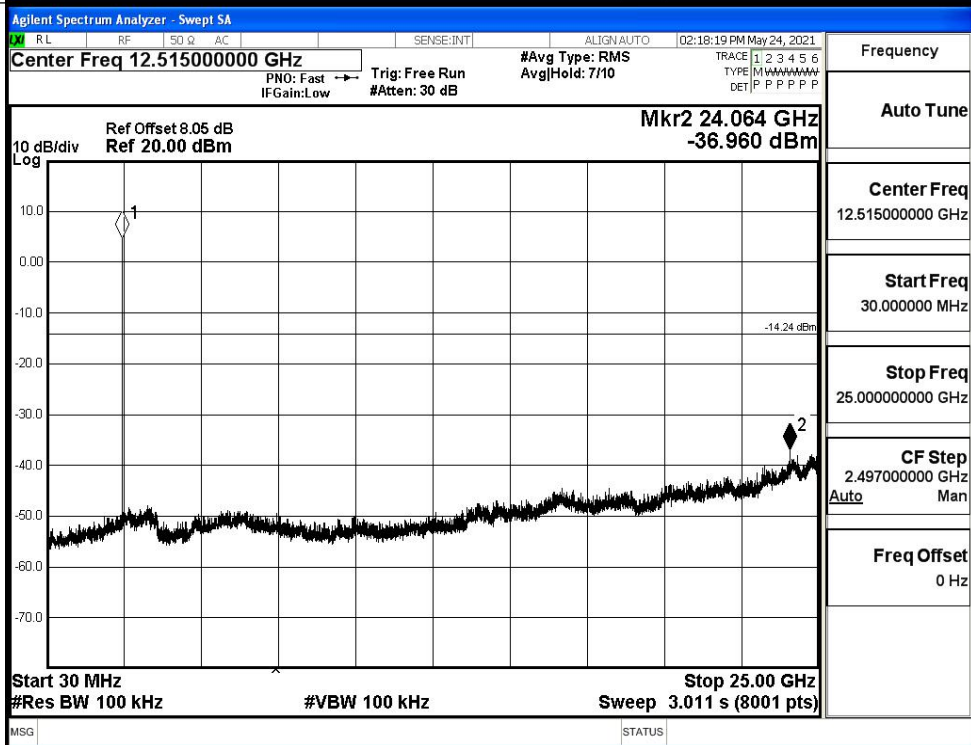

A.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	5.741	-49.734	-14.26	PASS
BT LE	HCH	5.901	-48.723	-14.1	PASS


Test Graphs

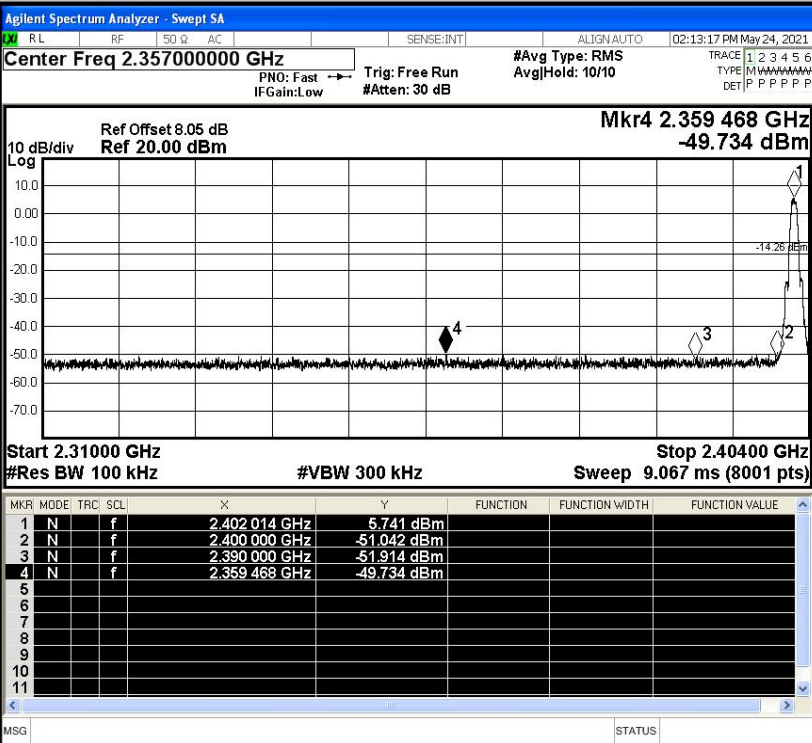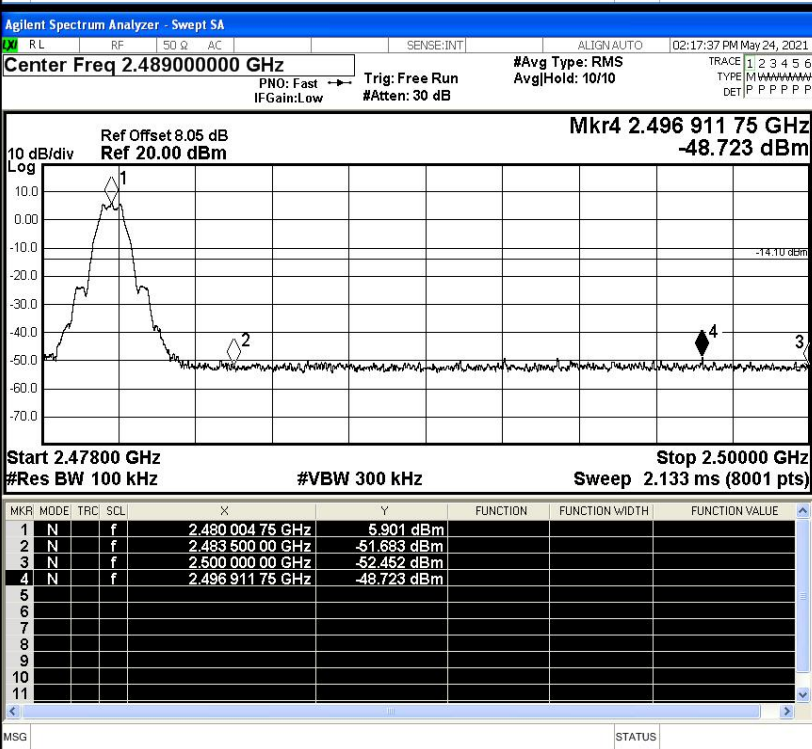LCH		<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.35700000 GHz</p> <p>Mkr4 2.359 468 GHz -49.734 dBm</p> <p>Start 2.31000 GHz Stop 2.40400 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td></td> <td>2.402 014 GHz</td> <td>5.741 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td></td> <td>2.400 000 GHz</td> <td>-51.042 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td></td> <td>2.390 000 GHz</td> <td>-51.914 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>f</td> <td></td> <td>2.359 468 GHz</td> <td>-49.734 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.402 014 GHz	5.741 dBm				2	N	f		2.400 000 GHz	-51.042 dBm				3	N	f		2.390 000 GHz	-51.914 dBm				4	N	f		2.359 468 GHz	-49.734 dBm			
	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f		2.402 014 GHz	5.741 dBm																																										
2	N	f		2.400 000 GHz	-51.042 dBm																																										
3	N	f		2.390 000 GHz	-51.914 dBm																																										
4	N	f		2.359 468 GHz	-49.734 dBm																																										
HCH		<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48900000 GHz</p> <p>Mkr4 2.496 911 75 GHz -48.723 dBm</p> <p>Start 2.47800 GHz Stop 2.50000 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td></td> <td>2.480 004 75 GHz</td> <td>5.901 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td></td> <td>2.483 500 00 GHz</td> <td>-51.683 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>f</td> <td></td> <td>2.500 000 00 GHz</td> <td>-52.452 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>f</td> <td></td> <td>2.496 911 75 GHz</td> <td>-48.723 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.480 004 75 GHz	5.901 dBm				2	N	f		2.483 500 00 GHz	-51.683 dBm				3	N	f		2.500 000 00 GHz	-52.452 dBm				4	N	f		2.496 911 75 GHz	-48.723 dBm			
	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	f		2.480 004 75 GHz	5.901 dBm																																										
2	N	f		2.483 500 00 GHz	-51.683 dBm																																										
3	N	f		2.500 000 00 GHz	-52.452 dBm																																										
4	N	f		2.496 911 75 GHz	-48.723 dBm																																										


A.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-42.18	2.0	0	55.05	PEAK	74	PASS
		Ant1	2310.0	-53.25	2.0	0	43.98	AV	54	PASS
		Ant1	2390.0	-41.81	2.0	0	55.42	PEAK	74	PASS
		Ant1	2390.0	-52.93	2.0	0	44.30	AV	54	PASS
	2480	Ant1	2483.5	-41.76	2.0	0	55.47	PEAK	74	PASS
		Ant1	2483.5	-52.17	2.0	0	45.06	AV	54	PASS
		Ant1	2500.0	-42.52	2.0	0	54.71	PEAK	74	PASS
		Ant1	2500.0	-52.24	2.0	0	44.99	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

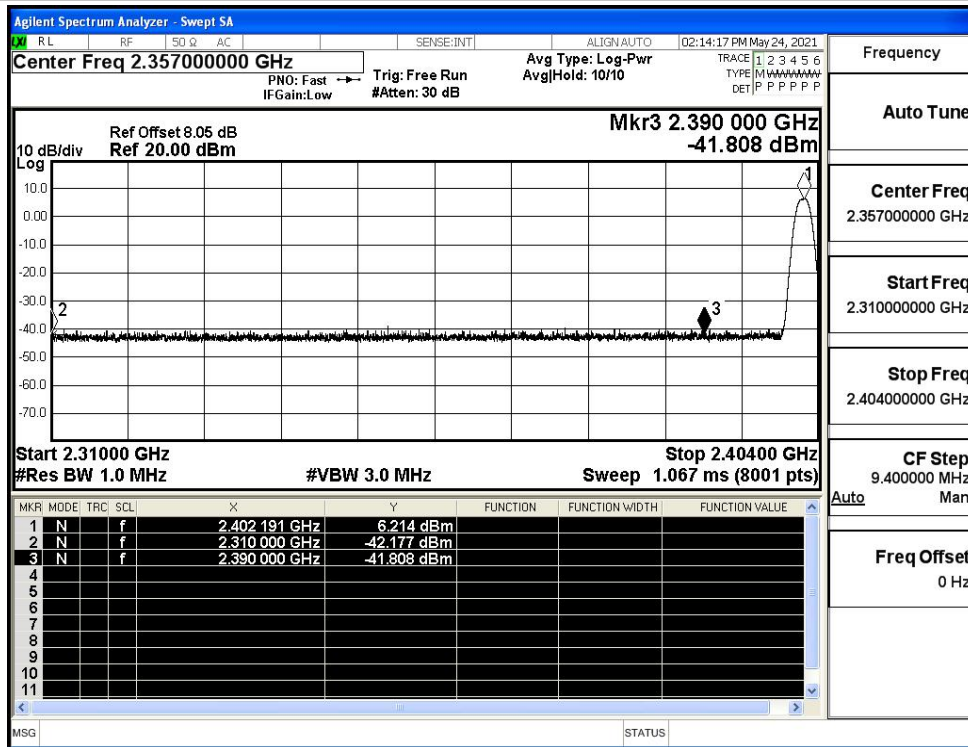

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

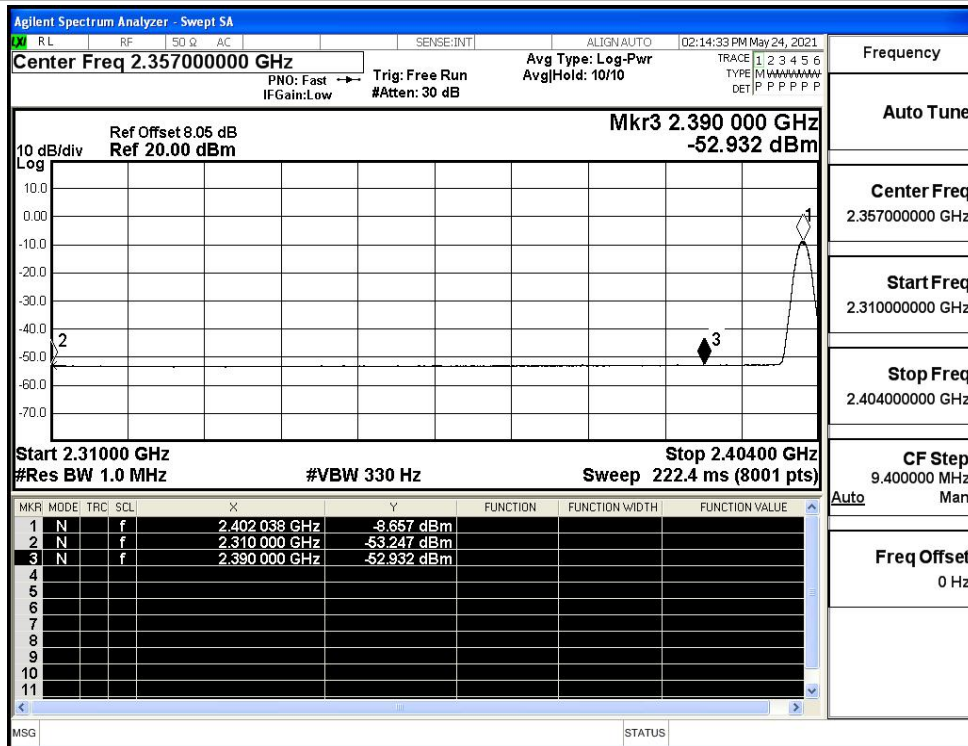

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

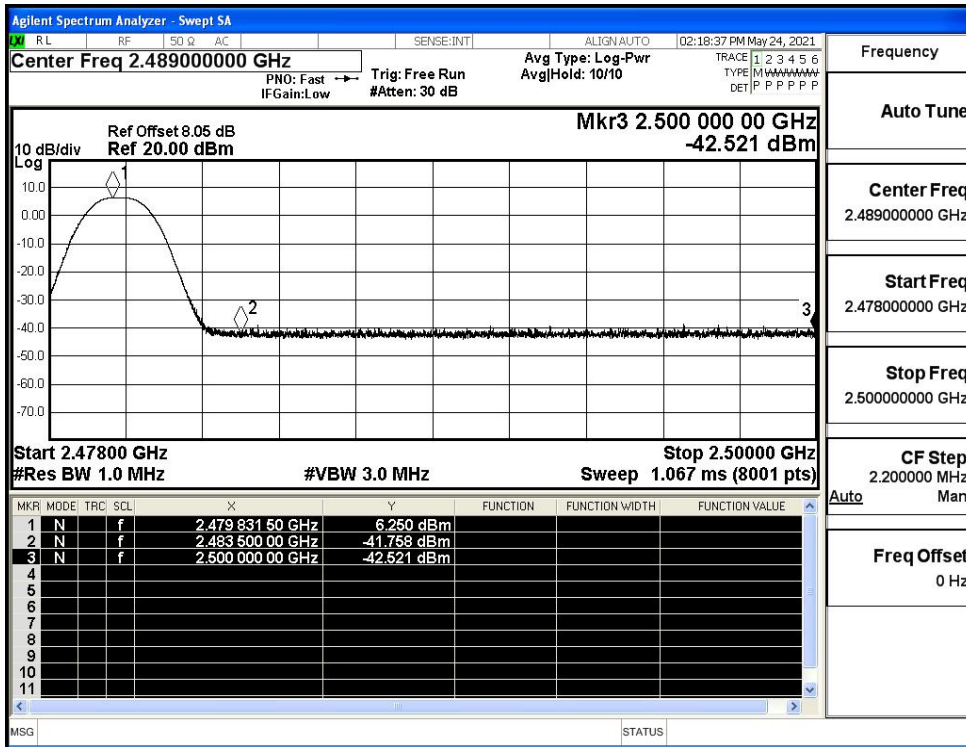

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

