



# PART 0 SAR CHAR REPORT

No. I22Z60151-SEM02

For

**HONOR Device Co., Ltd.**

**Smart Phone**

**Model Name: LGE-NX9**

with

**Hardware Version: HN1LGEHM**

**Software Version: 6.0.0.108(C900E103R1P3)**

**FCC ID: 2AYGCLGE-NX9**

**Issued Date: 2022-4-27**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



No.I22Z60151-SEM02

## **REPORT HISTORY**

| <b>Report Number</b> | <b>Revision</b> | <b>Issue Date</b> | <b>Description</b>              |
|----------------------|-----------------|-------------------|---------------------------------|
| I22Z60151-SEM02      | Rev.0           | 2022-4-27         | Initial creation of test report |



## TABLE OF CONTENT

|  |           |
|--|-----------|
| <b>1 TEST LABORATORY .....</b>                     | <b>4</b>  |
| 1.1 TESTING LOCATION .....                         | 4         |
| 1.2 TESTING ENVIRONMENT.....                       | 4         |
| 1.3 PROJECT DATA .....                             | 4         |
| 1.4 SIGNATURE.....                                 | 4         |
| <b>2 INTRODUCTION.....</b>                         | <b>5</b>  |
| <b>3 EQUIPMENT UNDER TEST (EUT) OVERVIEW .....</b> | <b>6</b>  |
| <b>4 SAR CHARACTERIZATION .....</b>                | <b>7</b>  |
| 4.1 DSI AND SAR DETERMINATION .....                | 7         |
| 4.2 SAR DESIGN TARGET AND UNCERTAINTY.....         | 8         |
| 4.2 SAR CHAR.....                                  | 9         |
| <b>5 MEASUREMENT UNCERTAINTY .....</b>             | <b>10</b> |

## 1 Test Laboratory

### 1.1 Testing Location

|               |   |
|---------------|---|
| Company Name: | CTTL(Shouxiang)   |
| Address:      | No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191 |

### 1.2 Testing Environment

|                             |                |
|-----------------------------|----------------|
| Temperature:                | 18°C~25°C,     |
| Relative humidity:          | 30%~ 70%       |
| Ground system resistance:   | < 0.5 $\Omega$ |
| Ambient noise & Reflection: | < 0.012 W/kg   |


### 1.3 Project Data

|                     |                  |
|---------------------|------------------|
| Project Leader:     | Qi Dianyuan      |
| Test Engineer:      | Lin Xiaojun      |
| Testing Start Date: | February 16,2022 |
| Testing End Date:   | April 6, 2022    |


### 1.4 Signature



Lin Xiaojun  
(Prepared this test report)

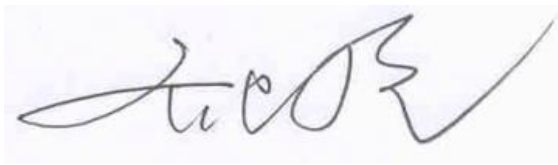

Qi Dianyuan  
(Reviewed this test report)

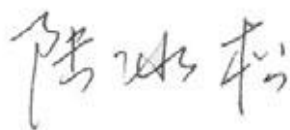

Lu Bingsong  
Deputy Director of the laboratory  
(Approved this test report)

## 2 Introduction

The equipment under test (EUT) is a smart phone. It contains the Qualcomm modem supporting 2G/3G/4G technologies and 5G NR Sub-6 GHz technologies. These modems enable Qualcomm Smart Transmit feature to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is in compliance with the FCC requirement.

In the Part 0 report, the EUT SAR are characterized for WWAN radios (2G/3G/4G/Sub6 NR) to determine the power limit that corresponds to the exposure design target after accounting for all device design related uncertainties, i.e., SAR\_design\_target (< FCC SAR limit) for sub-6. The SAR characterization are denoted as SAR Char. SAR Char will be used as input for Qualcomm Smart Transmit to operate. SAR Char will be loaded and store in the EUT via the Embedded File System (EFS).

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time- varying) transmission scenario for WWAN technologies are reported in Part 2 report.

The EUT supports WLAN/BT radio as well but WLAN/BT modem is not enabled with Smart Transmit.

### Nomenclature for Part 0 Report

| Term               | Description   |
|--------------------|---|
| $P_{limit}$        | The time-averaged RF power which corresponds to SAR_design_target.  |
| $P_{max}$          | Maximum target power level  |
| SAR_design_target: | The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties. |
| SAR Char           | $P_{limit}$ for all the technologies/bands for all applicable DSI   |

### 3 Equipment Under Test (EUT) Overview

|                                     |  |
|-------------------------------------|--|
| Description:                        | Smart Phone  |
| Model name:                         | LGE-NX9  |
| Tested Band:                        | GSM850/1900,<br>WCDMA B2/4/B5<br>LTE Band2/4/5/7/12/13/17/25/26/38/41/66<br>5G NR N2/5/7/38/41/66/71<br>BT, Wi-Fi(2.4G), Wi-Fi(5G) |
| Tx Frequency:                       | 824 – 849 MHz (GSM 850)  |
|                                     | 1850 – 1910 MHz (GSM 1900)   |
|                                     | 824–849 MHz (WCDMA 850 Band V)   |
|                                     | 1710 – 1755 MHz (WCDMA 1700 Band IV)   |
|                                     | 1850–1910 MHz (WCDMA1900 Band II)  |
|                                     | 1850 – 1910 MHz(LTE Band 2)  |
|                                     | 1710 – 1755 MHz (LTE Band 4)   |
|                                     | 824 – 849 MHz (LTE Band 5)   |
|                                     | 2500 – 2570 MHz(LTE Band 7)  |
|                                     | 699 – 716 MHz (LTE Band 12)  |
|                                     | 777 –787 MHz (LTE Band 13)   |
|                                     | 704 –716 MHz (LTE Band 17)   |
|                                     | 1850 – 1915 MHz (LTE Band 25)  |
|                                     | 814 – 849 MHz (LTE Band 26)  |
|                                     | 2570 – 2620 MHz (LTE Band 38)  |
|                                     | 2496 – 2690 MHz (LTE Band 41)  |
|                                     | 1710 – 1780 MHz (LTE Band 66)  |
|                                     | 2412 – 2462 MHz (Wi-Fi 2.4G)   |
|                                     | 5180 – 5240 MHz (Wi-Fi 5.2G)   |
|                                     | 5260 – 5320 MHz (Wi-Fi 5.3G)   |
|                                     | 5500 – 5720 MHz (Wi-Fi 5.5G)   |
|                                     | 5745 – 5825 MHz (Wi-Fi 5.8G)   |
|                                     | 2400 – 2483.5 MHz (Bluetooth)  |
|                                     | 1850 – 1910 MHz(n2)  |
|                                     | 824 – 849 MHz(n5)  |
|                                     | 2500 – 2570 MHz (NR n7)  |
| 2570 – 2620 MHz (NR n38)            |  |
| 2496 – 2690 MHz (n41)               |  |
| 1710– 1780 MHz (n66)                |  |
| 663 – 698 MHz (n71)                 |  |
| GPRS/EGPRS Multislot Class:         | 12   |
| Test device production information: | Production unit  |
| Device type:                        | Portable device  |
| Antenna type:                       | Integrated antenna   |
| Hotspot mode:                       | Support  |

Note: The device is a dual SIM and single SIM smart phone, Single SIM delete SIM2 only by software.

## 4 SAR Characterization

### 4.1 DSI and SAR Determination

This device uses different Device State Index (DSI) to configure different time averaged power levels based on certain exposure scenarios. Depending on the detection scheme implemented in the smartphone, the worst-case SAR is further grouped and determined for each or combined exposure scenario

**DSI and Corresponding Exposure Scenarios**

| <b>Scenario</b> | <b>Description</b>       |
|-----------------|--------------------------|
| DSI1            | Receiver on(Standalone)  |
| DSI3            | Receiver off(Standalone) |
| DSI13           | Hotspot on               |

## 4.2 SAR Design Target and Uncertainty

SAR\_design\_target is determined by ensuring that it is less than FCC SAR limit after accounting for total device designed related uncertainties specified by the manufacturer.

To account for total uncertainty, SAR\_design\_target should be determined as:

$$SAR\_design\_target < SAR_{regulatory\_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

| Exposure conditions | Trigger Conditions | DSI | SAR design target     | target-W/kg | report-W/kg | Remark          |
|---------------------|--------------------|-----|-----------------------|-------------|-------------|-----------------|
| Head                | Rcv On             | 1   | 1g SAR design target  | 0.78        | 0.98        | For WCDMA & LTE |
| Head                | Rcv On             | 1   | 1g SAR design target  | 0.69        | 0.98        | For NR          |
| Body Worn-hotspot   | Rcv Off            | 13  | 1g SAR design target  | 0.78        | 0.98        | For WCDMA & LTE |
| Body Worn-hotspot   | Rcv Off            | 13  | 1g SAR design target  | 0.69        | 0.98        | For NR          |
| Extremity           | Rcv Off            | 3   | 10g SAR design target | 2.14        | 2.7         | For WCDMA & LTE |
| Extremity           | Rcv Off            | 3   | 10g SAR design target | 1.91        | 2.7         | For NR          |

|                               | Uncertainty dB<br>2/3/4G (except<br>B34/B38/B41) | Uncertainty dB<br>B34/B40 | Uncertainty dB<br>NR/B41 |
|-------------------------------|--|---------------------------|--------------------------|
| Sub6 radio<br>TxAGC           | 1  | 1.2                       | 1.5                      |
| Device to device<br>variation | 0.5  | 0.5                       | 0.5                      |
| Total uncertainty             | 1.1  | 1.3                       | 1.55                     |



## 4.2 SAR Char

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating. Plimit is calculated by linearly scaling with the measured SAR at the Ppart0 to correspond to the SAR\_design\_target. When Plimit < Pmax, Ppart0 was used as Plimit in the Smart Transmit EFS. When Plimit >Pmax and Ppart0=Pmax, calculated Pmax was used in the Smart Transmit EFS. All reported SAR obtained from the Ppart0 SAR tests was less than SAR\_Design\_target+ device uncertainty.

| Band        | Antenna | Plimit |       |         | Pmax* |
|-------------|---------|--------|-------|---------|-------|
|             |         | Head   | Body  | Hotspot |       |
|             |         | DSI 1  | DSI 3 | DSI 13  |       |
| GSM_B850    | 0       | 32.5   | 32.5  | 27.5    | 32.5  |
| GSM_B850    | 3       | 29.5   | 30.0  | 24.5    | 32.0  |
| GSM_B1900   | 1       | 29.5   | 29.5  | 24.5    | 29.5  |
| GSM_B1900   | 2       | 27.1   | 28.1  | 22.1    | 29.6  |
| LTE_B2      | 1       | 23.5   | 20.6  | 16.2    | 23.5  |
| LTE_B2      | 2       | 23.6   | 21.5  | 17.1    | 23.6  |
| LTE_B4      | 1       | 24.2   | 21.7  | 17.3    | 24.2  |
| LTE_B4      | 2       | 24.3   | 21.4  | 17.0    | 24.3  |
| LTE_B4      | 4       | 15.5   | 19.8  | 10.5    | 23.0  |
| LTE_B4      | 6       | 20.2   | 20.2  | 15.2    | 20.2  |
| LTE_B5      | 0       | 24.5   | 24.5  | 19.5    | 24.5  |
| LTE_B5      | 3       | 23.0   | 22.5  | 18.0    | 24.0  |
| LTE_B7      | 1       | 21.9   | 21.9  | 16.9    | 24.0  |
| LTE_B7      | 2       | 20.1   | 19.9  | 15.1    | 24.1  |
| LTE_B7      | 4       | 15.6   | 18.0  | 10.6    | 22.5  |
| LTE_B7      | 9       | 23.1   | 23.1  | 18.1    | 23.1  |
| LTE_B12     | 0       | 24.5   | 24.5  | 19.5    | 24.5  |
| LTE_B12     | 3       | 23.9   | 23.9  | 18.9    | 23.9  |
| LTE_B13     | 0       | 23.5   | 23.5  | 18.5    | 23.5  |
| LTE_B13     | 3       | 23.0   | 23.0  | 18.0    | 23.0  |
| LTE_B17     | 0       | 24.5   | 24.5  | 19.5    | 24.5  |
| LTE_B17     | 3       | 23.9   | 23.9  | 18.9    | 23.9  |
| LTE_B25     | 1       | 23.5   | 21.1  | 16.7    | 23.5  |
| LTE_B25     | 2       | 23.1   | 21.2  | 16.8    | 23.6  |
| LTE_B26     | 0       | 24.5   | 24.5  | 19.5    | 24.5  |
| LTE_B26     | 3       | 23.4   | 23.9  | 18.4    | 23.9  |
| LTE_B38     | 4       | 15.2   | 17.5  | 10.2    | 24.0  |
| LTE_B38     | 9       | 22.5   | 22.5  | 17.5    | 22.5  |
| LTE_B38     | 1       | 23.1   | 22.7  | 18.1    | 23.8  |
| LTE_B38     | 2       | 21.7   | 21.6  | 16.7    | 23.9  |
| LTE_B41 PC2 | 1       | 24.8   | 24.8  | 19.8    | 26.0  |
| LTE_B41 PC2 | 2       | 24.2   | 24.2  | 19.2    | 26.1  |
| LTE_B41 PC3 | 1       | 23.3   | 23.3  | 18.3    | 24.5  |
| LTE_B41 PC3 | 2       | 22.7   | 22.7  | 17.7    | 24.6  |
| LTE_B41 PC3 | 4       | 15.7   | 18.0  | 10.7    | 24.5  |
| LTE_B41 PC3 | 9       | 23.1   | 23.1  | 18.1    | 23.1  |
| LTE_B66     | 1       | 23.5   | 21.4  | 17.0    | 23.5  |
| LTE_B66     | 2       | 23.6   | 20.9  | 16.5    | 23.6  |
| NR5G_N2     | 1       | 23.5   | 21.2  | 16.8    | 23.5  |
| NR5G_N2     | 2       | 21.5   | 19.9  | 15.5    | 22.5  |
| NR5G_N5     | 0       | 24.5   | 24.5  | 19.5    | 24.5  |
| NR5G_N5     | 3       | 22.1   | 24.0  | 17.1    | 24.0  |
| NR5G_N7     | 4       | 13.9   | 14.7  | 8.9     | 22.5  |
| NR5G_N7     | 9       | 22.9   | 22.8  | 17.9    | 23.1  |
| NR5G_N7     | 1       | 21.2   | 21.2  | 16.2    | 24.2  |
| NR5G_N7     | 2       | 19.6   | 19.6  | 14.6    | 24.3  |
| NR5G_N38    | 1       | 19.6   | 19.6  | 14.6    | 20.5  |
| NR5G_N38    | 2       | 19.0   | 19.0  | 14.0    | 21.9  |
| NR5G_N38    | 4       | 15.2   | 17.1  | 10.2    | 24.5  |
| NR5G_N38    | 9       | 23.1   | 23.1  | 18.1    | 23.1  |
| NR5G_N41    | 1       | 21.5   | 21.5  | 16.5    | 25.0  |
| NR5G_N41    | 2       | 18.8   | 18.8  | 13.8    | 25.1  |
| NR5G_N41    | 4       | 15.7   | 17.9  | 10.7    | 25.0  |
| NR5G_N41    | 9       | 23.7   | 23.7  | 18.7    | 23.7  |
| NR5G_N66    | 1       | 23.5   | 21.2  | 16.8    | 23.5  |
| NR5G_N66    | 2       | 21.7   | 21.0  | 16.6    | 23.6  |
| NR5G_N71    | 0       | 24.0   | 24.0  | 19.0    | 24.0  |
| NR5G_N71    | 3       | 23.5   | 23.5  | 18.5    | 23.5  |
| WCDMA_B2    | 1       | 24.0   | 20.9  | 16.5    | 24.0  |
| WCDMA_B2    | 2       | 23.4   | 21.1  | 16.7    | 24.1  |
| WCDMA_B4    | 1       | 24.0   | 21.2  | 16.8    | 24.0  |
| WCDMA_B4    | 2       | 23.4   | 20.9  | 16.5    | 24.1  |
| WCDMA_B6    | 0       | 24.5   | 24.5  | 19.5    | 24.5  |
| WCDMA_B6    | 3       | 23.3   | 24.0  | 18.3    | 24.0  |

**Note:**

- 1 When Pmax < Plimit, the DUT will operate at a power level up to Pmax.
- 2 Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + device uncertainty.
- 3 The device have similar frequency in some LTE bands : LTEB5/26,12/17,4/66, since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands, therefore, only larger LTE bands were required to be tested for SAR.



## 5 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.