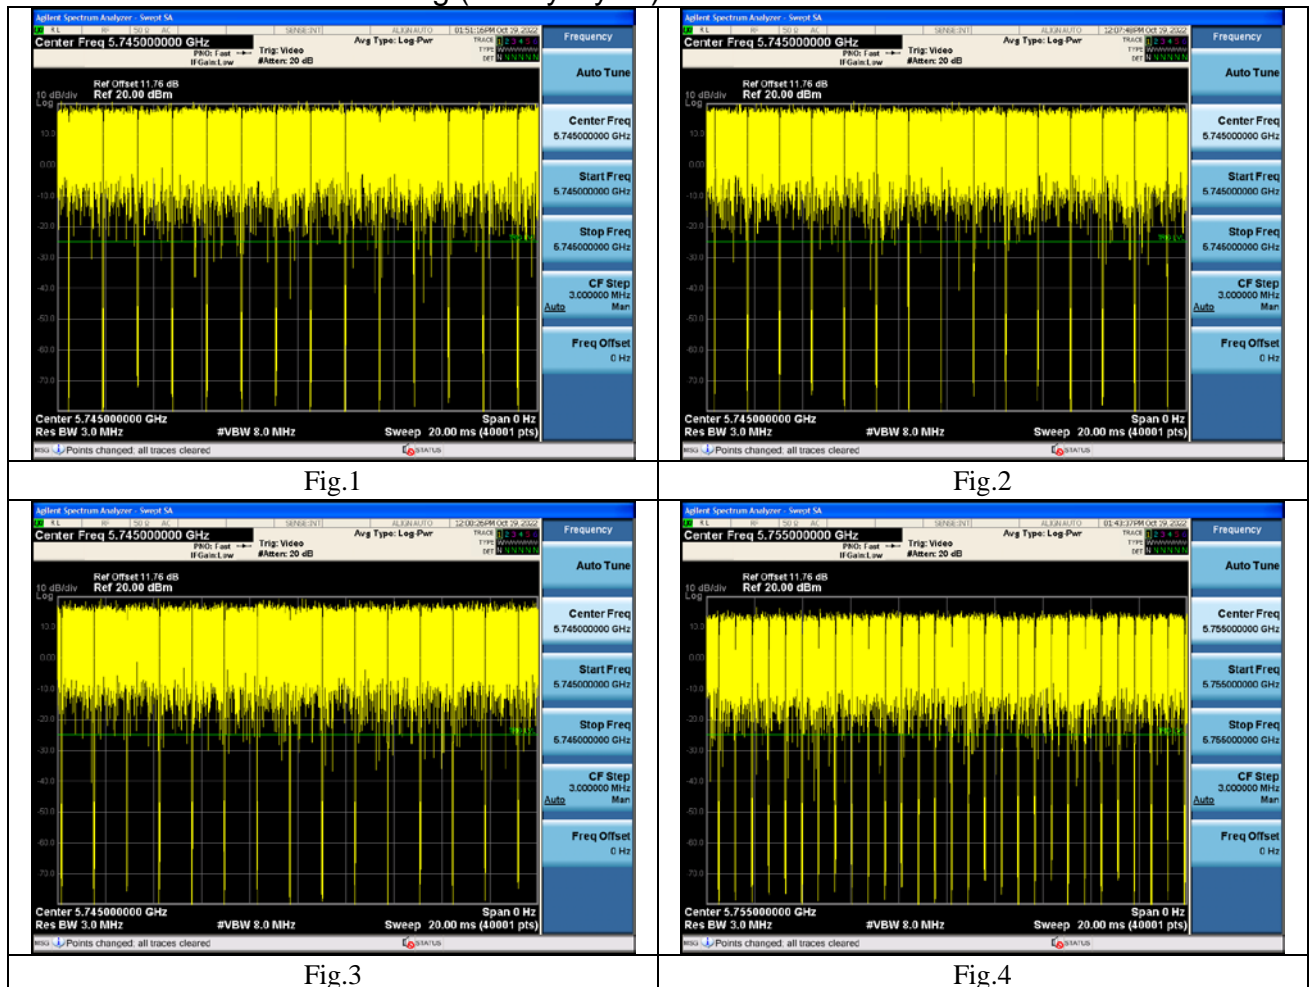


## APPENDIX A – TEST DATA OF CONDUCTED EMISSION

### Duty Cycle

Test Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor(dB)	Plot
802.11a	5745	98.69%	0	Fig.1
802.11n HT20	5745	98.64%	0	Fig.2
802.11ac VHT20	5745	98.62%	0	Fig.3
802.11n HT40	5755	97.34%	0.12	Fig.4
802.11ac VHT40	5755	97.31%	0.12	Fig.5
802.11ac VHT80	5775	94.99%	0.22	Fig.6

Note: Correction Factor=10\*log (1/Duty Cycle)



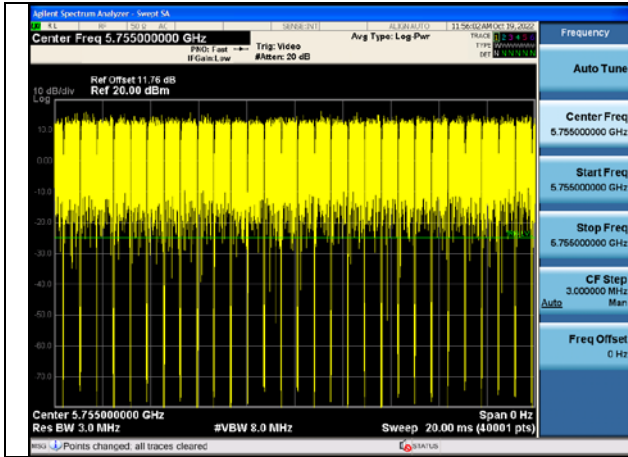


Fig.5

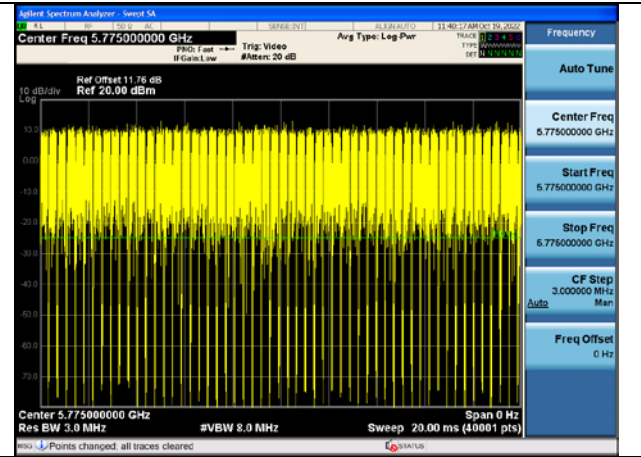


Fig.6

## Output Power

Mode	Tones/ RUIndex	Freq (MHz)	Antenna	Conducted average power output(dBm)	EIRP (dBm)
802.11a	NA	5745	Chain0	15.50	14.30
802.11a	NA	5785	Chain0	15.95	14.75
802.11a	NA	5825	Chain0	16.08	14.88
802.11n HT20	NA	5745	Chain0	15.35	14.15
802.11n HT20	NA	5785	Chain0	15.87	14.67
802.11n HT20	NA	5825	Chain0	16.01	14.81
802.11ac VHT20	NA	5745	Chain0	15.44	14.24
802.11ac VHT20	NA	5785	Chain0	15.77	14.57
802.11ac VHT20	NA	5825	Chain0	16.02	14.82
802.11n HT40	NA	5755	Chain0	15.37	14.17
802.11n HT40	NA	5795	Chain0	15.77	14.57
802.11ac VHT40	NA	5755	Chain0	15.36	14.16
802.11ac VHT40	NA	5795	Chain0	15.79	14.59
802.11ac VHT80	NA	5775	Chain0	14.90	13.70

## Emission Bandwidth


Offset 11.76dB = Attenuator + Temporary antenna connector loss + Cable loss

Test Mode	Antenna	26dB Bandwidth (MHz)		
		Channel No.667	Channel No.675	Channel No.683
		5745MHz	5785MHz	5825MHz
802.11a	Chain0	28.10	25.61	21.09
802.11n HT20	Chain0	23.50	23.67	23.43
802.11ac VHT20	Chain0	20.50	20.13	20.63


Test Mode	Antenna	26dB Bandwidth (MHz)		
		Channel No.669	---	Channel No.677
		5755MHz	---	5795MHz
802.11n HT40	Chain0	44.26	---	49.92
802.11ac VHT40	Chain0	39.87	---	40.72

Test Mode	Antenna	26dB Bandwidth (MHz)		
		Channel No.673	---	---
		5775MHz	---	---
802.11ac VHT80	Chain0	80.66	---	---


Test Mode: 802.11a

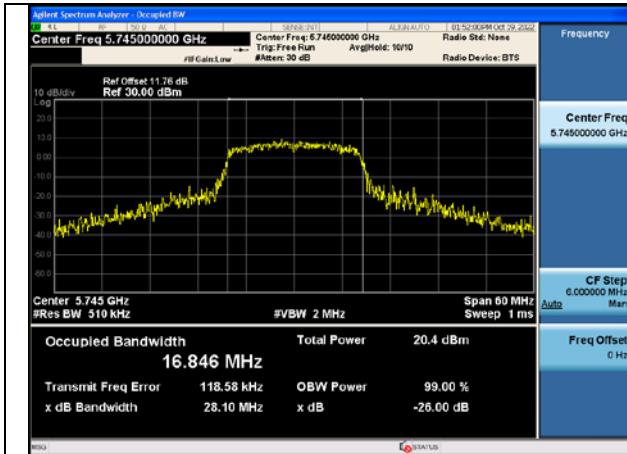

Test Mode:802.11a 5745MHz Chain0

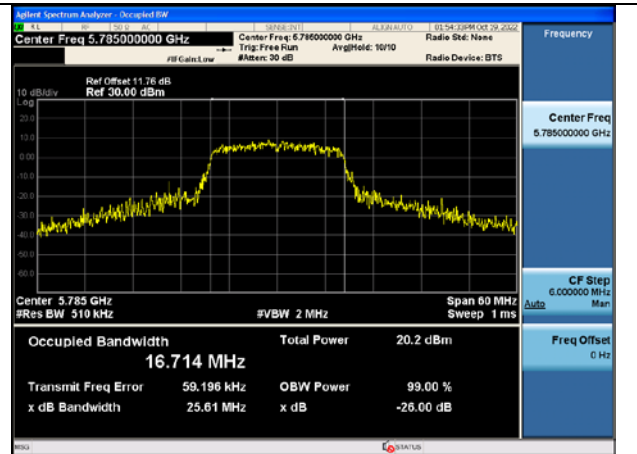


Test Mode:802.11a 5785MHz Chain0

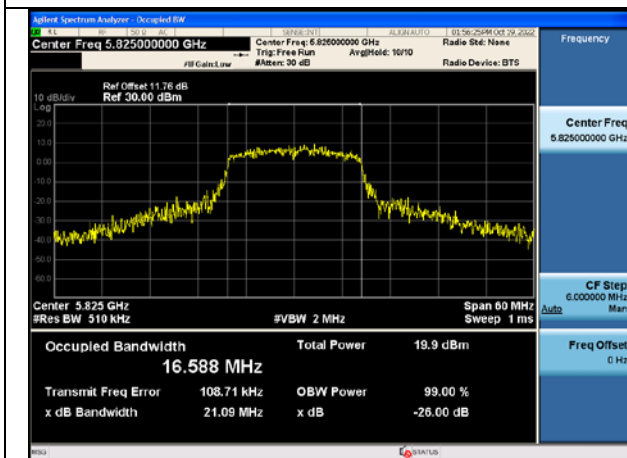


Test Mode:802.11a 5825MHz Chain0


Test Mode: 802.11n HT20

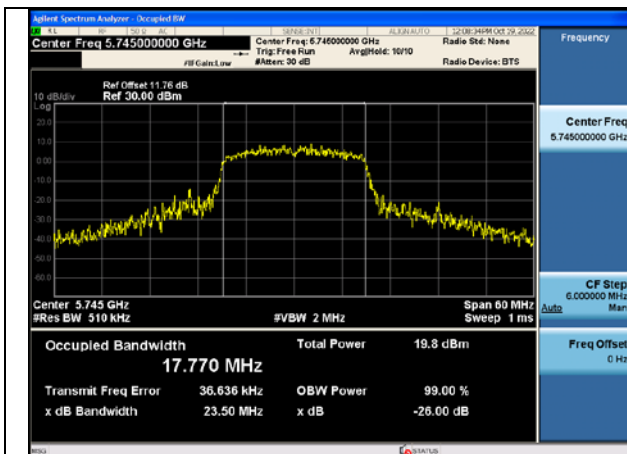

Test Mode:802.11n HT20 5745MHz Chain0

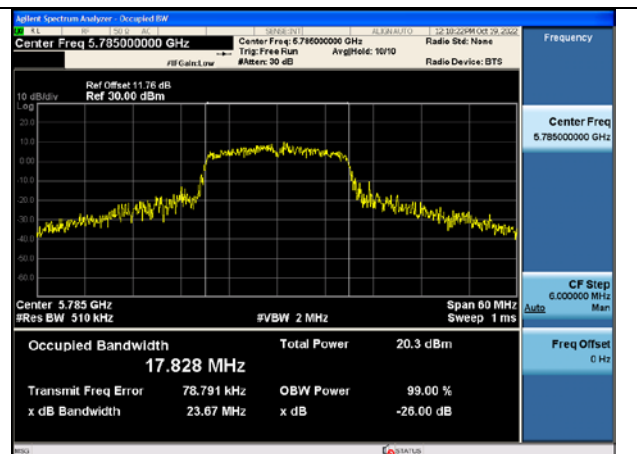


Test Mode:802.11n HT20 5785MHz Chain0

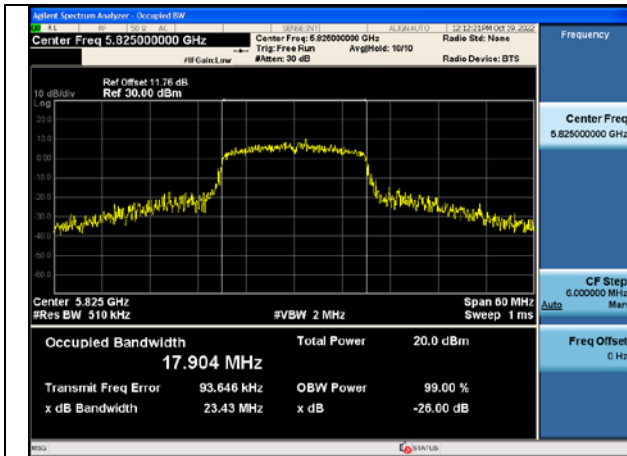


Test Mode:802.11n HT20 5825MHz Chain0


Test Mode: 802.11ac VHT20

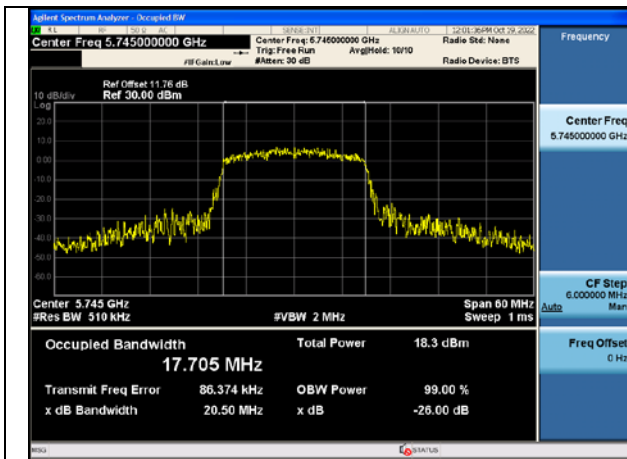

Test Mode:802.11ac VHT20 5745MHz Chain0

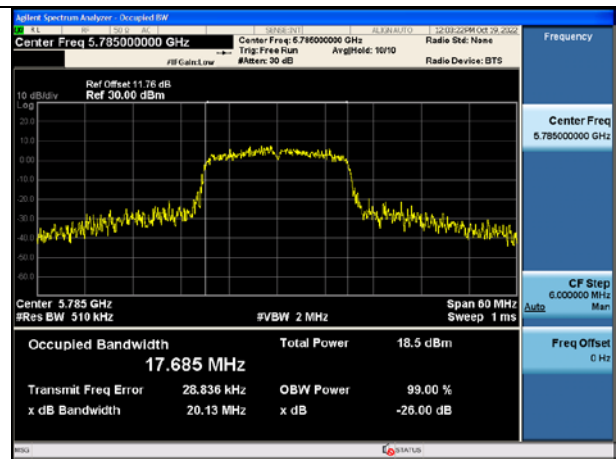


Test Mode:802.11ac VHT20 5785MHz Chain0

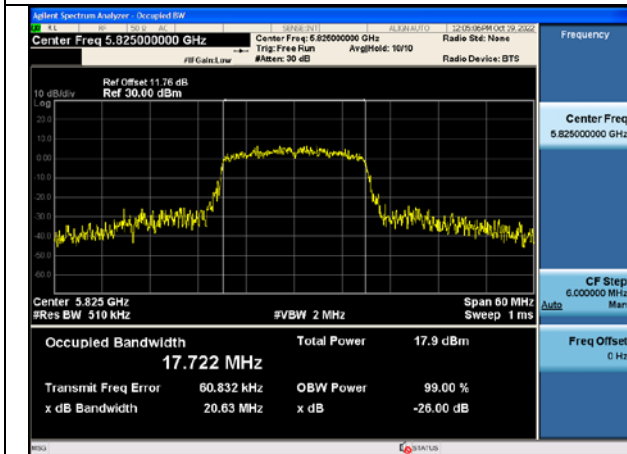


Test Mode:802.11ac VHT20 5825MHz Chain0

Test Mode: 802.11n HT40

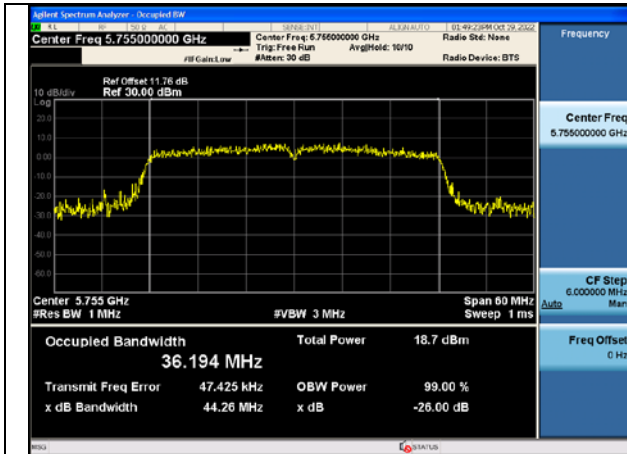


Test Mode:802.11n HT40 5755MHz Chain0

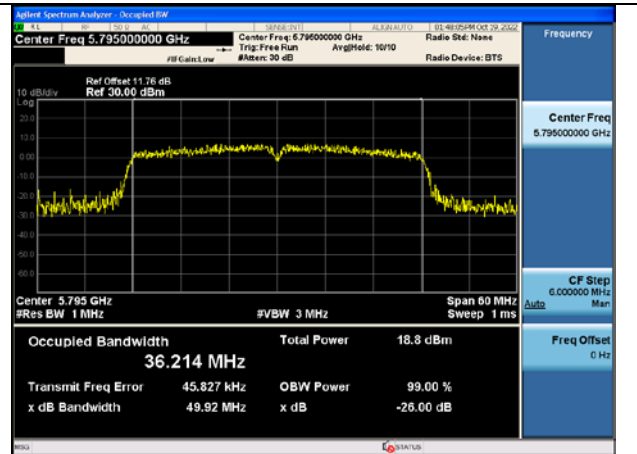


Test Mode:802.11n HT40 5795MHz Chain0

Test Mode: 802.11ac VHT40

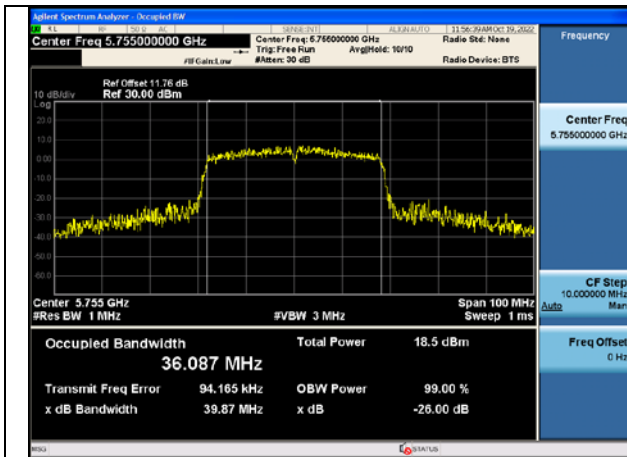


Test Mode:802.11ac VHT40 5755MHz Chain0

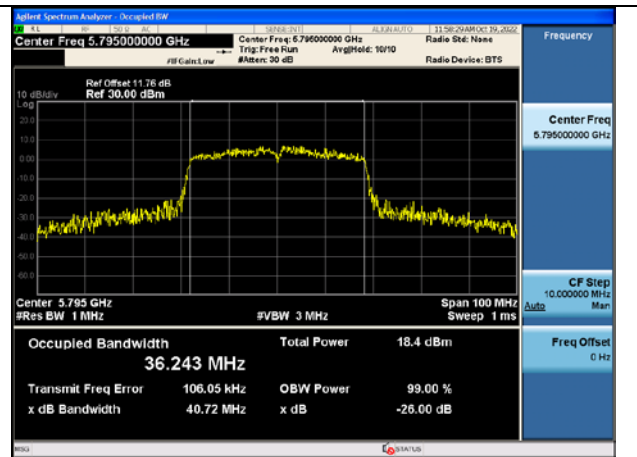

Test Mode:802.11ac VHT40 5795MHz Chain0

Test Mode: 802.11ac VHT80

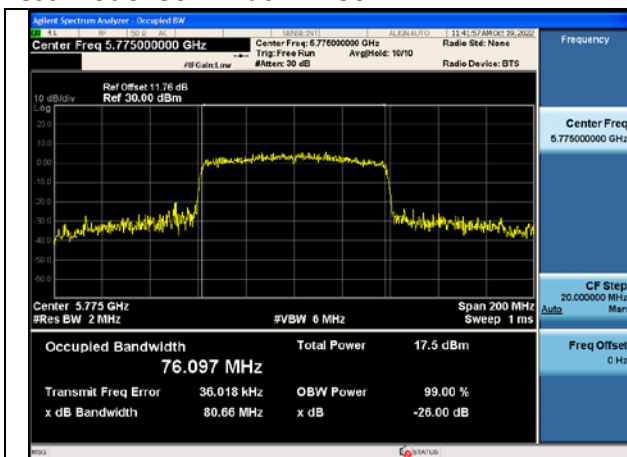

Test Mode:802.11ac VHT80 5775MHz Chain0

## Occupied Bandwidth

Offset 11.76dB = Attenuator + Temporary antenna connector loss + Cable loss


Test Mode	Antenna	Occupied Bandwidth (MHz)		
		Channel No.667	Channel No.675	Channel No.683
		5745MHz	5785MHz	5825MHz
802.11a	Chain0	16.728	16.634	16.616
802.11n HT20	Chain0	17.700	17.810	17.846
802.11ac VHT20	Chain0	17.683	17.647	17.707

Test Mode	Antenna	Occupied Bandwidth (MHz)		
		Channel No.669	---	Channel No.677
		5755MHz	---	5795MHz
802.11n HT40	Chain0	36.171	---	36.174
802.11ac VHT40	Chain0	36.144	---	36.118


Test Mode	Antenna	Occupied Bandwidth (MHz)		
		Channel No.673	---	---
		5775MHz	---	---
802.11ac VHT80	Chain0	75.715	---	---




Test Mode: 802.11a

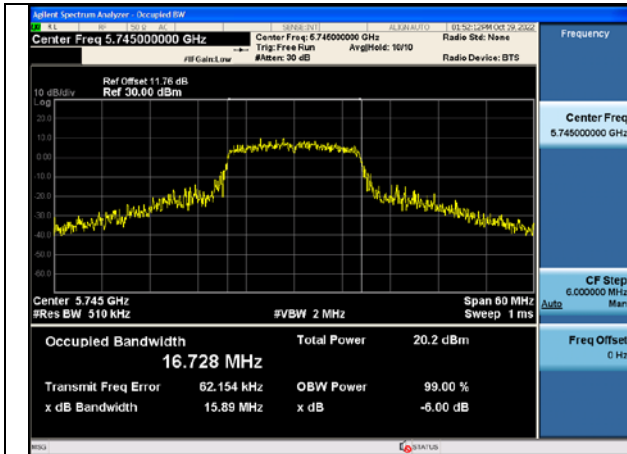

Test Mode:802.11a 5745MHz Chain0

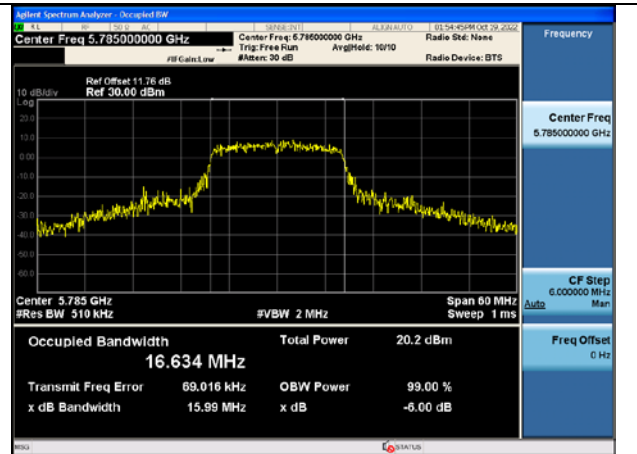


Test Mode:802.11a 5785MHz Chain0

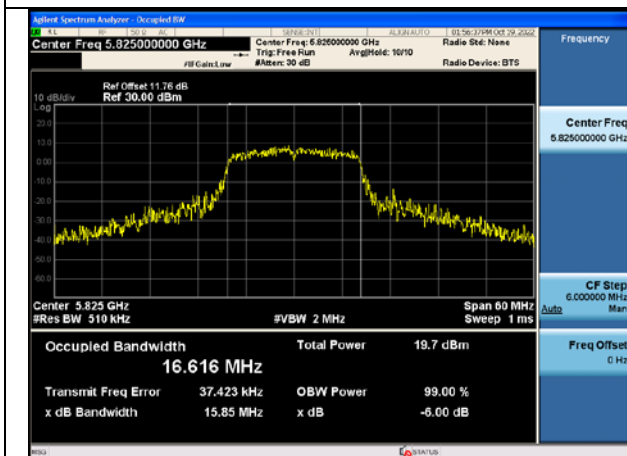


Test Mode:802.11a 5825MHz Chain0


Test Mode: 802.11n HT20

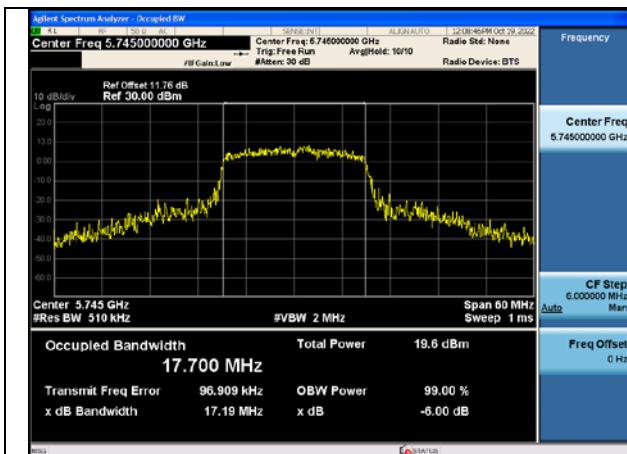

Test Mode:802.11n HT20 5745MHz Chain0

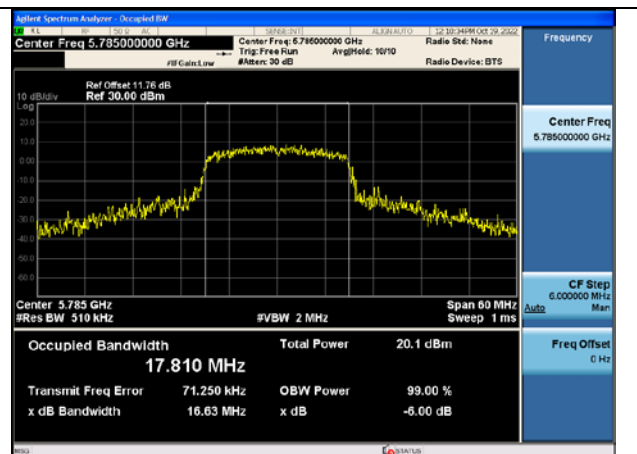


Test Mode:802.11n HT20 5785MHz Chain0

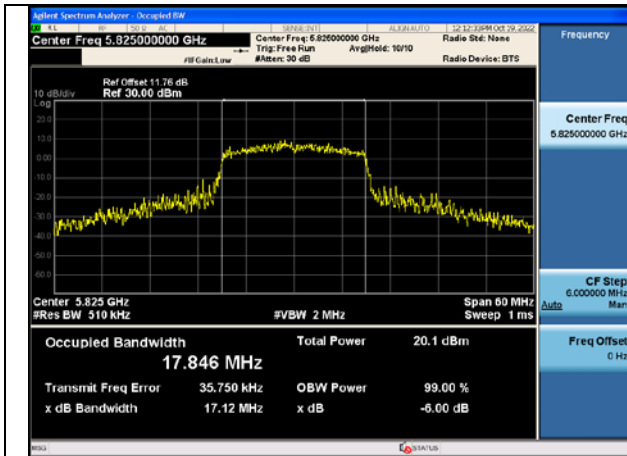


Test Mode:802.11n HT20 5825MHz Chain0


Test Mode: 802.11ac VHT20

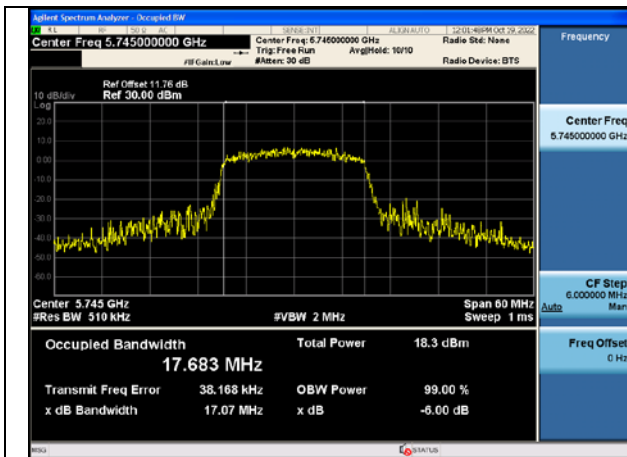

Test Mode:802.11ac VHT20 5745MHz Chain0

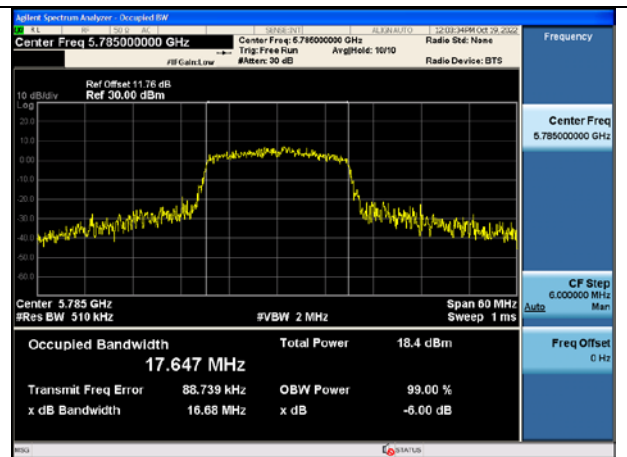


Test Mode:802.11ac VHT20 5785MHz Chain0

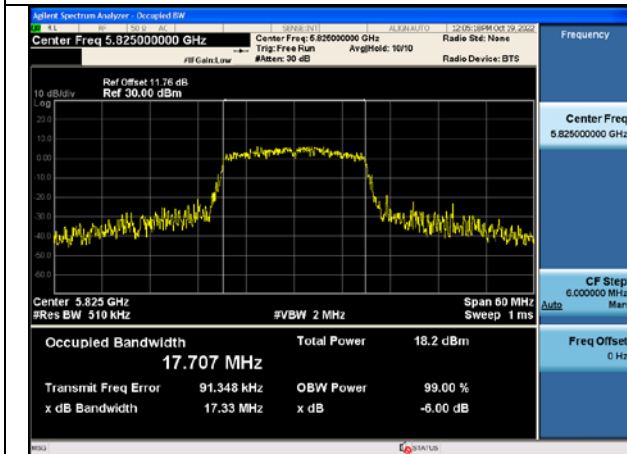


Test Mode:802.11ac VHT20 5825MHz Chain0

Test Mode: 802.11n HT40

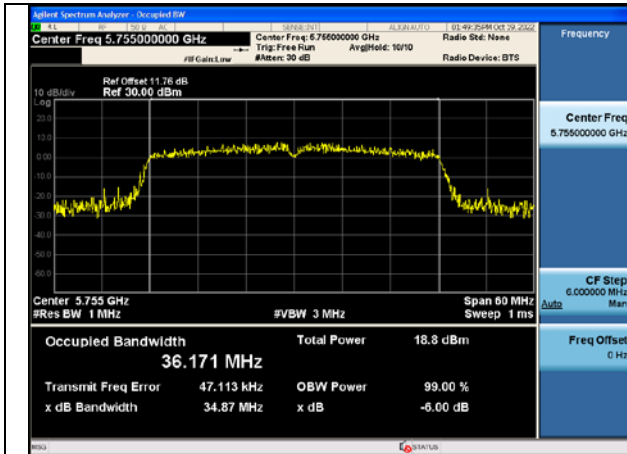


Test Mode:802.11n HT40 5755MHz Chain0

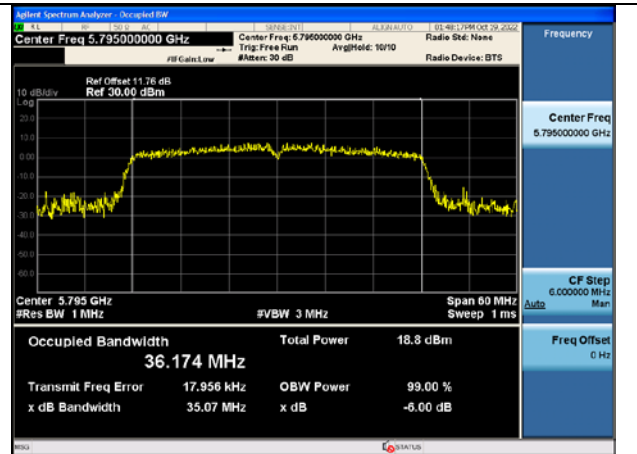


Test Mode:802.11n HT40 5795MHz Chain0

Test Mode: 802.11ac VHT40

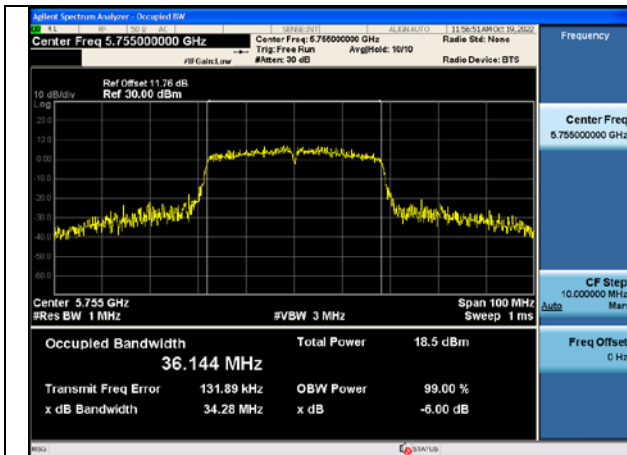


Test Mode:802.11ac VHT40 5755MHz Chain0

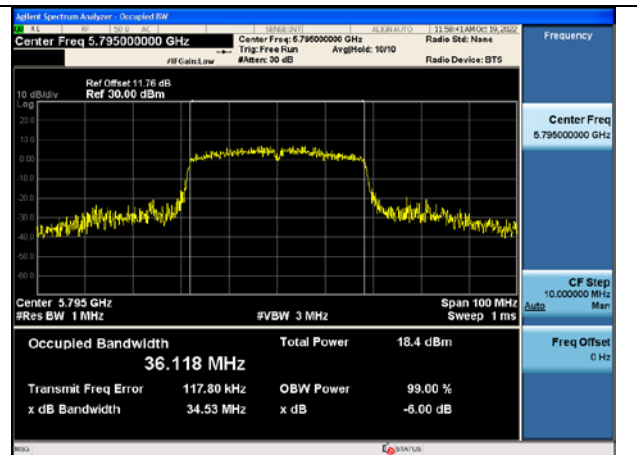

Test Mode:802.11ac VHT40 5795MHz Chain0

Test Mode: 802.11ac VHT80

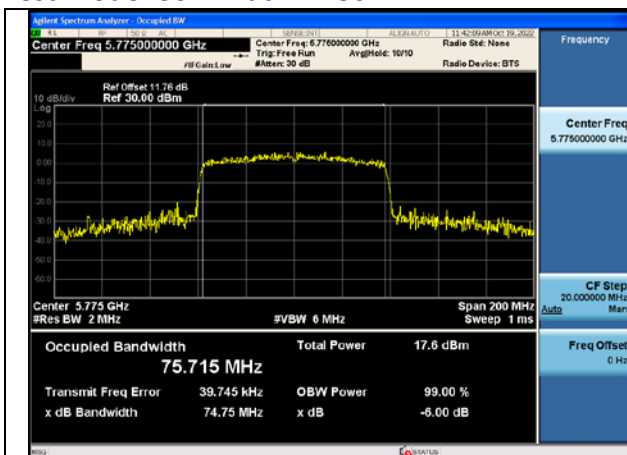

Test Mode:802.11ac VHT80 5775MHz Chain0

## 6dB Bandwidth


Offset 11.76dB = Attenuator + Temporary antenna connector loss + Cable loss

Test Mode	Antenna	6dB Bandwidth (MHz)		
		Channel No.667	Channel No.675	Channel No.683
		5745MHz	5785MHz	5825MHz
802.11a	Chain0	16.01	15.10	15.47
802.11n HT20	Chain0	17.14	13.22	15.35
802.11ac VHT20	Chain0	17.34	15.05	10.99


Test Mode	Antenna	6dB Bandwidth (MHz)		
		Channel No.669	---	Channel No.677
		5755MHz	---	5795MHz
802.11n HT40	Chain0	31.54	---	31.51
802.11ac VHT40	Chain0	28.17	---	35.76

Test Mode	Antenna	6dB Bandwidth (MHz)		
		Channel No.673	---	---
		5775MHz	---	---
802.11ac VHT80	Chain0	74.77	---	---


Test Mode: 802.11a

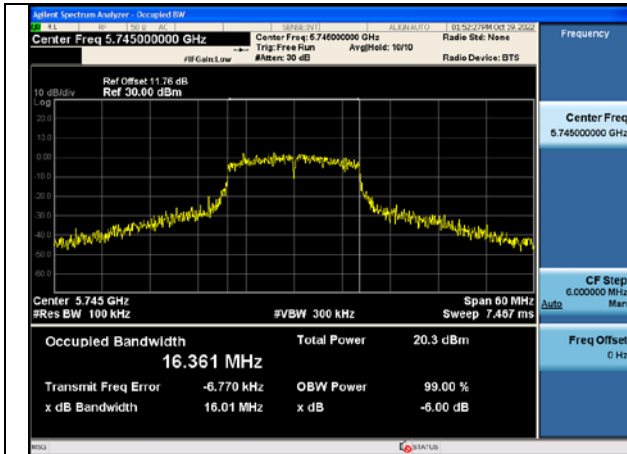

Test Mode:802.11a 5745MHz Chain0

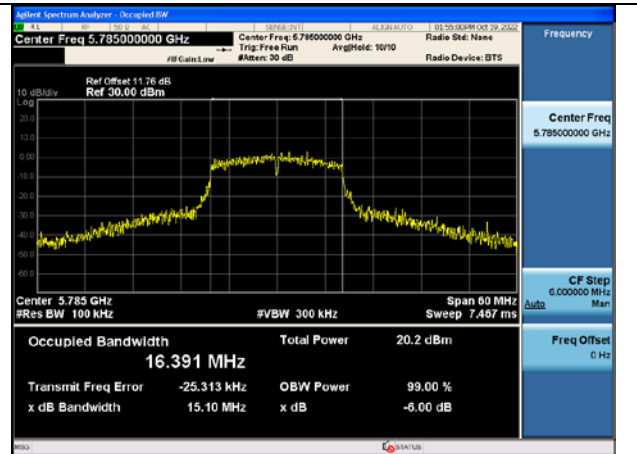


Test Mode:802.11a 5785MHz Chain0

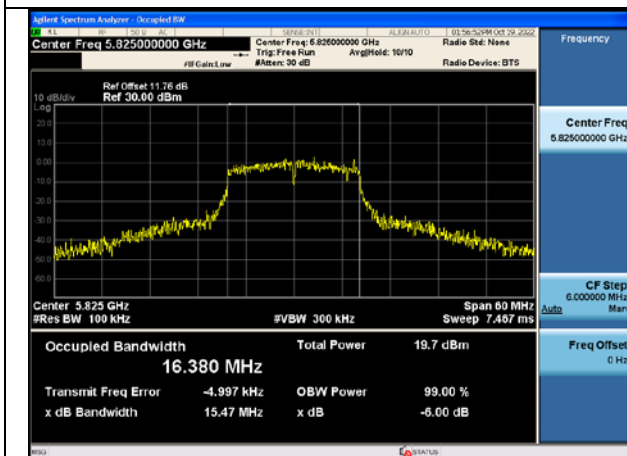


Test Mode:802.11a 5825MHz Chain0


Test Mode: 802.11n HT20

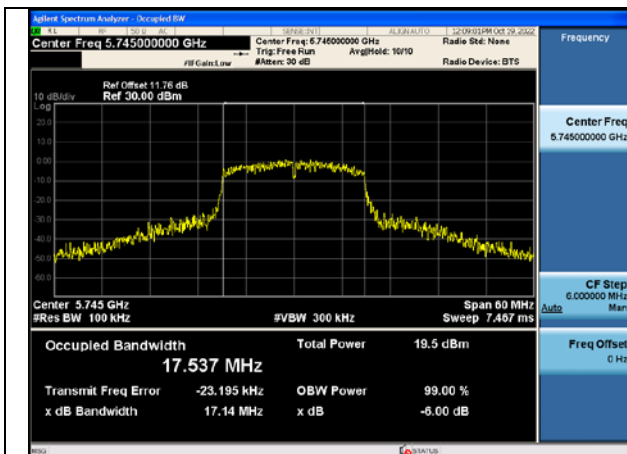

Test Mode:802.11n HT20 5745MHz Chain0

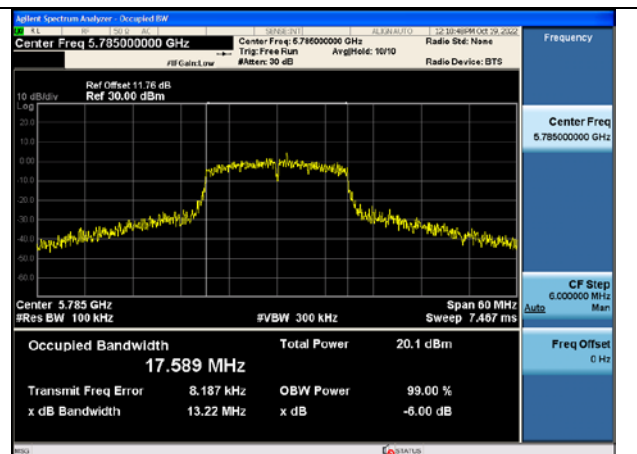


Test Mode:802.11n HT20 5785MHz Chain0

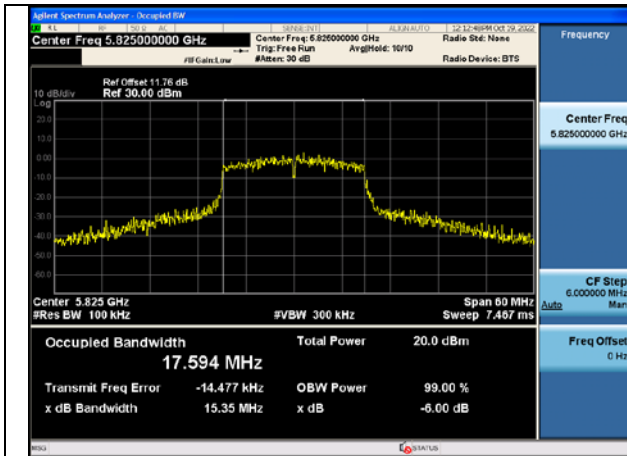


Test Mode:802.11n HT20 5825MHz Chain0


Test Mode: 802.11ac VHT20

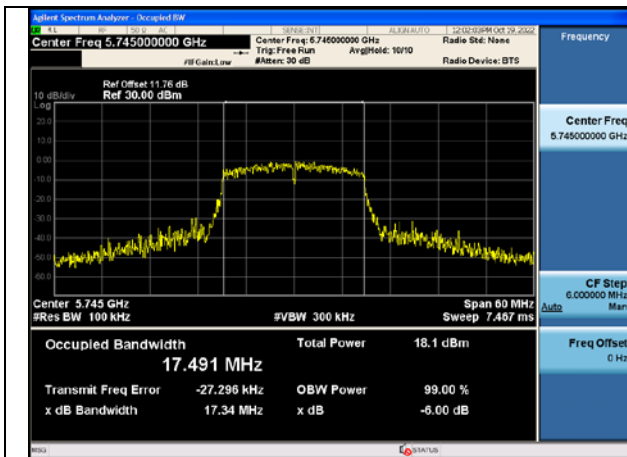

Test Mode:802.11ac VHT20 5745MHz Chain0

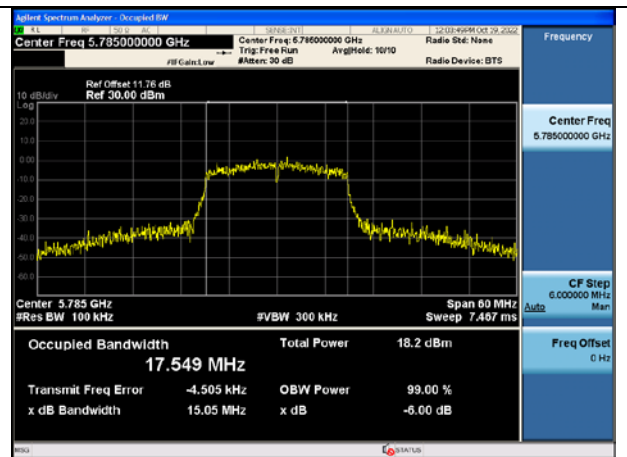


Test Mode:802.11ac VHT20 5785MHz Chain0

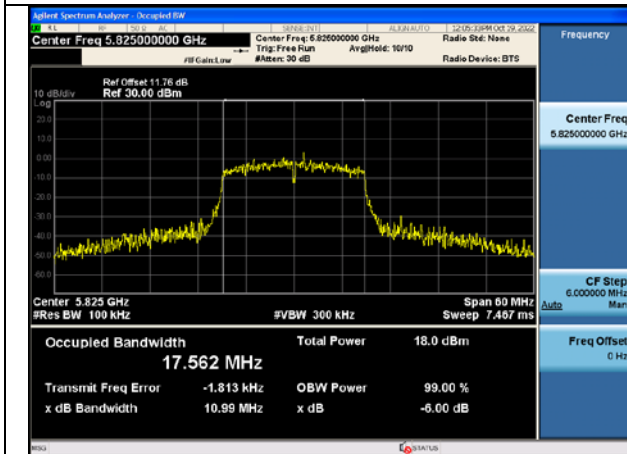


Test Mode:802.11ac VHT20 5825MHz Chain0

Test Mode: 802.11n HT40

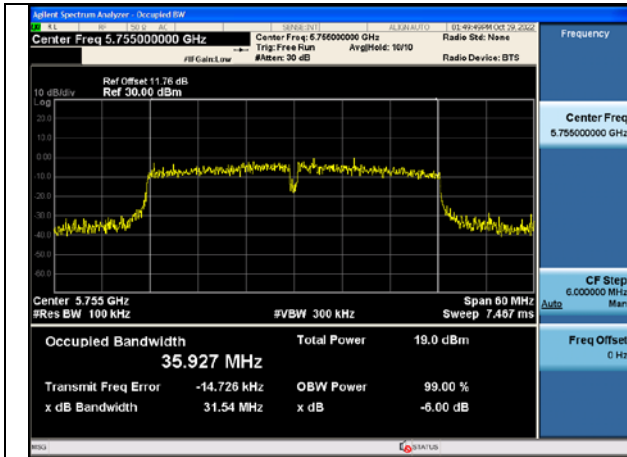


Test Mode:802.11n HT40 5755MHz Chain0

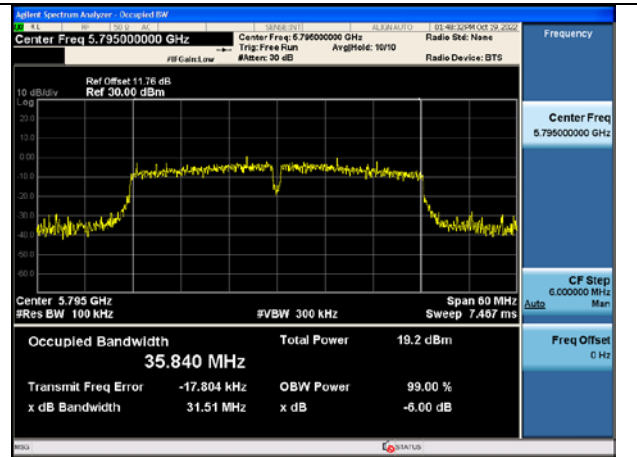


Test Mode:802.11n HT40 5795MHz Chain0

Test Mode: 802.11ac VHT40

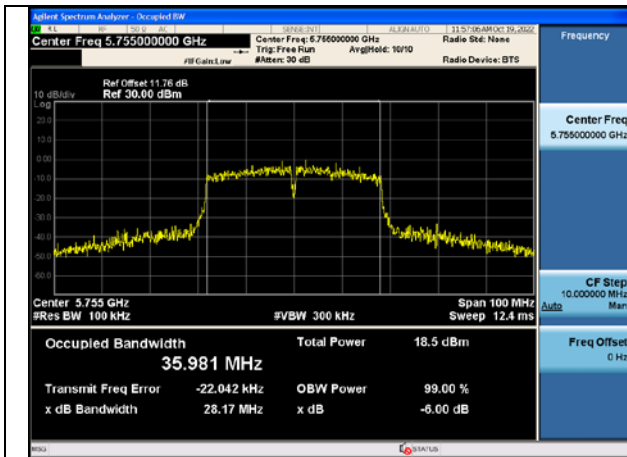


Test Mode:802.11ac VHT40 5755MHz Chain0

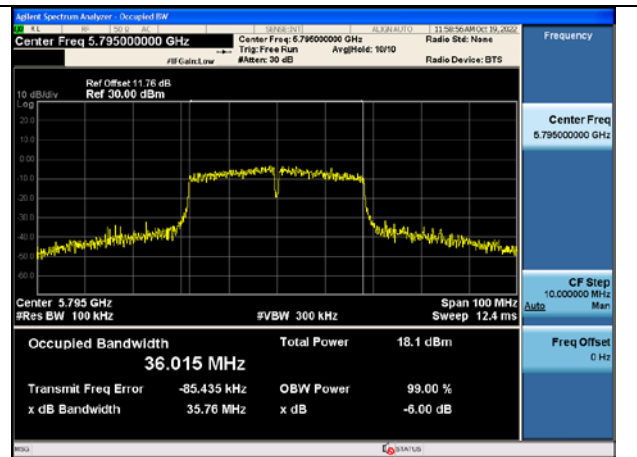

Test Mode:802.11ac VHT40 5795MHz Chain0

Test Mode: 802.11ac VHT80

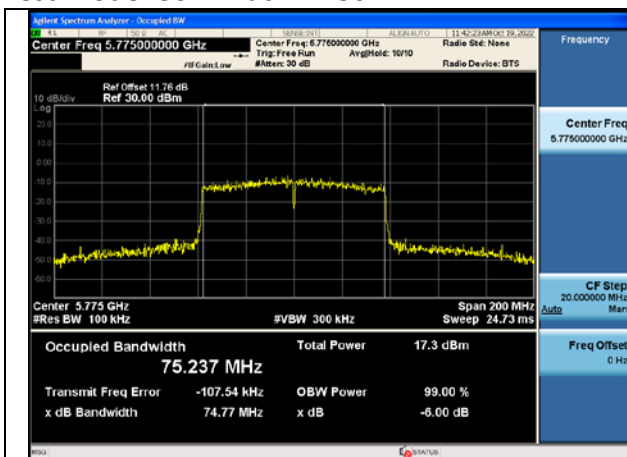

Test Mode:802.11ac VHT80 5775MHz Chain0



## Transmitter Power Spectral Density

Offset 11.76dB = Attenuator + Temporary antenna connector loss + Cable loss

Test Mode	Antenna	Tones	5745MHz		5785MHz		5825MHz	
			Correction Factor(dB)	Power Density (dBm/500KHz)	Correction Factor(dB)	Power Density (dBm/500KHz)	Correction Factor(dB)	Power Density (dBm/500KHz)
802.11a	Chain0	NA	0	4.990		4.732		4.425
802.11n HT20	Chain0	NA	0	4.261		4.886		4.732
802.11ac VHT20	Chain0	NA	0	2.755		2.819		2.457

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.


Test Mode	Antenna	Tones	5755MHz		---		5795MHz	
			Correction Factor(dB)	Power Density (dBm/500KHz)	Correction Factor(dB)	Power Density (dBm/500KHz)	Correction Factor(dB)	Power Density (dBm/500KHz)
802.11n HT40	Chain0	NA	0.12	0.943	---	---		0.556
802.11ac VHT40	Chain0	NA	0.12	0.174	---	---		0.207

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.


Test Mode	Antenna	Tones	5775MHz		---		---	
			Correction Factor(dB)	Power Density (dBm/500KHz)	Correction Factor(dB)	Power Density (dBm/500KHz)	Correction Factor(dB)	Power Density (dBm/500KHz)
802.11ac VHT80	Chain0	NA	0.22	-2.762	---	---		---

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add 10log(500kHz/RBW) to the measured result.

Test Mode: 802.11a

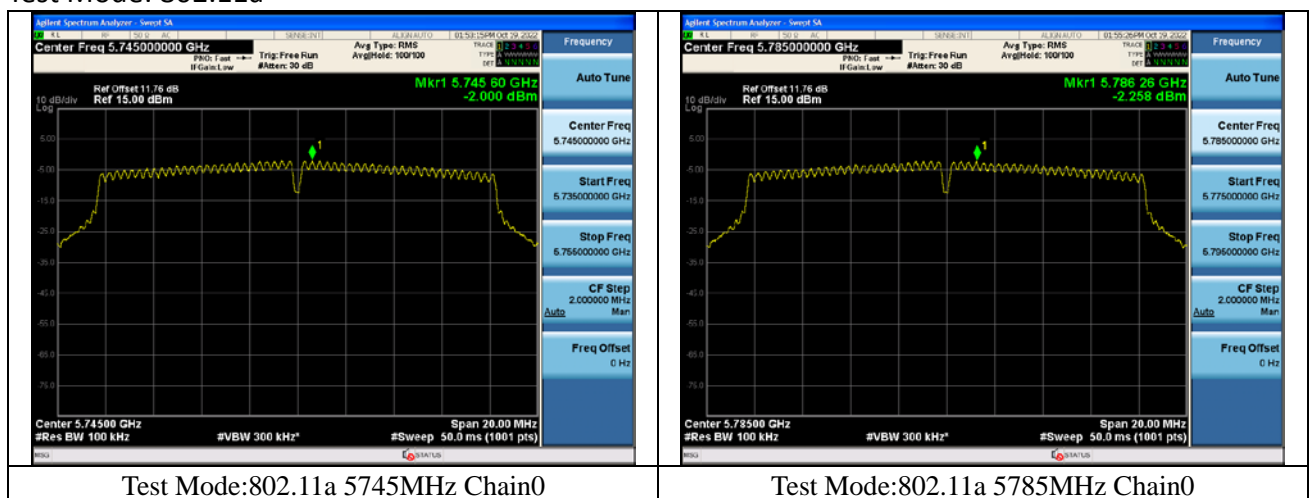




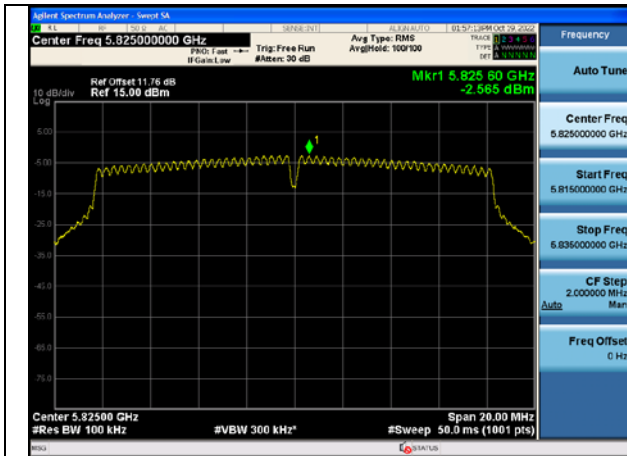

Test Mode:802.11a 5825MHz Chain0


Test Mode: 802.11n HT20

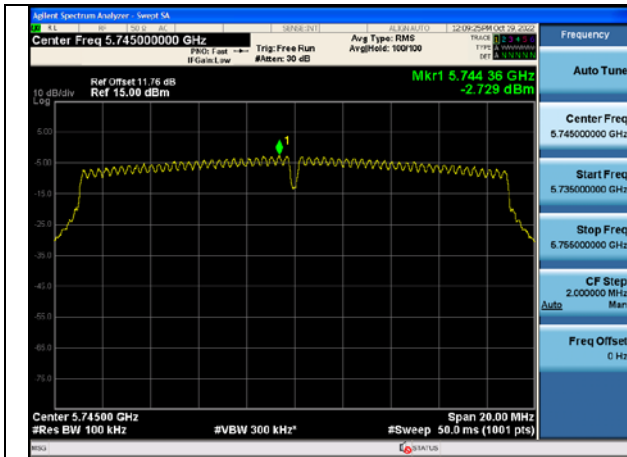

Test Mode:802.11n HT20 5745MHz Chain0




Test Mode:802.11n HT20 5785MHz Chain0

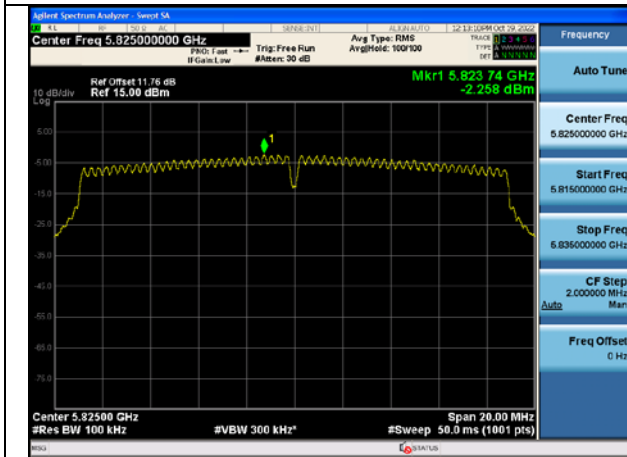


Test Mode:802.11n HT20 5825MHz Chain0


Test Mode: 802.11ac VHT20

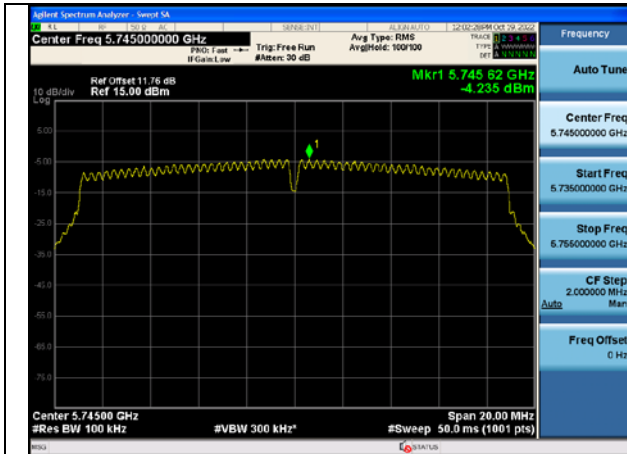


Test Mode:802.11ac VHT20 5745MHz Chain0

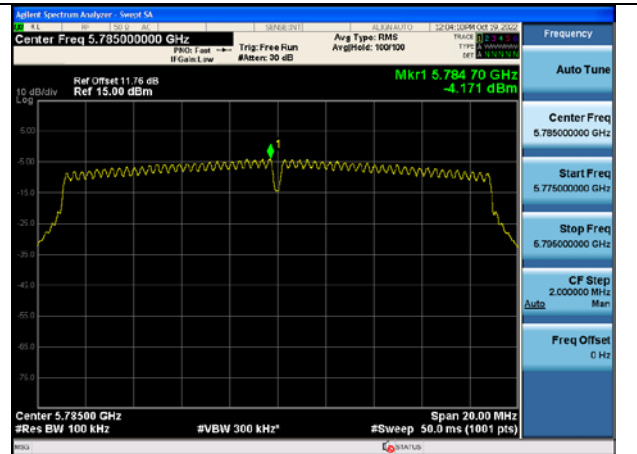

Test Mode:802.11ac VHT20 5785MHz Chain0

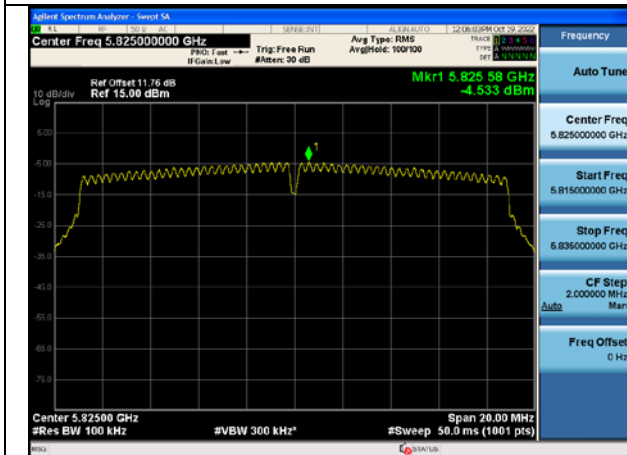


Test Mode:802.11ac VHT20 5825MHz Chain0




Test Mode:802.11ac VHT20 5795MHz Chain0

Test Mode: 802.11n HT40

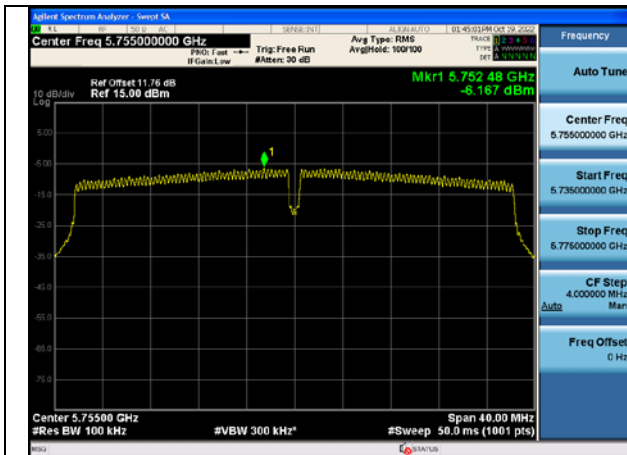


Test Mode:802.11n HT40 5755MHz Chain0

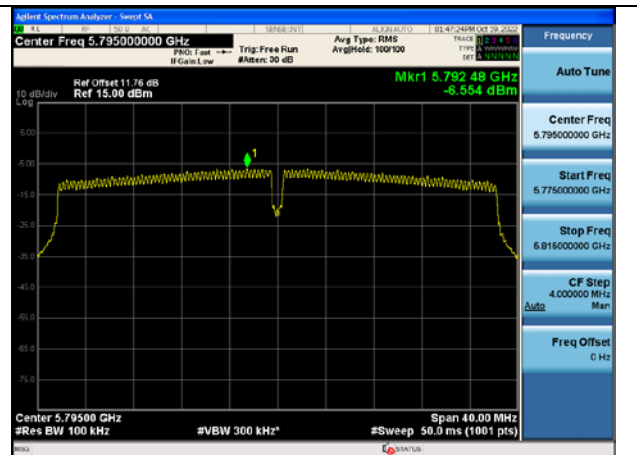


Test Mode:802.11n HT40 5795MHz Chain0

Test Mode: 802.11ac VHT40

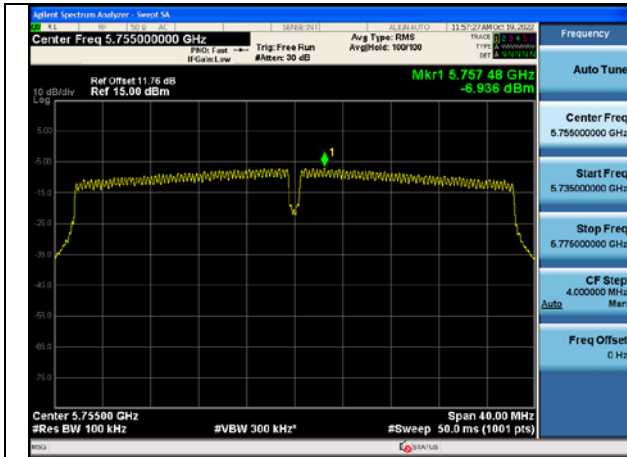


Test Mode:802.11ac VHT40 5755MHz Chain0

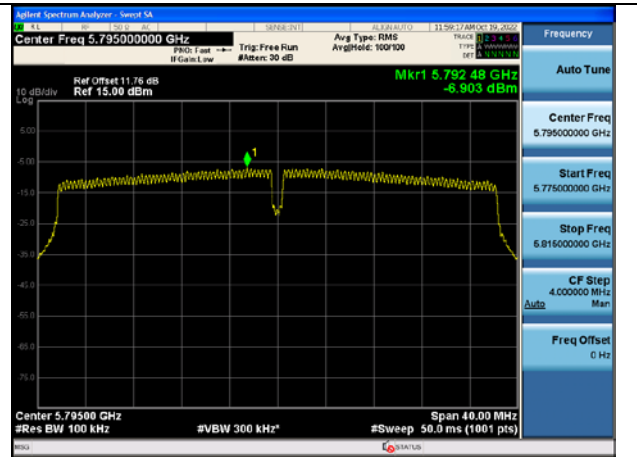

Test Mode:802.11ac VHT40 5795MHz Chain0

Test Mode: 802.11ac VHT80

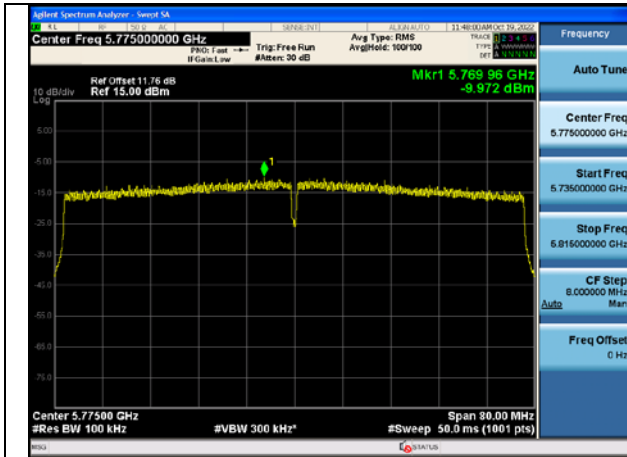

Test Mode:802.11ac VHT80 5775MHz Chain0