


Appendix A. Test Result of AC Power Line Conducted Emission

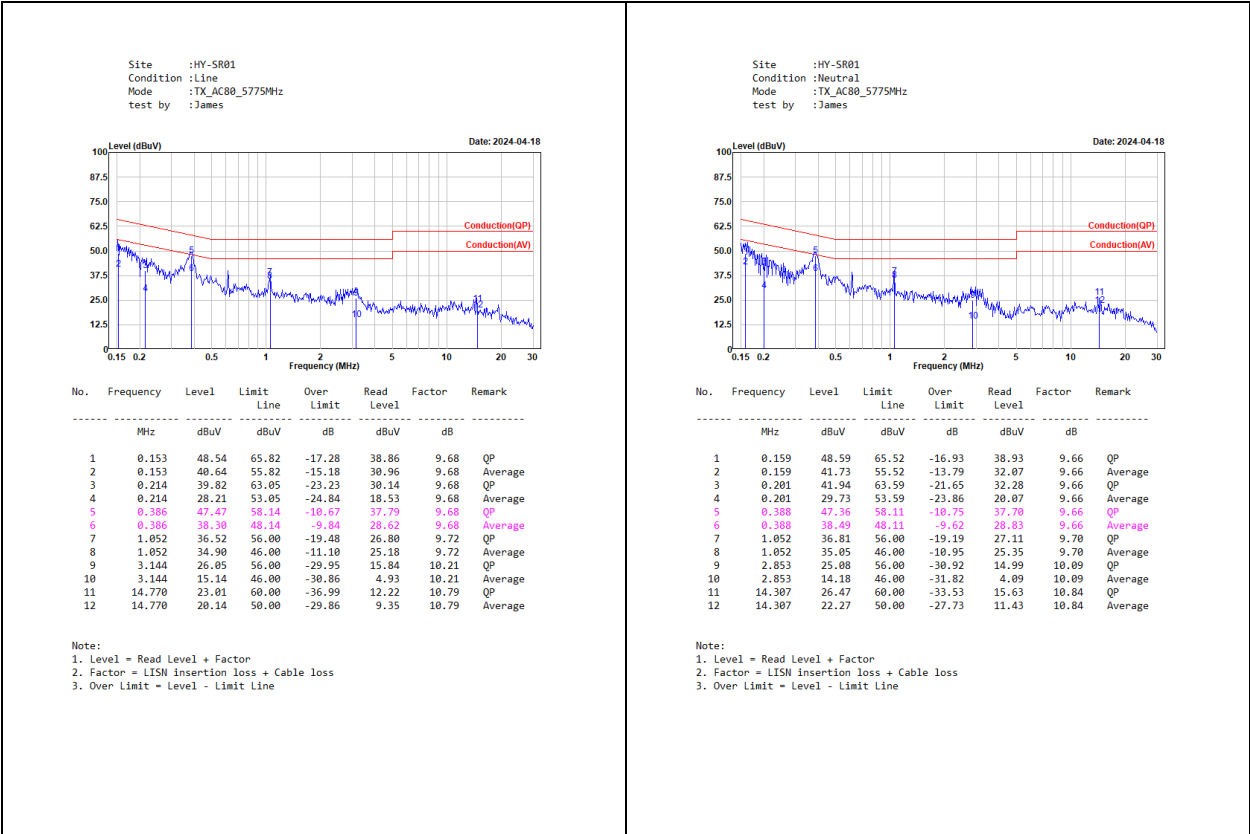

Appendix B. Test Result of Emission Bandwidth


Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	20.94	--	30.73	--
	5220	22.50	--	32.65	--
	5240	22.26	--	32.97	--
	5260	21.18	--	34.37	--
	5300	21.62	--	32.45	--
	5320	21.98	--	33.37	--
	5500	26.05	--	32.01	--
	5580	28.25	--	33.17	--
	5700	28.37	--	36.88	--
	5720	25.69	--	36.84	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	24.90	--	16.264	0.50
	5785	25.69	--	16.264	0.50
	5825	25.09	--	16.264	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11ac (20 MHz)	5180	20.38	--	30.57	--
	5220	22.74	--	32.61	--
	5240	22.98	--	32.41	--
	5260	21.98	--	30.89	--
	5300	21.30	--	34.73	--
	5320	24.38	--	33.17	--
	5500	26.93	--	31.69	--
	5580	27.65	--	31.13	--
	5700	27.57	--	37.04	--
	5720	24.98	--	35.12	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11ac (20 MHz)	5745	24.66	--	16.304	0.50
	5785	26.33	--	16.943	0.50
	5825	26.29	--	16.504	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11ac (40 MHz)	5190	41.16	--	64.42	--
	5230	45.55	--	62.18	--
	5270	43.80	--	58.18	--
	5310	42.20	--	68.65	--
	5510	51.63	--	66.33	--
	5550	53.15	--	53.47	--
	5670	51.55	--	58.42	--
	5710	49.31	--	53.55	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11ac (40 MHz)	5755	47.63	--	35.564	0.50
	5795	49.63	--	35.165	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11ac (80 MHz)	5210	88.55	--	121.00	--
	5290	83.76	--	112.05	--
	5530	101.18	--	118.92	--
	5610	94.15	--	104.22	--
	5690	89.19	--	104.38	--
Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11ac (80 MHz)	5775	90.15	--	75.125	0.50

For 6dB Bandwidth:

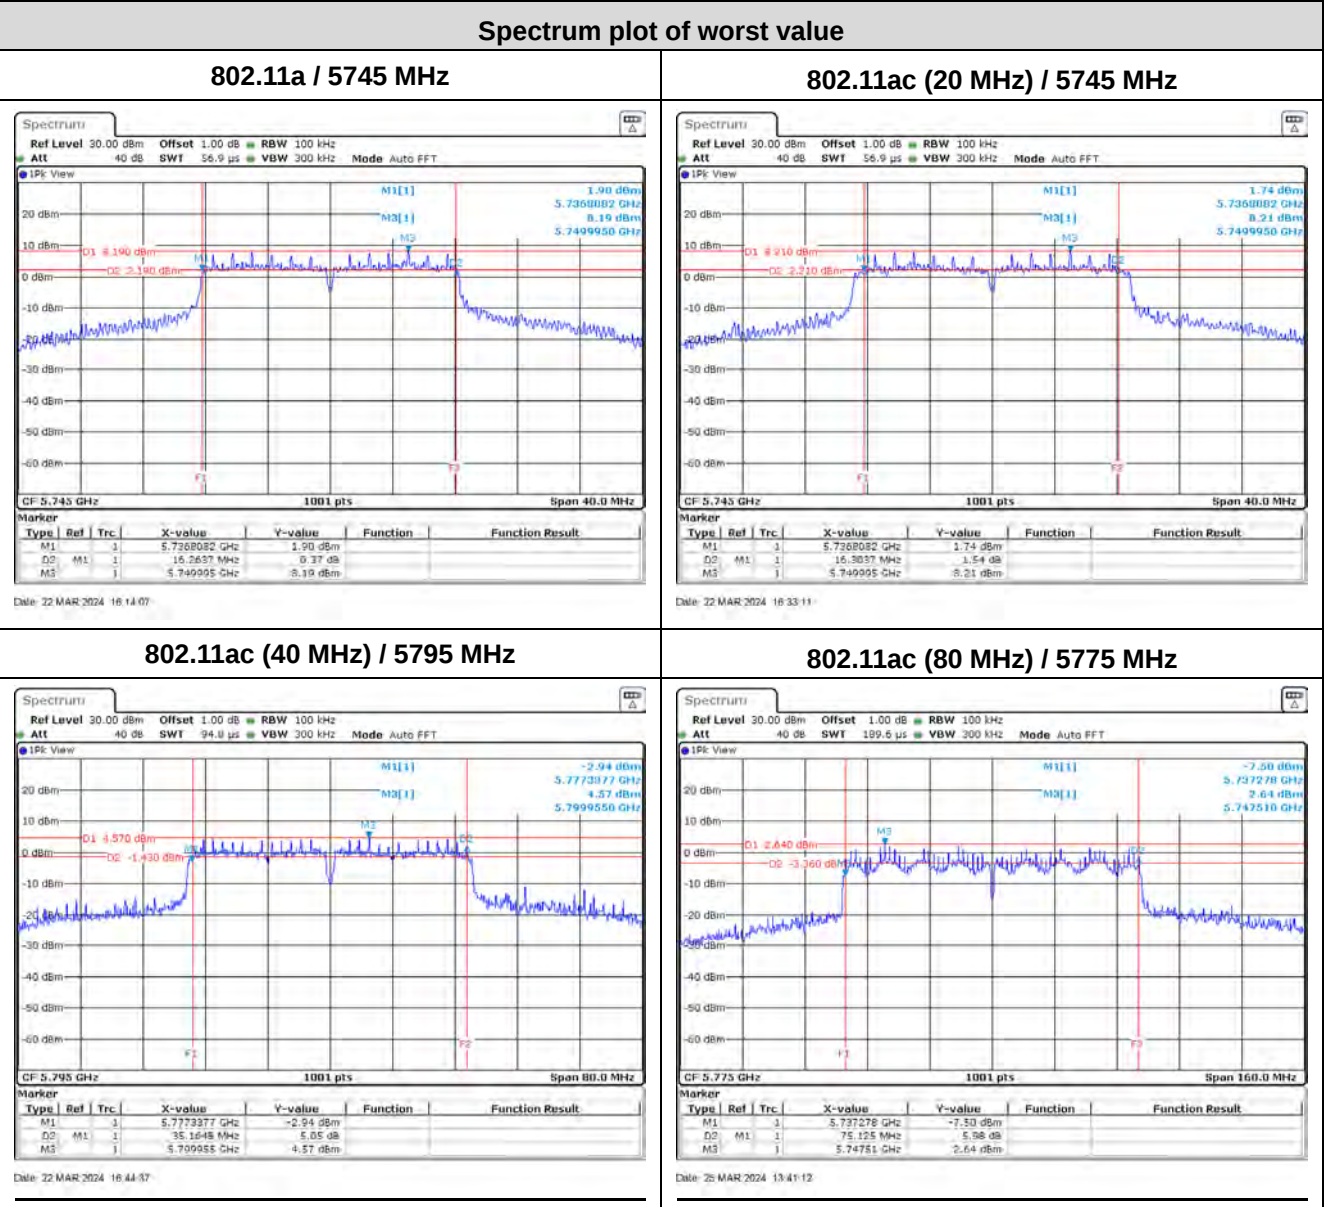


Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log (BW)	
802.11a	5180	--	18.57	--	18.57	24	--	Pass
	5220	--	18.96	--	18.96	24	--	Pass
	5240	--	18.91	--	18.91	24	--	Pass
	5260	34.37	18.97	--	18.97	24	26.36	Pass
	5300	32.45	18.92	--	18.92	24	26.11	Pass
	5320	33.37	16.34	--	16.34	24	26.23	Pass
	5500	32.01	12.15	--	12.15	24	26.05	Pass
	5580	33.17	19.53	--	19.53	24	26.21	Pass
	5700	36.88	13.78	--	13.78	24	26.67	Pass
	5720 (U-NII-2C)	23.51	18.68	0.10	18.78	24	24.71	Pass
	5720 (U-NII-3)	--	13.11	0.10	13.21	30	--	Pass
	5745	--	18.62	--	18.62	30	--	Pass
	5785	--	18.46	--	18.46	30	--	Pass
	5825	--	16.60	--	16.60	30	--	Pass

Note: Output Power (dBm) = Power (dBm) + Duty factor.


26 dB Occupied Bandwidth

802.11a / 5720 (U-NII-2C) MHz

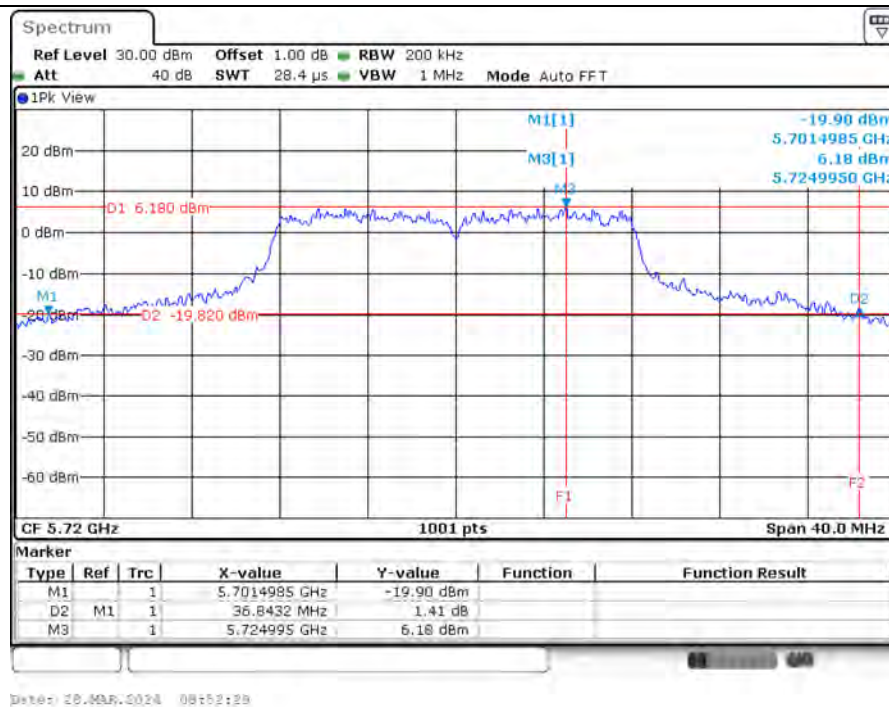


Maximum conducted output power

802.11a / 5720 (U-NII-2C) MHz

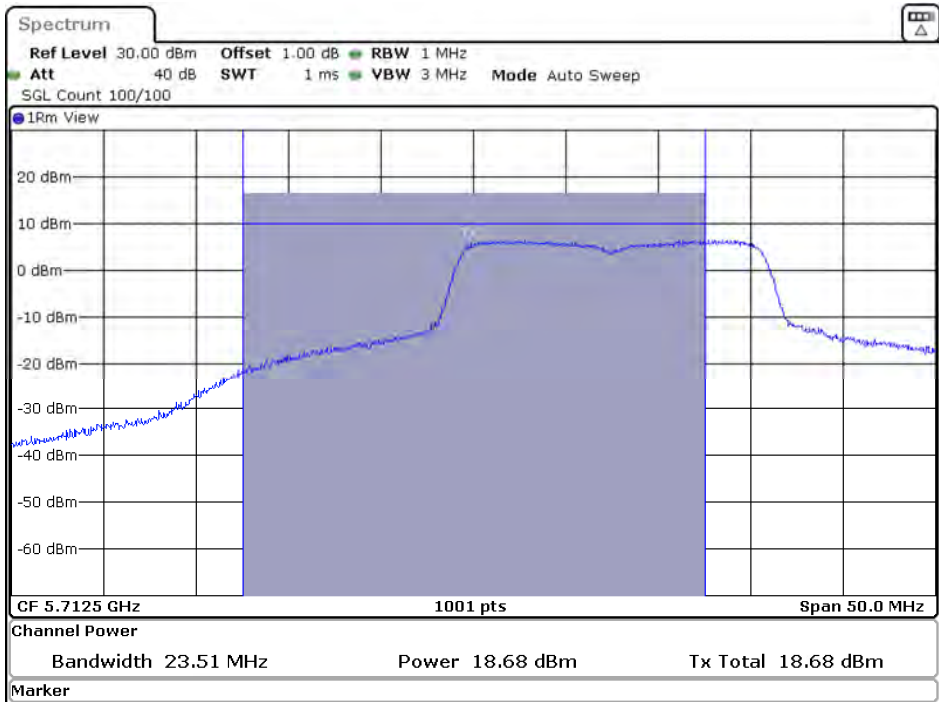

Date: 25.MAR.2024 10:56:19

802.11a / 5720 (U-NII-3) MHz

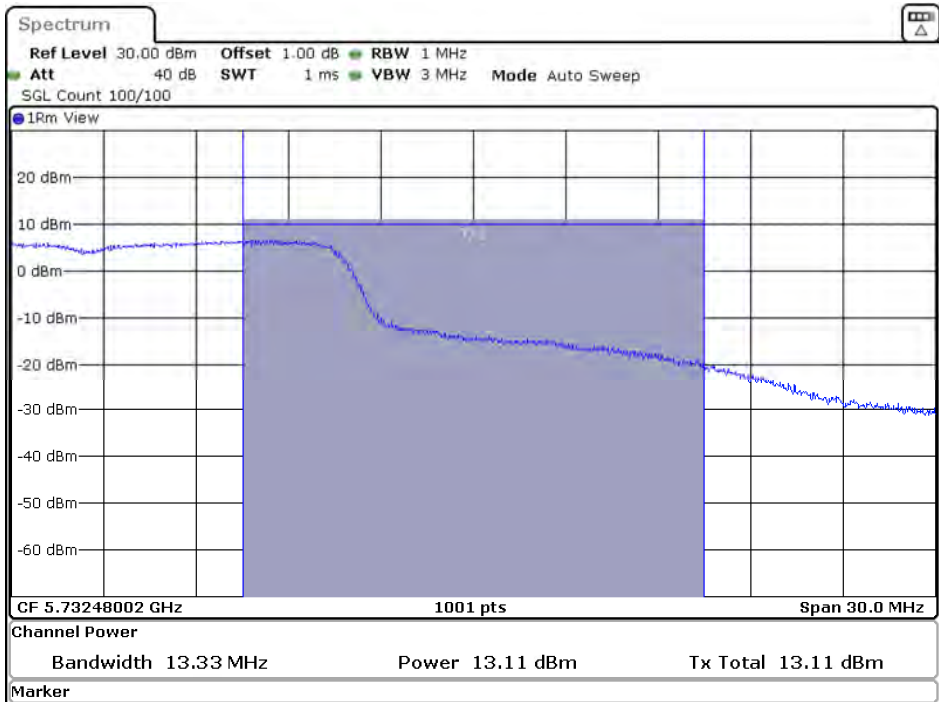


Date: 25.MAR.2024 10:56:21


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ac (20 MHz)	5180	--	17.45	--	17.45	24	--	Pass
	5220	--	18.93	--	18.93	24	--	Pass
	5240	--	19.30	--	19.30	24	--	Pass
	5260	30.89	18.63		18.63	24	25.90	Pass
	5300	34.73	18.74		18.74	24	26.41	Pass
	5320	33.17	15.71		15.71	24	26.21	Pass
	5500	31.69	11.88		11.88	24	26.01	Pass
	5580	31.13	19.41		19.41	24	25.93	Pass
	5700	37.04	12.82		12.82	24	26.69	Pass
	5720 (U-NII-2C)	21.67	18.44	0.16	18.60	24	24.36	Pass
	5720 (U-NII-3)	--	13.17	0.16	13.33	30	--	Pass
	5745	--	18.73	--	18.73	30	--	Pass
	5785	--	18.87	--	18.87	30	--	Pass
	5825	--	18.69	--	18.69	30	--	Pass

Note: Output Power (dBm) = Power (dBm) + Duty factor.

26 dB Occupied Bandwidth 802.11ac (20MHz) / 5720 (U-NII-2C) MHz

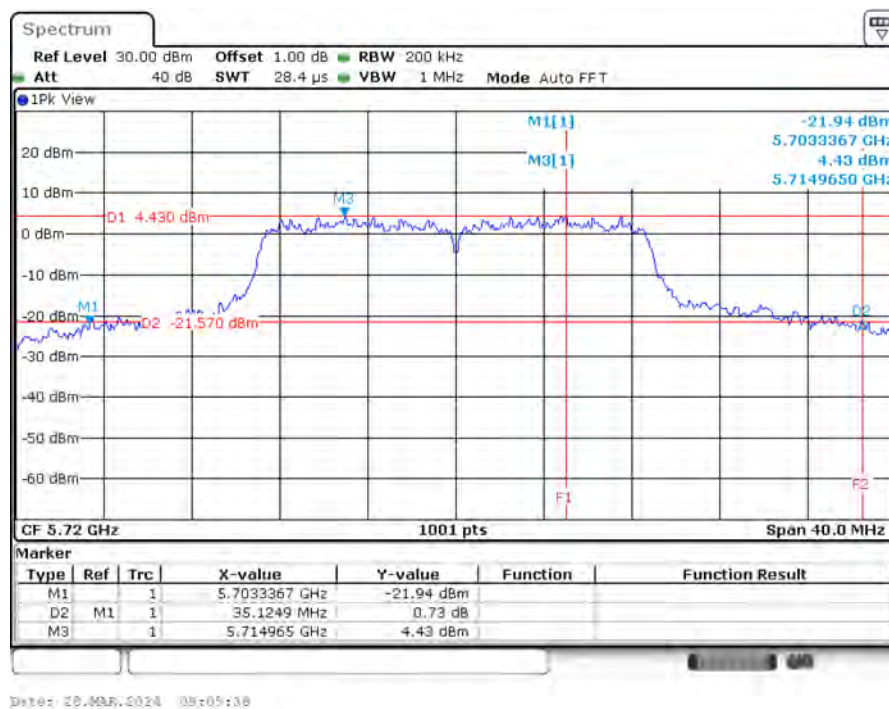


Maximum conducted output power
802.11ac (20MHz) / 5720 (U-NII-2C) MHz

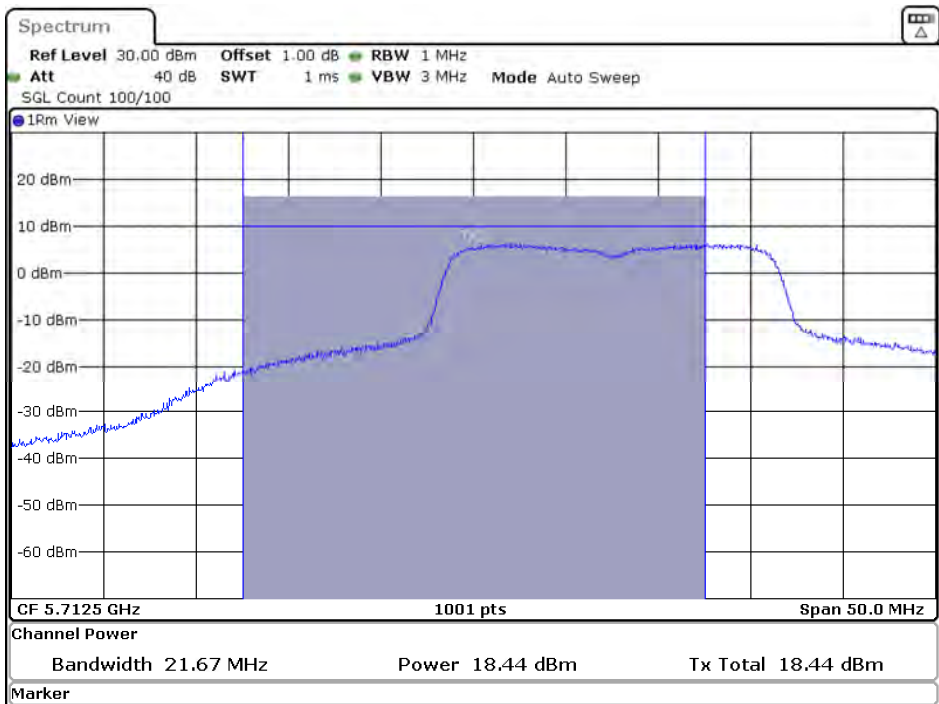

Date: 25.MAR.2024 11:12:55

802.11ac (20MHz) / 5720 (U-NII-3) MHz

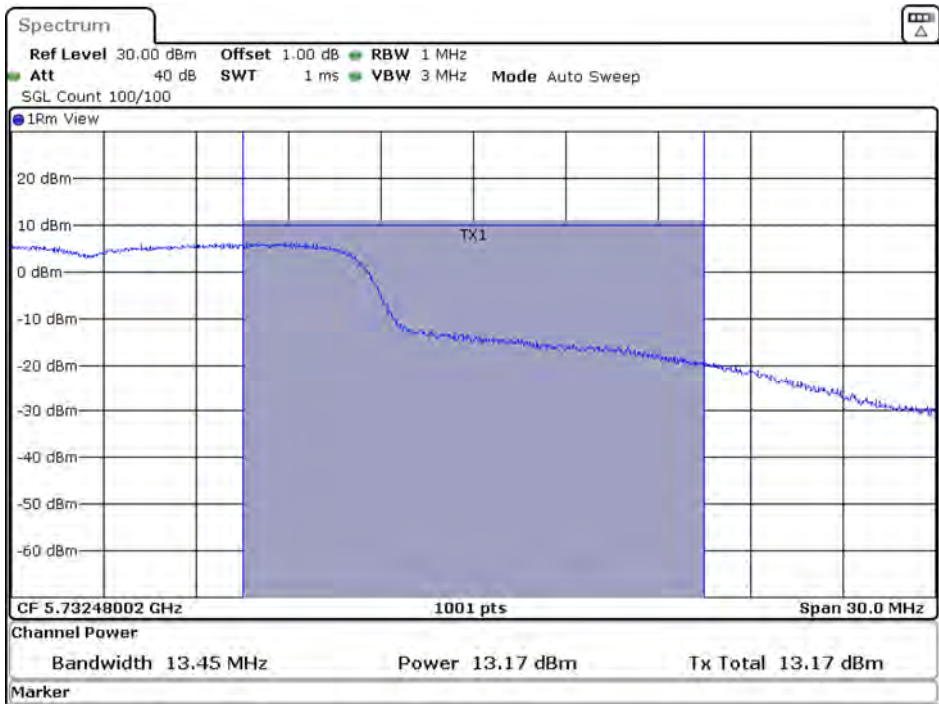


Date: 25.MAR.2024 11:12:58

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11ac (40 MHz)	5190	--	13.21	--	13.21	24	--	Pass
	5230	--	19.13	--	19.13	24	--	Pass
	5270	58.18	18.75	--	18.75	24	28.65	Pass
	5310	68.65	11.35	--	11.35	24	29.37	Pass
	5510	66.33	11.55	--	11.55	24	29.22	Pass
	5550	53.47	19.04	--	19.04	24	28.28	Pass
	5670	58.42	14.31	--	14.31	24	28.67	Pass
	5710 (U-NII-2C)	35.94	19.22	0.52	19.74	24	26.56	Pass
	5710 (U-NII-3)	--	8.97	0.52	9.49	30	--	Pass
	5755	--	18.82	--	18.82	30	--	Pass
	5795	--	18.87	--	18.87	30	--	Pass


Note:

1. Output Power (dBm) = Power (dBm) + Duty factor.

26 dB Occupied Bandwidth 802.11ac (40MHz) / 5710 (U-NII-2C) MHz

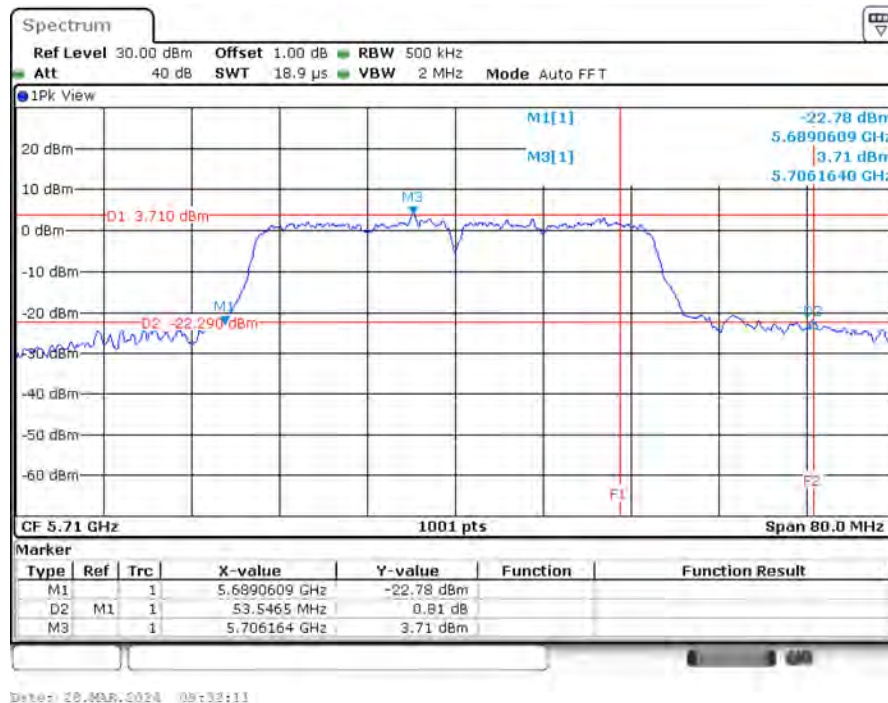


Maximum conducted output power
802.11ac (40MHz) / 5710 (U-NII-2C) MHz

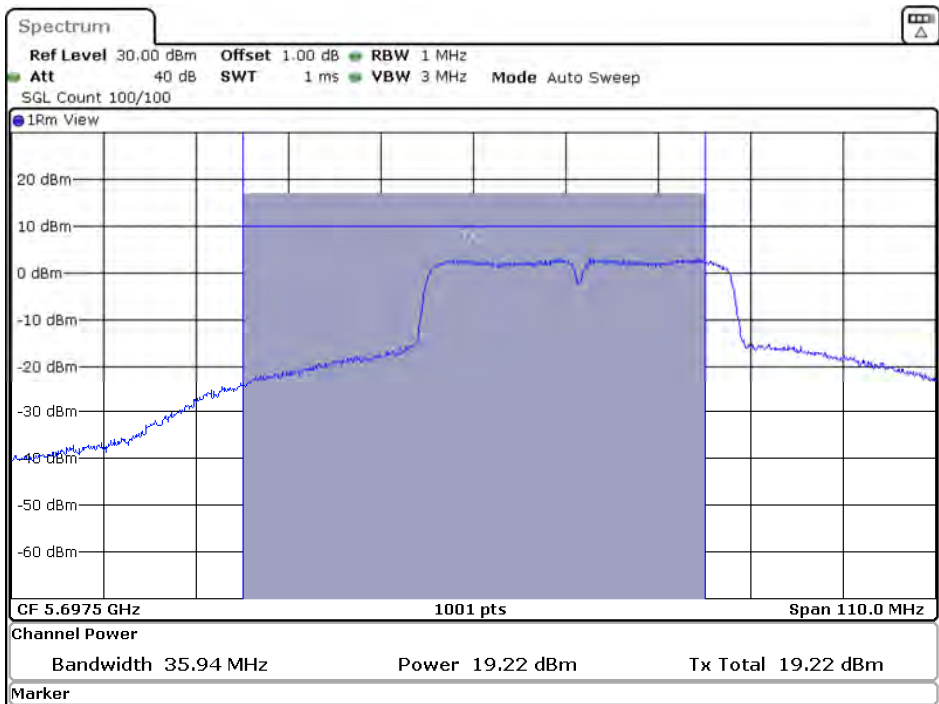

Date: 25.MAR.2024 11:26:21

802.11ac (40MHz) / 5710 (U-NII-3) MHz

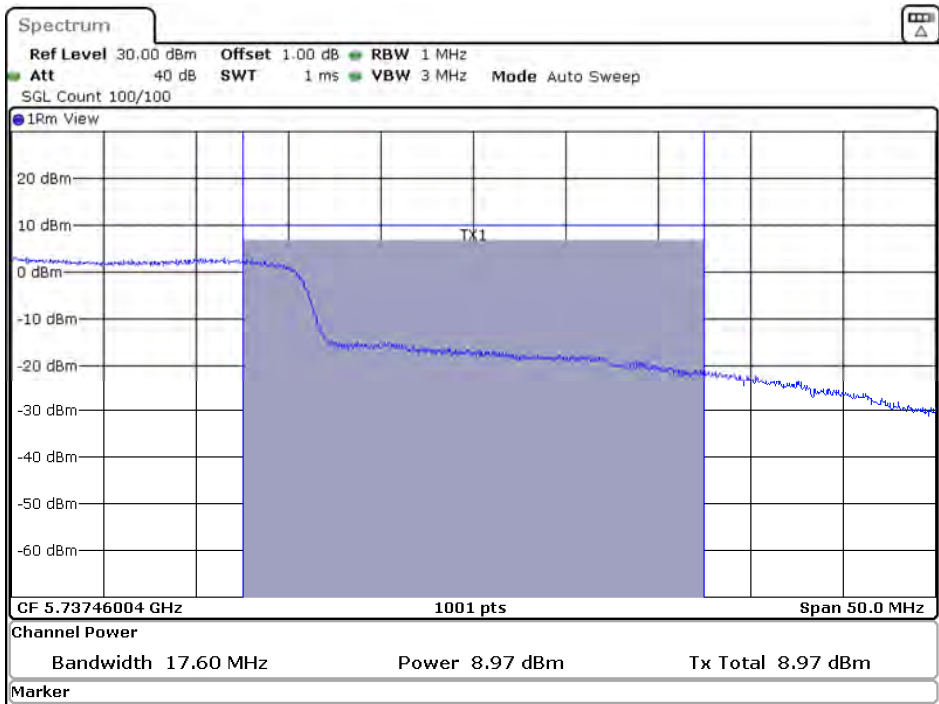


Date: 25.MAR.2024 11:26:24

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ac (80 MHz)	5210	--	12.42	--	12.42	24	--	Pass
	5290	112.05	9.85	--	9.85	24	31.49	Pass
	5530	118.92	12.14	--	12.14	24	31.75	Pass
	5610	104.22	19.16	--	19.16	24	31.18	Pass
	5690 (U-NII-2C)	76.08	19.34	0.78	20.12	24	29.81	Pass
	5690 (U-NII-3)	--	5.63	0.78	6.41	30	--	Pass
	5775	--	18.63	--	18.63	30	--	Pass

Note:


1. Output Power (dBm) = Power (dBm) + Duty factor.

26 dB Occupied Bandwidth
802.11ac (80MHz) / 5690 (U-NII-2C) MHz

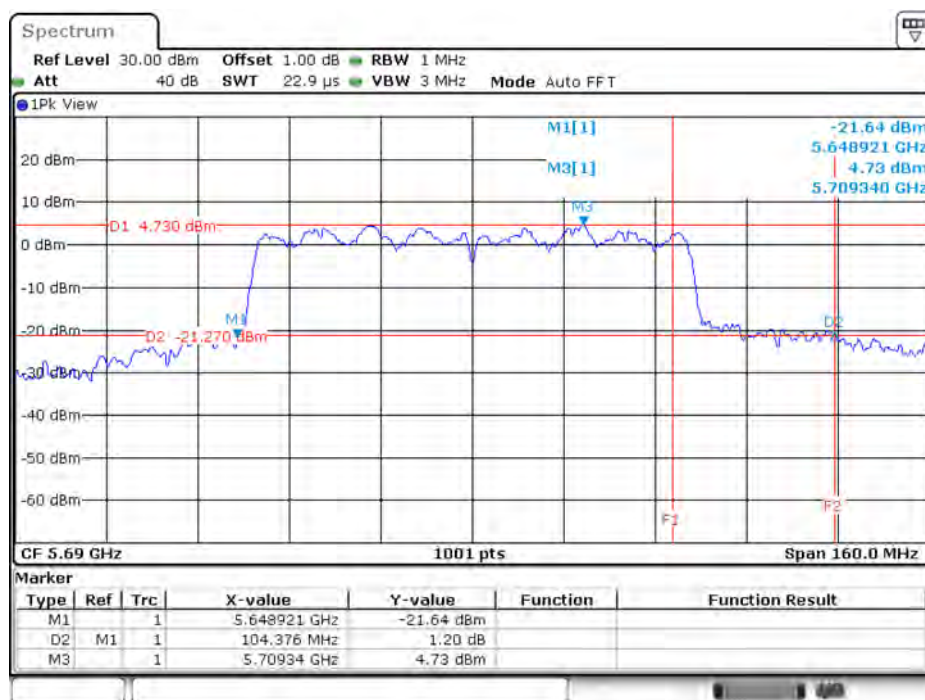


Date: 28-MAR-2024 09:44:20

Maximum conducted output power
802.11ac (80MHz) / 5690 (U-NII-2C) MHz

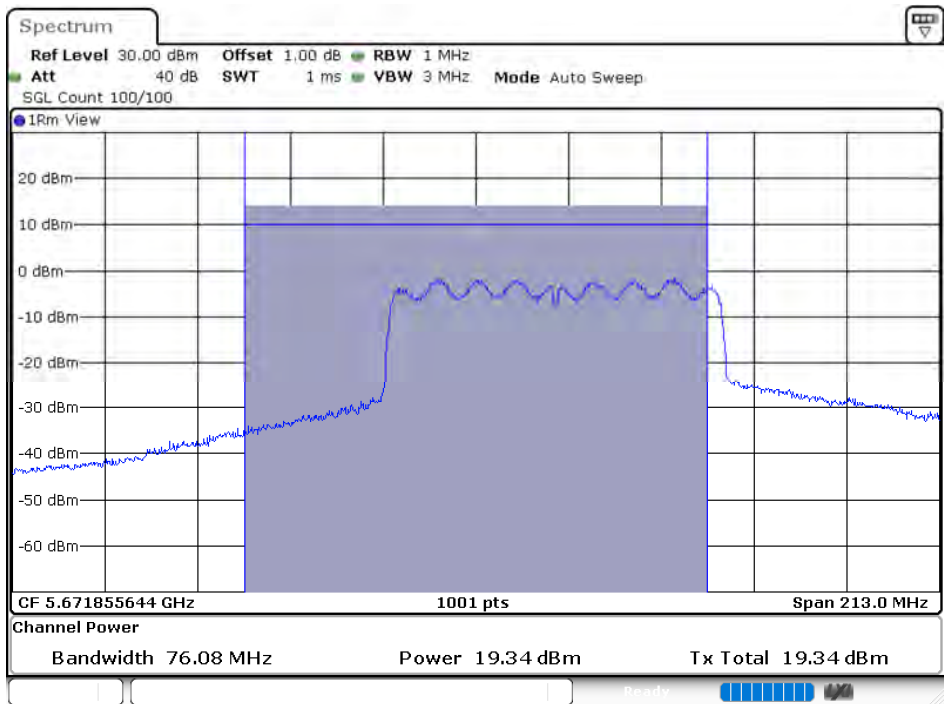

Date: 29.MAR.2024 12:44:52

802.11ac (80MHz) / 5690 (U-NII-3) MHz

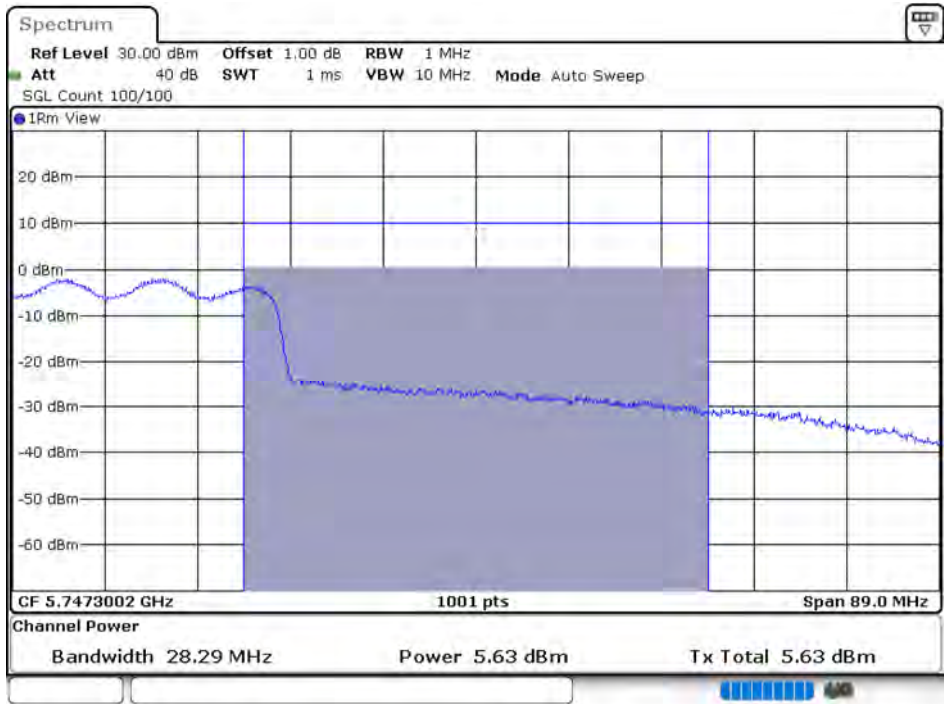


Date: 29.MAR.2024 12:44:52

Appendix D. Test Result of Maximum Power Spectral Density


Modulation	Frequency (MHz)	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	5.94	0.10	6.04	<11	Pass
	5220	7.22	0.10	7.32	<11	Pass
	5240	7.40	0.10	7.50	<11	Pass
	5260	6.80	0.10	6.90	<11	Pass
	5300	6.21	0.10	6.31	<11	Pass
	5320	5.59	0.10	5.69	<11	Pass
	5500	0.73	0.10	0.83	<11	Pass
	5580	6.95	0.10	7.05	<11	Pass
	5700	2.18	0.10	2.28	<11	Pass
	5720 (U-NII-2C)	6.26	0.10	6.36	<11	Pass

Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	3.40	0.10	3.50	<30	Pass
	5745	4.39	0.10	4.49	<30	Pass
	5785	4.62	0.10	4.72	<30	Pass
	5825	4.06	0.10	4.16	<30	Pass

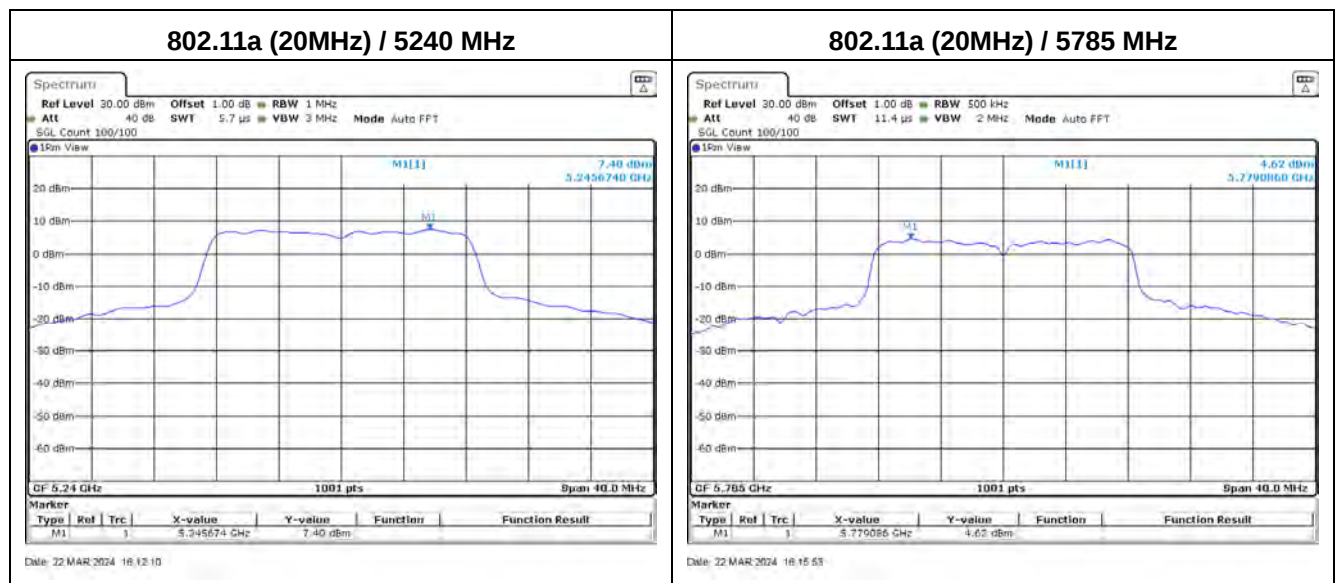


Modulation	Frequency (MHz)	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ac (20 MHz)	5180	6.44	0.16	6.60	<11	Pass
	5220	6.87	0.16	7.03	<11	Pass
	5240	6.83	0.16	6.99	<11	Pass
	5260	6.06	0.16	6.22	<11	Pass
	5300	6.08	0.16	6.24	<11	Pass
	5320	3.97	0.16	4.13	<11	Pass
	5500	-0.08	0.16	0.08	<11	Pass
	5580	5.68	0.16	5.84	<11	Pass
	5700	1.08	0.16	1.24	<11	Pass
	5720 (U-NII-2C)	6.44	0.16	6.60	<11	Pass

Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ac (20 MHz)	5720 (U-NII-3)	2.95	0.16	3.11	<30	Pass
	5745	3.89	0.16	4.05	<30	Pass
	5785	4.01	0.16	4.17	<30	Pass
	5825	3.93	0.16	4.09	<30	Pass

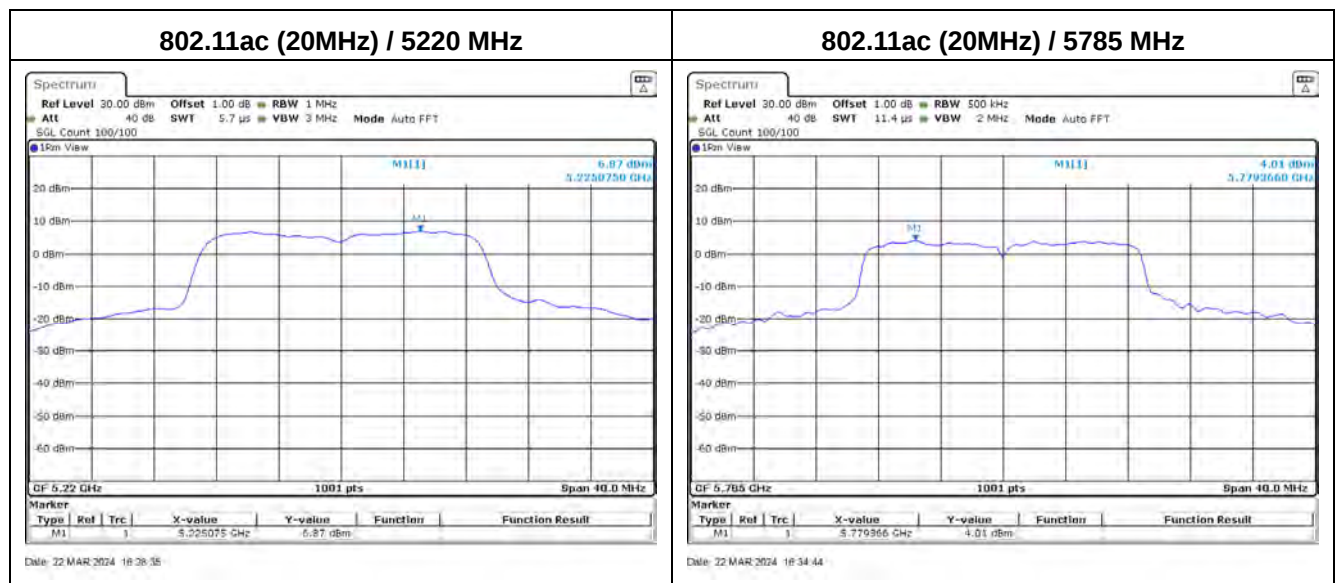


Modulation	Frequency (MHz)	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ac (40 MHz)	5190	-1.44	0.52	-0.92	<11	Pass
	5230	4.34	0.52	4.86	<11	Pass
	5270	2.83	0.52	3.35	<11	Pass
	5310	-3.63	0.52	-3.11	<11	Pass
	5510	-2.81	0.52	-2.29	<11	Pass
	5550	3.00	0.52	3.52	<11	Pass
	5670	-0.95	0.52	-0.43	<11	Pass
	5710 (U-NII-2C)	2.71	0.52	3.23	<11	Pass

Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ac (40 MHz)	5710 (U-NII-3)	-0.66	0.52	-0.14	<30	Pass
	5755	1.38	0.52	1.90	<30	Pass
	5795	0.90	0.52	1.42	<30	Pass

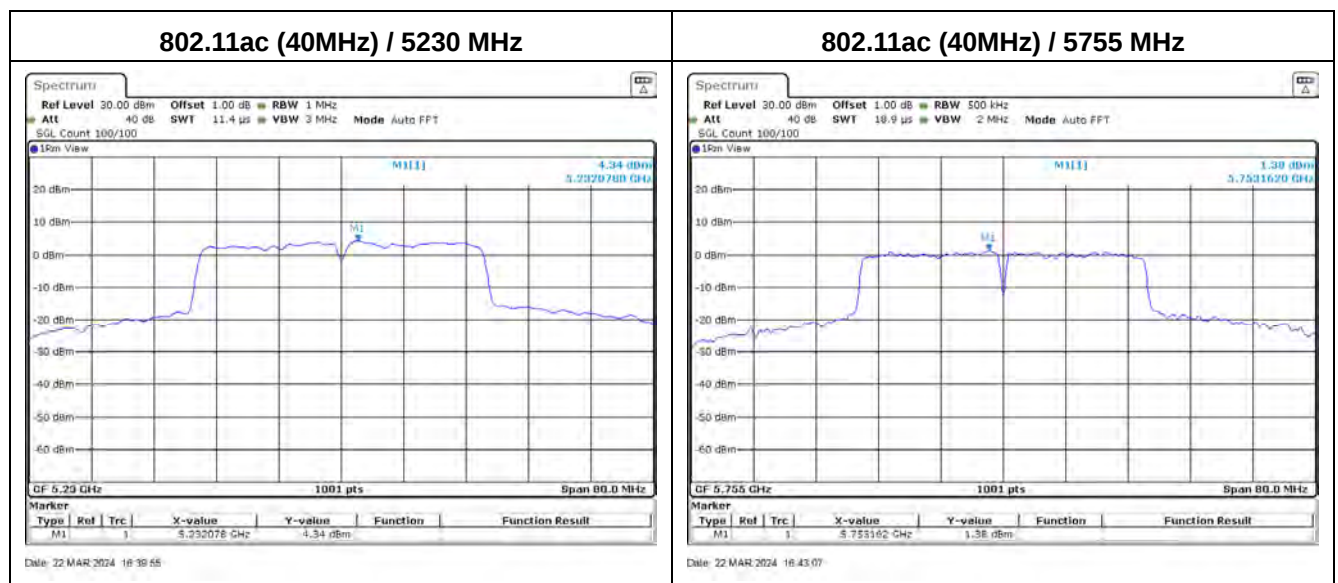


Modulation	Frequency (MHz)	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ac (80 MHz)	5210	-3.66	0.78	-2.88	<11	Pass
	5290	-6.81	0.78	-6.03	<11	Pass
	5530	-4.90	0.78	-4.12	<11	Pass
	5610	0.55	0.78	1.33	<11	Pass
	5690 (U-NII-2C)	1.84	0.78	2.62	<11	Pass


Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ac (80 MHz)	5690 (U-NII-3)	-2.86	0.78	-2.08	<30	Pass
	5775	-0.99	0.78	-0.21	<30	Pass

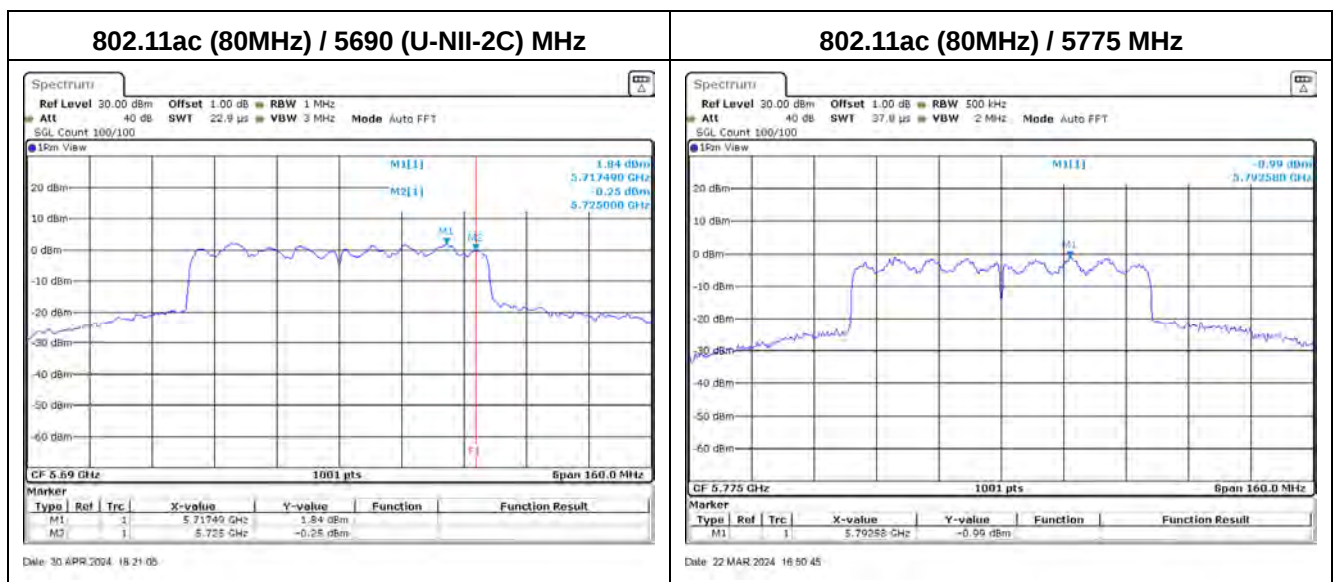

Appendix E. Test Result of Transmitter Radiated Spurious Emission

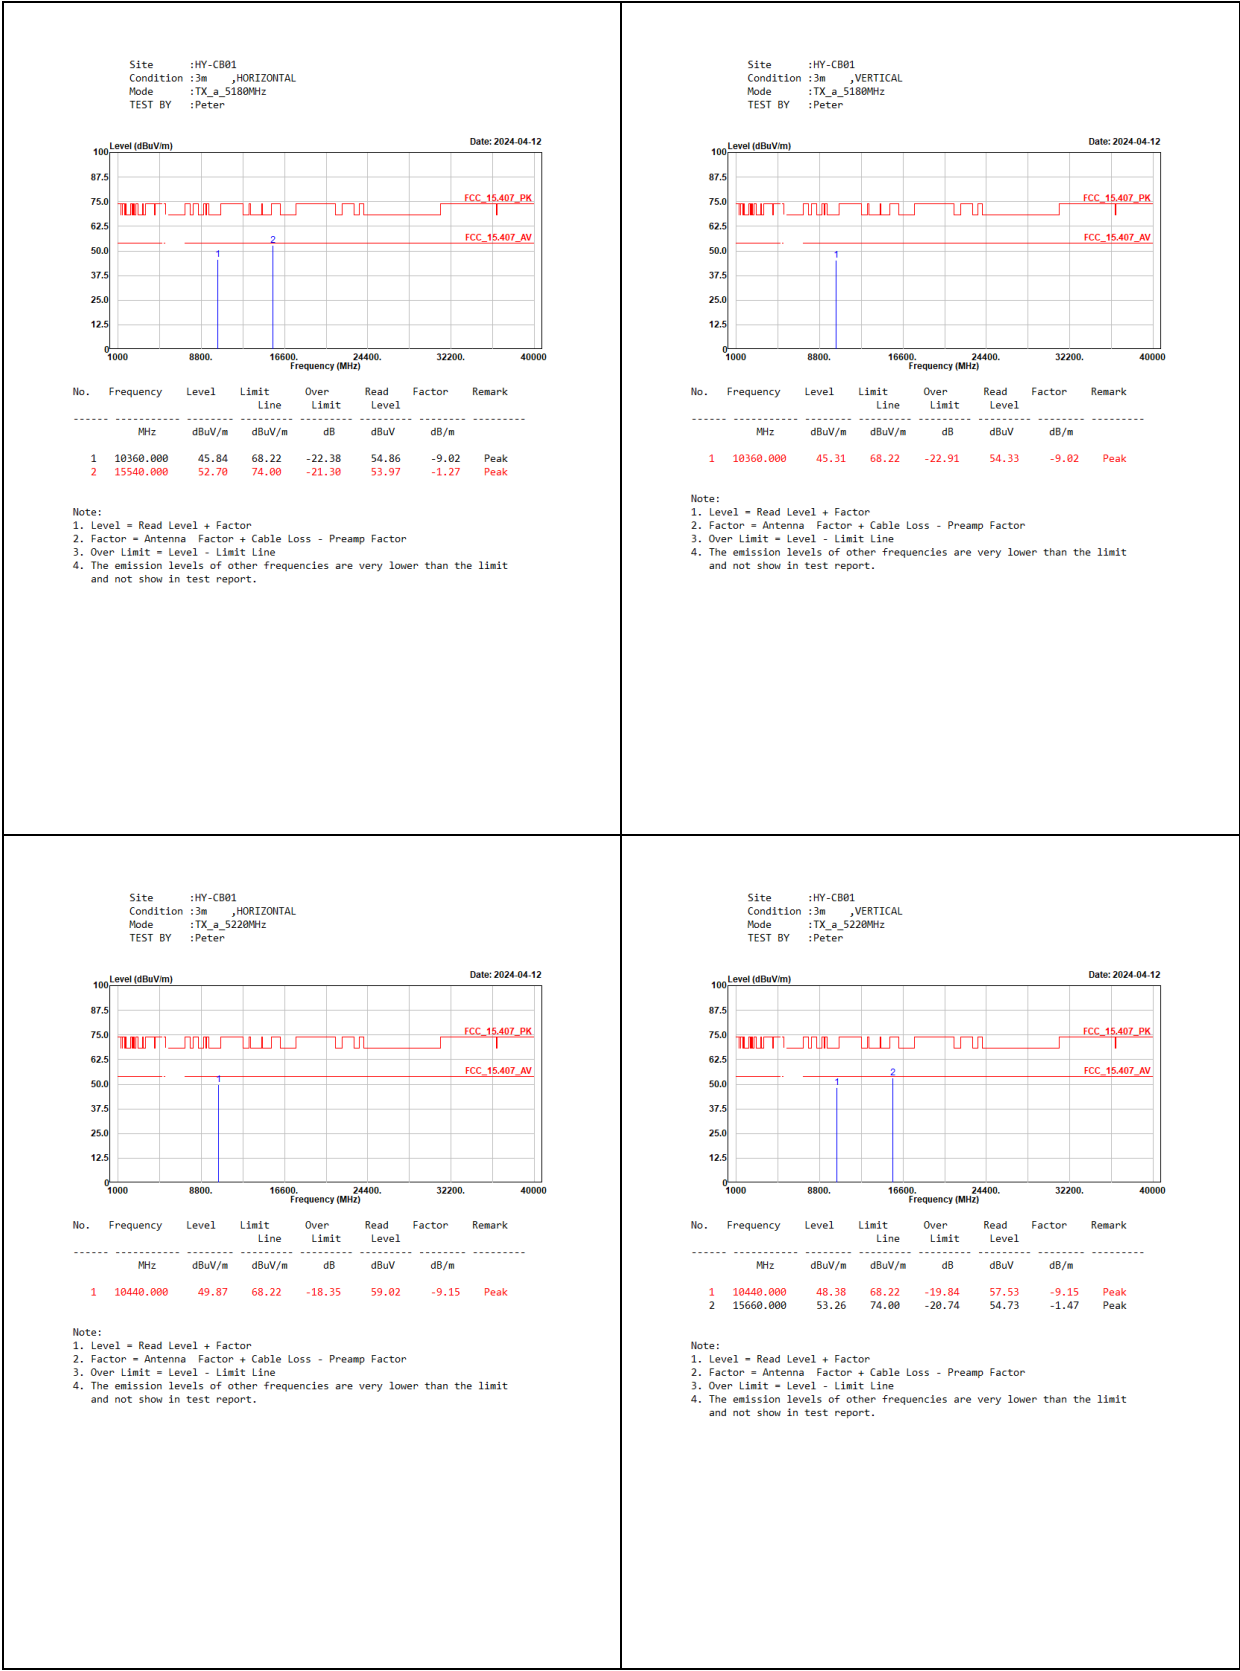


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5240MHz
TEST BY :Peter

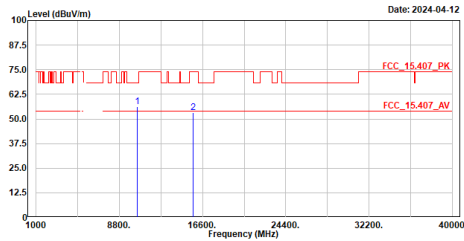

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	56.36	68.22	-11.86	65.43	-9.07	Peak
2	15720.000	53.30	74.00	-20.70	54.50	-1.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5240MHz
TEST BY :Peter

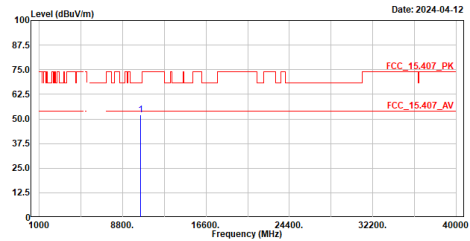

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	52.05	68.22	-16.17	61.12	-9.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5260MHz
TEST BY :Peter

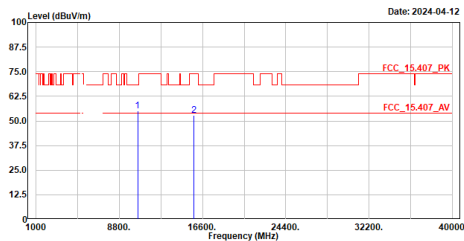

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10520.000	55.00	68.22	-13.22	63.95	-8.95	Peak
2	15780.000	53.02	74.00	-20.98	54.07	-1.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5260MHz
TEST BY :Peter

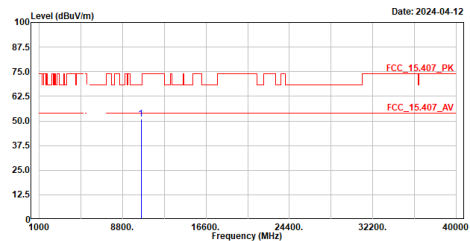

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10520.000	51.05	68.22	-17.17	60.00	-8.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5300MHz
TEST BY :Peter

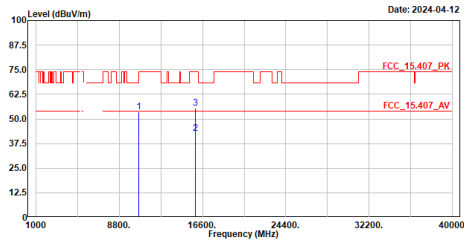


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	53.54	74.00	-20.46	62.06	-8.52	Peak
2	15900.000	42.71	54.00	-11.29	43.87	-1.16	Average
3	15900.000	55.59	74.00	-18.41	56.75	-1.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5300MHz
TEST BY :Peter

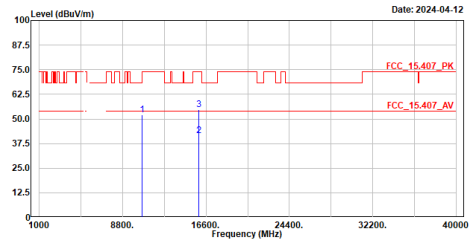


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	52.07	74.00	-21.93	60.59	-8.52	Peak
2	15900.000	41.56	54.00	-12.44	42.72	-1.16	Average
3	15900.000	54.58	74.00	-19.42	55.74	-1.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5320MHz
TEST BY :Peter

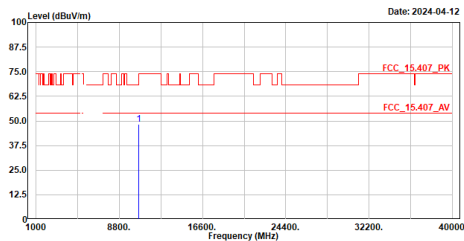


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	48.17	74.00	-25.83	56.77	-8.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5320MHz
TEST BY :Peter

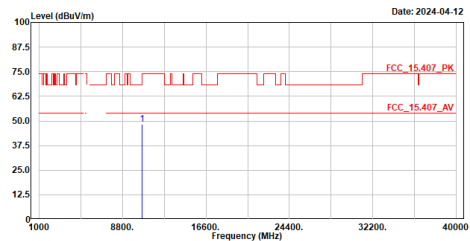


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	48.17	74.00	-25.83	56.77	-8.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5500MHz
TEST BY :Peter

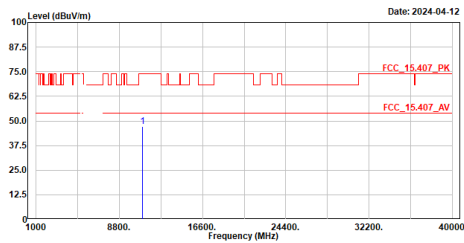


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11000.000	47.03	74.00	-26.97	55.20	-8.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5500MHz
TEST BY :Peter

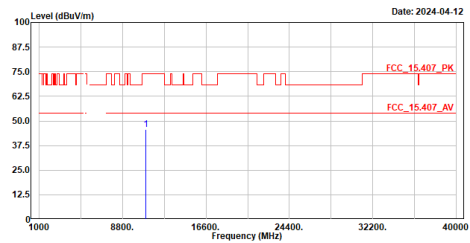


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11000.000	45.65	74.00	-28.35	53.82	-8.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5500MHz
TEST BY :Peter

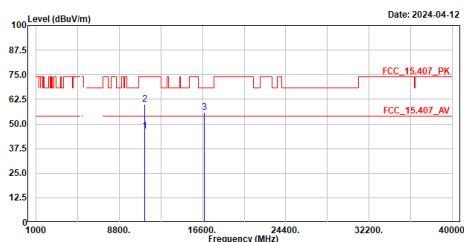


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11160.000	46.29	54.00	-7.71	53.80	-7.51	Average
2	11160.000	60.05	74.00	-13.95	67.56	-7.51	Peak
3	16740.000	55.81	68.22	-12.41	56.36	-0.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.





Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5500MHz
TEST BY :Peter

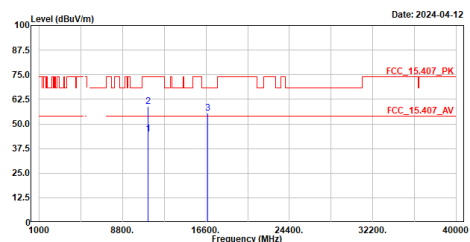


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11160.000	44.96	54.00	-9.04	52.47	-7.51	Average
2	11160.000	58.87	74.00	-15.13	66.38	-7.51	Peak
3	16740.000	55.41	68.22	-12.81	55.96	-0.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5745MHz
TEST BY :Peter

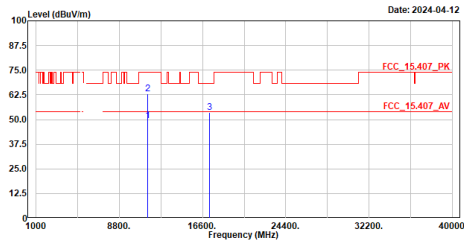


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11490.000	49.33	54.00	-4.67	56.31	-6.98	Average
2	11490.000	63.04	74.00	-10.96	70.02	-6.98	Peak
3	17235.000	53.74	68.22	-14.48	54.17	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5745MHz
TEST BY :Peter

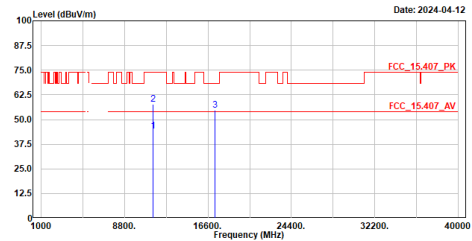


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11490.000	44.04	54.00	-9.96	51.02	-6.98	Average
2	11490.000	57.82	74.00	-16.18	64.80	-6.98	Peak
3	17235.000	54.66	68.22	-13.56	55.09	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5785MHz
TEST BY :Peter

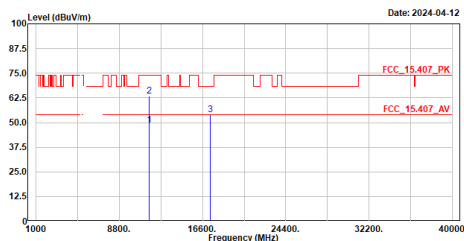


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11570.000	48.85	54.00	-5.15	55.80	-6.95	Average
2	11570.000	63.37	74.00	-10.63	70.32	-6.95	Peak
3	17355.000	54.00	68.22	-14.22	54.33	-0.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5785MHz
TEST BY :Peter

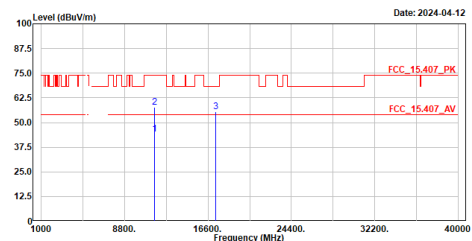


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11570.000	44.31	54.00	-9.69	51.26	-6.95	Average
2	11570.000	57.87	74.00	-16.13	64.82	-6.95	Peak
3	17355.000	55.65	68.22	-12.57	55.98	-0.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5625MHz
TEST BY :Peter

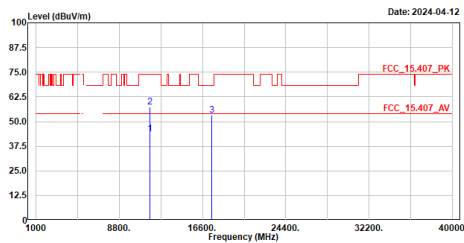


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	43.74	54.00	-10.26	50.82	-7.08	Average
2	11650.000	57.52	74.00	-16.48	64.60	-7.08	Peak
3	17475.000	53.17	68.22	-15.05	53.13	0.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5625MHz
TEST BY :Peter

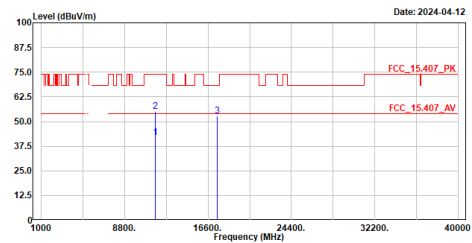


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	41.71	54.00	-12.29	48.79	-7.08	Average
2	11650.000	55.13	74.00	-18.87	62.21	-7.08	Peak
3	17475.000	52.90	68.22	-15.32	52.86	0.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5180MHz
TEST BY :Caster

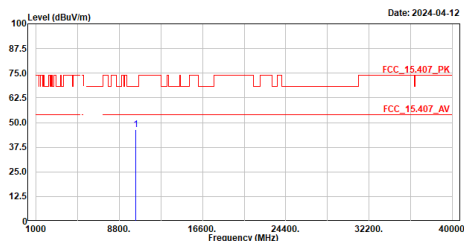


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	46.33	68.22	-21.89	55.35	-9.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5180MHz
TEST BY :Caster

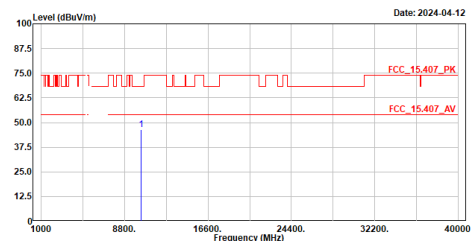


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	46.34	68.22	-21.88	55.36	-9.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5220MHz
TEST BY :Caster

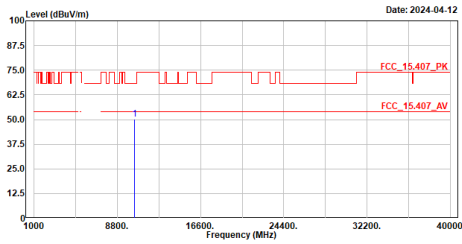


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	50.38	68.22	-17.84	59.53	-9.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5220MHz
TEST BY :Caster

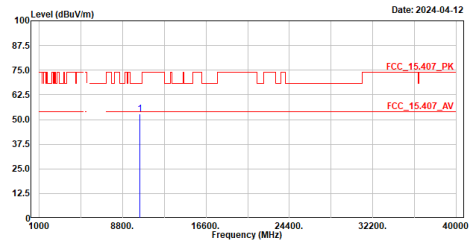


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	52.78	68.22	-15.44	61.93	-9.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5240MHz
TEST BY :Caster

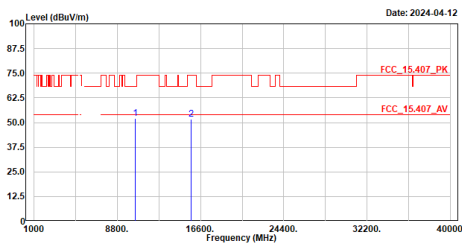


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10400.000	52.05	68.22	-16.17	61.12	-9.07	Peak
2	15720.000	51.84	74.00	-22.16	53.04	-1.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5240MHz
TEST BY :Caster

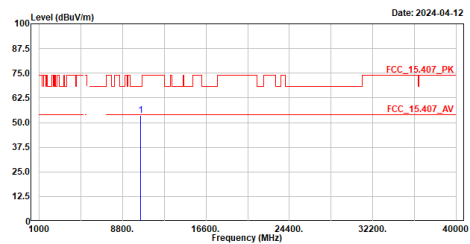


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10400.000	53.53	68.22	-14.69	62.60	-9.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5260MHz
TEST BY :Caster

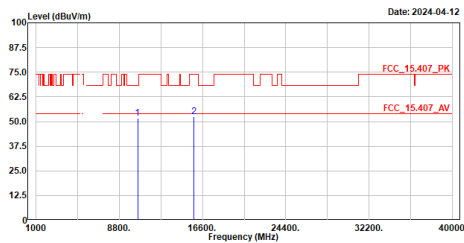


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10520.000	51.57	68.22	-16.65	60.52	-8.95	Peak
2	15780.000	52.52	74.00	-21.48	53.57	-1.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5260MHz
TEST BY :Caster

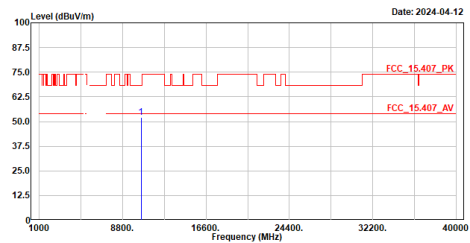


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10520.000	51.99	68.22	-16.23	60.94	-8.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5300MHz
TEST BY :Caster

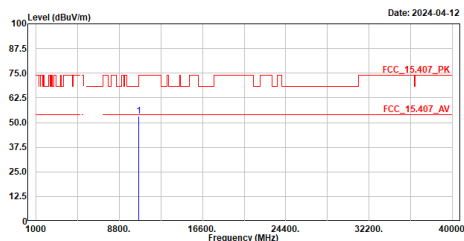


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10600.000	53.06	74.00	-20.94	61.58	-8.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5300MHz
TEST BY :Caster

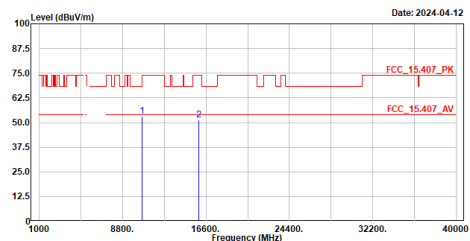


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10600.000	53.28	74.00	-20.72	61.80	-8.52	Peak
2	15900.000	51.45	74.00	-22.55	52.61	-1.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5320MHz
TEST BY :Caster

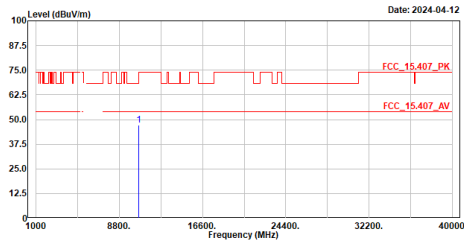


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	47.05	74.00	-26.95	55.65	-8.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5320MHz
TEST BY :Caster

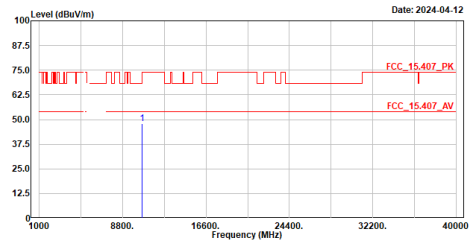


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	47.84	74.00	-26.16	56.44	-8.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5500MHz
TEST BY :Caster

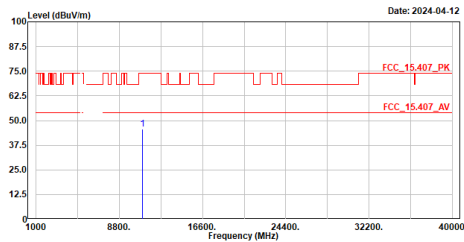


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11000.000	45.80	74.00	-28.20	53.97	-8.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.





Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5500MHz
TEST BY :Caster

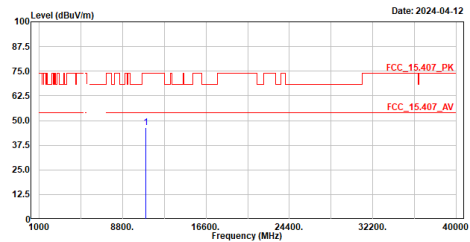


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11000.000	46.29	74.00	-27.71	54.46	-8.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5720MHz
TEST BY :Caster

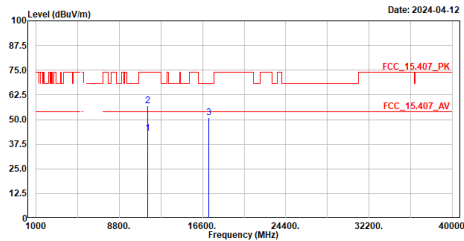


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11440.000	43.15	54.00	-10.85	50.09	-6.94	Average
2	11440.000	56.89	74.00	-17.11	63.83	-6.94	Peak
3	17160.000	50.94	68.22	-17.28	51.11	-0.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5720MHz
TEST BY :Caster

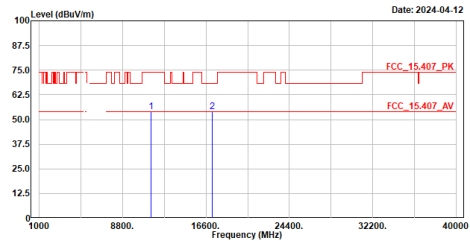


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11440.000	53.90	74.00	-20.10	60.84	-6.94	Peak
2	17160.000	53.83	68.22	-14.39	54.00	-0.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5745MHz
TEST BY :Caster

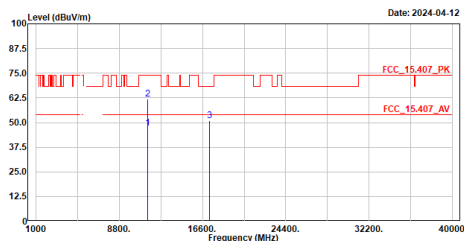


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	47.28	54.00	-6.72	54.26	-6.98	Average
2	11490.000	61.77	74.00	-12.23	68.75	-6.98	Peak
3	17235.000	50.96	68.22	-17.26	51.39	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5745MHz
TEST BY :Caster

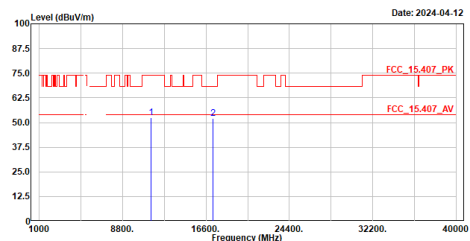


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	52.41	74.00	-21.59	59.39	-6.98	Peak
2	17235.000	51.91	68.22	-16.31	52.34	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5785MHz
TEST BY :Caster

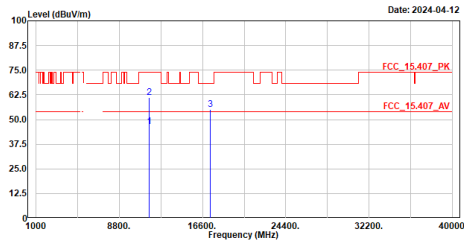


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	46.54	54.00	-7.46	53.49	-6.95	Average
2	11570.000	61.21	74.00	-12.79	68.16	-6.95	Peak
3	17355.000	55.15	68.22	-13.07	55.48	-0.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5785MHz
TEST BY :Caster

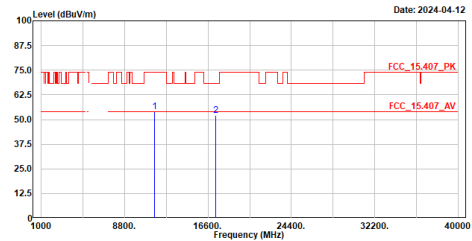


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	53.78	74.00	-20.22	60.73	-6.95	Peak
2	17355.000	52.18	68.22	-16.04	52.51	-0.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac20_5825MHz
TEST BY :Caster

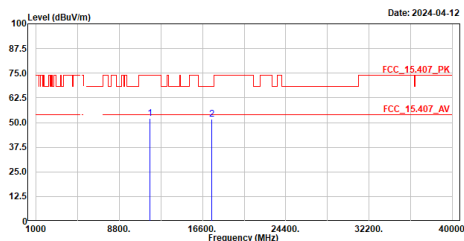


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	51.98	74.00	-22.02	59.06	-7.08	Peak
2	17475.000	51.72	68.22	-16.50	51.68	0.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac20_5825MHz
TEST BY :Caster

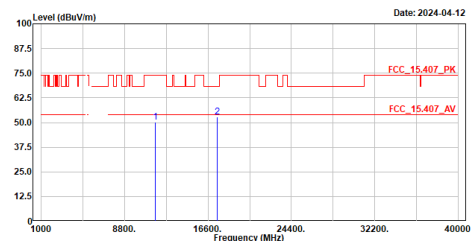


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	50.11	74.00	-23.89	57.19	-7.08	Peak
2	17475.000	52.65	68.22	-15.57	52.61	0.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5190MHz
TEST BY :Caster

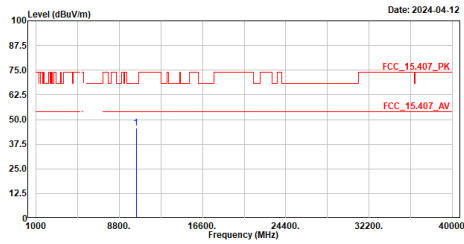


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10380.000	45.57	68.22	-22.65	54.63	-9.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5190MHz
TEST BY :Caster

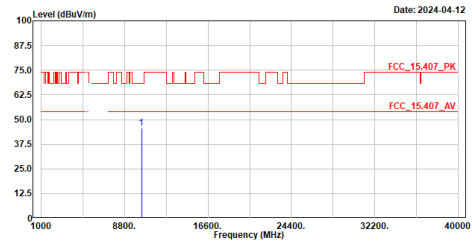


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10380.000	45.71	68.22	-22.51	54.77	-9.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5230MHz
TEST BY :Caster

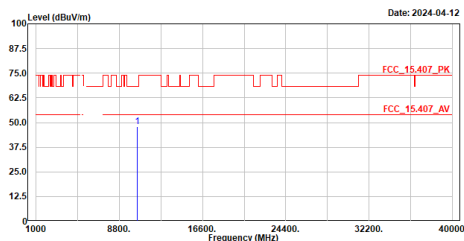


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10460.000	47.84	68.22	-20.38	56.97	-9.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5230MHz
TEST BY :Caster

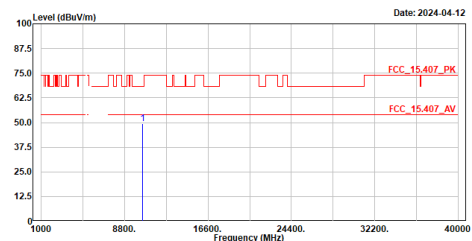


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10460.000	49.59	68.22	-18.63	58.72	-9.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5270MHz
TEST BY :Caster

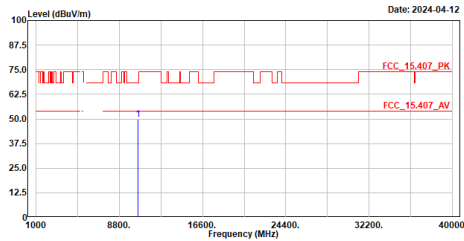


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10540.000	49.69	68.22	-18.53	58.53	-8.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5270MHz
TEST BY :Caster

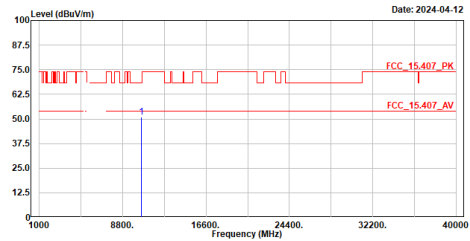


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10540.000	50.94	68.22	-17.28	59.78	-8.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5310MHz
TEST BY :Caster

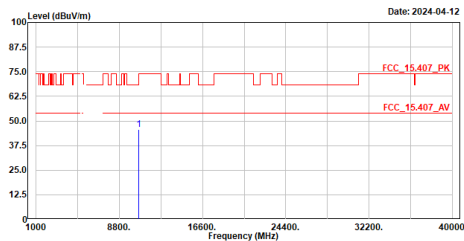


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10620.000	45.74	74.00	-28.26	54.29	-8.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5310MHz
TEST BY :Caster

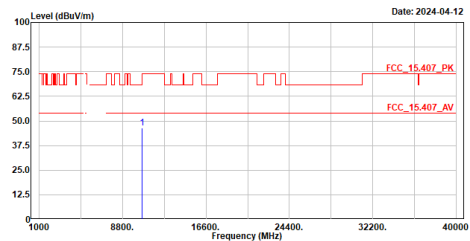


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10620.000	46.23	74.00	-27.77	54.78	-8.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

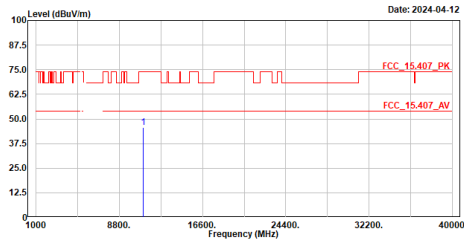


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11020.000	45.60	74.00	-28.40	53.70	-8.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

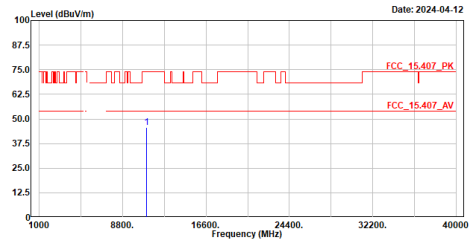


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11020.000	45.58	74.00	-28.42	53.68	-8.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5550MHz
TEST BY :Caster

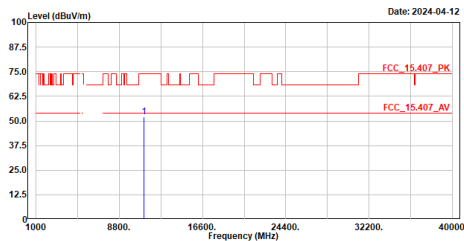


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11100.000	51.96	74.00	-22.04	59.75	-7.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5550MHz
TEST BY :Caster

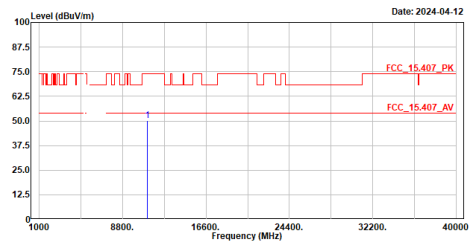


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11100.000	50.16	74.00	-23.84	57.95	-7.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5670MHz
TEST BY :Caster

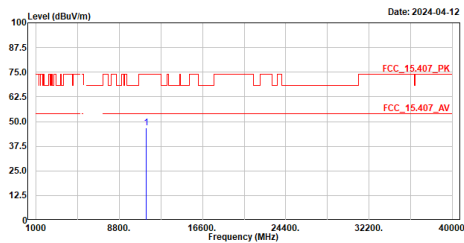


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11340.000	46.95	74.00	-27.05	54.19	-7.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5670MHz
TEST BY :Caster

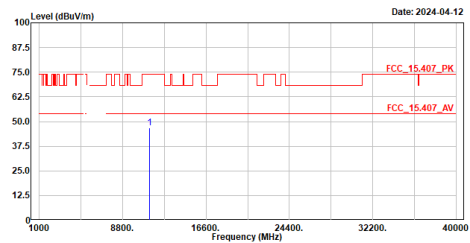


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11340.000	46.70	74.00	-27.30	53.94	-7.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5710MHz
TEST BY :Caster

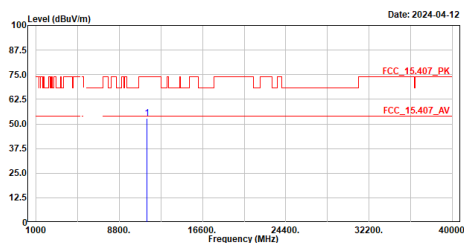


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11420.000	52.68	74.00	-21.32	59.65	-6.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5710MHz
TEST BY :Caster

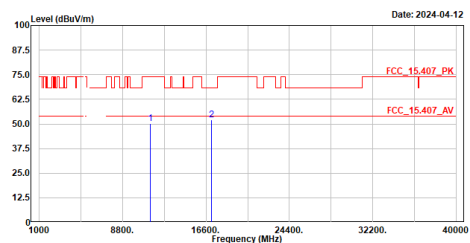


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11420.000	50.17	74.00	-23.83	57.14	-6.97	Peak
2	17130.000	52.20	68.22	-16.02	52.47	-0.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5755MHz
TEST BY :Caster

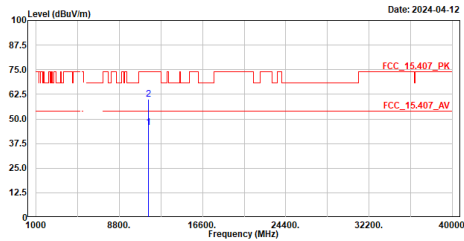


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11510.000	45.65	54.00	-8.35	52.64	-6.99	Average
2	11510.000	60.05	74.00	-13.95	67.04	-6.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5755MHz
TEST BY :Caster

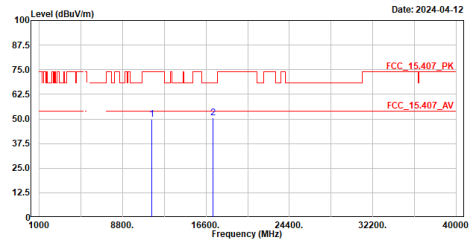


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11510.000	49.99	74.00	-24.01	56.98	-6.99	Peak
2	17265.000	50.48	68.22	-17.74	50.84	-0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5795MHz
TEST BY :Caster

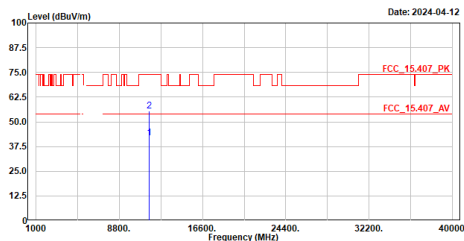


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11590.000	42.07	54.00	-11.93	49.03	-6.96	Average
2	11590.000	55.48	74.00	-18.52	62.44	-6.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac40_5795MHz
TEST BY :Caster

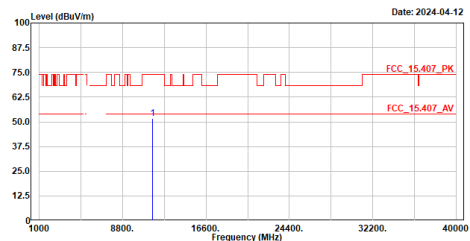


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11590.000	51.86	74.00	-22.14	58.82	-6.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5210MHz
TEST BY :Caster

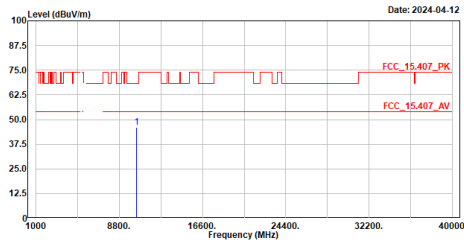


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	45.92	68.22	-22.30	55.04	-9.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5210MHz
TEST BY :Caster

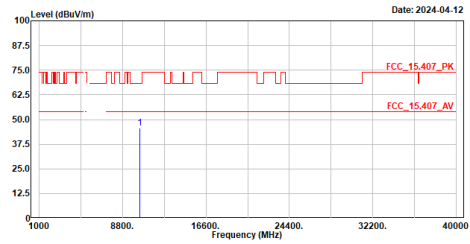


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	45.54	68.22	-22.68	54.66	-9.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5290MHz
TEST BY :Caster

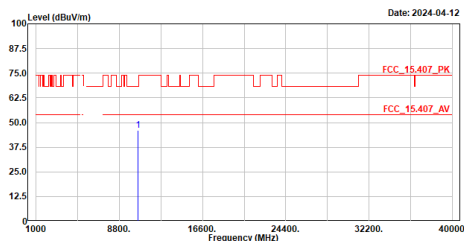


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10580.000	46.07	68.22	-22.15	54.70	-8.63	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5290MHz
TEST BY :Caster

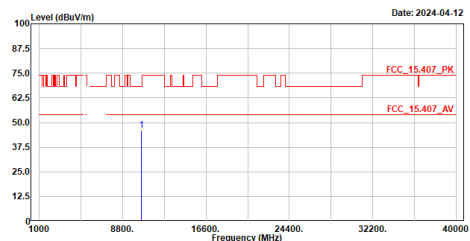


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10580.000	46.04	68.22	-22.18	54.67	-8.63	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5530MHz
TEST BY :Caster

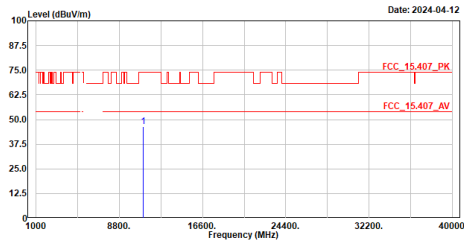


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11060.000	46.47	74.00	-27.53	54.42	-7.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5530MHz
TEST BY :Caster

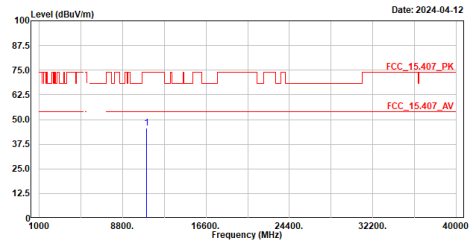


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11060.000	45.56	74.00	-28.44	53.51	-7.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5610MHz
TEST BY :Caster

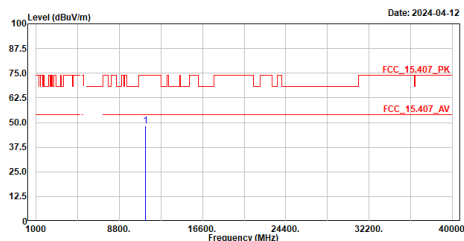


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11220.000	48.24	74.00	-25.76	55.57	-7.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5610MHz
TEST BY :Caster

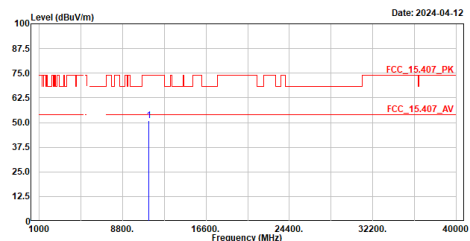


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11220.000	50.95	74.00	-23.05	58.28	-7.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5690MHz
TEST BY :Caster

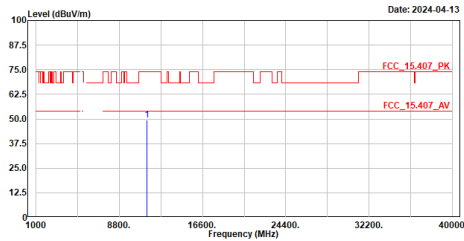


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11380.000	49.49	74.00	-24.51	56.59	-7.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5690MHz
TEST BY :Caster

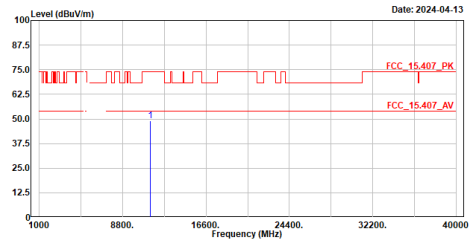


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11380.000	49.18	74.00	-24.82	56.28	-7.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
TEST BY :Caster

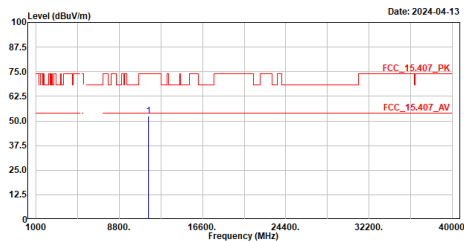


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	52.44	74.00	-21.56	59.38	-6.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
TEST BY :Caster

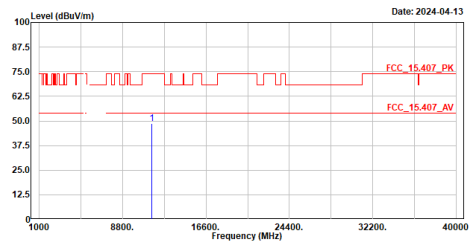


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	48.85	74.00	-25.15	55.79	-6.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
TEST BY :Peter

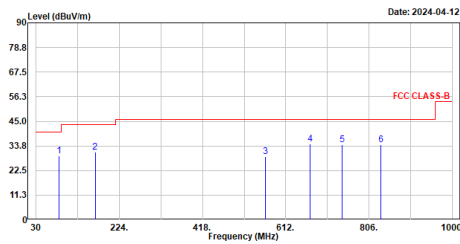


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.350	29.32	40.00	-10.68	59.05	-29.73	QP
2	167.740	31.04	43.50	-12.46	55.24	-24.20	QP
3	564.470	28.83	46.00	-17.17	45.31	-16.48	QP
4	668.260	34.68	46.00	-11.32	49.27	-14.59	QP
5	742.950	34.23	46.00	-11.77	47.41	-13.18	QP
6	833.160	34.30	46.00	-11.70	46.59	-12.29	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
TEST BY :Peter

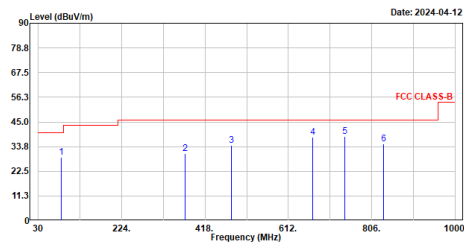


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.350	28.99	40.00	-11.01	58.72	-29.73	QP
2	371.440	30.42	46.00	-15.58	51.49	-21.07	QP
3	480.080	34.19	46.00	-11.81	52.50	-18.31	QP
4	668.260	37.89	46.00	-8.11	52.48	-14.59	QP
5	742.950	38.32	46.00	-7.68	51.50	-13.18	QP
6	833.160	34.91	46.00	-11.09	47.20	-12.29	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
TEST BY :Peter

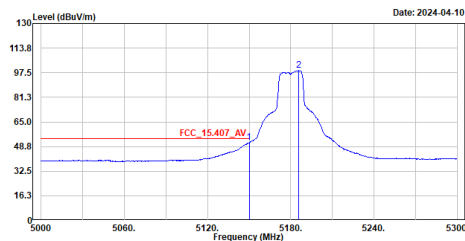


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	51.27	54.00	-2.73	36.97	14.30	Average
2	5185.700	98.85	-----	-----	84.47	14.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
TEST BY :Peter

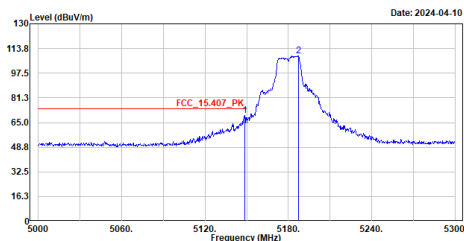


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5140.500	69.76	74.00	-4.24	55.45	14.31	Peak
2	5187.200	108.79	-----	-----	94.41	14.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5180MHz
TEST BY :Peter

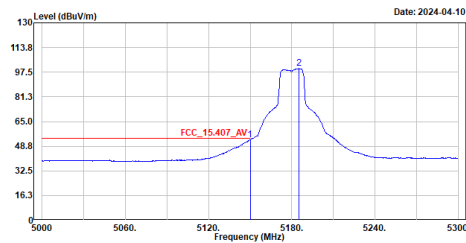


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	52.99	54.00	-1.01	38.69	14.30	Average
2	5185.400	99.87	-----	-----	85.49	14.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5180MHz
TEST BY :Peter

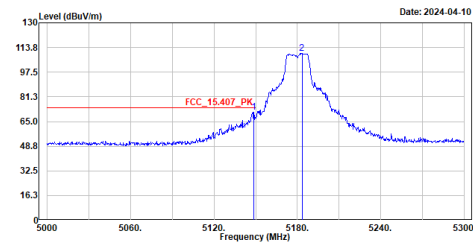


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	71.05	74.00	-2.95	56.75	14.30	Peak
2	5183.300	109.87	-----	-----	95.50	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
TEST BY :Peter

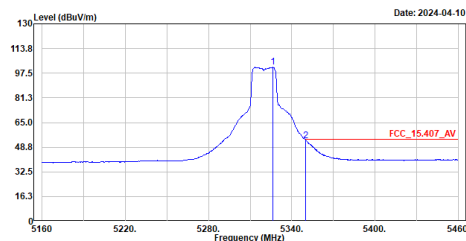


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5326.200	101.36	-----	-----	86.83	14.53	Average
2	5350.200	53.17	54.00	-0.83	38.64	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
TEST BY :Peter

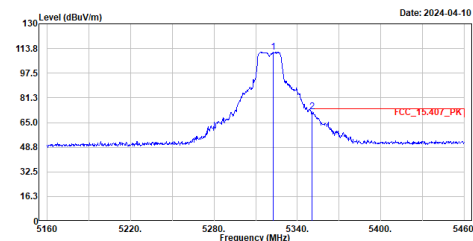


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5322.600	111.29	-----	-----	96.76	14.53	Peak
2	5350.500	72.07	74.00	-1.93	57.54	14.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5320MHz
TEST BY :Peter

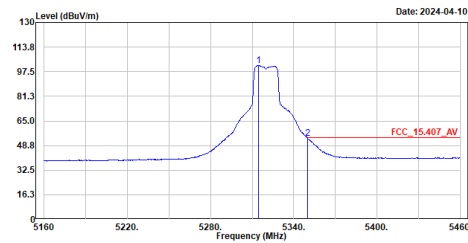


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5314.500	101.41	-----	-----	86.87	14.54	Average
2	5350.200	53.26	54.00	-0.74	38.73	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5320MHz
TEST BY :Peter

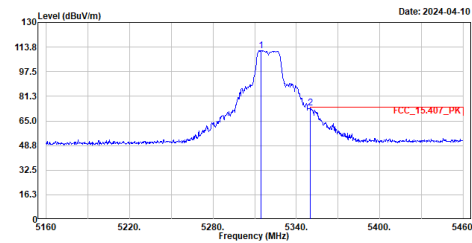


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5314.500	111.42	-----	-----	96.88	14.54	Peak
2	5350.200	73.47	74.00	-0.53	58.94	14.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5500MHz
TEST BY :Peter

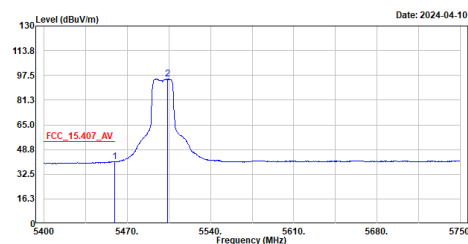


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5459.150	40.77	54.00	-13.23	25.62	15.15	Average
2	5503.950	95.03	-----	-----	79.47	15.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5500MHz
TEST BY :Peter

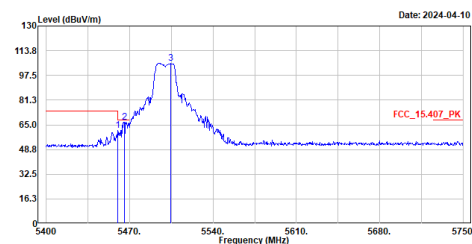


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5459.150	61.13	74.00	-12.87	45.98	15.15	Peak
2	5465.450	66.63	68.22	-1.59	51.42	15.21	Peak
3	5504.650	105.31	-----	-----	89.75	15.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5500MHz
TEST BY :Peter

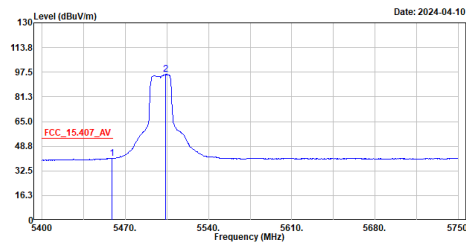


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5458.800	40.91	54.00	-13.09	25.76	15.15	Average
2	5503.950	95.95	-----	-----	80.39	15.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5500MHz
TEST BY :Peter

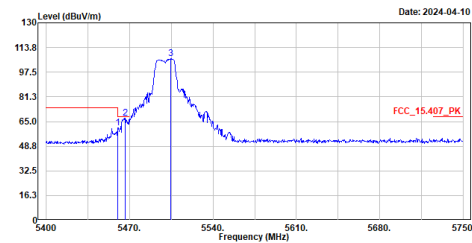


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	60.89	74.00	-13.11	45.74	15.15	Peak
2	5466.500	67.38	68.22	-0.84	52.16	15.22	Peak
3	5504.300	106.25	-----	-----	90.69	15.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5700MHz
TEST BY :Peter

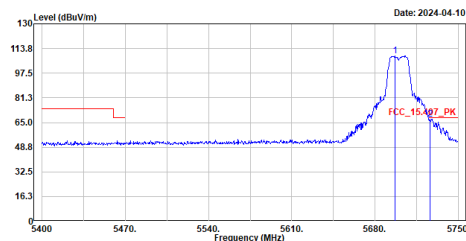


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5696.800	100.80	-----	-----	92.81	15.99	Peak
2	5726.550	67.38	68.22	-0.84	51.25	16.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5700MHz
TEST BY :Peter

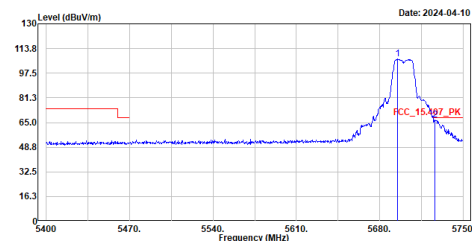


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5694.700	106.72	-----	-----	90.74	15.98	Peak
2	5726.200	66.90	68.22	-1.32	50.78	16.12	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

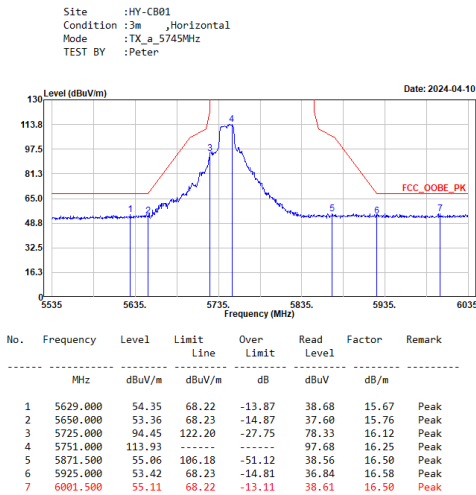


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

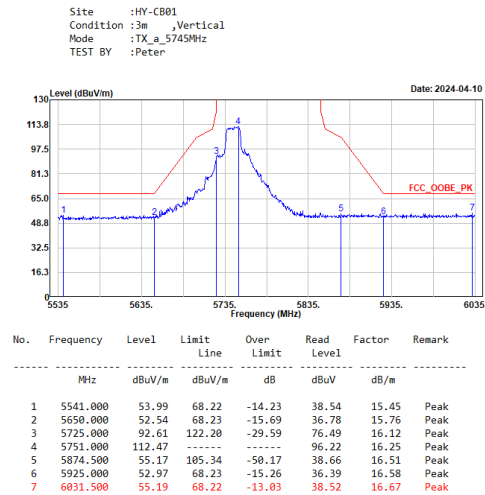


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

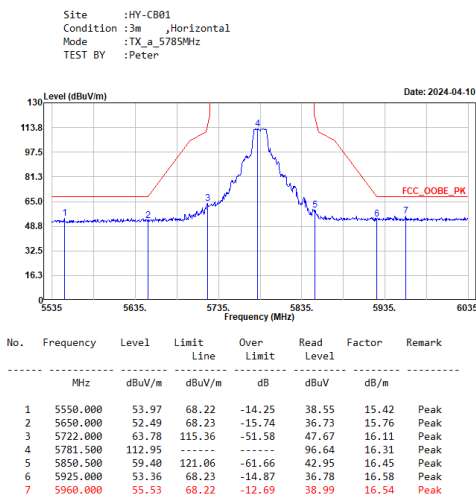

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

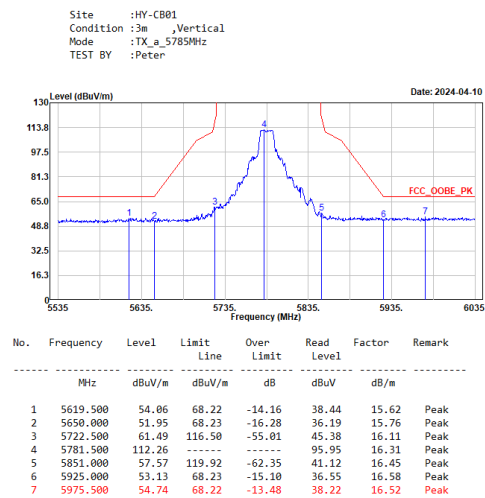


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

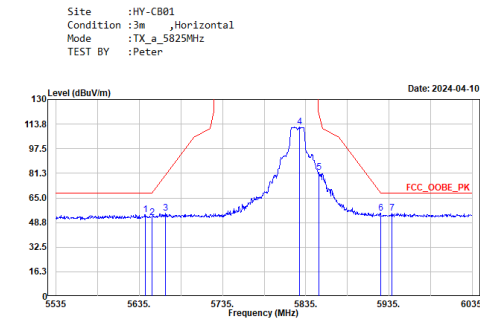


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5642.000	54.05	68.22	-14.17	38.32	15.73	Peak
2	5650.000	52.05	68.23	-16.18	36.29	15.76	Peak
3	5666.500	55.04	80.43	-25.39	39.20	15.84	Peak
4	5827.500	111.99	-----	-----	95.60	16.39	Peak
5	5851.000	81.99	119.92	-37.93	65.54	16.45	Peak
6	5925.000	54.98	68.23	-13.25	38.40	16.58	Peak
7	5938.500	54.83	68.22	-13.39	38.26	16.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

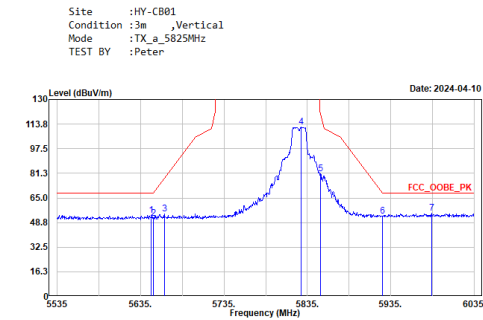


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5648.000	53.44	68.22	-14.78	37.69	15.75	Peak
2	5650.000	51.75	68.23	-16.48	35.99	15.76	Peak
3	5663.500	54.34	78.21	-23.87	38.52	15.82	Peak
4	5827.500	111.90	-----	-----	95.51	16.39	Peak
5	5850.500	80.92	121.06	-40.14	64.47	16.45	Peak
6	5925.000	52.94	68.23	-15.29	36.36	16.58	Peak
7	5984.000	55.03	68.22	-13.19	38.52	16.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

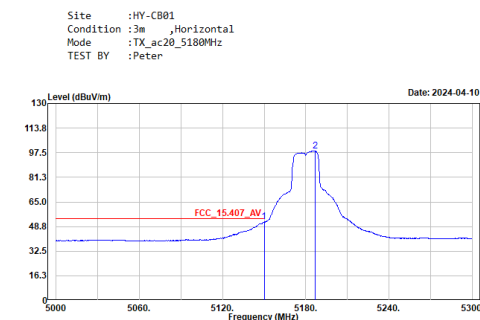

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	51.81	54.00	-2.19	37.51	14.30	Average
2	5186.600	98.75	-----	-----	84.37	14.38	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

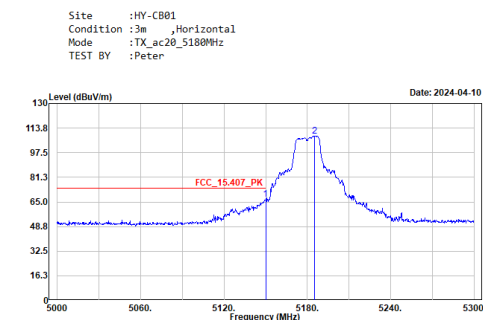

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	66.50	74.00	-7.50	52.20	14.30	Peak
2	5185.400	108.56	-----	-----	94.18	14.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
TEST BY :Peter

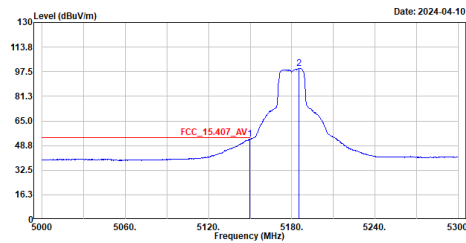


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	53.00	54.00	-1.00	38.70	14.30	Average
2	5185.400	99.48	-----	-----	85.10	14.38	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
TEST BY :Peter

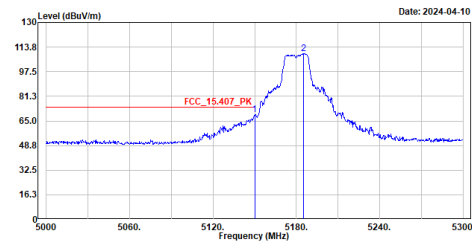


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	68.99	74.00	-5.01	54.69	14.30	Peak
2	5185.100	109.37	-----	-----	94.99	14.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5320MHz
TEST BY :Peter

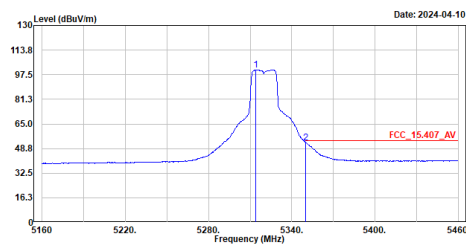


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5314.200	100.77	-----	-----	86.23	14.54	Average
2	5350.200	52.45	54.00	-1.55	37.92	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5320MHz
TEST BY :Peter

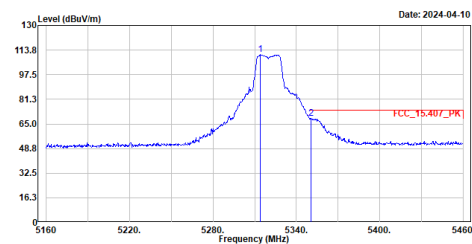


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5313.900	110.63	-----	-----	96.09	14.54	Peak
2	5350.800	68.76	74.00	-5.24	54.23	14.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5320MHz
TEST BY :Peter

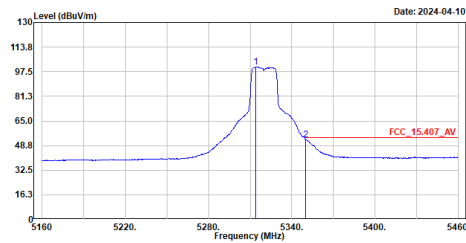


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5314.200	100.71	-----	-----	86.17	14.54	Average
2	5350.200	52.65	54.00	-1.35	38.12	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5320MHz
TEST BY :Peter

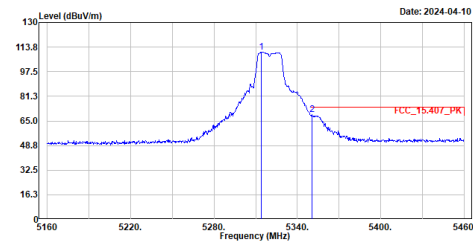


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5313.900	110.59	-----	-----	96.05	14.54	Peak
2	5350.800	69.28	74.00	-4.72	54.75	14.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
TEST BY :Peter

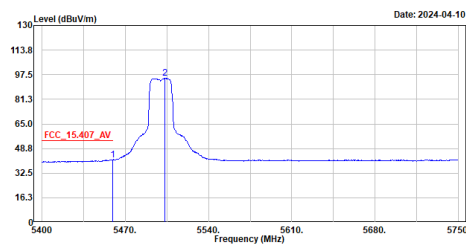


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.150	41.36	54.00	-12.64	26.21	15.15	Average
2	5503.250	95.13	-----	-----	79.58	15.55	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
TEST BY :Peter

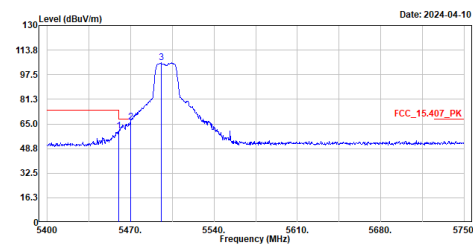


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.850	60.56	74.00	-13.44	45.41	15.15	Peak
2	5470.000	66.10	68.22	-2.12	50.84	15.26	Peak
3	5495.900	105.31	-----	-----	89.82	15.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5500MHz
TEST BY :Peter

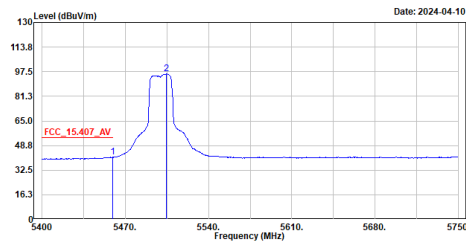

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.150	41.05	54.00	-12.95	25.90	15.15	Average
2	5504.650	96.13	-----	-----	80.57	15.56	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5500MHz
TEST BY :Peter

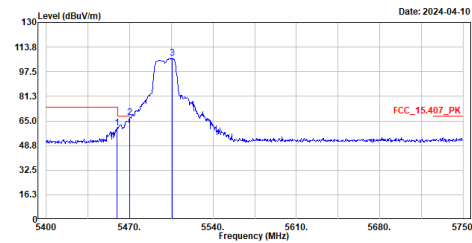

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.500	60.21	74.00	-13.79	45.06	15.15	Peak
2	5470.000	66.97	68.22	-1.25	51.71	15.26	Peak
3	5505.700	106.37	-----	-----	90.81	15.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac20_5700MHz
TEST BY :Peter

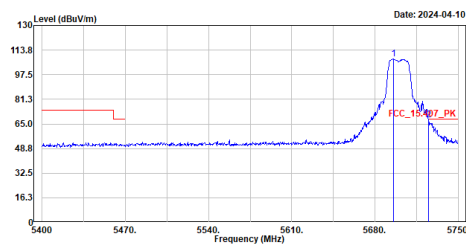

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5695.750	107.97	-----	-----	91.99	15.98	Peak
2	5725.150	67.64	68.22	-0.58	51.52	16.12	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac20_5700MHz
TEST BY :Peter

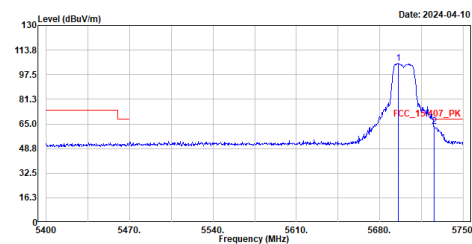


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5695.750	104.92	-----	-----	88.94	15.98	Peak
2	5725.500	63.16	68.22	-5.06	47.04	16.12	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

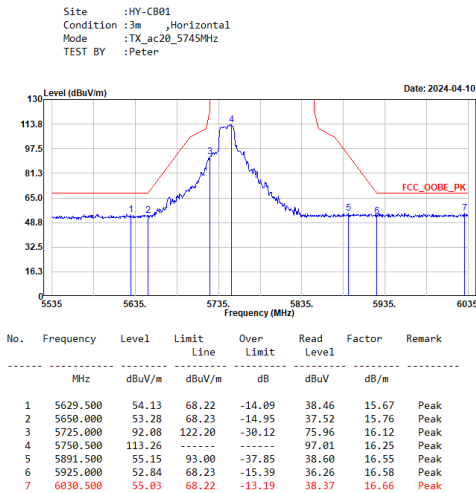


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

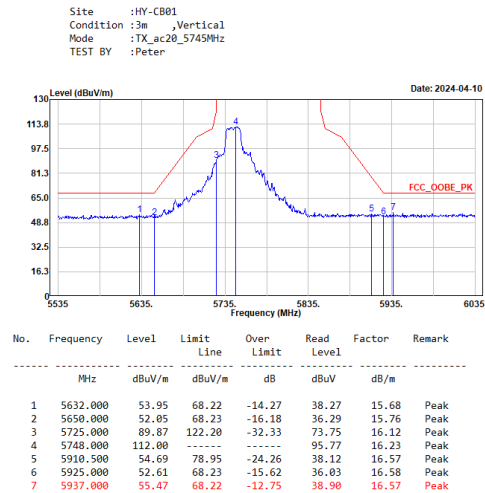


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

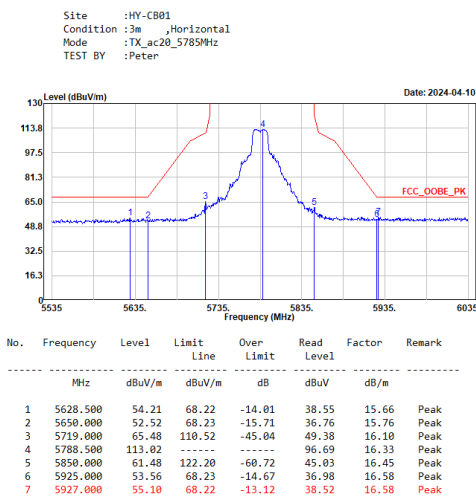


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

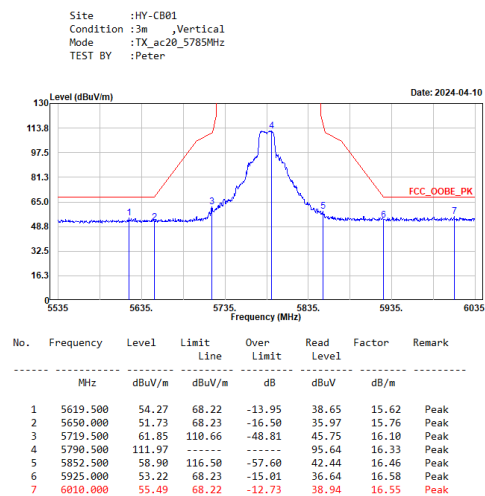


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

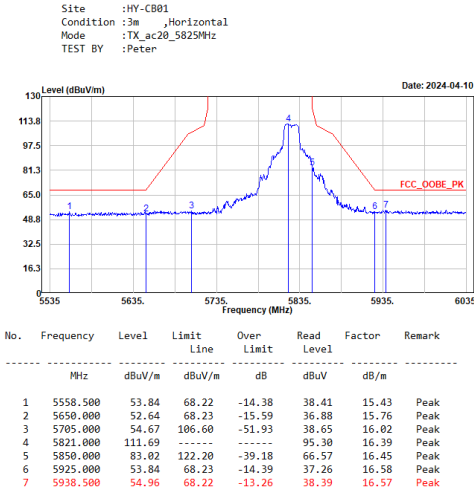


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

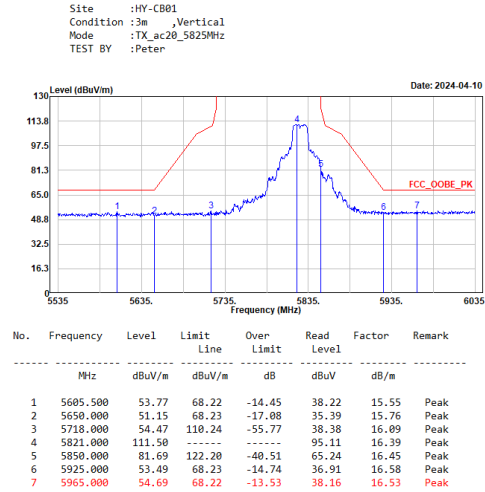

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

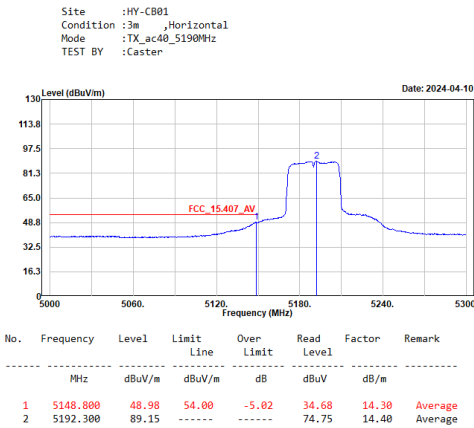


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

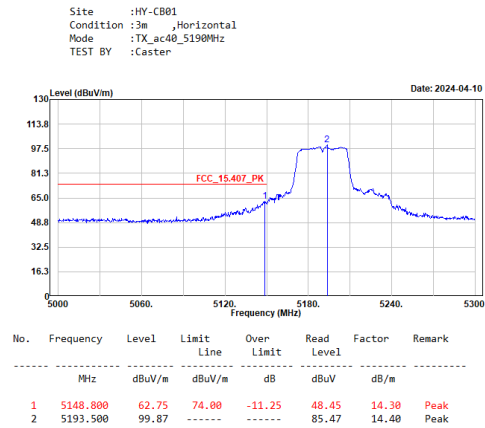

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
TEST BY :Caster

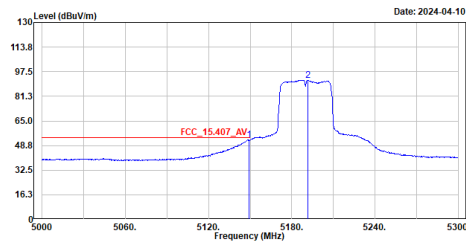


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.100	52.34	54.00	-1.66	38.04	14.30	Average
2	5191.400	91.87	-----	-----	77.47	14.40	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
TEST BY :Caster

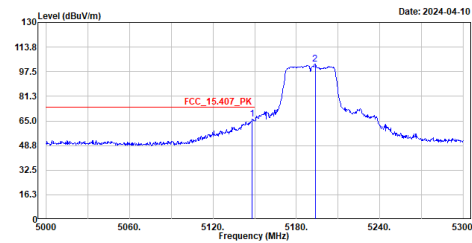


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.200	66.39	74.00	-7.61	52.08	14.31	Peak
2	5193.500	102.54	-----	-----	88.14	14.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_5310MHz
TEST BY :Caster

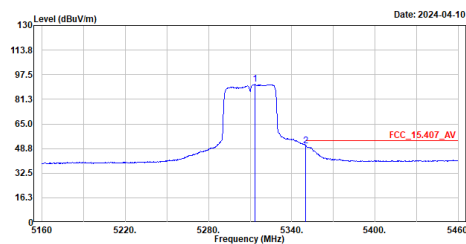


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5313.600	91.14	-----	-----	76.61	14.53	Average
2	5350.200	50.58	54.00	-3.42	36.05	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_5310MHz
TEST BY :Caster

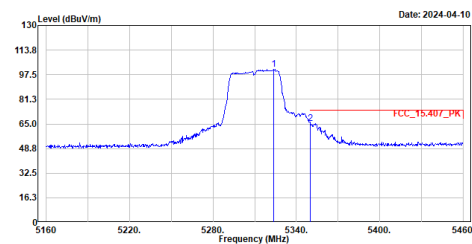


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5323.800	101.10	-----	-----	86.57	14.53	Peak
2	5350.200	65.44	74.00	-8.56	50.91	14.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5310MHz
TEST BY :Caster

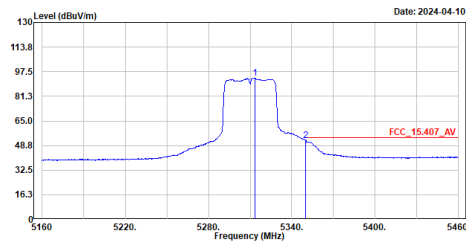


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5313.300	93.21	-----	-----	78.68	14.53	Average
2	5350.200	52.09	54.00	-1.91	37.56	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5310MHz
TEST BY :Caster

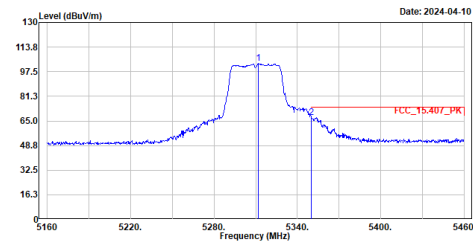


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5311.800	102.80	-----	-----	88.26	14.54	Peak
2	5350.200	67.12	74.00	-6.88	52.59	14.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

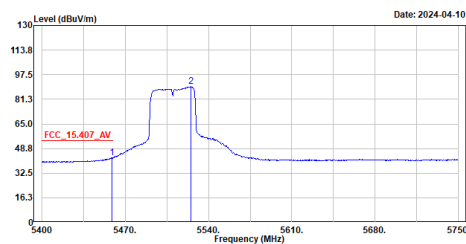


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5458.800	42.71	54.00	-11.29	27.56	15.15	Average
2	5525.300	89.59	-----	-----	74.09	15.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac40_5510MHz
TEST BY :Caster

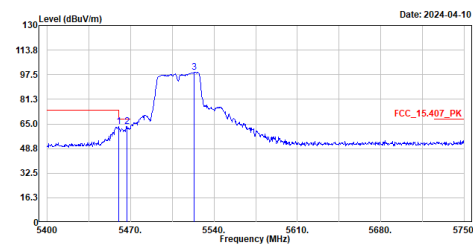


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5459.850	63.35	74.00	-10.65	48.20	15.15	Peak
2	5467.200	63.38	68.22	-4.84	48.16	15.22	Peak
3	5523.550	99.28	-----	-----	83.77	15.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5510MHz
TEST BY :Caster

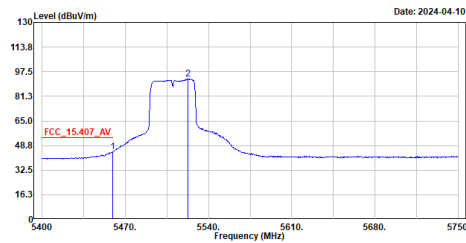


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.500	44.55	54.00	-9.45	29.40	15.15	Average
2	5522.500	92.67	-----	-----	77.17	15.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5510MHz
TEST BY :Caster

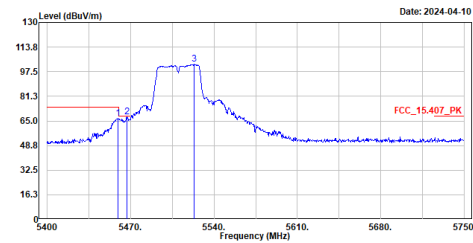


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.500	66.57	74.00	-7.43	51.42	15.15	Peak
2	5466.850	67.69	68.22	-0.53	52.47	15.22	Peak
3	5523.550	102.53	-----	-----	87.02	15.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac40_5670MHz
TEST BY :Caster

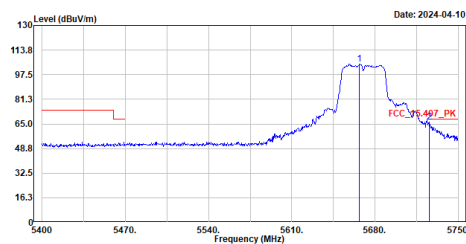


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5667.050	104.47	-----	-----	88.63	15.84	Peak
2	5725.500	66.08	68.22	-2.14	49.96	16.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac40_5670MHz
TEST BY :Caster

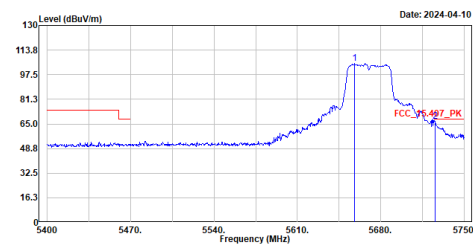


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5658.300	105.07	-----	-----	89.27	15.80	Peak
2	5725.500	66.47	68.22	-1.75	50.35	16.12	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

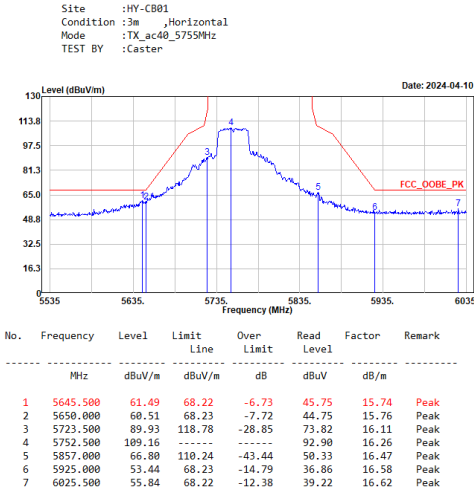


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

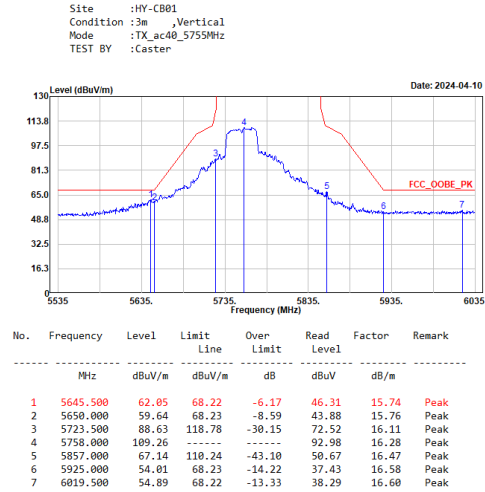

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

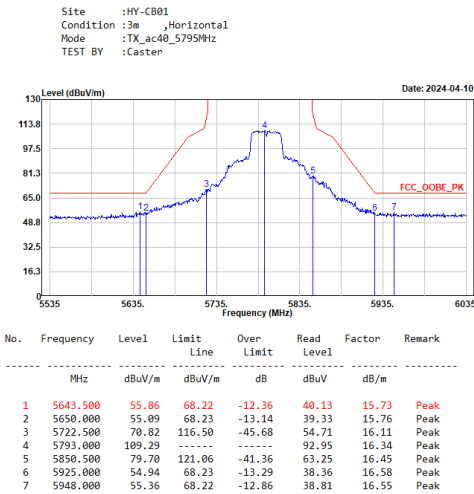


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

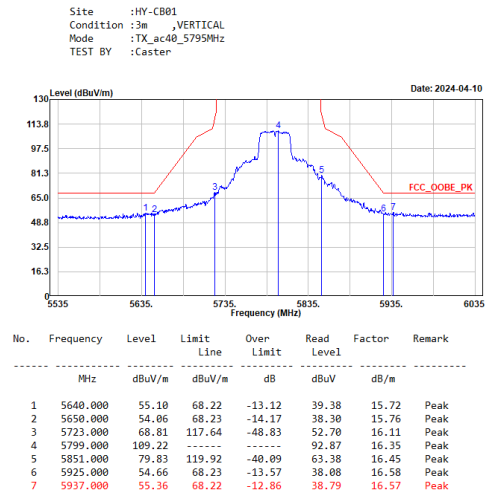

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Horizontal
Mode :TX_ac80_5210MHz
TEST BY :Peter

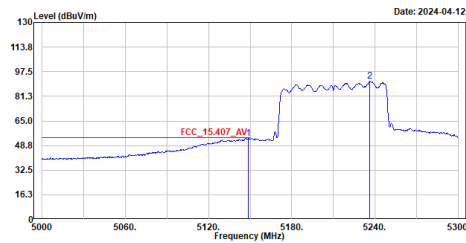


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.800	53.40	54.00	-0.60	39.10	14.30	Average
2	5236.100	91.21	-----	-----	76.75	14.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Horizontal
Mode :TX_ac80_5210MHz
TEST BY :Peter

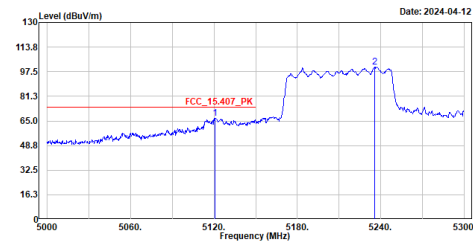


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5120.600	66.87	74.00	-7.13	52.49	14.38	Peak
2	5235.800	100.48	-----	-----	86.82	14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Vertical
Mode :TX_ac80_5210MHz
TEST BY :Peter

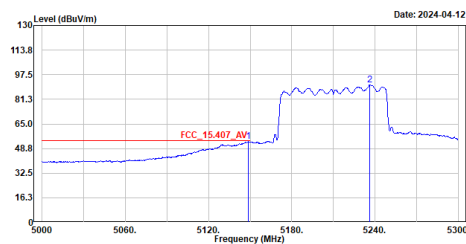


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5148.800	53.23	54.00	-0.77	38.93	14.30	Average
2	5236.100	90.93	-----	-----	76.47	14.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Vertical
Mode :TX_ac80_5210MHz
TEST BY :Peter

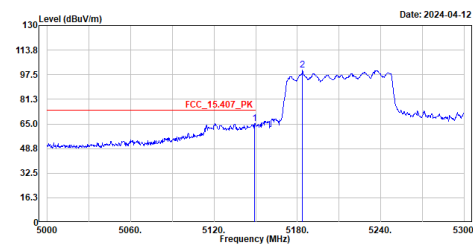


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.400	65.11	74.00	-8.89	50.81	14.30	Peak
2	5183.600	100.73	-----	-----	86.35	14.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Horizontal
Mode :TX_ac80_5290MHz
TEST BY :Peter

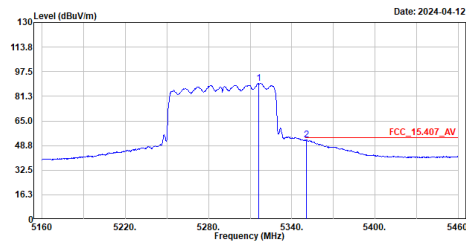


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5316.000	89.75	-----	-----	75.21	14.54	Average
2	5350.800	52.59	54.00	-1.41	38.06	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Horizontal
Mode :TX_ac80_5290MHz
TEST BY :Peter

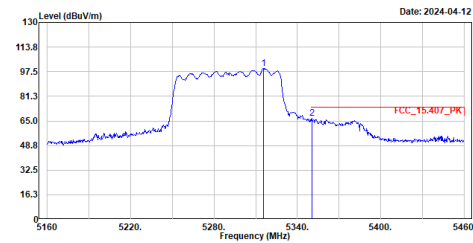


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5315.700	99.65	-----	-----	85.11	14.54	Peak
2	5350.800	66.56	74.00	-7.44	52.03	14.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Vertical
Mode :TX_ac80_5290MHz
TEST BY :Peter

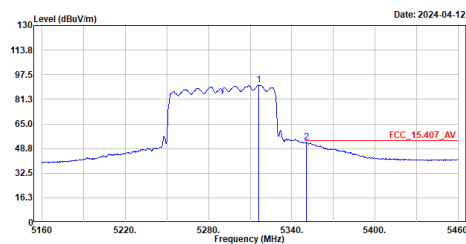


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5316.000	90.62	-----	-----	76.08	14.54	Average
2	5350.800	52.82	54.00	-1.18	38.29	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m,Vertical
Mode :TX_ac80_5290MHz
TEST BY :Peter

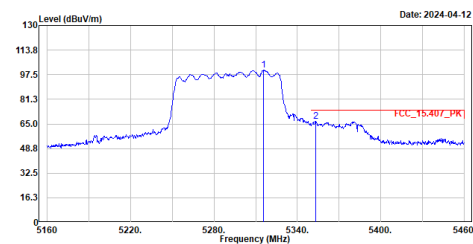


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5315.700	100.56	-----	-----	86.02	14.54	Peak
2	5353.200	66.58	74.00	-7.42	52.03	14.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
TEST BY :Peter

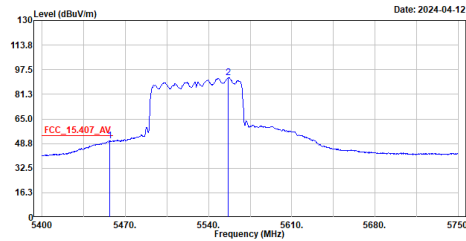


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5456.700	50.76	54.00	-3.24	35.63	15.13	Average
2	5556.800	92.37	-----	-----	76.94	15.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
TEST BY :Peter

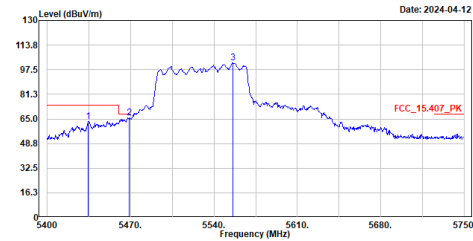


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5434.650	63.50	74.00	-10.50	48.54	14.96	Peak
2	5468.600	65.81	68.22	-2.41	50.58	15.23	Peak
3	5555.750	101.99	-----	-----	86.57	15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
TEST BY :Peter

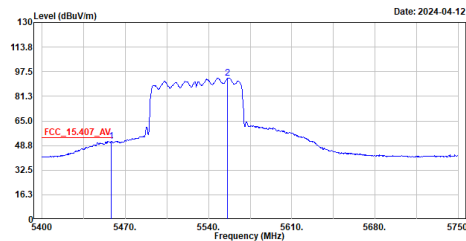


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5458.100	51.57	54.00	-2.43	36.43	15.14	Average
2	5556.100	93.38	-----	-----	77.95	15.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
TEST BY :Peter

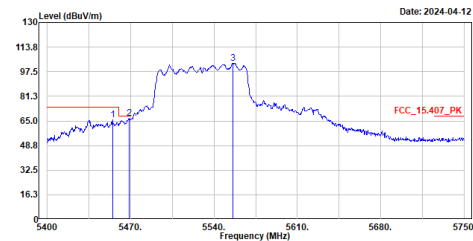


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5454.950	65.55	74.00	-8.45	50.44	15.11	Peak
2	5468.600	66.51	68.22	-1.71	51.28	15.23	Peak
3	5555.750	102.98	-----	-----	87.56	15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
TEST BY :Peter

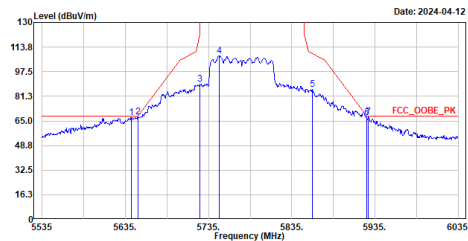

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5642.000	67.41	68.22	-0.81	51.68	15.73	Peak
2	5650.000	67.60	68.23	-0.63	51.84	15.76	Peak
3	5725.000	89.12	122.20	-33.08	73.00	16.12	Peak
4	5747.500	107.92	-----	-----	91.69	16.23	Peak
5	5860.000	86.02	109.40	-23.38	69.54	16.48	Peak
6	5925.000	67.10	68.23	-1.13	50.52	16.58	Peak
7	5927.000	67.59	68.22	-0.63	51.01	16.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
TEST BY :Peter

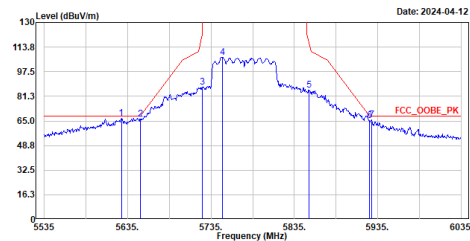


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5627.500	66.80	68.22	-1.42	51.14	15.66	Peak
2	5650.000	66.34	68.23	-1.89	50.58	15.76	Peak
3	5724.500	87.43	121.06	-33.63	71.31	16.12	Peak
4	5748.500	106.90	-----	-----	90.67	16.23	Peak
5	5852.500	85.30	116.50	-31.20	68.84	16.46	Peak
6	5925.000	65.39	68.23	-2.84	48.81	16.58	Peak
7	5927.500	65.54	68.22	-2.68	48.96	16.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Battery pack


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ac80_5775MHz
TEST BY :Caster

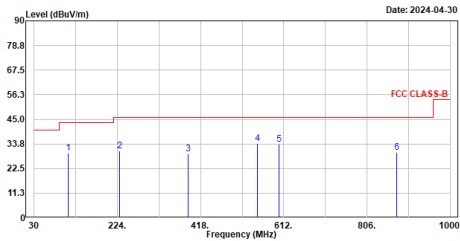

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	109.540	29.46	43.50	-14.04	56.42	-26.96	QP
2	229.820	30.47	46.00	-15.53	56.18	-25.71	QP
3	389.870	29.31	46.00	-16.69	49.73	-20.42	QP
4	549.920	33.84	46.00	-12.16	50.97	-17.13	QP
5	600.360	33.51	46.00	-12.49	48.81	-15.30	QP
6	874.870	29.80	46.00	-16.20	41.85	-12.05	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ac80_5775MHz
TEST BY :Caster

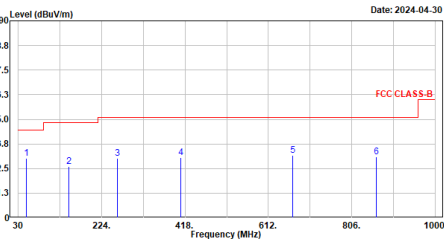


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.430	27.33	40.00	-12.67	50.57	-23.24	QP
2	148.340	23.37	43.50	-20.13	47.29	-23.92	QP
3	259.890	27.04	46.00	-18.96	51.60	-24.56	QP
4	408.300	27.50	46.00	-18.50	47.48	-19.98	QP
5	668.260	28.38	46.00	-17.62	42.97	-14.59	QP
6	863.230	27.77	46.00	-18.23	39.74	-11.97	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix F. Test Setup Photograph

Front View of Conducted Test

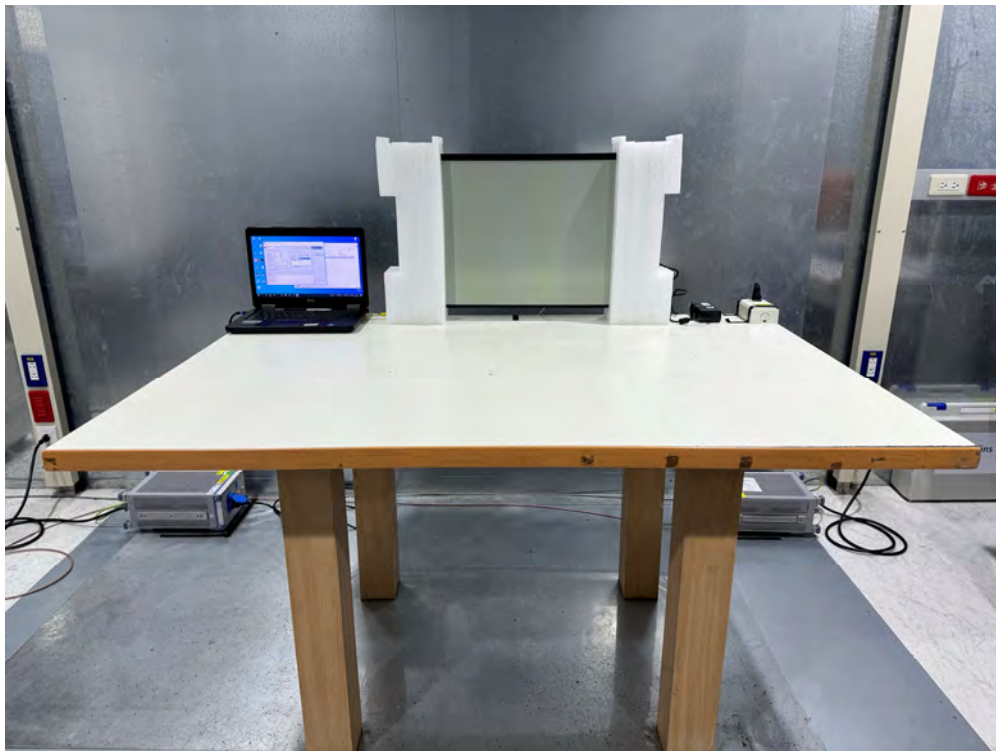

Back View of Conducted Test




Radiated Test



Radiated Test (Battery pack)



Radiated Test (Horn)

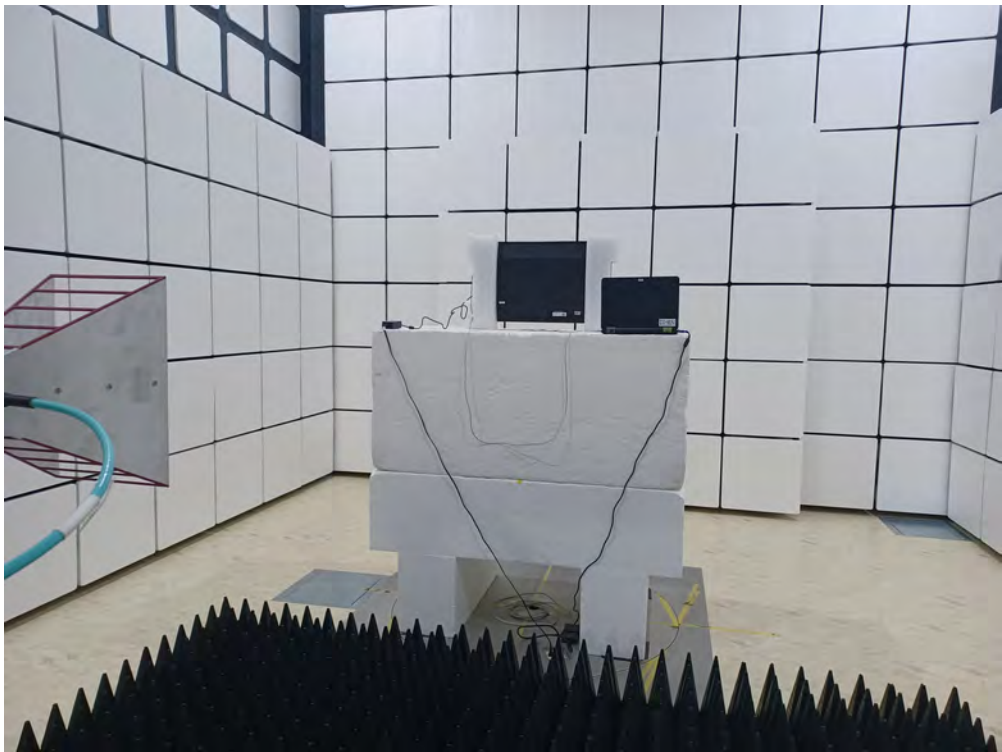

Radiated Test (Horn)

