

TEST REPORT

Product Name: ICE COMPRESS VISUAL BLACKHEAD VACUUM DEVICE
FCC ID: 2AYJD-DZ07
Trademark: N/A
Model Number: DZ07
Prepared For: Shenzhen Dianzhui Culture Technology Co., Ltd.
Address: 320, Block A, Baoyuan Huafeng Headquarter Economic Building ,
Xixiang Street, Baoan District, Shenzhen, China
Manufacturer: Shenzhen Dianzhui Culture Technology Co., Ltd.
Address: 320, Block A, Baoyuan Huafeng Headquarter Economic Building ,
Xixiang Street, Baoan District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan
District, Shenzhen China
Sample Received Date: Aug. 4, 2021
Sample tested Date: Aug. 4, 2021 to Aug. 7, 2021
Issue Date: Aug. 7, 2021
Report No.: CTB210805029RFX
Test Standards FCC Part15.247
ANSI C63.10:2013
Test Results PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Arron Liu

Reviewed by:

Bin Mei

Approved by:

Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	40
8.1 Block Diagram Of Test Setup	40
8.2 Limit	40
8.3 Test procedure	40
8.4 Test Result	41
9. CONDUCTED OUTPUT POWER	49
9.1 Block Diagram Of Test Setup	49
9.2 Limit	49
9.3 Test procedure	49
9.4 Test Result	50
10. 6DB OCCUPIED BANDWIDTH	55
10.1 Block Diagram Of Test Setup	55
10.2 Limit	55
10.3 Test procedure	55
10.4 Test Result	55
11. POWER SPECTRAL DENSITY	61
11.1 Block Diagram Of Test Setup	61
11.2 Limit	61
11.3 Test procedure	61

11.4 Test Result 62

12. ANTENNA REQUIREMENT 67

13. EUT PHOTOGRAPHS 68

14. EUT TEST SETUP PHOTOGRAPHS 69

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB210805029RFX	Aug. 7, 2021	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	DZ07
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	LW-3117-Vx.x
Software Version:	DZ_LW3117_UDU Beauty-xxxx_CH3_BK7231U_Vx.x
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 7.646dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	WiFi (2.4G) : 2.0dBi
Ratings:	DC 5V charging from adapter DC 3.7V for battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZEHN ENGINE ELECTRONIC	EE-0501000E	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.7
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27
4	Communication test set	R&S	CMW500	108058	2021.09.27
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27
10	band rejection filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2021.09.27
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27
16	966 chamber	C.R.T.	966 Room	966	2021.09.27
17	Receiver	R&S	ESPI	100362	2021.09.27
18	Amplifier	HP	8447E	2945A02747	2021.09.27
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27
20	TRILOG Broadband	Schwarzbeck	VULB 9163	869	2021.09.27


	Antenna				
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
7	Communication test set	R&S	CMW500	108058	2021.09.27
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27
4	Amplifier	HP	8447E	2945A02747	2021.09.27
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
11	Communication test set	R&S	CMW500	108058	2021.09.27
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

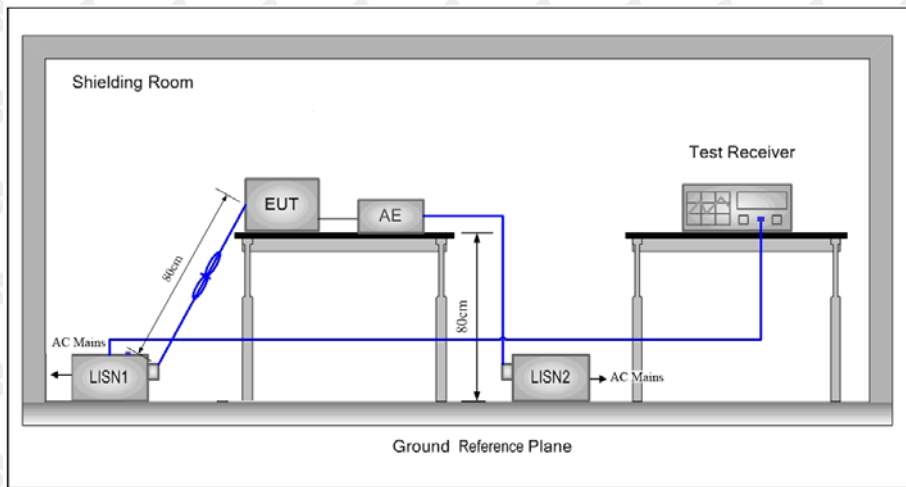

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

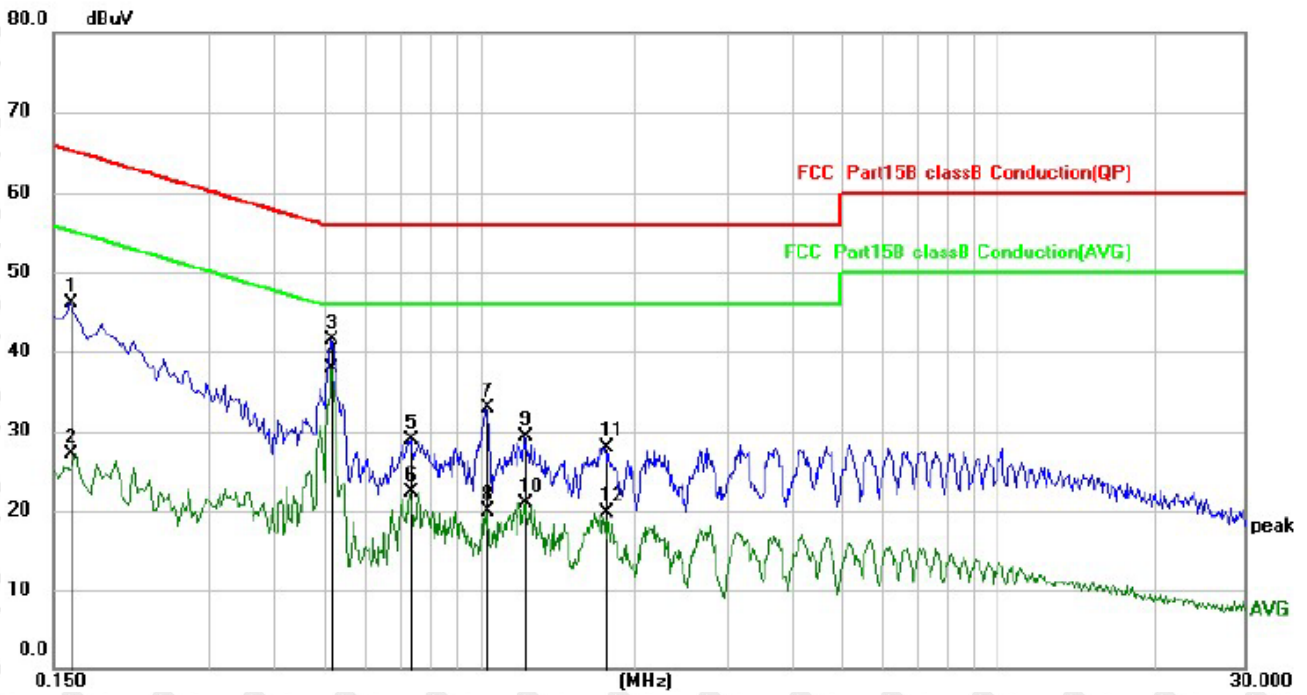


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1620	36.10	9.96	46.06	65.36	-19.30	QP
2		0.1620	17.07	9.96	27.03	55.36	-28.33	AVG
3		0.5180	31.58	9.96	41.54	56.00	-14.46	QP
4	*	0.5180	27.90	9.96	37.86	46.00	-8.14	AVG
5		0.7380	18.88	9.96	28.84	56.00	-27.16	QP
6		0.7380	12.34	9.96	22.30	46.00	-23.70	AVG
7		1.0300	22.99	9.96	32.95	56.00	-23.05	QP
8		1.0300	10.04	9.96	20.00	46.00	-26.00	AVG
9		1.2220	19.34	9.97	29.31	56.00	-26.69	QP
10		1.2220	10.85	9.97	20.82	46.00	-25.18	AVG
11		1.7500	17.92	10.00	27.92	56.00	-28.08	QP
12		1.7500	9.66	10.00	19.66	46.00	-26.34	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

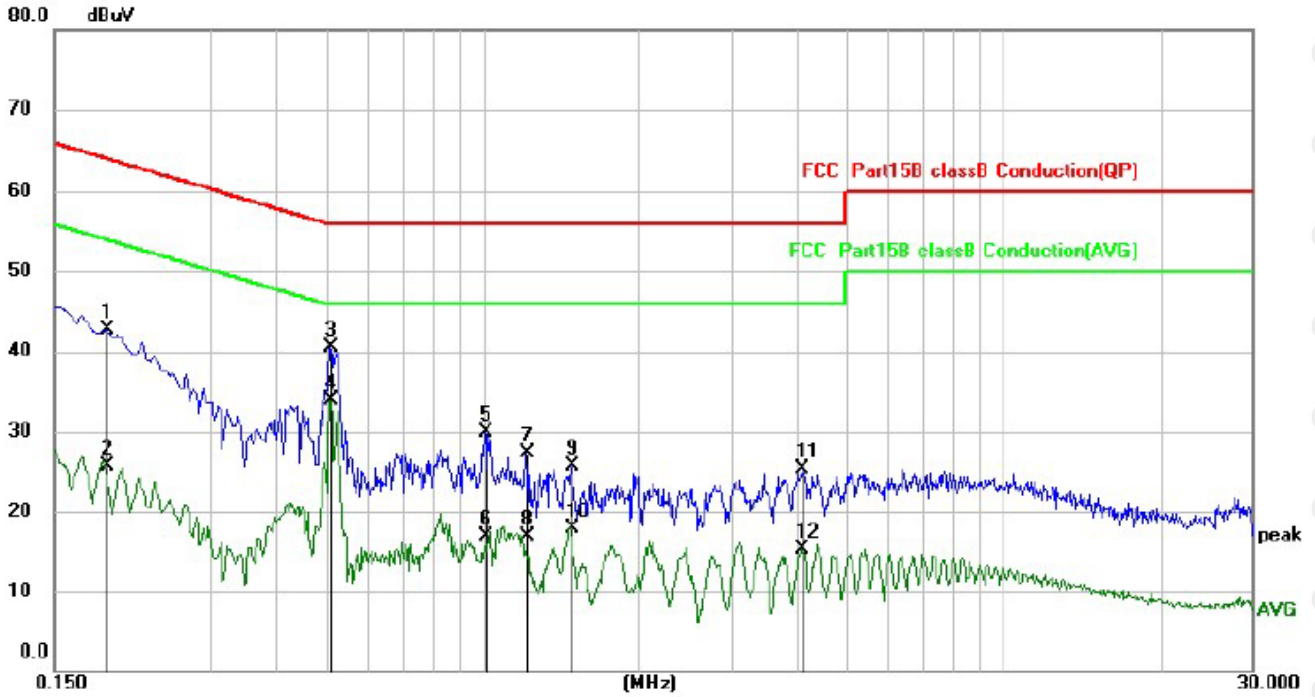

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1900	32.76	9.96	42.72	64.04	-21.32	QP
2		0.1900	15.78	9.96	25.74	54.04	-28.30	AVG
3		0.5100	30.60	9.96	40.56	56.00	-15.44	QP
4	*	0.5100	23.92	9.96	33.88	46.00	-12.12	AVG
5		1.0060	20.03	9.96	29.99	56.00	-26.01	QP
6		1.0060	6.98	9.96	16.94	46.00	-29.06	AVG
7		1.2100	17.42	9.97	27.39	56.00	-28.61	QP
8		1.2100	7.01	9.97	16.98	46.00	-29.02	AVG
9		1.4740	15.76	9.98	25.74	56.00	-30.26	QP
10		1.4740	8.02	9.98	18.00	46.00	-28.00	AVG
11		4.0980	15.19	10.12	25.31	56.00	-30.69	QP
12		4.0980	5.09	10.12	15.21	46.00	-30.79	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

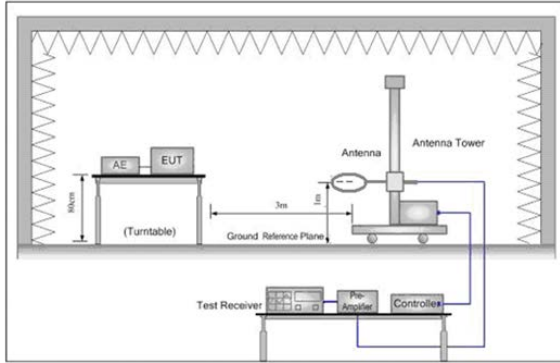


Figure 1. Below 30MHz

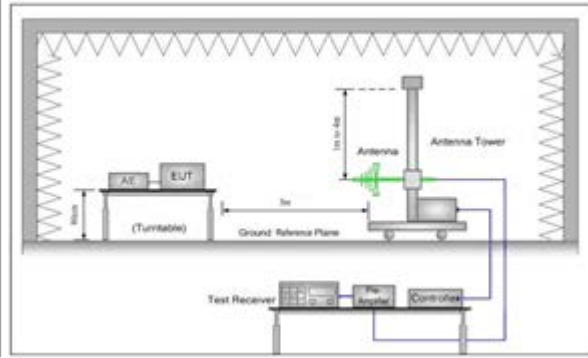


Figure 2. 30MHz to 1GHz

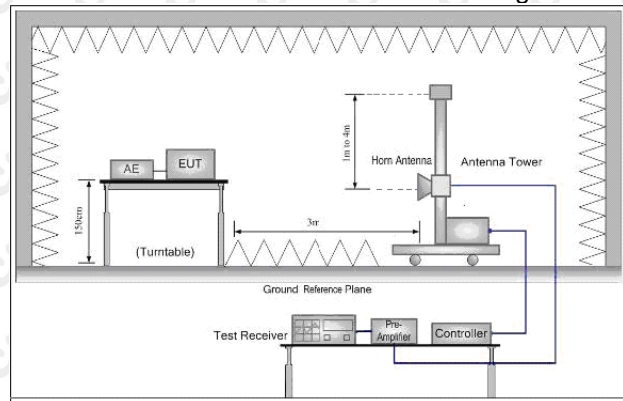


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

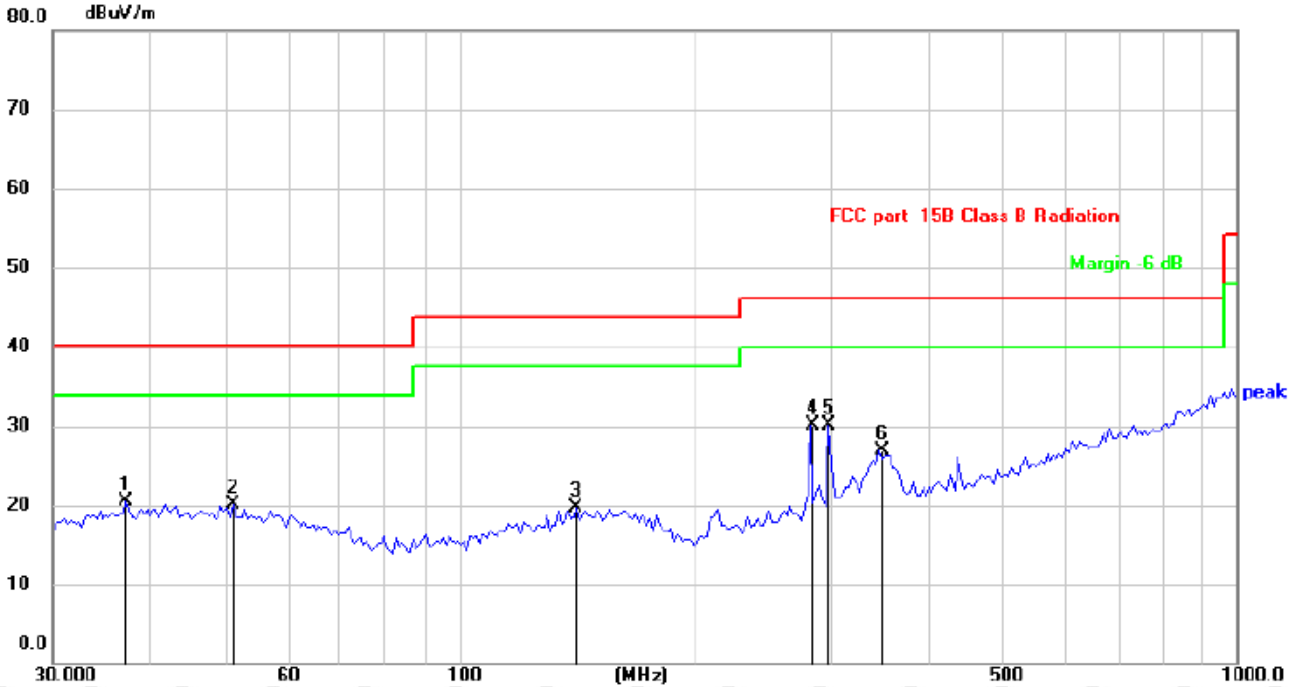

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		37.3509	27.61	-7.04	20.57	40.00	-19.43	QP
2		51.2106	27.28	-7.18	20.10	40.00	-19.90	QP
3		141.5777	26.97	-7.28	19.69	43.50	-23.81	QP
4	*	282.9852	37.34	-7.21	30.13	46.00	-15.87	QP
5		298.2681	36.93	-6.81	30.12	46.00	-15.88	QP
6		346.2017	32.67	-5.79	26.88	46.00	-19.12	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

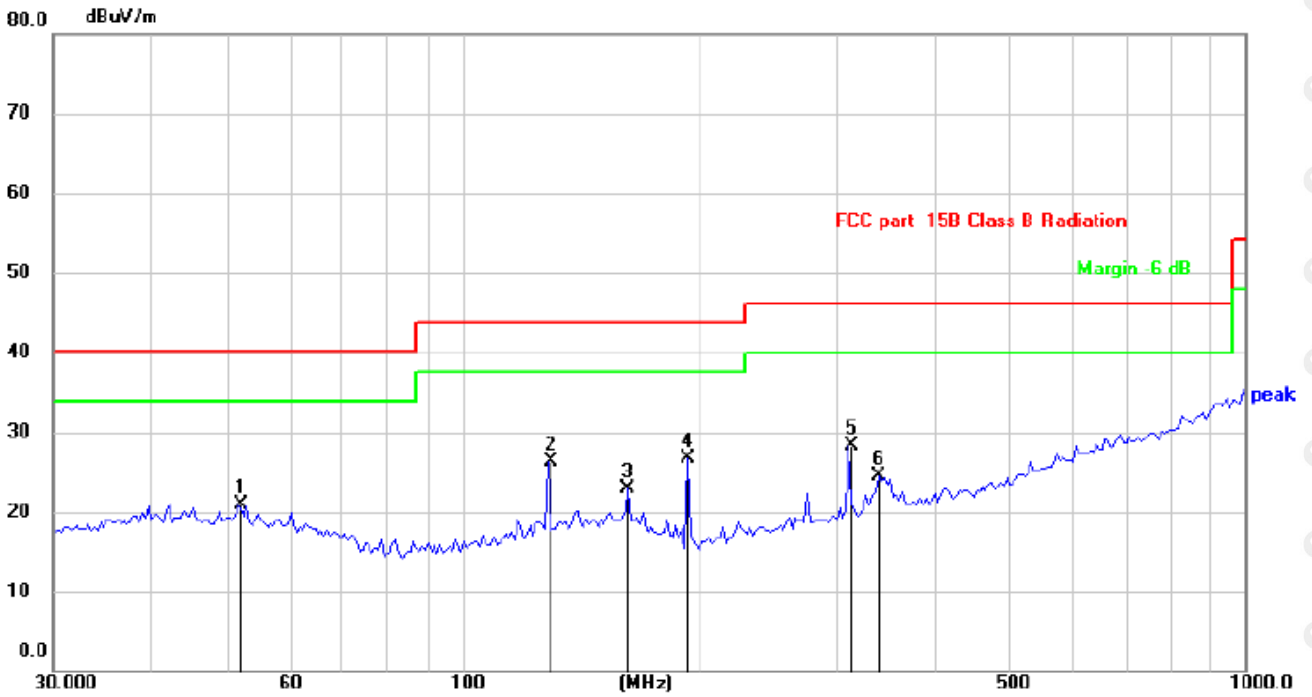

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		51.6616	28.09	-7.22	20.87	40.00	-19.13	QP
2		128.5630	34.60	-8.20	26.40	43.50	-17.10	QP
3		162.8959	29.78	-6.95	22.83	43.50	-20.67	QP
4	*	194.1128	36.69	-9.93	26.76	43.50	-16.74	QP
5		311.6326	34.74	-6.52	28.22	46.00	-17.78	QP
6		340.1847	30.49	-5.92	24.57	46.00	-21.43	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	65.86	-3.64	62.22	74	-11.78	peak
4824	49.56	-3.64	45.92	54	-8.08	AVG
7236	59.27	-0.95	58.32	74	-15.68	peak
7236	44.58	-0.95	43.63	54	-10.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	65.87	-3.64	62.23	74	-11.77	peak
4824	49.18	-3.64	45.54	54	-8.46	AVG
7236	57.27	-0.95	56.32	74	-17.68	peak
7236	43.02	-0.95	42.07	54	-11.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	65.19	-3.51	61.68	74	-12.32	peak
4874	49.24	-3.51	45.73	54	-8.27	AVG
7311	59.93	-0.82	59.11	74	-14.89	peak
7311	45.17	-0.82	44.35	54	-9.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	62.79	-3.51	59.28	74	-14.72	peak
4874	46.83	-3.51	43.32	54	-10.68	AVG
7311	59.37	-0.82	58.55	74	-15.45	peak
7311	42.60	-0.82	41.78	54	-12.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.62	-3.43	60.19	74	-13.81	peak
4924	47.15	-3.43	43.72	54	-10.28	AVG
7386	57.65	-0.75	56.90	74	-17.10	peak
7386	43.07	-0.75	42.32	54	-11.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	65.38	-3.43	61.95	74	-12.05	peak
4924	47.18	-3.43	43.75	54	-10.25	AVG
7386	58.60	-0.75	57.85	74	-16.15	peak
7386	42.41	-0.75	41.66	54	-12.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.67	-3.64	60.03	74	-13.97	peak
4824	48.21	-3.64	44.57	54	-9.43	AVG
7236	59.32	-0.95	58.37	74	-15.63	peak
7236	46.29	-0.95	45.34	54	-8.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.65	-3.64	60.01	74	-13.99	peak
4824	48.98	-3.64	45.34	54	-8.66	AVG
7236	58.40	-0.95	57.45	74	-16.55	peak
7236	44.60	-0.95	43.65	54	-10.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.51	-3.51	61.00	74	-13.00	peak
4874	48.28	-3.51	44.77	54	-9.23	AVG
7311	57.59	-0.82	56.77	74	-17.23	peak
7311	44.65	-0.82	43.83	54	-10.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.72	-3.51	61.21	74	-12.79	peak
4874	48.05	-3.51	44.54	54	-9.46	AVG
7311	57.06	-0.82	56.24	74	-17.76	peak
7311	42.26	-0.82	41.44	54	-12.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	64.46	-3.43	61.03	74	-12.97	peak
4924	48.88	-3.43	45.45	54	-8.55	AVG
7386	58.85	-0.75	58.10	74	-15.90	peak
7386	42.52	-0.75	41.77	54	-12.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.39	-3.43	59.96	74	-14.04	peak
4924	47.04	-3.43	43.61	54	-10.39	AVG
7386	57.82	-0.75	57.07	74	-16.93	peak
7386	42.15	-0.75	41.40	54	-12.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	64.65	-3.64	61.01	74	-12.99	peak
4824	48.19	-3.64	44.55	54	-9.45	AVG
7236	59.20	-0.95	58.25	74	-15.75	peak
7236	44.57	-0.95	43.62	54	-10.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	65.66	-3.64	62.02	74	-11.98	peak
4824	51.22	-3.64	47.58	54	-6.42	AVG
7236	59.81	-0.95	58.86	74	-15.14	peak
7236	45.58	-0.95	44.63	54	-9.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	65.02	-3.51	61.51	74.00	-12.49	peak
4874.00	48.76	-3.51	45.25	54.00	-8.75	AVG
7311.00	59.22	-0.82	58.40	74.00	-15.60	peak
7311.00	43.81	-0.82	42.99	54.00	-11.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	64.00	-3.51	60.49	74.00	-13.51	peak
4874.00	46.76	-3.51	43.25	54.00	-10.75	AVG
7311.00	56.92	-0.82	56.10	74.00	-17.90	peak
7311.00	42.12	-0.82	41.30	54.00	-12.70	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.10	-3.43	58.67	74	-15.33	peak
4924	48.49	-3.43	45.06	54	-8.94	AVG
7386	58.68	-0.75	57.93	74	-16.07	peak
7386	42.07	-0.75	41.32	54	-12.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.87	-3.43	59.44	74	-14.56	peak
4924	46.76	-3.43	43.33	54	-10.67	AVG
7386	56.75	-0.75	56.00	74	-18.00	peak
7386	41.73	-0.75	40.98	54	-13.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	65.56	-3.63	61.93	74	-12.07	peak
4844	49.31	-3.63	45.68	54	-8.32	AVG
7266	58.91	-0.94	57.97	74	-16.03	peak
7266	44.43	-0.94	43.49	54	-10.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	65.52	-3.63	61.89	74	-12.11	peak
4844	49.54	-3.63	45.91	54	-8.09	AVG
7266	59.33	-0.94	58.39	74	-15.61	peak
7266	44.90	-0.94	43.96	54	-10.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.35	-3.51	60.84	74	-13.16	peak
4874	47.21	-3.51	43.70	54	-10.30	AVG
7311	58.40	-0.82	57.58	74	-16.42	peak
7311	45.62	-0.82	44.80	54	-9.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.71	-0.82	55.89	74	-18.11	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	63.94	-3.43	60.51	74	-13.49	peak
4904	48.39	-3.43	44.96	54	-9.04	AVG
7356	58.20	-0.75	57.45	74	-16.55	peak
7356	41.90	-0.75	41.15	54	-12.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	62.32	-3.43	58.89	74	-15.11	peak
4904	46.36	-3.43	42.93	54	-11.07	AVG
7356	56.26	-0.75	55.51	74	-18.49	peak
7356	44.80	-0.75	44.05	54	-9.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.38	-5.81	50.57	74	-23.43	peak
2390	/	-5.81	/	54	/	AVG
2399	65.15	-5.84	59.31	74	-14.69	peak
2399	49.22	-5.84	43.38	54	-10.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	55.97	-5.81	50.16	74	-23.84	peak
2390	/	-5.81	/	54	/	AVG
2399	63.12	-5.84	57.28	74	-16.72	peak
2399	46.12	-5.84	40.28	54	-13.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	57.56	-5.65	51.91	74	-22.09	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.64	-5.65	50.99	74	-23.01	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	59.33	-5.81	53.52	74	-20.48	peak
2390	/	-5.81	/	54	/	AVG
2399	61.57	-5.84	55.73	74	-18.27	peak
2399	46.08	-5.84	40.24	54	-13.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	56.86	-5.81	51.05	74	-22.95	peak
2390	/	-5.81	/	54	/	AVG
2399	63.30	-5.84	57.46	74	-16.54	peak
2399	46.45	-5.84	40.61	54	-13.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.92	-5.65	51.27	74	-22.73	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	57.73	-5.81	51.92	74	-22.08	peak
2390	/	-5.81	/	54	/	AVG
2399	63.52	-5.84	57.68	74	-16.32	peak
2399	48.39	-5.84	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	57.24	-5.81	51.43	74	-22.57	peak
2390	/	-5.81	/	54	/	AVG
2399	59.83	-5.84	53.99	74	-20.01	peak
2399	47.02	-5.84	41.18	54	-12.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.57	-5.65	51.92	74	-22.08	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	55.82	-5.65	50.17	74	-23.83	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	59.16	-5.81	53.35	74	-20.65	peak
2390	/	-5.81	/	54	/	AVG
2399	62.78	-5.84	56.94	74	-17.06	peak
2399	46.24	-5.84	40.40	54	-13.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	58.22	-5.81	52.41	74	-21.59	peak
2390	/	-5.81	/	54	/	AVG
2399	61.58	-5.84	55.74	74	-18.26	peak
2399	46.46	-5.84	40.62	54	-13.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.21	-5.65	51.56	74	-22.44	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	56.60	-5.65	50.95	74	-23.05	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

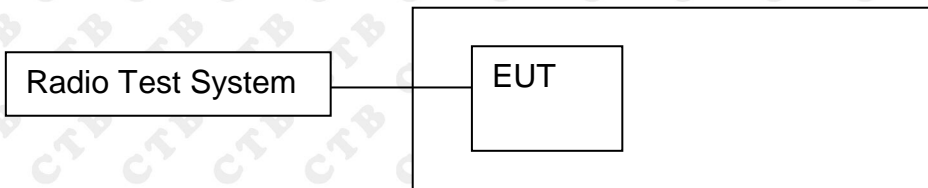


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result

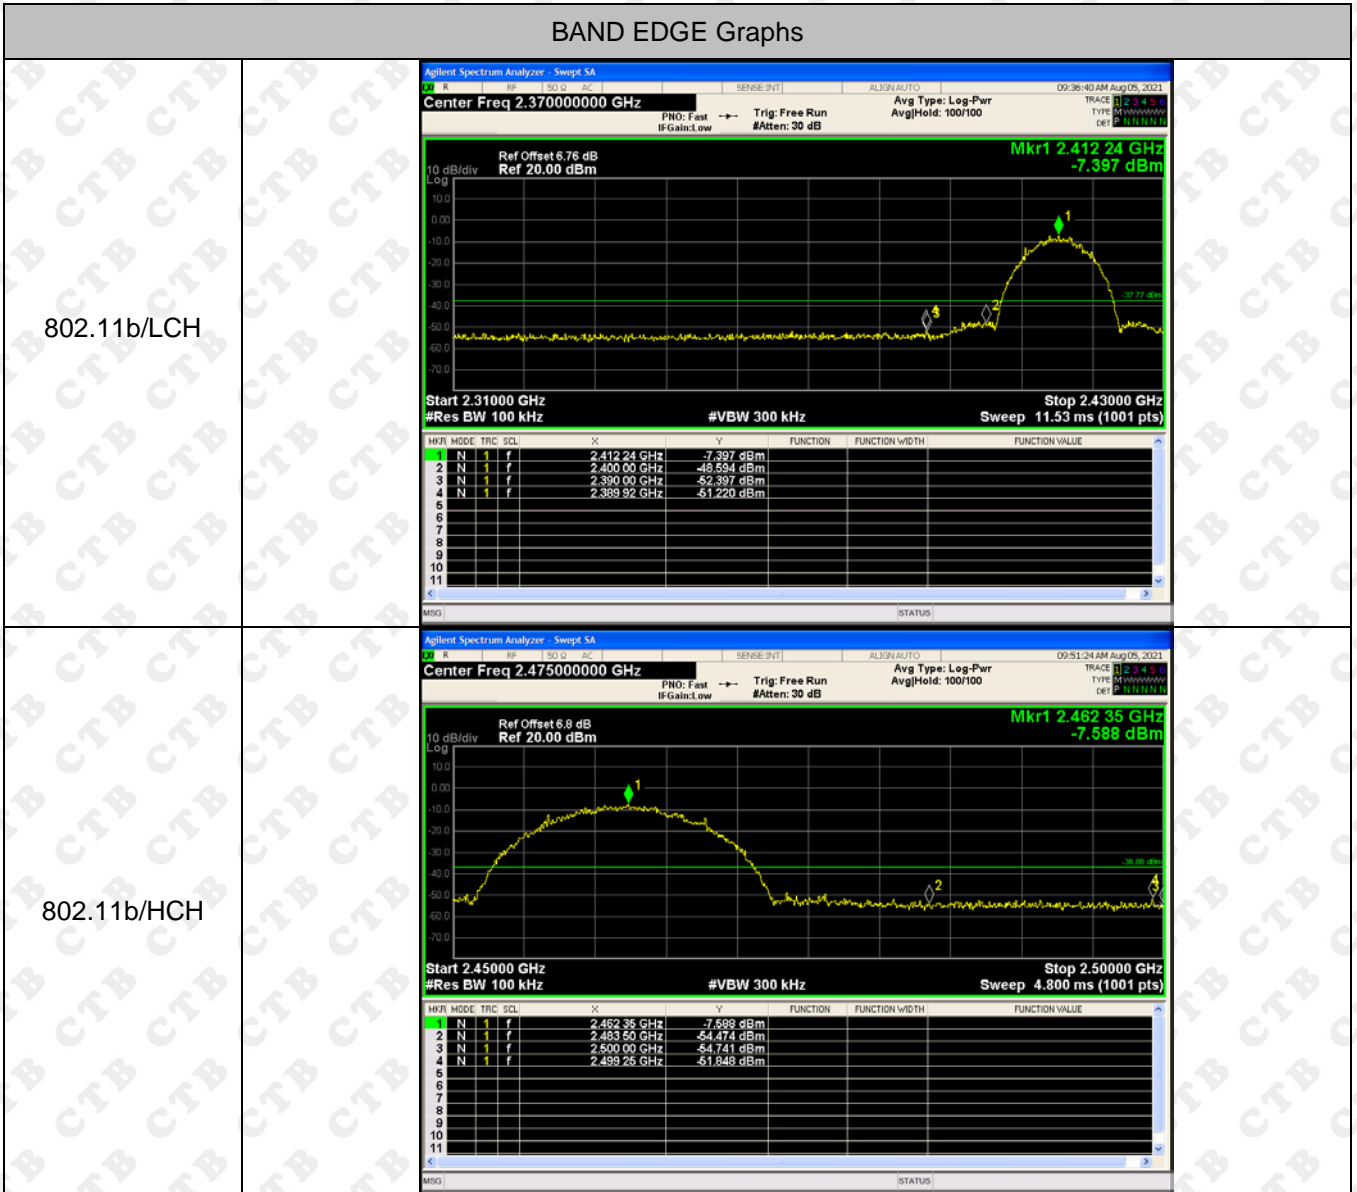

BAND EDGE Graphs

802.11g/LCH

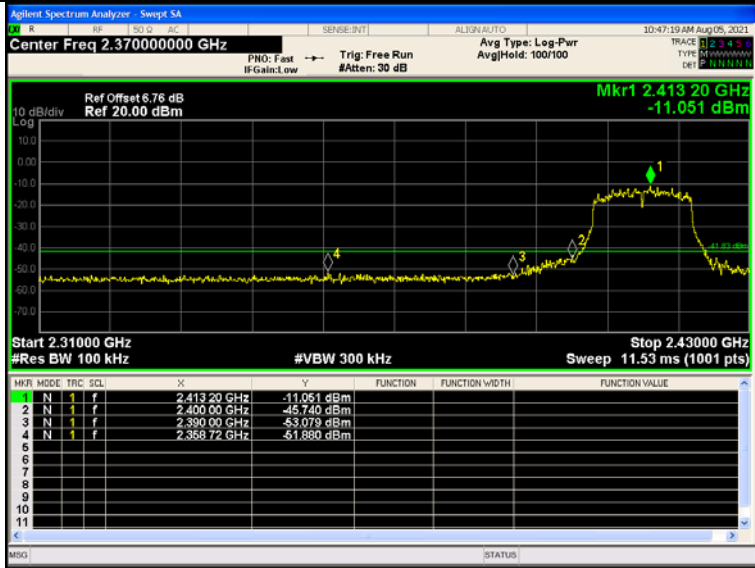


802.11g/HCH




BAND EDGE Graphs

802.11n(HT20)/L
CH

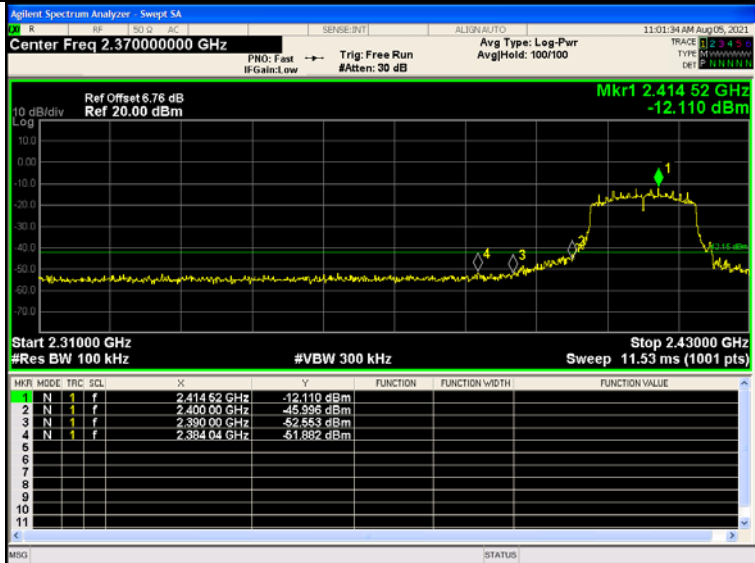


802.11n(HT20)/H
CH

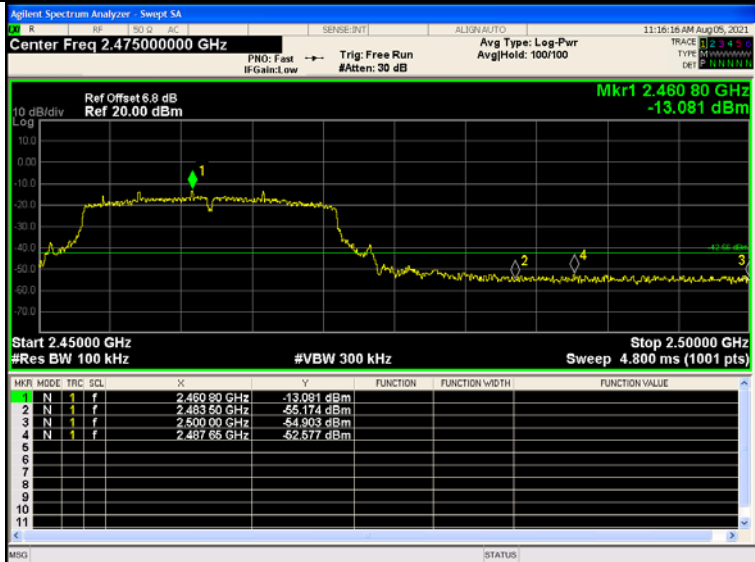


BAND EDGE Graphs

802.11n(HT40)/L
CH

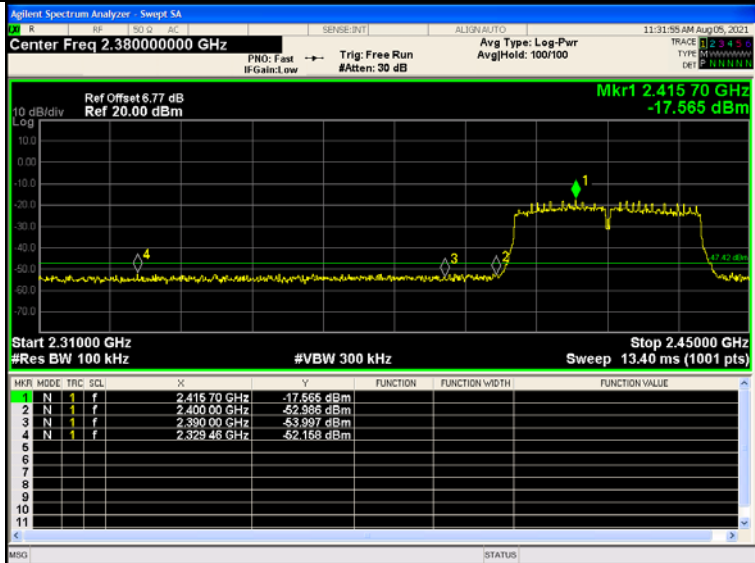


802.11n(HT40)/H
CH

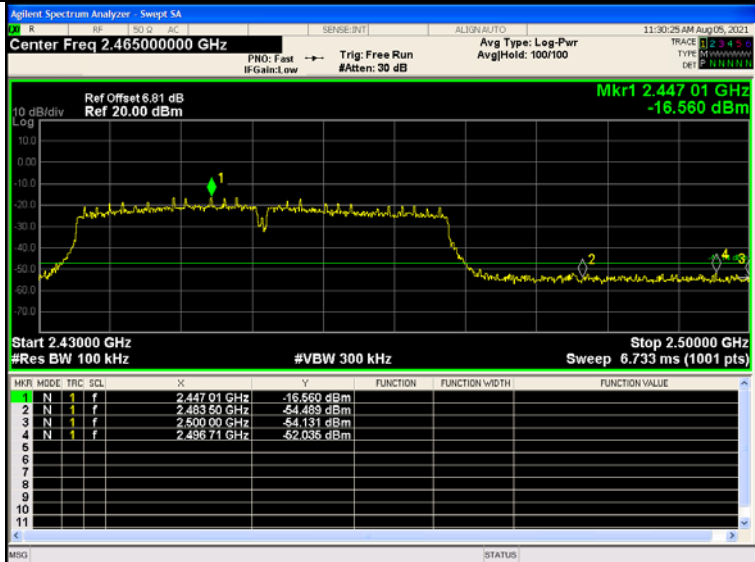


RF Conducted Spurious Emissions Graphs


802.11b
/LCH

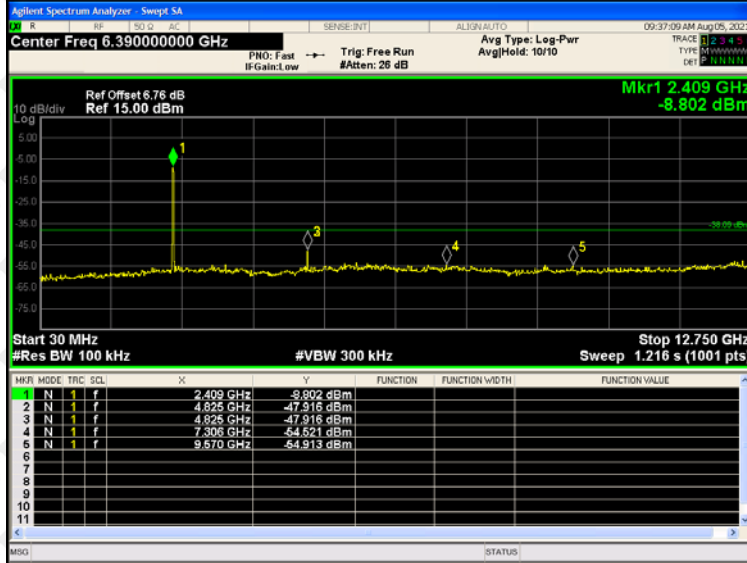

802.11b
/MCH

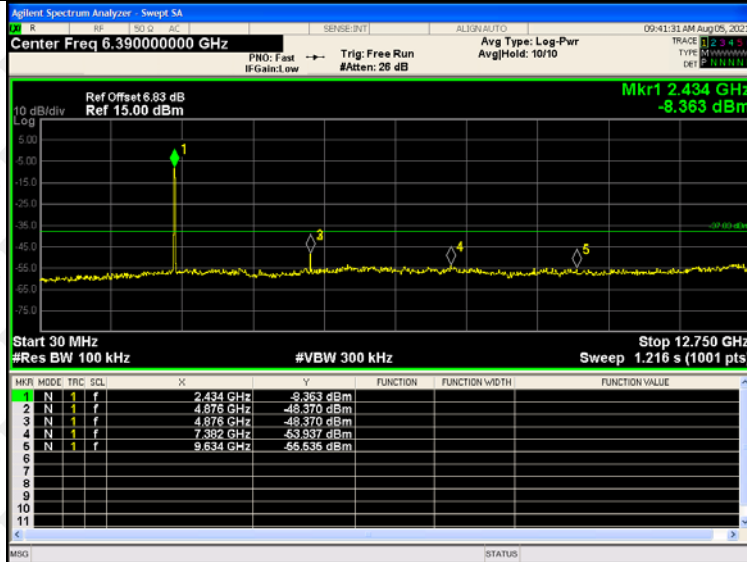

802.11b
/HCH

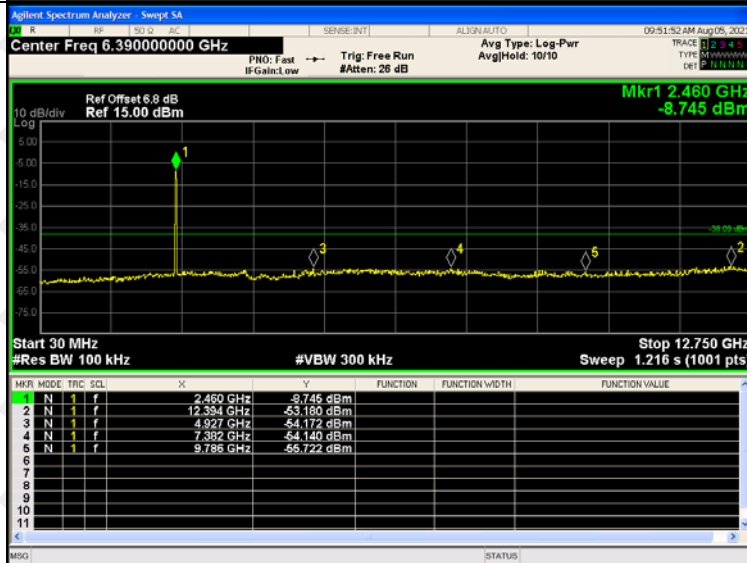

RF Conducted Spurious Emissions Graphs

<p>802.11g /LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.76 dB Ref 15.00 dBm Mkr1 2.409 GHz -12.867 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 GHz</td><td>-12.867 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>4.825 GHz</td><td>-50.303 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.825 GHz</td><td>-50.303 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.395 GHz</td><td>-53.800 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.710 GHz</td><td>-55.496 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 GHz	-12.867 dBm				2	N	1	f	4.825 GHz	-50.303 dBm				3	N	1	f	4.825 GHz	-50.303 dBm				4	N	1	f	7.395 GHz	-53.800 dBm				5	N	1	f	9.710 GHz	-55.496 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.409 GHz	-12.867 dBm																																																		
2	N	1	f	4.825 GHz	-50.303 dBm																																																		
3	N	1	f	4.825 GHz	-50.303 dBm																																																		
4	N	1	f	7.395 GHz	-53.800 dBm																																																		
5	N	1	f	9.710 GHz	-55.496 dBm																																																		
<p>802.11g /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.434 GHz -12.427 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 GHz</td><td>-12.427 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.432 GHz</td><td>-52.803 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.876 GHz</td><td>-53.287 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.471 GHz</td><td>-54.053 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.896 GHz</td><td>-55.982 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 GHz	-12.427 dBm				2	N	1	f	12.432 GHz	-52.803 dBm				3	N	1	f	4.876 GHz	-53.287 dBm				4	N	1	f	7.471 GHz	-54.053 dBm				5	N	1	f	9.896 GHz	-55.982 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.434 GHz	-12.427 dBm																																																		
2	N	1	f	12.432 GHz	-52.803 dBm																																																		
3	N	1	f	4.876 GHz	-53.287 dBm																																																		
4	N	1	f	7.471 GHz	-54.053 dBm																																																		
5	N	1	f	9.896 GHz	-55.982 dBm																																																		
<p>802.11g /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.8 dB Ref 15.00 dBm Mkr1 2.460 GHz -12.199 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.460 GHz</td><td>-12.199 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>12.457 GHz</td><td>-52.844 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.118 GHz</td><td>-54.494 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.344 GHz</td><td>-53.994 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.850 GHz</td><td>-55.763 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 GHz	-12.199 dBm				2	N	1	f	12.457 GHz	-52.844 dBm				3	N	1	f	5.118 GHz	-54.494 dBm				4	N	1	f	7.344 GHz	-53.994 dBm				5	N	1	f	9.850 GHz	-55.763 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.460 GHz	-12.199 dBm																																																		
2	N	1	f	12.457 GHz	-52.844 dBm																																																		
3	N	1	f	5.118 GHz	-54.494 dBm																																																		
4	N	1	f	7.344 GHz	-53.994 dBm																																																		
5	N	1	f	9.850 GHz	-55.763 dBm																																																		

RF Conducted Spurious Emissions Graphs


<p>802.11n (HT20)/ LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.76 dB Ref 15.00 dBm Mkr1 2.409 GHz -14.725 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.409 GHz</td> <td>-14.725 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>12.419 GHz</td> <td>-52.530 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.826 GHz</td> <td>-52.778 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.128 GHz</td> <td>-53.721 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.619 GHz</td> <td>-54.676 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.409 GHz	-14.725 dBm				2	N	1	f	12.419 GHz	-52.530 dBm				3	N	1	f	4.826 GHz	-52.778 dBm				4	N	1	f	7.128 GHz	-53.721 dBm				5	N	1	f	9.619 GHz	-54.676 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.409 GHz	-14.725 dBm																																																		
2	N	1	f	12.419 GHz	-52.530 dBm																																																		
3	N	1	f	4.826 GHz	-52.778 dBm																																																		
4	N	1	f	7.128 GHz	-53.721 dBm																																																		
5	N	1	f	9.619 GHz	-54.676 dBm																																																		
<p>802.11n (HT20)/ MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.434 GHz -13.955 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.434 GHz</td> <td>-13.955 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>5.970 GHz</td> <td>-52.608 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.884 GHz</td> <td>-55.327 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.448 GHz</td> <td>-54.133 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.857 GHz</td> <td>-55.747 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 GHz	-13.955 dBm				2	N	1	f	5.970 GHz	-52.608 dBm				3	N	1	f	4.884 GHz	-55.327 dBm				4	N	1	f	7.448 GHz	-54.133 dBm				5	N	1	f	9.857 GHz	-55.747 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.434 GHz	-13.955 dBm																																																		
2	N	1	f	5.970 GHz	-52.608 dBm																																																		
3	N	1	f	4.884 GHz	-55.327 dBm																																																		
4	N	1	f	7.448 GHz	-54.133 dBm																																																		
5	N	1	f	9.857 GHz	-55.747 dBm																																																		
<p>802.11n (HT20)/ HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 6.390000000 GHz Ref Offset 6.8 dB Ref 15.00 dBm Mkr1 2.460 GHz -15.430 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.460 GHz</td> <td>-15.430 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>12.521 GHz</td> <td>-52.881 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.787 GHz</td> <td>-54.135 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.522 GHz</td> <td>-53.797 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.952 GHz</td> <td>-55.925 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 GHz	-15.430 dBm				2	N	1	f	12.521 GHz	-52.881 dBm				3	N	1	f	4.787 GHz	-54.135 dBm				4	N	1	f	7.522 GHz	-53.797 dBm				5	N	1	f	9.952 GHz	-55.925 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.460 GHz	-15.430 dBm																																																		
2	N	1	f	12.521 GHz	-52.881 dBm																																																		
3	N	1	f	4.787 GHz	-54.135 dBm																																																		
4	N	1	f	7.522 GHz	-53.797 dBm																																																		
5	N	1	f	9.952 GHz	-55.925 dBm																																																		

RF Conducted Spurious Emissions Graphs

<p>802.11 n(HT40) /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.421 GHz</td> <td>-18.331 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>12.127 GHz</td> <td>-53.037 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.724 GHz</td> <td>-55.512 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.319 GHz</td> <td>-53.921 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.494 GHz</td> <td>-54.827 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.421 GHz	-18.331 dBm				2	N	1	f	12.127 GHz	-53.037 dBm				3	N	1	f	4.724 GHz	-55.512 dBm				4	N	1	f	7.319 GHz	-53.921 dBm				5	N	1	f	9.494 GHz	-54.827 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.421 GHz	-18.331 dBm																																																			
2	N	1	f	12.127 GHz	-53.037 dBm																																																			
3	N	1	f	4.724 GHz	-55.512 dBm																																																			
4	N	1	f	7.319 GHz	-53.921 dBm																																																			
5	N	1	f	9.494 GHz	-54.827 dBm																																																			
<p>802.11 n(HT40) /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.447 GHz</td> <td>-19.221 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>12.470 GHz</td> <td>-52.785 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.029 GHz</td> <td>-54.895 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.408 GHz</td> <td>-54.183 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.808 GHz</td> <td>-54.372 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.447 GHz	-19.221 dBm				2	N	1	f	12.470 GHz	-52.785 dBm				3	N	1	f	5.029 GHz	-54.895 dBm				4	N	1	f	7.408 GHz	-54.183 dBm				5	N	1	f	9.808 GHz	-54.372 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.447 GHz	-19.221 dBm																																																			
2	N	1	f	12.470 GHz	-52.785 dBm																																																			
3	N	1	f	5.029 GHz	-54.895 dBm																																																			
4	N	1	f	7.408 GHz	-54.183 dBm																																																			
5	N	1	f	9.808 GHz	-54.372 dBm																																																			
<p>802.11 n(HT40) /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.460 GHz</td> <td>-19.375 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>12.355 GHz</td> <td>-53.008 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.876 GHz</td> <td>-54.911 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.433 GHz</td> <td>-54.480 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.812 GHz</td> <td>-55.474 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 GHz	-19.375 dBm				2	N	1	f	12.355 GHz	-53.008 dBm				3	N	1	f	4.876 GHz	-54.911 dBm				4	N	1	f	7.433 GHz	-54.480 dBm				5	N	1	f	9.812 GHz	-55.474 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.460 GHz	-19.375 dBm																																																			
2	N	1	f	12.355 GHz	-53.008 dBm																																																			
3	N	1	f	4.876 GHz	-54.911 dBm																																																			
4	N	1	f	7.433 GHz	-54.480 dBm																																																			
5	N	1	f	9.812 GHz	-55.474 dBm																																																			

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

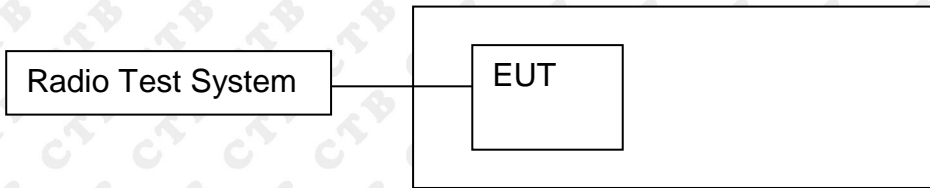

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.521	30	PASS
	MCH	7.646	30	PASS
	HCH	7.542	30	PASS
802.11g	LCH	6.687	30	PASS
	MCH	6.1	30	PASS
	HCH	6.817	30	PASS
802.11n(HT20)	LCH	5.656	30	PASS
	MCH	5.411	30	PASS
	HCH	5.408	30	PASS
802.11n(HT40)	LCH	3.433	30	PASS
	MCH	3.843	30	PASS
	HCH	3.528	30	PASS

Mode	Channel.	Maximum Output Power [dBm]
	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Channel Power: 7.52 dBm / 20 MHz</p> <p>Power Spectral Density: -65.49 dBm / Hz</p>
802.11b	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Channel Power: 7.65 dBm / 20 MHz</p> <p>Power Spectral Density: -65.36 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Channel Power: 7.54 dBm / 20 MHz</p> <p>Power Spectral Density: -65.47 dBm / Hz</p>


	LCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.76 dB Ref: 26.76 dBm</p> <p>Channel Power: 6.69 dBm / 20 MHz</p> <p>Power Spectral Density: -66.32 dBm / Hz</p>
802.11g	MCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.83 dB Ref: 26.83 dBm</p> <p>Channel Power: 6.10 dBm / 20 MHz</p> <p>Power Spectral Density: -66.91 dBm / Hz</p>
	HCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.8 dB Ref: 26.80 dBm</p> <p>Channel Power: 6.82 dBm / 20 MHz</p> <p>Power Spectral Density: -66.19 dBm / Hz</p>

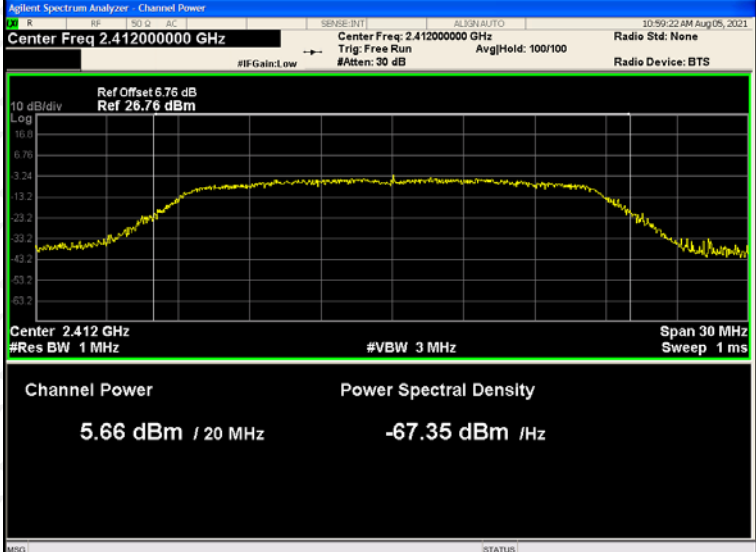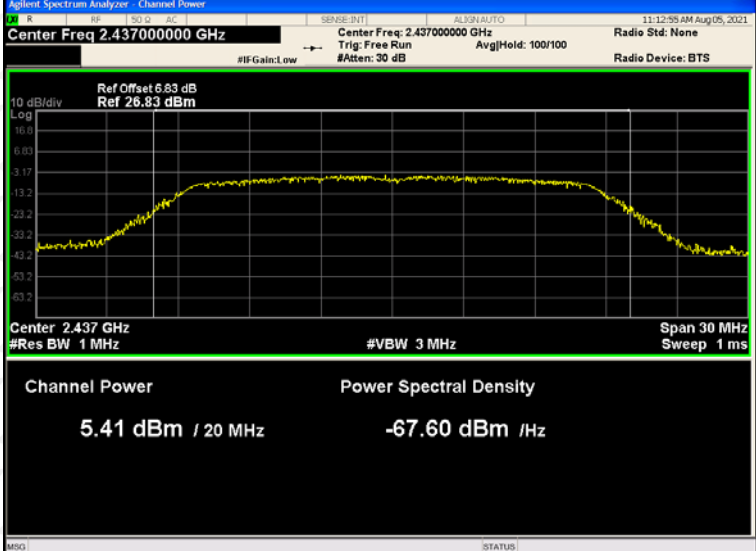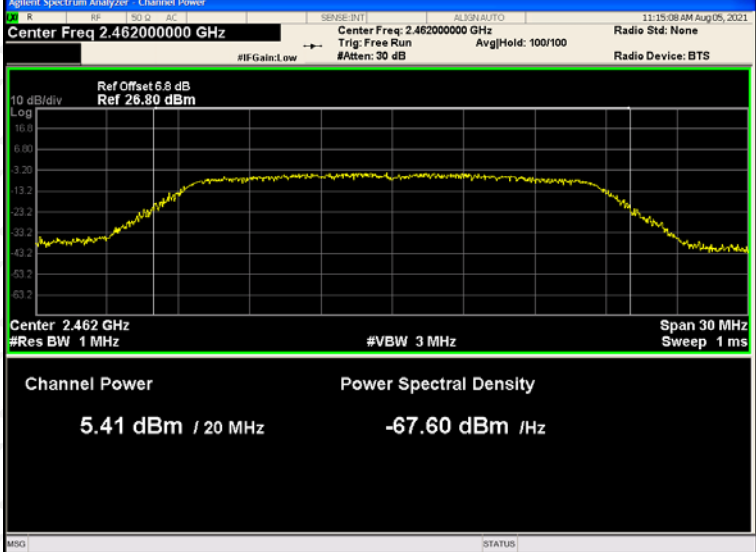	LCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.76 dB, Ref: 26.76 dBm</p> <p>Channel Power: 5.66 dBm / 20 MHz</p> <p>Power Spectral Density: -67.35 dBm / Hz</p>
802.11n(HT20)	MCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.83 dB, Ref: 26.83 dBm</p> <p>Channel Power: 5.41 dBm / 20 MHz</p> <p>Power Spectral Density: -67.60 dBm / Hz</p>
	HCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.8 dB, Ref: 26.80 dBm</p> <p>Channel Power: 5.41 dBm / 20 MHz</p> <p>Power Spectral Density: -67.60 dBm / Hz</p>

	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.422000000 GHz</p> <p>Channel Power: 3.43 dBm / 40 MHz</p> <p>Power Spectral Density: -72.59 dBm / Hz</p>
802.11n(HT40)	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Channel Power: 3.84 dBm / 40 MHz</p> <p>Power Spectral Density: -72.18 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.452000000 GHz</p> <p>Channel Power: 3.53 dBm / 40 MHz</p> <p>Power Spectral Density: -72.49 dBm / Hz</p>

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

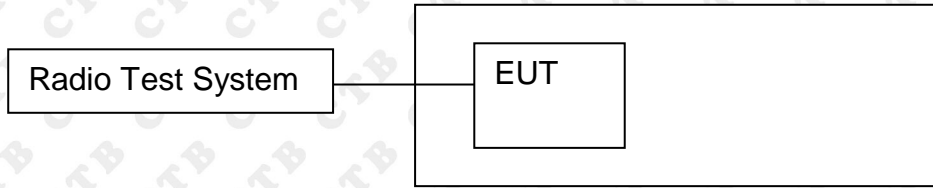

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.396	500	PASS
	MCH	9.333	500	PASS
	HCH	9.315	500	PASS
802.11g	LCH	15.413	500	PASS
	MCH	15.699	500	PASS
	HCH	16.297	500	PASS
802.11n(HT20)	LCH	15.656	500	PASS
	MCH	16.54	500	PASS
	HCH	15.062	500	PASS
802.11n(HT40)	LCH	35.119	500	PASS
	MCH	35.091	500	PASS
	HCH	33.861	500	PASS

Test Graph:




<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.76 dB</p> <p>Ref 26.76 dBm</p> <p>Mkr3 2.419632 GHz</p> <p>-17.612 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.79 dBm</td> </tr> <tr> <td>16.342 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-74.622 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>15.41 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.79 dBm	16.342 MHz			Transmit Freq Error	OBW Power	99.00 %	-74.622 kHz	x dB	-6.00 dB	x dB Bandwidth			15.41 MHz		
Occupied Bandwidth	Total Power	5.79 dBm																	
16.342 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-74.622 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
15.41 MHz																			
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.83 dB</p> <p>Ref 26.83 dBm</p> <p>Mkr3 2.444885 GHz</p> <p>-18.568 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.13 dBm</td> </tr> <tr> <td>16.323 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>36.059 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>15.70 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.13 dBm	16.323 MHz			Transmit Freq Error	OBW Power	99.00 %	36.059 kHz	x dB	-6.00 dB	x dB Bandwidth			15.70 MHz		
Occupied Bandwidth	Total Power	5.13 dBm																	
16.323 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
36.059 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
15.70 MHz																			
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.8 dB</p> <p>Ref 26.80 dBm</p> <p>Mkr3 2.470158 GHz</p> <p>-18.248 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.96 dBm</td> </tr> <tr> <td>16.347 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>9.520 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.30 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.96 dBm	16.347 MHz			Transmit Freq Error	OBW Power	99.00 %	9.520 kHz	x dB	-6.00 dB	x dB Bandwidth			16.30 MHz		
Occupied Bandwidth	Total Power	5.96 dBm																	
16.347 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
9.520 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.30 MHz																			
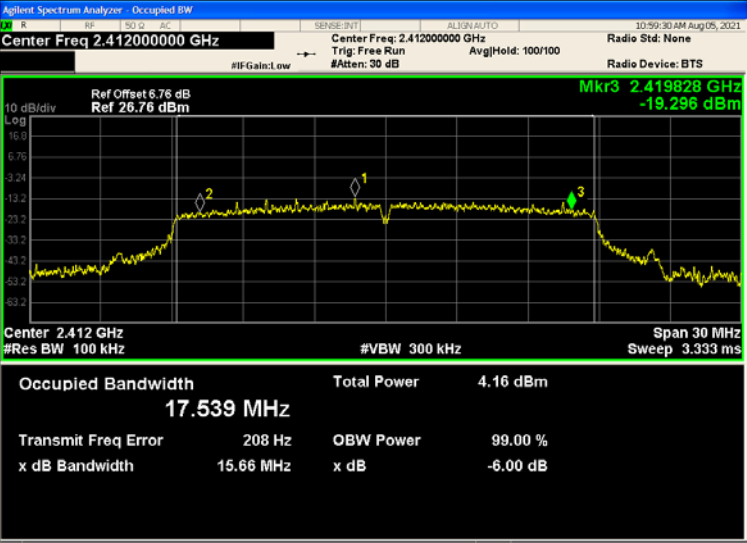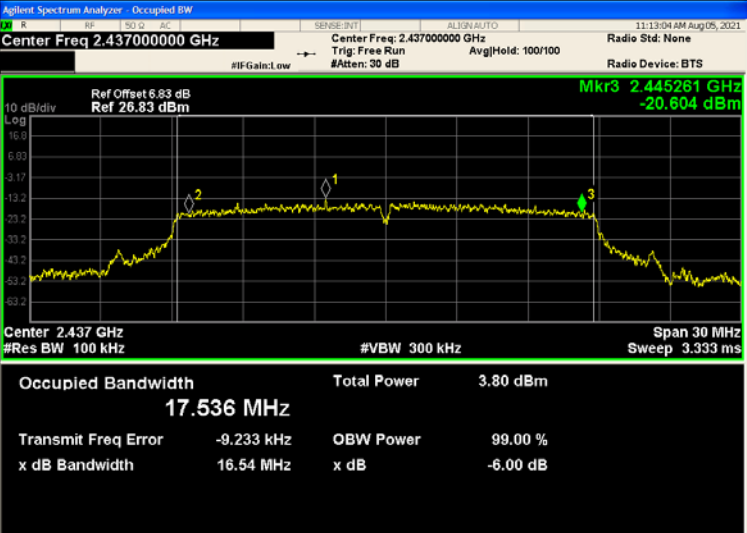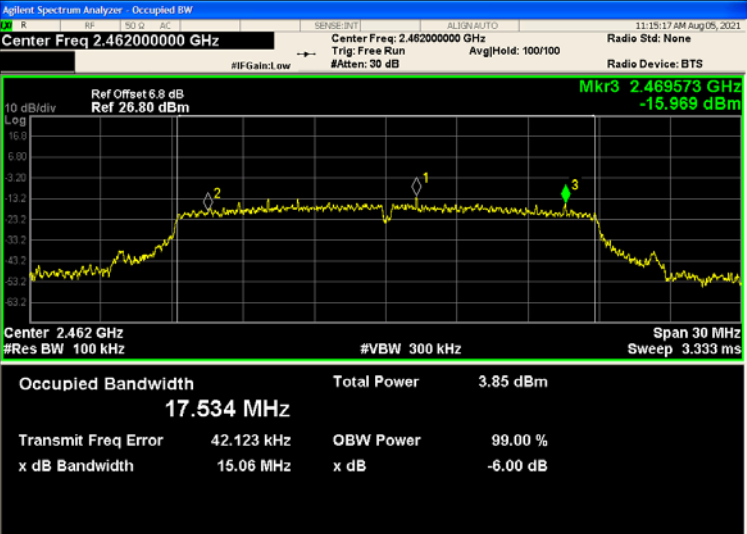
<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.76 dB</p> <p>Ref 26.76 dBm</p> <p>Mkr3 2.419828 GHz</p> <p>-19.296 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.16 dBm</td> </tr> <tr> <td>17.539 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>208 Hz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>15.66 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	4.16 dBm	17.539 MHz			Transmit Freq Error	208 Hz	OBW Power	x dB Bandwidth	15.66 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	4.16 dBm														
17.539 MHz																
Transmit Freq Error	208 Hz	OBW Power														
x dB Bandwidth	15.66 MHz	x dB														
		-6.00 dB														
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.83 dB</p> <p>Ref 26.83 dBm</p> <p>Mkr3 2.445261 GHz</p> <p>-20.604 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>3.80 dBm</td> </tr> <tr> <td>17.536 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-9.233 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>16.54 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	3.80 dBm	17.536 MHz			Transmit Freq Error	-9.233 kHz	OBW Power	x dB Bandwidth	16.54 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	3.80 dBm														
17.536 MHz																
Transmit Freq Error	-9.233 kHz	OBW Power														
x dB Bandwidth	16.54 MHz	x dB														
		-6.00 dB														
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.8 dB</p> <p>Ref 26.80 dBm</p> <p>Mkr3 2.469573 GHz</p> <p>-15.969 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>3.85 dBm</td> </tr> <tr> <td>17.534 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>42.123 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>15.06 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	3.85 dBm	17.534 MHz			Transmit Freq Error	42.123 kHz	OBW Power	x dB Bandwidth	15.06 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	3.85 dBm														
17.534 MHz																
Transmit Freq Error	42.123 kHz	OBW Power														
x dB Bandwidth	15.06 MHz	x dB														
		-6.00 dB														

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Radio Std: None #Res BW 100 kHz #VBW 300 kHz AvgHold: 100/100 Radio Device: BTS</p> <p>Ref Offset 6.77 dB Ref 26.77 dBm Mkr3 2.439642 GHz -26.002 dBm</p> <p>Center 2.422 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 6 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.09 dBm</td> </tr> <tr> <td>35.896 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>82.581 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.12 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	2.09 dBm	35.896 MHz			Transmit Freq Error	OBW Power	99.00 %	82.581 kHz	x dB	-6.00 dB	x dB Bandwidth			35.12 MHz		
Occupied Bandwidth	Total Power	2.09 dBm																	
35.896 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
82.581 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.12 MHz																			
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Radio Std: None #Res BW 100 kHz #VBW 300 kHz AvgHold: 100/100 Radio Device: BTS</p> <p>Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.454819 GHz -24.167 dBm</p> <p>Center 2.437 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 6 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.64 dBm</td> </tr> <tr> <td>35.866 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>73.411 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.09 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	2.64 dBm	35.866 MHz			Transmit Freq Error	OBW Power	99.00 %	73.411 kHz	x dB	-6.00 dB	x dB Bandwidth			35.09 MHz		
Occupied Bandwidth	Total Power	2.64 dBm																	
35.866 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
73.411 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.09 MHz																			
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Radio Std: None #Res BW 100 kHz #VBW 300 kHz AvgHold: 100/100 Radio Device: BTS</p> <p>Ref Offset 6.81 dB Ref 26.81 dBm Mkr3 2.468957 GHz -25.007 dBm</p> <p>Center 2.452 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 6 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.08 dBm</td> </tr> <tr> <td>35.947 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>26.024 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>33.86 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	2.08 dBm	35.947 MHz			Transmit Freq Error	OBW Power	99.00 %	26.024 kHz	x dB	-6.00 dB	x dB Bandwidth			33.86 MHz		
Occupied Bandwidth	Total Power	2.08 dBm																	
35.947 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
26.024 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
33.86 MHz																			

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

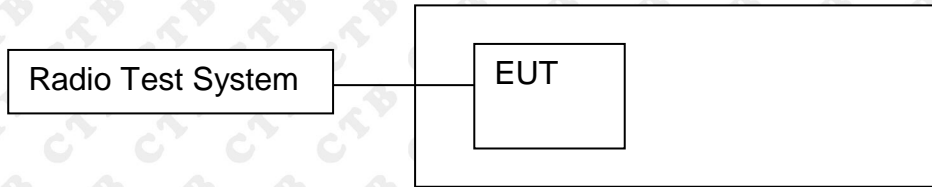

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-22.077	8	PASS
	MCH	-21.564	8	PASS
	HCH	-21.308	8	PASS
802.11g	LCH	-24.369	8	PASS
	MCH	-25.143	8	PASS
	HCH	-24.577	8	PASS
802.11n(H T20)	LCH	-26.017	8	PASS
	MCH	-26.775	8	PASS
	HCH	-27.085	8	PASS
802.11n(H T40)	LCH	-29.738	8	PASS
	MCH	-31.575	8	PASS
	HCH	-31.501	8	PASS

Test Graph

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.41119 GHz -22.077 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.43790 GHz -21.564 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.46203 GHz -21.308 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.41158 GHz -24.369 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.43574 GHz -25.143 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.46077 GHz -24.577 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
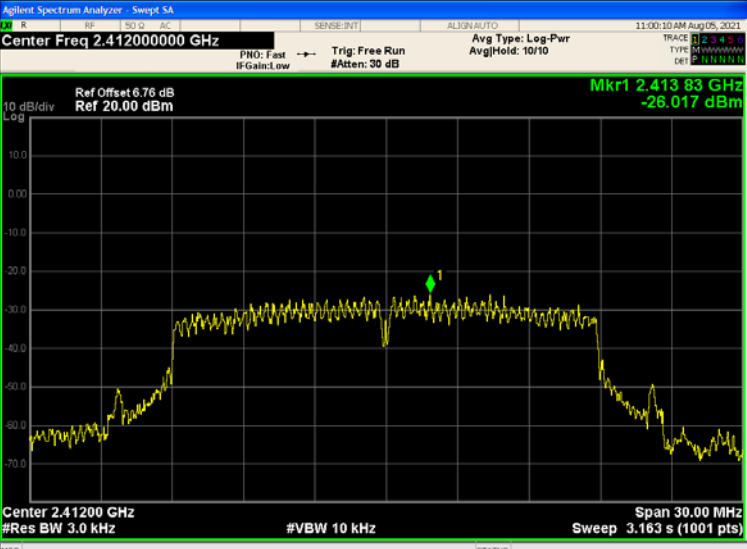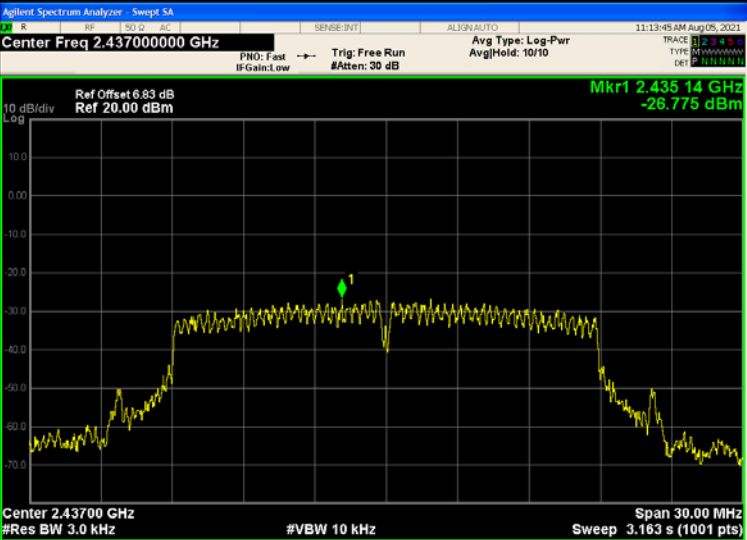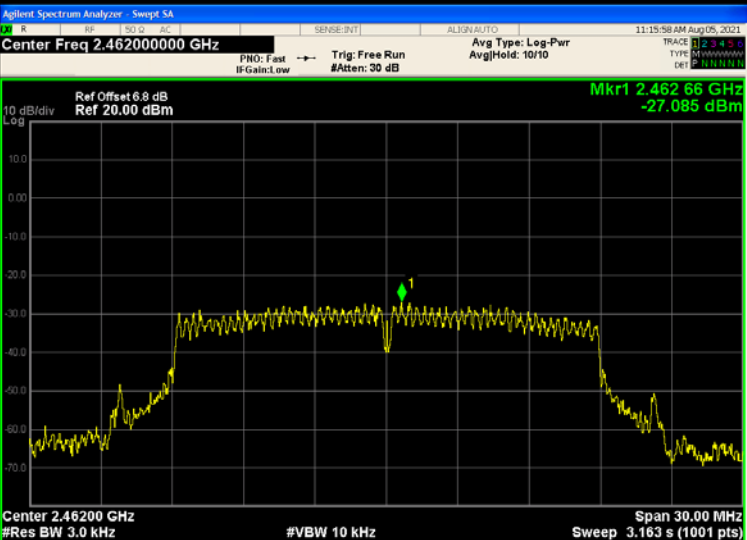
<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.41383 GHz -28.017 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.43514 GHz -26.775 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.46266 GHz -27.085 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 6.77 dB Ref 20.00 dBm Mkr1 2.419 54 GHz -29.738 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.444 56 GHz -31.575 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 6.81 dB Ref 20.00 dBm Mkr1 2.448 82 GHz -31.501 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 2.0dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted Emission



XXXXXXXX END OF REPORT XXXXXXXX