



# TEST REPORT

Product Name: Bluetooth Speaker  
FCC ID: 2AYL8-BT2602  
Trademark: N/A  
Model Number: BT2602  
Prepared For: Shenzhen Kingree Intelligent Digital Co., Ltd  
Address: Floor3, Bohua Technology Park, Shangkeng Community Guanhu Street, Longhua New District ShengZhen, Guangdong China  
Manufacturer: Shenzhen Kingree Intelligent Digital Co., Ltd  
Address: Floor3, Bohua Technology Park, Shangkeng Community Guanhu Street, Longhua New District ShengZhen, Guangdong China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China  
Sample Received Date: Apr. 19, 2022  
Sample tested Date: Apr. 19, 2022 to Apr. 20, 2022  
Issue Date: Apr. 20, 2022  
Report No.: CTB220427023RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## TABLE OF CONTENT

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	12
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 Test Result .....	14
<b>7. RADIATED SPURIOUS EMISSION</b> .....	16
7.1 Block Diagram Of Test Setup .....	16
7.2 Limit .....	16
7.3 Test procedure .....	17
7.4 Test Result .....	18
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	27
8.1 Block Diagram Of Test Setup .....	27
8.2 Limit .....	27
8.3 Test procedure .....	27
8.4 Test Result .....	28
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	35
9.1 Block Diagram Of Test Setup .....	35
9.2 Limit .....	35
9.3 Test procedure .....	35
9.4 Test Result .....	36
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	40
10.1 Block Diagram Of Test Setup .....	40
10.2 Limit .....	40
10.3 Test procedure .....	40
10.4 Test Result .....	40
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	44
11.1 Block Diagram Of Test Setup .....	44
11.2 Limit .....	44



11.3	Test procedure	44
11.4	Test Result	44
<b>12.</b>	<b>HOPPING CHANNEL NUMBER</b>	<b>48</b>
12.1	Block Diagram Of Test Setup	48
12.2	Limit	48
12.3	Test procedure	48
12.4	Test Result	48
<b>13.</b>	<b>DWELL TIME</b>	<b>50</b>
13.1	Block Diagram Of Test Setup	50
13.2	Limit	50
13.3	Test procedure	50
13.4	Test Result	51
<b>14.</b>	<b>PSEUDORANDOM FREQUENCY</b>	<b>55</b>
14.1	Limit	55
14.2	Test procedure	55
14.3	Test Result	56
<b>15.</b>	<b>ANTENNA REQUIREMENT</b>	<b>57</b>
<b>16.</b>	<b>EUT PHOTOGRAPHS</b>	<b>58</b>
<b>17.</b>	<b>EUT TEST SETUP PHOTOGRAPHS</b>	<b>59</b>

*(Note: N/A means not applicable)*

## 1. VERSION

Report No.	Issue Date	Description	Approved
CTB220427023RFX	Apr. 20, 2022	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (a)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.



### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	$1 \times 10^{-7}$
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

Model(s):	BT2602
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: -3.257dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: 1.0dBi
Ratings:	DC 5V charging from adapter DC 3.7 Battery power

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZHEN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature( $^{\circ}$ C)	23
Low Temperature( $^{\circ}$ C)	0
High Temperature( $^{\circ}$ C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05




Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

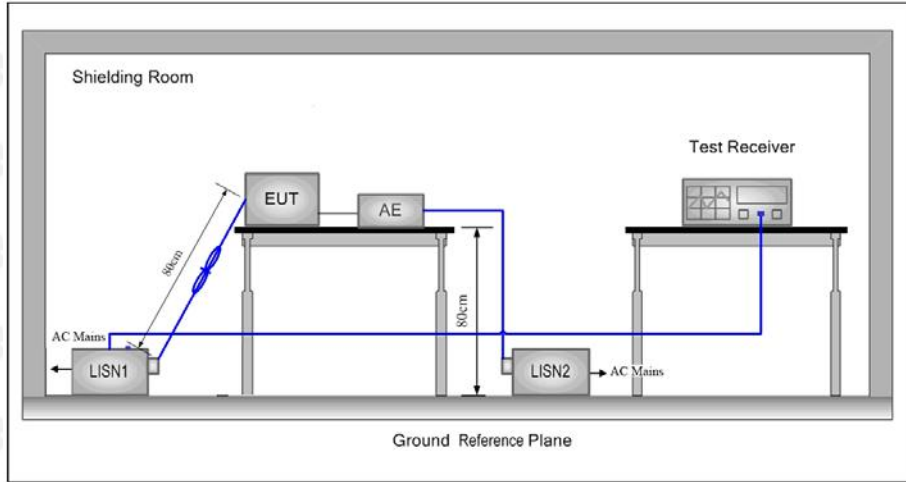

### 6.2 Limit

**Table 4 - AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference




plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

### 6.4 Test Result

L:

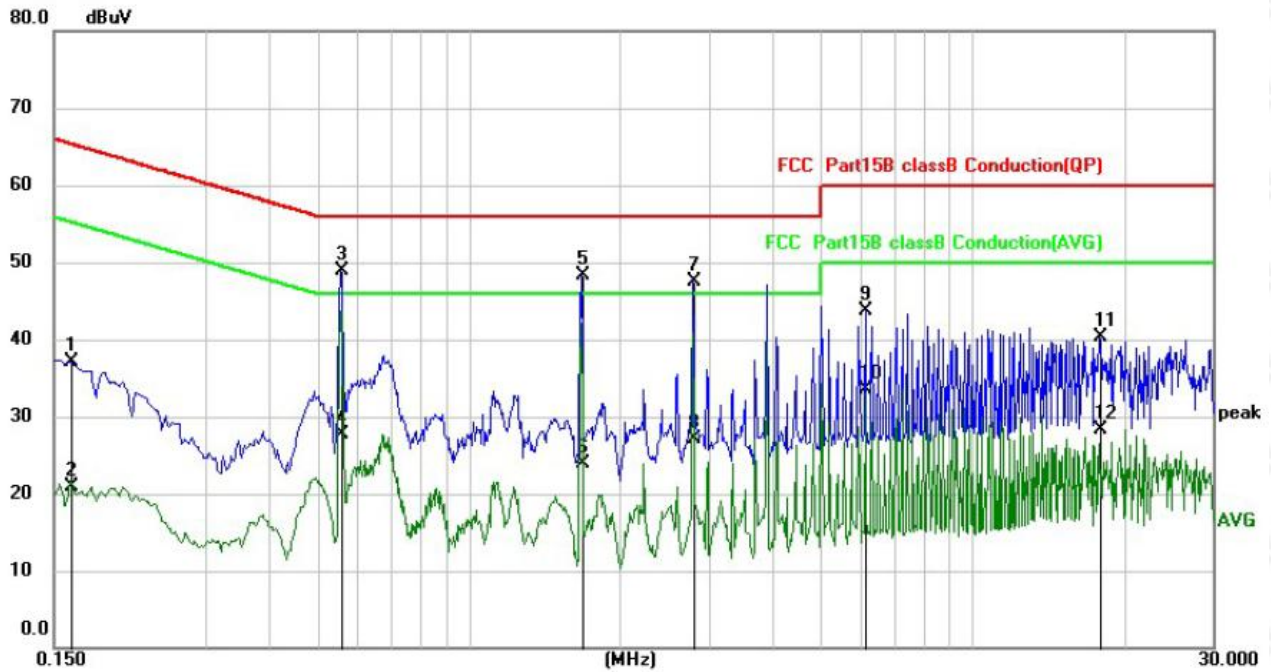


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1620	26.48	10.71	37.19	65.36	-28.17	QP
2		0.1620	10.10	10.71	20.81	55.36	-34.55	AVG
3	*	0.5580	38.32	10.53	48.85	56.00	-7.15	QP
4		0.5580	17.11	10.53	27.64	46.00	-18.36	AVG
5		1.6740	37.70	10.62	48.32	56.00	-7.68	QP
6		1.6740	13.28	10.62	23.90	46.00	-22.10	AVG
7		2.7900	36.97	10.63	47.60	56.00	-8.40	QP
8		2.7900	16.38	10.63	27.01	46.00	-18.99	AVG
9		6.1420	33.11	10.69	43.80	60.00	-16.20	QP
10		6.1420	22.86	10.69	33.55	50.00	-16.45	AVG
11		17.8620	29.36	10.95	40.31	60.00	-19.69	QP
12		17.8620	17.28	10.95	28.23	50.00	-21.77	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



N:

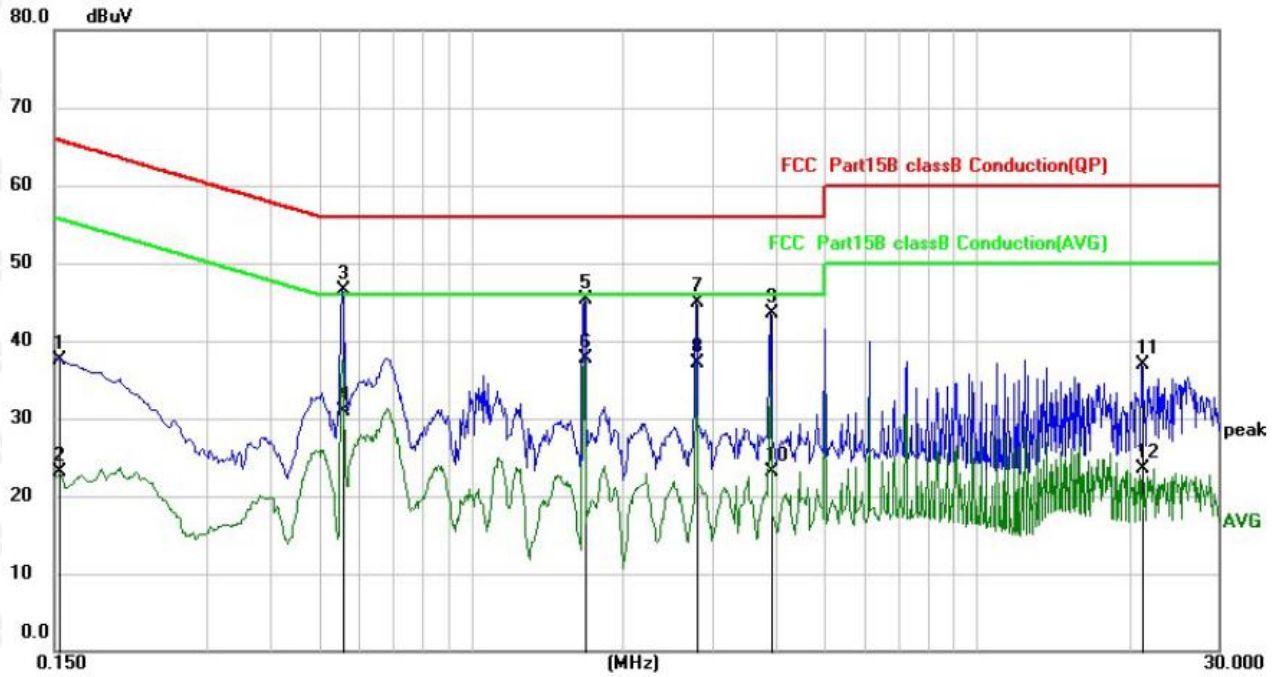

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1532	26.88	10.72	37.60	65.82	-28.22	QP
2		0.1532	12.29	10.72	23.01	55.82	-32.81	AVG
3		0.5580	35.88	10.53	46.41	56.00	-9.59	QP
4		0.5580	20.35	10.53	30.88	46.00	-15.12	AVG
5		1.6740	34.74	10.62	45.36	56.00	-10.64	QP
6	*	1.6740	27.03	10.62	37.65	46.00	-8.35	AVG
7		2.7900	34.23	10.63	44.86	56.00	-11.14	QP
8		2.7900	26.51	10.63	37.14	46.00	-8.86	AVG
9		3.9060	32.93	10.64	43.57	56.00	-12.43	QP
10		3.9060	12.52	10.64	23.16	46.00	-22.84	AVG
11		21.1940	26.01	10.99	37.00	60.00	-23.00	QP
12		21.1940	12.51	10.99	23.50	50.00	-26.50	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

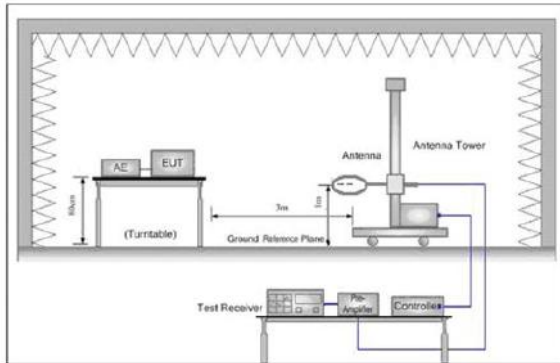


Figure 1. Below 30MHz

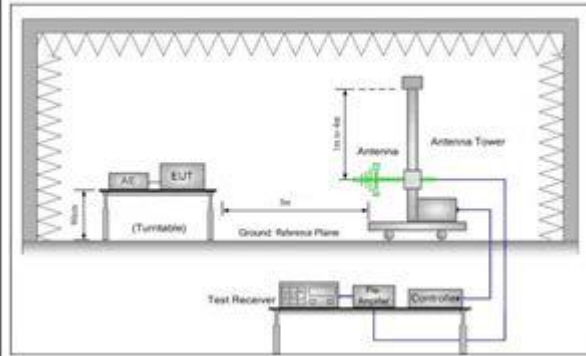


Figure 2. 30MHz to 1GHz

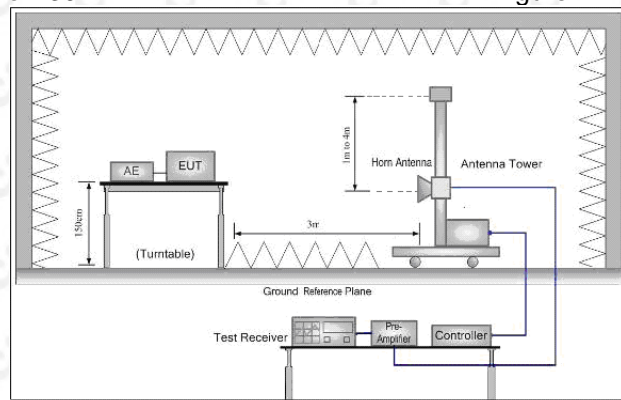


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

### 7.4 Test Result

Below 1GHz Test Results:  
Antenna polarity: H

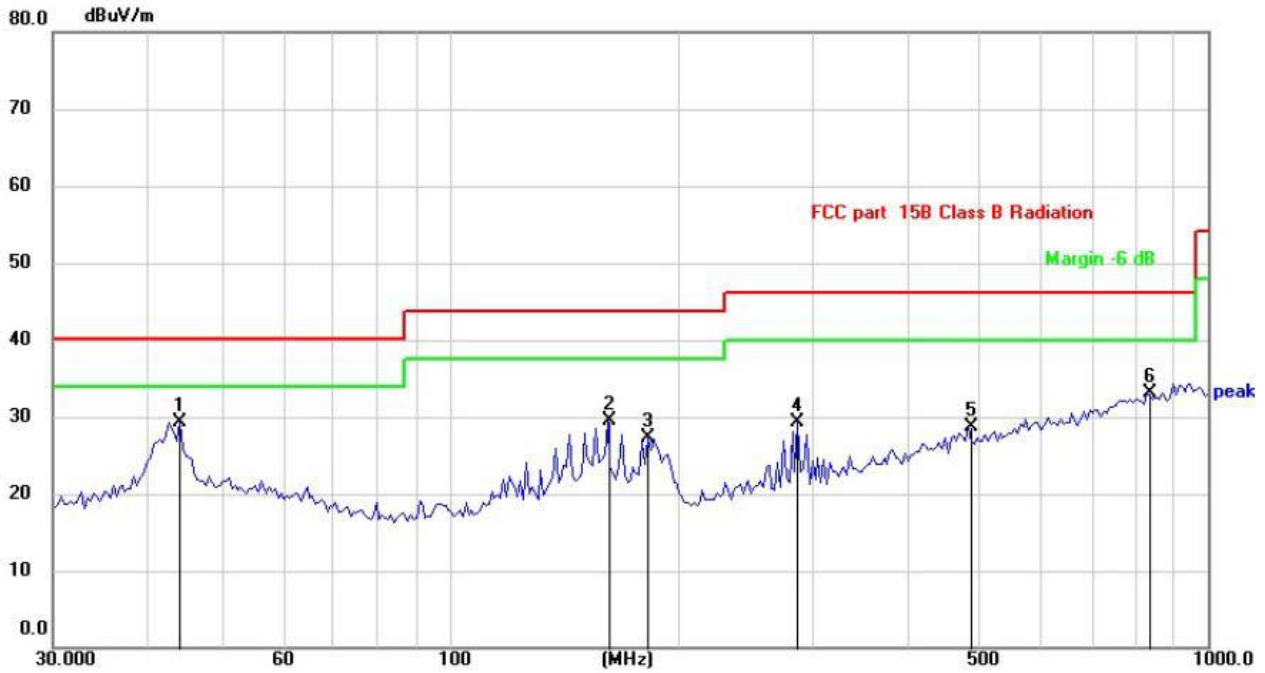


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	44.1202	34.78	-5.42	29.36	40.00	-10.64	QP
2		161.4742	35.14	-5.66	29.48	43.50	-14.02	QP
3		182.5592	35.17	-7.87	27.30	43.50	-16.20	QP
4		287.9904	34.73	-5.33	29.40	46.00	-16.60	QP
5		483.0618	28.49	0.31	28.80	46.00	-17.20	QP
6		831.8574	27.03	6.09	33.12	46.00	-12.88	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit



Antenna polarity: V

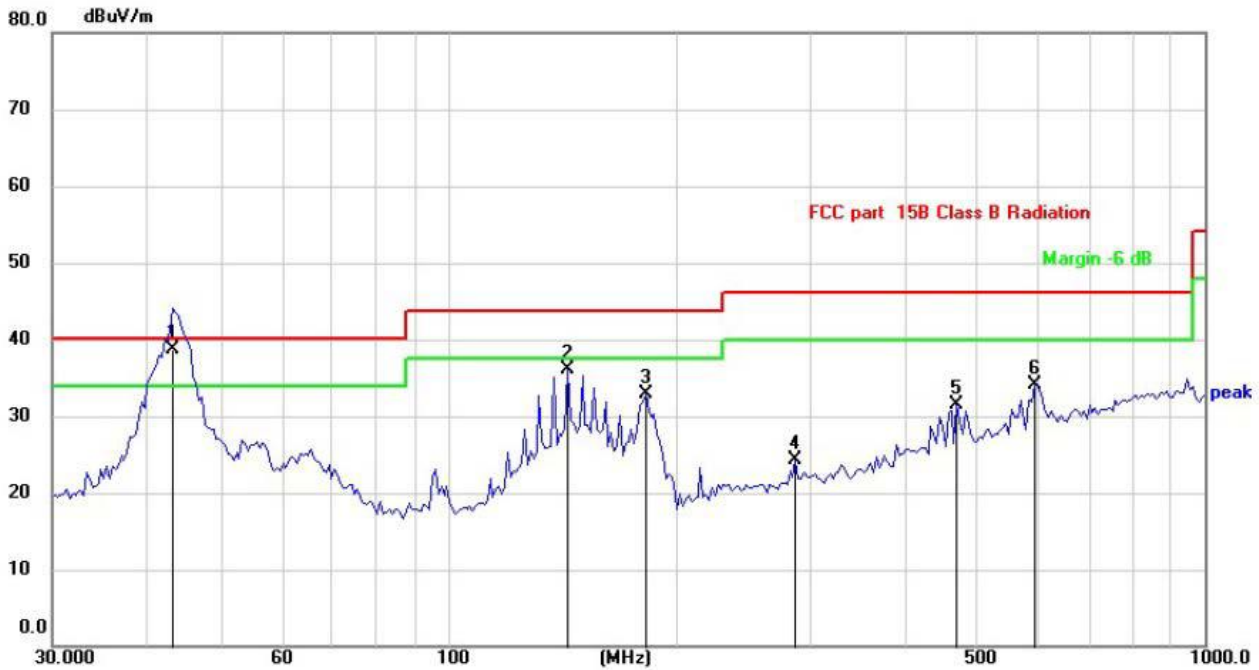

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	43.0833	44.00	-5.38	38.62	40.00	-1.38	QP
2		144.0819	41.56	-5.46	36.10	43.50	-7.40	QP
3		182.5592	40.82	-7.87	32.95	43.50	-10.55	QP
4		287.9904	29.60	-5.33	24.27	46.00	-21.73	QP
5		470.5232	31.56	0.01	31.57	46.00	-14.43	QP
6		596.1772	31.64	2.50	34.14	46.00	-11.86	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Above 1 GHz Test Results:  
 CH Low (2402MHz)  
 Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	57.96	-3.65	54.31	74.00	-19.69	peak
4804	49.42	-3.65	45.77	54.00	-8.23	AVG
7206	59.81	-0.95	58.86	74.00	-15.14	peak
7206	42.97	-0.95	42.02	54.00	-11.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	58.99	-3.65	55.34	74.00	-18.66	peak
4804	49.55	-3.65	45.90	54.00	-8.10	AVG
7206	59.57	-0.95	58.62	74.00	-15.38	peak
7206	41.89	-0.95	40.94	54.00	-13.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



CH Middle (2441MHz)  
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	58.68	-3.54	55.14	74.00	-18.86	peak
4882.00	48.09	-3.54	44.55	54.00	-9.45	AVG
7323.00	57.27	-0.81	56.46	74.00	-17.54	peak
7323.00	42.68	-0.81	41.87	54.00	-12.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	59.02	-3.54	55.48	74.00	-18.52	peak
4882.00	48.24	-3.54	44.70	54.00	-9.30	AVG
7323.00	57.45	-0.81	56.64	74.00	-17.36	peak
7323.00	41.95	-0.81	41.14	54.00	-12.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)  
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	57.39	-3.43	53.96	74.00	-20.04	peak
4960	50.11	-3.44	46.67	54.00	-7.33	AVG
7440	60.60	-0.77	59.83	74.00	-14.17	peak
7440	42.43	-0.77	41.66	54.00	-12.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	58.59	-3.43	55.16	74.00	-18.84	peak
4960	49.66	-3.44	46.22	54.00	-7.78	AVG
7440	61.31	-0.77	60.54	74.00	-13.46	peak
7440	40.41	-0.77	39.64	54.00	-14.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz ◦
- (2). All modes of GFSK,  $\pi/4$  DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK,  $\pi/4$  DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.



**Restricted bands around fundamental frequency (Radiated)**

hopping  
 Operation Mode: TX CH Low (2402MHz)-GFSK  
 Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.27	-5.81	51.46	74.00	-22.54	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.02	-5.84	50.18	74.00	-23.82	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.82	-5.81	50.01	74.00	-23.99	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.61	-5.84	49.77	74.00	-24.23	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz) -GFSK  
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.51	-5.81	49.70	74.00	-24.30	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.59	-6.06	48.53	74.00	-25.47	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.86	-5.81	50.05	74.00	-23.95	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.38	-6.06	49.32	74.00	-24.68	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



NO hopping

Operation Mode: TX CH Low (2402MHz) -GFSK  
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.53	-5.81	49.72	74.00	-24.28	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.09	-5.84	48.25	74.00	-25.75	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.72	-5.81	50.91	74.00	-23.09	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.55	-5.84	47.71	74.00	-26.29	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz) -GFSK  
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.91	-5.81	50.10	74.00	-23.90	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.25	-6.06	50.19	74.00	-23.81	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.89	-5.81	50.08	74.00	-23.92	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.81	-6.06	47.75	74.00	-26.25	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

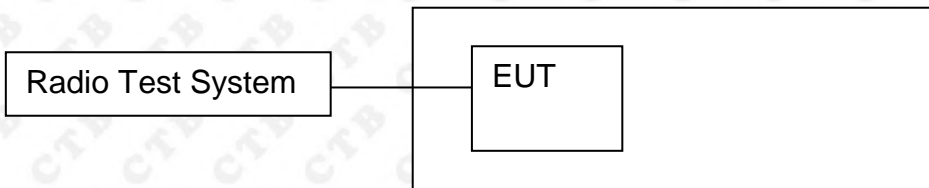

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Below 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100KHz, VBW = 300KHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 8.4 Test Result

BAND EDGE Graphs																																																																																																	
<p>GFSK/LCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 17 GHz</td> <td></td> <td></td> <td>-4.913 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td></td> <td></td> <td>-50.200 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.380 00 GHz</td> <td></td> <td></td> <td>-54.944 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.377 93 GHz</td> <td></td> <td></td> <td>-49.456 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 17 GHz			-4.913 dBm	2	N	1	f	2.400 00 GHz			-50.200 dBm	3	N	1	f	2.380 00 GHz			-54.944 dBm	4	N	1	f	2.377 93 GHz			-49.456 dBm	5								6								7								8								9								10								11							
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f	2.402 17 GHz			-4.913 dBm																																																																																										
2	N	1	f	2.400 00 GHz			-50.200 dBm																																																																																										
3	N	1	f	2.380 00 GHz			-54.944 dBm																																																																																										
4	N	1	f	2.377 93 GHz			-49.456 dBm																																																																																										
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	
<p>GFSK/LCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.423 868 GHz</td> <td></td> <td></td> <td>-4.353 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td></td> <td></td> <td>-50.523 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.380 000 GHz</td> <td></td> <td></td> <td>-52.784 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.388 900 GHz</td> <td></td> <td></td> <td>-49.368 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.423 868 GHz			-4.353 dBm	2	N	1	f	2.400 000 GHz			-50.523 dBm	3	N	1	f	2.380 000 GHz			-52.784 dBm	4	N	1	f	2.388 900 GHz			-49.368 dBm	5								6								7								8								9								10								11							
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f	2.423 868 GHz			-4.353 dBm																																																																																										
2	N	1	f	2.400 000 GHz			-50.523 dBm																																																																																										
3	N	1	f	2.380 000 GHz			-52.784 dBm																																																																																										
4	N	1	f	2.388 900 GHz			-49.368 dBm																																																																																										
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	
<p>GFSK/HCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 870 0 GHz</td> <td></td> <td></td> <td>-4.713 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td></td> <td></td> <td>-52.646 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td></td> <td></td> <td>-53.896 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.491 750 0 GHz</td> <td></td> <td></td> <td>-51.044 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 870 0 GHz			-4.713 dBm	2	N	1	f	2.483 500 0 GHz			-52.646 dBm	3	N	1	f	2.500 000 0 GHz			-53.896 dBm	4	N	1	f	2.491 750 0 GHz			-51.044 dBm	5								6								7								8								9								10								11							
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f	2.479 870 0 GHz			-4.713 dBm																																																																																										
2	N	1	f	2.483 500 0 GHz			-52.646 dBm																																																																																										
3	N	1	f	2.500 000 0 GHz			-53.896 dBm																																																																																										
4	N	1	f	2.491 750 0 GHz			-51.044 dBm																																																																																										
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	



<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.437 875 00 GHz -4.461 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 875 00 GHz</td> <td>-4.461 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-52.366 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-50.689 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.495 952 25 GHz</td> <td>-46.848 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 875 00 GHz	-4.461 dBm				2	N	1	f	2.483 500 00 GHz	-52.366 dBm				3	N	1	f	2.500 000 00 GHz	-50.689 dBm				4	N	1	f	2.495 952 25 GHz	-46.848 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.437 875 00 GHz	-4.461 dBm																																									
2	N	1	f	2.483 500 00 GHz	-52.366 dBm																																									
3	N	1	f	2.500 000 00 GHz	-50.689 dBm																																									
4	N	1	f	2.495 952 25 GHz	-46.848 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.401 87 GHz -4.817 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.41000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 87 GHz</td> <td>-4.817 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-54.864 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-54.872 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.370 02 GHz</td> <td>-50.902 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 87 GHz	-4.817 dBm				2	N	1	f	2.400 00 GHz	-54.864 dBm				3	N	1	f	2.390 00 GHz	-54.872 dBm				4	N	1	f	2.370 02 GHz	-50.902 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 87 GHz	-4.817 dBm																																									
2	N	1	f	2.400 00 GHz	-54.864 dBm																																									
3	N	1	f	2.390 00 GHz	-54.872 dBm																																									
4	N	1	f	2.370 02 GHz	-50.902 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.422 872 GHz -4.627 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.422 872 GHz</td> <td>-4.627 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-52.360 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-52.719 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.384 016 GHz</td> <td>-49.308 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.422 872 GHz	-4.627 dBm				2	N	1	f	2.400 000 GHz	-52.360 dBm				3	N	1	f	2.390 000 GHz	-52.719 dBm				4	N	1	f	2.384 016 GHz	-49.308 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.422 872 GHz	-4.627 dBm																																									
2	N	1	f	2.400 000 GHz	-52.360 dBm																																									
3	N	1	f	2.390 000 GHz	-52.719 dBm																																									
4	N	1	f	2.384 016 GHz	-49.308 dBm																																									


<p><math>\pi/4</math>DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 6.98 dB Ref 20.00 dBm Mkr1 2.480 015 2 GHz -6.543 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 015 2 GHz</td> <td>-6.543 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.177 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-55.252 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 007 5 GHz</td> <td>-51.650 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 015 2 GHz	-6.543 dBm				2	N	1	f	2.483 500 0 GHz	-53.177 dBm				3	N	1	f	2.500 000 0 GHz	-55.252 dBm				4	N	1	f	2.480 007 5 GHz	-51.650 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 015 2 GHz	-6.543 dBm																																									
2	N	1	f	2.483 500 0 GHz	-53.177 dBm																																									
3	N	1	f	2.500 000 0 GHz	-55.252 dBm																																									
4	N	1	f	2.480 007 5 GHz	-51.650 dBm																																									
<p><math>\pi/4</math>DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 6.98 dB Ref 20.00 dBm Mkr1 2.440 868 75 GHz -4.633 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 868 75 GHz</td> <td>-4.633 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.777 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-49.805 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 943 75 GHz</td> <td>-48.440 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 868 75 GHz	-4.633 dBm				2	N	1	f	2.483 500 0 GHz	-52.777 dBm				3	N	1	f	2.500 000 0 GHz	-49.805 dBm				4	N	1	f	2.484 943 75 GHz	-48.440 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.440 868 75 GHz	-4.633 dBm																																									
2	N	1	f	2.483 500 0 GHz	-52.777 dBm																																									
3	N	1	f	2.500 000 0 GHz	-49.805 dBm																																									
4	N	1	f	2.484 943 75 GHz	-48.440 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.401 90 GHz -6.576 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 90 GHz</td> <td>-6.576 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-54.853 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-55.101 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378 23 GHz</td> <td>-50.126 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 90 GHz	-6.576 dBm				2	N	1	f	2.400 00 GHz	-54.853 dBm				3	N	1	f	2.390 00 GHz	-55.101 dBm				4	N	1	f	2.378 23 GHz	-50.126 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 90 GHz	-6.576 dBm																																									
2	N	1	f	2.400 00 GHz	-54.853 dBm																																									
3	N	1	f	2.390 00 GHz	-55.101 dBm																																									
4	N	1	f	2.378 23 GHz	-50.126 dBm																																									




<p>8DPSK /LCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.416 872 GHz</td> <td>-4.632 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-51.343 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.380 000 GHz</td> <td>-50.738 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.360 890 GHz</td> <td>-49.836 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.416 872 GHz	-4.632 dBm				2	N	1	f	2.400 000 GHz	-51.343 dBm				3	N	1	f	2.380 000 GHz	-50.738 dBm				4	N	1	f	2.360 890 GHz	-49.836 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.416 872 GHz	-4.632 dBm																																									
2	N	1	f	2.400 000 GHz	-51.343 dBm																																									
3	N	1	f	2.380 000 GHz	-50.738 dBm																																									
4	N	1	f	2.360 890 GHz	-49.836 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 193 4 GHz</td> <td>-5.037 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.374 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-54.924 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 395 0 GHz</td> <td>-51.486 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 193 4 GHz	-5.037 dBm				2	N	1	f	2.483 500 0 GHz	-53.374 dBm				3	N	1	f	2.500 000 0 GHz	-54.924 dBm				4	N	1	f	2.489 395 0 GHz	-51.486 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 193 4 GHz	-5.037 dBm																																									
2	N	1	f	2.483 500 0 GHz	-53.374 dBm																																									
3	N	1	f	2.500 000 0 GHz	-54.924 dBm																																									
4	N	1	f	2.489 395 0 GHz	-51.486 dBm																																									
<p>8DPSK /HCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.449 868 75 GHz</td> <td>-4.839 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-53.297 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-53.006 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 868 75 GHz</td> <td>-49.017 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.449 868 75 GHz	-4.839 dBm				2	N	1	f	2.483 500 00 GHz	-53.297 dBm				3	N	1	f	2.500 000 00 GHz	-53.006 dBm				4	N	1	f	2.489 868 75 GHz	-49.017 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.449 868 75 GHz	-4.839 dBm																																									
2	N	1	f	2.483 500 00 GHz	-53.297 dBm																																									
3	N	1	f	2.500 000 00 GHz	-53.006 dBm																																									
4	N	1	f	2.489 868 75 GHz	-49.017 dBm																																									

## RF Conducted Spurious Emissions Graphs


GFSK/LCH

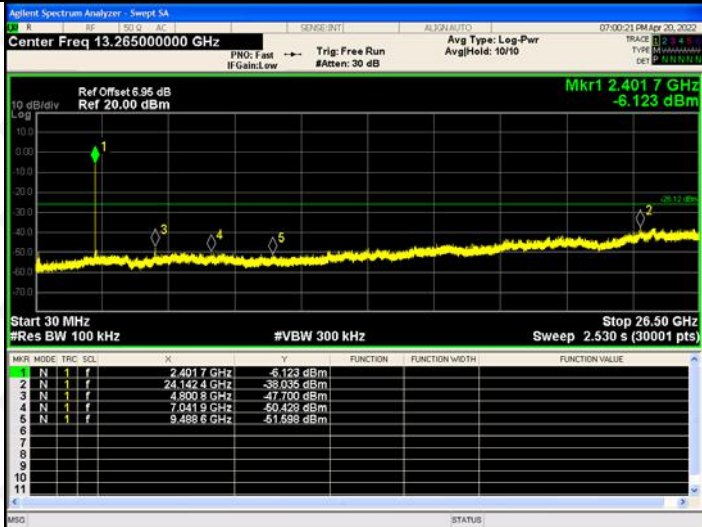




GFSK/MCH

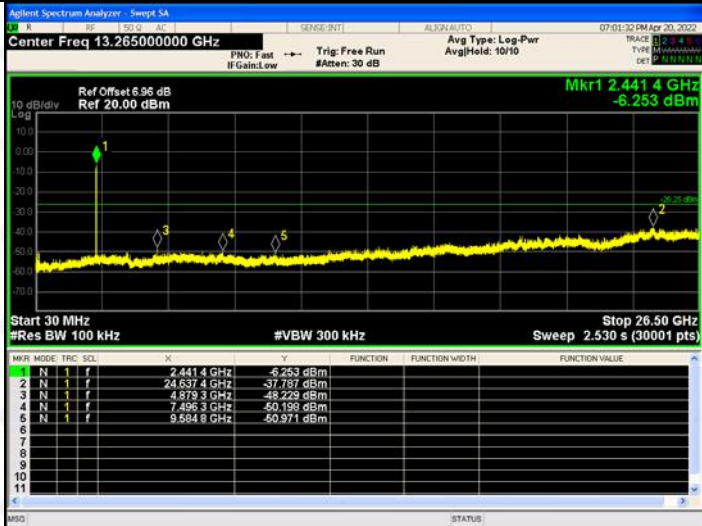

GFSK/HCH

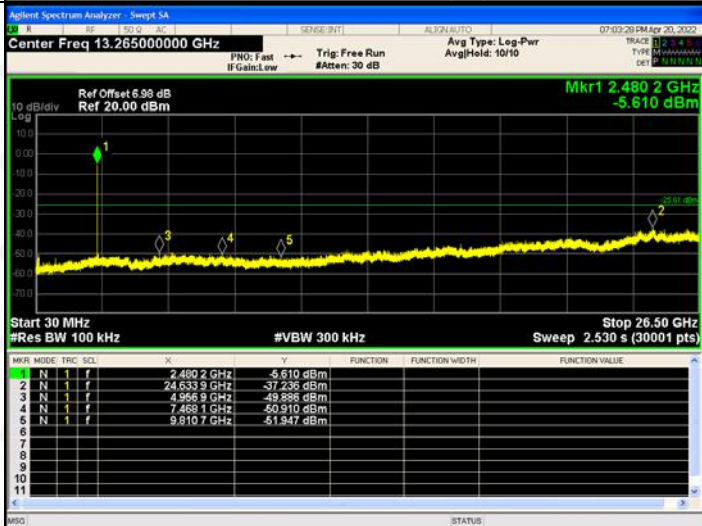

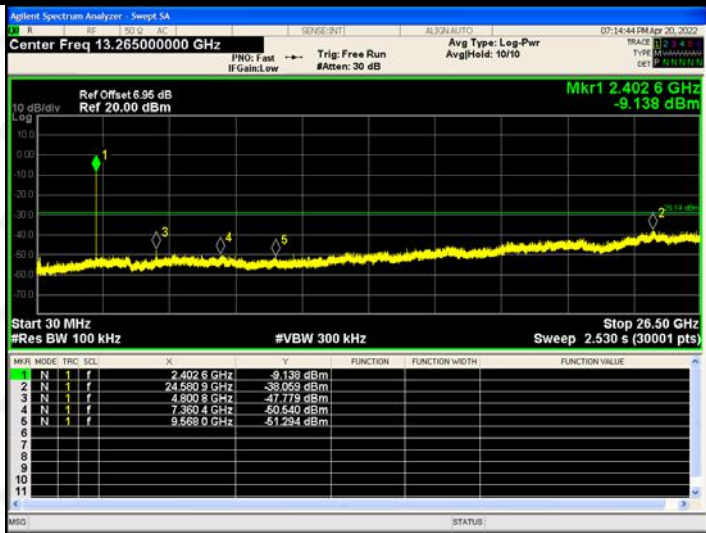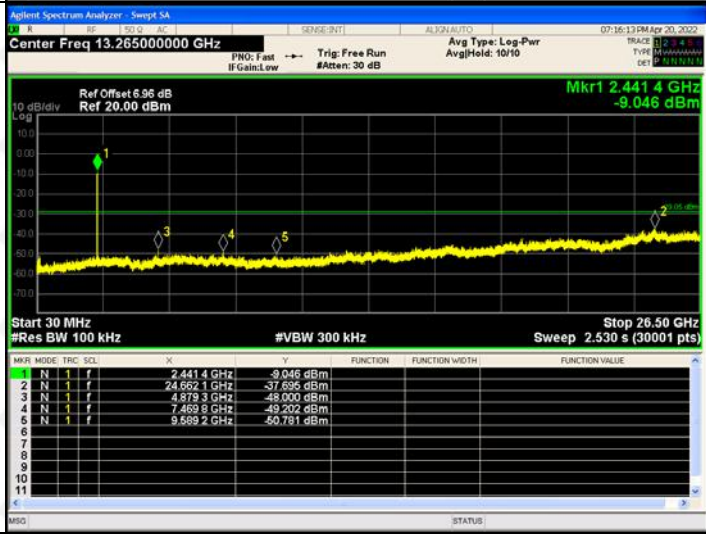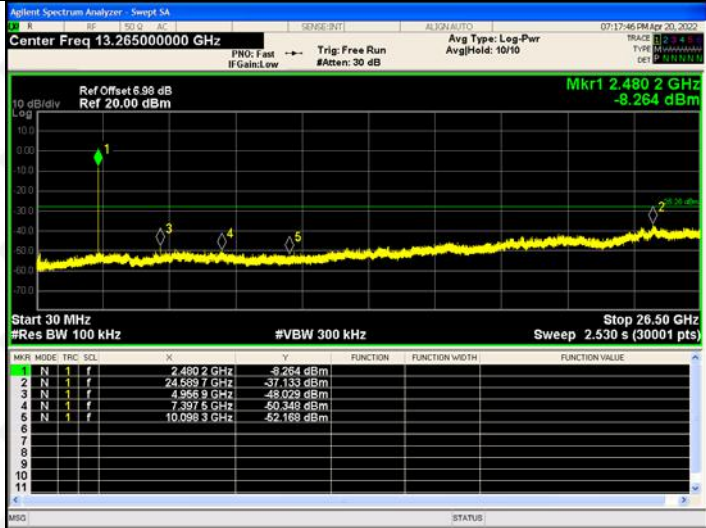


<p><math>\pi/4</math>DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4026 GHz</td> <td>-9.138 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.5809 GHz</td> <td>-38.059 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8008 GHz</td> <td>-47.779 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.8894 GHz</td> <td>-50.640 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5680 GHz</td> <td>-51.294 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4026 GHz	-9.138 dBm				2	N	1	f	24.5809 GHz	-38.059 dBm				3	N	1	f	4.8008 GHz	-47.779 dBm				4	N	1	f	7.8894 GHz	-50.640 dBm				5	N	1	f	9.5680 GHz	-51.294 dBm			
MNR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4026 GHz	-9.138 dBm																																																		
2	N	1	f	24.5809 GHz	-38.059 dBm																																																		
3	N	1	f	4.8008 GHz	-47.779 dBm																																																		
4	N	1	f	7.8894 GHz	-50.640 dBm																																																		
5	N	1	f	9.5680 GHz	-51.294 dBm																																																		
<p><math>\pi/4</math>DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-9.046 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6621 GHz</td> <td>-37.695 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8733 GHz</td> <td>-48.000 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4689 GHz</td> <td>-49.202 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5882 GHz</td> <td>-50.781 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-9.046 dBm				2	N	1	f	24.6621 GHz	-37.695 dBm				3	N	1	f	4.8733 GHz	-48.000 dBm				4	N	1	f	7.4689 GHz	-49.202 dBm				5	N	1	f	9.5882 GHz	-50.781 dBm			
MNR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-9.046 dBm																																																		
2	N	1	f	24.6621 GHz	-37.695 dBm																																																		
3	N	1	f	4.8733 GHz	-48.000 dBm																																																		
4	N	1	f	7.4689 GHz	-49.202 dBm																																																		
5	N	1	f	9.5882 GHz	-50.781 dBm																																																		
<p><math>\pi/4</math>DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-8.264 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6897 GHz</td> <td>-37.133 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9569 GHz</td> <td>-48.029 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3975 GHz</td> <td>-50.349 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.0983 GHz</td> <td>-52.188 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-8.264 dBm				2	N	1	f	24.6897 GHz	-37.133 dBm				3	N	1	f	4.9569 GHz	-48.029 dBm				4	N	1	f	7.3975 GHz	-50.349 dBm				5	N	1	f	10.0983 GHz	-52.188 dBm			
MNR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-8.264 dBm																																																		
2	N	1	f	24.6897 GHz	-37.133 dBm																																																		
3	N	1	f	4.9569 GHz	-48.029 dBm																																																		
4	N	1	f	7.3975 GHz	-50.349 dBm																																																		
5	N	1	f	10.0983 GHz	-52.188 dBm																																																		

<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-6.931 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.6445 GHz</td> <td>-36.918 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8008 GHz</td> <td>-47.273 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1286 GHz</td> <td>-49.754 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5618 GHz</td> <td>-51.934 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-6.931 dBm				2	N	1	f	2.6445 GHz	-36.918 dBm				3	N	1	f	4.8008 GHz	-47.273 dBm				4	N	1	f	7.1286 GHz	-49.754 dBm				5	N	1	f	9.5618 GHz	-51.934 dBm				
MKR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4017 GHz	-6.931 dBm																																																			
2	N	1	f	2.6445 GHz	-36.918 dBm																																																			
3	N	1	f	4.8008 GHz	-47.273 dBm																																																			
4	N	1	f	7.1286 GHz	-49.754 dBm																																																			
5	N	1	f	9.5618 GHz	-51.934 dBm																																																			
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-8.551 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.6085 GHz</td> <td>-37.660 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8733 GHz</td> <td>-47.604 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4010 GHz</td> <td>-49.751 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7577 GHz</td> <td>-50.839 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-8.551 dBm				2	N	1	f	2.6085 GHz	-37.660 dBm				3	N	1	f	4.8733 GHz	-47.604 dBm				4	N	1	f	7.4010 GHz	-49.751 dBm				5	N	1	f	9.7577 GHz	-50.839 dBm				
MKR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4414 GHz	-8.551 dBm																																																			
2	N	1	f	2.6085 GHz	-37.660 dBm																																																			
3	N	1	f	4.8733 GHz	-47.604 dBm																																																			
4	N	1	f	7.4010 GHz	-49.751 dBm																																																			
5	N	1	f	9.7577 GHz	-50.839 dBm																																																			
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRF</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-6.016 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.6385 GHz</td> <td>-37.560 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9569 GHz</td> <td>-48.659 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5215 GHz</td> <td>-49.121 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8674 GHz</td> <td>-51.307 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-6.016 dBm				2	N	1	f	2.6385 GHz	-37.560 dBm				3	N	1	f	4.9569 GHz	-48.659 dBm				4	N	1	f	7.5215 GHz	-49.121 dBm				5	N	1	f	9.8674 GHz	-51.307 dBm				
MKR	MODE	TRF	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4802 GHz	-6.016 dBm																																																			
2	N	1	f	2.6385 GHz	-37.560 dBm																																																			
3	N	1	f	4.9569 GHz	-48.659 dBm																																																			
4	N	1	f	7.5215 GHz	-49.121 dBm																																																			
5	N	1	f	9.8674 GHz	-51.307 dBm																																																			



## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

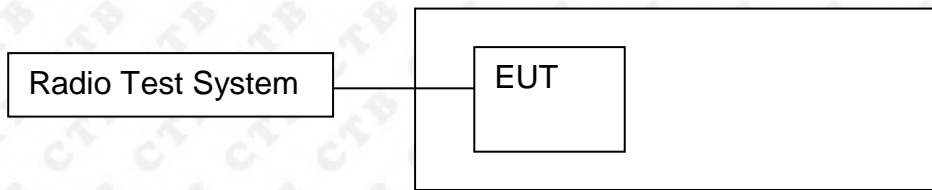

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

## 9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	-4.603	PASS
	MCH	-4.461	PASS
	HCH	-4.56	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	-3.775	PASS
	MCH	-3.691	PASS
	HCH	-3.777	PASS
EDR mode (8DPSK)	LCH	-3.375	PASS
	MCH	-3.257	PASS
	HCH	-3.338	PASS



**Test Graph:**

Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 6.95 dB          Ref 20.00 dBm          Mkr1 2.40199 GHz          -4.603 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.44100000 GHz          Ref Offset 6.95 dB          Ref 20.00 dBm          Mkr1 2.44093 GHz          -4.461 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.48000000 GHz          Ref Offset 6.95 dB          Ref 20.00 dBm          Mkr1 2.47995 GHz          -4.560 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>


<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.402 10 GHz -3.775 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.440 84 GHz -3.691 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref Offset 6.98 dB Ref 20.00 dBm Mkr1 2.479 88 GHz -3.777 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>	



<p>8DPSK/LCH</p>		
<p>8DPSK /MCH</p>		
<p>8DPSK /HCH</p>		

## 10. 20DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

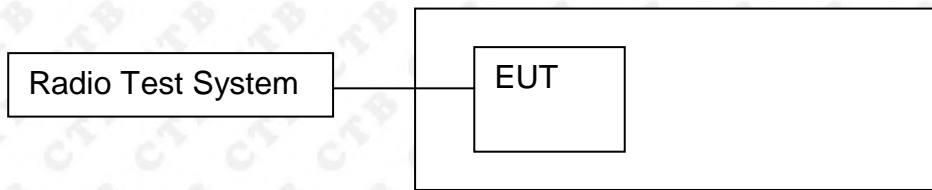

### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.864	<b>PASS</b>
	Mid channel	0.873	<b>PASS</b>
	High channel	0.918	<b>PASS</b>
$\pi/4$ DQPSK	Low channel	1.267	<b>PASS</b>
	Mid channel	1.258	<b>PASS</b>
	High channel	1.273	<b>PASS</b>
8DPSK	Low channel	1.285	<b>PASS</b>
	Mid channel	1.298	<b>PASS</b>
	High channel	1.293	<b>PASS</b>


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.



Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #F Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.402443 GHz -27.778 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 810.31 kHz Total Power 1.89 dBm</p> <p>Transmit Freq Error 11.414 kHz OBW Power 99.00 % x dB Bandwidth 863.8 kHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #F Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.44145 GHz -27.664 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 801.17 kHz Total Power 2.00 dBm</p> <p>Transmit Freq Error 13.346 kHz OBW Power 99.00 % x dB Bandwidth 872.5 kHz x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run #F Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.480479 GHz -28.034 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 824.17 kHz Total Power 1.64 dBm</p> <p>Transmit Freq Error 19.893 kHz OBW Power 99.00 % x dB Bandwidth 917.6 kHz x dB -20.00 dB</p>

$\pi/4$ -DQPSK  
Low channel

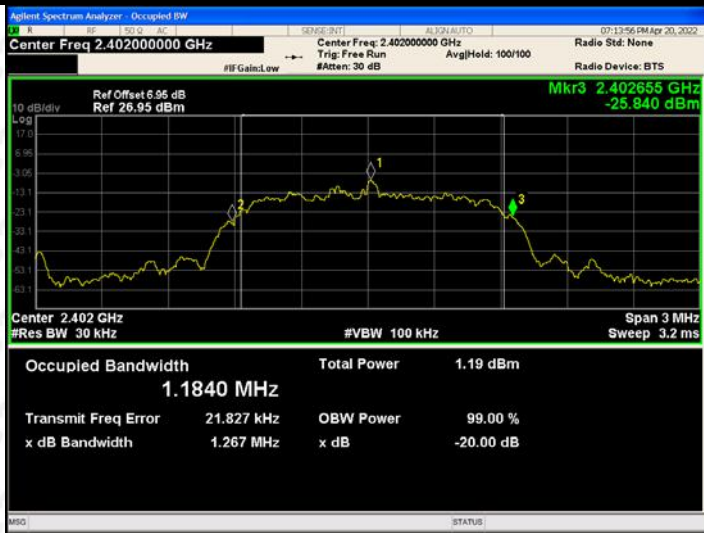

$\pi/4$ -DQPSK  
Mid channel



$\pi/4$ -DQPSK  
High channel






<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 6.95 dB Ref: 26.95 dBm</p> <p>Mkr3: 2.402662 GHz -26.875 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.42 dBm</td> </tr> <tr> <td>1.1866 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>19.577 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.285 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	1.42 dBm	1.1866 MHz			Transmit Freq Error	OBW Power	99.00 %	19.577 kHz			x dB Bandwidth	x dB	-20.00 dB	1.285 MHz			
Occupied Bandwidth	Total Power	1.42 dBm																		
1.1866 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
19.577 kHz																				
x dB Bandwidth	x dB	-20.00 dB																		
1.285 MHz																				
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3: 2.441665 GHz -27.155 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.46 dBm</td> </tr> <tr> <td>1.1952 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>16.136 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.298 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	1.46 dBm	1.1952 MHz			Transmit Freq Error	OBW Power	99.00 %	16.136 kHz			x dB Bandwidth	x dB	-20.00 dB	1.298 MHz			
Occupied Bandwidth	Total Power	1.46 dBm																		
1.1952 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
16.136 kHz																				
x dB Bandwidth	x dB	-20.00 dB																		
1.298 MHz																				
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 6.98 dB Ref: 26.98 dBm</p> <p>Mkr3: 2.480663 GHz -27.156 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.73 dBm</td> </tr> <tr> <td>1.1846 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>16.600 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.293 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	1.73 dBm	1.1846 MHz			Transmit Freq Error	OBW Power	99.00 %	16.600 kHz			x dB Bandwidth	x dB	-20.00 dB	1.293 MHz			
Occupied Bandwidth	Total Power	1.73 dBm																		
1.1846 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
16.600 kHz																				
x dB Bandwidth	x dB	-20.00 dB																		
1.293 MHz																				

## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

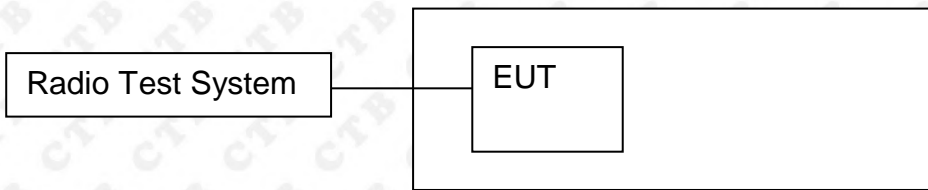

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit [MHz]	Verdict
GFSK	LCH	1.000	0.576	PASS
GFSK	MCH	1.000	0.582	PASS
GFSK	HCH	1.000	0.612	PASS
$\pi/4$ DQPSK	LCH	1.002	0.845	PASS
$\pi/4$ DQPSK	MCH	1.000	0.839	PASS
$\pi/4$ DQPSK	HCH	1.000	0.849	PASS
8DPSK	LCH	1.000	0.857	PASS
8DPSK	MCH	1.000	0.865	PASS
8DPSK	HCH	1.000	0.862	PASS



## Test Graph

### Graphs

GFSK/LCH



GFSK/MCH




GFSK/HCH




<p><math>\pi/4</math>DQPSK/LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.002 MHz (Δ)</td> <td>0.368 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.401846 GHz</td> <td>-7.745 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f (Δ)	1.002 MHz (Δ)	0.368 dB				2	F	1	f	2.401846 GHz	-7.745 dBm				
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	ΔZ	1	f (Δ)	1.002 MHz (Δ)	0.368 dB																								
2	F	1	f	2.401846 GHz	-7.745 dBm																								
<p><math>\pi/4</math>DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.000 MHz (Δ)</td> <td>-0.407 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.441012 GHz</td> <td>-6.886 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f (Δ)	1.000 MHz (Δ)	-0.407 dB				2	F	1	f	2.441012 GHz	-6.886 dBm				
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	ΔZ	1	f (Δ)	1.000 MHz (Δ)	-0.407 dB																								
2	F	1	f	2.441012 GHz	-6.886 dBm																								
<p><math>\pi/4</math>DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.000 MHz (Δ)</td> <td>0.027 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.478860 GHz</td> <td>-6.362 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f (Δ)	1.000 MHz (Δ)	0.027 dB				2	F	1	f	2.478860 GHz	-6.362 dBm				
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	ΔZ	1	f (Δ)	1.000 MHz (Δ)	0.027 dB																								
2	F	1	f	2.478860 GHz	-6.362 dBm																								

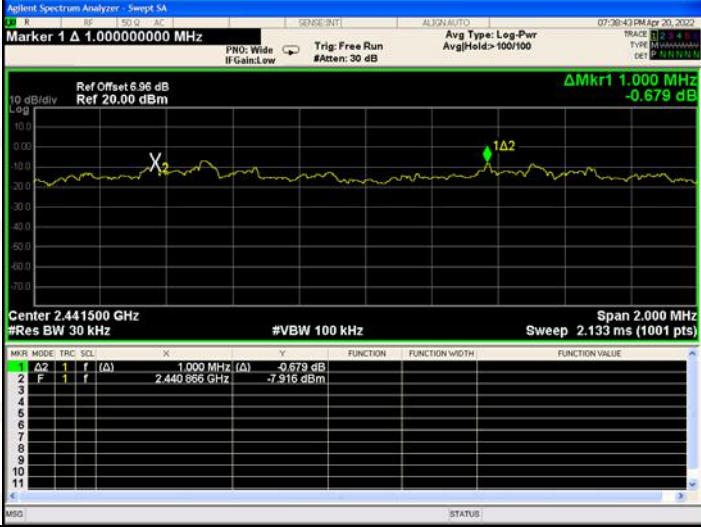

<p>8DPSK/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz -0.616 dB</p> <p>Center 2.402500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.616 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401858 GHz</td> <td></td> <td></td> <td>-8.147 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.616 dB	2	F	1	f		2.401858 GHz			-8.147 dBm	
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ Z	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.616 dB																					
2	F	1	f		2.401858 GHz			-8.147 dBm																					
<p>8DPSK /MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz -0.679 dB</p> <p>Center 2.441500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.679 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440866 GHz</td> <td></td> <td></td> <td>-7.916 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.679 dB	2	F	1	f		2.440866 GHz			-7.916 dBm	
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ Z	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.679 dB																					
2	F	1	f		2.440866 GHz			-7.916 dBm																					
<p>8DPSK /HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 6.98 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz -1.420 dB</p> <p>Center 2.479500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-1.420 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479018 GHz</td> <td></td> <td></td> <td>-7.300 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-1.420 dB	2	F	1	f		2.479018 GHz			-7.300 dBm	
MKR	MODE	TRG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ Z	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-1.420 dB																					
2	F	1	f		2.479018 GHz			-7.300 dBm																					

## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

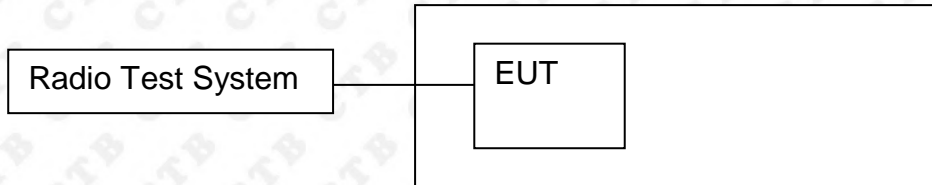

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 12.4 Test Result


Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS




## Test Graph

### Graphs


GFSK/Hop

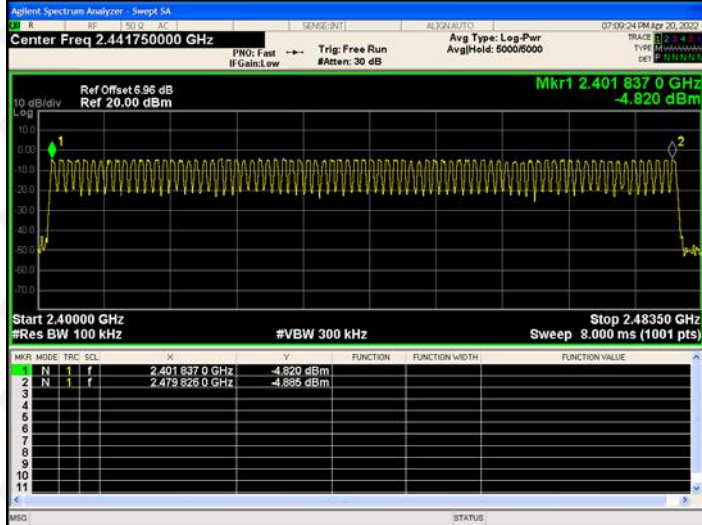

$\pi/4$ DQPSK/Hop

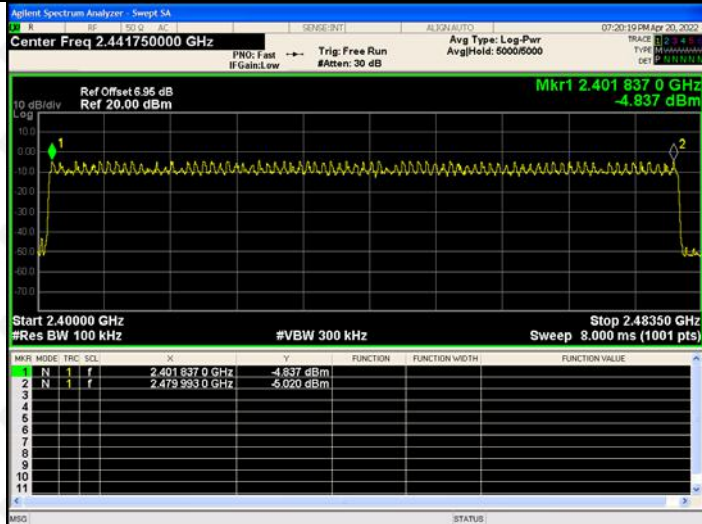


8DPSK/Hop

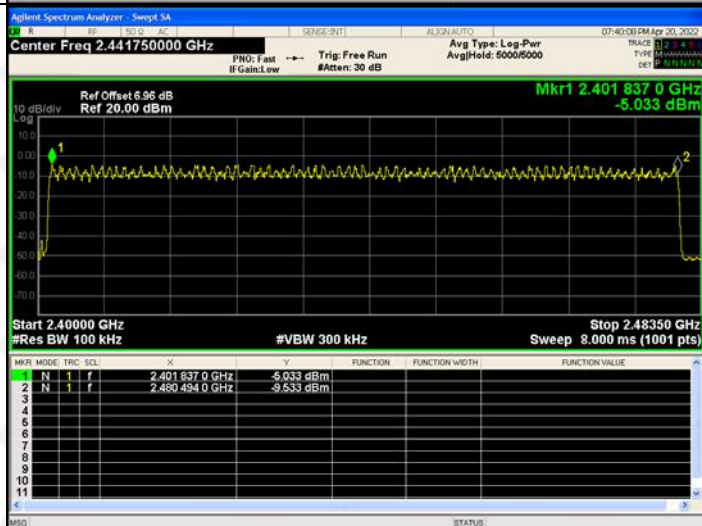

## 13. DWELL TIME

### 13.1 Block Diagram Of Test Setup

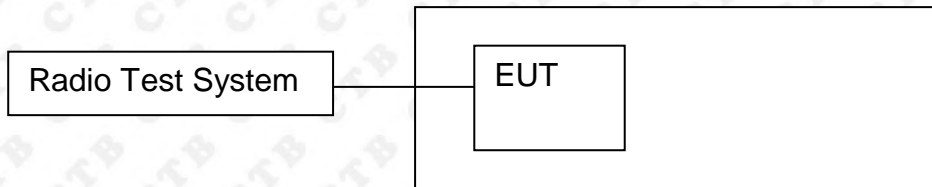

### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



### 13.4 Test Result

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.377	120.64	400	PASS
	DH1	MCH	0.377	120.64	400	PASS
	DH1	HCH	0.377	120.64	400	PASS
	DH3	LCH	1.639	262.24	400	PASS
	DH3	MCH	1.639	262.24	400	PASS
	DH3	HCH	1.638	262.08	400	PASS
	DH5	LCH	2.888	308.053	400	PASS
	DH5	MCH	2.888	308.053	400	PASS
	DH5	HCH	2.889	308.16	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5:  $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3:  $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1:  $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


## Test Graph

### Graphs


GFSK\_DH1/LCH

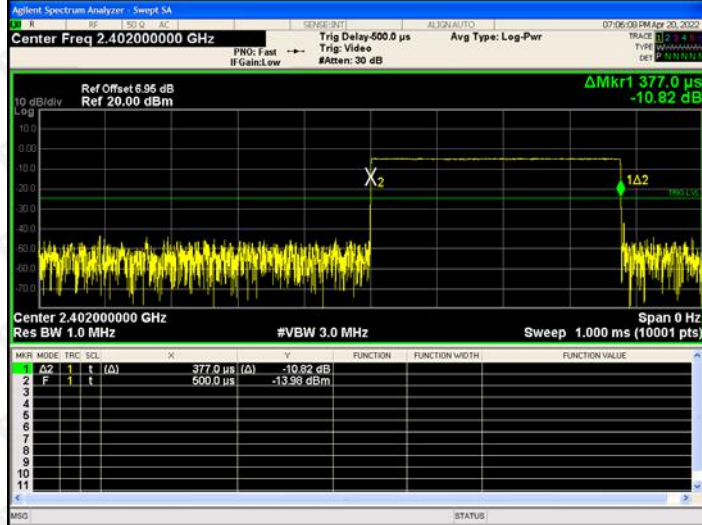


GFSK\_DH1/MCH

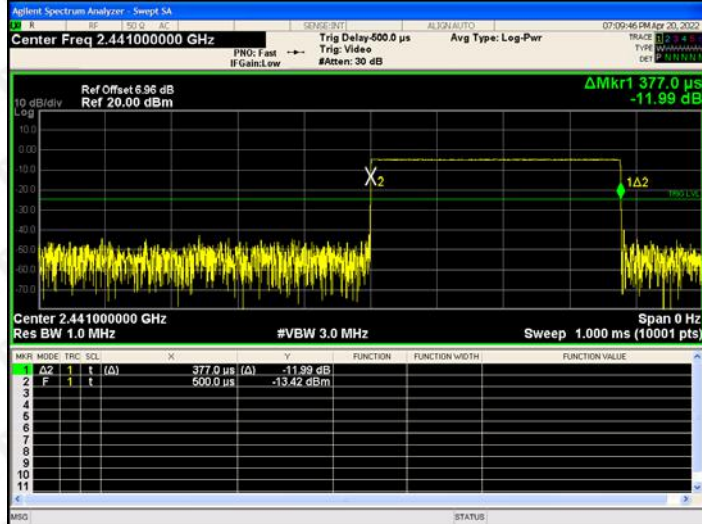

GFSK\_DH1/HCH

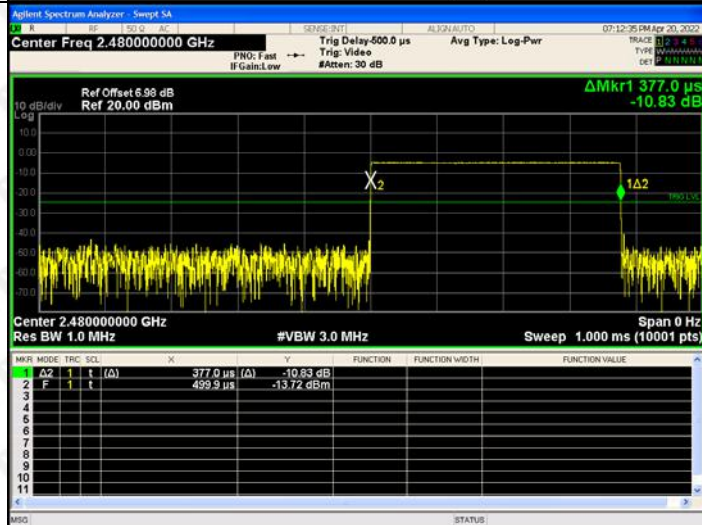



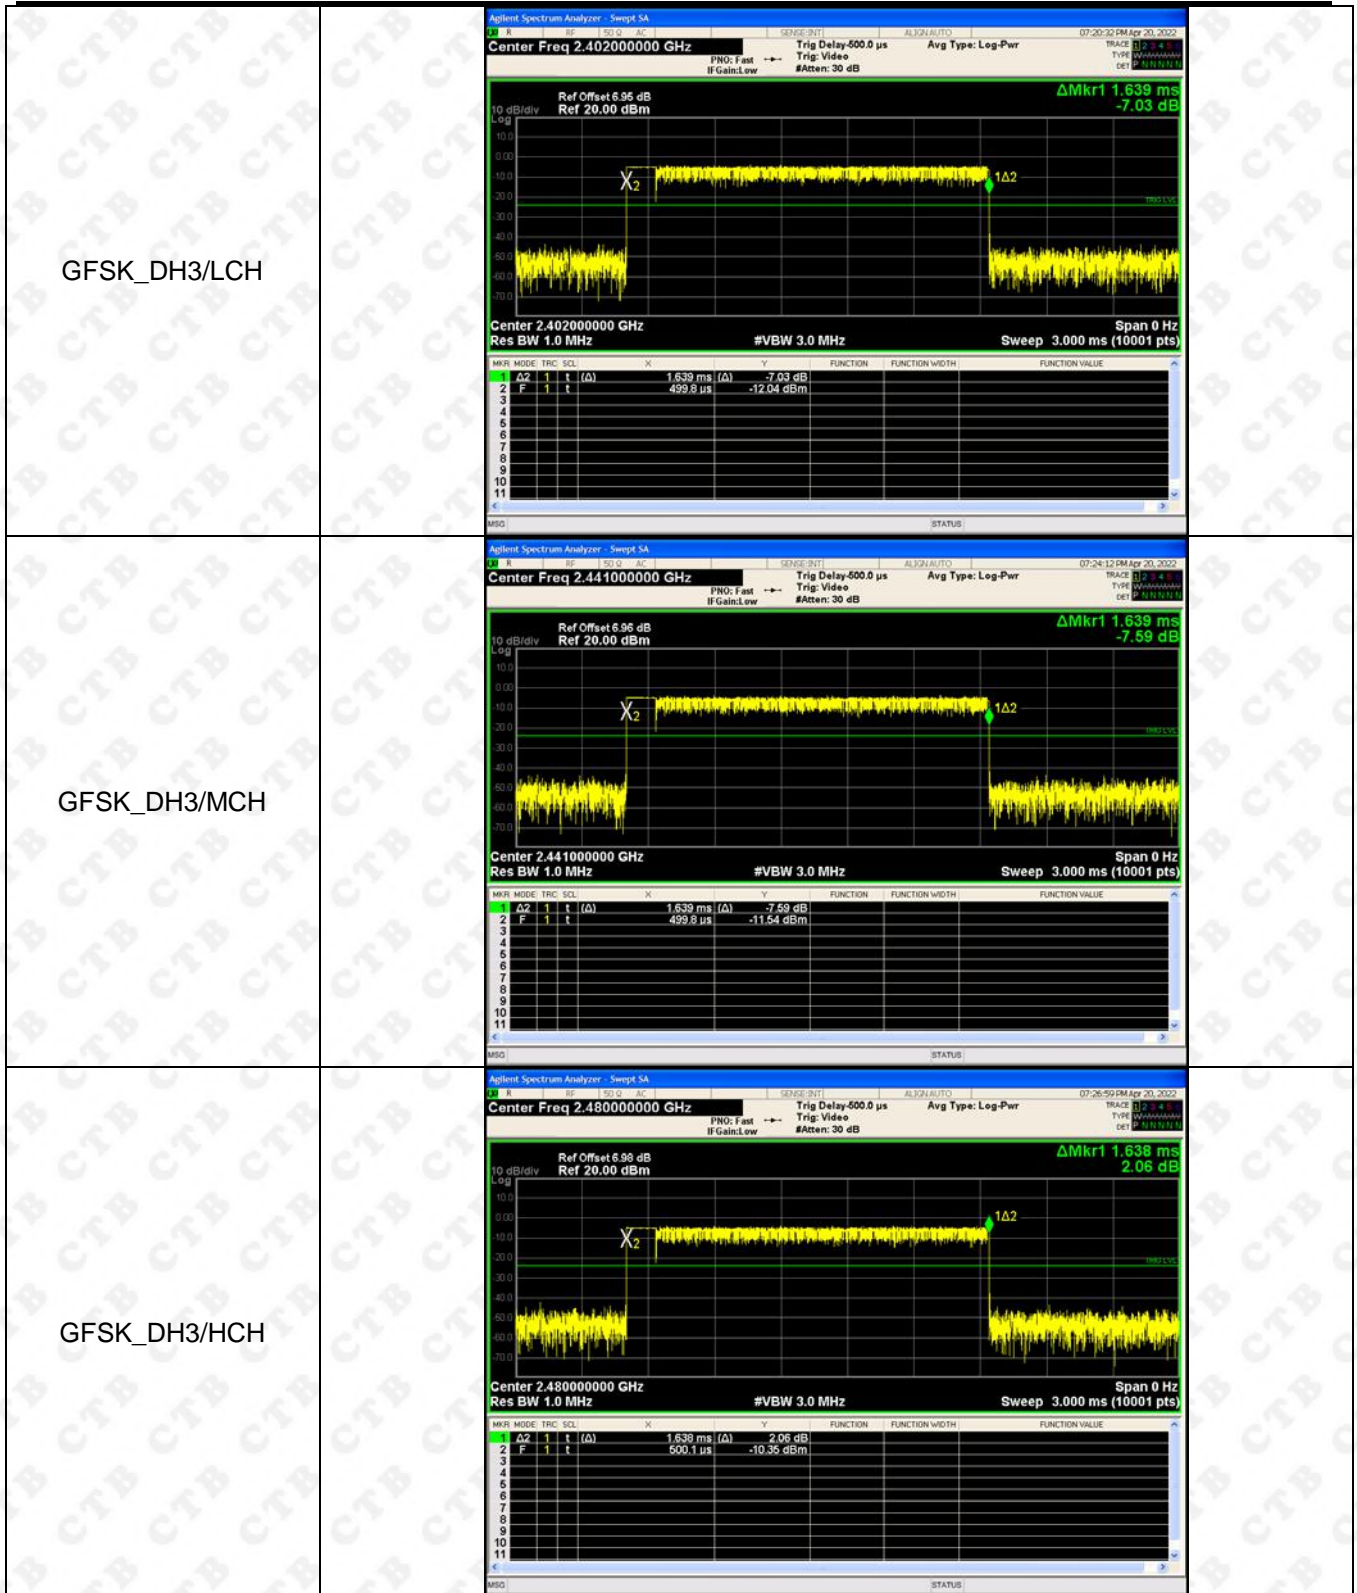





## 14. PSEUDORANDOM FREQUENCY


### 14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

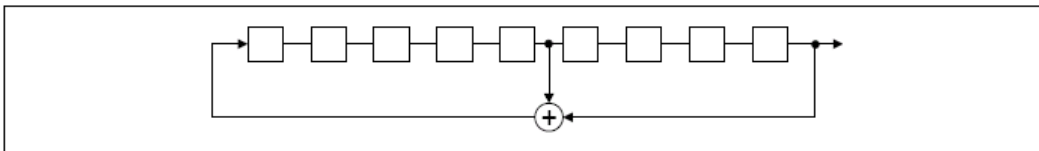

An example of Pseudorandom Frequency Hopping Sequence as follow:

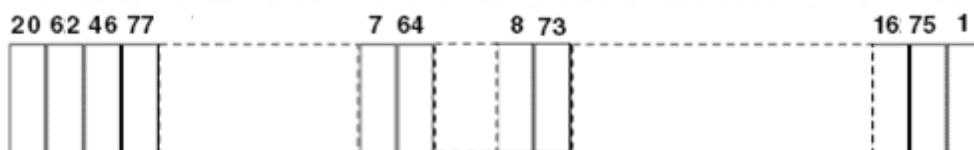

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.



## 15. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is 1dBi.

## 16. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2





## 17. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

Below 1G



Above 1G



## Conducted emissions



\*\*\*\*\* END OF REPORT \*\*\*\*\*