




## Appendix E: Band edge measurements

### Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	Low	2402	5.49	-44.75	≤-14.51	PASS
TX	Ant1	High	2480	5.22	-49.41	≤-14.78	PASS
TX	Ant2	Low	2402	5.09	-46.12	≤-14.91	PASS
TX	Ant2	High	2480	2.40	-49.2	≤-17.6	PASS
TX	Ant3	Low	2402	6.39	-42.09	≤-13.62	PASS
TX	Ant3	High	2480	5.02	-49.52	≤-14.98	PASS

### Test Graphs

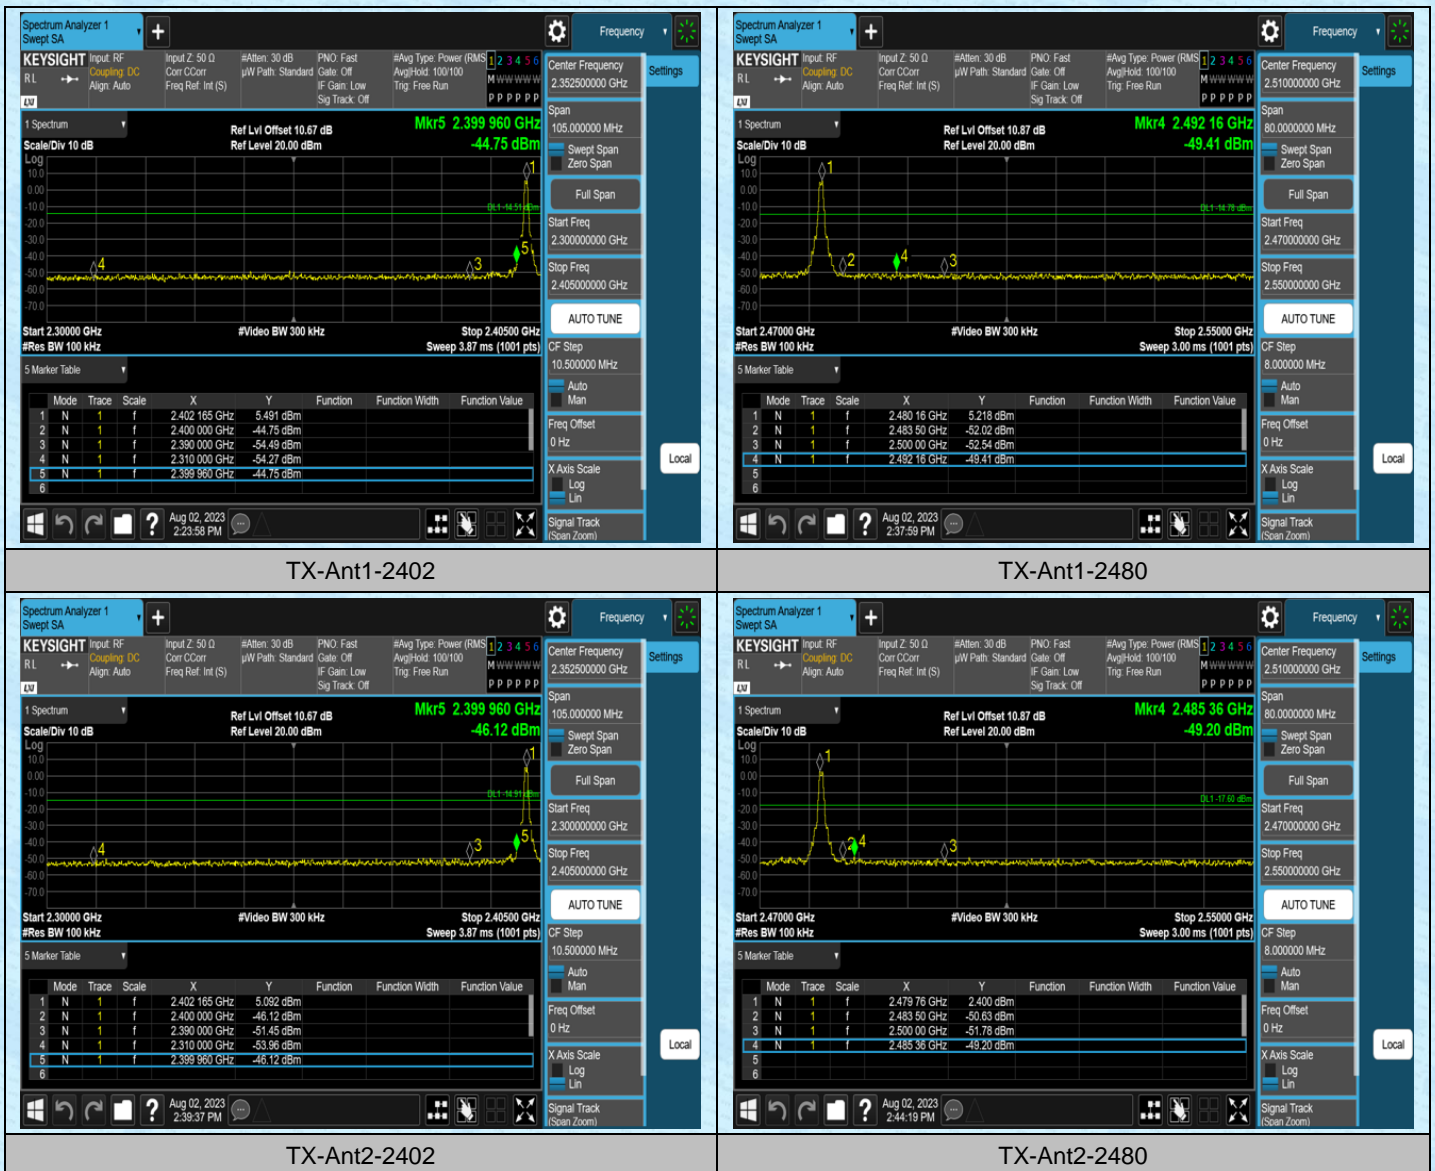

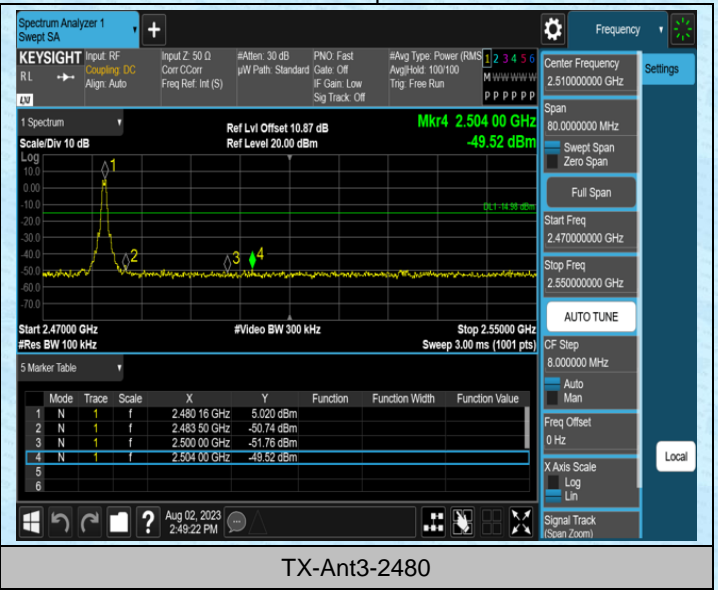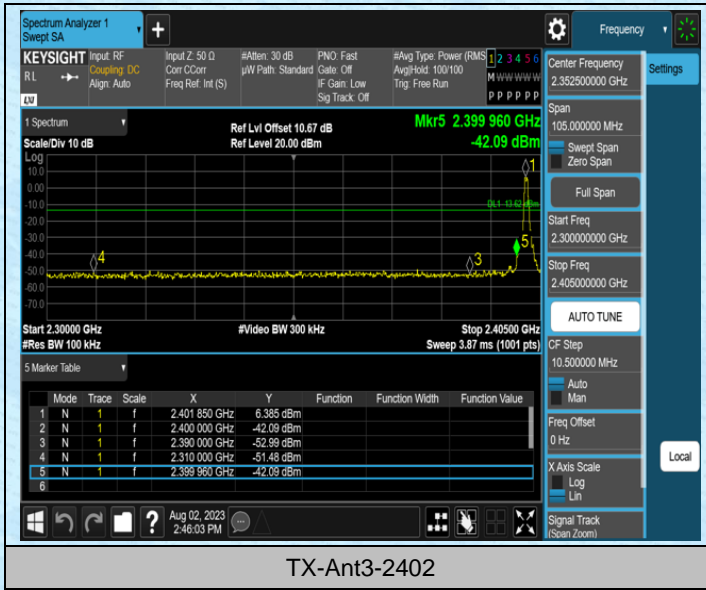


## Appendix F: Conducted Spurious Emission





### Test Result




TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2402	0~Reference	5.45	5.45	---	PASS
TX	Ant1	2402	30~1000	5.45	-62.1	≤-14.55	PASS
TX	Ant1	2402	1000~26500	5.45	-47.5	≤-14.55	PASS
TX	Ant1	2440	0~Reference	5.36	5.36	---	PASS
TX	Ant1	2440	30~1000	5.36	-61.74	≤-14.64	PASS
TX	Ant1	2440	1000~26500	5.36	-50.07	≤-14.64	PASS
TX	Ant1	2480	0~Reference	5.22	5.22	---	PASS
TX	Ant1	2480	30~1000	5.22	-62.45	≤-14.78	PASS
TX	Ant1	2480	1000~26500	5.22	-49.56	≤-14.78	PASS
TX	Ant2	2402	0~Reference	4.54	4.54	---	PASS
TX	Ant2	2402	30~1000	4.54	-62.18	≤-15.46	PASS
TX	Ant2	2402	1000~26500	4.54	-47.62	≤-15.46	PASS
TX	Ant2	2440	0~Reference	4.02	4.02	---	PASS
TX	Ant2	2440	30~1000	4.02	-62.64	≤-15.98	PASS
TX	Ant2	2440	1000~26500	4.02	-49.61	≤-15.98	PASS
TX	Ant2	2480	0~Reference	2.58	2.58	---	PASS
TX	Ant2	2480	30~1000	2.58	-62.21	≤-17.42	PASS
TX	Ant2	2480	1000~26500	2.58	-50.27	≤-17.42	PASS
TX	Ant3	2402	0~Reference	6.41	6.41	---	PASS
TX	Ant3	2402	30~1000	6.41	-62.46	≤-13.59	PASS
TX	Ant3	2402	1000~26500	6.41	-47.34	≤-13.59	PASS




TX	Ant3	2440	0~Reference	6.00	6.00	---	PASS
TX	Ant3	2440	30~1000	6.00	-62.11	≤-14	PASS
TX	Ant3	2440	1000~26500	6.00	-50.21	≤-14	PASS
TX	Ant3	2480	0~Reference	4.48	4.48	---	PASS
TX	Ant3	2480	30~1000	4.48	-61.4	≤-15.52	PASS
TX	Ant3	2480	1000~26500	4.48	-50.24	≤-15.52	PASS

## Test Graphs




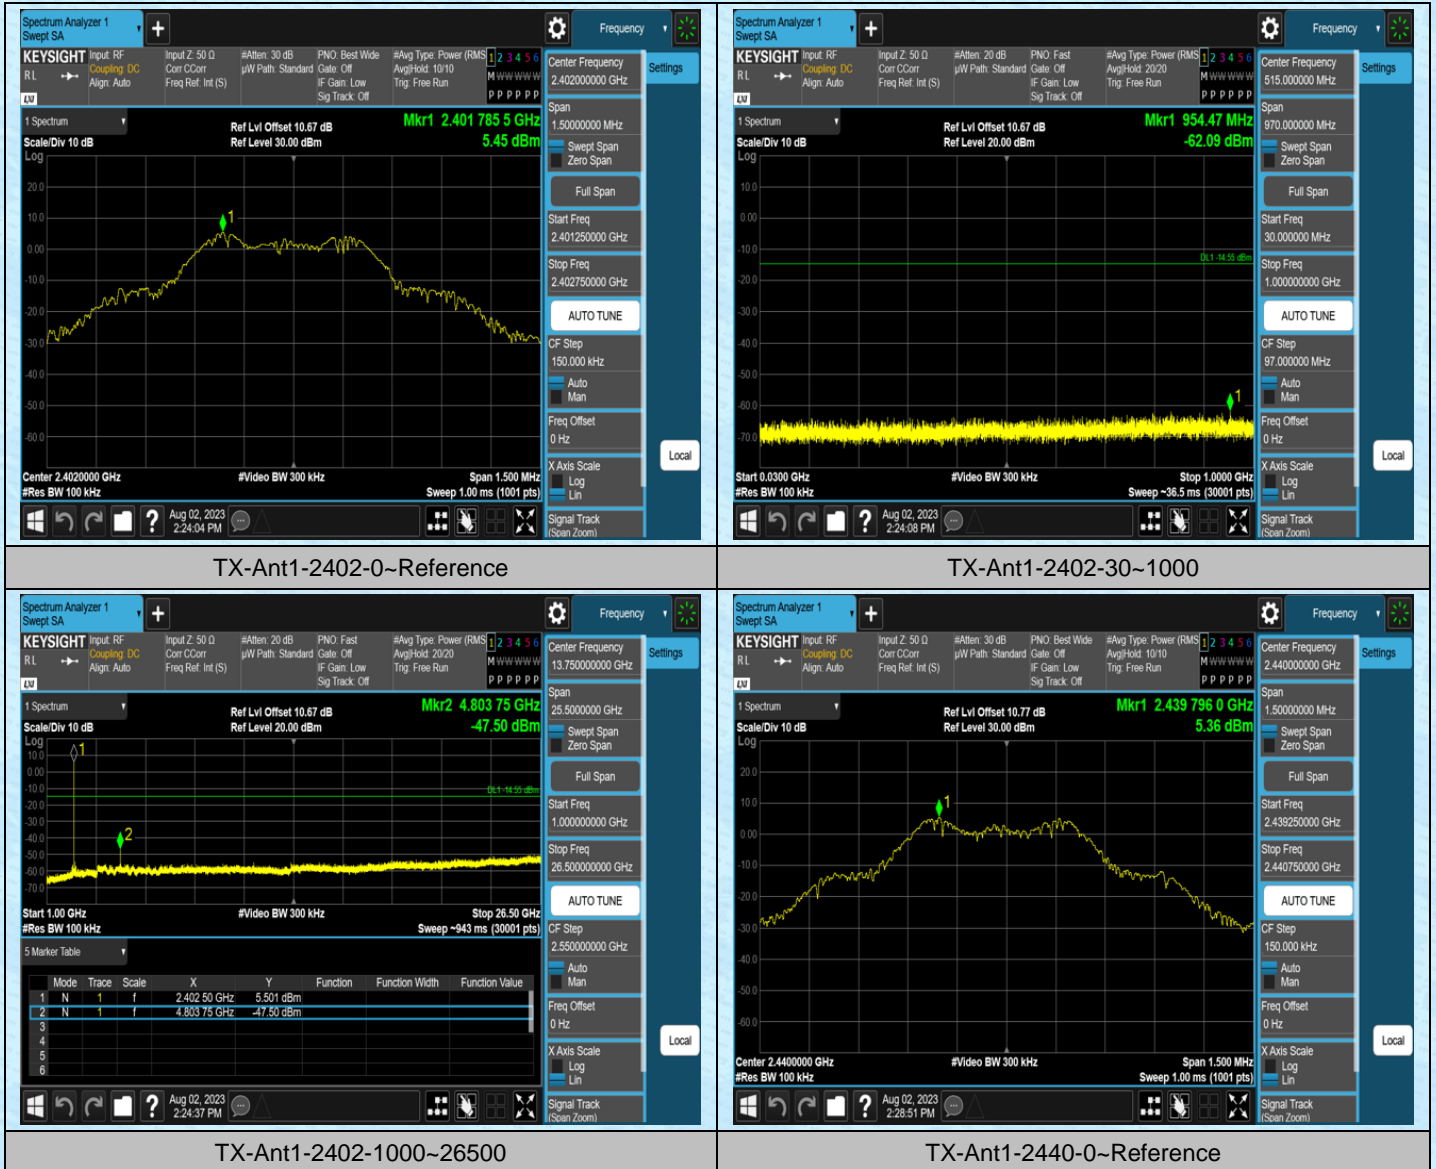


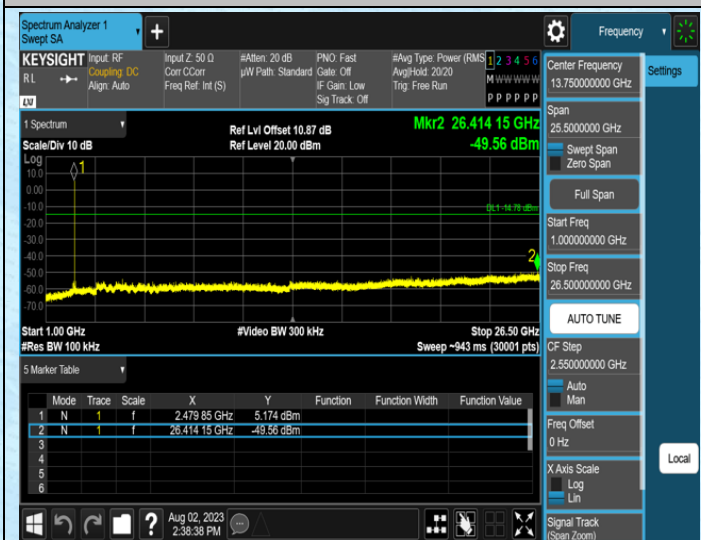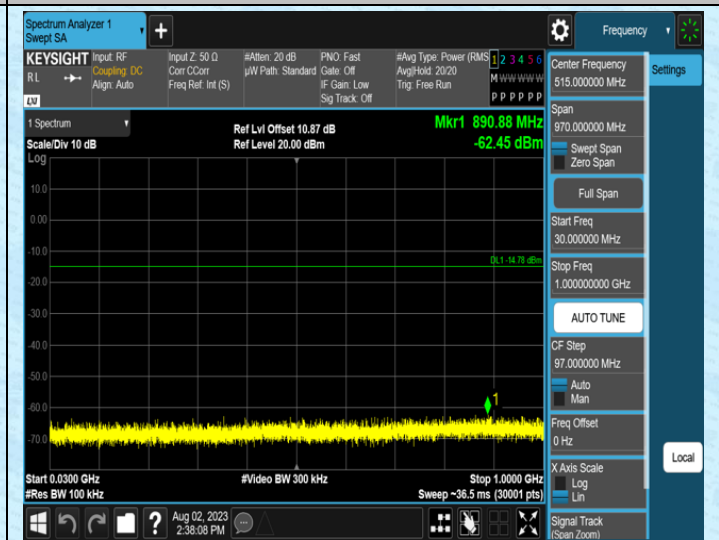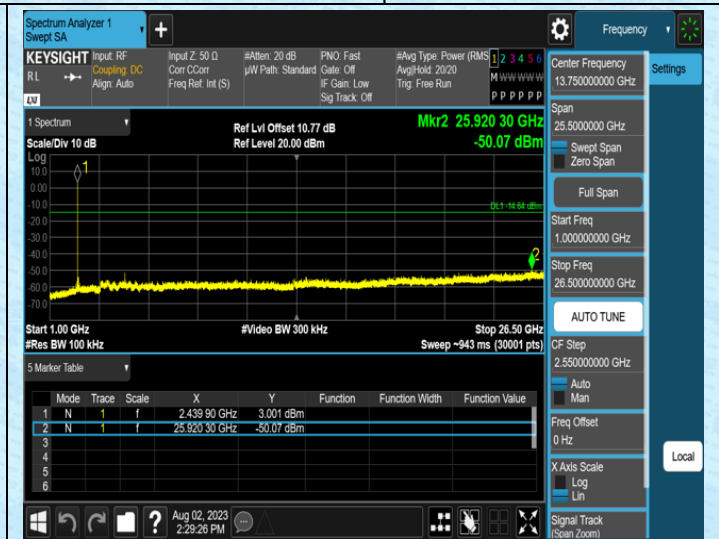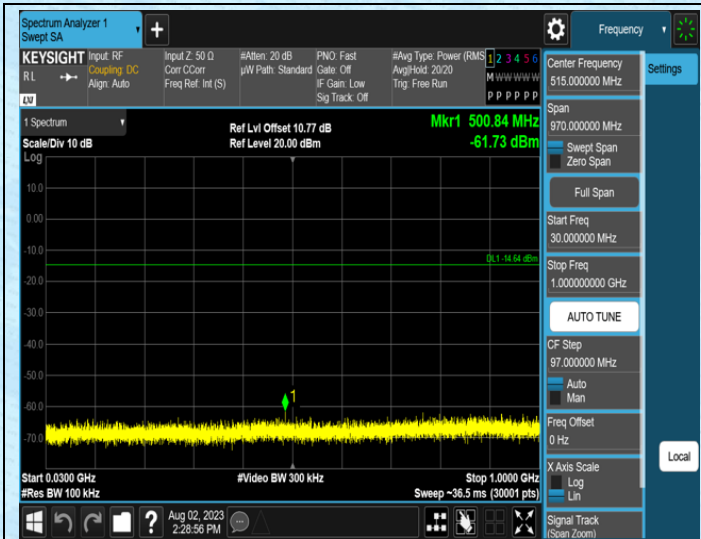

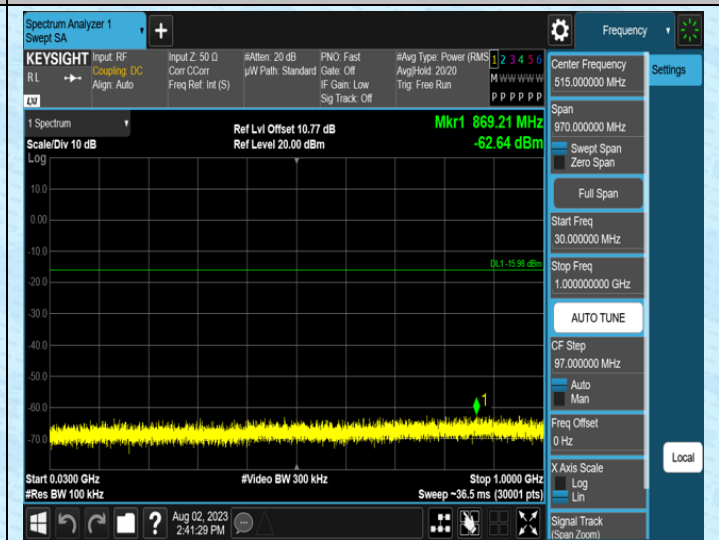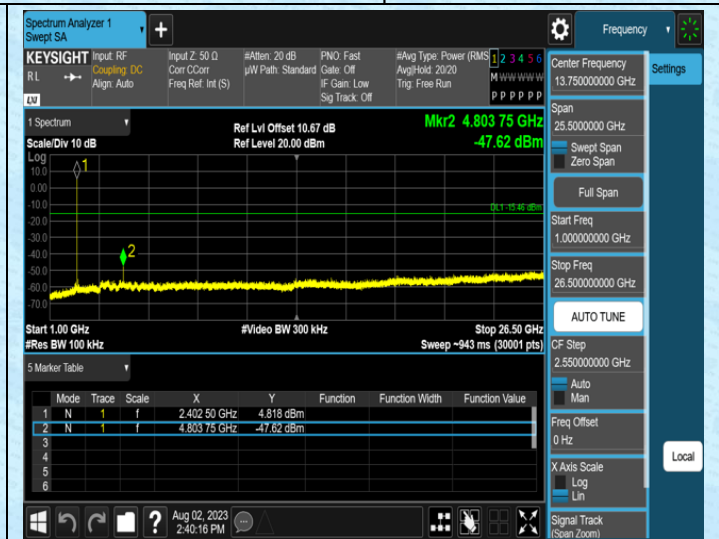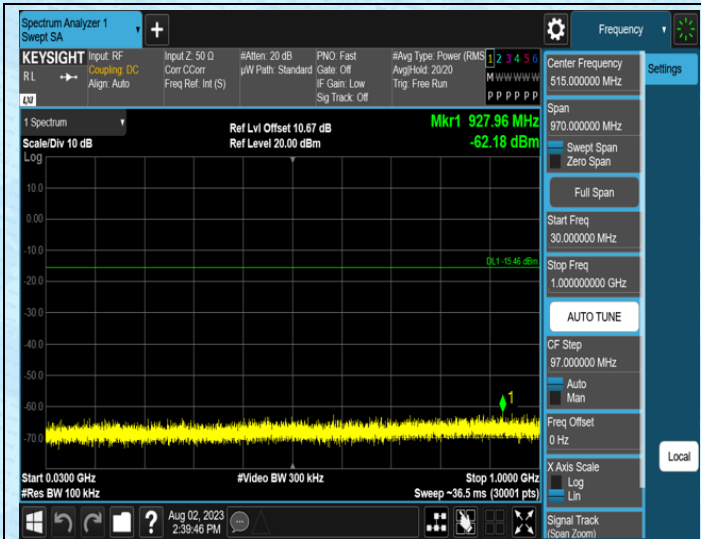

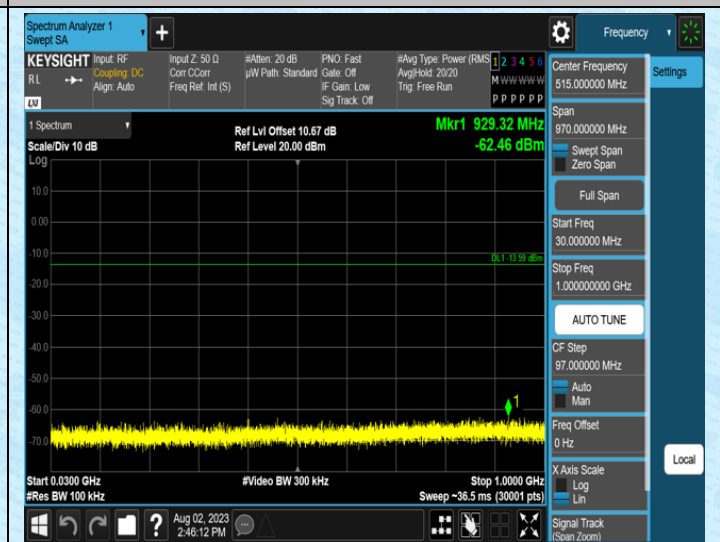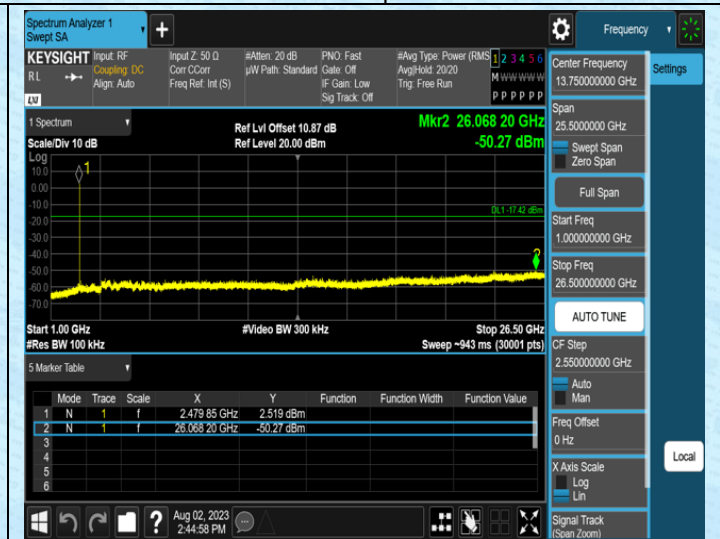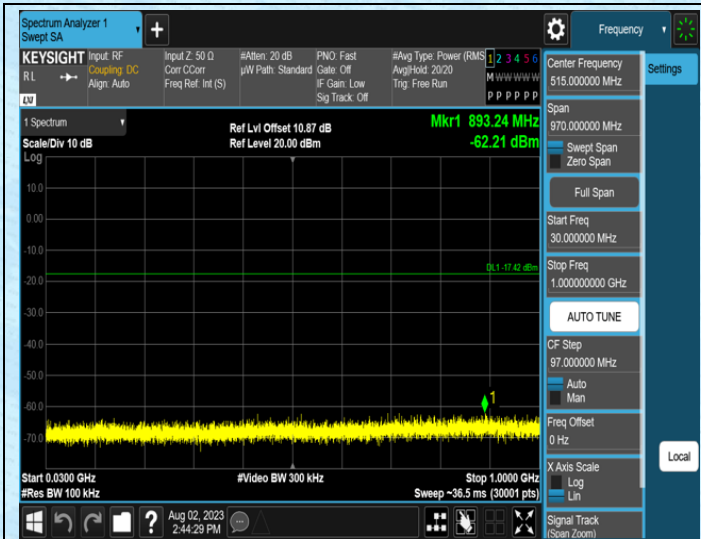



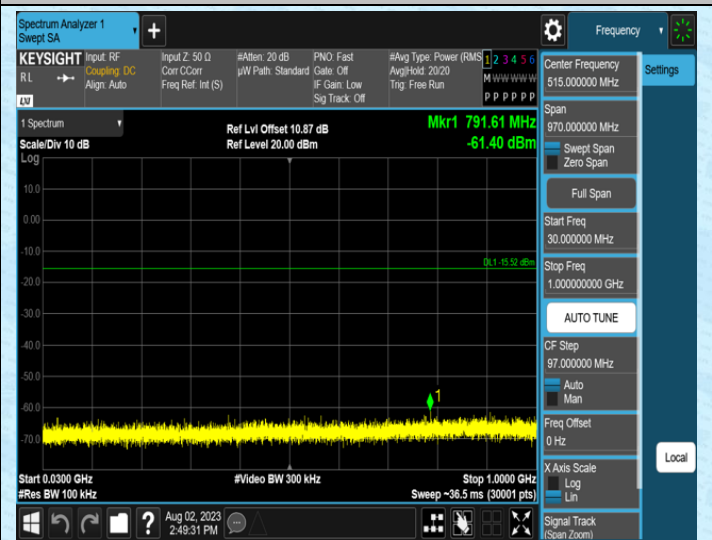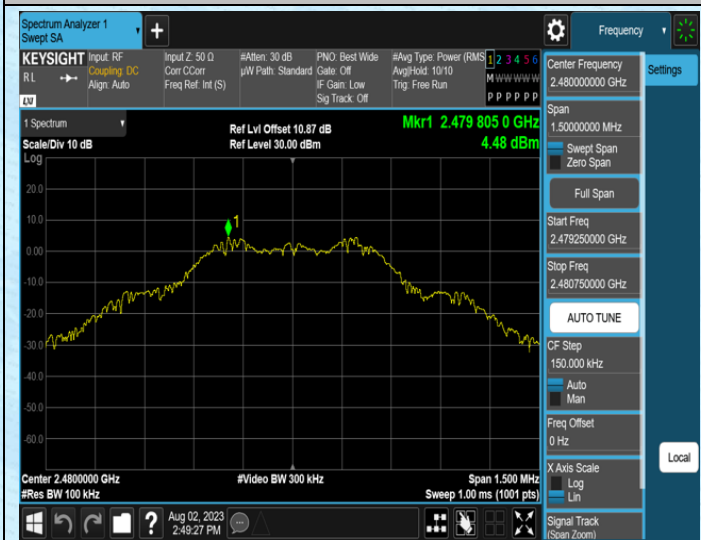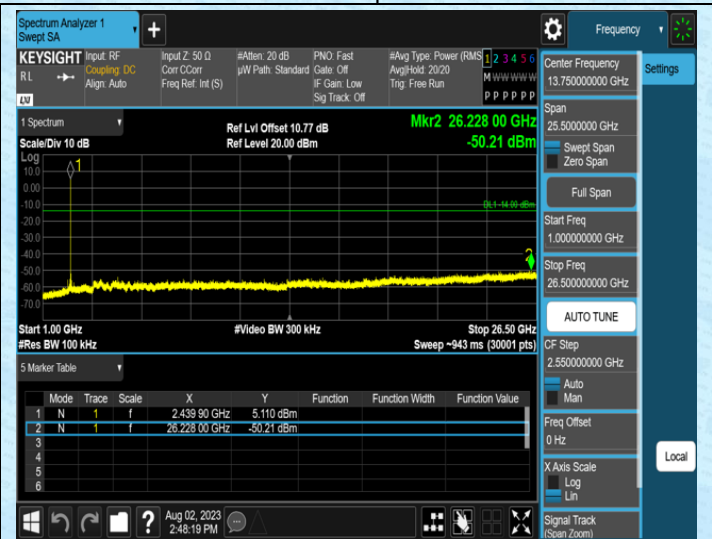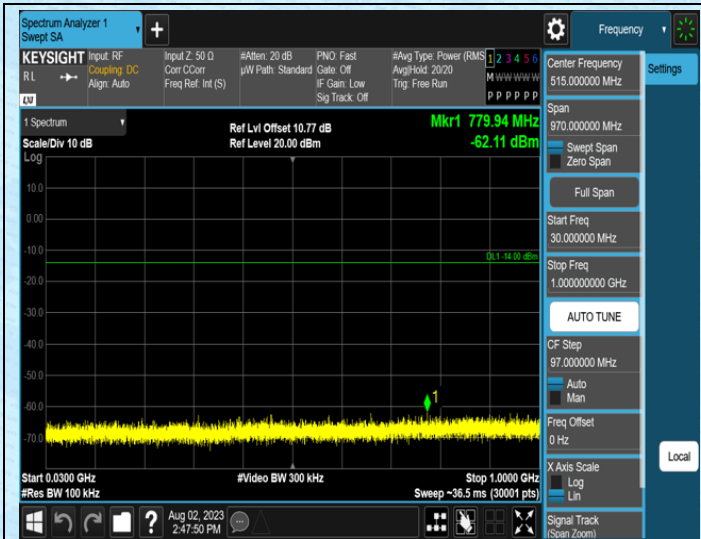

-----End-----