





EUT Mode : 802.11ax HE20 Partial RU

Plot on Channel 5955MHz 26RU0

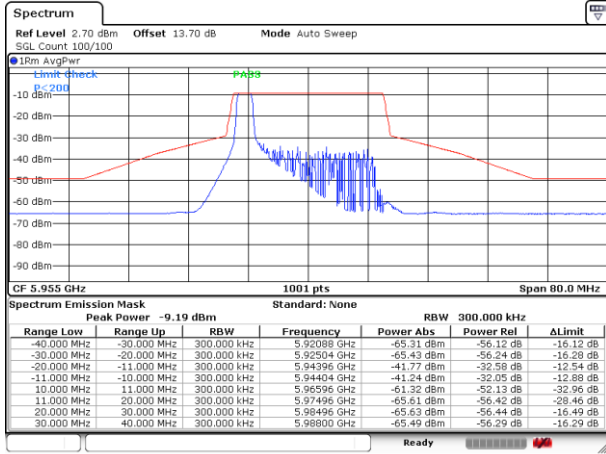


Date: 1.JUN.2023 23:52:13

Plot on Channel 5955MHz 52RU37

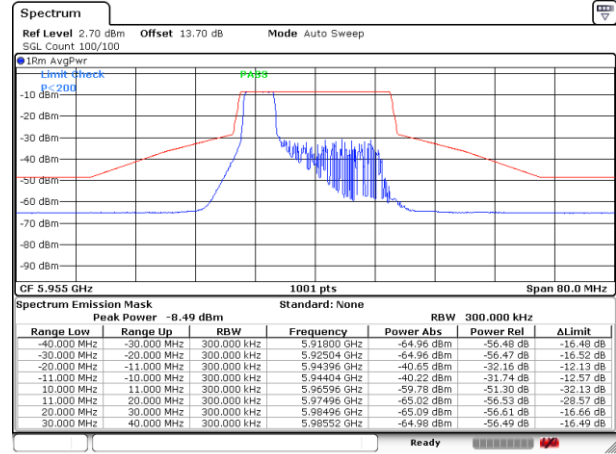

Date: 2.JUN.2023 00:00:18


Plot on Channel 5955MHz 106RU53

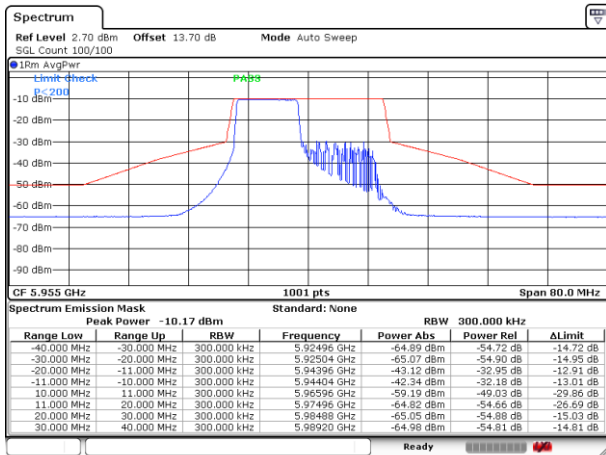

Date: 2.JUN.2023 00:03:48




Plot on Channel 6435MHz 26RU0

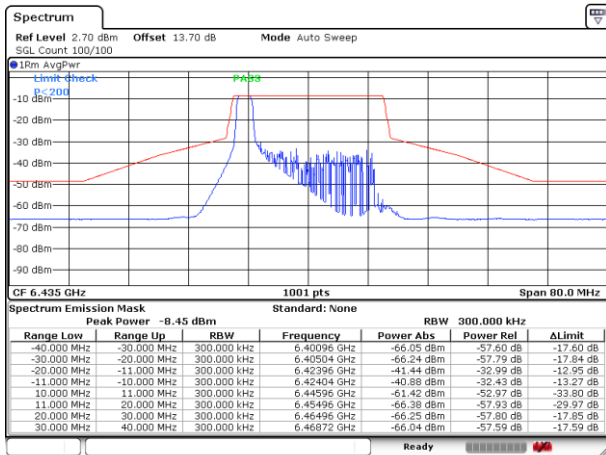


Date: 2.JUN.2023 00:18:22

Plot on Channel 6435MHz 52RU37

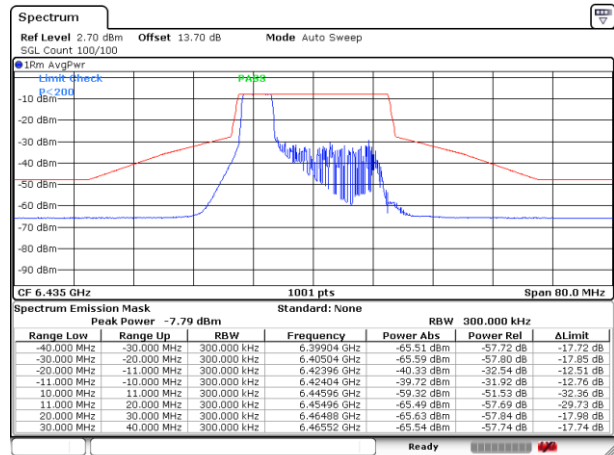

Date: 2.JUN.2023 00:20:44


Plot on Channel 6435MHz 106RU53

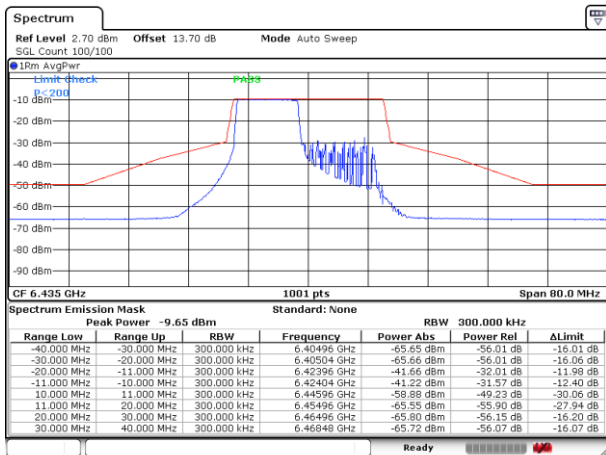

Date: 2.JUN.2023 01:03:12




Plot on Channel 6535MHz 26RU0

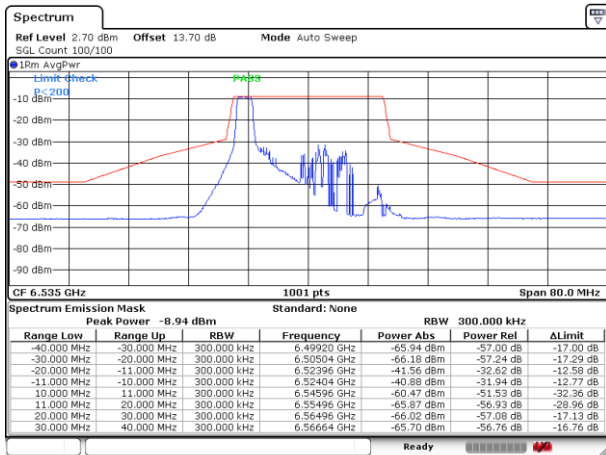


Date: 2.JUN.2023 01:26:06

Plot on Channel 6535MHz 52RU37

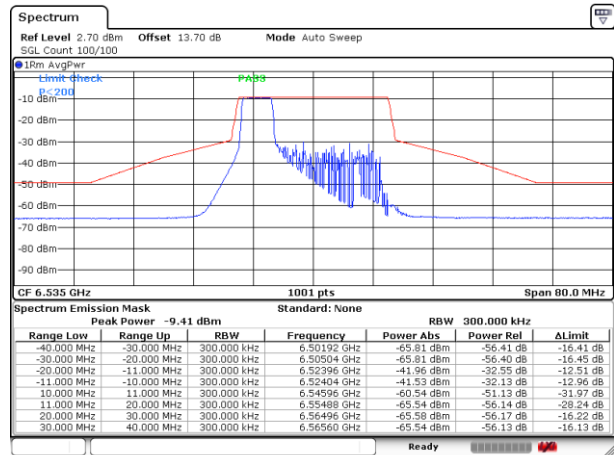

Date: 2.JUN.2023 01:27:58


Plot on Channel 6535MHz 106RU53

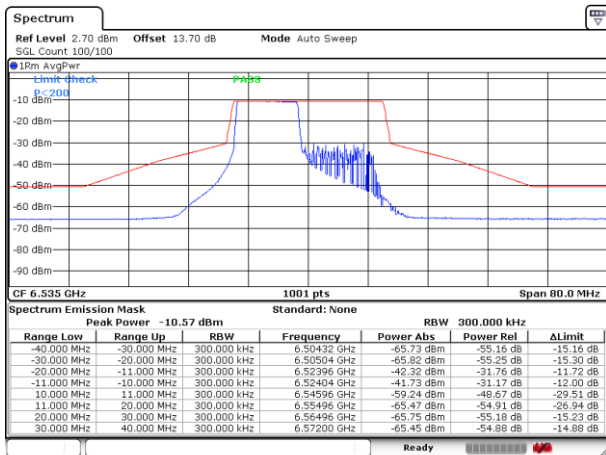

Date: 2.JUN.2023 01:29:31




Plot on Channel 7095MHz 26RU0

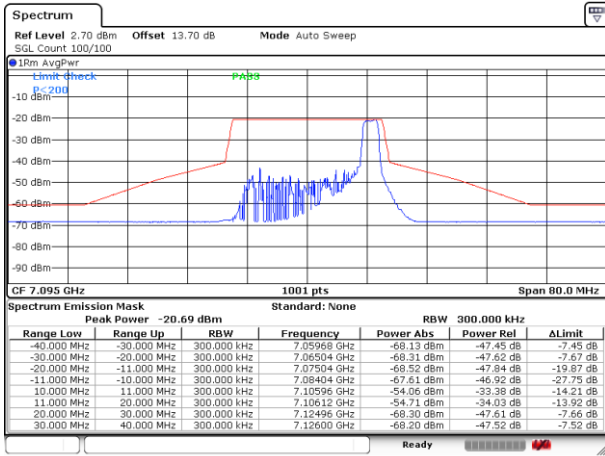


Date: 2.JUN.2023 01:32:40

Plot on Channel 7095MHz 52RU37

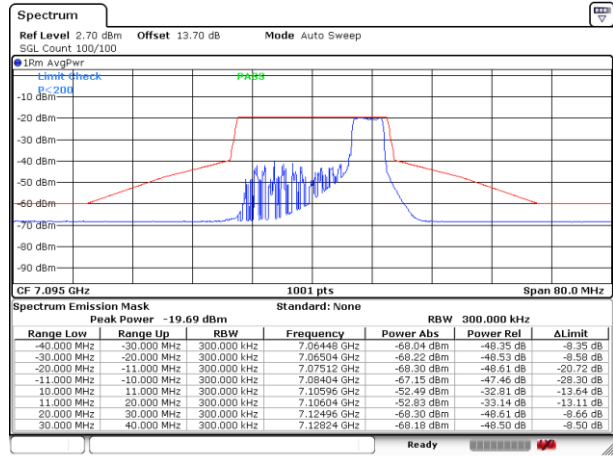

Date: 2.JUN.2023 01:34:37

Plot on Channel 7095MHz 106RU53

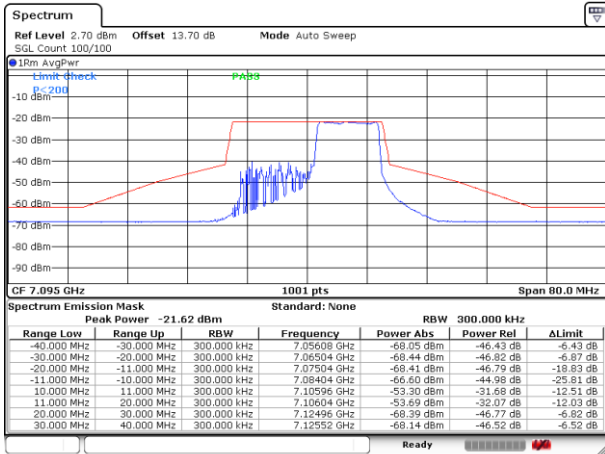

Date: 2.JUN.2023 01:35:58



3.5 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.5.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v01r01 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




3.5.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.5.4 Test Setup


For radiated emissions below 30MHz

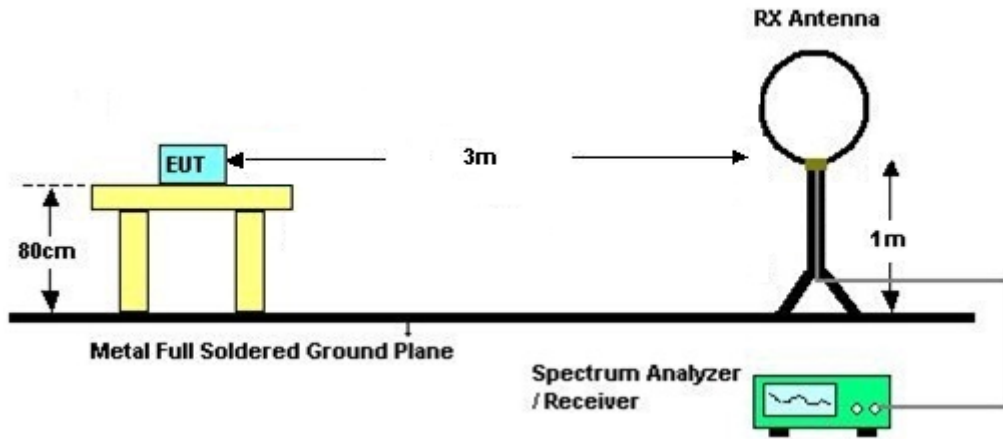

For radiated emissions from 30MHz to 1GHz

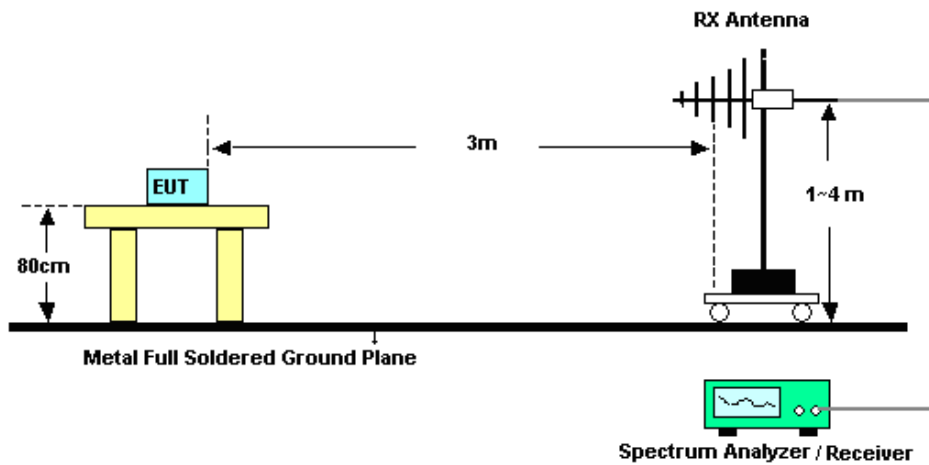

For radiated emissions above 1GHz

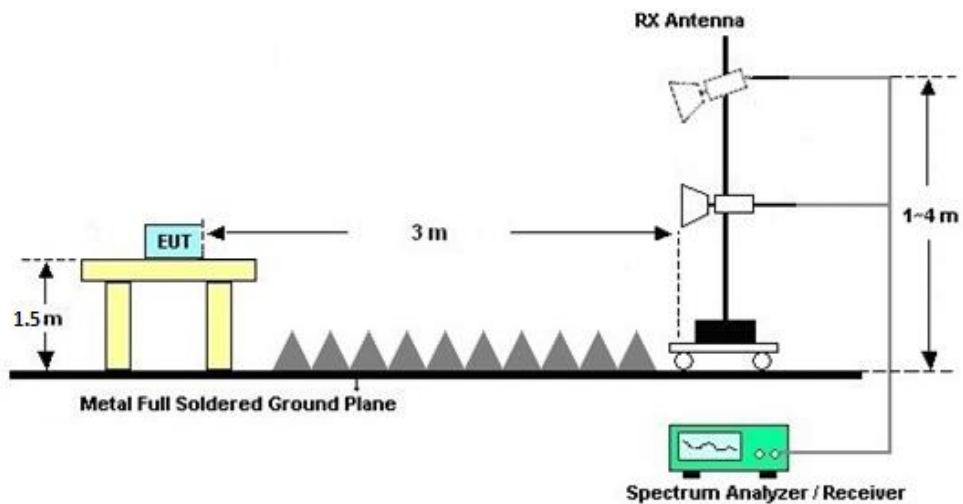



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	May 25, 2023~Jun. 09, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	May 25, 2023~Jun. 09, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	May 25, 2023~Jun. 09, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	May 08, 2023~Jun. 10, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	May 08, 2023~Jun. 10, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	May 08, 2023~Jun. 10, 2023	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 09, 2021	May 08, 2023~Jun. 10, 2023	Aug. 08, 2023	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	May 08, 2023~Jun. 10, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06, 2022	May 08, 2023~Jun. 10, 2023	Jul. 05, 2023	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	May 08, 2023~Jun. 10, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	May 08, 2023~Jun. 10, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	May 08, 2023~Jun. 10, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2022	May 08, 2023~Jun. 10, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	1 N/A	Nov. 10, 2022	May 08, 2023~Jun. 10, 2023	Nov. 09, 2023	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 08, 2023~Jun. 10, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 08, 2023~Jun. 10, 2023	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Jun. 07, 2023	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Jun. 07, 2023	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Jun. 07, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Jun. 07, 2023	Jul. 06, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %
Conducted Power Spectral Density	±1.32 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Chen Ran	Temperature:	21~25	°C
Test Date:	2023/5/25~2023/6/9	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5							
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
11a	6Mbps	1	001	5955	17.83	24.00	320
11a	6Mbps	1	049	6195	17.63	23.94	320
11a	6Mbps	1	093	6415	17.73	24.12	320

TEST RESULTS DATA
26dB and 99% OBW

U-NII-5								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
HE20	MCS0	1	001	5955	Full	19.23	23.58	320
HE20	MCS0	1	049	6195	Full	19.13	23.76	320
HE20	MCS0	1	093	6415	Full	19.23	23.70	320
HE40	MCS0	1	003	5965	Full	38.06	44.52	320
HE40	MCS0	1	051	6205	Full	38.06	44.40	320
HE40	MCS0	1	091	6405	Full	38.06	44.40	320
HE80	MCS0	1	007	5985	Full	77.92	88.56	320
HE80	MCS0	1	055	6225	Full	77.80	90.00	320
HE80	MCS0	1	087	6385	Full	78.04	88.56	320
HE160	MCS0	1	015	6025	Full	157.28	173.76	320
HE160	MCS0	1	047	6185	Full	157.04	171.84	320
HE160	MCS0	1	079	6345	Full	157.28	170.88	320

TEST RESULTS DATA
EIRP Power Table

U-NII-5											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
11a	6Mbps	1	001	5955	0.04	5.47	1.90	7.37	24.00	Pass	6.5
11a	6Mbps	1	049	6195	0.04	5.81	1.90	7.71	24.00	Pass	7
11a	6Mbps	1	093	6415	0.04	5.97	1.90	7.87	24.00	Pass	7

TEST RESULTS DATA
EIRP Power Table

U-NII-5												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
HE20	MCS0	1	001	5955	Full	0.03	6.15	1.90	8.05	24.00	Pass	7
HE20	MCS0	1	001	5955	26/0	0.03	-1.08	1.90	0.82	24.00	Pass	-2
HE20	MCS0	1	001	5955	52/37	0.03	1.92	1.90	3.82	24.00	Pass	1
HE20	MCS0	1	001	5955	106/53	0.03	3.79	1.90	5.69	24.00	Pass	4
HE20	MCS0	1	049	6195	Full	0.03	6.45	1.90	8.35	24.00	Pass	7.5
HE20	MCS0	1	093	6415	Full	0.03	6.65	1.90	8.55	24.00	Pass	7.5
HE40	MCS0	1	003	5965	Full	0.05	9.51	1.90	11.41	24.00	Pass	10
HE40	MCS0	1	051	6205	Full	0.05	9.82	1.90	11.72	24.00	Pass	10.5
HE40	MCS0	1	091	6405	Full	0.05	9.98	1.90	11.88	24.00	Pass	10.5
HE80	MCS0	1	007	5985	Full	0.05	12.55	1.90	14.45	24.00	Pass	13
HE80	MCS0	1	055	6225	Full	0.05	12.88	1.90	14.78	24.00	Pass	13.5
HE80	MCS0	1	087	6385	Full	0.05	13.17	1.90	15.07	24.00	Pass	13.5
HE160	MCS0	1	015	6025	Full	0.05	15.81	1.90	17.71	24.00	Pass	16
HE160	MCS0	1	047	6185	Full	0.05	16.03	1.90	17.93	24.00	Pass	16
HE160	MCS0	1	079	6345	Full	0.05	16.82	1.90	18.72	24.00	Pass	16.5

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
11a	6Mbps	1	001	5955	0.04	-6.18	1.90	-4.28	-1.00	Pass
11a	6Mbps	1	049	6195	0.04	-6.14	1.90	-4.24	-1.00	Pass
11a	6Mbps	1	093	6415	0.04	-6.23	1.90	-4.33	-1.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-5											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
HE20	MCS0	1	001	5955	Full	0.03	-6.56	1.90	-4.66	-1.00	Pass
HE20	MCS0	1	001	5955	26/0	0.03	-4.12	1.90	-2.22	-1.00	Pass
HE20	MCS0	1	001	5955	52/37	0.03	-3.81	1.90	-1.91	-1.00	Pass
HE20	MCS0	1	001	5955	106/53	0.03	-4.74	1.90	-2.84	-1.00	Pass
HE20	MCS0	1	049	6195	Full	0.03	-5.99	1.90	-4.09	-1.00	Pass
HE20	MCS0	1	093	6415	Full	0.03	-6.16	1.90	-4.26	-1.00	Pass
HE40	MCS0	1	003	5965	Full	0.05	-5.57	1.90	-3.67	-1.00	Pass
HE40	MCS0	1	051	6205	Full	0.05	-5.49	1.90	-3.59	-1.00	Pass
HE40	MCS0	1	091	6405	Full	0.05	-5.66	1.90	-3.76	-1.00	Pass
HE80	MCS0	1	007	5985	Full	0.05	-5.85	1.90	-3.95	-1.00	Pass
HE80	MCS0	1	055	6225	Full	0.05	-5.20	1.90	-3.30	-1.00	Pass
HE80	MCS0	1	087	6385	Full	0.05	-5.20	1.90	-3.30	-1.00	Pass
HE160	MCS0	1	015	6025	Full	0.05	-4.68	1.90	-2.78	-1.00	Pass
HE160	MCS0	1	047	6185	Full	0.05	-4.55	1.90	-2.65	-1.00	Pass
HE160	MCS0	1	079	6345	Full	0.05	-3.96	1.90	-2.06	-1.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6							
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
11a	6Mbps	1	097	6435	17.73	24.00	320
11a	6Mbps	1	105	6475	17.73	23.94	320
11a	6Mbps	1	113	6515	17.73	24.36	320

TEST RESULTS DATA
26dB and 99% OBW

U-NII-6								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
HE20	MCS0	1	097	6435	Full	19.23	23.46	320
HE20	MCS0	1	105	6475	Full	19.23	24.12	320
HE20	MCS0	1	113	6515	Full	19.23	24.12	320
HE40	MCS0	1	099	6445	Full	38.06	44.52	320
HE40	MCS0	1	107	6485	Full	38.06	44.04	320
HE80	MCS0	1	103	6465	Full	77.92	89.04	320

U-NII-6 straddle channel								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
HE40	MCS0	1	049	6525	Full	38.06	44.40	320
HE80	MCS0	1	093	6545	Full	77.92	89.52	320
HE160	MCS0	1	093	6505	Full	157.28	172.80	320

TEST RESULTS DATA
EIRP Power Table

U-NII-6											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
11a	6Mbps	1	097	6435	0.04	5.92	1.70	7.62	24.00	Pass	7
11a	6Mbps	1	105	6475	0.04	5.72	1.70	7.42	24.00	Pass	7
11a	6Mbps	1	113	6515	0.04	5.15	1.70	6.85	24.00	Pass	6.5

TEST RESULTS DATA
EIRP Power Table

U-NII-6												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
HE20	MCS0	1	097	6435	Full	0.03	6.62	1.70	8.32	24.00	Pass	7.5
HE20	MCS0	1	097	6435	26/0	0.03	-0.64	1.70	1.06	24.00	Pass	-2
HE20	MCS0	1	097	6435	52/37	0.03	2.48	1.70	4.18	24.00	Pass	1
HE20	MCS0	1	097	6435	106/53	0.03	3.92	1.70	5.62	24.00	Pass	4
HE20	MCS0	1	105	6475	Full	0.03	6.43	1.70	8.13	24.00	Pass	7.5
HE20	MCS0	1	113	6515	Full	0.03	5.71	1.70	7.41	24.00	Pass	7
HE40	MCS0	1	099	6445	Full	0.05	10.12	1.70	11.82	24.00	Pass	10.5
HE40	MCS0	1	107	6485	Full	0.05	9.40	1.70	11.10	24.00	Pass	10
HE80	MCS0	1	103	6465	Full	0.05	12.86	1.70	14.56	24.00	Pass	13.5

U-NII-6 straddle channel												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
HE40	MCS0	1	115	6525	Full	0.05	9.68	3.50	13.18	24.00	Pass	10.5
HE80	MCS0	1	119	6545	Full	0.05	12.02	3.50	15.52	24.00	Pass	13
HE160	MCS0	1	111	6505	Full	0.05	14.90	3.50	18.40	24.00	Pass	15

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
11a	6Mbps	1	097	6435	0.04	-6.31	1.70	-4.61	-1.00	Pass
11a	6Mbps	1	105	6475	0.04	-6.64	1.70	-4.94	-1.00	Pass
11a	6Mbps	1	113	6515	0.04	-7.18	1.70	-5.48	-1.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-6										
Mod.	Data Rate	N _{TX}	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
HE20	MCS0	1	6435	Full	0.03	-6.22	1.70	-4.52	-1.00	Pass
HE20	MCS0	1	6435	26/0	0.03	-3.72	1.70	-2.02	-1.00	Pass
HE20	MCS0	1	6435	52/37	0.03	-3.72	1.70	-2.02	-1.00	Pass
HE20	MCS0	1	6435	106/53	0.03	-4.47	1.70	-2.77	-1.00	Pass
HE20	MCS0	1	6475	Full	0.03	-6.53	1.70	-4.83	-1.00	Pass
HE20	MCS0	1	6515	Full	0.03	-7.09	1.70	-5.39	-1.00	Pass
HE40	MCS0	1	6445	Full	0.05	-5.57	1.70	-3.87	-1.00	Pass
HE40	MCS0	1	6485	Full	0.05	-6.31	1.70	-4.61	-1.00	Pass
HE80	MCS0	1	6465	Full	0.05	-5.70	1.70	-4.00	-1.00	Pass

U-NII-6 straddle channel										
Mod.	Data Rate	N _{TX}	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
HE40	MCS0	1	6525	Full	0.05	-5.98	3.50	-2.48	-1.00	Pass
HE80	MCS0	1	6545	Full	0.05	-6.42	3.50	-2.92	-1.00	Pass
HE160	MCS0	1	6505	Full	0.05	-5.62	3.50	-2.12	-1.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7						
Mod.	Data Rate	NTX	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
11a	6Mbps	1	6535	17.78	23.88	320
11a	6Mbps	1	6695	17.73	24.06	320
11a	6Mbps	1	6855	17.73	24.12	320

TEST RESULTS DATA
26dB and 99% OBW

U-NII-7							
Mod.	Data Rate	N _{TX}	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
HE20	MCS0	1	6535	Full	19.23	23.82	320
HE20	MCS0	1	6695	Full	19.23	23.94	320
HE20	MCS0	1	6855	Full	19.18	23.64	320
HE40	MCS0	1	6565	Full	38.06	44.52	320
HE40	MCS0	1	6685	Full	38.06	44.64	320
HE40	MCS0	1	6845	Full	38.06	44.16	320
HE80	MCS0	1	6625	Full	78.04	90.48	320
HE80	MCS0	1	6705	Full	77.68	89.28	320
HE80	MCS0	1	6785	Full	77.92	89.04	320
HE160	MCS0	1	6665	Full	157.28	173.28	320

U-NII-7 straddle channel							
Mod.	Data Rate	N _{TX}	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
HE80	MCS0	1	6865	Full	78.04	90.96	320
HE160	MCS0	1	6825	Full	157.28	174.72	320

TEST RESULTS DATA
EIRP Power Table

U-NII-7										Power Setting
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
11a	6Mbps	1	6535	0.04	5.45	3.50	8.95	24.00	Pass	7
11a	6Mbps	1	6695	0.04	5.96	3.50	9.46	24.00	Pass	7
11a	6Mbps	1	6855	0.04	5.61	3.50	9.11	24.00	Pass	7
11a	6Mbps	1	6875	0.04	5.52	3.50	9.02	24.00	Pass	7

TEST RESULTS DATA
EIRP Power Table

U-NII-7											
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
HE20	MCS0	1	6535	Full	0.03	6.18	3.50	9.68	24.00	Pass	7.5
HE20	MCS0	1	6535	26/0	0.03	-1.11	3.50	2.39	24.00	Pass	-2
HE20	MCS0	1	6535	52/37	0.03	0.89	3.50	4.39	24.00	Pass	1
HE20	MCS0	1	6535	106/53	0.03	3.20	3.50	6.70	24.00	Pass	4
HE20	MCS0	1	6695	Full	0.03	6.68	3.50	10.18	24.00	Pass	7.5
HE20	MCS0	1	6855	Full	0.03	6.34	3.50	9.84	24.00	Pass	7.5
HE20	MCS0	1	6875	Full	0.03	6.28	3.50	9.78	24.00	Pass	6
HE40	MCS0	1	6565	Full	0.05	9.72	3.50	13.22	24.00	Pass	10.5
HE40	MCS0	1	6685	Full	0.05	9.66	3.50	13.16	24.00	Pass	10.5
HE40	MCS0	1	6845	Full	0.05	9.38	3.50	12.88	24.00	Pass	10.5
HE80	MCS0	1	6625	Full	0.05	12.73	3.50	16.23	24.00	Pass	13.5
HE80	MCS0	1	6705	Full	0.05	12.82	3.50	16.32	24.00	Pass	13.5
HE80	MCS0	1	6785	Full	0.05	12.17	3.50	15.67	24.00	Pass	13
HE80	MCS0	1	6865	Full	0.05	12.46	3.50	15.96	24.00	Pass	13.5
HE160	MCS0	1	6665	Full	0.05	12.75	3.50	16.25	24.00	Pass	13

U-NII-7 straddle channel											
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
HE80	MCS0	1	6865	Full	0.05	12.46	3.50	15.96	24.00	Pass	13.5
HE160	MCS0	1	6825	Full	0.05	12.81	3.50	16.31	24.00	Pass	13

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7									
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
11a	6Mbps	1	6535	0.04	-6.86	3.50	-3.36	-1.00	Pass
11a	6Mbps	1	6695	0.04	-6.25	3.50	-2.75	-1.00	Pass
11a	6Mbps	1	6855	0.04	-6.97	3.50	-3.47	-1.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-7										
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
HE20	MCS0	1	6535	Full	0.03	-6.77	3.50	-3.27	-1.00	Pass
HE20	MCS0	1	6535	26/0	0.03	-4.64	3.50	-1.14	-1.00	Pass
HE20	MCS0	1	6535	52/37	0.03	-4.61	3.50	-1.11	-1.00	Pass
HE20	MCS0	1	6535	106/53	0.03	-5.26	3.50	-1.76	-1.00	Pass
HE20	MCS0	1	6695	Full	0.03	-6.16	3.50	-2.66	-1.00	Pass
HE20	MCS0	1	6855	Full	0.03	-6.87	3.50	-3.37	-1.00	Pass
HE40	MCS0	1	6565	Full	0.05	-6.02	3.50	-2.52	-1.00	Pass
HE40	MCS0	1	6685	Full	0.05	-6.03	3.50	-2.53	-1.00	Pass
HE40	MCS0	1	6845	Full	0.05	-6.46	3.50	-2.96	-1.00	Pass
HE80	MCS0	1	6625	Full	0.05	-5.47	3.50	-1.97	-1.00	Pass
HE80	MCS0	1	6705	Full	0.05	-5.63	3.50	-2.13	-1.00	Pass
HE80	MCS0	1	6785	Full	0.05	-6.28	3.50	-2.78	-1.00	Pass
HE160	MCS0	1	6665	Full	0.05	-8.46	3.50	-4.96	-1.00	Pass

U-NII-7 straddle channel										
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
HE80	MCS0	1	6865	Full	0.05	-6.36	3.50	-2.86	-1.00	Pass
HE160	MCS0	1	6825	Full	0.05	-7.57	3.50	-4.07	-1.00	Pass

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8						
Mod.	Data Rate	NTX	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
11a	6Mbps	1	6895	17.68	24.12	320
11a	6Mbps	1	6995	17.73	23.10	320
11a	6Mbps	1	7095	17.53	23.46	320

U-NII-8 straddle channel						
Mod.	Data Rate	NTX	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
11a	6Mbps	1	6875	17.68	23.82	320

TEST RESULTS DATA
26dB EBW and 99% OBW

U-NII-8							
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
HE20	MCS0	1	6895	Full	19.18	23.70	320
HE20	MCS0	1	6995	Full	19.13	23.34	320
HE20	MCS0	1	7095	Full	19.18	23.58	320
HE40	MCS0	1	6925	Full	37.96	43.68	320
HE40	MCS0	1	7005	Full	37.96	43.32	320
HE40	MCS0	1	7085	Full	37.96	44.52	320
HE80	MCS0	1	6945	Full	77.80	90.00	320
HE80	MCS0	1	7025	Full	77.44	87.12	320
HE160	MCS0	1	6985	Full	157.28	175.68	320

U-NII-8 straddle channel							
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Channel Bandwidth Limit (MHz)
HE20	MCS0	1	6875	Full	19.18	23.52	320
HE40	MCS0	1	6885	Full	38.06	44.04	320

TEST RESULTS DATA
EIRP Power Table

U-NII-8										
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
11a	6Mbps	1	6895	0.04	5.50	2.50	8.00	24.00	Pass	7
11a	6Mbps	1	6995	0.04	5.95	2.50	8.45	24.00	Pass	7
11a	6Mbps	1	7095	0.04	5.89	2.50	8.39	24.00	Pass	7

U-NII-8 straddle channel										
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
11a	6Mbps	1	6875	0.04	5.52	3.50	9.02	24.00	Pass	7

TEST RESULTS DATA
EIRP Power Table

U-NII-8											Power Setting
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
HE20	MCS0	1	6895	Full	0.03	6.24	2.50	8.74	24.00	Pass	7.5
HE20	MCS0	1	6995	Full	0.03	6.63	2.50	9.13	24.00	Pass	7.5
HE20	MCS0	1	7095	Full	0.03	6.58	2.50	9.08	24.00	Pass	7.5
HE20	MCS0	1	7095	26/8	0.03	-1.41	2.50	1.09	24.00	Pass	-2
HE20	MCS0	1	7095	52/40	0.03	1.74	2.50	4.24	24.00	Pass	1
HE20	MCS0	1	7095	106/54	0.03	3.55	2.50	6.05	24.00	Pass	4
HE40	MCS0	1	6925	Full	0.05	9.28	2.50	11.78	24.00	Pass	10.5
HE40	MCS0	1	7005	Full	0.05	9.79	2.50	12.29	24.00	Pass	10.5
HE40	MCS0	1	7085	Full	0.05	9.28	2.50	11.78	24.00	Pass	10
HE80	MCS0	1	6945	Full	0.05	12.45	2.50	14.95	24.00	Pass	13.5
HE80	MCS0	1	7025	Full	0.05	12.42	2.50	14.92	24.00	Pass	13
HE160	MCS0	1	6985	Full	0.05	13.74	2.50	16.24	24.00	Pass	14

U-NII-8 straddle channel											Power Setting
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
HE20	MCS0	1	6875	Full	0.03	6.28	3.50	9.78	24.00	Pass	7.5
HE40	MCS0	1	6885	Full	0.05	9.26	3.50	12.76	24.00	Pass	10.5

TEST RESULTS DATA
EIRP Power Spectral Density

U-NII-8									
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
11a	6Mbps	1	6895	0.04	-7.43	2.50	-4.93	-1.00	Pass
11a	6Mbps	1	6995	0.04	-5.83	2.50	-3.33	-1.00	Pass
11a	6Mbps	1	7095	0.04	-5.89	2.50	-3.39	-1.00	Pass

U-NII-8 straddle channel									
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
11a	6Mbps	1	6875	0.04	-7.07	3.50	-3.57	-1.00	Pass

TEST RESULTS DATA
EIRP Power Spectral Density


U-NII-8										
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
HE20	MCS0	1	6895	Full	0.03	-7.01	2.50	-4.51	-1.00	Pass
HE20	MCS0	1	6995	Full	0.03	-5.71	2.50	-3.21	-1.00	Pass
HE20	MCS0	1	7095	Full	0.03	-5.86	2.50	-3.36	-1.00	Pass
HE20	MCS0	1	7095	26/8	0.03	-17.56	2.50	-15.06	-1.00	Pass
HE20	MCS0	1	7095	52/40	0.03	-17.02	2.50	-14.52	-1.00	Pass
HE20	MCS0	1	7095	106/54	0.03	-18.24	2.50	-15.74	-1.00	Pass
HE40	MCS0	1	6925	Full	0.05	-7.27	2.50	-4.77	-1.00	Pass
HE40	MCS0	1	7005	Full	0.05	-5.28	2.50	-2.78	-1.00	Pass
HE40	MCS0	1	7085	Full	0.05	-5.60	2.50	-3.10	-1.00	Pass
HE80	MCS0	1	6945	Full	0.05	-6.80	2.50	-4.30	-1.00	Pass
HE80	MCS0	1	7025	Full	0.05	-5.41	2.50	-2.91	-1.00	Pass
HE160	MCS0	1	6985	Full	0.05	-6.43	2.50	-3.93	-1.00	Pass

U-NII-8										
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
HE20	MCS0	1	6875	Full	0.03	-6.96	3.50	-3.46	-1.00	Pass
HE40	MCS0	1	6885	Full	0.05	-6.87	3.50	-3.37	-1.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

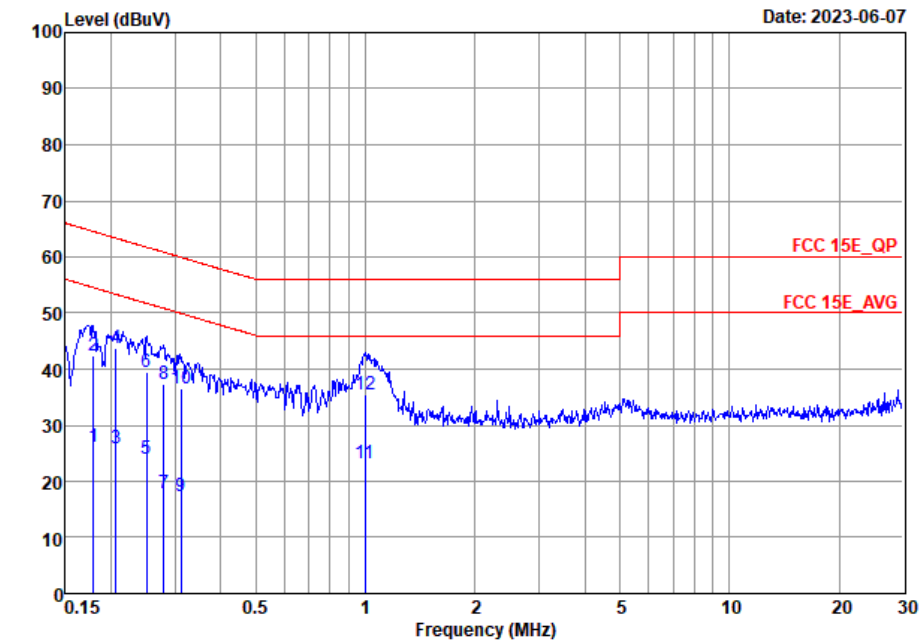


Site : CO01-SZ
 Condition: FCC 15E_QP LISN_20230420_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	26.00	-28.55	54.55	5.40	10.46	10.14	Average
2	0.18	42.50	-22.05	64.55	21.90	10.46	10.14	QP
3	0.21	25.86	-27.50	53.36	5.30	10.41	10.15	Average
4 *	0.21	43.76	-19.60	63.36	23.20	10.41	10.15	QP
5	0.25	24.13	-27.60	51.73	3.60	10.38	10.15	Average
6	0.25	39.53	-22.20	61.73	19.00	10.38	10.15	QP
7	0.28	17.93	-32.92	50.85	-2.59	10.37	10.15	Average
8	0.28	37.23	-23.62	60.85	16.71	10.37	10.15	QP
9	0.31	17.21	-32.72	49.93	-3.29	10.35	10.15	Average
10	0.31	36.51	-23.42	59.93	16.01	10.35	10.15	QP
11	1.00	23.30	-22.70	46.00	2.90	10.24	10.16	Average
12	1.00	35.40	-20.60	56.00	15.00	10.24	10.16	QP



Test Engineer :	Lily	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

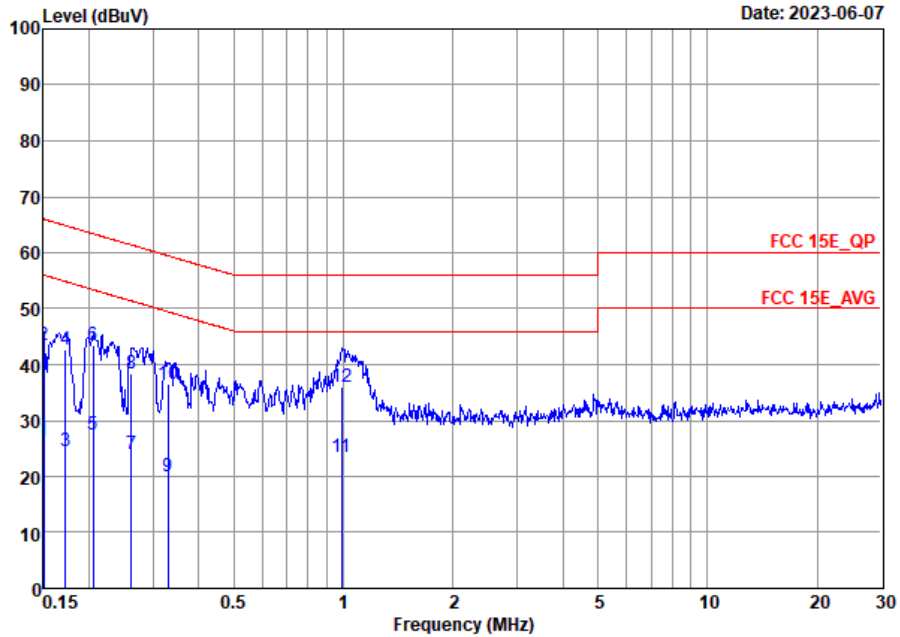

Site : CO01-SZ
 Condition: FCC 15E QP LISN 20230420 N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	26.39	-29.61	56.00	5.80	10.46	10.13	Average
2	0.15	43.49	-22.51	66.00	22.90	10.46	10.13	QP
3	0.17	24.56	-30.30	54.86	4.00	10.42	10.14	Average
4	0.17	42.66	-22.20	64.86	22.10	10.42	10.14	QP
5	0.21	27.50	-25.90	53.40	7.00	10.35	10.15	Average
6 *	0.21	43.60	-19.80	63.40	23.10	10.35	10.15	QP
7	0.26	23.87	-27.51	51.38	3.40	10.32	10.15	Average
8	0.26	38.47	-22.91	61.38	18.00	10.32	10.15	QP
9	0.33	20.13	-29.31	49.44	-0.30	10.27	10.16	Average
10	0.33	36.53	-22.91	59.44	16.10	10.27	10.16	QP
11	0.99	23.50	-22.50	46.00	3.10	10.24	10.16	Average
12	0.99	35.90	-20.10	56.00	15.50	10.24	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	50%
		Temperature :	20~22°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	UNII-5	5925-6425	802.11a	1	5955	6Mbps	-	-
Mode 2	UNII-5	5925-6425	802.11a	49	6195	6Mbps	-	-
Mode 3	UNII-5	5925-6425	802.11a	93	6415	6Mbps	-	-
Mode 4	UNII-6	6425-6525	802.11a	97	6435	6Mbps	-	-
Mode 5	UNII-6	6425-6525	802.11a	105	6475	6Mbps	-	-
Mode 6	UNII-6	6425-6525	802.11a	113	6515	6Mbps	-	-
Mode 7	UNII-7	6525-6875	802.11a	117	6535	6Mbps	-	-
Mode 8	UNII-7	6525-6875	802.11a	149	6695	6Mbps	-	-
Mode 9	UNII-7	6525-6875	802.11a	181	6855	6Mbps	-	-
Mode 10	UNII-8	6875-7125	802.11a	189	6895	6Mbps	-	-
Mode 11	UNII-8	6875-7125	802.11a	209	6995	6Mbps	-	-
Mode 12	UNII-8	6875-7125	802.11a	229	7095	6Mbps	-	-
Mode 13	UNII-5	5925-6425	802.11AX HE20	1	5955	MCS0	Full	-
Mode 14	UNII-5	5925-6425	802.11AX HE20	1	5955	MCS0	RU26/0	-
Mode 15	UNII-5	5925-6425	802.11AX HE20	1	5955	MCS0	RU52/37	-
Mode 16	UNII-5	5925-6425	802.11AX HE20	1	5955	MCS0	RU106/53	-
Mode 17	UNII-5	5925-6425	802.11AX HE20	49	6195	MCS0	Full	-
Mode 18	UNII-5	5925-6425	802.11AX HE20	93	6415	MCS0	Full	-
Mode 19	UNII-6	5925-6425	802.11AX HE20	97	6435	MCS0	Full	-
Mode 20	UNII-6	5925-6425	802.11AX HE20	97	6435	MCS0	26/0	-
Mode 21	UNII-6	5925-6425	802.11AX HE20	97	6435	MCS0	52/37	-
Mode 22	UNII-6	5925-6425	802.11AX HE20	97	6435	MCS0	106/53	-
Mode 23	UNII-6	6425-6525	802.11AX HE20	105	6475	MCS0	Full	-
Mode 24	UNII-6	6425-6525	802.11AX HE20	113	6515	MCS0	Full	-
Mode 25	UNII-7	6525-6875	802.11AX HE20	117	6535	MCS0	Full	-
Mode 26	UNII-7	6525-6875	802.11AX HE20	117	6535	MCS0	26/0	-
Mode 27	UNII-7	6525-6875	802.11AX HE20	117	6535	MCS0	52/37	-
Mode 28	UNII-7	6525-6875	802.11AX HE20	117	6535	MCS0	106/53	-
Mode 29	UNII-7	6525-6875	802.11AX HE20	149	6695	MCS0	Full	-
Mode 30	UNII-7	6525-6875	802.11AX HE20	181	6855	MCS0	Full	-
Mode 31	UNII-7	6525-6875	802.11AX HE20	185	6875	MCS0	Full	-
Mode 32	UNII-8	6875-7125	802.11AX HE20	189	6895	MCS0	Full	-
Mode 33	UNII-8	6875-7125	802.11AX HE20	209	6995	MCS0	Full	-
Mode 34	UNII-8	6875-7125	802.11AX HE20	229	7095	MCS0	Full	-
Mode 35	UNII-8	6875-7125	802.11AX HE20	229	7095	MCS0	RU26/8	-



Mode	Band	Band (GHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 36	UNII-8	6875-7125	802.11AX HE20	229	7095	MCS0	RU52/40	-
Mode 37	UNII-8	6875-7125	802.11AX HE20	229	7095	MCS0	RU106/54	-
Mode 38	UNII-5	5925-6425	802.11AX HE40	3	5965	MCS0	Full	-
Mode 39	UNII-5	5925-6425	802.11AX HE40	51	6205	MCS0	Full	-
Mode 40	UNII-5	5925-6425	802.11AX HE40	91	6405	MCS0	Full	-
Mode 41	UNII-6	6425-6525	802.11AX HE40	99	6445	MCS0	Full	-
Mode 42	UNII-6	6425-6525	802.11AX HE40	107	6485	MCS0	Full	-
Mode 43	UNII-6	6425-6525	802.11AX HE40	115	6525	MCS0	Full	-
Mode 44	UNII-7	6525-6875	802.11AX HE40	123	6565	MCS0	Full	-
Mode 45	UNII-7	6525-6875	802.11AX HE40	147	6685	MCS0	Full	-
Mode 46	UNII-7	6525-6875	802.11AX HE40	179	6845	MCS0	Full	-
Mode 47	UNII-7	6525-6875	802.11AX HE40	187	6885	MCS0	Full	-
Mode 48	UNII-8	6875-7125	802.11AX HE40	195	6925	MCS0	Full	-
Mode 49	UNII-8	6875-7125	802.11AX HE40	211	7005	MCS0	Full	-
Mode 50	UNII-8	6875-7125	802.11AX HE40	227	7085	MCS0	Full	-
Mode 51	UNII-5	5925-6425	802.11AX HE80	7	5985	MCS0	Full	-
Mode 52	UNII-5	5925-6425	802.11AX HE80	55	6255	MCS0	Full	-
Mode 53	UNII-5	5925-6425	802.11AX HE80	87	6385	MCS0	Full	-
Mode 54	UNII-6	6425-6525	802.11AX HE80	103	6465	MCS0	Full	-
Mode 55	UNII-6	6425-6525	802.11AX HE80	119	6545	MCS0	Full	-
Mode 56	UNII-7	6525-6875	802.11AX HE80	135	6625	MCS0	Full	-
Mode 57	UNII-7	6525-6875	802.11AX HE80	151	6705	MCS0	Full	-
Mode 58	UNII-7	6525-6875	802.11AX HE80	167	6785	MCS0	Full	-
Mode 59	UNII-7	6525-6875	802.11AX HE80	183	6865	MCS0	Full	-
Mode 60	UNII-8	6875-7125	802.11AX HE80	199	6945	MCS0	Full	-
Mode 61	UNII-8	6875-7125	802.11AX HE80	215	7025	MCS0	Full	-
Mode 62	UNII-5	5925-6425	802.11AX HE160	15	6025	MCS0	Full	-
Mode 63	UNII-5	5925-6425	802.11AX HE160	47	6185	MCS0	Full	-
Mode 64	UNII-5	5925-6425	802.11AX HE160	79	6345	MCS0	Full	-
Mode 65	UNII-6	6425-6525	802.11AX HE160	111	6505	MCS0	Full	-
Mode 66	UNII-7	6525-6875	802.11AX HE160	175	6825	MCS0	Full	-
Mode 67	UNII-8	6875-7125	802.11AX HE160	207	6985	MCS0	Full	-
Mode 68	UNII-8	6875-7125	802.11AX HE160	207	6985	MCS0	Full	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	1	5917.69	41.12	68.20	-27.08	H	Average	Pass	Band Edge
1	802.11a	1	11910.00	49.72	74.00	-24.28	H	Peak	Pass	Harmonic
2	802.11a	49	12390.00	50.63	74.00	-23.37	H	Peak	Pass	Harmonic
3	802.11a	93	12830.00	51.08	88.20	-37.12	H	Peak	Pass	Harmonic
4	802.11a	97	12870.00	51.04	88.20	-37.16	H	Peak	Pass	Harmonic
5	802.11a	105	12950.00	50.42	88.20	-37.78	V	Peak	Pass	Harmonic
6	802.11a	113	13030.00	51.60	88.20	-36.60	H	Peak	Pass	Harmonic
7	802.11a	117	13070.00	50.29	88.20	-37.91	H	Peak	Pass	Harmonic
8	802.11a	149	13392.00	50.99	74	-23.01	H	Peak	Pass	Harmonic
9	802.11a	181	13710.00	50.62	88.20	-37.58	H	Peak	Pass	Harmonic
10	802.11a	189	13790.00	50.00	88.20	-38.20	V	Peak	Pass	Harmonic
11	802.11a	209	13990.00	50.49	88.20	-37.71	V	Peak	Pass	Harmonic
12	802.11a	229	7263.67	41.64	54.00	-12.36	H	Average	Pass	Band Edge
12	802.11a	229	14190.00	50.34	88.20	-37.86	V	Peak	Pass	Harmonic
13	802.11AX HE20	1	5921.46	41.43	68.20	-26.77	H	Average	Pass	Band Edge
13	802.11AX HE20	1	11910.00	48.96	74.00	-25.04	V	Peak	Pass	Harmonic
14	802.11AX HE20	1	5921.46	40.98	68.20	-27.22	H	Average	Pass	Band Edge
15	802.11AX HE20	1	5920.29	41.09	68.20	-27.11	H	Average	Pass	Band Edge
16	802.11AX HE20	1	5905.34	41.00	68.20	-27.20	H	Average	Pass	Band Edge
17	802.11AX HE20	49	12390.00	50.44	74.00	-23.56	H	Peak	Pass	Harmonic
18	802.11AX HE20	93	12830.00	50.56	88.20	-37.64	V	Peak	Pass	Harmonic
19	802.11AX HE20	97	12870.00	51.62	88.20	-36.58	V	Peak	Pass	Harmonic
20	802.11AX HE20	97	5831.50	39.72	68.20	-28.48	V	Average	Pass	Band Edge
21	802.11AX HE20	97	5856.85	39.77	68.20	-28.43	H	Average	Pass	Band Edge
22	802.11AX HE20	97	5867.25	39.71	68.20	-28.49	V	Average	Pass	Band Edge
23	802.11AX HE20	105	12950.00	50.17	88.20	-38.03	V	Peak	Pass	Harmonic
24	802.11AX HE20	113	13030.00	50.85	88.20	-37.35	V	Peak	Pass	Harmonic
25	802.11AX HE20	117	13070.00	51.57	88.20	-36.63	V	Peak	Pass	Harmonic
26	802.11AX HE20	117	7333.57	41.22	54.00	-12.78	V	Average	Pass	Band Edge
27	802.11AX HE20	117	7339.62	41.23	54.00	-12.77	V	Average	Pass	Band Edge
28	802.11AX HE20	117	7338.76	41.26	54.00	-12.74	H	Average	Pass	Band Edge
29	802.11AX HE20	149	13390.00	51.79	74.00	-22.21	V	Peak	Pass	Harmonic
30	802.11AX HE20	181	13710	51.77	88.20	-36.43	V	Peak	Pass	Harmonic
31	802.11AX HE20	185	13750.00	51.86	88.20	-36.34	V	Peak	Pass	Harmonic
32	802.11AX HE20	189	13790.00	50.90	88.20	-37.30	H	Peak	Pass	Harmonic
33	802.11AX HE20	209	13990.00	49.79	88.20	-38.41	H	Peak	Pass	Harmonic
34	802.11AX HE20	229	7340.66	41.77	54.00	-12.23	V	Average	Pass	Band Edge
34	802.11AX HE20	229	14190.00	50.66	88.20	-37.54	V	Peak	Pass	Harmonic
35	802.11AX HE20	229	7336.65	41.18	54.00	-12.82	H	Average	Pass	Band Edge
36	802.11AX HE20	229	7267.23	41.06	54.00	-12.94	H	Average	Pass	Band Edge
37	802.11AX HE20	229	7264.12	41.12	54.00	-12.88	V	Average	Pass	Band Edge
38	802.11AX HE40	3	5873.48	41.46	68.20	-26.74	V	Average	Pass	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
38	802.11AX HE40	3	11930.00	49.07	74.00	-24.93	H	Peak	Pass	Harmonic
39	802.11AX HE40	51	12410.00	51.32	74.00	-22.68	V	Peak	Pass	Harmonic
40	802.11AX HE40	91	12810.00	50.19	88.20	-38.01	H	Peak	Pass	Harmonic
41	802.11AX HE40	99	12890.00	51.22	88.20	-36.98	V	Peak	Pass	Harmonic
42	802.11AX HE40	107	12970.00	50.29	88.20	-37.91	V	Peak	Pass	Harmonic
43	802.11AX HE40	115	13050.00	51.39	88.20	-36.81	V	Peak	Pass	Harmonic
44	802.11AX HE40	123	13130.00	51.08	88.20	-37.12	H	Peak	Pass	Harmonic
45	802.11AX HE40	147	13370.00	49.83	74.00	-24.17	V	Peak	Pass	Harmonic
46	802.11AX HE40	179	13690.00	50.25	88.20	-37.95	H	Peak	Pass	Harmonic
47	802.11AX HE40	187	13770.00	50.24	88.20	-37.96	H	Peak	Pass	Harmonic
48	802.11AX HE40	195	13850.00	50.33	88.20	-37.87	V	Peak	Pass	Harmonic
49	802.11AX HE40	211	14010.00	49.75	88.20	-38.45	V	Peak	Pass	Harmonic
50	802.11AX HE40	227	7262.78	41.74	54.00	-12.26	H	Average	Pass	Band Edge
50	802.11AX HE40	227	14170.00	50.04	88.20	-38.16	V	Peak	Pass	Harmonic
51	802.11AX HE80	7	5917.48	47.46	68.20	-20.74	H	Average	Pass	Band Edge
51	802.11AX HE80	7	11970.00	49.03	74.00	-24.97	V	Peak	Pass	Harmonic
52	802.11AX HE80	55	12510	49.77	74	-24.23	H	Peak	Pass	Harmonic
53	802.11AX HE80	87	12770.00	50.82	88.20	-37.38	V	Peak	Pass	Harmonic
54	802.11AX HE80	103	12930.00	50.62	88.20	-37.58	V	Peak	Pass	Harmonic
55	802.11AX HE80	119	13090.00	50.76	88.20	-37.44	H	Peak	Pass	Harmonic
56	802.11AX HE80	135	13250.00	51.96	74.00	-22.04	H	Peak	Pass	Harmonic
57	802.11AX HE80	151	13410.00	50.89	88.20	-37.31	V	Peak	Pass	Harmonic
58	802.11AX HE80	167	13570.00	50.86	88.20	-37.34	H	Peak	Pass	Harmonic
59	802.11AX HE80	183	13730.00	50.45	88.20	-37.75	H	Peak	Pass	Harmonic
60	802.11AX HE80	199	13890.00	50.72	88.20	-37.48	H	Peak	Pass	Harmonic
61	802.11AX HE80	215	7270.70	41.66	54.00	-12.34	V	Average	Pass	Band Edge
61	802.11AX HE80	215	14050.00	48.98	88.20	-39.22	V	Peak	Pass	Harmonic
62	802.11AX HE160	15	5922.16	55.67	68.20	-12.53	H	Average	Pass	Band Edge
62	802.11AX HE160	15	12050.00	47.92	74.00	-26.08	V	Peak	Pass	Harmonic
63	802.11AX HE160	47	12370.00	49.91	74.00	-24.09	V	Peak	Pass	Harmonic
64	802.11AX HE160	79	12690.00	50.54	74.00	-23.46	V	Peak	Pass	Harmonic
65	802.11AX HE160	111	13010.00	51.51	88.20	-36.69	V	Peak	Pass	Harmonic
66	802.11AX HE160	175	13650.00	49.16	88.20	-39.04	V	Peak	Pass	Harmonic
67	802.11AX HE160	207	7253.87	44.97	54.00	-9.03	H	Average	Pass	Band Edge
67	802.11AX HE160	207	13970.00	50.18	88.20	-38.02	H	Peak	Pass	Harmonic
68	802.11AX HE160	207	800.18	30.99	46.00	-15.01	V	Peak	Pass	LF



		1																																																														
Mode	Band Edge																																																															
	UNII-5_5925-6425_802.11a_CH1_5955MHz																																																															
Pol.	Horizontal		Fundamental																																																													
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5899.23</td> <td>52.64</td> <td>88.20</td> <td>-35.56</td> <td>41.86</td> <td>35.28</td> <td>8.82</td> <td>33.32</td> <td>400</td> <td>11</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5899.23	52.64	88.20	-35.56	41.86	35.28	8.82	33.32	400	11	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>96.45</td> <td>-----</td> <td>-----</td> <td>85.60</td> <td>35.41</td> <td>8.75</td> <td>33.31</td> <td>400</td> <td>11</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5955.00	96.45	-----	-----	85.60	35.41	8.75	33.31	400	11	Peak
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5899.23	52.64	88.20	-35.56	41.86	35.28	8.82	33.32	400	11	PEAK																																																					
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5955.00	96.45	-----	-----	85.60	35.41	8.75	33.31	400	11	Peak																																																					
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.69</td> <td>41.12</td> <td>68.20</td> <td>-27.08</td> <td>30.32</td> <td>35.32</td> <td>8.80</td> <td>33.32</td> <td>400</td> <td>11</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5917.69	41.12	68.20	-27.08	30.32	35.32	8.80	33.32	400	11	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>87.68</td> <td>-----</td> <td>-----</td> <td>76.83</td> <td>35.41</td> <td>8.75</td> <td>33.31</td> <td>400</td> <td>11</td> <td>Average</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5955.00	87.68	-----	-----	76.83	35.41	8.75	33.31	400	11	Average
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5917.69	41.12	68.20	-27.08	30.32	35.32	8.80	33.32	400	11	AVERAGE																																																					
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5955.00	87.68	-----	-----	76.83	35.41	8.75	33.31	400	11	Average																																																					



Mode	1																																																															
	Band Edge																																																															
	UNII-5_5925-6425_802.11a_CH1_5955MHz																																																															
Pol.	Vertical	Fundamental																																																														
Peak	<p>Date: 2023-05-19</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5899.49</td> <td>52.51</td> <td>88.20</td> <td>-35.69</td> <td>41.73</td> <td>35.28</td> <td>8.82</td> <td>33.32</td> <td>200</td> <td>26</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5899.49	52.51	88.20	-35.69	41.73	35.28	8.82	33.32	200	26	PEAK	<p>Date: 2023-05-22</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>89.01</td> <td>-----</td> <td>-----</td> <td>78.16</td> <td>35.41</td> <td>8.75</td> <td>33.31</td> <td>200</td> <td>26</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5955.00	89.01	-----	-----	78.16	35.41	8.75	33.31	200	26	Peak
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5899.49	52.51	88.20	-35.69	41.73	35.28	8.82	33.32	200	26	PEAK																																																					
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5955.00	89.01	-----	-----	78.16	35.41	8.75	33.31	200	26	Peak																																																					
Avg	<p>Date: 2023-05-19</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5859.58</td> <td>41.02</td> <td>68.20</td> <td>-27.18</td> <td>30.29</td> <td>35.19</td> <td>8.87</td> <td>33.33</td> <td>200</td> <td>26</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5859.58	41.02	68.20	-27.18	30.29	35.19	8.87	33.33	200	26	AVERAGE	<p>Date: 2023-05-22</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 1 Setting : 6M Power setting 6.5 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>81.15</td> <td>-----</td> <td>-----</td> <td>70.30</td> <td>35.41</td> <td>8.75</td> <td>33.31</td> <td>200</td> <td>26</td> <td>Average</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5955.00	81.15	-----	-----	70.30	35.41	8.75	33.31	200	26	Average
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5859.58	41.02	68.20	-27.18	30.29	35.19	8.87	33.33	200	26	AVERAGE																																																					
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																						
1	5955.00	81.15	-----	-----	70.30	35.41	8.75	33.31	200	26	Average																																																					



Mode	1																																																																	
	Harmonic																																																																	
	UNII-5_5925-6425_802.11a_CH1_5955MHz																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 1 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 6.5</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>49.72</td> <td>74.00</td> <td>-24.28</td> <td>54.95</td> <td>39.09</td> <td>13.66</td> <td>57.98</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	Level	Factor	Loss Factor	dB	dB	1	11910.00	49.72	74.00	-24.28	54.95	39.09	13.66	57.98	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 1 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 6.5</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>49.39</td> <td>74.00</td> <td>-24.61</td> <td>54.62</td> <td>39.09</td> <td>13.66</td> <td>57.98</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	Level	Factor	Loss Factor	dB	dB	1	11910.00	49.39	74.00	-24.61	54.62	39.09	13.66	57.98	---	---	Peak
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	Level	Factor	Loss Factor	dB	dB																																																									
1	11910.00	49.72	74.00	-24.28	54.95	39.09	13.66	57.98	---	---	Peak																																																							
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	Level	Factor	Loss Factor	dB	dB																																																									
1	11910.00	49.39	74.00	-24.61	54.62	39.09	13.66	57.98	---	---	Peak																																																							



Mode	2																																																											
	Harmonic																																																											
	UNII-5_5925-6425_802.11a_CH49_6195MHz																																																											
Pol.	Horizontal	Vertical																																																										
Peak Avg	<div style="text-align: right;">Date: 2023-06-10</div> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 2 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th rowspan="2">Read Level</th> <th rowspan="2">Ant Level</th> <th rowspan="2">Cable Loss</th> <th rowspan="2">Preamp Loss</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12390.00</td> <td>50.63</td> <td>74.00</td> <td>-23.37</td> <td>54.13</td> <td>39.36</td> <td>14.43</td> <td>57.29</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 12390.00	50.63	74.00	-23.37	54.13	39.36	14.43	57.29	---	---	Peak	<div style="text-align: right;">Date: 2023-06-10</div> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 2 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th rowspan="2">Read Level</th> <th rowspan="2">Ant Level</th> <th rowspan="2">Cable Loss</th> <th rowspan="2">Preamp Loss</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12390.00</td> <td>50.11</td> <td>74.00</td> <td>-23.89</td> <td>53.61</td> <td>39.36</td> <td>14.43</td> <td>57.29</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 12390.00	50.11	74.00	-23.89	53.61	39.36	14.43	57.29	---	---	Peak
Freq	Limit		Read Level	Ant Level								Cable Loss	Preamp Loss	APos	TPos	Remark																																												
	dBuV/m	dBuV/m			dB	dB/m	dB	dB	cm	deg																																																		
1 12390.00	50.63	74.00	-23.37	54.13	39.36	14.43	57.29	---	---	Peak																																																		
Freq	Limit		Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																			
	dBuV/m	dBuV/m								dB	dB/m	dB	dB	cm	deg																																													
1 12390.00	50.11	74.00	-23.89	53.61	39.36	14.43	57.29	---	---	Peak																																																		



Mode	3																																																																			
	Harmonic																																																																			
	UNII-5_5925-6425_802.11a_CH93_6415MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 3 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12830.00</td> <td>51.08</td> <td>88.20</td> <td>-37.12</td> <td>53.93</td> <td>39.47</td> <td>15.31</td> <td>57.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12830.00	51.08	88.20	-37.12	53.93	39.47	15.31	57.63	---	---	Peak	<p>Date: 2023-05-09</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 3 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12830.00</td> <td>47.89</td> <td>88.20</td> <td>-40.31</td> <td>50.74</td> <td>39.47</td> <td>15.31</td> <td>57.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12830.00	47.89	88.20	-40.31	50.74	39.47	15.31	57.63	---	---	Peak
	Freq		Limit		Read		Ant	Cable	Preamp	Apos	Tpos		Remark																																																							
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	12830.00	51.08	88.20	-37.12	53.93	39.47	15.31	57.63	---	---	Peak																																																									
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	12830.00	47.89	88.20	-40.31	50.74	39.47	15.31	57.63	---	---	Peak																																																									



Mode	4																																																																																												
	Harmonic																																																																																												
	UNII-6_6425-6525_802.11a_CH97_6435MHz																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<p>Date: 2023-06-10</p>	<p>Date: 2023-06-10</p>																																																																																											
	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 4 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">MHz</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12870.00</td> <td>51.04</td> <td>88.20</td> <td>-37.16</td> <td>53.87</td> <td>39.47</td> <td>15.39</td> <td>57.69</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	MHz	Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Level	Line Margin	Level	Factor	Level	Factor	Loss	Factor	cm	deg	cm	deg	1	12870.00	51.04	88.20	-37.16	53.87	39.47	15.39	57.69	---	---	---	---	---	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 4 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">MHz</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12870.00</td> <td>50.94</td> <td>88.20</td> <td>-37.26</td> <td>53.77</td> <td>39.47</td> <td>15.39</td> <td>57.69</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	MHz	Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Level	Line Margin	Level	Factor	Level	Factor	Loss	Factor	cm	deg	cm	deg	1	12870.00	50.94	88.20	-37.26	53.77	39.47	15.39	57.69	---	---	---	---	---	---	---
Freq	MHz			Limit		Read		Ant		Cable		Preamp		APos		TPos			Remark																																																																										
		Level	Line Margin	Level	Factor	Level	Factor	Loss	Factor	cm	deg	cm	deg																																																																																
1	12870.00	51.04	88.20	-37.16	53.87	39.47	15.39	57.69	---	---	---	---	---	---	---	Peak																																																																													
Freq	MHz	Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																													
		Level	Line Margin	Level	Factor	Level	Factor	Loss	Factor	cm	deg	cm	deg																																																																																
1	12870.00	50.94	88.20	-37.26	53.77	39.47	15.39	57.69	---	---	---	---	---	---	---	Peak																																																																													



Mode	5																																																																			
	Harmonic																																																																			
	UNII-6_6425-6525_802.11a_CH105_6475MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 5 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12950.00</td> <td>50.22</td> <td>88.20</td> <td>-37.98</td> <td>53.00</td> <td>39.49</td> <td>15.55</td> <td>57.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12950.00	50.22	88.20	-37.98	53.00	39.49	15.55	57.82	---	---	Peak	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 5 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12950.00</td> <td>50.42</td> <td>88.20</td> <td>-37.78</td> <td>53.20</td> <td>39.49</td> <td>15.55</td> <td>57.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12950.00	50.42	88.20	-37.78	53.20	39.49	15.55	57.82	---	---	Peak
	Freq		Limit		Read		Ant	Cable	Preamp	Apos	Tpos		Remark																																																							
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	12950.00	50.22	88.20	-37.98	53.00	39.49	15.55	57.82	---	---	Peak																																																									
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	12950.00	50.42	88.20	-37.78	53.20	39.49	15.55	57.82	---	---	Peak																																																									



Mode	6																																																																													
	Harmonic																																																																													
	UNII-6_6425-6525_802.11a_CH113_6515MHz																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak Avg	<p>Time: 14:04:31</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 6 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6W power setting 6.5</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13030.00</td> <td>51.60</td> <td>88.20</td> <td>-36.60</td> <td>54.34</td> <td>39.50</td> <td>15.66</td> <td>57.90</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	13030.00	51.60	88.20	-36.60	54.34	39.50	15.66	57.90	--- --- Peak	<p>Time: 14:04:38</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 6 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6W power setting 6.5</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13032.00</td> <td>50.90</td> <td>88.20</td> <td>-37.30</td> <td>53.64</td> <td>39.50</td> <td>15.66</td> <td>57.90</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	13032.00	50.90	88.20	-37.30	53.64	39.50	15.66	57.90	--- --- Peak
	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1	13030.00	51.60	88.20	-36.60	54.34	39.50	15.66	57.90	--- --- Peak																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1	13032.00	50.90	88.20	-37.30	53.64	39.50	15.66	57.90	--- --- Peak																																																																					



		7																																																																			
Mode	Harmonic																																																																				
	UNII-7_6525-6875_802.11a_CH117_6535MHz																																																																				
Pol.	Horizontal		Vertical																																																																		
Peak Avg																																																																					
	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 7 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13070.00</td> <td>50.29</td> <td>88.20</td> <td>-37.91</td> <td>53.06</td> <td>39.50</td> <td>15.63</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Freq	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13070.00	50.29	88.20	-37.91	53.06	39.50	15.63	57.90	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 7 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13070.00</td> <td>50.13</td> <td>88.20</td> <td>-38.07</td> <td>52.90</td> <td>39.50</td> <td>15.63</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Freq	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13070.00	50.13	88.20	-38.07	52.90	39.50	15.63	57.90	---	---
Freq	Limit			Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	13070.00	50.29	88.20	-37.91	53.06	39.50	15.63	57.90	---	---	Peak																																																										
Freq	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																										
1	13070.00	50.13	88.20	-38.07	52.90	39.50	15.63	57.90	---	---	Peak																																																										



Mode	8																																																																			
	Harmonic																																																																			
	UNII-7_6525-6875_802.11a_CH149_6695MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 8 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13392.00</td> <td>50.99</td> <td>74.00</td> <td>-23.01</td> <td>53.96</td> <td>39.50</td> <td>15.43</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13392.00	50.99	74.00	-23.01	53.96	39.50	15.43	57.90	---	---	Peak	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 8 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13392.00</td> <td>50.61</td> <td>74.00</td> <td>-23.39</td> <td>53.58</td> <td>39.50</td> <td>15.43</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13392.00	50.61	74.00	-23.39	53.58	39.50	15.43	57.90	---	---	Peak
	Freq		Limit		Read		Ant	Cable	Preamp	Apos	Tpos		Remark																																																							
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	13392.00	50.99	74.00	-23.01	53.96	39.50	15.43	57.90	---	---	Peak																																																									
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	13392.00	50.61	74.00	-23.39	53.58	39.50	15.43	57.90	---	---	Peak																																																									



Mode	9																																																																			
	Harmonic																																																																			
	UNII-7_6525-6875_802.11a_CH181_6855MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 9 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13710.00</td> <td>50.62</td> <td>88.20</td> <td>-37.58</td> <td>54.17</td> <td>39.58</td> <td>15.23</td> <td>58.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13710.00	50.62	88.20	-37.58	54.17	39.58	15.23	58.36	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 9 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13710.00</td> <td>50.13</td> <td>88.20</td> <td>-38.07</td> <td>53.68</td> <td>39.58</td> <td>15.23</td> <td>58.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13710.00	50.13	88.20	-38.07	53.68	39.58	15.23	58.36	---	---	Peak
	Freq		Limit		Read		Ant	Cable	Preamp	Apos	Tpos		Remark																																																							
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	13710.00	50.62	88.20	-37.58	54.17	39.58	15.23	58.36	---	---	Peak																																																									
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	13710.00	50.13	88.20	-38.07	53.68	39.58	15.23	58.36	---	---	Peak																																																									



Mode	10																																																																			
	Harmonic																																																																			
	UNII-8_6875-7125_802.11a_CH189_6895MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Date: 2023-05-08</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 10 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13790.00</td> <td>48.92</td> <td>88.20</td> <td>-39.28</td> <td>52.66</td> <td>39.62</td> <td>15.18</td> <td>58.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13790.00	48.92	88.20	-39.28	52.66	39.62	15.18	58.54	---	---	Peak	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 10 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13790.00</td> <td>50.00</td> <td>88.20</td> <td>-38.20</td> <td>53.74</td> <td>39.62</td> <td>15.18</td> <td>58.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13790.00	50.00	88.20	-38.20	53.74	39.62	15.18	58.54	---	---	Peak
	Freq		Limit		Read		Ant	Cable	Preamp	Apos	Tpos		Remark																																																							
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	13790.00	48.92	88.20	-39.28	52.66	39.62	15.18	58.54	---	---	Peak																																																									
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	13790.00	50.00	88.20	-38.20	53.74	39.62	15.18	58.54	---	---	Peak																																																									



Mode	11																																																																					
	Harmonic																																																																					
	UNII-8_6875-7125_802.11a_CH209_6995MHz																																																																					
Pol.	Horizontal	Vertical																																																																				
Peak Avg	<p style="text-align: right;">Date: 2023-05-08</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 11 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>13990.00</td> <td>49.29</td> <td>88.20</td> <td>-38.91</td> <td>53.52</td> <td>39.69</td> <td>15.05</td> <td>58.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		13990.00	49.29	88.20	-38.91	53.52	39.69	15.05	58.97	---	---	Peak	<p style="text-align: right;">Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 11 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>13990.00</td> <td>50.49</td> <td>88.20</td> <td>-37.71</td> <td>54.72</td> <td>39.69</td> <td>15.05</td> <td>58.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		13990.00	50.49	88.20	-37.71	54.72	39.69	15.05	58.97	---	---	Peak
1	Freq			Limit		Read		Ant	Cable	Preamp	Apos	Tpos		Remark																																																								
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
	13990.00	49.29	88.20	-38.91	53.52	39.69	15.05	58.97	---	---	Peak																																																											
1	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																											
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																										
	13990.00	50.49	88.20	-37.71	54.72	39.69	15.05	58.97	---	---	Peak																																																											



Mode	12																																																																																											
	Band Edge																																																																																											
	UNII-8_6875-7125_802.11a_CH229_7095MHz																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p>Level (dBuV/m) Date: 2023-05-19</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7153.31</td> <td>52.11</td> <td>88.20</td> <td>-36.09</td> <td>40.88</td> <td>36.25</td> <td>8.64</td> <td>33.66</td> <td>261</td> <td>314</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7259.22</td> <td>52.46</td> <td>74.00</td> <td>-21.54</td> <td>41.03</td> <td>36.36</td> <td>8.77</td> <td>33.70</td> <td>261</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7153.31	52.11	88.20	-36.09	40.88	36.25	8.64	33.66	261	314	PEAK	2	7259.22	52.46	74.00	-21.54	41.03	36.36	8.77	33.70	261	314	PEAK	<p>Level (dBuV/m) Date: 2023-05-22</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>95.94</td> <td>-----</td> <td>-----</td> <td>84.66</td> <td>36.19</td> <td>8.73</td> <td>33.64</td> <td>261</td> <td>314</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	95.94	-----	-----	84.66	36.19	8.73	33.64	261	314	Peak
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7153.31	52.11	88.20	-36.09	40.88	36.25	8.64	33.66	261	314	PEAK																																																																																	
2	7259.22	52.46	74.00	-21.54	41.03	36.36	8.77	33.70	261	314	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7095.00	95.94	-----	-----	84.66	36.19	8.73	33.64	261	314	Peak																																																																																	
Avg	<p>Level (dBuV/m) Date: 2023-05-19</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7234.75</td> <td>41.48</td> <td>68.20</td> <td>-26.72</td> <td>30.16</td> <td>36.33</td> <td>8.69</td> <td>33.70</td> <td>261</td> <td>314</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>7263.67</td> <td>41.64</td> <td>54.00</td> <td>-12.36</td> <td>30.21</td> <td>36.36</td> <td>8.78</td> <td>33.71</td> <td>261</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7234.75	41.48	68.20	-26.72	30.16	36.33	8.69	33.70	261	314	AVERAGE	2	7263.67	41.64	54.00	-12.36	30.21	36.36	8.78	33.71	261	314	AVERAGE	<p>Level (dBuV/m) Date: 2023-05-22</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q37B1NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>84.89</td> <td>-----</td> <td>-----</td> <td>73.61</td> <td>36.19</td> <td>8.73</td> <td>33.64</td> <td>261</td> <td>314</td> <td>Average</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	84.89	-----	-----	73.61	36.19	8.73	33.64	261	314	Average
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7234.75	41.48	68.20	-26.72	30.16	36.33	8.69	33.70	261	314	AVERAGE																																																																																	
2	7263.67	41.64	54.00	-12.36	30.21	36.36	8.78	33.71	261	314	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7095.00	84.89	-----	-----	73.61	36.19	8.73	33.64	261	314	Average																																																																																	







Mode	12																																																																																											
	Band Edge																																																																																											
	UNII-8_6875-7125_802.11a_CH229_7095MHz																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<p>Level (dBuV/m) Date: 2023-05-19</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q3781NF33008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7236.97</td> <td>52.17</td> <td>88.20</td> <td>-36.03</td> <td>40.84</td> <td>36.34</td> <td>8.69</td> <td>33.70</td> <td>282</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7263.67</td> <td>52.35</td> <td>74.00</td> <td>-21.65</td> <td>40.92</td> <td>36.36</td> <td>8.78</td> <td>33.71</td> <td>282</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7236.97	52.17	88.20	-36.03	40.84	36.34	8.69	33.70	282	360	PEAK	2	7263.67	52.35	74.00	-21.65	40.92	36.36	8.78	33.71	282	360	PEAK	<p>Level (dBuV/m) Date: 2023-05-22</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q3781NF33008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>92.99</td> <td>-----</td> <td>-----</td> <td>81.72</td> <td>36.20</td> <td>8.71</td> <td>33.64</td> <td>282</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	92.99	-----	-----	81.72	36.20	8.71	33.64	282	360	Peak
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7236.97	52.17	88.20	-36.03	40.84	36.34	8.69	33.70	282	360	PEAK																																																																																	
2	7263.67	52.35	74.00	-21.65	40.92	36.36	8.78	33.71	282	360	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7095.00	92.99	-----	-----	81.72	36.20	8.71	33.64	282	360	Peak																																																																																	
Avg	<p>Level (dBuV/m) Date: 2023-05-19</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q3781NF33008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7242.31</td> <td>41.56</td> <td>68.20</td> <td>-26.64</td> <td>30.21</td> <td>36.34</td> <td>8.71</td> <td>33.70</td> <td>282</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>7338.88</td> <td>41.52</td> <td>54.00</td> <td>-12.48</td> <td>29.80</td> <td>36.44</td> <td>9.02</td> <td>33.74</td> <td>282</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7242.31	41.56	68.20	-26.64	30.21	36.34	8.71	33.70	282	360	AVERAGE	2	7338.88	41.52	54.00	-12.48	29.80	36.44	9.02	33.74	282	360	AVERAGE	<p>Level (dBuV/m) Date: 2023-05-22</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 6M Power setting 7 Plane : Z with accessories : #12 2Q3781NF33008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>87.13</td> <td>-----</td> <td>-----</td> <td>75.86</td> <td>36.19</td> <td>8.72</td> <td>33.64</td> <td>282</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	87.13	-----	-----	75.86	36.19	8.72	33.64	282	360	Average
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7242.31	41.56	68.20	-26.64	30.21	36.34	8.71	33.70	282	360	AVERAGE																																																																																	
2	7338.88	41.52	54.00	-12.48	29.80	36.44	9.02	33.74	282	360	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	7095.00	87.13	-----	-----	75.86	36.19	8.72	33.64	282	360	Average																																																																																	







Mode	12																																																																			
	Harmonic																																																																			
	UNII-8_6875-7125_802.11a_CH229_7095MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 12 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14190.00</td> <td>50.12</td> <td>88.20</td> <td>-38.08</td> <td>54.23</td> <td>39.85</td> <td>15.12</td> <td>59.08</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	14190.00	50.12	88.20	-38.08	54.23	39.85	15.12	59.08	---	---	Peak	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 12 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : 6W power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>14190.00</td> <td>50.34</td> <td>88.20</td> <td>-37.86</td> <td>54.45</td> <td>39.85</td> <td>15.12</td> <td>59.08</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	14190.00	50.34	88.20	-37.86	54.45	39.85	15.12	59.08	---	---	Peak
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	14190.00	50.12	88.20	-38.08	54.23	39.85	15.12	59.08	---	---	Peak																																																									
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	14190.00	50.34	88.20	-37.86	54.45	39.85	15.12	59.08	---	---	Peak																																																									

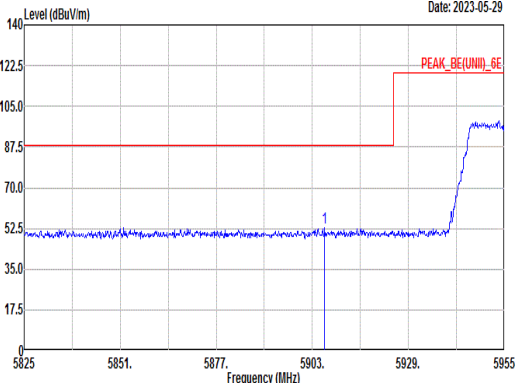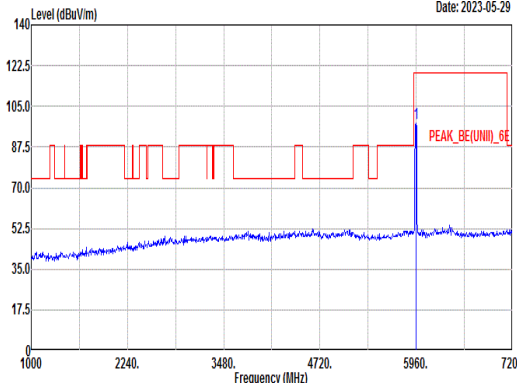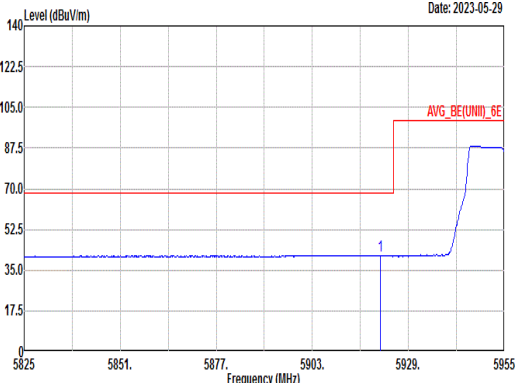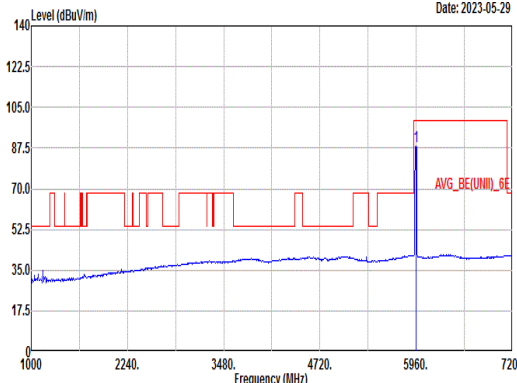

		13																																																																														
Mode	Band Edge																																																																															
	UNII-5_5925-6425_802.11AX_HE20_CH1_Full_5955MHz																																																																															
Pol.	Horizontal		Fundamental																																																																													
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level that is flat at approximately 80 dBuV/m until 5925 MHz, then rises to a peak of about 122.5 dBuV/m at 5955 MHz. A red line indicates the limit, and a blue line shows the actual signal. A peak is labeled 'PEAK_BE(UNII)_6E'.</p> <p>Date: 2023-05-29</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5906.38</td> <td>53.02</td> <td>88.20</td> <td>-35.18</td> <td>42.24</td> <td>35.29</td> <td>8.81</td> <td>33.32</td> <td>138</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5906.38	53.02	88.20	-35.18	42.24	35.29	8.81	33.32	138	162	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level that is flat at approximately 80 dBuV/m until 5925 MHz, then rises to a peak of about 122.5 dBuV/m at 5955 MHz. A red line indicates the limit, and a blue line shows the actual signal. A peak is labeled 'PEAK_BE(UNII)_6E'.</p> <p>Date: 2023-05-29</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.88</td> <td>-----</td> <td>-----</td> <td>87.03</td> <td>35.41</td> <td>8.75</td> <td>33.31</td> <td>138</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	97.88	-----	-----	87.03	35.41	8.75	33.31	138	162	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5906.38	53.02	88.20	-35.18	42.24	35.29	8.81	33.32	138	162	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	97.88	-----	-----	87.03	35.41	8.75	33.31	138	162	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level that is flat at approximately 80 dBuV/m until 5925 MHz, then rises to a peak of about 122.5 dBuV/m at 5955 MHz. A red line indicates the limit, and a blue line shows the actual signal. A peak is labeled 'AVG_BE(UNII)_6E'.</p> <p>Date: 2023-05-29</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5921.46</td> <td>41.43</td> <td>68.20</td> <td>-26.77</td> <td>30.63</td> <td>35.33</td> <td>8.79</td> <td>33.32</td> <td>138</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5921.46	41.43	68.20	-26.77	30.63	35.33	8.79	33.32	138	162	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level that is flat at approximately 80 dBuV/m until 5925 MHz, then rises to a peak of about 122.5 dBuV/m at 5955 MHz. A red line indicates the limit, and a blue line shows the actual signal. A peak is labeled 'AVG_BE(UNII)_6E'.</p> <p>Date: 2023-05-29</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>88.34</td> <td>-----</td> <td>-----</td> <td>77.51</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>138</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	88.34	-----	-----	77.51	35.38	8.76	33.31	138	162	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5921.46	41.43	68.20	-26.77	30.63	35.33	8.79	33.32	138	162	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	88.34	-----	-----	77.51	35.38	8.76	33.31	138	162	AVERAGE																																																																					

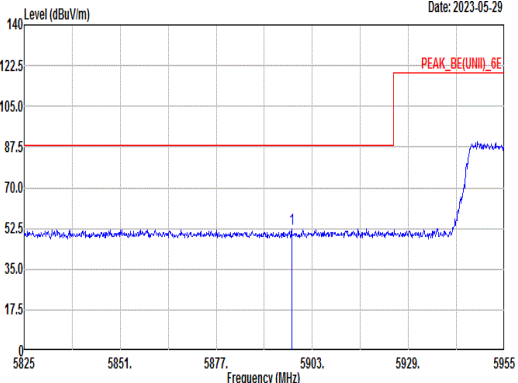
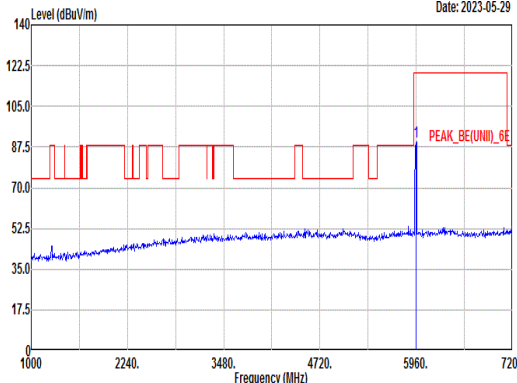
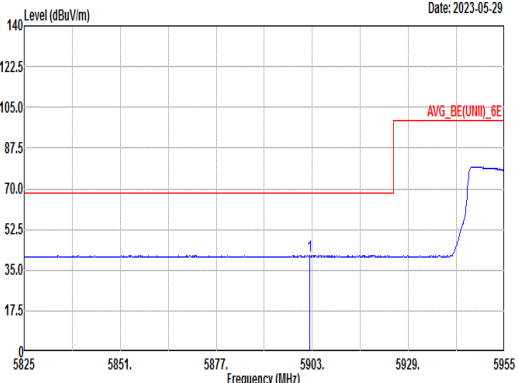
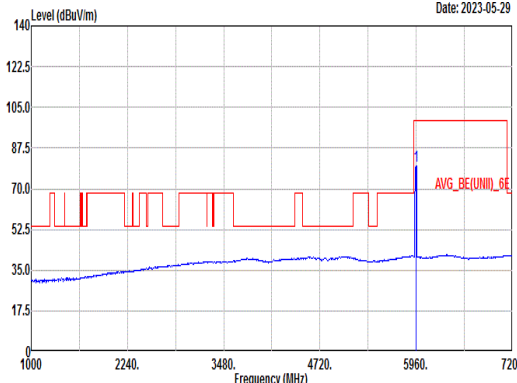


		13																																																																												
Mode	Band Edge																																																																													
	UNII-5_5925-6425_802.11AX_HE20_CH1_Full_5955MHz																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level around 87.5 dBuV/m with a peak at 5929 MHz reaching approximately 122.5 dBuV/m. The x-axis ranges from 5825 to 5955 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF31008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5897.41</td> <td>52.15</td> <td>88.20</td> <td>-36.05</td> <td>41.38</td> <td>35.27</td> <td>8.82</td> <td>33.32</td> <td>234</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5897.41	52.15	88.20	-36.05	41.38	35.27	8.82	33.32	234	0 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level around 87.5 dBuV/m with a peak at 5955 MHz reaching approximately 122.5 dBuV/m. The x-axis ranges from 1000 to 7200 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF31008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>89.56</td> <td>-----</td> <td>-----</td> <td>78.70</td> <td>35.43</td> <td>8.74</td> <td>33.31</td> <td>234</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	89.56	-----	-----	78.70	35.43	8.74	33.31	234	0 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5897.41	52.15	88.20	-36.05	41.38	35.27	8.82	33.32	234	0 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5955.00	89.56	-----	-----	78.70	35.43	8.74	33.31	234	0 PEAK																																																																				
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows an average signal level around 70.0 dBuV/m with a peak at 5929 MHz reaching approximately 105.0 dBuV/m. The x-axis ranges from 5825 to 5955 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF31008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5902.22</td> <td>41.22</td> <td>68.20</td> <td>-26.98</td> <td>30.44</td> <td>35.28</td> <td>8.82</td> <td>33.32</td> <td>234</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5902.22	41.22	68.20	-26.98	30.44	35.28	8.82	33.32	234	0 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows an average signal level around 70.0 dBuV/m with a peak at 5955 MHz reaching approximately 105.0 dBuV/m. The x-axis ranges from 1000 to 7200 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 13 Setting : MCS0 power setting 7 Plane : Z with Accessory : #12 2Q3781NF31008F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>80.03</td> <td>99.20</td> <td>-19.17</td> <td>69.17</td> <td>35.43</td> <td>8.74</td> <td>33.31</td> <td>234</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	80.03	99.20	-19.17	69.17	35.43	8.74	33.31	234	0 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5902.22	41.22	68.20	-26.98	30.44	35.28	8.82	33.32	234	0 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5955.00	80.03	99.20	-19.17	69.17	35.43	8.74	33.31	234	0 AVERAGE																																																																				



Mode	13																																																																			
	Harmonic																																																																			
	UNII-5_5925-6425_802.11AX HE20_CH1_Full_5955MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 13 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11910.00</td> <td>48.56</td> <td>74.00</td> <td>-25.44</td> <td>53.79</td> <td>39.09</td> <td>13.66</td> <td>57.98</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Level	Line Margin	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11910.00	48.56	74.00	-25.44	53.79	39.09	13.66	57.98	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 13 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11910.00</td> <td>48.96</td> <td>74.00</td> <td>-25.04</td> <td>54.19</td> <td>39.09</td> <td>13.66</td> <td>57.98</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Level	Line Margin	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11910.00	48.96	74.00	-25.04	54.19	39.09	13.66	57.98	---	---	Peak
Freq	Limit		Read	Ant								Cable	Preamp	APos	TPos	Remark																																																				
	Level	Line Margin																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1 11910.00	48.56	74.00	-25.44	53.79	39.09	13.66	57.98	---	---	Peak																																																										
Freq	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
	Level	Line Margin																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1 11910.00	48.96	74.00	-25.04	54.19	39.09	13.66	57.98	---	---	Peak																																																										

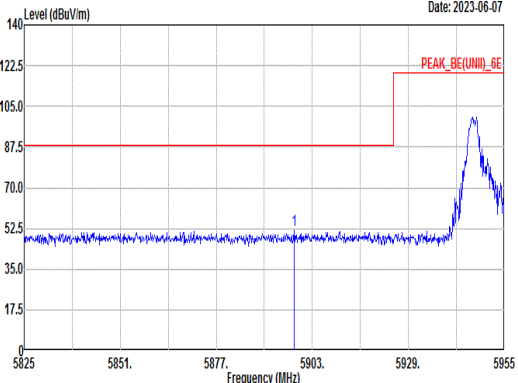
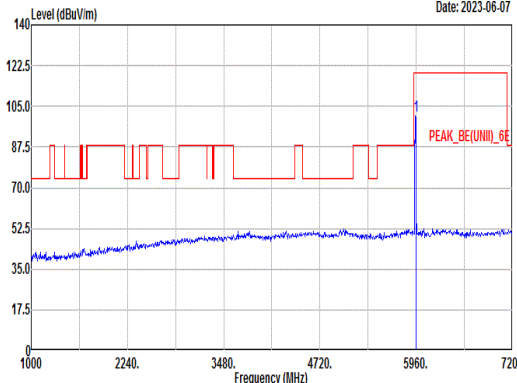
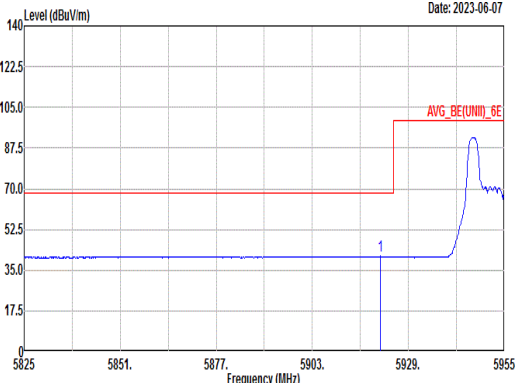
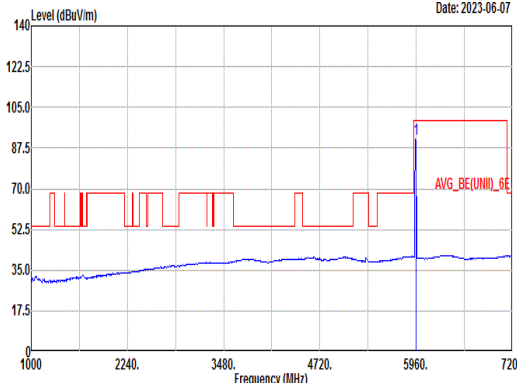


		14																																																																															
Mode	Band Edge																																																																																
	UNII-5_5925-6425_802.11AX HE20_CH1_RU26/0_5955MHz																																																																																
Pol.	Horizontal		Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Peak Horizontal. Peak at 5929.19 MHz.</p>		 <p>Level (dBuV/m) vs Frequency (MHz) for Peak Fundamental. Peak at 5955.00 MHz.</p>																																																																														
	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5898.19</td> <td>51.67</td> <td>88.20</td> <td>-36.53</td> <td>40.89</td> <td>35.28</td> <td>8.82</td> <td>33.32</td> <td>150</td> <td>166</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5898.19	51.67	88.20	-36.53	40.89	35.28	8.82	33.32	150	166	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>101.09</td> <td>-----</td> <td>-----</td> <td>90.26</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>150</td> <td>166</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	101.09	-----	-----	90.26	35.38	8.76	33.31	150	166
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5898.19	51.67	88.20	-36.53	40.89	35.28	8.82	33.32	150	166	PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5955.00	101.09	-----	-----	90.26	35.38	8.76	33.31	150	166	PEAK																																																																						
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Avg Horizontal. Peak at 5921.46 MHz.</p>		 <p>Level (dBuV/m) vs Frequency (MHz) for Avg Fundamental. Peak at 5955.00 MHz.</p>																																																																														
	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5921.46</td> <td>40.98</td> <td>68.20</td> <td>-27.22</td> <td>30.18</td> <td>35.33</td> <td>8.79</td> <td>33.32</td> <td>150</td> <td>166</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5921.46	40.98	68.20	-27.22	30.18	35.33	8.79	33.32	150	166	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>91.38</td> <td>-----</td> <td>-----</td> <td>80.55</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>150</td> <td>166</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	91.38	-----	-----	80.55	35.38	8.76	33.31	150	166
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5921.46	40.98	68.20	-27.22	30.18	35.33	8.79	33.32	150	166	AVERAGE																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5955.00	91.38	-----	-----	80.55	35.38	8.76	33.31	150	166	AVERAGE																																																																						



		14																																																																														
Mode	Band Edge																																																																															
	UNII-5_5925-6425_802.11AX HE20_CH1_RU26/0_5955MHz																																																																															
Pol.	Vertical		Fundamental																																																																													
Peak	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5844.37</td> <td>51.50</td> <td>88.20</td> <td>-36.70</td> <td>40.79</td> <td>35.16</td> <td>8.88</td> <td>33.33</td> <td>363</td> <td>208</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5844.37	51.50	88.20	-36.70	40.79	35.16	8.88	33.33	363	208	PEAK	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>94.94</td> <td>-----</td> <td>-----</td> <td>84.11</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>363</td> <td>208</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	94.94	-----	-----	84.11	35.38	8.76	33.31	363	208	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5844.37	51.50	88.20	-36.70	40.79	35.16	8.88	33.33	363	208	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	94.94	-----	-----	84.11	35.38	8.76	33.31	363	208	PEAK																																																																					
Avg	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.42</td> <td>40.85</td> <td>68.20</td> <td>-27.35</td> <td>30.06</td> <td>35.32</td> <td>8.79</td> <td>33.32</td> <td>363</td> <td>208</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5920.42	40.85	68.20	-27.35	30.06	35.32	8.79	33.32	363	208	AVERAGE	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 14 Setting : MCS0 Power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>86.29</td> <td>99.20</td> <td>-12.91</td> <td>75.46</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>363</td> <td>208</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	86.29	99.20	-12.91	75.46	35.38	8.76	33.31	363	208	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5920.42	40.85	68.20	-27.35	30.06	35.32	8.79	33.32	363	208	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	86.29	99.20	-12.91	75.46	35.38	8.76	33.31	363	208	AVERAGE																																																																					

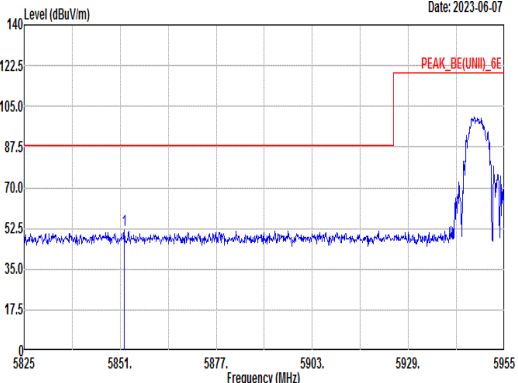
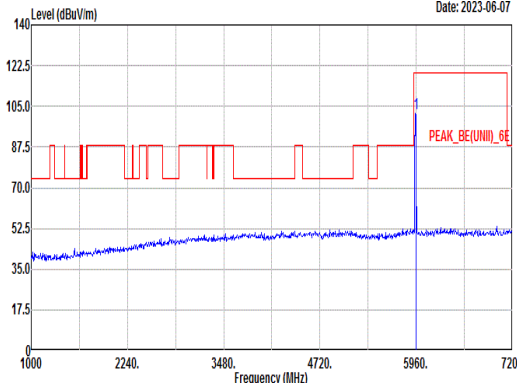
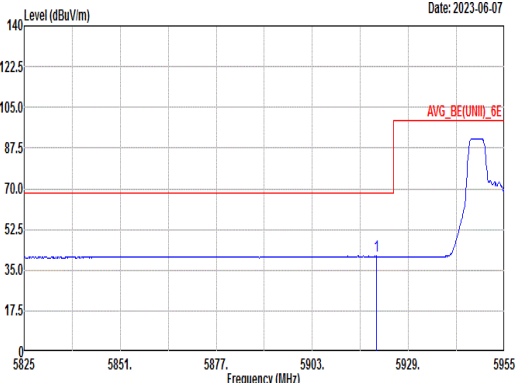
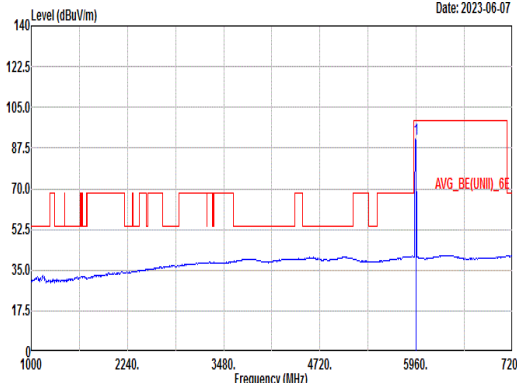


Mode	15																																																																															
	Band Edge																																																																															
	UNII-5_5925-6425_802.11AX HE20_CH1_RU52/37_5955MHz																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. Peak at 5955 MHz. Y-axis: 0 to 140 dBuV/m. X-axis: 5825 to 5955 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.17</td> <td>51.99</td> <td>88.20</td> <td>-36.21</td> <td>41.28</td> <td>35.17</td> <td>8.87</td> <td>33.33</td> <td>200</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5852.17	51.99	88.20	-36.21	41.28	35.17	8.87	33.33	200	171	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Peak at 5955 MHz. Y-axis: 0 to 140 dBuV/m. X-axis: 1000 to 7200 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>101.77</td> <td>-----</td> <td>-----</td> <td>90.94</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>200</td> <td>171</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	101.77	-----	-----	90.94	35.38	8.76	33.31	200	171	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5852.17	51.99	88.20	-36.21	41.28	35.17	8.87	33.33	200	171	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	101.77	-----	-----	90.94	35.38	8.76	33.31	200	171	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. Average at 5955 MHz. Y-axis: 0 to 140 dBuV/m. X-axis: 5825 to 5955 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.29</td> <td>41.09</td> <td>68.20</td> <td>-27.11</td> <td>30.30</td> <td>35.32</td> <td>8.79</td> <td>33.32</td> <td>200</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5920.29	41.09	68.20	-27.11	30.30	35.32	8.79	33.32	200	171	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Average at 5955 MHz. Y-axis: 0 to 140 dBuV/m. X-axis: 1000 to 7200 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>91.25</td> <td>-----</td> <td>-----</td> <td>80.42</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>200</td> <td>171</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	91.25	-----	-----	80.42	35.38	8.76	33.31	200	171	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5920.29	41.09	68.20	-27.11	30.30	35.32	8.79	33.32	200	171	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	91.25	-----	-----	80.42	35.38	8.76	33.31	200	171	AVERAGE																																																																					



Mode	15																																																									
	Band Edge																																																									
	UNII-5_5925-6425_802.11AX HE20_CH1_RU52/37_5955MHz																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5899.49 51.98 88.20 -36.22</td> <td>41.20</td> <td>35.28</td> <td>8.82</td> <td>33.32</td> <td>386</td> <td>191 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5899.49 51.98 88.20 -36.22	41.20	35.28	8.82	33.32	386	191 PEAK	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00 96.69</td> <td>85.86</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>386</td> <td>191 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5955.00 96.69	85.86	35.38	8.76	33.31	386	191 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5899.49 51.98 88.20 -36.22	41.20	35.28	8.82	33.32	386	191 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5955.00 96.69	85.86	35.38	8.76	33.31	386	191 PEAK																																																				
Avg	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5903.13 40.98 68.20 -27.22</td> <td>30.20</td> <td>35.29</td> <td>8.81</td> <td>33.32</td> <td>386</td> <td>191 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5903.13 40.98 68.20 -27.22	30.20	35.29	8.81	33.32	386	191 AVERAGE	<p>Date: 2023-06-07</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 15 Setting : MCS0 Power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00 88.18 99.20 -11.02</td> <td>77.35</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>386</td> <td>191 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5955.00 88.18 99.20 -11.02	77.35	35.38	8.76	33.31	386	191 AVERAGE
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5903.13 40.98 68.20 -27.22	30.20	35.29	8.81	33.32	386	191 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5955.00 88.18 99.20 -11.02	77.35	35.38	8.76	33.31	386	191 AVERAGE																																																				

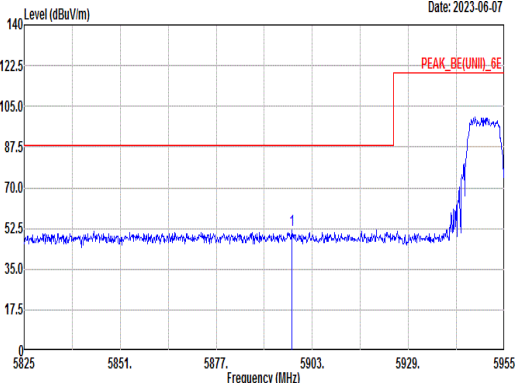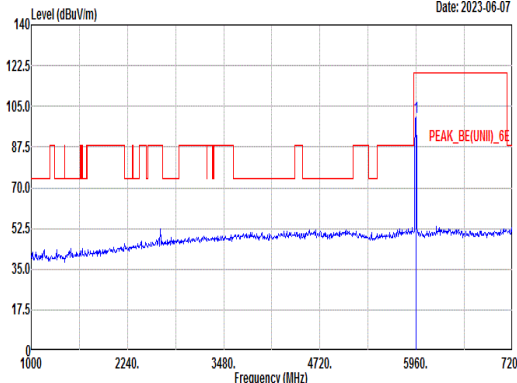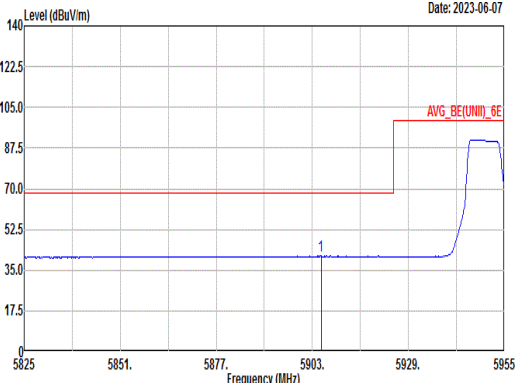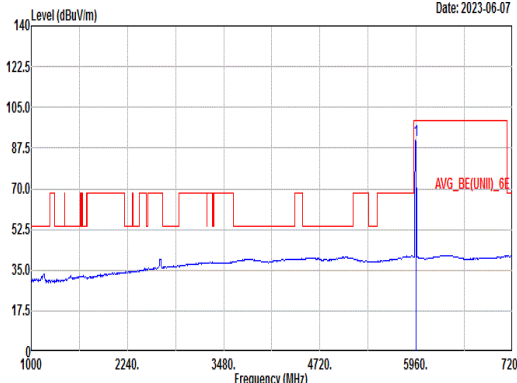

		16																																																																														
Mode	Band Edge																																																																															
	UNII-5_5925-6425_802.11AX HE20_CH1_RU106/53_5955MHz																																																																															
Pol.	Horizontal		Fundamental																																																																													
Peak	 <p>Date: 2023-06-07</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5897.41</td> <td>51.71</td> <td>88.20</td> <td>-36.49</td> <td>40.94</td> <td>35.27</td> <td>8.82</td> <td>33.32</td> <td>166</td> <td>161</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5897.41	51.71	88.20	-36.49	40.94	35.27	8.82	33.32	166	161	PEAK	 <p>Date: 2023-06-07</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>100.21</td> <td>-----</td> <td>-----</td> <td>89.36</td> <td>35.40</td> <td>8.76</td> <td>33.31</td> <td>166</td> <td>161</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	100.21	-----	-----	89.36	35.40	8.76	33.31	166	161	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5897.41	51.71	88.20	-36.49	40.94	35.27	8.82	33.32	166	161	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	100.21	-----	-----	89.36	35.40	8.76	33.31	166	161	PEAK																																																																					
Avg	 <p>Date: 2023-06-07</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5905.34</td> <td>41.00</td> <td>68.20</td> <td>-27.20</td> <td>30.22</td> <td>35.29</td> <td>8.81</td> <td>33.32</td> <td>166</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5905.34	41.00	68.20	-27.20	30.22	35.29	8.81	33.32	166	161	AVERAGE	 <p>Date: 2023-06-07</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>90.66</td> <td>-----</td> <td>-----</td> <td>79.83</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>166</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	90.66	-----	-----	79.83	35.38	8.76	33.31	166	161	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5905.34	41.00	68.20	-27.20	30.22	35.29	8.81	33.32	166	161	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5955.00	90.66	-----	-----	79.83	35.38	8.76	33.31	166	161	AVERAGE																																																																					



Mode	16																																																									
	Band Edge																																																									
	UNII-5_5925-6425_802.11AX HE20_CH1_RU106/53_5955MHz																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5947.82 52.47 88.20 -35.73</td> <td>41.67</td> <td>35.32</td> <td>8.80</td> <td>33.32</td> <td>317</td> <td>199 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5947.82 52.47 88.20 -35.73	41.67	35.32	8.80	33.32	317	199 PEAK	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00 96.10</td> <td>85.27</td> <td>35.38</td> <td>8.76</td> <td>33.31</td> <td>317</td> <td>199 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5955.00 96.10	85.27	35.38	8.76	33.31	317	199 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5947.82 52.47 88.20 -35.73	41.67	35.32	8.80	33.32	317	199 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5955.00 96.10	85.27	35.38	8.76	33.31	317	199 PEAK																																																				
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5908.98 40.93 68.20 -27.27</td> <td>30.14</td> <td>35.30</td> <td>8.81</td> <td>33.32</td> <td>317</td> <td>199 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5908.98 40.93 68.20 -27.27	30.14	35.30	8.81	33.32	317	199 AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 16 Setting : MCS0 Power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00 85.24 99.20 -13.96</td> <td>74.39</td> <td>35.40</td> <td>8.76</td> <td>33.31</td> <td>317</td> <td>199 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5955.00 85.24 99.20 -13.96	74.39	35.40	8.76	33.31	317	199 AVERAGE
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5908.98 40.93 68.20 -27.27	30.14	35.30	8.81	33.32	317	199 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5955.00 85.24 99.20 -13.96	74.39	35.40	8.76	33.31	317	199 AVERAGE																																																				



Mode	17																																																																											
	Harmonic																																																																											
	UNII-5_5925-6425_802.11AX HE20_CH49_Full_6195MHz																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 17 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 12390.00</td> <td>50.44</td> <td>74.00</td> <td>-23.56</td> <td>53.94</td> <td>39.36</td> <td>14.43</td> <td>57.29</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Level	Line Margin	Level	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 12390.00	50.44	74.00	-23.56	53.94	39.36	14.43	57.29	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 17 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 12390.00</td> <td>50.22</td> <td>74.00</td> <td>-23.78</td> <td>53.72</td> <td>39.36</td> <td>14.43</td> <td>57.29</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Level	Line Margin	Level	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 12390.00	50.22	74.00	-23.78	53.72	39.36	14.43	57.29	---	---	Peak
	Freq		Limit		Read								Ant	Cable	Preamp	APos	TPos	Remark																																																										
Level		Line Margin	Level	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 12390.00	50.44	74.00	-23.56	53.94	39.36	14.43	57.29	---	---	Peak																																																																		
Freq	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																		
	Level	Line Margin	Level	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 12390.00	50.22	74.00	-23.78	53.72	39.36	14.43	57.29	---	---	Peak																																																																		







Mode	18																																																																			
	Harmonic																																																																			
	UNII-5_5925-6425_802.11AX HE20_CH93_Full_6415MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 18 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">MHz</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>12830.00</td> <td>49.68</td> <td>88.20</td> <td>-38.52</td> <td>52.53</td> <td>39.47</td> <td>15.31</td> <td>57.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	MHz	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		12830.00	49.68	88.20	-38.52	52.53	39.47	15.31	57.63	---	---	Peak	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 18 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">MHz</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>12830.00</td> <td>50.56</td> <td>88.20</td> <td>-37.64</td> <td>53.41</td> <td>39.47</td> <td>15.31</td> <td>57.63</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	MHz	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		12830.00	50.56	88.20	-37.64	53.41	39.47	15.31	57.63	---	---	Peak
	1			MHz	Limit		Read		Ant	Cable	Preamp	APos		TPos	Remark																																																					
dBuV/m		dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																										
	12830.00	49.68	88.20	-38.52	52.53	39.47	15.31	57.63	---	---	Peak																																																									
1	MHz	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																									
		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
	12830.00	50.56	88.20	-37.64	53.41	39.47	15.31	57.63	---	---	Peak																																																									



Mode	19																																																																					
	Harmonic																																																																					
	UNII-6_5925-6425_802.11AX HE20_CH97_Full_6435MHz																																																																					
Pol.	Horizontal	Vertical																																																																				
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 19 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">12870.00</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>50.35</td> <td>88.20</td> <td>-37.85</td> <td>53.18</td> <td>39.47</td> <td>15.39</td> <td>57.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	12870.00	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			50.35	88.20	-37.85	53.18	39.47	15.39	57.69	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 19 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">12870.00</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>51.62</td> <td>88.20</td> <td>-36.58</td> <td>54.45</td> <td>39.47</td> <td>15.39</td> <td>57.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	12870.00	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			51.62	88.20	-36.58	54.45	39.47	15.39	57.69	---	---	Peak
	1			12870.00	Limit		Read		Ant	Cable	Preamp	Apos		Tpos	Remark																																																							
MHz		dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	cm	deg																																																											
		50.35	88.20	-37.85	53.18	39.47	15.39	57.69	---	---	Peak																																																											
1	12870.00	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																											
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																										
		51.62	88.20	-36.58	54.45	39.47	15.39	57.69	---	---	Peak																																																											

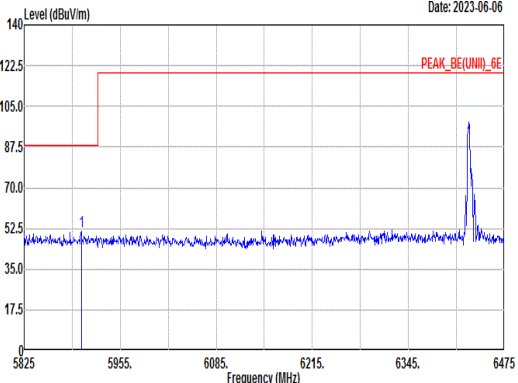
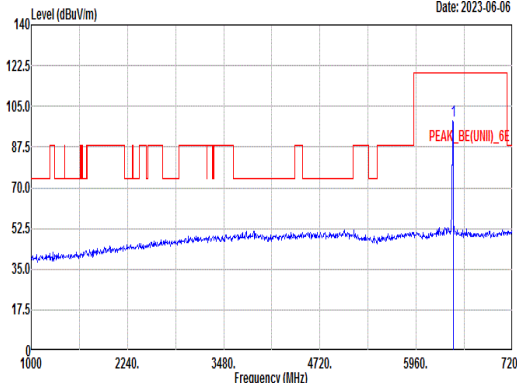
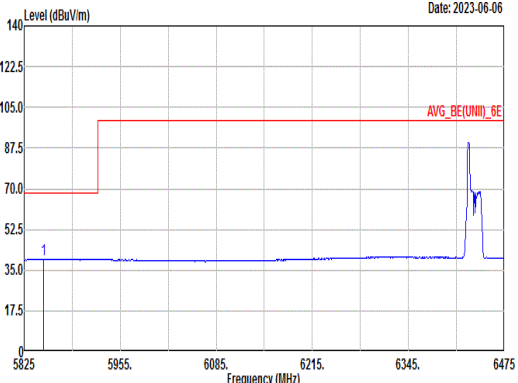
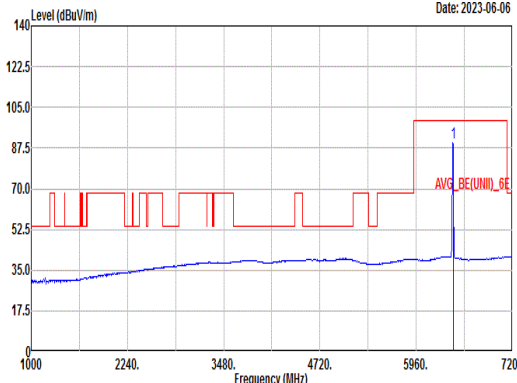


		20																																																																														
Mode	Band Edge																																																																															
	UNII-6_5925-6425_802.11AX HE20_CH97_26/0_6435MHz																																																																															
Pol.	Horizontal		Fundamental																																																																													
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue signal line with a red limit line labeled 'PEAK_BE(UNII)_6E'. A peak is visible at approximately 6435 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5902.35</td> <td>51.09</td> <td>88.20</td> <td>-37.11</td> <td>40.30</td> <td>35.29</td> <td>8.82</td> <td>33.32</td> <td>101</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5902.35	51.09	88.20	-37.11	40.30	35.29	8.82	33.32	101	47	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a red limit line labeled 'PEAK_BE(UNII)_6E'. A peak is visible at approximately 6435 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>98.77</td> <td>-----</td> <td>-----</td> <td>87.48</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>101</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6435.00	98.77	-----	-----	87.48	35.84	9.08	33.63	101	47	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5902.35	51.09	88.20	-37.11	40.30	35.29	8.82	33.32	101	47	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	98.77	-----	-----	87.48	35.84	9.08	33.63	101	47	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue signal line with a red limit line labeled 'AVG_BE(UNII)_6E'. A peak is visible at approximately 6435 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.65</td> <td>39.71</td> <td>68.20</td> <td>-28.49</td> <td>28.99</td> <td>35.17</td> <td>8.88</td> <td>33.33</td> <td>101</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5851.65	39.71	68.20	-28.49	28.99	35.17	8.88	33.33	101	47	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a red limit line labeled 'AVG_BE(UNII)_6E'. A peak is visible at approximately 6435 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>90.03</td> <td>-----</td> <td>-----</td> <td>78.74</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>101</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6435.00	90.03	-----	-----	78.74	35.84	9.08	33.63	101	47	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5851.65	39.71	68.20	-28.49	28.99	35.17	8.88	33.33	101	47	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	90.03	-----	-----	78.74	35.84	9.08	33.63	101	47	AVERAGE																																																																					



Mode	20																																																									
	Band Edge																																																									
	UNII-6_5925-6425_802.11AX HE20_CH97_26/0_6435MHz																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5842.55 50.02 88.20 -38.18</td> <td>39.31</td> <td>35.15</td> <td>8.89</td> <td>33.33</td> <td>320</td> <td>133 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5842.55 50.02 88.20 -38.18	39.31	35.15	8.89	33.33	320	133 PEAK	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 6435.00 93.14</td> <td>81.85</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>320</td> <td>133 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 6435.00 93.14	81.85	35.84	9.08	33.63	320	133 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5842.55 50.02 88.20 -38.18	39.31	35.15	8.89	33.33	320	133 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 6435.00 93.14	81.85	35.84	9.08	33.63	320	133 PEAK																																																				
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5831.50 39.72 68.20 -28.48</td> <td>29.02</td> <td>35.13</td> <td>8.90</td> <td>33.33</td> <td>320</td> <td>133 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5831.50 39.72 68.20 -28.48	29.02	35.13	8.90	33.33	320	133 AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 20 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 6435.00 83.08 99.20 -16.12</td> <td>71.79</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>320</td> <td>133 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 6435.00 83.08 99.20 -16.12	71.79	35.84	9.08	33.63	320	133 AVERAGE
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 5831.50 39.72 68.20 -28.48	29.02	35.13	8.90	33.33	320	133 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 6435.00 83.08 99.20 -16.12	71.79	35.84	9.08	33.63	320	133 AVERAGE																																																				

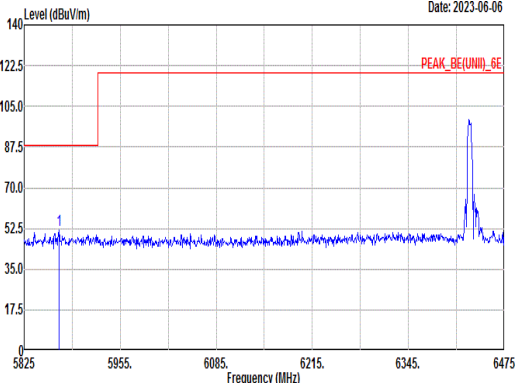
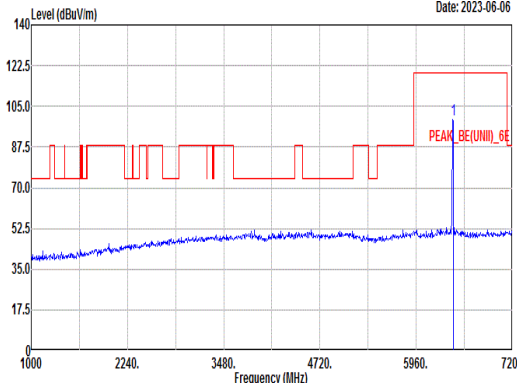
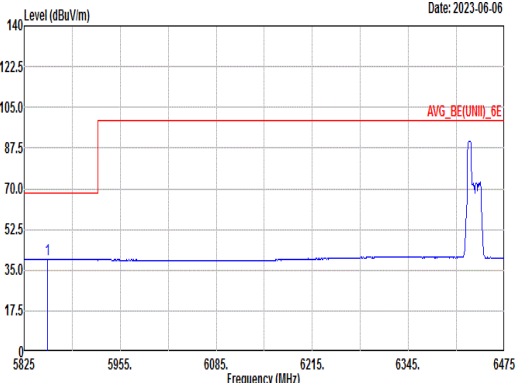
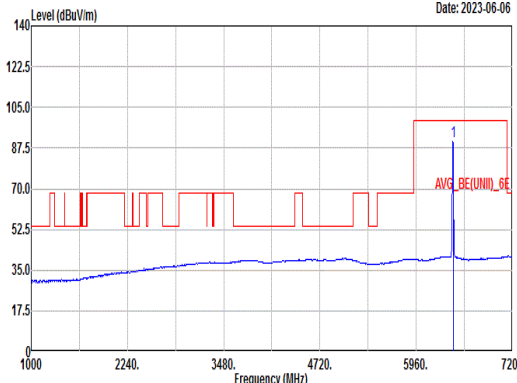


		21																																																																														
Mode	Band Edge																																																																															
	UNII-6_5925-6425_802.11AX HE20_CH97_52/37_6435MHz																																																																															
Pol.	Horizontal		Fundamental																																																																													
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue signal line with a red limit line labeled 'PEAK_BE(UNII)_6E'. A peak is marked with a blue vertical line at approximately 6435 MHz.</p> <p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5871.00</td> <td>51.56</td> <td>88.20</td> <td>-36.64</td> <td>40.82</td> <td>35.22</td> <td>8.85</td> <td>33.33</td> <td>100</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5871.00	51.56	88.20	-36.64	40.82	35.22	8.85	33.33	100	48	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a red limit line labeled 'PEAK_BE(UNII)_6E'. A peak is marked with a blue vertical line at approximately 6435 MHz.</p> <p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>99.24</td> <td>-----</td> <td>-----</td> <td>87.95</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>100</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	99.24	-----	-----	87.95	35.84	9.08	33.63	100	48	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5871.00	51.56	88.20	-36.64	40.82	35.22	8.85	33.33	100	48	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	99.24	-----	-----	87.95	35.84	9.08	33.63	100	48	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue signal line with a red limit line labeled 'AVG_BE(UNII)_6E'. A peak is marked with a blue vertical line at approximately 6435 MHz.</p> <p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5856.85</td> <td>39.77</td> <td>68.20</td> <td>-28.43</td> <td>29.04</td> <td>35.19</td> <td>8.87</td> <td>33.33</td> <td>100</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5856.85	39.77	68.20	-28.43	29.04	35.19	8.87	33.33	100	48	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a red limit line labeled 'AVG_BE(UNII)_6E'. A peak is marked with a blue vertical line at approximately 6435 MHz.</p> <p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>90.23</td> <td>-----</td> <td>-----</td> <td>78.94</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>100</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	90.23	-----	-----	78.94	35.84	9.08	33.63	100	48	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5856.85	39.77	68.20	-28.43	29.04	35.19	8.87	33.33	100	48	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	90.23	-----	-----	78.94	35.84	9.08	33.63	100	48	AVERAGE																																																																					



		21																																																																														
Mode	Band Edge																																																																															
	UNII-6_5925-6425_802.11AX_HE20_CH97_52/37_6435MHz																																																																															
Pol.	Vertical		Fundamental																																																																													
Peak	<p style="text-align: right;">Date: 2023-06-06</p> <p style="text-align: right;">PEAK_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5917.30</td> <td>50.19</td> <td>88.20</td> <td>-38.01</td> <td>39.39</td> <td>35.32</td> <td>8.80</td> <td>33.32</td> <td>320</td> <td>132</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5917.30	50.19	88.20	-38.01	39.39	35.32	8.80	33.32	320	132	PEAK	<p style="text-align: right;">Date: 2023-06-06</p> <p style="text-align: right;">PEAK_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>94.17</td> <td>82.88</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>320</td> <td>132</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	94.17	82.88	35.84	9.08	33.63	320	132	PEAK		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5917.30	50.19	88.20	-38.01	39.39	35.32	8.80	33.32	320	132	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	94.17	82.88	35.84	9.08	33.63	320	132	PEAK																																																																							
Avg	<p style="text-align: right;">Date: 2023-06-06</p> <p style="text-align: right;">AVG_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5853.60</td> <td>39.73</td> <td>68.20</td> <td>-28.47</td> <td>29.01</td> <td>35.18</td> <td>8.87</td> <td>33.33</td> <td>320</td> <td>132</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5853.60	39.73	68.20	-28.47	29.01	35.18	8.87	33.33	320	132	AVERAGE	<p style="text-align: right;">Date: 2023-06-06</p> <p style="text-align: right;">AVG_BE(UNII)_6E</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 21 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>85.04</td> <td>99.20</td> <td>-14.16</td> <td>73.75</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>320</td> <td>132</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	85.04	99.20	-14.16	73.75	35.84	9.08	33.63	320	132	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5853.60	39.73	68.20	-28.47	29.01	35.18	8.87	33.33	320	132	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	85.04	99.20	-14.16	73.75	35.84	9.08	33.63	320	132	AVERAGE																																																																					

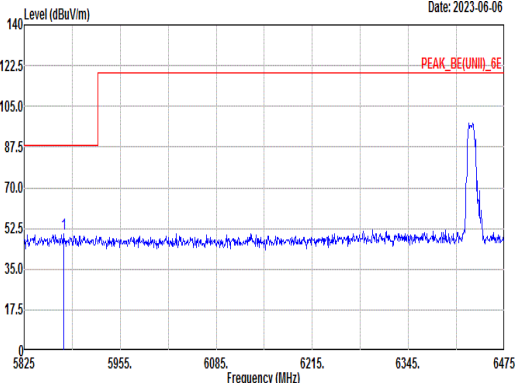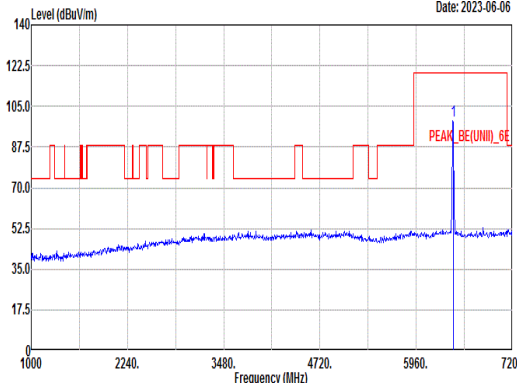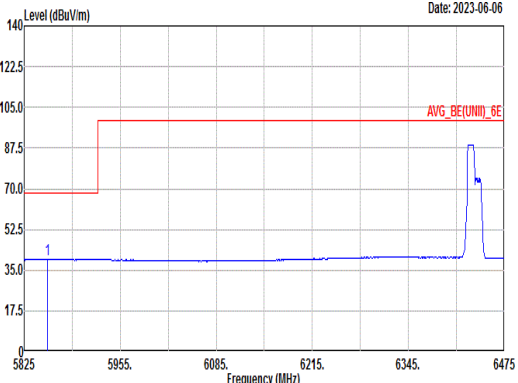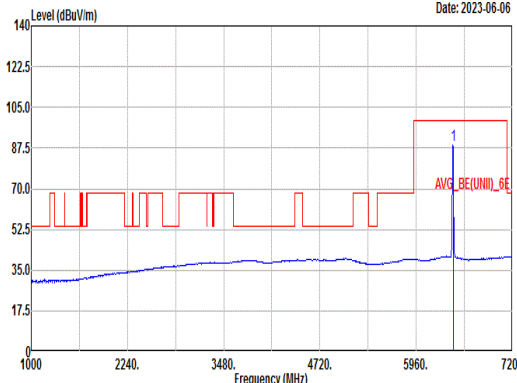

		22																																																																														
Mode	Band Edge																																																																															
	UNII-6_5925-6425_802.11AX HE20_CH97_106/53_6435MHz																																																																															
Pol.	Horizontal		Fundamental																																																																													
Peak	 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Peak at 6435 MHz.</p>		 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Peak at 6435 MHz.</p>																																																																													
	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5878.30</td> <td>50.19</td> <td>88.20</td> <td>-38.01</td> <td>39.45</td> <td>35.23</td> <td>8.84</td> <td>33.33</td> <td>106</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5878.30	50.19	88.20	-38.01	39.45	35.23	8.84	33.33	106	43	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>98.67</td> <td>-----</td> <td>-----</td> <td>87.41</td> <td>35.84</td> <td>9.06</td> <td>33.64</td> <td>106</td> <td>43</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	98.67	-----	-----	87.41	35.84	9.06	33.64	106	43
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5878.30	50.19	88.20	-38.01	39.45	35.23	8.84	33.33	106	43	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	98.67	-----	-----	87.41	35.84	9.06	33.64	106	43	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Avg at 6435 MHz.</p>		 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Avg at 6435 MHz.</p>																																																																													
	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5856.20</td> <td>39.69</td> <td>68.20</td> <td>-28.51</td> <td>28.97</td> <td>35.18</td> <td>8.87</td> <td>33.33</td> <td>106</td> <td>43</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5856.20	39.69	68.20	-28.51	28.97	35.18	8.87	33.33	106	43	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>88.98</td> <td>99.20</td> <td>-10.22</td> <td>77.69</td> <td>35.84</td> <td>9.08</td> <td>33.63</td> <td>106</td> <td>43</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	88.98	99.20	-10.22	77.69	35.84	9.08	33.63	106	43
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5856.20	39.69	68.20	-28.51	28.97	35.18	8.87	33.33	106	43	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	88.98	99.20	-10.22	77.69	35.84	9.08	33.63	106	43	AVERAGE																																																																					



		22																																																																														
Mode	Band Edge																																																																															
	UNII-6_5925-6425_802.11AX HE20_CH97_106/53_6435MHz																																																																															
Pol.	Vertical		Fundamental																																																																													
Peak	<p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5897.15</td> <td>51.60</td> <td>88.20</td> <td>-36.60</td> <td>40.83</td> <td>35.27</td> <td>8.82</td> <td>33.32</td> <td>317</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5897.15	51.60	88.20	-36.60	40.83	35.27	8.82	33.32	317	131	PEAK	<p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>91.09</td> <td>-----</td> <td>-----</td> <td>79.83</td> <td>35.84</td> <td>9.06</td> <td>33.64</td> <td>317</td> <td>131</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	91.09	-----	-----	79.83	35.84	9.06	33.64	317	131	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5897.15	51.60	88.20	-36.60	40.83	35.27	8.82	33.32	317	131	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	91.09	-----	-----	79.83	35.84	9.06	33.64	317	131	PEAK																																																																					
Avg	<p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5867.25</td> <td>39.71</td> <td>68.20</td> <td>-28.49</td> <td>28.97</td> <td>35.21</td> <td>8.86</td> <td>33.33</td> <td>317</td> <td>131</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5867.25	39.71	68.20	-28.49	28.97	35.21	8.86	33.33	317	131	AVERAGE	<p>Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 power setting 4 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6435.00</td> <td>81.36</td> <td>99.20</td> <td>-17.84</td> <td>70.10</td> <td>35.84</td> <td>9.06</td> <td>33.64</td> <td>317</td> <td>131</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6435.00	81.36	99.20	-17.84	70.10	35.84	9.06	33.64	317	131	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5867.25	39.71	68.20	-28.49	28.97	35.21	8.86	33.33	317	131	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6435.00	81.36	99.20	-17.84	70.10	35.84	9.06	33.64	317	131	AVERAGE																																																																					



Mode	23																																																																			
	Harmonic																																																																			
	UNII-6_6425-6525_802.11AX HE20_CH105_Full_6475MHz																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 23 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12950.00</td> <td>50.11</td> <td>88.20</td> <td>-38.09</td> <td>52.89</td> <td>39.49</td> <td>15.55</td> <td>57.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12950.00	50.11	88.20	-38.09	52.89	39.49	15.55	57.82	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 23 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12950.00</td> <td>50.17</td> <td>88.20</td> <td>-38.03</td> <td>52.95</td> <td>39.49</td> <td>15.55</td> <td>57.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12950.00	50.17	88.20	-38.03	52.95	39.49	15.55	57.82	---	---	Peak
	Freq		Limit		Read		Ant	Cable	Preamp	Apos	Tpos		Remark																																																							
MHz		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	12950.00	50.11	88.20	-38.09	52.89	39.49	15.55	57.82	---	---	Peak																																																									
Freq	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																									
1	12950.00	50.17	88.20	-38.03	52.95	39.49	15.55	57.82	---	---	Peak																																																									







Mode	24																																																						
	Harmonic																																																						
	UNII-6_6425-6525_802.11AX HE20_CH113_Full_6515MHz																																																						
Pol.	Horizontal	Vertical																																																					
Peak Avg	<p>Date: 2023-06-10</p>	<p>Date: 2023-06-10</p>																																																					
	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 24 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">MHz</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Apos</th> <th rowspan="2">Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13030.00</td> <td>50.66</td> <td>88.20 -37.54</td> <td>53.40</td> <td>39.50</td> <td>15.66</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	MHz	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	Level	Line Margin	Level	Factor	1	13030.00	50.66	88.20 -37.54	53.40	39.50	15.66	57.90	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 24 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">MHz</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">Apos</th> <th rowspan="2">Tpos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13030.00</td> <td>50.85</td> <td>88.20 -37.35</td> <td>53.59</td> <td>39.50</td> <td>15.66</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	MHz	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark	Level	Line Margin	Level	Factor	1	13030.00	50.85	88.20 -37.35	53.59	39.50	15.66	57.90	---	---
Freq	MHz			Limit		Read								Ant	Cable	Preamp	Apos	Tpos	Remark																																				
		Level	Line Margin	Level	Factor																																																		
1	13030.00	50.66	88.20 -37.54	53.40	39.50	15.66	57.90	---	---	Peak																																													
Freq	MHz	Limit		Read		Ant	Cable	Preamp	Apos	Tpos	Remark																																												
		Level	Line Margin	Level	Factor																																																		
1	13030.00	50.85	88.20 -37.35	53.59	39.50	15.66	57.90	---	---	Peak																																													



Mode	25																																																																																	
	Harmonic																																																																																	
	UNII-7_6525-6875_802.11AX HE20_CH117_Full_6535MHz																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 HORIZONTAL Project : 272102-02 Mode : 25 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">13070.00</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>50.91</td> <td>88.20</td> <td>-37.29</td> <td>53.68</td> <td>39.50</td> <td>15.63</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	13070.00	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Level	Line Margin	Level	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				50.91	88.20	-37.29	53.68	39.50	15.63	57.90	---	---	Peak	<p>Date: 2023-06-10</p> <p>Site : 03CH03-SZ Condition: PEAK(U-NII)_6E 3m HF_ANT_3117_0107 VERTICAL Project : 272102-02 Mode : 25 SN : #9 2q37b1vf3j002z Plane : Z with Accessories setting : MCS0 power setting 7.5</p> <table border="1"> <thead> <tr> <th rowspan="2">1</th> <th rowspan="2">13070.00</th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td>51.57</td> <td>88.20</td> <td>-36.63</td> <td>54.34</td> <td>39.50</td> <td>15.63</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	1	13070.00	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Level	Line Margin	Level	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				51.57	88.20	-36.63	54.34	39.50	15.63	57.90	---	---	Peak
1	13070.00			Limit		Read								Ant	Cable	Preamp	APos	TPos	Remark																																																															
		Level	Line Margin	Level	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
		50.91	88.20	-37.29	53.68	39.50	15.63	57.90	---	---	Peak																																																																							
1	13070.00	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																							
		Level	Line Margin	Level	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
		51.57	88.20	-36.63	54.34	39.50	15.63	57.90	---	---	Peak																																																																							

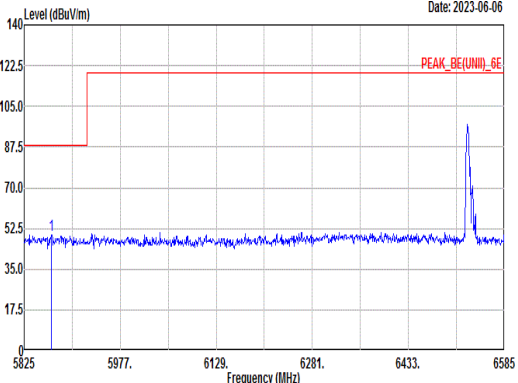
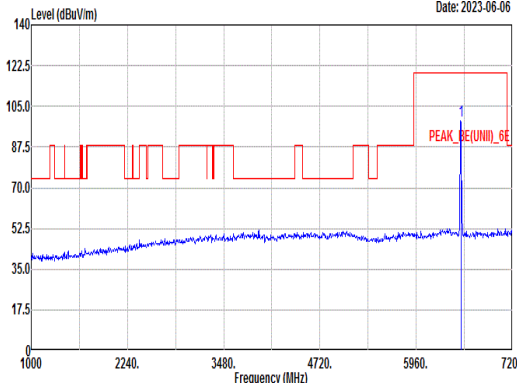
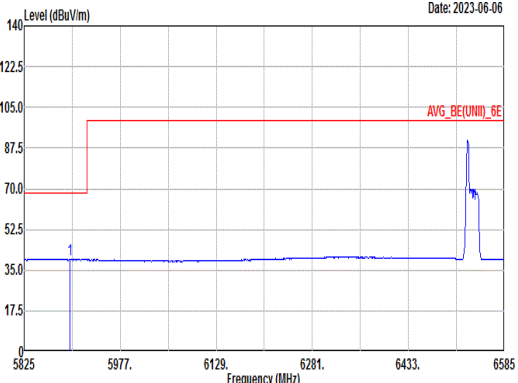
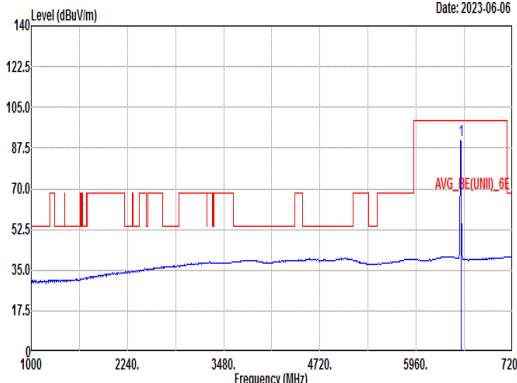


		26																																																																														
Mode	Band Edge - L																																																																															
	UNII-7_6525-6875_802.11AX HE20_CH117_26/0_6535MHz																																																																															
Pol.	Horizontal		Fundamental																																																																													
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level around 87.5 dBuV/m with a peak at 5868.32 MHz reaching approximately 122.5 dBuV/m. The limit line is at 88.20 dB.</p>		 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level around 70 dBuV/m with a peak at 6535.00 MHz reaching approximately 100 dBuV/m. The limit line is at 90.62 dB.</p>																																																																													
	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5868.32</td> <td>49.64</td> <td>88.20</td> <td>-38.56</td> <td>38.90</td> <td>35.21</td> <td>8.86</td> <td>33.33</td> <td>109</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5868.32	49.64	88.20	-38.56	38.90	35.21	8.86	33.33	109	47	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6535.00</td> <td>98.86</td> <td>-----</td> <td>-----</td> <td>87.86</td> <td>35.91</td> <td>8.79</td> <td>33.70</td> <td>109</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6535.00	98.86	-----	-----	87.86	35.91	8.79	33.70	109	47
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5868.32	49.64	88.20	-38.56	38.90	35.21	8.86	33.33	109	47	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	6535.00	98.86	-----	-----	87.86	35.91	8.79	33.70	109	47	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows an average signal level around 70 dBuV/m with a peak at 5897.96 MHz reaching approximately 100 dBuV/m. The limit line is at 68.20 dB.</p>		 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows an average signal level around 70 dBuV/m with a peak at 6535.00 MHz reaching approximately 100 dBuV/m. The limit line is at 90.62 dB.</p>																																																																													
	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5897.96</td> <td>39.65</td> <td>68.20</td> <td>-28.55</td> <td>28.87</td> <td>35.28</td> <td>8.82</td> <td>33.32</td> <td>109</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5897.96	39.65	68.20	-28.55	28.87	35.28	8.82	33.32	109	47	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6535.00</td> <td>90.62</td> <td>-----</td> <td>-----</td> <td>79.62</td> <td>35.91</td> <td>8.79</td> <td>33.70</td> <td>109</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	6535.00	90.62	-----	-----	79.62	35.91	8.79	33.70	109	47
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5897.96	39.65	68.20	-28.55	28.87	35.28	8.82	33.32	109	47	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	6535.00	90.62	-----	-----	79.62	35.91	8.79	33.70	109	47	AVERAGE																																																																					



		26																																											
Mode	Band Edge - R																																												
	UNII-7_6525-6875_802.11AX HE20_CH117_26/0_6535MHz																																												
Pol.	Horizontal		Fundamental																																										
Peak	<p style="text-align: right;">Date: 2023-06-06</p>		Blank																																										
	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7145.00</td> <td>51.44</td> <td>88.20</td> <td>-36.76</td> <td>40.21</td> <td>36.24</td> <td>8.65</td> <td>33.66</td> <td>109</td> <td>47 PEAK</td> </tr> <tr> <td>2</td> <td>7278.21</td> <td>51.22</td> <td>74.00</td> <td>-22.78</td> <td>39.72</td> <td>36.38</td> <td>8.83</td> <td>33.71</td> <td>109</td> <td>47 PEAK</td> </tr> </tbody> </table>			Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	7145.00	51.44	88.20	-36.76	40.21	36.24	8.65	33.66	109	47 PEAK	2	7278.21	51.22	74.00	-22.78	39.72	36.38	8.83	33.71
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	7145.00	51.44	88.20	-36.76	40.21	36.24	8.65	33.66	109	47 PEAK																																			
2	7278.21	51.22	74.00	-22.78	39.72	36.38	8.83	33.71	109	47 PEAK																																			
Avg	<p style="text-align: right;">Date: 2023-06-06</p>		Blank																																										
	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7232.36</td> <td>41.13</td> <td>68.20</td> <td>-27.07</td> <td>29.81</td> <td>36.33</td> <td>8.68</td> <td>33.69</td> <td>109</td> <td>47 AVERAGE</td> </tr> <tr> <td>2</td> <td>7333.57</td> <td>41.20</td> <td>54.00</td> <td>-12.80</td> <td>29.51</td> <td>36.43</td> <td>9.00</td> <td>33.74</td> <td>109</td> <td>47 AVERAGE</td> </tr> </tbody> </table>			Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	7232.36	41.13	68.20	-27.07	29.81	36.33	8.68	33.69	109	47 AVERAGE	2	7333.57	41.20	54.00	-12.80	29.51	36.43	9.00	33.74
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	7232.36	41.13	68.20	-27.07	29.81	36.33	8.68	33.69	109	47 AVERAGE																																			
2	7333.57	41.20	54.00	-12.80	29.51	36.43	9.00	33.74	109	47 AVERAGE																																			

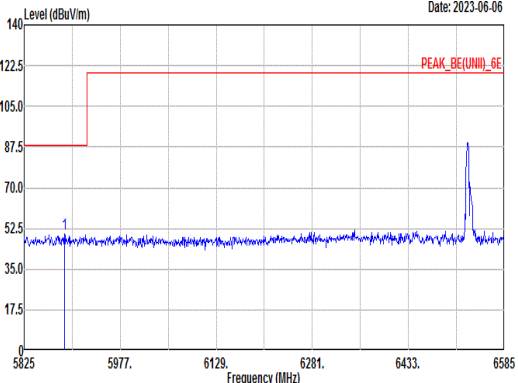
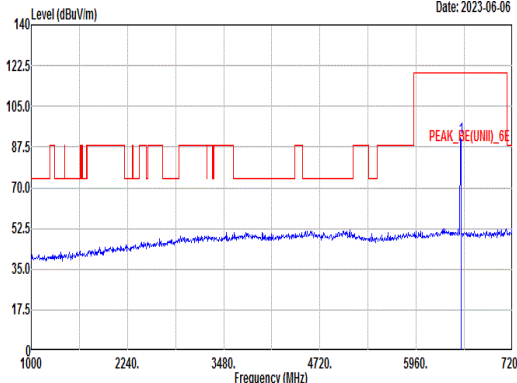
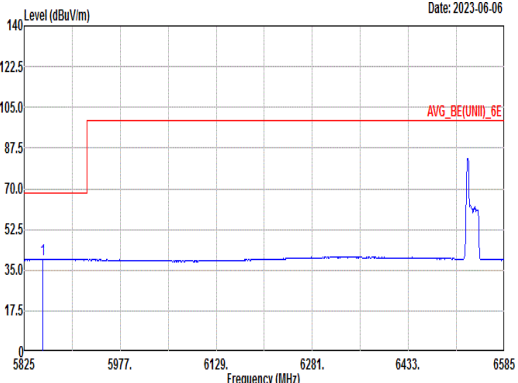
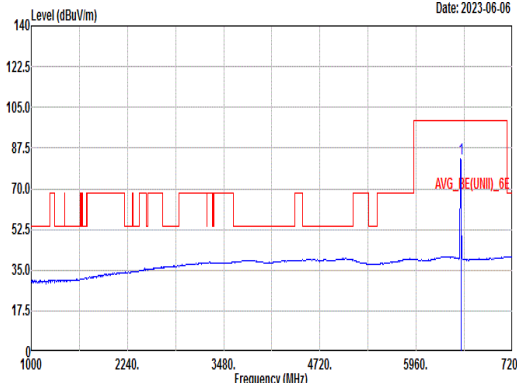


		26																																																																														
Mode	Band Edge - L																																																																															
	UNII-7_6525-6875_802.11AX HE20_CH117_26/0_6535MHz																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level around 87.5 dBuV/m with a peak at 5888.84 MHz. A red line indicates the limit at 122.5 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5888.84</td> <td>50.12</td> <td>88.20</td> <td>-38.08</td> <td>39.35</td> <td>35.26</td> <td>8.83</td> <td>33.32</td> <td>319</td> <td>198</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5888.84	50.12	88.20	-38.08	39.35	35.26	8.83	33.32	319	198	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level around 87.5 dBuV/m with a peak at 6535.00 MHz. A red line indicates the limit at 122.5 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6535.00</td> <td>91.34</td> <td>-----</td> <td>-----</td> <td>80.34</td> <td>35.91</td> <td>8.79</td> <td>33.70</td> <td>319</td> <td>198</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6535.00	91.34	-----	-----	80.34	35.91	8.79	33.70	319	198	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5888.84	50.12	88.20	-38.08	39.35	35.26	8.83	33.32	319	198	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6535.00	91.34	-----	-----	80.34	35.91	8.79	33.70	319	198	PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Vertical polarization. The plot shows a signal level around 70.0 dBuV/m with a peak at 5854.64 MHz. A red line indicates the limit at 122.5 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.64</td> <td>39.67</td> <td>68.20</td> <td>-28.53</td> <td>28.95</td> <td>35.18</td> <td>8.87</td> <td>33.33</td> <td>319</td> <td>198</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.64	39.67	68.20	-28.53	28.95	35.18	8.87	33.33	319	198	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Fundamental polarization. The plot shows a signal level around 70.0 dBuV/m with a peak at 6535.00 MHz. A red line indicates the limit at 122.5 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6535.00</td> <td>82.96</td> <td>99.20</td> <td>-16.24</td> <td>71.96</td> <td>35.91</td> <td>8.79</td> <td>33.70</td> <td>319</td> <td>198</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6535.00	82.96	99.20	-16.24	71.96	35.91	8.79	33.70	319	198	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5854.64	39.67	68.20	-28.53	28.95	35.18	8.87	33.33	319	198	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	6535.00	82.96	99.20	-16.24	71.96	35.91	8.79	33.70	319	198	AVERAGE																																																																					



		26																																																				
Mode	Band Edge - R																																																					
	UNII-7_6525-6875_802.11AX HE20_CH117_26/0_6535MHz																																																					
Pol.	Vertical	Fundamental																																																				
Peak	<p style="text-align: right;">Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7186.52</td> <td>51.03</td> <td>88.20</td> <td>-37.17</td> <td>39.82</td> <td>36.29</td> <td>8.60</td> <td>33.68</td> <td>319</td> <td>198</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7314.54</td> <td>52.05</td> <td>74.00</td> <td>-21.95</td> <td>40.43</td> <td>36.41</td> <td>8.94</td> <td>33.73</td> <td>319</td> <td>198</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7186.52	51.03	88.20	-37.17	39.82	36.29	8.60	33.68	319	198	PEAK	2	7314.54	52.05	74.00	-21.95	40.43	36.41	8.94	33.73	319	198	PEAK	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																														
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																														
1	7186.52	51.03	88.20	-37.17	39.82	36.29	8.60	33.68	319	198	PEAK																																											
2	7314.54	52.05	74.00	-21.95	40.43	36.41	8.94	33.73	319	198	PEAK																																											
Avg	<p style="text-align: right;">Date: 2023-06-06</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting -2 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7236.69</td> <td>41.23</td> <td>68.20</td> <td>-26.97</td> <td>29.90</td> <td>36.34</td> <td>8.69</td> <td>33.70</td> <td>319</td> <td>198</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>7333.57</td> <td>41.22</td> <td>54.00</td> <td>-12.78</td> <td>29.53</td> <td>36.43</td> <td>9.00</td> <td>33.74</td> <td>319</td> <td>198</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	7236.69	41.23	68.20	-26.97	29.90	36.34	8.69	33.70	319	198	AVERAGE	2	7333.57	41.22	54.00	-12.78	29.53	36.43	9.00	33.74	319	198	AVERAGE	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																														
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																														
1	7236.69	41.23	68.20	-26.97	29.90	36.34	8.69	33.70	319	198	AVERAGE																																											
2	7333.57	41.22	54.00	-12.78	29.53	36.43	9.00	33.74	319	198	AVERAGE																																											

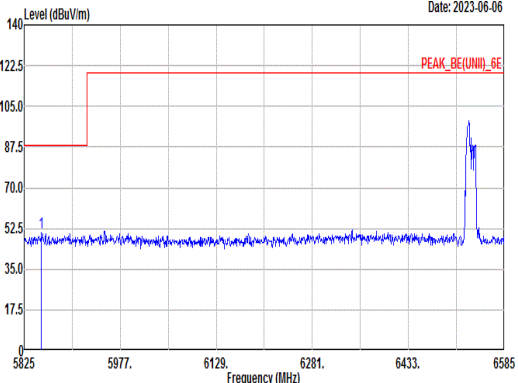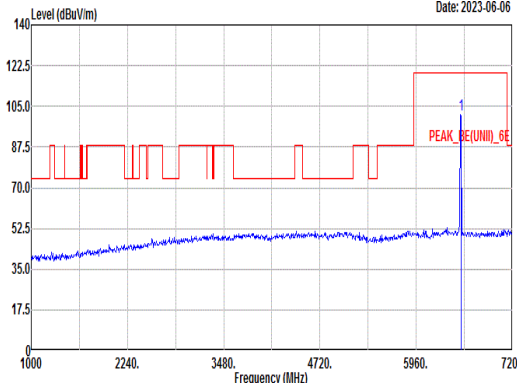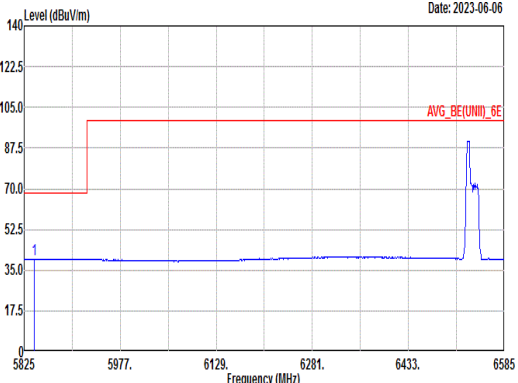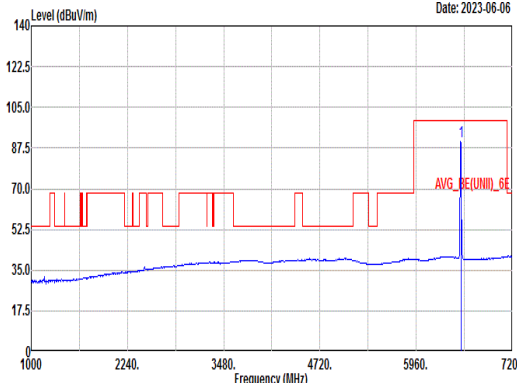

		27																																																																																
Mode	Band Edge - L																																																																																	
	UNII-7_6525-6875_802.11AX HE20_CH117_52/37_6535MHz																																																																																	
Pol.	Horizontal		Fundamental																																																																															
Peak	 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Peak at 5852.36 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5852.36</td> <td>50.46</td> <td>88.20</td> <td>-37.74</td> <td>39.74</td> <td>35.18</td> <td>8.87</td> <td>33.33</td> <td>110</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5852.36	50.46	88.20	-37.74	39.74	35.18	8.87	33.33	110	47	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Peak at 6535.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6535.00</td> <td>101.45</td> <td>-----</td> <td>-----</td> <td>90.45</td> <td>35.91</td> <td>8.79</td> <td>33.70</td> <td>110</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6535.00	101.45	-----	-----	90.45	35.91	8.79	33.70	110	47	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5852.36	50.46	88.20	-37.74	39.74	35.18	8.87	33.33	110	47	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	6535.00	101.45	-----	-----	90.45	35.91	8.79	33.70	110	47	PEAK																																																																							
Avg	 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Avg at 5840.96 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 27 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5840.96</td> <td>39.73</td> <td>68.20</td> <td>-28.47</td> <td>29.02</td> <td>35.15</td> <td>8.89</td> <td>33.33</td> <td>110</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5840.96	39.73	68.20	-28.47	29.02	35.15	8.89	33.33	110	47	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz). Date: 2023-06-06. Avg at 6535.00 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 27 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6535.00</td> <td>90.26</td> <td>-----</td> <td>-----</td> <td>79.26</td> <td>35.91</td> <td>8.79</td> <td>33.70</td> <td>110</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	6535.00	90.26	-----	-----	79.26	35.91	8.79	33.70	110	47	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5840.96	39.73	68.20	-28.47	29.02	35.15	8.89	33.33	110	47	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	6535.00	90.26	-----	-----	79.26	35.91	8.79	33.70	110	47	AVERAGE																																																																							



		27																																											
Mode	Band Edge - R																																												
	UNII-7_6525-6875_802.11AX HE20_CH117_52/37_6535MHz																																												
Pol.	Horizontal		Fundamental																																										
Peak	<p style="text-align: right;">Date: 2023-06-06</p>		Blank																																										
	<p>Site : 03CH03-SZ Condition: PEAK_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7183.92</td> <td>51.58</td> <td>88.20</td> <td>-36.62</td> <td>40.37</td> <td>36.28</td> <td>8.60</td> <td>33.67</td> <td>110</td> <td>47 PEAK</td> </tr> <tr> <td>2</td> <td>7272.15</td> <td>51.83</td> <td>74.00</td> <td>-22.17</td> <td>40.36</td> <td>36.37</td> <td>8.81</td> <td>33.71</td> <td>110</td> <td>47 PEAK</td> </tr> </tbody> </table>			Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	7183.92	51.58	88.20	-36.62	40.37	36.28	8.60	33.67	110	47 PEAK	2	7272.15	51.83	74.00	-22.17	40.36	36.37	8.81	33.71
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	7183.92	51.58	88.20	-36.62	40.37	36.28	8.60	33.67	110	47 PEAK																																			
2	7272.15	51.83	74.00	-22.17	40.36	36.37	8.81	33.71	110	47 PEAK																																			
Avg	<p style="text-align: right;">Date: 2023-06-06</p>		Blank																																										
	<p>Site : 03CH03-SZ Condition: AVG_BE(UNII)_6E 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 27 Setting : MCS0 power setting 1 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7206.41</td> <td>41.19</td> <td>68.20</td> <td>-27.01</td> <td>29.96</td> <td>36.31</td> <td>8.60</td> <td>33.68</td> <td>110</td> <td>47 AVERAGE</td> </tr> <tr> <td>2</td> <td>7325.78</td> <td>41.23</td> <td>54.00</td> <td>-12.77</td> <td>29.55</td> <td>36.43</td> <td>8.98</td> <td>33.73</td> <td>110</td> <td>47 AVERAGE</td> </tr> </tbody> </table>			Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	7206.41	41.19	68.20	-27.01	29.96	36.31	8.60	33.68	110	47 AVERAGE	2	7325.78	41.23	54.00	-12.77	29.55	36.43	8.98	33.73
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	7206.41	41.19	68.20	-27.01	29.96	36.31	8.60	33.68	110	47 AVERAGE																																			
2	7325.78	41.23	54.00	-12.77	29.55	36.43	8.98	33.73	110	47 AVERAGE																																			