



# FCC RF Test Report

**APPLICANT** : Luxottica Group S.p.A.  
**EQUIPMENT** : SMART GLASSES  
**BRAND NAME** : Ray-Ban Meta or Ray-Ban  
**MODEL NAME** : RW4006, RW4008, RW4009  
**FCC ID** : 2AYOA-4003  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : May 08, 2023 ~ Jun. 12, 2023

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Test Software ..... 8

    1.8 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 12

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 13

    2.6 Measurement Results Explanation Example ..... 13

**3 TEST RESULT ..... 14**

    3.1 26dB & 99% Occupied Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 19

    3.3 Power Spectral Density Measurement ..... 21

    3.4 Unwanted Emissions Measurement ..... 23

    3.5 AC Conducted Emission Measurement ..... 28

    3.6 Antenna Requirements ..... 30

**4 LIST OF MEASURING EQUIPMENT ..... 31**

**5 MEASUREMENT UNCERTAINTY ..... 32**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION   | ISSUED DATE   |
|--------------|---------|---|---------------|
| FR272102-02D | Rev. 01 | Initial issue of report   | Jul. 03, 2023 |
| FR272102-02D | Rev. 02 | Update Equipment name, Brand name and address of Applicant & Manufacturer | Jul. 26, 2023 |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |
|              |         |   |               |



### SUMMARY OF TEST RESULT

| Report Section | FCC Rule           | Description                    | Limit                 | Result      | Remark                                   |
|----------------|--------------------|--------------------------------|-----------------------|-------------|--|
| 3.1            | 2.1049 & 15.403(i) | 26dB & 99% Bandwidth           | -                     | Report only | -  |
| 3.2            | 15.407(a)          | Maximum Conducted Output Power | ≤ 24 dBm              | Pass        | -  |
| 3.3            | 15.407(a)          | Power Spectral Density         | ≤ 11 dBm/MHz          | Pass        | -  |
| 3.4            | 15.407(b)          | Unwanted Emissions             | 15.407(b) & 15.209(a) | Pass        | Under limit<br>2.68 dB at<br>5355.96 MHz |
| 3.5            | 15.207             | AC Conducted Emission          | 15.207(a)             | Pass        | Under limit<br>19.60 dB at<br>0.21 MHz   |
| 3.6            | 15.203 & 15.407(a) | Antenna Requirement            | 15.203 & 15.407(a)    | Pass        | -  |

|   |
|---|
| <b>Conformity Assessment Condition:</b>   |
| 1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. |
| 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"  |
| <b>Disclaimer:</b>  |
| The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.   |



# 1 General Description

## 1.1 Applicant

Luxottica Group S.p.A.  
Piazzale Cadorna 3 20123 Milan, Italy

## 1.2 Manufacturer

Luxottica Group S.p.A.  
Piazzale Cadorna 3 20123 Milan, Italy

## 1.3 Product Feature of Equipment Under Test

| Product Feature |  |
|-----------------|--|
| Equipment       | SMART GLASSES  |
| Brand Name      | Ray-Ban Meta or Ray-Ban  |
| Model Name      | RW4006, RW4008, RW4009   |
| FCC ID          | 2AYOA-4003   |
| SN Code         | Conducted: 2Q37B1WF3J003B<br>Conduction: 2Q37B1WF3J006G<br>Radiation: 2Q37B1WF3J002Z |
| HW Version      | EVT2   |
| SW Version      | 12/SQ3A. 220605. 009. A1/49757590052300100:userdebug/test-keys                       |
| EUT Stage       | Identical Prototype  |

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three types of EUT: Sample 1(RW4006), Sample 2(RW4008) and Sample 3(RW4009). The manufacturer declares that they share the same radio characteristics and Software/Firmware, the differences between each of them are color of lenses and size of frames which certainly do not affect the test results. Therefore, the test is mainly performed with the Sample 1.
3. The device has four power states, the power state C is the highest output power, thus RF report only test power state C with the highest output power.
4. Under power state C, RSE pretest the "glass in charging case" and "glass stand alone" mode, use the worst mode "glass stand alone" to perform final RSE test.

| Power State | Exposure Condition                    |
|-------------|---------------------------------------|
| A           | Face-Worn                             |
|             | Rest-on-Head                          |
| B           | Rest-on-Shirt                         |
|             | Pocketing                             |
| C           | Pocketing/handheld (in Charging Case) |
| D           | Free Space/Off Body                   |



### 1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification |  |
|---|--|
| <b>Tx/Rx Frequency Range</b>            | 5180 MHz ~ 5240 MHz<br>5260 MHz ~ 5320 MHz<br>5500 MHz ~ 5720 MHz  |
| <b>Maximum Output Power to Antenna</b>  | <p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b><br/> 802.11a : 16.62 dBm / 0.0459 W<br/> 802.11n HT20 : 16.66 dBm / 0.0463 W<br/> 802.11n HT40 : 16.82 dBm / 0.0481 W<br/> 802.11ac VHT20: 16.63 dBm / 0.0460 W<br/> 802.11ac VHT40: 16.78 dBm / 0.0476 W<br/> 802.11ac VHT80: 13.01 dBm / 0.0200 W<br/> 802.11ac VHT160: 13.52 dBm / 0.0225 W<br/> 802.11ax HE20: 16.69 dBm / 0.0467 W<br/> 802.11ax HE40: 16.85 dBm / 0.0484 W<br/> 802.11ax HE80: 13.06 dBm / 0.0202 W<br/> 802.11ax HE160: 13.56 dBm / 0.0227 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b><br/> 802.11a : 16.58 dBm / 0.0455 W<br/> 802.11n HT20 : 16.64 dBm / 0.0461 W<br/> 802.11n HT40 : 17.27 dBm / 0.0533 W<br/> 802.11ac VHT20: 16.61 dBm / 0.0458 W<br/> 802.11ac VHT40: 17.23 dBm / 0.0528 W<br/> 802.11ac VHT80: 14.66 dBm / 0.0292 W<br/> 802.11ax HE20: 16.67 dBm / 0.0465 W<br/> 802.11ax HE40: 17.30 dBm / 0.0537 W<br/> 802.11ax HE80: 14.71 dBm / 0.0296 W</p> <p><b>&lt;5500 MHz ~ 5720 MHz&gt;</b><br/> 802.11a : 16.60 dBm / 0.0457 W<br/> 802.11n HT20 : 16.66 dBm / 0.0463 W<br/> 802.11n HT40 : 17.26 dBm / 0.0532 W<br/> 802.11ac VHT20: 16.63 dBm / 0.0460 W<br/> 802.11ac VHT40: 17.22 dBm / 0.0527 W<br/> 802.11ac VHT80: 17.05 dBm / 0.0507 W<br/> 802.11ac VHT160: 14.44 dBm / 0.0278 W<br/> 802.11ax HE20: 16.69 dBm / 0.0467 W<br/> 802.11ax HE40: 17.29 dBm / 0.0536 W<br/> 802.11ax HE80: 17.10 dBm / 0.0513 W<br/> 802.11ax HE160: 14.48 dBm / 0.0281 W</p> |
| <b>99% Occupied Bandwidth</b>           | <p><b>&lt;5180 MHz ~ 5250 MHz&gt;</b><br/> 802.11a : 17.63 MHz<br/> 802.11ax HE20: 19.23 MHz<br/> 802.11ax HE40: 37.96 MHz<br/> 802.11ax HE80: 78.00 MHz<br/> 802.11ax HE160: 157.60 MHz</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b><br/> 802.11a : 17.53 MHz<br/> 802.11ax HE20: 19.23 MHz<br/> 802.11ax HE40: 38.06 MHz<br/> 802.11ax HE80: 78.00 MHz</p> <p><b>&lt;5500 MHz ~ 5720 MHz&gt;</b><br/> 802.11a : 17.58 MHz<br/> 802.11ax HE20: 19.23 MHz<br/> 802.11ax HE40: 38.06 MHz<br/> 802.11ax HE80: 78.00 MHz</p>   |



|                            |  |
|----------------------------|--|
|                            | 802.11ax HE160: 156.96 MHz   |
| <b>Antenna Type / Gain</b> | <b>&lt;5180 MHz ~ 5240 MHz&gt;</b><br>Inverted-F and folded monopole Antenna with gain 1.2 dBi<br><b>&lt;5260 MHz ~ 5320 MHz&gt;</b><br>Inverted-F and folded monopole Antenna with gain 1.7 dBi<br><b>&lt;5500 MHz ~ 5720 MHz&gt;</b><br>Inverted-F and folded monopole Antenna with gain 3.9 dBi |
| <b>Type of Modulation</b>  | 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)<br>802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)  |

**Note:**

1. For 802.11n / 11ac / 11ax mode, the whole testing has assessed 802.11ax HE20 / HE40 / HE80 / HE160 by referring to the higher output power.
2. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are full tested for conducted Power/PSD/Spurious/Bandedge.
3. The device does not support 802.11ax channel puncture mode.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

|                           |   |                            |                                       |
|---------------------------|---|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (ShenZhen)   |                            |                                       |
| <b>Test Site Location</b> | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China<br>TEL: +86-755-86379589<br>FAX: +86-755-86379595 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>   | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | CO01-SZ<br>TH01-SZ  | CN1256                     | 421272                                |



|                           |   |                            |                                       |
|---------------------------|---|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International Inc. (ShenZhen)   |                            |                                       |
| <b>Test Site Location</b> | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103<br>TEL: +86-755-33202398 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>   | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | 03CH03-SZ   | CN1256                     | 421272                                |

### 1.7 Test Software

| Item | Site      | Manufacturer | Name | Version     |
|------|-----------|--------------|------|-------------|
| 1.   | 03CH03-SZ | AUDIX        | E3   | 6.2009-8-24 |
| 2.   | CO01-SZ   | AUDIX        | E3   | 6.120613b   |

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

| Frequency Band           | Channel         | Freq. (MHz) | Channel         | Freq. (MHz) |
|--------------------------|-----------------|-------------|-----------------|-------------|
| 5180-5240 MHz<br>U-NII-1 | 36              | 5180        | 44              | 5220        |
|                          | 38*             | 5190        | 46*             | 5230        |
|                          | 40              | 5200        | 48              | 5240        |
|                          | 42 <sup>#</sup> | 5210        | 50 <sup>2</sup> | 5250        |

| Frequency Band            | Channel         | Freq. (MHz) | Channel | Freq. (MHz) |
|---------------------------|-----------------|-------------|---------|-------------|
| 5260-5320 MHz<br>U-NII-2A | 52              | 5260        | 60      | 5300        |
|                           | 54*             | 5270        | 62*     | 5310        |
|                           | 56              | 5280        | 64      | 5320        |
|                           | 58 <sup>#</sup> | 5290        | -       | -           |

| Frequency Band             | Channel          | Freq. (MHz) | Channel          | Freq. (MHz) |
|----------------------------|------------------|-------------|------------------|-------------|
| 5500- 5720 MHz<br>U-NII-2C | 100              | 5500        | 114 <sup>2</sup> | 5570        |
|                            | 102*             | 5510        | 116              | 5580        |
|                            | 104              | 5520        | 132              | 5660        |
|                            | 106 <sup>#</sup> | 5530        | 134*             | 5670        |
|                            | 108              | 5540        | 136              | 5680        |
|                            | 110*             | 5550        | 140              | 5700        |
|                            | 112              | 5560        | -                | -           |



| Frequency Band | Channel          | Freq. (MHz) | Channel | Freq. (MHz) |
|----------------|------------------|-------------|---------|-------------|
| TDWR Channel   | 118*             | 5590        | 124     | 5620        |
|                | 120              | 5600        | 126*    | 5630        |
|                | 122 <sup>#</sup> | 5610        | 128     | 5640        |

| Frequency Band   | Channel          | Freq. (MHz) | Channel | Freq. (MHz) |
|------------------|------------------|-------------|---------|-------------|
| Straddle Channel | 138 <sup>#</sup> | 5690        | 144     | 5720        |
|                  | 142*             | 5710        | -       | -           |

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80 and 802.11ax HE80.
3. The above Frequency and Channel in "<sup>2</sup>" were 802.11ac VHT160 and 802.11ax HE160.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

| Modulation     | Data Rate |
|----------------|-----------|
| 802.11a        | 6 Mbps    |
| 802.11ax HE20  | MCS0      |
| 802.11ax HE40  | MCS0      |
| 802.11ax HE80  | MCS0      |
| 802.11ax HE160 | MCS0      |

| RSE co-location mode              |
|-----------------------------------|
| BLE(2M) CH39 + 802.11ax HE80 CH58 |

| Test Cases            |   |
|-----------------------|---|
| AC Conducted Emission | Mode 1 : BT Link (Connect to phone) + WLAN (5G) Link + EUT into Charging case (Ray-Ban Meta) + Ray-Ban Meta -Type C with Adapter (Charging from Adapter) for Sample 1 |



| Ch. #    |        | U-NII-1 | U-NII-2A | U-NII-2C |
|----------|--------|---------|----------|----------|
|          |        | 802.11a | 802.11a  | 802.11a  |
| L        | Low    | 36      | 52       | 100      |
| M        | Middle | 44      | 60       | 116      |
| H        | High   | 48      | 64       | 140      |
| Straddle |        | -       | -        | 144      |

| Ch. #    |        | U-NII-1       | U-NII-2A      | U-NII-2C      |
|----------|--------|---------------|---------------|---------------|
|          |        | 802.11ax HE20 | 802.11ax HE20 | 802.11ax HE20 |
| L        | Low    | 36            | 52            | 100           |
| M        | Middle | 44            | 60            | 116           |
| H        | High   | 48            | 64            | 140           |
| Straddle |        | -             | -             | 144           |


| Ch. #    |        | U-NII-1       | U-NII-2A      | U-NII-2C      |
|----------|--------|---------------|---------------|---------------|
|          |        | 802.11ax HE40 | 802.11ax HE40 | 802.11ax HE40 |
| L        | Low    | 38            | 54            | 102           |
| M        | Middle | -             | -             | 110           |
| H        | High   | 46            | 62            | 134           |
| Straddle |        | -             | -             | 142           |

| Ch. #    |        | U-NII-1       | U-NII-2A      | U-NII-2C      |
|----------|--------|---------------|---------------|---------------|
|          |        | 802.11ax HE80 | 802.11ax HE80 | 802.11ax HE80 |
| L        | Low    | -             | -             | 106           |
| M        | Middle | 42            | 58            | -             |
| H        | High   | -             | -             | 122           |
| Straddle |        | -             | -             | 138           |


| Ch. # |        | U-NII-1        | U-NII-2A       | U-NII-2C       |
|-------|--------|----------------|----------------|----------------|
|       |        | 802.11ax HE160 | 802.11ax HE160 | 802.11ax HE160 |
| M     | Middle | 50             |                | 114            |

## 2.3 Connection Diagram of Test System

For Conducted Emission:

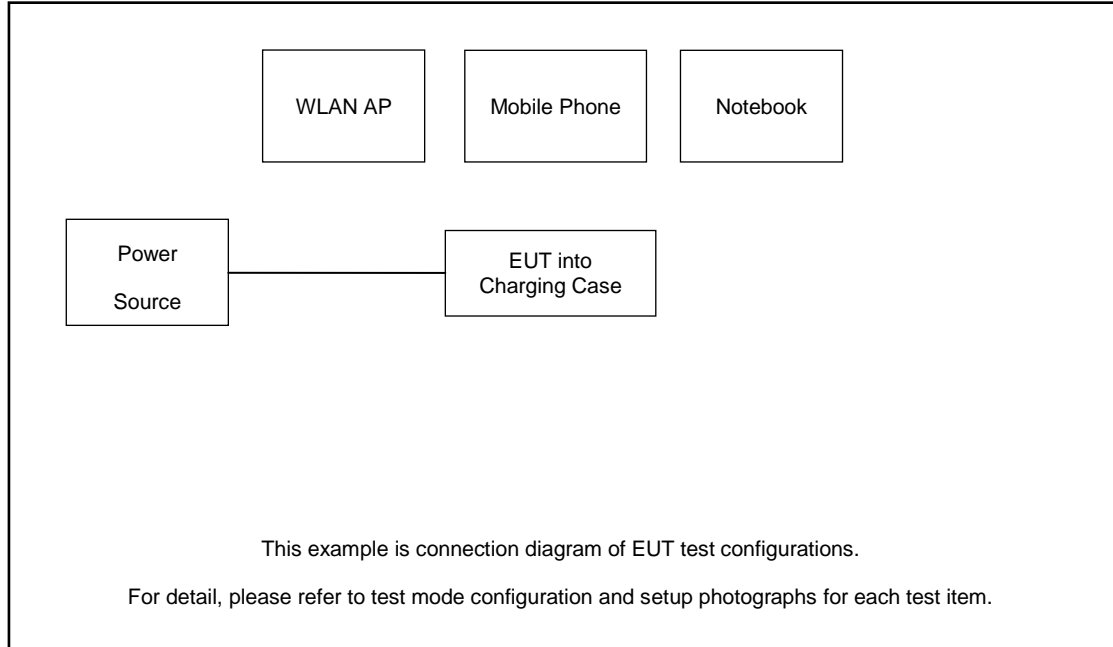

For Radiated Emission:

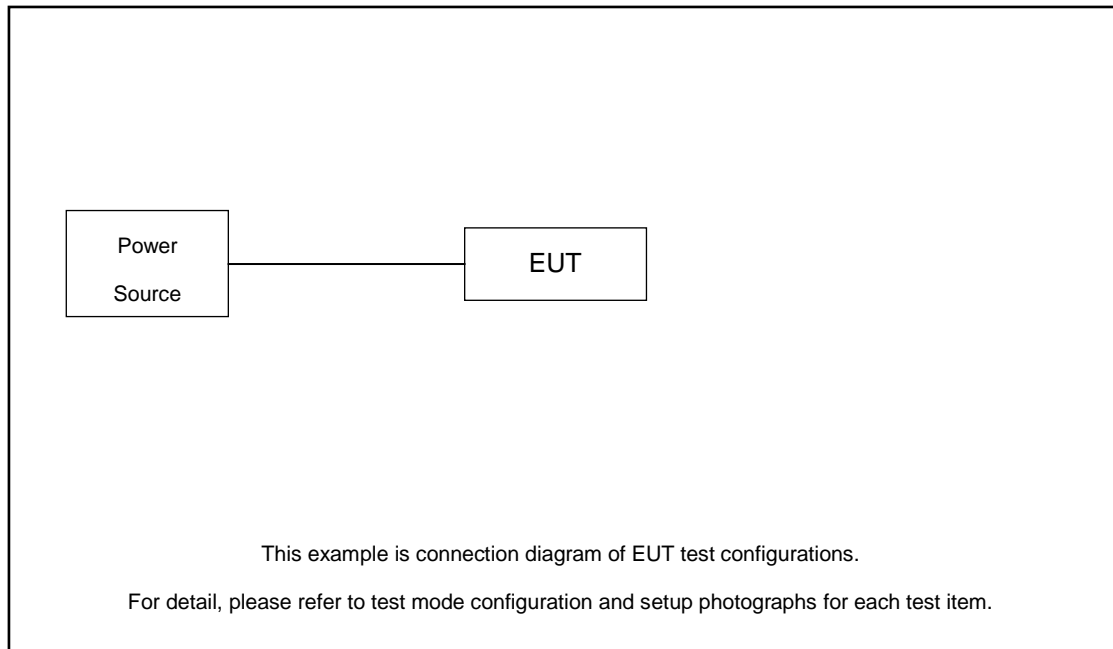

## 2.4 Support Unit used in test configuration and system

| Item | Equipment       | Trade Name | Model Name | FCC ID      | Data Cable | Power Cord   |
|------|-----------------|------------|------------|-------------|------------|--|
| 1.   | WLAN AP         | Dlink      | DIR-820L   | KA2IR820LA1 | N/A        | Unshielded,1.8m  |
| 2.   | Notebook        | Lenovo     | E540       | FCC DoC     | N/A        | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 3.   | Mobile Phone    | Oneplus    | N/A        | N/A         | N/A        | N/A  |
| 4.   | Adapter         | N/A        | N/A        | N/A         | N/A        | N/A  |
| 5.   | DC Power Supply | N/A        | N/A        | N/A         | N/A        | N/A  |

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 3.4 dB and 20dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 3.4 + 20 = 23.4 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the OBW and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.



##### 3.1.4 Test Setup


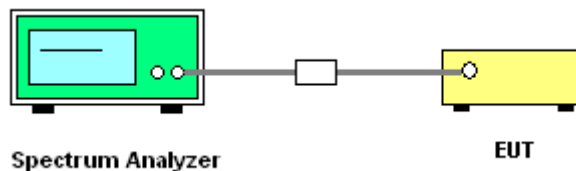






### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth



Please refer to Appendix A.

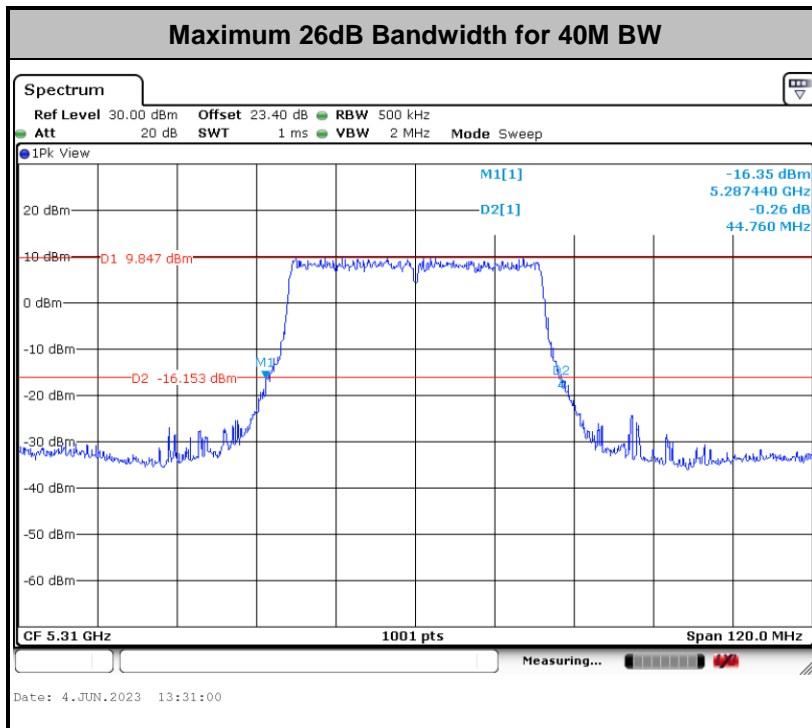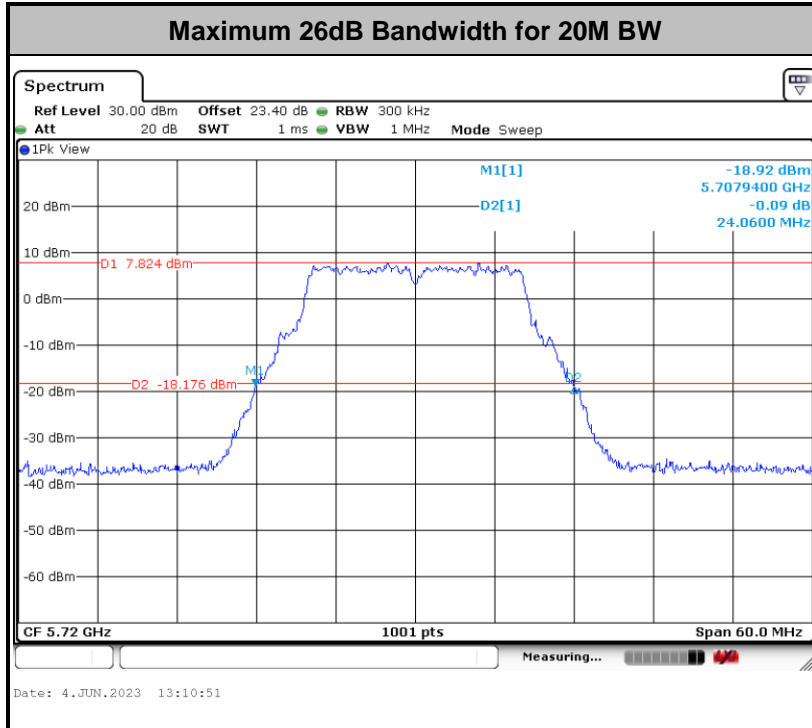

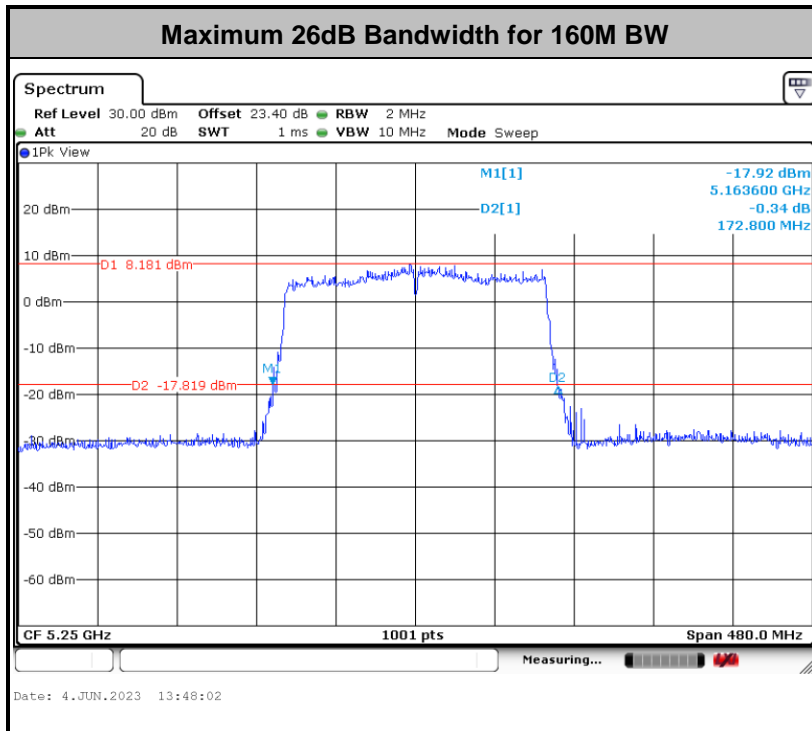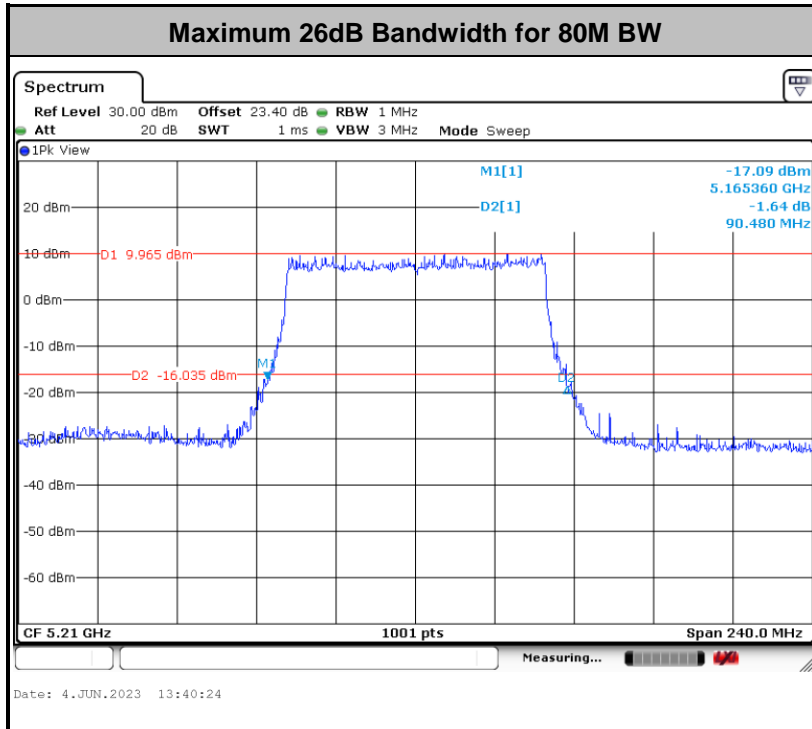



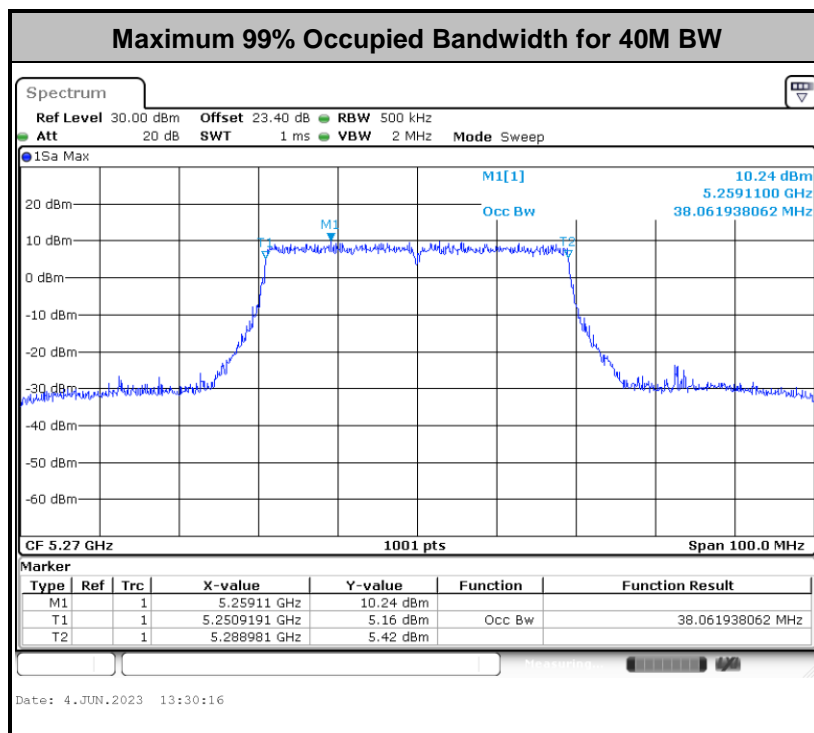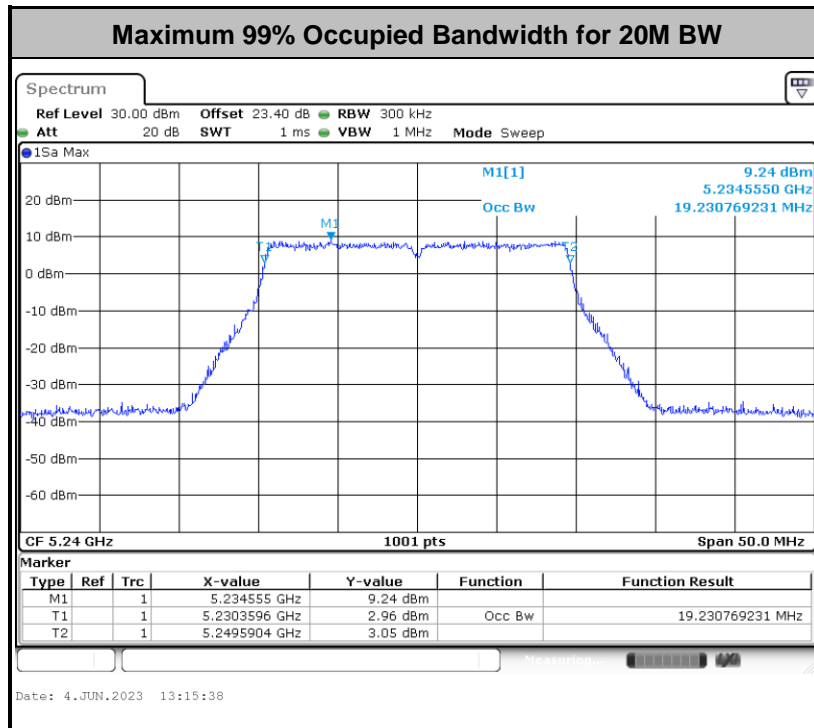

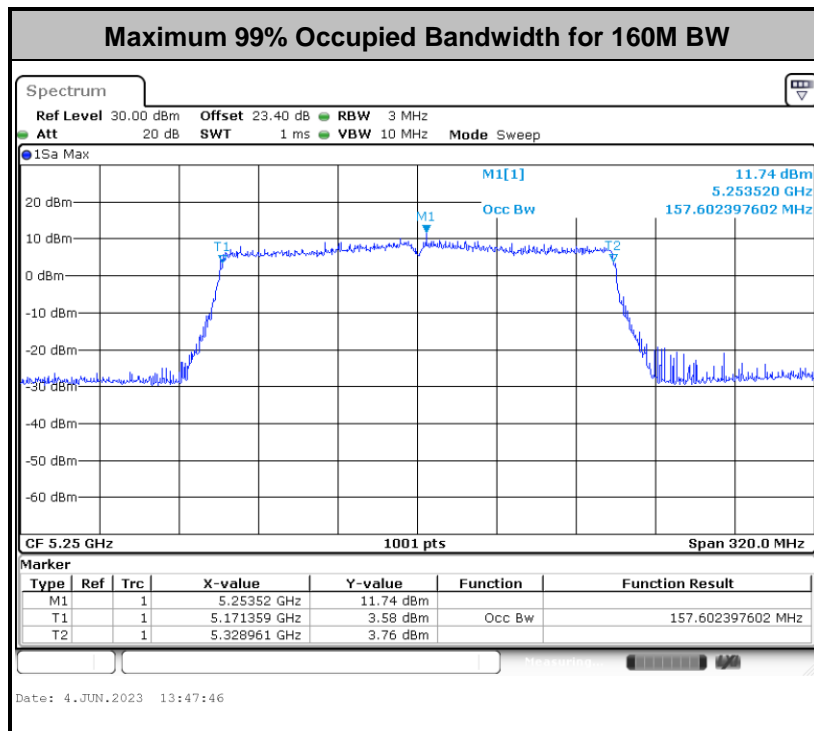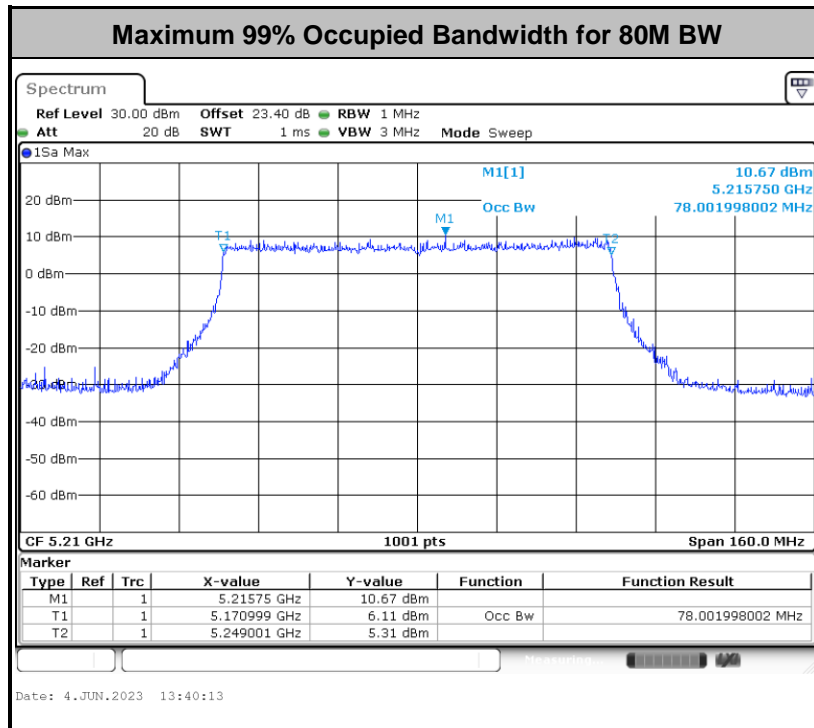

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log_{10} B$ , where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

### 3.2.4 Test Setup

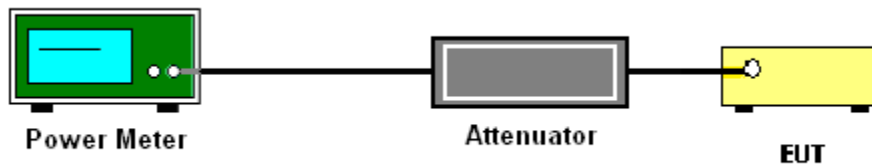

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.


**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

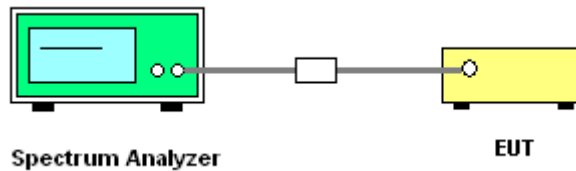

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

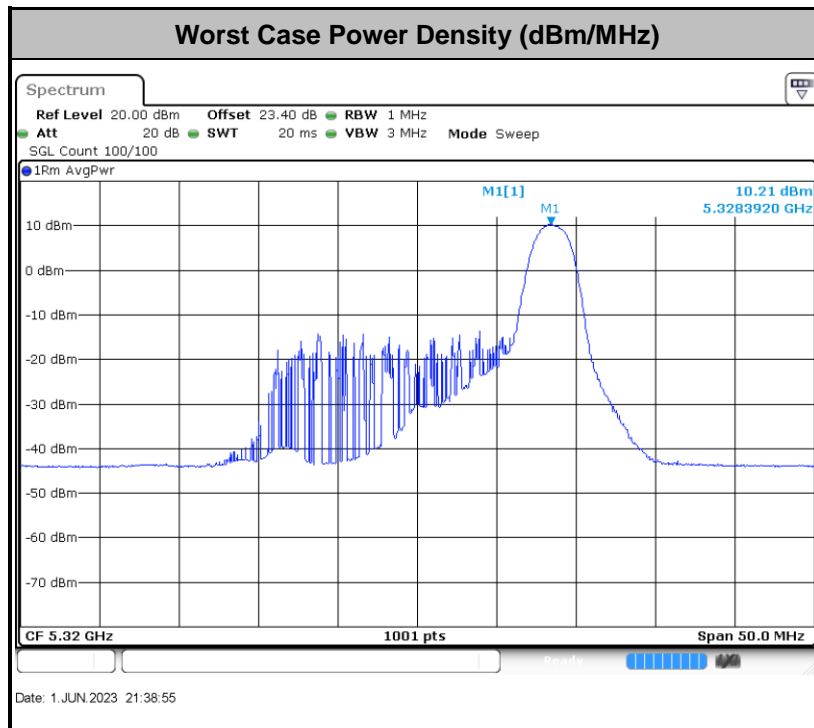

**Note:** Average Power Density (dB) = Measured value+ Duty Factor



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                       | 300                           |
| 0.490 – 1.705   | 24000/F(kHz)                      | 30                            |
| 1.705 – 30.0    | 30                                | 30                            |
| 30 – 88         | 100                               | 3                             |
| 88 – 216        | 150                               | 3                             |
| 216 - 960       | 200                               | 3                             |
| Above 960       | 500                               | 3                             |



| EIRP (dBm) | Field Strength at 3m (dBµV/m) |
|------------|-------------------------------|
| - 27       | 68.2                          |

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.






### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

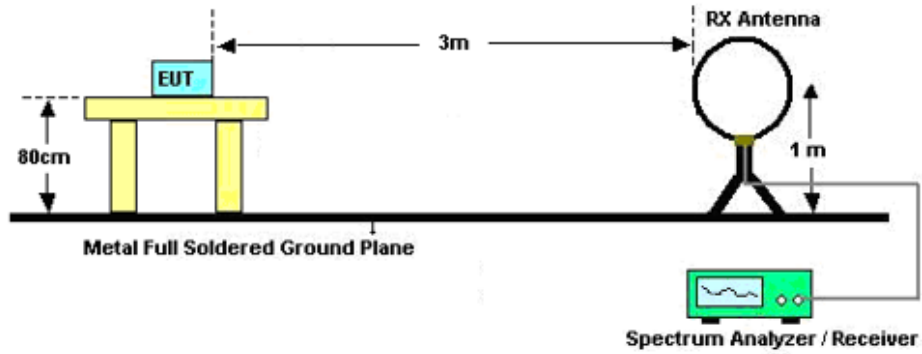

For radiated emissions from 30MHz to 1GHz

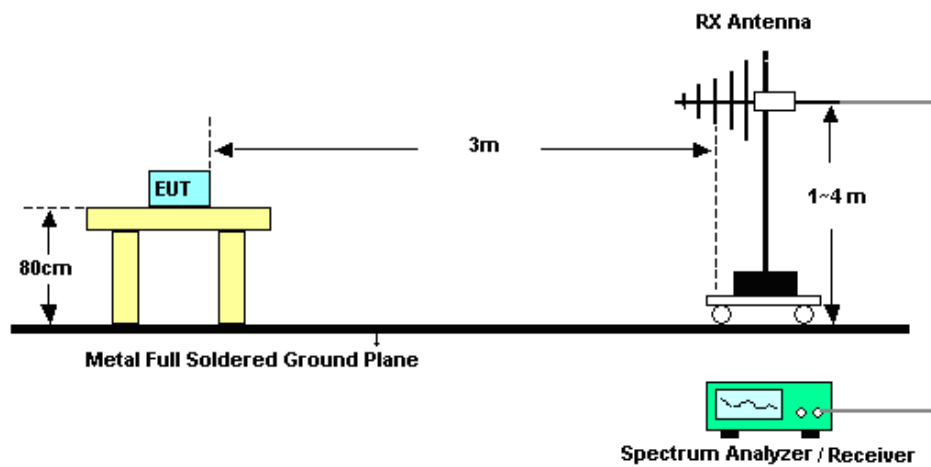

For radiated emissions above 1GHz

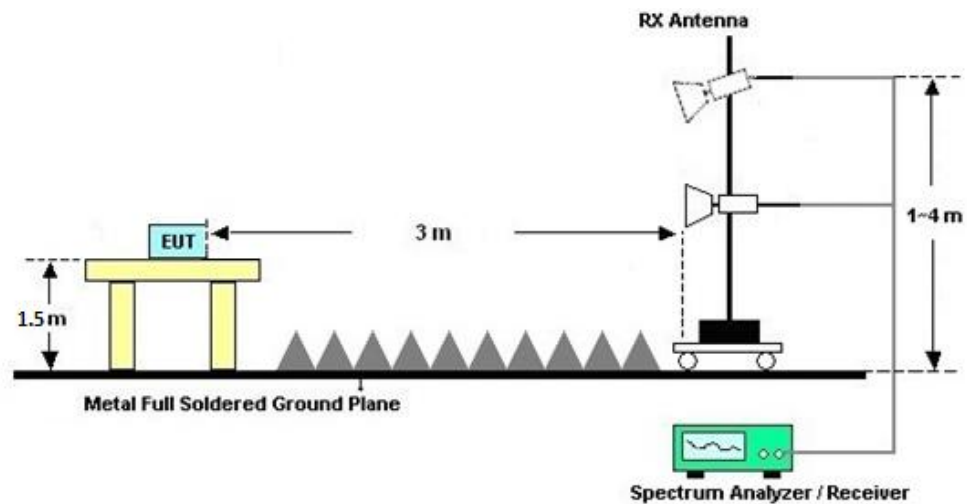



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBµV) |           |
|-----------------------------|------------------------|-----------|
|                             | Quasi-peak             | Average   |
| 0.15-0.5                    | 66 to 56*              | 56 to 46* |
| 0.5-5                       | 56                     | 46        |
| 5-30                        | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

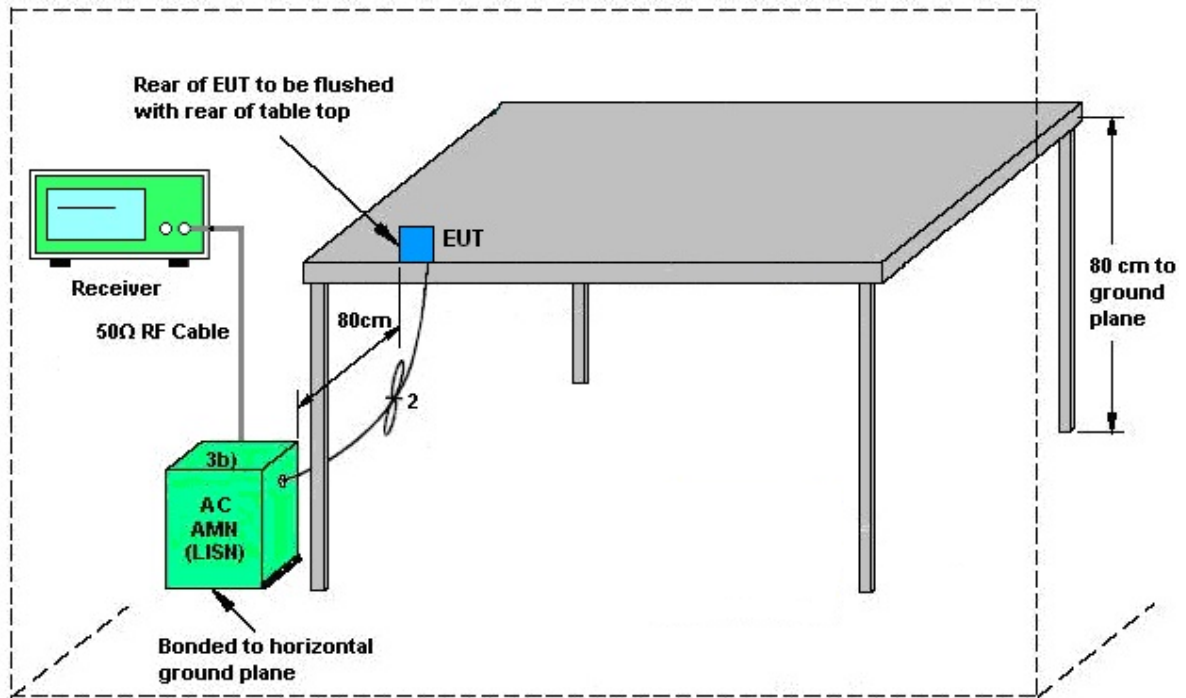

AMN = Artificial mains network (LISH)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

| Instrument                        | Manufacturer         | Model No.                | Serial No.   | Characteristics | Calibration Date | Test Date                   | Due Date      | Remark                |
|-----------------------------------|----------------------|--------------------------|--------------|-----------------|------------------|-----------------------------|---------------|-----------------------|
| Spectrum Analyzer                 | R&S                  | FSV40                    | 101078       | 10Hz~40GHz      | Apr. 06, 2023    | Jun. 01, 2023~Jun. 04, 2023 | Apr. 05, 2024 | Conducted (TH01-SZ)   |
| Pulse Power Sensor                | Anritsu              | MA2411B                  | 1339473      | 30MHz~40GHz     | Dec. 27, 2022    | Jun. 01, 2023~Jun. 04, 2023 | Dec. 26, 2023 | Conducted (TH01-SZ)   |
| Power Meter                       | Anritsu              | ML2495A                  | 1542004      | 50MHz Bandwidth | Dec. 27, 2022    | Jun. 01, 2023~Jun. 04, 2023 | Dec. 26, 2023 | Conducted (TH01-SZ)   |
| EMI Test Receiver&SA              | KEYSIGHT             | N9038A                   | MY54450083   | 20Hz~8.4GHz     | Apr. 04, 2023    | May 08, 2023~Jun. 12, 2023  | Apr. 03, 2024 | Radiation (03CH03-SZ) |
| EXA Spectrum Analyzer             | KEYSIGHT             | N9010A                   | MY55150246   | 10Hz~44GHz;     | Apr. 04, 2023    | May 08, 2023~Jun. 12, 2023  | Apr. 03, 2024 | Radiation (03CH03-SZ) |
| Loop Antenna                      | R&S                  | HFH2-Z2                  | 100354       | 9kHz~30MHz      | Jul. 28, 2022    | May 08, 2023~Jun. 12, 2023  | Jul. 27, 2024 | Radiation (03CH03-SZ) |
| Bilog Antenna                     | TeseQ                | CBL6112D                 | 35408        | 30MHz~2GHz      | Aug. 09, 2021    | May 08, 2023~Jun. 12, 2023  | Aug. 08, 2023 | Radiation (03CH03-SZ) |
| Double Ridge Horn Antenna         | SCHWARZBECK          | BBHA9120D                | 9120D-1355   | 1GHz~18GHz      | Apr. 08, 2023    | May 08, 2023~Jun. 12, 2023  | Apr. 07, 2024 | Radiation (03CH03-SZ) |
| SHF-EHF Horn                      | com-power            | AH-840                   | 101071       | 18Ghz~40GHz     | Apr. 08, 2023    | May 08, 2023~Jun. 12, 2023  | Apr. 07, 2024 | Radiation (03CH03-SZ) |
| Amplifier                         | Burgeon              | BPA-530                  | 102211       | 0.01Hz~3000MHz  | Oct. 19, 2022    | May 08, 2023~Jun. 12, 2023  | Oct. 18, 2023 | Radiation (03CH03-SZ) |
| HF Amplifier                      | MITEQ                | AMF-7D-00101800-30-10P-R | 1943528      | 1GHz~18GHz      | Oct. 19, 2022    | May 08, 2023~Jun. 12, 2023  | Oct. 18, 2023 | Radiation (03CH03-SZ) |
| Amplifier                         | Agilent Technologies | 83017A                   | MY39501302   | 500MHz~26.5GHz  | Dec. 26, 2022    | May 08, 2023~Jun. 12, 2023  | Dec. 25, 2023 | Radiation (03CH03-SZ) |
| HF Amplifier                      | MITEQ                | TTA1840-35-HG            | 1871923      | 18GHz~40GHz     | Jul. 06, 2022    | May 08, 2023~Jun. 12, 2023  | Jul. 05, 2023 | Radiation (03CH03-SZ) |
| AC Power Source                   | Chroma               | 61601                    | 616010002729 | 1 N/A           | Nov. 10, 2022    | May 08, 2023~Jun. 12, 2023  | Nov. 09, 2023 | Radiation (03CH03-SZ) |
| Turn Table                        | EM                   | EM1000                   | N/A          | 0~360 degree    | NCR              | May 08, 2023~Jun. 12, 2023  | NCR           | Radiation (03CH03-SZ) |
| Antenna Mast                      | EM                   | EM1000                   | N/A          | 1 m~4 m         | NCR              | May 08, 2023~Jun. 12, 2023  | NCR           | Radiation (03CH03-SZ) |
| EMI Receiver                      | R&S                  | ESR7                     | 101630       | 9kHz~7GHz;      | Jul. 07, 2022    | Jun. 07, 2023               | Jul. 06, 2023 | Conduction (CO01-SZ)  |
| AC LISN                           | R&S                  | ENV216                   | 100063       | 9kHz~30MHz      | Sep. 15, 2022    | Jun. 07, 2023               | Sep. 14, 2023 | Conduction (CO01-SZ)  |
| AC LISN (for auxiliary equipment) | EMCO                 | 3816/2SH                 | 00103892     | 9kHz~30MHz      | Oct. 17, 2022    | Jun. 07, 2023               | Oct. 16, 2023 | Conduction (CO01-SZ)  |
| AC Power Source                   | Chroma               | 61602                    | 616020000891 | 100Vac~250Vac   | Jul. 07, 2022    | Jun. 07, 2023               | Jul. 06, 2023 | Conduction (CO01-SZ)  |

NCR: No Calibration Required.



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

| Test Item                        | Uncertainty |
|----------------------------------|-------------|
| Conducted Power                  | ±1.34 dB    |
| Conducted Emissions              | ±1.34 dB    |
| Occupied Channel Bandwidth       | ±0.13 %     |
| Conducted Power Spectral Density | ±1.32 dB    |

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

|   |       |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.7dB |
|---|-------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|   |       |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0dB |
|---|-------|

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

|   |       |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 4.9dB |
|---|-------|

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

|   |       |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0dB |
|---|-------|

----- THE END -----





## Appendix A. Conducted Test Results

|                |                   |                    |       |    |
|----------------|-------------------|--------------------|-------|----|
| Test Engineer: | Liu Qiu Qiu       | Temperature:       | 21~25 | °C |
| Test Date:     | 2023/6/1~2023/6/4 | Relative Humidity: | 51~54 | %  |

**TEST RESULTS DATA**  
**Average Power Table**

| U-NII-1 |           |     |     |             |                  |                               |                                 |          |  |           |               |
|---------|-----------|-----|-----|-------------|------------------|-------------------------------|---------------------------------|----------|--|-----------|---------------|
| Mod.    | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) |  | Pass/Fail | Power Setting |
| HT20    | MCS0      | 1   | 36  | 5180        | 0.00             | 16.66                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| HT20    | MCS0      | 1   | 44  | 5220        | 0.00             | 16.55                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| HT20    | MCS0      | 1   | 48  | 5240        | 0.00             | 16.63                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| HT40    | MCS0      | 1   | 38  | 5190        | 0.00             | 15.54                         | 24.00                           | 1.20     |  | Pass      | 16            |
| HT40    | MCS0      | 1   | 46  | 5230        | 0.00             | 16.82                         | 24.00                           | 1.20     |  | Pass      | 17            |
| VHT20   | MCS0      | 1   | 36  | 5180        | 0.00             | 16.63                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| VHT20   | MCS0      | 1   | 44  | 5220        | 0.00             | 16.52                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| VHT20   | MCS0      | 1   | 48  | 5240        | 0.00             | 16.60                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| VHT40   | MCS0      | 1   | 38  | 5190        | 0.00             | 15.50                         | 24.00                           | 1.20     |  | Pass      | 16            |
| VHT40   | MCS0      | 1   | 46  | 5230        | 0.00             | 16.78                         | 24.00                           | 1.20     |  | Pass      | 17            |
| VHT80   | MCS0      | 1   | 42  | 5210        | 0.00             | 13.01                         | 24.00                           | 1.20     |  | Pass      | 13.5          |
| VHT160  | MCS0      | 1   | 50  | 5250        | 0.00             | 13.52                         | 24.00                           | 1.20     |  | Pass      | 13.5          |

**TEST RESULTS DATA**  
**Average Power Table**

| U-NII-2A |           |                 |     |             |                  |                               |                                 |          |                        |           |               |
|----------|-----------|-----------------|-----|-------------|------------------|-------------------------------|---------------------------------|----------|------------------------|-----------|---------------|
| Mod.     | Data Rate | N <sub>TX</sub> | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | EIRP Power Limit (dBm) | Pass/Fail | Power Setting |
| HT20     | MCS 0     | 1               | 52  | 5260        | 0.00             | 16.64                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| HT20     | MCS 0     | 1               | 60  | 5300        | 0.00             | 16.53                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| HT20     | MCS 0     | 1               | 64  | 5320        | 0.00             | 16.45                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| HT40     | MCS 0     | 1               | 54  | 5270        | 0.00             | 17.27                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| HT40     | MCS 0     | 1               | 62  | 5310        | 0.00             | 14.20                         | 23.98                           | 1.70     | 26.99                  | Pass      | 14.5          |
| VHT20    | MCS 0     | 1               | 52  | 5260        | 0.00             | 16.61                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| VHT20    | MCS 0     | 1               | 60  | 5300        | 0.00             | 16.50                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| VHT20    | MCS 0     | 1               | 64  | 5320        | 0.00             | 16.42                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| VHT40    | MCS 0     | 1               | 54  | 5270        | 0.00             | 17.23                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| VHT40    | MCS 0     | 1               | 62  | 5310        | 0.00             | 14.16                         | 23.98                           | 1.70     | 26.99                  | Pass      | 14.5          |
| VHT80    | MCS 0     | 1               | 58  | 5290        | 0.00             | 14.66                         | 23.98                           | 1.70     | 26.99                  | Pass      | 15            |

**TEST RESULTS DATA**  
**Average Power Table**

| U-NII-2C |           |                 |     |             |                  |                               |                                 |          |                        |           |               |
|----------|-----------|-----------------|-----|-------------|------------------|-------------------------------|---------------------------------|----------|------------------------|-----------|---------------|
| Mod.     | Data Rate | N <sub>TX</sub> | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | EIRP Power Limit (dBm) | Pass/Fail | Power Setting |
| HT20     | MCS 0     | 1               | 100 | 5500        | 0.00             | 16.44                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| HT20     | MCS 0     | 1               | 116 | 5580        | 0.00             | 16.66                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| HT20     | MCS 0     | 1               | 140 | 5700        | 0.00             | 16.17                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| HT20     | MCS 0     | 1               | 144 | 5720        | 0.00             | 16.20                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| HT40     | MCS 0     | 1               | 102 | 5510        | 0.00             | 14.01                         | 23.98                           | 3.90     | 26.99                  | Pass      | 14.5          |
| HT40     | MCS 0     | 1               | 110 | 5550        | 0.00             | 17.26                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| HT40     | MCS 0     | 1               | 134 | 5670        | 0.00             | 16.93                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| HT40     | MCS 0     | 1               | 142 | 5710        | 0.00             | 16.71                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT20    | MCS 0     | 1               | 100 | 5500        | 0.00             | 16.41                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT20    | MCS 0     | 1               | 116 | 5580        | 0.00             | 16.63                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT20    | MCS 0     | 1               | 140 | 5700        | 0.00             | 16.14                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT20    | MCS 0     | 1               | 144 | 5720        | 0.00             | 16.17                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT40    | MCS 0     | 1               | 102 | 5510        | 0.00             | 13.97                         | 23.98                           | 3.90     | 26.99                  | Pass      | 14.5          |
| VHT40    | MCS 0     | 1               | 110 | 5550        | 0.00             | 17.22                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT40    | MCS 0     | 1               | 134 | 5670        | 0.00             | 16.89                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT40    | MCS 0     | 1               | 142 | 5710        | 0.00             | 16.67                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT80    | MCS 0     | 1               | 106 | 5530        | 0.00             | 13.93                         | 23.98                           | 3.90     | 26.99                  | Pass      | 14.5          |
| VHT80    | MCS 0     | 1               | 122 | 5610        | 0.00             | 17.05                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT80    | MCS 0     | 1               | 138 | 5690        | 0.00             | 16.70                         | 23.98                           | 3.90     | 26.99                  | Pass      | 17.5          |
| VHT160   | MCS0      | 1               | 114 | 5570        | 0.00             | 14.44                         | 23.98                           | 3.90     | 26.99                  | Pass      | 14.5          |

**TEST RESULTS DATA**  
**26dB and 99% OBW**

| U-NII-1 |           |                 |     |             |                     |                       |                                   |  |      |
|---------|-----------|-----------------|-----|-------------|---------------------|-----------------------|-----------------------------------|--|------|
| Mod.    | Data Rate | N <sub>TX</sub> | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | 26 dB Bandwidth (MHz) | IC 99% Bandwidth EIRP Limit (dBm) |  | Note |
| 11a     | 6Mbps     | 1               | 36  | 5180        | 17.48               | 23.76                 | 22.43                             |  |      |
| 11a     | 6Mbps     | 1               | 44  | 5220        | 17.63               | 23.82                 | 22.46                             |  |      |
| 11a     | 6Mbps     | 1               | 48  | 5240        | 17.53               | 23.64                 | 22.44                             |  |      |
| HE20    | MCS0      | 2               | 36  | 5180        | 19.18               | 23.70                 | 22.83                             |  |      |
| HE20    | MCS0      | 2               | 44  | 5220        | 19.18               | 23.76                 | 22.83                             |  |      |
| HE20    | MCS0      | 2               | 48  | 5240        | 19.23               | 23.64                 | 22.84                             |  |      |
| HE40    | MCS0      | 2               | 38  | 5190        | 37.96               | 44.64                 | 23.01                             |  |      |
| HE40    | MCS0      | 2               | 46  | 5230        | 37.96               | 44.40                 | 23.01                             |  |      |
| HE80    | MCS0      | 2               | 42  | 5210        | 78.00               | 90.48                 | 23.01                             |  |      |
| HE160   | MCS0      | 2               | 50  | 5250        | 157.60              | 172.80                | 23.01                             |  |      |

**TEST RESULTS DATA**  
**Average Power Table**

| U-NII-1 |           |     |     |           |             |                  |                               |                                 |          |  |           |               |
|---------|-----------|-----|-----|-----------|-------------|------------------|-------------------------------|---------------------------------|----------|--|-----------|---------------|
| Mod.    | Data Rate | NTX | CH. | RU Config | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) |  | Pass/Fail | Power Setting |
| 11a     | 6Mbps     | 1   | 36  | Full      | 5180        | 0.03             | 16.62                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| 11a     | 6Mbps     | 1   | 44  | Full      | 5220        | 0.03             | 16.49                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| 11a     | 6Mbps     | 1   | 48  | Full      | 5240        | 0.03             | 16.54                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| HE20    | MCS0      | 1   | 36  | Full      | 5180        | 0.06             | 16.69                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
|         | MCS0      | 1   | 36  | 26/0      |             | 0.06             | 10.26                         | 24.00                           | 1.20     |  | Pass      | 9.5           |
|         | MCS0      | 1   | 36  | 52/37     |             | 0.06             | 12.66                         | 24.00                           | 1.20     |  | Pass      | 12.5          |
|         | MCS0      | 1   | 36  | 106/53    |             | 0.06             | 15.57                         | 24.00                           | 1.20     |  | Pass      | 15.5          |
| HE20    | MCS0      | 1   | 44  | Full      | 5220        | 0.06             | 16.58                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
| HE20    | MCS0      | 1   | 48  | Full      | 5240        | 0.06             | 16.66                         | 24.00                           | 1.20     |  | Pass      | 17.5          |
|         | MCS0      | 1   | 48  | 26/8      |             | 0.06             | 10.43                         | 24.00                           | 1.20     |  | Pass      | 9.5           |
|         | MCS0      | 1   | 48  | 52/40     |             | 0.06             | 12.75                         | 24.00                           | 1.20     |  | Pass      | 12.5          |
|         | MCS0      | 1   | 48  | 106/54    |             | 0.06             | 15.62                         | 24.00                           | 1.20     |  | Pass      | 15.5          |
| HE40    | MCS0      | 1   | 38  | Full      | 5190        | 0.03             | 15.57                         | 24.00                           | 1.20     |  | Pass      | 16            |
| HE40    | MCS0      | 1   | 46  | Full      | 5230        | 0.03             | 16.85                         | 24.00                           | 1.20     |  | Pass      | 17            |
| HE80    | MCS0      | 1   | 42  | Full      | 5210        | 0.05             | 13.06                         | 24.00                           | 1.20     |  | Pass      | 13.5          |
| HE160   | MCS0      | 1   | 52  | Full      | 5250        | 0.05             | 13.56                         | 24.00                           | 1.20     |  | Pass      | 13.5          |

**TEST RESULTS DATA**  
**Power Spectral Density**

| U-NII-1 |           |                 |     |           |             |                  |                                 |                             |          |            |
|---------|-----------|-----------------|-----|-----------|-------------|------------------|---------------------------------|-----------------------------|----------|------------|
| Mod.    | Data Rate | N <sub>TX</sub> | CH. | RU Config | Freq. (MHz) | Duty Factor (dB) | Average Power Density (dBm/MHz) | Average PSD Limit (dBm/MHz) | DG (dBi) | Pass /Fail |
| 11a     | 6Mbps     | 1               | 36  | Full      | 5180        | 0.03             | 4.75                            | 11.00                       | 1.20     | Pass       |
| 11a     | 6Mbps     | 1               | 44  | Full      | 5220        | 0.03             | 4.58                            | 11.00                       | 1.20     | Pass       |
| 11a     | 6Mbps     | 1               | 48  | Full      | 5240        | 0.03             | 4.54                            | 11.00                       | 1.20     | Pass       |
| HE20    | MCS0      | 1               | 36  | Full      | 5180        | 0.06             | 4.10                            | 11.00                       | 1.20     | Pass       |
|         |           |                 |     | 26/0      |             | 0.06             | 6.52                            | 11.00                       | 1.20     | Pass       |
|         |           |                 |     | 52/37     |             | 0.06             | 6.48                            | 11.00                       | 1.20     | Pass       |
|         |           |                 |     | 106/53    |             | 0.06             | 6.26                            | 11.00                       | 1.20     | Pass       |
| HE20    | MCS0      | 1               | 44  | Full      | 5220        | 0.06             | 3.96                            | 11.00                       | 1.20     | Pass       |
| HE20    | MCS0      | 1               | 48  | Full      | 5240        | 0.06             | 3.94                            | 11.00                       | 1.20     | Pass       |
|         |           |                 |     | 26/8      |             | 0.06             | 6.47                            | 11.00                       | 1.20     | Pass       |
|         |           |                 |     | 52/40     |             | 0.06             | 6.29                            | 11.00                       | 1.20     | Pass       |
|         |           |                 |     | 106/54    |             | 0.06             | 6.28                            | 11.00                       | 1.20     | Pass       |
| HE40    | MCS0      | 1               | 38  | Full      | 5190        | 0.03             | 0.39                            | 11.00                       | 1.20     | Pass       |
| HE40    | MCS0      | 1               | 46  | Full      | 5230        | 0.03             | 1.50                            | 11.00                       | 1.20     | Pass       |
| HE80    | MCS0      | 1               | 42  | Full      | 5210        | 0.05             | -5.52                           | 11.00                       | 1.20     | Pass       |
| HE160   | MCS0      | 1               | 50  | Full      | 5250        | 0.05             | -7.09                           | 11.00                       | 1.20     | Pass       |



**TEST RESULTS DATA**  
**26dB and 99% OBW**

| U-NII-2A |           |     |     |             |                     |                       |                                    |                                   |                                      |      |
|----------|-----------|-----|-----|-------------|---------------------|-----------------------|------------------------------------|-----------------------------------|--------------------------------------|------|
| Mod.     | Data Rate | NTX | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | 26 dB Bandwidth (MHz) | IC 99% Bandwidth Power Limit (dBm) | IC 99% Bandwidth EIRP Limit (dBm) | FCC 26dB Bandwidth Power Limit (dBm) | Note |
| 11a      | 6Mbps     | 1   | 52  | 5260        | 17.53               | 23.64                 | 23.44                              | 29.44                             | 23.98                                |      |
| 11a      | 6Mbps     | 1   | 60  | 5300        | 17.53               | 23.76                 | 23.44                              | 29.44                             | 23.98                                |      |
| 11a      | 6Mbps     | 1   | 64  | 5320        | 17.53               | 23.82                 | 23.44                              | 29.44                             | 23.98                                |      |
| HE20     | MCS0      | 2   | 52  | 5260        | 19.18               | 23.58                 | 23.83                              | 29.83                             | 23.98                                |      |
| HE20     | MCS0      | 2   | 60  | 5300        | 19.23               | 23.70                 | 23.84                              | 29.84                             | 23.98                                |      |
| HE20     | MCS0      | 2   | 64  | 5320        | 19.23               | 24.00                 | 23.84                              | 29.84                             | 23.98                                |      |
| HE40     | MCS0      | 2   | 54  | 5270        | 38.06               | 44.04                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE40     | MCS0      | 2   | 62  | 5310        | 38.06               | 44.76                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE80     | MCS0      | 2   | 58  | 5290        | 78.00               | 90.24                 | 23.98                              | 30.00                             | 23.98                                |      |

**TEST RESULTS DATA**  
**Average Power Table**

| U-NII-2A |           |     |     |           |             |                  |                               |                                 |          |                        |           |               |
|----------|-----------|-----|-----|-----------|-------------|------------------|-------------------------------|---------------------------------|----------|------------------------|-----------|---------------|
| Mod.     | Data Rate | NtX | CH. | RU Config | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | EIRP Power Limit (dBm) | Pass/Fail | Power Setting |
| 11a      | 6Mbps     | 1   | 52  | Full      | 5260        | 0.03             | 16.58                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| 11a      | 6Mbps     | 1   | 60  | Full      | 5300        | 0.03             | 16.44                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| 11a      | 6Mbps     | 1   | 64  | Full      | 5320        | 0.03             | 16.39                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| HE20     | MCS0      | 1   | 52  | Full      | 5260        | 0.06             | 16.67                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
|          | MCS0      | 1   |     | 26/0      |             | 0.06             | 13.60                         | 23.98                           | 1.70     | 26.99                  | Pass      | 13.5          |
|          | MCS0      | 1   |     | 52/37     |             | 0.06             | 16.26                         | 23.98                           | 1.70     | 26.99                  | Pass      | 16.5          |
|          | MCS0      | 1   |     | 106/53    |             | 0.06             | 16.38                         | 23.98                           | 1.70     | 26.99                  | Pass      | 16.5          |
| HE20     | MCS0      | 1   | 60  | Full      | 5300        | 0.06             | 16.56                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| HE20     | MCS0      | 1   | 64  | Full      | 5320        | 0.06             | 16.48                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
|          | MCS0      | 1   |     | 26/8      |             | 0.06             | 13.77                         | 23.98                           | 1.70     | 26.99                  | Pass      | 13.5          |
|          | MCS0      | 1   |     | 52/40     |             | 0.06             | 16.42                         | 23.98                           | 1.70     | 26.99                  | Pass      | 16.5          |
|          | MCS0      | 1   |     | 106/54    |             | 0.06             | 16.25                         | 23.98                           | 1.70     | 26.99                  | Pass      | 16.5          |
| HE40     | MCS0      | 1   | 54  | Full      | 5270        | 0.03             | 17.30                         | 23.98                           | 1.70     | 26.99                  | Pass      | 17.5          |
| HE40     | MCS0      | 1   | 62  | Full      | 5310        | 0.03             | 14.23                         | 23.98                           | 1.70     | 26.99                  | Pass      | 14.5          |
| HE80     | MCS0      | 1   | 58  | Full      | 5290        | 0.05             | 14.71                         | 23.98                           | 1.70     | 26.99                  | Pass      | 15            |

**TEST RESULTS DATA**  
**Power Spectral Density**

| U-NII-2A |           |                 |     |           |             |                  |                                 |                             |          |            |
|----------|-----------|-----------------|-----|-----------|-------------|------------------|---------------------------------|-----------------------------|----------|------------|
| Mod.     | Data Rate | N <sub>TX</sub> | CH. | RU Config | Freq. (MHz) | Duty Factor (dB) | Average Power Density (dBm/MHz) | Average PSD Limit (dBm/MHz) | DG (dBi) | Pass /Fail |
| 11a      | 6Mbps     | 1               | 52  | Full      | 5260        | 0.03             | 4.55                            | 11.00                       | 1.70     | Pass       |
| 11a      | 6Mbps     | 1               | 60  | Full      | 5300        | 0.03             | 4.44                            | 11.00                       | 1.70     | Pass       |
| 11a      | 6Mbps     | 1               | 64  | Full      | 5320        | 0.03             | 4.44                            | 11.00                       | 1.70     | Pass       |
| HE20     | MCS0      | 1               | 52  | Full      | 5260        | 0.06             | 3.97                            | 11.00                       | 1.70     | Pass       |
|          |           |                 |     | 26/0      |             | 0.06             | 10.19                           | 11.00                       | 1.70     | Pass       |
|          |           |                 |     | 52/37     |             | 0.06             | 9.82                            | 11.00                       | 1.70     | Pass       |
|          |           |                 |     | 106/53    |             | 0.06             | 7.36                            | 11.00                       | 1.70     | Pass       |
| HE20     | MCS0      | 1               | 60  | Full      | 5300        | 0.06             | 3.87                            | 11.00                       | 1.70     | Pass       |
| HE20     | MCS0      | 1               | 64  | Full      | 5320        | 0.06             | 3.83                            | 11.00                       | 1.70     | Pass       |
|          |           |                 |     | 26/8      |             | 0.06             | 10.27                           | 11.00                       | 1.70     | Pass       |
|          |           |                 |     | 52/40     |             | 0.06             | 10.23                           | 11.00                       | 1.70     | Pass       |
|          |           |                 |     | 106/54    |             | 0.06             | 7.22                            | 11.00                       | 1.70     | Pass       |
| HE40     | MCS0      | 1               | 54  | Full      | 5270        | 0.03             | 1.64                            | 11.00                       | 1.70     | Pass       |
| HE40     | MCS0      | 1               | 62  | Full      | 5310        | 0.03             | -1.26                           | 11.00                       | 1.70     | Pass       |
| HE80     | MCS0      | 1               | 58  | Full      | 5290        | 0.05             | -3.75                           | 11.00                       | 1.70     | Pass       |

**TEST RESULTS DATA**  
**26dB and 99% OBW**

| U-NII-2C |           |     |     |             |                     |                       |                                    |                                   |                                      |      |
|----------|-----------|-----|-----|-------------|---------------------|-----------------------|------------------------------------|-----------------------------------|--------------------------------------|------|
| Mod.     | Data Rate | Ntx | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | 26 dB Bandwidth (MHz) | IC 99% Bandwidth Power Limit (dBm) | IC 99% Bandwidth EIRP Limit (dBm) | FCC 26dB Bandwidth Power Limit (dBm) | Note |
| 11a      | 6Mbps     | 1   | 100 | 5500        | 17.53               | 23.40                 | 23.44                              | 29.44                             | 23.98                                |      |
| 11a      | 6Mbps     | 1   | 116 | 5580        | 17.58               | 23.46                 | 23.45                              | 29.45                             | 23.98                                |      |
| 11a      | 6Mbps     | 1   | 140 | 5700        | 17.53               | 23.82                 | 23.44                              | 29.44                             | 23.98                                |      |
| 11a      | 6Mbps     | 1   | 144 | 5720        | 17.53               | 24.06                 | 23.44                              | 29.44                             | 23.98                                |      |
| HE20     | MCS0      | 2   | 100 | 5500        | 19.18               | 24.00                 | 23.83                              | 29.83                             | 23.98                                |      |
| HE20     | MCS0      | 2   | 116 | 5580        | 19.23               | 24.00                 | 23.84                              | 29.84                             | 23.98                                |      |
| HE20     | MCS0      | 2   | 140 | 5700        | 19.18               | 23.52                 | 23.83                              | 29.83                             | 23.98                                |      |
| HE20     | MCS0      | 2   | 144 | 5720        | 19.23               | 23.94                 | 23.84                              | 29.84                             | 23.98                                |      |
| HE40     | MCS0      | 2   | 102 | 5510        | 38.06               | 44.52                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE40     | MCS0      | 2   | 110 | 5550        | 37.96               | 44.28                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE40     | MCS0      | 2   | 134 | 5670        | 38.06               | 44.16                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE40     | MCS0      | 2   | 142 | 5710        | 37.96               | 44.40                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE80     | MCS0      | 2   | 106 | 5530        | 77.84               | 88.56                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE80     | MCS0      | 2   | 122 | 5610        | 77.84               | 88.32                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE80     | MCS0      | 2   | 138 | 5690        | 78.00               | 89.52                 | 23.98                              | 30.00                             | 23.98                                |      |
| HE160    | MCS0      | 2   | 114 | 5570        | 156.96              | 171.84                | 23.98                              | 30.00                             | 23.98                                |      |

**TEST RESULTS DATA**  
**Average Power Table**

| U-NII-2C |           |     |     |           |             |                  |                               |                                 |          |                        |           |               |
|----------|-----------|-----|-----|-----------|-------------|------------------|-------------------------------|---------------------------------|----------|------------------------|-----------|---------------|
| Mod.     | Data Rate | Nrx | CH. | RU Config | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | EIRP Power Limit (dBm) | Pass/Fail | Power Setting |
| 11a      | 6Mbps     | 1   | 100 | Full      | 5500        | 0.03             | 16.40                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| 11a      | 6Mbps     | 1   | 116 | Full      | 5580        | 0.03             | 16.60                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| 11a      | 6Mbps     | 1   | 140 | Full      | 5700        | 0.03             | 16.10                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| 11a      | 6Mbps     | 1   | 144 | Full      | 5720        | 0.03             | 16.16                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| HE20     | MCS0      | 1   | 100 | Full      | 5500        | 0.06             | 16.47                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
|          | MCS0      | 1   |     | 26/0      | 5500        | 0.06             | 13.54                         | 23.98                           | 3.90     | 26.9897                | Pass      | 13.5          |
|          | MCS0      | 1   |     | 52/37     | 5500        | 0.06             | 16.35                         | 23.98                           | 3.90     | 26.9897                | Pass      | 16.5          |
|          | MCS0      | 1   |     | 106/53    | 5500        | 0.06             | 16.15                         | 23.98                           | 3.90     | 26.9897                | Pass      | 16.5          |
| HE20     | MCS0      | 1   | 116 | Full      | 5580        | 0.06             | 16.69                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| HE20     | MCS0      | 1   | 140 | Full      | 5700        | 0.06             | 16.20                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
|          | MCS0      | 1   |     | 26/8      |             | 0.06             | 13.28                         | 23.98                           | 3.90     | 26.9897                | Pass      | 13.5          |
|          | MCS0      | 1   |     | 52/40     |             | 0.06             | 16.17                         | 23.98                           | 3.90     | 26.9897                | Pass      | 16.5          |
|          | MCS0      | 1   |     | 106/54    |             | 0.06             | 16.12                         | 23.98                           | 3.90     | 26.9897                | Pass      | 16.5          |
| HE20     | MCS0      | 1   | 144 | Full      | 5720        | 0.06             | 16.23                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
|          | MCS0      | 1   |     | 26/8      |             | 0.06             | 13.51                         | 23.98                           | 3.90     | 26.9897                | Pass      | 13.5          |
|          | MCS0      | 1   |     | 52/40     |             | 0.06             | 16.20                         | 23.98                           | 3.90     | 26.9897                | Pass      | 16.5          |
|          | MCS0      | 1   |     | 106/54    |             | 0.06             | 16.11                         | 23.98                           | 3.90     | 26.9897                | Pass      | 16.5          |
| HE40     | MCS0      | 1   | 102 | Full      | 5510        | 0.03             | 14.04                         | 23.98                           | 3.90     | 26.9897                | Pass      | 14.5          |
| HE40     | MCS0      | 1   | 110 | Full      | 5550        | 0.03             | 17.29                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| HE40     | MCS0      | 1   | 134 | Full      | 5670        | 0.03             | 16.96                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| HE40     | MCS0      | 1   | 142 | Full      | 5710        | 0.03             | 16.74                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| HE80     | MCS0      | 1   | 106 | Full      | 5530        | 0.05             | 13.98                         | 23.98                           | 3.90     | 26.9897                | Pass      | 14.5          |
| HE80     | MCS0      | 1   | 122 | Full      | 5610        | 0.05             | 17.10                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| HE80     | MCS0      | 1   | 138 | Full      | 5690        | 0.05             | 16.75                         | 23.98                           | 3.90     | 26.9897                | Pass      | 17.5          |
| HE160    | MCS0      | 1   | 114 | Full      | 5570        | 0.05             | 14.48                         | 23.98                           | 3.90     | 26.9897                | Pass      | 14.5          |


**TEST RESULTS DATA**  
**Power Spectral Density**

| U-NII-2C |           |                 |     |           |             |                  |                                 |                             |          |            |
|----------|-----------|-----------------|-----|-----------|-------------|------------------|---------------------------------|-----------------------------|----------|------------|
| Mod.     | Data Rate | N <sub>TX</sub> | CH. | RU Config | Freq. (MHz) | Duty Factor (dB) | Average Power Density (dBm/MHz) | Average PSD Limit (dBm/MHz) | DG (dBi) | Pass /Fail |
| 11a      | 6Mbps     | 1               | 100 | Full      | 5500        | 0.03             | 4.58                            | 11.00                       | 3.90     | Pass       |
| 11a      | 6Mbps     | 1               | 116 | Full      | 5580        | 0.03             | 4.57                            | 11.00                       | 3.90     | Pass       |
| 11a      | 6Mbps     | 1               | 140 | Full      | 5700        | 0.03             | 3.99                            | 11.00                       | 3.90     | Pass       |
| 11a      | 6Mbps     | 1               | 144 | Full      | 5720        | 0.03             | 3.99                            | 11.00                       | 3.90     | Pass       |
| HE20     | MCS0      | 1               | 100 | Full      | 5500        | 0.06             | 3.99                            | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 26/0      |             | 0.06             | 10.15                           | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 52/37     |             | 0.06             | 10.23                           | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 106/53    |             | 0.06             | 6.93                            | 11.00                       | 3.90     | Pass       |
| HE20     | MCS0      | 1               | 116 | Full      | 5580        | 0.06             | 4.00                            | 11.00                       | 3.90     | Pass       |
| HE20     | MCS0      | 1               | 140 | Full      | 5700        | 0.06             | 3.41                            | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 26/8      |             | 0.06             | 9.57                            | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 52/40     |             | 0.06             | 9.72                            | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 106/54    |             | 0.06             | 6.86                            | 11.00                       | 3.90     | Pass       |
| HE20     | MCS0      | 1               | 144 | Full      | 5720        | 0.06             | 3.49                            | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 26/8      |             | 0.06             | 9.89                            | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 52/40     |             | 0.06             | 9.96                            | 11.00                       | 3.90     | Pass       |
|          |           |                 |     | 106/54    |             | 0.06             | 6.83                            | 11.00                       | 3.90     | Pass       |
| HE40     | MCS0      | 1               | 102 | Full      | 5510        | 0.03             | -1.43                           | 11.00                       | 3.90     | Pass       |
| HE40     | MCS0      | 1               | 110 | Full      | 5550        | 0.03             | 1.72                            | 11.00                       | 3.90     | Pass       |
| HE40     | MCS0      | 1               | 134 | Full      | 5670        | 0.03             | 1.36                            | 11.00                       | 3.90     | Pass       |
| HE40     | MCS0      | 1               | 142 | Full      | 5710        | 0.03             | 1.12                            | 11.00                       | 3.90     | Pass       |
| HE80     | MCS0      | 1               | 106 | Full      | 5530        | 0.05             | -4.49                           | 11.00                       | 3.90     | Pass       |
| HE80     | MCS0      | 1               | 122 | Full      | 5610        | 0.05             | -1.53                           | 11.00                       | 3.90     | Pass       |
| HE80     | MCS0      | 1               | 138 | Full      | 5690        | 0.05             | -1.86                           | 11.00                       | 3.90     | Pass       |
| HE160    | MCS0      | 2               | 114 | Full      | 5570        | 0.05             | -6.25                           | 11.00                       | 3.90     | Pass       |



## Appendix B. AC Conducted Emission Test Results

|                 |   |                     |         |
|-----------------|---|---------------------|---------|
| Test Engineer : | Lily  | Temperature :       | 22~25°C |
|                 |   | Relative Humidity : | 50~55%  |
| Test Voltage :  | 120Vac / 60Hz   | Phase :             | Line    |
| Remark :        | All emissions not reported here are more than 10 dB below the prescribed limit. |                     |         |

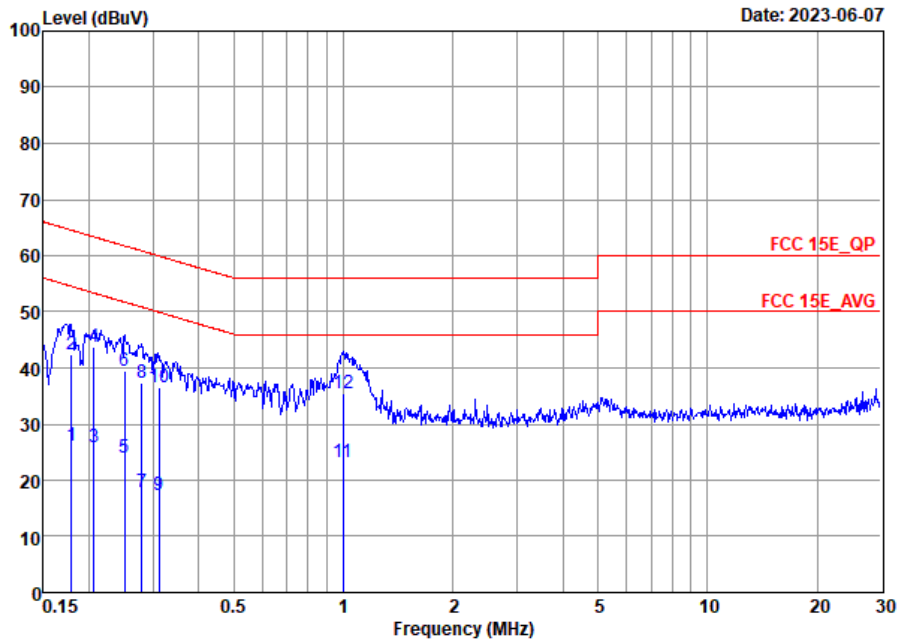


Site : CO01-SZ  
 Condition: FCC 15E\_QP LISN\_20230420\_L LINE

|     | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|-----|------|-------|------------|------------|------------|-------------|------------|---------|
|     | MHz  | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1   | 0.18 | 26.00 | -28.55     | 54.55      | 5.40       | 10.46       | 10.14      | Average |
| 2   | 0.18 | 42.50 | -22.05     | 64.55      | 21.90      | 10.46       | 10.14      | QP      |
| 3   | 0.21 | 25.86 | -27.50     | 53.36      | 5.30       | 10.41       | 10.15      | Average |
| 4 * | 0.21 | 43.76 | -19.60     | 63.36      | 23.20      | 10.41       | 10.15      | QP      |
| 5   | 0.25 | 24.13 | -27.60     | 51.73      | 3.60       | 10.38       | 10.15      | Average |
| 6   | 0.25 | 39.53 | -22.20     | 61.73      | 19.00      | 10.38       | 10.15      | QP      |
| 7   | 0.28 | 17.93 | -32.92     | 50.85      | -2.59      | 10.37       | 10.15      | Average |
| 8   | 0.28 | 37.23 | -23.62     | 60.85      | 16.71      | 10.37       | 10.15      | QP      |
| 9   | 0.31 | 17.21 | -32.72     | 49.93      | -3.29      | 10.35       | 10.15      | Average |
| 10  | 0.31 | 36.51 | -23.42     | 59.93      | 16.01      | 10.35       | 10.15      | QP      |
| 11  | 1.00 | 23.30 | -22.70     | 46.00      | 2.90       | 10.24       | 10.16      | Average |
| 12  | 1.00 | 35.40 | -20.60     | 56.00      | 15.00      | 10.24       | 10.16      | QP      |



|                 |   |                     |         |
|-----------------|---|---------------------|---------|
| Test Engineer : | Lily  | Temperature :       | 22~25°C |
|                 |   | Relative Humidity : | 50~55%  |
| Test Voltage :  | 120Vac / 60Hz   | Phase :             | Neutral |
| Remark :        | All emissions not reported here are more than 10 dB below the prescribed limit. |                     |         |

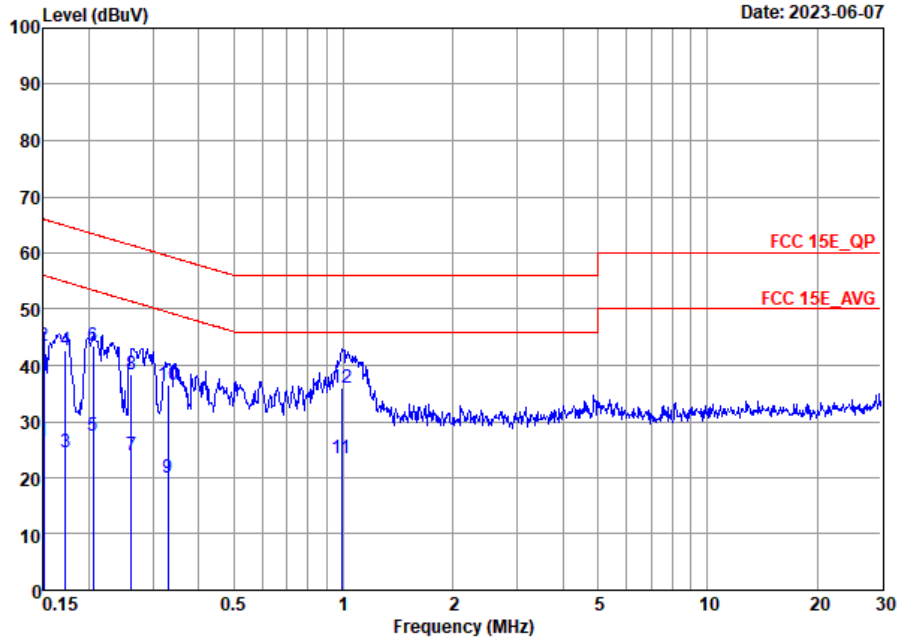

Site : CO01-SZ  
 Condition: FCC 15E\_QP LISN\_20230420\_N NEUTRAL

|     | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|-----|------|-------|------------|------------|------------|-------------|------------|---------|
|     | MHz  | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1   | 0.15 | 26.39 | -29.61     | 56.00      | 5.80       | 10.46       | 10.13      | Average |
| 2   | 0.15 | 43.49 | -22.51     | 66.00      | 22.90      | 10.46       | 10.13      | QP      |
| 3   | 0.17 | 24.56 | -30.30     | 54.86      | 4.00       | 10.42       | 10.14      | Average |
| 4   | 0.17 | 42.66 | -22.20     | 64.86      | 22.10      | 10.42       | 10.14      | QP      |
| 5   | 0.21 | 27.50 | -25.90     | 53.40      | 7.00       | 10.35       | 10.15      | Average |
| 6 * | 0.21 | 43.60 | -19.80     | 63.40      | 23.10      | 10.35       | 10.15      | QP      |
| 7   | 0.26 | 23.87 | -27.51     | 51.38      | 3.40       | 10.32       | 10.15      | Average |
| 8   | 0.26 | 38.47 | -22.91     | 61.38      | 18.00      | 10.32       | 10.15      | QP      |
| 9   | 0.33 | 20.13 | -29.31     | 49.44      | -0.30      | 10.27       | 10.16      | Average |
| 10  | 0.33 | 36.53 | -22.91     | 59.44      | 16.10      | 10.27       | 10.16      | QP      |
| 11  | 0.99 | 23.50 | -22.50     | 46.00      | 3.10       | 10.24       | 10.16      | Average |
| 12  | 0.99 | 35.90 | -20.10     | 56.00      | 15.50      | 10.24       | 10.16      | QP      |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





## Appendix C. Radiated Spurious Emission

|                 |            |                     |         |
|-----------------|------------|---------------------|---------|
| Test Engineer : | Reid Huang | Relative Humidity : | 50%     |
|                 |            | Temperature :       | 20~22°C |

## Radiated Spurious Emission Test Modes

| Mode    | Band     | Band (GHz) | Modulation     | Channel | Frequency | Data Rate | RU       | Remark |
|---------|----------|------------|----------------|---------|-----------|-----------|----------|--------|
| Mode 1  | U-NII-1  | 5.15-5.25  | 802.11a        | 36      | 5180      | 6Mbps     | -        | -      |
| Mode 2  | U-NII-1  | 5.15-5.25  | 802.11a        | 44      | 5220      | 6Mbps     | -        | -      |
| Mode 3  | U-NII-1  | 5.15-5.25  | 802.11a        | 48      | 5240      | 6Mbps     | -        | -      |
| Mode 4  | U-NII-1  | 5.15-5.25  | 802.11ax HE20  | 36      | 5180      | MCS0      | Full RU  | -      |
| Mode 5  | U-NII-1  | 5.15-5.25  | 802.11ax HE20  | 36      | 5180      | MCS0      | RU26/0   | -      |
| Mode 6  | U-NII-1  | 5.15-5.25  | 802.11ax HE20  | 36      | 5180      | MCS0      | RU52/37  | -      |
| Mode 7  | U-NII-1  | 5.15-5.25  | 802.11ax HE20  | 36      | 5180      | MCS0      | RU106/53 | -      |
| Mode 8  | U-NII-1  | 5.15-5.25  | 802.11ax HE20  | 44      | 5220      | MCS0      | Full RU  | -      |
| Mode 9  | U-NII-1  | 5.15-5.25  | 802.11ax HE20  | 48      | 5240      | MCS0      | Full RU  | -      |
| Mode 10 | U-NII-1  | 5.25-5.35  | 802.11ax HE20  | 48      | 5240      | MCS0      | RU26/8   | -      |
| Mode 11 | U-NII-1  | 5.25-5.35  | 802.11ax HE20  | 48      | 5240      | MCS0      | RU52/40  | -      |
| Mode 12 | U-NII-1  | 5.25-5.35  | 802.11ax HE20  | 48      | 5240      | MCS0      | RU106/54 | -      |
| Mode 13 | U-NII-1  | 5.15-5.25  | 802.11ax HE40  | 38      | 5190      | MCS0      | Full RU  | -      |
| Mode 14 | U-NII-1  | 5.15-5.25  | 802.11ax HE40  | 46      | 5230      | MCS0      | Full RU  | -      |
| Mode 15 | U-NII-1  | 5.15-5.25  | 802.11ax HE80  | 42      | 5210      | MCS0      | Full RU  | -      |
| Mode 16 | U-NII-1  | 5.15-5.25  | 802.11ax HE160 | 50      | 5250      | MCS0      | Full RU  | -      |
| Mode 17 | U-NII-2A | 5.25-5.35  | 802.11a        | 52      | 5260      | 6Mbps     | -        | -      |
| Mode 18 | U-NII-2A | 5.25-5.35  | 802.11a        | 60      | 5300      | 6Mbps     | -        | -      |
| Mode 19 | U-NII-2A | 5.25-5.35  | 802.11a        | 64      | 5320      | 6Mbps     | -        | -      |
| Mode 20 | U-NII-2A | 5.25-5.35  | 802.11ax HE20  | 52      | 5260      | MCS0      | Full RU  | -      |
| Mode 21 | U-NII-2A | 5.25-5.35  | 802.11ax HE20  | 52      | 5260      | MCS0      | RU26/0   | -      |
| Mode 22 | U-NII-2A | 5.25-5.35  | 802.11ax HE20  | 52      | 5260      | MCS0      | RU52/37  | -      |
| Mode 23 | U-NII-2A | 5.25-5.35  | 802.11ax HE20  | 52      | 5260      | MCS0      | RU106/53 | -      |
| Mode 24 | U-NII-2A | 5.25-5.35  | 802.11ax HE20  | 60      | 5300      | MCS0      | Full RU  | -      |
| Mode 25 | U-NII-2A | 5.25-5.35  | 802.11ax HE20  | 64      | 5320      | MCS0      | Full RU  | -      |
| Mode 26 | U-NII-2A | 5.25-5.35  | 802.11ax HE20  | 64      | 5320      | MCS0      | RU26/8   | -      |
| Mode 27 | U-NII-2A | 5.47-5.725 | 802.11ax HE20  | 64      | 5320      | 6Mbps     | RU52/40  | -      |
| Mode 28 | U-NII-2A | 5.47-5.725 | 802.11ax HE20  | 64      | 5320      | 6Mbps     | RU106/54 | -      |
| Mode 29 | U-NII-2A | 5.25-5.35  | 802.11ax HE40  | 54      | 5270      | MCS0      | Full RU  | -      |



| Mode    | Band     | Band (GHz) | Modulation     | Channel | Frequency | Data Rate | RU       | Remark |
|---------|----------|------------|----------------|---------|-----------|-----------|----------|--------|
| Mode 30 | U-NII-2A | 5.25-5.35  | 802.11ax HE40  | 62      | 5310      | MCS0      | Full RU  | -      |
| Mode 31 | U-NII-2A | 5.25-5.35  | 802.11ax HE80  | 58      | 5290      | MCS0      | Full RU  | -      |
| Mode 32 | U-NII-2C | 5.47-5.725 | 802.11a        | 100     | 5500      | 6Mbps     | -        | -      |
| Mode 33 | U-NII-2C | 5.47-5.725 | 802.11a        | 116     | 5580      | 6Mbps     | -        | -      |
| Mode 34 | U-NII-2C | 5.47-5.725 | 802.11a        | 140     | 5700      | 6Mbps     | -        | -      |
| Mode 35 | U-NII-2C | 5.47-5.725 | 802.11a        | 144     | 5720      | 6Mbps     | -        | -      |
| Mode 36 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 100     | 5500      | MCS0      | Full RU  | -      |
| Mode 37 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 100     | 5500      | MCS0      | RU26/0   | -      |
| Mode 38 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 100     | 5500      | MCS0      | RU52/37  | -      |
| Mode 39 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 100     | 5500      | MCS0      | RU106/53 | -      |
| Mode 40 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 116     | 5580      | MCS0      | Full RU  | -      |
| Mode 41 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 140     | 5700      | MCS0      | Full RU  | -      |
| Mode 42 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 140     | 5700      | MCS0      | RU26/8   | -      |
| Mode 43 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 140     | 5700      | MCS0      | RU52/40  | -      |
| Mode 44 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 140     | 5700      | MCS0      | RU106/54 | -      |
| Mode 45 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 144     | 5720      | MCS0      | Full RU  | -      |
| Mode 46 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 144     | 5720      | MCS0      | RU26/8   | -      |
| Mode 47 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 144     | 5720      | MCS0      | RU52/40  | -      |
| Mode 48 | U-NII-2C | 5.47-5.725 | 802.11ax HE20  | 144     | 5720      | MCS0      | RU106/54 | -      |
| Mode 49 | U-NII-2C | 5.47-5.725 | 802.11ax HE40  | 102     | 5510      | MCS0      | Full RU  | -      |
| Mode 50 | U-NII-2C | 5.47-5.725 | 802.11ax HE40  | 110     | 5550      | MCS0      | Full RU  | -      |
| Mode 51 | U-NII-2C | 5.47-5.725 | 802.11ax HE40  | 134     | 5670      | MCS0      | Full RU  | -      |
| Mode 52 | U-NII-2C | 5.47-5.725 | 802.11ax HE40  | 142     | 5710      | MCS0      | Full RU  | -      |
| Mode 53 | U-NII-2C | 5.47-5.725 | 802.11ax HE80  | 106     | 5530      | MCS0      | Full RU  | -      |
| Mode 54 | U-NII-2C | 5.47-5.725 | 802.11ax HE80  | 122     | 5610      | MCS0      | Full RU  | -      |
| Mode 55 | U-NII-2C | 5.47-5.725 | 802.11ax HE80  | 138     | 5690      | MCS0      | Full RU  | -      |
| Mode 56 | U-NII-2C | 5.47-5.725 | 802.11ax HE160 | 114     | 5570      | MCS0      | Full RU  | -      |
| Mode 72 | U-NII-2A | 5.25-5.35  | 802.11ax HE80  | 58      | 5290      | MCS0      | Full RU  | LF     |

### Co-location Test Mode

| Mode    | Band     | Band (GHz)  | Modulation        | Channel | Frequency | Data Rate | RU   | Remark |
|---------|----------|-------------|-------------------|---------|-----------|-----------|------|--------|
| Mode 74 | -        | 2400-2483.5 | Bluetooth-LE_GSKF | 39      | 2480      | 2Mbps     | -    | -      |
|         | U-NII-2A | 5.25-5.35   | 802.11ax HE80     | 58      | 5290      | MCS0      | Full | -      |



### Summary of each worse mode

| Mode | Modulation     | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark    |
|------|----------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 1    | 802.11a        | 36  | 5149.22     | 45.65          | 54.00          | -8.35       | H    | Average   | Pass   | Band Edge |
|      | 802.11a        | 36  | 10360.00    | 46.28          | 68.30          | -22.02      | V    | Peak      | Pass   | Harmonic  |
| 2    | 802.11a        | 44  | 5100.32     | 40.65          | 54.00          | -13.35      | H    | Average   | Pass   | Band Edge |
|      | 802.11a        | 44  | 10440.00    | 47.92          | 68.30          | -20.38      | V    | Peak      | Pass   | Harmonic  |
| 3    | 802.11a        | 48  | 5017.04     | 40.53          | 54.00          | -13.47      | H    | Average   | Pass   | Band Edge |
|      | 802.11a        | 48  | 10480.00    | 46.59          | 68.30          | -21.71      | H    | Peak      | Pass   | Harmonic  |
| 4    | 802.11ax HE20  | 36  | 5149.94     | 45.66          | 54.00          | -8.34       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 36  | 10360.00    | 46.93          | 68.30          | -21.37      | H    | Peak      | Pass   | Harmonic  |
| 5    | 802.11ax HE20  | 36  | 5053.28     | 40.39          | 54.00          | -13.61      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 36  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 6    | 802.11ax HE20  | 36  | 5136.80     | 41.33          | 54.00          | -12.67      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 36  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 7    | 802.11ax HE20  | 36  | 5149.94     | 41.68          | 54.00          | -12.32      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 36  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 8    | 802.11ax HE20  | 44  | 5148.06     | 41.51          | 54.00          | -12.49      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 44  | 10440.00    | 47.81          | 68.30          | -20.49      | V    | Peak      | Pass   | Harmonic  |
| 9    | 802.11ax HE20  | 48  | 5047.04     | 41.05          | 54.00          | -12.95      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 48  | 10480.00    | 46.84          | 68.30          | -21.46      | H    | Peak      | Pass   | Harmonic  |
| 10   | 802.11ax HE20  | 48  | 5049.68     | 40.26          | 54.00          | -13.74      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 48  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 11   | 802.11ax HE20  | 48  | 5050.16     | 40.36          | 54.00          | -13.64      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 48  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 12   | 802.11ax HE20  | 48  | 5108.24     | 40.29          | 54.00          | -13.71      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 48  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 13   | 802.11ax HE40  | 38  | 5149.91     | 50.44          | 54.00          | -3.56       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE40  | 38  | 10380.00    | 48.10          | 68.30          | -20.20      | H    | Peak      | Pass   | Harmonic  |
| 14   | 802.11ax HE40  | 46  | 5149.27     | 49.12          | 54.00          | -4.88       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE40  | 46  | 10460.00    | 46.49          | 68.30          | -21.81      | V    | Peak      | Pass   | Harmonic  |
| 15   | 802.11ax HE80  | 42  | 5144.27     | 42.94          | 54.00          | -11.06      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE80  | 42  | 10420.00    | 47.04          | 68.30          | -21.26      | H    | Peak      | Pass   | Harmonic  |
| 16   | 802.11ax HE160 | 50  | 5407.50     | 46.37          | 54.00          | -7.63       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE160 | 50  | 10500.00    | 47.44          | 68.30          | -20.86      | V    | Peak      | Pass   | Harmonic  |
| 17   | 802.11a        | 52  | 5052.78     | 40.51          | 54.00          | -13.49      | H    | Average   | Pass   | Band Edge |
|      | 802.11a        | 52  | 10520.00    | 46.60          | 68.30          | -21.70      | V    | Peak      | Pass   | Harmonic  |
| 18   | 802.11a        | 60  | 5352.00     | 40.95          | 54.00          | -13.05      | H    | Average   | Pass   | Band Edge |
|      | 802.11a        | 60  | 15900.00    | 50.75          | 74.00          | -23.25      | H    | Peak      | Pass   | Harmonic  |



| Mode | Modulation    | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark    |
|------|---------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 19   | 802.11a       | 64  | 5350.66     | 44.48          | 54.00          | -9.52       | H    | Average   | Pass   | Band Edge |
|      | 802.11a       | 64  | 15960.00    | 50.56          | 74.00          | -23.44      | V    | Peak      | Pass   | Harmonic  |
| 20   | 802.11ax HE20 | 52  | 5138.06     | 40.99          | 54.00          | -13.01      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 52  | 10520.00    | 47.59          | 68.30          | -20.71      | H    | Peak      | Pass   | Harmonic  |
| 21   | 802.11ax HE20 | 52  | 5049.92     | 40.46          | 54.00          | -13.54      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 52  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 22   | 802.11ax HE20 | 52  | 5046.28     | 40.38          | 54.00          | -13.62      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 52  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 23   | 802.11ax HE20 | 52  | 5019.76     | 40.23          | 54.00          | -13.77      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 52  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 24   | 802.11ax HE20 | 60  | 5351.36     | 43.93          | 54.00          | -10.07      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 60  | 15900.00    | 48.99          | 74.00          | -25.01      | H    | Peak      | Pass   | Harmonic  |
| 25   | 802.11ax HE20 | 64  | 5351.64     | 43.08          | 54.00          | -10.92      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 64  | 15960.00    | 50.66          | 74.00          | -23.34      | V    | Peak      | Pass   | Harmonic  |
| 26   | 802.11ax HE20 | 64  | 5361.72     | 41.45          | 54.00          | -12.55      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 64  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 27   | 802.11ax HE20 | 64  | 5359.90     | 40.99          | 54.00          | -13.01      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 64  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 28   | 802.11ax HE20 | 64  | 5350.38     | 42.38          | 54.00          | -11.62      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 64  | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 29   | 802.11ax HE40 | 54  | 5351.51     | 42.29          | 54.00          | -11.71      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE40 | 54  | 10540.00    | 47.93          | 68.30          | -20.37      | H    | Peak      | Pass   | Harmonic  |
| 30   | 802.11ax HE40 | 62  | 5355.75     | 43.33          | 54.00          | -10.67      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE40 | 62  | 15930.00    | 50.98          | 74.00          | -23.02      | H    | Peak      | Pass   | Harmonic  |
| 31   | 802.11ax HE80 | 58  | 5355.96     | 51.32          | 54.00          | -2.68       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE80 | 58  | 10580.00    | 47.01          | 68.30          | -21.29      | V    | Peak      | Pass   | Harmonic  |
| 32   | 802.11a       | 100 | 5459.95     | 41.98          | 54.00          | -12.02      | H    | Average   | Pass   | Band Edge |
|      | 802.11a       | 100 | 16500.00    | 51.05          | 68.30          | -17.25      | V    | Peak      | Pass   | Harmonic  |
| 33   | 802.11a       | 116 | 5456.95     | 39.53          | 54.00          | -14.47      | H    | Average   | Pass   | Band Edge |
|      | 802.11a       | 116 | 16740.00    | 52.30          | 68.30          | -16.00      | H    | Peak      | Pass   | Harmonic  |
| 34   | 802.11a       | 140 | 5725.35     | 64.30          | 68.30          | -4.00       | H    | Peak      | Pass   | Band Edge |
|      | 802.11a       | 140 | 17100.00    | 53.37          | 68.30          | -14.93      | H    | Peak      | Pass   | Harmonic  |
| 35   | 802.11a       | 144 | 5390.15     | 38.00          | 54.00          | -16.00      | H    | Average   | Pass   | Band Edge |
|      | 802.11a       | 144 | 17160.00    | 51.26          | 68.30          | -17.04      | V    | Peak      | Pass   | Harmonic  |
| 36   | 802.11ax HE20 | 100 | 5459.35     | 43.51          | 54.00          | -10.49      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 100 | 16500.00    | 51.06          | 68.30          | -17.24      | H    | Peak      | Pass   | Harmonic  |
| 37   | 802.11ax HE20 | 100 | 5457.85     | 40.99          | 54.00          | -13.01      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20 | 100 | -           | -              | -              | -           | -    | -         | -      | Harmonic  |



| Mode | Modulation     | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark    |
|------|----------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 38   | 802.11ax HE20  | 100 | 5459.65     | 40.50          | 54.00          | -13.50      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 100 | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 39   | 802.11ax HE20  | 100 | 5457.70     | 40.34          | 54.00          | -13.66      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 100 | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 40   | 802.11ax HE20  | 116 | 5424.06     | 39.04          | 54.00          | -14.96      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 116 | 16740.00    | 51.47          | 68.30          | -16.83      | V    | Peak      | Pass   | Harmonic  |
| 41   | 802.11ax HE20  | 140 | 5725.74     | 60.85          | 68.30          | -7.45       | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE20  | 140 | 17100.00    | 51.05          | 68.30          | -17.25      | V    | Peak      | Pass   | Harmonic  |
| 42   | 802.11ax HE20  | 140 | 5727.50     | 52.83          | 68.30          | -15.47      | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE20  | 140 | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 43   | 802.11ax HE20  | 140 | 5728.21     | 52.76          | 68.30          | -15.54      | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE20  | 140 | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 44   | 802.11ax HE20  | 140 | 5726.00     | 58.84          | 68.30          | -9.46       | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE20  | 140 | -           | -              | -              | -           | -    | -         | -      | Harmonic  |
| 45   | 802.11ax HE20  | 144 | 5429.75     | 38.51          | 54.00          | -15.49      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE20  | 144 | 17160.00    | 52.44          | 68.30          | -15.86      | V    | Peak      | Pass   | Harmonic  |
| 46   | 802.11ax HE20  | 144 | 5391.25     | 38.53          | 54.00          | -15.47      | H    | Average   | Pass   | Band Edge |
| 47   | 802.11ax HE20  | 144 | 5420.95     | 38.50          | 54.00          | -15.50      | H    | Average   | Pass   | Band Edge |
| 48   | 802.11ax HE20  | 144 | 5416.00     | 38.61          | 54.00          | -15.39      | H    | Average   | Pass   | Band Edge |
| 49   | 802.11ax HE40  | 102 | 5469.20     | 65.10          | 68.30          | -3.20       | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE40  | 102 | 16530.00    | 51.86          | 68.30          | -16.44      | H    | Peak      | Pass   | Harmonic  |
| 50   | 802.11ax HE40  | 110 | 5469.00     | 64.87          | 68.30          | -3.43       | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE40  | 110 | 16650.00    | 51.65          | 68.30          | -16.65      | V    | Peak      | Pass   | Harmonic  |
| 51   | 802.11ax HE40  | 134 | 5725.01     | 62.62          | 68.30          | -5.68       | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE40  | 134 | 17010.00    | 51.52          | 68.30          | -16.78      | V    | Peak      | Pass   | Harmonic  |
| 52   | 802.11ax HE40  | 142 | 5424.25     | 37.68          | 54.00          | -16.32      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE40  | 142 | 17130.00    | 52.75          | 68.30          | -15.55      | V    | Peak      | Pass   | Harmonic  |
| 53   | 802.11ax HE80  | 106 | 5459.80     | 45.41          | 54.00          | -8.59       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE80  | 106 | 16590.00    | 51.64          | 68.30          | -16.66      | H    | Peak      | Pass   | Harmonic  |
| 54   | 802.11ax HE80  | 122 | 5726.41     | 63.01          | 68.30          | -5.29       | H    | Peak      | Pass   | Band Edge |
|      | 802.11ax HE80  | 122 | 16830.00    | 50.82          | 68.30          | -17.48      | V    | Peak      | Pass   | Harmonic  |
| 55   | 802.11ax HE80  | 138 | 5460.00     | 38.50          | 54.00          | -15.50      | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE80  | 138 | 17070.00    | 51.89          | 68.30          | -16.41      | V    | Peak      | Pass   | Harmonic  |
| 56   | 802.11ax HE160 | 114 | 5459.34     | 45.79          | 54.00          | -8.21       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE160 | 114 | 16710.00    | 51.57          | 68.30          | -16.73      | H    | Peak      | Pass   | Harmonic  |
| 72   | 802.11ax HE80  | 58  | 597.45      | 32.13          | 46.00          | -13.87      | H    | Peak      | Pass   | LF        |



## Co-location

| Mode | Modulation        | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark    |
|------|-------------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 74   | Bluetooth-LE_GSKF | 39  | 2498.60     | 44.39          | 54.00          | -9.61       | H    | Average   | Pass   | Band Edge |
|      | Bluetooth-LE_GSKF | 39  | 4960.00     | 44.43          | 74.00          | -29.57      | H    | Peak      | Pass   | Harmonic  |
|      | 802.11ax HE80     | 58  | 5364.96     | 50.11          | 54.00          | -3.89       | H    | Average   | Pass   | Band Edge |
|      | 802.11ax HE80     | 58  | 10580.00    | 48.89          | 68.30          | -19.41      | V    | Peak      | Pass   | Harmonic  |



|       |  | 1      |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|-------|--|--------|-------------|--------|-------------|-------|-------|--------|------|------|---------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|
| Mode  | Band Edge  |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|       | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz   |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Pol.  | Horizontal   |        | Fundamental |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Peak  |  |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>56.60</td> <td>74.00</td> <td>-17.40</td> <td>46.98</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>187</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>   |        | Limit       | Margin | Read        | Ant   | Cable | Preamp | APos | TPos | Remark  | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5147.42 | 56.60 | 74.00 | -17.40 | 46.98 | 34.54 | 7.92 | 32.84 | 187 | 116 | PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.02</td> <td>-----</td> <td>-----</td> <td>98.44</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>187</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 108.02 | ----- | ----- | 98.44 | 34.53 | 7.94 | 32.89 | 187 | 116 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5147.42  | 56.60  | 74.00       | -17.40 | 46.98       | 34.54 | 7.92  | 32.84  | 187  | 116  | PEAK    |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5180.00  | 108.02 | -----       | -----  | 98.44       | 34.53 | 7.94  | 32.89  | 187  | 116  | PEAK    |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Avg   |  |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.22</td> <td>45.65</td> <td>54.00</td> <td>-8.35</td> <td>36.03</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>187</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table> |        | Limit       | Margin | Read        | Ant   | Cable | Preamp | APos | TPos | Remark  | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.22 | 45.65 | 54.00 | -8.35  | 36.03 | 34.54 | 7.92 | 32.84 | 187 | 116 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.11</td> <td>-----</td> <td>-----</td> <td>89.53</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>187</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 99.11  | ----- | ----- | 89.53 | 34.53 | 7.94 | 32.89 | 187 | 116 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5149.22  | 45.65  | 54.00       | -8.35  | 36.03       | 34.54 | 7.92  | 32.84  | 187  | 116  | AVERAGE |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5180.00  | 99.11  | -----       | -----  | 89.53       | 34.53 | 7.94  | 32.89  | 187  | 116  | AVERAGE |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |



|  | 1   |             |        |        |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
|--|---|-------------|--------|--------|--------|-------|--------|-------|--------|--------|---------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|--|--|-------|--------|------|-----|-------|--------|------|------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| Mode                                   | Band Edge   |             |        |        |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| U-NII-1_5.15-5.25_802.11a_CH36_5180MHz |   |             |        |        |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| Pol.                                   | Vertical  | Fundamental |        |        |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| <b>Peak</b>                            | <div style="text-align:right; font-size:small;">Date: 2023-05-16</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5071.64</td> <td>52.67</td> <td>74.00</td> <td>-21.33</td> <td>42.95</td> <td>34.57</td> <td>7.87</td> <td>32.72</td> <td>200</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>    |             |        | Limit  | Margin | Read  | Ant    | Cable | Preamp | APos   | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5071.64 | 52.67 | 74.00 | -21.33 | 42.95 | 34.57 | 7.87 | 32.72 | 200 | 211 | PEAK    | <div style="text-align:right; font-size:small;">Date: 2023-05-16</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>91.15</td> <td>-----</td> <td>-----</td> <td>81.57</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>200</td> <td>211</td> <td>PEAK</td> </tr> </tbody> </table>    |  |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5180.00 | 91.15 | ----- | ----- | 81.57 | 34.53 | 7.94 | 32.89 | 200 | 211 | PEAK    |
|  |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| Freq                                   | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| MHz                                    | dBuV/m  | dBuV/m      |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| 1                                      | 5071.64   | 52.67       | 74.00  | -21.33 | 42.95  | 34.57 | 7.87   | 32.72 | 200    | 211    | PEAK    |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
|  |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| Freq                                   | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| MHz                                    | dBuV/m  | dBuV/m      |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| 1                                      | 5180.00   | 91.15       | -----  | -----  | 81.57  | 34.53 | 7.94   | 32.89 | 200    | 211    | PEAK    |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| <b>Avg</b>                             | <div style="text-align:right; font-size:small;">Date: 2023-05-16</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5018.90</td> <td>40.42</td> <td>54.00</td> <td>-13.58</td> <td>30.63</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>200</td> <td>211</td> <td>AVERAGE</td> </tr> </tbody> </table> |             |        | Limit  | Margin | Read  | Ant    | Cable | Preamp | APos   | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5018.90 | 40.42 | 54.00 | -13.58 | 30.63 | 34.59 | 7.83 | 32.63 | 200 | 211 | AVERAGE | <div style="text-align:right; font-size:small;">Date: 2023-05-16</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>82.94</td> <td>-----</td> <td>-----</td> <td>73.39</td> <td>34.52</td> <td>7.94</td> <td>32.91</td> <td>200</td> <td>211</td> <td>AVERAGE</td> </tr> </tbody> </table> |  |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5180.00 | 82.94 | ----- | ----- | 73.39 | 34.52 | 7.94 | 32.91 | 200 | 211 | AVERAGE |
|  |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| Freq                                   | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| MHz                                    | dBuV/m  | dBuV/m      |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| 1                                      | 5018.90   | 40.42       | 54.00  | -13.58 | 30.63  | 34.59 | 7.83   | 32.63 | 200    | 211    | AVERAGE |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
|  |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| Freq                                   | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| MHz                                    | dBuV/m  | dBuV/m      |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |
| 1                                      | 5180.00   | 82.94       | -----  | -----  | 73.39  | 34.52 | 7.94   | 32.91 | 200    | 211    | AVERAGE |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |       |       |       |      |       |     |     |         |





| Mode     | 1   |          |        |        |        |       |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
|----------|---|----------|--------|--------|--------|-------|--------|--------|--------------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|
|          | Harmonic  |          |        |        |        |       |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
|          | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz  |          |        |        |        |       |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Pol.     | Horizontal  | Vertical |        |        |        |       |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Peak Avg | <p>Date: 2023-05-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.91</td> <td>68.30</td> <td>-22.39</td> <td>55.15</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.10</td> <td>74.00</td> <td>-23.90</td> <td>52.58</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit    | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos         | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10360.00 | 45.91 | 68.30 | -22.39 | 55.15 | 37.62 | 13.48 | 60.34 | --- --- Peak | 2 | 15540.00 | 50.10 | 74.00 | -23.90 | 52.58 | 40.56 | 15.54 | 58.58 | --- --- Peak | <p>Date: 2023-05-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>46.28</td> <td>68.30</td> <td>-22.02</td> <td>55.52</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.59</td> <td>74.00</td> <td>-23.41</td> <td>53.07</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10360.00 | 46.28 | 68.30 | -22.02 | 55.52 | 37.62 | 13.48 | 60.34 | --- --- Peak | 2 | 15540.00 | 50.59 | 74.00 | -23.41 | 53.07 | 40.56 | 15.54 | 58.58 | --- --- Peak |
| Limit    | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   | Remark |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Freq     | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| MHz      | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 1        | 10360.00  | 45.91    | 68.30  | -22.39 | 55.15  | 37.62 | 13.48  | 60.34  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 2        | 15540.00  | 50.10    | 74.00  | -23.90 | 52.58  | 40.56 | 15.54  | 58.58  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Limit    | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   | Remark |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Freq     | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| MHz      | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 1        | 10360.00  | 46.28    | 68.30  | -22.02 | 55.52  | 37.62 | 13.48  | 60.34  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 2        | 15540.00  | 50.59    | 74.00  | -23.41 | 53.07  | 40.56 | 15.54  | 58.58  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |



|                              |  | 2           |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
|------------------------------|--|-------------|--------------|--------|------|-------|---------|------|------|--------|----------------------|--------------|-------------|--|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------------------|-------|-------|------|-------|-----|-----|---------|---|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|--|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------------|-------|-------|------|-------|-----|-----|
| Mode                         | Band Edge - L  |             |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
|                              | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz   |             |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Pol.                         | Horizontal   |             | Fundamental  |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Peak                         |  |             |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
|                              | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5032.56 51.80 74.00 -22.20</td> <td>42.03</td> <td>34.59</td> <td>7.84</td> <td>32.66</td> <td>200</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>    |             | Limit Margin | Read   | Ant  | Cable | Preamp  | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5032.56 51.80 74.00 -22.20 | 42.03 | 34.59 | 7.84 | 32.66 | 200 | 156 | PEAK    | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5220.00 107.88 -----</td> <td>98.35</td> <td>34.51</td> <td>7.98</td> <td>32.96</td> <td>200</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>   |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5220.00 107.88 ----- | 98.35 | 34.51 | 7.98 | 32.96 | 200 | 156 |
| Limit Margin                 | Read   | Ant         | Cable        | Preamp | APos | TPos  | Remark  |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Freq Level Line (dB)         | Level Factor   | Loss Factor |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m        | dB           | dB     | cm   | deg   |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| 1 5032.56 51.80 74.00 -22.20 | 42.03  | 34.59       | 7.84         | 32.66  | 200  | 156   | PEAK    |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Limit Margin                 | Read   | Ant         | Cable        | Preamp | APos | TPos  | Remark  |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Freq Level Line (dB)         | Level Factor   | Loss Factor |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m        | dB           | dB     | cm   | deg   |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| 1 5220.00 107.88 -----       | 98.35  | 34.51       | 7.98         | 32.96  | 200  | 156   | PEAK    |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Avg                          |  |             |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
|                              | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5100.32 40.65 54.00 -13.35</td> <td>30.97</td> <td>34.56</td> <td>7.89</td> <td>32.77</td> <td>200</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table> |             | Limit Margin | Read   | Ant  | Cable | Preamp  | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5100.32 40.65 54.00 -13.35 | 30.97 | 34.56 | 7.89 | 32.77 | 200 | 156 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5220.00 98.45 -----</td> <td>88.92</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>200</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table> |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5220.00 98.45 -----  | 88.92 | 34.51 | 7.99 | 32.97 | 200 | 156 |
| Limit Margin                 | Read   | Ant         | Cable        | Preamp | APos | TPos  | Remark  |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Freq Level Line (dB)         | Level Factor   | Loss Factor |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m        | dB           | dB     | cm   | deg   |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| 1 5100.32 40.65 54.00 -13.35 | 30.97  | 34.56       | 7.89         | 32.77  | 200  | 156   | AVERAGE |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Limit Margin                 | Read   | Ant         | Cable        | Preamp | APos | TPos  | Remark  |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| Freq Level Line (dB)         | Level Factor   | Loss Factor |              |        |      |       |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m        | dB           | dB     | cm   | deg   |         |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |
| 1 5220.00 98.45 -----        | 88.92  | 34.51       | 7.99         | 32.97  | 200  | 156   | AVERAGE |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                        |       |       |      |       |     |     |



|       |   | 2           |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|--|
| Mode  | Band Edge - R   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|       | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Pol.  | Horizontal  | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Peak  | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5427.84</td> <td>50.45</td> <td>74.00</td> <td>-23.55</td> <td>40.87</td> <td>34.43</td> <td>8.45</td> <td>33.30</td> <td>200</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5427.84 | 50.45 | 74.00 | -23.55 | 40.87 | 34.43 | 8.45 | 33.30 | 200 | 156 | PEAK    | Blank |  |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5427.84   | 50.45       | 74.00  | -23.55 | 40.87  | 34.43  | 8.45   | 33.30  | 200  | 156    | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Avg   | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.88</td> <td>39.45</td> <td>54.00</td> <td>-14.55</td> <td>29.84</td> <td>34.43</td> <td>8.46</td> <td>33.28</td> <td>200</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5420.88 | 39.45 | 54.00 | -14.55 | 29.84 | 34.43 | 8.46 | 33.28 | 200 | 156 | AVERAGE | Blank |  |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5420.88   | 39.45       | 54.00  | -14.55 | 29.84  | 34.43  | 8.46   | 33.28  | 200  | 156    | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |



|                              |  | 2            |             |        |        |        |         |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
|------------------------------|--|--------------|-------------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|-------------|----|----|----|-----|------------------------------|-------|-------|------|-------|-----|-----|---------|---|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|-------------|----|----|----|-----|------------------------|-------|-------|------|-------|-----|-----|---------|
| Mode                         | Band Edge - L  |              |             |        |        |        |         |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
|                              | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz   |              |             |        |        |        |         |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Pol.                         | Vertical   | Fundamental  |             |        |        |        |         |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Peak                         | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5024.64 51.59 74.00 -22.41</td> <td>41.80</td> <td>34.59</td> <td>7.84</td> <td>32.64</td> <td>268</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit Margin | Read        | Ant    | Cable  | Preamp | APos    | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor | dB | dB | cm | deg | 1 5024.64 51.59 74.00 -22.41 | 41.80 | 34.59 | 7.84 | 32.64 | 268 | 130 | PEAK    | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5220.00 100.18 -----</td> <td>90.65</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>268</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor | dB | dB | cm | deg | 1 5220.00 100.18 ----- | 90.65 | 34.51 | 7.99 | 32.97 | 268 | 130 | PEAK    |
|                              | Limit Margin   | Read         | Ant         | Cable  | Preamp | APos   | TPos    | Remark |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  | Loss Factor | dB     | dB     | cm     | deg     |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| 1 5024.64 51.59 74.00 -22.41 | 41.80  | 34.59        | 7.84        | 32.64  | 268    | 130    | PEAK    |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Limit Margin                 | Read   | Ant          | Cable       | Preamp | APos   | TPos   | Remark  |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  | Loss Factor | dB     | dB     | cm     | deg     |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| 1 5220.00 100.18 -----       | 90.65  | 34.51        | 7.99        | 32.97  | 268    | 130    | PEAK    |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Avg                          | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5048.62 40.33 54.00 -13.67</td> <td>30.58</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>268</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read        | Ant    | Cable  | Preamp | APos    | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor | dB | dB | cm | deg | 1 5048.62 40.33 54.00 -13.67 | 30.58 | 34.58 | 7.85 | 32.68 | 268 | 130 | AVERAGE | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5220.00 92.67 -----</td> <td>83.14</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>268</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor | dB | dB | cm | deg | 1 5220.00 92.67 -----  | 83.14 | 34.51 | 7.99 | 32.97 | 268 | 130 | AVERAGE |
|                              | Limit Margin   | Read         | Ant         | Cable  | Preamp | APos   | TPos    | Remark |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  | Loss Factor | dB     | dB     | cm     | deg     |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| 1 5048.62 40.33 54.00 -13.67 | 30.58  | 34.58        | 7.85        | 32.68  | 268    | 130    | AVERAGE |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Limit Margin                 | Read   | Ant          | Cable       | Preamp | APos   | TPos   | Remark  |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  | Loss Factor | dB     | dB     | cm     | deg     |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |
| 1 5220.00 92.67 -----        | 83.14  | 34.51        | 7.99        | 32.97  | 268    | 130    | AVERAGE |        |        |                      |              |             |             |    |    |    |     |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |    |    |    |     |                        |       |       |      |       |     |     |         |



|       |  | 2           |        |        |        |        |        |        |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|------|-------------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|-------|--|
| Mode  | Band Edge - R  |             |        |        |        |        |        |        |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
|       | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz   |             |        |        |        |        |        |        |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| Pol.  | Vertical   | Fundamental |        |        |        |        |        |        |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| Peak  | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.08</td> <td>50.37</td> <td>74.00</td> <td>-23.63</td> <td>40.73</td> <td>34.45</td> <td>8.42</td> <td>33.23</td> <td>268</td> <td>130 PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark      | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5386.08 | 50.37 | 74.00 | -23.63 | 40.73 | 34.45 | 8.42 | 33.23 | 268 | 130 PEAK    | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| 1     | 5386.08  | 50.37       | 74.00  | -23.63 | 40.73  | 34.45  | 8.42   | 33.23  | 268  | 130 PEAK    |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| Avg   | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5407.44</td> <td>38.97</td> <td>54.00</td> <td>-15.03</td> <td>29.31</td> <td>34.44</td> <td>8.48</td> <td>33.26</td> <td>268</td> <td>130 AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark      | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5407.44 | 38.97 | 54.00 | -15.03 | 29.31 | 34.44 | 8.48 | 33.26 | 268 | 130 AVERAGE | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |             |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |
| 1     | 5407.44  | 38.97       | 54.00  | -15.03 | 29.31  | 34.44  | 8.48   | 33.26  | 268  | 130 AVERAGE |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |       |  |



| Mode        | 2   |          |        |        |        |        |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
|-------------|---|----------|--------|--------|--------|--------|--------|--------|--------------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|
|             | Harmonic  |          |        |        |        |        |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
|             | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz  |          |        |        |        |        |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Pol.        | Horizontal  | Vertical |        |        |        |        |        |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Peak<br>Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.65</td> <td>68.30</td> <td>-20.65</td> <td>56.86</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.02</td> <td>74.00</td> <td>-23.98</td> <td>52.68</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit    | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos         | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10440.00 | 47.65 | 68.30 | -20.65 | 56.86 | 37.66 | 13.51 | 60.38 | --- --- Peak | 2 | 15660.00 | 50.02 | 74.00 | -23.98 | 52.68 | 40.60 | 15.56 | 58.82 | --- --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.92</td> <td>68.30</td> <td>-20.38</td> <td>57.13</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.89</td> <td>74.00</td> <td>-23.11</td> <td>53.55</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10440.00 | 47.92 | 68.30 | -20.38 | 57.13 | 37.66 | 13.51 | 60.38 | --- --- Peak | 2 | 15660.00 | 50.89 | 74.00 | -23.11 | 53.55 | 40.60 | 15.56 | 58.82 | --- --- Peak |
|             | Limit   | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark       |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss   | Factor |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 1           | 10440.00  | 47.65    | 68.30  | -20.65 | 56.86  | 37.66  | 13.51  | 60.38  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 2           | 15660.00  | 50.02    | 74.00  | -23.98 | 52.68  | 40.60  | 15.56  | 58.82  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Limit       | Margin  | Read     | Ant    | Cable  | Preamp | APos   | TPos   | Remark |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss   | Factor |        |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |              |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 1           | 10440.00  | 47.92    | 68.30  | -20.38 | 57.13  | 37.66  | 13.51  | 60.38  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |
| 2           | 15660.00  | 50.89    | 74.00  | -23.11 | 53.55  | 40.60  | 15.56  | 58.82  | --- --- Peak |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |



|       |  | 3  |             |        |        |       |        |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|-------|--|--|-------------|--------|--------|-------|--------|--------|------|-----|---------|-------|------|-------|------|------|--|--|--------|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|-------|------|------|--|--|--------|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|
| Mode  | Band Edge - L  |  |             |        |        |       |        |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|       | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz   |  |             |        |        |       |        |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Pol.  | Horizontal   |  | Fundamental |        |        |       |        |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Peak  | <p style="text-align: right;">Date: 2023-05-16</p>   | <p style="text-align: right;">Date: 2023-05-16</p> |             |        |        |       |        |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5124.08</td> <td>51.68</td> <td>74.00</td> <td>-22.32</td> <td>42.03</td> <td>34.55</td> <td>7.90</td> <td>32.80</td> <td>200</td> <td>147</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit  | Margin      | Read   | Ant    | Cable | Preamp | APos   | TPos |     | Freq    | Level | Line | Level | Loss | Loss |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5124.08 | 51.68 | 74.00 | -22.32 | 42.03 | 34.55 | 7.90 | 32.80 | 200 | 147 | PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>107.57</td> <td>-----</td> <td>-----</td> <td>98.03</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>200</td> <td>147</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | Level | Loss | Loss |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 107.57 | ----- | ----- | 98.03 | 34.50 | 8.04 | 33.00 | 200 | 147 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Loss   | Loss   |       |        | Remark |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m   | dBuV        | dB/m   | dB     | dB    | cm     | deg    |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5124.08  | 51.68  | 74.00       | -22.32 | 42.03  | 34.55 | 7.90   | 32.80  | 200  | 147 | PEAK    |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Loss   | Loss   |       |        | Remark |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m   | dBuV        | dB/m   | dB     | dB    | cm     | deg    |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5240.00  | 107.57   | -----       | -----  | 98.03  | 34.50 | 8.04   | 33.00  | 200  | 147 | PEAK    |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Avg   | <p style="text-align: right;">Date: 2023-05-16</p>   | <p style="text-align: right;">Date: 2023-05-16</p> |             |        |        |       |        |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5017.04</td> <td>40.53</td> <td>54.00</td> <td>-13.47</td> <td>30.74</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>200</td> <td>147</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin      | Read   | Ant    | Cable | Preamp | APos   | TPos |     | Freq    | Level | Line | Level | Loss | Loss |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5017.04 | 40.53 | 54.00 | -13.47 | 30.74 | 34.59 | 7.83 | 32.63 | 200 | 147 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>99.58</td> <td>-----</td> <td>-----</td> <td>90.04</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>200</td> <td>147</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | Level | Loss | Loss |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 99.58  | ----- | ----- | 90.04 | 34.50 | 8.04 | 33.00 | 200 | 147 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Loss   | Loss   |       |        | Remark |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m   | dBuV        | dB/m   | dB     | dB    | cm     | deg    |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5017.04  | 40.53  | 54.00       | -13.47 | 30.74  | 34.59 | 7.83   | 32.63  | 200  | 147 | AVERAGE |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | Level       | Loss   | Loss   |       |        | Remark |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m   | dBuV        | dB/m   | dB     | dB    | cm     | deg    |      |     |         |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5240.00  | 99.58  | -----       | -----  | 90.04  | 34.50 | 8.04   | 33.00  | 200  | 147 | AVERAGE |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |  |      |       |      |       |      |      |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |



| Mode      | 3   |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|-----------|---|-------------|--------|--------|--------|--------|--------|-----------------|------|--------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----------------|-------|
|           | Band Edge - R   |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|           | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz  |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Pol.      | Horizontal  | Fundamental |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Peak      | <p>Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5443.94</td> <td>50.83</td> <td>74.00</td> <td>-23.17</td> <td>41.30</td> <td>34.42</td> <td>8.43</td> <td>33.32</td> <td>200 147 PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5443.94 | 50.83 | 74.00 | -23.17 | 41.30 | 34.42 | 8.43 | 33.32 | 200 147 PEAK    | Blank |
| Limit     | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level   | Line        | Level  | Factor | Loss   | Factor |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5443.94 | 50.83   | 74.00       | -23.17 | 41.30  | 34.42  | 8.43   | 33.32  | 200 147 PEAK    |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Avg       | <p>Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5358.36</td> <td>39.74</td> <td>54.00</td> <td>-14.26</td> <td>30.11</td> <td>34.46</td> <td>8.35</td> <td>33.18</td> <td>200 147 AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5358.36 | 39.74 | 54.00 | -14.26 | 30.11 | 34.46 | 8.35 | 33.18 | 200 147 AVERAGE | Blank |
| Limit     | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level   | Line        | Level  | Factor | Loss   | Factor |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5358.36 | 39.74   | 54.00       | -14.26 | 30.11  | 34.46  | 8.35   | 33.18  | 200 147 AVERAGE |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |





|       |  | 3                                      |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|-------|--|--|--------|--------|-------------|-------|--------|--------|------|--------|---------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| Mode  |  | Band Edge - L                          |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|       |  | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Pol.  | Vertical   | Fundamental                            |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Peak  | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5025.68</td> <td>51.75</td> <td>74.00</td> <td>-22.25</td> <td>41.96</td> <td>34.59</td> <td>7.84</td> <td>32.64</td> <td>400</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit                                  | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5025.68 | 51.75 | 74.00 | -22.25 | 41.96 | 34.59 | 7.84 | 32.64 | 400 | 150 | PEAK    | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>100.72</td> <td>-----</td> <td>-----</td> <td>91.18</td> <td>34.51</td> <td>8.01</td> <td>32.98</td> <td>400</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 100.72 | ----- | ----- | 91.18 | 34.51 | 8.01 | 32.98 | 400 | 150 | PEAK    |
| Limit | Margin   | Read                                   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line                                   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m                                 | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5025.68  | 51.75                                  | 74.00  | -22.25 | 41.96       | 34.59 | 7.84   | 32.64  | 400  | 150    | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin   | Read                                   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line                                   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m                                 | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5240.00  | 100.72                                 | -----  | -----  | 91.18       | 34.51 | 8.01   | 32.98  | 400  | 150    | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Avg   | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5052.08</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>30.53</td> <td>34.58</td> <td>7.85</td> <td>32.69</td> <td>400</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit                                  | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5052.08 | 40.27 | 54.00 | -13.73 | 30.53 | 34.58 | 7.85 | 32.69 | 400 | 150 | AVERAGE | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>92.12</td> <td>-----</td> <td>-----</td> <td>82.56</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>400</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 92.12  | ----- | ----- | 82.56 | 34.50 | 8.06 | 33.00 | 400 | 150 | AVERAGE |
| Limit | Margin   | Read                                   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line                                   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m                                 | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5052.08  | 40.27                                  | 54.00  | -13.73 | 30.53       | 34.58 | 7.85   | 32.69  | 400  | 150    | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin   | Read                                   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line                                   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m                                 | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5240.00  | 92.12                                  | -----  | -----  | 82.56       | 34.50 | 8.06   | 33.00  | 400  | 150    | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |



|       |   | 3           |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|--|
| Mode  | Band Edge - R   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|       | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Pol.  | Vertical  | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Peak  | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.18</td> <td>50.13</td> <td>74.00</td> <td>-23.87</td> <td>40.52</td> <td>34.43</td> <td>8.46</td> <td>33.28</td> <td>400</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5420.18 | 50.13 | 74.00 | -23.87 | 40.52 | 34.43 | 8.46 | 33.28 | 400 | 150 | PEAK    | Blank |  |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5420.18   | 50.13       | 74.00  | -23.87 | 40.52  | 34.43  | 8.46   | 33.28  | 400  | 150    | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Avg   | <p style="text-align: right;">Date: 2023-05-16</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5419.30</td> <td>38.88</td> <td>54.00</td> <td>-15.12</td> <td>29.27</td> <td>34.43</td> <td>8.46</td> <td>33.28</td> <td>400</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5419.30 | 38.88 | 54.00 | -15.12 | 29.27 | 34.43 | 8.46 | 33.28 | 400 | 150 | AVERAGE | Blank |  |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5419.30   | 38.88       | 54.00  | -15.12 | 29.27  | 34.43  | 8.46   | 33.28  | 400  | 150    | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |



| Mode        | 3   |                         |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|-------------|---|-------------------------|--------|--------|--------|-------|--------|--------|--------------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|
|             | Harmonic  |                         |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz  |                         |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Pol.        | Horizontal  | Vertical                |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Peak<br>Avg | <p>Date: 2023-05-09</p>   | <p>Date: 2023-05-09</p> |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.59</td> <td>68.30</td> <td>-21.71</td> <td>55.76</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.66</td> <td>74.00</td> <td>-23.34</td> <td>53.40</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit                   | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos         |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10480.00 | 46.59 | 68.30 | -21.71 | 55.76 | 37.69 | 13.53 | 60.39 | --- --- Peak | 2 | 15720.00 | 50.66 | 74.00 | -23.34 | 53.40 | 40.62 | 15.58 | 58.94 | --- --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.34</td> <td>68.30</td> <td>-21.96</td> <td>55.51</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.05</td> <td>74.00</td> <td>-23.95</td> <td>52.79</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10480.00 | 46.34 | 68.30 | -21.96 | 55.51 | 37.69 | 13.53 | 60.39 | --- --- Peak | 2 | 15720.00 | 50.05 | 74.00 | -23.95 | 52.79 | 40.62 | 15.58 | 58.94 |
| Limit       | Margin  | Read                    | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line                    | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m                  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10480.00  | 46.59                   | 68.30  | -21.71 | 55.76  | 37.69 | 13.53  | 60.39  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15720.00  | 50.66                   | 74.00  | -23.34 | 53.40  | 40.62 | 15.58  | 58.94  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Limit       | Margin  | Read                    | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line                    | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m                  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10480.00  | 46.34                   | 68.30  | -21.96 | 55.51  | 37.69 | 13.53  | 60.39  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15720.00  | 50.05                   | 74.00  | -23.95 | 52.79  | 40.62 | 15.58  | 58.94  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |



|       |  | 4      |             |        |        |       |        |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
|-------|--|--------|-------------|--------|--------|-------|--------|--------|------|------|---------|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|----|------|------|----|----|----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|
| Mode  | Band Edge  |        |             |        |        |       |        |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz   |        |             |        |        |       |        |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Pol.  | Horizontal   |        | Fundamental |        |        |       |        |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Peak  |  |        |             |        |        |       |        |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.40</td> <td>55.54</td> <td>74.00</td> <td>-18.46</td> <td>45.93</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>127</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>   |        | Limit       | Margin | Read   | Ant   | Cable  | Preamp | APos | TPos |         | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5149.40 | 55.54 | 74.00 | -18.46 | 45.93 | 34.54 | 7.92 | 32.85 | 127 | 156 | PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.00</td> <td>-----</td> <td>-----</td> <td>99.50</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>127</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>   |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5180.00 | 109.00 | ----- | ----- | 99.50 | 34.53 | 7.94 | 32.89 | 127 | 156 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | (dB)        | Level  | Factor | Loss  | Factor | Remark |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dB          | dBuV   | dB/m   | dB    | dB     | cm     |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5149.40  | 55.54  | 74.00       | -18.46 | 45.93  | 34.54 | 7.92   | 32.85  | 127  | 156  | PEAK    |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | (dB)        | Level  | Factor | Loss  | Factor | Remark |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dB          | dBuV   | dB/m   | dB    | dB     | cm     |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5180.00  | 109.00 | -----       | -----  | 99.50  | 34.53 | 7.94   | 32.89  | 127  | 156  | PEAK    |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Avg   |  |        |             |        |        |       |        |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>45.66</td> <td>54.00</td> <td>-8.34</td> <td>36.05</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>127</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table> |        | Limit       | Margin | Read   | Ant   | Cable  | Preamp | APos | TPos |         | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5149.94 | 45.66 | 54.00 | -8.34  | 36.05 | 34.54 | 7.92 | 32.85 | 127 | 156 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.33</td> <td>-----</td> <td>-----</td> <td>89.78</td> <td>34.52</td> <td>7.94</td> <td>32.91</td> <td>127</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table> |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | 1 | 5180.00 | 99.33  | ----- | ----- | 89.78 | 34.52 | 7.94 | 32.91 | 127 | 156 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | (dB)        | Level  | Factor | Loss  | Factor | Remark |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dB          | dBuV   | dB/m   | dB    | dB     | cm     |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5149.94  | 45.66  | 54.00       | -8.34  | 36.05  | 34.54 | 7.92   | 32.85  | 127  | 156  | AVERAGE |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos  | TPos   |        |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| Freq  | Level  | Line   | (dB)        | Level  | Factor | Loss  | Factor | Remark |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| MHz   | dBuV/m   | dBuV/m | dB          | dBuV   | dB/m   | dB    | dB     | cm     |      |      |         |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |
| 1     | 5180.00  | 99.33  | -----       | -----  | 89.78  | 34.52 | 7.94   | 32.91  | 127  | 156  | AVERAGE |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |       |       |        |       |       |      |       |     |     |         |  |  |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |    |      |      |    |    |    |   |         |        |       |       |       |       |      |       |     |     |







|       |   | 4           |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| Mode  | Band Edge   |             |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz  |             |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Pol.  | Vertical  | Fundamental |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Peak  | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.40</td> <td>52.81</td> <td>74.00</td> <td>-21.19</td> <td>43.20</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>380</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.40 | 52.81 | 74.00 | -21.19 | 43.20 | 34.54 | 7.92 | 32.85 | 380 | 202 | PEAK    | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.37</td> <td>-----</td> <td>-----</td> <td>92.79</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>380</td> <td>202</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 102.37 | ----- | ----- | 92.79 | 34.53 | 7.93 | 32.88 | 380 | 202 | PEAK    |
|       | Limit   | Margin      | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line        | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5149.40   | 52.81       | 74.00  | -21.19 | 43.20  | 34.54  | 7.92   | 32.85  | 380    | 202    | PEAK    |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line        | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5180.00   | 102.37      | -----  | -----  | 92.79  | 34.53  | 7.93   | 32.88  | 380    | 202    | PEAK    |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Avg   | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>42.87</td> <td>54.00</td> <td>-11.13</td> <td>33.26</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>380</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.94 | 42.87 | 54.00 | -11.13 | 33.26 | 34.54 | 7.92 | 32.85 | 380 | 202 | AVERAGE | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>92.35</td> <td>-----</td> <td>-----</td> <td>82.77</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>380</td> <td>202</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 92.35  | ----- | ----- | 82.77 | 34.53 | 7.93 | 32.88 | 380 | 202 | AVERAGE |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line        | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5149.94   | 42.87       | 54.00  | -11.13 | 33.26  | 34.54  | 7.92   | 32.85  | 380    | 202    | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line        | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5180.00   | 92.35       | -----  | -----  | 82.77  | 34.53  | 7.93   | 32.88  | 380    | 202    | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |



| Mode        | 4   |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|-------------|---|----------|--------|--------|--------|-------|--------|--------|--------------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|
|             | Harmonic  |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz  |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Pol.        | Horizontal  | Vertical |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Peak<br>Avg |   |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>46.93</td> <td>68.30</td> <td>-21.37</td> <td>56.17</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.36</td> <td>74.00</td> <td>-23.64</td> <td>52.84</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit    | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos         |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10360.00 | 46.93 | 68.30 | -21.37 | 56.17 | 37.62 | 13.48 | 60.34 | --- --- Peak | 2 | 15540.00 | 50.36 | 74.00 | -23.64 | 52.84 | 40.56 | 15.54 | 58.58 | --- --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>46.75</td> <td>68.30</td> <td>-21.55</td> <td>55.99</td> <td>37.62</td> <td>13.48</td> <td>60.34</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>53.08</td> <td>40.56</td> <td>15.54</td> <td>58.58</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10360.00 | 46.75 | 68.30 | -21.55 | 55.99 | 37.62 | 13.48 | 60.34 | --- --- Peak | 2 | 15540.00 | 50.60 | 74.00 | -23.40 | 53.08 | 40.56 | 15.54 | 58.58 |
| Limit       | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10360.00  | 46.93    | 68.30  | -21.37 | 56.17  | 37.62 | 13.48  | 60.34  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15540.00  | 50.36    | 74.00  | -23.64 | 52.84  | 40.56 | 15.54  | 58.58  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Limit       | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10360.00  | 46.75    | 68.30  | -21.55 | 55.99  | 37.62 | 13.48  | 60.34  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15540.00  | 50.60    | 74.00  | -23.40 | 53.08  | 40.56 | 15.54  | 58.58  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |

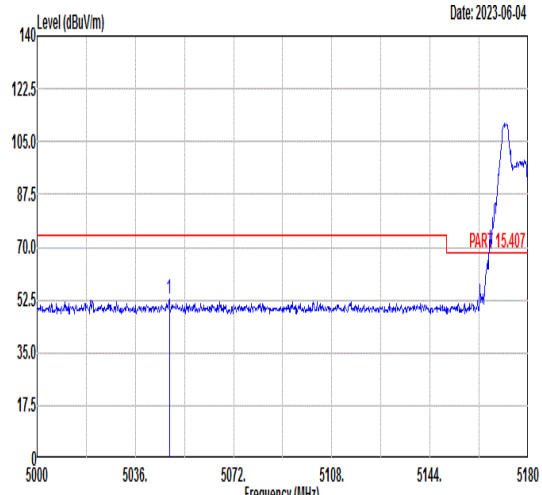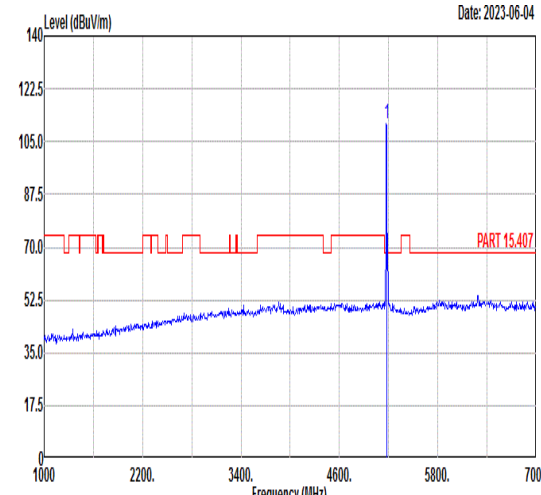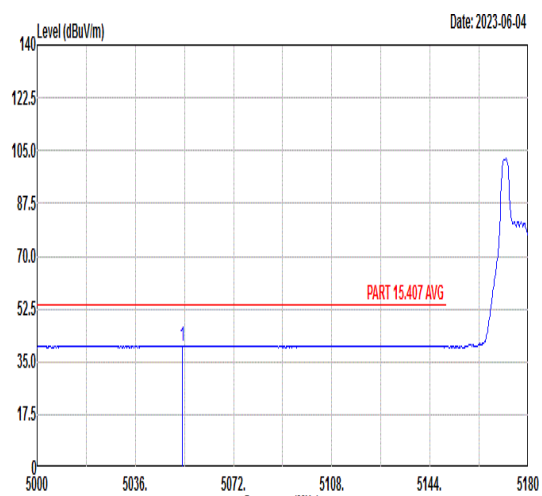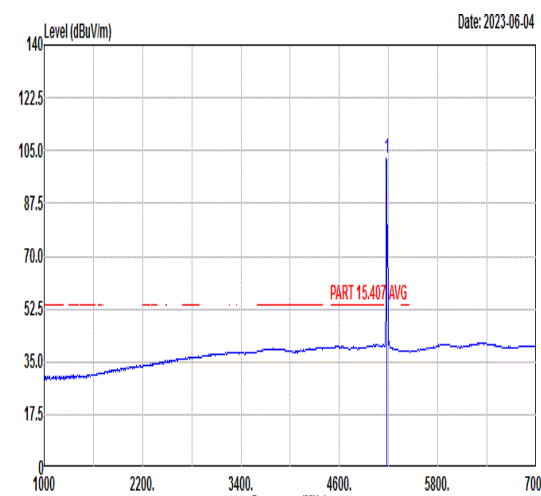





|       |   | 5      |  |        |             |       |       |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
|-------|---|--------|--|--------|-------------|-------|-------|--------|------|------------|--|------|-------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|------------|---|--|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|--------|-------|------|-------|-----|
| Mode  | Band Edge   |        |  |        |             |       |       |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz   |        |  |        |             |       |       |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Pol.  | Horizontal  |        | Fundamental  |        |             |       |       |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Peak  |  <p>Date: 2023-06-04</p>  |        |  <p>Date: 2023-06-04</p>  |        |             |       |       |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5048.42</td> <td>52.70</td> <td>74.00</td> <td>-21.30</td> <td>42.95</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>200</td> <td>78 PEAK</td> </tr> </tbody> </table>    |        | Limit  | Margin | Read        | Ant   | Cable | Preamp | APos | TPos       |  | Freq | Level | Line | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5048.42 | 52.70 | 74.00 | -21.30 | 42.95 | 34.58 | 7.85 | 32.68 | 200 | 78 PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>110.72</td> <td>-----</td> <td>-----</td> <td>101.14</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>200</td> <td>78 PEAK</td> </tr> </tbody> </table>   |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 110.72 | ----- | ----- | 101.14 | 34.53 | 7.93 | 32.88 | 200 |
| Limit | Margin  | Read   | Ant  | Cable  | Preamp      | APos  | TPos  |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Freq  | Level   | Line   | Level  | Factor | Loss Factor |       |       | Remark |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| MHz   | dBuV/m  | dBuV/m | dBuV   | dB/m   | dB          | dB    | cm    | deg    |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| 1     | 5048.42   | 52.70  | 74.00  | -21.30 | 42.95       | 34.58 | 7.85  | 32.68  | 200  | 78 PEAK    |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Limit | Margin  | Read   | Ant  | Cable  | Preamp      | APos  | TPos  |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Freq  | Level   | Line   | Level  | Factor | Loss Factor |       |       | Remark |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| MHz   | dBuV/m  | dBuV/m | dBuV   | dB/m   | dB          | dB    | cm    | deg    |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| 1     | 5180.00   | 110.72 | -----  | -----  | 101.14      | 34.53 | 7.93  | 32.88  | 200  | 78 PEAK    |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Avg   |  <p>Date: 2023-06-04</p>   |        |  <p>Date: 2023-06-04</p> |        |             |       |       |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5053.28</td> <td>40.39</td> <td>54.00</td> <td>-13.61</td> <td>30.65</td> <td>34.58</td> <td>7.85</td> <td>32.69</td> <td>200</td> <td>78 AVERAGE</td> </tr> </tbody> </table> |        | Limit  | Margin | Read        | Ant   | Cable | Preamp | APos | TPos       |  | Freq | Level | Line | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5053.28 | 40.39 | 54.00 | -13.61 | 30.65 | 34.58 | 7.85 | 32.69 | 200 | 78 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.23</td> <td>-----</td> <td>-----</td> <td>92.65</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>200</td> <td>78 AVERAGE</td> </tr> </tbody> </table> |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 102.23 | ----- | ----- | 92.65  | 34.53 | 7.93 | 32.88 | 200 |
| Limit | Margin  | Read   | Ant  | Cable  | Preamp      | APos  | TPos  |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Freq  | Level   | Line   | Level  | Factor | Loss Factor |       |       | Remark |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| MHz   | dBuV/m  | dBuV/m | dBuV   | dB/m   | dB          | dB    | cm    | deg    |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| 1     | 5053.28   | 40.39  | 54.00  | -13.61 | 30.65       | 34.58 | 7.85  | 32.69  | 200  | 78 AVERAGE |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Limit | Margin  | Read   | Ant  | Cable  | Preamp      | APos  | TPos  |        |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| Freq  | Level   | Line   | Level  | Factor | Loss Factor |       |       | Remark |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| MHz   | dBuV/m  | dBuV/m | dBuV   | dB/m   | dB          | dB    | cm    | deg    |      |            |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |
| 1     | 5180.00   | 102.23 | -----  | -----  | 92.65       | 34.53 | 7.93  | 32.88  | 200  | 78 AVERAGE |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |  |      |       |      |       |        |             |  |  |        |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |



|       |  | 5   |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|-------|--|---|--------|--------|-------------|-------|--------|--------|------|--------|---------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| Mode  |  | Band Edge   |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|       |  | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU26/0_5180MHz |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Pol.  | Vertical   | Fundamental   |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Peak  | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5042.30</td> <td>52.17</td> <td>74.00</td> <td>-21.83</td> <td>42.41</td> <td>34.58</td> <td>7.85</td> <td>32.67</td> <td>298</td> <td>188</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit   | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5042.30 | 52.17 | 74.00 | -21.83 | 42.41 | 34.58 | 7.85 | 32.67 | 298 | 188 | PEAK    | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.01</td> <td>-----</td> <td>-----</td> <td>93.43</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>298</td> <td>188</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 103.01 | ----- | ----- | 93.43 | 34.53 | 7.93 | 32.88 | 298 | 188 | PEAK    |
| Limit | Margin   | Read  | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line  | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5042.30  | 52.17   | 74.00  | -21.83 | 42.41       | 34.58 | 7.85   | 32.67  | 298  | 188    | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin   | Read  | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line  | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5180.00  | 103.01  | -----  | -----  | 93.43       | 34.53 | 7.93   | 32.88  | 298  | 188    | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Avg   | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5050.40</td> <td>40.24</td> <td>54.00</td> <td>-13.76</td> <td>30.49</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>298</td> <td>188</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5050.40 | 40.24 | 54.00 | -13.76 | 30.49 | 34.58 | 7.85 | 32.68 | 298 | 188 | AVERAGE | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.00</td> <td>-----</td> <td>-----</td> <td>83.42</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>298</td> <td>188</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 93.00  | ----- | ----- | 83.42 | 34.53 | 7.93 | 32.88 | 298 | 188 | AVERAGE |
| Limit | Margin   | Read  | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line  | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5050.40  | 40.24   | 54.00  | -13.76 | 30.49       | 34.58 | 7.85   | 32.68  | 298  | 188    | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin   | Read  | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line  | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m  | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5180.00  | 93.00   | -----  | -----  | 83.42       | 34.53 | 7.93   | 32.88  | 298  | 188    | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |



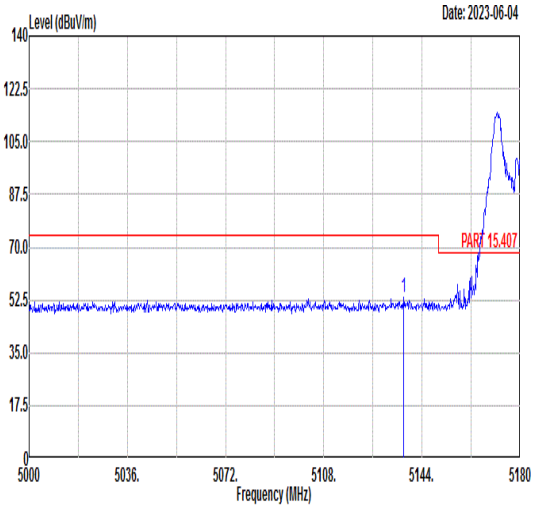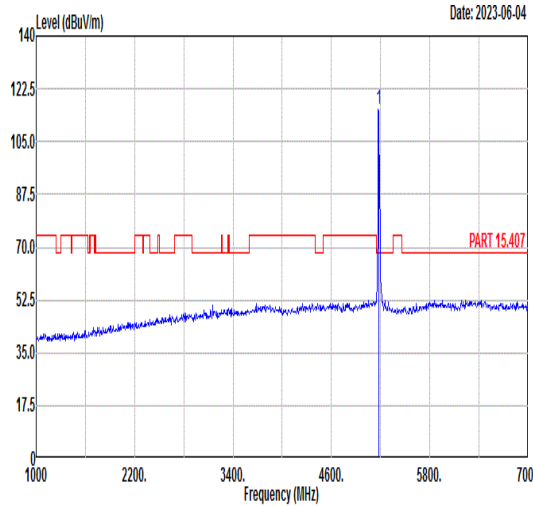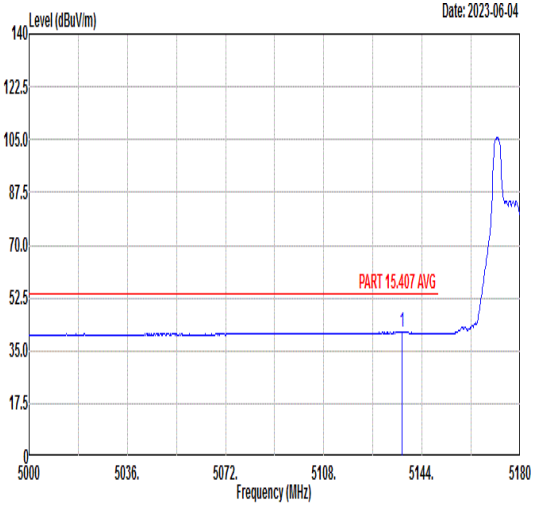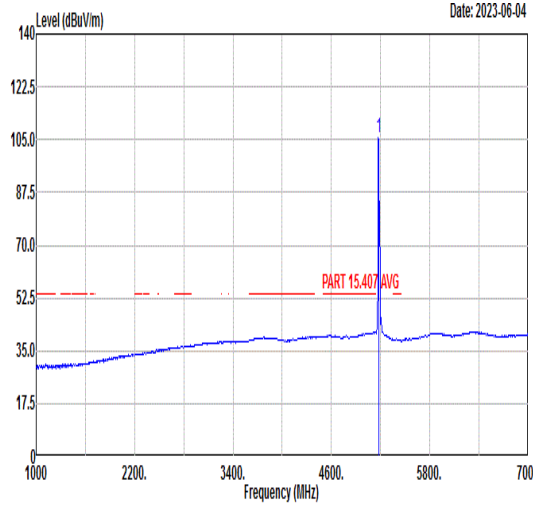

|       |  | 6  |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
|-------|--|--|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|--------|-------|------|-------|-----|----|---------|
| Mode  |  | Band Edge  |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
|       |  | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Pol.  | Horizontal   | Fundamental  |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Peak  |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.34</td> <td>53.40</td> <td>74.00</td> <td>-20.60</td> <td>43.77</td> <td>34.55</td> <td>7.91</td> <td>32.83</td> <td>200</td> <td>83</td> <td>PEAK</td> </tr> </tbody> </table>     | Limit  | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5137.34 | 53.40 | 74.00 | -20.60 | 43.77 | 34.55 | 7.91 | 32.83 | 200 | 83 | PEAK    |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>115.51</td> <td>-----</td> <td>-----</td> <td>105.93</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>200</td> <td>83</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 115.51 | ----- | ----- | 105.93 | 34.53 | 7.93 | 32.88 | 200 | 83 | PEAK    |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5137.34  | 53.40  | 74.00  | -20.60 | 43.77  | 34.55 | 7.91   | 32.83  | 200  | 83     | PEAK    |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5180.00  | 115.51   | -----  | -----  | 105.93 | 34.53 | 7.93   | 32.88  | 200  | 83     | PEAK    |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Avg   |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5136.80</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>31.69</td> <td>34.55</td> <td>7.91</td> <td>32.82</td> <td>200</td> <td>83</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5136.80 | 41.33 | 54.00 | -12.67 | 31.69 | 34.55 | 7.91 | 32.82 | 200 | 83 | AVERAGE |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.46</td> <td>-----</td> <td>-----</td> <td>95.88</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>200</td> <td>83</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 105.46 | ----- | ----- | 95.88  | 34.53 | 7.93 | 32.88 | 200 | 83 | AVERAGE |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5136.80  | 41.33  | 54.00  | -12.67 | 31.69  | 34.55 | 7.91   | 32.82  | 200  | 83     | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5180.00  | 105.46   | -----  | -----  | 95.88  | 34.53 | 7.93   | 32.88  | 200  | 83     | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |



|                              |   | 6            |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
|------------------------------|---|--------------|-------|--------|--------|--------|-------------|--------|--------|----------------------|--------------|-------------|--|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------------------|-------|-------|------|-------|-----|-----|---------|--|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|--|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------|-------|-------|-------|------|-------|-----|-------------|
| Mode                         | Band Edge   |              |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
|                              | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU52/37_5180MHz  |              |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Pol.                         | Vertical  | Fundamental  |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Peak                         | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5106.74 52.10 74.00 -21.90</td> <td>42.43</td> <td>34.56</td> <td>7.89</td> <td>32.78</td> <td>305</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit Margin | Read  | Ant    | Cable  | Preamp | APos        | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5106.74 52.10 74.00 -21.90 | 42.43 | 34.56 | 7.89 | 32.78 | 305 | 180 | PEAK    | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00 104.26</td> <td>-----</td> <td>94.68</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>305</td> <td>180 PEAK</td> </tr> </tbody> </table>   | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5180.00 104.26 | ----- | 94.68 | 34.53 | 7.93 | 32.88 | 305 | 180 PEAK    |
|                              | Limit Margin  | Read         | Ant   | Cable  | Preamp | APos   | TPos        | Remark |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor  | Loss Factor  |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| MHz dBuV/m dBuV/m            | dBuV  | dB/m         | dB    | dB     | cm     | deg    |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5106.74 52.10 74.00 -21.90 | 42.43   | 34.56        | 7.89  | 32.78  | 305    | 180    | PEAK        |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Limit Margin                 | Read  | Ant          | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor  | Loss Factor  |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| MHz dBuV/m dBuV/m            | dBuV  | dB/m         | dB    | dB     | cm     | deg    |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5180.00 104.26             | -----   | 94.68        | 34.53 | 7.93   | 32.88  | 305    | 180 PEAK    |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Avg                          | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5017.46 40.16 54.00 -13.84</td> <td>30.37</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>305</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read  | Ant    | Cable  | Preamp | APos        | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5017.46 40.16 54.00 -13.84 | 30.37 | 34.59 | 7.83 | 32.63 | 305 | 180 | AVERAGE | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5180.00 96.57</td> <td>-----</td> <td>86.99</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>305</td> <td>180 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5180.00 96.57  | ----- | 86.99 | 34.53 | 7.93 | 32.88 | 305 | 180 AVERAGE |
|                              | Limit Margin  | Read         | Ant   | Cable  | Preamp | APos   | TPos        | Remark |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor  | Loss Factor  |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| MHz dBuV/m dBuV/m            | dBuV  | dB/m         | dB    | dB     | cm     | deg    |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5017.46 40.16 54.00 -13.84 | 30.37   | 34.59        | 7.83  | 32.63  | 305    | 180    | AVERAGE     |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Limit Margin                 | Read  | Ant          | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor  | Loss Factor  |       |        |        |        |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| MHz dBuV/m dBuV/m            | dBuV  | dB/m         | dB    | dB     | cm     | deg    |             |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5180.00 96.57              | -----   | 86.99        | 34.53 | 7.93   | 32.88  | 305    | 180 AVERAGE |        |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |  |              |      |     |       |        |      |      |        |                      |              |             |  |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |       |      |       |     |             |







|       |  | 7      |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
|-------|--|--------|-------------|--------|-------------|-------|-------|--------|------|------|---------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|--|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|--------|-------|------|-------|-----|----|
| Mode  | Band Edge  |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz  |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Pol.  | Horizontal   |        | Fundamental |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Peak  |  |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.88</td> <td>55.43</td> <td>74.00</td> <td>-18.57</td> <td>45.81</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>208</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table>    |        | Limit       | Margin | Read        | Ant   | Cable | Preamp | APos | TPos | Remark  | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5146.88 | 55.43 | 74.00 | -18.57 | 45.81 | 34.54 | 7.92 | 32.84 | 208 | 86 | PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>110.90</td> <td>-----</td> <td>-----</td> <td>101.32</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>208</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table>   |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 110.90 | ----- | ----- | 101.32 | 34.53 | 7.94 | 32.89 | 208 | 86 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| 1     | 5146.88  | 55.43  | 74.00       | -18.57 | 45.81       | 34.54 | 7.92  | 32.84  | 208  | 86   | PEAK    |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| 1     | 5180.00  | 110.90 | -----       | -----  | 101.32      | 34.53 | 7.94  | 32.89  | 208  | 86   | PEAK    |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Avg   |  |        |             |        |             |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>41.68</td> <td>54.00</td> <td>-12.32</td> <td>32.07</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>208</td> <td>86</td> <td>AVERAGE</td> </tr> </tbody> </table> |        | Limit       | Margin | Read        | Ant   | Cable | Preamp | APos | TPos | Remark  | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.94 | 41.68 | 54.00 | -12.32 | 32.07 | 34.54 | 7.92 | 32.85 | 208 | 86 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.99</td> <td>-----</td> <td>-----</td> <td>92.41</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>208</td> <td>86</td> <td>AVERAGE</td> </tr> </tbody> </table> |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 101.99 | ----- | ----- | 92.41  | 34.53 | 7.93 | 32.88 | 208 | 86 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| 1     | 5149.94  | 41.68  | 54.00       | -12.32 | 32.07       | 34.54 | 7.92  | 32.85  | 208  | 86   | AVERAGE |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp      | APos  | TPos  | Remark |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| Freq  | Level  | Line   | Level       | Factor | Loss Factor |       |       |        |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB          | dB    | cm    | deg    |      |      |         |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |
| 1     | 5180.00  | 101.99 | -----       | -----  | 92.41       | 34.53 | 7.93  | 32.88  | 208  | 86   | AVERAGE |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |



|      |  | 7            |              |              |        |       |        |        |        |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
|------|--|--------------|--------------|--------------|--------|-------|--------|--------|--------|-------------|------|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|---|--|--|--------------|--|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|------|-------|-----|-----|---------|
| Mode | Band Edge  |              |              |              |        |       |        |        |        |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
|      | U-NII-1_5.15-5.25_802.11ax HE20_CH36_RU106/53_5180MHz  |              |              |              |        |       |        |        |        |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| Pol. | Vertical   | Fundamental  |              |              |        |       |        |        |        |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| Peak | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5088.92</td> <td>52.42</td> <td>74.00</td> <td>-21.58</td> <td>42.73</td> <td>34.56</td> <td>7.88</td> <td>32.75</td> <td>302</td> <td>189 PEAK</td> </tr> </tbody> </table>    |              |              | Limit Margin |        | Read  | Ant    | Cable  | Preamp | APos        | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5088.92 | 52.42 | 74.00 | -21.58 | 42.73 | 34.56 | 7.88 | 32.75 | 302 | 189 PEAK    | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.80</td> <td>-----</td> <td>94.22</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>302</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>   |  |  | Limit Margin |  | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5180.00 | 103.80 | ----- | 94.22 | 34.53 | 7.94 | 32.89 | 302 | 189 | PEAK    |
|      |  |              | Limit Margin |              | Read   | Ant   | Cable  | Preamp | APos   | TPos        |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| Freq | Level  | Line         | (dB)         | Level        | Factor | Loss  | Factor |        |        | Remark      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m   | dBuV/m       |              | dBuV         | dB/m   | dB    | dB     | cm     | deg    |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| 1    | 5088.92  | 52.42        | 74.00        | -21.58       | 42.73  | 34.56 | 7.88   | 32.75  | 302    | 189 PEAK    |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
|      |  | Limit Margin |              | Read         | Ant    | Cable | Preamp | APos   | TPos   |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| Freq | Level  | Line         | (dB)         | Level        | Factor | Loss  | Factor |        |        | Remark      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m   | dBuV/m       |              | dBuV         | dB/m   | dB    | dB     | cm     | deg    |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| 1    | 5180.00  | 103.80       | -----        | 94.22        | 34.53  | 7.94  | 32.89  | 302    | 189    | PEAK        |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| Avg  | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5053.64</td> <td>40.24</td> <td>54.00</td> <td>-13.76</td> <td>30.50</td> <td>34.58</td> <td>7.85</td> <td>32.69</td> <td>302</td> <td>189 AVERAGE</td> </tr> </tbody> </table> |              |              | Limit Margin |        | Read  | Ant    | Cable  | Preamp | APos        | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5053.64 | 40.24 | 54.00 | -13.76 | 30.50 | 34.58 | 7.85 | 32.69 | 302 | 189 AVERAGE | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>94.68</td> <td>-----</td> <td>85.10</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>302</td> <td>189</td> <td>AVERAGE</td> </tr> </tbody> </table> |  |  | Limit Margin |  | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5180.00 | 94.68  | ----- | 85.10 | 34.53 | 7.94 | 32.89 | 302 | 189 | AVERAGE |
|      |  | Limit Margin |              | Read         | Ant    | Cable | Preamp | APos   | TPos   |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| Freq | Level  | Line         | (dB)         | Level        | Factor | Loss  | Factor |        |        | Remark      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m   | dBuV/m       |              | dBuV         | dB/m   | dB    | dB     | cm     | deg    |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| 1    | 5053.64  | 40.24        | 54.00        | -13.76       | 30.50  | 34.58 | 7.85   | 32.69  | 302    | 189 AVERAGE |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
|      |  | Limit Margin |              | Read         | Ant    | Cable | Preamp | APos   | TPos   |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| Freq | Level  | Line         | (dB)         | Level        | Factor | Loss  | Factor |        |        | Remark      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m   | dBuV/m       |              | dBuV         | dB/m   | dB    | dB     | cm     | deg    |             |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |
| 1    | 5180.00  | 94.68        | -----        | 85.10        | 34.53  | 7.94  | 32.89  | 302    | 189    | AVERAGE     |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |  |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |     |         |

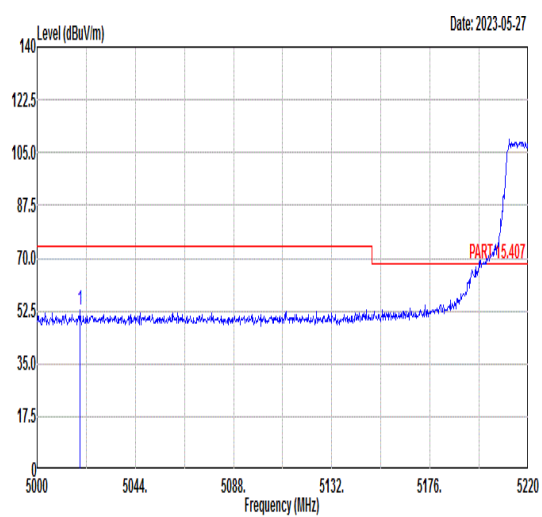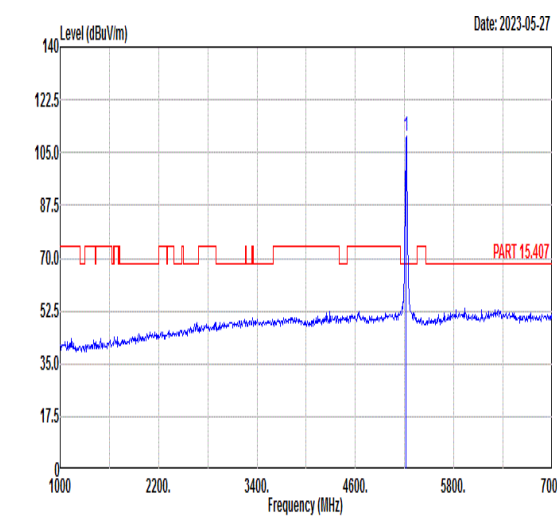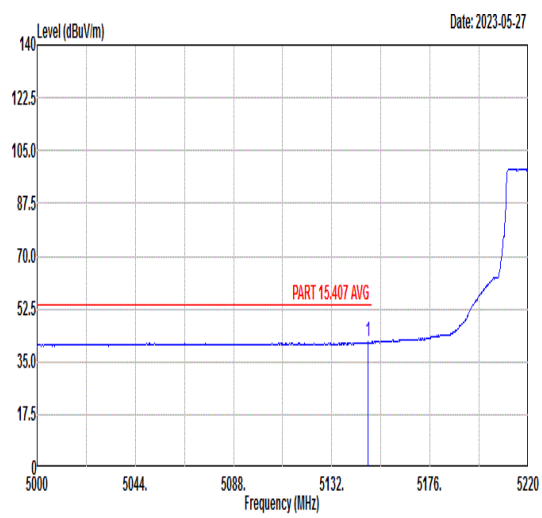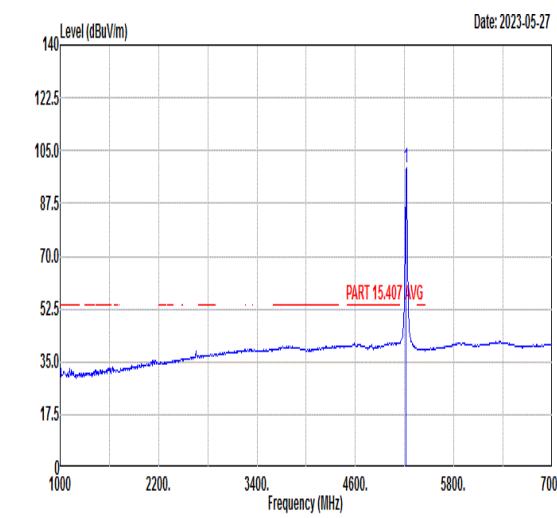

|       |  | 8  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
|-------|--|--|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|--------|-------|------|-------|-----|----|---------|
| Mode  |  | Band Edge - L  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
|       |  | U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Pol.  | Horizontal   | Fundamental  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Peak  |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5019.36</td> <td>52.69</td> <td>74.00</td> <td>-21.31</td> <td>42.90</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>254</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>     | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5019.36 | 52.69 | 74.00 | -21.31 | 42.90 | 34.59 | 7.83 | 32.63 | 254 | 87 | PEAK    |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>110.54</td> <td>-----</td> <td>-----</td> <td>101.00</td> <td>34.51</td> <td>8.01</td> <td>32.98</td> <td>254</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5220.00 | 110.54 | ----- | ----- | 101.00 | 34.51 | 8.01 | 32.98 | 254 | 87 | PEAK    |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5019.36  | 52.69  | 74.00  | -21.31 | 42.90  | 34.59  | 7.83   | 32.63  | 254  | 87     | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5220.00  | 110.54   | -----  | -----  | 101.00 | 34.51  | 8.01   | 32.98  | 254  | 87     | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Avg   |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.06</td> <td>41.51</td> <td>54.00</td> <td>-12.49</td> <td>31.89</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>254</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5148.06 | 41.51 | 54.00 | -12.49 | 31.89 | 34.54 | 7.92 | 32.84 | 254 | 87 | AVERAGE |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>99.06</td> <td>-----</td> <td>-----</td> <td>89.52</td> <td>34.51</td> <td>8.01</td> <td>32.98</td> <td>254</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5220.00 | 99.06  | ----- | ----- | 89.52  | 34.51 | 8.01 | 32.98 | 254 | 87 | AVERAGE |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5148.06  | 41.51  | 54.00  | -12.49 | 31.89  | 34.54  | 7.92   | 32.84  | 254  | 87     | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| Freq  | Level  | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |
| 1     | 5220.00  | 99.06  | -----  | -----  | 89.52  | 34.51  | 8.01   | 32.98  | 254  | 87     | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |    |         |



|       |   | 8           |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
|-------|---|-------------|--------|--------|-------------|-------|--------|--------|------|--------|---------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|-------|--|
| Mode  | Band Edge - R   |             |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz  |             |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Pol.  | Horizontal  | Fundamental |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Peak  | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5407.68</td> <td>51.01</td> <td>74.00</td> <td>-22.99</td> <td>41.35</td> <td>34.44</td> <td>8.48</td> <td>33.26</td> <td>254</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5407.68 | 51.01 | 74.00 | -22.99 | 41.35 | 34.44 | 8.48 | 33.26 | 254 | 87 | PEAK    | Blank |  |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Freq  | Level   | Line        | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| 1     | 5407.68   | 51.01       | 74.00  | -22.99 | 41.35       | 34.44 | 8.48   | 33.26  | 254  | 87     | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Avg   | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5384.16</td> <td>39.45</td> <td>54.00</td> <td>-14.55</td> <td>29.81</td> <td>34.45</td> <td>8.42</td> <td>33.23</td> <td>254</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5384.16 | 39.45 | 54.00 | -14.55 | 29.81 | 34.45 | 8.42 | 33.23 | 254 | 87 | AVERAGE | Blank |  |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Freq  | Level   | Line        | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| 1     | 5384.16   | 39.45       | 54.00  | -14.55 | 29.81       | 34.45 | 8.42   | 33.23  | 254  | 87     | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |



| Mode                         |  | 8  |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
|------------------------------|--|--|-------|--------|--------|--------|-------------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|------|-------|-----|-----|---------|---|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------|-------|-------|-------|------|-------|-----|-------------|
|                              |  | Band Edge - L  |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
|                              |  | U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Pol.                         | Vertical   | Fundamental  |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Peak                         | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5050.60 51.91 74.00 -22.09</td> <td>42.17</td> <td>34.58</td> <td>7.85</td> <td>32.69</td> <td>314</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit Margin   | Read  | Ant    | Cable  | Preamp | APos        | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 5050.60 51.91 74.00 -22.09 | 42.17 | 34.58 | 7.85 | 32.69 | 314 | 190 | PEAK    | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5220.00 104.00</td> <td>-----</td> <td>94.47</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>314</td> <td>190 PEAK</td> </tr> </tbody> </table>   | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 5220.00 104.00 | ----- | 94.47 | 34.51 | 7.99 | 32.97 | 314 | 190 PEAK    |
|                              | Limit Margin   | Read   | Ant   | Cable  | Preamp | APos   | TPos        | Remark |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5050.60 51.91 74.00 -22.09 | 42.17  | 34.58  | 7.85  | 32.69  | 314    | 190    | PEAK        |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Limit Margin                 | Read   | Ant  | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5220.00 104.00             | -----  | 94.47  | 34.51 | 7.99   | 32.97  | 314    | 190 PEAK    |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Avg                          | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5021.12 40.90 54.00 -13.10</td> <td>31.12</td> <td>34.59</td> <td>7.83</td> <td>32.64</td> <td>314</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin   | Read  | Ant    | Cable  | Preamp | APos        | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 5021.12 40.90 54.00 -13.10 | 31.12 | 34.59 | 7.83 | 32.64 | 314 | 190 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5220.00 93.37</td> <td>-----</td> <td>83.84</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>314</td> <td>190 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 5220.00 93.37  | ----- | 83.84 | 34.51 | 7.99 | 32.97 | 314 | 190 AVERAGE |
| Limit Margin                 | Read   | Ant  | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5021.12 40.90 54.00 -13.10 | 31.12  | 34.59  | 7.83  | 32.64  | 314    | 190    | AVERAGE     |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Limit Margin                 | Read   | Ant  | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| Freq Level Line (dB)         | Level Factor   | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |
| 1 5220.00 93.37              | -----  | 83.84  | 34.51 | 7.99   | 32.97  | 314    | 190 AVERAGE |        |        |                      |              |             |  |  |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |                  |       |       |       |      |       |     |             |



|       |  | 8           |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|-------|--|-------------|--------|--------|-------------|-------|--------|--------|------|--------|---------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|--|
| Mode  | Band Edge - R  |             |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz   |             |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Pol.  | Vertical   | Fundamental |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Peak  | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5382.72</td> <td>50.82</td> <td>74.00</td> <td>-23.18</td> <td>41.17</td> <td>34.45</td> <td>8.42</td> <td>33.22</td> <td>314</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5382.72 | 50.82 | 74.00 | -23.18 | 41.17 | 34.45 | 8.42 | 33.22 | 314 | 190 | PEAK    | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5382.72  | 50.82       | 74.00  | -23.18 | 41.17       | 34.45 | 8.42   | 33.22  | 314  | 190    | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Avg   | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5397.60</td> <td>39.22</td> <td>54.00</td> <td>-14.78</td> <td>29.58</td> <td>34.44</td> <td>8.45</td> <td>33.25</td> <td>314</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5397.60 | 39.22 | 54.00 | -14.78 | 29.58 | 34.44 | 8.45 | 33.25 | 314 | 190 | AVERAGE | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5397.60  | 39.22       | 54.00  | -14.78 | 29.58       | 34.44 | 8.45   | 33.25  | 314  | 190    | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |





| Mode        | 8   |                         |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|-------------|---|-------------------------|--------|--------|--------|-------|--------|--------|--------------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|
|             | Harmonic  |                         |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz  |                         |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Pol.        | Horizontal  | Vertical                |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Peak<br>Avg | <p>Date: 2023-05-08</p>   | <p>Date: 2023-05-08</p> |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.73</td> <td>68.30</td> <td>-20.57</td> <td>56.94</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.76</td> <td>74.00</td> <td>-23.24</td> <td>53.42</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit                   | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos         |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10440.00 | 47.73 | 68.30 | -20.57 | 56.94 | 37.66 | 13.51 | 60.38 | --- --- Peak | 2 | 15660.00 | 50.76 | 74.00 | -23.24 | 53.42 | 40.60 | 15.56 | 58.82 | --- --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.81</td> <td>68.30</td> <td>-20.49</td> <td>57.02</td> <td>37.66</td> <td>13.51</td> <td>60.38</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.03</td> <td>74.00</td> <td>-23.97</td> <td>52.69</td> <td>40.60</td> <td>15.56</td> <td>58.82</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10440.00 | 47.81 | 68.30 | -20.49 | 57.02 | 37.66 | 13.51 | 60.38 | --- --- Peak | 2 | 15660.00 | 50.03 | 74.00 | -23.97 | 52.69 | 40.60 | 15.56 | 58.82 |
| Limit       | Margin  | Read                    | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line                    | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m                  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10440.00  | 47.73                   | 68.30  | -20.57 | 56.94  | 37.66 | 13.51  | 60.38  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15660.00  | 50.76                   | 74.00  | -23.24 | 53.42  | 40.60 | 15.56  | 58.82  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Limit       | Margin  | Read                    | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line                    | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m                  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10440.00  | 47.81                   | 68.30  | -20.49 | 57.02  | 37.66 | 13.51  | 60.38  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15660.00  | 50.03                   | 74.00  | -23.97 | 52.69  | 40.60 | 15.56  | 58.82  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |







|       |  | 9      |             |        |        |        |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
|-------|--|--------|-------------|--------|--------|--------|-------|--------|------|------------|--------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|------------|---|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|
| Mode  | Band Edge - L  |        |             |        |        |        |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz   |        |             |        |        |        |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Pol.  | Horizontal   |        | Fundamental |        |        |        |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Peak  |  |        |             |        |        |        |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5046.08</td> <td>52.94</td> <td>74.00</td> <td>-21.06</td> <td>43.19</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>151</td> <td>79 PEAK</td> </tr> </tbody> </table>    |        | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos | TPos       | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5046.08 | 52.94 | 74.00 | -21.06 | 43.19 | 34.58 | 7.85 | 32.68 | 151 | 79 PEAK    | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>109.28</td> <td>-----</td> <td>-----</td> <td>99.74</td> <td>34.51</td> <td>8.01</td> <td>32.98</td> <td>151</td> <td>79 PEAK</td> </tr> </tbody> </table>   |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 109.28 | ----- | ----- | 99.74 | 34.51 | 8.01 | 32.98 | 151 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos   | TPos  | Remark |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Freq  | Level  | Line   | Level       | Factor | Loss   | Factor |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB     | dB     | cm    | deg    |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| 1     | 5046.08  | 52.94  | 74.00       | -21.06 | 43.19  | 34.58  | 7.85  | 32.68  | 151  | 79 PEAK    |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos   | TPos  | Remark |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Freq  | Level  | Line   | Level       | Factor | Loss   | Factor |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB     | dB     | cm    | deg    |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| 1     | 5240.00  | 109.28 | -----       | -----  | 99.74  | 34.51  | 8.01  | 32.98  | 151  | 79 PEAK    |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Avg   |  |        |             |        |        |        |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
|       | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5047.04</td> <td>41.05</td> <td>54.00</td> <td>-12.95</td> <td>31.30</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>151</td> <td>79 AVERAGE</td> </tr> </tbody> </table> |        | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos | TPos       | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5047.04 | 41.05 | 54.00 | -12.95 | 31.30 | 34.58 | 7.85 | 32.68 | 151 | 79 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>98.51</td> <td>-----</td> <td>-----</td> <td>88.97</td> <td>34.51</td> <td>8.01</td> <td>32.98</td> <td>151</td> <td>79 AVERAGE</td> </tr> </tbody> </table> |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 98.51  | ----- | ----- | 88.97 | 34.51 | 8.01 | 32.98 | 151 |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos   | TPos  | Remark |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Freq  | Level  | Line   | Level       | Factor | Loss   | Factor |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB     | dB     | cm    | deg    |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| 1     | 5047.04  | 41.05  | 54.00       | -12.95 | 31.30  | 34.58  | 7.85  | 32.68  | 151  | 79 AVERAGE |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Limit | Margin   | Read   | Ant         | Cable  | Preamp | APos   | TPos  | Remark |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| Freq  | Level  | Line   | Level       | Factor | Loss   | Factor |       |        |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| MHz   | dBuV/m   | dBuV/m | dBuV        | dB/m   | dB     | dB     | cm    | deg    |      |            |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |
| 1     | 5240.00  | 98.51  | -----       | -----  | 88.97  | 34.51  | 8.01  | 32.98  | 151  | 79 AVERAGE |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |   |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |



|       |   | 9  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
|-------|---|--|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|-------|--|
| Mode  |   | Band Edge - R  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
|       |   | U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Pol.  | Horizontal  | Fundamental  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Peak  | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5372.44</td> <td>51.39</td> <td>74.00</td> <td>-22.61</td> <td>41.76</td> <td>34.45</td> <td>8.39</td> <td>33.21</td> <td>151</td> <td>79</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5372.44 | 51.39 | 74.00 | -22.61 | 41.76 | 34.45 | 8.39 | 33.21 | 151 | 79 | PEAK    | Blank |  |
| Limit | Margin  | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Freq  | Level   | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| MHz   | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| 1     | 5372.44   | 51.39  | 74.00  | -22.61 | 41.76  | 34.45  | 8.39   | 33.21  | 151  | 79     | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Avg   | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.16</td> <td>39.53</td> <td>54.00</td> <td>-14.47</td> <td>29.91</td> <td>34.46</td> <td>8.34</td> <td>33.18</td> <td>151</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5356.16 | 39.53 | 54.00 | -14.47 | 29.91 | 34.46 | 8.34 | 33.18 | 151 | 79 | AVERAGE | Blank |  |
| Limit | Margin  | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Freq  | Level   | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| MHz   | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| 1     | 5356.16   | 39.53  | 54.00  | -14.47 | 29.91  | 34.46  | 8.34   | 33.18  | 151  | 79     | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |

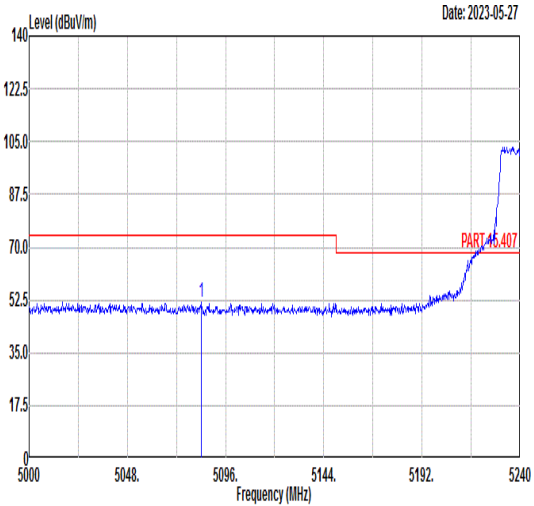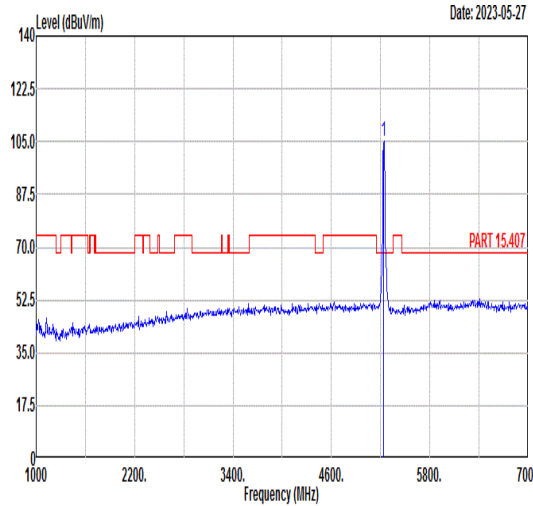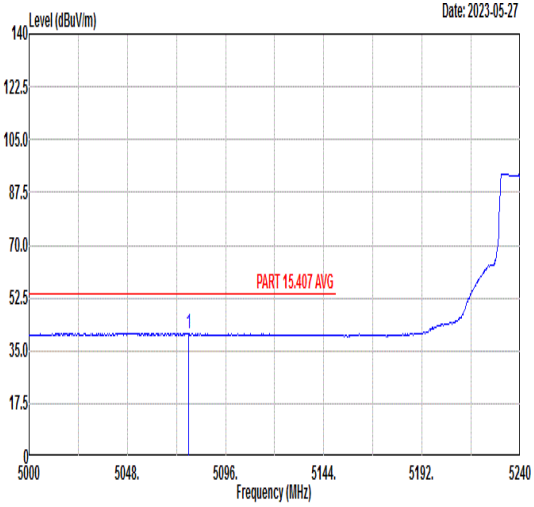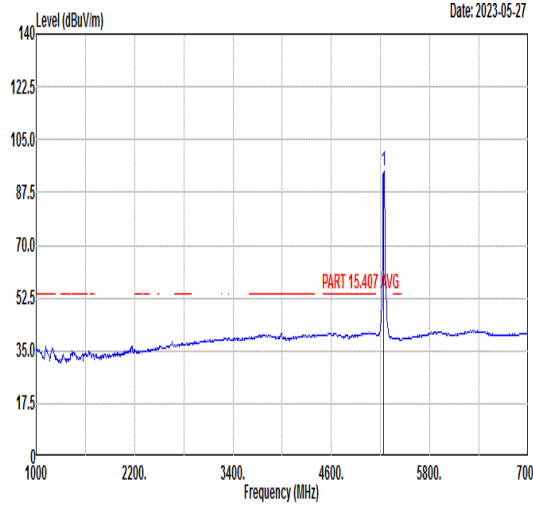

| Mode  |   | 9  |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|-------|---|--|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|
|       |   | Band Edge - L  |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|       |   | U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Pol.  | Vertical  | Fundamental  |        |        |        |        |        |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Peak  |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5084.00</td> <td>51.89</td> <td>74.00</td> <td>-22.11</td> <td>42.19</td> <td>34.57</td> <td>7.87</td> <td>32.74</td> <td>347</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>     | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5084.00 | 51.89 | 74.00 | -22.11 | 42.19 | 34.57 | 7.87 | 32.74 | 347 | 140 | PEAK    |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>104.92</td> <td>-----</td> <td>-----</td> <td>95.36</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>347</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 104.92 | ----- | ----- | 95.36 | 34.50 | 8.06 | 33.00 | 347 | 140 | PEAK    |
|       | Limit   | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line   | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5084.00   | 51.89  | 74.00  | -22.11 | 42.19  | 34.57  | 7.87   | 32.74  | 347    | 140    | PEAK    |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin  | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line   | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5240.00   | 104.92   | -----  | -----  | 95.36  | 34.50  | 8.06   | 33.00  | 347    | 140    | PEAK    |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Avg   |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5077.76</td> <td>40.80</td> <td>54.00</td> <td>-13.20</td> <td>31.09</td> <td>34.57</td> <td>7.87</td> <td>32.73</td> <td>347</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5077.76 | 40.80 | 54.00 | -13.20 | 31.09 | 34.57 | 7.87 | 32.73 | 347 | 140 | AVERAGE |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>94.30</td> <td>-----</td> <td>-----</td> <td>84.74</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>347</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 94.30  | ----- | ----- | 84.74 | 34.50 | 8.06 | 33.00 | 347 | 140 | AVERAGE |
| Limit | Margin  | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line   | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5077.76   | 40.80  | 54.00  | -13.20 | 31.09  | 34.57  | 7.87   | 32.73  | 347    | 140    | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin  | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level   | Line   | (dB)   | Level  | Factor | Loss   | Factor |        |        |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m   | dB     | dBuV   | dB/m   | dB     | dB     | cm     | deg    |        |         |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5240.00   | 94.30  | -----  | -----  | 84.74  | 34.50  | 8.06   | 33.00  | 347    | 140    | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |   |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |    |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |



|       |  | 9           |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|--|
| Mode  | Band Edge - R  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|       | U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Pol.  | Vertical   | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Peak  | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5427.44</td> <td>50.50</td> <td>74.00</td> <td>-23.50</td> <td>40.92</td> <td>34.43</td> <td>8.45</td> <td>33.30</td> <td>347</td> <td>140</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5427.44 | 50.50 | 74.00 | -23.50 | 40.92 | 34.43 | 8.45 | 33.30 | 347 | 140 | PEAK    | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5427.44  | 50.50       | 74.00  | -23.50 | 40.92  | 34.43  | 8.45   | 33.30  | 347  | 140    | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Avg   | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5396.42</td> <td>39.27</td> <td>54.00</td> <td>-14.73</td> <td>29.63</td> <td>34.44</td> <td>8.45</td> <td>33.25</td> <td>347</td> <td>140</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5396.42 | 39.27 | 54.00 | -14.73 | 29.63 | 34.44 | 8.45 | 33.25 | 347 | 140 | AVERAGE | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5396.42  | 39.27       | 54.00  | -14.73 | 29.63  | 34.44  | 8.45   | 33.25  | 347  | 140    | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |



| Mode        | 9   |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|-------------|---|----------|--------|--------|--------|-------|--------|--------|--------------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|--------------|---|----------|-------|-------|--------|-------|-------|-------|-------|
|             | Harmonic  |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz  |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Pol.        | Horizontal  | Vertical |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Peak<br>Avg |   |          |        |        |        |       |        |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.84</td> <td>68.30</td> <td>-21.46</td> <td>56.01</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.51</td> <td>74.00</td> <td>-23.49</td> <td>53.25</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit    | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos         |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10480.00 | 46.84 | 68.30 | -21.46 | 56.01 | 37.69 | 13.53 | 60.39 | --- --- Peak | 2 | 15720.00 | 50.51 | 74.00 | -23.49 | 53.25 | 40.62 | 15.58 | 58.94 | --- --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.20</td> <td>68.30</td> <td>-22.10</td> <td>55.37</td> <td>37.69</td> <td>13.53</td> <td>60.39</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>53.34</td> <td>40.62</td> <td>15.58</td> <td>58.94</td> <td>--- --- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10480.00 | 46.20 | 68.30 | -22.10 | 55.37 | 37.69 | 13.53 | 60.39 | --- --- Peak | 2 | 15720.00 | 50.60 | 74.00 | -23.40 | 53.34 | 40.62 | 15.58 | 58.94 |
| Limit       | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10480.00  | 46.84    | 68.30  | -21.46 | 56.01  | 37.69 | 13.53  | 60.39  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15720.00  | 50.51    | 74.00  | -23.49 | 53.25  | 40.62 | 15.58  | 58.94  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Limit       | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   |        |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor | Remark |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |              |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 1           | 10480.00  | 46.20    | 68.30  | -22.10 | 55.37  | 37.69 | 13.53  | 60.39  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |
| 2           | 15720.00  | 50.60    | 74.00  | -23.40 | 53.34  | 40.62 | 15.58  | 58.94  | --- --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |              |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |              |   |          |       |       |        |       |       |       |       |



|      |   | 10  |       |              |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
|------|---|---|-------|--------------|--------|-------|--------|-------|--------|--------|---------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|--|--|--------------|--|------|-----|-------|--------|------|------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| Mode |   | Band Edge - L                                       |       |              |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
|      |   | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz |       |              |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| Pol. | Horizontal  | Fundamental   |       |              |        |       |        |       |        |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| Peak | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5018.24</td> <td>52.36</td> <td>74.00</td> <td>-21.64</td> <td>42.57</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>100</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>    |   |       | Limit Margin |        | Read  | Ant    | Cable | Preamp | APos   | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5018.24 | 52.36 | 74.00 | -21.64 | 42.57 | 34.59 | 7.83 | 32.63 | 100 | 149 | PEAK    | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>109.09</td> <td>-----</td> <td>-----</td> <td>99.53</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>100</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>    |  |  | Limit Margin |  | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5240.00 | 109.09 | ----- | ----- | 99.53 | 34.50 | 8.06 | 33.00 | 100 | 149 | PEAK    |
|      |   | Limit Margin  |       | Read         | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq | Level   | Line  | (dB)  | Level        | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m  |       | dBuV         | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| 1    | 5018.24   | 52.36   | 74.00 | -21.64       | 42.57  | 34.59 | 7.83   | 32.63 | 100    | 149    | PEAK    |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
|      |   | Limit Margin  |       | Read         | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq | Level   | Line  | (dB)  | Level        | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m  |       | dBuV         | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| 1    | 5240.00   | 109.09  | ----- | -----        | 99.53  | 34.50 | 8.06   | 33.00 | 100    | 149    | PEAK    |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| Avg  | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5049.68</td> <td>40.26</td> <td>54.00</td> <td>-13.74</td> <td>30.51</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>100</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table> |   |       | Limit Margin |        | Read  | Ant    | Cable | Preamp | APos   | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5049.68 | 40.26 | 54.00 | -13.74 | 30.51 | 34.58 | 7.85 | 32.68 | 100 | 149 | AVERAGE | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>101.54</td> <td>-----</td> <td>-----</td> <td>91.98</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>100</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table> |  |  | Limit Margin |  | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5240.00 | 101.54 | ----- | ----- | 91.98 | 34.50 | 8.06 | 33.00 | 100 | 149 | AVERAGE |
|      |   | Limit Margin  |       | Read         | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq | Level   | Line  | (dB)  | Level        | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m  |       | dBuV         | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| 1    | 5049.68   | 40.26   | 54.00 | -13.74       | 30.51  | 34.58 | 7.85   | 32.68 | 100    | 149    | AVERAGE |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
|      |   | Limit Margin  |       | Read         | Ant    | Cable | Preamp | APos  | TPos   |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq | Level   | Line  | (dB)  | Level        | Factor | Loss  | Factor |       |        | Remark |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m  |       | dBuV         | dB/m   | dB    | dB     | cm    | deg    |        |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |
| 1    | 5240.00   | 101.54  | ----- | -----        | 91.98  | 34.50 | 8.06   | 33.00 | 100    | 149    | AVERAGE |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |              |  |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |     |         |



| Mode  | 10  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|----|-----|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|
|       | Band Edge - R   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|       | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Pol.  | Horizontal  | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Peak  | <p>Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5389.38</td> <td>51.06</td> <td>74.00</td> <td>-22.94</td> <td>41.42</td> <td>34.44</td> <td>8.43</td> <td>33.23</td> <td>100</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5389.38 | 51.06 | 74.00 | -22.94 | 41.42 | 34.44 | 8.43 | 33.23 | 100 | 149 | PEAK    | Blank |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5389.38   | 51.06       | 74.00  | -22.94 | 41.42  | 34.44  | 8.43   | 33.23  | 100  | 149    | PEAK    |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Avg   | <p>Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.66</td> <td>38.95</td> <td>54.00</td> <td>-15.05</td> <td>29.33</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>100</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.66 | 38.95 | 54.00 | -15.05 | 29.33 | 34.46 | 8.33 | 33.17 | 100 | 149 | AVERAGE | Blank |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5350.66   | 38.95       | 54.00  | -15.05 | 29.33  | 34.46  | 8.33   | 33.17  | 100  | 149    | AVERAGE |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |









|                              |  | 10  |             |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
|------------------------------|--|---|-------------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|-------------|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------------------|-------|-------|------|-------|-----|-----|---------|---|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|-------------|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------|-------|-------|------|-------|-----|-----|---------|
| Mode                         |  | Band Edge - L                                       |             |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
|                              |  | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz |             |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Pol.                         | Vertical   | Fundamental   |             |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Peak                         | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5003.84 52.19 74.00 -21.81</td> <td>42.38</td> <td>34.60</td> <td>7.82</td> <td>32.61</td> <td>304</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit Margin  | Read        | Ant    | Cable  | Preamp | APos    | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5003.84 52.19 74.00 -21.81 | 42.38 | 34.60 | 7.82 | 32.61 | 304 | 192 | PEAK    | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5240.00 102.58</td> <td>93.02</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>304</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>   | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5240.00 102.58 | 93.02 | 34.50 | 8.06 | 33.00 | 304 | 192 | PEAK    |
|                              | Limit Margin   | Read  | Ant         | Cable  | Preamp | APos   | TPos    | Remark |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor   | Loss Factor |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m  | dB          | dB     | cm     | deg    |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| 1 5003.84 52.19 74.00 -21.81 | 42.38  | 34.60   | 7.82        | 32.61  | 304    | 192    | PEAK    |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Limit Margin                 | Read   | Ant   | Cable       | Preamp | APos   | TPos   | Remark  |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor   | Loss Factor |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m  | dB          | dB     | cm     | deg    |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| 1 5240.00 102.58             | 93.02  | 34.50   | 8.06        | 33.00  | 304    | 192    | PEAK    |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Avg                          | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5048.24 40.19 54.00 -13.81</td> <td>30.44</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>304</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin  | Read        | Ant    | Cable  | Preamp | APos    | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5048.24 40.19 54.00 -13.81 | 30.44 | 34.58 | 7.85 | 32.68 | 304 | 192 | AVERAGE | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5240.00 94.50</td> <td>84.94</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>304</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | Loss Factor |  |  |  |  | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg |  | 1 5240.00 94.50  | 84.94 | 34.50 | 8.06 | 33.00 | 304 | 192 | AVERAGE |
|                              | Limit Margin   | Read  | Ant         | Cable  | Preamp | APos   | TPos    | Remark |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor   | Loss Factor |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m  | dB          | dB     | cm     | deg    |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| 1 5048.24 40.19 54.00 -13.81 | 30.44  | 34.58   | 7.85        | 32.68  | 304    | 192    | AVERAGE |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Limit Margin                 | Read   | Ant   | Cable       | Preamp | APos   | TPos   | Remark  |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| Freq Level Line (dB)         | Level Factor   | Loss Factor   | Loss Factor |        |        |        |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| MHz dBuV/m dBuV/m            | dBuV   | dB/m  | dB          | dB     | cm     | deg    |         |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |
| 1 5240.00 94.50              | 84.94  | 34.50   | 8.06        | 33.00  | 304    | 192    | AVERAGE |        |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                              |       |       |      |       |     |     |         |   |              |      |     |       |        |      |      |        |                      |              |             |             |  |  |  |  |                   |      |      |    |    |    |     |  |                  |       |       |      |       |     |     |         |



| Mode      | 10  |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|-----------|---|-------------|--------|--------|--------|--------|--------|-----------------|------|--------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----------------|-------|
|           | Band Edge - R   |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|           | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU26/8_5240MHz   |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Pol.      | Vertical  | Fundamental |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Peak      | <p>Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5441.30</td> <td>49.87</td> <td>74.00</td> <td>-24.13</td> <td>40.34</td> <td>34.42</td> <td>8.43</td> <td>33.32</td> <td>304 192 PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5441.30 | 49.87 | 74.00 | -24.13 | 40.34 | 34.42 | 8.43 | 33.32 | 304 192 PEAK    | Blank |
| Limit     | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level   | Line        | Level  | Factor | Loss   | Factor |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5441.30 | 49.87   | 74.00       | -24.13 | 40.34  | 34.42  | 8.43   | 33.32  | 304 192 PEAK    |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Avg       | <p>Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5391.14</td> <td>38.69</td> <td>54.00</td> <td>-15.31</td> <td>29.05</td> <td>34.44</td> <td>8.44</td> <td>33.24</td> <td>304 192 AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5391.14 | 38.69 | 54.00 | -15.31 | 29.05 | 34.44 | 8.44 | 33.24 | 304 192 AVERAGE | Blank |
| Limit     | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level   | Line        | Level  | Factor | Loss   | Factor |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5391.14 | 38.69   | 54.00       | -15.31 | 29.05  | 34.44  | 8.44   | 33.24  | 304 192 AVERAGE |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |

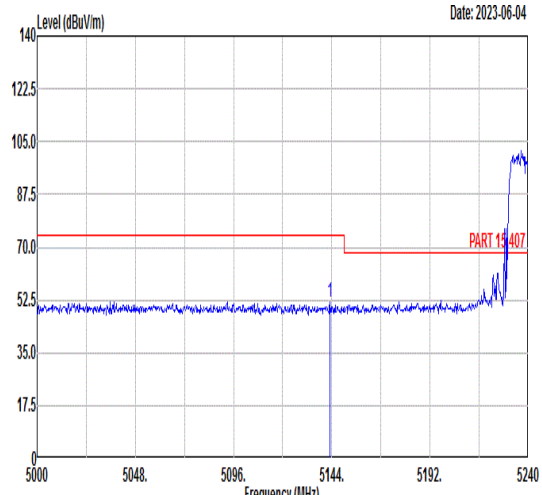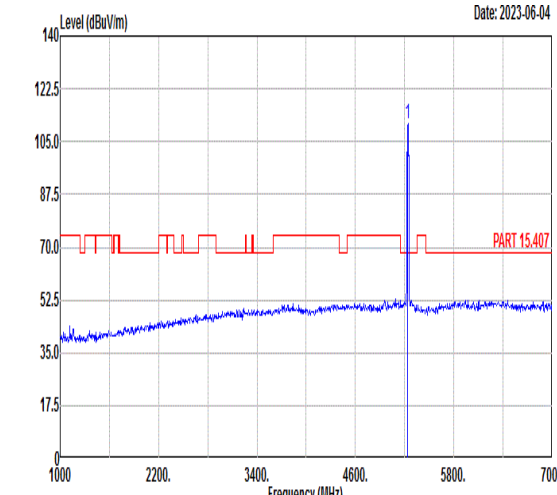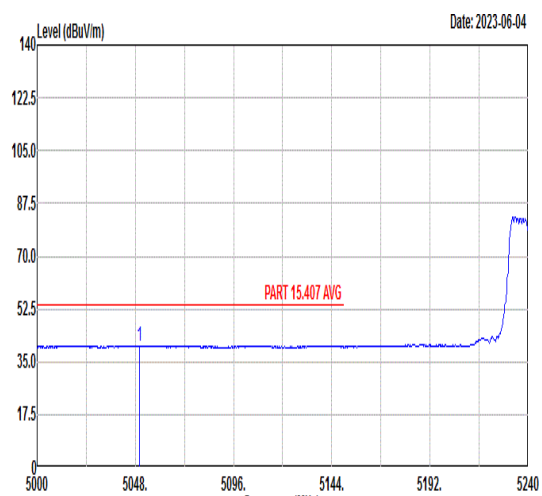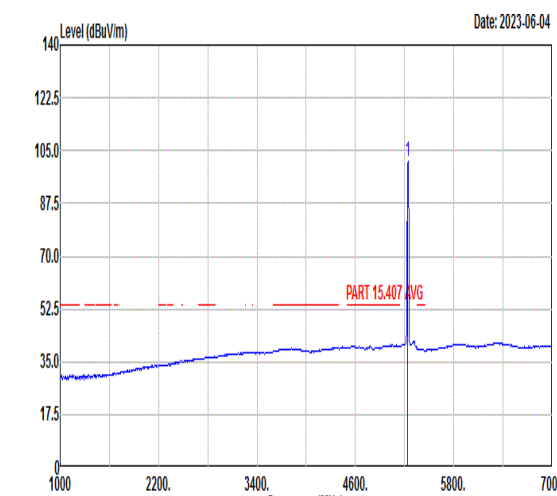

|      | 11  |             |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
|------|---|-------------|--------|--------|--------|-------|--------|-------|--------|---------|---------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|---|--|--|-------|--------|------|-----|-------|--------|------|------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|--------|-------|--------|-------|------|-------|-----|-----|---------|
| Mode | Band Edge - L   |             |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
|      | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz  |             |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| Pol. | Horizontal  | Fundamental |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| Peak | <div style="text-align:right; font-size:small;">Date: 2023-06-04</div>  <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.04</td> <td>51.75</td> <td>74.00</td> <td>-22.25</td> <td>42.13</td> <td>34.54</td> <td>7.91</td> <td>32.83</td> <td>100</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>     |             |        | Limit  | Margin | Read  | Ant    | Cable | Preamp | APos    | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5143.04 | 51.75 | 74.00 | -22.25 | 42.13 | 34.54 | 7.91 | 32.83 | 100 | 149 | PEAK    | <div style="text-align:right; font-size:small;">Date: 2023-06-04</div>  <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>110.96</td> <td>-----</td> <td>101.40</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>100</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>    |  |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5240.00 | 110.96 | ----- | 101.40 | 34.50 | 8.06 | 33.00 | 100 | 149 | PEAK    |
|      |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| Freq | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| 1    | 5143.04   | 51.75       | 74.00  | -22.25 | 42.13  | 34.54 | 7.91   | 32.83 | 100    | 149     | PEAK    |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
|      |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| Freq | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| 1    | 5240.00   | 110.96      | -----  | 101.40 | 34.50  | 8.06  | 33.00  | 100   | 149    | PEAK    |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| Avg  | <div style="text-align:right; font-size:small;">Date: 2023-06-04</div>  <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5050.16</td> <td>40.36</td> <td>54.00</td> <td>-13.64</td> <td>30.61</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>100</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table> |             |        | Limit  | Margin | Read  | Ant    | Cable | Preamp | APos    | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5050.16 | 40.36 | 54.00 | -13.64 | 30.61 | 34.58 | 7.85 | 32.68 | 100 | 149 | AVERAGE | <div style="text-align:right; font-size:small;">Date: 2023-06-04</div>  <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>101.29</td> <td>-----</td> <td>91.73</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>100</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table> |  |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5240.00 | 101.29 | ----- | 91.73  | 34.50 | 8.06 | 33.00 | 100 | 149 | AVERAGE |
|      |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| Freq | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| 1    | 5050.16   | 40.36       | 54.00  | -13.64 | 30.61  | 34.58 | 7.85   | 32.68 | 100    | 149     | AVERAGE |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
|      |   | Limit       | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| Freq | Level   | Line        | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| MHz  | dBuV/m  | dBuV/m      | dB     | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |
| 1    | 5240.00   | 101.29      | -----  | 91.73  | 34.50  | 8.06  | 33.00  | 100   | 149    | AVERAGE |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |     |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |        |       |      |       |     |     |         |



|           |  | 11          |        |        |        |        |       |                 |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|-----------|--|-------------|--------|--------|--------|--------|-------|-----------------|------|------|--------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----------------|-------|
| Mode      | Band Edge - R  |             |        |        |        |        |       |                 |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|           | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz   |             |        |        |        |        |       |                 |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Pol.      | Horizontal   | Fundamental |        |        |        |        |       |                 |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Peak      | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5430.08</td> <td>51.23</td> <td>74.00</td> <td>-22.77</td> <td>41.65</td> <td>34.43</td> <td>8.45</td> <td>33.30</td> <td>100 149 PEAK</td> </tr> </tbody> </table>    |             | Limit  | Margin | Read   | Ant    | Cable | Preamp          | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5430.08 | 51.23 | 74.00 | -22.77 | 41.65 | 34.43 | 8.45 | 33.30 | 100 149 PEAK    | Blank |
| Limit     | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos  | Remark          |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level  | Line        | Level  | Factor | Loss   | Factor |       |                 |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm    | deg             |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5430.08 | 51.23  | 74.00       | -22.77 | 41.65  | 34.43  | 8.45   | 33.30 | 100 149 PEAK    |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Avg       | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5354.62</td> <td>39.33</td> <td>54.00</td> <td>-14.67</td> <td>29.71</td> <td>34.46</td> <td>8.34</td> <td>33.18</td> <td>100 149 AVERAGE</td> </tr> </tbody> </table> |             | Limit  | Margin | Read   | Ant    | Cable | Preamp          | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5354.62 | 39.33 | 54.00 | -14.67 | 29.71 | 34.46 | 8.34 | 33.18 | 100 149 AVERAGE | Blank |
| Limit     | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos  | Remark          |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level  | Line        | Level  | Factor | Loss   | Factor |       |                 |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm    | deg             |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5354.62 | 39.33  | 54.00       | -14.67 | 29.71  | 34.46  | 8.34   | 33.18 | 100 149 AVERAGE |      |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |







|      |  | 11   |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|------|--|--|--------------|--------------|--------|-------------|--------|--------|--------|-------------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|---|--|--|--------------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-------------|
| Mode |  | Band Edge - L  |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|      |  | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Pol. | Vertical   | Fundamental  |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Peak | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5032.40</td> <td>51.66</td> <td>74.00</td> <td>-22.34</td> <td>41.89</td> <td>34.59</td> <td>7.84</td> <td>32.66</td> <td>320</td> <td>175 PEAK</td> </tr> </tbody> </table>    |  |              | Limit Margin | Read   | Ant         | Cable  | Preamp | APos   | TPos        |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5032.40 | 51.66 | 74.00 | -22.34 | 41.89 | 34.59 | 7.84 | 32.66 | 320 | 175 PEAK    | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>98.79</td> <td>-----</td> <td>-----</td> <td>89.23</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>320</td> <td>175 PEAK</td> </tr> </tbody> </table>    |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 98.79 | ----- | ----- | 89.23 | 34.50 | 8.06 | 33.00 | 320 | 175 PEAK    |
|      |  |  | Limit Margin | Read         | Ant    | Cable       | Preamp | APos   | TPos   |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level  | Line   | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m   | dBuV/m   | dB           | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5032.40  | 51.66  | 74.00        | -22.34       | 41.89  | 34.59       | 7.84   | 32.66  | 320    | 175 PEAK    |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|      |  | Limit Margin   | Read         | Ant          | Cable  | Preamp      | APos   | TPos   |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level  | Line   | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m   | dBuV/m   | dB           | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5240.00  | 98.79  | -----        | -----        | 89.23  | 34.50       | 8.06   | 33.00  | 320    | 175 PEAK    |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Avg  | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5019.92</td> <td>40.25</td> <td>54.00</td> <td>-13.75</td> <td>30.47</td> <td>34.59</td> <td>7.83</td> <td>32.64</td> <td>320</td> <td>175 AVERAGE</td> </tr> </tbody> </table> |  |              | Limit Margin | Read   | Ant         | Cable  | Preamp | APos   | TPos        |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5019.92 | 40.25 | 54.00 | -13.75 | 30.47 | 34.59 | 7.83 | 32.64 | 320 | 175 AVERAGE | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>90.33</td> <td>-----</td> <td>-----</td> <td>80.77</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>320</td> <td>175 AVERAGE</td> </tr> </tbody> </table> |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 90.33 | ----- | ----- | 80.77 | 34.50 | 8.06 | 33.00 | 320 | 175 AVERAGE |
|      |  |  | Limit Margin | Read         | Ant    | Cable       | Preamp | APos   | TPos   |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level  | Line   | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m   | dBuV/m   | dB           | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5019.92  | 40.25  | 54.00        | -13.75       | 30.47  | 34.59       | 7.83   | 32.64  | 320    | 175 AVERAGE |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|      |  | Limit Margin   | Read         | Ant          | Cable  | Preamp      | APos   | TPos   |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level  | Line   | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m   | dBuV/m   | dB           | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5240.00  | 90.33  | -----        | -----        | 80.77  | 34.50       | 8.06   | 33.00  | 320    | 175 AVERAGE |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |   |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |    |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |



|           |  | 11   |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
|-----------|--|--|--------|--------|--------|--------|--------|-----------------|------|--------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----------------|-------|--|
| Mode      |  | Band Edge - R  |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
|           |  | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU52/40_5240MHz |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| Pol.      | Vertical   | Fundamental  |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| Peak      | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5434.92</td> <td>50.30</td> <td>74.00</td> <td>-23.70</td> <td>40.74</td> <td>34.43</td> <td>8.44</td> <td>33.31</td> <td>320 175 PEAK</td> </tr> </tbody> </table>    | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5434.92 | 50.30 | 74.00 | -23.70 | 40.74 | 34.43 | 8.44 | 33.31 | 320 175 PEAK    | Blank |  |
| Limit     | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| Freq      | Level  | Line   | Level  | Factor | Loss   | Factor |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| MHz       | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| 1 5434.92 | 50.30  | 74.00  | -23.70 | 40.74  | 34.43  | 8.44   | 33.31  | 320 175 PEAK    |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| Avg       | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5390.70</td> <td>38.73</td> <td>54.00</td> <td>-15.27</td> <td>29.09</td> <td>34.44</td> <td>8.44</td> <td>33.24</td> <td>320 175 AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5390.70 | 38.73 | 54.00 | -15.27 | 29.09 | 34.44 | 8.44 | 33.24 | 320 175 AVERAGE | Blank |  |
| Limit     | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| Freq      | Level  | Line   | Level  | Factor | Loss   | Factor |        |                 |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| MHz       | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |
| 1 5390.70 | 38.73  | 54.00  | -15.27 | 29.09  | 34.44  | 8.44   | 33.24  | 320 175 AVERAGE |      |        |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |  |

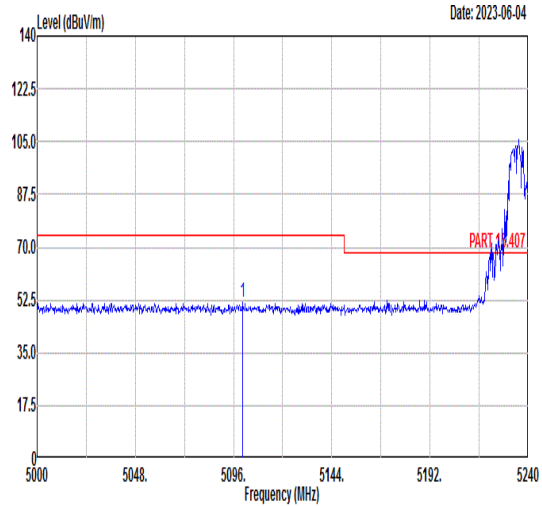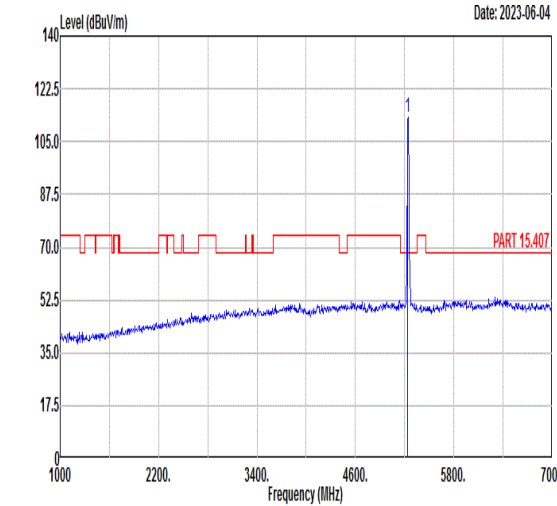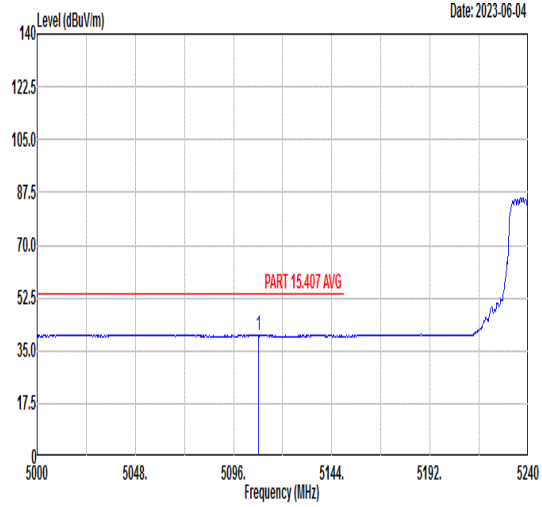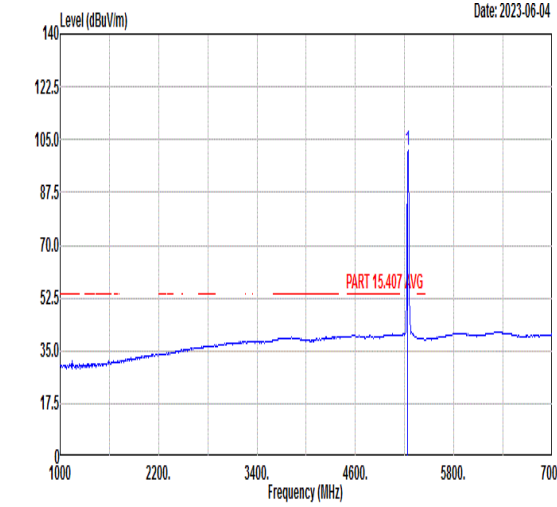

|       |   | 12  |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
|-------|---|---|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|--------|-------|------|-------|-----|-----|---------|
| Mode  |   | Band Edge - L   |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
|       |   | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Pol.  | Horizontal  | Fundamental   |        |        |        |       |        |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Peak  |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.56</td> <td>51.64</td> <td>74.00</td> <td>-22.36</td> <td>41.96</td> <td>34.56</td> <td>7.89</td> <td>32.77</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> </tbody> </table>     | Limit   | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5100.56 | 51.64 | 74.00 | -22.36 | 41.96 | 34.56 | 7.89 | 32.77 | 100 | 157 | PEAK    |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>113.05</td> <td>-----</td> <td>-----</td> <td>103.49</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 113.05 | ----- | ----- | 103.49 | 34.50 | 8.06 | 33.00 | 100 | 157 | PEAK    |
| Limit | Margin  | Read  | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Freq  | Level   | Line  | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| 1     | 5100.56   | 51.64   | 74.00  | -22.36 | 41.96  | 34.56 | 7.89   | 32.77  | 100  | 157    | PEAK    |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Limit | Margin  | Read  | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Freq  | Level   | Line  | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| 1     | 5240.00   | 113.05  | -----  | -----  | 103.49 | 34.50 | 8.06   | 33.00  | 100  | 157    | PEAK    |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Avg   |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5108.24</td> <td>40.29</td> <td>54.00</td> <td>-13.71</td> <td>30.62</td> <td>34.56</td> <td>7.89</td> <td>32.78</td> <td>100</td> <td>157</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit   | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5108.24 | 40.29 | 54.00 | -13.71 | 30.62 | 34.56 | 7.89 | 32.78 | 100 | 157 | AVERAGE |  <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>101.30</td> <td>-----</td> <td>-----</td> <td>91.74</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>100</td> <td>157</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 101.30 | ----- | ----- | 91.74  | 34.50 | 8.06 | 33.00 | 100 | 157 | AVERAGE |
| Limit | Margin  | Read  | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Freq  | Level   | Line  | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| 1     | 5108.24   | 40.29   | 54.00  | -13.71 | 30.62  | 34.56 | 7.89   | 32.78  | 100  | 157    | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Limit | Margin  | Read  | Ant    | Cable  | Preamp | APos  | TPos   | Remark |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| Freq  | Level   | Line  | (dB)   | Level  | Factor | Loss  | Factor |        |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| MHz   | dBuV/m  | dBuV/m  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |      |        |         |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |
| 1     | 5240.00   | 101.30  | -----  | -----  | 91.74  | 34.50 | 8.06   | 33.00  | 100  | 157    | AVERAGE |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |      |       |        |      |        |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |        |       |      |       |     |     |         |



| Mode  | 12   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|
|       | Band Edge - R  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|       | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Pol.  | Horizontal   | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Peak  | <p>Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5426.34</td> <td>51.02</td> <td>74.00</td> <td>-22.98</td> <td>41.43</td> <td>34.43</td> <td>8.45</td> <td>33.29</td> <td>100</td> <td>157</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5426.34 | 51.02 | 74.00 | -22.98 | 41.43 | 34.43 | 8.45 | 33.29 | 100 | 157 | PEAK    | Blank |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5426.34  | 51.02       | 74.00  | -22.98 | 41.43  | 34.43  | 8.45   | 33.29  | 100  | 157    | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Avg   | <p>Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.16</td> <td>39.40</td> <td>54.00</td> <td>-14.60</td> <td>29.78</td> <td>34.46</td> <td>8.34</td> <td>33.18</td> <td>100</td> <td>157</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5356.16 | 39.40 | 54.00 | -14.60 | 29.78 | 34.46 | 8.34 | 33.18 | 100 | 157 | AVERAGE | Blank |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5356.16  | 39.40       | 54.00  | -14.60 | 29.78  | 34.46  | 8.34   | 33.18  | 100  | 157    | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |





|      |   | 12  |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|------|---|---|--------------|--------------|--------|-------------|--------|--------|--------|-------------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-------------|--|--|--|--------------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-------------|
| Mode |   | Band Edge - L   |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|      |   | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Pol. | Vertical  | Fundamental   |              |              |        |             |        |        |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Peak | <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5033.60</td> <td>52.05</td> <td>74.00</td> <td>-21.95</td> <td>42.28</td> <td>34.59</td> <td>7.84</td> <td>32.66</td> <td>116</td> <td>360 PEAK</td> </tr> </tbody> </table>    |   |              | Limit Margin | Read   | Ant         | Cable  | Preamp | APos   | TPos        |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg | 1 | 5033.60 | 52.05 | 74.00 | -21.95 | 42.28 | 34.59 | 7.84 | 32.66 | 116 | 360 PEAK    | <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>97.43</td> <td>-----</td> <td>-----</td> <td>87.89</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>116</td> <td>360 PEAK</td> </tr> </tbody> </table>    |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 97.43 | ----- | ----- | 87.89 | 34.50 | 8.04 | 33.00 | 116 | 360 PEAK    |
|      |   |   | Limit Margin | Read         | Ant    | Cable       | Preamp | APos   | TPos   |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level   | Line  | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m  | dBuV/m  |              | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5033.60   | 52.05   | 74.00        | -21.95       | 42.28  | 34.59       | 7.84   | 32.66  | 116    | 360 PEAK    |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|      |   | Limit Margin  | Read         | Ant          | Cable  | Preamp      | APos   | TPos   |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level   | Line  | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m  | dBuV/m  |              | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5240.00   | 97.43   | -----        | -----        | 87.89  | 34.50       | 8.04   | 33.00  | 116    | 360 PEAK    |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Avg  | <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5051.84</td> <td>40.16</td> <td>54.00</td> <td>-13.84</td> <td>30.42</td> <td>34.58</td> <td>7.85</td> <td>32.69</td> <td>116</td> <td>360 AVERAGE</td> </tr> </tbody> </table> |   |              | Limit Margin | Read   | Ant         | Cable  | Preamp | APos   | TPos        |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg | 1 | 5051.84 | 40.16 | 54.00 | -13.84 | 30.42 | 34.58 | 7.85 | 32.69 | 116 | 360 AVERAGE | <table border="1"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>88.43</td> <td>-----</td> <td>-----</td> <td>78.89</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>116</td> <td>360 AVERAGE</td> </tr> </tbody> </table> |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg | 1 | 5240.00 | 88.43 | ----- | ----- | 78.89 | 34.50 | 8.04 | 33.00 | 116 | 360 AVERAGE |
|      |   |   | Limit Margin | Read         | Ant    | Cable       | Preamp | APos   | TPos   |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level   | Line  | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m  | dBuV/m  |              | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5051.84   | 40.16   | 54.00        | -13.84       | 30.42  | 34.58       | 7.85   | 32.69  | 116    | 360 AVERAGE |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
|      |   | Limit Margin  | Read         | Ant          | Cable  | Preamp      | APos   | TPos   |        |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| Freq | Level   | Line  | (dB)         | Level        | Factor | Loss Factor |        |        | Remark |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| MHz  | dBuV/m  | dBuV/m  |              | dBuV         | dB/m   | dB          | dB     | cm     | deg    |             |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |
| 1    | 5240.00   | 88.43   | -----        | -----        | 78.89  | 34.50       | 8.04   | 33.00  | 116    | 360 AVERAGE |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |             |  |  |  |              |      |     |       |        |      |      |  |      |       |      |      |       |        |             |  |  |        |     |        |        |  |      |      |    |    |    |     |   |         |       |       |       |       |       |      |       |     |             |



|       |   | 12          |       |        |        |        |       |        |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|-------|---|-------------|-------|--------|--------|--------|-------|--------|------|------|---------|------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|
| Mode  | Band Edge - R   |             |       |        |        |        |       |        |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|       | U-NII-1_5.25-5.35_802.11ax HE20_CH48_RU106/54_5240MHz   |             |       |        |        |        |       |        |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Pol.  | Vertical  | Fundamental |       |        |        |        |       |        |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Peak  | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.58</td> <td>50.29</td> <td>74.00</td> <td>-23.71</td> <td>40.66</td> <td>34.46</td> <td>8.35</td> <td>33.18</td> <td>116</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>    |             | Limit | Margin | Read   | Ant    | Cable | Preamp | APos | TPos | Remark  | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5358.58 | 50.29 | 74.00 | -23.71 | 40.66 | 34.46 | 8.35 | 33.18 | 116 | 360 | PEAK    | Blank |
| Limit | Margin  | Read        | Ant   | Cable  | Preamp | APos   | TPos  | Remark |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level   | Line        | Level | Factor | Loss   | Factor |       |        |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m  | dBuV/m      | dBuV  | dB/m   | dB     | dB     | cm    | deg    |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5358.58   | 50.29       | 74.00 | -23.71 | 40.66  | 34.46  | 8.35  | 33.18  | 116  | 360  | PEAK    |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Avg   | <p style="text-align: right;">Date: 2023-06-04</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5387.84</td> <td>38.61</td> <td>54.00</td> <td>-15.39</td> <td>28.97</td> <td>34.44</td> <td>8.43</td> <td>33.23</td> <td>116</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> |             | Limit | Margin | Read   | Ant    | Cable | Preamp | APos | TPos | Remark  | Freq | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5387.84 | 38.61 | 54.00 | -15.39 | 28.97 | 34.44 | 8.43 | 33.23 | 116 | 360 | AVERAGE | Blank |
| Limit | Margin  | Read        | Ant   | Cable  | Preamp | APos   | TPos  | Remark |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level   | Line        | Level | Factor | Loss   | Factor |       |        |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m  | dBuV/m      | dBuV  | dB/m   | dB     | dB     | cm    | deg    |      |      |         |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5387.84   | 38.61       | 54.00 | -15.39 | 28.97  | 34.44  | 8.43  | 33.23  | 116  | 360  | AVERAGE |      |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |



|             |  | 13   |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
|-------------|--|--|--------|--------|--------|-------|--------|-------|--------|---------|---------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|---|--|--|-------|--------|------|-----|-------|--------|------|------|--|--|------|-------|------|------|-------|--------|------|--------|--|--|--------|-----|--------|--------|--|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|------|-------|-----|----|---------|
| Mode        |  | Band Edge - L  |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
|             |  | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| Pol.        | Horizontal   | Fundamental  |        |        |        |       |        |       |        |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| <b>Peak</b> | <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.91</td> <td>57.40</td> <td>74.00</td> <td>-16.60</td> <td>47.79</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>203</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table>   |  |        | Limit  | Margin | Read  | Ant    | Cable | Preamp | APos    | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5149.91 | 57.40 | 74.00 | -16.60 | 47.79 | 34.54 | 7.92 | 32.85 | 203 | 84 | PEAK    | <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>105.73</td> <td>-----</td> <td>96.18</td> <td>34.52</td> <td>7.94</td> <td>32.91</td> <td>203</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table>   |  |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5190.00 | 105.73 | ----- | 96.18 | 34.52 | 7.94 | 32.91 | 203 | 84 | PEAK    |
|             |  | Limit  | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| Freq        | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| MHz         | dBuV/m   | dBuV/m   |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| 1           | 5149.91  | 57.40  | 74.00  | -16.60 | 47.79  | 34.54 | 7.92   | 32.85 | 203    | 84      | PEAK    |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
|             |  | Limit  | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| Freq        | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| MHz         | dBuV/m   | dBuV/m   |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| 1           | 5190.00  | 105.73   | -----  | 96.18  | 34.52  | 7.94  | 32.91  | 203   | 84     | PEAK    |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| <b>Avg</b>  | <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.91</td> <td>50.44</td> <td>54.00</td> <td>-3.56</td> <td>40.83</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>203</td> <td>84</td> <td>AVERAGE</td> </tr> </tbody> </table> |  |        | Limit  | Margin | Read  | Ant    | Cable | Preamp | APos    | TPos    |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5149.91 | 50.44 | 54.00 | -3.56  | 40.83 | 34.54 | 7.92 | 32.85 | 203 | 84 | AVERAGE | <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>95.12</td> <td>-----</td> <td>85.55</td> <td>34.53</td> <td>7.94</td> <td>32.90</td> <td>203</td> <td>84</td> <td>AVERAGE</td> </tr> </tbody> </table> |  |  | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor |  |  | Remark | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5190.00 | 95.12  | ----- | 85.55 | 34.53 | 7.94 | 32.90 | 203 | 84 | AVERAGE |
|             |  | Limit  | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| Freq        | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| MHz         | dBuV/m   | dBuV/m   |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| 1           | 5149.91  | 50.44  | 54.00  | -3.56  | 40.83  | 34.54 | 7.92   | 32.85 | 203    | 84      | AVERAGE |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
|             |  | Limit  | Margin | Read   | Ant    | Cable | Preamp | APos  | TPos   |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| Freq        | Level  | Line   | (dB)   | Level  | Factor | Loss  | Factor |       |        | Remark  |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| MHz         | dBuV/m   | dBuV/m   |        | dBuV   | dB/m   | dB    | dB     | cm    | deg    |         |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |
| 1           | 5190.00  | 95.12  | -----  | 85.55  | 34.53  | 7.94  | 32.90  | 203   | 84     | AVERAGE |         |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |    |         |   |  |  |       |        |      |     |       |        |      |      |  |  |      |       |      |      |       |        |      |        |  |  |        |     |        |        |  |      |      |    |    |    |     |  |   |         |        |       |       |       |      |       |     |    |         |



|       |  | 13   |        |        |             |       |        |        |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
|-------|--|--|--------|--------|-------------|-------|--------|--------|------|------------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|------------|-------|--|
| Mode  |  | Band Edge - R  |        |        |             |       |        |        |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
|       |  | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz |        |        |             |       |        |        |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| Pol.  | Horizontal   | Fundamental  |        |        |             |       |        |        |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| Peak  | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.18</td> <td>50.82</td> <td>74.00</td> <td>-23.18</td> <td>41.19</td> <td>34.46</td> <td>8.36</td> <td>33.19</td> <td>203</td> <td>84 PEAK</td> </tr> </tbody> </table>    | Limit  | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark     | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5361.18 | 50.82 | 74.00 | -23.18 | 41.19 | 34.46 | 8.36 | 33.19 | 203 | 84 PEAK    | Blank |  |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| Freq  | Level  | Line   | Level  | Factor | Loss Factor |       |        |        |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| 1     | 5361.18  | 50.82  | 74.00  | -23.18 | 41.19       | 34.46 | 8.36   | 33.19  | 203  | 84 PEAK    |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| Avg   | <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.54</td> <td>40.04</td> <td>54.00</td> <td>-13.96</td> <td>30.42</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>203</td> <td>84 AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark     | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5352.54 | 40.04 | 54.00 | -13.96 | 30.42 | 34.46 | 8.33 | 33.17 | 203 | 84 AVERAGE | Blank |  |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| Freq  | Level  | Line   | Level  | Factor | Loss Factor |       |        |        |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |            |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |
| 1     | 5352.54  | 40.04  | 54.00  | -13.96 | 30.42       | 34.46 | 8.33   | 33.17  | 203  | 84 AVERAGE |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |            |       |  |



|  | 13   |              |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
|--|--|--------------|-------|--------------|--------|-------------|-------|--------|------|------|--|--|------|-------|------|------|-------|--------|-------------|--|--|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|--|--|--|--|--|--|--|--|--|--|--|--|--------------|------|-----|-------|--------|------|------|--|--|------|-------|------|------|-------|--------|-------------|--|--|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|--|--|--|--|--|--|--|--|--|
| Mode   | Band Edge - L  |              |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz |  |              |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| Pol.   | Vertical   | Fundamental  |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| Peak   | <div style="text-align:right; font-size:small;">Date: 2023-05-27</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.15</td> <td>56.95</td> <td>74.00</td> <td>-17.05</td> <td>47.33</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>354</td> <td>220</td> </tr> <tr> <td colspan="11" style="text-align:right;">PEAK</td> </tr> </tbody> </table>   |              |       | Limit Margin | Read   | Ant         | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | cm | deg | 1 | 5149.15 | 56.95 | 74.00 | -17.05 | 47.33 | 34.54 | 7.92 | 32.84 | 354 | 220 | PEAK    |  |  |  |  |  |  |  |  |  |  | <div style="text-align:right; font-size:small;">Date: 2023-05-27</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>100.53</td> <td>-----</td> <td>-----</td> <td>90.95</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>354</td> <td>220</td> </tr> <tr> <td colspan="11" style="text-align:right;">PEAK</td> </tr> </tbody> </table>   |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | cm | deg | 1 | 5190.00 | 100.53 | ----- | ----- | 90.95 | 34.53 | 7.94 | 32.89 | 354 | 220 | PEAK    |  |  |  |  |  |  |  |  |  |  |
|  |  | Limit Margin | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| Freq   | Level  | Line         | (dB)  | Level        | Factor | Loss Factor |       |        | cm   | deg  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| 1  | 5149.15  | 56.95        | 74.00 | -17.05       | 47.33  | 34.54       | 7.92  | 32.84  | 354  | 220  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| PEAK   |  |              |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
|  |  | Limit Margin | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| Freq   | Level  | Line         | (dB)  | Level        | Factor | Loss Factor |       |        | cm   | deg  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| 1  | 5190.00  | 100.53       | ----- | -----        | 90.95  | 34.53       | 7.94  | 32.89  | 354  | 220  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| PEAK   |  |              |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| Avg  | <div style="text-align:right; font-size:small;">Date: 2023-05-27</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.72</td> <td>46.00</td> <td>54.00</td> <td>-8.00</td> <td>36.39</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>354</td> <td>220</td> </tr> <tr> <td colspan="11" style="text-align:right;">AVERAGE</td> </tr> </tbody> </table> |              |       | Limit Margin | Read   | Ant         | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | cm | deg | 1 | 5149.72 | 46.00 | 54.00 | -8.00  | 36.39 | 34.54 | 7.92 | 32.85 | 354 | 220 | AVERAGE |  |  |  |  |  |  |  |  |  |  | <div style="text-align:right; font-size:small;">Date: 2023-05-27</div> <table border="1" style="width:100%; font-size:small; margin-top:10px;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>89.74</td> <td>-----</td> <td>-----</td> <td>80.16</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>354</td> <td>220</td> </tr> <tr> <td colspan="11" style="text-align:right;">AVERAGE</td> </tr> </tbody> </table> |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | cm | deg | 1 | 5190.00 | 89.74  | ----- | ----- | 80.16 | 34.53 | 7.93 | 32.88 | 354 | 220 | AVERAGE |  |  |  |  |  |  |  |  |  |  |
|  |  | Limit Margin | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| Freq   | Level  | Line         | (dB)  | Level        | Factor | Loss Factor |       |        | cm   | deg  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| 1  | 5149.72  | 46.00        | 54.00 | -8.00        | 36.39  | 34.54       | 7.92  | 32.85  | 354  | 220  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| AVERAGE  |  |              |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
|  |  | Limit Margin | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| Freq   | Level  | Line         | (dB)  | Level        | Factor | Loss Factor |       |        | cm   | deg  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| 1  | 5190.00  | 89.74        | ----- | -----        | 80.16  | 34.53       | 7.93  | 32.88  | 354  | 220  |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |
| AVERAGE  |  |              |       |              |        |             |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |  |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |    |     |   |         |        |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |  |  |  |  |







| Mode  | 13  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|-------|---|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|----|-----|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|
|       | Band Edge - R   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|       | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Pol.  | Vertical  | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Peak  | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.80</td> <td>51.21</td> <td>74.00</td> <td>-22.79</td> <td>41.59</td> <td>34.43</td> <td>8.47</td> <td>33.28</td> <td>354</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5416.80 | 51.21 | 74.00 | -22.79 | 41.59 | 34.43 | 8.47 | 33.28 | 354 | 220 | PEAK    | Blank |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5416.80   | 51.21       | 74.00  | -22.79 | 41.59  | 34.43  | 8.47   | 33.28  | 354  | 220    | PEAK    |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Avg   | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5408.97</td> <td>39.50</td> <td>54.00</td> <td>-14.50</td> <td>29.85</td> <td>34.44</td> <td>8.48</td> <td>33.27</td> <td>354</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5408.97 | 39.50 | 54.00 | -14.50 | 29.85 | 34.44 | 8.48 | 33.27 | 354 | 220 | AVERAGE | Blank |
| Limit | Margin  | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level   | Line        | Level  | Factor | Loss   | Factor | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| MHz   | dBuV/m  | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5408.97   | 39.50       | 54.00  | -14.50 | 29.85  | 34.44  | 8.48   | 33.27  | 354  | 220    | AVERAGE |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |



| Mode        | 13  |          |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
|-------------|---|----------|--------|--------|--------|-------|--------|--------|----------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----------|---|----------|-------|-------|--------|-------|-------|-------|-------|----------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----------|---|----------|-------|-------|--------|-------|-------|-------|-------|
|             | Harmonic  |          |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
|             | U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz  |          |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Pol.        | Horizontal  | Vertical |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Peak<br>Avg |   |          |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>48.10</td> <td>68.30</td> <td>-20.20</td> <td>57.33</td> <td>37.63</td> <td>13.49</td> <td>60.35</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>50.39</td> <td>74.00</td> <td>-23.61</td> <td>52.92</td> <td>40.57</td> <td>15.54</td> <td>58.64</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit    | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos     |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10380.00 | 48.10 | 68.30 | -20.20 | 57.33 | 37.63 | 13.49 | 60.35 | --- Peak | 2 | 15570.00 | 50.39 | 74.00 | -23.61 | 52.92 | 40.57 | 15.54 | 58.64 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>47.46</td> <td>68.30</td> <td>-20.84</td> <td>56.69</td> <td>37.63</td> <td>13.49</td> <td>60.35</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>50.09</td> <td>74.00</td> <td>-23.91</td> <td>52.62</td> <td>40.57</td> <td>15.54</td> <td>58.64</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10380.00 | 47.46 | 68.30 | -20.84 | 56.69 | 37.63 | 13.49 | 60.35 | --- Peak | 2 | 15570.00 | 50.09 | 74.00 | -23.91 | 52.62 | 40.57 | 15.54 | 58.64 |
| Limit       | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor | Remark |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 1           | 10380.00  | 48.10    | 68.30  | -20.20 | 57.33  | 37.63 | 13.49  | 60.35  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 2           | 15570.00  | 50.39    | 74.00  | -23.61 | 52.92  | 40.57 | 15.54  | 58.64  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Limit       | Margin  | Read     | Ant    | Cable  | Preamp | APos  | TPos   |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line     | (dB)   | Level  | Factor | Loss  | Factor | Remark |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m   | dBuV   | dB/m   | dB     | dB    | cm     | deg    |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 1           | 10380.00  | 47.46    | 68.30  | -20.84 | 56.69  | 37.63 | 13.49  | 60.35  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 2           | 15570.00  | 50.09    | 74.00  | -23.91 | 52.62  | 40.57 | 15.54  | 58.64  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |

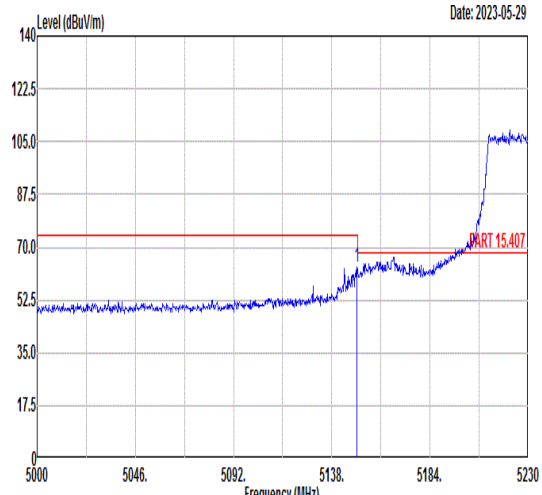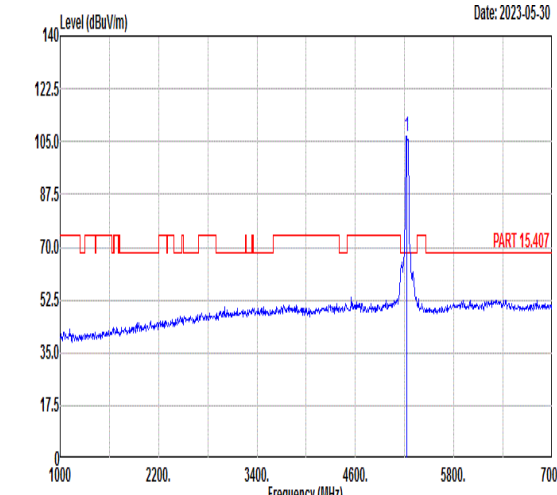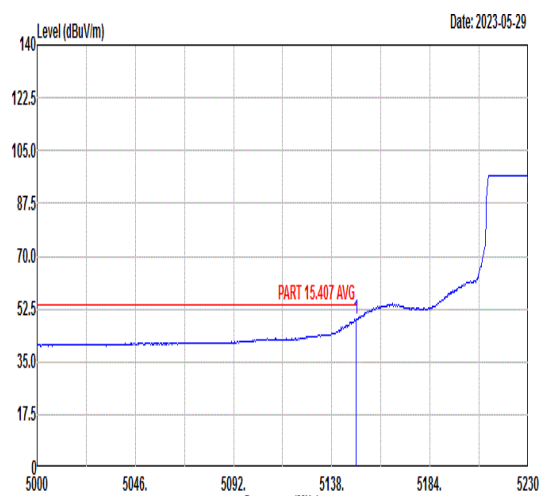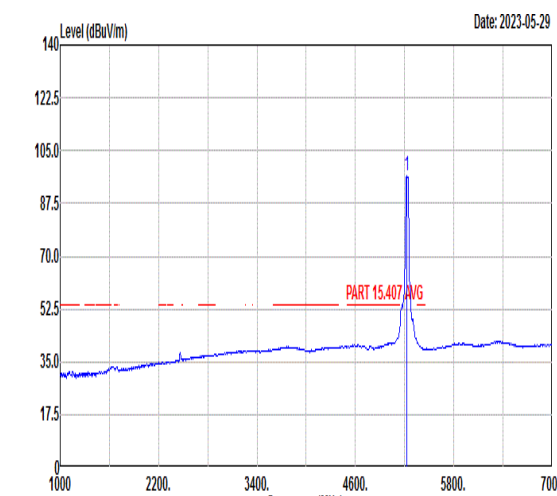





|      |  | 14   |       |              |        |             |       |        |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
|------|--|--|-------|--------------|--------|-------------|-------|--------|--------|------------|--|--|------|-------|------|------|-------|--------|-------------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|------------|---|--|--|--------------|------|-----|-------|--------|------|------|--|--|------|-------|------|------|-------|--------|-------------|--|--|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|------|-------|-----|------------|
| Mode |  | Band Edge - L  |       |              |        |             |       |        |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
|      |  | U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz |       |              |        |             |       |        |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| Pol. | Horizontal   | Fundamental  |       |              |        |             |       |        |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| Peak | <p style="text-align: right;">Date: 2023-05-29</p>  <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.73</td> <td>63.22</td> <td>74.00</td> <td>-10.78</td> <td>53.61</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>165</td> <td>85 PEAK</td> </tr> </tbody> </table>    |  |       | Limit Margin | Read   | Ant         | Cable | Preamp | APos   | TPos       |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5149.73 | 63.22 | 74.00 | -10.78 | 53.61 | 34.54 | 7.92 | 32.85 | 165 | 85 PEAK    | <p style="text-align: right;">Date: 2023-05-30</p>  <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>106.90</td> <td>-----</td> <td>-----</td> <td>97.37</td> <td>34.51</td> <td>7.98</td> <td>32.96</td> <td>165</td> <td>85 PEAK</td> </tr> </tbody> </table>    |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5230.00 | 106.90 | ----- | ----- | 97.37 | 34.51 | 7.98 | 32.96 | 165 | 85 PEAK    |
|      |  | Limit Margin   | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss Factor |       |        | Remark |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| MHz  | dBuV/m   | dBuV/m   | dB    | dBuV         | dB/m   | dB          | dB    | cm     | deg    |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| 1    | 5149.73  | 63.22  | 74.00 | -10.78       | 53.61  | 34.54       | 7.92  | 32.85  | 165    | 85 PEAK    |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
|      |  | Limit Margin   | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss Factor |       |        | Remark |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| MHz  | dBuV/m   | dBuV/m   | dB    | dBuV         | dB/m   | dB          | dB    | cm     | deg    |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| 1    | 5230.00  | 106.90   | ----- | -----        | 97.37  | 34.51       | 7.98  | 32.96  | 165    | 85 PEAK    |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| Avg  | <p style="text-align: right;">Date: 2023-05-29</p>  <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.27</td> <td>49.12</td> <td>54.00</td> <td>-4.88</td> <td>39.50</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>165</td> <td>85 AVERAGE</td> </tr> </tbody> </table> |  |       | Limit Margin | Read   | Ant         | Cable | Preamp | APos   | TPos       |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5149.27 | 49.12 | 54.00 | -4.88  | 39.50 | 34.54 | 7.92 | 32.84 | 165 | 85 AVERAGE | <p style="text-align: right;">Date: 2023-05-29</p>  <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2"></th> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>96.71</td> <td>-----</td> <td>-----</td> <td>87.18</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>165</td> <td>85 AVERAGE</td> </tr> </tbody> </table> |  |  | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos |  |  | Freq | Level | Line | (dB) | Level | Factor | Loss Factor |  |  | Remark |  | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg |  | 1 | 5230.00 | 96.71  | ----- | ----- | 87.18 | 34.51 | 7.99 | 32.97 | 165 | 85 AVERAGE |
|      |  | Limit Margin   | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss Factor |       |        | Remark |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| MHz  | dBuV/m   | dBuV/m   | dB    | dBuV         | dB/m   | dB          | dB    | cm     | deg    |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| 1    | 5149.27  | 49.12  | 54.00 | -4.88        | 39.50  | 34.54       | 7.92  | 32.84  | 165    | 85 AVERAGE |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
|      |  | Limit Margin   | Read  | Ant          | Cable  | Preamp      | APos  | TPos   |        |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss Factor |       |        | Remark |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| MHz  | dBuV/m   | dBuV/m   | dB    | dBuV         | dB/m   | dB          | dB    | cm     | deg    |            |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |
| 1    | 5230.00  | 96.71  | ----- | -----        | 87.18  | 34.51       | 7.99  | 32.97  | 165    | 85 AVERAGE |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |       |       |        |       |       |      |       |     |            |   |  |  |              |      |     |       |        |      |      |  |  |      |       |      |      |       |        |             |  |  |        |  |     |        |        |    |      |      |    |    |    |     |  |   |         |        |       |       |       |       |      |       |     |            |





|       |  | 14   |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
|-------|--|--|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|----|---------|-------|--|
| Mode  |  | Band Edge - R  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
|       |  | U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Pol.  | Horizontal   | Fundamental  |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Peak  | <p style="text-align: right;">Date: 2023-05-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.05</td> <td>52.99</td> <td>74.00</td> <td>-21.01</td> <td>43.36</td> <td>34.46</td> <td>8.34</td> <td>33.17</td> <td>165</td> <td>85</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5353.05 | 52.99 | 74.00 | -21.01 | 43.36 | 34.46 | 8.34 | 33.17 | 165 | 85 | PEAK    | Blank |  |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Freq  | Level  | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| 1     | 5353.05  | 52.99  | 74.00  | -21.01 | 43.36  | 34.46  | 8.34   | 33.17  | 165  | 85     | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Avg   | <p style="text-align: right;">Date: 2023-05-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.06</td> <td>41.84</td> <td>54.00</td> <td>-12.16</td> <td>32.22</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>165</td> <td>85</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.06 | 41.84 | 54.00 | -12.16 | 32.22 | 34.46 | 8.33 | 33.17 | 165 | 85 | AVERAGE | Blank |  |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| Freq  | Level  | Line   | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |
| 1     | 5350.06  | 41.84  | 54.00  | -12.16 | 32.22  | 34.46  | 8.33   | 33.17  | 165  | 85     | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |    |         |       |  |

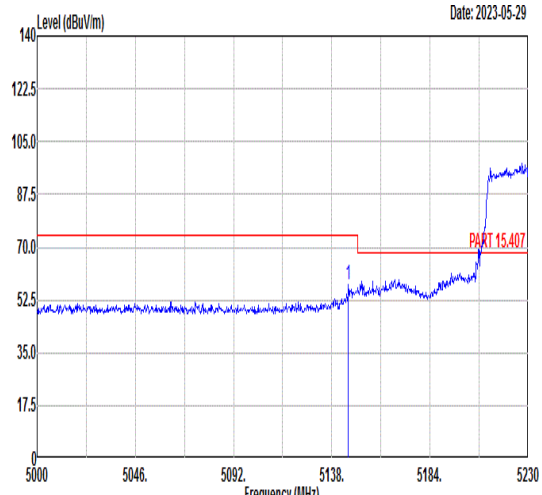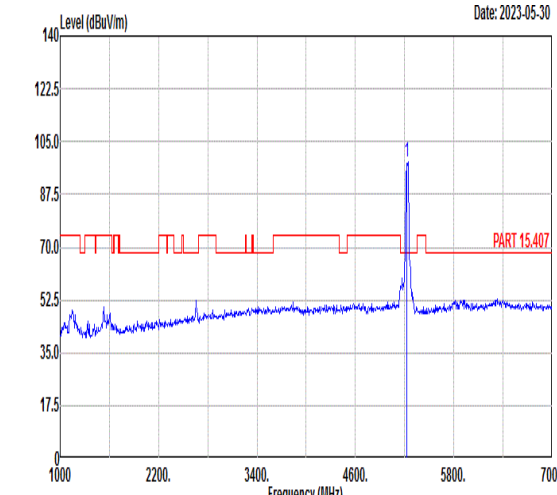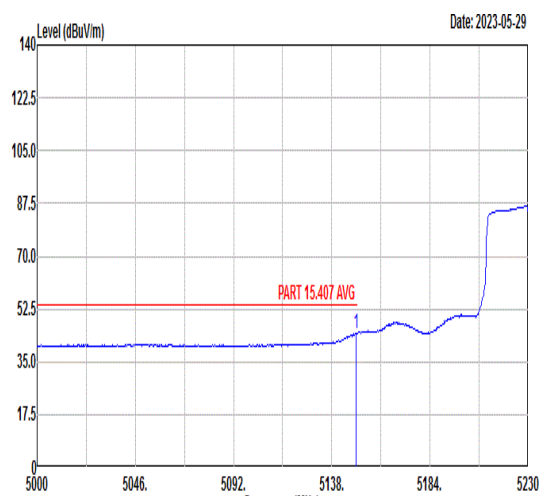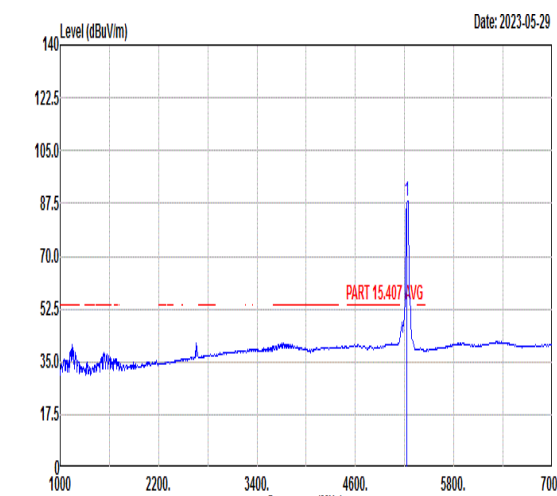

|      |  | 14   |       |              |        |       |        |       |     |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
|------|--|--|-------|--------------|--------|-------|--------|-------|-----|--------|---------|--------|--|------|--|--------|--|--------|--|------|-------|------|------|-------|--------|------|--------|----|----|----|-----|--|--|--|--|--|--|-----|--------|--------|--|------|------|----|----|----|-----|--|--|--|--|--|--|--|--|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|--|--|--|--|--|---|--|--|--------------|--|------|--|-----|--|-------|--|--------|--|------|--|------|--|--------|--|------|-------|------|------|-------|--------|------|--------|----|----|----|-----|--|--|--|--|--|--|-----|--------|--------|--|------|------|----|----|----|-----|--|--|--|--|--|--|--|--|---|---------|-------|-------|-------|-------|-------|------|-------|-----|-----|---------|--|--|--|--|--|--|
| Mode |  | Band Edge - L  |       |              |        |       |        |       |     |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
|      |  | U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz |       |              |        |       |        |       |     |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| Pol. | Vertical   | Fundamental  |       |              |        |       |        |       |     |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| Peak |  <p style="text-align: right;">Date: 2023-05-29</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.82</td> <td>57.43</td> <td>74.00</td> <td>-16.57</td> <td>47.81</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>400</td> <td>218</td> <td>PEAK</td> <td colspan="6"></td> </tr> </tbody> </table>    |  |       | Limit Margin |        | Read  |        | Ant   |     | Cable  |         | Preamp |  | APos |  | TPos   |  | Remark |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | dB | dB | cm | deg |  |  |  |  |  |  | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  |  |  |  |  |  |  |  | 1 | 5145.82 | 57.43 | 74.00 | -16.57 | 47.81 | 34.54 | 7.92 | 32.84 | 400 | 218 | PEAK    |  |  |  |  |  |  |  <p style="text-align: right;">Date: 2023-05-30</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>98.12</td> <td>-----</td> <td>-----</td> <td>88.58</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>400</td> <td>218</td> <td>PEAK</td> <td colspan="6"></td> </tr> </tbody> </table>     |  |  | Limit Margin |  | Read |  | Ant |  | Cable |  | Preamp |  | APos |  | TPos |  | Remark |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | dB | dB | cm | deg |  |  |  |  |  |  | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  |  |  |  |  |  |  |  | 1 | 5230.00 | 98.12 | ----- | ----- | 88.58 | 34.50 | 8.04 | 33.00 | 400 | 218 | PEAK    |  |  |  |  |  |  |
|      |  | Limit Margin   |       | Read         |        | Ant   |        | Cable |     | Preamp |         | APos   |  | TPos |  | Remark |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss  | Factor | dB    | dB  | cm     | deg     |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| MHz  | dBuV/m   | dBuV/m   |       | dBuV         | dB/m   | dB    | dB     | cm    | deg |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| 1    | 5145.82  | 57.43  | 74.00 | -16.57       | 47.81  | 34.54 | 7.92   | 32.84 | 400 | 218    | PEAK    |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
|      |  | Limit Margin   |       | Read         |        | Ant   |        | Cable |     | Preamp |         | APos   |  | TPos |  | Remark |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss  | Factor | dB    | dB  | cm     | deg     |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| MHz  | dBuV/m   | dBuV/m   |       | dBuV         | dB/m   | dB    | dB     | cm    | deg |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| 1    | 5230.00  | 98.12  | ----- | -----        | 88.58  | 34.50 | 8.04   | 33.00 | 400 | 218    | PEAK    |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| Avg  |  <p style="text-align: right;">Date: 2023-05-29</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.50</td> <td>44.64</td> <td>54.00</td> <td>-9.36</td> <td>35.03</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>400</td> <td>218</td> <td>AVERAGE</td> <td colspan="6"></td> </tr> </tbody> </table> |  |       | Limit Margin |        | Read  |        | Ant   |     | Cable  |         | Preamp |  | APos |  | TPos   |  | Remark |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | dB | dB | cm | deg |  |  |  |  |  |  | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  |  |  |  |  |  |  |  | 1 | 5149.50 | 44.64 | 54.00 | -9.36  | 35.03 | 34.54 | 7.92 | 32.85 | 400 | 218 | AVERAGE |  |  |  |  |  |  |  <p style="text-align: right;">Date: 2023-05-29</p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit Margin</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="8"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>88.42</td> <td>-----</td> <td>-----</td> <td>78.88</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>400</td> <td>218</td> <td>AVERAGE</td> <td colspan="6"></td> </tr> </tbody> </table> |  |  | Limit Margin |  | Read |  | Ant |  | Cable |  | Preamp |  | APos |  | TPos |  | Remark |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | dB | dB | cm | deg |  |  |  |  |  |  | MHz | dBuV/m | dBuV/m |  | dBuV | dB/m | dB | dB | cm | deg |  |  |  |  |  |  |  |  | 1 | 5230.00 | 88.42 | ----- | ----- | 78.88 | 34.50 | 8.04 | 33.00 | 400 | 218 | AVERAGE |  |  |  |  |  |  |
|      |  | Limit Margin   |       | Read         |        | Ant   |        | Cable |     | Preamp |         | APos   |  | TPos |  | Remark |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss  | Factor | dB    | dB  | cm     | deg     |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| MHz  | dBuV/m   | dBuV/m   |       | dBuV         | dB/m   | dB    | dB     | cm    | deg |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| 1    | 5149.50  | 44.64  | 54.00 | -9.36        | 35.03  | 34.54 | 7.92   | 32.85 | 400 | 218    | AVERAGE |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
|      |  | Limit Margin   |       | Read         |        | Ant   |        | Cable |     | Preamp |         | APos   |  | TPos |  | Remark |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| Freq | Level  | Line   | (dB)  | Level        | Factor | Loss  | Factor | dB    | dB  | cm     | deg     |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| MHz  | dBuV/m   | dBuV/m   |       | dBuV         | dB/m   | dB    | dB     | cm    | deg |        |         |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |
| 1    | 5230.00  | 88.42  | ----- | -----        | 78.88  | 34.50 | 8.04   | 33.00 | 400 | 218    | AVERAGE |        |  |      |  |        |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |        |       |       |      |       |     |     |         |  |  |  |  |  |  |   |  |  |              |  |      |  |     |  |       |  |        |  |      |  |      |  |        |  |      |       |      |      |       |        |      |        |    |    |    |     |  |  |  |  |  |  |     |        |        |  |      |      |    |    |    |     |  |  |  |  |  |  |  |  |   |         |       |       |       |       |       |      |       |     |     |         |  |  |  |  |  |  |







| Mode      | 14   |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|-----------|--|-------------|--------|--------|--------|--------|--------|-----------------|------|--------|------|-------|------|-------|--------|------|--------|----|-----|-----|--------|--------|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|------|-------|-----------------|-------|
|           | Band Edge - R  |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
|           | U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz   |             |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Pol.      | Vertical   | Fundamental |        |        |        |        |        |                 |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Peak      | <p>Date: 2023-05-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5384.56</td> <td>51.69</td> <td>74.00</td> <td>-22.31</td> <td>42.05</td> <td>34.45</td> <td>8.42</td> <td>33.23</td> <td>400 218 PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5384.56 | 51.69 | 74.00 | -22.31 | 42.05 | 34.45 | 8.42 | 33.23 | 400 218 PEAK    | Blank |
| Limit     | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level  | Line        | Level  | Factor | Loss   | Factor | cm     | deg             |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5384.56 | 51.69  | 74.00       | -22.31 | 42.05  | 34.45  | 8.42   | 33.23  | 400 218 PEAK    |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Avg       | <p>Date: 2023-05-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5382.26</td> <td>39.43</td> <td>54.00</td> <td>-14.57</td> <td>29.79</td> <td>34.45</td> <td>8.41</td> <td>33.22</td> <td>400 218 AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos            | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor | cm | deg | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5382.26 | 39.43 | 54.00 | -14.57 | 29.79 | 34.45 | 8.41 | 33.22 | 400 218 AVERAGE | Blank |
| Limit     | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark          |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| Freq      | Level  | Line        | Level  | Factor | Loss   | Factor | cm     | deg             |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| MHz       | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg             |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |
| 1 5382.26 | 39.43  | 54.00       | -14.57 | 29.79  | 34.45  | 8.41   | 33.22  | 400 218 AVERAGE |      |        |      |       |      |       |        |      |        |    |     |     |        |        |      |      |    |    |    |     |           |       |       |        |       |       |      |       |                 |       |



| Mode        | 14  |                         |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
|-------------|---|-------------------------|--------|--------|--------|-------|--------|--------|----------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----------|---|----------|-------|-------|--------|-------|-------|-------|-------|----------|---|-------|--------|------|-----|-------|--------|------|------|--|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----------|---|----------|-------|-------|--------|-------|-------|-------|-------|
|             | Harmonic  |                         |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
|             | U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz  |                         |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Pol.        | Horizontal  | Vertical                |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Peak<br>Avg | <p>Date: 2023-05-09</p>   | <p>Date: 2023-05-09</p> |        |        |        |       |        |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
|             | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>46.29</td> <td>68.30</td> <td>-22.01</td> <td>55.48</td> <td>37.67</td> <td>13.52</td> <td>60.38</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>50.05</td> <td>74.00</td> <td>-23.95</td> <td>52.75</td> <td>40.61</td> <td>15.57</td> <td>58.88</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit                   | Margin | Read   | Ant    | Cable | Preamp | APos   | TPos     |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10460.00 | 46.29 | 68.30 | -22.01 | 55.48 | 37.67 | 13.52 | 60.38 | --- Peak | 2 | 15690.00 | 50.05 | 74.00 | -23.95 | 52.75 | 40.61 | 15.57 | 58.88 | --- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>46.49</td> <td>68.30</td> <td>-21.81</td> <td>55.68</td> <td>37.67</td> <td>13.52</td> <td>60.38</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>50.01</td> <td>74.00</td> <td>-23.99</td> <td>52.71</td> <td>40.61</td> <td>15.57</td> <td>58.88</td> <td>--- Peak</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos |  | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 10460.00 | 46.49 | 68.30 | -21.81 | 55.68 | 37.67 | 13.52 | 60.38 | --- Peak | 2 | 15690.00 | 50.01 | 74.00 | -23.99 | 52.71 | 40.61 | 15.57 | 58.88 |
| Limit       | Margin  | Read                    | Ant    | Cable  | Preamp | APos  | TPos   |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line                    | (dB)   | Level  | Factor | Loss  | Factor | Remark |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m                  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 1           | 10460.00  | 46.29                   | 68.30  | -22.01 | 55.48  | 37.67 | 13.52  | 60.38  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 2           | 15690.00  | 50.05                   | 74.00  | -23.95 | 52.75  | 40.61 | 15.57  | 58.88  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Limit       | Margin  | Read                    | Ant    | Cable  | Preamp | APos  | TPos   |        |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| Freq        | Level   | Line                    | (dB)   | Level  | Factor | Loss  | Factor | Remark |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| MHz         | dBuV/m  | dBuV/m                  | dBuV   | dB/m   | dB     | dB    | cm     | deg    |          |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 1           | 10460.00  | 46.49                   | 68.30  | -21.81 | 55.68  | 37.67 | 13.52  | 60.38  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |
| 2           | 15690.00  | 50.01                   | 74.00  | -23.99 | 52.71  | 40.61 | 15.57  | 58.88  | --- Peak |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |          |   |       |        |      |     |       |        |      |      |  |      |       |      |      |       |        |      |        |        |     |        |        |      |      |    |    |    |     |   |          |       |       |        |       |       |       |       |          |   |          |       |       |        |       |       |       |       |

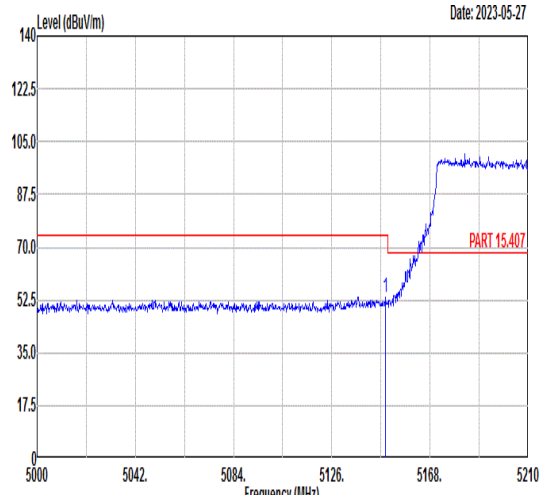
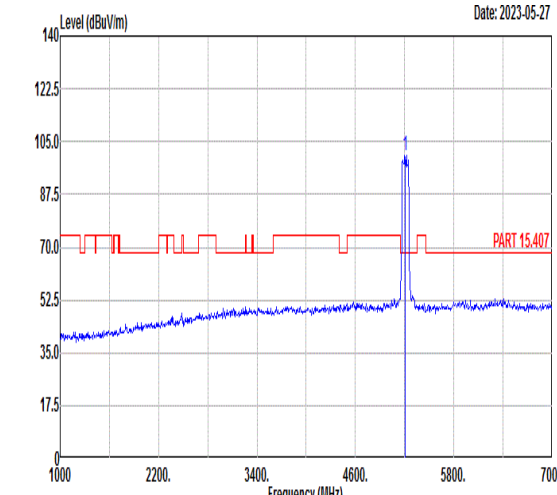
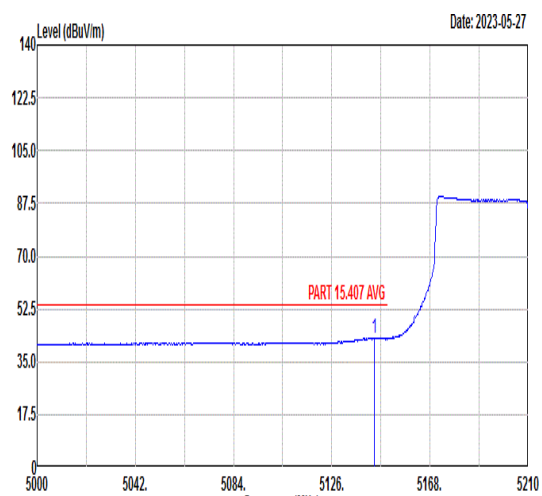
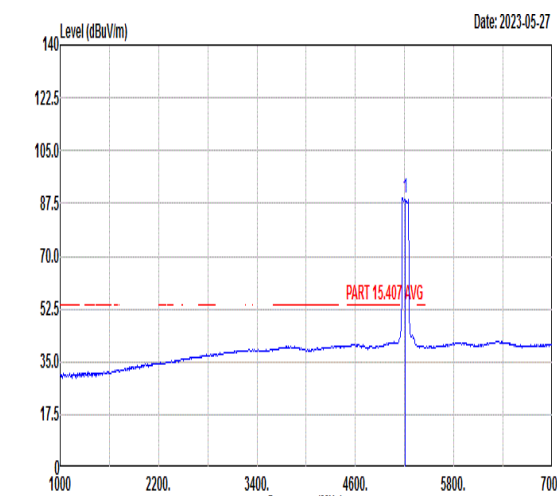


|       |  | 15   |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|-------|--|--|--------|--------|-------------|-------|--------|--------|------|--------|---------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|--|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|------|-------|-----|-----|---------|
| Mode  |  | Band Edge - L  |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
|       |  | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Pol.  | Horizontal   | Fundamental  |        |        |             |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Peak  |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.89</td> <td>53.53</td> <td>74.00</td> <td>-20.47</td> <td>43.91</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>254</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>     | Limit  | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5148.89 | 53.53 | 74.00 | -20.47 | 43.91 | 34.54 | 7.92 | 32.84 | 254 | 154 | PEAK    |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>100.63</td> <td>-----</td> <td>-----</td> <td>91.10</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>254</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5210.00 | 100.63 | ----- | ----- | 91.10 | 34.51 | 7.99 | 32.97 | 254 | 154 | PEAK    |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5148.89  | 53.53  | 74.00  | -20.47 | 43.91       | 34.54 | 7.92   | 32.84  | 254  | 154    | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5210.00  | 100.63   | -----  | -----  | 91.10       | 34.51 | 7.99   | 32.97  | 254  | 154    | PEAK    |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Avg   |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.27</td> <td>42.94</td> <td>54.00</td> <td>-11.06</td> <td>33.33</td> <td>34.54</td> <td>7.91</td> <td>32.84</td> <td>254</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit  | Margin | Read   | Ant         | Cable | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5144.27 | 42.94 | 54.00 | -11.06 | 33.33 | 34.54 | 7.91 | 32.84 | 254 | 154 | AVERAGE |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>89.52</td> <td>-----</td> <td>-----</td> <td>79.94</td> <td>34.53</td> <td>7.93</td> <td>32.88</td> <td>254</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor |  |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5210.00 | 89.52  | ----- | ----- | 79.94 | 34.53 | 7.93 | 32.88 | 254 | 154 | AVERAGE |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5144.27  | 42.94  | 54.00  | -11.06 | 33.33       | 34.54 | 7.91   | 32.84  | 254  | 154    | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Limit | Margin   | Read   | Ant    | Cable  | Preamp      | APos  | TPos   | Remark |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| Freq  | Level  | Line   | Level  | Factor | Loss Factor |       |        |        |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| MHz   | dBuV/m   | dBuV/m   | dBuV   | dB/m   | dB          | dB    | cm     | deg    |      |        |         |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |
| 1     | 5210.00  | 89.52  | -----  | -----  | 79.94       | 34.53 | 7.93   | 32.88  | 254  | 154    | AVERAGE |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |  |       |        |      |     |       |        |      |      |        |      |       |      |       |        |             |  |  |  |     |        |        |      |      |    |    |    |     |   |         |        |       |       |       |       |      |       |     |     |         |



| Mode  | 15   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|
|       | Band Edge - R  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
|       | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Pol.  | Horizontal   | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Peak  | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5395.00</td> <td>51.10</td> <td>74.00</td> <td>-22.90</td> <td>41.45</td> <td>34.44</td> <td>8.45</td> <td>33.24</td> <td>254</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor | cm | deg | 1 | 5395.00 | 51.10 | 74.00 | -22.90 | 41.45 | 34.44 | 8.45 | 33.24 | 254 | 154 | PEAK    | Blank |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5395.00  | 51.10       | 74.00  | -22.90 | 41.45  | 34.44  | 8.45   | 33.24  | 254  | 154    | PEAK    |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Avg   | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.25</td> <td>40.56</td> <td>54.00</td> <td>-13.44</td> <td>30.94</td> <td>34.46</td> <td>8.34</td> <td>33.18</td> <td>254</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor | cm | deg | 1 | 5356.25 | 40.56 | 54.00 | -13.44 | 30.94 | 34.46 | 8.34 | 33.18 | 254 | 154 | AVERAGE | Blank |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor | cm     | deg    |      |        |         |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |
| 1     | 5356.25  | 40.56       | 54.00  | -13.44 | 30.94  | 34.46  | 8.34   | 33.18  | 254  | 154    | AVERAGE |       |      |       |        |      |        |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |

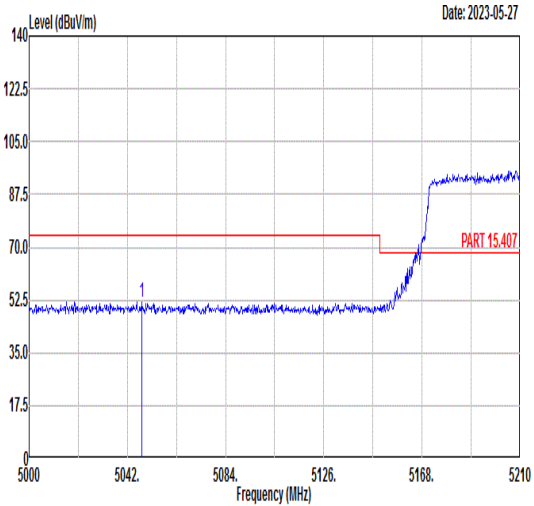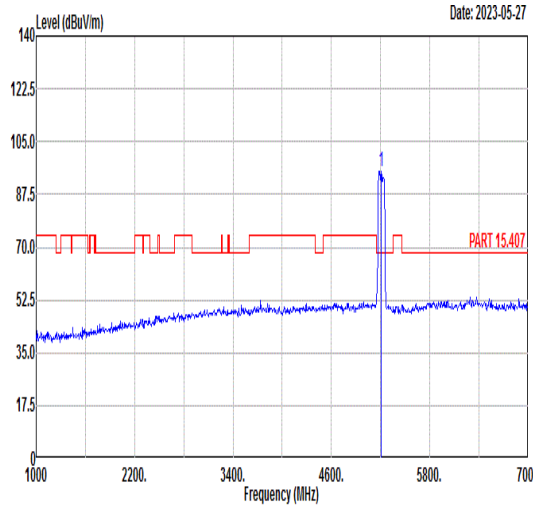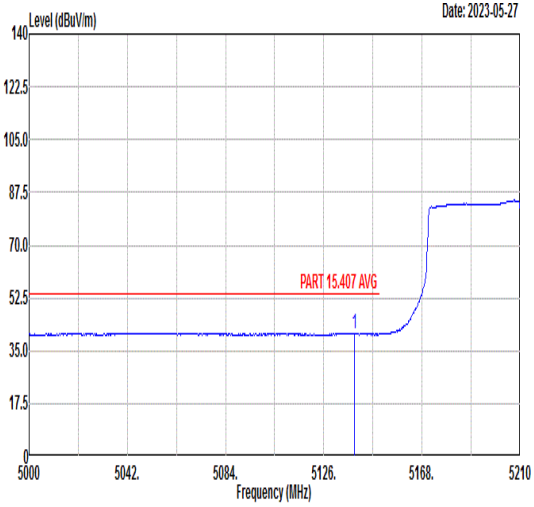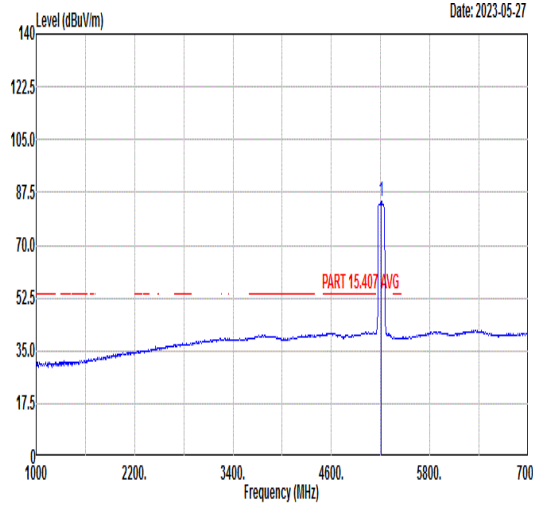

|                      |   | 15           |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
|----------------------|---|--------------|-------|--------|--------|--------|-------------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|---|----------------------------|-------|-------|------|-------|-----|-------------|---|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|--|--|----|-----|--|---|---------------|-------|-------|------|-------|-----|-------------|
| Mode                 | Band Edge - L   |              |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
|                      | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz  |              |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Pol.                 | Vertical  | Fundamental  |       |        |        |        |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Peak                 |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5048.30 51.98 74.00 -22.02</td> <td>42.23</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>386</td> <td>220 PEAK</td> </tr> </tbody> </table>     | Limit Margin | Read  | Ant    | Cable  | Preamp | APos        | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 | 5048.30 51.98 74.00 -22.02 | 42.23 | 34.58 | 7.85 | 32.68 | 386 | 220 PEAK    |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00 95.08</td> <td>85.54</td> <td>34.52</td> <td>7.96</td> <td>32.94</td> <td>386</td> <td>220 PEAK</td> </tr> </tbody> </table>     | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 | 5210.00 95.08 | 85.54 | 34.52 | 7.96 | 32.94 | 386 | 220 PEAK    |
|                      | Limit Margin  | Read         | Ant   | Cable  | Preamp | APos   | TPos        | Remark |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Freq Level Line (dB) | Level Factor  | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| 1                    | 5048.30 51.98 74.00 -22.02  | 42.23        | 34.58 | 7.85   | 32.68  | 386    | 220 PEAK    |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Limit Margin         | Read  | Ant          | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Freq Level Line (dB) | Level Factor  | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| 1                    | 5210.00 95.08   | 85.54        | 34.52 | 7.96   | 32.94  | 386    | 220 PEAK    |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Avg                  |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.23 40.91 54.00 -13.09</td> <td>31.29</td> <td>34.54</td> <td>7.91</td> <td>32.83</td> <td>386</td> <td>220 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read  | Ant    | Cable  | Preamp | APos        | TPos   | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 | 5139.23 40.91 54.00 -13.09 | 31.29 | 34.54 | 7.91 | 32.83 | 386 | 220 AVERAGE |  <p style="text-align: right;">Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00 84.63</td> <td>75.09</td> <td>34.52</td> <td>7.96</td> <td>32.94</td> <td>386</td> <td>220 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor |  |  | cm | deg |  | 1 | 5210.00 84.63 | 75.09 | 34.52 | 7.96 | 32.94 | 386 | 220 AVERAGE |
| Limit Margin         | Read  | Ant          | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Freq Level Line (dB) | Level Factor  | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| 1                    | 5139.23 40.91 54.00 -13.09  | 31.29        | 34.54 | 7.91   | 32.83  | 386    | 220 AVERAGE |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Limit Margin         | Read  | Ant          | Cable | Preamp | APos   | TPos   | Remark      |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| Freq Level Line (dB) | Level Factor  | Loss Factor  |       |        | cm     | deg    |             |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |
| 1                    | 5210.00 84.63   | 75.09        | 34.52 | 7.96   | 32.94  | 386    | 220 AVERAGE |        |        |                      |              |             |  |  |    |     |  |   |                            |       |       |      |       |     |             |   |              |      |     |       |        |      |      |        |                      |              |             |  |  |    |     |  |   |               |       |       |      |       |     |             |



|       |  | 15          |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|-------|--|-------------|--------|--------|--------|--------|--------|--------|------|--------|---------|-------|------|-------|--------|------|--------|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|------|-------|-----|-----|---------|-------|--|
| Mode  | Band Edge - R  |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
|       | U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz   |             |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Pol.  | Vertical   | Fundamental |        |        |        |        |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Peak  | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.25</td> <td>51.41</td> <td>74.00</td> <td>-22.59</td> <td>41.91</td> <td>34.42</td> <td>8.42</td> <td>33.34</td> <td>386</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>    | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5455.25 | 51.41 | 74.00 | -22.59 | 41.91 | 34.42 | 8.42 | 33.34 | 386 | 220 | PEAK    | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5455.25  | 51.41       | 74.00  | -22.59 | 41.91  | 34.42  | 8.42   | 33.34  | 386  | 220    | PEAK    |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Avg   | <p>Date: 2023-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.25</td> <td>39.48</td> <td>54.00</td> <td>-14.52</td> <td>29.86</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>386</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit       | Margin | Read   | Ant    | Cable  | Preamp | APos   | TPos | Remark | Freq    | Level | Line | Level | Factor | Loss | Factor |  |  | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5352.25 | 39.48 | 54.00 | -14.52 | 29.86 | 34.46 | 8.33 | 33.17 | 386 | 220 | AVERAGE | Blank |  |
| Limit | Margin   | Read        | Ant    | Cable  | Preamp | APos   | TPos   | Remark |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| Freq  | Level  | Line        | Level  | Factor | Loss   | Factor |        |        |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| MHz   | dBuV/m   | dBuV/m      | dBuV   | dB/m   | dB     | dB     | cm     | deg    |      |        |         |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |
| 1     | 5352.25  | 39.48       | 54.00  | -14.52 | 29.86  | 34.46  | 8.33   | 33.17  | 386  | 220    | AVERAGE |       |      |       |        |      |        |  |  |     |        |        |      |      |    |    |    |     |   |         |       |       |        |       |       |      |       |     |     |         |       |  |