







Test Mode :	802.11ax HE20	Test Channel :	12-RU52/40
-------------	---------------	----------------	------------

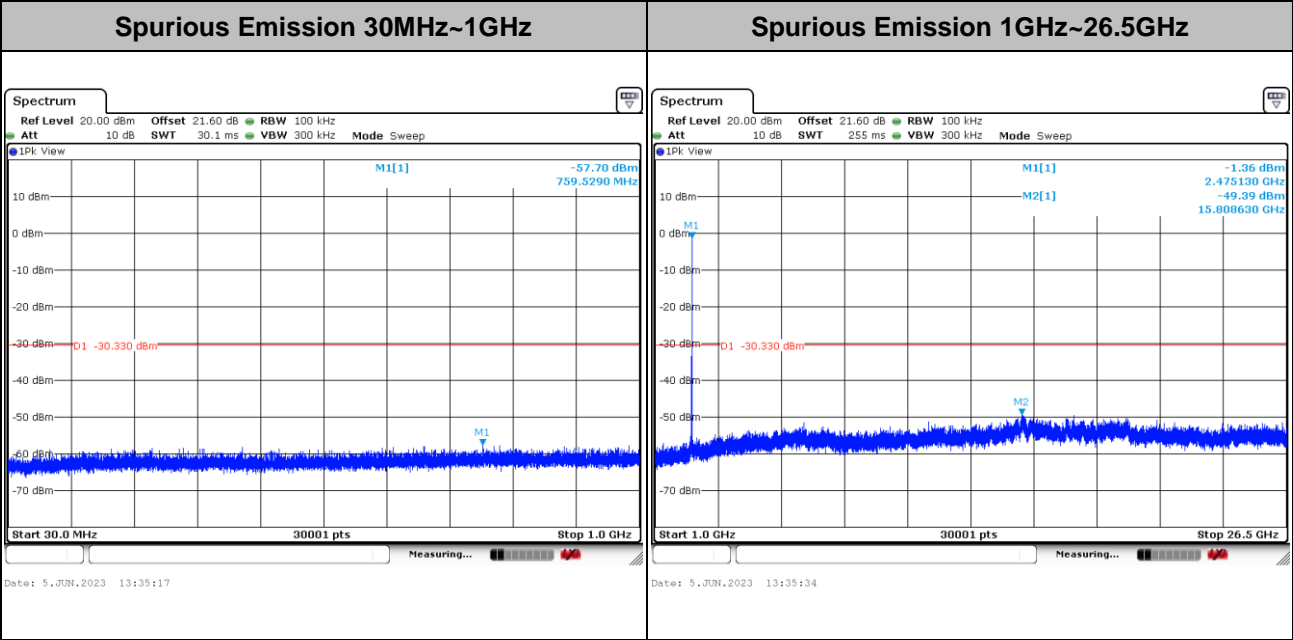


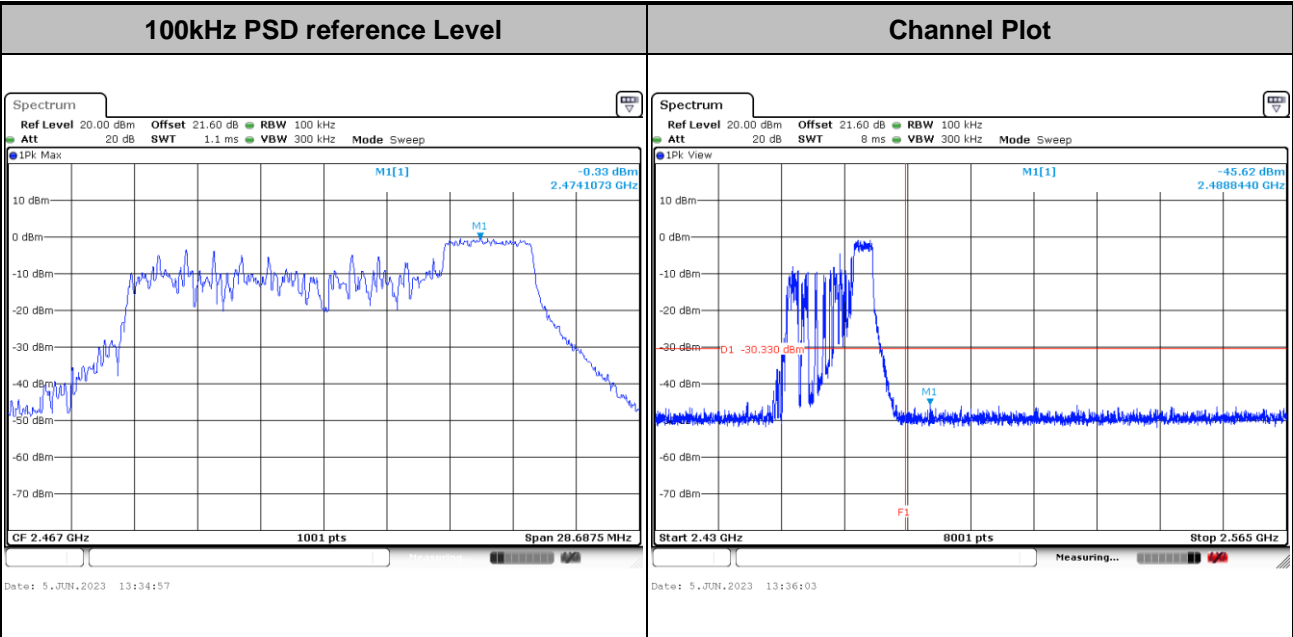


Test Mode :	802.11ax HE20	Test Channel :	12-RU106/54
-------------	---------------	----------------	-------------

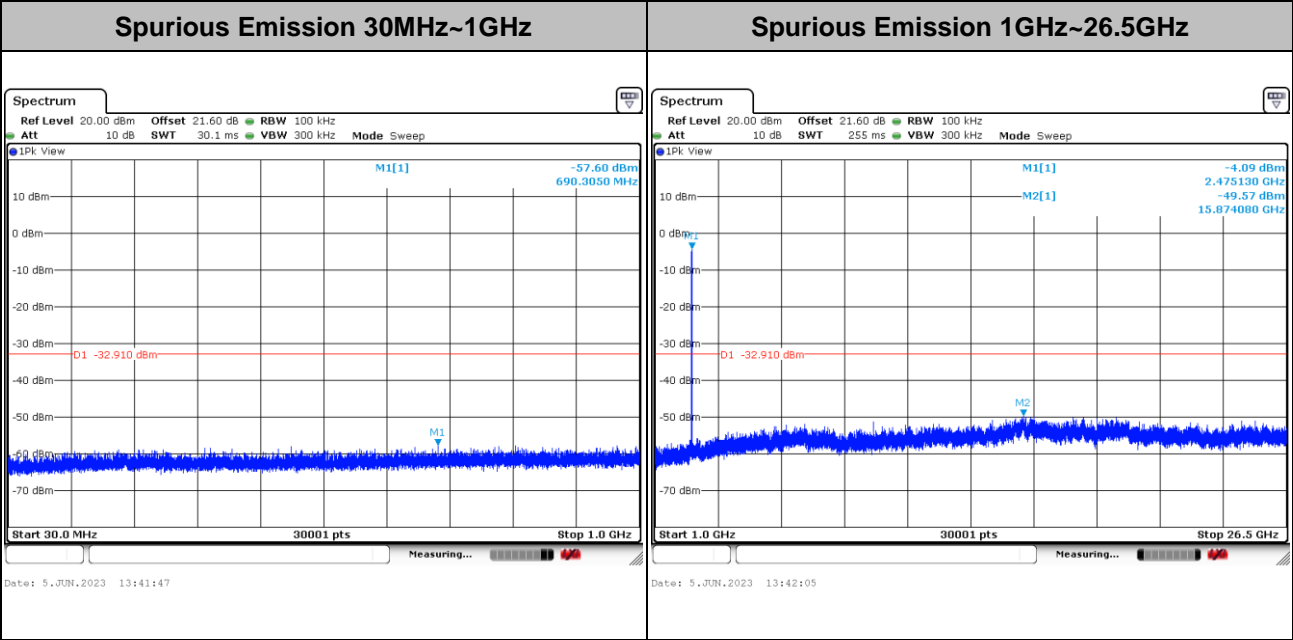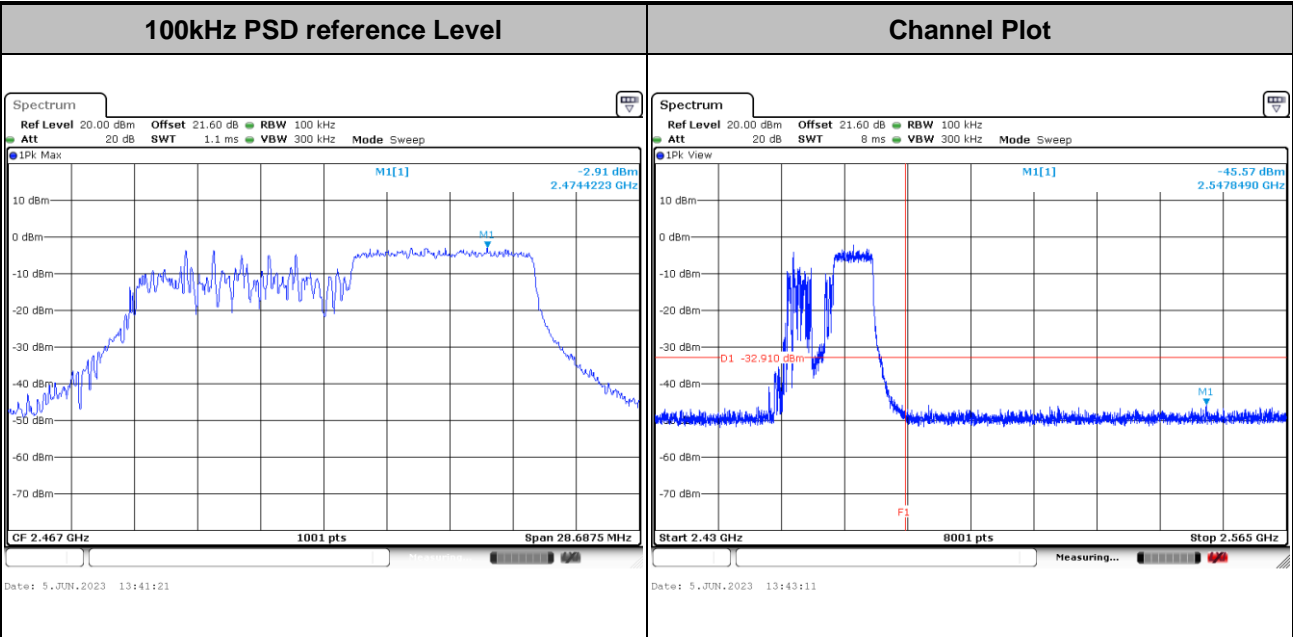





Test Mode : 802.11ax HE20 Test Channel : 13-RU26/8

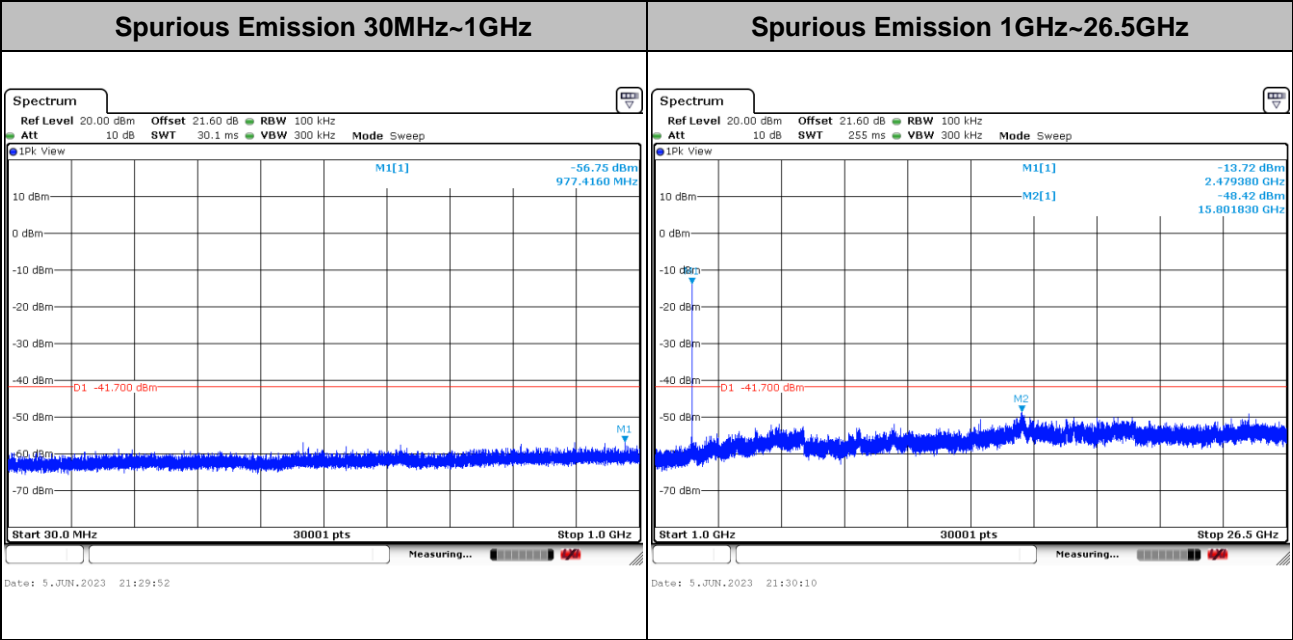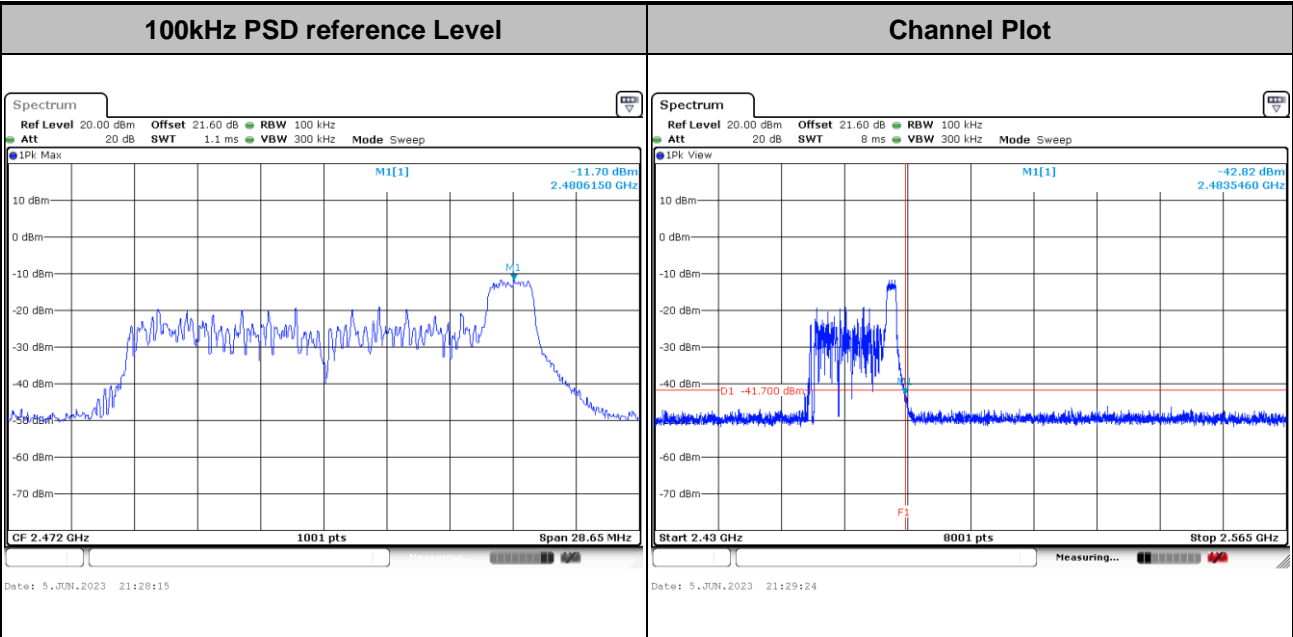





Test Mode : 802.11ax HE20 Test Channel : 13-RU52/40

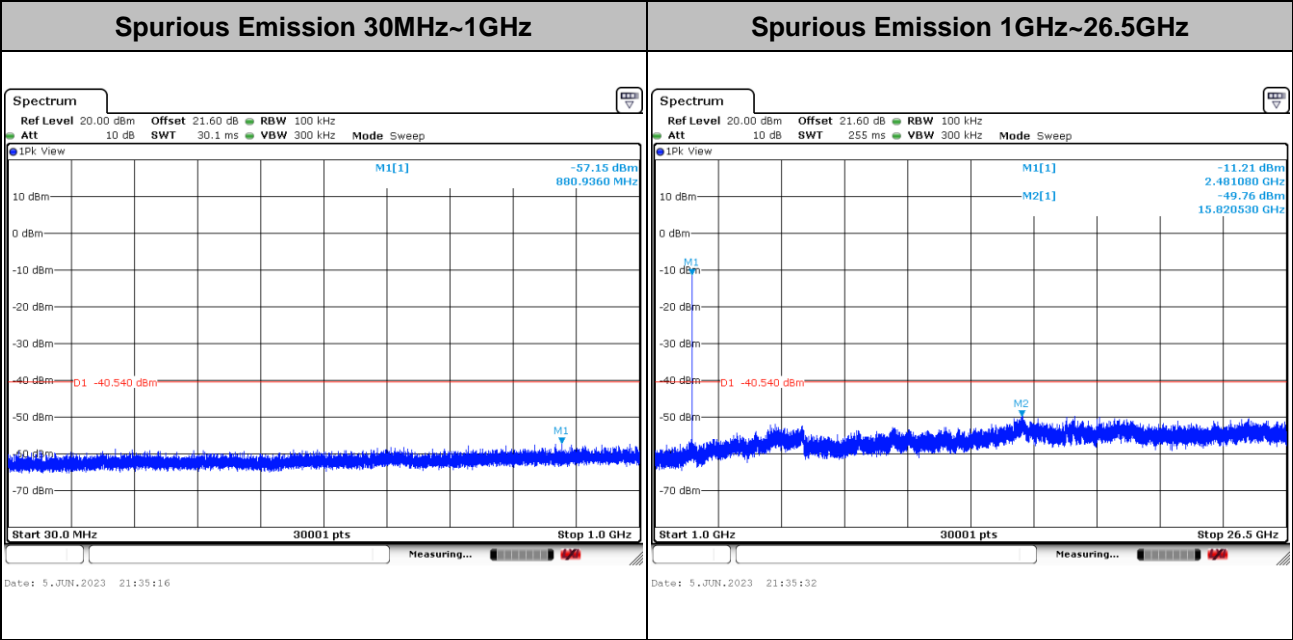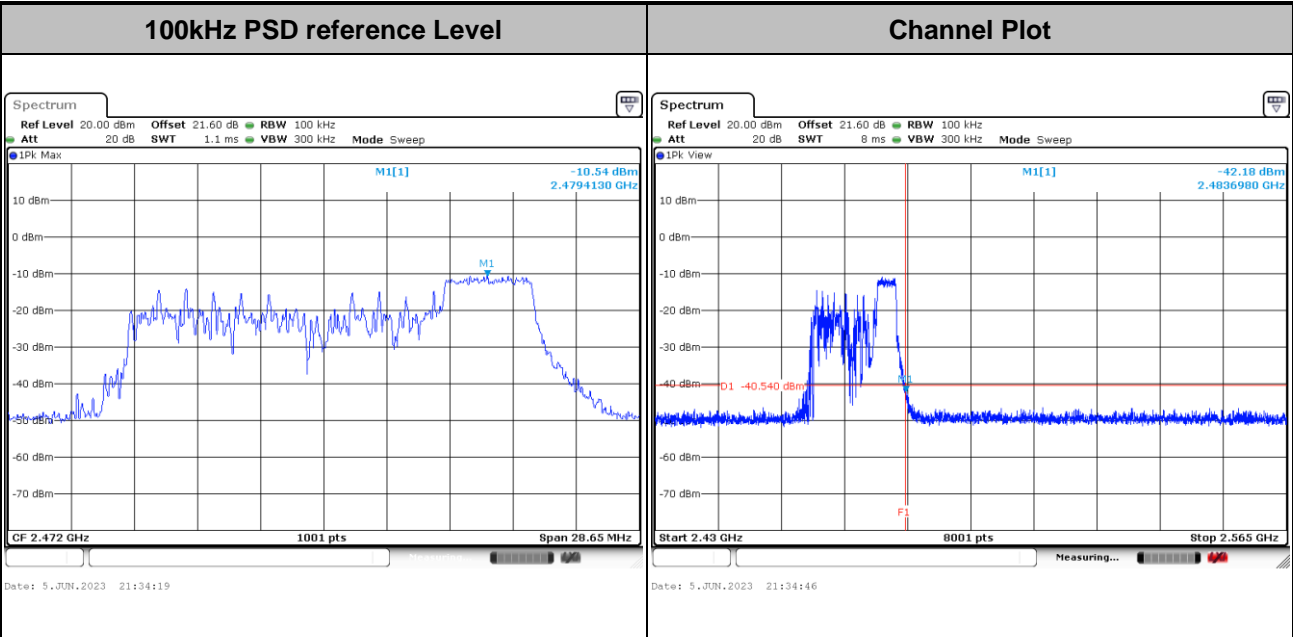



Test Mode :	802.11ax HE20	Test Channel :	13-RU106/54
-------------	---------------	----------------	-------------

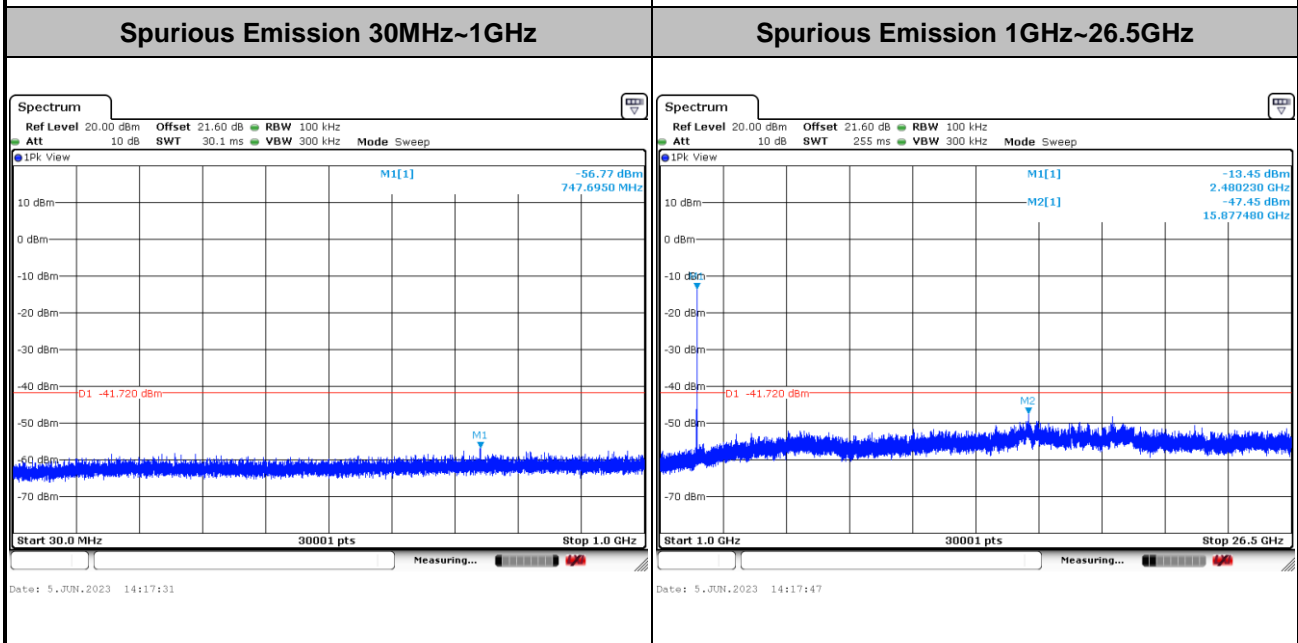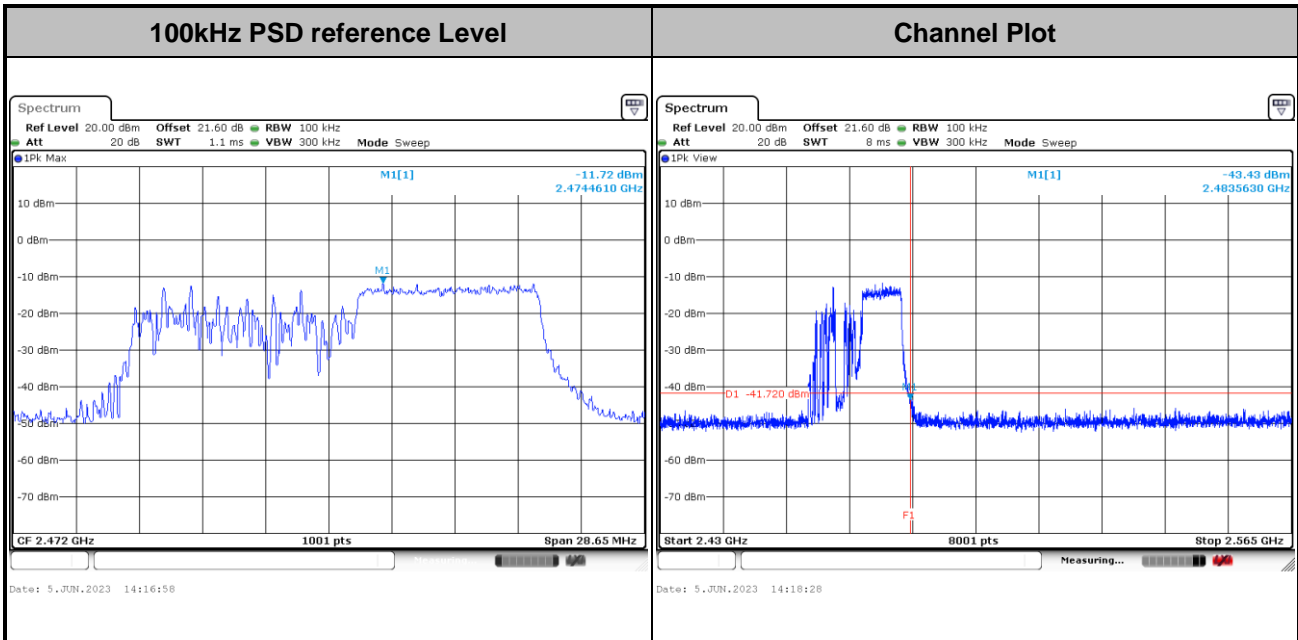



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

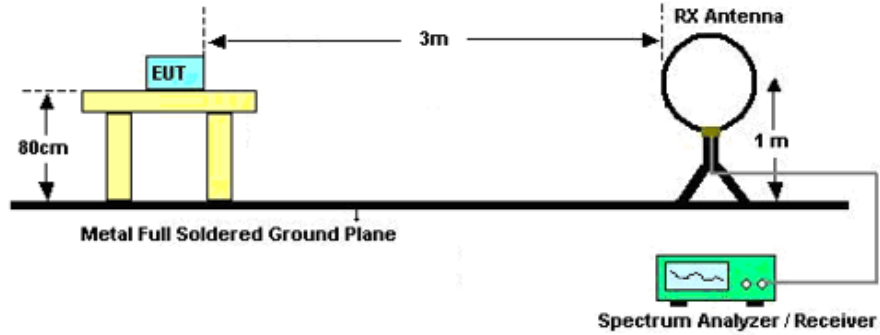

For radiated emissions from 30MHz to 1GHz

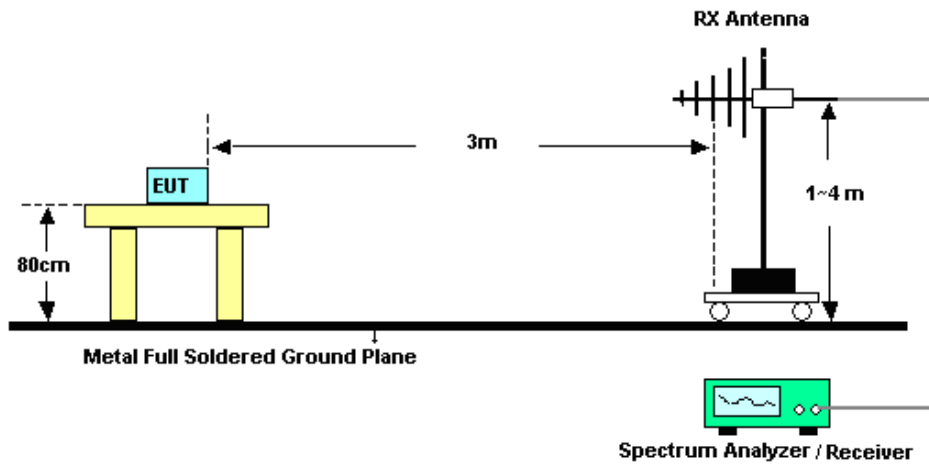

For radiated emissions above 1GHz

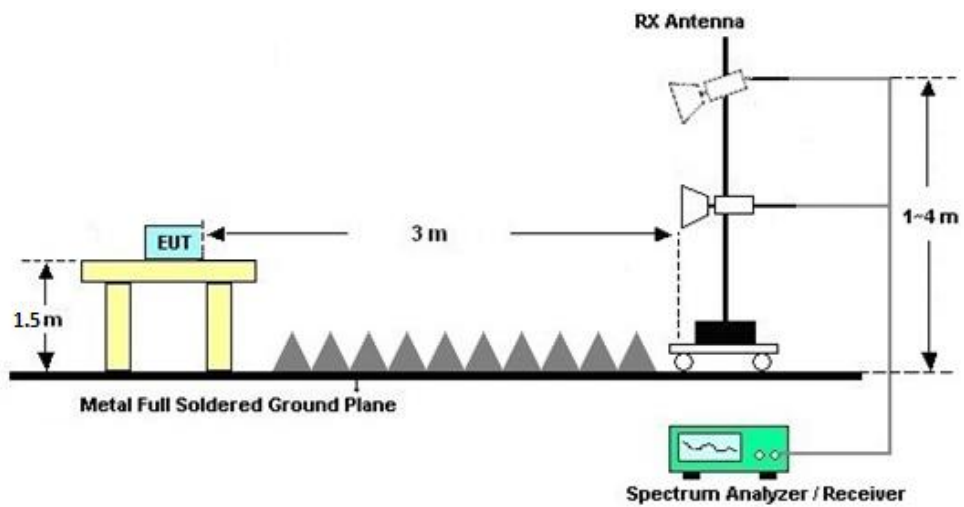





### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

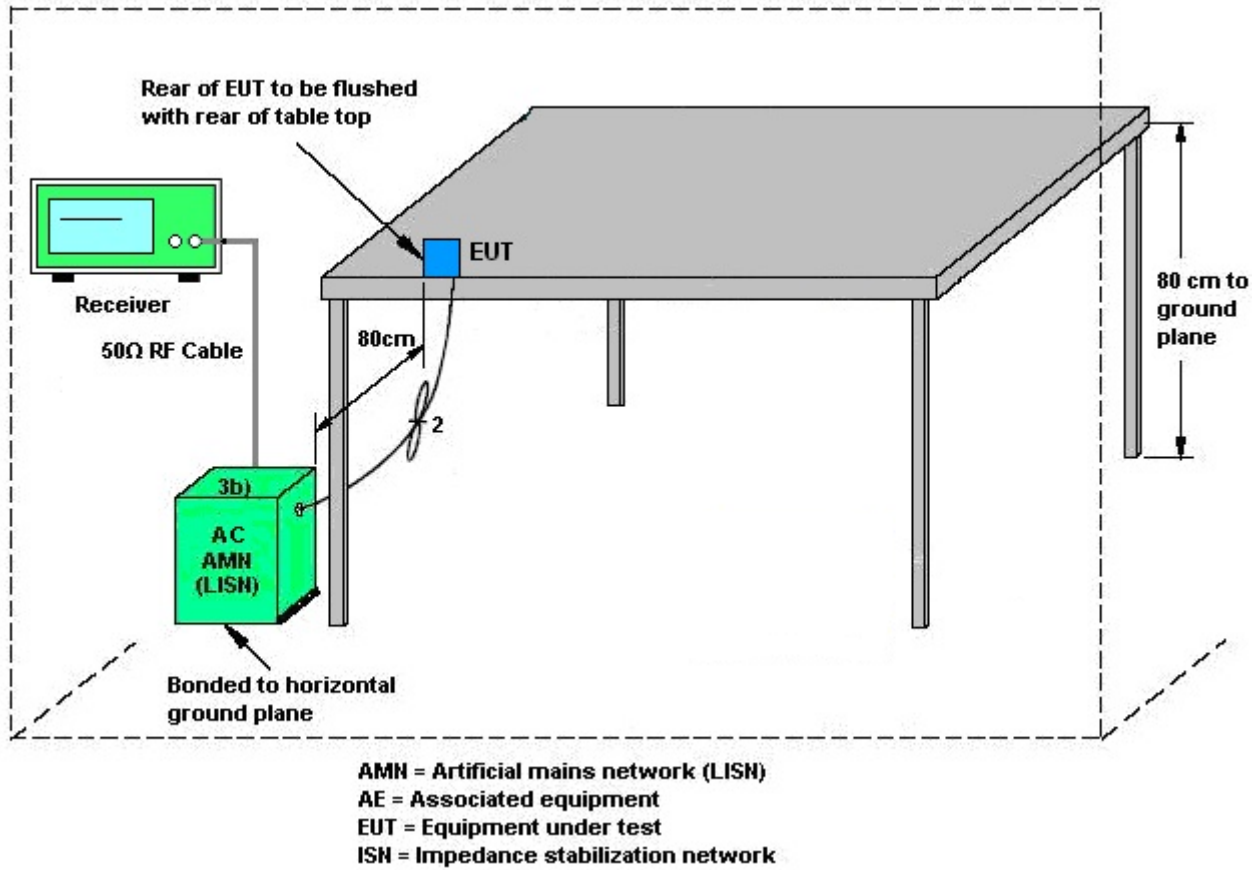

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	May 24, 2023~Jun. 07, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	May 24, 2023~Jun. 07, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	May 24, 2023~Jun. 07, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	May 15, 2023~Jun. 08, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	May 15, 2023~Jun. 08, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	May 15, 2023~Jun. 08, 2023	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 09, 2022	May 15, 2023~Jun. 08, 2023	Aug. 08, 2023	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	May 15, 2023~Jun. 08, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06, 2022	May 15, 2023~Jun. 08, 2023	Jul. 05, 2023	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08, 2023	May 15, 2023~Jun. 08, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	May 15, 2023~Jun. 08, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	May 15, 2023~Jun. 08, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2022	May 15, 2023~Jun. 08, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	1 N/A	Nov. 10, 2022	May 15, 2023~Jun. 08, 2023	Nov. 09, 2023	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 15, 2023~Jun. 08, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 15, 2023~Jun. 08, 2023	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Jun. 07, 2023	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Jun. 07, 2023	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Jun. 07, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Jun. 07, 2023	Jul. 06, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %
Conducted Power Spectral Density	±1.32 dB

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## **Appendix A. Conducted Test Results**

Test Engineer:	Chen Ran	Temperature:	24~26	°C
Test Date:	2023/5/24~2023/6/7	Relative Humidity:	50~53	%



**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant0	Ant0		
11b	1Mbps	1	1	2412	13.29	8.10	0.50	Pass
11b	1Mbps	1	6	2437	13.14	8.08	0.50	Pass
11b	1Mbps	1	11	2462	13.04	7.12	0.50	Pass
11b	1Mbps	1	12	2467	13.19	7.12	0.50	Pass
11b	1Mbps	1	13	2472	13.34	7.16	0.50	Pass
11g	6Mbps	1	1	2412	17.18	16.38	0.50	Pass
11g	6Mbps	1	6	2437	17.08	16.40	0.50	Pass
11g	6Mbps	1	10	2457	16.98	16.40	0.50	Pass
11g	6Mbps	1	11	2462	17.03	16.36	0.50	Pass
11g	6Mbps	1	12	2467	17.08	16.36	0.50	Pass
11g	6Mbps	1	13	2472	17.28	16.44	0.50	Pass

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
						Ant0	Ant0		
HE20	MCS0	1	1	2412	Full	19.23	19.15	0.50	Pass
HE20	MCS0	1	6	2437	Full	19.18	19.08	0.50	Pass
HE20	MCS0	1	10	2457	Full	19.18	19.13	0.50	Pass
HE20	MCS0	1	11	2462	Full	19.13	19.15	0.50	Pass
HE20	MCS0	1	12	2467	Full	19.13	19.13	0.50	Pass
HE20	MCS0	1	13	2472	Full	19.13	19.10	0.50	Pass
HE40	MCS0	1	3	2422	Full	38.46	38.08	0.50	Pass
HE40	MCS0	1	6	2437	Full	38.36	38.24	0.50	Pass
HE40	MCS0	1	9	2452	Full	38.46	38.20	0.50	Pass
HE40	MCS0	1	10	2457	Full	38.36	38.12	0.50	Pass
HE40	MCS0	1	11	2462	Full	38.46	38.20	0.50	Pass

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
					Ant0	Ant0	Ant0	Ant0	Ant0		
11b	1Mbps	1	1	2412	17.50	30.00	-0.40	17.10	36.00	Pass	Setting
											Ant 1
11b	1Mbps	1	6	2437	17.60	30.00	-0.40	17.20	36.00	Pass	17.00
11b	1Mbps	1	11	2462	17.60	30.00	-0.40	17.20	36.00	Pass	17.00
11b	1Mbps	1	12	2467	15.20	30.00	-0.40	14.80	36.00	Pass	17.00
11b	1Mbps	1	13	2472	12.30	30.00	-0.40	11.90	36.00	Pass	15.00
11g	6Mbps	1	1	2412	16.30	30.00	-0.40	15.90	36.00	Pass	12.00
11g	6Mbps	1	6	2437	17.30	30.00	-0.40	16.90	36.00	Pass	16.00
11g	6Mbps	1	10	2457	17.40	30.00	-0.40	17.00	36.00	Pass	17.00
11g	6Mbps	1	11	2462	13.70	30.00	-0.40	13.30	36.00	Pass	17.00
11g	6Mbps	1	12	2467	8.00	30.00	-0.40	7.60	36.00	Pass	13.50
11g	6Mbps	1	13	2472	-1.20	30.00	-0.40	-1.60	36.00	Pass	8.00
HT20	MCS0	1	1	2412	17.50	30.00	-0.40	17.10	36.00	Pass	Pass
HT20	MCS0	1	6	2437	17.40	30.00	-0.40	17.00	36.00	Pass	17.00
HT20	MCS0	1	10	2457	17.40	30.00	-0.40	17.00	36.00	Pass	17.50
HT20	MCS0	1	11	2462	9.50	30.00	-0.40	9.10	36.00	Pass	9.50
HT20	MCS0	1	12	2467	7.40	30.00	-0.40	7.00	36.00	Pass	7.50
HT20	MCS0	1	13	2472	-1.50	30.00	-0.40	-1.90	36.00	Pass	-2.50
HT40	MCS0	1	3	2422	10.60	30.00	-0.40	10.20	36.00	Pass	10.50
HT40	MCS0	1	6	2437	13.30	30.00	-0.40	12.90	36.00	Pass	13.00
HT40	MCS0	1	9	2452	10.60	30.00	-0.40	10.20	36.00	Pass	10.50
HT40	MCS0	1	10	2457	7.90	30.00	-0.40	7.50	36.00	Pass	8.00
HT40	MCS0	1	11	2462	0.60	30.00	-0.40	0.20	36.00	Pass	-1.00
VHT20	MCS0	1	1	2412	17.40	30.00	-0.40	17.00	36.00	Pass	17.00
VHT20	MCS0	1	6	2437	17.30	30.00	-0.40	16.90	36.00	Pass	17.00
VHT20	MCS0	1	10	2457	17.30	30.00	-0.40	16.90	36.00	Pass	17.50
VHT20	MCS0	1	11	2462	9.40	30.00	-0.40	9.00	36.00	Pass	9.50
VHT20	MCS0	1	12	2467	7.30	30.00	-0.40	6.90	36.00	Pass	7.50
VHT20	MCS0	1	13	2472	-1.60	30.00	-0.40	-2.00	36.00	Pass	-2.50
VHT40	MCS0	1	3	2422	10.50	30.00	-0.40	10.10	36.00	Pass	10.50
VHT40	MCS0	1	6	2437	13.20	30.00	-0.40	12.80	36.00	Pass	13.00
VHT40	MCS0	1	9	2452	10.50	30.00	-0.40	10.10	36.00	Pass	10.50
VHT40	MCS0	1	10	2457	7.90	30.00	-0.40	7.50	36.00	Pass	8.00
VHT40	MCS0	1	11	2462	0.50	30.00	-0.40	0.10	36.00	Pass	-1.00

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band Single Antenna											
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant0	Ant0	Ant0	Ant0	Ant0	
HE20	MCS0	1	1	2412	Full	17.60	30.00	-0.40	17.20	36.00	Pass
HE20	MCS0	1	1	2412	26/0	17.30	30.00	-0.40	16.90	36.00	Pass
HE20	MCS0	1	1	2412	52/37	17.20	30.00	-0.40	16.80	36.00	Pass
HE20	MCS0	1	1	2412	106/53	17.10	30.00	-0.40	16.70	36.00	Pass
HE20	MCS0	1	6	2437	Full	17.50	30.00	-0.40	17.10	36.00	Pass
HE20	MCS0	1	10	2457	Full	17.50	30.00	-0.40	17.10	36.00	Pass
HE20	MCS0	1	11	2462	Full	9.60	30.00	-0.40	9.20	36.00	Pass
HE20	MCS0	1	11	2462	26/8	9.40	30.00	-0.40	9.00	36.00	Pass
HE20	MCS0	1	11	2462	52/40	9.30	30.00	-0.40	8.90	36.00	Pass
HE20	MCS0	1	11	2462	106/54	9.40	30.00	-0.40	9.00	36.00	Pass
HE20	MCS0	1	12	2467	Full	7.60	30.00	-0.40	7.20	36.00	Pass
HE20	MCS0	1	12	2467	26/8	7.30	30.00	-0.40	6.90	36.00	Pass
HE20	MCS0	1	12	2467	52/40	7.30	30.00	-0.40	6.90	36.00	Pass
HE20	MCS0	1	12	2467	106/54	7.40	30.00	-0.40	7.00	36.00	Pass
HE20	MCS0	1	13	2472	Full	-1.40	30.00	-0.40	-1.80	36.00	Pass
HE20	MCS0	1	13	2472	26/8	-6.70	30.00	-0.40	-7.10	36.00	Pass
HE20	MCS0	1	13	2472	52/40	-2.70	30.00	-0.40	-3.10	36.00	Pass
HE20	MCS0	1	13	2472	106/54	-1.80	30.00	-0.40	-2.20	36.00	Pass
HE40	MCS0	1	3	2422	Full	10.70	30.00	-0.40	10.30	36.00	Pass
HE40	MCS0	1	6	2437	Full	13.40	30.00	-0.40	13.00	36.00	Pass
HE40	MCS0	1	9	2452	Full	10.70	30.00	-0.40	10.30	36.00	Pass
HE40	MCS0	1	10	2457	Full	8.00	30.00	-0.40	7.60	36.00	Pass
HE40	MCS0	1	11	2462	Full	0.70	30.00	-0.40	0.30	36.00	Pass

Setting
Ant 1
17.00
16.00
16.00
16.00
17.00
17.50
9.50
9.00
9.00
9.00
7.50
7.00
7.00
7.00
-2.50
-8.50
-4.50
-3.50
10.50
13.00
10.50
8.00
-1.00

**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant0	Ant0	Ant0	
11b	1Mbps	1	1	2412	-6.05	-0.40	8.00	Pass
11b	1Mbps	1	6	2437	-5.87	-0.40	8.00	Pass
11b	1Mbps	1	11	2462	-5.63	-0.40	8.00	Pass
11b	1Mbps	1	12	2467	-8.77	-0.40	8.00	Pass
11b	1Mbps	1	13	2472	-11.00	-0.40	8.00	Pass
11g	6Mbps	1	1	2412	-10.33	-0.40	8.00	Pass
11g	6Mbps	1	6	2437	-9.37	-0.40	8.00	Pass
11g	6Mbps	1	10	2457	-9.01	-0.40	8.00	Pass
11g	6Mbps	1	11	2462	-13.90	-0.40	8.00	Pass
11g	6Mbps	1	12	2467	-18.22	-0.40	8.00	Pass
11g	6Mbps	1	13	2472	-27.52	-0.40	8.00	Pass


**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
						Ant0	Ant0	Ant0	
HE20	MCS0	1	1	2412	Full	-9.48	-0.40	8.00	Pass
HE20	MCS0	1	1	2412	26/0	-0.98	-0.40	8.00	Pass
HE20	MCS0	1	1	2412	52/37	-3.15	-0.40	8.00	Pass
HE20	MCS0	1	1	2412	106/53	-5.85	-0.40	8.00	Pass
HE20	MCS0	1	6	2437	Full	-9.72	-0.40	8.00	Pass
HE20	MCS0	1	10	2457	Full	-9.01	-0.40	8.00	Pass
HE20	MCS0	1	11	2462	Full	-16.53	-0.40	8.00	Pass
HE20	MCS0	1	11	2462	26/8	-8.14	-0.40	8.00	Pass
HE20	MCS0	1	11	2462	52/40	-9.83	-0.40	8.00	Pass
HE20	MCS0	1	11	2462	106/54	-12.81	-0.40	8.00	Pass
HE20	MCS0	1	12	2467	Full	-17.63	-0.40	8.00	Pass
HE20	MCS0	1	12	2467	26/8	-10.29	-0.40	8.00	Pass
HE20	MCS0	1	12	2467	52/40	-11.79	-0.40	8.00	Pass
HE20	MCS0	1	12	2467	106/54	-15.16	-0.40	8.00	Pass
HE20	MCS0	1	13	2472	Full	-27.05	-0.40	8.00	Pass
HE20	MCS0	1	13	2472	26/8	-24.73	-0.40	8.00	Pass
HE20	MCS0	1	13	2472	52/40	-22.23	-0.40	8.00	Pass
HE20	MCS0	1	13	2472	106/54	-23.60	-0.40	8.00	Pass
HE40	MCS0	1	3	2422	Full	-18.83	-0.40	8.00	Pass
HE40	MCS0	1	6	2437	Full	-15.67	-0.40	8.00	Pass
HE40	MCS0	1	9	2452	Full	-18.74	-0.40	8.00	Pass
HE40	MCS0	1	10	2457	Full	-20.66	-0.40	8.00	Pass
HE40	MCS0	1	11	2462	Full	-28.24	-0.40	8.00	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

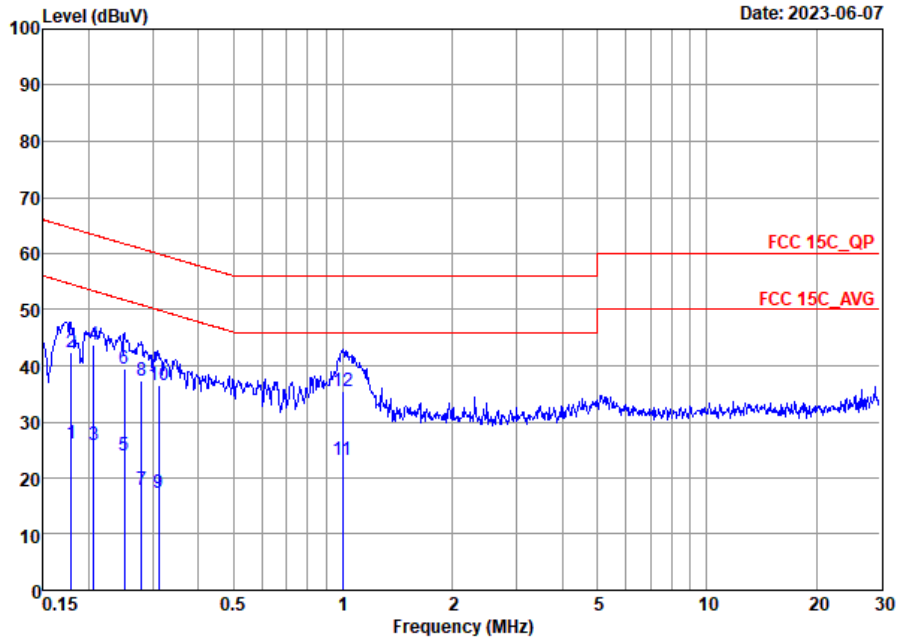


Site : C001-SZ  
 Condition: FCC 15C\_QP LISN\_20230420\_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	26.00	-28.55	54.55	5.40	10.46	10.14	Average
2	0.18	42.50	-22.05	64.55	21.90	10.46	10.14	QP
3	0.21	25.86	-27.50	53.36	5.30	10.41	10.15	Average
4 *	0.21	43.76	-19.60	63.36	23.20	10.41	10.15	QP
5	0.25	24.13	-27.60	51.73	3.60	10.38	10.15	Average
6	0.25	39.53	-22.20	61.73	19.00	10.38	10.15	QP
7	0.28	17.93	-32.92	50.85	-2.59	10.37	10.15	Average
8	0.28	37.23	-23.62	60.85	16.71	10.37	10.15	QP
9	0.31	17.21	-32.72	49.93	-3.29	10.35	10.15	Average
10	0.31	36.51	-23.42	59.93	16.01	10.35	10.15	QP
11	1.00	23.30	-22.70	46.00	2.90	10.24	10.16	Average
12	1.00	35.40	-20.60	56.00	15.00	10.24	10.16	QP



Test Engineer :	Lily	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

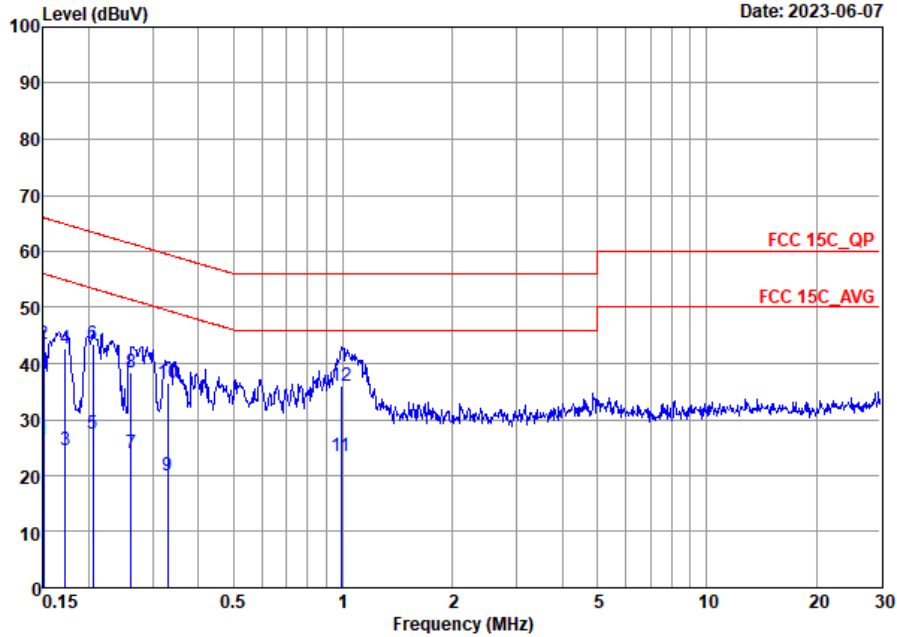

Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20230420\_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	26.39	-29.61	56.00	5.80	10.46	10.13	Average
2	0.15	43.49	-22.51	66.00	22.90	10.46	10.13	QP
3	0.17	24.56	-30.30	54.86	4.00	10.42	10.14	Average
4	0.17	42.66	-22.20	64.86	22.10	10.42	10.14	QP
5	0.21	27.50	-25.90	53.40	7.00	10.35	10.15	Average
6 *	0.21	43.60	-19.80	63.40	23.10	10.35	10.15	QP
7	0.26	23.87	-27.51	51.38	3.40	10.32	10.15	Average
8	0.26	38.47	-22.91	61.38	18.00	10.32	10.15	QP
9	0.33	20.13	-29.31	49.44	-0.30	10.27	10.16	Average
10	0.33	36.53	-22.91	59.44	16.10	10.27	10.16	QP
11	0.99	23.50	-22.50	46.00	3.10	10.24	10.16	Average
12	0.99	35.90	-20.10	56.00	15.50	10.24	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





### Appendix C. Radiated Spurious Emission (standalone mode)

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24~25°C

### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	802.11b	1	2412	1Mbps	-	-
Mode 11	2400-2483.5	802.11b	6	2437	1Mbps	-	-
Mode 12	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 13	2400-2483.5	802.11b	12	2467	1Mbps	-	-
Mode 14	2400-2483.5	802.11b	13	2472	1Mbps	-	-
Mode 15	2400-2483.5	802.11g	1	2412	6Mbps	-	-
Mode 16	2400-2483.5	802.11g	6	2437	6Mbps	-	-
Mode 17	2400-2483.5	802.11g	11	2462	6Mbps	-	-



### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 18	2400-2483.5	802.11g	12	2467	6Mbps	-	-
Mode 19	2400-2483.5	802.11g	13	2472	6Mbps	-	-
Mode 20	2400-2483.5	802.11 ax 20	1	2412	MCS0	Full	-
Mode 21	2400-2483.5	802.11 ax 20	1	2412	MCS0	RU26/0	-
Mode 22	2400-2483.5	802.11 ax 20	1	2412	MCS0	RU52/37	-
Mode 23	2400-2483.5	802.11 ax 20	1	2412	MCS0	RU106/53	-
Mode 24	2400-2483.5	802.11 ax 20	6	2437	MCS0	Full	-
Mode 25	2400-2483.5	802.11 ax 20	6	2462	MCS0	RU26/0	-
Mode 26	2400-2483.5	802.11 ax 20	6	2462	MCS0	RU52/37	-
Mode 27	2400-2483.5	802.11 ax 20	6	2462	MCS0	RU106/53	-



### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 28	2400-2483.5	802.11 ax 20	11	2462	MCS0	Full	-
Mode 29	2400-2483.5	802.11 ax 20	11	2462	MCS0	RU26/8	-
Mode 30	2400-2483.5	802.11 ax 20	11	2462	MCS0	RU52/40	-
Mode 31	2400-2483.5	802.11 ax 20	11	2462	MCS0	RU106/54	-
Mode 32	2400-2483.5	802.11 ax 20	12	2467	MCS0	Full	-
Mode 33	2400-2483.5	802.11 ax 20	12	2467	MCS0	RU26/8	-
Mode 34	2400-2483.5	802.11 ax 20	12	2467	MCS0	RU52/40	-
Mode 35	2400-2483.5	802.11 ax 20	12	2467	MCS0	RU106/54	-
Mode 36	2400-2483.5	802.11 ax 20	13	2472	MCS0	Full	-
Mode 37	2400-2483.5	802.11 ax 20	13	2472	MCS0	RU26/8	-



### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 38	2400-2483.5	802.11 ax 20	13	2472	MCS0	RU52/40	-
Mode 39	2400-2483.5	802.11 ax 20	13	2472	MCS0	RU106/54	-
Mode 40	2400-2483.5	802.11 ax 40	3	2422	MCS0	Full	-
Mode 41	2400-2483.5	802.11 ax 40	6	2437	MCS0	Full	-
Mode 42	2400-2483.5	802.11 ax 40	9	2452	MCS0	Full	-
Mode 43	2400-2483.5	802.11 ax 40	10	2457	MCS0	Full	-
Mode 44	2400-2483.5	802.11 ax 40	11	2462	MCS0	Full	-
Mode 47	-	802.11 ax 40	11	2462	-	-	LF



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
10	802.11b	1	2386.44	43.28	54.00	-10.72	H	AVERAGE	Pass	Band Edge
10	802.11b	1	4824.00	45.49	74.00	-28.51	V	Peak	Pass	Harmonic
11	802.11b	6	2484.82	41.99	54.00	-12.01	H	AVERAGE	Pass	Band Edge
11	802.11b	6	7311.00	45.22	74.00	-28.78	V	Peak	Pass	Harmonic
12	802.11b	11	2485.83	43.84	54.00	-10.16	H	AVERAGE	Pass	Band Edge
12	802.11b	11	4924.00	46.77	74.00	-27.23	H	Peak	Pass	Harmonic
13	802.11b	12	2484.42	51.64	54.00	-2.36	H	AVERAGE	Pass	Band Edge
13	802.11b	12	7401.00	45.94	74.00	-28.06	V	Peak	Pass	Harmonic
14	802.11b	13	2485.52	48.80	54.00	-5.20	H	AVERAGE	Pass	Band Edge
14	802.11b	13	7416.00	45.43	74.00	-28.57	H	Peak	Pass	Harmonic



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
15	802.11g	1	2389.95	51.72	54.00	-2.28	H	AVERAGE	Pass	Band Edge
15	802.11g	1	4824.00	44.80	74.00	-29.20	V	Peak	Pass	Harmonic
16	802.11g	6	2483.81	42.56	54.00	-11.44	H	AVERAGE	Pass	Band Edge
16	802.11g	6	7311.00	45.26	74.00	-28.74	H	Peak	Pass	Harmonic
17	802.11g	11	2483.51	51.91	54.00	-2.09	H	AVERAGE	Pass	Band Edge
17	802.11g	11	7386.00	45.87	74.00	-28.13	H	Peak	Pass	Harmonic
18	802.11g	12	2483.60	51.06	54.00	-2.94	H	AVERAGE	Pass	Band Edge
18	802.11g	12	7401.00	45.26	74.00	-28.74	H	Peak	Pass	Harmonic
19	802.11g	13	2483.51	51.55	54.00	-2.45	H	AVERAGE	Pass	Band Edge
19	802.11g	13	7416.00	45.65	74.00	-28.35	H	Peak	Pass	Harmonic



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
20	802.11 ax 20	1	2389.95	51.80	54.00	-2.20	H	AVERAGE	Pass	Band Edge
20	802.11 ax 20	1	4824.00	46.36	74.00	-27.64	H	Peak	Pass	Harmonic
21	802.11 ax 20	1	2389.95	48.34	54.00	-5.66	H	AVERAGE	Pass	Band Edge
21	802.11 ax 20	1	-	-	-	-	-	-	-	Harmonic
22	802.11 ax 20	1	2389.95	45.69	54.00	-8.31	H	AVERAGE	Pass	Band Edge
22	802.11 ax 20	1	-	-	-	-	-	-	-	Harmonic
23	802.11 ax 20	1	2389.95	45.14	54.00	-8.86	H	AVERAGE	Pass	Band Edge
23	802.11 ax 20	1	-	-	-	-	-	-	-	Harmonic
24	802.11 ax 20	6	2483.68	46.69	54.00	-7.31	H	AVERAGE	Pass	Band Edge
24	802.11 ax 20	6	7311.00	46.76	74.00	-27.24	H	Peak	Pass	Harmonic



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
25	802.11 ax 20	6	2389.38	41.34	54.00	-12.66	H	AVERAGE	Pass	Band Edge
25	802.11 ax 20	6	-	-	-	-	-	-	-	Harmonic
26	802.11 ax 20	6	2485.95	42.86	54.00	-11.14	H	AVERAGE	Pass	Band Edge
26	802.11 ax 20	6	-	-	-	-	-	-	-	Harmonic
27	802.11 ax 20	6	2486.01	42.53	54.00	-11.47	H	AVERAGE	Pass	Band Edge
27	802.11 ax 20	6	-	-	-	-	-	-	-	Harmonic
28	802.11 ax 20	11	2484.27	51.68	54.00	-2.32	H	AVERAGE	Pass	Band Edge
28	802.11 ax 20	11	7386.00	46.70	74.00	-27.30	H	Peak	Pass	Harmonic
29	802.11 ax 20	11	2484.23	41.97	54.00	-12.03	H	AVERAGE	Pass	Band Edge
29	802.11 ax 20	11	-	-	-	-	-	-	-	Harmonic





### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
30	802.11 ax 20	11	2484.65	41.77	54.00	-12.23	H	AVERAGE	Pass	Band Edge
30	802.11 ax 20	11	-	-	-	-	-	-	-	Harmonic
31	802.11 ax 20	11	2483.55	41.46	54.00	-12.54	H	AVERAGE	Pass	Band Edge
31	802.11 ax 20	11	-	-	-	-	-	-	-	Harmonic
32	802.11 ax 20	12	2483.81	50.14	54.00	-3.86	H	AVERAGE	Pass	Band Edge
32	802.11 ax 20	12	7401.00	46.42	74.00	-27.58	V	Peak	Pass	Harmonic
33	802.11 ax 20	12	2483.74	66.15	74.00	-7.85	H	PEAK	Pass	Band Edge
33	802.11 ax 20	12	-	-	-	-	-	-	-	Harmonic
34	802.11 ax 20	12	2483.66	65.64	74.00	-8.36	H	PEAK	Pass	Band Edge
	802.11 ax 20	12	-	-	-	-	-	-	-	Harmonic



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
35	802.11 ax 20	12	2483.51	48.07	54.00	-5.93	H	AVERAGE	Pass	Band Edge
	802.11 ax 20	12	-	-	-	-	-	-	-	Harmonic
36	802.11 ax 20	13	2483.51	51.58	54.00	-2.42	H	AVERAGE	Pass	Band Edge
	802.11 ax 20	13	4944.00	45.03	74.00	-28.97	V	Peak	Pass	Harmonic
37	802.11 ax 20	13	2483.51	71.63	74.00	-2.37	H	PEAK	Pass	Band Edge
	802.11 ax 20	13	-	-	-	-	-	-	-	Harmonic
38	802.11 ax 20	13	2483.51	70.96	74.00	-3.04	H	PEAK	Pass	Band Edge
	802.11 ax 20	13	-	-	-	-	-	-	-	Harmonic
39	802.11 ax 20	13	2483.51	71.01	74.00	-2.99	H	PEAK	Pass	Band Edge
	802.11 ax 20	13	-	-	-	-	-	-	-	Harmonic







### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
40	802.11 ax 40	3	2389.86	50.96	54.00	-3.04	H	AVERAGE	Pass	Band Edge
	802.11 ax 40	3	7266.00	44.95	74.00	-29.05	H	Peak	Pass	Harmonic
41	802.11 ax 40	6	2483.56	50.84	54.00	-3.16	H	AVERAGE	Pass	Band Edge
	802.11 ax 40	6	7311.00	45.41	74.00	-28.59	H	Peak	Pass	Harmonic
42	802.11 ax 40	9	2483.54	51.66	54.00	-2.34	H	AVERAGE	Pass	Band Edge
	802.11 ax 40	9	7356.00	44.75	74.00	-29.25	H	Peak	Pass	Harmonic
43	802.11 ax 40	10	2484.59	51.24	54.00	-2.76	H	AVERAGE	Pass	Band Edge
	802.11 ax 40	10	7371.00	44.66	74.00	-29.34	H	Peak	Pass	Harmonic
44	802.11 ax 40	11	2483.54	51.81	54.00	-2.19	H	AVERAGE	Pass	Band Edge
	802.11 ax 40	11	7386.00	46.21	74.00	-27.79	V	Peak	Pass	Harmonic
47	MCS0	11	517.91	30.64	46	-15.36	H	AVERAGE	Pass	LF



		<b>10</b>																																																								
<b>Mode</b>	<b>Band Edge</b>																																																									
	<b>2400-2483.5_802.11b_CH1_2412MHz</b>																																																									
<b>ANT</b>	<b>1</b>																																																									
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																								
<b>Peak</b>	<p style="text-align: right;">Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95 54.68 74.00 -19.32</td> <td>51.34</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>338</td> <td>66 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2389.95 54.68 74.00 -19.32	51.34	32.21	4.80	33.67	338	66 PEAK	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 107.03</td> <td>-----</td> <td>-----</td> <td>103.59</td> <td>32.27</td> <td>4.82</td> <td>33.65 338 66 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2412.00 107.03	-----	-----	103.59	32.27	4.82	33.65 338 66 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2389.95 54.68 74.00 -19.32	51.34	32.21	4.80	33.67	338	66 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2412.00 107.03	-----	-----	103.59	32.27	4.82	33.65 338 66 PEAK																																																				
<b>Avg</b>	<p style="text-align: right;">Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2386.44 43.28 54.00 -10.72</td> <td>39.96</td> <td>32.20</td> <td>4.79</td> <td>33.67</td> <td>338</td> <td>66 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2386.44 43.28 54.00 -10.72	39.96	32.20	4.79	33.67	338	66 AVERAGE	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 102.54</td> <td>-----</td> <td>-----</td> <td>99.10</td> <td>32.27</td> <td>4.82</td> <td>33.65 338 66 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2412.00 102.54	-----	-----	99.10	32.27	4.82	33.65 338 66 AVERAGE
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2386.44 43.28 54.00 -10.72	39.96	32.20	4.79	33.67	338	66 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2412.00 102.54	-----	-----	99.10	32.27	4.82	33.65 338 66 AVERAGE																																																				

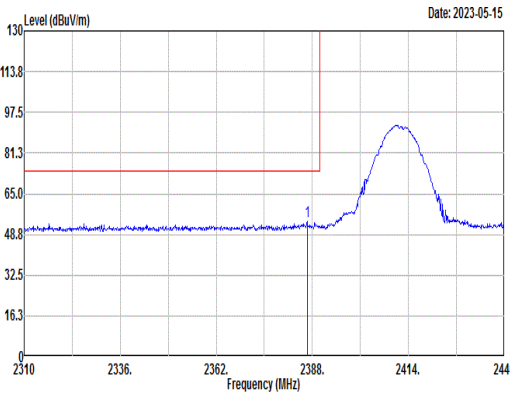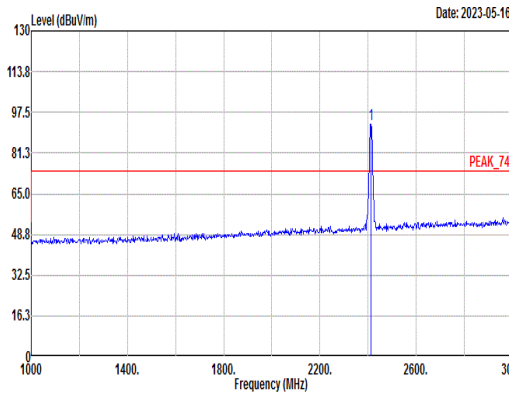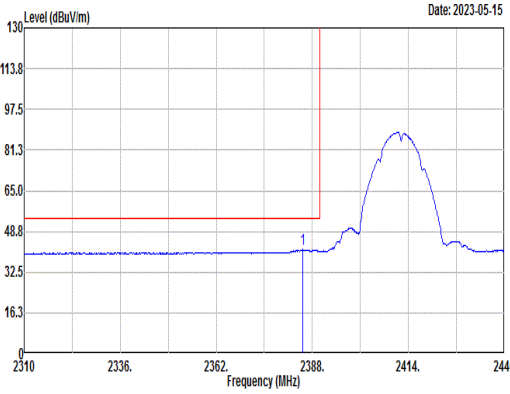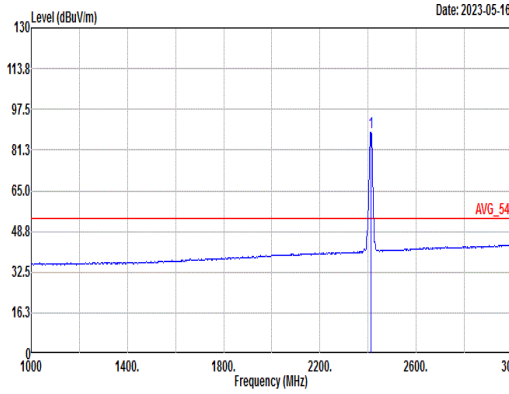

		<b>10</b>																																																																
<b>Mode</b>	<b>Band Edge</b>																																																																	
	<b>2400-2483.5_802.11b_CH1_2412MHz</b>																																																																	
<b>ANT</b>	<b>1</b>																																																																	
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																
<b>Peak</b>	 <p style="text-align: right;">Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2386.57 54.09 74.00 -19.91</td> <td>50.76</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>309</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2386.57 54.09 74.00 -19.91	50.76	32.21	4.79	33.67	309	0	PEAK	 <p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 92.81</td> <td>89.37</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>309</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 92.81	89.37	32.27	4.82	33.65	309	0	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2386.57 54.09 74.00 -19.91	50.76	32.21	4.79	33.67	309	0	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2412.00 92.81	89.37	32.27	4.82	33.65	309	0	PEAK																																																											
<b>Avg</b>	 <p style="text-align: right;">Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2385.40 41.60 54.00 -12.40</td> <td>38.28</td> <td>32.20</td> <td>4.79</td> <td>33.67</td> <td>309</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2385.40 41.60 54.00 -12.40	38.28	32.20	4.79	33.67	309	0	AVERAGE	 <p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 10 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 88.25</td> <td>84.81</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>309</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 88.25	84.81	32.27	4.82	33.65	309	0	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2385.40 41.60 54.00 -12.40	38.28	32.20	4.79	33.67	309	0	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2412.00 88.25	84.81	32.27	4.82	33.65	309	0	AVERAGE																																																											



Mode	10																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11b_CH1_2412MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 10 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 1M power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>44.19</td> <td>74.00</td> <td>-29.81</td> <td>54.68</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.19	74.00	-29.81	54.68	34.67	7.75	52.91	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 10 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 1M power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>45.49</td> <td>74.00</td> <td>-28.51</td> <td>55.98</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.49	74.00	-28.51	55.98	34.67	7.75	52.91	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4824.00	44.19	74.00	-29.81	54.68	34.67	7.75	52.91	---	---	Peak																																																																							
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4824.00	45.49	74.00	-28.51	55.98	34.67	7.75	52.91	---	---	Peak																																																																							



		<b>11</b>																																																																												
<b>Mode</b>	<b>Band Edge - L</b>																																																																													
	<b>2400-2483.5_802.11b_CH6_2437MHz</b>																																																																													
<b>ANT</b>	<b>1</b>																																																																													
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																												
<b>Peak</b>	<p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2371.72</td> <td>53.52</td> <td>74.00</td> <td>-20.48</td> <td>50.25</td> <td>32.17</td> <td>4.78</td> <td>33.68</td> <td>400</td> <td>79</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2371.72	53.52	74.00	-20.48	50.25	32.17	4.78	33.68	400	79	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>106.36</td> <td>-----</td> <td>-----</td> <td>102.82</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>400</td> <td>79</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2437.00	106.36	-----	-----	102.82	32.33	4.85	33.64	400	79	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																					
1	2371.72	53.52	74.00	-20.48	50.25	32.17	4.78	33.68	400	79	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																					
1	2437.00	106.36	-----	-----	102.82	32.33	4.85	33.64	400	79	PEAK																																																																			
<b>Avg</b>	<p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.71</td> <td>41.17</td> <td>54.00</td> <td>-12.83</td> <td>37.84</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>400</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2386.71	41.17	54.00	-12.83	37.84	32.21	4.79	33.67	400	79	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>100.86</td> <td>-----</td> <td>-----</td> <td>97.30</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>400</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2437.00	100.86	-----	-----	97.30	32.34	4.86	33.64	400	79	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																					
1	2386.71	41.17	54.00	-12.83	37.84	32.21	4.79	33.67	400	79	AVERAGE																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq Level	Line (dB)	Level Factor	Loss Factor	Loss Factor	cm	deg	Remark																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																					
1	2437.00	100.86	-----	-----	97.30	32.34	4.86	33.64	400	79	AVERAGE																																																																			



Mode	11																																										
	Band Edge - R																																										
	2400-2483.5_802.11b_CH6_2437MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	<p>Date: 2023-05-15</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH03-SZ            Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz            Mode : 11            Setting : 1M Power setting 17            Plane : Z with Accessories            : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.45</td> <td>53.74</td> <td>74.00</td> <td>-20.26</td> <td>49.97</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>79</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2485.45	53.74	74.00	-20.26	49.97	32.46	4.92	33.61	400	79	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																			
1	2485.45	53.74	74.00	-20.26	49.97	32.46	4.92	33.61	400	79	PEAK																																
Avg	<p>Date: 2023-05-15</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH03-SZ            Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL            : RBW:1000.000kHz VBW:0.010kHz            Mode : 11            Setting : 1M Power setting 17            Plane : Z with Accessories            : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.82</td> <td>41.99</td> <td>54.00</td> <td>-12.01</td> <td>38.22</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>79</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2484.82	41.99	54.00	-12.01	38.22	32.46	4.92	33.61	400	79	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																			
1	2484.82	41.99	54.00	-12.01	38.22	32.46	4.92	33.61	400	79	AVERAGE																																





<b>11</b>																																																																	
<b>Mode</b>	<b>Band Edge - L</b>																																																																
<b>2400-2483.5_802.11b_CH6_2437MHz</b>																																																																	
<b>ANT</b>	<b>1</b>																																																																
<b>Pol.</b>	<b>Vertical</b>																																																																
<b>Peak</b>	<b>Fundamental</b>																																																																
<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2370.71 53.31 74.00 -20.69</td> <td>50.05</td> <td>32.16</td> <td>4.78</td> <td>33.68</td> <td>200</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2370.71 53.31 74.00 -20.69	50.05	32.16	4.78	33.68	200	218	PEAK	<p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2437.00 100.44</td> <td>96.90</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>200</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2437.00 100.44	96.90	32.33	4.85	33.64	200	218	PEAK
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2370.71 53.31 74.00 -20.69	50.05	32.16	4.78	33.68	200	218	PEAK																																																										
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2437.00 100.44	96.90	32.33	4.85	33.64	200	218	PEAK																																																										
<b>Avg</b>	<b>Fundamental</b>																																																																
<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.88 40.66 54.00 -13.34</td> <td>37.32</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>200</td> <td>218</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.88 40.66 54.00 -13.34	37.32	32.21	4.80	33.67	200	218	AVERAGE	<p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 11 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2437.00 95.82</td> <td>92.28</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>200</td> <td>218</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2437.00 95.82	92.28	32.33	4.85	33.64	200	218	AVERAGE
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2389.88 40.66 54.00 -13.34	37.32	32.21	4.80	33.67	200	218	AVERAGE																																																										
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2437.00 95.82	92.28	32.33	4.85	33.64	200	218	AVERAGE																																																										



Mode	11																																										
	Band Edge - R																																										
	2400-2483.5_802.11b_CH6_2437MHz																																										
ANT	1																																										
Pol.	Vertical	Fundamental																																									
Peak	<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ          Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz          Mode : 11          Setting : 1M Power setting 17          Plane : Z with Accessories          : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.17</td> <td>52.99</td> <td>74.00</td> <td>-21.01</td> <td>49.15</td> <td>32.50</td> <td>4.94</td> <td>33.60</td> <td>200</td> <td>218</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2498.17	52.99	74.00	-21.01	49.15	32.50	4.94	33.60	200	218	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																			
1	2498.17	52.99	74.00	-21.01	49.15	32.50	4.94	33.60	200	218	PEAK																																
Avg	<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ          Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL          : RBW:1000.000kHz VBW:0.010kHz          Mode : 11          Setting : 1M Power setting 17          Plane : Z with Accessories          : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.33</td> <td>41.07</td> <td>54.00</td> <td>-12.93</td> <td>37.30</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>218</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2486.33	41.07	54.00	-12.93	37.30	32.46	4.92	33.61	200	218	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																			
1	2486.33	41.07	54.00	-12.93	37.30	32.46	4.92	33.61	200	218	AVERAGE																																







Mode	11																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11b_CH6_2437MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH03-SZ            Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL            Project : 272102-02            Mode : 11            SN : #9 2q37b1wf3j002z            Plane : Z with Accessories            setting : 1M power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>43.94</td> <td>74.00</td> <td>-30.06</td> <td>54.37</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>44.72</td> <td>74.00</td> <td>-29.28</td> <td>53.49</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	43.94	74.00	-30.06	54.37	34.65	7.77	52.85	---	---	Peak	2	7311.00	44.72	74.00	-29.28	53.49	36.41	8.93	54.11	---	---	Peak	<p>Site : 03CH03-SZ            Condition: PEAK_74 3m ANT3117_0057 VERTICAL            Project : 272102-02            Mode : 11            SN : #9 2q37b1wf3j002z            Plane : Z with Accessories            setting : 1M power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>43.70</td> <td>74.00</td> <td>-30.30</td> <td>54.13</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>45.22</td> <td>74.00</td> <td>-28.78</td> <td>53.99</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	43.70	74.00	-30.30	54.13	34.65	7.77	52.85	---	---	Peak	2	7311.00	45.22	74.00	-28.78	53.99	36.41	8.93	54.11	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4874.00	43.94	74.00	-30.06	54.37	34.65	7.77	52.85	---	---	Peak																																																																																															
2	7311.00	44.72	74.00	-29.28	53.49	36.41	8.93	54.11	---	---	Peak																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4874.00	43.70	74.00	-30.30	54.13	34.65	7.77	52.85	---	---	Peak																																																																																															
2	7311.00	45.22	74.00	-28.78	53.99	36.41	8.93	54.11	---	---	Peak																																																																																															



		12																																																																
Mode	Band Edge																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2486.21 55.13 74.00 -18.87</td> <td>51.36</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>51</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2486.21 55.13 74.00 -18.87	51.36	32.46	4.92	33.61	200	51	PEAK	<p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">PEAK_74</p> <p>Site : Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2462.00 107.37</td> <td>-----</td> <td>-----</td> <td>103.70</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>200 51 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2462.00 107.37	-----	-----	103.70	32.40	4.89	33.62	200 51 PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2486.21 55.13 74.00 -18.87	51.36	32.46	4.92	33.61	200	51	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2462.00 107.37	-----	-----	103.70	32.40	4.89	33.62	200 51 PEAK																																																											
Avg	<p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2485.83 43.84 54.00 -10.16</td> <td>40.07</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>51</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2485.83 43.84 54.00 -10.16	40.07	32.46	4.92	33.61	200	51	AVERAGE	<p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">AVG_54</p> <p>Site : Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2462.00 102.82</td> <td>-----</td> <td>-----</td> <td>99.15</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>200 51 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2462.00 102.82	-----	-----	99.15	32.40	4.89	33.62	200 51 AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2485.83 43.84 54.00 -10.16	40.07	32.46	4.92	33.61	200	51	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2462.00 102.82	-----	-----	99.15	32.40	4.89	33.62	200 51 AVERAGE																																																											

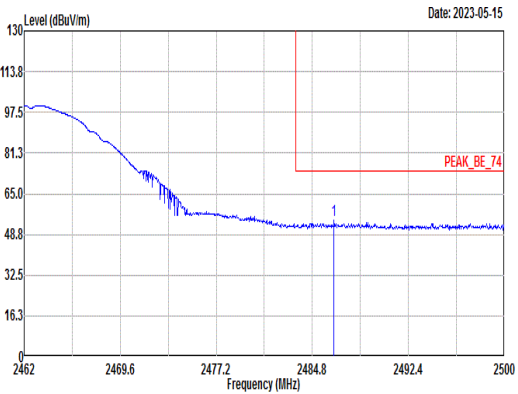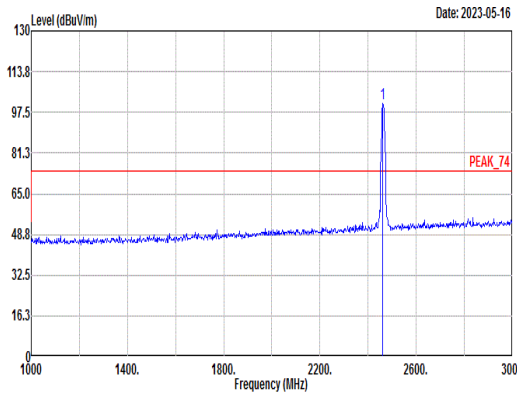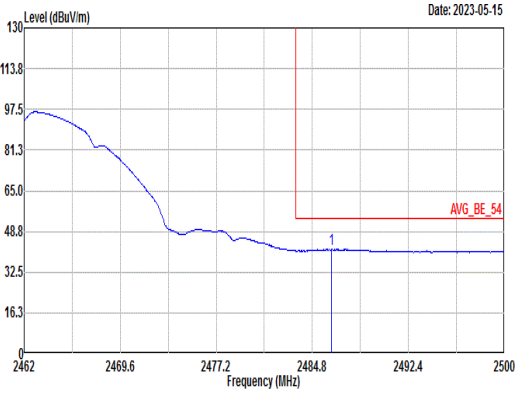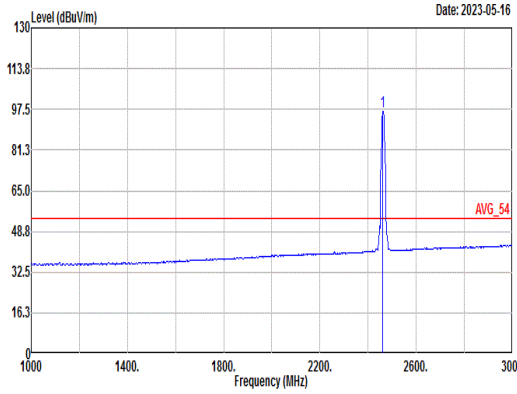

Mode	12																																																																															
	Band Edge																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Date: 2023-05-15</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.51</td> <td>54.38</td> <td>74.00</td> <td>-19.62</td> <td>50.61</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.51	54.38	74.00	-19.62	50.61	32.46	4.92	33.61	400	184	PEAK	 <p>Date: 2023-05-16</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.03</td> <td>-----</td> <td>-----</td> <td>97.36</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>400</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.03	-----	-----	97.36	32.40	4.89	33.62	400	184	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2486.51	54.38	74.00	-19.62	50.61	32.46	4.92	33.61	400	184	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	101.03	-----	-----	97.36	32.40	4.89	33.62	400	184	PEAK																																																																					
Avg	 <p>Date: 2023-05-15</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.32</td> <td>41.65</td> <td>54.00</td> <td>-12.35</td> <td>37.88</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.32	41.65	54.00	-12.35	37.88	32.46	4.92	33.61	400	184	AVERAGE	 <p>Date: 2023-05-16</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.63</td> <td>-----</td> <td>-----</td> <td>92.96</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>400</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.63	-----	-----	92.96	32.40	4.89	33.62	400	184	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2486.32	41.65	54.00	-12.35	37.88	32.46	4.92	33.61	400	184	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	96.63	-----	-----	92.96	32.40	4.89	33.62	400	184	AVERAGE																																																																					







Mode	12																																																																																															
	Harmonic																																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Site : 03CH03-SZ          Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL          Project : 272102-02          Mode : 12          SN : #9 2q37b1wf3j002z          Plane : Z with Accessories          setting : 1M power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>46.77</td> <td>74.00</td> <td>-27.23</td> <td>57.14</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>46.56</td> <td>74.00</td> <td>-27.44</td> <td>54.97</td> <td>36.49</td> <td>9.17</td> <td>54.07</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4924.00	46.77	74.00	-27.23	57.14	34.63	7.79	52.79	--- --- Peak	2	7386.00	46.56	74.00	-27.44	54.97	36.49	9.17	54.07	--- --- Peak	<p>Site : 03CH03-SZ          Condition: PEAK_74 3m ANT3117_0057 VERTICAL          Project : 272102-02          Mode : 12          SN : #9 2q37b1wf3j002z          Plane : Z with Accessories          setting : 1M power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>44.24</td> <td>74.00</td> <td>-29.76</td> <td>54.61</td> <td>34.63</td> <td>7.79</td> <td>52.79</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>46.32</td> <td>74.00</td> <td>-27.68</td> <td>54.73</td> <td>36.49</td> <td>9.17</td> <td>54.07</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4924.00	44.24	74.00	-29.76	54.61	34.63	7.79	52.79	--- --- Peak	2	7386.00	46.32	74.00	-27.68	54.73	36.49	9.17	54.07	--- --- Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																								
1	4924.00	46.77	74.00	-27.23	57.14	34.63	7.79	52.79	--- --- Peak																																																																																							
2	7386.00	46.56	74.00	-27.44	54.97	36.49	9.17	54.07	--- --- Peak																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																								
1	4924.00	44.24	74.00	-29.76	54.61	34.63	7.79	52.79	--- --- Peak																																																																																							
2	7386.00	46.32	74.00	-27.68	54.73	36.49	9.17	54.07	--- --- Peak																																																																																							



		13																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11b_CH12_2467MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Date: 2023-06-05</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>59.42</td> <td>74.00</td> <td>-14.58</td> <td>55.65</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>277</td> <td>57</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	59.42	74.00	-14.58	55.65	32.46	4.92	33.61	277	57	PEAK	<p>Date: 2023-06-05</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2467.00</td> <td>105.48</td> <td>-----</td> <td>-----</td> <td>101.79</td> <td>32.41</td> <td>4.90</td> <td>33.62</td> <td>277</td> <td>57</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2467.00	105.48	-----	-----	101.79	32.41	4.90	33.62	277	57	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2483.51	59.42	74.00	-14.58	55.65	32.46	4.92	33.61	277	57	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2467.00	105.48	-----	-----	101.79	32.41	4.90	33.62	277	57	PEAK																																																																					
Avg	<p>Date: 2023-06-05</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.42</td> <td>51.64</td> <td>54.00</td> <td>-2.36</td> <td>47.87</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>277</td> <td>57</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.42	51.64	54.00	-2.36	47.87	32.46	4.92	33.61	277	57	AVERAGE	<p>Date: 2023-06-05</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2467.00</td> <td>101.02</td> <td>-----</td> <td>-----</td> <td>97.32</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>277</td> <td>57</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2467.00	101.02	-----	-----	97.32	32.42	4.90	33.62	277	57	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2484.42	51.64	54.00	-2.36	47.87	32.46	4.92	33.61	277	57	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2467.00	101.02	-----	-----	97.32	32.42	4.90	33.62	277	57	AVERAGE																																																																					

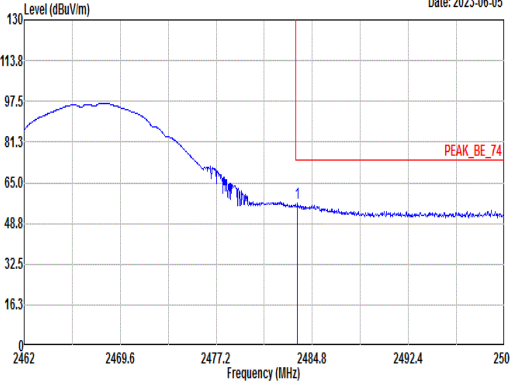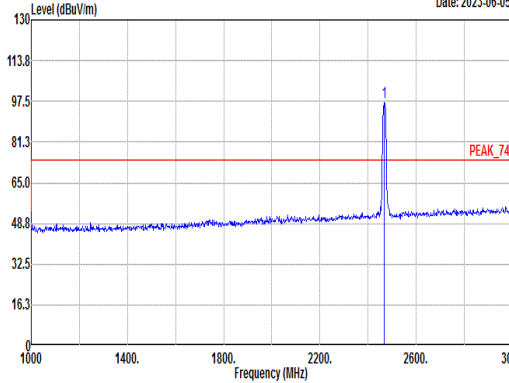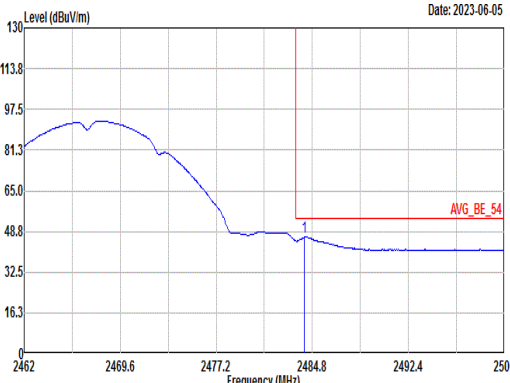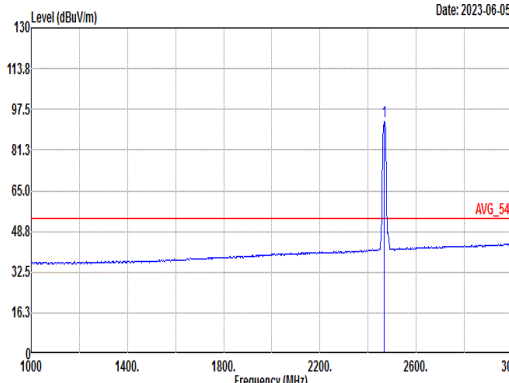

		13																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11b_CH12_2467MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p style="text-align: right;">Date: 2023-06-05</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>56.68</td> <td>74.00</td> <td>-17.32</td> <td>52.91</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>288</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.62	56.68	74.00	-17.32	52.91	32.46	4.92	33.61	288	130	PEAK	 <p style="text-align: right;">Date: 2023-06-05</p> <p style="text-align: right;">PEAK_74</p> <p>Site : Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2467.00</td> <td>97.13</td> <td>-----</td> <td>-----</td> <td>93.43</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>288</td> <td>130</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2467.00	97.13	-----	-----	93.43	32.42	4.90	33.62	288	130	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2483.62	56.68	74.00	-17.32	52.91	32.46	4.92	33.61	288	130	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2467.00	97.13	-----	-----	93.43	32.42	4.90	33.62	288	130	PEAK																																																																					
Avg	 <p style="text-align: right;">Date: 2023-06-05</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.19</td> <td>46.60</td> <td>54.00</td> <td>-7.40</td> <td>42.83</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>288</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2484.19	46.60	54.00	-7.40	42.83	32.46	4.92	33.61	288	130	AVERAGE	 <p style="text-align: right;">Date: 2023-06-05</p> <p style="text-align: right;">AVG_54</p> <p>Site : Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 12 Setting : 1M power setting 15 Plane : Z with Accessories : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2467.00</td> <td>92.75</td> <td>-----</td> <td>-----</td> <td>89.05</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>288</td> <td>130</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2467.00	92.75	-----	-----	89.05	32.42	4.90	33.62	288	130	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2484.19	46.60	54.00	-7.40	42.83	32.46	4.92	33.61	288	130	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2467.00	92.75	-----	-----	89.05	32.42	4.90	33.62	288	130	AVERAGE																																																																					





Mode	13																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11b_CH12_2467MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 13 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 1M power setting 15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4934.00</td> <td>45.39</td> <td>74.00</td> <td>-28.61</td> <td>55.74</td> <td>34.63</td> <td>7.79</td> <td>52.77</td> <td>0.00</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>7401.00</td> <td>45.55</td> <td>74.00</td> <td>-28.45</td> <td>53.91</td> <td>36.50</td> <td>9.20</td> <td>54.06</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	45.39	74.00	-28.61	55.74	34.63	7.79	52.77	0.00	--- --- Peak	2	7401.00	45.55	74.00	-28.45	53.91	36.50	9.20	54.06	0.00	--- --- Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 13 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 1M power setting 15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4934.00</td> <td>44.67</td> <td>74.00</td> <td>-29.33</td> <td>55.02</td> <td>34.63</td> <td>7.79</td> <td>52.77</td> <td>0.00</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>7401.00</td> <td>45.94</td> <td>74.00</td> <td>-28.06</td> <td>54.30</td> <td>36.50</td> <td>9.20</td> <td>54.06</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	4934.00	44.67	74.00	-29.33	55.02	34.63	7.79	52.77	0.00	--- --- Peak	2	7401.00	45.94	74.00	-28.06	54.30	36.50	9.20	54.06	0.00	--- --- Peak
	Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#																																																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4934.00	45.39	74.00	-28.61	55.74	34.63	7.79	52.77	0.00	--- --- Peak																																																																																																
2	7401.00	45.55	74.00	-28.45	53.91	36.50	9.20	54.06	0.00	--- --- Peak																																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#																																																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4934.00	44.67	74.00	-29.33	55.02	34.63	7.79	52.77	0.00	--- --- Peak																																																																																																
2	7401.00	45.94	74.00	-28.06	54.30	36.50	9.20	54.06	0.00	--- --- Peak																																																																																																



		14																																																								
Mode	Band Edge																																																									
	2400-2483.5_802.11b_CH13_2472MHz																																																									
ANT	1																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.51 63.93 74.00 -10.07</td> <td>60.16</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>57 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.51 63.93 74.00 -10.07	60.16	32.46	4.92	33.61	200	57 PEAK	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2472.00 100.00 -----</td> <td>96.29</td> <td>32.43</td> <td>4.90</td> <td>33.62</td> <td>200</td> <td>57 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line	Level Factor	Level Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2472.00 100.00 -----	96.29	32.43	4.90	33.62	200	57 PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2483.51 63.93 74.00 -10.07	60.16	32.46	4.92	33.61	200	57 PEAK																																																				
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line	Level Factor	Level Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2472.00 100.00 -----	96.29	32.43	4.90	33.62	200	57 PEAK																																																				
Avg	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2485.52 48.80 54.00 -5.20</td> <td>45.03</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>57 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2485.52 48.80 54.00 -5.20	45.03	32.46	4.92	33.61	200	57 AVERAGE	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2472.00 95.54 -----</td> <td>91.82</td> <td>32.43</td> <td>4.91</td> <td>33.62</td> <td>200</td> <td>57 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line	Level Factor	Level Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2472.00 95.54 -----	91.82	32.43	4.91	33.62	200	57 AVERAGE
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line Margin	Level Factor	Level Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2485.52 48.80 54.00 -5.20	45.03	32.46	4.92	33.61	200	57 AVERAGE																																																				
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line	Level Factor	Level Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2472.00 95.54 -----	91.82	32.43	4.91	33.62	200	57 AVERAGE																																																				



		14																																																								
Mode	Band Edge																																																									
	2400-2483.5_802.11b_CH13_2472MHz																																																									
ANT	1																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.70 61.91 74.00 -12.09</td> <td>58.14</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>151 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.70 61.91 74.00 -12.09	58.14	32.46	4.92	33.61	400	151 PEAK	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2472.00 98.08</td> <td>94.37</td> <td>32.43</td> <td>4.90</td> <td>33.62</td> <td>400</td> <td>151 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq Level Line	Level	Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2472.00 98.08	94.37	32.43	4.90	33.62	400	151 PEAK
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																			
Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2483.70 61.91 74.00 -12.09	58.14	32.46	4.92	33.61	400	151 PEAK																																																				
Limit	Read	Ant	Cable	APos	TPos	Remark																																																				
Freq Level Line	Level	Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2472.00 98.08	94.37	32.43	4.90	33.62	400	151 PEAK																																																				
Avg	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2484.66 46.45 54.00 -7.55</td> <td>42.68</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>151 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2484.66 46.45 54.00 -7.55	42.68	32.46	4.92	33.61	400	151 AVERAGE	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 1M Power setting 12 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2472.00 93.58</td> <td>89.87</td> <td>32.43</td> <td>4.90</td> <td>33.62</td> <td>400</td> <td>151 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq Level Line	Level	Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2472.00 93.58	89.87	32.43	4.90	33.62	400	151 AVERAGE
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																			
Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2484.66 46.45 54.00 -7.55	42.68	32.46	4.92	33.61	400	151 AVERAGE																																																				
Limit	Read	Ant	Cable	APos	TPos	Remark																																																				
Freq Level Line	Level	Factor	Loss Factor	dB	cm	deg																																																				
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2472.00 93.58	89.87	32.43	4.90	33.62	400	151 AVERAGE																																																				







Mode	14																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11b_CH13_2472MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 14 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 1M power setting 12</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4944.00 43.99 74.00 -30.01</td> <td>54.33</td> <td>34.62</td> <td>7.80</td> <td>52.76</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 7416.00 45.43 74.00 -28.57</td> <td>53.77</td> <td>36.52</td> <td>9.19</td> <td>54.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#				MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg			1 4944.00 43.99 74.00 -30.01	54.33	34.62	7.80	52.76	0.00	---	---	Peak	2 7416.00 45.43 74.00 -28.57	53.77	36.52	9.19	54.05	0.00	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 14 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 1M power setting 12</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4944.00 44.83 74.00 -29.17</td> <td>55.17</td> <td>34.62</td> <td>7.80</td> <td>52.76</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 7416.00 45.13 74.00 -28.87</td> <td>53.47</td> <td>36.52</td> <td>9.19</td> <td>54.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#				MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg			1 4944.00 44.83 74.00 -29.17	55.17	34.62	7.80	52.76	0.00	---	---	Peak	2 7416.00 45.13 74.00 -28.87	53.47	36.52	9.19	54.05	0.00	---	---	Peak
	Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																			
Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#																																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 4944.00 43.99 74.00 -30.01	54.33	34.62	7.80	52.76	0.00	---	---	Peak																																																																																				
2 7416.00 45.43 74.00 -28.57	53.77	36.52	9.19	54.05	0.00	---	---	Peak																																																																																				
Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																				
Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#																																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 4944.00 44.83 74.00 -29.17	55.17	34.62	7.80	52.76	0.00	---	---	Peak																																																																																				
2 7416.00 45.13 74.00 -28.87	53.47	36.52	9.19	54.05	0.00	---	---	Peak																																																																																				



		15																																																																
Mode	Band Edge																																																																	
	2400-2483.5_802.11g_CH1_2412MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.17 66.88 74.00 -7.12</td> <td>63.55</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>336</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.17 66.88 74.00 -7.12	63.55	32.21	4.79	33.67	336	65	PEAK	<p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 106.34</td> <td>102.93</td> <td>32.26</td> <td>4.81</td> <td>33.66</td> <td>336</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 106.34	102.93	32.26	4.81	33.66	336	65	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2389.17 66.88 74.00 -7.12	63.55	32.21	4.79	33.67	336	65	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2412.00 106.34	102.93	32.26	4.81	33.66	336	65	PEAK																																																											
Avg	<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95 51.72 54.00 -2.28</td> <td>48.38</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>336</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.95 51.72 54.00 -2.28	48.38	32.21	4.80	33.67	336	65	AVERAGE	<p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 97.17</td> <td>93.77</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>336</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 97.17	93.77	32.25	4.81	33.66	336	65	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2389.95 51.72 54.00 -2.28	48.38	32.21	4.80	33.67	336	65	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2412.00 97.17	93.77	32.25	4.81	33.66	336	65	AVERAGE																																																											

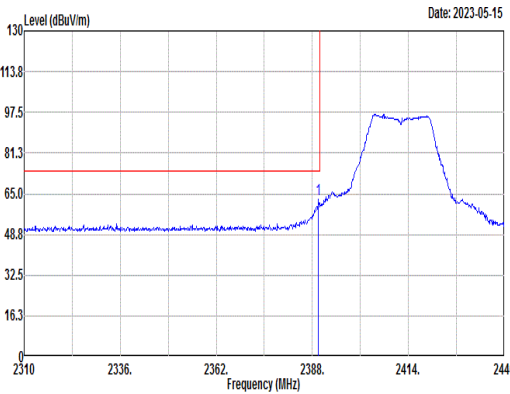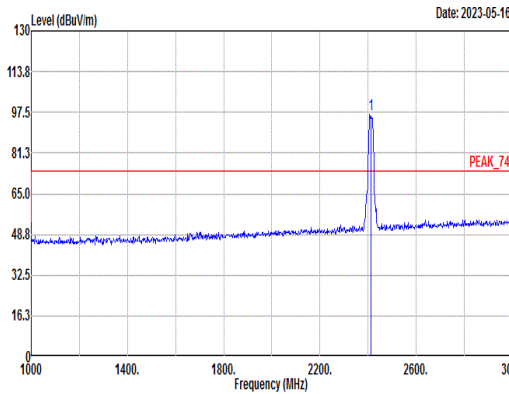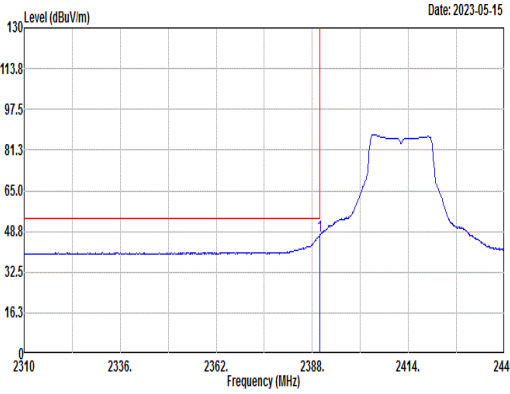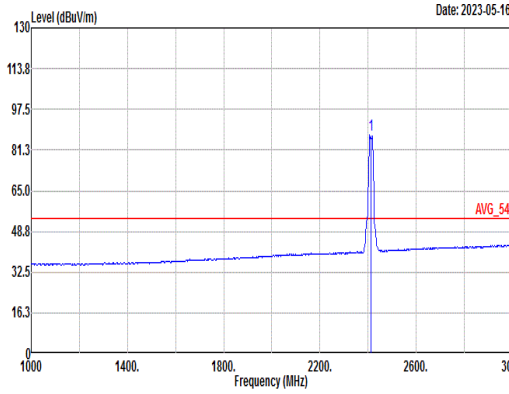

<b>15</b>																																								
<b>Mode</b>	<b>Band Edge</b>																																							
<b>2400-2483.5_802.11g_CH1_2412MHz</b>																																								
<b>ANT</b>	<b>1</b>																																							
<b>Pol.</b>	<b>Vertical</b>																																							
<b>Peak</b>	 <p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>62.92</td> <td>74.00</td> <td>-11.08</td> <td>59.58</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>308</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.69	62.92	74.00	-11.08	59.58	32.21	4.80	33.67	308	0	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2389.69	62.92	74.00	-11.08	59.58	32.21	4.80	33.67	308	0	PEAK																													
 <p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>96.43</td> <td>-----</td> <td>-----</td> <td>93.02</td> <td>32.26</td> <td>4.81</td> <td>33.66</td> <td>308</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	96.43	-----	-----	93.02	32.26	4.81	33.66	308	0	PEAK	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2412.00	96.43	-----	-----	93.02	32.26	4.81	33.66	308	0	PEAK																													
<b>Avg</b>	 <p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>47.21</td> <td>54.00</td> <td>-6.79</td> <td>43.87</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>308</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	47.21	54.00	-6.79	43.87	32.21	4.80	33.67	308	0	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2389.95	47.21	54.00	-6.79	43.87	32.21	4.80	33.67	308	0	AVERAGE																													
 <p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 15 Setting : 6M Power setting 16 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>87.43</td> <td>-----</td> <td>-----</td> <td>84.03</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>308</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	87.43	-----	-----	84.03	32.25	4.81	33.66	308	0	AVERAGE	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2412.00	87.43	-----	-----	84.03	32.25	4.81	33.66	308	0	AVERAGE																													



Mode	15																																																																																					
	Harmonic																																																																																					
	2400-2483.5_802.11g_CH1_2412MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 15 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6W power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>#</th> <th>#</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>44.14</td> <td>74.00</td> <td>-29.86</td> <td>54.63</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	#	#	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			cm	deg		1	4824.00	44.14	74.00	-29.86	54.63	34.67	7.75	52.91	0.00	---	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 15 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6W power setting 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>#</th> <th>#</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>44.80</td> <td>74.00</td> <td>-29.20</td> <td>55.29</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>0.00</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	#	#	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			cm	deg		1	4824.00	44.80	74.00	-29.20	55.29	34.67	7.75	52.91	0.00	---	---	---	Peak
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	#	#	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			cm	deg																																																																										
1	4824.00	44.14	74.00	-29.86	54.63	34.67	7.75	52.91	0.00	---	---	---	Peak																																																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Loss	#	#	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			cm	deg																																																																										
1	4824.00	44.80	74.00	-29.20	55.29	34.67	7.75	52.91	0.00	---	---	---	Peak																																																																									







		16																																																																
Mode	Band Edge - L																																																																	
	2400-2483.5_802.11g_CH6_2437MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2387.47 53.69 74.00 -20.31</td> <td>50.36</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>219</td> <td>33</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2387.47 53.69 74.00 -20.31	50.36	32.21	4.79	33.67	219	33	PEAK	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2437.00 108.26</td> <td>104.69</td> <td>32.35</td> <td>4.86</td> <td>33.64</td> <td>219</td> <td>33</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2437.00 108.26	104.69	32.35	4.86	33.64	219	33	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2387.47 53.69 74.00 -20.31	50.36	32.21	4.79	33.67	219	33	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2437.00 108.26	104.69	32.35	4.86	33.64	219	33	PEAK																																																											
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.12 41.94 54.00 -12.06</td> <td>38.61</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>219</td> <td>33</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.12 41.94 54.00 -12.06	38.61	32.21	4.79	33.67	219	33	AVERAGE	<p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2437.00 98.36</td> <td>94.78</td> <td>32.35</td> <td>4.87</td> <td>33.64</td> <td>219</td> <td>33</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2437.00 98.36	94.78	32.35	4.87	33.64	219	33	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2389.12 41.94 54.00 -12.06	38.61	32.21	4.79	33.67	219	33	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2437.00 98.36	94.78	32.35	4.87	33.64	219	33	AVERAGE																																																											





Mode	16																																								
	Band Edge - R																																								
	2400-2483.5_802.11g_CH6_2437MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.20</td> <td>55.44</td> <td>74.00</td> <td>-18.56</td> <td>51.67</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>219</td> <td>33</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.20	55.44	74.00	-18.56	51.67	32.46	4.92	33.61	219	33	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2485.20	55.44	74.00	-18.56	51.67	32.46	4.92	33.61	219	33	PEAK																														
Avg	<p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.81</td> <td>42.56</td> <td>54.00</td> <td>-11.44</td> <td>38.79</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>219</td> <td>33</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.81	42.56	54.00	-11.44	38.79	32.46	4.92	33.61	219	33	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2483.81	42.56	54.00	-11.44	38.79	32.46	4.92	33.61	219	33	AVERAGE																														

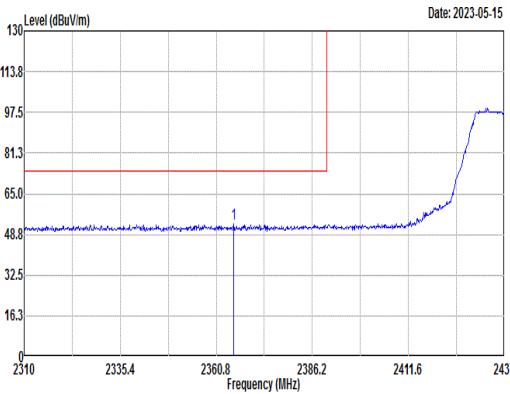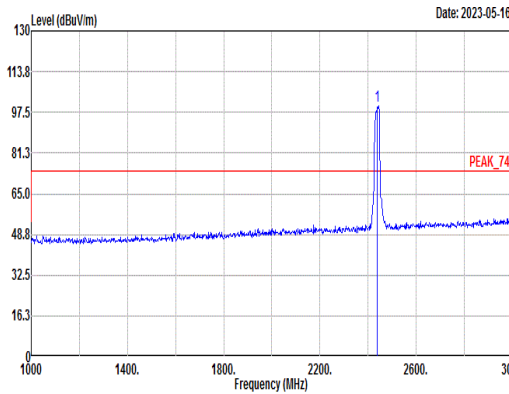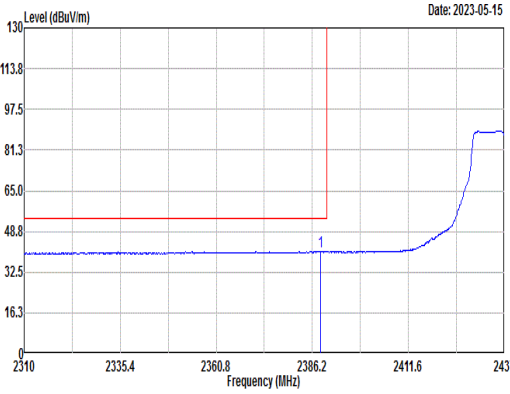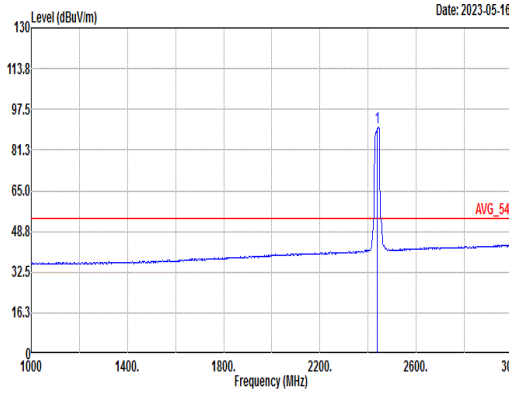

		16																																																																							
Mode	Band Edge - L																																																																								
	2400-2483.5_802.11g_CH6_2437MHz																																																																								
ANT	1																																																																								
Pol.	Vertical	Fundamental																																																																							
Peak	 <p style="text-align: right;">Date: 2023-05-15</p> <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>2310 2335.4 2360.8 2386.2 2411.6 2437</p> <p style="text-align: center;">Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2365.37</td> <td>52.76</td> <td>74.00</td> <td>-21.24</td> <td>49.52</td> <td>32.15</td> <td>4.77</td> <td>33.68</td> <td>400</td> <td>283</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2365.37	52.76	74.00	-21.24	49.52	32.15	4.77	33.68	400	283	PEAK	 <p style="text-align: right;">Date: 2023-05-16</p> <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>1000 1400 1800 2200 2600 3000</p> <p style="text-align: center;">Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>99.99</td> <td>-----</td> <td>-----</td> <td>96.41</td> <td>32.35</td> <td>4.87</td> <td>33.64</td> <td>400</td> <td>283</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2437.00	99.99	-----	-----	96.41	32.35	4.87	33.64	400	283	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq Level Line (dB)	Level Factor	Loss Factor																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																		
1 2365.37	52.76	74.00	-21.24	49.52	32.15	4.77	33.68	400	283	PEAK																																																															
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level Factor	Loss Factor																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																		
1 2437.00	99.99	-----	-----	96.41	32.35	4.87	33.64	400	283	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2023-05-15</p> <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>2310 2335.4 2360.8 2386.2 2411.6 2437</p> <p style="text-align: center;">Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2388.36</td> <td>40.76</td> <td>54.00</td> <td>-13.24</td> <td>37.43</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>400</td> <td>283</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2388.36	40.76	54.00	-13.24	37.43	32.21	4.79	33.67	400	283	AVERAGE	 <p style="text-align: right;">Date: 2023-05-16</p> <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>1000 1400 1800 2200 2600 3000</p> <p style="text-align: center;">Frequency (MHz)</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>90.44</td> <td>-----</td> <td>-----</td> <td>86.86</td> <td>32.35</td> <td>4.87</td> <td>33.64</td> <td>400</td> <td>283</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2437.00	90.44	-----	-----	86.86	32.35	4.87	33.64	400	283	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq Level Line (dB)	Level Factor	Loss Factor																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																		
1 2388.36	40.76	54.00	-13.24	37.43	32.21	4.79	33.67	400	283	AVERAGE																																																															
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level Factor	Loss Factor																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																		
1 2437.00	90.44	-----	-----	86.86	32.35	4.87	33.64	400	283	AVERAGE																																																															



Mode	16																																										
	Band Edge - R																																										
	2400-2483.5_802.11g_CH6_2437MHz																																										
ANT	1																																										
Pol.	Vertical	Fundamental																																									
Peak	<p>Date: 2023-05-15</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.29</td> <td>53.53</td> <td>74.00</td> <td>-20.47</td> <td>49.74</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>400</td> <td>283</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	2489.29	53.53	74.00	-20.47	49.74	32.47	4.93	33.61	400	283	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																			
1	2489.29	53.53	74.00	-20.47	49.74	32.47	4.93	33.61	400	283	PEAK																																
Avg	<p>Date: 2023-05-15</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 16 Setting : 6M Power setting 17 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.70</td> <td>41.50</td> <td>54.00</td> <td>-12.50</td> <td>37.73</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>400</td> <td>283</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	2485.70	41.50	54.00	-12.50	37.73	32.46	4.92	33.61	400	283	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																			
1	2485.70	41.50	54.00	-12.50	37.73	32.46	4.92	33.61	400	283	AVERAGE																																



Mode	16																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11g_CH6_2437MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	<p>Site : 03CH03-SZ            Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL            Project : 272102-02            Mode : 16            SN : #9 2q37b1wf3j002z            Plane : Z with Accessories            setting : 6W power setting 17</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>44.10</td> <td>74.00</td> <td>-29.90</td> <td>54.53</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>45.26</td> <td>74.00</td> <td>-28.74</td> <td>54.03</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.10	74.00	-29.90	54.53	34.65	7.77	52.85	---	---	Peak	2	7311.00	45.26	74.00	-28.74	54.03	36.41	8.93	54.11	---	---	Peak	<p>Site : 03CH03-SZ            Condition: PEAK_74 3m ANT3117_0057 VERTICAL            Project : 272102-02            Mode : 16            SN : #9 2q37b1wf3j002z            Plane : Z with Accessories            setting : 6W power setting 17</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>43.15</td> <td>74.00</td> <td>-30.85</td> <td>53.58</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>44.65</td> <td>74.00</td> <td>-29.35</td> <td>53.42</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	43.15	74.00	-30.85	53.58	34.65	7.77	52.85	---	---	Peak	2	7311.00	44.65	74.00	-29.35	53.42	36.41	8.93	54.11	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4874.00	44.10	74.00	-29.90	54.53	34.65	7.77	52.85	---	---	Peak																																																																																																					
2	7311.00	45.26	74.00	-28.74	54.03	36.41	8.93	54.11	---	---	Peak																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4874.00	43.15	74.00	-30.85	53.58	34.65	7.77	52.85	---	---	Peak																																																																																																					
2	7311.00	44.65	74.00	-29.35	53.42	36.41	8.93	54.11	---	---	Peak																																																																																																					



		17																																																																
Mode	Band Edge																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2484.53 66.94 74.00 -7.06</td> <td>63.17</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>226</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2484.53 66.94 74.00 -7.06	63.17	32.46	4.92	33.61	226	66	PEAK	<p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">PEAK_74</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2462.00 105.58 -----</td> <td>101.88</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>226</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2462.00 105.58 -----	101.88	32.42	4.90	33.62	226	66	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2484.53 66.94 74.00 -7.06	63.17	32.46	4.92	33.61	226	66	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2462.00 105.58 -----	101.88	32.42	4.90	33.62	226	66	PEAK																																																											
Avg	<p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2483.51 51.91 54.00 -2.09</td> <td>48.14</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>226</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2483.51 51.91 54.00 -2.09	48.14	32.46	4.92	33.61	226	66	AVERAGE	<p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">AVG_54</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2462.00 95.87 -----</td> <td>92.17</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>226</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2462.00 95.87 -----	92.17	32.42	4.90	33.62	226	66	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2483.51 51.91 54.00 -2.09	48.14	32.46	4.92	33.61	226	66	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																																
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2462.00 95.87 -----	92.17	32.42	4.90	33.62	226	66	AVERAGE																																																											







		17																																																								
Mode		Band Edge																																																								
		2400-2483.5_802.11g_CH11_2462MHz																																																								
ANT		1																																																								
Pol.	Vertical	Fundamental																																																								
Peak	<p style="text-align: right;">Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2484.65 60.73 74.00 -13.27</td> <td>56.96</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>395</td> <td>189 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2484.65 60.73 74.00 -13.27	56.96	32.46	4.92	33.61	395	189 PEAK	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00 100.03 -----</td> <td>96.33</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>395</td> <td>189 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2462.00 100.03 -----	96.33	32.42	4.90	33.62	395	189 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2484.65 60.73 74.00 -13.27	56.96	32.46	4.92	33.61	395	189 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2462.00 100.03 -----	96.33	32.42	4.90	33.62	395	189 PEAK																																																				
Avg	<p style="text-align: right;">Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.55 45.94 54.00 -8.06</td> <td>42.17</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>395</td> <td>189 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.55 45.94 54.00 -8.06	42.17	32.46	4.92	33.61	395	189 AVERAGE	<p style="text-align: right;">Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 17 Setting : 6M Power setting 14.5 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2462.00 90.84 -----</td> <td>87.14</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>395</td> <td>189 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2462.00 90.84 -----	87.14	32.42	4.90	33.62	395	189 AVERAGE
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2483.55 45.94 54.00 -8.06	42.17	32.46	4.92	33.61	395	189 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2462.00 90.84 -----	87.14	32.42	4.90	33.62	395	189 AVERAGE																																																				







Mode	17																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Data: 5 Date: 2023-05-18</p> <p>Site : 03CH03-SZ Condition : PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 17 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6M power setting 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>44.53</td> <td>-29.47</td> <td>74.00</td> <td>54.88</td> <td>34.63</td> <td>7.80</td> <td>52.78</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>45.87</td> <td>-28.13</td> <td>74.00</td> <td>54.25</td> <td>36.49</td> <td>9.20</td> <td>54.07</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	44.53	-29.47	74.00	54.88	34.63	7.80	52.78	--- Peak	2	7386.00	45.87	-28.13	74.00	54.25	36.49	9.20	54.07	--- Peak	<p>Data: 6 Date: 2023-05-18</p> <p>Site : 03CH03-SZ Condition : PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 17 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6M power setting 14.5</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>44.58</td> <td>-29.42</td> <td>74.00</td> <td>54.93</td> <td>34.63</td> <td>7.80</td> <td>52.78</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>45.53</td> <td>-28.47</td> <td>74.00</td> <td>53.91</td> <td>36.49</td> <td>9.20</td> <td>54.07</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	44.58	-29.42	74.00	54.93	34.63	7.80	52.78	--- Peak	2	7386.00	45.53	-28.47	74.00	53.91	36.49	9.20	54.07	--- Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4924.00	44.53	-29.47	74.00	54.88	34.63	7.80	52.78	--- Peak																																																																									
2	7386.00	45.87	-28.13	74.00	54.25	36.49	9.20	54.07	--- Peak																																																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4924.00	44.58	-29.42	74.00	54.93	34.63	7.80	52.78	--- Peak																																																																									
2	7386.00	45.53	-28.47	74.00	53.91	36.49	9.20	54.07	--- Peak																																																																									

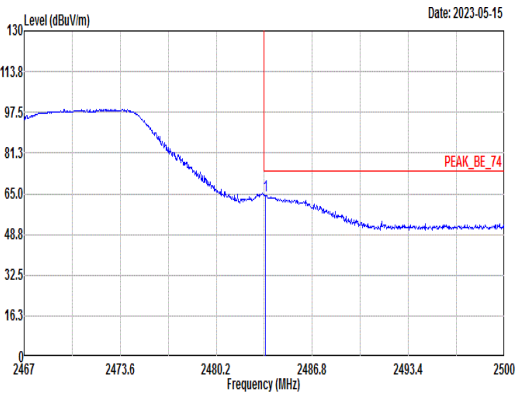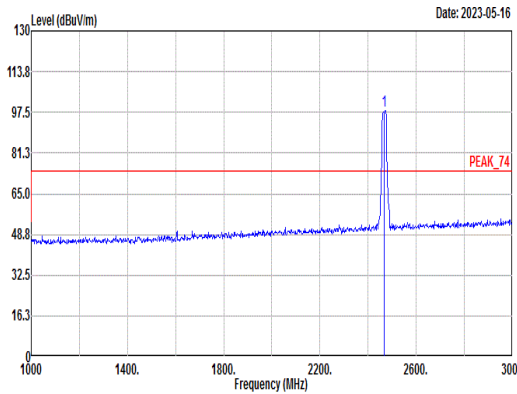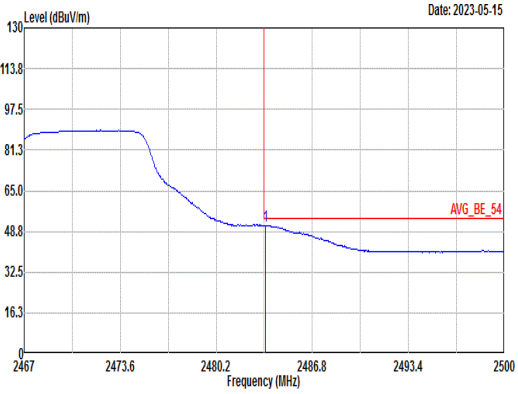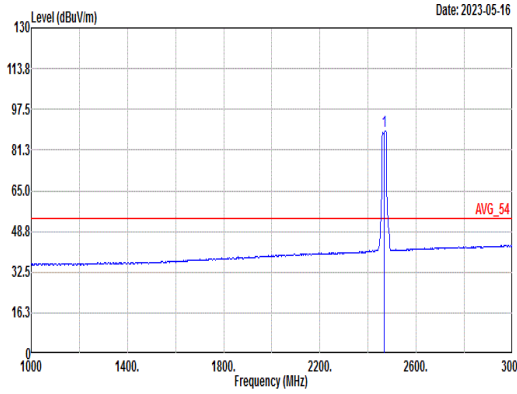

		<b>18</b>																																																																
<b>Mode</b>	<b>Band Edge</b>																																																																	
	<b>2400-2483.5_802.11g_CH12_2467MHz</b>																																																																	
<b>ANT</b>	<b>1</b>																																																																	
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																
<b>Peak</b>	 <p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2483.57 64.36 74.00 -9.64</td> <td>60.59</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>199</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2483.57 64.36 74.00 -9.64	60.59	32.46	4.92	33.61	199	68	PEAK	 <p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">PEAK_74</p> <p>Site : Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2467.00 98.04</td> <td>94.33</td> <td>32.43</td> <td>4.90</td> <td>33.62</td> <td>199</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2467.00 98.04	94.33	32.43	4.90	33.62	199	68	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2483.57 64.36 74.00 -9.64	60.59	32.46	4.92	33.61	199	68	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2467.00 98.04	94.33	32.43	4.90	33.62	199	68	PEAK																																																											
<b>Avg</b>	 <p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2483.60 51.06 54.00 -2.94</td> <td>47.29</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>199</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2483.60 51.06 54.00 -2.94	47.29	32.46	4.92	33.61	199	68	AVERAGE	 <p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">AVG_54</p> <p>Site : Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2467.00 88.95</td> <td>85.23</td> <td>32.43</td> <td>4.91</td> <td>33.62</td> <td>199</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2467.00 88.95	85.23	32.43	4.91	33.62	199	68	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2483.60 51.06 54.00 -2.94	47.29	32.46	4.92	33.61	199	68	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2467.00 88.95	85.23	32.43	4.91	33.62	199	68	AVERAGE																																																											



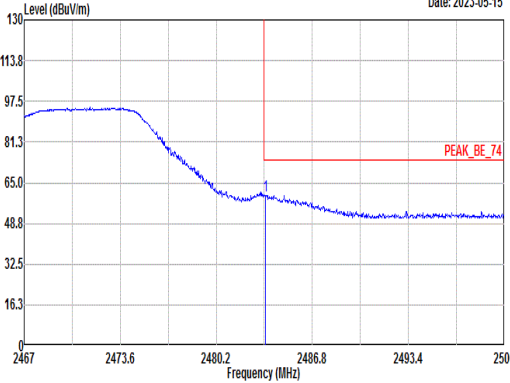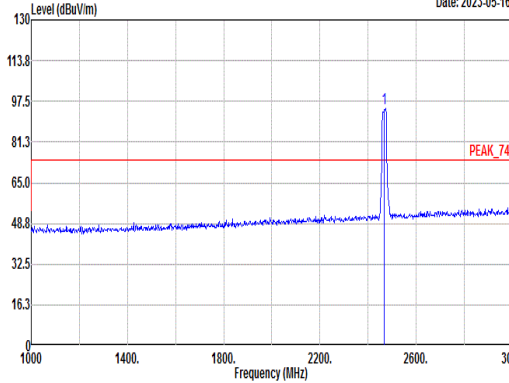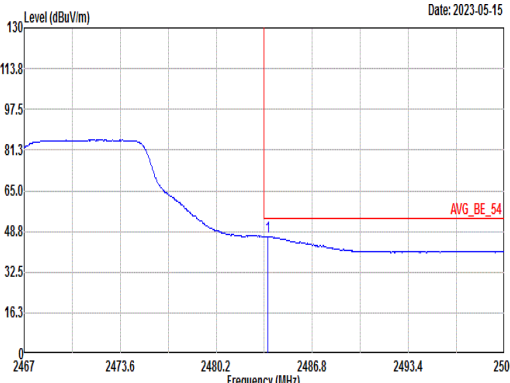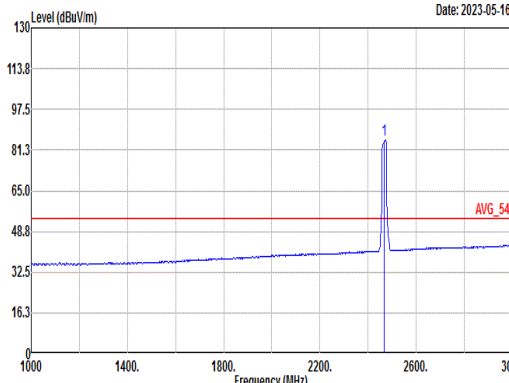

		18																																																								
Mode	Band Edge																																																									
	2400-2483.5_802.11g_CH12_2467MHz																																																									
ANT	1																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 <p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.57 60.07 74.00 -13.93</td> <td>56.30</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>349</td> <td>208 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.57 60.07 74.00 -13.93	56.30	32.46	4.92	33.61	349	208 PEAK	 <p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">PEAK_74</p> <p>Site : Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2467.00 94.69 -----</td> <td>90.97</td> <td>32.43</td> <td>4.91</td> <td>33.62</td> <td>349</td> <td>208 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2467.00 94.69 -----	90.97	32.43	4.91	33.62	349	208 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2483.57 60.07 74.00 -13.93	56.30	32.46	4.92	33.61	349	208 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2467.00 94.69 -----	90.97	32.43	4.91	33.62	349	208 PEAK																																																				
Avg	 <p style="text-align: right;">Date: 2023-05-15</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.76 46.84 54.00 -7.16</td> <td>43.07</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>349</td> <td>208 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2483.76 46.84 54.00 -7.16	43.07	32.46	4.92	33.61	349	208 AVERAGE	 <p style="text-align: right;">Date: 2023-05-16</p> <p style="text-align: right;">AVG_54</p> <p>Site : Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 18 Setting : 6M Power setting 8 Plane : Z with Accessories : #9 2q37b1wF3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2467.00 85.11 -----</td> <td>81.39</td> <td>32.43</td> <td>4.91</td> <td>33.62</td> <td>349</td> <td>208 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2467.00 85.11 -----	81.39	32.43	4.91	33.62	349	208 AVERAGE
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2483.76 46.84 54.00 -7.16	43.07	32.46	4.92	33.61	349	208 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2467.00 85.11 -----	81.39	32.43	4.91	33.62	349	208 AVERAGE																																																				







Mode	18																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11g_CH12_2467MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 18 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6W power setting 8</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4934.00</td> <td>44.69</td> <td>74.00</td> <td>-29.31</td> <td>55.04</td> <td>34.63</td> <td>7.79</td> <td>52.77</td> <td>0.00</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>7401.00</td> <td>45.26</td> <td>74.00</td> <td>-28.74</td> <td>53.62</td> <td>36.50</td> <td>9.20</td> <td>54.06</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	1	4934.00	44.69	74.00	-29.31	55.04	34.63	7.79	52.77	0.00	--- --- Peak	2	7401.00	45.26	74.00	-28.74	53.62	36.50	9.20	54.06	0.00	--- --- Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 18 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : 6W power setting 8</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>#</th> <th>#</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4934.00</td> <td>44.66</td> <td>74.00</td> <td>-29.34</td> <td>55.01</td> <td>34.63</td> <td>7.79</td> <td>52.77</td> <td>0.00</td> <td>--- --- Peak</td> </tr> <tr> <td>2</td> <td>7401.00</td> <td>45.23</td> <td>74.00</td> <td>-28.77</td> <td>53.59</td> <td>36.50</td> <td>9.20</td> <td>54.06</td> <td>0.00</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	1	4934.00	44.66	74.00	-29.34	55.01	34.63	7.79	52.77	0.00	--- --- Peak	2	7401.00	45.23	74.00	-28.77	53.59	36.50	9.20	54.06	0.00	--- --- Peak
	Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	4934.00	44.69	74.00	-29.31	55.04	34.63	7.79	52.77	0.00	--- --- Peak																																																																																																
2	7401.00	45.26	74.00	-28.74	53.62	36.50	9.20	54.06	0.00	--- --- Peak																																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	#	#																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	4934.00	44.66	74.00	-29.34	55.01	34.63	7.79	52.77	0.00	--- --- Peak																																																																																																
2	7401.00	45.23	74.00	-28.77	53.59	36.50	9.20	54.06	0.00	--- --- Peak																																																																																																



		<b>19</b>																																																																
<b>Mode</b>		<b>Band Edge</b>																																																																
		<b>2400-2483.5_802.11g_CH13_2472MHz</b>																																																																
<b>ANT</b>		<b>1</b>																																																																
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																
<b>Peak</b>	<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.56 66.51 74.00 -7.49</td> <td>62.74</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2483.56 66.51 74.00 -7.49	62.74	32.46	4.92	33.61	200	71	PEAK	<p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2472.00 90.10 -----</td> <td>86.38</td> <td>32.43</td> <td>4.91</td> <td>33.62</td> <td>200</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2472.00 90.10 -----	86.38	32.43	4.91	33.62	200	71	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2483.56 66.51 74.00 -7.49	62.74	32.46	4.92	33.61	200	71	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2472.00 90.10 -----	86.38	32.43	4.91	33.62	200	71	PEAK																																																											
<b>Avg</b>	<p>Date: 2023-05-15</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2483.51 51.55 54.00 -2.45</td> <td>47.78</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2483.51 51.55 54.00 -2.45	47.78	32.46	4.92	33.61	200	71	AVERAGE	<p>Date: 2023-05-16</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2472.00 80.63 -----</td> <td>76.91</td> <td>32.43</td> <td>4.91</td> <td>33.62</td> <td>200</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2472.00 80.63 -----	76.91	32.43	4.91	33.62	200	71	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2483.51 51.55 54.00 -2.45	47.78	32.46	4.92	33.61	200	71	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2472.00 80.63 -----	76.91	32.43	4.91	33.62	200	71	AVERAGE																																																											

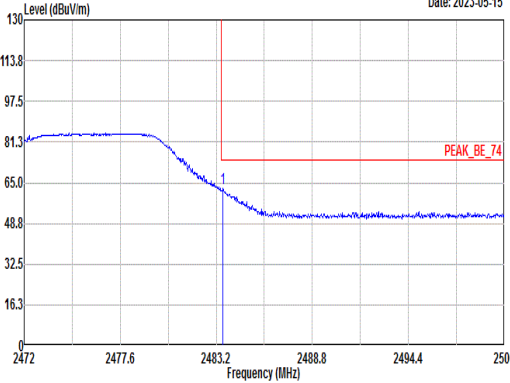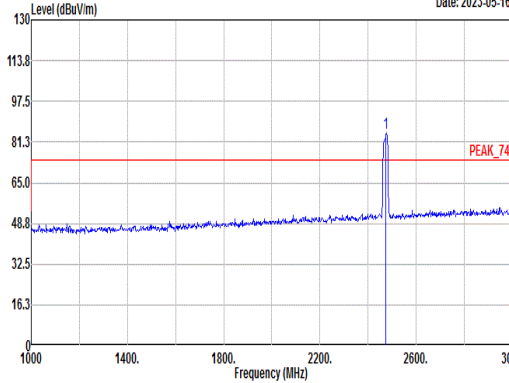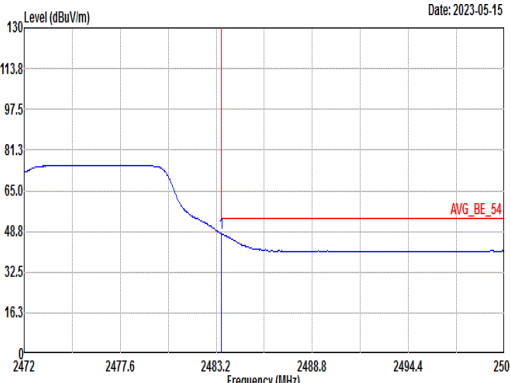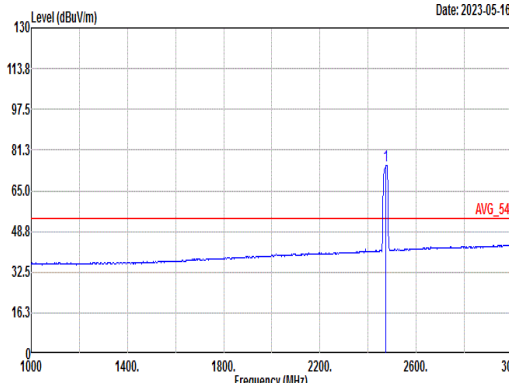

		19																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11g_CH13_2472MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Date: 2023-05-15</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Peak at 2483.2 MHz, Level 81.3 dBuV/m</p> <p>PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.59</td> <td>62.68</td> <td>74.00</td> <td>-11.32</td> <td>58.91</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>288</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.59	62.68	74.00	-11.32	58.91	32.46	4.92	33.61	288	183	PEAK	 <p>Date: 2023-05-16</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Peak at 2472.00 MHz, Level 84.77 dBuV/m</p> <p>PEAK_74</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>84.77</td> <td>-----</td> <td>-----</td> <td>81.03</td> <td>32.44</td> <td>4.91</td> <td>33.61</td> <td>288</td> <td>183</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2472.00	84.77	-----	-----	81.03	32.44	4.91	33.61	288	183	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2483.59	62.68	74.00	-11.32	58.91	32.46	4.92	33.61	288	183	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2472.00	84.77	-----	-----	81.03	32.44	4.91	33.61	288	183	PEAK																																																																					
Avg	 <p>Date: 2023-05-15</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Average at 2483.2 MHz, Level 54.00 dBuV/m</p> <p>AVG_BE_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>47.86</td> <td>54.00</td> <td>-6.14</td> <td>44.09</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>288</td> <td>183</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.51	47.86	54.00	-6.14	44.09	32.46	4.92	33.61	288	183	AVERAGE	 <p>Date: 2023-05-16</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Average at 2472.00 MHz, Level 75.16 dBuV/m</p> <p>AVG_54</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 19 Setting : 6M Power setting -3 Plane : Z with Accessories : #9 2q37b1wf3j002z</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>75.16</td> <td>-----</td> <td>-----</td> <td>71.42</td> <td>32.44</td> <td>4.91</td> <td>33.61</td> <td>288</td> <td>183</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2472.00	75.16	-----	-----	71.42	32.44	4.91	33.61	288	183	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2483.51	47.86	54.00	-6.14	44.09	32.46	4.92	33.61	288	183	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2472.00	75.16	-----	-----	71.42	32.44	4.91	33.61	288	183	AVERAGE																																																																					







Mode	19																																																																																											
	Harmonic																																																																																											
	2400-2483.5_802.11g_CH13_2472MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<p>Site : 03CH03-SZ            Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL            Project : 272102-02            Mode : 19            SN : #9 2q37b1wf3j002z            Plane : Z with Accessories            setting : 6W power setting -3</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4944.00 44.69 74.00 -29.31</td> <td>55.03</td> <td>34.62</td> <td>7.80</td> <td>52.76</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 7416.00 45.65 74.00 -28.35</td> <td>53.99</td> <td>36.52</td> <td>9.19</td> <td>54.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#				MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg			1 4944.00 44.69 74.00 -29.31	55.03	34.62	7.80	52.76	0.00	---	---	Peak	2 7416.00 45.65 74.00 -28.35	53.99	36.52	9.19	54.05	0.00	---	---	Peak	<p>Site : 03CH03-SZ            Condition: PEAK_74 3m ANT3117_0057 VERTICAL            Project : 272102-02            Mode : 19            SN : #9 2q37b1wf3j002z            Plane : Z with Accessories            setting : 6W power setting -3</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th colspan="2">APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Level Factor</th> <th>Loss Factor</th> <th>#</th> <th>#</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4944.00 44.66 74.00 -29.34</td> <td>55.00</td> <td>34.62</td> <td>7.80</td> <td>52.76</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 7416.00 44.07 74.00 -29.93</td> <td>52.41</td> <td>36.52</td> <td>9.19</td> <td>54.05</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark	Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#				MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg			1 4944.00 44.66 74.00 -29.34	55.00	34.62	7.80	52.76	0.00	---	---	Peak	2 7416.00 44.07 74.00 -29.93	52.41	36.52	9.19	54.05	0.00	---	---	Peak
	Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																			
Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#																																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 4944.00 44.69 74.00 -29.31	55.03	34.62	7.80	52.76	0.00	---	---	Peak																																																																																				
2 7416.00 45.65 74.00 -28.35	53.99	36.52	9.19	54.05	0.00	---	---	Peak																																																																																				
Limit Margin	Read	Ant	Cable	Preamp	APos		TPos	Remark																																																																																				
Freq Level Line (dB)	Level Factor	Level Factor	Loss Factor	#	#																																																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1 4944.00 44.66 74.00 -29.34	55.00	34.62	7.80	52.76	0.00	---	---	Peak																																																																																				
2 7416.00 44.07 74.00 -29.93	52.41	36.52	9.19	54.05	0.00	---	---	Peak																																																																																				



		20																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11 ax 20_CH1_Full_2412MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>62.76</td> <td>74.00</td> <td>-11.24</td> <td>59.42</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>242</td> <td>34</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	62.76	74.00	-11.24	59.42	32.21	4.80	33.67	242	34	PEAK	<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>109.20</td> <td>-----</td> <td>-----</td> <td>105.72</td> <td>32.30</td> <td>4.83</td> <td>33.65</td> <td>242</td> <td>34</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.20	-----	-----	105.72	32.30	4.83	33.65	242	34	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.69	62.76	74.00	-11.24	59.42	32.21	4.80	33.67	242	34	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	109.20	-----	-----	105.72	32.30	4.83	33.65	242	34	PEAK																																																																					
Avg	<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>51.80</td> <td>54.00</td> <td>-2.20</td> <td>48.46</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>242</td> <td>34</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	51.80	54.00	-2.20	48.46	32.21	4.80	33.67	242	34	AVERAGE	<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.00</td> <td>-----</td> <td>-----</td> <td>95.53</td> <td>32.29</td> <td>4.83</td> <td>33.65</td> <td>242</td> <td>34</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.00	-----	-----	95.53	32.29	4.83	33.65	242	34	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.95	51.80	54.00	-2.20	48.46	32.21	4.80	33.67	242	34	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	99.00	-----	-----	95.53	32.29	4.83	33.65	242	34	AVERAGE																																																																					

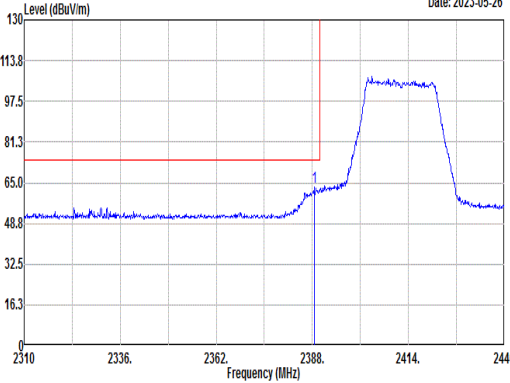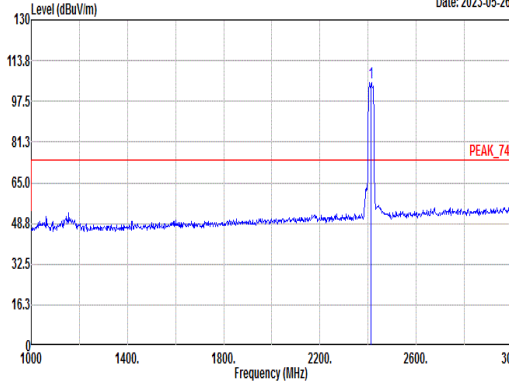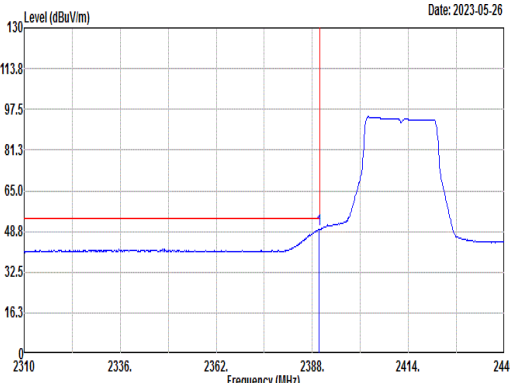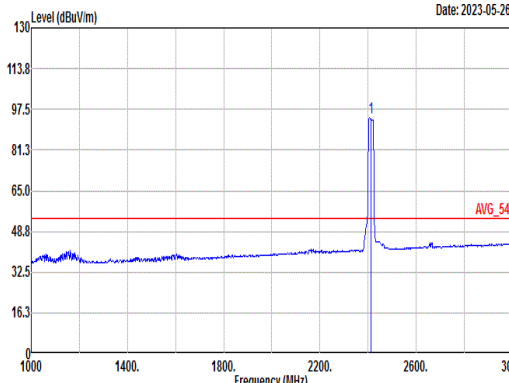





		20																																																																
Mode	Band Edge																																																																	
	2400-2483.5_802.11 ax 20_CH1_Full_2412MHz																																																																	
ANT	1																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Peak at 2388.52 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2388.52 63.49 74.00 -10.51</td> <td>60.16</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>350</td> <td>179</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2388.52 63.49 74.00 -10.51	60.16	32.21	4.79	33.67	350	179	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Peak at 2412.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 105.16</td> <td>101.71</td> <td>32.28</td> <td>4.82</td> <td>33.65</td> <td>350</td> <td>179</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2412.00 105.16	101.71	32.28	4.82	33.65	350	179	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2388.52 63.49 74.00 -10.51	60.16	32.21	4.79	33.67	350	179	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2412.00 105.16	101.71	32.28	4.82	33.65	350	179	PEAK																																																											
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Average at 2389.82 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2389.82 49.58 54.00 -4.42</td> <td>46.24</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>350</td> <td>179</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2389.82 49.58 54.00 -4.42	46.24	32.21	4.80	33.67	350	179	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Average at 2412.00 MHz.</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 20 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3100BF</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 94.39</td> <td>90.99</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>350</td> <td>179</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2412.00 94.39	90.99	32.25	4.81	33.66	350	179	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2389.82 49.58 54.00 -4.42	46.24	32.21	4.80	33.67	350	179	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2412.00 94.39	90.99	32.25	4.81	33.66	350	179	AVERAGE																																																											



Mode	20																																																																	
	Harmonic																																																																	
	2400-2483.5_802.11 ax 20_CH1_Full_2412MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 20 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : MCS0 power setting 17</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4824.00 46.36 74.00 -27.64</td> <td>56.85</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 4824.00 46.36 74.00 -27.64	56.85	34.67	7.75	52.91	---	---	Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 20 SN : #9 2q37b1wf3j002z Plane : Z with Accessories setting : MCS0 power setting 17</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4824.00 44.08 74.00 -29.92</td> <td>54.57</td> <td>34.67</td> <td>7.75</td> <td>52.91</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 4824.00 44.08 74.00 -29.92	54.57	34.67	7.75	52.91	---	---	Peak
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 4824.00 46.36 74.00 -27.64	56.85	34.67	7.75	52.91	---	---	Peak																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 4824.00 44.08 74.00 -29.92	54.57	34.67	7.75	52.91	---	---	Peak																																																											



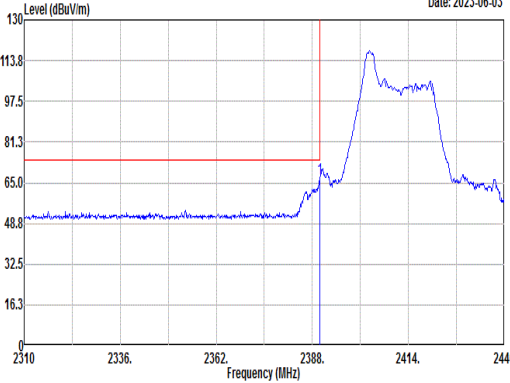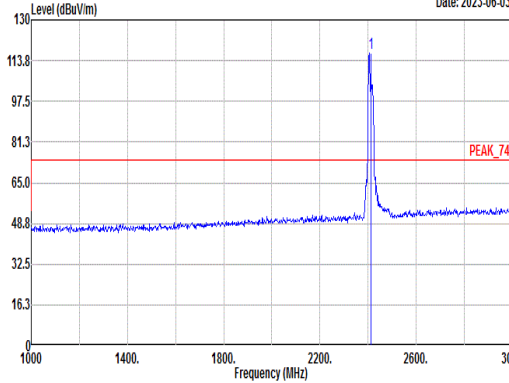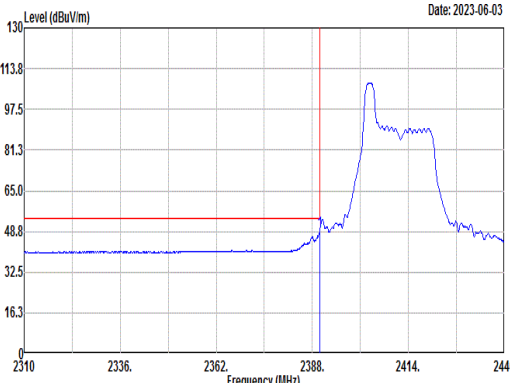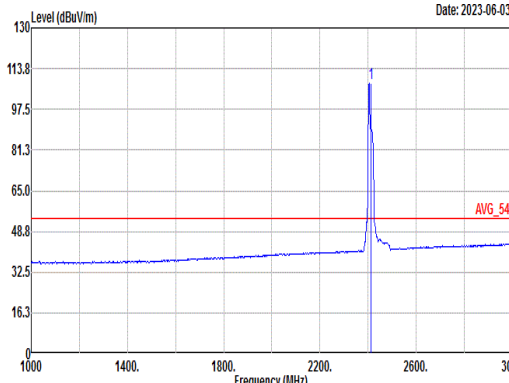

	<b>21</b>																																																																															
<b>Mode</b>	<b>Band Edge</b>																																																																															
<b>ANT</b>	<b>2400-2483.5_802.11 ax 20_CH1_RU26/0_2412MHz</b>																																																																															
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																														
<b>Peak</b>	<div style="text-align:right; font-size:small;">Date: 2023-06-03</div>  <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2389.95</td><td>66.49</td><td>74.00</td><td>-7.51</td><td>63.15</td><td>32.21</td><td>4.80</td><td>33.67</td><td>100</td><td>134</td><td>PEAK</td></tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	66.49	74.00	-7.51	63.15	32.21	4.80	33.67	100	134	PEAK	<div style="text-align:right; font-size:small;">Date: 2023-06-03</div>  <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2412.00</td><td>116.80</td><td>-----</td><td>-----</td><td>113.40</td><td>32.25</td><td>4.81</td><td>33.66</td><td>100</td><td>134</td><td>PEAK</td></tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	116.80	-----	-----	113.40	32.25	4.81	33.66	100	134	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.95	66.49	74.00	-7.51	63.15	32.21	4.80	33.67	100	134	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	116.80	-----	-----	113.40	32.25	4.81	33.66	100	134	PEAK																																																																					
<b>Avg</b>	<div style="text-align:right; font-size:small;">Date: 2023-06-03</div>  <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2389.95</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>45.00</td><td>32.21</td><td>4.80</td><td>33.67</td><td>100</td><td>134</td><td>AVERAGE</td></tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.34	54.00	-5.66	45.00	32.21	4.80	33.67	100	134	AVERAGE	<div style="text-align:right; font-size:small;">Date: 2023-06-03</div>  <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2412.00</td><td>107.86</td><td>-----</td><td>-----</td><td>104.46</td><td>32.25</td><td>4.81</td><td>33.66</td><td>100</td><td>134</td><td>AVERAGE</td></tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.86	-----	-----	104.46	32.25	4.81	33.66	100	134	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.95	48.34	54.00	-5.66	45.00	32.21	4.80	33.67	100	134	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	107.86	-----	-----	104.46	32.25	4.81	33.66	100	134	AVERAGE																																																																					







<b>21</b>																																																																	
<b>Mode</b>	<b>Band Edge</b>																																																																
<b>2400-2483.5_802.11 ax 20_CH1_RU26/0_2412MHz</b>																																																																	
<b>ANT</b>	<b>1</b>																																																																
<b>Pol.</b>	<b>Vertical</b>																																																																
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95 63.37 74.00 -10.63</td> <td>60.03</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>371</td> <td>317</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 113.05</td> <td>109.65</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>371</td> <td>317</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.95 63.37 74.00 -10.63	60.03	32.21	4.80	33.67	371	317	PEAK	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 113.05	109.65	32.25	4.81	33.66	371	317	PEAK
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2389.95 63.37 74.00 -10.63	60.03	32.21	4.80	33.67	371	317	PEAK																																																										
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2412.00 113.05	109.65	32.25	4.81	33.66	371	317	PEAK																																																										
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95 45.94 54.00 -8.06</td> <td>42.60</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>371</td> <td>317</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 21 Setting : MCS0 Power setting 16 Plane : Z with Accessories 26/0 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 104.27</td> <td>100.87</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>371</td> <td>317</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.95 45.94 54.00 -8.06	42.60	32.21	4.80	33.67	371	317	AVERAGE	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 104.27	100.87	32.25	4.81	33.66	371	317	AVERAGE
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2389.95 45.94 54.00 -8.06	42.60	32.21	4.80	33.67	371	317	AVERAGE																																																										
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 2412.00 104.27	100.87	32.25	4.81	33.66	371	317	AVERAGE																																																										



<b>22</b>																																	
<b>Mode</b>	<b>Band Edge</b>																																
<b>2400-2483.5_802.11 ax 20_CH1_RU52/37_2412MHz</b>																																	
<b>ANT</b>	<b>1</b>																																
<b>Pol.</b>	<b>Horizontal</b>																																
<b>Peak</b>	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.04 64.28 74.00 -9.72</td> <td>60.95</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>245</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.04 64.28 74.00 -9.72	60.95	32.21	4.79	33.67	245	52	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																									
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																											
1 2389.04 64.28 74.00 -9.72	60.95	32.21	4.79	33.67	245	52	PEAK																										
<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 115.24</td> <td>111.83</td> <td>32.26</td> <td>4.81</td> <td>33.66</td> <td>245</td> <td>52</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 115.24	111.83	32.26	4.81	33.66	245	52	PEAK	
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																											
1 2412.00 115.24	111.83	32.26	4.81	33.66	245	52	PEAK																										
<b>Avg</b>	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.95 45.69 54.00 -8.31</td> <td>42.35</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>245</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2389.95 45.69 54.00 -8.31	42.35	32.21	4.80	33.67	245	52	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																									
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																											
1 2389.95 45.69 54.00 -8.31	42.35	32.21	4.80	33.67	245	52	AVERAGE																										
<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2412.00 105.36</td> <td>101.96</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>245</td> <td>52</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2412.00 105.36	101.96	32.25	4.81	33.66	245	52	AVERAGE	
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																											
1 2412.00 105.36	101.96	32.25	4.81	33.66	245	52	AVERAGE																										

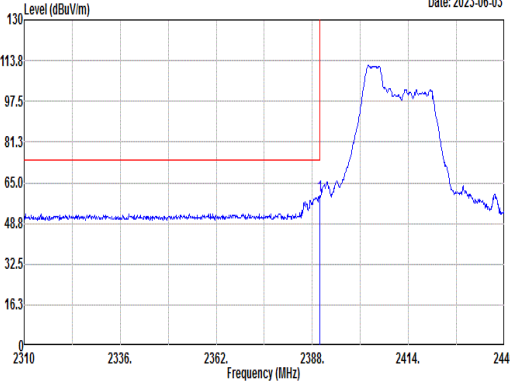
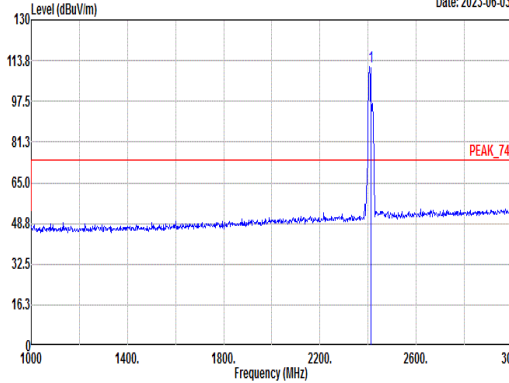
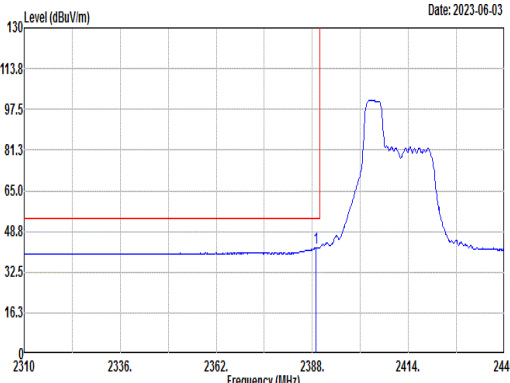
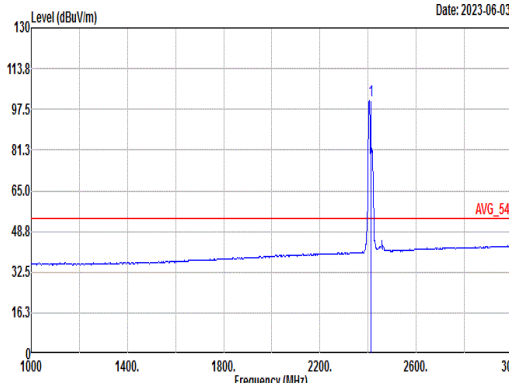


		22																																																																														
Mode	Band Edge																																																																															
	2400-2483.5_802.11 ax 20_CH1_RU52/37_2412MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>60.01</td> <td>74.00</td> <td>-13.99</td> <td>56.67</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>375</td> <td>322</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	60.01	74.00	-13.99	56.67	32.21	4.80	33.67	375	322	PEAK	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>111.40</td> <td>-----</td> <td>-----</td> <td>108.00</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>375</td> <td>322</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	111.40	-----	-----	108.00	32.25	4.81	33.66	375	322	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2389.95	60.01	74.00	-13.99	56.67	32.21	4.80	33.67	375	322	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	111.40	-----	-----	108.00	32.25	4.81	33.66	375	322	PEAK																																																																					
Avg	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>42.36</td> <td>54.00</td> <td>-11.64</td> <td>39.03</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>375</td> <td>322</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2388.91	42.36	54.00	-11.64	39.03	32.21	4.79	33.67	375	322	AVERAGE	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 22 Setting : MCS0 Power setting 16 Plane : Z with Accessories 52/37 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>100.82</td> <td>-----</td> <td>-----</td> <td>97.42</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>375</td> <td>322</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	100.82	-----	-----	97.42	32.25	4.81	33.66	375	322	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2388.91	42.36	54.00	-11.64	39.03	32.21	4.79	33.67	375	322	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	100.82	-----	-----	97.42	32.25	4.81	33.66	375	322	AVERAGE																																																																					



		23																																																								
Mode	Band Edge																																																									
	2400-2483.5_802.11 ax 20_CH1_RU106/53_2412MHz																																																									
ANT	1																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.56 62.47 74.00 -11.53</td> <td>59.13</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>137 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2389.56 62.47 74.00 -11.53	59.13	32.21	4.80	33.67	100	137 PEAK	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 109.96</td> <td>-----</td> <td>106.55</td> <td>32.26</td> <td>4.81</td> <td>33.66</td> <td>100 137 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2412.00 109.96	-----	106.55	32.26	4.81	33.66	100 137 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2389.56 62.47 74.00 -11.53	59.13	32.21	4.80	33.67	100	137 PEAK																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2412.00 109.96	-----	106.55	32.26	4.81	33.66	100 137 PEAK																																																				
Avg	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.95 45.14 54.00 -8.86</td> <td>41.80</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>137 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2389.95 45.14 54.00 -8.86	41.80	32.21	4.80	33.67	100	137 AVERAGE	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 99.62</td> <td>-----</td> <td>96.22</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>100 137 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2412.00 99.62	-----	96.22	32.25	4.81	33.66	100 137 AVERAGE
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2389.95 45.14 54.00 -8.86	41.80	32.21	4.80	33.67	100	137 AVERAGE																																																				
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq Level Line (dB)	Level Factor	Loss Factor																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																				
1 2412.00 99.62	-----	96.22	32.25	4.81	33.66	100 137 AVERAGE																																																				

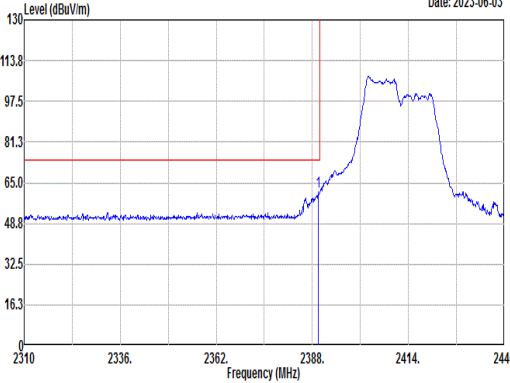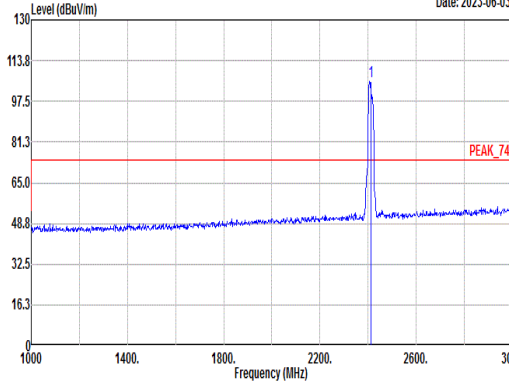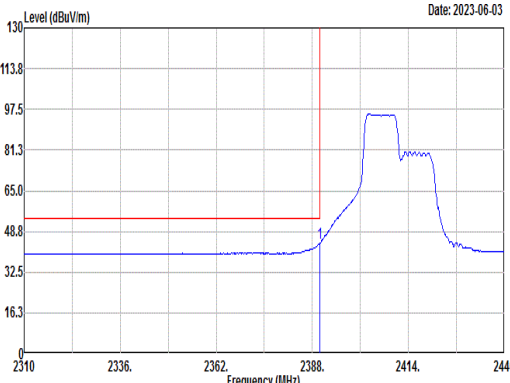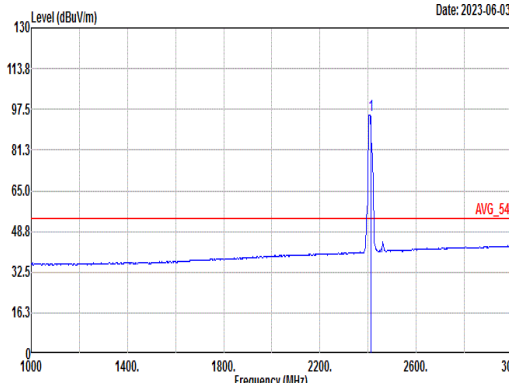

		23																																																																						
Mode	Band Edge																																																																							
	2400-2483.5_802.11 ax 20_CH1_RU106/53_2412MHz																																																																							
ANT	1																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2389.69</td> <td>61.29</td> <td>74.00</td> <td>-12.71</td> <td>57.95</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>300</td> <td>323</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2389.69	61.29	74.00	-12.71	57.95	32.21	4.80	33.67	300	323	PEAK	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2412.00</td> <td>105.55</td> <td>-----</td> <td>-----</td> <td>102.15</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>300</td> <td>323</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2412.00	105.55	-----	-----	102.15	32.25	4.81	33.66	300	323	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																																		
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																	
1 2389.69	61.29	74.00	-12.71	57.95	32.21	4.80	33.67	300	323	PEAK																																																														
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																																		
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																	
1 2412.00	105.55	-----	-----	102.15	32.25	4.81	33.66	300	323	PEAK																																																														
Avg	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2389.95</td> <td>43.91</td> <td>54.00</td> <td>-10.09</td> <td>40.57</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>300</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2389.95	43.91	54.00	-10.09	40.57	32.21	4.80	33.67	300	323	AVERAGE	 <p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 23 Setting : MCS0 Power setting 16 Plane : Z with Accessories 106/53 : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2412.00</td> <td>95.29</td> <td>-----</td> <td>-----</td> <td>91.89</td> <td>32.25</td> <td>4.81</td> <td>33.66</td> <td>300</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2412.00	95.29	-----	-----	91.89	32.25	4.81	33.66	300	323	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																																		
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																	
1 2389.95	43.91	54.00	-10.09	40.57	32.21	4.80	33.67	300	323	AVERAGE																																																														
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																																		
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																	
1 2412.00	95.29	-----	-----	91.89	32.25	4.81	33.66	300	323	AVERAGE																																																														



		24																																																																								
Mode	Band Edge - L																																																																									
	2400-2483.5_802.11 ax 20_CH6_Full_2437MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q37B1NF3100BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.38</td> <td>55.93</td> <td>74.00</td> <td>-18.07</td> <td>52.59</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>194</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	2389.38	55.93	74.00	-18.07	52.59	32.21	4.80	33.67	194	125	PEAK	<p style="text-align: right;">Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q37B1NF3100BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>109.53</td> <td>-----</td> <td>-----</td> <td>105.93</td> <td>32.36</td> <td>4.87</td> <td>33.63</td> <td>194</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	2437.00	109.53	-----	-----	105.93	32.36	4.87	33.63	194	125	PEAK
	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																															
1	2389.38	55.93	74.00	-18.07	52.59	32.21	4.80	33.67	194	125	PEAK																																																															
1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																															
1	2437.00	109.53	-----	-----	105.93	32.36	4.87	33.63	194	125	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q37B1NF3100BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.76</td> <td>44.21</td> <td>54.00</td> <td>-9.79</td> <td>40.87</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>194</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	2389.76	44.21	54.00	-9.79	40.87	32.21	4.80	33.67	194	125	AVERAGE	<p style="text-align: right;">Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q37B1NF3100BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>98.55</td> <td>-----</td> <td>-----</td> <td>94.95</td> <td>32.36</td> <td>4.87</td> <td>33.63</td> <td>194</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	2437.00	98.55	-----	-----	94.95	32.36	4.87	33.63	194	125	AVERAGE
1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																															
1	2389.76	44.21	54.00	-9.79	40.87	32.21	4.80	33.67	194	125	AVERAGE																																																															
1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																															
1	2437.00	98.55	-----	-----	94.95	32.36	4.87	33.63	194	125	AVERAGE																																																															



	<b>24</b>																																								
<b>Mode</b>	<b>Band Edge - R</b>																																								
	<b>2400-2483.5_802.11 ax 20_CH6_Full_2437MHz</b>																																								
<b>ANT</b>	<b>1</b>																																								
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																							
<b>Peak</b>	<p style="text-align: right;">Date: 2023-05-26</p> <p style="text-align: right;"><b>PEAK_BE_74</b></p> <p>Site : 03CH03-SZ          Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL          : RBW:1000.000kHz VBW:3000.000kHz          Mode : 24          Setting : MCS0 power setting 17          Plane : Z with Accessories          : #12 2Q37B1NF31000F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.12</td> <td>59.79</td> <td>74.00</td> <td>-14.21</td> <td>56.02</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>194</td> <td>125</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.12	59.79	74.00	-14.21	56.02	32.46	4.92	33.61	194	125	PEAK	<b>Blank</b>
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2484.12	59.79	74.00	-14.21	56.02	32.46	4.92	33.61	194	125	PEAK																														
<b>Avg</b>	<p style="text-align: right;">Date: 2023-05-26</p> <p style="text-align: right;"><b>AVG_BE_54</b></p> <p>Site : 03CH03-SZ          Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL          : RBW:1000.000kHz VBW:0.010kHz          Mode : 24          Setting : MCS0 power setting 17          Plane : Z with Accessories          : #12 2Q37B1NF31000F</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>46.69</td> <td>54.00</td> <td>-7.31</td> <td>42.92</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>194</td> <td>125</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	46.69	54.00	-7.31	42.92	32.46	4.92	33.61	194	125	AVERAGE	<b>Blank</b>
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2483.68	46.69	54.00	-7.31	42.92	32.46	4.92	33.61	194	125	AVERAGE																														





<b>24</b>																																																																									
<b>Mode</b>	<b>Band Edge - L</b>																																																																								
<b>2400-2483.5_802.11 ax 20_CH6_Full_2437MHz</b>																																																																									
<b>ANT</b>	<b>1</b>																																																																								
<b>Pol.</b>	<b>Vertical</b>																																																																								
<b>Peak</b>	<b>Fundamental</b>																																																																								
<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>(dB)</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>PEAK</td> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.12</td> <td>55.30</td> <td>74.00</td> <td>-18.70</td> <td>51.97</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>387</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2389.12	55.30	74.00	-18.70	51.97	32.21	4.79	33.67	387	162	PEAK	<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>(dB)</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>PEAK</td> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>104.64</td> <td>-----</td> <td>-----</td> <td>101.11</td> <td>32.32</td> <td>4.85</td> <td>33.64</td> <td>387</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2437.00	104.64	-----	-----	101.11	32.32	4.85	33.64	387	162	PEAK
1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																														
1	2389.12	55.30	74.00	-18.70	51.97	32.21	4.79	33.67	387	162	PEAK																																																														
1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																														
1	2437.00	104.64	-----	-----	101.11	32.32	4.85	33.64	387	162	PEAK																																																														
<b>Avg</b>	<b>Fundamental</b>																																																																								
<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>(dB)</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>AVERAGE</td> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.76</td> <td>43.93</td> <td>54.00</td> <td>-10.07</td> <td>40.59</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>387</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2389.76	43.93	54.00	-10.07	40.59	32.21	4.80	33.67	387	162	AVERAGE	<p>Date: 2023-05-26</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.010kHz Mode : 24 Setting : MCS0 power setting 17 Plane : Z with Accessories : #12 2Q3781NF3300BF</p> <table border="1"> <thead> <tr> <th>1</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>(dB)</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>AVERAGE</td> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>94.07</td> <td>-----</td> <td>-----</td> <td>90.56</td> <td>32.31</td> <td>4.84</td> <td>33.64</td> <td>387</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table>	1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2437.00	94.07	-----	-----	90.56	32.31	4.84	33.64	387	162	AVERAGE
1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																														
1	2389.76	43.93	54.00	-10.07	40.59	32.21	4.80	33.67	387	162	AVERAGE																																																														
1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																														
1	2437.00	94.07	-----	-----	90.56	32.31	4.84	33.64	387	162	AVERAGE																																																														



	24	
Mode	Band Edge - R	
	2400-2483.5_802.11 ax 20_CH6_Full_2437MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	<p style="text-align: right;">Date: 2023-05-26</p>	
	Blank	
Avg	<p style="text-align: right;">Date: 2023-05-26</p>	
	Blank	

Site : 03CH03-SZ  
 Condition: PEAK\_BE\_74 3m ANT3117\_0057 VERTICAL  
 : RBW:1000.000kHz VBW:3000.000kHz  
 Mode : 24  
 Setting : MCS0 power setting 17  
 Plane : Z with Accessories  
 : #12 2Q3781NF33000F

Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg			
1	2487.34	55.73	74.00	-18.27	51.94	32.47	4.93	33.61	387	162	PEAK

Site : 03CH03-SZ  
 Condition: AVG\_BE\_54 3m ANT3117\_0057 VERTICAL  
 : RBW:1000.000kHz VBW:0.010kHz  
 Mode : 24  
 Setting : MCS0 power setting 17  
 Plane : Z with Accessories  
 : #12 2Q3781NF33000F

Limit	Margin	Read	Ant	Cable	Preamp	Apos	Tpos	Remark			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg			
1	2484.12	43.62	54.00	-10.38	39.85	32.46	4.92	33.61	387	162	AVERAGE



Mode	24																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11 ax 20_CH6_Full_2437MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL Project : 272102-02 Mode : 24 SN : #12 2Q3781WF3300BF Plane : Z with Accessories setting : MCS0 power setting 17</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>43.56</td> <td>74.00</td> <td>-30.44</td> <td>53.99</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>46.76</td> <td>74.00</td> <td>-27.24</td> <td>55.53</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor	cm	deg		1	4874.00	43.56	74.00	-30.44	53.99	34.65	7.77	52.85	--- Peak	2	7311.00	46.76	74.00	-27.24	55.53	36.41	8.93	54.11	--- Peak	<p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL Project : 272102-02 Mode : 24 SN : #12 2Q3781WF3300BF Plane : Z with Accessories setting : MCS0 power setting 17</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>43.90</td> <td>74.00</td> <td>-30.10</td> <td>54.33</td> <td>34.65</td> <td>7.77</td> <td>52.85</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>44.53</td> <td>74.00</td> <td>-29.47</td> <td>53.30</td> <td>36.41</td> <td>8.93</td> <td>54.11</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss Factor	cm	deg		1	4874.00	43.90	74.00	-30.10	54.33	34.65	7.77	52.85	--- Peak	2	7311.00	44.53	74.00	-29.47	53.30	36.41	8.93	54.11	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss Factor	cm	deg																																																																										
1	4874.00	43.56	74.00	-30.44	53.99	34.65	7.77	52.85	--- Peak																																																																									
2	7311.00	46.76	74.00	-27.24	55.53	36.41	8.93	54.11	--- Peak																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss Factor	cm	deg																																																																										
1	4874.00	43.90	74.00	-30.10	54.33	34.65	7.77	52.85	--- Peak																																																																									
2	7311.00	44.53	74.00	-29.47	53.30	36.41	8.93	54.11	--- Peak																																																																									



		<b>25</b>																																																
<b>Mode</b>	<b>Band Edge - L</b>																																																	
	<b>2400-2483.5_802.11 ax 20_CH6_RU26/0_2462MHz</b>																																																	
<b>ANT</b>	<b>1</b>																																																	
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																
<b>Peak</b>	<p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>1</th> <th>2388.23</th> <th>53.58</th> <th>74.00</th> <th>-20.42</th> <th>50.25</th> <th>32.21</th> <th>4.79</th> <th>33.67</th> <th>223</th> <th>59</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>Remark</td> </tr> </tbody> </table>	1	2388.23	53.58	74.00	-20.42	50.25	32.21	4.79	33.67	223	59	PEAK		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	<p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>1</th> <th>2437.00</th> <th>115.75</th> <th>-----</th> <th>-----</th> <th>112.21</th> <th>32.33</th> <th>4.85</th> <th>33.64</th> <th>223</th> <th>59</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>Remark</td> </tr> </tbody> </table>	1	2437.00	115.75	-----	-----	112.21	32.33	4.85	33.64	223	59	PEAK		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark
	1	2388.23	53.58	74.00	-20.42	50.25	32.21	4.79	33.67	223	59	PEAK																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																							
1	2437.00	115.75	-----	-----	112.21	32.33	4.85	33.64	223	59	PEAK																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																							
<b>Avg</b>	<p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.38</th> <th>41.34</th> <th>54.00</th> <th>-12.66</th> <th>38.00</th> <th>32.21</th> <th>4.80</th> <th>33.67</th> <th>223</th> <th>59</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>Remark</td> </tr> </tbody> </table>	1	2389.38	41.34	54.00	-12.66	38.00	32.21	4.80	33.67	223	59	AVERAGE		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	<p style="text-align: right;">Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>1</th> <th>2437.00</th> <th>106.52</th> <th>-----</th> <th>-----</th> <th>102.96</th> <th>32.34</th> <th>4.86</th> <th>33.64</th> <th>223</th> <th>59</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td>Remark</td> </tr> </tbody> </table>	1	2437.00	106.52	-----	-----	102.96	32.34	4.86	33.64	223	59	AVERAGE		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark
	1	2389.38	41.34	54.00	-12.66	38.00	32.21	4.80	33.67	223	59	AVERAGE																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																							
1	2437.00	106.52	-----	-----	102.96	32.34	4.86	33.64	223	59	AVERAGE																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																							



Mode	25																																								
	Band Edge - R																																								
	2400-2483.5_802.11 ax 20_CH6_RU26/0_2462MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2023-06-03</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH03-SZ            Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz            Mode : 25            Setting : MCS0 power setting 17.5            Plane : Z with Accessories 26/4            : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.75</td> <td>56.07</td> <td>74.00</td> <td>-17.93</td> <td>52.30</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>223</td> <td>59</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.75	56.07	74.00	-17.93	52.30	32.46	4.92	33.61	223	59	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Level	Factor	Loss Factor																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2484.75	56.07	74.00	-17.93	52.30	32.46	4.92	33.61	223	59	PEAK																														



		25																																																																														
Mode	Band Edge - L																																																																															
	2400-2483.5_802.11 ax 20_CH6_RU26/0_2462MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2023-06-03</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.01</td> <td>53.42</td> <td>74.00</td> <td>-20.58</td> <td>49.65</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>376</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.01	53.42	74.00	-20.58	49.65	32.46	4.92	33.61	376	192	PEAK	<p style="text-align: right;">Date: 2023-06-03</p> <p style="text-align: right;">PEAK_74</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>102.77</td> <td>-----</td> <td>-----</td> <td>99.23</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>376</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	102.77	-----	-----	99.23	32.33	4.85	33.64	376	192	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2485.01	53.42	74.00	-20.58	49.65	32.46	4.92	33.61	376	192	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2437.00	102.77	-----	-----	99.23	32.33	4.85	33.64	376	192	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2023-06-03</p> <p style="text-align: right;">AVG_54</p> <p>Site : 03CH03-SZ Condition: AVG_BE_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.96</td> <td>40.34</td> <td>54.00</td> <td>-13.66</td> <td>37.01</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>376</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2386.96	40.34	54.00	-13.66	37.01	32.21	4.79	33.67	376	192	AVERAGE	<p style="text-align: right;">Date: 2023-06-03</p> <p style="text-align: right;">AVG_54</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:0.300kHz Mode : 25 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 26/4 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>94.65</td> <td>-----</td> <td>-----</td> <td>91.11</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>376</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	94.65	-----	-----	91.11	32.33	4.85	33.64	376	192	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2386.96	40.34	54.00	-13.66	37.01	32.21	4.79	33.67	376	192	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2437.00	94.65	-----	-----	91.11	32.33	4.85	33.64	376	192	AVERAGE																																																																					



Mode	25																																							
	Band Edge - R																																							
	2400-2483.5_802.11 ax 20_CH6_RU26/0_2462MHz																																							
ANT	1																																							
Pol.	Vertical	Fundamental																																						
Avg	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ          Condition: AVG_BE_54 3m ANI3117_0057 VERTICAL          : RBW:1000.000kHz VBW:0.300kHz          Mode : 25          Setting : MCS0 power setting 17.5          Plane : Z with Accessories 26/4          : #26 2Q37B2DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.45</td> <td>41.14</td> <td>54.00</td> <td>-12.86</td> <td>37.37</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>376</td> <td>192 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.45	41.14	54.00	-12.86	37.37	32.46	4.92	33.61	376	192 AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																
1	2485.45	41.14	54.00	-12.86	37.37	32.46	4.92	33.61	376	192 AVERAGE																														



		<b>26</b>																																																																														
<b>Mode</b>	<b>Band Edge - L</b>																																																																															
	<b>2400-2483.5_802.11 ax 20_CH6_RU52/37_2462MHz</b>																																																																															
<b>ANT</b>	<b>1</b>																																																																															
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																														
<b>Peak</b>	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 52/38 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.63</td> <td>54.10</td> <td>74.00</td> <td>-19.90</td> <td>50.76</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>227</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	54.10	74.00	-19.90	50.76	32.21	4.80	33.67	227	65	PEAK	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: PEAK_74 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 52/38 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>114.57</td> <td>-----</td> <td>-----</td> <td>111.03</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>227</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	114.57	-----	-----	111.03	32.33	4.85	33.64	227	65	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.63	54.10	74.00	-19.90	50.76	32.21	4.80	33.67	227	65	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2437.00	114.57	-----	-----	111.03	32.33	4.85	33.64	227	65	PEAK																																																																					
<b>Avg</b>	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 52/38 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.38</td> <td>41.54</td> <td>54.00</td> <td>-12.46</td> <td>38.20</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>227</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.38	41.54	54.00	-12.46	38.20	32.21	4.80	33.67	227	65	AVERAGE	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ Condition: AVG_54 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz Mode : 26 Setting : MCS0 power setting 17.5 Plane : Z with Accessories 52/38 : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>104.21</td> <td>-----</td> <td>-----</td> <td>100.67</td> <td>32.33</td> <td>4.85</td> <td>33.64</td> <td>227</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.21	-----	-----	100.67	32.33	4.85	33.64	227	65	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.38	41.54	54.00	-12.46	38.20	32.21	4.80	33.67	227	65	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2437.00	104.21	-----	-----	100.67	32.33	4.85	33.64	227	65	AVERAGE																																																																					





	26																																								
Mode	Band Edge - R																																								
	2400-2483.5_802.11 ax 20_CH6_RU52/37_2462MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ            Condition: PEAK_BE_74 3m ANT3117_0057 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz            Mode : 26            Setting : MCS0 power setting 17.5            Plane : Z with Accessories 52/38            : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.42</td> <td>55.44</td> <td>74.00</td> <td>-18.56</td> <td>51.65</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>227</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2489.42	55.44	74.00	-18.56	51.65	32.47	4.93	33.61	227	65	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2489.42	55.44	74.00	-18.56	51.65	32.47	4.93	33.61	227	65	PEAK																														
Avg	<p>Date: 2023-06-03</p> <p>Site : 03CH03-SZ            Condition: AVG_BE_54 3m ANT3117_0057 HORIZONTAL            : RBW:1000.000kHz VBW:0.300kHz            Mode : 26            Setting : MCS0 power setting 17.5            Plane : Z with Accessories 52/38            : #26 2Q3782DF47004P</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.95</td> <td>42.86</td> <td>54.00</td> <td>-11.14</td> <td>39.09</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>227</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.95	42.86	54.00	-11.14	39.09	32.46	4.92	33.61	227	65	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	2485.95	42.86	54.00	-11.14	39.09	32.46	4.92	33.61	227	65	AVERAGE																														