

Appendix A

RF Test Data for BT LE V4.0 (Conducted Measurement)

Product Name: BLUETOOTH AUDIO RECEIVER

Trade Mark: DS18


Test Model: BT-TWO

Environmental Conditions

Temperature:	21.4 °C
Relative Humidity:	51.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Carl Fu
Supervised by:	Li Huan


A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

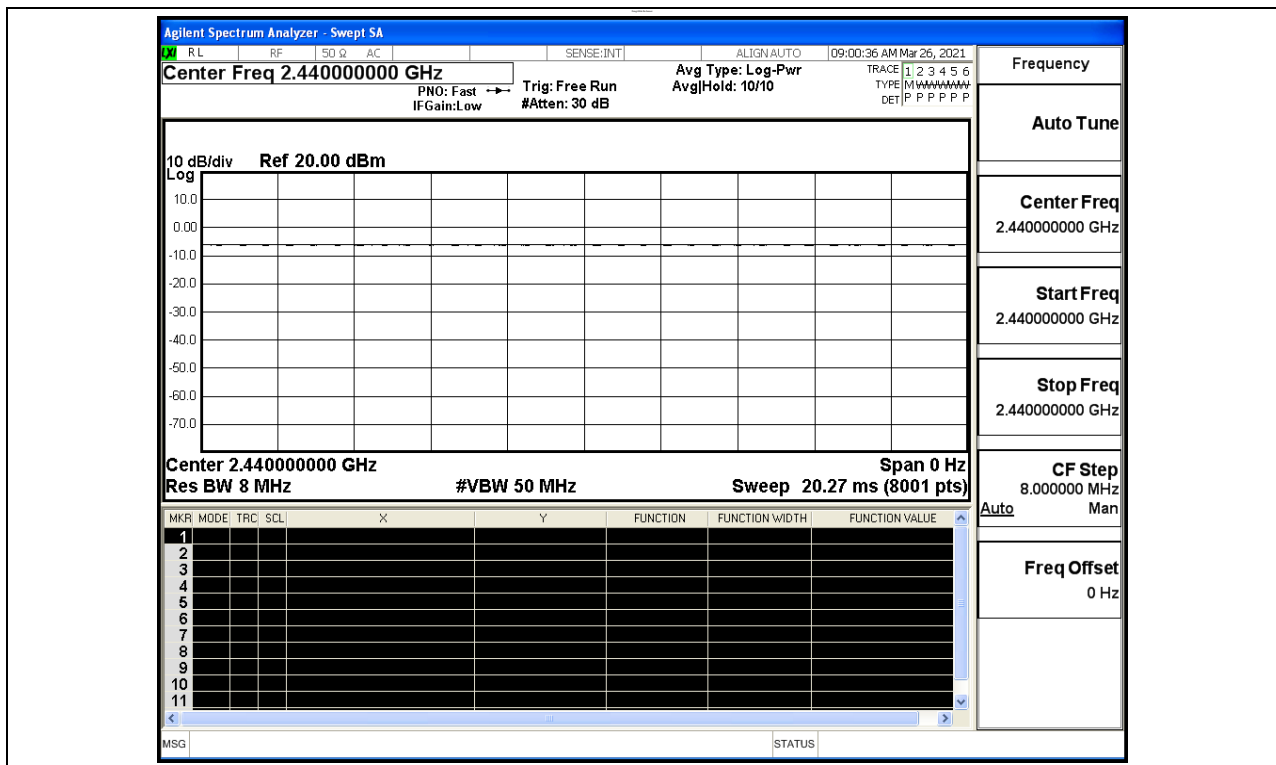


A.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	0.224	30	PASS
BT LE	MCH	1.731	30	PASS
BT LE	HCH	0.354	30	PASS

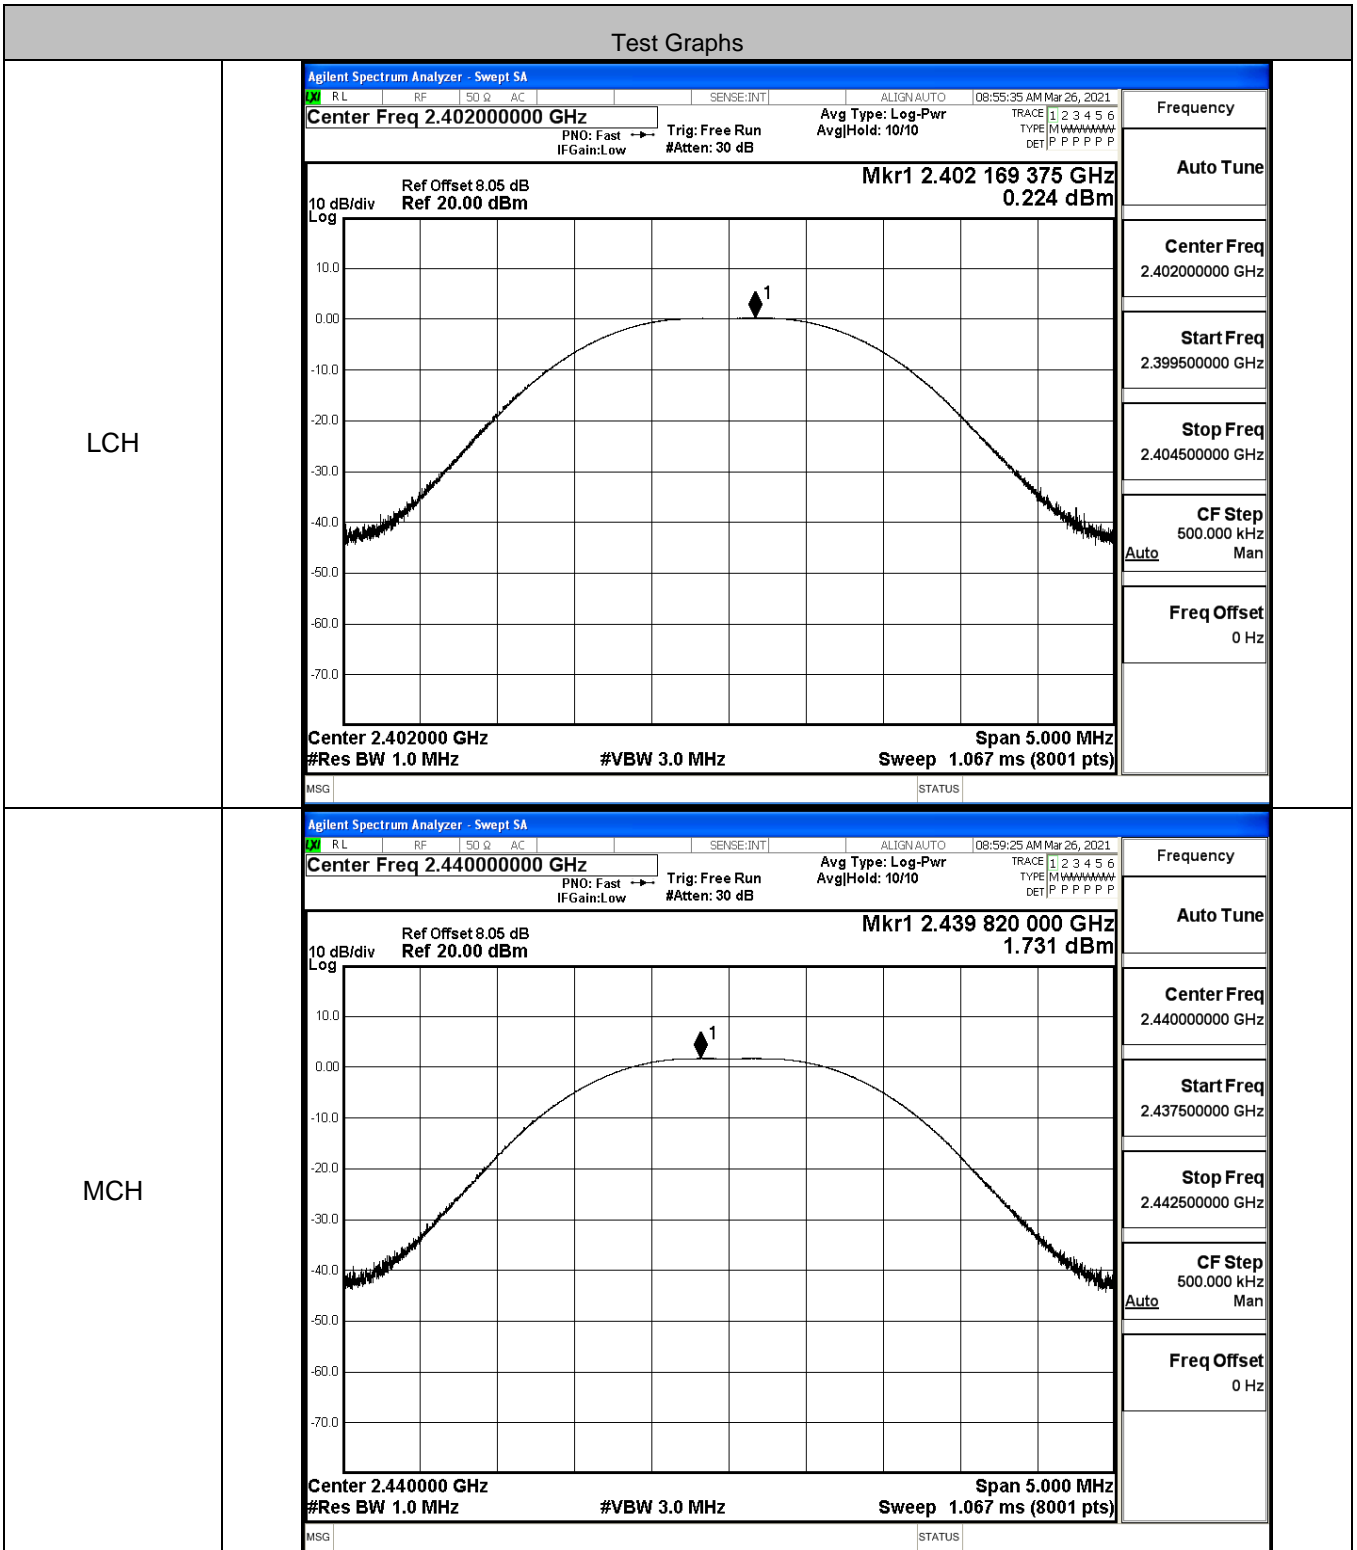



HCH

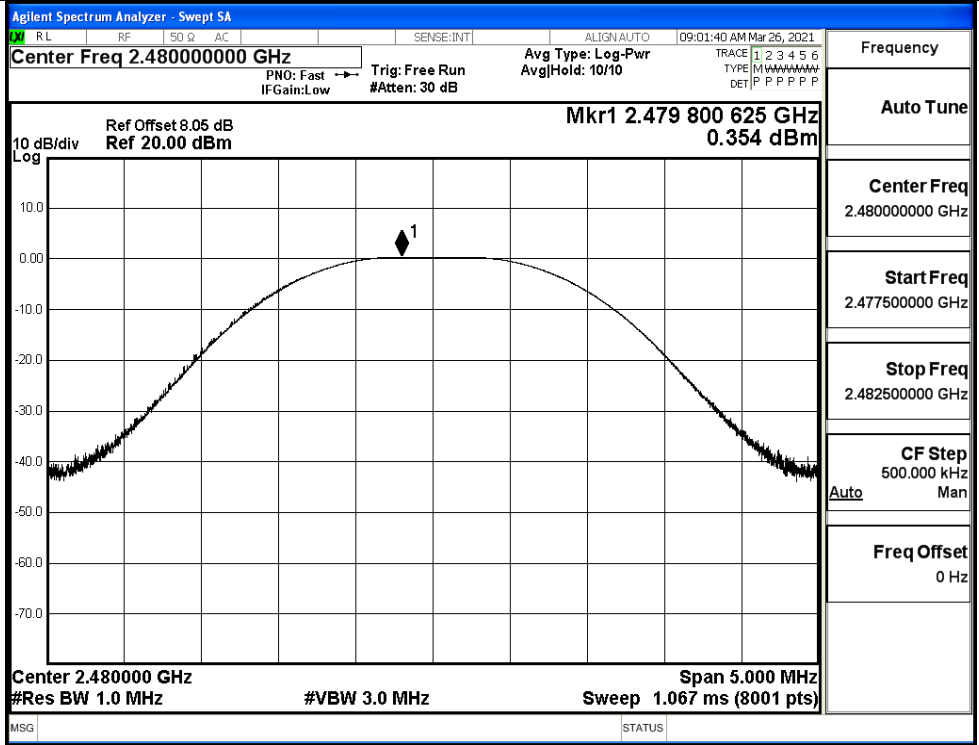

A.3 Maximum Power Spectral Density



Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-14.577	8	PASS
BT LE	MCH	-12.976	8	PASS
BT LE	HCH	-14.590	8	PASS

Test Graphs

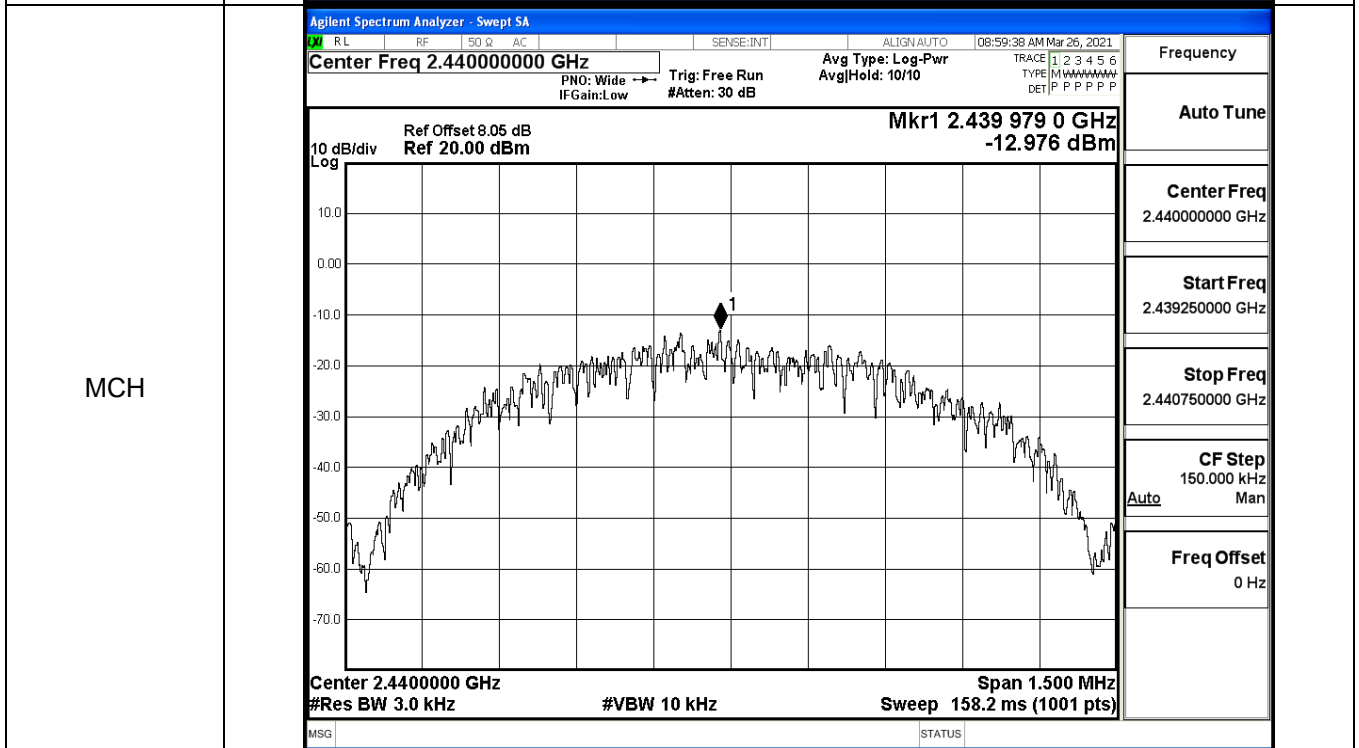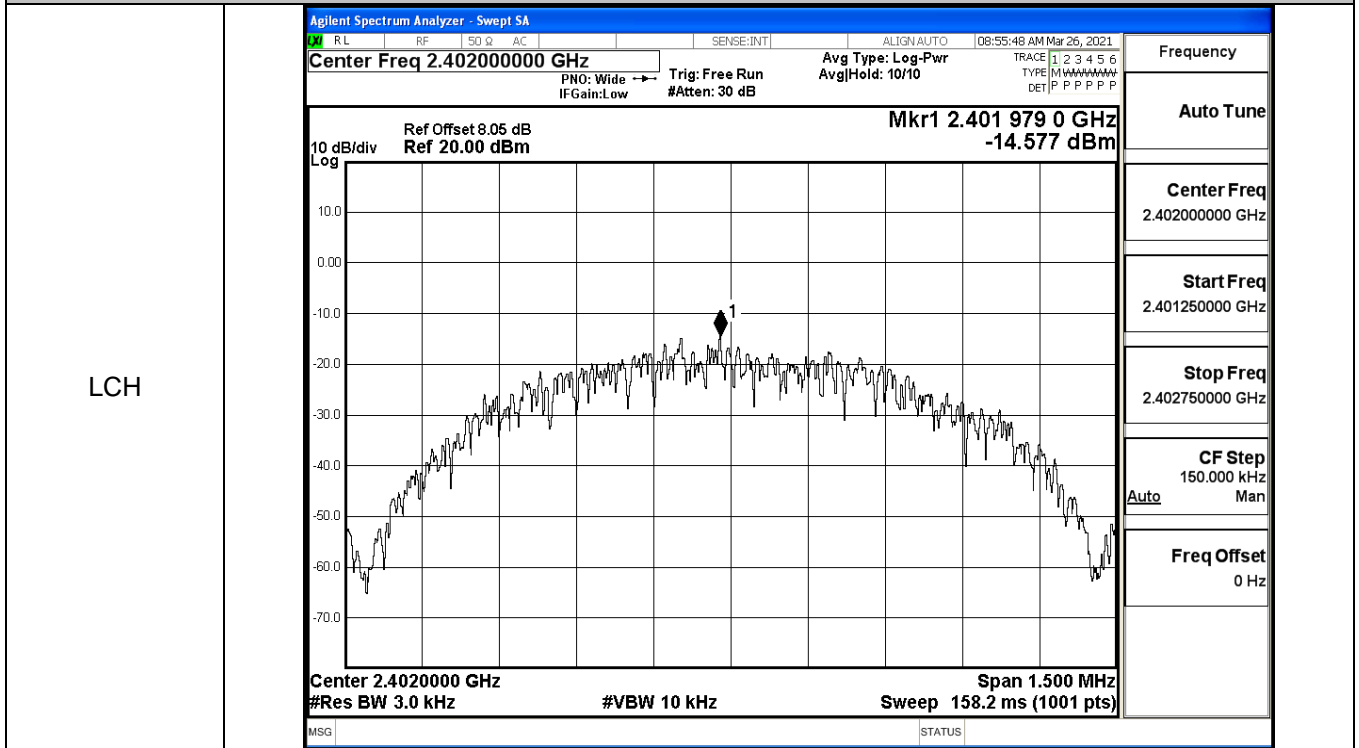

A.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6698	≥0.5	PASS
BT LE	MCH	0.6742	≥0.5	PASS
BT LE	HCH	0.6712	≥0.5	PASS

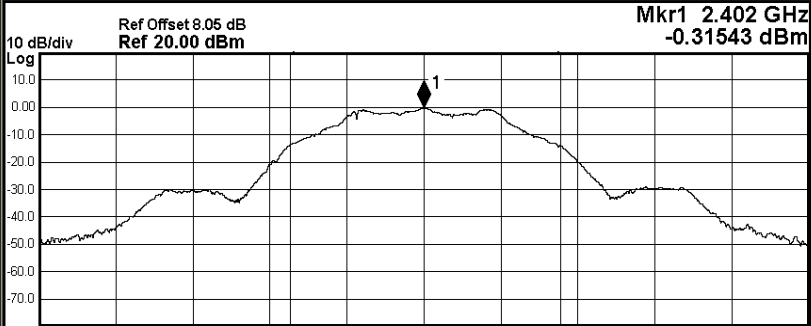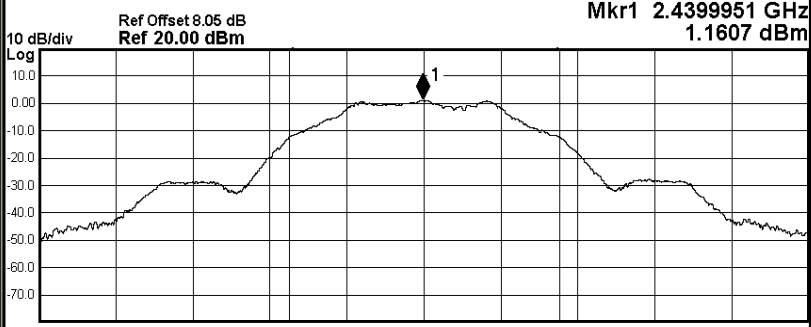Test Graphs																			
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 08:55:24 AM Mar 26, 2021</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Trig: Free Run AvgHold>1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 8.05 dB Mkr1 2.402 GHz Log Ref 20.00 dBm -0.31543 dBm</p>  <p style="font-size: x-small; margin: 0;">Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">6.42 dBm</td> </tr> <tr> <td style="text-align: center;">1.0485 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>6.301 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>669.8 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 5px;"> MSG STATUS </div>	Occupied Bandwidth	Total Power	6.42 dBm	1.0485 MHz			Transmit Freq Error	6.301 kHz	OBW Power	x dB Bandwidth	669.8 kHz	x dB			99.00 %			-6.00 dB
Occupied Bandwidth	Total Power	6.42 dBm																	
1.0485 MHz																			
Transmit Freq Error	6.301 kHz	OBW Power																	
x dB Bandwidth	669.8 kHz	x dB																	
		99.00 %																	
		-6.00 dB																	
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 08:59:14 AM Mar 26, 2021</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None Trig: Free Run AvgHold>1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="border: 1px solid black; padding: 2px;"> <p style="font-size: x-small; margin: 0;">10 dB/div Ref Offset 8.05 dB Mkr1 2.4399951 GHz Log Ref 20.00 dBm 1.1607 dBm</p>  <p style="font-size: x-small; margin: 0;">Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <table style="width: 100%; font-size: x-small; border-collapse: collapse;"> <tr> <td style="width: 33%;">Occupied Bandwidth</td> <td style="width: 33%;">Total Power</td> <td style="width: 33%;">7.91 dBm</td> </tr> <tr> <td style="text-align: center;">1.0483 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>4.824 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>674.2 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>99.00 %</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small; margin-top: 5px;"> MSG STATUS </div>	Occupied Bandwidth	Total Power	7.91 dBm	1.0483 MHz			Transmit Freq Error	4.824 kHz	OBW Power	x dB Bandwidth	674.2 kHz	x dB			99.00 %			-6.00 dB
Occupied Bandwidth	Total Power	7.91 dBm																	
1.0483 MHz																			
Transmit Freq Error	4.824 kHz	OBW Power																	
x dB Bandwidth	674.2 kHz	x dB																	
		99.00 %																	
		-6.00 dB																	

HCH

Agilent Spectrum Analyzer - Occupied BW

<input type="checkbox"/> RL	<input type="checkbox"/> RF	<input type="checkbox"/> 50 Ω	<input type="checkbox"/> AC		SENSE:INT	ALIGN:AUTO	09:01:29 AM Mar 26, 2021
Center Freq 2.480000000 GHz				Center Freq: 2.480000000 GHz		Radio Std: None	
				Trig: Free Run		AvgJHold: 1/1	
				#IFGain:Low		#Atten: 30 dB	
				Radio Device: BTS			

10 dB/div
Ref Offset 8.05 dB
Mkr1 2.4800019 GHz

Log
Ref 20.00 dBm
-0.15518 dBm

Center 2.48 GHz
#VBW 300 kHz
Span 3 MHz

#Res BW 100 kHz
Sweep 1.067 ms


Occupied Bandwidth	Total Power	6.62 dBm
1.0458 MHz		
Transmit Freq Error	4.580 kHz	OBW Power 99.00 %
x dB Bandwidth	671.2 kHz	x dB -6.00 dB

MSG
STATUS

Frequency
Center Freq 2.480000000 GHz
CF Step 300.000 kHz Auto Man
Freq Offset 0 Hz


A.6 RF Conducted Spurious Emissions

Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.36	-37.983	-20.360	PASS
BT LE	MCH	1.153	-38.002	-18.847	PASS
BT LE	HCH	-0.185	-37.610	-20.185	PASS

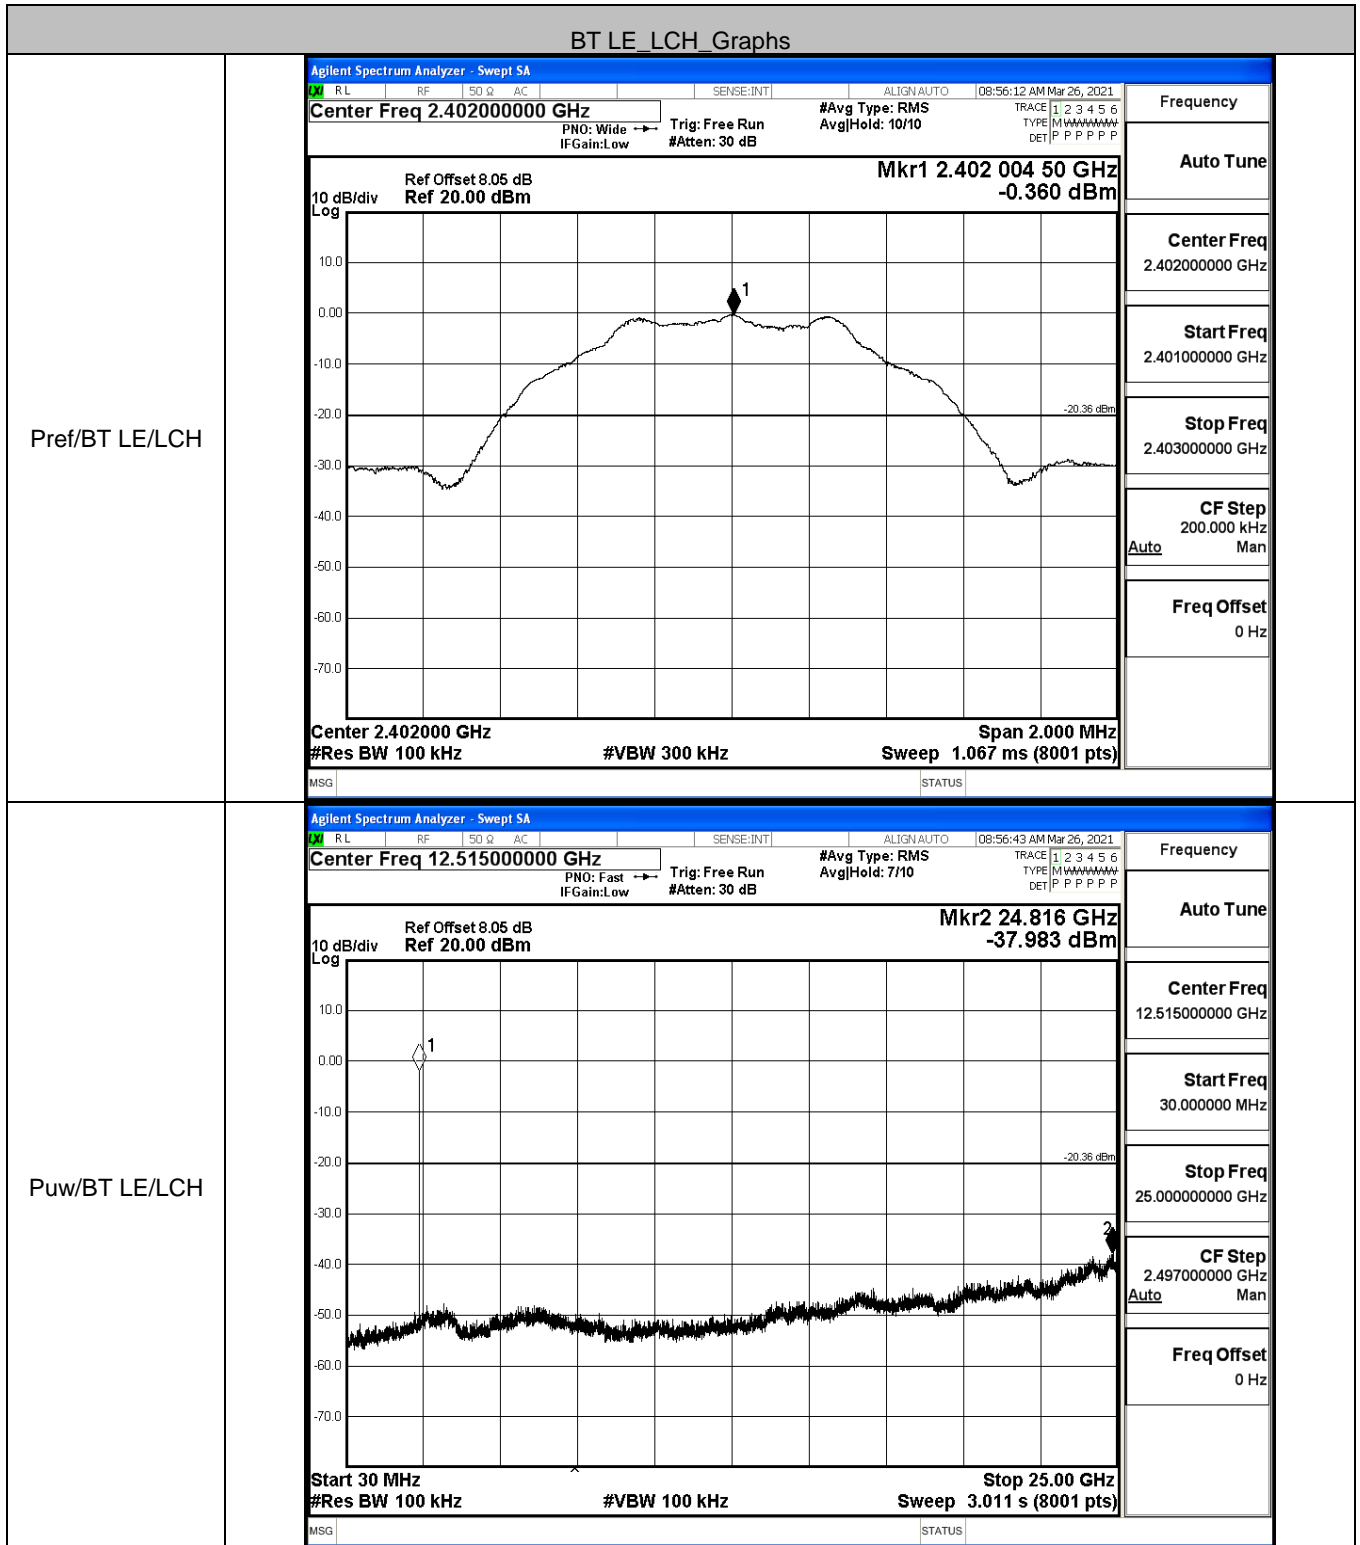


BT LE_MCH_Graphs

Pref/BT LE/MCH

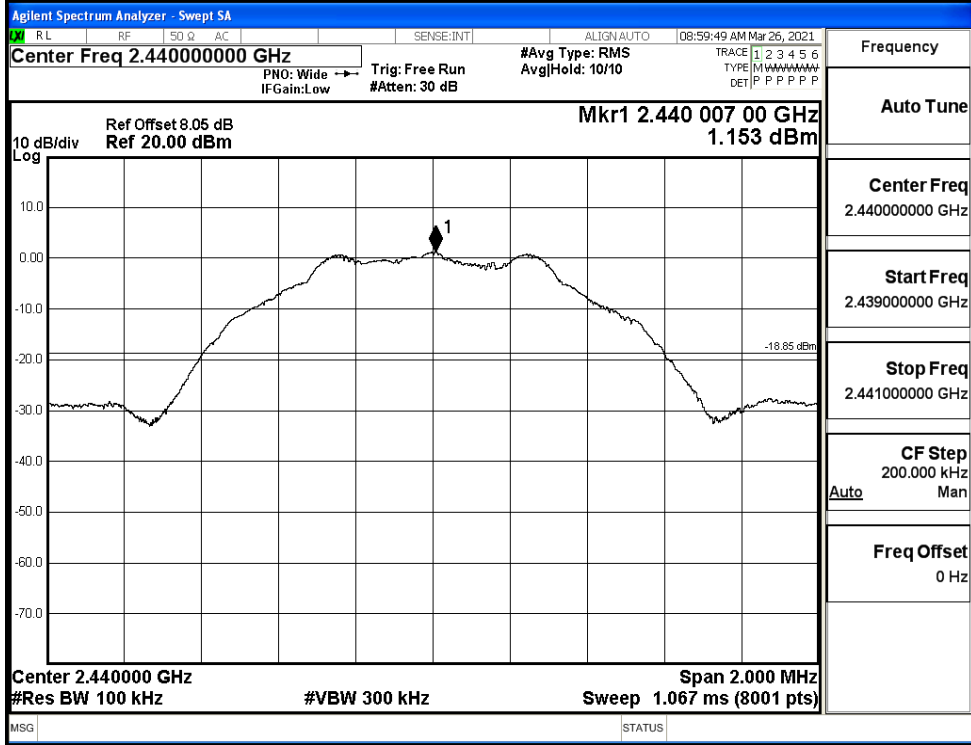


Puw/BT LE/MCH

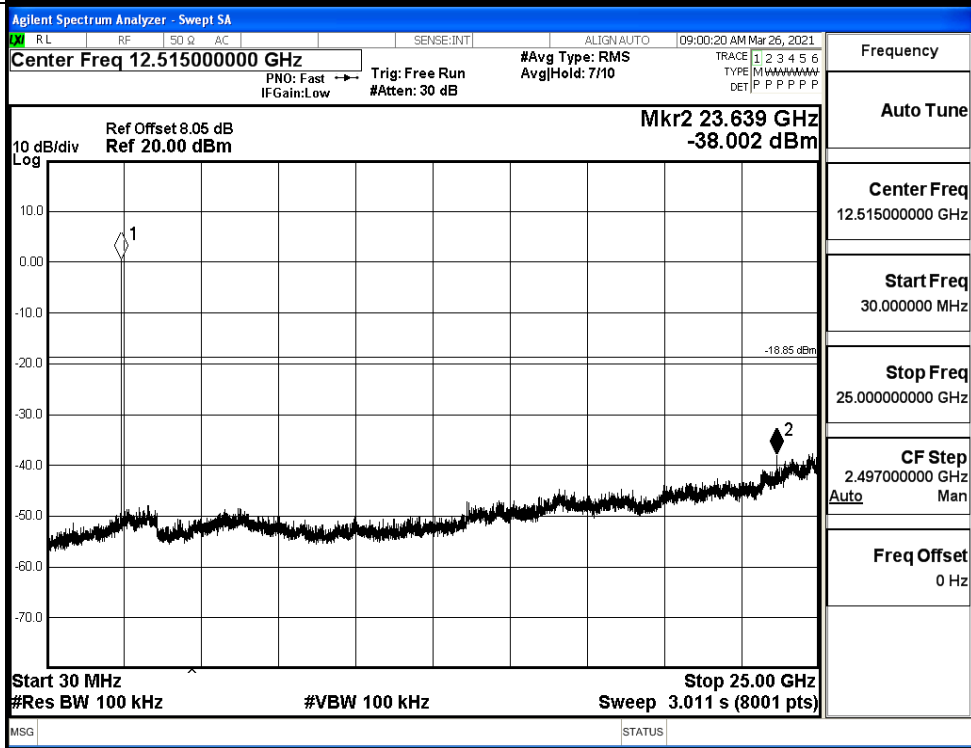


BT LE_HCH_Graphs

Pref/BT LE/HCH

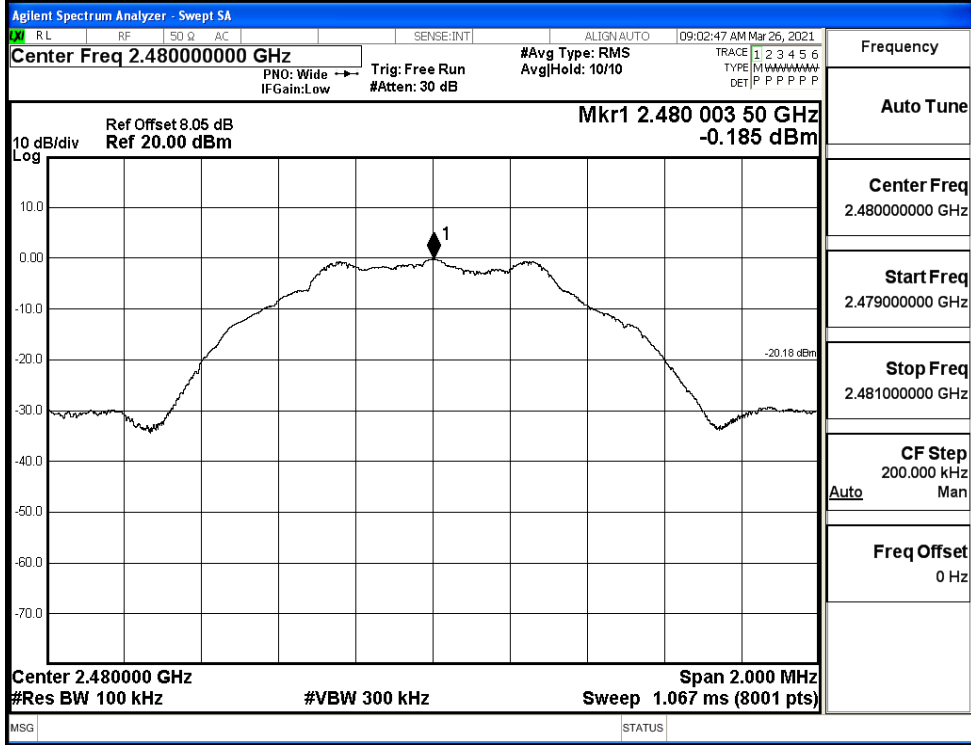

Puw/BT LE/HCH

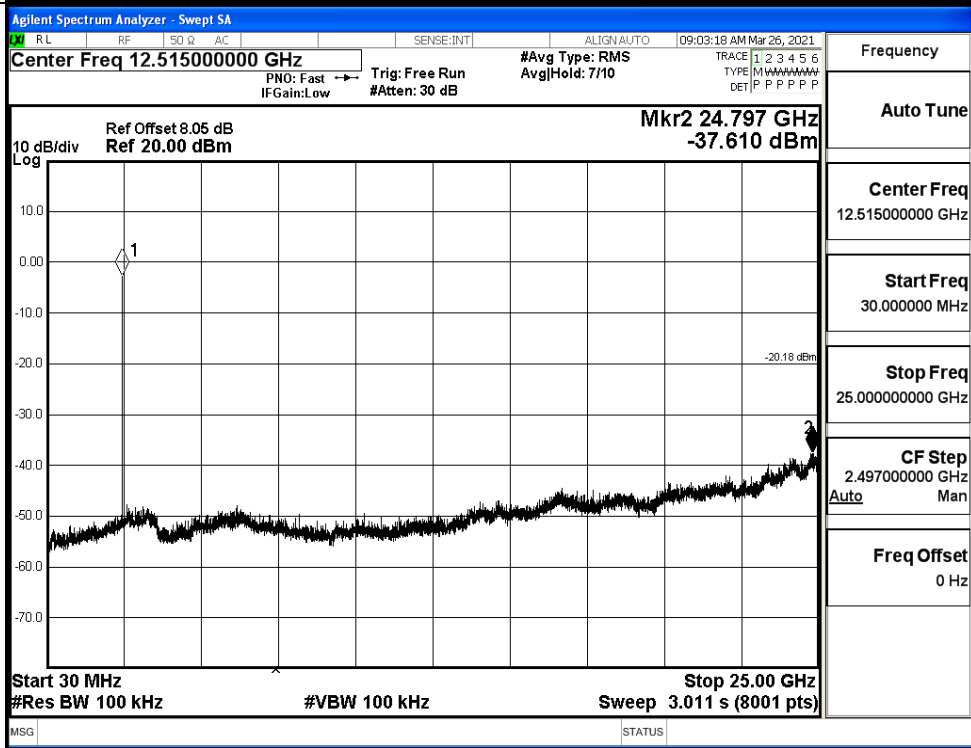

A.7 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-0.246	-49.249	-20.25	PASS
BT LE	HCH	-0.040	-48.099	-20.04	PASS


Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.35700000 GHz Max Spurious Level: -49.249 dBm Mkr4 2.371 370 GHz Start 2.31000 GHz, Stop 2.40400 GHz #Res BW 100 kHz, #VBW 300 kHz, Sweep 9.067 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.402 003 GHz</td><td>-0.246 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.400 000 GHz</td><td>-53.313 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.390 000 GHz</td><td>-54.711 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.371 370 GHz</td><td>-49.249 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.402 003 GHz	-0.246 dBm				2	N	f		2.400 000 GHz	-53.313 dBm				3	N	f		2.390 000 GHz	-54.711 dBm				4	N	f		2.371 370 GHz	-49.249 dBm				Frequency Auto Tune Center Freq 2.35700000 GHz Start Freq 2.310000000 GHz Stop Freq 2.404000000 GHz CF Step 9.400000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.402 003 GHz	-0.246 dBm																																										
2	N	f		2.400 000 GHz	-53.313 dBm																																										
3	N	f		2.390 000 GHz	-54.711 dBm																																										
4	N	f		2.371 370 GHz	-49.249 dBm																																										
HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48900000 GHz Max Spurious Level: -48.099 dBm Mkr4 2.494 230 50 GHz Start 2.47800 GHz, Stop 2.50000 GHz #Res BW 100 kHz, #VBW 300 kHz, Sweep 2.133 ms (8001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td></td><td>2.480 002 00 GHz</td><td>-0.040 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>f</td><td></td><td>2.483 500 00 GHz</td><td>-51.818 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>f</td><td></td><td>2.500 000 00 GHz</td><td>-53.349 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>f</td><td></td><td>2.494 230 50 GHz</td><td>-48.099 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f		2.480 002 00 GHz	-0.040 dBm				2	N	f		2.483 500 00 GHz	-51.818 dBm				3	N	f		2.500 000 00 GHz	-53.349 dBm				4	N	f		2.494 230 50 GHz	-48.099 dBm				Frequency Auto Tune Center Freq 2.48900000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Freq Offset 0 Hz
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	f		2.480 002 00 GHz	-0.040 dBm																																										
2	N	f		2.483 500 00 GHz	-51.818 dBm																																										
3	N	f		2.500 000 00 GHz	-53.349 dBm																																										
4	N	f		2.494 230 50 GHz	-48.099 dBm																																										


A.8 Restrict-band band-edge measurements

Test Mode	Test Channel	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BT LE	2402	2310.0	-44.14	2.0	0	53.09	PEAK	74	PASS
		2310.0	-53.59	2.0	0	43.64	AV	54	PASS
		2390.0	-43.00	2.0	0	54.23	PEAK	74	PASS
		2390.0	-53.08	2.0	0	44.15	AV	54	PASS
	2480	2483.5	-40.74	2.0	0	56.49	PEAK	74	PASS
		2483.5	-52.50	2.0	0	44.73	AV	54	PASS
		2500.0	-40.92	2.0	0	56.31	PEAK	74	PASS
		2500.0	-52.32	2.0	0	44.91	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

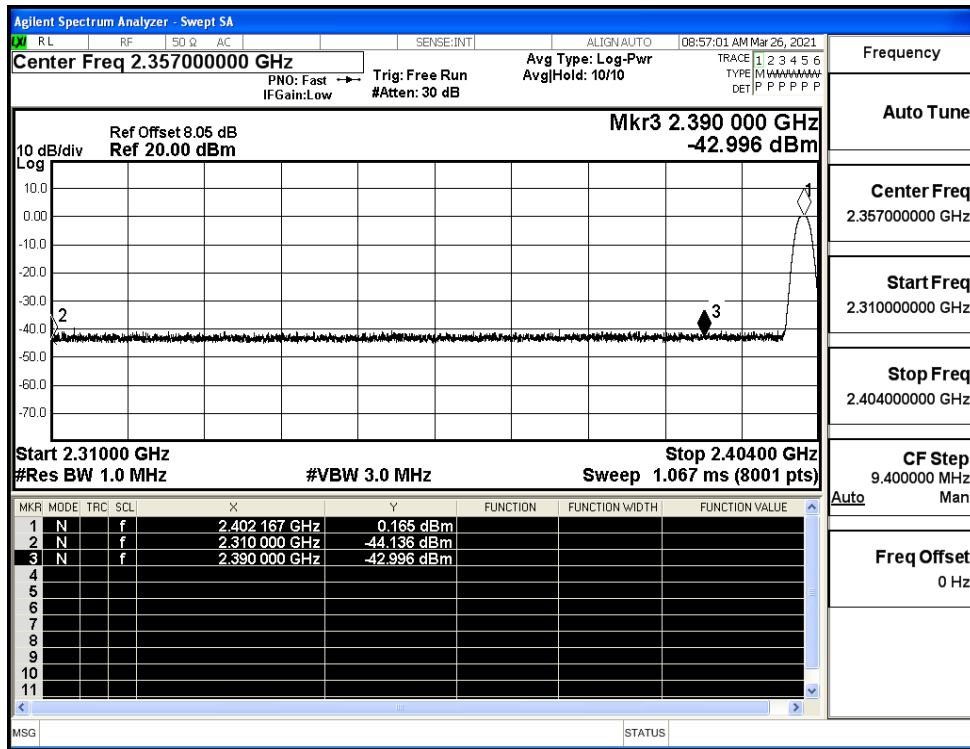

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

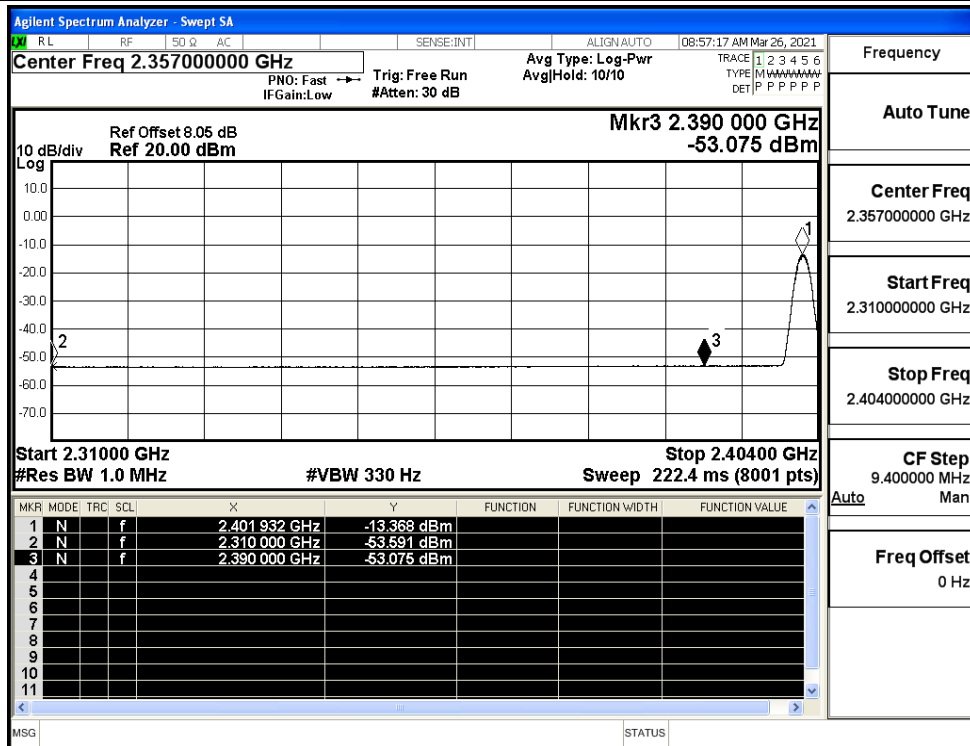

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

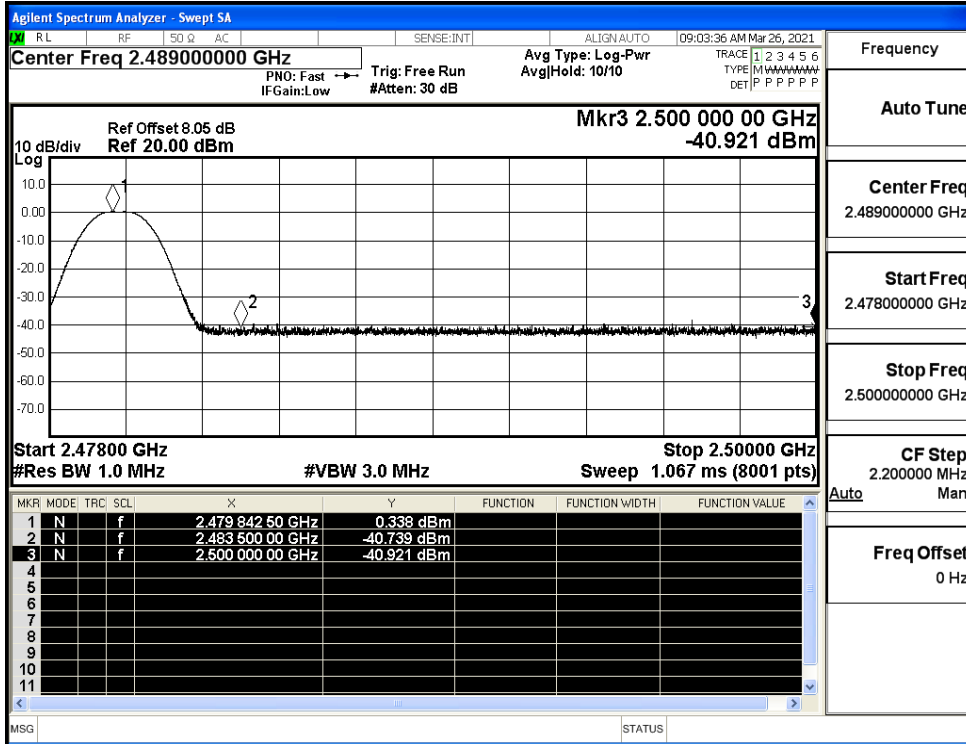

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

