




DS18[®]
HYDRO

OWNER'S MANUAL
BKS-BT


WATERPROOF-RATED ROCKER
SWITCH RECEIVER REMOTE CONTROL

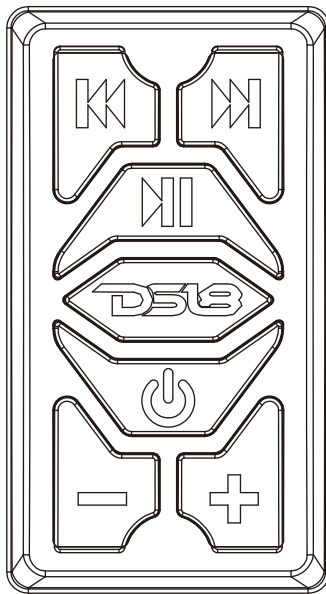

RKS-BT

Congratulations on the purchase of the RKS-BT. It has been designed, engineered and manufactured for the highest level of performance and quality.

WIRE DIAGRAM

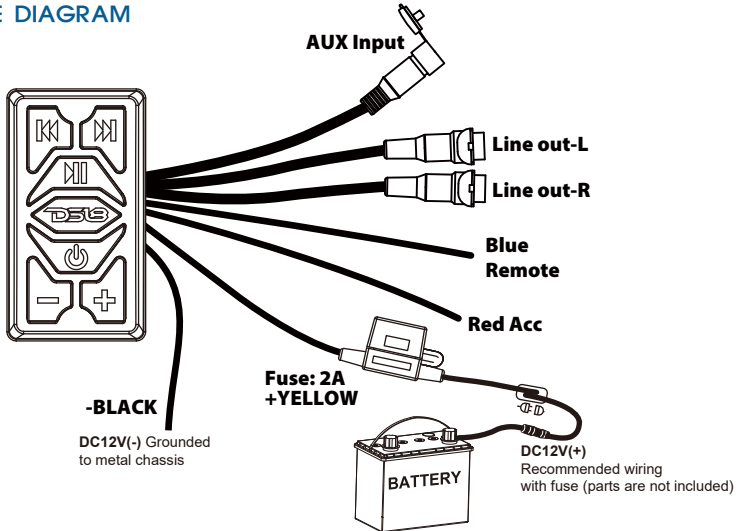

Wire Color	Description
Yellow -----	Battery (+), 12dc
Black -----	Battery (-), Ground
White -----	Line out-L
Red -----	Line out-R
Red -----	ACC
Blue -----	REMOTE

BT Pairing and Connection

Power:

1. Press and hold  to power ON/OFF.











Wireless BT Streaming Connection:


- a. Ensure BT ability is activated, then search for the **RKS-BT** from your BT-enabled device. The light will turn blue and blinks while waiting for BT connection.
- b. The **RKS-BT** BT Network Name will appear as "RKS-BT" (No password is required for connecting).
- c. When the BT is connected, the light will turn blue and stops blinking.

Auto Reconnection:


- When the device is out of the BT range, BT will be disconnected automatically, the light turns blue while blinking.
- BT will automatically reconnect when detected in range again in 10 minutes.
- Disconnected BT after 10 minutes, you need to process BT connection steps (above) to reconnect BT again.
- If the other device occupied the BT during this period (10mins), you need to process BT connection steps (above).

Playing Music

- Long press  3 seconds for Power on / off
Short press  for switching BT / AUX In mode
- Short press  for play / pause
Long press  for LED off / on
- Short press  for previous song
- Short press  for next song
- Short press  to increase volume by one scale
Long press  to continuously increase volume
- Short press  to decrease volume by one scale
Long press  to continuously decrease volume

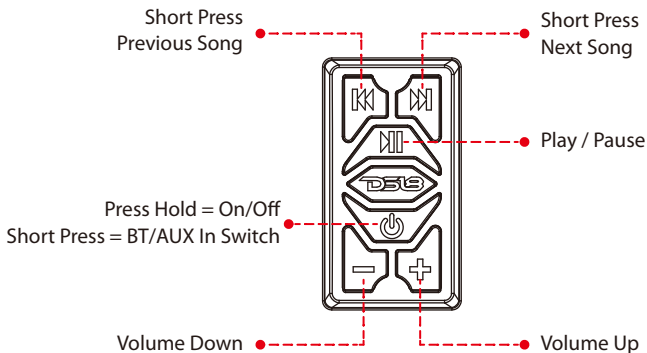

Installation (Seamless Flush Mount)

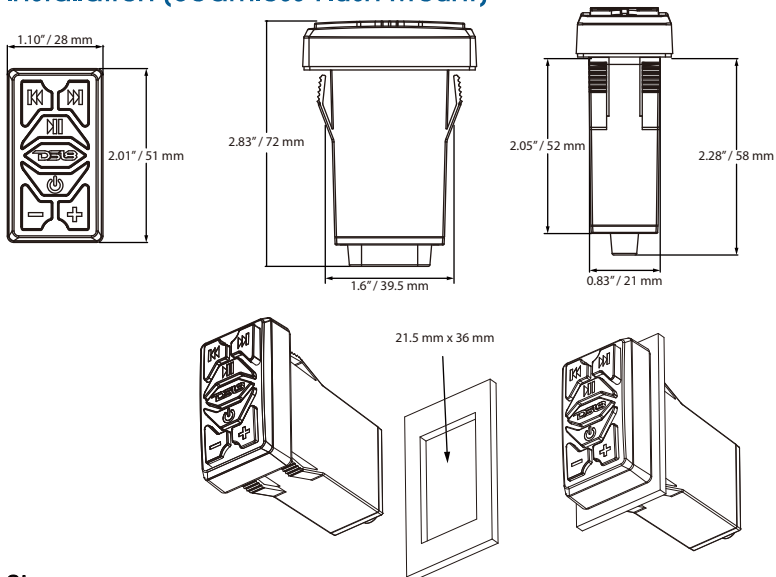

Size:

- 28 mm / 1.10" (Overall Length)
- 51 mm / 2.01" (Overall Depth)
- 72 mm / 2.83" (Overall Height)
- 21.5 mm x 36 mm / 0.85"x1.42" (Mounting Hole Size)

FEATURES:

- Rocker Switch Universal Mount BT Control Unit
- Built-in Wireless BT Audio Receiver
- Marine Grade Construction
- Water-Resistant, Weatherproof Design
- Connect & Stream Audio from Additional External Devices
- Aux (3.5mm) Input
- Full-Range Stereo Sound Reproduction
- Integrated Power Wiring Harness
- Pre-Amp RCA Out to Any OEM/Factory-Made Mono-Block /Full-Range Amplifier



- Universal Vehicle Mounting on Rocker Switch Position
- Anti-Thump On/Off
- Soft Turn On/Off
- Overload & Power Protection Circuitry
- Great For Cars, Trucks, ATVs, UTV's, 4x4s, Boats,
- Marine Watercrafts, & PowerSport Vehicles

ROCKER SWITCH WIRELESS BT MUSIC STREAMING:

- Simple & Hassle-Free Pairing
- Instant Wireless Audio-Streaming Receiver
- Works with All of Today's Latest Devices
- Smartphones, Tablets, Laptops, Computers, etc.
- Wireless BT Version: 5.0
- Wireless BT Network Name: 'RKS-BT'
- Wireless Range: Up to 30+ ft

WHAT'S IN THE BOX:

- (1) Rocker Switch Wireless BT Control Unit
- (1) 3.5 mm Auto Connection Cable

TECHNICAL SPECS:

- Construction Materials: Silicon + PP
- Marine Grade Waterproof Rating: IPX6
- Fuse: 2A
- RCA Line Out (Pre-Amp): 1 Pair (Left & Right) 2.5Volts
- Aux Line Input: Plug 3.5mm
- Power Output: DC 12V
- Total Unit Dimensions (Lx W x H):
1.10" x 2.01" x 2.87" -inches (Flush Mount)

WARNING

While we have designed the mounting system to provide a safe and stable installation, it is important to remember these are objects that will be used in an environment that is extremely bumpy and turbulent. Please consider all possible scenarios where these will be placed and secured.

All specifications subject to change without notice

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.



DSL8[®]