



NBTR

Marine Bluetooth® controller



OWNER'S MANUAL



WARNING:

This product can potentially expose you to chemicals including lead, nickel and chromium which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Thank you for making **NOAM** your choice for marine audio entertainment!


NBTR

Marine Bluetooth® controller

- Designed for marine and powersports applications.
- IPX6 water resistance rating.
- For all elements.
- Bluetooth® connectivity.
- Wireless connection range up to 35ft.*
- 3.5mm jack auxiliary audio input.
- RCA pre-output and remote turn-on to connect external amplifiers.
- Use it as stand-alone source unit/receiver.
- Easy to use - LED illuminated push buttons.
- One hole design for easy installation.
- Including 9' RCA cables and a NOAM rocker switch.

* Conditions may vary the maximum range.

Bluetooth® Pairing and Connection

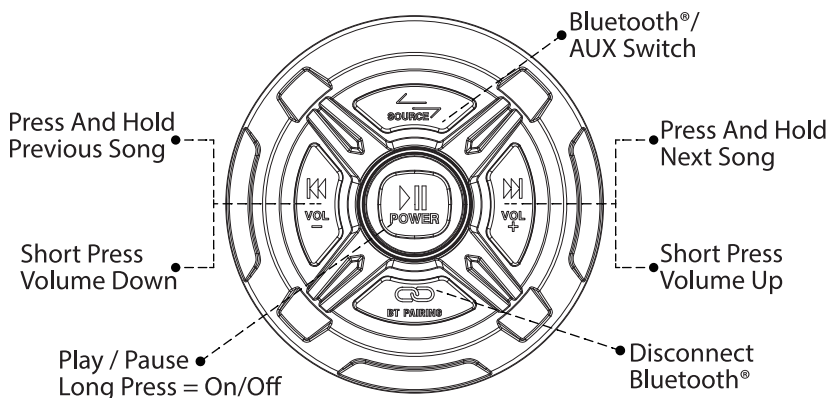

Power:

1. Long press the power button to power on/off.

Wireless Bluetooth® Streaming Connection:

- a. Ensure Bluetooth mode is activated, then search for the NBTR from your Bluetooth-enabled device. The light will blink short and fast while waiting for Bluetooth connection.
- b. The NBTR Bluetooth Network Name will appear as “NOAM” (No password is required for connecting).
- c. When the Bluetooth is connected, the light will blink slower.









AUX-IN

- a. Short press  to switch Bluetooth mode to Aux-in mode.


Auto Reconnection:

- a. When the Bluetooth device is out of range, the NBTR's Bluetooth will disconnect automatically and the buttons will start blinking short and fast.
- b. If within 10 minutes, the Bluetooth device will be back in range, the NBTR will automatically reconnect to it.
- c. If 10 minutes have passed, you will need to manually reconnect with the NBTR.

Playing Music

1. Long press  for 3 seconds to Power ON or OFF.
2. Short press  to play music or pause.
3. Short press  to switch Bluetooth mode/Aux-in mode.
4. Short press  for volume up, press and hold  for next track.
5. Short press  for volume down, press and hold  for previous track.
6. Press and hold  to disconnect Bluetooth.


Installation (Seamless Flush Mount)

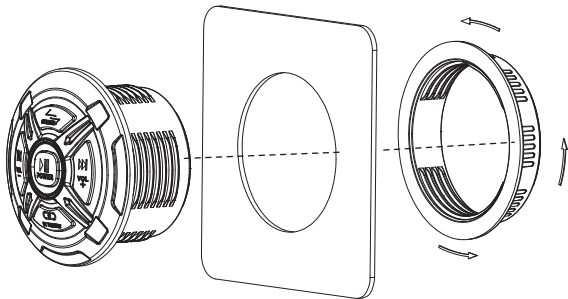

Size:

- 3.43" (Overall Diameter)
- 2.76" (Overall Depth)
- 2.75" (Mounting Hole Diameter)
- 2.20" (Mounting Depth)

Wire Diagram

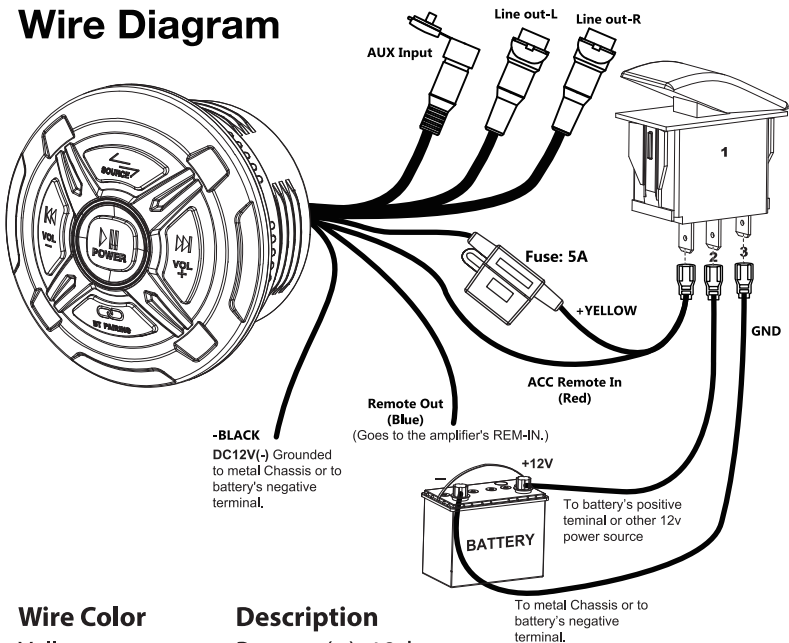

Wire Color

Description

- | | |
|--------------|-----------------------------|
| Yellow ----- | Battery (+), 12dc |
| Black ----- | Battery (-), Ground |
| White ----- | Line out-L |
| Red ----- | Line out-R |
| Red ----- | ACC |
| Blue ----- | REMOTE |
| Red ----- | 2-rocker switch power wire |
| Black ----- | 3-rocker switch Ground wire |

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.