

TEST REPORT

Product Name: Dual lens smart floodlight cameraFF002
FCC ID: 2AYZ8WP0500137
Trademark: N/A
Model Number: WP0500137
Prepared For: Linkzone Technology Co., Limited
Address: Room 510, 5/F, Wayson Commercial Building, 28 Connaught Road West, Sheung Wan, Hong Kong, China
Manufacturer: Linkzone Technology Co., Limited
Address: Room 510, 5/F, Wayson Commercial Building, 28 Connaught Road West, Sheung Wan, Hong Kong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jun. 21, 2023
Sample tested Date: Jun. 21, 2023 to Jul. 12, 2023
Issue Date: Jul. 12, 2023
Report No.: CTB230711053RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

ChenZheng

Chen Zheng

Arron Liu

Arron Liu



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	38
8.1 Block Diagram Of Test Setup.....	38
8.2 Limit.....	38
8.3 Test procedure	38
9. CONDUCTED OUTPUT POWER.....	55
9.1 Block Diagram Of Test Setup.....	55
9.2 Limit.....	55
9.3 Test procedure	55
9.4 Test Result	56
10. 6DB OCCUPIED BANDWIDTH.....	57
10.1 Block Diagram Of Test Setup.....	57
10.2 Limit.....	57
10.3 Test procedure	57
10.4 Test Result	58
11. POWER SPECTRAL DENSITY.....	68
11.1 Block Diagram Of Test Setup.....	68
11.2 Limit.....	68
11.3 Test procedure	68
11.4 Test Result	69
12. ANTENNA REQUIREMENT	78
13. EUT TEST SETUP PHOTOGRAPHS.....	79

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB230711053RFX	Jul. 12, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): WP0500137
 Model Description: N/A
 Wi-Fi Specification: IEEE 802.11b/g/n
 Hardware Version: V1.0
 Software Version: V1.0
 Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel
 IEEE 802.11n 40: 2422-2452MHz/ 7 channel
 Max. RF output power: WiFi (2.4G) : 17.005dBm
 Type of Modulation: WiFi: DSSS, OFDM
 Antenna installation: WiFi: FPC Antenna
 Antenna Gain: WiFi (2.4G) : ANT1:-2.73dBi
 ANT2:-2.74dBi
 Ratings: AC110-240V, 50/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.0dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=0.5dB,

So the directional gain for PSD is 1.5dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.0dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC)V:	120
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

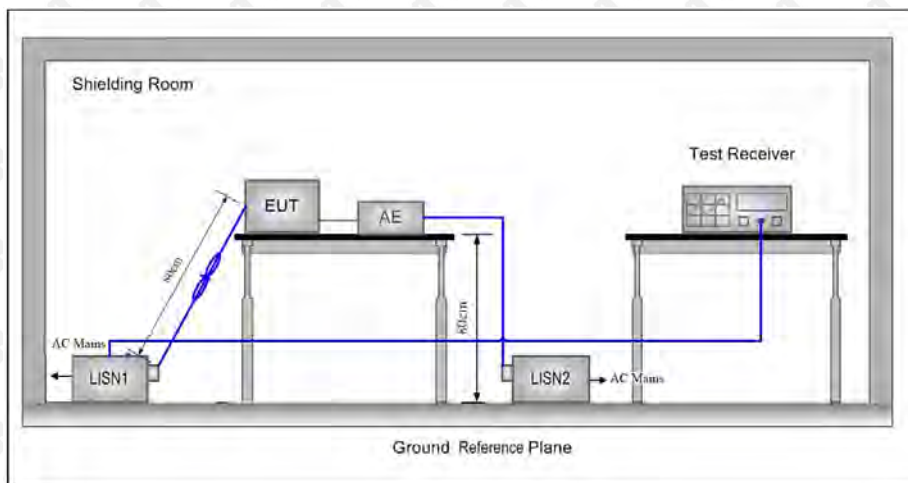

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

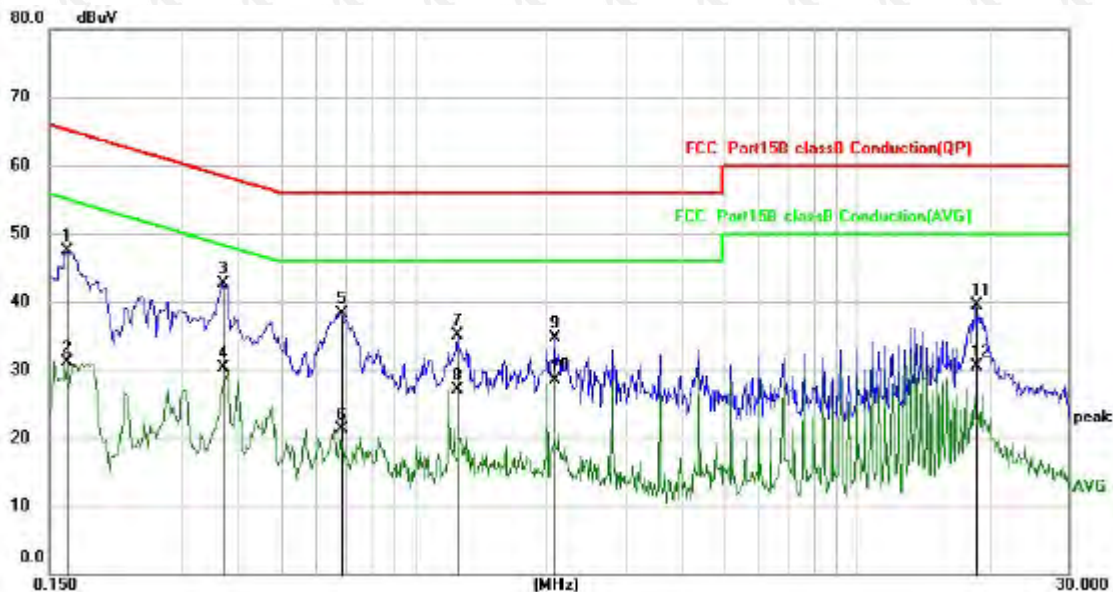

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1650	37.42	10.01	47.43	65.21	-17.78	QP
2		0.1650	21.10	10.01	31.11	55.21	-24.10	AVG
3	*	0.3700	32.64	9.98	42.62	58.50	-15.88	QP
4		0.3700	20.41	9.98	30.39	48.50	-18.11	AVG
5		0.6860	28.28	9.97	38.25	56.00	-17.75	QP
6		0.6860	11.30	9.97	21.27	46.00	-24.73	AVG
7		1.2500	25.10	9.99	35.09	56.00	-20.91	QP
8		1.2500	17.21	9.99	27.20	46.00	-18.80	AVG
9		2.0859	24.68	10.03	34.71	56.00	-21.29	QP
10		2.0859	18.39	10.03	28.42	46.00	-17.58	AVG
11		18.6018	28.99	10.54	39.53	60.00	-20.47	QP
12		18.6018	19.90	10.54	30.44	50.00	-19.56	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

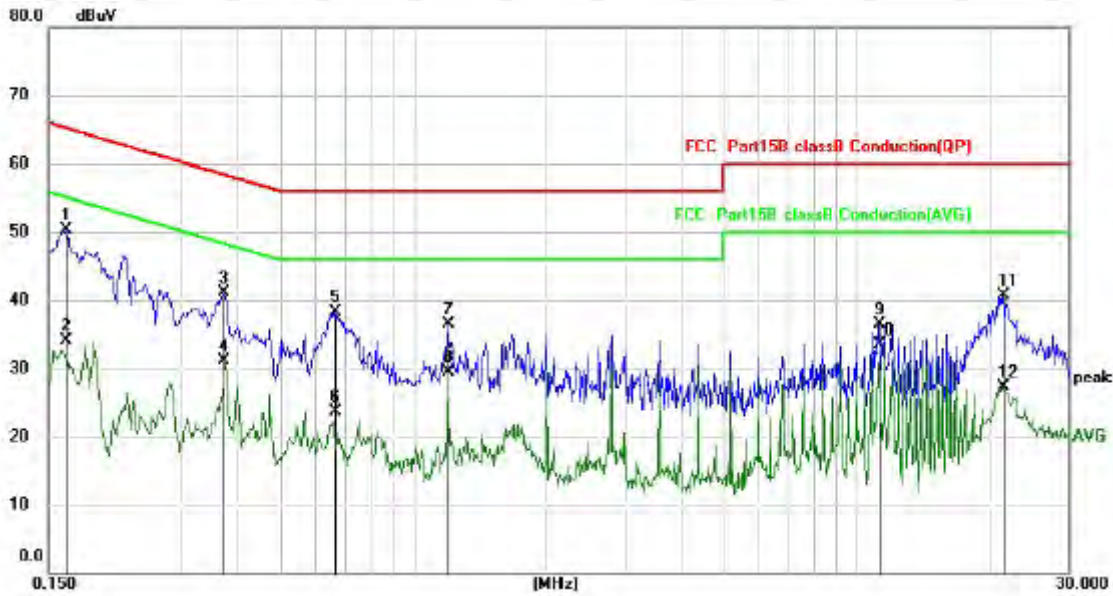

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1650	40.27	10.01	50.28	65.21	-14.93	QP
2		0.1650	24.13	10.01	34.14	55.21	-21.07	AVG
3		0.3738	31.14	9.98	41.12	58.42	-17.30	QP
4		0.3738	21.03	9.98	31.01	48.42	-17.41	AVG
5		0.6660	28.42	9.97	38.39	56.00	-17.61	QP
6		0.6660	13.69	9.97	23.66	46.00	-22.34	AVG
7		1.2018	26.50	9.99	36.49	56.00	-19.51	QP
8		1.2018	19.57	9.99	29.56	46.00	-16.44	AVG
9		11.2018	26.20	10.38	36.58	60.00	-23.42	QP
10		11.2018	23.11	10.38	33.49	50.00	-16.51	AVG
11		21.2900	30.15	10.58	40.73	60.00	-19.27	QP
12		21.2900	16.76	10.58	27.34	50.00	-22.66	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

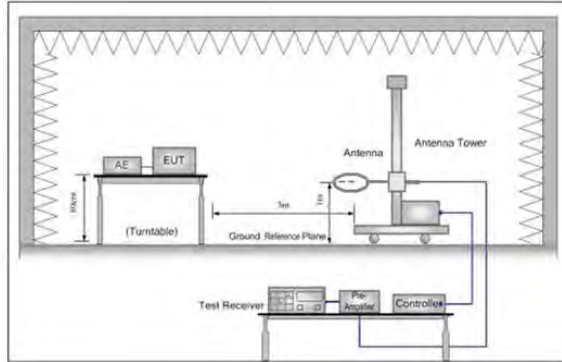


Figure 1. Below 30MHz

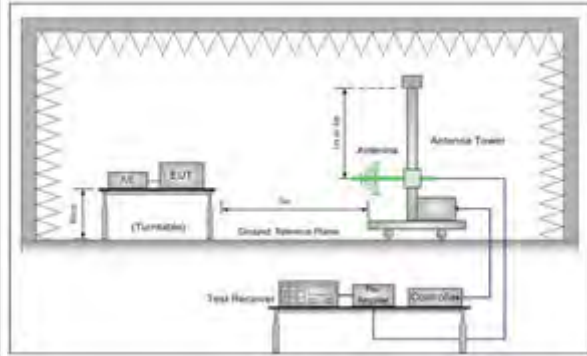


Figure 2. 30MHz to 1GHz

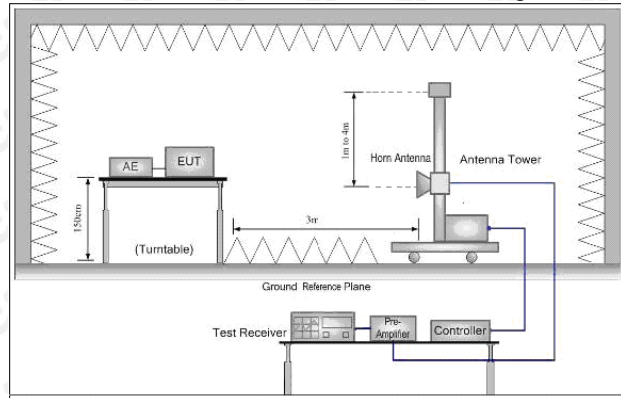


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.7351	30.74	-6.53	24.21	40.00	-15.79	QP
2		80.0805	34.49	-10.50	23.99	40.00	-16.01	QP
3		215.6452	34.91	-9.07	25.84	43.50	-17.66	QP
4		311.6324	44.14	-5.14	39.00	46.00	-7.00	QP
5	*	408.9458	42.88	-2.40	40.48	46.00	-5.52	QP
6		948.7608	30.26	7.63	37.89	46.00	-8.11	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.6000	35.35	-6.51	28.84	40.00	-11.16	QP
2		53.5052	37.79	-6.95	30.84	40.00	-9.16	QP
3		141.5776	29.78	-5.50	24.28	43.50	-19.22	QP
4		250.3010	38.92	-7.80	31.12	46.00	-14.88	QP
5	!	408.9458	42.89	-2.40	40.49	46.00	-5.51	QP
6	*	555.7989	40.11	1.38	41.49	46.00	-4.51	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	65.00	-3.64	61.36	74	-12.64	peak
4824	50.57	-3.64	46.93	54	-7.07	AVG
7236	57.66	-0.95	56.71	74	-17.29	peak
7236	46.10	-0.95	45.15	54	-8.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	66.84	-3.64	63.20	74	-10.80	peak
4824	47.10	-3.64	43.46	54	-10.54	AVG
7236	58.17	-0.95	57.22	74	-16.78	peak
7236	44.22	-0.95	43.27	54	-10.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.84	-3.51	61.33	74	-12.67	peak
4874	49.43	-3.51	45.92	54	-8.08	AVG
7311	58.97	-0.82	58.15	74	-15.85	peak
7311	45.77	-0.82	44.95	54	-9.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.25	-3.51	60.74	74	-13.26	peak
4874	47.30	-3.51	43.79	54	-10.21	AVG
7311	60.16	-0.82	59.34	74	-14.66	peak
7311	43.23	-0.82	42.41	54	-11.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.93	-3.43	59.50	74	-14.50	peak
4924	48.28	-3.43	44.85	54	-9.15	AVG
7386	57.37	-0.75	56.62	74	-17.38	peak
7386	42.74	-0.75	41.99	54	-12.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.99	-3.43	59.56	74	-14.44	peak
4924	47.07	-3.43	43.64	54	-10.36	AVG
7386	56.91	-0.75	56.16	74	-17.84	peak
7386	41.64	-0.75	40.89	54	-13.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.36	-3.64	60.72	74	-13.28	peak
4824	50.85	-3.64	47.21	54	-6.79	AVG
7236	58.62	-0.95	57.67	74	-16.33	peak
7236	44.86	-0.95	43.91	54	-10.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.19	-3.64	62.55	74	-11.45	peak
4824	47.72	-3.64	44.08	54	-9.92	AVG
7236	57.62	-0.95	56.67	74	-17.33	peak
7236	43.78	-0.95	42.83	54	-11.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	65.75	-3.51	62.24	74	-11.76	peak
4874	48.84	-3.51	45.33	54	-8.67	AVG
7311	57.56	-0.82	56.74	74	-17.26	peak
7311	44.15	-0.82	43.33	54	-10.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.52	-3.51	61.01	74	-12.99	peak
4874	46.96	-3.51	43.45	54	-10.55	AVG
7311	60.04	-0.82	59.22	74	-14.78	peak
7311	42.74	-0.82	41.92	54	-12.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.34	-3.43	58.91	74	-15.09	peak
4924	47.59	-3.43	44.16	54	-9.84	AVG
7386	60.01	-0.75	59.26	74	-14.74	peak
7386	43.78	-0.75	43.03	54	-10.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.36	-3.43	59.93	74	-14.07	peak
4924	47.00	-3.43	43.57	54	-10.43	AVG
7386	56.40	-0.75	55.65	74	-18.35	peak
7386	41.54	-0.75	40.79	54	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.33	-3.64	62.69	74	-11.31	peak
4824	48.51	-3.64	44.87	54	-9.13	AVG
7236	56.88	-0.95	55.93	74	-18.07	peak
7236	45.21	-0.95	44.26	54	-9.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.87	-3.64	62.23	74	-11.77	peak
4824	47.16	-3.64	43.52	54	-10.48	AVG
7236	58.33	-0.95	57.38	74	-16.62	peak
7236	43.61	-0.95	42.66	54	-11.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	65.16	-3.51	61.65	74	-12.35	peak
4874	48.57	-3.51	45.06	54	-8.94	AVG
7311	59.86	-0.82	59.04	74	-14.96	peak
7311	44.22	-0.82	43.40	54	-10.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.53	-3.51	60.02	74	-13.98	peak
4874	49.22	-3.51	45.71	54	-8.29	AVG
7311	58.76	-0.82	57.94	74	-16.06	peak
7311	44.25	-0.82	43.43	54	-10.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.52	-3.43	61.09	74	-12.91	peak
4924	46.08	-3.43	42.65	54	-11.35	AVG
7386	58.51	-0.75	57.76	74	-16.24	peak
7386	42.72	-0.75	41.97	54	-12.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.79	-3.43	59.36	74	-14.64	peak
4924	47.85	-3.43	44.42	54	-9.58	AVG
7386	57.78	-0.75	57.03	74	-16.97	peak
7386	41.71	-0.75	40.96	54	-13.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.07	-3.63	61.44	74	-12.56	peak
4844	47.65	-3.63	44.02	54	-9.98	AVG
7266	57.76	-0.94	56.82	74	-17.18	peak
7266	44.61	-0.94	43.67	54	-10.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.13	-3.63	61.50	74	-12.50	peak
4844	48.33	-3.63	44.70	54	-9.30	AVG
7266	59.64	-0.94	58.70	74	-15.30	peak
7266	45.12	-0.94	44.18	54	-9.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.53	-3.51	61.02	74	-12.98	peak
4874	49.35	-3.51	45.84	54	-8.16	AVG
7311	59.05	-0.82	58.23	74	-15.77	peak
7311	46.21	-0.82	45.39	54	-8.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.24	-3.51	58.73	74	-15.27	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	64.83	-3.43	61.40	74	-12.60	peak
4904	47.11	-3.43	43.68	54	-10.32	AVG
7356	57.65	-0.75	56.90	74	-17.10	peak
7356	43.88	-0.75	43.13	54	-10.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	62.53	-3.43	59.10	74	-14.90	peak
4904	46.66	-3.43	43.23	54	-10.77	AVG
7356	58.15	-0.75	57.40	74	-16.60	peak
7356	43.33	-0.75	42.58	54	-11.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.40	-5.81	50.59	74	-23.41	peak
2390	/	-5.81	/	54	/	AVG
2399	64.97	-5.84	59.13	74	-14.87	peak
2399	49.81	-5.84	43.97	54	-10.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.05	-5.81	50.24	74	-23.76	peak
2390	/	-5.81	/	54	/	AVG
2399	62.91	-5.84	57.07	74	-16.93	peak
2399	46.65	-5.84	40.81	54	-13.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.25	-5.65	51.60	74	-22.40	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.64	-5.65	50.99	74	-23.01	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.32	-5.81	53.51	74	-20.49	peak
2390	/	-5.81	/	54	/	AVG
2399	61.97	-5.84	56.13	74	-17.87	peak
2399	46.27	-5.84	40.43	54	-13.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.98	-5.81	50.17	74	-23.83	peak
2390	/	-5.81	/	54	/	AVG
2399	62.70	-5.84	56.86	74	-17.14	peak
2399	47.11	-5.84	41.27	54	-12.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.49	-5.65	50.84	74	-23.16	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.11	-5.65	51.46	74	-22.54	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.74	-5.81	50.93	74	-23.07	peak
2390	/	-5.81	/	54	/	AVG
2399	62.33	-5.84	56.49	74	-17.51	peak
2399	48.20	-5.84	42.36	54	-11.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.16	-5.81	51.35	74	-22.65	peak
2390	/	-5.81	/	54	/	AVG
2399	60.69	-5.84	54.85	74	-19.15	peak
2399	47.85	-5.84	42.01	54	-11.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.61	-5.65	50.96	74	-23.04	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.16	-5.65	50.51	74	-23.49	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.37	-5.81	53.56	74	-20.44	peak
2390	/	-5.81	/	54	/	AVG
2399	63.52	-5.84	57.68	74	-16.32	peak
2399	46.35	-5.84	40.51	54	-13.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.10	-5.81	51.29	74	-22.71	peak
2390	/	-5.81	/	54	/	AVG
2399	61.53	-5.84	55.69	74	-18.31	peak
2399	46.28	-5.84	40.44	54	-13.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.61	-5.65	51.96	74	-22.04	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.00	-5.65	50.35	74	-23.65	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

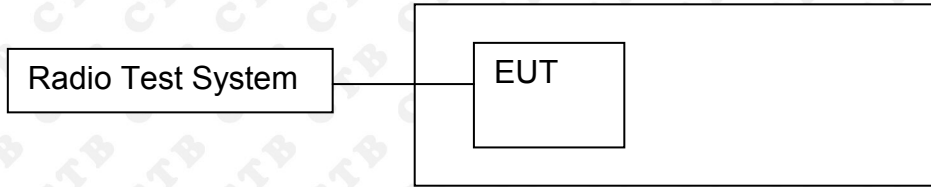


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result
ANT1:

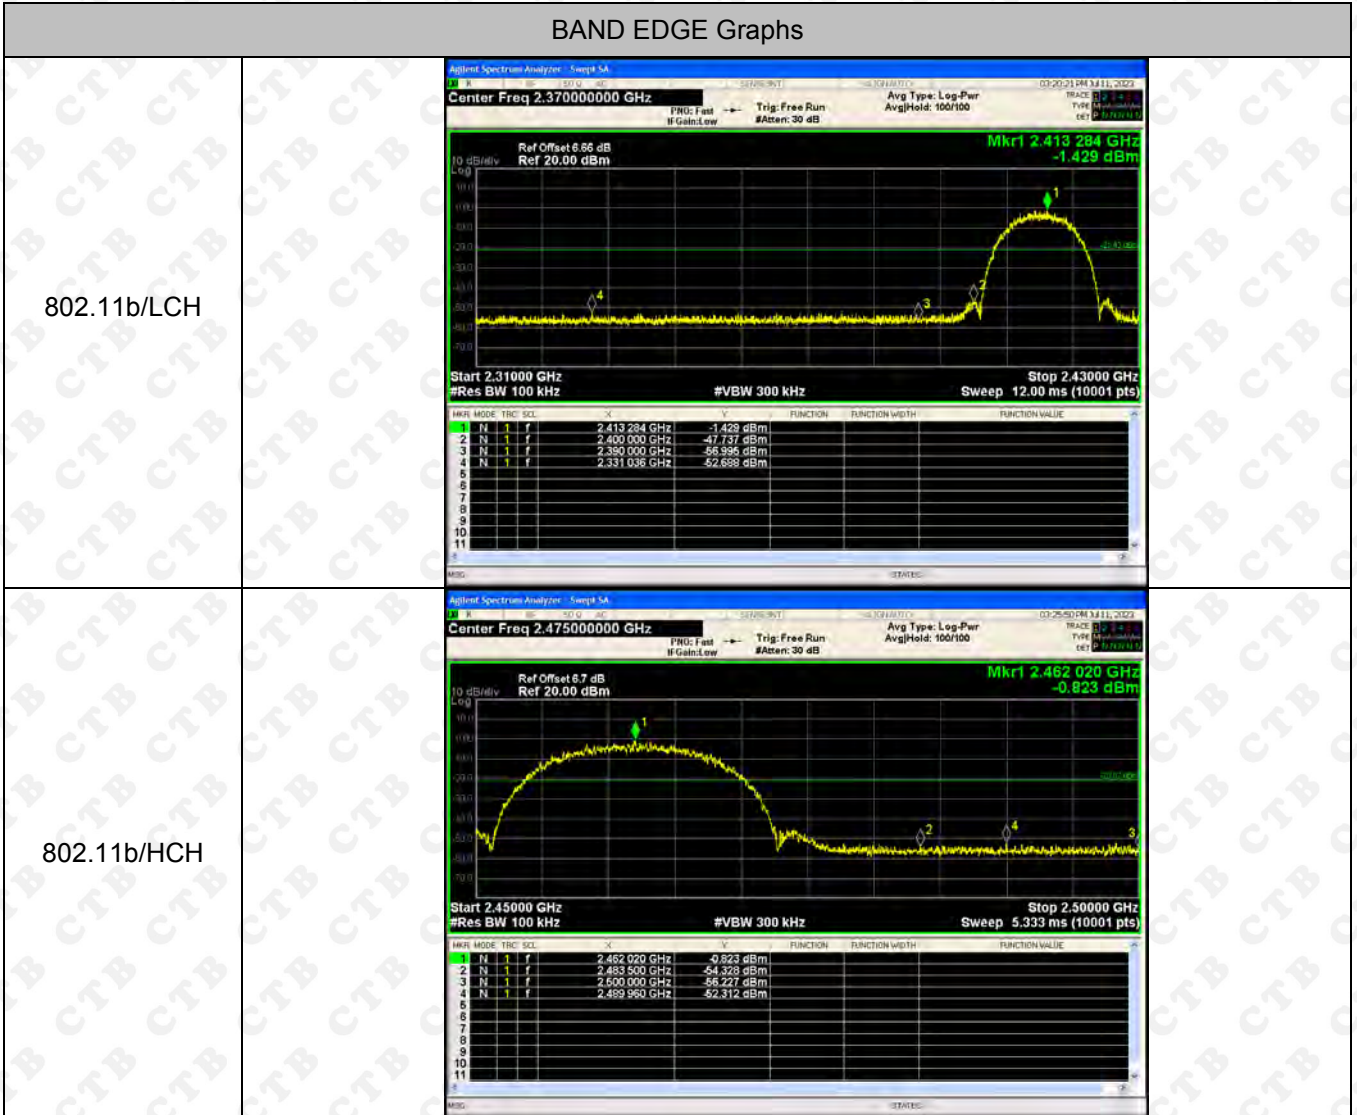


BAND EDGE Graphs

802.11g/LCH

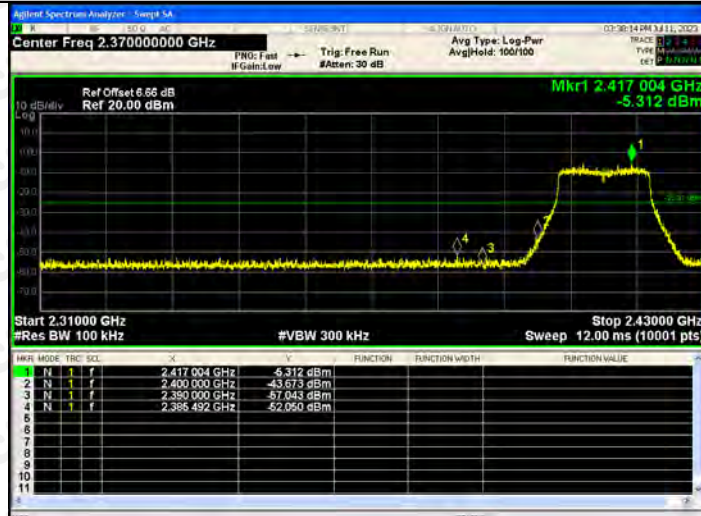


802.11g/HCH

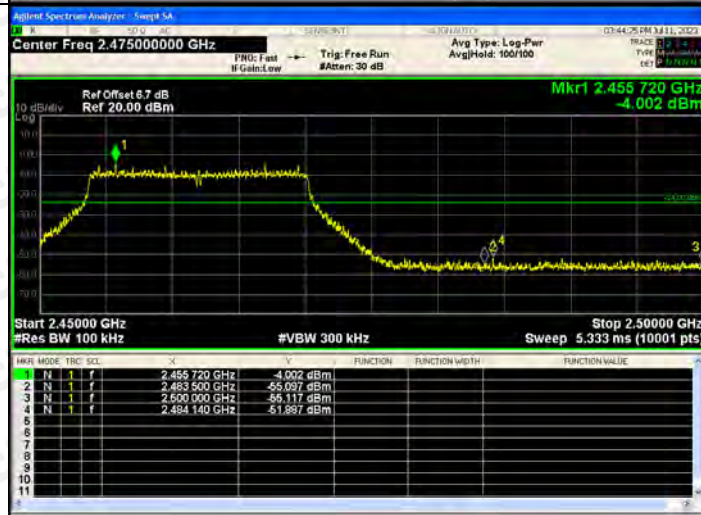

BAND EDGE Graphs

802.11n(HT20)/
LCH

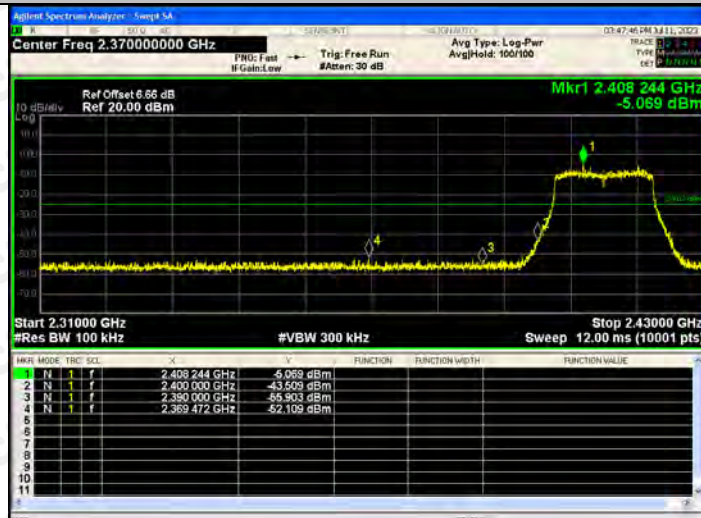


802.11n(HT20)/
HCH



BAND EDGE Graphs


802.11n(HT40)/
LCH

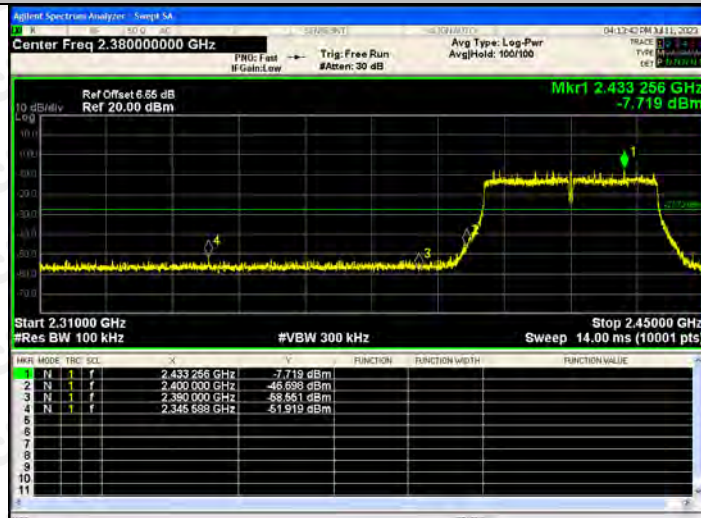

802.11n(HT40)/
HCH




RF Conducted Spurious Emissions Graphs

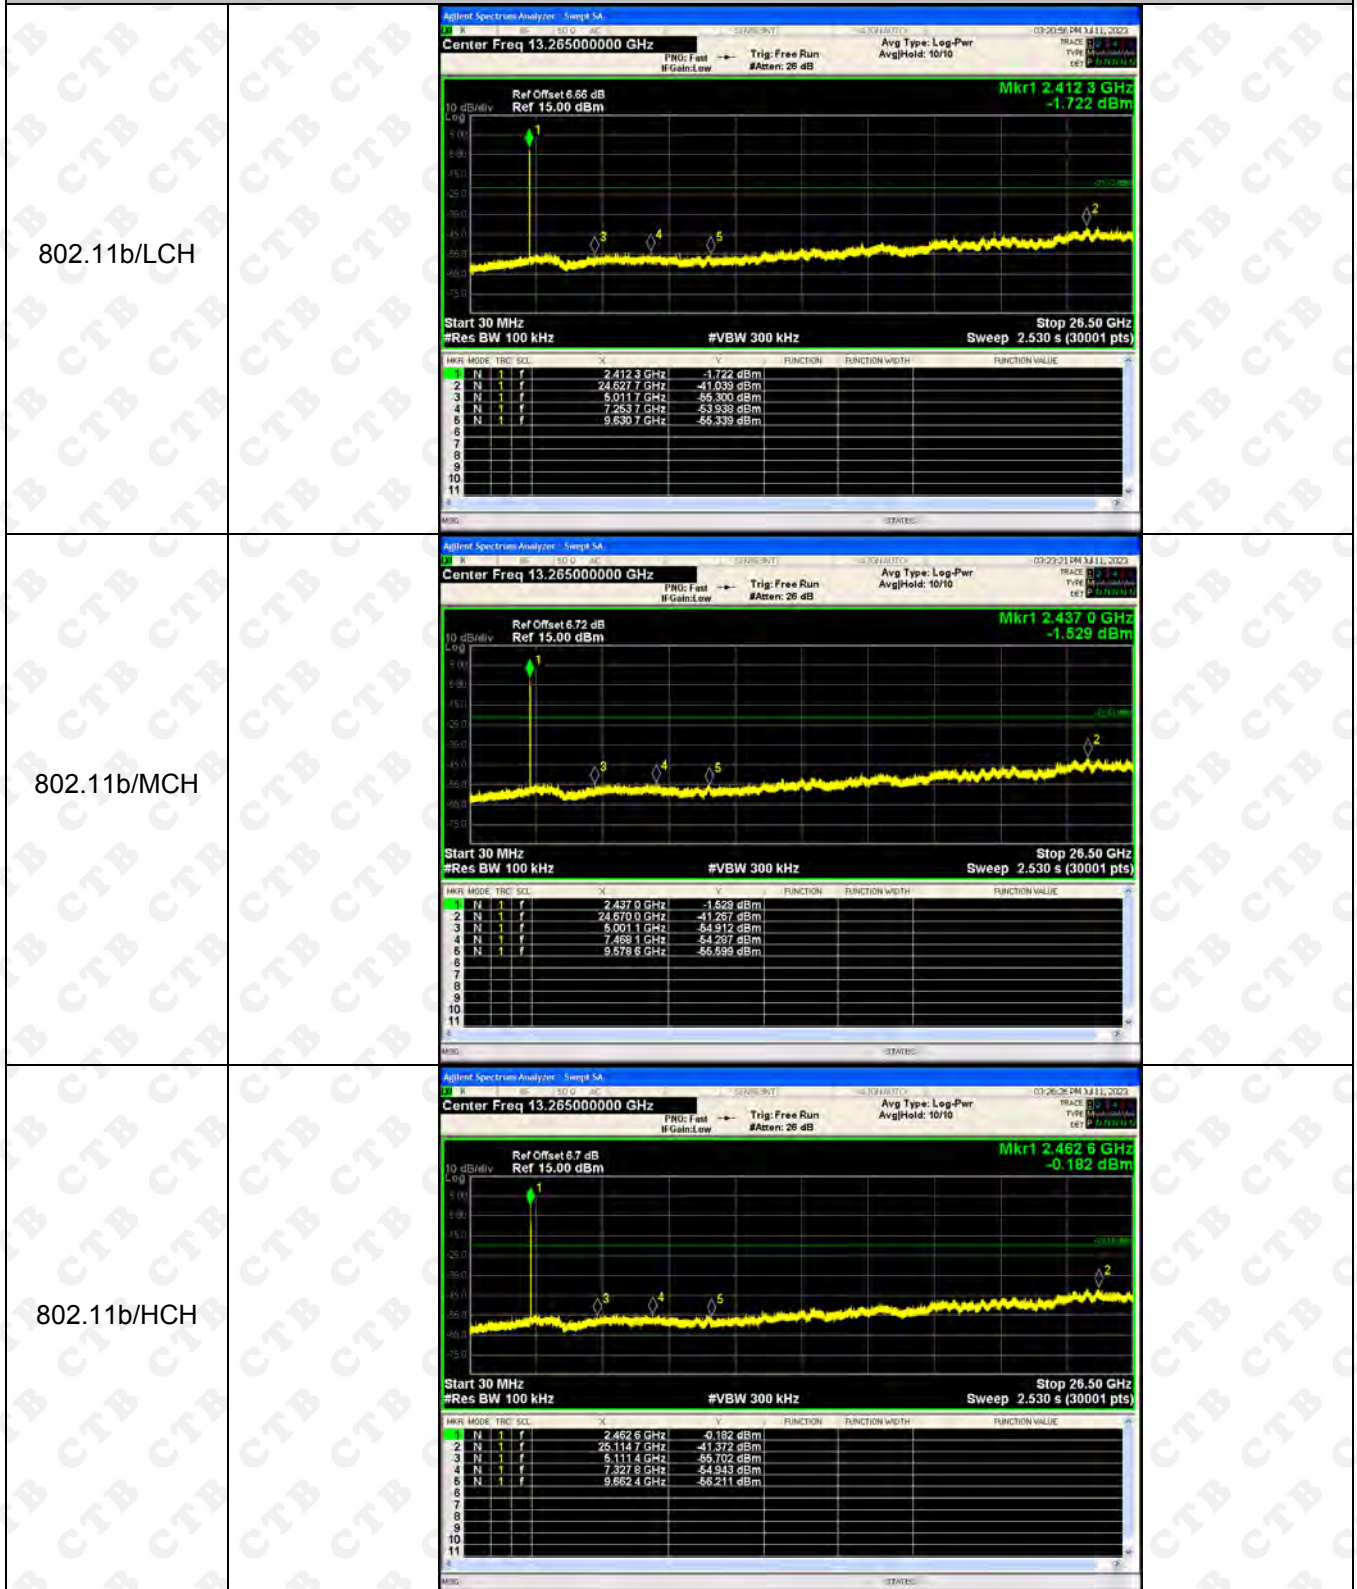


RF Conducted Spurious Emissions Graphs


802.11g/LCH

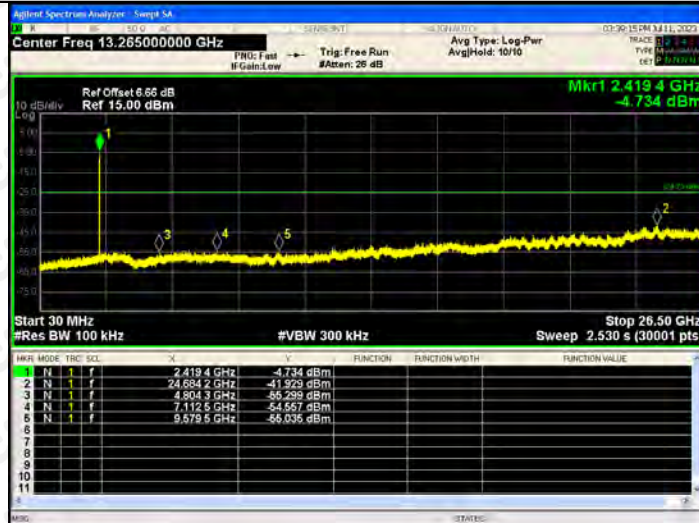




802.11g/MCH

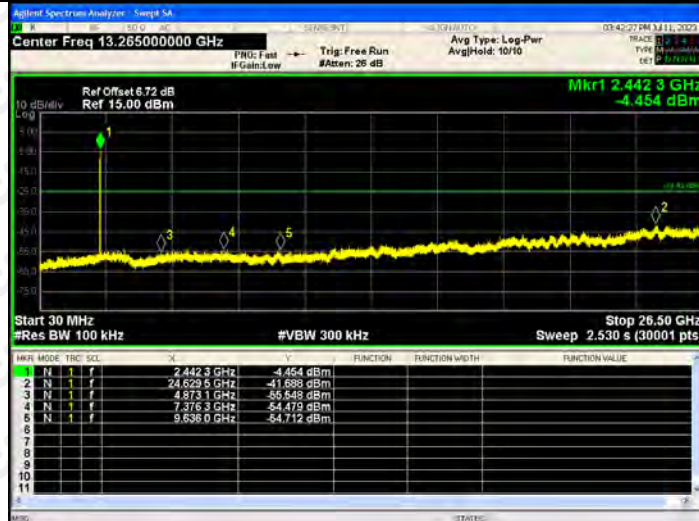

802.11g/HCH

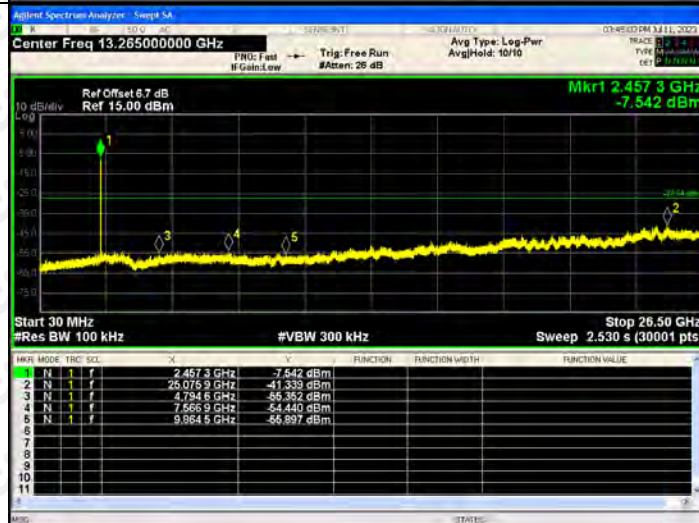

RF Conducted Spurious Emissions Graphs

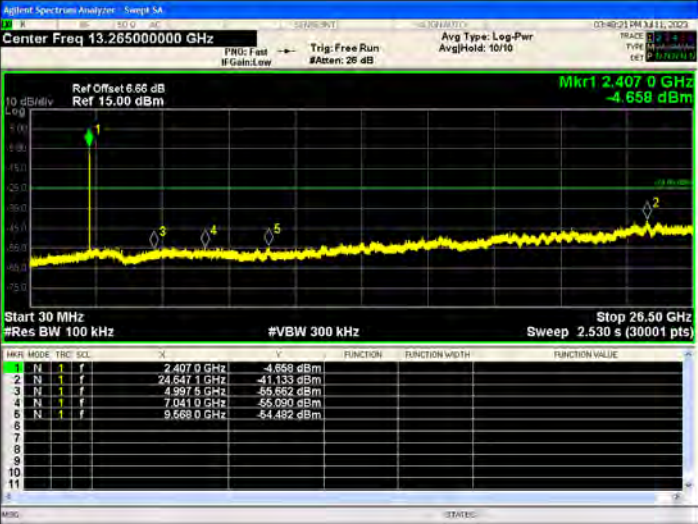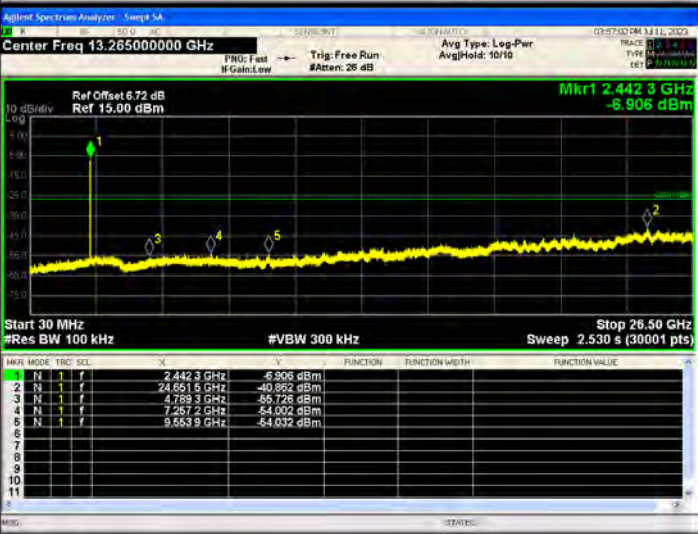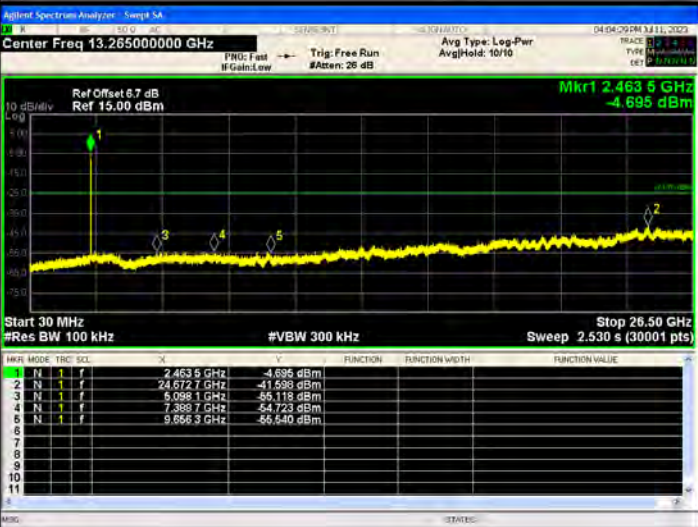
<p>802.11n(HT20)/LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.407 0 GHz</td> <td>-4.658 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.647 1 GHz</td> <td>-41.133 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.997 5 GHz</td> <td>-55.662 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.041 0 GHz</td> <td>-55.090 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.569 0 GHz</td> <td>-54.492 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.407 0 GHz	-4.658 dBm				2	N	24.647 1 GHz	-41.133 dBm				3	N	4.997 5 GHz	-55.662 dBm				4	N	7.041 0 GHz	-55.090 dBm				5	N	9.569 0 GHz	-54.492 dBm			
MNR	MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.407 0 GHz	-4.658 dBm																																								
2	N	24.647 1 GHz	-41.133 dBm																																								
3	N	4.997 5 GHz	-55.662 dBm																																								
4	N	7.041 0 GHz	-55.090 dBm																																								
5	N	9.569 0 GHz	-54.492 dBm																																								
<p>802.11 n(HT20)/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.442 3 GHz</td> <td>-8.906 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.651 5 GHz</td> <td>-40.892 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.789 3 GHz</td> <td>-55.728 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.257 2 GHz</td> <td>-54.002 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.563 9 GHz</td> <td>-54.032 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.442 3 GHz	-8.906 dBm				2	N	24.651 5 GHz	-40.892 dBm				3	N	4.789 3 GHz	-55.728 dBm				4	N	7.257 2 GHz	-54.002 dBm				5	N	9.563 9 GHz	-54.032 dBm			
MNR	MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.442 3 GHz	-8.906 dBm																																								
2	N	24.651 5 GHz	-40.892 dBm																																								
3	N	4.789 3 GHz	-55.728 dBm																																								
4	N	7.257 2 GHz	-54.002 dBm																																								
5	N	9.563 9 GHz	-54.032 dBm																																								
<p>802.11 n(HT20)/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.463 5 GHz</td> <td>-4.695 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.572 7 GHz</td> <td>-41.599 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>5.098 1 GHz</td> <td>-55.118 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.388 7 GHz</td> <td>-54.723 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.666 9 GHz</td> <td>-55.540 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.463 5 GHz	-4.695 dBm				2	N	24.572 7 GHz	-41.599 dBm				3	N	5.098 1 GHz	-55.118 dBm				4	N	7.388 7 GHz	-54.723 dBm				5	N	9.666 9 GHz	-55.540 dBm			
MNR	MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.463 5 GHz	-4.695 dBm																																								
2	N	24.572 7 GHz	-41.599 dBm																																								
3	N	5.098 1 GHz	-55.118 dBm																																								
4	N	7.388 7 GHz	-54.723 dBm																																								
5	N	9.666 9 GHz	-55.540 dBm																																								

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 13.26500000 GHz</p> <p>Ref Offset 6.66 dB Ref 15.00 dBm</p> <p>Mkr1 2.422 0 GHz -9.091 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 300001 pts</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>F</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.422 0 GHz</td> <td>-9.091 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.616 2 GHz</td> <td>-39.897 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.770 6 GHz</td> <td>-55.880 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.326 0 GHz</td> <td>-54.165 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.589 2 GHz</td> <td>-54.833 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.422 0 GHz	-9.091 dBm				2	N	1	f	24.616 2 GHz	-39.897 dBm				3	N	1	f	4.770 6 GHz	-55.880 dBm				4	N	1	f	7.326 0 GHz	-54.165 dBm				5	N	1	f	9.589 2 GHz	-54.833 dBm			
MKR	MODE	TRIG	SCAL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.422 0 GHz	-9.091 dBm																																																		
2	N	1	f	24.616 2 GHz	-39.897 dBm																																																		
3	N	1	f	4.770 6 GHz	-55.880 dBm																																																		
4	N	1	f	7.326 0 GHz	-54.165 dBm																																																		
5	N	1	f	9.589 2 GHz	-54.833 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 13.26500000 GHz</p> <p>Ref Offset 6.72 dB Ref 15.00 dBm</p> <p>Mkr1 2.429 1 GHz -8.561 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 30001 pts</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>F</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.429 1 GHz</td> <td>-8.561 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.123 6 GHz</td> <td>-41.659 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.844 8 GHz</td> <td>-56.221 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.246 6 GHz</td> <td>-55.499 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.574 2 GHz</td> <td>-55.076 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.429 1 GHz	-8.561 dBm				2	N	1	f	26.123 6 GHz	-41.659 dBm				3	N	1	f	4.844 8 GHz	-56.221 dBm				4	N	1	f	7.246 6 GHz	-55.499 dBm				5	N	1	f	9.574 2 GHz	-55.076 dBm			
MKR	MODE	TRIG	SCAL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.429 1 GHz	-8.561 dBm																																																		
2	N	1	f	26.123 6 GHz	-41.659 dBm																																																		
3	N	1	f	4.844 8 GHz	-56.221 dBm																																																		
4	N	1	f	7.246 6 GHz	-55.499 dBm																																																		
5	N	1	f	9.574 2 GHz	-55.076 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 13.26500000 GHz</p> <p>Ref Offset 6.7 dB Ref 15.00 dBm</p> <p>Mkr1 2.449 4 GHz -7.739 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 30001 pts</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>F</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.449 4 GHz</td> <td>-7.739 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.616 2 GHz</td> <td>-40.984 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.048 1 GHz</td> <td>-55.657 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.334 0 GHz</td> <td>-55.100 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.913 0 GHz</td> <td>-55.644 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.449 4 GHz	-7.739 dBm				2	N	1	f	24.616 2 GHz	-40.984 dBm				3	N	1	f	5.048 1 GHz	-55.657 dBm				4	N	1	f	7.334 0 GHz	-55.100 dBm				5	N	1	f	9.913 0 GHz	-55.644 dBm			
MKR	MODE	TRIG	SCAL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.449 4 GHz	-7.739 dBm																																																		
2	N	1	f	24.616 2 GHz	-40.984 dBm																																																		
3	N	1	f	5.048 1 GHz	-55.657 dBm																																																		
4	N	1	f	7.334 0 GHz	-55.100 dBm																																																		
5	N	1	f	9.913 0 GHz	-55.644 dBm																																																		


ANT2:

BAND EDGE Graphs

802.11b/LCH

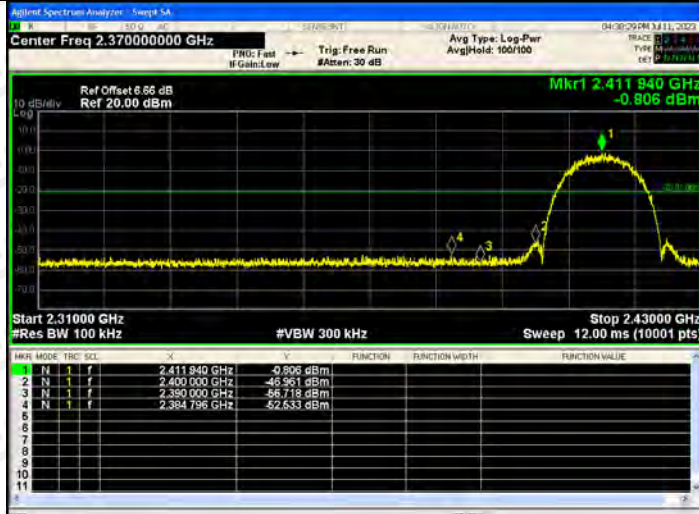


802.11b/HCH

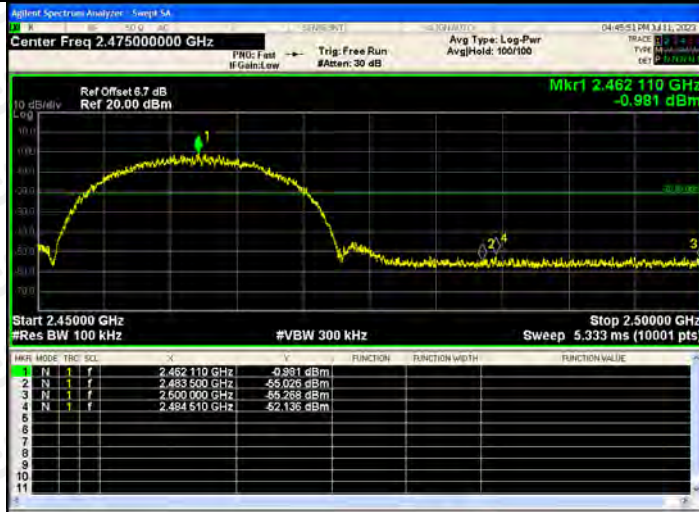

BAND EDGE Graphs

802.11g/LCH

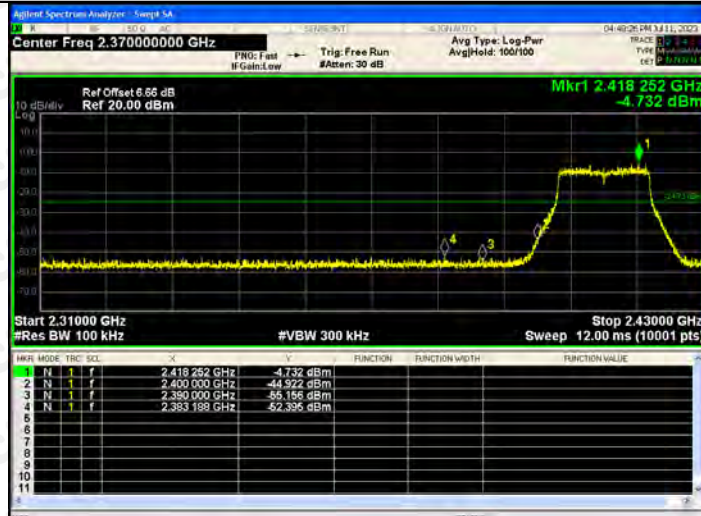


802.11g/HCH




BAND EDGE Graphs

802.11n(HT20)/
LCH

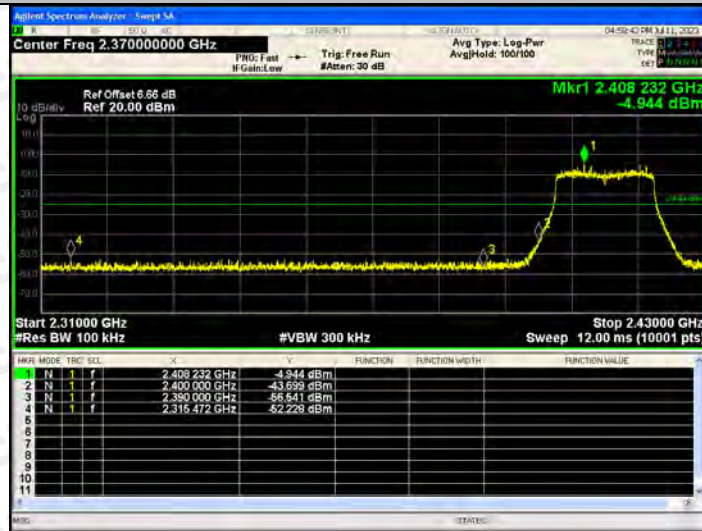


802.11n(HT20)/
HCH

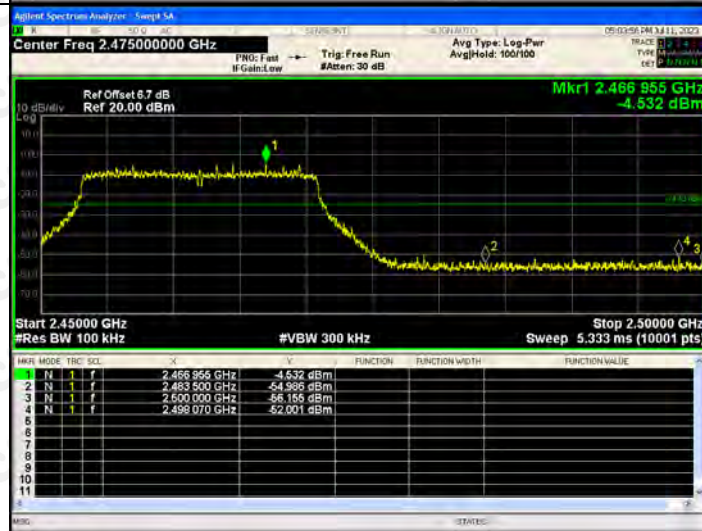

BAND EDGE Graphs

802.11n(HT40)/
LCH

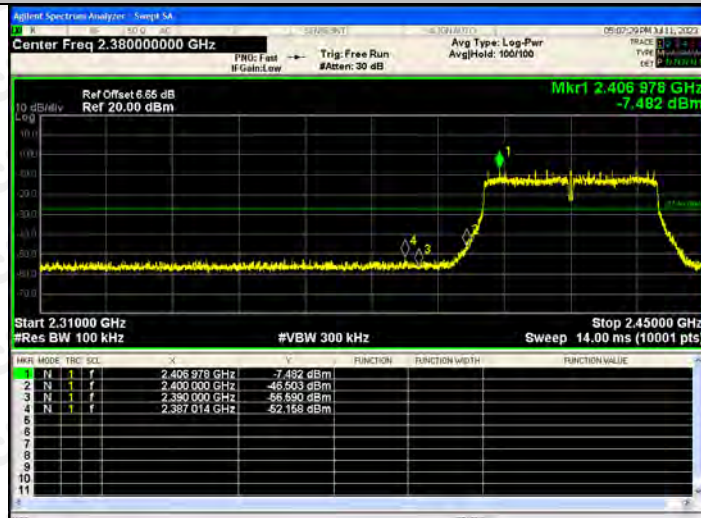


802.11n(HT40)/
HCH




RF Conducted Spurious Emissions Graphs


802.11b/LCH

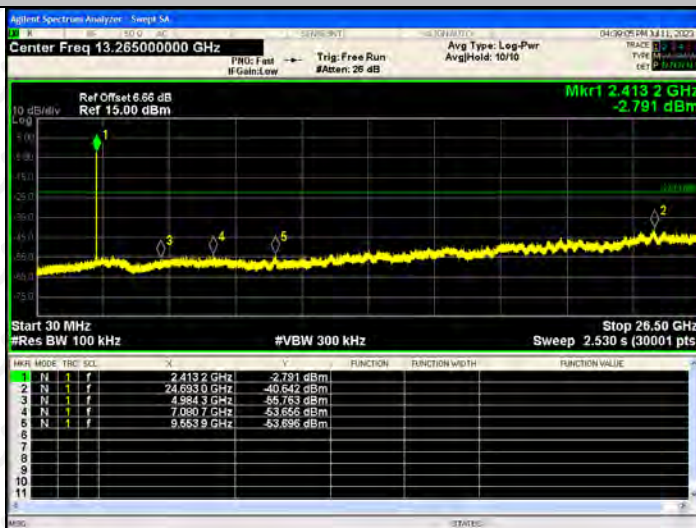

802.11b/MCH

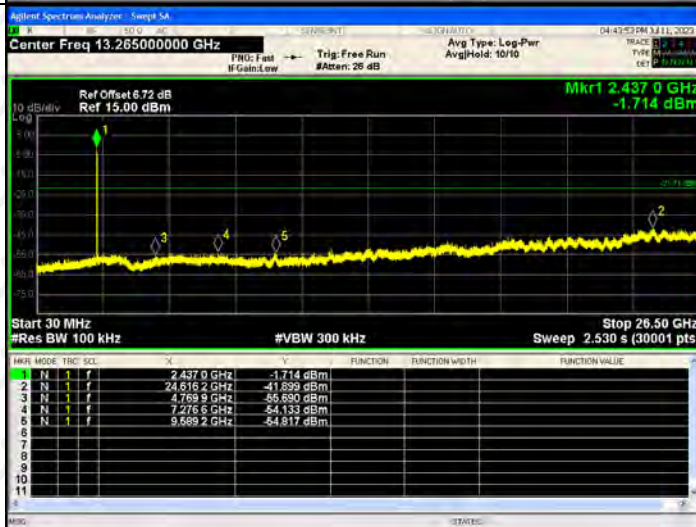


802.11b/HCH

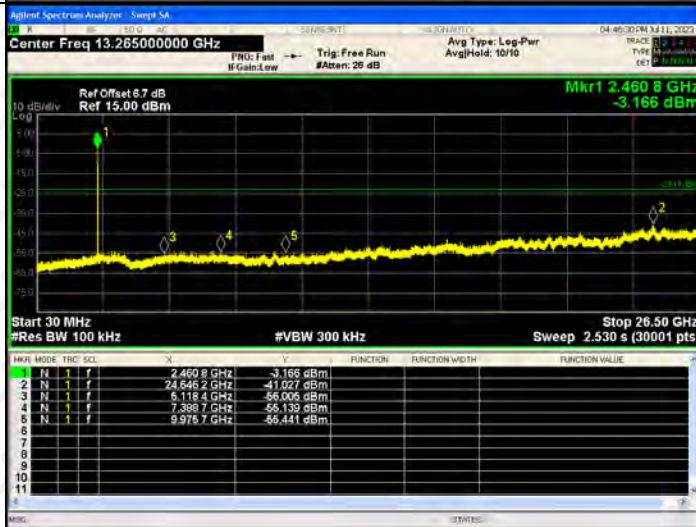


RF Conducted Spurious Emissions Graphs


802.11g/LCH

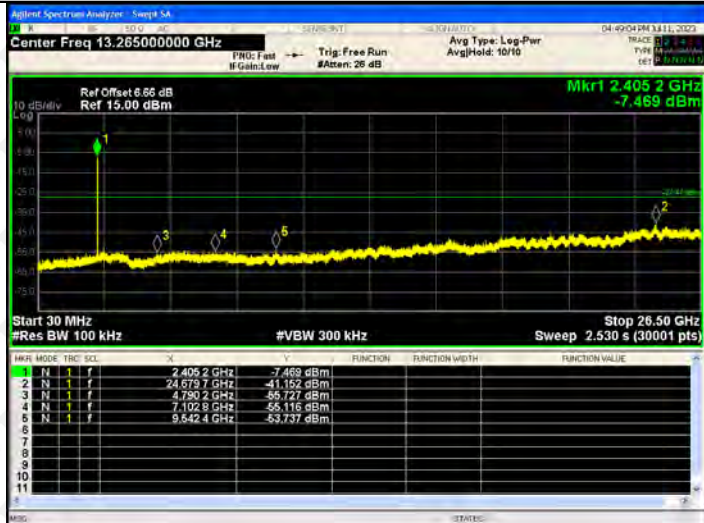




802.11g/MCH

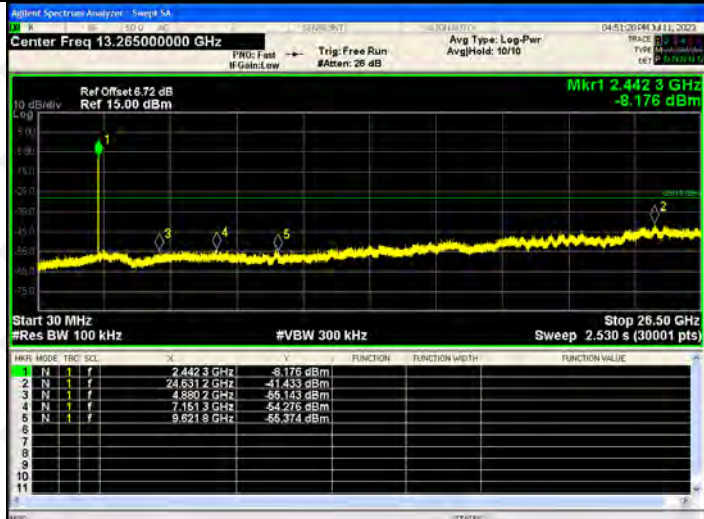

802.11g/HCH

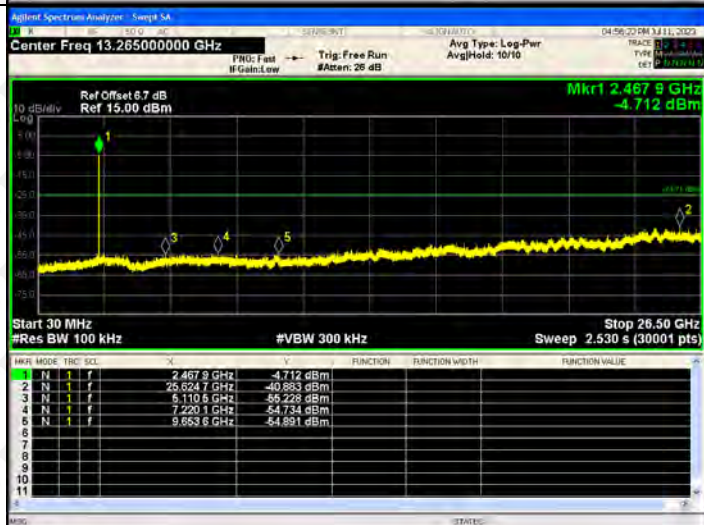


RF Conducted Spurious Emissions Graphs

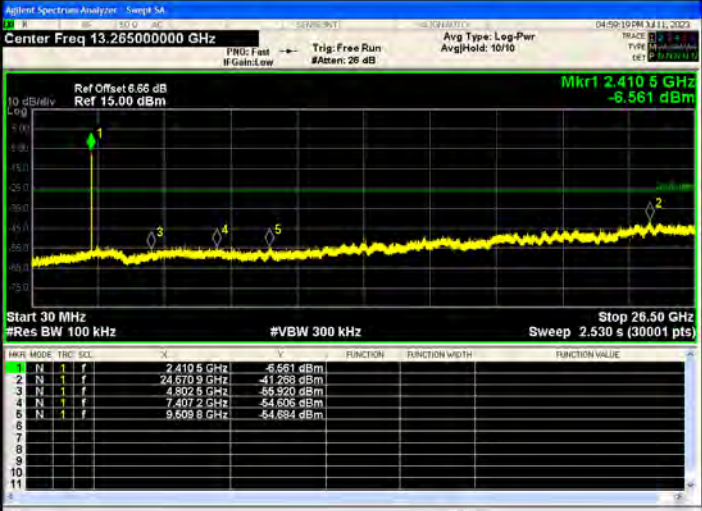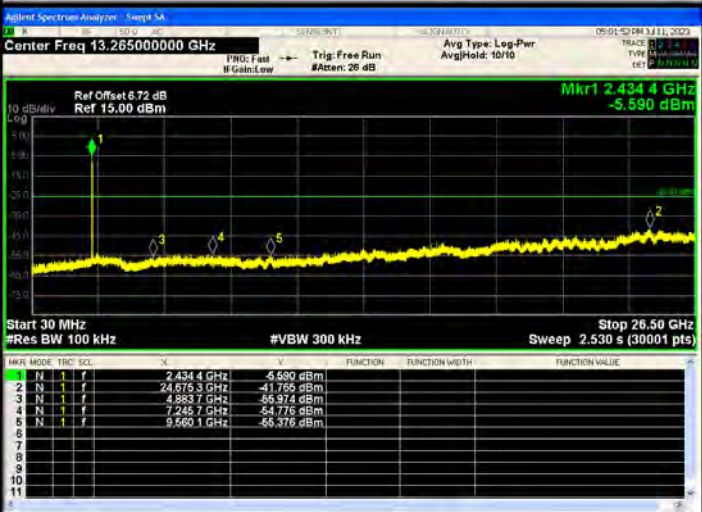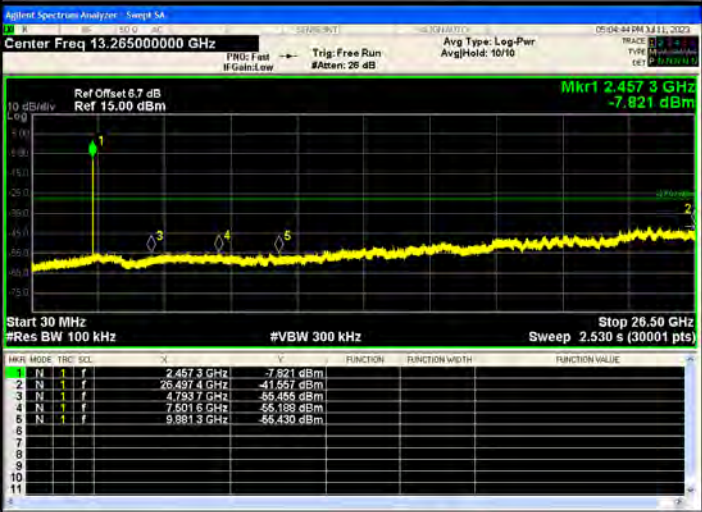
<p>802.11n(HT20)/LCH</p>	 <table border="1" data-bbox="611 694 1300 862"> <thead> <tr> <th>PKR MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>M</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.410 5 GHz</td> <td>-6.561 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.670 9 GHz</td> <td>-41.288 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.802 5 GHz</td> <td>-55.920 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.407 2 GHz</td> <td>-54.606 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.508 6 GHz</td> <td>-54.684 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	PKR MODE	TRF	SQL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.410 5 GHz	-6.561 dBm			2	N	1	f	24.670 9 GHz	-41.288 dBm			3	N	1	f	4.802 5 GHz	-55.920 dBm			4	N	1	f	7.407 2 GHz	-54.606 dBm			5	N	1	f	9.508 6 GHz	-54.684 dBm		
PKR MODE	TRF	SQL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.410 5 GHz	-6.561 dBm																																												
2	N	1	f	24.670 9 GHz	-41.288 dBm																																												
3	N	1	f	4.802 5 GHz	-55.920 dBm																																												
4	N	1	f	7.407 2 GHz	-54.606 dBm																																												
5	N	1	f	9.508 6 GHz	-54.684 dBm																																												
<p>802.11 n(HT20)/MCH</p>	 <table border="1" data-bbox="611 1220 1300 1384"> <thead> <tr> <th>PKR MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>M</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.434 4 GHz</td> <td>-5.580 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.676 3 GHz</td> <td>-41.785 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.883 7 GHz</td> <td>-56.974 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.245 7 GHz</td> <td>-54.776 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.560 1 GHz</td> <td>-55.376 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	PKR MODE	TRF	SQL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 4 GHz	-5.580 dBm			2	N	1	f	24.676 3 GHz	-41.785 dBm			3	N	1	f	4.883 7 GHz	-56.974 dBm			4	N	1	f	7.245 7 GHz	-54.776 dBm			5	N	1	f	9.560 1 GHz	-55.376 dBm		
PKR MODE	TRF	SQL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.434 4 GHz	-5.580 dBm																																												
2	N	1	f	24.676 3 GHz	-41.785 dBm																																												
3	N	1	f	4.883 7 GHz	-56.974 dBm																																												
4	N	1	f	7.245 7 GHz	-54.776 dBm																																												
5	N	1	f	9.560 1 GHz	-55.376 dBm																																												
<p>802.11 n(HT20)/HCH</p>	 <table border="1" data-bbox="611 1751 1300 1915"> <thead> <tr> <th>PKR MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>M</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.457 3 GHz</td> <td>-7.821 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.497 4 GHz</td> <td>-41.257 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.793 7 GHz</td> <td>-55.455 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.501 5 GHz</td> <td>-55.188 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.981 3 GHz</td> <td>-55.430 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	PKR MODE	TRF	SQL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.457 3 GHz	-7.821 dBm			2	N	1	f	25.497 4 GHz	-41.257 dBm			3	N	1	f	4.793 7 GHz	-55.455 dBm			4	N	1	f	7.501 5 GHz	-55.188 dBm			5	N	1	f	9.981 3 GHz	-55.430 dBm		
PKR MODE	TRF	SQL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.457 3 GHz	-7.821 dBm																																												
2	N	1	f	25.497 4 GHz	-41.257 dBm																																												
3	N	1	f	4.793 7 GHz	-55.455 dBm																																												
4	N	1	f	7.501 5 GHz	-55.188 dBm																																												
5	N	1	f	9.981 3 GHz	-55.430 dBm																																												

RF Conducted Spurious Emissions Graphs


802.11 n(HT40)/LCH

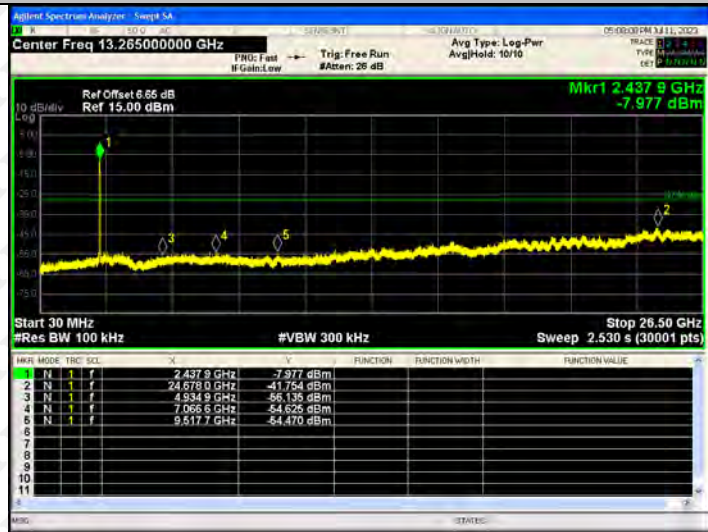

802.11 n(HT40)/MCH

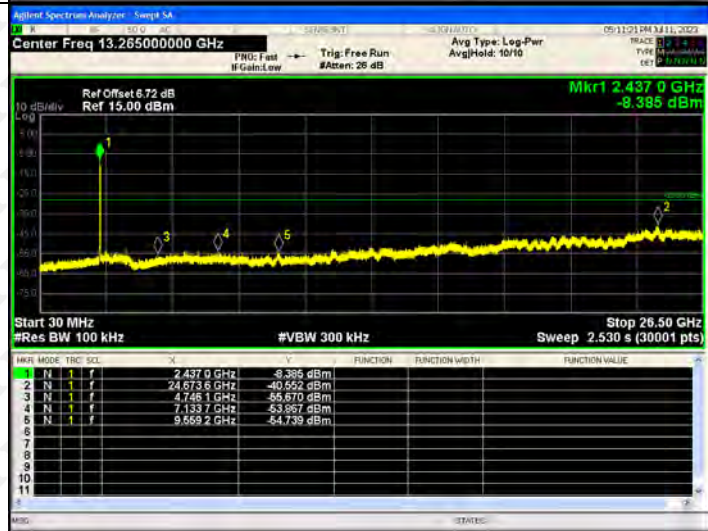


802.11 n(HT40)/HCH

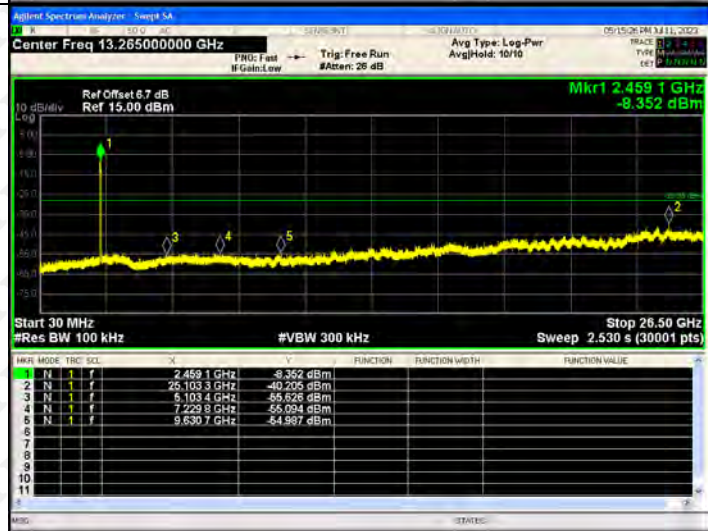

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

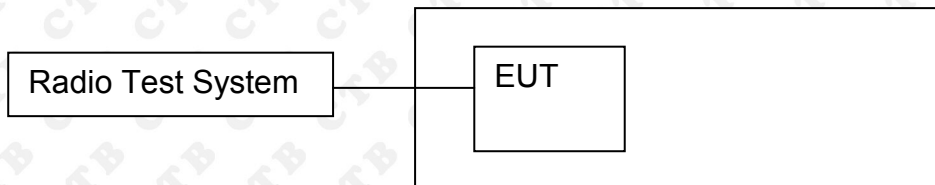

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	14.16	14.851	/	30
	MCH	14.161	14.646	/	30
	HCH	14.399	14.389	/	30
802.11g	LCH	13.65	13.889	/	30
	MCH	14.014	13.76	/	30
	HCH	13.933	13.901	/	30
802.11n(HT20)	LCH	13.75	13.802	16.786	30
	MCH	13.926	14.062	17.005	30
	HCH	13.754	13.981	16.879	30
802.11n(HT40)	LCH	13.211	13.33	16.281	30
	MCH	13.568	13.73	16.660	30
	HCH	13.622	13.758	16.701	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

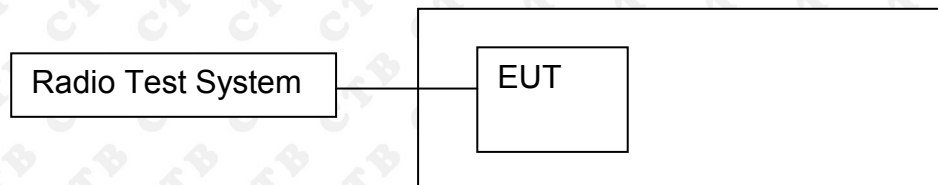

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.88	500	PASS
	MCH	10.132	500	PASS
	HCH	10.47	500	PASS
802.11g	LCH	16.354	500	PASS
	MCH	16.421	500	PASS
	HCH	16.336	500	PASS
802.11n(HT20)	LCH	17.231	500	PASS
	MCH	17.561	500	PASS
	HCH	17.043	500	PASS
802.11n(HT40)	LCH	35.426	500	PASS
	MCH	35.388	500	PASS
	HCH	35.576	500	PASS




ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.271	500	PASS
	MCH	10.424	500	PASS
	HCH	10.307	500	PASS
802.11g	LCH	16.331	500	PASS
	MCH	16.572	500	PASS
	HCH	16.371	500	PASS
802.11n(HT20)	LCH	17.536	500	PASS
	MCH	17.326	500	PASS
	HCH	17.58	500	PASS
802.11n(HT40)	LCH	35.669	500	PASS
	MCH	35.589	500	PASS
	HCH	35.562	500	PASS

ANT1:
Test Graph:

Graphs																			
<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3: 2.416431 GHz</p> <p>-5.4318 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.5 dBm</td> </tr> <tr> <td>14.800 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-9.187 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>8.880 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.5 dBm	14.800 MHz			Transmit Freq Error	OBW Power	99.00 %	-9.187 kHz			x dB Bandwidth	x dB	-6.00 dB	8.880 MHz		
Occupied Bandwidth	Total Power	15.5 dBm																	
14.800 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-9.187 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
8.880 MHz																			
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3: 2.442037 GHz</p> <p>-8.4074 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.4 dBm</td> </tr> <tr> <td>14.918 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-28.503 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.13 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.4 dBm	14.918 MHz			Transmit Freq Error	OBW Power	99.00 %	-28.503 kHz			x dB Bandwidth	x dB	-6.00 dB	10.13 MHz		
Occupied Bandwidth	Total Power	15.4 dBm																	
14.918 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-28.503 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.13 MHz																			
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3: 2.467187 GHz</p> <p>-9.1606 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.6 dBm</td> </tr> <tr> <td>14.889 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-47.890 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.47 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.6 dBm	14.889 MHz			Transmit Freq Error	OBW Power	99.00 %	-47.890 kHz			x dB Bandwidth	x dB	-6.00 dB	10.47 MHz		
Occupied Bandwidth	Total Power	15.6 dBm																	
14.889 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-47.890 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.47 MHz																			

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.420181 GHz -10.776 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">16.474 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	16.474 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
16.474 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.445195 GHz -11.435 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">16.466 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	16.466 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.9 dBm											
16.466 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.470146 GHz -11.382 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">16.436 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	16.436 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.9 dBm											
16.436 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420806 GHz -12.441 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td>17.638 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-9.422 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.23 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.638 MHz			Transmit Freq Error	OBW Power	99.00 %	-9.422 kHz	x dB	-6.00 dB	x dB Bandwidth			17.23 MHz			
Occupied Bandwidth	Total Power	12.6 dBm																		
17.638 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-9.422 kHz	x dB	-6.00 dB																		
x dB Bandwidth																				
17.23 MHz																				
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.445755 GHz -10.804 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td>17.602 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-25.535 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.56 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	17.602 MHz			Transmit Freq Error	OBW Power	99.00 %	-25.535 kHz	x dB	-6.00 dB	x dB Bandwidth			17.56 MHz			
Occupied Bandwidth	Total Power	12.9 dBm																		
17.602 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-25.535 kHz	x dB	-6.00 dB																		
x dB Bandwidth																				
17.56 MHz																				
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470486 GHz -10.069 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td>17.607 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-25.043 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.04 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	17.607 MHz			Transmit Freq Error	OBW Power	99.00 %	-25.043 kHz	x dB	-6.00 dB	x dB Bandwidth			17.04 MHz			
Occupied Bandwidth	Total Power	12.9 dBm																		
17.607 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-25.043 kHz	x dB	-6.00 dB																		
x dB Bandwidth																				
17.04 MHz																				
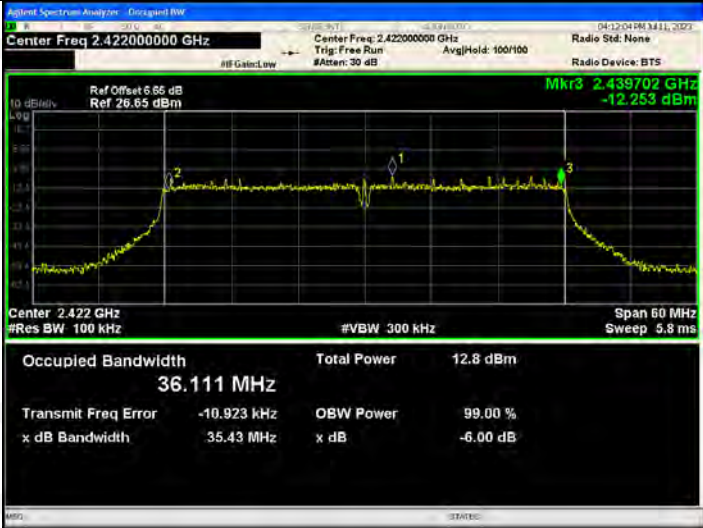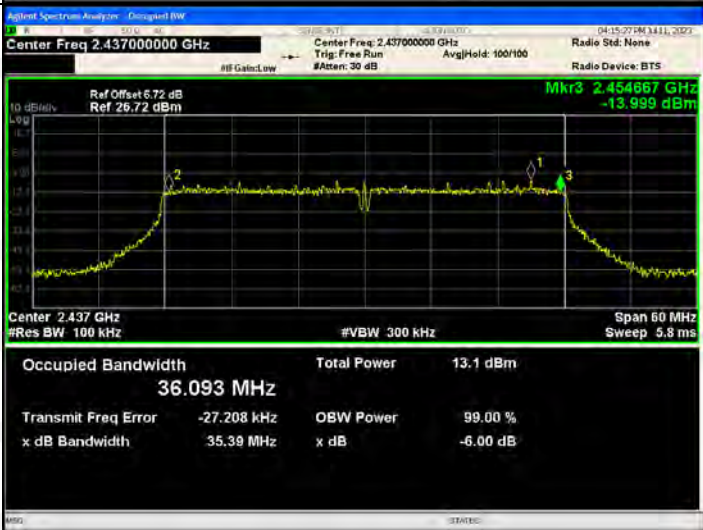
<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset: 6.65 dB Ref: 26.65 dBm</p> <p>Mkr3: 2.439702 GHz -12.253 dBm</p> <p>Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td colspan="3">36.111 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	36.111 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.8 dBm											
36.111 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.454867 GHz -13.999 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.1 dBm</td> </tr> <tr> <td colspan="3">36.093 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	13.1 dBm	36.093 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	13.1 dBm											
36.093 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.7 dBm</p> <p>Mkr3: 2.46977 GHz -12.937 dBm</p> <p>Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.2 dBm</td> </tr> <tr> <td colspan="3">36.085 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	13.2 dBm	36.085 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	13.2 dBm											
36.085 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

ANT2:
Test Graph:

Graphs													
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.417108 GHz -7.4627 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>14.911 MHz</td> <td>Total Power</td> <td>15.7 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-27.896 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>10.27 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	14.911 MHz	Total Power	15.7 dBm	Transmit Freq Error	-27.896 kHz	OBW Power	99.00 %	x dB Bandwidth	10.27 MHz	x dB	-6.00 dB
Occupied Bandwidth	14.911 MHz	Total Power	15.7 dBm										
Transmit Freq Error	-27.896 kHz	OBW Power	99.00 %										
x dB Bandwidth	10.27 MHz	x dB	-6.00 dB										
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.442155 GHz -8.2792 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>14.900 MHz</td> <td>Total Power</td> <td>15.7 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-57.266 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>10.42 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	14.900 MHz	Total Power	15.7 dBm	Transmit Freq Error	-57.266 kHz	OBW Power	99.00 %	x dB Bandwidth	10.42 MHz	x dB	-6.00 dB
Occupied Bandwidth	14.900 MHz	Total Power	15.7 dBm										
Transmit Freq Error	-57.266 kHz	OBW Power	99.00 %										
x dB Bandwidth	10.42 MHz	x dB	-6.00 dB										
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.4671 GHz -8.1060 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>14.839 MHz</td> <td>Total Power</td> <td>15.6 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-53.611 kHz</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>10.31 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	14.839 MHz	Total Power	15.6 dBm	Transmit Freq Error	-53.611 kHz	OBW Power	99.00 %	x dB Bandwidth	10.31 MHz	x dB	-6.00 dB
Occupied Bandwidth	14.839 MHz	Total Power	15.6 dBm										
Transmit Freq Error	-53.611 kHz	OBW Power	99.00 %										
x dB Bandwidth	10.31 MHz	x dB	-6.00 dB										


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Occupied Bandwidth: 16.447 MHz</p> <p>Total Power: 12.6 dBm</p> <p>Transmit Freq Error: -24.832 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.33 MHz</p> <p>x dB: -6.00 dB</p> <p>Mkr3: 2.420141 GHz -10.462 dBm</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Occupied Bandwidth: 16.477 MHz</p> <p>Total Power: 12.4 dBm</p> <p>Transmit Freq Error: -42.157 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.57 MHz</p> <p>x dB: -6.00 dB</p> <p>Mkr3: 2.445244 GHz -13.596 dBm</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Occupied Bandwidth: 16.456 MHz</p> <p>Total Power: 12.8 dBm</p> <p>Transmit Freq Error: -35.228 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 16.37 MHz</p> <p>x dB: -6.00 dB</p> <p>Mkr3: 2.470115 GHz -11.044 dBm</p>

<p>802.11n(HT20)/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3: 2.420738 GHz -10.583 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td colspan="3">17.610 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	17.610 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.7 dBm											
17.610 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.445644 GHz -12.473 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">17.620 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	17.620 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.9 dBm											
17.620 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.470771 GHz -10.793 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">17.608 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	17.608 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.9 dBm											
17.608 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset: 6.66 dB Ref: 26.65 dBm</p> <p>Mkr3: 2.439826 GHz -13.018 dBm</p> <p>Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">36.117 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>35.67 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	36.117 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			35.67 MHz
Occupied Bandwidth	Total Power	12.9 dBm														
36.117 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		35.67 MHz														
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.454772 GHz -12.878 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.1 dBm</td> </tr> <tr> <td colspan="3">36.118 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>35.59 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	13.1 dBm	36.118 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			35.59 MHz
Occupied Bandwidth	Total Power	13.1 dBm														
36.118 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		35.59 MHz														
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3: 2.469746 GHz -13.728 dBm</p> <p>Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.2 dBm</td> </tr> <tr> <td colspan="3">36.083 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>35.56 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	13.2 dBm	36.083 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			35.56 MHz
Occupied Bandwidth	Total Power	13.2 dBm														
36.083 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		35.56 MHz														

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

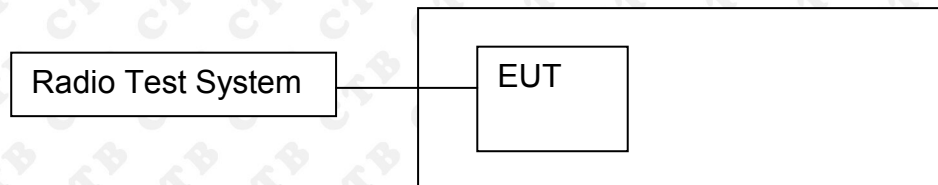

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-7.975	-8.188	/	8
	MCH	-7.968	-8.045	/	8
	HCH	-8.137	-8.271	/	8
802.11g	LCH	-9.461	-9.555	/	8
	MCH	-9.342	-9.733	/	8
	HCH	-9.455	-9.408	/	8
802.11n (HT20)	LCH	-9.596	-9.524	-6.550	8
	MCH	-9.365	-9.273	-6.308	8
	HCH	-9.395	-9.298	-6.336	8
802.11n (HT40)	LCH	-9.455	-9.266	-6.349	8
	MCH	-9.52	-9.12	-6.305	8
	HCH	-9.036	-9.024	-6.020	8

**ANT1:
Test Graph**

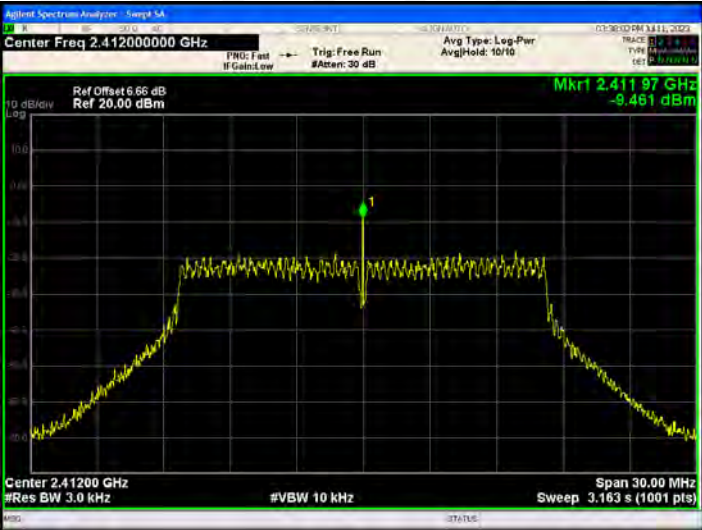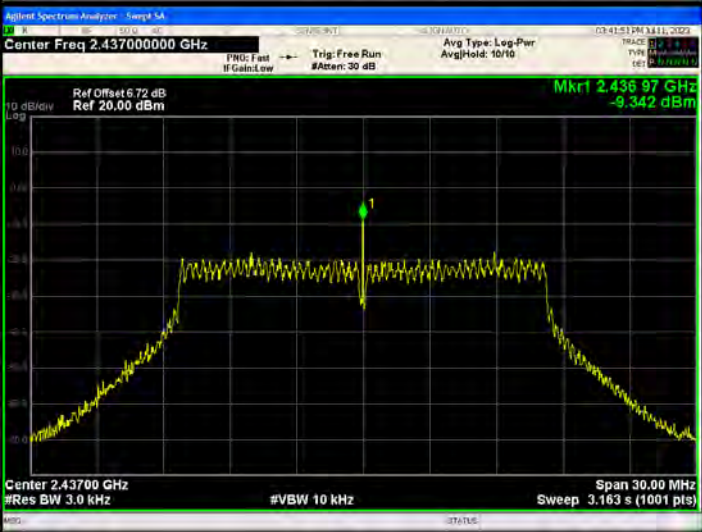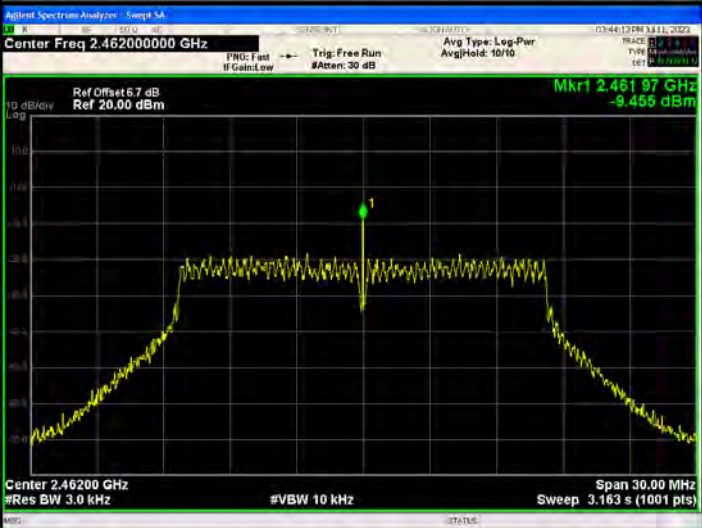


Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.411 97 GHz -7.975 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 97 GHz -7.968 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 97 GHz -8.137 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.411 97 GHz -9.461 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 97 GHz -9.342 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 97 GHz -9.455 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>



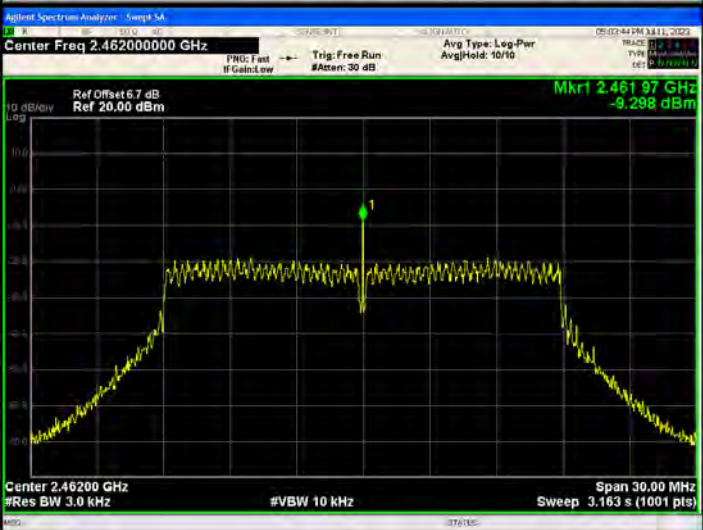
<p>802.11n(HT20)/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.41197 GHz -9.596 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.43697 GHz -9.385 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.46197 GHz -9.385 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>




<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.42200000 GHz</p> <p>Ref Offset 6.66 dB Ref 20.00 dBm</p> <p>Mkr1 2.42194 GHz -9.455 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.43694 GHz -9.520 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.45200000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.45194 GHz -9.036 dBm</p> <p>Center 2.45200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

**ANT 2:
Test Graph**

Graphs	
802.11b /LCH	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.411 97 GHz -8.188 dBm Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 97 GHz -8.045 dBm Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 97 GHz -8.271 dBm Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.66 dB Ref 20.00 dBm</p> <p>Mkr1 2.41197 GHz -9.555 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.43697 GHz -9.733 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.46197 GHz -9.408 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
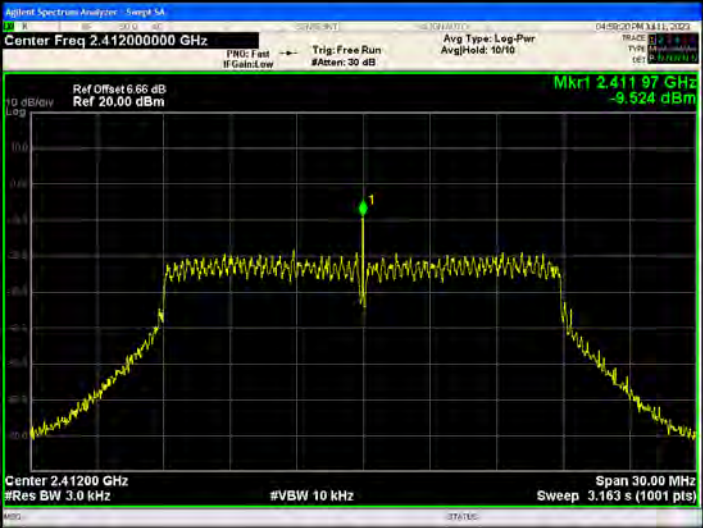
<p>802.11n(HT20)/LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.66 dB Ref 20.00 dBm</p> <p>Mkr1 2.41197 GHz -9.524 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.43697 GHz -9.273 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.46197 GHz -9.298 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
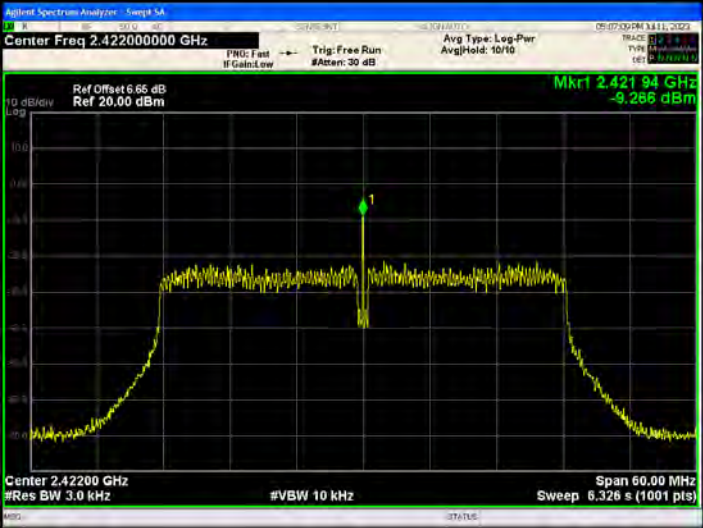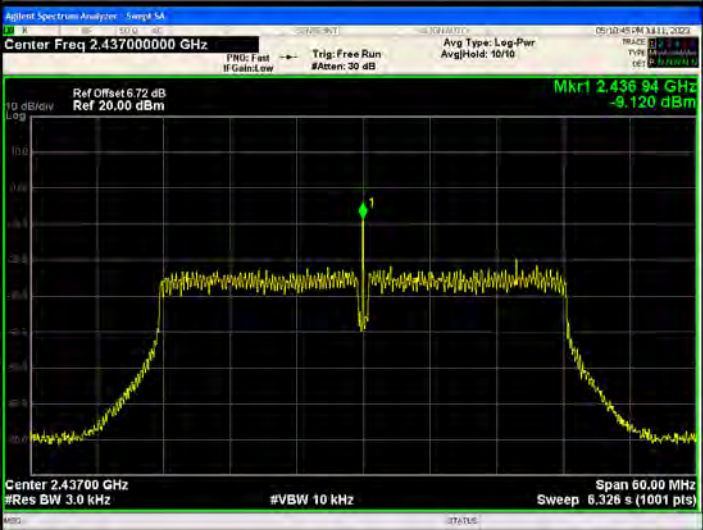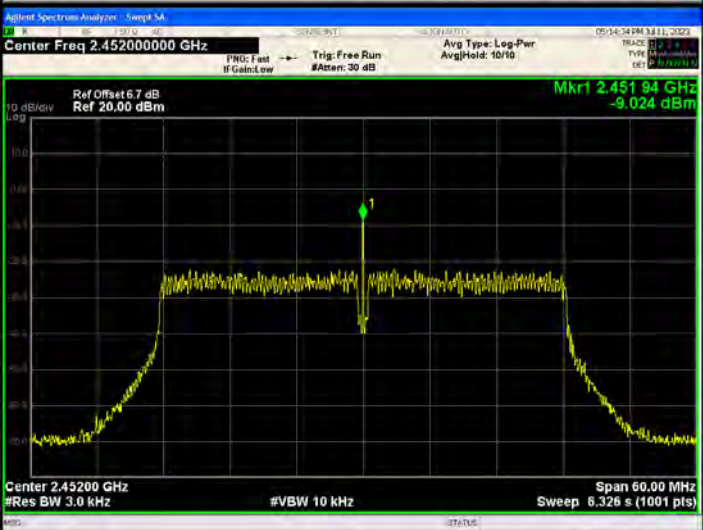
<p>802.11n(HT40)/LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.42200000 GHz</p> <p>Ref Offset 6.66 dB Ref 20.00 dBm</p> <p>Mkr1 2.42194 GHz -9.266 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.43694 GHz -9.120 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.45200000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.45194 GHz -9.024 dBm</p> <p>Center 2.45200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is ANT1:-2.73dBi, ANT2:-2.74dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

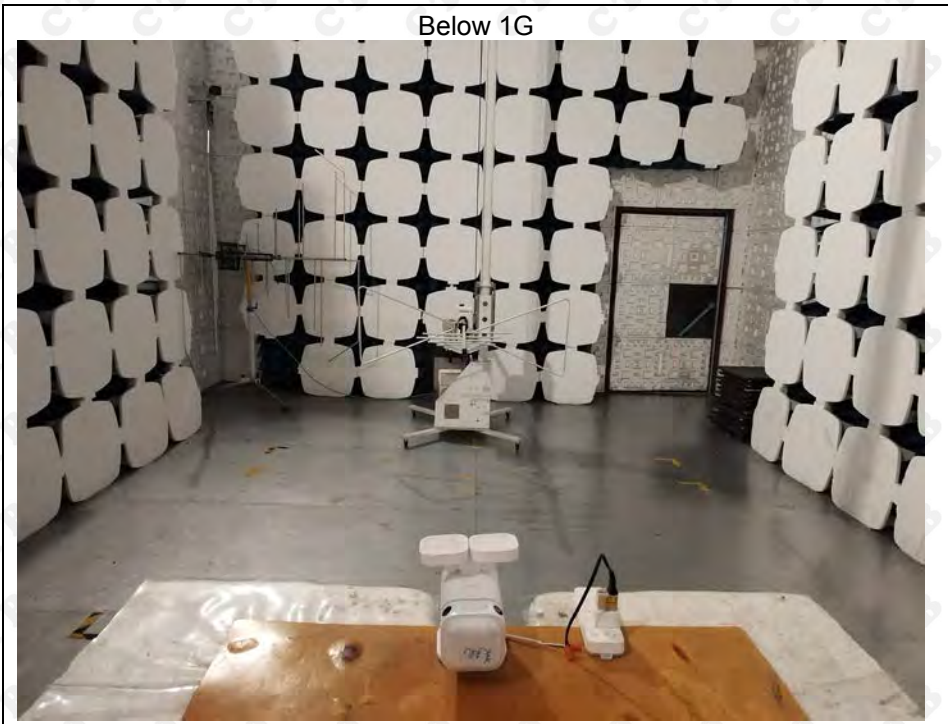

Above 1G

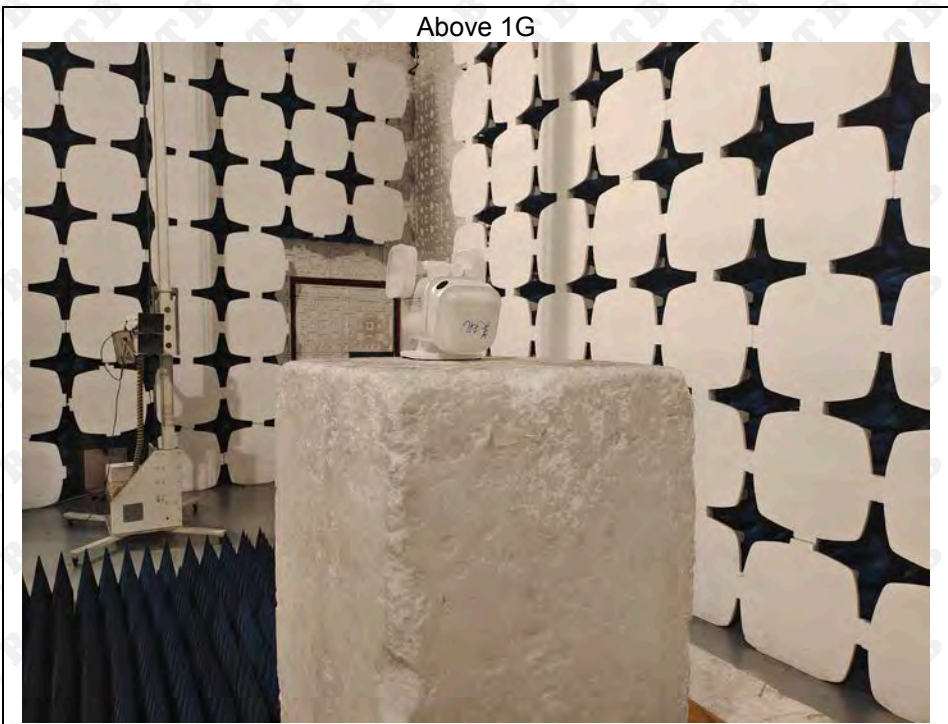

Conducted Emission

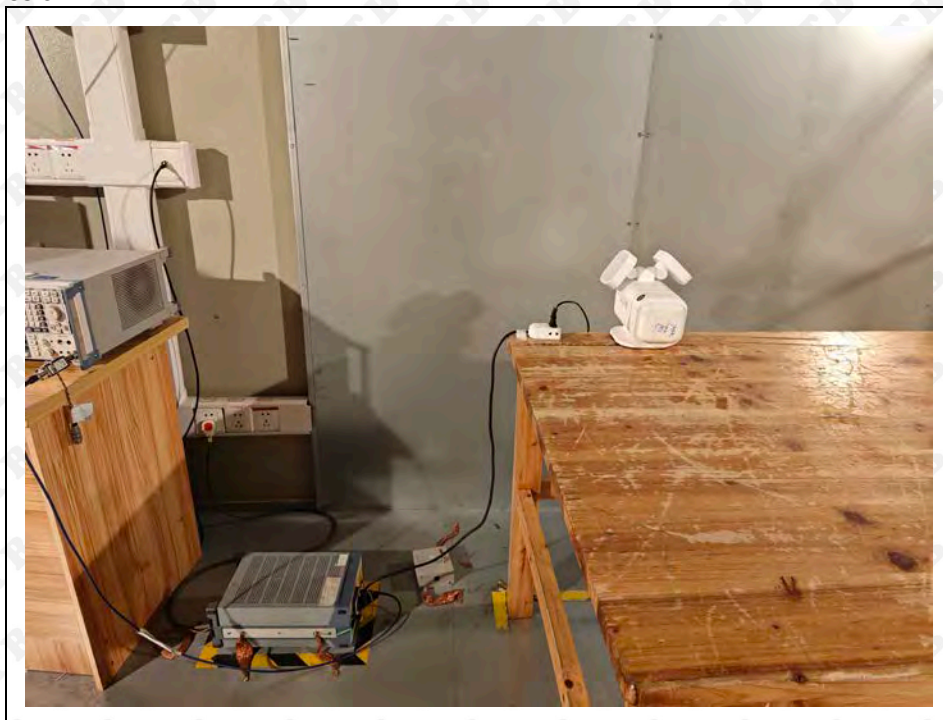

***** END OF REPORT *****