


TEST REPORT

Product Name: spotlight camera
FCC ID: 2AYZ8WP32001326
Trademark: Winees
Model Number: WP32001326
Prepared For: Linkzone Technology Co., Limited
Address: ROOM 20 5/F WAYSON COMMERCIAL BLDG 28 CONNADGHT ROAD WEST SHEUNG WAN HK
Manufacturer: Linkzone Technology Co., Limited
Address: ROOM 20 5/F WAYSON COMMERCIAL BLDG 28 CONNADGHT ROAD WEST SHEUNG WAN HK
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 5th Floor, Building C2, Hengfeng Industrial City, No. 739, Zhoushi Road, Hezhou District, Hangcheng Street, Baoan District, Shenzhen
Sample Received Date: Apr. 19, 2022
Sample tested Date: Apr. 19, 2022 to May, 11, 2022
Issue Date: May, 11, 2022
Report No.: CTB220507021RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei, Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP.....	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment.....	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED.....	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION.....	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit.....	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit.....	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS.....	51
8.1 Block Diagram Of Test Setup	51
8.2 Limit.....	51
8.3 Test procedure	51
8.4 Test Result	52
9. CONDUCTED OUTPUT POWER.....	66
9.1 Block Diagram Of Test Setup	66
9.2 Limit.....	66
9.3 Test procedure	66
9.4 Test Result	67
10. 6DB OCCUPIED BANDWIDTH	68
10.1 Block Diagram Of Test Setup	68
10.2 Limit.....	68
10.3 Test procedure	68
10.4 Test Result	69
11. POWER SPECTRAL DENSITY.....	78
11.1 Block Diagram Of Test Setup	78
11.2 Limit.....	78
11.3 Test procedure	78



11.4 Test Result79

12. ANTENNA REQUIREMENT88

13. EUT PHOTOGRAPHS.....89

14. EUT TEST SETUP PHOTOGRAPHS.....90

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220507021RFX	May,11, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	WP32001326
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V2.0
Software Version:	1.00.09
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 18.919dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	WiFi (2.4G) : ANT1:1.42 dBi ANT2:2.31 dBi
Ratings:	Adapter : Input: 100-240V _~ , 50/60Hz, 0.3A max Output: 5V 1.2A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC Adapter	Zhuzhou Dachuan Electronic Technology Co.,Ltd	NBS05B050120VU S-A0	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

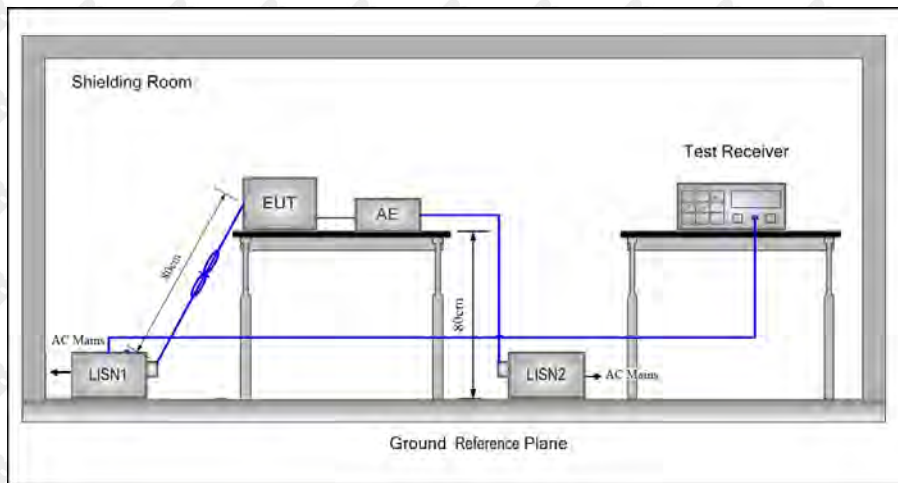

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed

0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

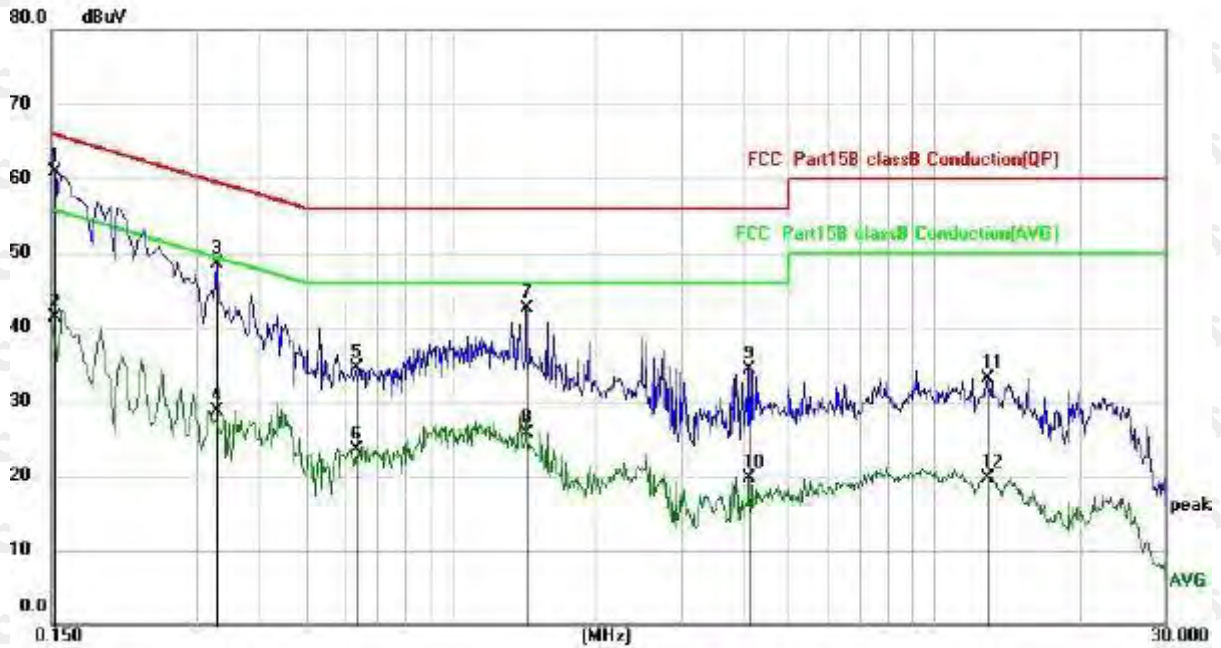


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1524	50.12	10.72	60.84	65.87	-5.03	QP
2		0.1524	30.50	10.72	41.22	55.87	-14.65	AVG
3		0.3300	37.97	10.62	48.59	59.45	-10.86	QP
4		0.3300	18.08	10.62	28.70	49.45	-20.75	AVG
5		0.6340	24.05	10.55	34.60	56.00	-21.40	QP
6		0.6340	12.96	10.55	23.51	46.00	-22.49	AVG
7		1.4299	31.90	10.62	42.52	56.00	-13.48	QP
8		1.4299	15.04	10.62	25.66	46.00	-20.34	AVG
9		4.1340	23.64	10.64	34.28	56.00	-21.72	QP
10		4.1340	8.99	10.64	19.63	46.00	-26.37	AVG
11		12.8620	22.22	10.87	33.09	60.00	-26.91	QP
12		12.8620	8.75	10.87	19.62	50.00	-30.38	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

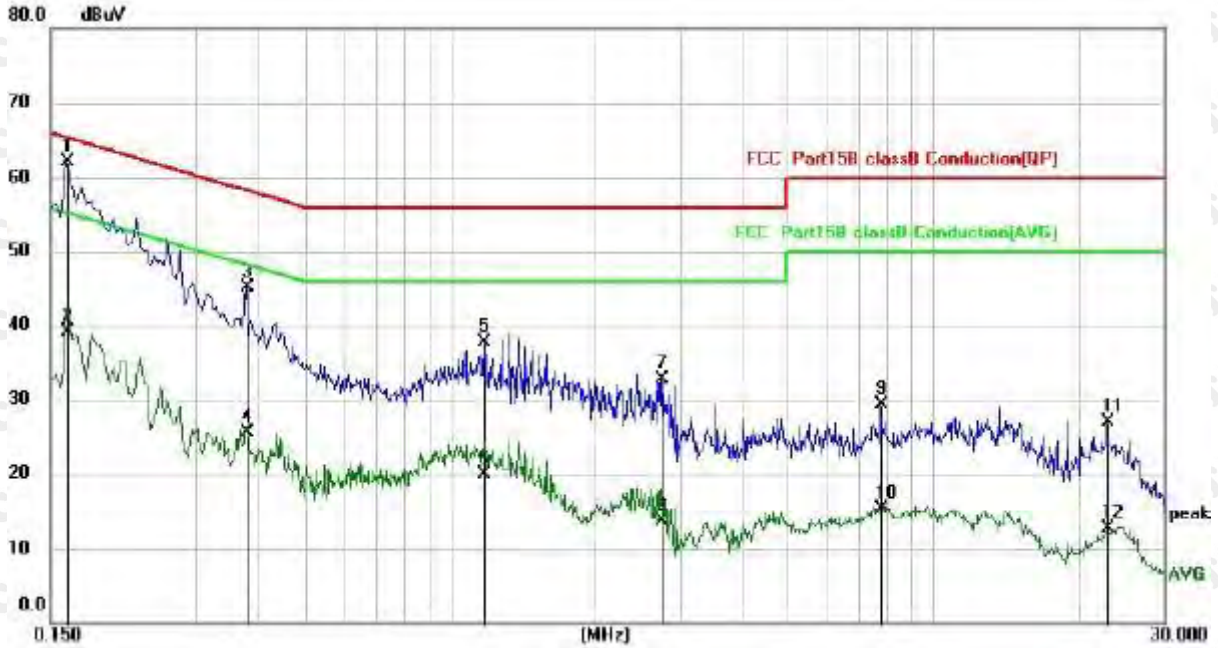

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1620	51.32	10.71	62.03	65.36	-3.33	QP
2		0.1620	28.38	10.71	39.09	55.36	-16.27	AVG
3		0.3780	34.53	10.59	45.12	58.32	-13.20	QP
4		0.3780	14.86	10.59	25.45	48.32	-22.87	AVG
5		1.1780	27.07	10.62	37.69	56.00	-18.31	QP
6		1.1780	9.35	10.62	19.97	46.00	-26.03	AVG
7		2.7300	22.15	10.63	32.78	56.00	-23.22	QP
8		2.7300	3.02	10.63	13.65	46.00	-32.35	AVG
9		7.7740	18.49	10.74	29.23	60.00	-30.77	QP
10		7.7740	4.62	10.74	15.36	50.00	-34.64	AVG
11		22.9780	15.86	11.00	26.86	60.00	-33.14	QP
12		22.9780	1.61	11.00	12.61	50.00	-37.39	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

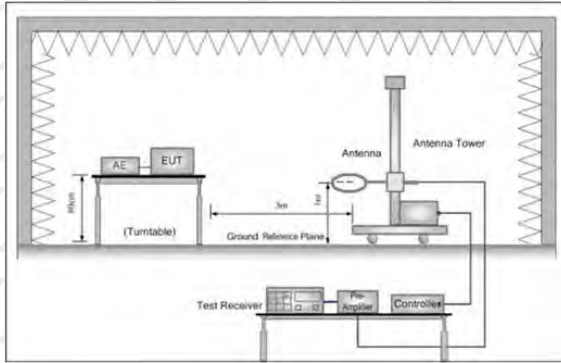


Figure 1. Below 30MHz

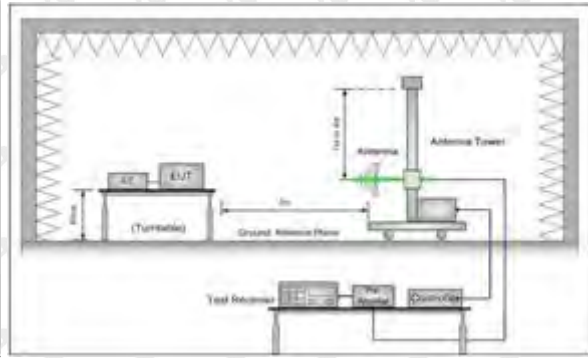


Figure 2. 30MHz to 1GHz

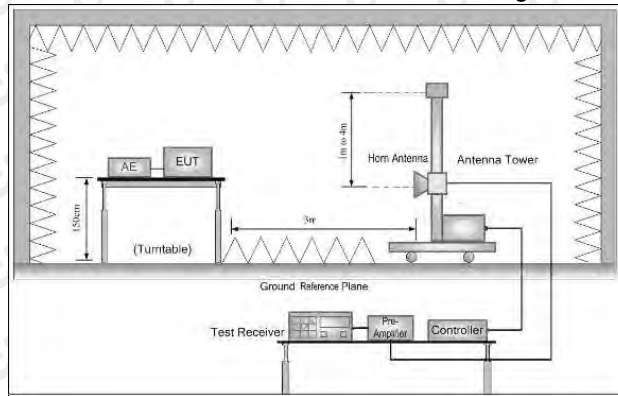


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

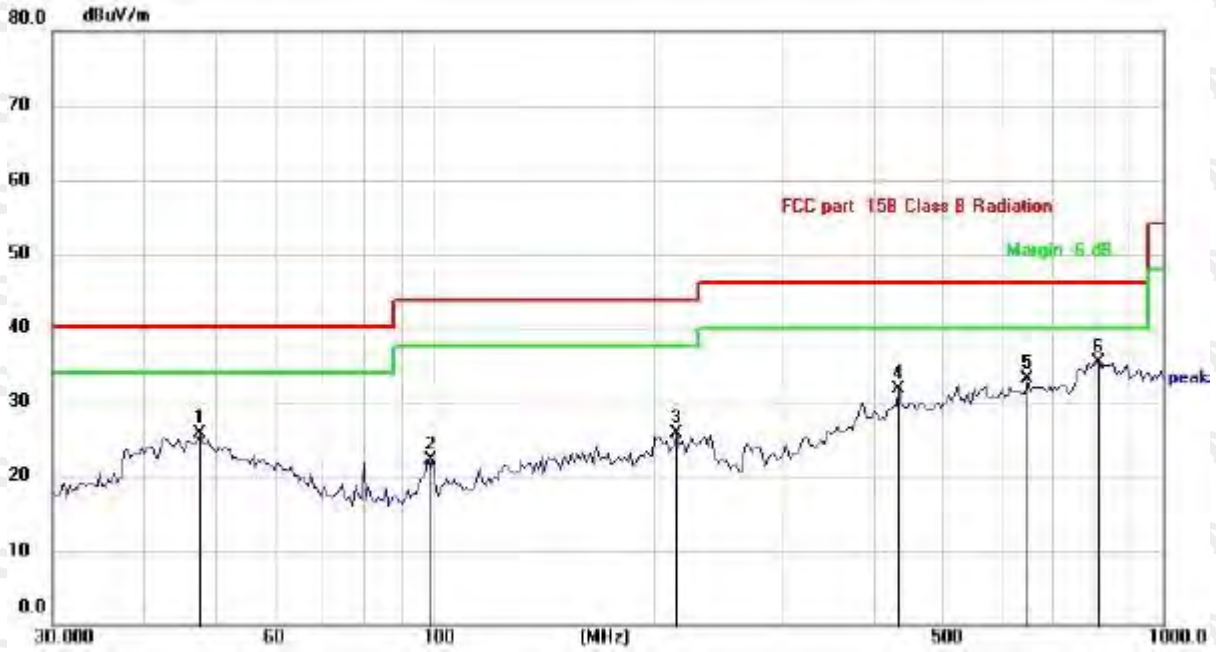

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		47.7421	31.17	-5.56	25.61	40.00	-14.39	QP
2		97.9700	30.99	-8.86	22.13	43.50	-21.37	QP
3		215.6454	32.68	-7.03	25.65	43.50	-17.85	QP
4		434.8267	32.50	-0.85	31.65	46.00	-14.35	QP
5		650.7997	29.81	3.28	33.09	46.00	-12.91	QP
6	*	817.3995	29.29	6.06	35.35	46.00	-10.65	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

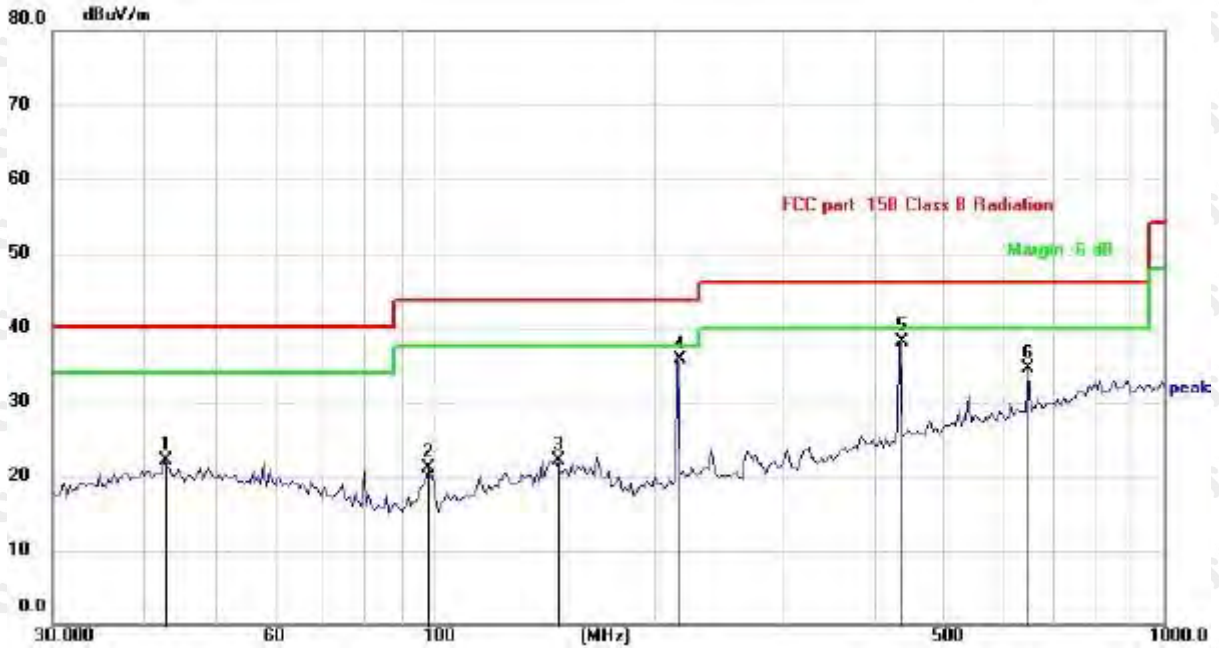

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.6000	27.56	-5.37	22.19	40.00	-17.81	QP
2		97.9699	29.99	-8.86	21.13	43.50	-22.37	QP
3		146.6304	27.57	-5.48	22.09	43.50	-21.41	QP
4	*	215.6456	42.68	-7.03	35.65	43.50	-7.85	QP
5		434.8268	39.00	-0.85	38.15	46.00	-7.85	QP
6		650.7997	31.31	3.28	34.59	46.00	-11.41	QP

- Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level
- The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: TM1 (the worst)
 - All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: TM1 (the worst)
 - After pre-scanning three directions, the report recorded the worst case Test Mode: TM1 (the worst)

ANT1:
Above 1 GHz Test Results:
LOW CH1 (802.11b Mode)/2412

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	64.83	-3.64	61.19	74	-12.81	peak
4824	48.58	-3.64	44.94	54	-9.06	AVG
7236	58.14	-0.95	57.19	74	-16.81	peak
7236	46.40	-0.95	45.45	54	-8.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	65.08	-3.64	61.44	74	-12.56	peak
4824	49.50	-3.64	45.86	54	-8.14	AVG
7236	56.84	-0.95	55.89	74	-18.11	peak
7236	45.44	-0.95	44.49	54	-9.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	65.58	-3.51	62.07	74	-11.93	peak
4874	48.86	-3.51	45.35	54	-8.65	AVG
7311	58.37	-0.82	57.55	74	-16.45	peak
7311	43.06	-0.82	42.24	54	-11.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.38	-3.51	59.87	74	-14.13	peak
4874	46.84	-3.51	43.33	54	-10.67	AVG
7311	59.32	-0.82	58.50	74	-15.50	peak
7311	43.83	-0.82	43.01	54	-10.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.51	-3.43	60.08	74	-13.92	peak
4924	46.87	-3.43	43.44	54	-10.56	AVG
7386	58.46	-0.75	57.71	74	-16.29	peak
7386	43.52	-0.75	42.77	54	-11.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.43	-3.43	60.00	74	-14.00	peak
4924	47.53	-3.43	44.10	54	-9.90	AVG
7386	58.26	-0.75	57.51	74	-16.49	peak
7386	44.01	-0.75	43.26	54	-10.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.96	-3.64	61.32	74	-12.68	peak
4824	48.90	-3.64	45.26	54	-8.74	AVG
7236	58.93	-0.95	57.98	74	-16.02	peak
7236	45.26	-0.95	44.31	54	-9.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.25	-3.64	58.61	74	-15.39	peak
4824	48.65	-3.64	45.01	54	-8.99	AVG
7236	59.25	-0.95	58.30	74	-15.70	peak
7236	43.61	-0.95	42.66	54	-11.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	62.46	-3.51	58.95	74	-15.05	peak
4874	46.75	-3.51	43.24	54	-10.76	AVG
7311	59.85	-0.82	59.03	74	-14.97	peak
7311	45.61	-0.82	44.79	54	-9.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.39	-3.51	60.88	74	-13.12	peak
4874	47.60	-3.51	44.09	54	-9.91	AVG
7311	56.30	-0.82	55.48	74	-18.52	peak
7311	42.14	-0.82	41.32	54	-12.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	62.64	-3.43	59.21	74	-14.79	peak
4924	49.14	-3.43	45.71	54	-8.29	AVG
7386	56.55	-0.75	55.80	74	-18.20	peak
7386	43.89	-0.75	43.14	54	-10.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	61.86	-3.43	58.43	74	-15.57	peak
4924	48.18	-3.43	44.75	54	-9.25	AVG
7386	57.85	-0.75	57.10	74	-16.90	peak
7386	42.86	-0.75	42.11	54	-11.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.49	-3.64	58.85	74	-15.15	peak
4824	47.46	-3.64	43.82	54	-10.18	AVG
7236	58.02	-0.95	57.07	74	-16.93	peak
7236	45.48	-0.95	44.53	54	-9.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.46	-3.64	61.82	74	-12.18	peak
4824	49.98	-3.64	46.34	54	-7.66	AVG
7236	60.55	-0.95	59.60	74	-14.40	peak
7236	43.26	-0.95	42.31	54	-11.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	62.45	-3.51	58.94	74.00	-15.06	peak
4874.00	49.68	-3.51	46.17	54.00	-7.83	AVG
7311.00	59.67	-0.82	58.85	74.00	-15.15	peak
7311.00	46.61	-0.82	45.79	54.00	-8.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	64.54	-3.51	61.03	74.00	-12.97	peak
4874.00	46.15	-3.51	42.64	54.00	-11.36	AVG
7311.00	58.26	-0.82	57.44	74.00	-16.56	peak
7311.00	42.71	-0.82	41.89	54.00	-12.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	61.66	-3.43	58.23	74	-15.77	peak
4924	47.80	-3.43	44.37	54	-9.63	AVG
7386	57.91	-0.75	57.16	74	-16.84	peak
7386	41.84	-0.75	41.09	54	-12.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	64.61	-3.43	61.18	74	-12.82	peak
4924	46.87	-3.43	43.44	54	-10.56	AVG
7386	56.15	-0.75	55.40	74	-18.60	peak
7386	42.49	-0.75	41.74	54	-12.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.01	-3.63	60.38	74	-13.62	
4844	48.37	-3.63	44.74	54	-9.26	AVG
7266	60.17	-0.94	59.23	74	-14.77	peak
7266	44.19	-0.94	43.25	54	-10.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.43	-3.63	60.80	74	-13.20	
4844	48.14	-3.63	44.51	54	-9.49	AVG
7266	58.98	-0.94	58.04	74	-15.96	peak
7266	44.72	-0.94	43.78	54	-10.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.09	-3.51	60.58	74	-13.42	peak
4874	49.70	-3.51	46.19	54	-7.81	AVG
7311	58.40	-0.82	57.58	74	-16.42	peak
7311	45.07	-0.82	44.25	54	-9.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	62.24	-3.51	58.73	74	-15.27	peak
4874	46.45	-3.51	42.94	54	-11.06	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.34	-0.82	42.52	54	-11.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.12	-3.43	60.69	74	-13.31	
4904	48.37	-3.43	44.94	54	-9.06	AVG
7356	56.42	-0.75	55.67	74	-18.33	peak
7356	40.95	-0.75	40.20	54	-13.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.94	-3.43	59.51	74	-14.49	
4904	46.91	-3.43	43.48	54	-10.52	AVG
7356	57.61	-0.75	56.86	74	-17.14	peak
7356	43.38	-0.75	42.63	54	-11.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5) Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

 Operation Mode:
 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.32	-5.81	50.51	74	-23.49	peak
2390	/	-5.81	/	54	/	AVG
2399	65.00	-5.84	59.16	74	-14.84	peak
2399	49.30	-5.84	43.46	54	-10.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.60	-5.81	50.79	74	-23.21	peak
2390	/	-5.81	/	54	/	AVG
2399	63.26	-5.84	57.42	74	-16.58	peak
2399	47.09	-5.84	41.25	54	-12.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



Operation Mode:
802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	55.91	-5.65	50.26	74	-23.74	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	57.01	-5.65	51.36	74	-22.64	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.73	-5.81	51.92	74	-22.08	peak
2390	/	-5.81	/	54	/	AVG
2399	61.92	-5.84	56.08	74	-17.92	peak
2399	47.29	-5.84	41.45	54	-12.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.83	-5.81	51.02	74	-22.98	peak
2390	/	-5.81	/	54	/	AVG
2399	61.93	-5.84	56.09	74	-17.91	peak
2399	46.95	-5.84	41.11	54	-12.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.54	-5.65	51.89	74	-22.11	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.22	-5.65	50.57	74	-23.43	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.68	-5.81	51.87	74	-22.13	peak
2390	/	-5.81	/	54	/	AVG
2399	63.67	-5.84	57.83	74	-16.17	peak
2399	47.28	-5.84	41.44	54	-12.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.00	-5.81	51.19	74	-22.81	peak
2390	/	-5.81	/	54	/	AVG
2399	61.68	-5.84	55.84	74	-18.16	peak
2399	46.74	-5.84	40.90	54	-13.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: 802.11n/H2O Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.91	-5.65	51.26	74	-22.74	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.35	-5.65	50.70	74	-23.30	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.44	-5.81	51.63	74	-22.37	peak
2390	/	-5.81	/	54	/	AVG
2399	63.35	-5.84	57.51	74	-16.49	peak
2399	46.71	-5.84	40.87	54	-13.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.91	-5.81	53.10	74	-20.90	peak
2390	/	-5.81	/	54	/	AVG
2399	61.26	-5.84	55.42	74	-18.58	peak
2399	46.86	-5.84	41.02	54	-12.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.69	-5.65	51.04	74	-22.96	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.85	-5.65	50.20	74	-23.80	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

NT2:

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	63.69	-3.64	60.05	74	-13.95	peak
4824	49.42	-3.64	45.78	54	-8.22	AVG
7236	58.79	-0.95	57.84	74	-16.16	peak
7236	45.87	-0.95	44.92	54	-9.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4824	65.37	-3.64	61.73	74	-12.27	peak
4824	47.03	-3.64	43.39	54	-10.61	AVG
7236	57.58	-0.95	56.63	74	-17.37	peak
7236	45.84	-0.95	44.89	54	-9.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	65.20	-3.51	61.69	74	-12.31	peak
4874	48.63	-3.51	45.12	54	-8.88	AVG
7311	57.99	-0.82	57.17	74	-16.83	peak
7311	43.44	-0.82	42.62	54	-11.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.62	-3.51	60.11	74	-13.89	peak
4874	47.55	-3.51	44.04	54	-9.96	AVG
7311	58.04	-0.82	57.22	74	-16.78	peak
7311	45.15	-0.82	44.33	54	-9.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.10	-3.43	58.67	74	-15.33	peak
4924	45.88	-3.43	42.45	54	-11.55	AVG
7386	58.33	-0.75	57.58	74	-16.42	peak
7386	43.21	-0.75	42.46	54	-11.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.40	-3.43	60.97	74	-13.03	peak
4924	48.27	-3.43	44.84	54	-9.16	AVG
7386	56.91	-0.75	56.16	74	-17.84	peak
7386	43.61	-0.75	42.86	54	-11.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	63.89	-3.64	60.25	74	-13.75	peak
4824	50.10	-3.64	46.46	54	-7.54	AVG
7236	58.00	-0.95	57.05	74	-16.95	peak
7236	44.71	-0.95	43.76	54	-10.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	62.38	-3.64	58.74	74	-15.26	peak
4824	47.16	-3.64	43.52	54	-10.48	AVG
7236	58.59	-0.95	57.64	74	-16.36	peak
7236	42.96	-0.95	42.01	54	-11.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.17	-3.51	60.66	74	-13.34	peak
4874	47.34	-3.51	43.83	54	-10.17	AVG
7311	58.59	-0.82	57.77	74	-16.23	peak
7311	44.27	-0.82	43.45	54	-10.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	63.40	-3.51	59.89	74	-14.11	peak
4874	47.15	-3.51	43.64	54	-10.36	AVG
7311	56.74	-0.82	55.92	74	-18.08	peak
7311	41.32	-0.82	40.50	54	-13.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.84	-3.43	60.41	74	-13.59	peak
4924	47.53	-3.43	44.10	54	-9.90	AVG
7386	58.77	-0.75	58.02	74	-15.98	peak
7386	44.23	-0.75	43.48	54	-10.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.11	-3.43	59.68	74	-14.32	peak
4924	48.44	-3.43	45.01	54	-8.99	AVG
7386	57.42	-0.75	56.67	74	-17.33	peak
7386	41.48	-0.75	40.73	54	-13.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.37	-3.64	59.73	74	-14.27	peak
4824	47.98	-3.64	44.34	54	-9.66	AVG
7236	58.74	-0.95	57.79	74	-16.21	peak
7236	45.10	-0.95	44.15	54	-9.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.32	-3.64	58.68	74	-15.32	peak
4824	51.15	-3.64	47.51	54	-6.49	AVG
7236	57.68	-0.95	56.73	74	-17.27	peak
7236	45.55	-0.95	44.60	54	-9.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	63.90	-3.51	60.39	74.00	-13.61	peak
4874.00	50.24	-3.51	46.73	54.00	-7.27	AVG
7311.00	56.98	-0.82	56.16	74.00	-17.84	peak
7311.00	45.58	-0.82	44.76	54.00	-9.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874.00	63.12	-3.51	59.61	74.00	-14.39	peak
4874.00	46.06	-3.51	42.55	54.00	-11.45	AVG
7311.00	57.19	-0.82	56.37	74.00	-17.63	peak
7311.00	42.66	-0.82	41.84	54.00	-12.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits



HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	61.67	-3.43	58.24	74	-15.76	peak
4924	48.32	-3.43	44.89	54	-9.11	AVG
7386	58.72	-0.75	57.97	74	-16.03	peak
7386	41.77	-0.75	41.02	54	-12.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	63.91	-3.43	60.48	74	-13.52	peak
4924	47.35	-3.43	43.92	54	-10.08	AVG
7386	57.87	-0.75	57.12	74	-16.88	peak
7386	41.20	-0.75	40.45	54	-13.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.72	-3.63	61.09	74	-12.91	
4844	49.16	-3.63	45.53	54	-8.47	AVG
7266	57.79	-0.94	56.85	74	-17.15	peak
7266	45.62	-0.94	44.68	54	-9.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.64	-3.63	61.01	74	-12.99	
4844	47.61	-3.63	43.98	54	-10.02	AVG
7266	59.12	-0.94	58.18	74	-15.82	peak
7266	45.07	-0.94	44.13	54	-9.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	64.80	-3.51	61.29	74	-12.71	peak
4874	49.24	-3.51	45.73	54	-8.27	AVG
7311	60.24	-0.82	59.42	74	-14.58	peak
7311	46.47	-0.82	45.65	54	-8.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.66	-0.82	55.84	74	-18.16	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	63.70	-3.43	60.27	74	-13.73	
4904	47.29	-3.43	43.86	54	-10.14	AVG
7356	57.69	-0.75	56.94	74	-17.06	peak
7356	41.32	-0.75	40.57	54	-13.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	63.56	-3.43	60.13	74	-13.87	
4904	47.19	-3.43	43.76	54	-10.24	AVG
7356	57.27	-0.75	56.52	74	-17.48	peak
7356	44.24	-0.75	43.49	54	-10.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed

(5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	57.56	-5.81	51.75	74	-22.25	peak
2390	/	-5.81	/	54	/	AVG
2399	65.14	-5.84	59.30	74	-14.70	peak
2399	49.33	-5.84	43.49	54	-10.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	57.73	-5.81	51.92	74	-22.08	peak
2390	/	-5.81	/	54	/	AVG
2399	61.77	-5.84	55.93	74	-18.07	peak
2399	47.39	-5.84	41.55	54	-12.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



Operation Mode:
802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.49	-5.65	51.84	74	-22.16	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.13	-5.65	51.48	74	-22.52	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	57.81	-5.81	52.00	74	-22.00	peak
2390	/	-5.81	/	54	/	AVG
2399	62.78	-5.84	56.94	74	-17.06	peak
2399	46.70	-5.84	40.86	54	-13.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	57.21	-5.81	51.40	74	-22.60	peak
2390	/	-5.81	/	54	/	AVG
2399	62.49	-5.84	56.65	74	-17.35	peak
2399	45.48	-5.84	39.64	54	-14.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.42	-5.65	50.77	74	-23.23	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	57.97	-5.65	52.32	74	-21.68	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	57.47	-5.81	51.66	74	-22.34	peak
2390	/	-5.81	/	54	/	AVG
2399	62.64	-5.84	56.80	74	-17.20	peak
2399	47.54	-5.84	41.70	54	-12.30	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	55.84	-5.81	50.03	74	-23.97	peak
2390	/	-5.81	/	54	/	AVG
2399	60.94	-5.84	55.10	74	-18.90	peak
2399	46.42	-5.84	40.58	54	-13.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits



Operation Mode: 802.11n/H2O Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	55.77	-5.65	50.12	74	-23.88	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	55.79	-5.65	50.14	74	-23.86	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	58.78	-5.81	52.97	74	-21.03	peak
2390	/	-5.81	/	54	/	AVG
2399	62.73	-5.84	56.89	74	-17.11	peak
2399	46.99	-5.84	41.15	54	-12.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	58.22	-5.81	52.41	74	-21.59	peak
2390	/	-5.81	/	54	/	AVG
2399	60.81	-5.84	54.97	74	-19.03	peak
2399	46.48	-5.84	40.64	54	-13.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.69	-5.65	51.04	74	-22.96	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.72	-5.65	50.07	74	-23.93	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. Band edge AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

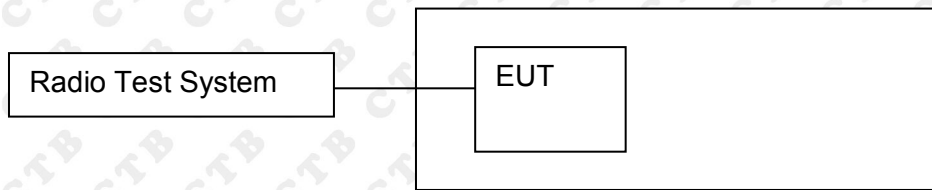

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold


8.4 Test Result

ANT 1:

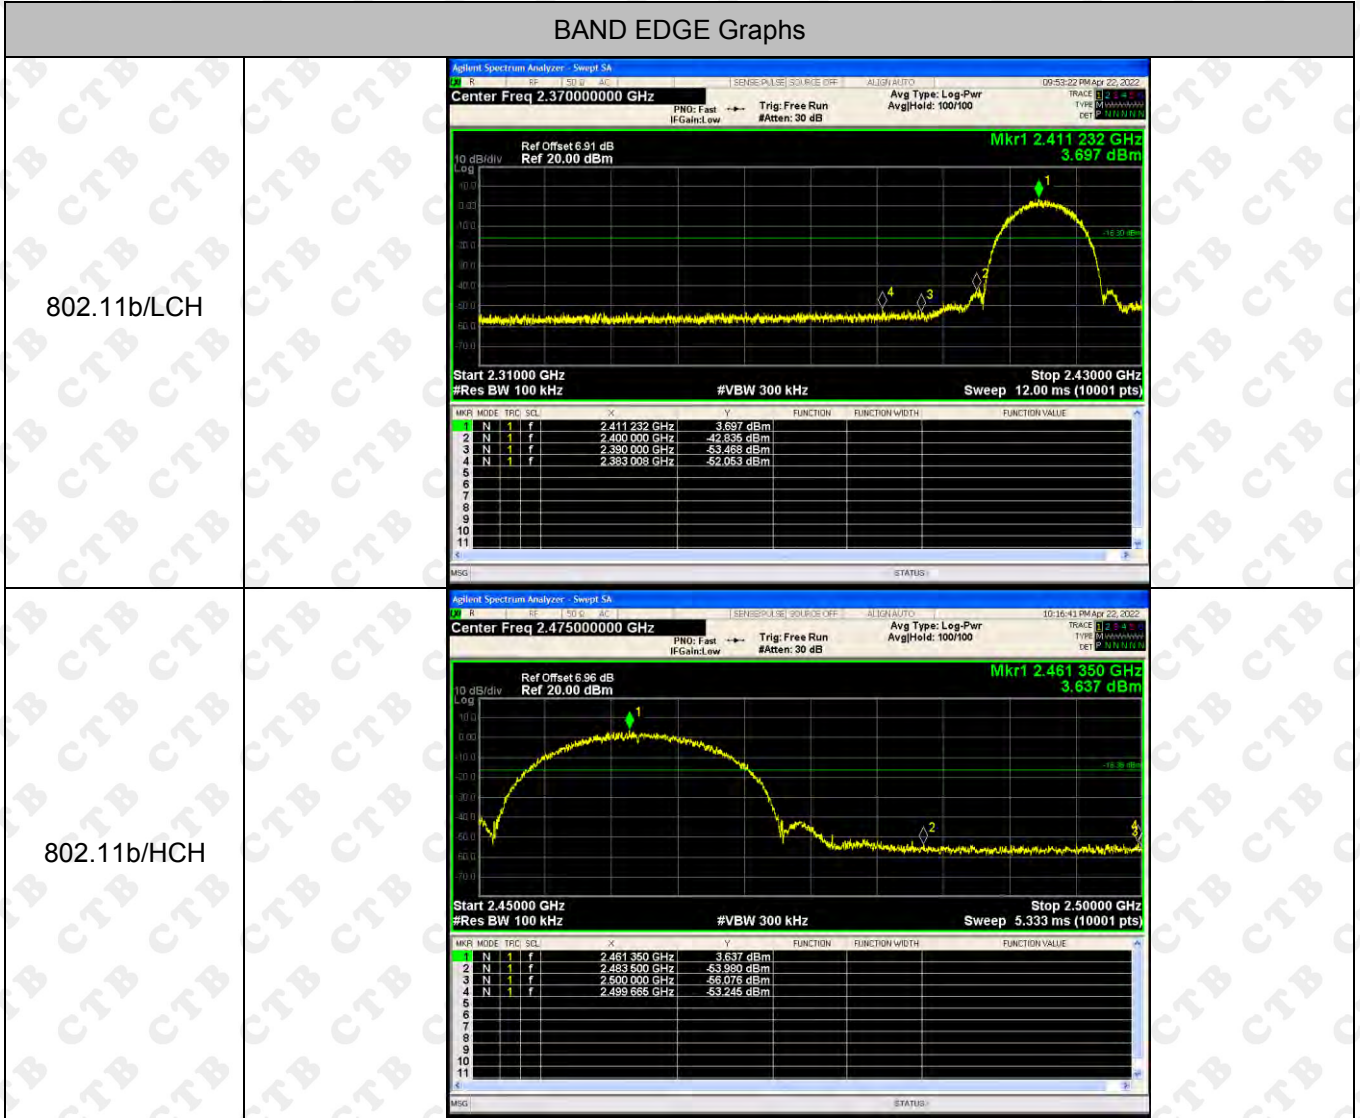


BAND EDGE Graphs


802.11g/LCH


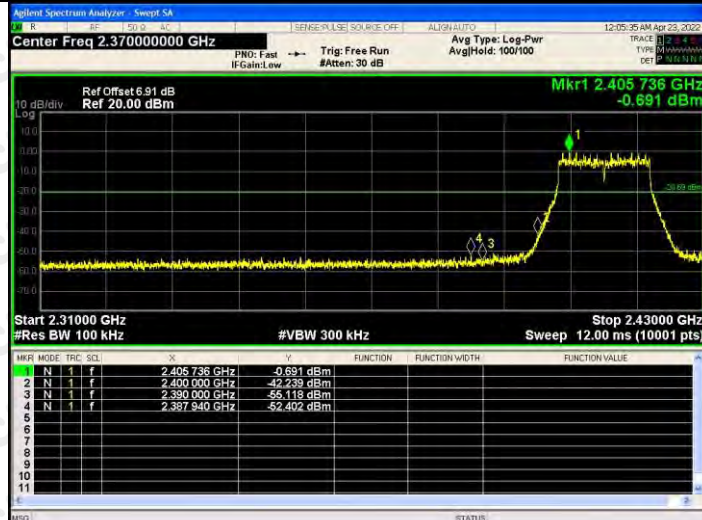


802.11g/HCH

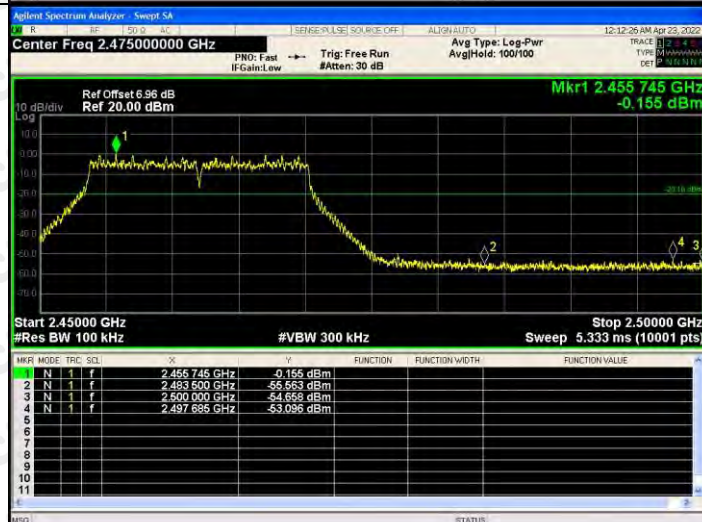


802.11n(HT20)/LCH

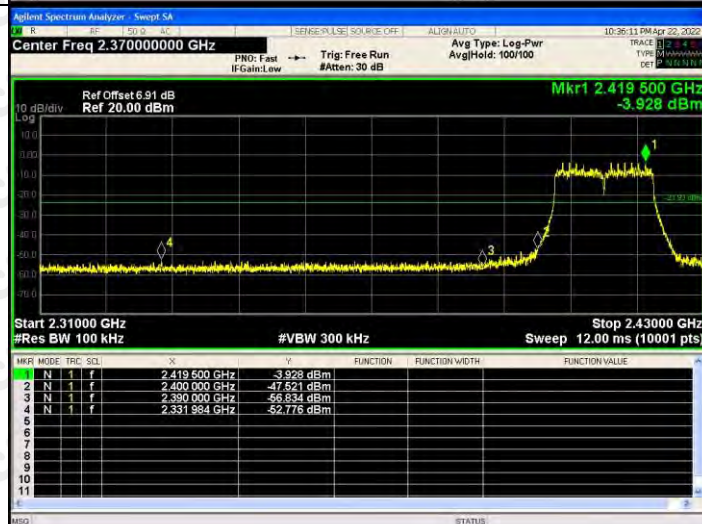

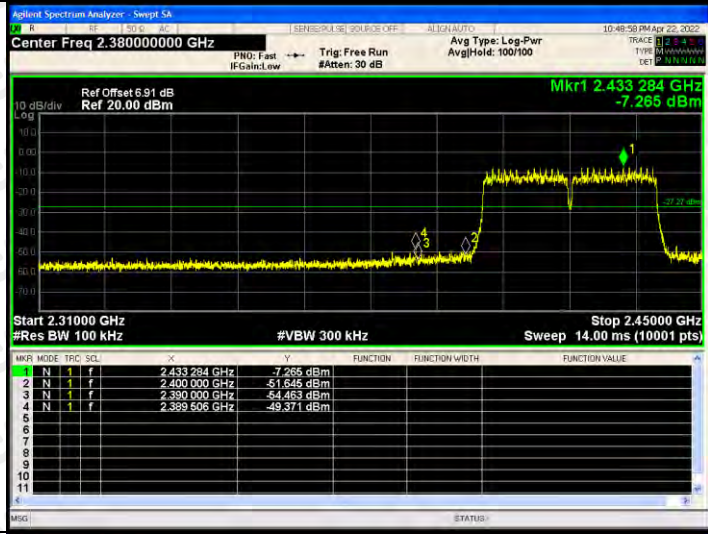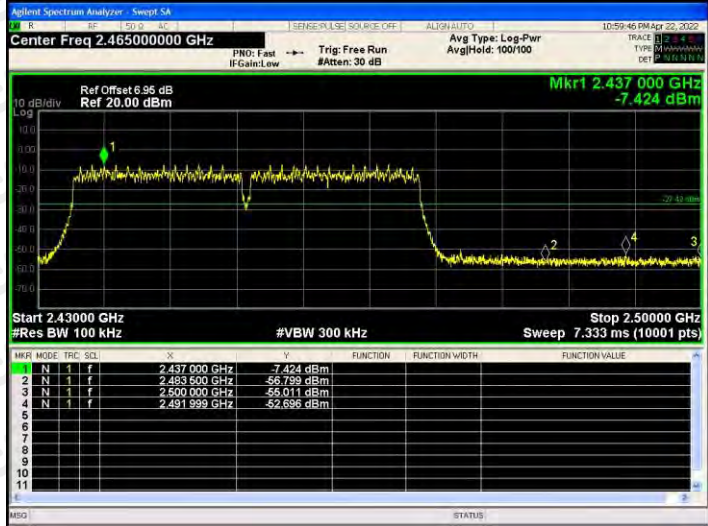
<p>802.11n(HT20)/H CH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.455 745 GHz</td> <td>-3.018 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-54.987 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 GHz</td> <td>-55.782 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494 870 GHz</td> <td>-52.401 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455 745 GHz	-3.018 dBm				2	N	1	f	2.483 500 GHz	-54.987 dBm				3	N	1	f	2.500 000 GHz	-55.782 dBm				4	N	1	f	2.494 870 GHz	-52.401 dBm				5									6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.455 745 GHz	-3.018 dBm																																																																																																									
2	N	1	f	2.483 500 GHz	-54.987 dBm																																																																																																									
3	N	1	f	2.500 000 GHz	-55.782 dBm																																																																																																									
4	N	1	f	2.494 870 GHz	-52.401 dBm																																																																																																									
5																																																																																																														
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
<p>802.11n(HT40)/L CH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.433 284 GHz</td> <td>-7.265 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-51.845 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.380 000 GHz</td> <td>-54.463 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.389 806 GHz</td> <td>-49.371 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.433 284 GHz	-7.265 dBm				2	N	1	f	2.400 000 GHz	-51.845 dBm				3	N	1	f	2.380 000 GHz	-54.463 dBm				4	N	1	f	2.389 806 GHz	-49.371 dBm				5									6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.433 284 GHz	-7.265 dBm																																																																																																									
2	N	1	f	2.400 000 GHz	-51.845 dBm																																																																																																									
3	N	1	f	2.380 000 GHz	-54.463 dBm																																																																																																									
4	N	1	f	2.389 806 GHz	-49.371 dBm																																																																																																									
5																																																																																																														
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
<p>802.11n(HT40)/H CH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 000 GHz</td> <td>-7.424 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-56.799 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 GHz</td> <td>-55.011 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.481 899 GHz</td> <td>-52.686 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 000 GHz	-7.424 dBm				2	N	1	f	2.483 500 GHz	-56.799 dBm				3	N	1	f	2.500 000 GHz	-55.011 dBm				4	N	1	f	2.481 899 GHz	-52.686 dBm				5									6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.437 000 GHz	-7.424 dBm																																																																																																									
2	N	1	f	2.483 500 GHz	-56.799 dBm																																																																																																									
3	N	1	f	2.500 000 GHz	-55.011 dBm																																																																																																									
4	N	1	f	2.481 899 GHz	-52.686 dBm																																																																																																									
5																																																																																																														
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														

RF Conducted Spurious Emissions Graphs


802.11b/LCH

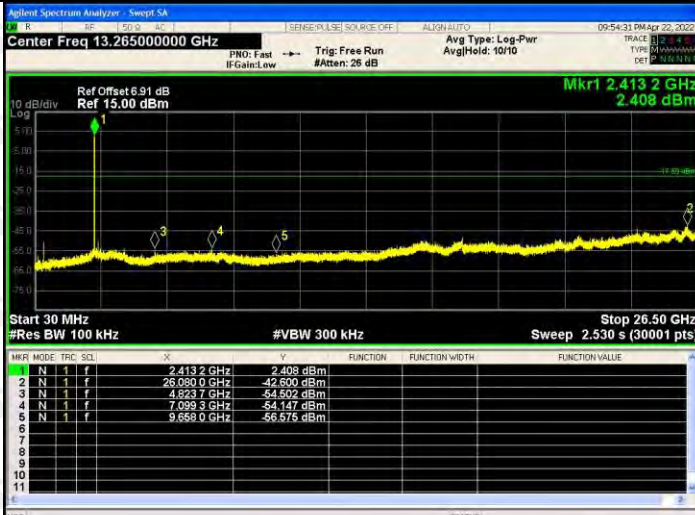

802.11b/MCH

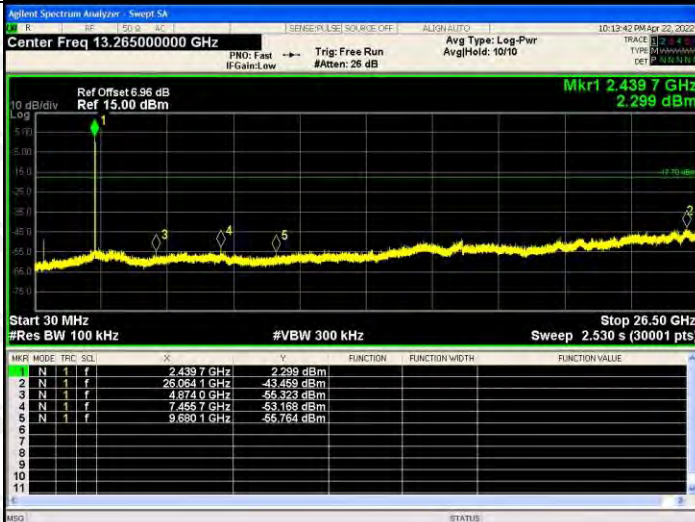


802.11b/HCH

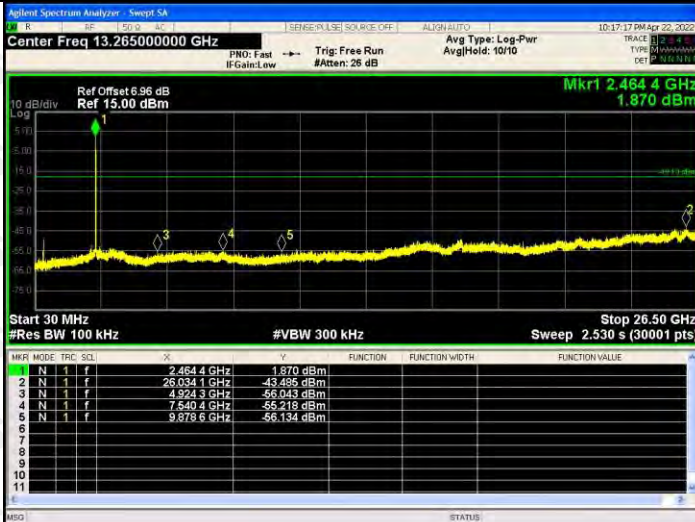


RF Conducted Spurious Emissions Graphs


802.11g/LCH

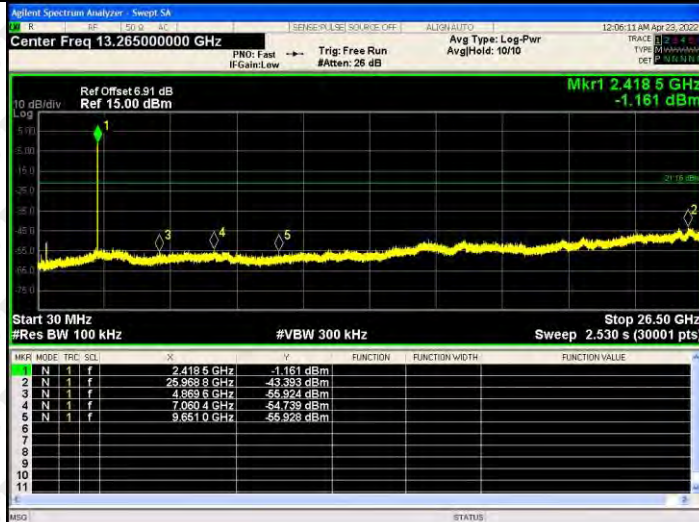




802.11g/MCH

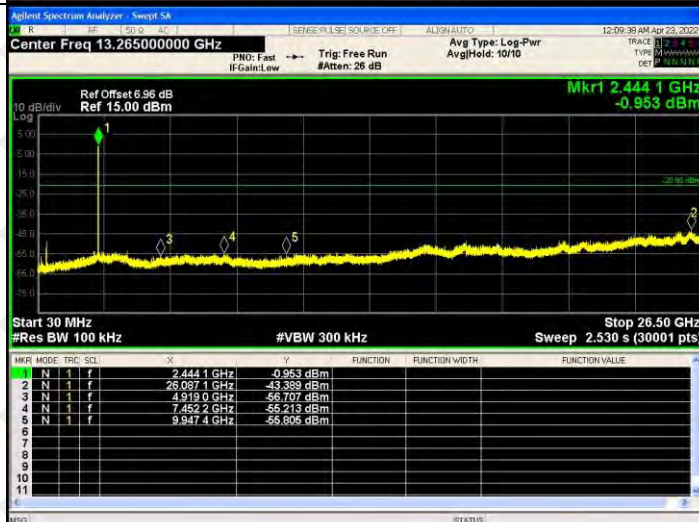

802.11g/HCH

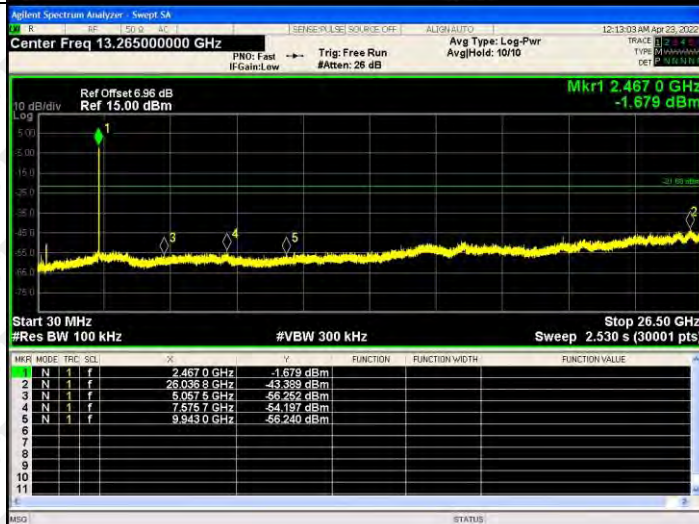

RF Conducted Spurious Emissions Graphs

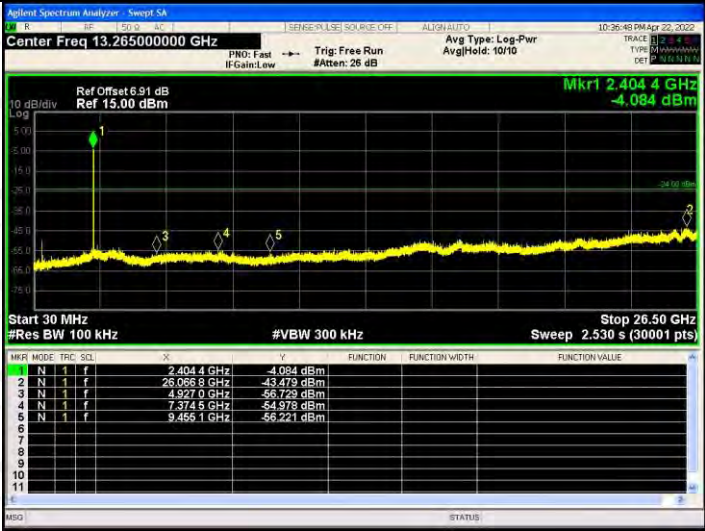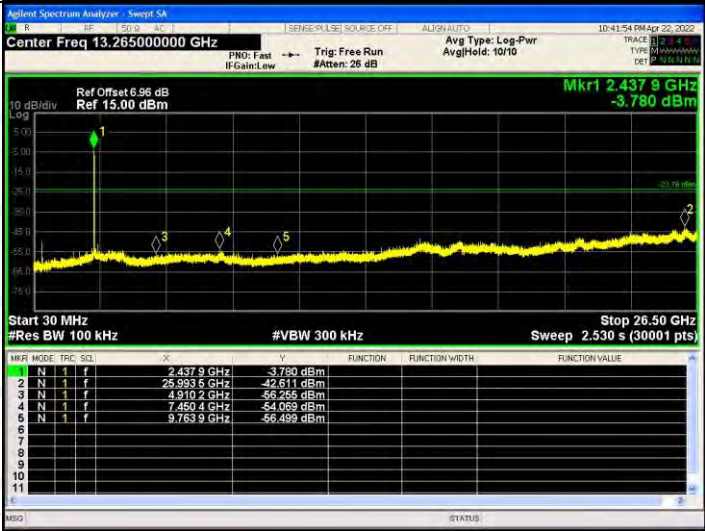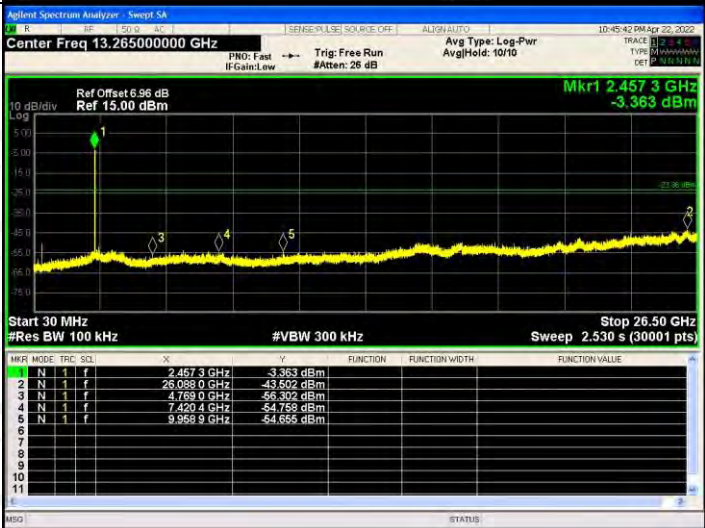
<p>802.11n(HT20)/LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4044 GHz</td> <td>-4.084 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0568 GHz</td> <td>-43.479 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9270 GHz</td> <td>-56.729 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3745 GHz</td> <td>-54.978 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.4561 GHz</td> <td>-56.221 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4044 GHz	-4.084 dBm				2	N	1	f	26.0568 GHz	-43.479 dBm				3	N	1	f	4.9270 GHz	-56.729 dBm				4	N	1	f	7.3745 GHz	-54.978 dBm				5	N	1	f	9.4561 GHz	-56.221 dBm			
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4044 GHz	-4.084 dBm																																																		
2	N	1	f	26.0568 GHz	-43.479 dBm																																																		
3	N	1	f	4.9270 GHz	-56.729 dBm																																																		
4	N	1	f	7.3745 GHz	-54.978 dBm																																																		
5	N	1	f	9.4561 GHz	-56.221 dBm																																																		
<p>802.11 n(HT20)/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4379 GHz</td> <td>-3.780 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.9935 GHz</td> <td>-42.611 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9102 GHz</td> <td>-56.265 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4504 GHz</td> <td>-54.069 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7639 GHz</td> <td>-56.499 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4379 GHz	-3.780 dBm				2	N	1	f	26.9935 GHz	-42.611 dBm				3	N	1	f	4.9102 GHz	-56.265 dBm				4	N	1	f	7.4504 GHz	-54.069 dBm				5	N	1	f	9.7639 GHz	-56.499 dBm			
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4379 GHz	-3.780 dBm																																																		
2	N	1	f	26.9935 GHz	-42.611 dBm																																																		
3	N	1	f	4.9102 GHz	-56.265 dBm																																																		
4	N	1	f	7.4504 GHz	-54.069 dBm																																																		
5	N	1	f	9.7639 GHz	-56.499 dBm																																																		
<p>802.11 n(HT20)/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4573 GHz</td> <td>-3.363 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0880 GHz</td> <td>-43.502 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7690 GHz</td> <td>-56.302 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4294 GHz</td> <td>-54.759 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9599 GHz</td> <td>-54.655 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4573 GHz	-3.363 dBm				2	N	1	f	26.0880 GHz	-43.502 dBm				3	N	1	f	4.7690 GHz	-56.302 dBm				4	N	1	f	7.4294 GHz	-54.759 dBm				5	N	1	f	9.9599 GHz	-54.655 dBm			
MNR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4573 GHz	-3.363 dBm																																																		
2	N	1	f	26.0880 GHz	-43.502 dBm																																																		
3	N	1	f	4.7690 GHz	-56.302 dBm																																																		
4	N	1	f	7.4294 GHz	-54.759 dBm																																																		
5	N	1	f	9.9599 GHz	-54.655 dBm																																																		

<p>802.11n(HT40)/LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 0 GHz</td> <td>-7.853 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.808 8 GHz</td> <td>-43.345 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.833 8 GHz</td> <td>-55.737 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.116 0 GHz</td> <td>-55.506 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.758 6 GHz</td> <td>-55.863 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-7.853 dBm				2	N	1	f	25.808 8 GHz	-43.345 dBm				3	N	1	f	4.833 8 GHz	-55.737 dBm				4	N	1	f	7.116 0 GHz	-55.506 dBm				5	N	1	f	9.758 6 GHz	-55.863 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.437 0 GHz	-7.853 dBm																																																		
2	N	1	f	25.808 8 GHz	-43.345 dBm																																																		
3	N	1	f	4.833 8 GHz	-55.737 dBm																																																		
4	N	1	f	7.116 0 GHz	-55.506 dBm																																																		
5	N	1	f	9.758 6 GHz	-55.863 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.425 5 GHz</td> <td>-8.097 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.035 9 GHz</td> <td>-43.224 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.783 7 GHz</td> <td>-55.444 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.407 2 GHz</td> <td>-55.565 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.938 6 GHz</td> <td>-56.119 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.425 5 GHz	-8.097 dBm				2	N	1	f	26.035 9 GHz	-43.224 dBm				3	N	1	f	4.783 7 GHz	-55.444 dBm				4	N	1	f	7.407 2 GHz	-55.565 dBm				5	N	1	f	9.938 6 GHz	-56.119 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.425 5 GHz	-8.097 dBm																																																		
2	N	1	f	26.035 9 GHz	-43.224 dBm																																																		
3	N	1	f	4.783 7 GHz	-55.444 dBm																																																		
4	N	1	f	7.407 2 GHz	-55.565 dBm																																																		
5	N	1	f	9.938 6 GHz	-56.119 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.436 1 GHz</td> <td>-8.258 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.011 2 GHz</td> <td>-41.620 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.863 1 GHz</td> <td>-55.028 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.445 9 GHz</td> <td>-54.479 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.816 1 GHz</td> <td>-55.943 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 1 GHz	-8.258 dBm				2	N	1	f	26.011 2 GHz	-41.620 dBm				3	N	1	f	4.863 1 GHz	-55.028 dBm				4	N	1	f	7.445 9 GHz	-54.479 dBm				5	N	1	f	9.816 1 GHz	-55.943 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.436 1 GHz	-8.258 dBm																																																		
2	N	1	f	26.011 2 GHz	-41.620 dBm																																																		
3	N	1	f	4.863 1 GHz	-55.028 dBm																																																		
4	N	1	f	7.445 9 GHz	-54.479 dBm																																																		
5	N	1	f	9.816 1 GHz	-55.943 dBm																																																		


ANT 2:

BAND EDGE Graphs

802.11b/LCH

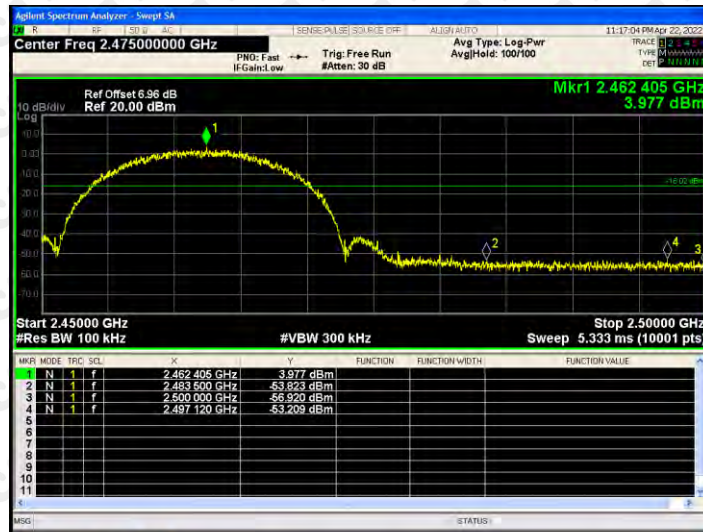


802.11b/HCH

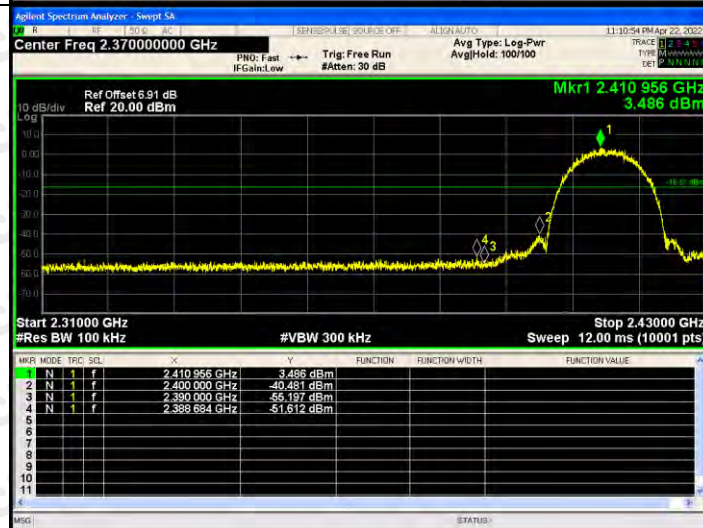


BAND EDGE Graphs


802.11g/LCH



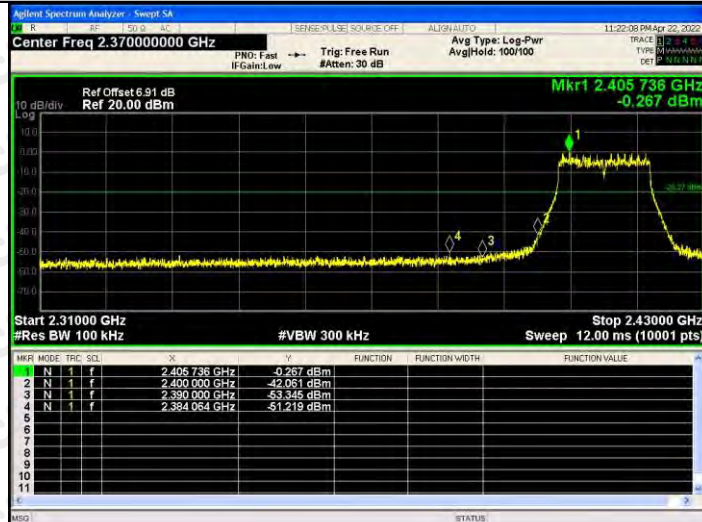


802.11g/HCH

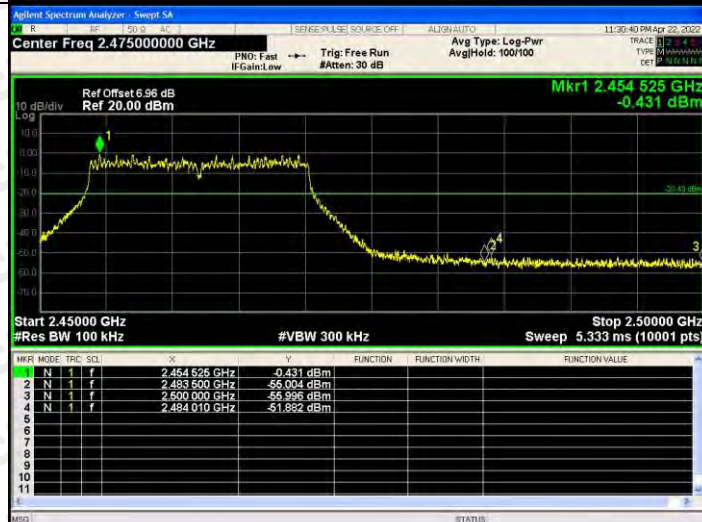


802.11n(HT20)/L
CH

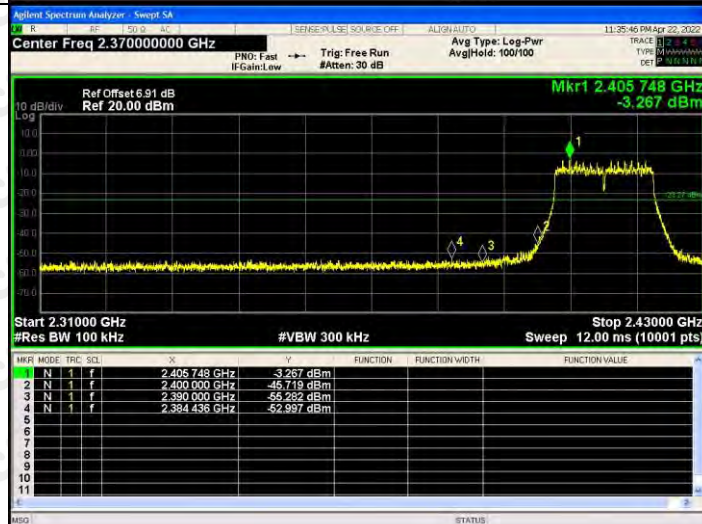

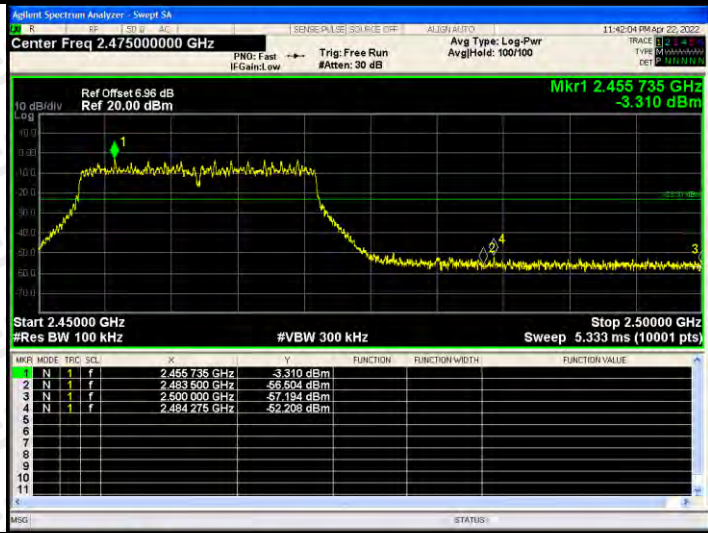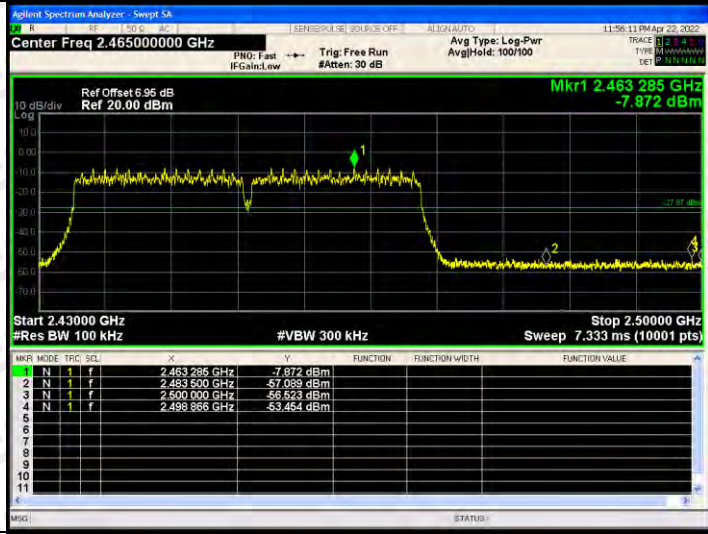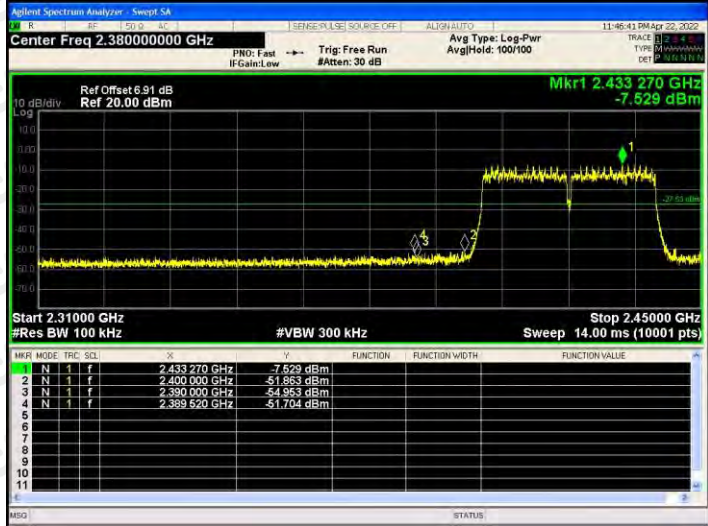
<p>802.11n(HT20)/H CH</p>		
<p>802.11n(HT40)/L CH</p>		
<p>802.11n(HT40)/H CH</p>		

RF Conducted Spurious Emissions Graphs


802.11b/LCH

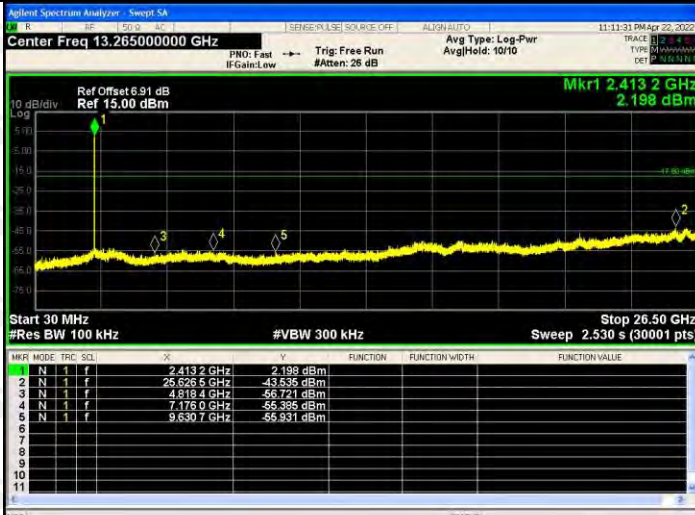


802.11b/MCH

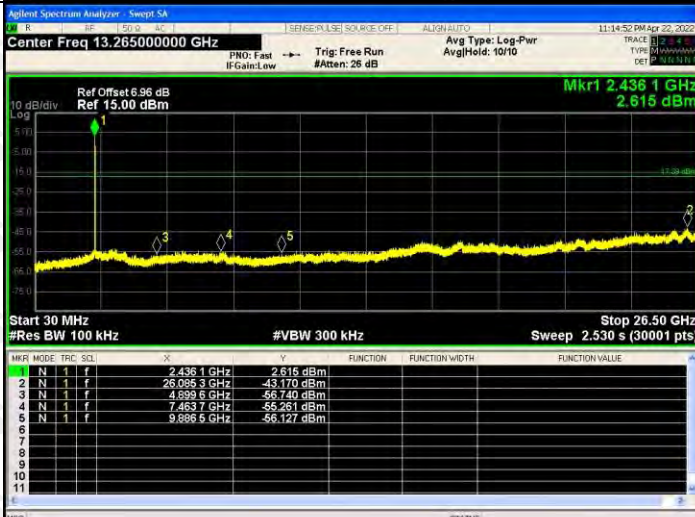

802.11b/HCH



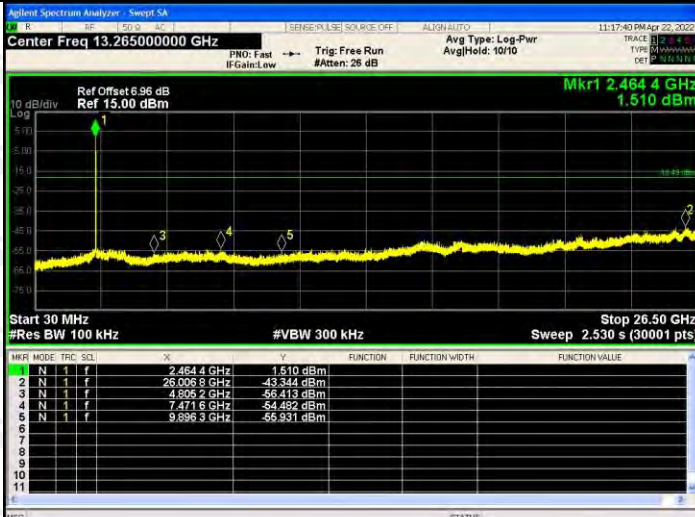


RF Conducted Spurious Emissions Graphs
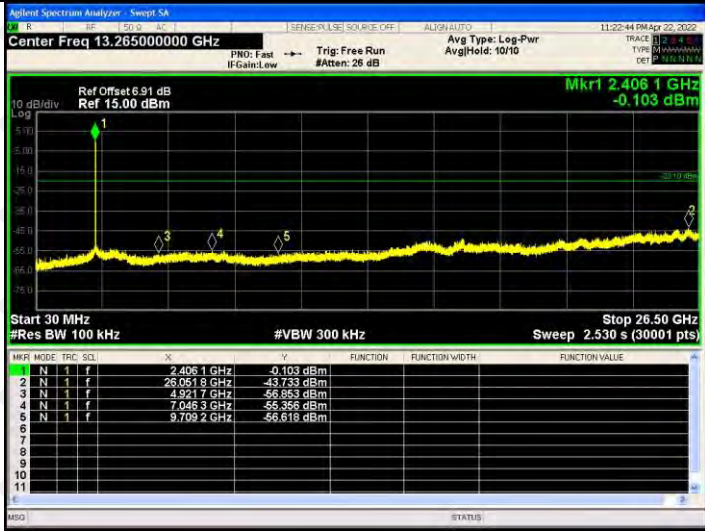
<p>802.11g/LCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4061 GHz</td> <td>-0.103 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0518 GHz</td> <td>-43.733 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9217 GHz</td> <td>-56.953 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0453 GHz</td> <td>-55.386 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7092 GHz</td> <td>-56.618 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4061 GHz	-0.103 dBm				2	N	1	f	26.0518 GHz	-43.733 dBm				3	N	1	f	4.9217 GHz	-56.953 dBm				4	N	1	f	7.0453 GHz	-55.386 dBm				5	N	1	f	9.7092 GHz	-56.618 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4061 GHz	-0.103 dBm																																																		
2	N	1	f	26.0518 GHz	-43.733 dBm																																																		
3	N	1	f	4.9217 GHz	-56.953 dBm																																																		
4	N	1	f	7.0453 GHz	-55.386 dBm																																																		
5	N	1	f	9.7092 GHz	-56.618 dBm																																																		
<p>802.11g/MCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4441 GHz</td> <td>-0.276 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0032 GHz</td> <td>-42.899 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9909 GHz</td> <td>-56.627 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4652 GHz</td> <td>-56.317 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6748 GHz</td> <td>-56.474 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4441 GHz	-0.276 dBm				2	N	1	f	26.0032 GHz	-42.899 dBm				3	N	1	f	4.9909 GHz	-56.627 dBm				4	N	1	f	7.4652 GHz	-56.317 dBm				5	N	1	f	9.6748 GHz	-56.474 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4441 GHz	-0.276 dBm																																																		
2	N	1	f	26.0032 GHz	-42.899 dBm																																																		
3	N	1	f	4.9909 GHz	-56.627 dBm																																																		
4	N	1	f	7.4652 GHz	-56.317 dBm																																																		
5	N	1	f	9.6748 GHz	-56.474 dBm																																																		
<p>802.11g/HCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4670 GHz</td> <td>-0.872 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.5674 GHz</td> <td>-43.021 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0725 GHz</td> <td>-56.626 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4575 GHz</td> <td>-54.424 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9624 GHz</td> <td>-56.189 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4670 GHz	-0.872 dBm				2	N	1	f	25.5674 GHz	-43.021 dBm				3	N	1	f	5.0725 GHz	-56.626 dBm				4	N	1	f	7.4575 GHz	-54.424 dBm				5	N	1	f	9.9624 GHz	-56.189 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4670 GHz	-0.872 dBm																																																		
2	N	1	f	25.5674 GHz	-43.021 dBm																																																		
3	N	1	f	5.0725 GHz	-56.626 dBm																																																		
4	N	1	f	7.4575 GHz	-54.424 dBm																																																		
5	N	1	f	9.9624 GHz	-56.189 dBm																																																		

RF Conducted Spurious Emissions Graphs

<p>802.11n(HT20)/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.415 8 GHz</td><td>-4.295 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.085 9 GHz</td><td>-43.799 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.882 3 GHz</td><td>-56.274 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.109 0 GHz</td><td>-56.837 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.647 4 GHz</td><td>-56.898 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.415 8 GHz	-4.295 dBm				2	N	1	f	26.085 9 GHz	-43.799 dBm				3	N	1	f	4.882 3 GHz	-56.274 dBm				4	N	1	f	7.109 0 GHz	-56.837 dBm				5	N	1	f	9.647 4 GHz	-56.898 dBm			
MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.415 8 GHz	-4.295 dBm																																																		
2	N	1	f	26.085 9 GHz	-43.799 dBm																																																		
3	N	1	f	4.882 3 GHz	-56.274 dBm																																																		
4	N	1	f	7.109 0 GHz	-56.837 dBm																																																		
5	N	1	f	9.647 4 GHz	-56.898 dBm																																																		
<p>802.11 n(HT20)/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.444 9 GHz</td><td>-3.439 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.093 5 GHz</td><td>-43.492 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.987 0 GHz</td><td>-56.689 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.433 7 GHz</td><td>-56.483 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.919 2 GHz</td><td>-56.921 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.444 9 GHz	-3.439 dBm				2	N	1	f	26.093 5 GHz	-43.492 dBm				3	N	1	f	4.987 0 GHz	-56.689 dBm				4	N	1	f	7.433 7 GHz	-56.483 dBm				5	N	1	f	9.919 2 GHz	-56.921 dBm			
MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.444 9 GHz	-3.439 dBm																																																		
2	N	1	f	26.093 5 GHz	-43.492 dBm																																																		
3	N	1	f	4.987 0 GHz	-56.689 dBm																																																		
4	N	1	f	7.433 7 GHz	-56.483 dBm																																																		
5	N	1	f	9.919 2 GHz	-56.921 dBm																																																		
<p>802.11 n(HT20)/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.457 3 GHz</td><td>-3.903 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.608 8 GHz</td><td>-42.945 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.982 5 GHz</td><td>-56.683 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.526 3 GHz</td><td>-54.434 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>10.024 2 GHz</td><td>-56.966 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.457 3 GHz	-3.903 dBm				2	N	1	f	26.608 8 GHz	-42.945 dBm				3	N	1	f	4.982 5 GHz	-56.683 dBm				4	N	1	f	7.526 3 GHz	-54.434 dBm				5	N	1	f	10.024 2 GHz	-56.966 dBm			
MNR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.457 3 GHz	-3.903 dBm																																																		
2	N	1	f	26.608 8 GHz	-42.945 dBm																																																		
3	N	1	f	4.982 5 GHz	-56.683 dBm																																																		
4	N	1	f	7.526 3 GHz	-54.434 dBm																																																		
5	N	1	f	10.024 2 GHz	-56.966 dBm																																																		
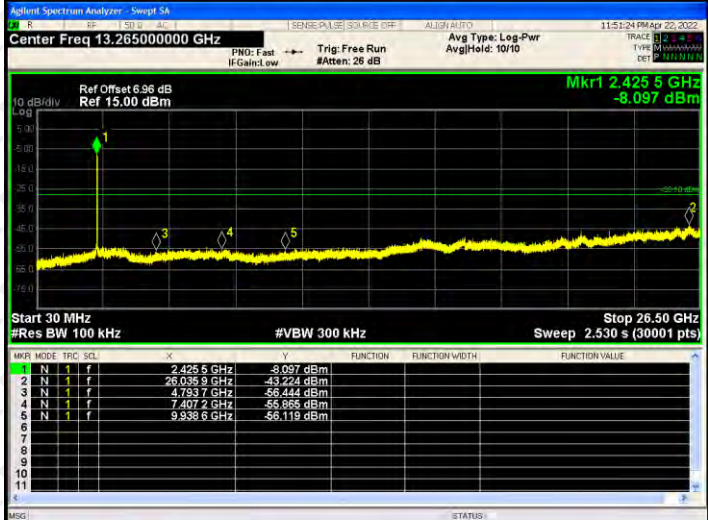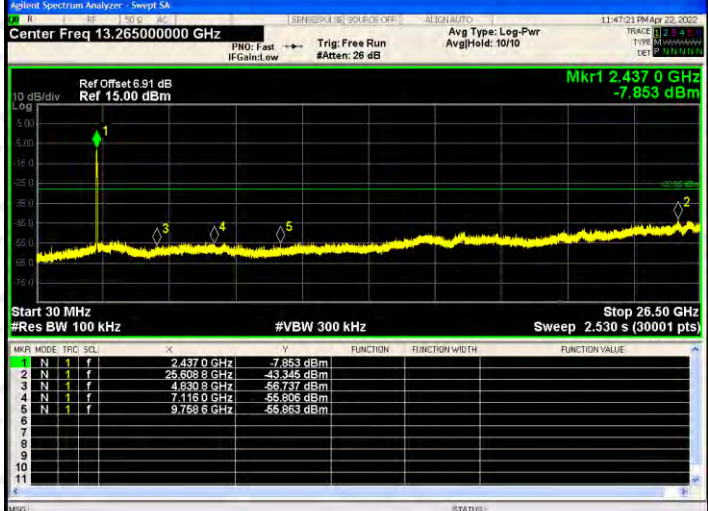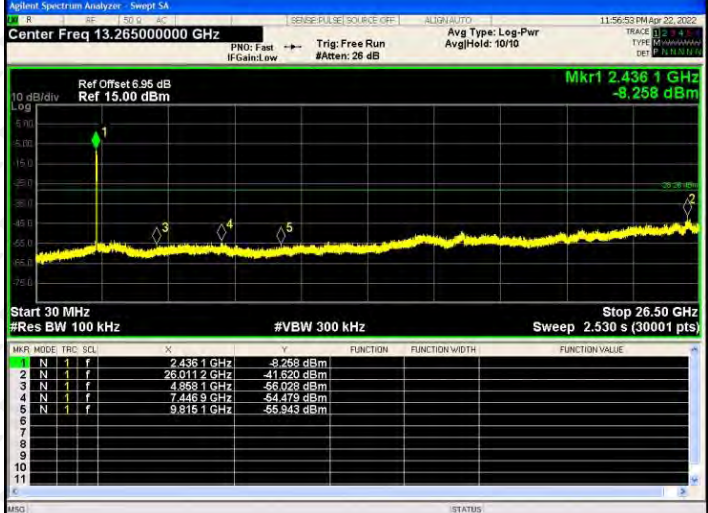
<p>802.11n(HT40)/LCH</p>	 <table border="1" data-bbox="606 526 1316 703"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.425 5 GHz</td> <td>-8.097 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.035 9 GHz</td> <td>-43.224 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.733 7 GHz</td> <td>-55.444 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.407 2 GHz</td> <td>-55.985 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.938 6 GHz</td> <td>-56.119 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.425 5 GHz	-8.097 dBm				2	N	1	f	26.035 9 GHz	-43.224 dBm				3	N	1	f	4.733 7 GHz	-55.444 dBm				4	N	1	f	7.407 2 GHz	-55.985 dBm				5	N	1	f	9.938 6 GHz	-56.119 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.425 5 GHz	-8.097 dBm																																																		
2	N	1	f	26.035 9 GHz	-43.224 dBm																																																		
3	N	1	f	4.733 7 GHz	-55.444 dBm																																																		
4	N	1	f	7.407 2 GHz	-55.985 dBm																																																		
5	N	1	f	9.938 6 GHz	-56.119 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	 <table border="1" data-bbox="606 1052 1316 1229"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 0 GHz</td> <td>-7.853 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.608 8 GHz</td> <td>-43.345 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.930 9 GHz</td> <td>-56.737 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.116 0 GHz</td> <td>-55.506 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.758 6 GHz</td> <td>-55.883 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-7.853 dBm				2	N	1	f	26.608 8 GHz	-43.345 dBm				3	N	1	f	4.930 9 GHz	-56.737 dBm				4	N	1	f	7.116 0 GHz	-55.506 dBm				5	N	1	f	9.758 6 GHz	-55.883 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.437 0 GHz	-7.853 dBm																																																		
2	N	1	f	26.608 8 GHz	-43.345 dBm																																																		
3	N	1	f	4.930 9 GHz	-56.737 dBm																																																		
4	N	1	f	7.116 0 GHz	-55.506 dBm																																																		
5	N	1	f	9.758 6 GHz	-55.883 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	 <table border="1" data-bbox="606 1579 1316 1760"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.436 1 GHz</td> <td>-8.258 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.011 2 GHz</td> <td>-41.620 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.868 1 GHz</td> <td>-55.028 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.446 9 GHz</td> <td>-54.479 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.816 1 GHz</td> <td>-55.943 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 1 GHz	-8.258 dBm				2	N	1	f	26.011 2 GHz	-41.620 dBm				3	N	1	f	4.868 1 GHz	-55.028 dBm				4	N	1	f	7.446 9 GHz	-54.479 dBm				5	N	1	f	9.816 1 GHz	-55.943 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.436 1 GHz	-8.258 dBm																																																		
2	N	1	f	26.011 2 GHz	-41.620 dBm																																																		
3	N	1	f	4.868 1 GHz	-55.028 dBm																																																		
4	N	1	f	7.446 9 GHz	-54.479 dBm																																																		
5	N	1	f	9.816 1 GHz	-55.943 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. The EUT was directly connected to the Power meter


9.4 Test Result

ANT1

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	18.711	18.919	/	30
	MCH	18.605	18.462	/	30
	HCH	18.509	18.35	/	30
802.11g	LCH	18.08	18.03	/	30
	MCH	18.422	18.304	/	30
	HCH	18.087	17.999	/	30
802.11n(HT20)	LCH	14.658	14.95	17.817	30
	MCH	15.29	15.074	18.194	30
	HCH	15.085	15.118	18.112	30
802.11n(HT40)	LCH	13.655	13.584	16.63	30
	MCH	14.024	13.46	16.761	30
	HCH	13.883	13.388	16.653	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

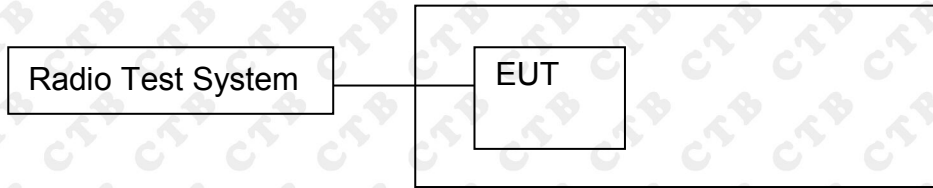

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.286	500	PASS
	MCH	9.518	500	PASS
	HCH	9.593	500	PASS
802.11g	LCH	16.493	500	PASS
	MCH	16.405	500	PASS
	HCH	16.431	500	PASS
802.11n(HT20)	LCH	17.628	500	PASS
	MCH	17.541	500	PASS
	HCH	17.678	500	PASS
802.11n(HT40)	LCH	35.986	500	PASS
	MCH	36.115	500	PASS
	HCH	35.915	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.397	500	PASS
	MCH	10.101	500	PASS
	HCH	9.023	500	PASS
802.11g	LCH	16.42	500	PASS
	MCH	16.443	500	PASS
	HCH	16.395	500	PASS
802.11n(HT20)	LCH	17.651	500	PASS
	MCH	17.119	500	PASS
	HCH	17.554	500	PASS
802.11n(HT40)	LCH	36.339	500	PASS
	MCH	36.337	500	PASS
	HCH	36.017	500	PASS

Test Graph:
ANT1:

Graphs

<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run AvgHld: 100/100</p> <p>Radio Std: None</p> <p>#IF Gain: Low #Atten: 30 dB Radio Device: BTS</p> <p>Ref Offset: 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.416716 GHz -3.6478 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.832 MHz Total Power 20.5 dBm</p> <p>Transmit Freq Error 73.503 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 9.286 MHz x dB -6.00 dB</p>
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run AvgHld: 100/100</p> <p>Radio Std: None</p> <p>#IF Gain: Low #Atten: 30 dB Radio Device: BTS</p> <p>Ref Offset: 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.441785 GHz -1.8630 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.793 MHz Total Power 20.4 dBm</p> <p>Transmit Freq Error 25.785 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 9.518 MHz x dB -6.00 dB</p>
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run AvgHld: 100/100</p> <p>Radio Std: None</p> <p>#IF Gain: Low #Atten: 30 dB Radio Device: BTS</p> <p>Ref Offset: 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.466793 GHz -3.8090 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.794 MHz Total Power 20.3 dBm</p> <p>Transmit Freq Error -3.047 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 9.593 MHz x dB -6.00 dB</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.420247 GHz -7.3608 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.4 dBm</td> </tr> <tr> <td colspan="3">16.439 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>16.49 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	17.4 dBm	16.439 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			16.49 MHz	
Occupied Bandwidth	Total Power	17.4 dBm															
16.439 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
		16.49 MHz															
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.445198 GHz -5.2889 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.9 dBm</td> </tr> <tr> <td colspan="3">16.409 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>16.41 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	17.9 dBm	16.409 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			16.41 MHz	
Occupied Bandwidth	Total Power	17.9 dBm															
16.409 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
		16.41 MHz															
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.470192 GHz -6.1310 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.6 dBm</td> </tr> <tr> <td colspan="3">16.453 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>16.43 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	17.6 dBm	16.453 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			16.43 MHz	
Occupied Bandwidth	Total Power	17.6 dBm															
16.453 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
		16.43 MHz															

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.420821 GHz -9.8563 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.1 dBm</td> </tr> <tr> <td colspan="3">17.604 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.63 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	14.1 dBm	17.604 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	17.63 MHz		
Occupied Bandwidth	Total Power	14.1 dBm														
17.604 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
17.63 MHz																
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.445761 GHz -7.9226 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.6 dBm</td> </tr> <tr> <td colspan="3">17.578 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.54 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	14.6 dBm	17.578 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	17.54 MHz		
Occupied Bandwidth	Total Power	14.6 dBm														
17.578 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
17.54 MHz																
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.47083 GHz -9.2220 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.5 dBm</td> </tr> <tr> <td colspan="3">17.620 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.68 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	14.5 dBm	17.620 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	17.68 MHz		
Occupied Bandwidth	Total Power	14.5 dBm														
17.620 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
17.68 MHz																

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.440085 GHz -12.945 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.6 dBm</td> </tr> <tr> <td>35.974 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>91.913 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>35.99 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.6 dBm	35.974 MHz			Transmit Freq Error	OBW Power	99.00 %	91.913 kHz			x dB Bandwidth	x dB	-6.00 dB	35.99 MHz			
Occupied Bandwidth	Total Power	13.6 dBm																		
35.974 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
91.913 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
35.99 MHz																				
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.455041 GHz -14.442 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.9 dBm</td> </tr> <tr> <td>35.929 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-16.497 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>36.11 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.9 dBm	35.929 MHz			Transmit Freq Error	OBW Power	99.00 %	-16.497 kHz			x dB Bandwidth	x dB	-6.00 dB	36.11 MHz			
Occupied Bandwidth	Total Power	13.9 dBm																		
35.929 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-16.497 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
36.11 MHz																				
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.95 dBm</p> <p>Mkr3 2.469991 GHz -12.670 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.8 dBm</td> </tr> <tr> <td>36.002 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>33.532 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>35.91 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.8 dBm	36.002 MHz			Transmit Freq Error	OBW Power	99.00 %	33.532 kHz			x dB Bandwidth	x dB	-6.00 dB	35.91 MHz			
Occupied Bandwidth	Total Power	13.8 dBm																		
36.002 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
33.532 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
35.91 MHz																				

ANT 2:


Graphs

Graphs																			
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Center Freq: 2.41200000 GHz Trig: Free Run AvgHld: 100/100 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref Offset: 6.91 dB Ref: 26.91 dBm Mkr3: 2.417219 GHz -4.0169 dBm</p> <p>Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>20.7 dBm</td> </tr> <tr> <td>14.842 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>20.154 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.40 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	20.7 dBm	14.842 MHz			Transmit Freq Error	OBW Power	99.00 %	20.154 kHz			x dB Bandwidth	x dB	-6.00 dB	10.40 MHz		
Occupied Bandwidth	Total Power	20.7 dBm																	
14.842 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
20.154 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.40 MHz																			
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run AvgHld: 100/100 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref Offset: 6.96 dB Ref: 26.96 dBm Mkr3: 2.442036 GHz -2.1997 dBm</p> <p>Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>20.1 dBm</td> </tr> <tr> <td>14.922 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-14.330 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.10 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	20.1 dBm	14.922 MHz			Transmit Freq Error	OBW Power	99.00 %	-14.330 kHz			x dB Bandwidth	x dB	-6.00 dB	10.10 MHz		
Occupied Bandwidth	Total Power	20.1 dBm																	
14.922 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-14.330 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.10 MHz																			
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Center Freq: 2.46200000 GHz Trig: Free Run AvgHld: 100/100 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref Offset: 6.96 dB Ref: 26.96 dBm Mkr3: 2.466506 GHz -3.0891 dBm</p> <p>Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>20.2 dBm</td> </tr> <tr> <td>14.832 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-5.269 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>9.023 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	20.2 dBm	14.832 MHz			Transmit Freq Error	OBW Power	99.00 %	-5.269 kHz			x dB Bandwidth	x dB	-6.00 dB	9.023 MHz		
Occupied Bandwidth	Total Power	20.2 dBm																	
14.832 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-5.269 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
9.023 MHz																			


<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.42023 GHz -6.5468 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.6 dBm</td> </tr> <tr> <td colspan="3">16.439 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>20.606 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.42 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	17.6 dBm	16.439 MHz			Transmit Freq Error	OBW Power	99.00 %	20.606 kHz	x dB	-6.00 dB	x dB Bandwidth			16.42 MHz		
Occupied Bandwidth	Total Power	17.6 dBm																	
16.439 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
20.606 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.42 MHz																			
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.445228 GHz -6.8130 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.8 dBm</td> </tr> <tr> <td colspan="3">16.412 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>6.333 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.44 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	17.8 dBm	16.412 MHz			Transmit Freq Error	OBW Power	99.00 %	6.333 kHz	x dB	-6.00 dB	x dB Bandwidth			16.44 MHz		
Occupied Bandwidth	Total Power	17.8 dBm																	
16.412 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
6.333 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.44 MHz																			
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.470205 GHz -6.8726 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.4 dBm</td> </tr> <tr> <td colspan="3">16.382 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>7.907 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.40 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	17.4 dBm	16.382 MHz			Transmit Freq Error	OBW Power	99.00 %	7.907 kHz	x dB	-6.00 dB	x dB Bandwidth			16.40 MHz		
Occupied Bandwidth	Total Power	17.4 dBm																	
16.382 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
7.907 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.40 MHz																			

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.420844 GHz -10.237 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.5 dBm</td> </tr> <tr> <td colspan="3">17.622 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td colspan="2">17.65 MHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	14.5 dBm	17.622 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	17.65 MHz			
Occupied Bandwidth	Total Power	14.5 dBm															
17.622 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
17.65 MHz																	
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.445552 GHz -8.1793 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.7 dBm</td> </tr> <tr> <td colspan="3">17.552 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td colspan="2">17.12 MHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	14.7 dBm	17.552 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	17.12 MHz			
Occupied Bandwidth	Total Power	14.7 dBm															
17.552 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
17.12 MHz																	
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.470776 GHz -10.027 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>14.4 dBm</td> </tr> <tr> <td colspan="3">17.555 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td colspan="2">17.55 MHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	14.4 dBm	17.555 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	17.55 MHz			
Occupied Bandwidth	Total Power	14.4 dBm															
17.555 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
17.55 MHz																	


802.11n(HT40)/LC
H

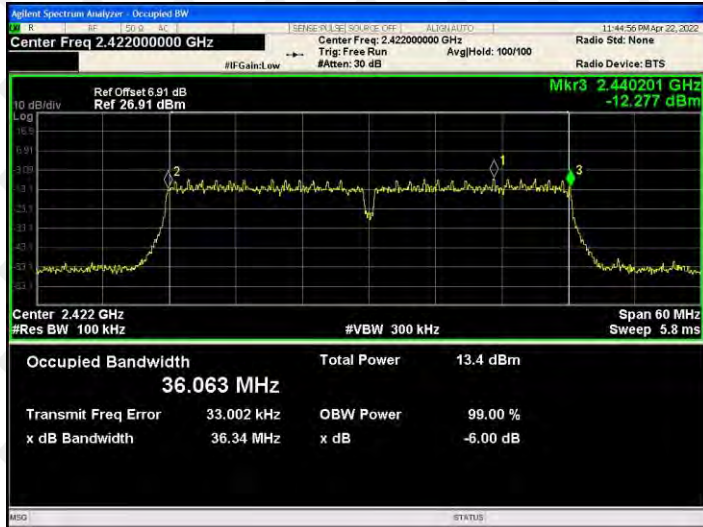

802.11n(HT40)/MC
H

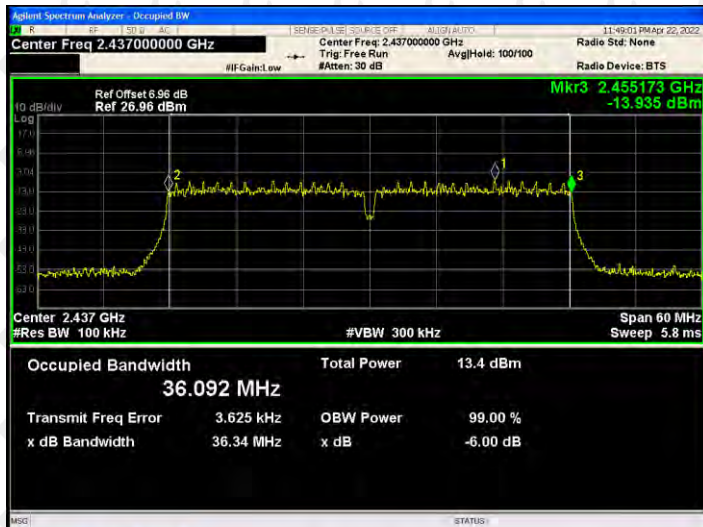


802.11n(HT40)/HC
H

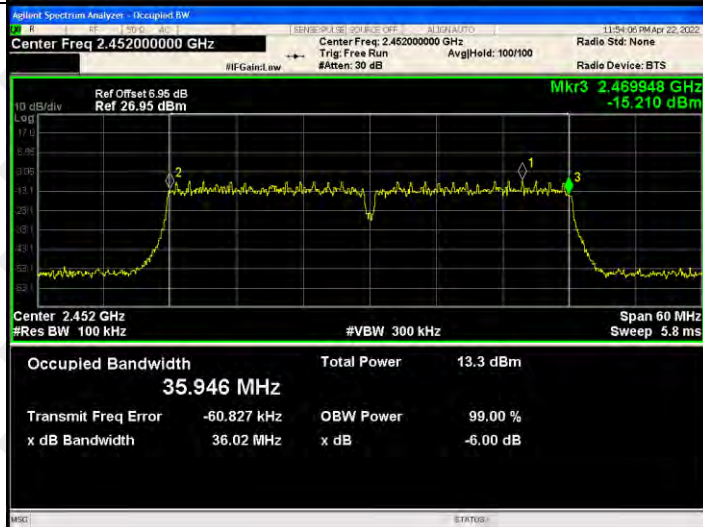

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

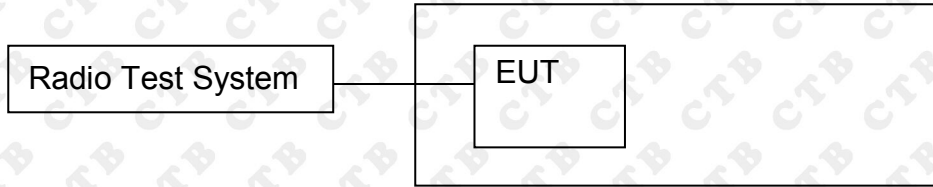

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dB m)	Limit(dB m)
802.11b	LCH	-10.702	-9.808	/	8	PASS
	MCH	-11.177	-10.582	/	8	PASS
	HCH	-10.567	-10.872	/	8	PASS
802.11g	LCH	-15.554	-15.224	/	8	PASS
	MCH	-14.755	-15.657	/	8	PASS
	HCH	-14.376	-15.429	/	8	PASS
802.11n(H T20)	LCH	-19.306	-19.31	-16.3	8	PASS
	MCH	-18.279	-18.779	-15.51	8	PASS
	HCH	-18.37	-17.98	-15.16	8	PASS
802.11n(H T40)	LCH	-21.94	-21.344	-18.62	8	PASS
	MCH	-20.575	-20.979	-17.76	8	PASS
	HCH	-21.233	-22.434	-18.78	8	PASS

Test Graph

ANT 1:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.412 03 GHz -10.702 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.438 02 GHz -11.177 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.463 53 GHz -10.587 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.419 44 GHz -19.306 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.441 32 GHz -18.279 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.468 27 GHz -18.370 dBm Span 30.00 MHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)</p>


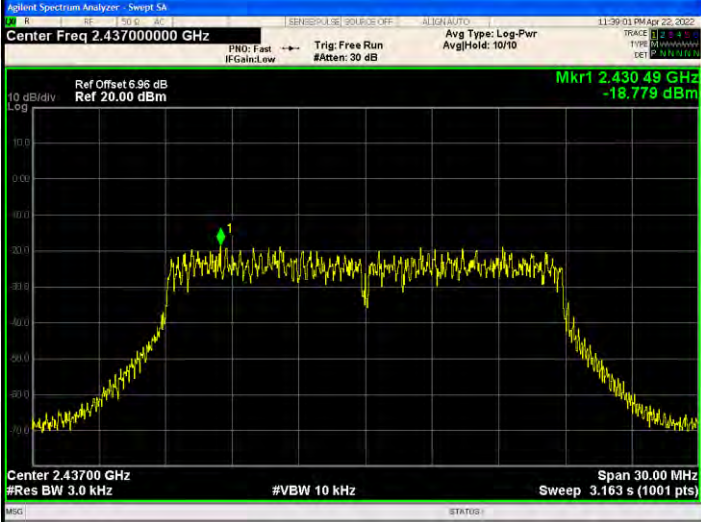

<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

ANT 2:

Graphs

<p>802.11b /LCH</p>	
<p>802.11b /MCH</p>	
<p>802.11b/HCH</p>	

<p>802.11g/LCH</p>		
<p>802.11g/MCH</p>		
<p>802.11g/HCH</p>		

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.405 49 GHz -19.310 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.430 49 GHz -18.779 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.455 76 GHz -17.980 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	

<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G



Conducted Emission

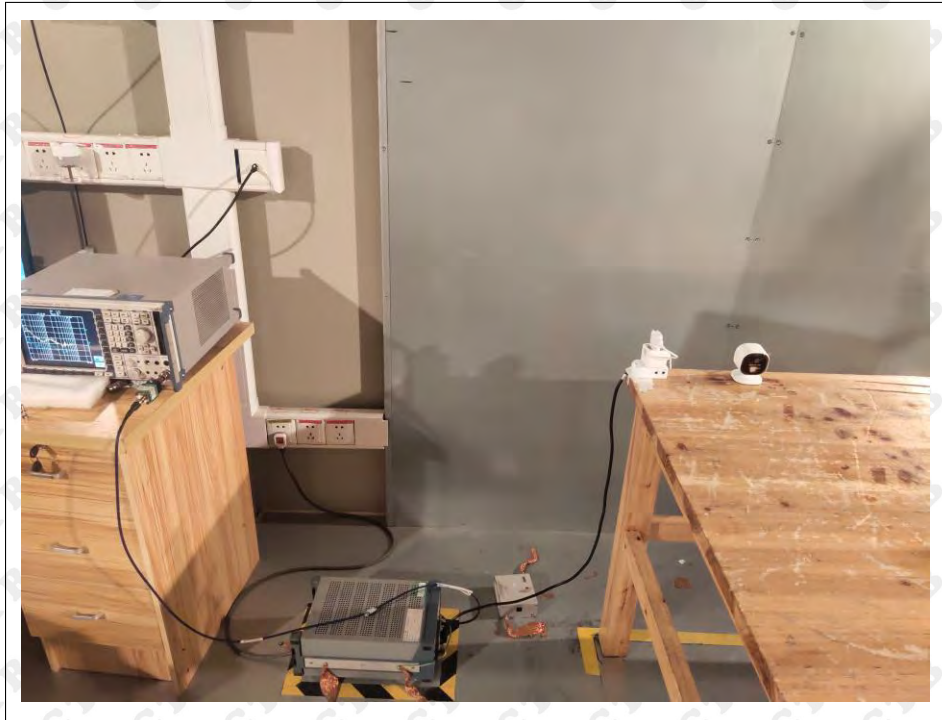

***** END OF REPORT *****