


Thank you for purchasing the MQ-26 Wireless Bluetooth earbuds. Please read this manual carefully and keep it for future reference. If you need any assistance, please contact ourSupport team, provide your product model number and Amazon order number to contact our support team.

**Package Contents**

Earbuds\*1  
Charging case\*1  
USB-A to C cable\*1  
Ear cap\*1  
User Manual\*1

- 01 -

**Product Diagram**

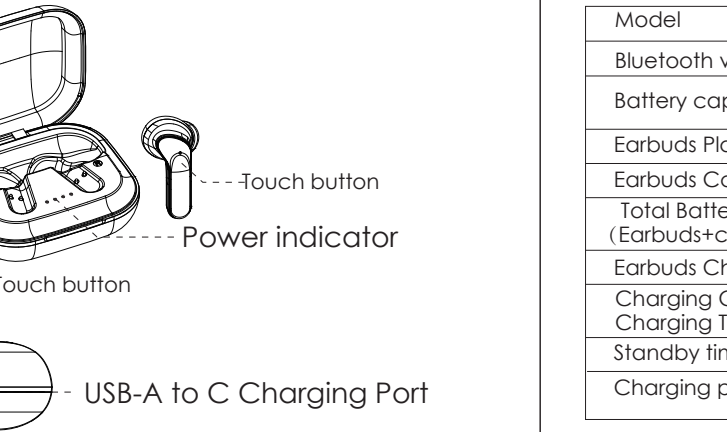

--- Touch button

--- Power indicator

--- USB-A to C Charging Port

- 02 -

**Specification**

Model	MQ-26
Bluetooth version	V5.2
Battery capacity	30mah (each earbud) 400mah (each charging case)
Earbuds Playtime	4 Hours
Earbuds Call Time	4 Hours
Total Battery Life (Earbuds+Charging Case)	8 Hours
Earbuds Charging Time	1.5 Hours
Charging Case Charging Time	1.5 Hours
Standby time	150 hours
Charging port	TYPE-C


- 03 -

**Specification**

**Charge the earbuds**

Before using it for the first time, please put the left and right earbuds into the charging case to fully charge them. Connect one end of the USB-A to C cable to the charging input port of the MQ-26, and the other end to a USB charger or charging port for charging. While charging, the charging point LED indicator will be solid white and will turn off when fully charged. Charging takes about 2 hours.

LED indicator

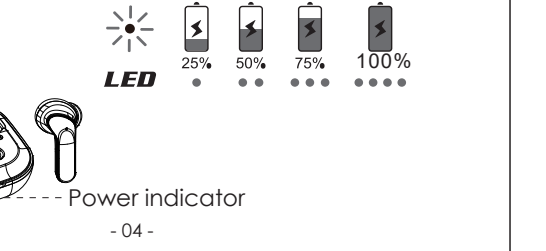

--- Power indicator

- 04 -

**Power On**

1) Open the flip cover of the charging case with both ears in the charging box (cover closed), take out the earphones, it will turn on, and the left/right ear will prompt "Power on"

2) The earbuds is outside the charging box (off state) The earbuds is outside the charging box, press and hold the "Touch button" for 3 seconds to turn on the headset, and the left/right ear will prompt "Power on"

**Notice**

●When the earbuds is turned on, it automatically enters pairing and reconnection; the left/right ear prompts Power on, and the white light stays on for 1 second.

**Power Off**

1) Put the earbuds into the charging box to charge, and turn off the earbuds (one ear/two ears are put into the charging box, the result is the same) the left/right ear prompts "Power off"

2) If it exceeds the connection range, it will enter the back-connection state. After 5 minutes, it will automatically shut down if there is no connection, and the left/right ear will prompt "Power off"

- 05 -

3) Manually disconnect the connection and enter the pairing state. After 5 minutes, it will automatically shut down if there is no connection, and the left/right ear will prompt "Power off"

4) Put the earbuds into the charging box to charge, turn off the earbuds (one ear/two ears are put into the charging box, the result is the same) the left/right ear prompts "Power off"

**Notice**

●When the earbuds is turned off and the mobile phone is turned on, it can still be searched and connected by other mobile phones when connecting back, the left/right ear will prompt "Power off", and the white light will be on for 1 second.

**Pairing**

During pairing with the mobile phone, after the TWS earbuds is teamed up, it enters the pairing state with the mobile phone, the white light of the main ear flashes slowly (on for 1 second and off for 1 second), the light of the secondary ear is off, the connection with the mobile phone is successful, the main ear/secondary ear left/ Right ear prompts "Connected"

- 06 -

**Notice**

●When the earbuds is turned off and the mobile phone is turned on, it can still be searched and connected by other mobile phones when connecting back, the left/right ear will prompt "Power off", and the white light will be on for 1 second.

**Call**

Function	Description
Answer the call	click the left/right ear "Touch button"
End the call	double-click the left/right ear "Touch button"
Cancel the call	long press the left/right ear "Touch button" for 2 seconds
Reject the call	long press the left/right ear "Touch button" for 2 seconds

- 07 -

**Listen to music**

Function	Description
Play/Pause	Double tap the left/right ear "Touch button"
Next track	Triple-click the right earbud "Touch button"
Previous track	Triple-click the left earbud "Touch button"

**Voice Assistant**

Bluetooth connection status/or playing music status, start the mobile phone voice assistant, press and hold the left/right ear for 2s"Touch button" to open the phone's voice assistant, the main/secondary ear prompts "beep"

- 08 -

**Product use and safety**

1) Please choose the appropriate size earplug cap, adjust the earphone to wear correctly to achieve the best noise reduction effect and sound quality.

2) Long-term exposure to excessive volume may damage your hearing. Turn down the bass as much as possible before wearing volume, and then adjust to an appropriate volume.

3) It is forbidden to use your headphones while driving and riding.

4) Keep away from sharp objects, uneven surfaces, metal parts and everything that may damage the headset. .

5) It is forbidden to modify, repair and disassemble this product under non-professional guidance.

6) It is forbidden to clean the earphone with corrosive and volatile liquid.

7) It is forbidden to use your earbuds in a dangerous environment.

8) The earbuds contains relatively small parts that may cause a suffocation hazard. Keep this product away from children and pets to prevent danger.

- 09 -

9) Battery Warning:

●Incorrect use of batteries may cause fire and chemical burns, and batteries may be damaged when damaged

Can cause an explosion.

●Please dispose of the battery according to local regulations. Recycle as much as possible, do not treat it as a normal life

Dispose of garbage or throw it into fire to avoid contamination or explosion.

**Warranty and Customer Support**

● For questions, support, or warranty claims, contact us at the address below that corresponds with your region. Please include your Amazon order number and product model number.

E-mail: sales@szmuqi.com

\*Please note, MUQI can only provide after-sales service for products purchased directly from MUQI. If you have purchased from a different seller, please contact them directly for service or warranty issues.

- 10 -

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.