

TEST REPORT

Product Name: wireless doorbell
FCC ID: 2AZI3KR-WM5221
Trademark: N/A
Model Number: KR-WM5221, WM5221, INK-WM-5221
Prepared For: SHENZHEN KERUI SMART TECHNOLOGY CO., LTD.
Address: Room 1501, T2, Jinlitong Building, No. 1100, Xingye Road, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Manufacturer: SHENZHEN KERUI SMART TECHNOLOGY CO., LTD.
Address: Room 1501, T2, Jinlitong Building, No. 1100, Xingye Road, Xin'an Street, Bao'an District, Shenzhen, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Sep. 07, 2021
Sample tested Date: Sep. 07, 2021 to Sep. 11, 2021
Issue Date: Sep. 11, 2021
Report No.: CTB210911001RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Arron Liu

Reviewed by:

Bin Mei

Approved by:

Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	41
8.1 Block Diagram Of Test Setup	41
8.2 Limit	41
8.3 Test procedure	41
8.4 Test Result	42
9. CONDUCTED OUTPUT POWER	50
9.1 Block Diagram Of Test Setup	50
9.2 Limit	50
9.3 Test procedure	50
9.4 Test Result	51
10. 6DB OCCUPIED BANDWIDTH	56
10.1 Block Diagram Of Test Setup	56
10.2 Limit	56
10.3 Test procedure	56
10.4 Test Result	56
11. POWER SPECTRAL DENSITY	62
11.1 Block Diagram Of Test Setup	62
11.2 Limit	62
11.3 Test procedure	62

11.4 Test Result 63

12. ANTENNA REQUIREMENT 68

13. EUT PHOTOGRAPHS 69

14. EUT TEST SETUP PHOTOGRAPHS 70

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB210911001RFX	Sep. 11, 2021	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	KR-WM5221, WM5221, INK-WM-5221
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: KR-WM5221
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 7.893dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	WiFi (2.4G) : 1.0dBi
Working voltage:	100-240V 50-60Hz alternating current

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZEHN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.7
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27
4	Communication test set	R&S	CMW500	108058	2021.09.27
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27
10	band rejection filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2021.09.27
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27
16	966 chamber	C.R.T.	966 Room	966	2021.09.27
17	Receiver	R&S	ESPI	100362	2021.09.27
18	Amplifier	HP	8447E	2945A02747	2021.09.27
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27
20	TRILOG Broadband	Schwarzbeck	VULB 9163	869	2021.09.27


	Antenna				
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
7	Communication test set	R&S	CMW500	108058	2021.09.27
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27
4	Amplifier	HP	8447E	2945A02747	2021.09.27
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27
11	Communication test set	R&S	CMW500	108058	2021.09.27
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

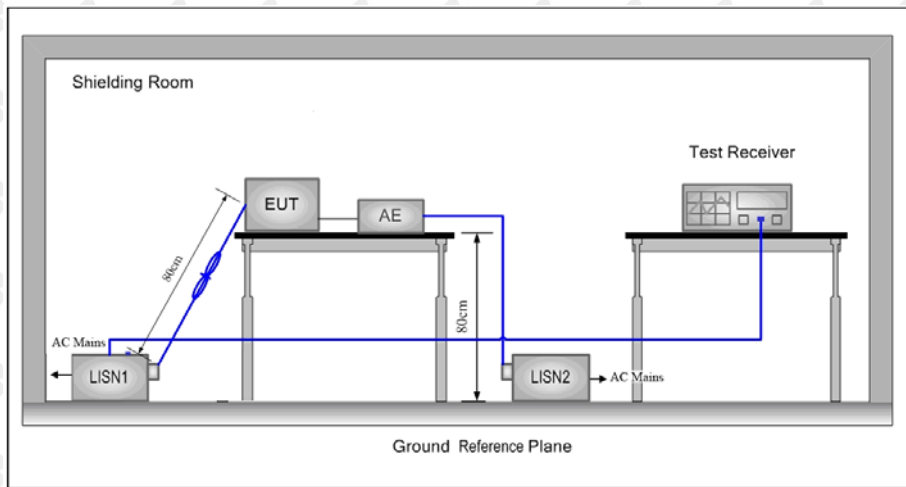

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

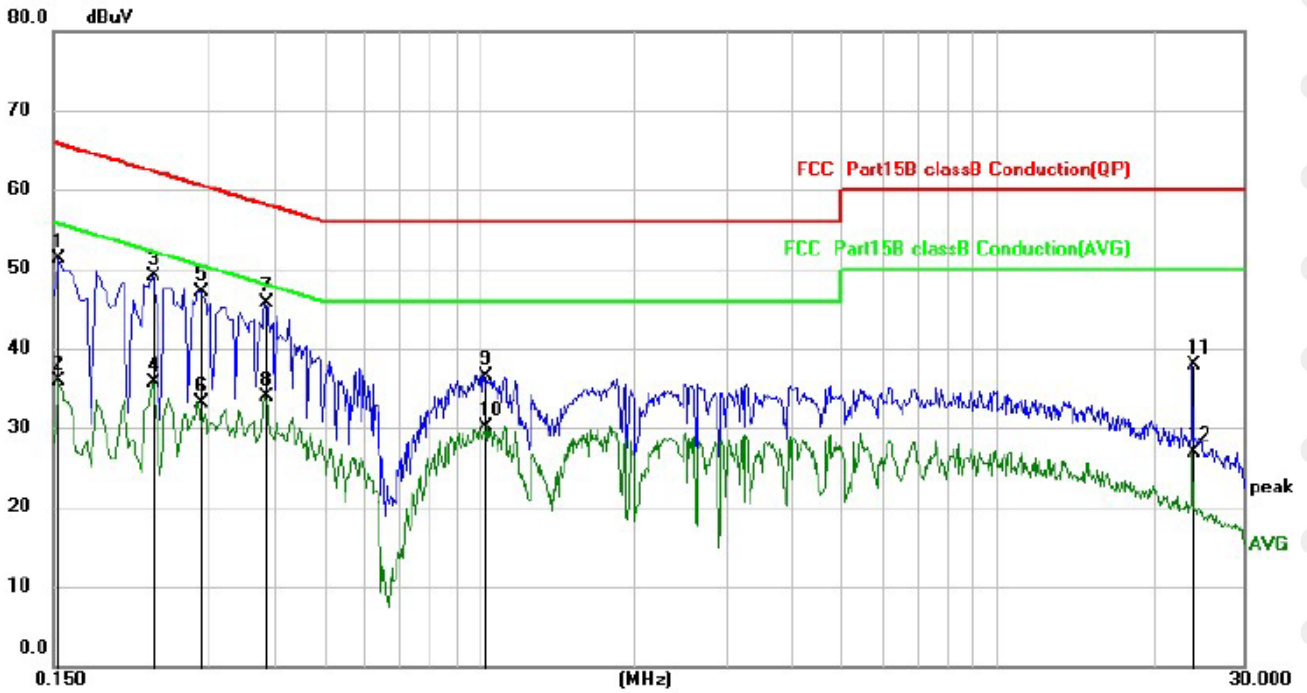


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1539	41.29	9.96	51.25	65.79	-14.54	QP
2		0.1539	25.91	9.96	35.87	55.79	-19.92	AVG
3		0.2340	39.07	9.96	49.03	62.31	-13.28	QP
4		0.2340	25.72	9.96	35.68	52.31	-16.63	AVG
5		0.2900	37.17	9.96	47.13	60.52	-13.39	QP
6		0.2900	23.16	9.96	33.12	50.52	-17.40	AVG
7	*	0.3860	35.84	9.96	45.80	58.15	-12.35	QP
8		0.3860	23.98	9.96	33.94	48.15	-14.21	AVG
9		1.0220	26.57	9.96	36.53	56.00	-19.47	QP
10		1.0220	20.09	9.96	30.05	46.00	-15.95	AVG
11		24.0020	26.79	11.20	37.99	60.00	-22.01	QP
12		24.0020	15.70	11.20	26.90	50.00	-23.10	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement - Limit

Test Specification: Neutral
AC 120V 60Hz

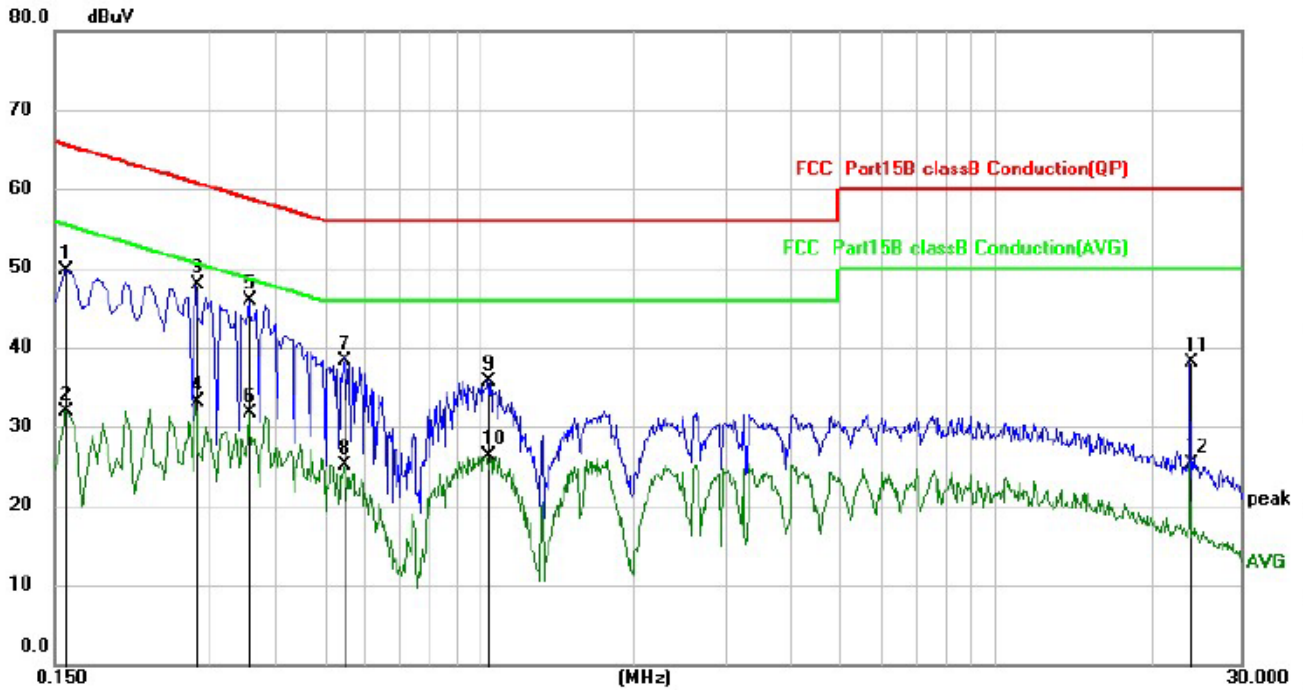

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1580	39.76	9.96	49.72	65.57	-15.85	QP
2		0.1580	21.97	9.96	31.93	55.57	-23.64	AVG
3		0.2819	37.97	9.96	47.93	60.76	-12.83	QP
4		0.2819	23.14	9.96	33.10	50.76	-17.66	AVG
5	*	0.3580	36.01	9.96	45.97	58.77	-12.80	QP
6		0.3580	21.82	9.96	31.78	48.77	-16.99	AVG
7		0.5464	28.28	9.96	38.24	56.00	-17.76	QP
8		0.5464	15.15	9.96	25.11	46.00	-20.89	AVG
9		1.0380	25.78	9.96	35.74	56.00	-20.26	QP
10		1.0380	16.39	9.96	26.35	46.00	-19.65	AVG
11		24.0020	26.91	11.20	38.11	60.00	-21.89	QP
12		24.0020	14.06	11.20	25.26	50.00	-24.74	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

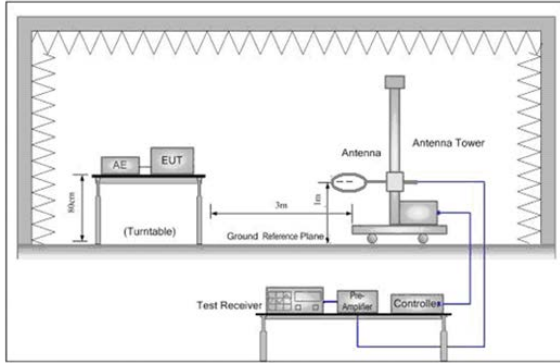


Figure 1. Below 30MHz

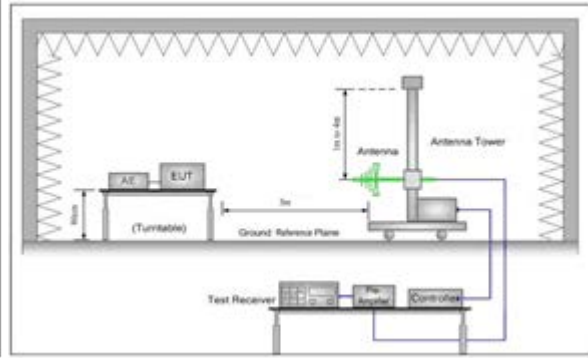


Figure 2. 30MHz to 1GHz

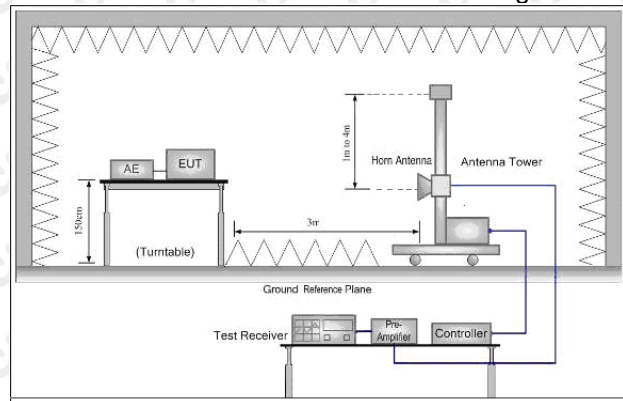


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

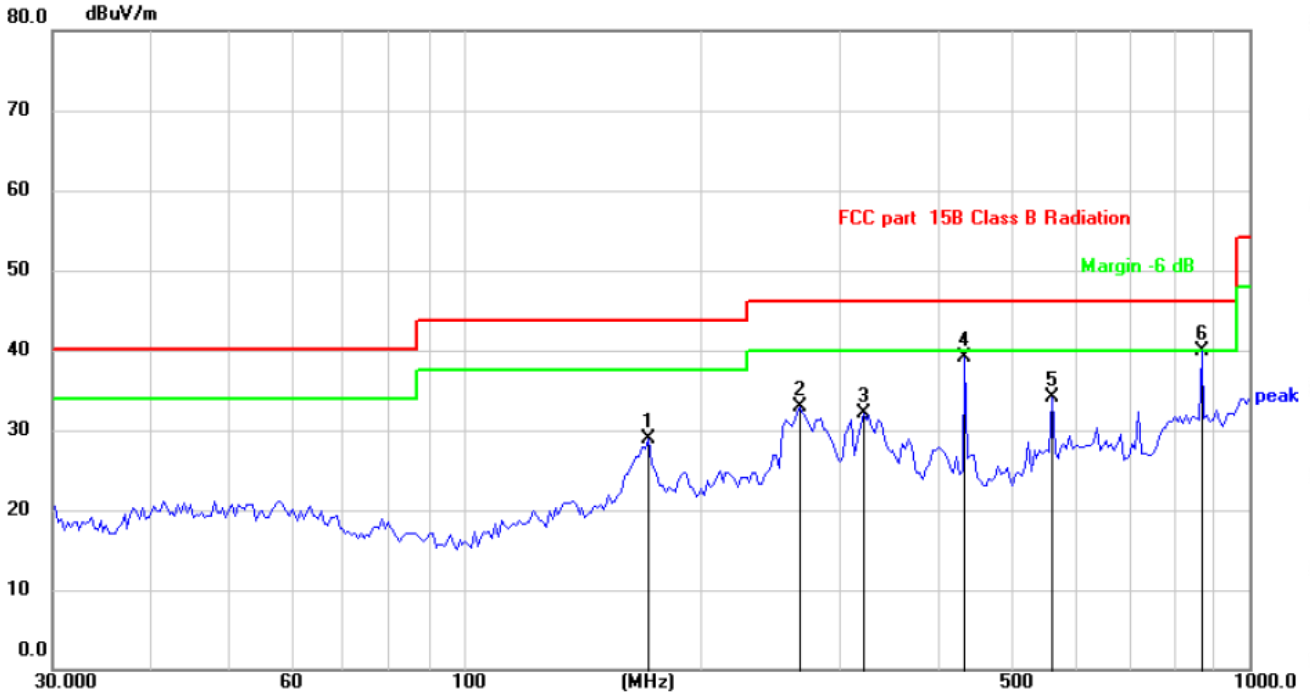

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		171.6930	36.77	-7.96	28.81	43.50	-14.69	QP
2		268.4852	40.40	-7.59	32.81	46.00	-13.19	QP
3		322.7538	38.41	-6.28	32.13	46.00	-13.87	QP
4		434.8267	42.90	-3.84	39.06	46.00	-6.94	QP
5		560.6928	34.51	-0.43	34.08	46.00	-11.92	QP
6	*	869.1300	34.21	5.67	39.88	46.00	-6.12	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

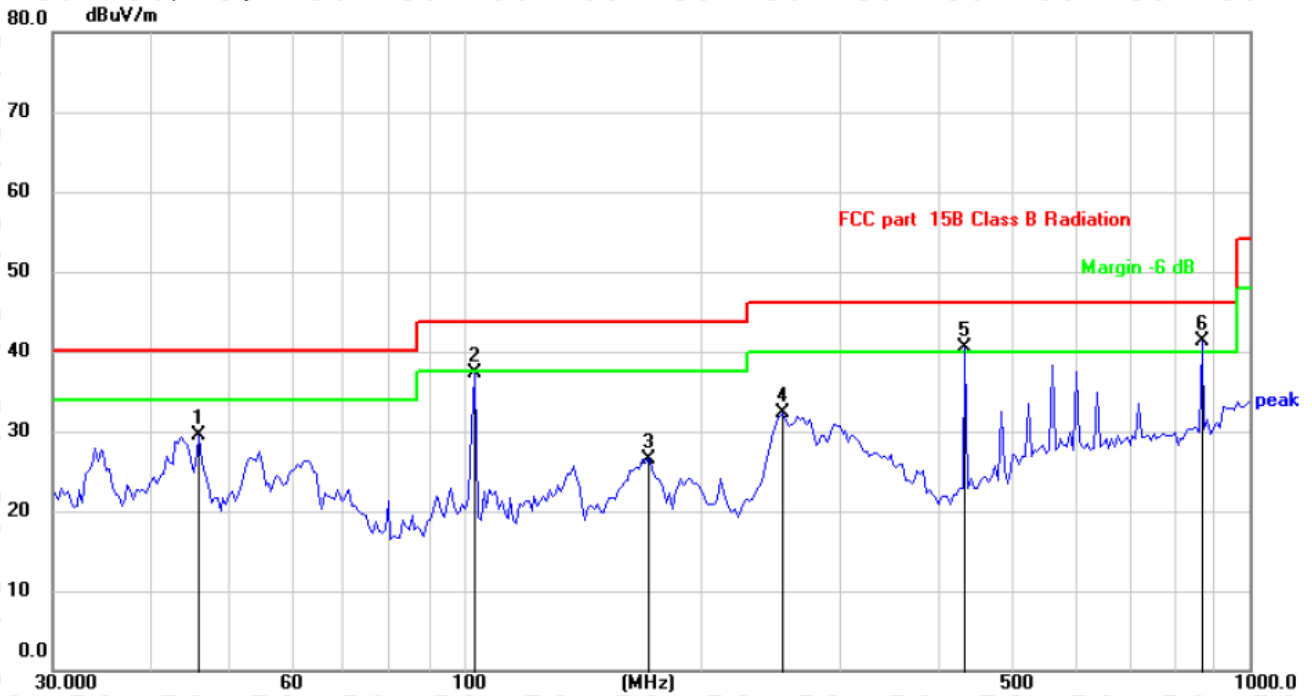

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.0970	36.49	-6.96	29.53	40.00	-10.47	QP
2		103.2609	47.27	-10.06	37.21	43.50	-6.29	QP
3		171.6930	34.56	-7.96	26.60	43.50	-16.90	QP
4		254.7281	40.31	-7.96	32.35	46.00	-13.65	QP
5	!	434.8267	44.32	-3.84	40.48	46.00	-5.52	QP
6	*	869.1300	35.70	5.67	41.37	46.00	-4.63	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit - Level

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	64.09	-3.64	60.45	74	-13.55	peak
4824	48.36	-3.64	44.72	54	-9.28	AVG
7236	59.46	-0.95	58.51	74	-15.49	peak
7236	46.15	-0.95	45.20	54	-8.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	65.04	-3.64	61.40	74	-12.60	peak
4824	48.02	-3.64	44.38	54	-9.62	AVG
7236	58.48	-0.95	57.53	74	-16.47	peak
7236	43.99	-0.95	43.04	54	-10.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	65.19	-3.51	61.68	74	-12.32	peak
4874	49.24	-3.51	45.73	54	-8.27	AVG
7311	59.93	-0.82	59.11	74	-14.89	peak
7311	45.17	-0.82	44.35	54	-9.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4874	62.79	-3.51	59.28	74	-14.72	peak
4874	46.83	-3.51	43.32	54	-10.68	AVG
7311	59.37	-0.82	58.55	74	-15.45	peak
7311	42.60	-0.82	41.78	54	-12.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.62	-3.43	60.19	74	-13.81	peak
4924	47.15	-3.43	43.72	54	-10.28	AVG
7386	57.65	-0.75	56.90	74	-17.10	peak
7386	43.07	-0.75	42.32	54	-11.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.04	-3.43	59.61	74	-14.39	peak
4924	47.51	-3.43	44.08	54	-9.92	AVG
7386	57.25	-0.75	56.50	74	-17.50	peak
7386	41.79	-0.75	41.04	54	-12.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.89	-3.64	60.25	74	-13.75	peak
4824	47.60	-3.64	43.96	54	-10.04	AVG
7236	59.48	-0.95	58.53	74	-15.47	peak
7236	46.93	-0.95	45.98	54	-8.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.88	-3.64	59.24	74	-14.76	peak
4824	49.02	-3.64	45.38	54	-8.62	AVG
7236	60.48	-0.95	59.53	74	-14.47	peak
7236	45.00	-0.95	44.05	54	-9.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.57	-3.51	60.06	74	-13.94	peak
4874	48.00	-3.51	44.49	54	-9.51	AVG
7311	59.33	-0.82	58.51	74	-15.49	peak
7311	44.77	-0.82	43.95	54	-10.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.79	-3.51	59.28	74	-14.72	peak
4874	46.78	-3.51	43.27	54	-10.73	AVG
7311	56.75	-0.82	55.93	74	-18.07	peak
7311	42.13	-0.82	41.31	54	-12.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	62.74	-3.43	59.31	74	-14.69	peak
4924	47.48	-3.43	44.05	54	-9.95	AVG
7386	58.84	-0.75	58.09	74	-15.91	peak
7386	42.74	-0.75	41.99	54	-12.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4924	63.50	-3.43	60.07	74	-13.93	peak
4924	47.47	-3.43	44.04	54	-9.96	AVG
7386	57.59	-0.75	56.84	74	-17.16	peak
7386	43.08	-0.75	42.33	54	-11.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	64.19	-3.64	60.55	74	-13.45	peak
4824	47.12	-3.64	43.48	54	-10.52	AVG
7236	59.31	-0.95	58.36	74	-15.64	peak
7236	42.75	-0.95	41.80	54	-12.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	62.45	-3.64	58.81	74	-15.19	peak
4824	49.02	-3.64	45.38	54	-8.62	AVG
7236	57.05	-0.95	56.10	74	-17.90	peak
7236	45.54	-0.95	44.59	54	-9.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	64.50	-3.51	60.99	74.00	-13.01	peak
4874.00	48.85	-3.51	45.34	54.00	-8.66	AVG
7311.00	57.48	-0.82	56.66	74.00	-17.34	peak
7311.00	44.76	-0.82	43.94	54.00	-10.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874.00	61.97	-3.51	58.46	74.00	-15.54	peak
4874.00	48.06	-3.51	44.55	54.00	-9.45	AVG
7311.00	56.97	-0.82	56.15	74.00	-17.85	peak
7311.00	42.57	-0.82	41.75	54.00	-12.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	62.62	-3.43	59.19	74	-14.81	peak
4924	47.79	-3.43	44.36	54	-9.64	AVG
7386	56.34	-0.75	55.59	74	-18.41	peak
7386	42.60	-0.75	41.85	54	-12.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4924	62.92	-3.43	59.49	74	-14.51	peak
4924	47.49	-3.43	44.06	54	-9.94	AVG
7386	55.84	-0.75	55.09	74	-18.91	peak
7386	42.63	-0.75	41.88	54	-12.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	65.33	-3.63	61.70	74	-12.30	peak
4844	49.29	-3.63	45.66	54	-8.34	AVG
7266	59.26	-0.94	58.32	74	-15.68	peak
7266	44.77	-0.94	43.83	54	-10.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4844	65.34	-3.63	61.71	74	-12.29	peak
4844	48.96	-3.63	45.33	54	-8.67	AVG
7266	58.39	-0.94	57.45	74	-16.55	peak
7266	44.34	-0.94	43.40	54	-10.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.79	-3.51	61.28	74	-12.72	peak
4874	47.39	-3.51	43.88	54	-10.12	AVG
7311	59.31	-0.82	58.49	74	-15.51	peak
7311	45.98	-0.82	45.16	54	-8.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	62.27	-3.51	58.76	74	-15.24	peak
4874	46.45	-3.51	42.94	54	-11.06	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.30	-0.82	42.48	54	-11.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	65.11	-3.43	61.68	74	-12.32	peak
4904	46.79	-3.43	43.36	54	-10.64	AVG
7356	55.77	-0.75	55.02	74	-18.98	peak
7356	43.38	-0.75	42.63	54	-11.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4904	63.62	-3.43	60.19	74	-13.81	peak
4904	47.00	-3.43	43.57	54	-10.43	AVG
7356	59.17	-0.75	58.42	74	-15.58	peak
7356	45.03	-0.75	44.28	54	-9.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.39	-5.81	50.58	74	-23.42	peak
2390	/	-5.81	/	54	/	AVG
2399	63.80	-5.84	57.96	74	-16.04	peak
2399	48.31	-5.84	42.47	54	-11.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2390	56.13	-5.81	50.32	74	-23.68	peak
2390	/	-5.81	/	54	/	AVG
2399	63.02	-5.84	57.18	74	-16.82	peak
2399	47.56	-5.84	41.72	54	-12.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.19	-5.65	50.54	74	-23.46	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.47	-5.65	50.82	74	-23.18	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.88	-5.81	52.07	74	-21.93	peak
2390	/	-5.81	/	54	/	AVG
2399	63.01	-5.84	57.17	74	-16.83	peak
2399	46.84	-5.84	41.00	54	-13.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.27	-5.81	50.46	74	-23.54	peak
2390	/	-5.81	/	54	/	AVG
2399	62.34	-5.84	56.50	74	-17.50	peak
2399	45.92	-5.84	40.08	54	-13.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.17	-5.65	50.52	74	-23.48	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.21	-5.65	50.56	74	-23.44	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.57	-5.81	50.76	74	-23.24	peak
2390	/	-5.81	/	54	/	AVG
2399	62.93	-5.84	57.09	74	-16.91	peak
2399	47.67	-5.84	41.83	54	-12.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	55.90	-5.81	50.09	74	-23.91	peak
2390	/	-5.81	/	54	/	AVG
2399	61.06	-5.84	55.22	74	-18.78	peak
2399	47.55	-5.84	41.71	54	-12.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.81	-5.65	51.16	74	-22.84	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.58	-5.65	50.93	74	-23.07	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	59.12	-5.81	53.31	74	-20.69	peak
2390	/	-5.81	/	54	/	AVG
2399	63.52	-5.84	57.68	74	-16.32	peak
2399	47.34	-5.84	41.50	54	-12.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2390	57.38	-5.81	51.57	74	-22.43	peak
2390	/	-5.81	/	54	/	AVG
2399	60.26	-5.84	54.42	74	-19.58	peak
2399	46.92	-5.84	41.08	54	-12.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	57.06	-5.65	51.41	74	-22.59	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	57.45	-5.65	51.80	74	-22.20	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

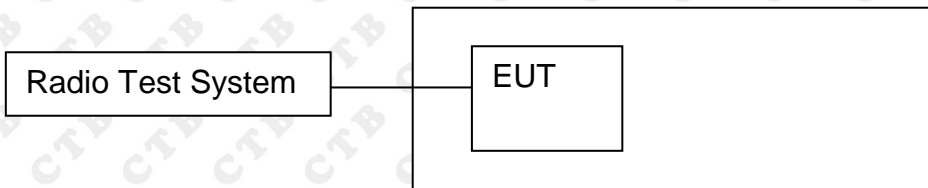


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result

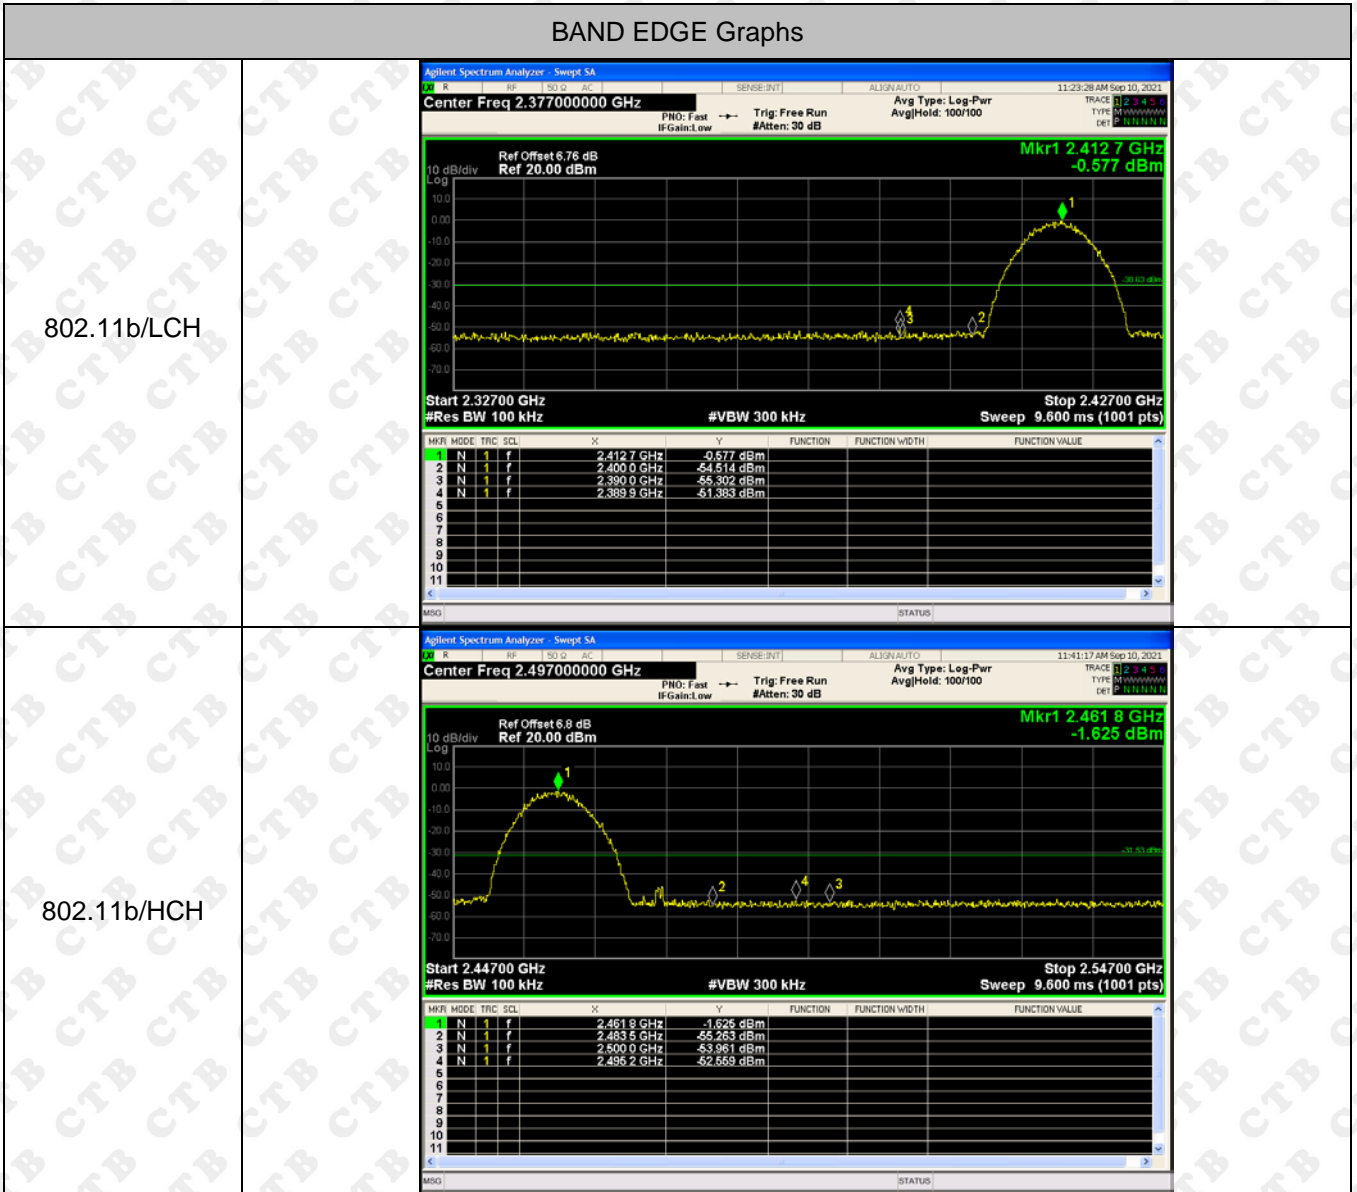


BAND EDGE Graphs

802.11g/LCH

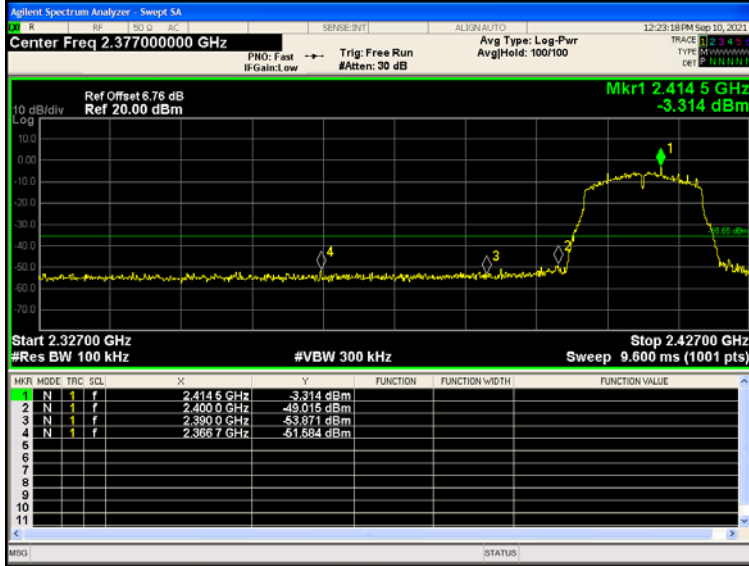


802.11g/HCH

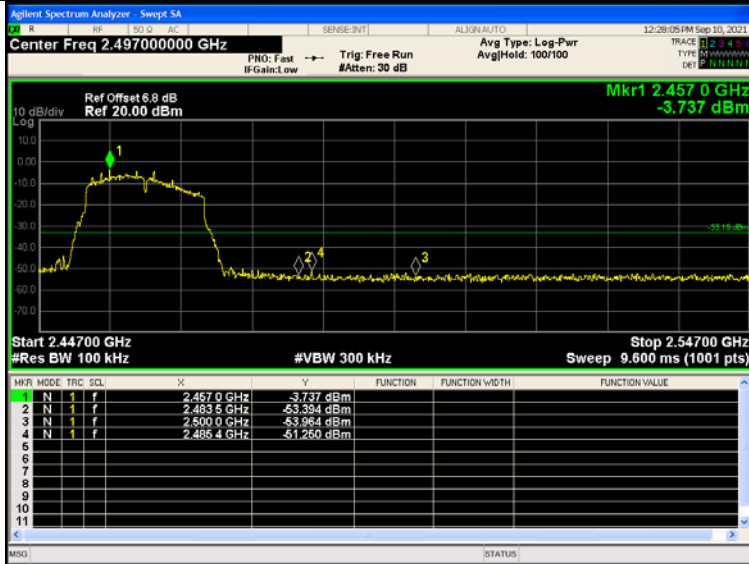

BAND EDGE Graphs

802.11n(HT20)/L
CH

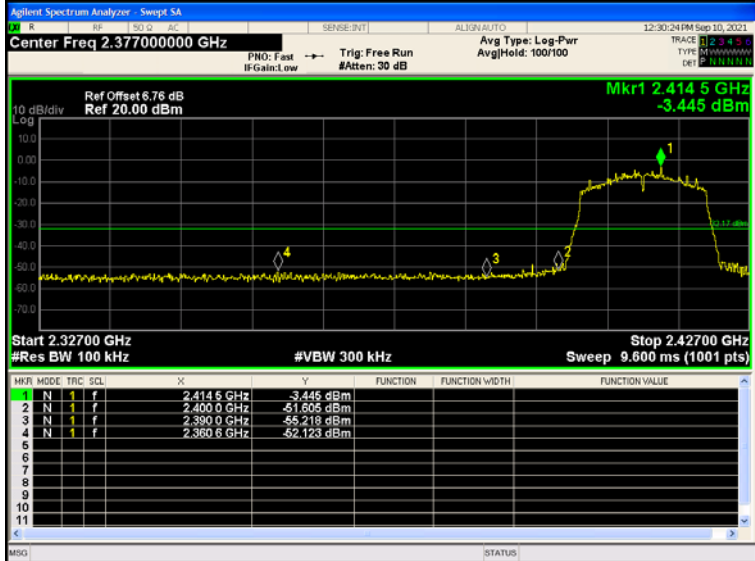


802.11n(HT20)/H
CH




BAND EDGE Graphs

802.11n(HT40)/L
CH

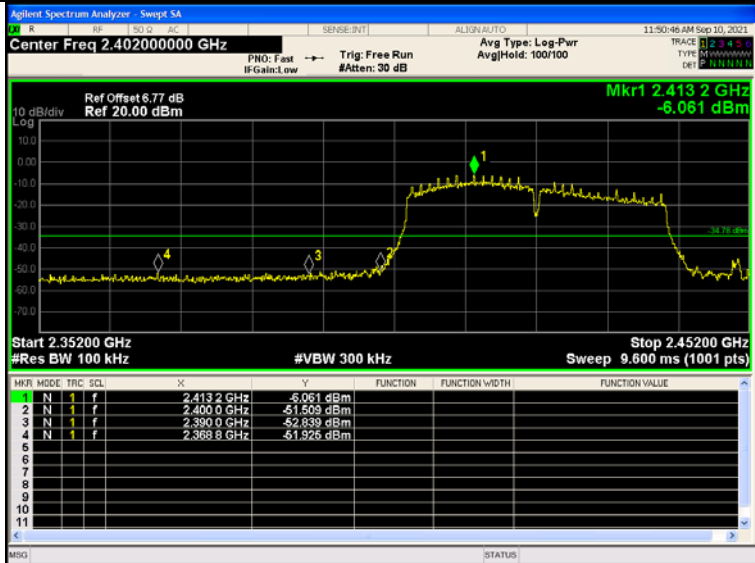


802.11n(HT40)/H
CH

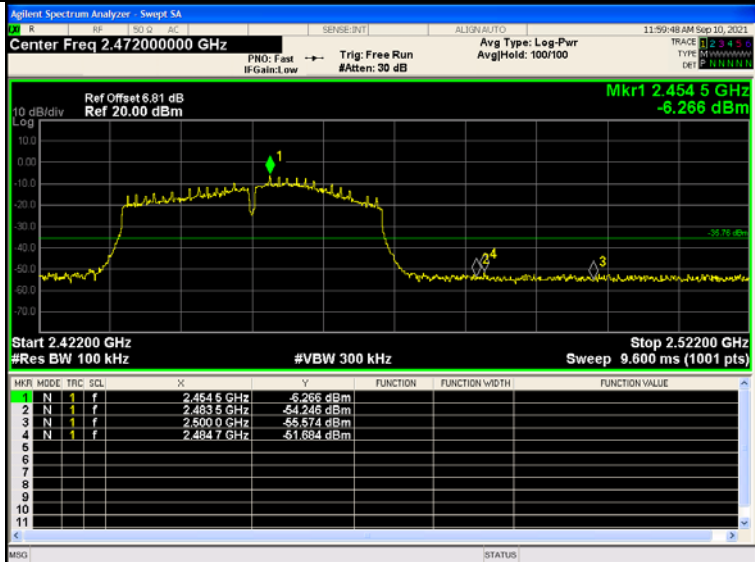


RF Conducted Spurious Emissions Graphs


802.11b
/LCH

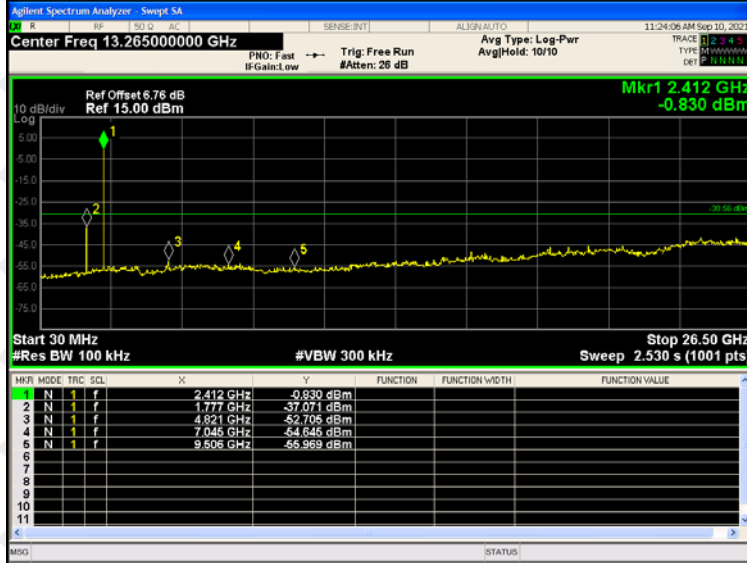

802.11b
/MCH

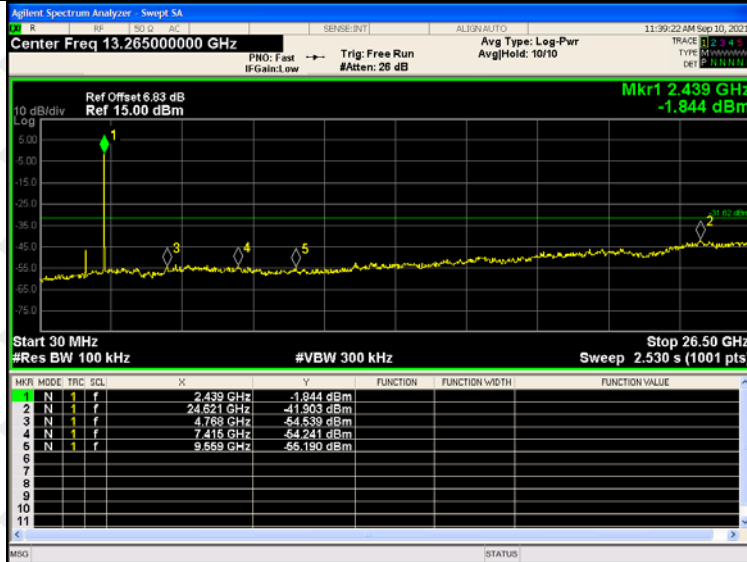

802.11b
/HCH

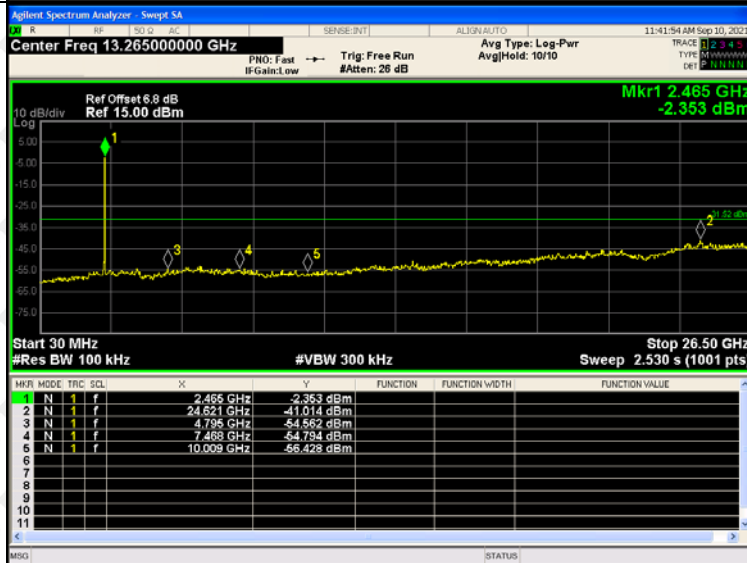


RF Conducted Spurious Emissions Graphs


<p>802.11g /LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 6.76 dB Ref 15.00 dB Mkr1 2.412 GHz -3.690 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.412 GHz</td><td>-3.690 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.674 GHz</td><td>-41.512 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.821 GHz</td><td>-55.802 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.415 GHz</td><td>-54.310 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.686 GHz</td><td>-54.842 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 GHz	-3.690 dBm				2	N	1	f	24.674 GHz	-41.512 dBm				3	N	1	f	4.821 GHz	-55.802 dBm				4	N	1	f	7.415 GHz	-54.310 dBm				5	N	1	f	9.686 GHz	-54.842 dBm				6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.412 GHz	-3.690 dBm																																																																																																									
2	N	1	f	24.674 GHz	-41.512 dBm																																																																																																									
3	N	1	f	4.821 GHz	-55.802 dBm																																																																																																									
4	N	1	f	7.415 GHz	-54.310 dBm																																																																																																									
5	N	1	f	9.686 GHz	-54.842 dBm																																																																																																									
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
<p>802.11g /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 6.83 dB Ref 15.00 dB Mkr1 2.439 GHz -4.962 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 GHz</td><td>-4.962 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.674 GHz</td><td>-40.954 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.768 GHz</td><td>-54.993 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.468 GHz</td><td>-54.719 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.824 GHz</td><td>-55.848 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 GHz	-4.962 dBm				2	N	1	f	24.674 GHz	-40.954 dBm				3	N	1	f	4.768 GHz	-54.993 dBm				4	N	1	f	7.468 GHz	-54.719 dBm				5	N	1	f	9.824 GHz	-55.848 dBm				6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.439 GHz	-4.962 dBm																																																																																																									
2	N	1	f	24.674 GHz	-40.954 dBm																																																																																																									
3	N	1	f	4.768 GHz	-54.993 dBm																																																																																																									
4	N	1	f	7.468 GHz	-54.719 dBm																																																																																																									
5	N	1	f	9.824 GHz	-55.848 dBm																																																																																																									
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
<p>802.11g /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr AvgHold: 10/10 Ref Offset 6.8 dB Ref 15.00 dB Mkr1 2.465 GHz -6.537 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.465 GHz</td><td>-6.537 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.674 GHz</td><td>-42.208 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.795 GHz</td><td>-55.477 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.442 GHz</td><td>-54.394 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.983 GHz</td><td>-55.001 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.465 GHz	-6.537 dBm				2	N	1	f	24.674 GHz	-42.208 dBm				3	N	1	f	4.795 GHz	-55.477 dBm				4	N	1	f	7.442 GHz	-54.394 dBm				5	N	1	f	9.983 GHz	-55.001 dBm				6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.465 GHz	-6.537 dBm																																																																																																									
2	N	1	f	24.674 GHz	-42.208 dBm																																																																																																									
3	N	1	f	4.795 GHz	-55.477 dBm																																																																																																									
4	N	1	f	7.442 GHz	-54.394 dBm																																																																																																									
5	N	1	f	9.983 GHz	-55.001 dBm																																																																																																									
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														

RF Conducted Spurious Emissions Graphs


802.11n
(HT20)/
LCH

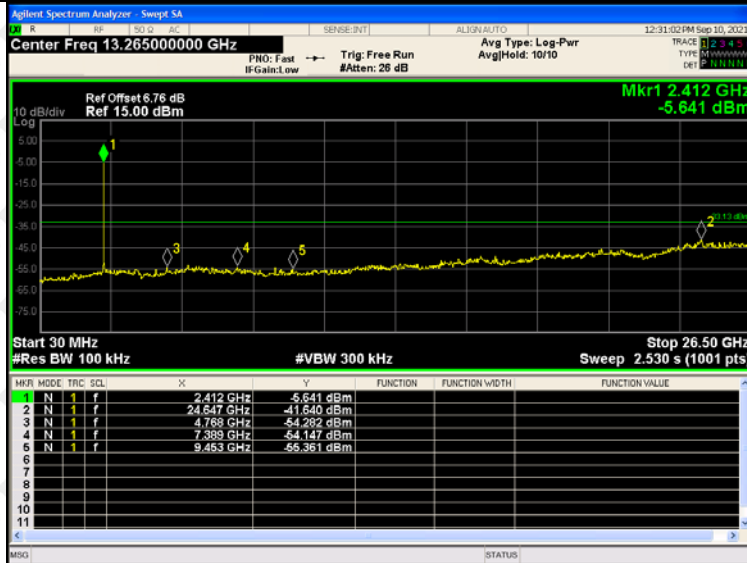

802.11
n(HT20)
/MCH

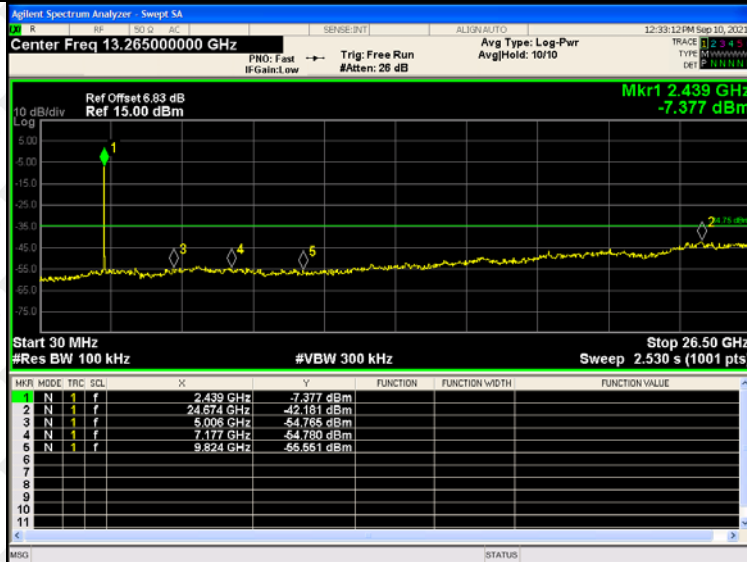

802.11
n(HT20)
/HCH

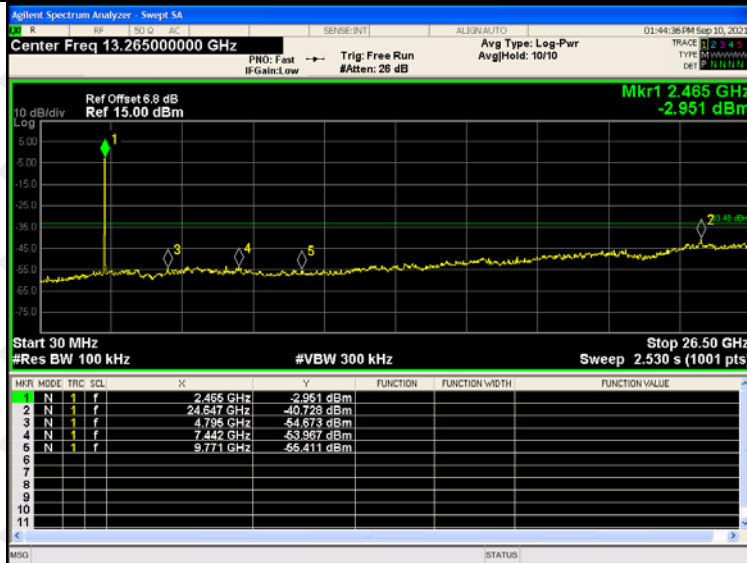


RF Conducted Spurious Emissions Graphs

<p>802.11 n(HT40) /LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz Ref Offset 6.77 dB Ref 15.00 dBm Mkr1 2.412 GHz -6.988 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.412 GHz</td><td>-6.989 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.674 GHz</td><td>-41.352 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.715 GHz</td><td>-55.344 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.442 GHz</td><td>-55.173 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.559 GHz</td><td>-55.916 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 GHz	-6.989 dBm				2	N	1	f	24.674 GHz	-41.352 dBm				3	N	1	f	4.715 GHz	-55.344 dBm				4	N	1	f	7.442 GHz	-55.173 dBm				5	N	1	f	9.559 GHz	-55.916 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.412 GHz	-6.989 dBm																																																		
2	N	1	f	24.674 GHz	-41.352 dBm																																																		
3	N	1	f	4.715 GHz	-55.344 dBm																																																		
4	N	1	f	7.442 GHz	-55.173 dBm																																																		
5	N	1	f	9.559 GHz	-55.916 dBm																																																		
<p>802.11 n(HT40) /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.439 GHz -9.819 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 GHz</td><td>-9.819 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.674 GHz</td><td>-41.422 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.874 GHz</td><td>-55.386 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.442 GHz</td><td>-54.157 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.559 GHz</td><td>-54.727 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 GHz	-9.819 dBm				2	N	1	f	24.674 GHz	-41.422 dBm				3	N	1	f	4.874 GHz	-55.386 dBm				4	N	1	f	7.442 GHz	-54.157 dBm				5	N	1	f	9.559 GHz	-54.727 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.439 GHz	-9.819 dBm																																																		
2	N	1	f	24.674 GHz	-41.422 dBm																																																		
3	N	1	f	4.874 GHz	-55.386 dBm																																																		
4	N	1	f	7.442 GHz	-54.157 dBm																																																		
5	N	1	f	9.559 GHz	-54.727 dBm																																																		
<p>802.11 n(HT40) /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz Ref Offset 6.81 dB Ref 15.00 dBm Mkr1 2.465 GHz -5.734 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.465 GHz</td><td>-5.734 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.668 GHz</td><td>-40.411 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.098 GHz</td><td>-54.892 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.336 GHz</td><td>-54.127 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.890 GHz</td><td>-55.151 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.465 GHz	-5.734 dBm				2	N	1	f	24.668 GHz	-40.411 dBm				3	N	1	f	5.098 GHz	-54.892 dBm				4	N	1	f	7.336 GHz	-54.127 dBm				5	N	1	f	9.890 GHz	-55.151 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.465 GHz	-5.734 dBm																																																		
2	N	1	f	24.668 GHz	-40.411 dBm																																																		
3	N	1	f	5.098 GHz	-54.892 dBm																																																		
4	N	1	f	7.336 GHz	-54.127 dBm																																																		
5	N	1	f	9.890 GHz	-55.151 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

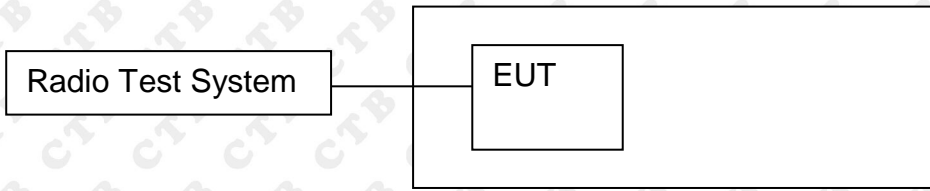

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.893	30	PASS
	MCH	7.022	30	PASS
	HCH	7.283	30	PASS
802.11g	LCH	6.647	30	PASS
	MCH	6.452	30	PASS
	HCH	6.197	30	PASS
802.11n(HT20)	LCH	6.417	30	PASS
	MCH	6.395	30	PASS
	HCH	5.918	30	PASS
802.11n(HT40)	LCH	5.678	30	PASS
	MCH	4.965	30	PASS
	HCH	4.502	30	PASS

Mode	Channel.	Maximum Output Power [dBm]
	LCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Ref Offset: 6.76 dB Ref: 26.76 dBm Channel Power: 7.89 dBm / 20 MHz Power Spectral Density: -65.12 dBm / Hz</p>
802.11b	MCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Ref Offset: 6.83 dB Ref: 26.83 dBm Channel Power: 7.02 dBm / 20 MHz Power Spectral Density: -65.99 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Ref Offset: 6.8 dB Ref: 26.80 dBm Channel Power: 7.28 dBm / 20 MHz Power Spectral Density: -65.73 dBm / Hz</p>


	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.76 dB Ref: 26.76 dBm</p> <p>Channel Power: 6.65 dBm / 20 MHz</p> <p>Power Spectral Density: -66.36 dBm / Hz</p>
802.11g	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.83 dB Ref: 26.83 dBm</p> <p>Channel Power: 6.45 dBm / 20 MHz</p> <p>Power Spectral Density: -66.56 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.8 dB Ref: 26.80 dBm</p> <p>Channel Power: 6.20 dBm / 20 MHz</p> <p>Power Spectral Density: -66.81 dBm / Hz</p>

	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.76 dB Ref: 26.76 dBm</p> <p>Channel Power: 6.42 dBm / 20 MHz</p> <p>Power Spectral Density: -66.59 dBm / Hz</p>
802.11n(HT20)	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.83 dB Ref: 26.83 dBm</p> <p>Channel Power: 6.40 dBm / 20 MHz</p> <p>Power Spectral Density: -66.62 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.8 dB Ref: 26.80 dBm</p> <p>Channel Power: 5.92 dBm / 20 MHz</p> <p>Power Spectral Density: -67.09 dBm / Hz</p>

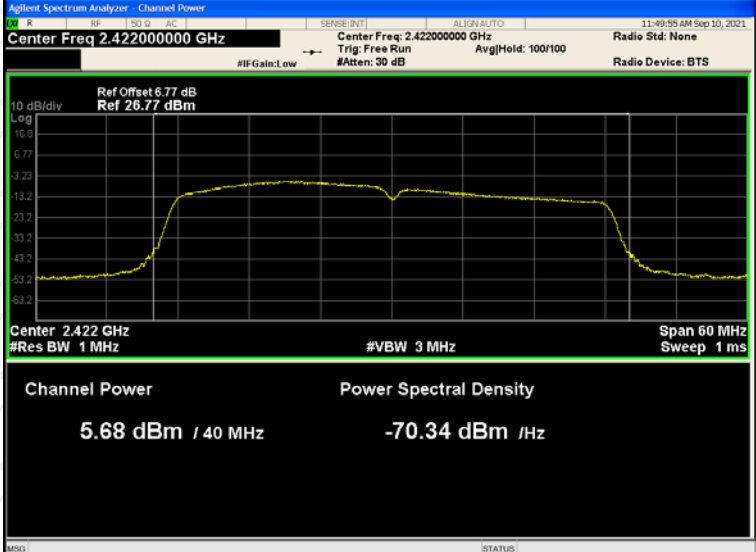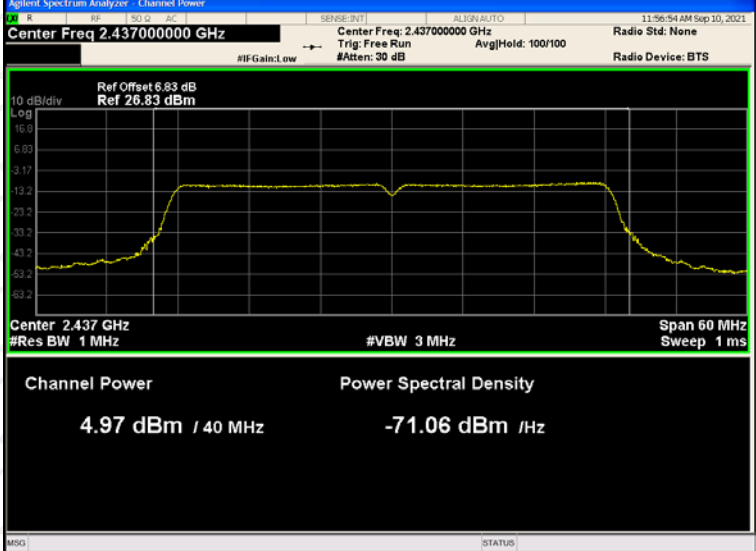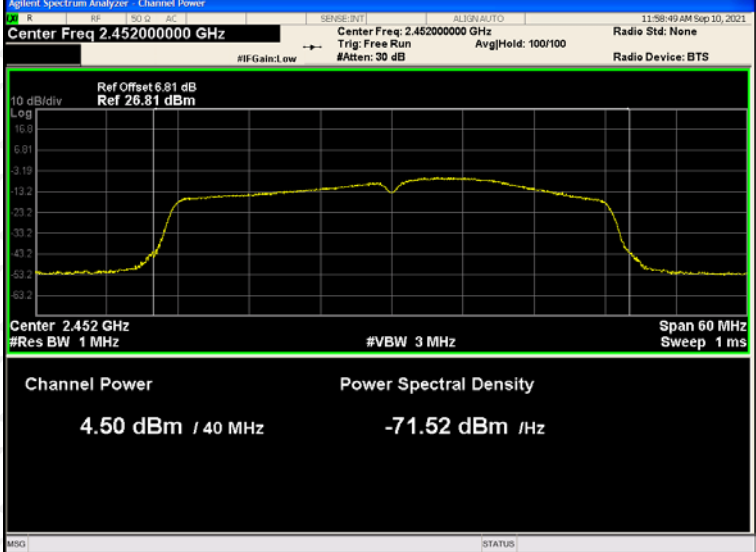	LCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset: 6.77 dB Ref: 26.77 dBm</p> <p>Channel Power: 5.68 dBm / 40 MHz</p> <p>Power Spectral Density: -70.34 dBm / Hz</p>
802.11n(HT40)	MCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.83 dB Ref: 26.83 dBm</p> <p>Channel Power: 4.97 dBm / 40 MHz</p> <p>Power Spectral Density: -71.06 dBm / Hz</p>
	HCH	 <p>Agilent Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.452000000 GHz</p> <p>Ref Offset: 6.81 dB Ref: 26.81 dBm</p> <p>Channel Power: 4.50 dBm / 40 MHz</p> <p>Power Spectral Density: -71.52 dBm / Hz</p>

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

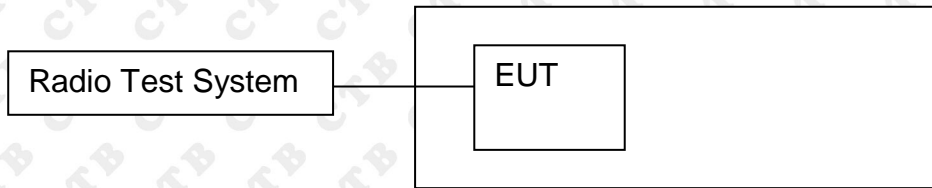

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result




Test Mode	Frequency	-6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	7.381	500	PASS
	MCH	7.872	500	PASS
	HCH	7.533	500	PASS
802.11g	LCH	11.068	500	PASS
	MCH	14.747	500	PASS
	HCH	10.124	500	PASS
802.11n(HT20)	LCH	12.554	500	PASS
	MCH	16.77	500	PASS
	HCH	11.28	500	PASS
802.11n(HT40)	LCH	22.544	500	PASS
	MCH	36.056	500	PASS
	HCH	17.557	500	PASS

Test Graph:




<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.76 dB Ref 26.76 dBm</p> <p>Mkr3 2.417569 GHz -11.891 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td>16.112 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>34.983 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>11.07 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	16.112 MHz			Transmit Freq Error	OBW Power	99.00 %	34.983 kHz			x dB Bandwidth	x dB	-6.00 dB	11.07 MHz		
Occupied Bandwidth	Total Power	12.4 dBm																	
16.112 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
34.983 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
11.07 MHz																			
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.83 dB Ref 26.83 dBm</p> <p>Mkr3 2.444388 GHz -11.534 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td>16.374 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>14.873 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>14.75 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	16.374 MHz			Transmit Freq Error	OBW Power	99.00 %	14.873 kHz			x dB Bandwidth	x dB	-6.00 dB	14.75 MHz		
Occupied Bandwidth	Total Power	12.3 dBm																	
16.374 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
14.873 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
14.75 MHz																			
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.8 dB Ref 26.80 dBm</p> <p>Mkr3 2.466904 GHz -13.553 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.0 dBm</td> </tr> <tr> <td>16.023 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-157.83 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.12 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.0 dBm	16.023 MHz			Transmit Freq Error	OBW Power	99.00 %	-157.83 kHz			x dB Bandwidth	x dB	-6.00 dB	10.12 MHz		
Occupied Bandwidth	Total Power	12.0 dBm																	
16.023 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-157.83 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.12 MHz																			

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.76 dB</p> <p>Ref 26.76 dBm</p> <p>Mkr3 2.418324 GHz</p> <p>-12.488 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <p>Occupied Bandwidth 17.216 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error 47.154 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 12.55 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.83 dB</p> <p>Ref 26.83 dBm</p> <p>Mkr3 2.445405 GHz</p> <p>-10.550 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <p>Occupied Bandwidth 17.582 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error 19.408 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.77 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.8 dB</p> <p>Ref 26.80 dBm</p> <p>Mkr3 2.467483 GHz</p> <p>-14.676 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 3.333 ms</p> <p>Occupied Bandwidth 17.173 MHz</p> <p>Total Power 11.7 dBm</p> <p>Transmit Freq Error -157.57 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 11.28 MHz</p> <p>x dB -6.00 dB</p>
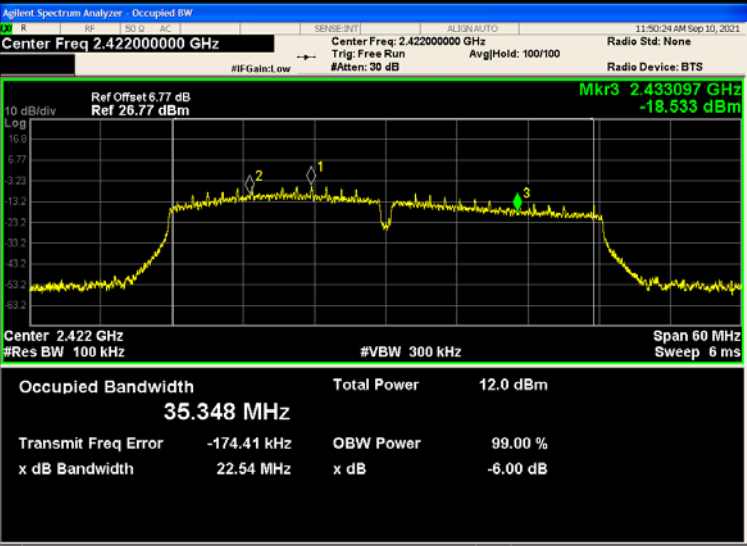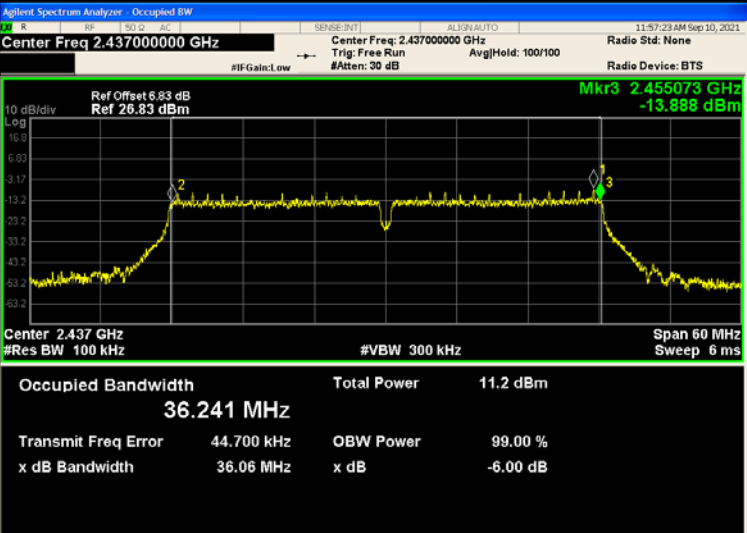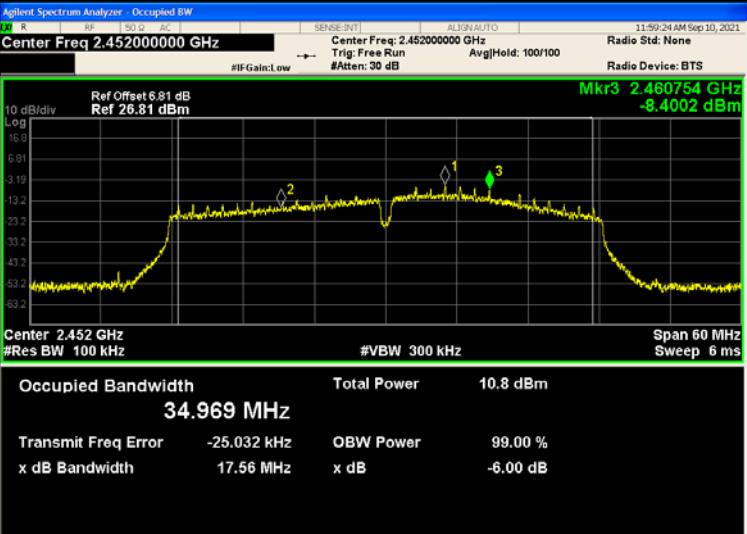
<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Radio Std: None</p> <p>Ref Offset 6.77 dB Ref 26.77 dBm Mkr3 2.433097 GHz -18.533 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 6 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.0 dBm</td> </tr> <tr> <td>35.348 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-174.41 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>22.54 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.0 dBm	35.348 MHz			Transmit Freq Error	OBW Power	99.00 %	-174.41 kHz	x dB	-6.00 dB	x dB Bandwidth			22.54 MHz		
Occupied Bandwidth	Total Power	12.0 dBm																	
35.348 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-174.41 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
22.54 MHz																			
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Radio Std: None</p> <p>Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.455073 GHz -13.888 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 6 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.2 dBm</td> </tr> <tr> <td>36.241 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>44.700 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.06 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	11.2 dBm	36.241 MHz			Transmit Freq Error	OBW Power	99.00 %	44.700 kHz	x dB	-6.00 dB	x dB Bandwidth			36.06 MHz		
Occupied Bandwidth	Total Power	11.2 dBm																	
36.241 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
44.700 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.06 MHz																			
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Radio Std: None</p> <p>Ref Offset 6.81 dB Ref 26.81 dBm Mkr3 2.460754 GHz -8.4002 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 6 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.8 dBm</td> </tr> <tr> <td>34.969 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-25.032 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.56 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	10.8 dBm	34.969 MHz			Transmit Freq Error	OBW Power	99.00 %	-25.032 kHz	x dB	-6.00 dB	x dB Bandwidth			17.56 MHz		
Occupied Bandwidth	Total Power	10.8 dBm																	
34.969 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-25.032 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.56 MHz																			

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

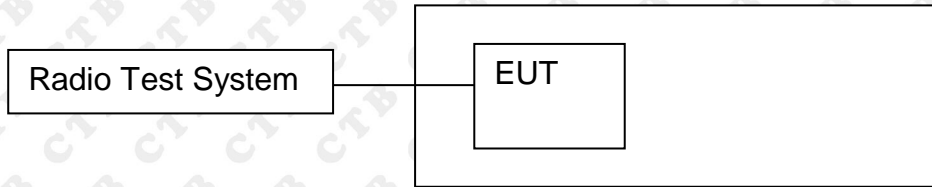

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /100KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-8.416	8	PASS
	MCH	-9.957	8	PASS
	HCH	-8.958	8	PASS
802.11g	LCH	-10.872	8	PASS
	MCH	-13.036	8	PASS
	HCH	-11.622	8	PASS
802.11n(H T20)	LCH	-12.085	8	PASS
	MCH	-13.173	8	PASS
	HCH	-12.346	8	PASS
802.11n(H T40)	LCH	-14.8	8	PASS
	MCH	-17.236	8	PASS
	HCH	-15.21	8	PASS

Test Graph

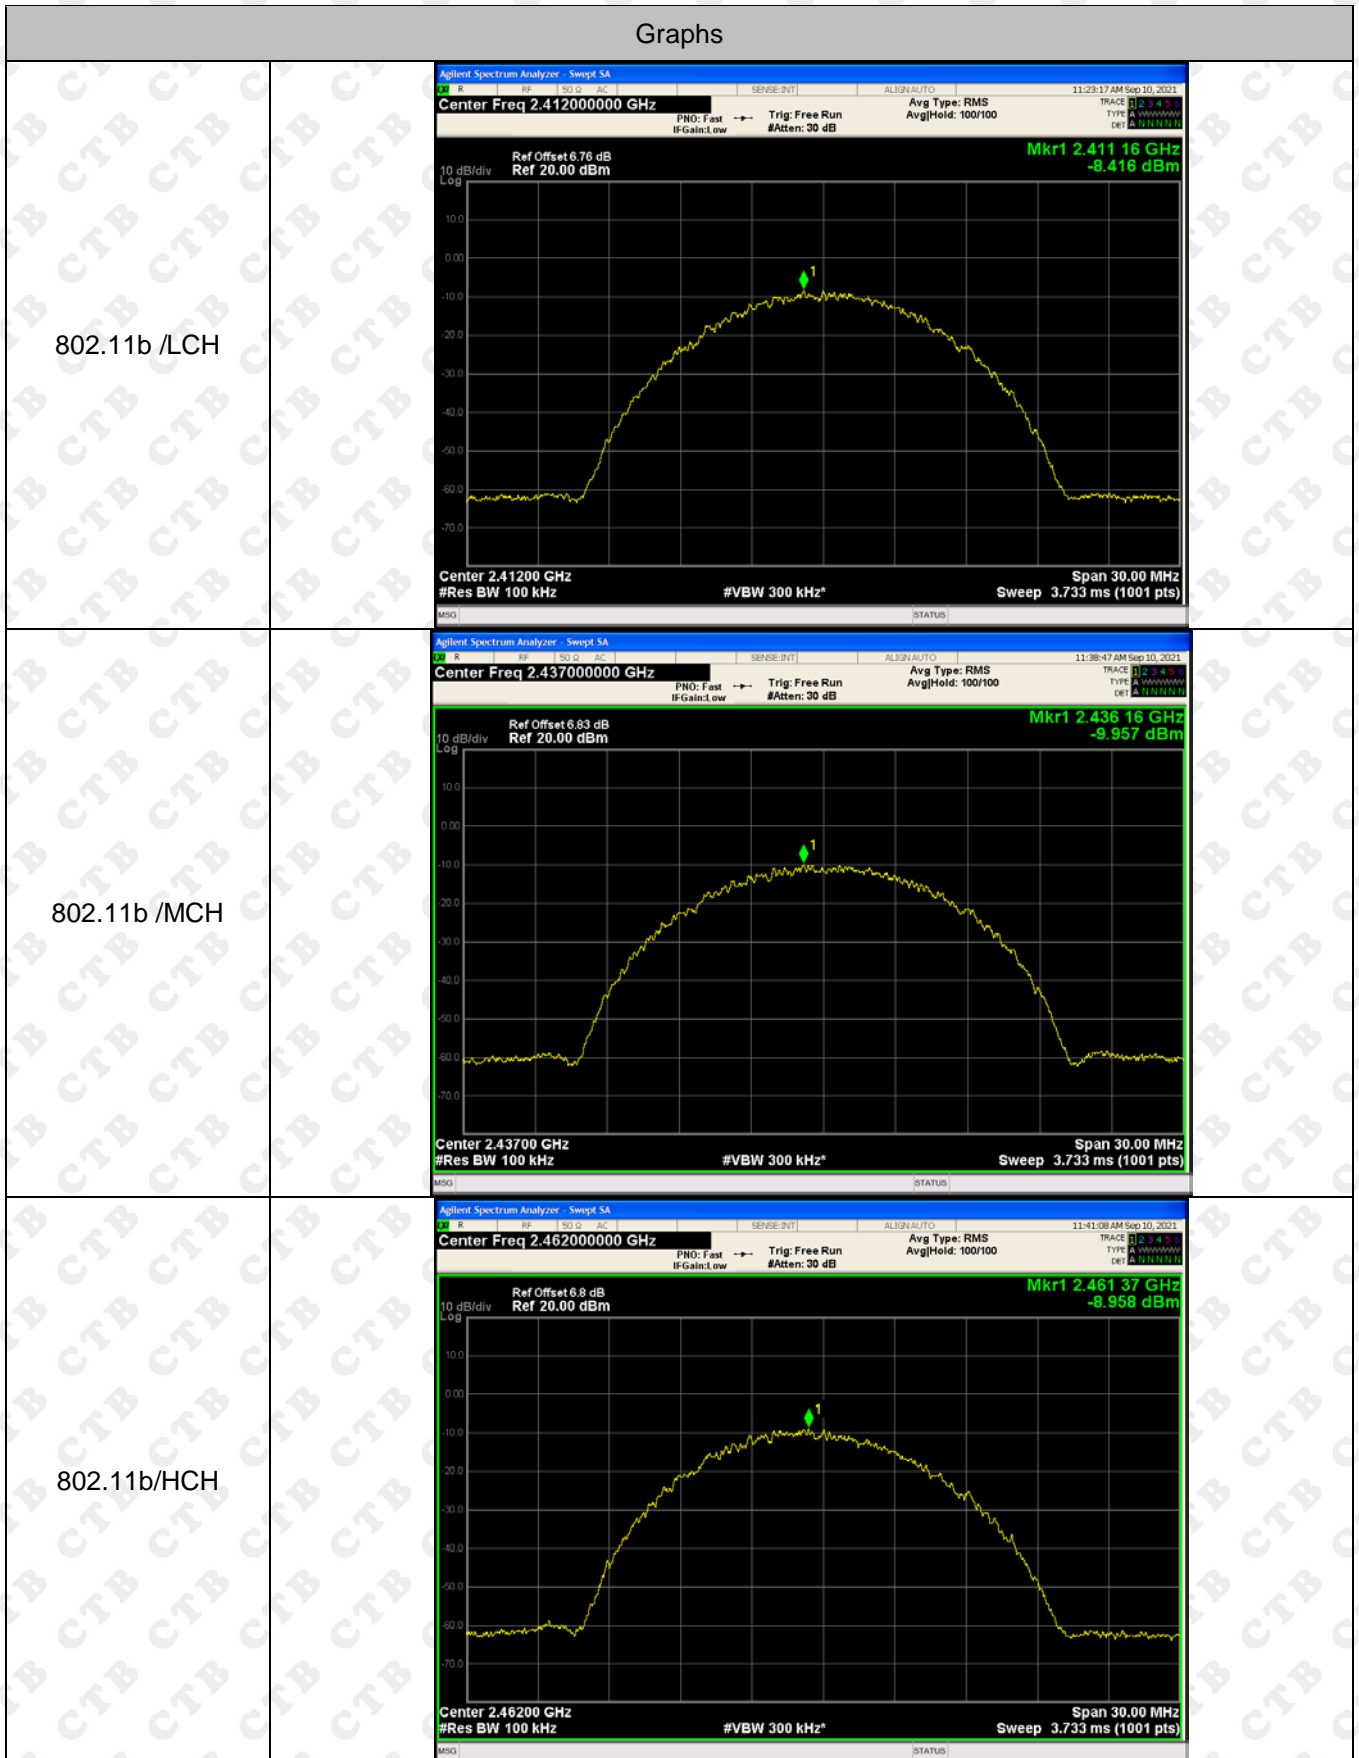

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.413 26 GHz -10.872 dBm Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz* Span 30.00 MHz Sweep 3.733 ms (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.435 74 GHz -13.036 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz* Span 30.00 MHz Sweep 3.733 ms (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.460 74 GHz -11.622 dBm Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz* Span 30.00 MHz Sweep 3.733 ms (1001 pts)</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.412 30 GHz -12.085 dBm Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz* Span 30.00 MHz Sweep 3.733 ms (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.438 23 GHz -13.173 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz* Span 30.00 MHz Sweep 3.733 ms (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.461 07 GHz -12.346 dBm Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz* Span 30.00 MHz Sweep 3.733 ms (1001 pts)</p>

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 6.77 dB Ref 20.00 dBm Mkr1 2.413 24 GHz -14.800 dBm Center 2.42200 GHz #Res BW 100 kHz #VBW 300 kHz* Span 60.00 MHz Sweep 7.467 ms (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.454 52 GHz -17.236 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz* Span 60.00 MHz Sweep 7.467 ms (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 6.81 dB Ref 20.00 dBm Mkr1 2.458 24 GHz -15.210 dBm Center 2.45200 GHz #Res BW 100 kHz #VBW 300 kHz* Span 60.00 MHz Sweep 7.467 ms (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2

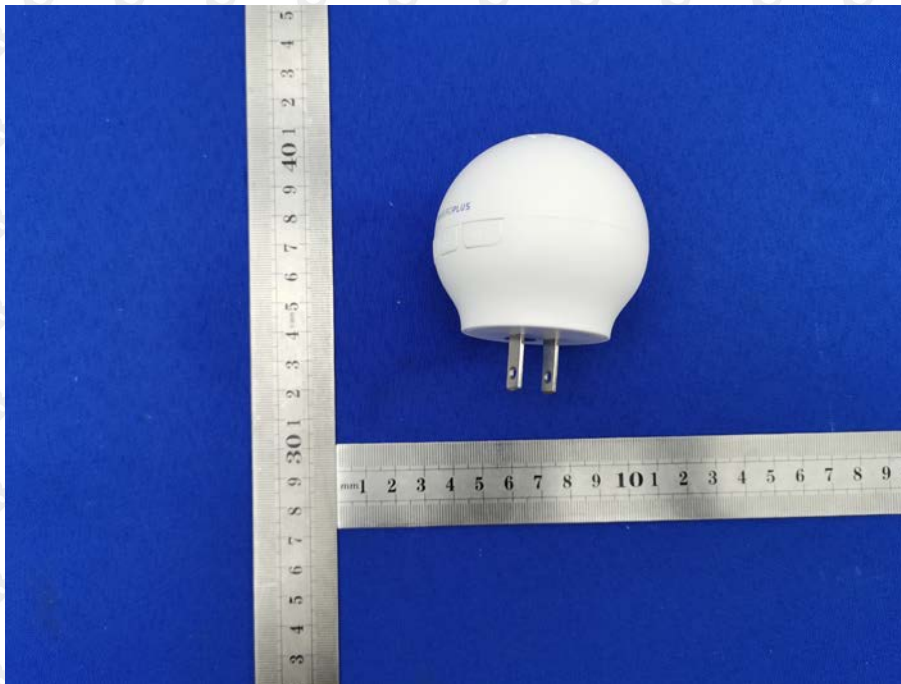

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted Emission



XXXXXXXX END OF REPORT XXXXXXXX