



Appendix B

RF Test Data for BTLE (Conducted Measurement)

Product Name: Music Box

Test Model: K60

Environmental Conditions

Temperature:	23.1° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu





B.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.708	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.705	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.702	≥ 0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

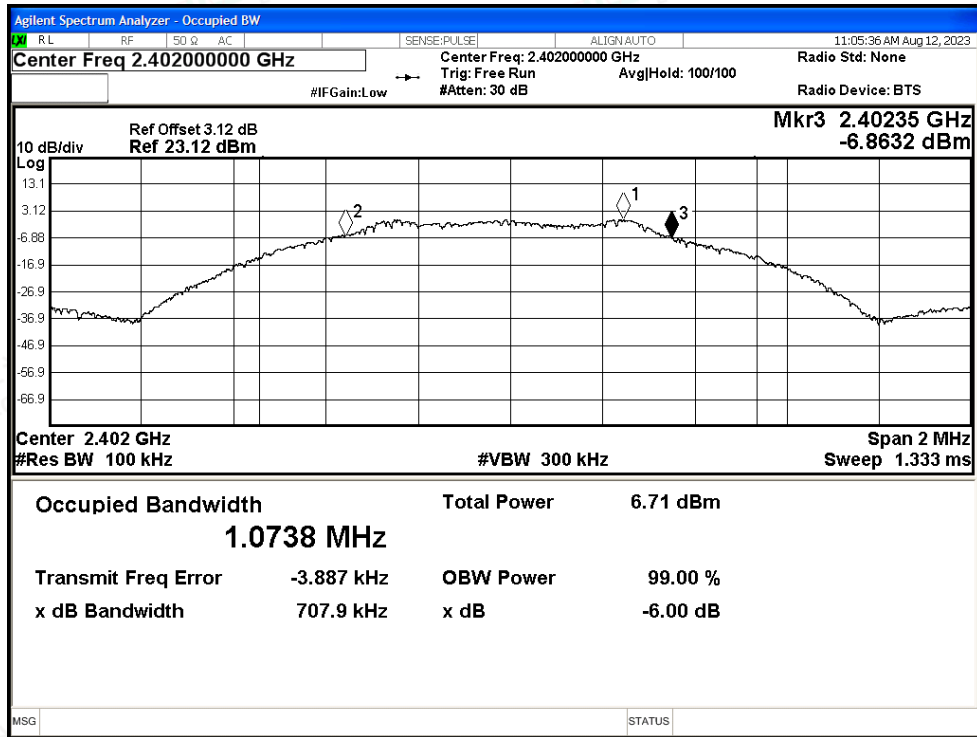

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

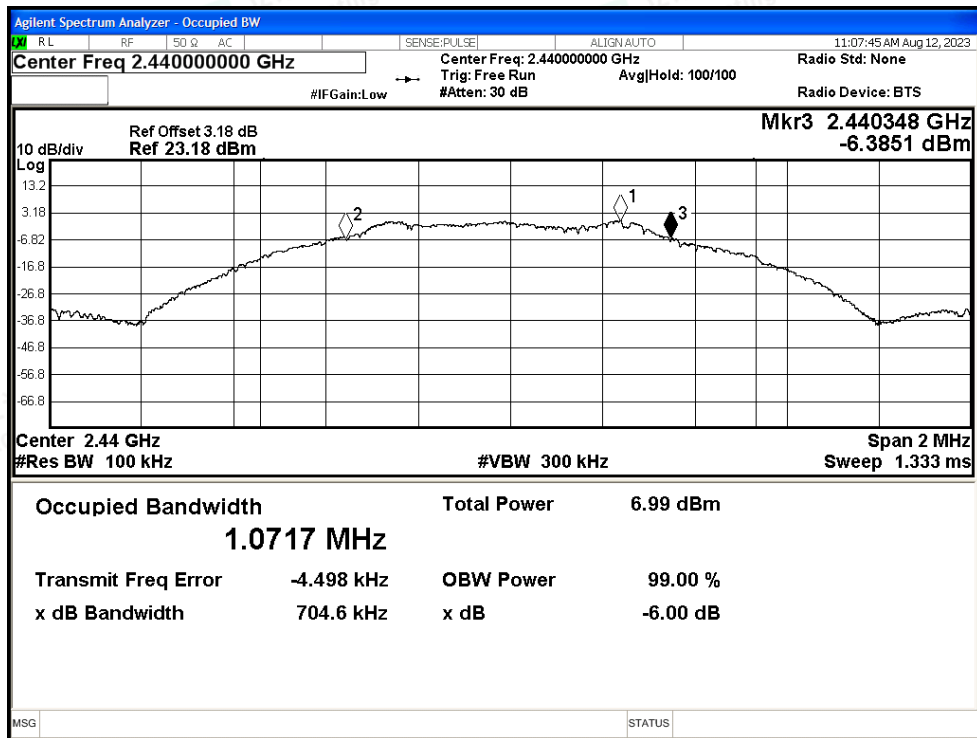

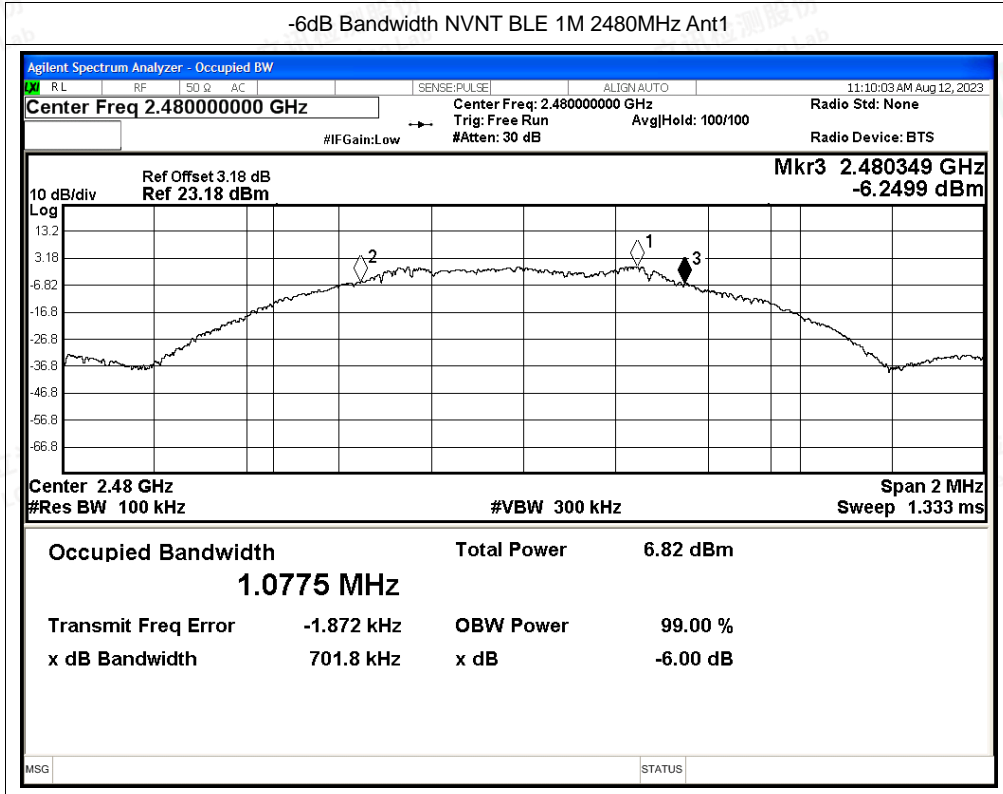



B.2 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.064
NVNT	BLE 1M	2440	Ant1	1.065
NVNT	BLE 1M	2480	Ant1	1.067




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

OBW NVNT BLE 1M 2402MHz Ant1

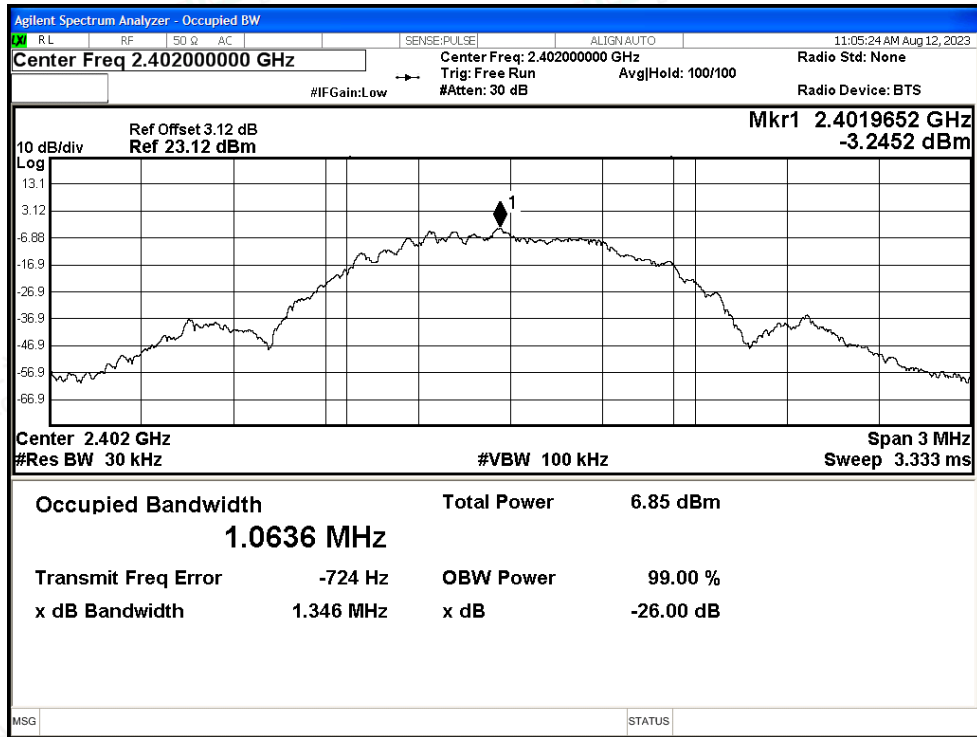

OBW NVNT BLE 1M 2440MHz Ant1

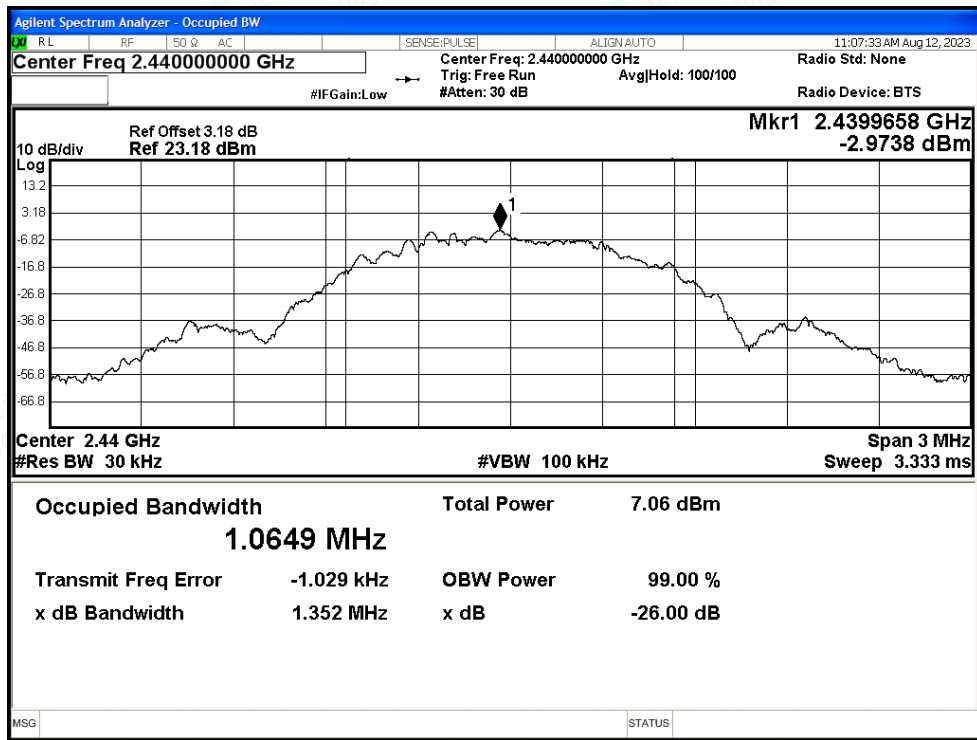

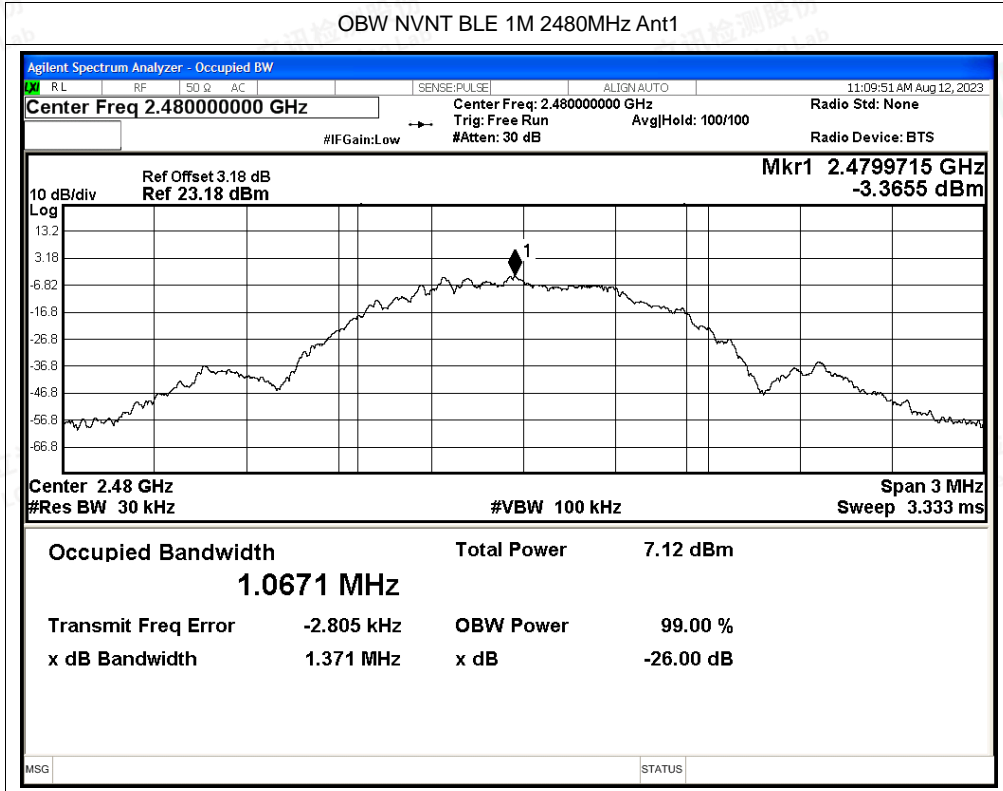



B.3 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	0.93	30	Pass
NVNT	BLE 1M	2440	Ant1	1.22	30	Pass
NVNT	BLE 1M	2480	Ant1	1.25	30	Pass

EIRP


TestMode	Frequency (MHz)	Maximum Peak Output Power (dBm)	Antenna Gain	Report EIRP Power(dBm)	Limit (dBm)	Verdict
BLE 1M	2402	0.93	3.38	4.31	36	PASS
BLE 1M	2440	1.22	3.38	4.6	36	PASS
BLE 1M	2480	1.25	3.38	4.63	36	PASS







Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

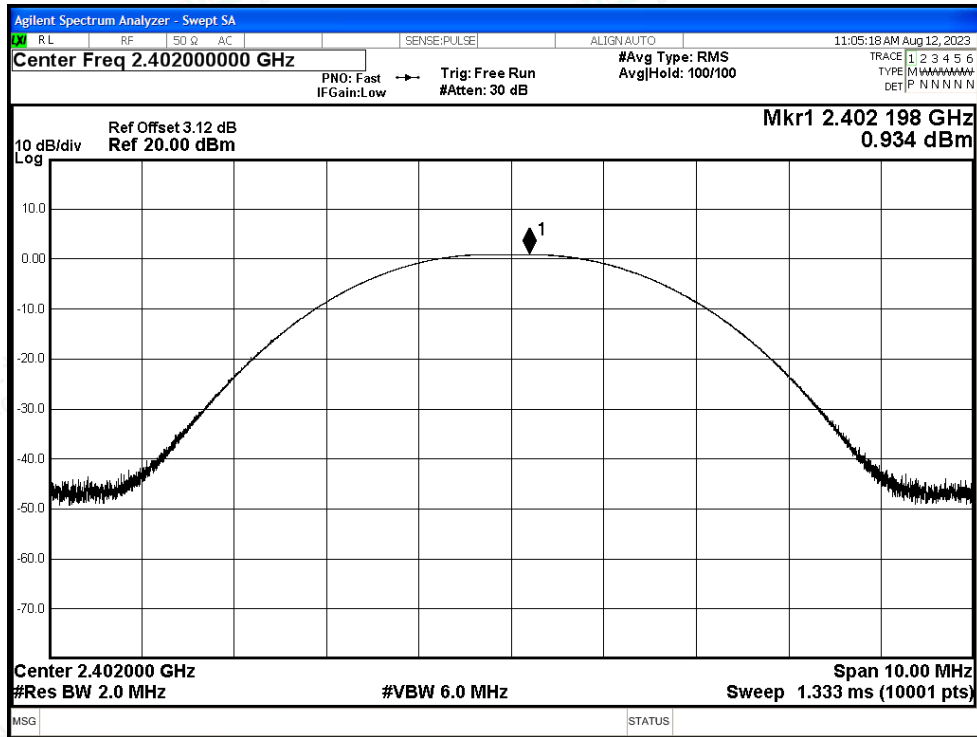

Power NVNT BLE 1M 2440MHz Ant1

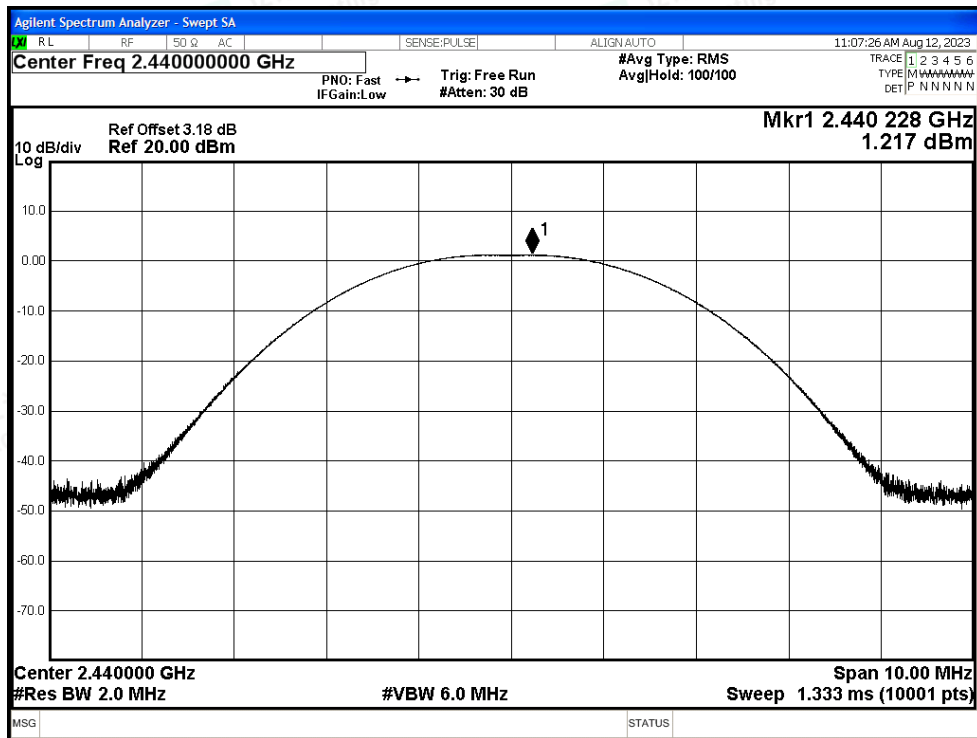

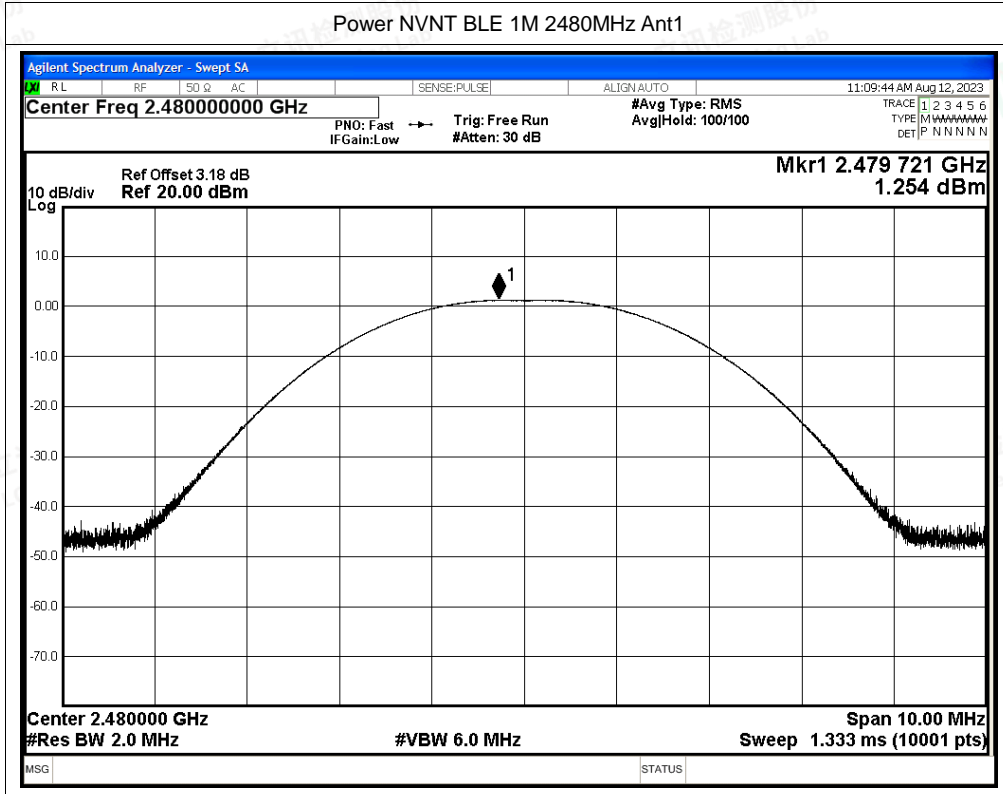



B.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-15.33	8	Pass
NVNT	BLE 1M	2440	Ant1	-13.9	8	Pass
NVNT	BLE 1M	2480	Ant1	-14.17	8	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

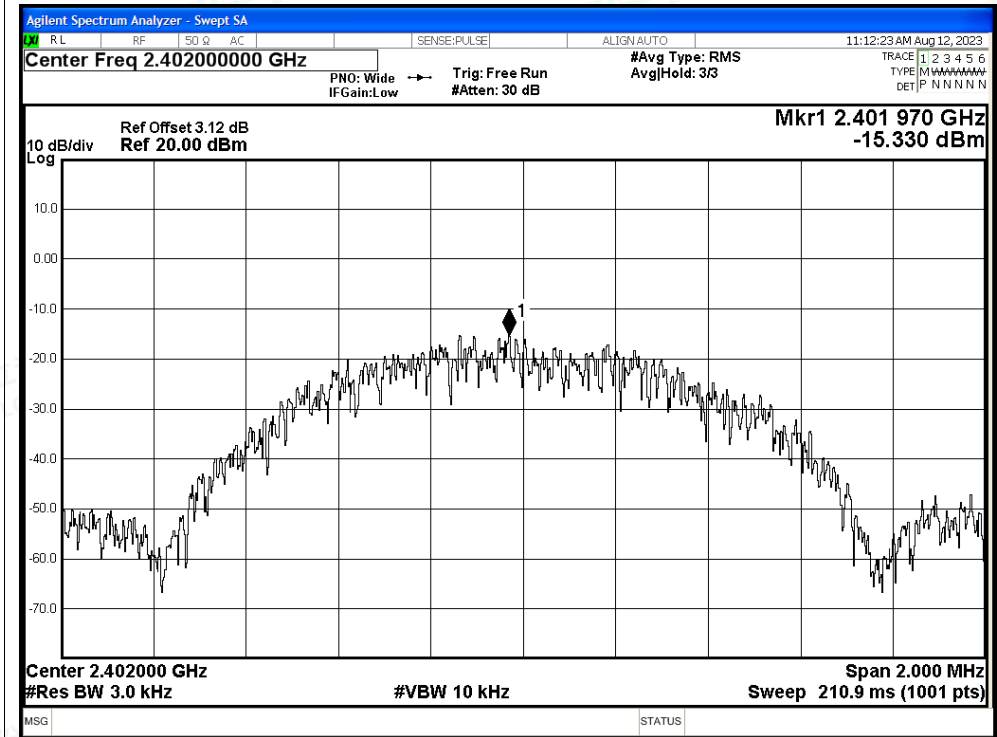

PSD NVNT BLE 1M 2440MHz Ant1

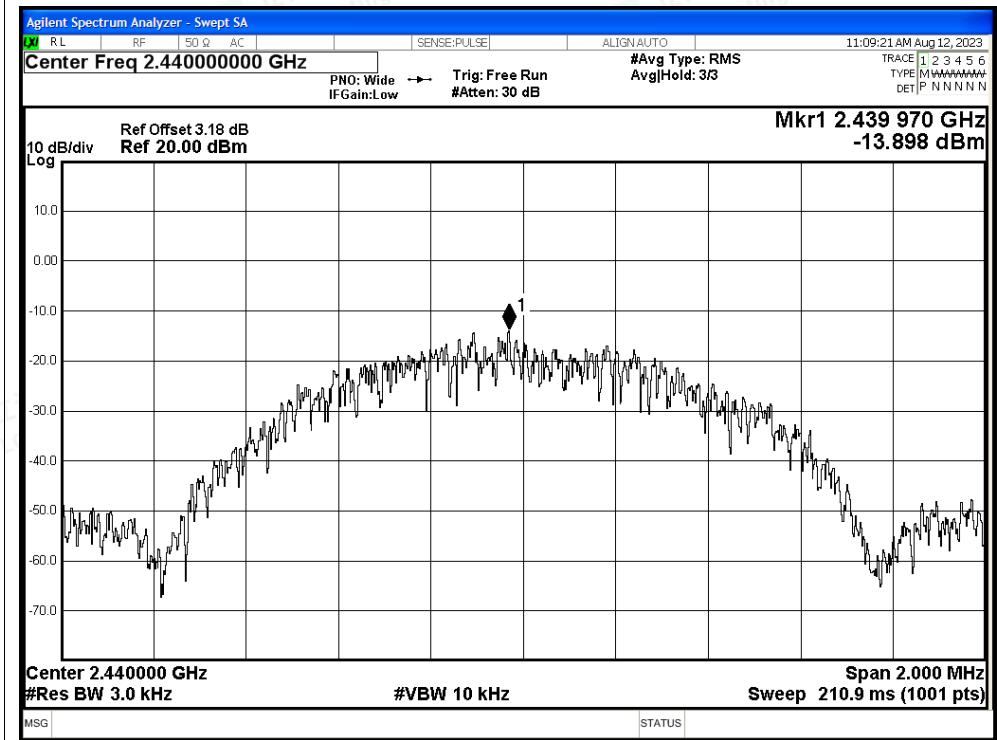

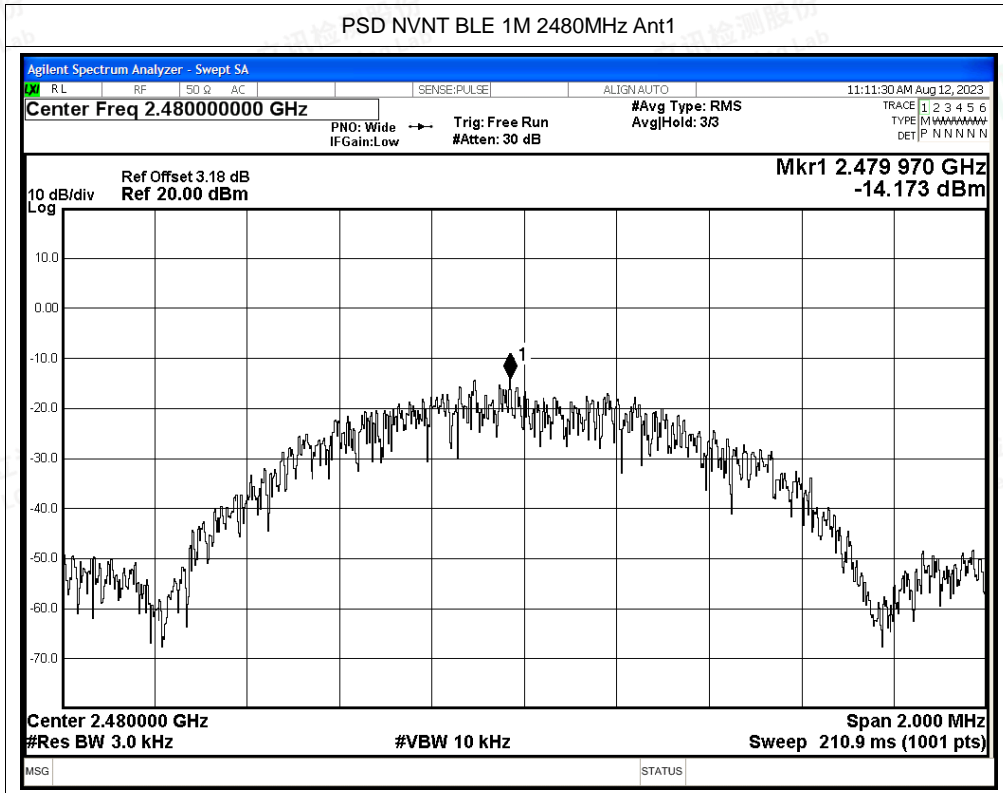

Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



B.5 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.61	-20	Pass
NVNT	BLE 1M	2480	Ant1	-55.12	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity






Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

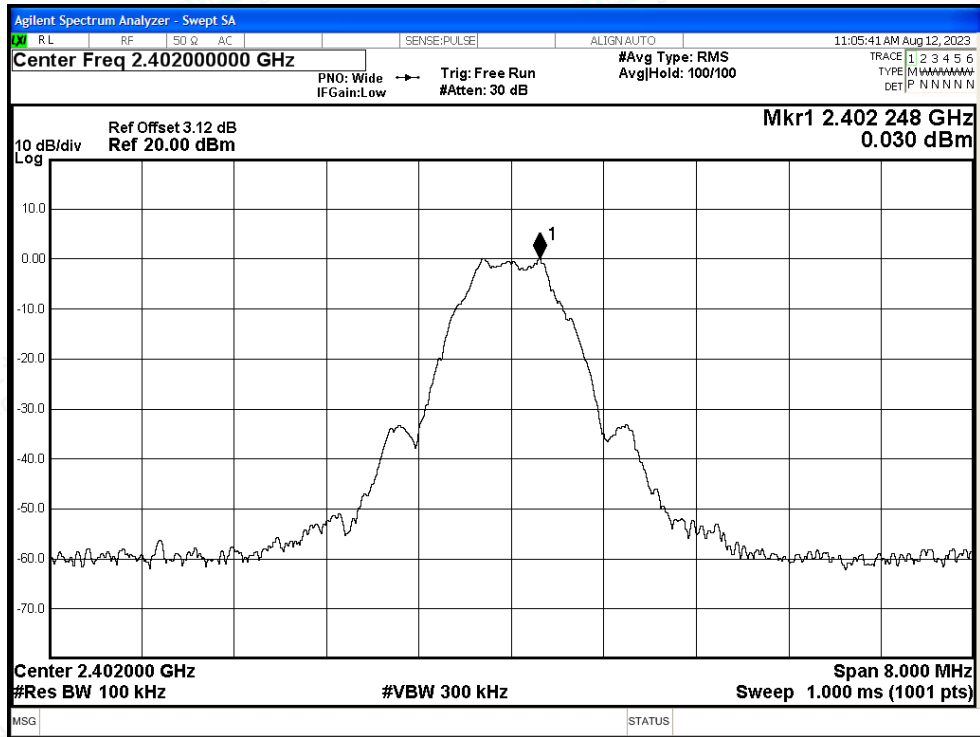

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

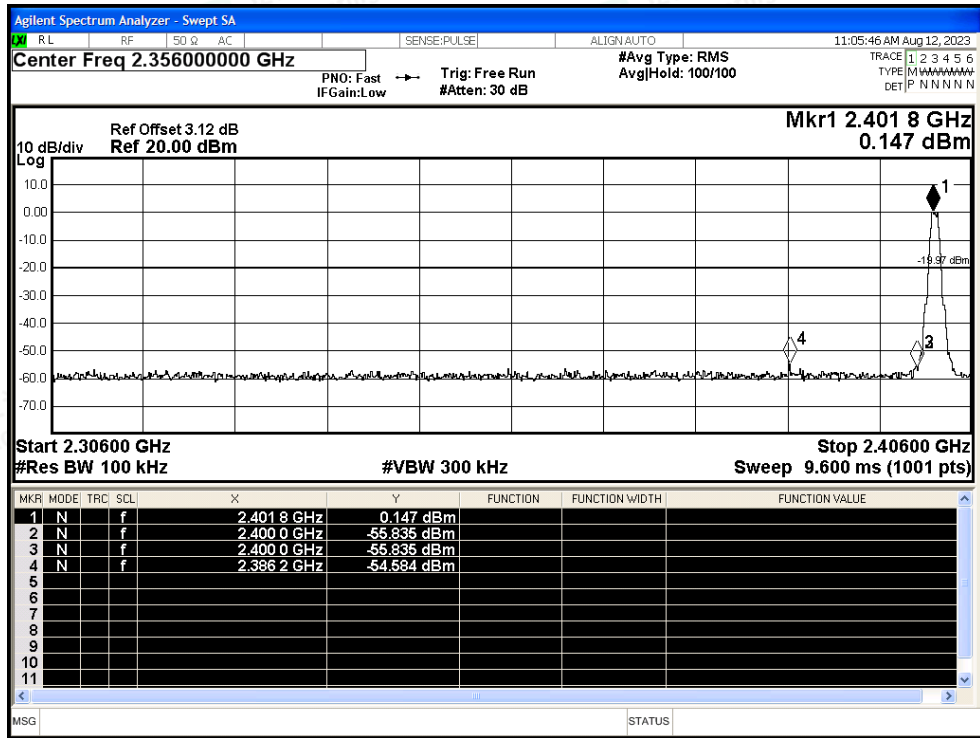

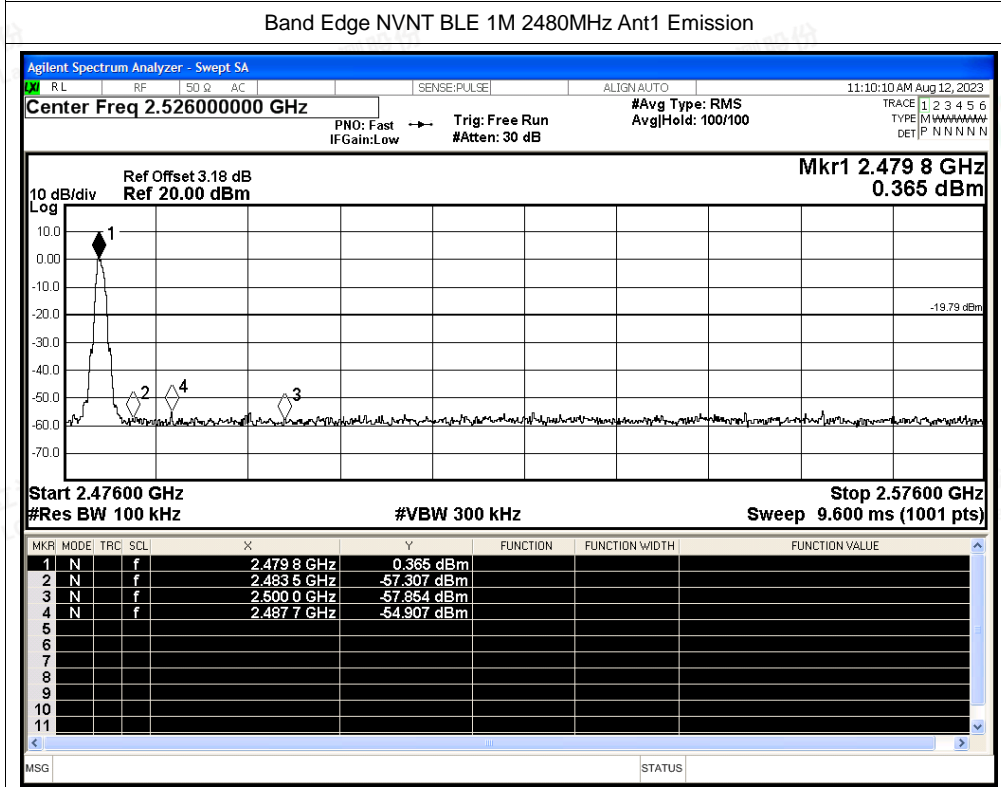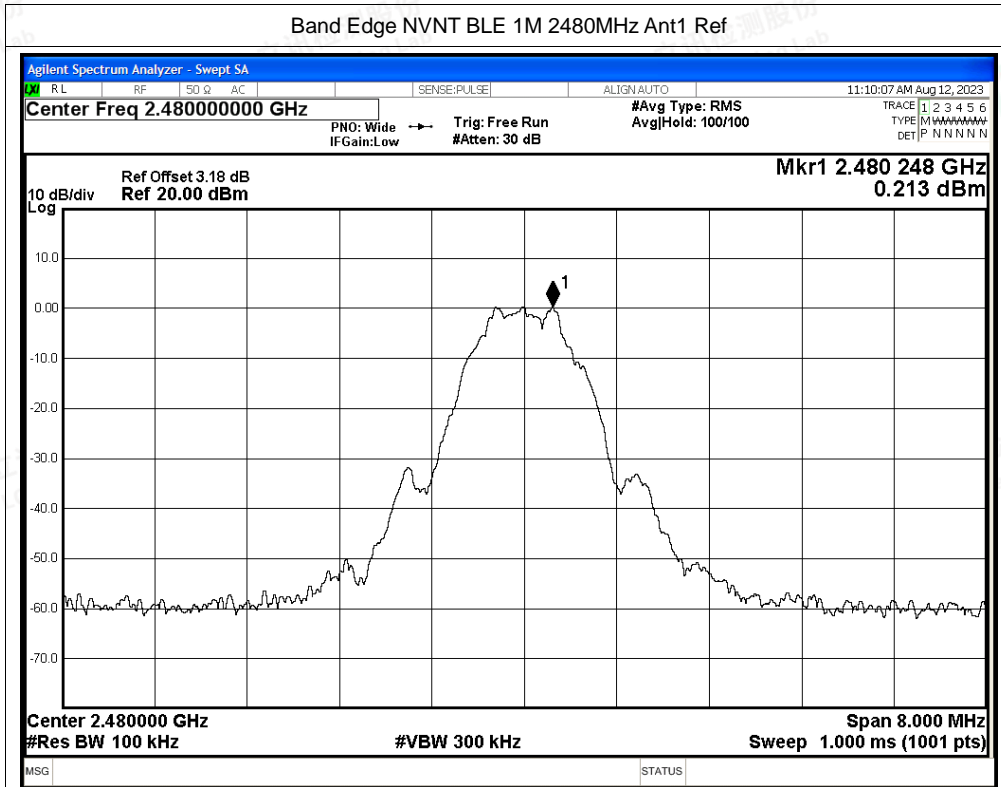



B.6 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.88	-20	Pass
NVNT	BLE 1M	2440	Ant1	-55	-20	Pass
NVNT	BLE 1M	2480	Ant1	-55.01	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity






Test Graphs



Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

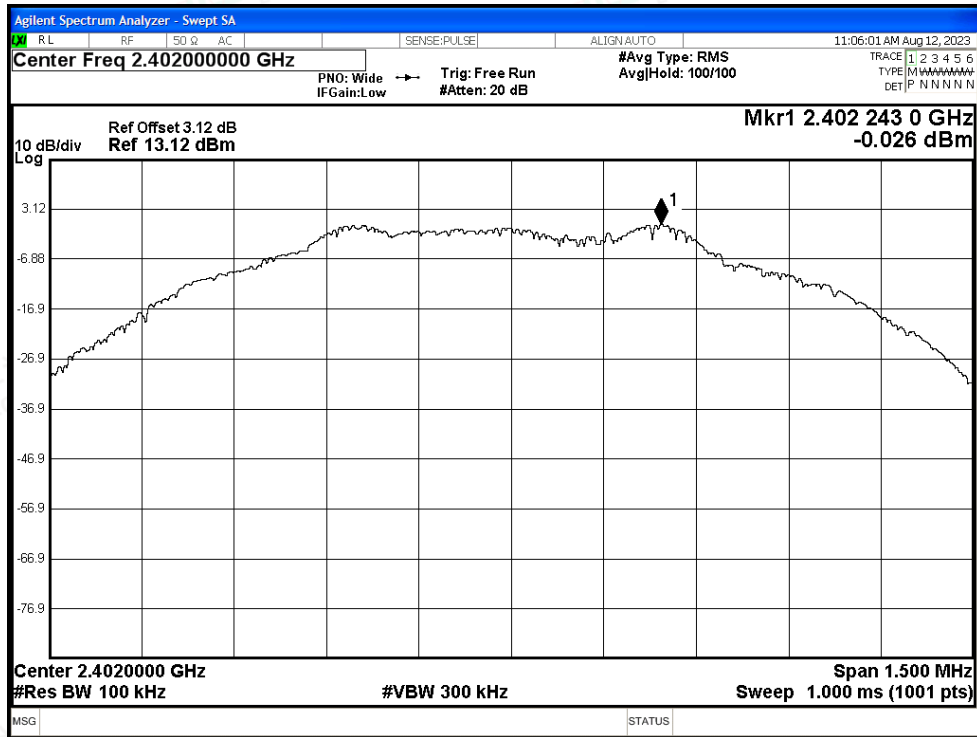

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

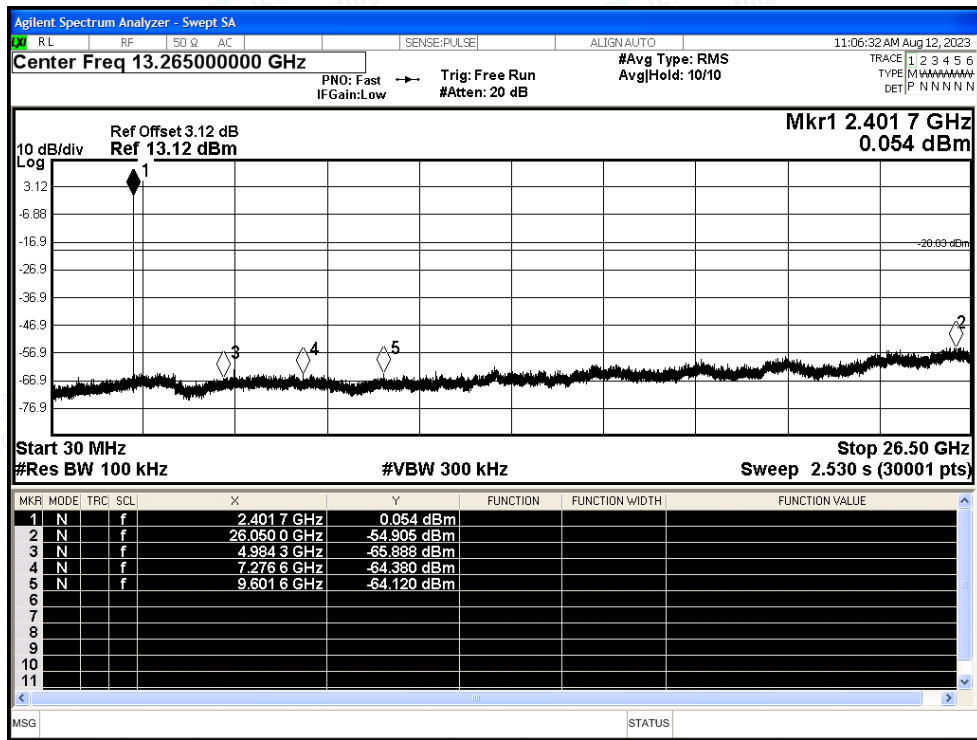

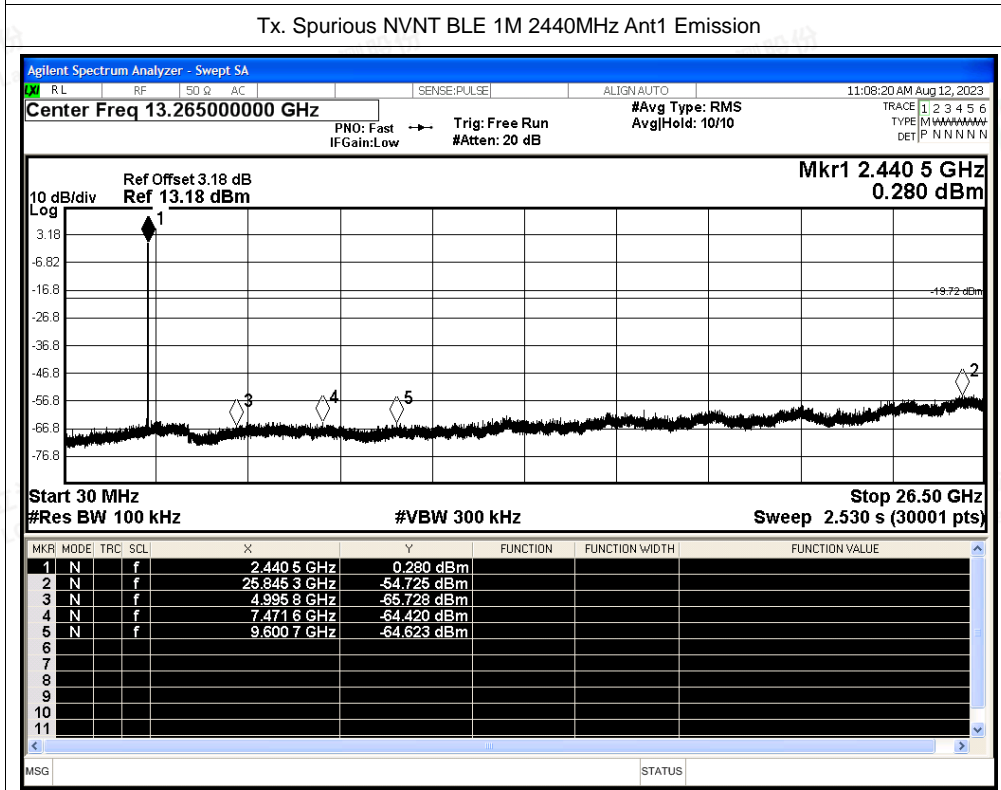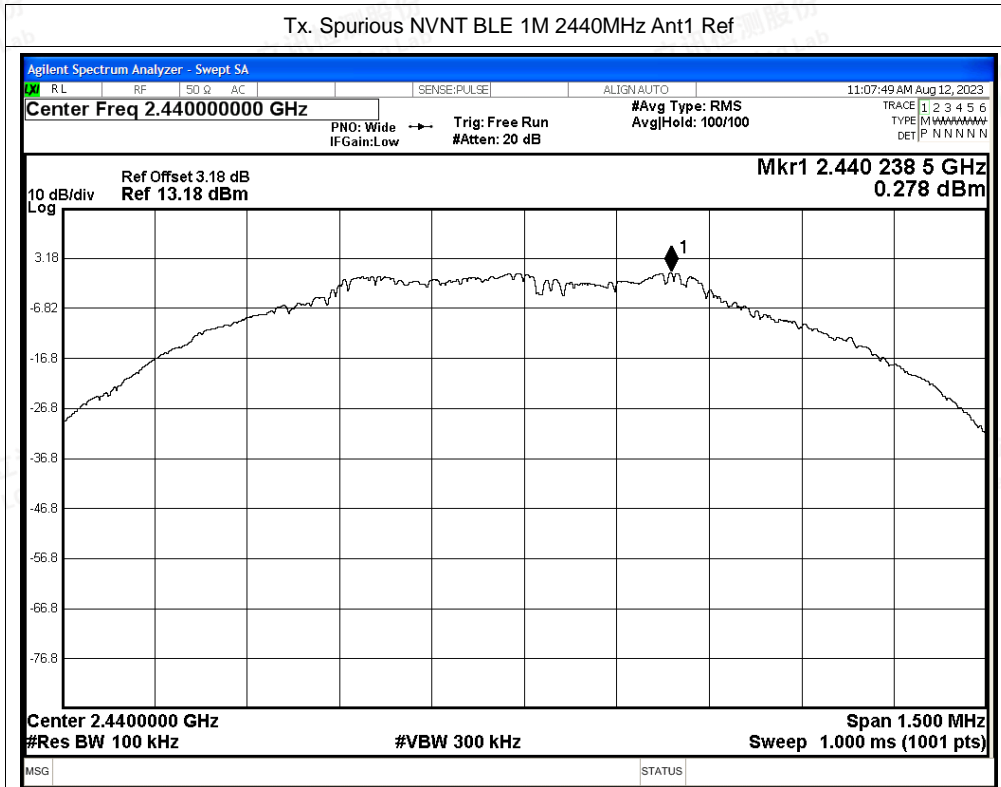

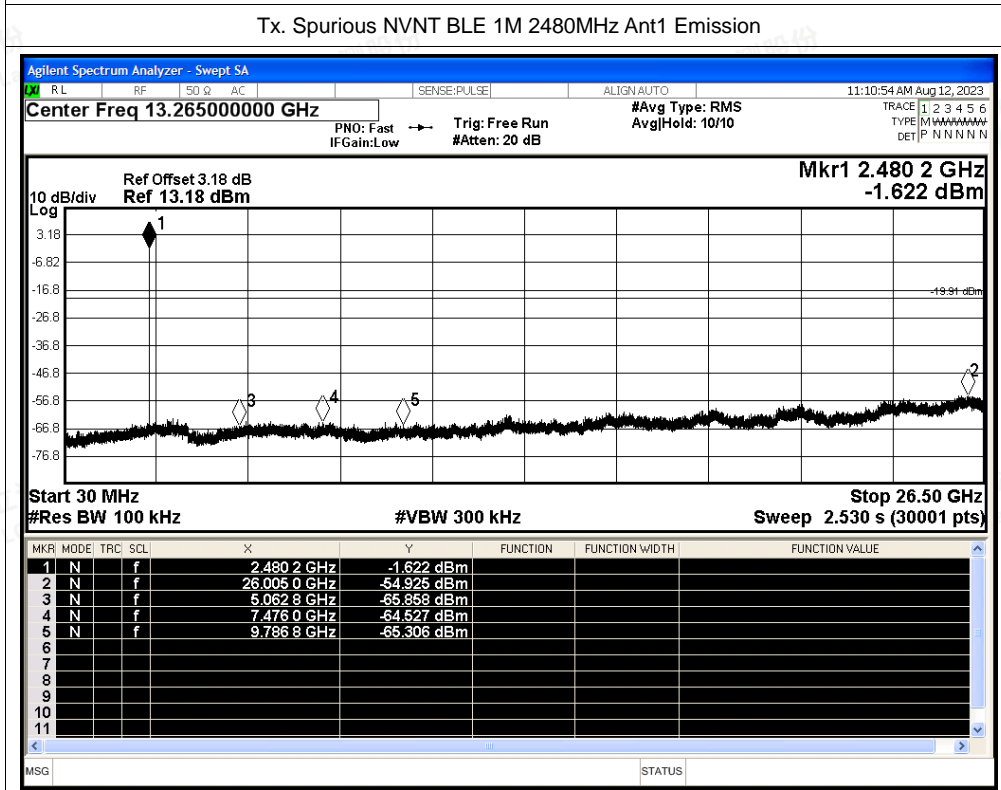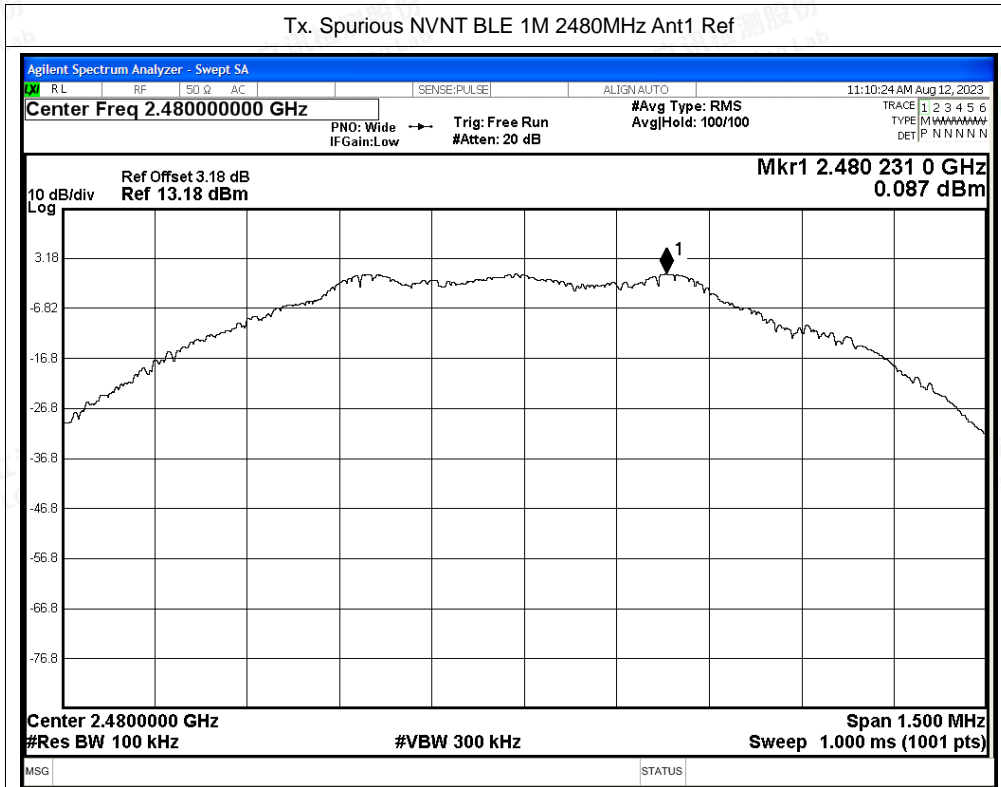



B.7 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.36	2.12	2.61
NVNT	BLE 1M	2440	Ant1	61.39	2.12	2.6
NVNT	BLE 1M	2480	Ant1	61.44	2.12	2.6







Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

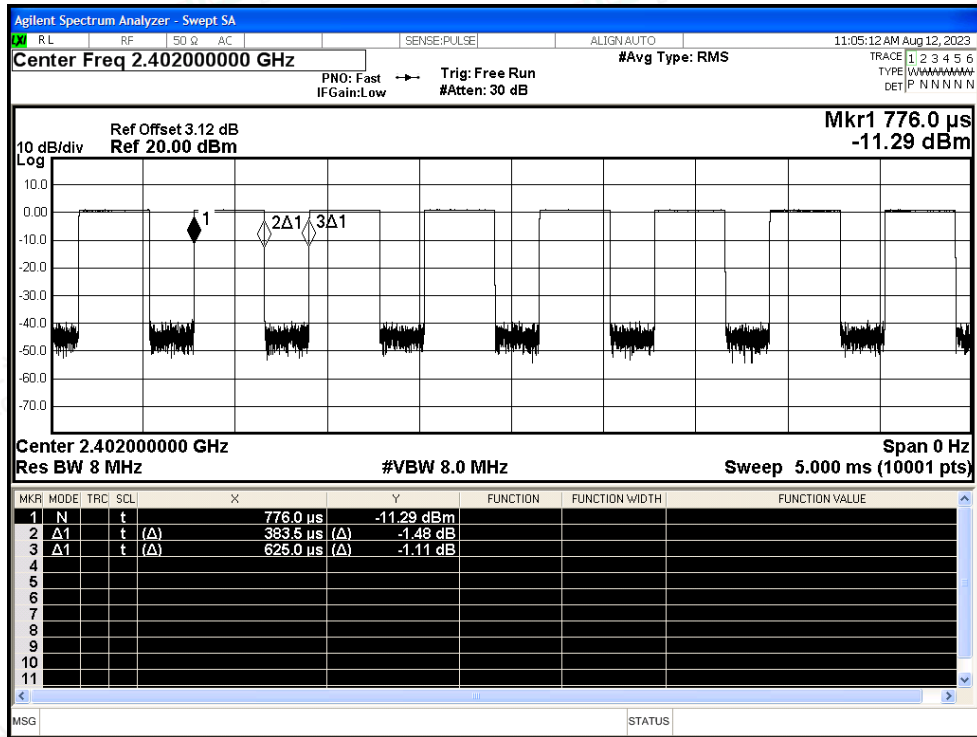

Duty Cycle NVNT BLE 1M 2440MHz Ant1

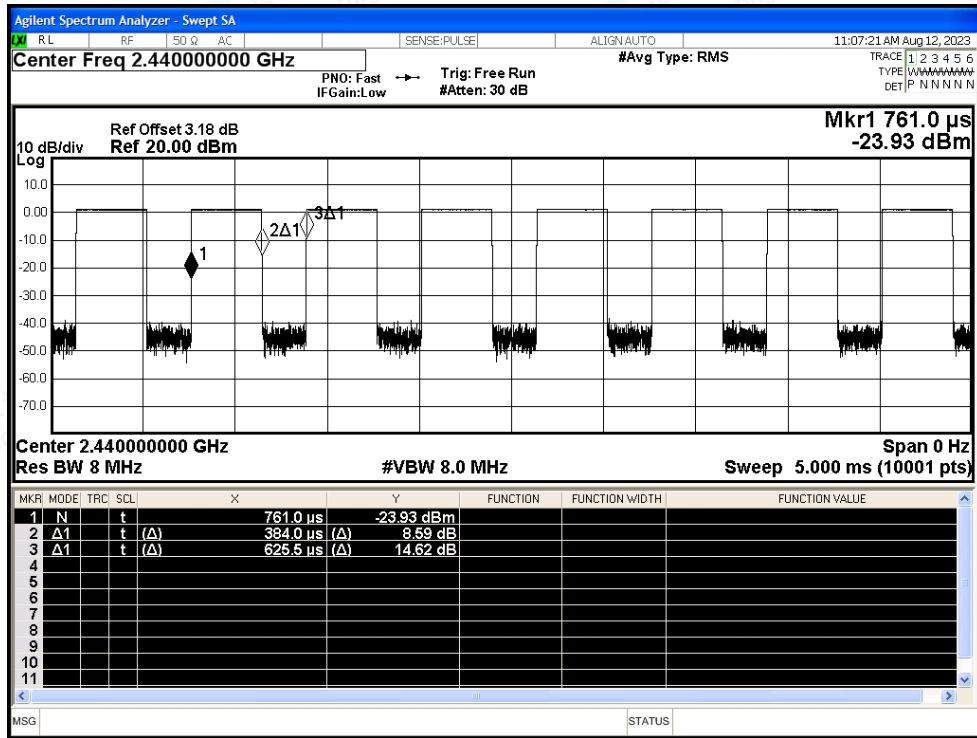

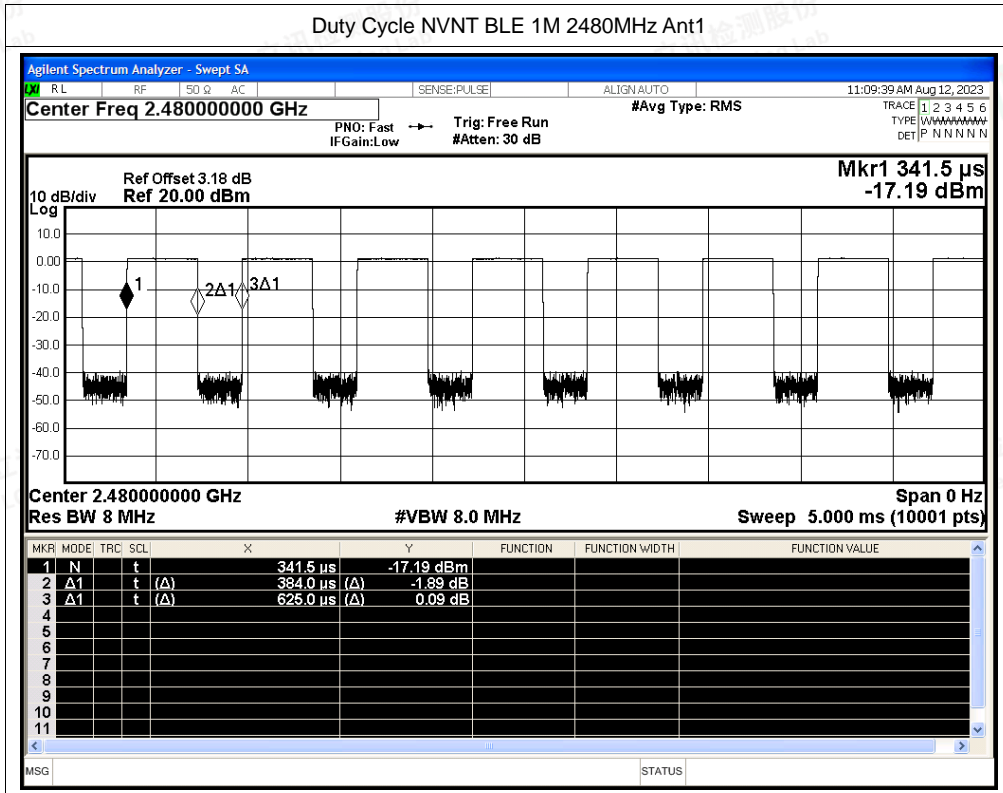



B.8 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-49.32	3.38	49.32	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-56.14	3.38	42.50	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2379.024	-46.88	3.38	51.76	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2375.856	-55.43	3.38	43.21	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-48.58	3.38	50.06	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-55.51	3.38	43.13	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-48.19	3.38	50.45	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-53.38	3.38	45.26	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2492.392	-45.96	3.38	52.68	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.512	-53.38	3.38	45.26	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-48.48	3.38	50.16	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-55.67	3.38	42.97	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

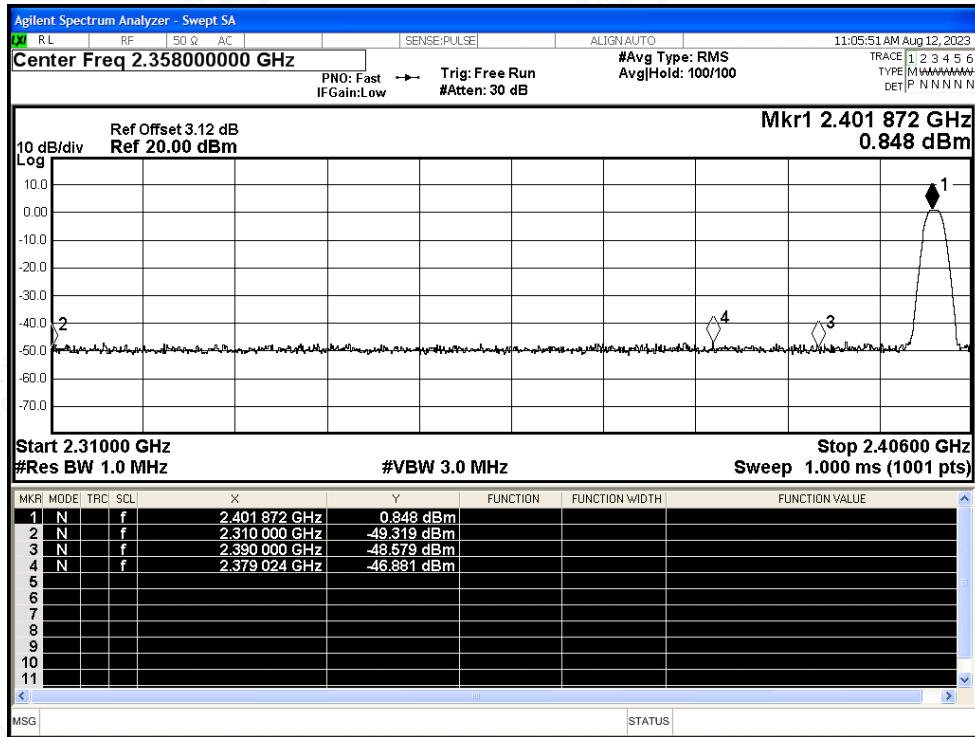

Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

