

# TONOR

UHF Wireless Microphone Instruction Manual

## TW840



## ABOUT THIS MANUAL

---

Thank you for purchasing TONOR wireless microphone. This manual is intended to help you understand all about this microphone and how to use it. TONOR always strives for the ultimate user experience. All our knowledge and passion for audio technology are incorporated into building microphones with high performance for you. The TONOR microphone is high quality and easy to use to achieve the best user experience.

Enjoy your microphone!

TONOR Team

ENGLISH

Package Including



## OPERATING ENVIRONMENTS & NOTES

-  When using this device, keep it away from water.
-  Use the device in ventilated environment, keep it away from fire.
-  Since it's a wireless device, please keep it away from other interfering sources.
-  Don't take apart the device.
-  Please use the standard power supply, high voltage may damage the device.
-  Please place the used batteries into the recycle bin, don't litter them.

## SPECIFICATIONS

Frequency Response: 40hz-18khz  
Operating Frequency: 902.8-908.2MHz  
902.8 mhz, 903.4 mhz, 904 mhz, 904.6 mhz, 905.2 mhz, 905.8 mhz, 906.4 mhz,  
907 mhz, 907.6 mhz, 908.2 mhz  
Operating Range: Up to 60m  
Frequency Stability:  $\pm 10$ ppm  
SNR: 96dB  
Sound Distortion: 0.03%  
Mic Input Sensitivity:  $-52\text{dB} \pm 3\text{dB}$   
RF Sensitivity:  $-95\text{dBm}$   
Operating Temperature:  $0^{\circ}\text{C}$  to  $+55^{\circ}\text{C}$

## MICROPHONE OPERATION INSTRUCTION



As shown in the pictures:

1. Display Screen
2. On/Off Switch
3. Tail Tube
4. HI-LO Button
5. Battery Compartment




Install 2\*AA batteries before using the wireless microphone and installing instruction is as follows:  
1. Take down the tail tube of mic.  
2. Install the batteries and tighten tail tube of mic.

Note: The positive and negative polarity of battery cannot be reversed.



Instruction:

1. Press button 2 to turn on. Long press for 2 seconds to turn off.

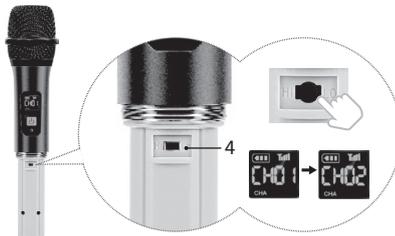

2. Press the HI-LO button 4, then the frequency on the screen will be changed.

## TROUBLESHOOTING

▷ No sound (The batteries of microphone have already been installed, but one of the microphone has on sound.)

► Please turn off the microphone which can work normally, and you will find that the RF light on the receiver will disappear. Then follow the steps below to pair the microphone (no sound) with the receiver.

1. Make sure that the receiver and microphone are turned OFF.
2. Unscrew the microphone tail tube and install the batteries into the mic's battery compartment.
3. Make sure that the microphone is OFF, press and hold the HI/LO button and the power button simultaneously, do not release them, until the microphone screen flashes quickly, then release two buttons simultaneously.
4. Turn on the receiver's power button, wait for 5 seconds or so, then press the HI/LO button (on the microphone) once, until the microphone screen becomes steady and no longer flashes, the RF light on the receiver turns steady, indicating that the pairing is successful.
5. Turn off the microphone, then tighten the microphone tail tube. Pairing is now completed.

▷ Received signal with noise or interference

- Change to other channels;
- Check if receiving distance exceeds the maximum range.

▷ Microphone cannot be turned on

- Check if batteries are installed reversely;
- Change to new batteries.

## WARRANTY

TONOR provides 2 years of after-sales service, free replacement to products that are NOT damaged resulting from accident, alteration, misuse, negligence, or abuse. If exceeding 30 days of Amazon return policy, you can still contact us through our Shopify TONORMIC. We will serve you with full sincerity!

## FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

## ISED Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L' appareil ne doit pas produire de brouillage;
- (2) L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.



Vous êtes responsable de remettre tous les appareils électriques et électroniques usagés à des points de collecte correspondants,

Pour en savoir plus:  
[www.quefairedemesdechets.fr](http://www.quefairedemesdechets.fr)



FR

Les piles  
et batteries  
se recyclent

À DÉPOSER  
EN MAGASIN



OU

À DÉPOSER  
EN DÉCHÈTTERIE



Points de collecte sur [www.quefairedemesdechets.fr](http://www.quefairedemesdechets.fr)

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### **FCC Radiation Exposure Statement**

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

#### **ISED Radiation Exposure Statement**

The device has been evaluated to meet general RF exposure requirement. The device can be used installed and operated with minimum distance 0mm between the radiator and your body.

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre corps.

EASTWEST ELECTRONIC COMMERCE CO., LIMITED  
LEVEL 54 HOPEWELL CENTRE 183 QUEEN'S ROAD  
EAST HONG KONG

EASTWEST ELECTRONIC COMMERCE CO US LIMITED  
3500 SOUTH DUPONT HIGHWAY, SUITE G106  
DOVER, DE 19901 UNITED STATES

LIFEWIT LIMITED  
FLAT 237, 233 HIGH STREET CROYDON SURREY  
ENGLAND CR0 1FY UNITED KINGDOM

Lifewit GmbH  
Friedenstraße 5 97072 Wuerzburg Germany

MADE IN CHINA