



Prüfbericht-Nr.: <i>Test report no.:</i>	CN24AWWG 002	Auftrags-Nr.: <i>Order no.:</i>	168487434 P01514699	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2024-05-31	
Auftraggeber: <i>Client:</i>	Shenzhen Baseus Technology Co., Ltd. 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China			
Prüfgegenstand: <i>Test item:</i>	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	CCNMS140 (Trademark: baseus)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.215 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2024-06-06	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003733747-001			
Prüfzeitraum: <i>Testing period:</i>	2024-06-06 to 2024-06-20			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	 Hardy Suo	genehmigt von: <i>authorized by:</i>	 Bell Hu	
Datum: <i>Date:</i>	2024-07-08	Ausstellungsdatum: <i>Issue date:</i>	2024-07-08	
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / <i>Other:</i>	FCC ID: 2A482-CCNMS140			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN24AWWG 002
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

1	<p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>
2	<p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i></p>
3	<p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>
4	<p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES.....	6
2.1	TEST FACILITIES.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY.....	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS.....	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	12
5.1.1	<i>Antenna Requirement.....</i>	<i>12</i>
5.1.2	<i>20dB Bandwidth</i>	<i>13</i>
5.1.3	<i>Field Strength of Fundamental and Harmonics</i>	<i>14</i>
5.1.4	<i>Conducted Emission on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP.....	16
7	LIST OF TABLES	16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of FCC Part 15C.

Appendix B: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

A2LA Certificate Number: 5162.01

FCC Accreditation Designation No.: CN1260

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2023-07-26	2024-07-25
OSP	R&S	OSP 150	101017	2023-11-14	2024-11-13
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A	N/A
Power Meter	R&S	NRP2	107105	2023-11-14	2024-11-13
Wideband Power Sensor	R&S	NRP-Z81	105677	2023-07-26	2024-07-25
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2021-06-22	2024-06-22
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-07-26	2024-07-25
Signal Analyzer	R&S	FSV 40	101439	2023-07-26	2024-07-25
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2023-07-26	2024-07-25
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-07-26	2024-07-25
Amplifier	R&S	SCU-18F	180070	2023-07-26	2024-07-25
Amplifier	R&S	SCU40A	100475	2023-07-26	2024-07-25
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-07	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-07	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-28	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-08-07	2024-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A

Prüfbericht - Nr.: CN24AWWG 002
Test Report No.:

 Seite 7 von 16
 Page 7 of 16

Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2021-06-22	2024-06-22

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2024-07-30
Artificial Mains Network	R&S	ENV216	102333	2024-07-31
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a wireless charger, it supports wireless charging function.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Type Designation:	CCNMS140CS
Trade Mark	baseus
FCC ID:	2A482-CCNMS140
Operating Temperature Range	0°C to +25°C
Rated Input	AC 100-240V, 50/60Hz, 2.5A Max.
Rated Output	1) Type-C1/Type-C2 Output: 5.0V=3.0A (15.0W); 9.0V=3.0A (27.0W); 12.0V=3.0A (36.0W); 15.0V=3.0A (45.0W); 20.0V=5.0A (100.0W) Max. 2) Type-C3 Output: 5.0V=3.0A (15.0W); 9.0V=3.0A (27.0W); 12.0V=3.0A (36.0W); 15.0V=3.0A (45.0W); 20.0V=5.0A (100.0W); 28.0V=5.0A (140.0W) Max. 3) USB1 Output: 5.0V=3.0A (15.0W) Max. Wireless charging QI2 Output: 15.0W Max.
Test Voltage:	AC 120V, 60Hz
Technical Specification of WPT	
Frequency Range:	110.5kHz to 205kHz 360kHz
Type of Modulation:	ASK, FSK
Antenna Type:	Coil antenna
Antenna Number:	1
Wireless output power:	110.5kHz to 205kHz: 5W, 7.5W 360kHz: 15W

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless charging
 - 1. 110.5-205kHz
 - 2. 360kHz
- B. Standby

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Block Diagram
- ID Label and Location Info
- User Manual
- Schematics
- Operation Description

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. All testing were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model CCNMS140CS in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Intelligent wireless charging full function test module	YBZ	V3.1	5W, 7.5W, 15W (Supports QI2)	Intelligent wireless charging full function test module

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

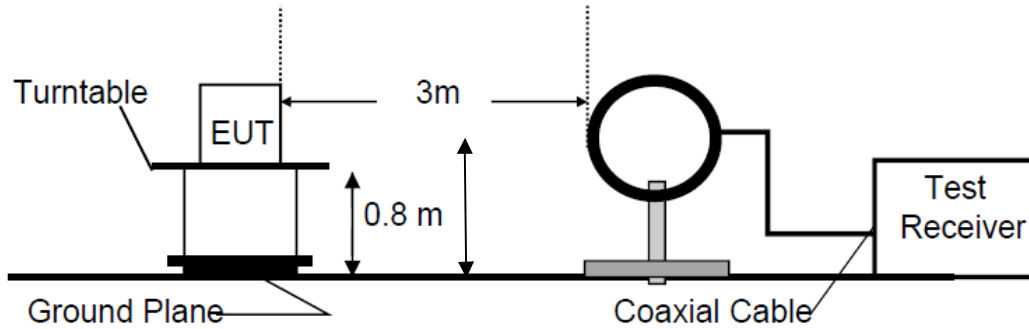


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


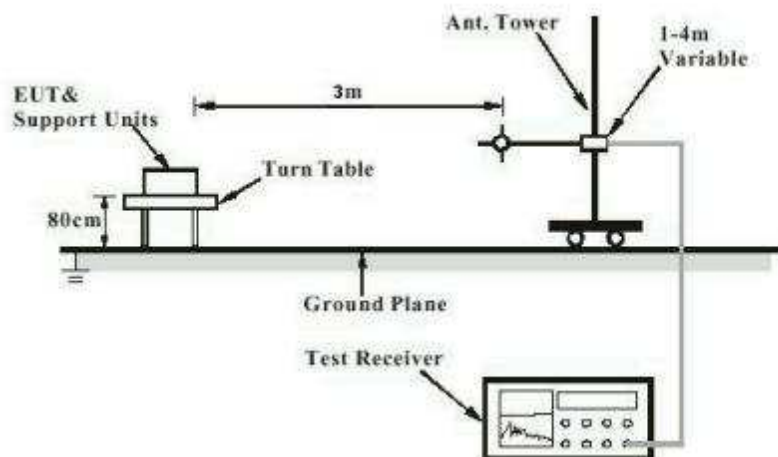


Diagram of Measurement Configuration for Mains Conduction Measurement

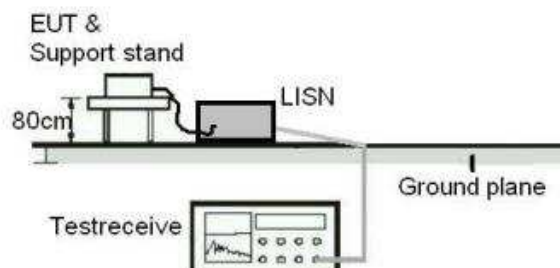

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : Part 15.203
the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has one internal antenna, and the antenna is permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 20dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.215(c)
Basic standard	:	ANSI C63.10: 2013
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2024-06-19
Input voltage	:	AC 120V, 60Hz
Operation mode	:	A, B
Ambient temperature	:	22 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

5.1.3 Field Strength of Fundamental and Harmonics

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.209 & 15.205
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a)
Kind of test site	:	3m Semi-anechoic Chamber

Test Setup

Date of testing	:	2024-06-06 to 2024-06-20
Input voltage	:	AC 120V, 60Hz
Operation mode	:	A, B
Ambient temperature	:	22 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

5.1.4 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-06-06 to 2024-06-20
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B
Earthing	: Not connected
Ambient temperature	: 23.9 °C
Relative humidity	: 52.7 %
Atmospheric pressure	: 101 kPa

Note: This testing was carried out on all operation modes, but only the worst case was presented in this report.

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables


Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	8
Table 4: List of Accessories and Auxiliary Equipment.....	10

Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
<i>Operating mode 1: 110.5-205kHz</i>	2
<i>Operating mode 2: 360kHz</i>	2
APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS	3
<i>Standby</i>	3
<i>Operating mode 1: 110.5-205kHz</i>	14
<i>Operating mode 2: 360kHz</i>	25
APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS	36

Appendix A.1: Test Results of 20dB Bandwidth

Operating mode 1: 110.5-205kHz

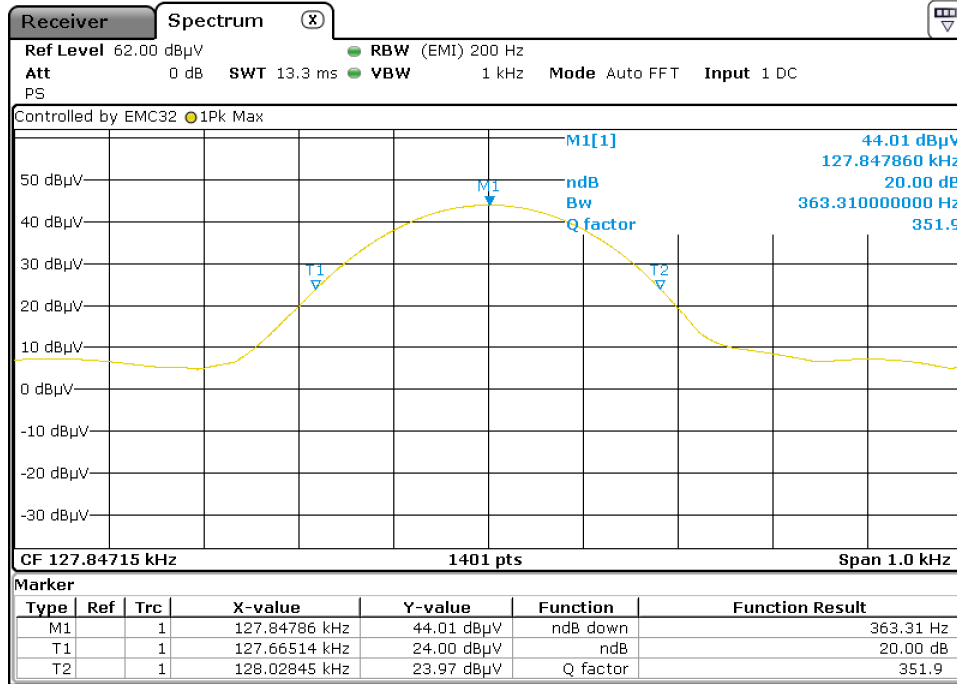

Operating mode 2: 360kHz

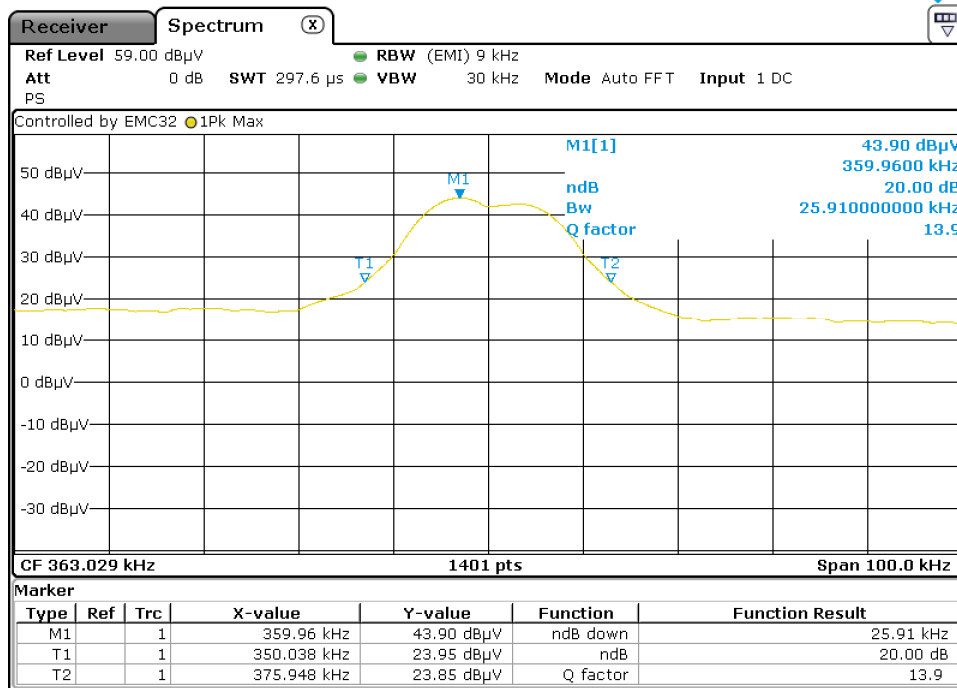


Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Standby

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

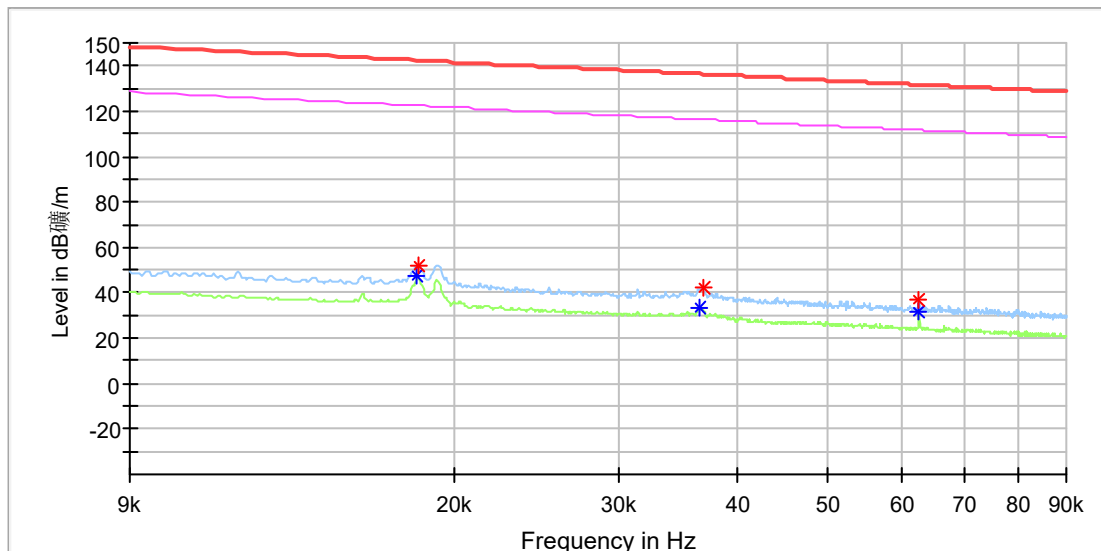


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018257	---	47.13	122.36	75.23	100.0	X	148.0	20.0
0.018315	51.95	---	142.33	90.39	100.0	X	165.0	20.0
0.036540	---	33.31	116.34	83.03	100.0	X	96.0	20.0
0.036887	42.26	---	136.25	94.00	100.0	X	0.0	20.0
0.062576	36.50	---	131.67	95.17	100.0	X	154.0	20.0
0.062576	---	31.85	111.67	79.82	100.0	X	154.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

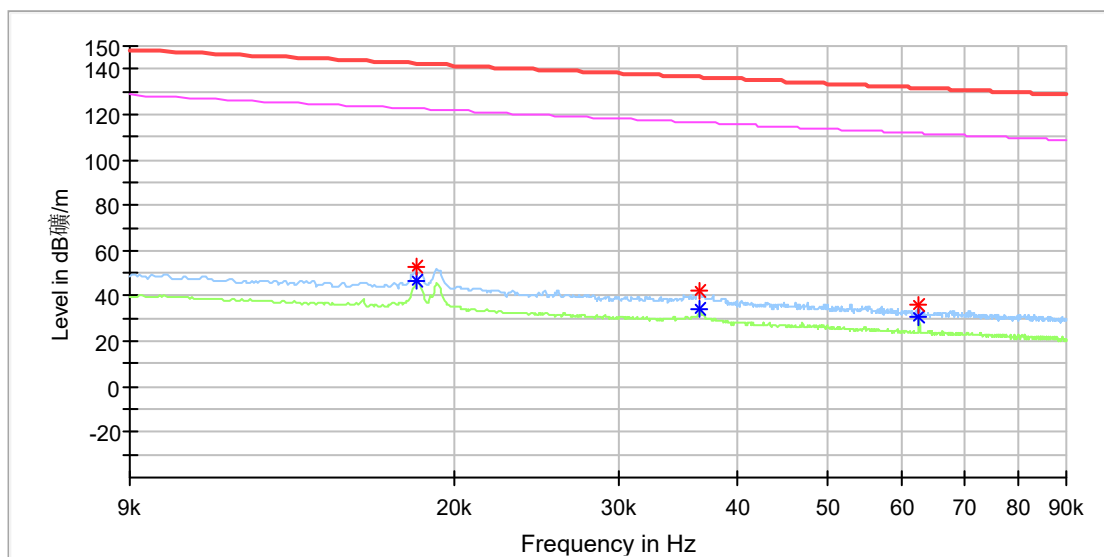


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018257	52.98	---	142.36	89.38	100.0	Y	184.0	20.0
0.018257	---	46.94	122.36	75.42	100.0	Y	184.0	20.0
0.036540	42.23	---	136.34	94.10	100.0	Y	94.0	20.0
0.036540	---	33.80	116.34	82.54	100.0	Y	94.0	20.0
0.062518	35.92	---	131.67	95.75	100.0	Y	0.0	20.0
0.062576	---	31.08	111.67	80.59	100.0	Y	0.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

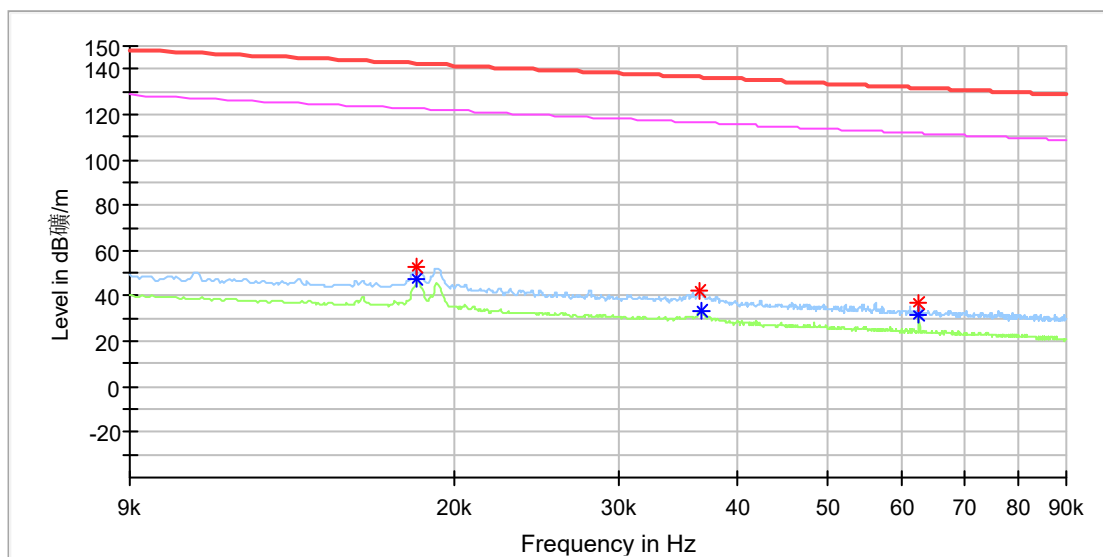


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018257	52.36	---	142.36	90.00	100.0	Z	9.0	20.0
0.018257	---	47.11	122.36	75.25	100.0	Z	9.0	20.0
0.036482	42.58	---	136.35	93.77	100.0	Z	182.0	20.0
0.036771	---	33.11	116.28	83.17	100.0	Z	188.0	20.0
0.062576	36.55	---	131.67	95.11	100.0	Z	139.0	20.0
0.062576	---	31.23	111.67	80.44	100.0	Z	139.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

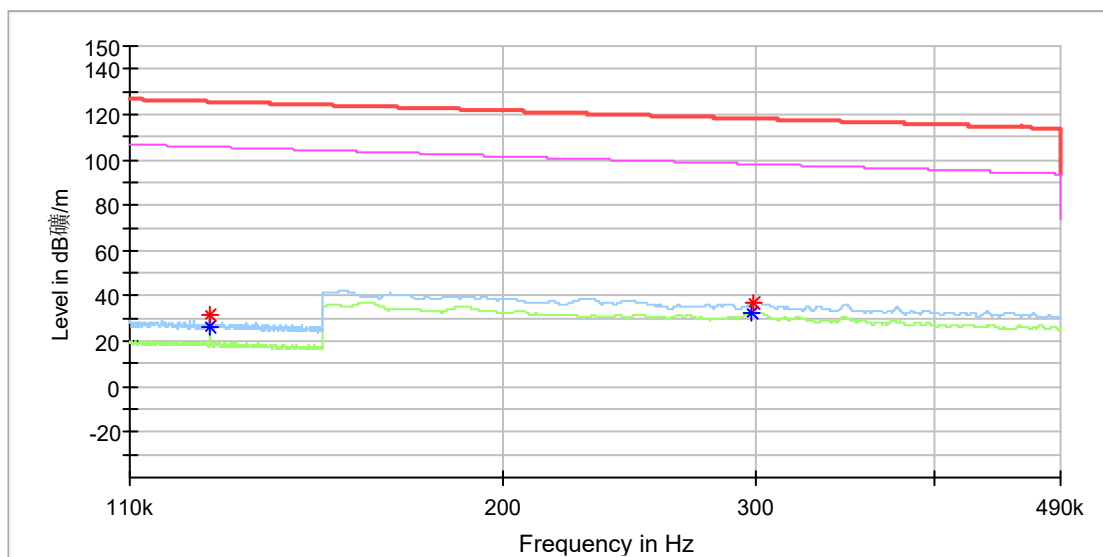


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125114	31.89	---	125.65	93.76	100.0	X	300.0	20.0
0.125114	---	26.68	105.65	78.97	100.0	X	300.0	20.0
0.298700	---	32.67	98.10	65.43	100.0	X	60.0	20.0
0.299250	37.18	---	118.08	80.91	100.0	X	60.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

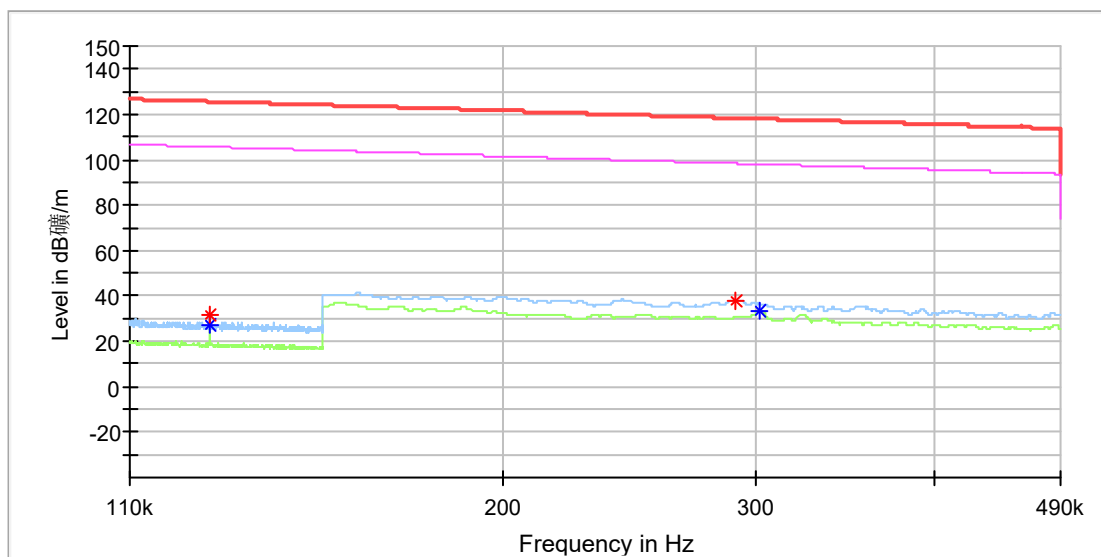


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125143	31.41	---	125.65	94.23	100.0	Y	1.0	20.0
0.125143	---	26.72	105.65	78.93	100.0	Y	1.0	20.0
0.290650	37.83	---	118.33	80.50	100.0	Y	183.0	20.0
0.302700	---	33.69	97.98	64.29	100.0	Y	69.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

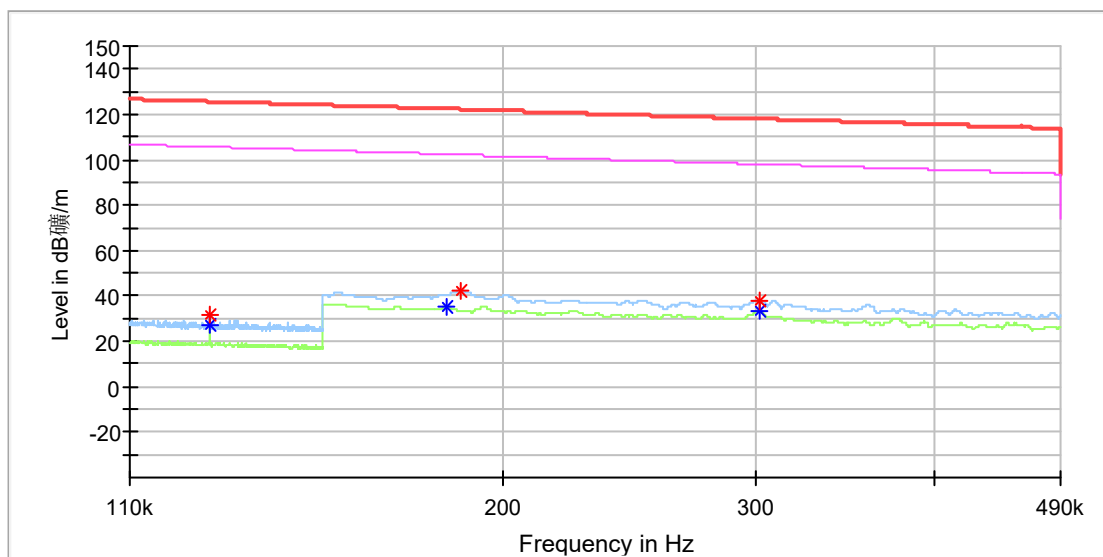


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125143	---	27.16	105.65	78.49	100.0	Z	292.0	20.0
0.125172	31.42	---	125.65	94.23	100.0	Z	140.0	20.0
0.183200	---	34.98	102.34	67.36	100.0	Z	192.0	20.0
0.187300	41.94	---	122.15	80.21	100.0	Z	57.0	20.0
0.301950	---	33.28	98.00	64.72	100.0	Z	3.0	20.0
0.302700	37.79	---	117.98	80.19	100.0	Z	3.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

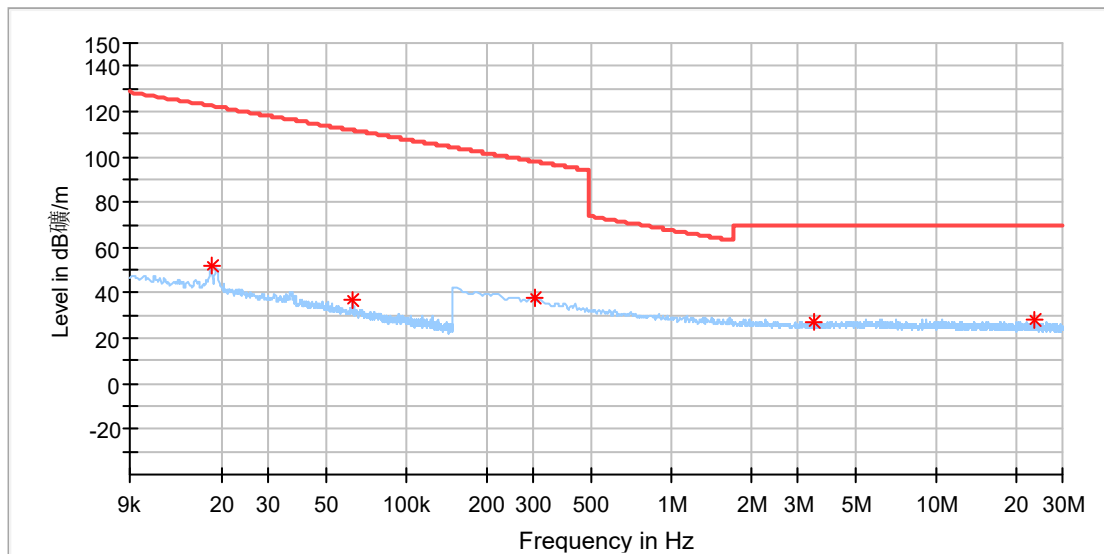

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018266	51.72	122.36	70.63	100.0	X	156.0	20.1
0.062580	36.69	111.67	74.97	100.0	X	183.0	20.1
0.303640	37.96	97.95	59.99	100.0	X	197.0	20.1
3.433500	27.41	69.50	42.09	100.0	X	297.0	20.2
23.639316	27.72	69.50	41.78	100.0	X	182.0	20.6

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

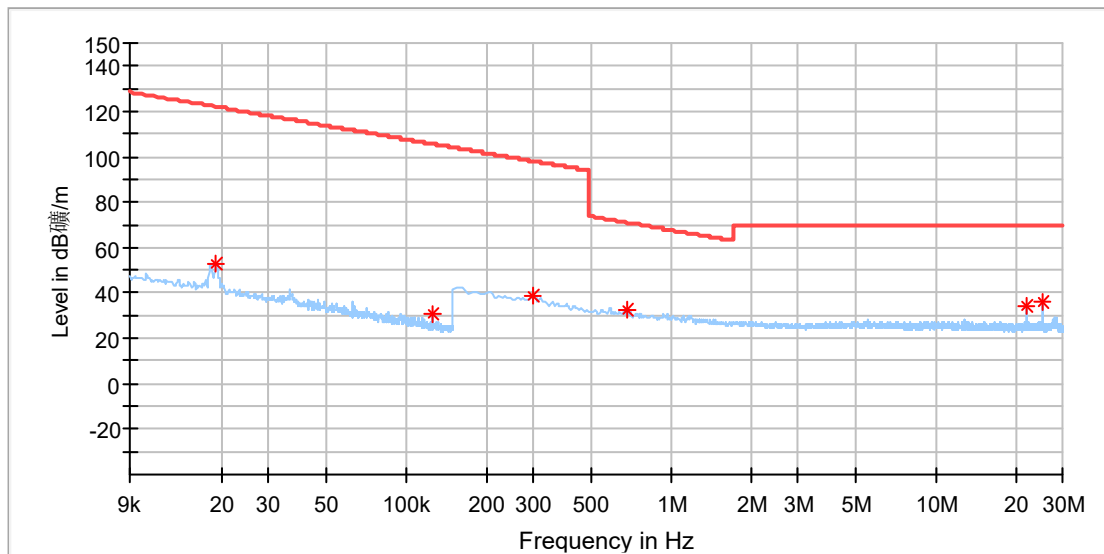

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	52.85	121.94	69.09	100.0	Y	343.0	20.1
0.124922	30.92	105.67	74.74	100.0	Y	90.0	20.1
0.299250	38.92	98.08	59.16	100.0	Y	314.0	20.1
0.676765	32.65	71.00	38.35	100.0	Y	16.0	20.1
21.879044	34.24	69.50	35.26	100.0	Y	257.0	20.6
25.000125	36.10	69.50	33.40	100.0	Y	181.0	20.7

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No./Sample No.:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

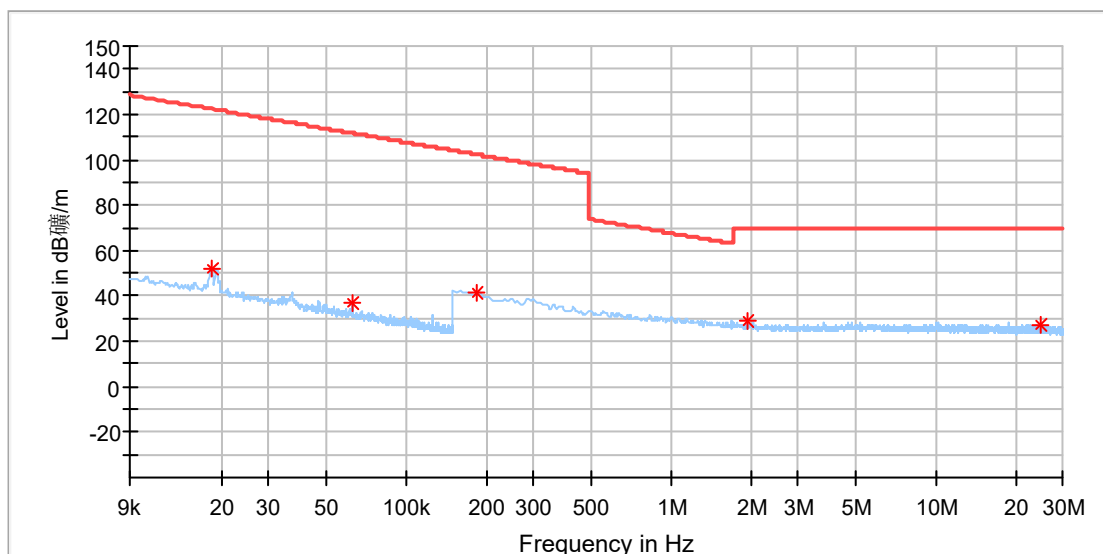

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018266	52.14	122.36	70.22	100.0	Z	4.0	20.1
0.062580	36.66	111.67	75.01	100.0	Z	216.0	20.1
0.185118	41.45	102.25	60.80	100.0	Z	233.0	20.1
1.927831	28.71	69.50	40.79	100.0	Z	128.0	20.2
24.578713	27.40	69.50	42.10	100.0	Z	315.0	20.6

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

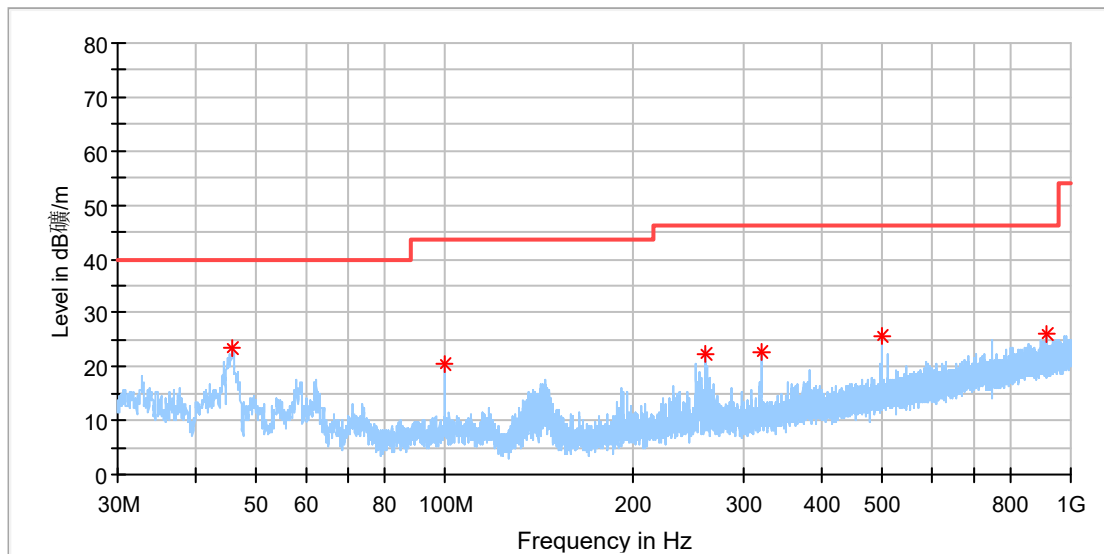

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.855769	23.45	40.00	16.55	100.0	H	1.0	-19.0
99.989231	20.44	43.50	23.06	100.0	H	60.0	-19.3
261.009231	22.44	46.00	23.56	100.0	H	69.0	-17.4
319.843462	22.63	46.00	23.37	100.0	H	189.0	-16.1
500.002308	25.62	46.00	20.38	100.0	H	311.0	-12.2
916.095000	26.13	46.00	19.87	100.0	H	35.0	-5.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Standby
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

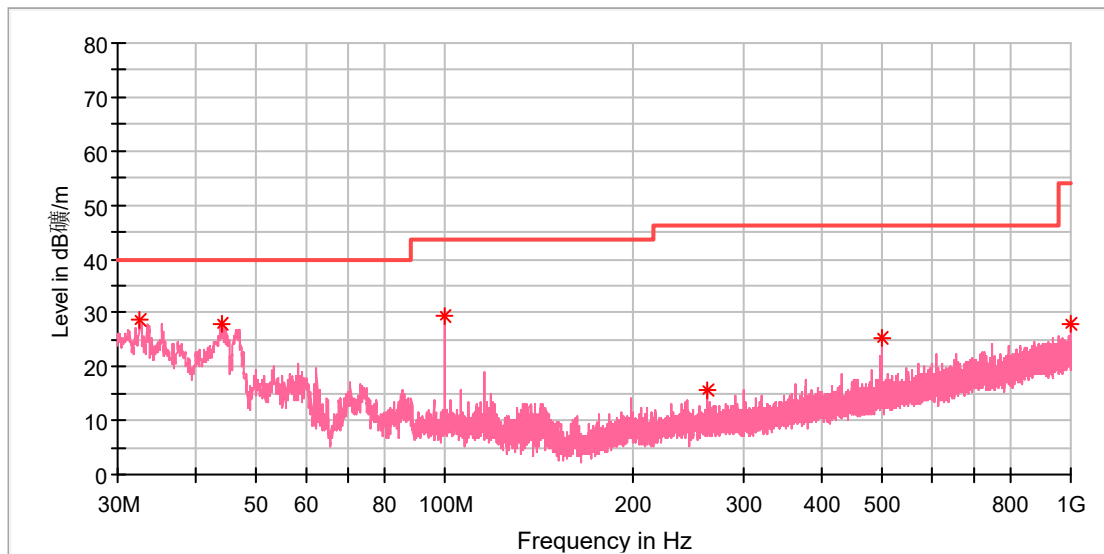

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
32.611539	28.54	40.00	11.46	100.0	V	140.0	-22.9
43.990385	27.76	40.00	12.24	100.0	V	63.0	-19.3
99.989231	29.49	43.50	14.01	100.0	V	9.0	-19.3
262.538846	15.58	46.00	30.42	100.0	V	9.0	-17.4
500.002308	25.41	46.00	20.59	100.0	V	148.0	-12.2
1000.000000	28.05	54.00	25.95	100.0	V	18.0	-4.0


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Operating mode 1: 110.5-205kHz

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

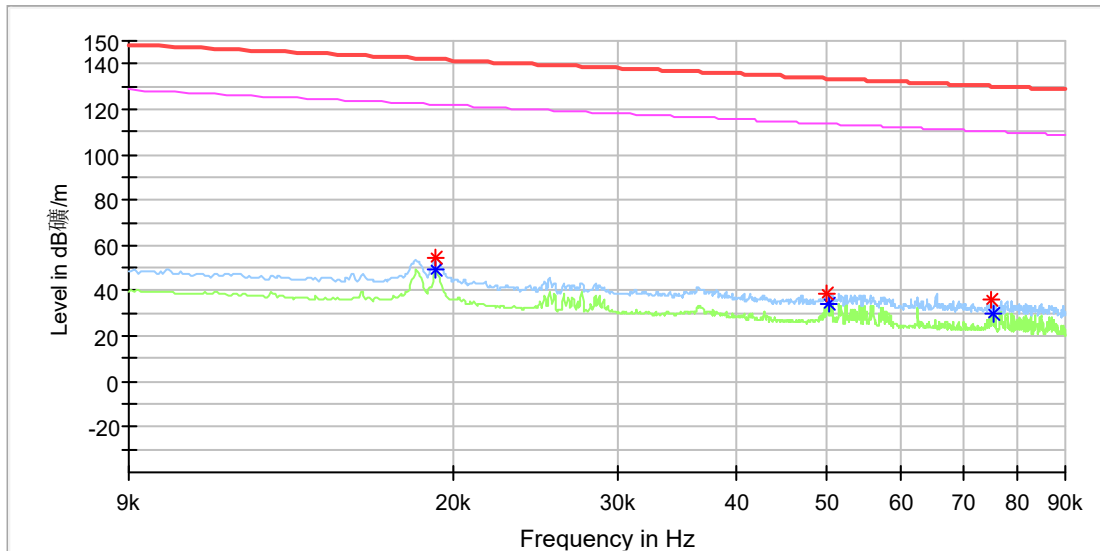


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	54.27	---	141.93	87.66	100.0	X	318.0	20.0
0.019183	---	48.91	121.93	73.02	100.0	X	318.0	20.0
0.050079	38.91	---	133.60	94.69	100.0	X	187.0	20.0
0.050368	---	34.59	113.55	78.96	100.0	X	193.0	20.0
0.075131	35.74	---	130.08	94.34	100.0	X	174.0	20.0
0.075189	---	29.67	110.07	80.41	100.0	X	174.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

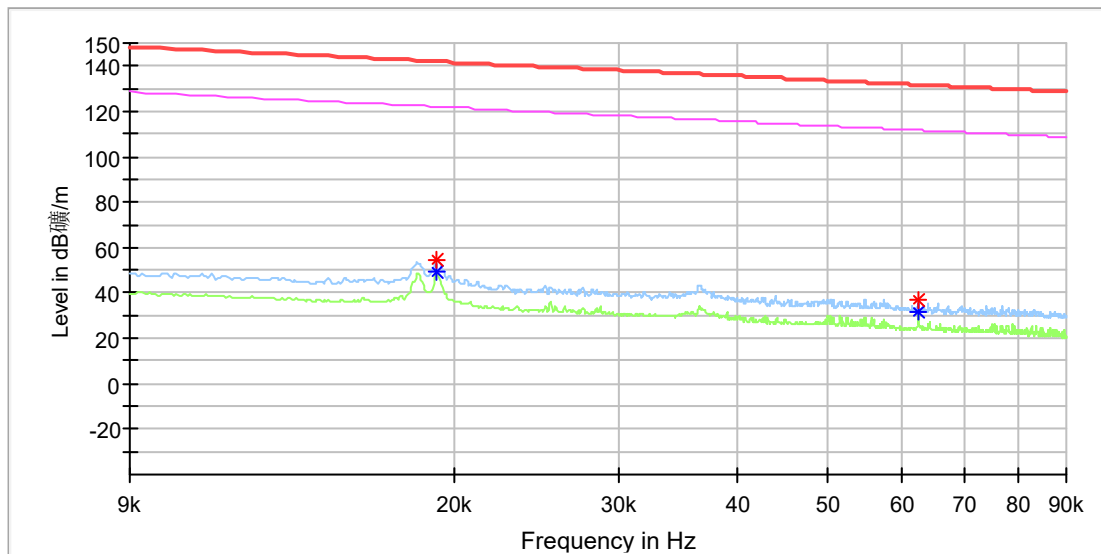


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	54.33	---	141.93	87.60	100.0	Y	292.0	20.0
0.019183	---	48.86	121.93	73.07	100.0	Y	292.0	20.0
0.062518	36.83	---	131.67	94.84	100.0	Y	130.0	20.0
0.062518	---	31.81	111.67	79.86	100.0	Y	130.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

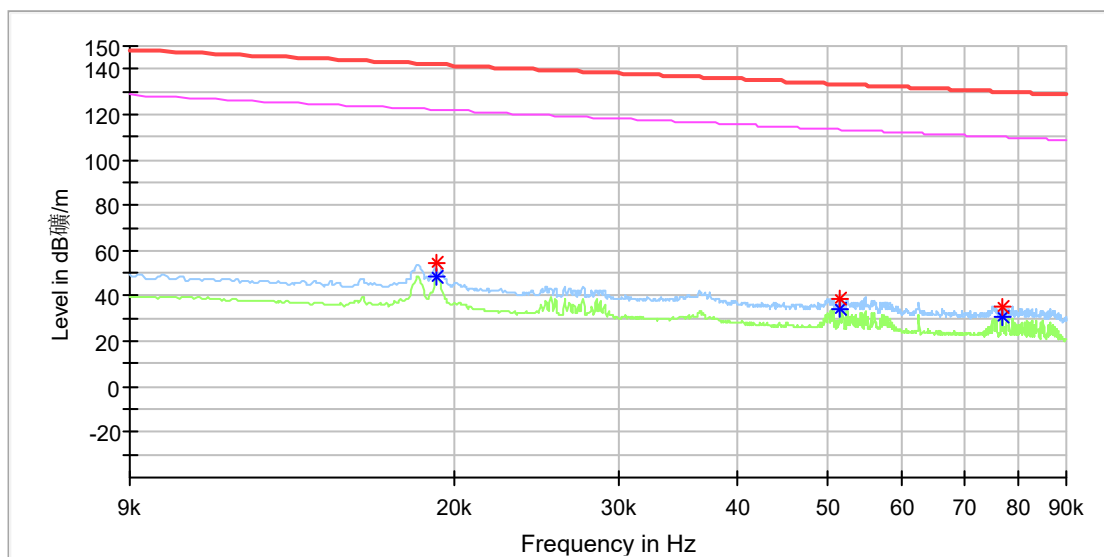


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	54.59	---	141.93	87.34	100.0	Z	201.0	20.0
0.019183	---	48.68	121.93	73.25	100.0	Z	201.0	20.0
0.051583	38.88	---	133.34	94.46	100.0	Z	281.0	20.0
0.051583	---	34.01	113.34	79.34	100.0	Z	281.0	20.0
0.076982	35.29	---	129.87	94.58	100.0	Z	201.0	20.0
0.076982	---	30.83	109.87	79.04	100.0	Z	201.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

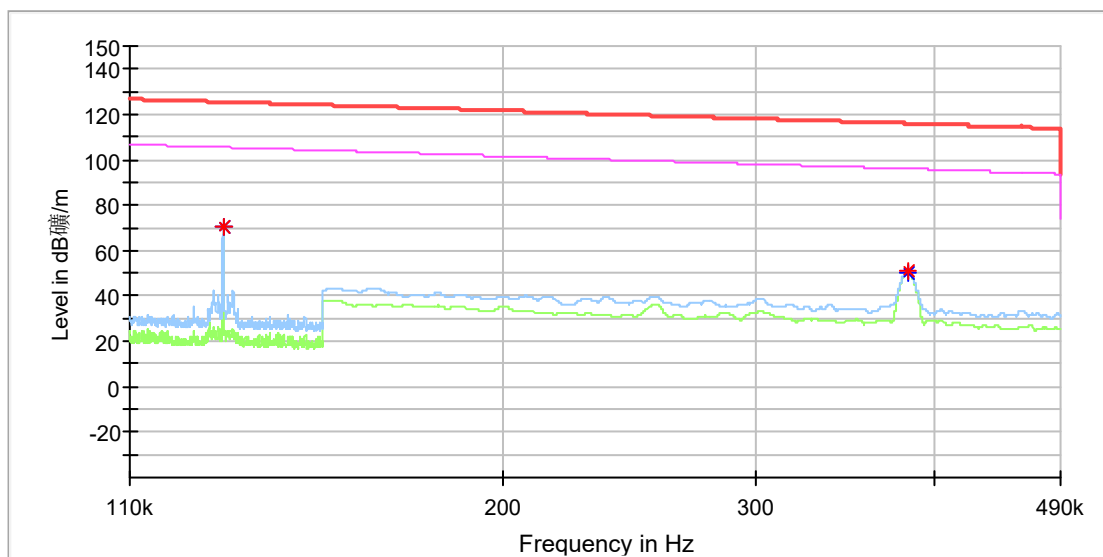


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127857	70.55	---	125.46	54.91	100.0	X	282.0	20.0
0.127857	---	70.09	105.46	35.38	100.0	X	282.0	20.0
0.383550	---	50.42	95.93	45.51	100.0	X	310.0	20.0
0.383600	50.81	---	115.93	65.11	100.0	X	310.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

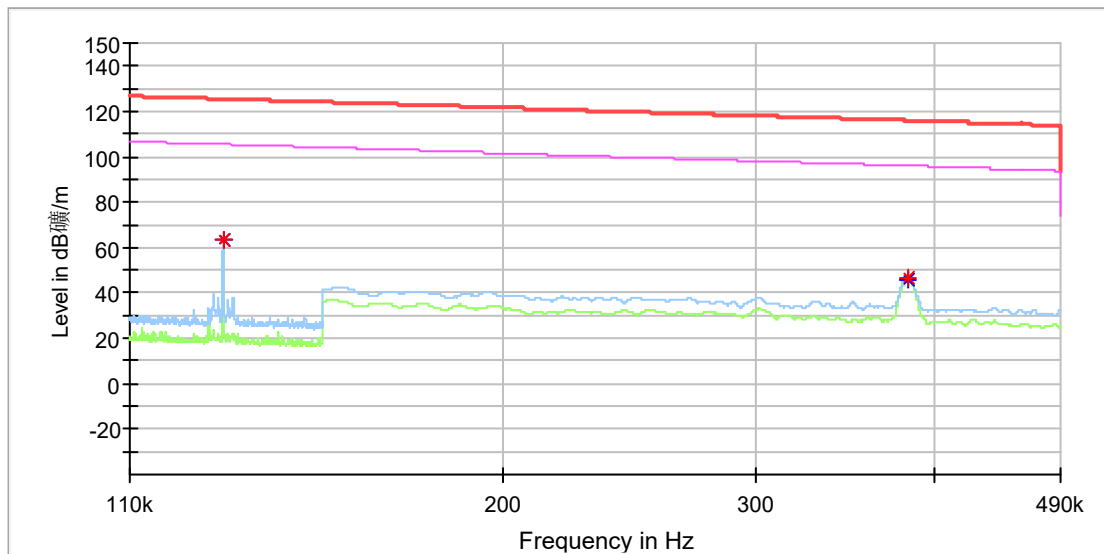


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127857	63.73	---	125.46	61.74	100.0	Y	197.0	20.0
0.127857	---	63.26	105.46	42.21	100.0	Y	197.0	20.0
0.383400	47.04	---	115.93	68.89	100.0	Y	48.0	20.0
0.383600	---	45.92	95.93	50.01	100.0	Y	48.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

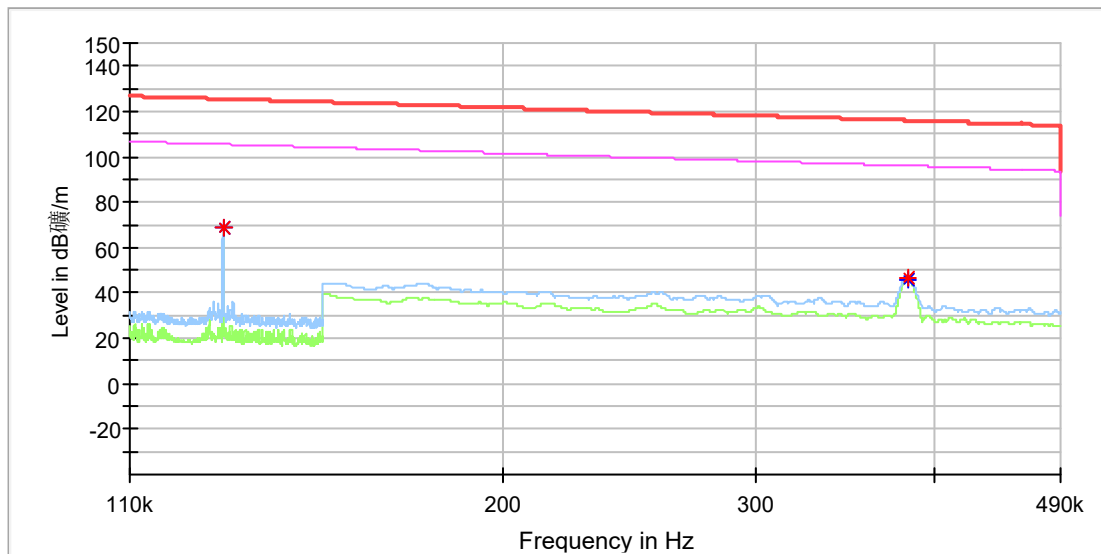


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127857	68.86	---	125.46	56.60	100.0	Z	302.0	20.0
0.127857	---	68.56	105.46	36.90	100.0	Z	302.0	20.0
0.383400	46.66	---	115.93	69.27	100.0	Z	317.0	20.0
0.383550	---	46.05	95.93	49.87	100.0	Z	317.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

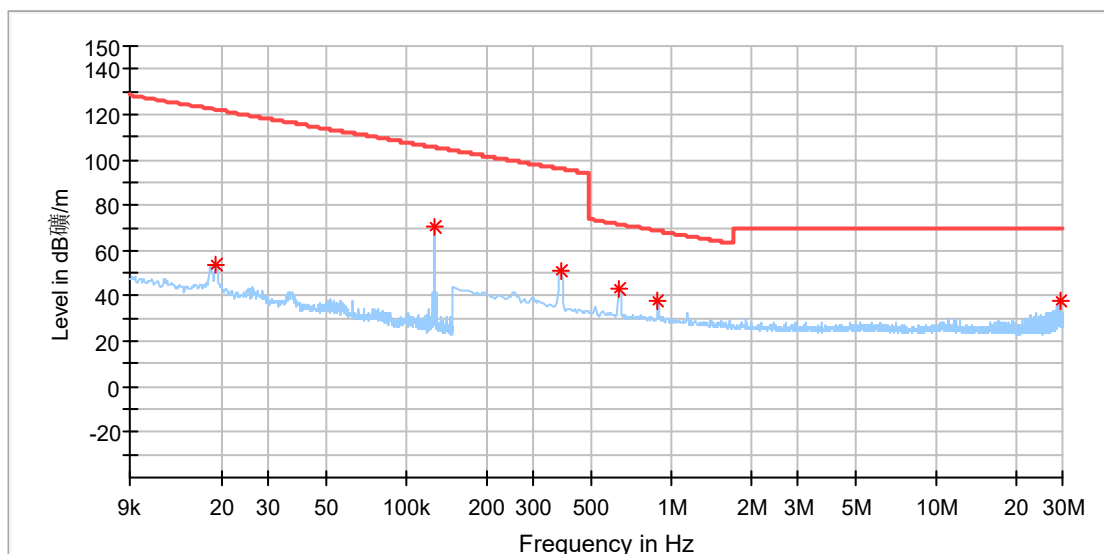

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	53.75	121.94	68.18	100.0	X	11.0	20.1
0.127843	70.19	105.46	35.28	100.0	X	289.0	20.1
0.382655	51.15	95.95	44.80	100.0	X	306.0	20.1
0.637258	42.82	71.52	28.70	100.0	X	342.0	20.1
0.891860	37.93	68.61	30.69	100.0	X	317.0	20.1
29.280088	37.60	69.50	31.90	100.0	X	191.0	20.7

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

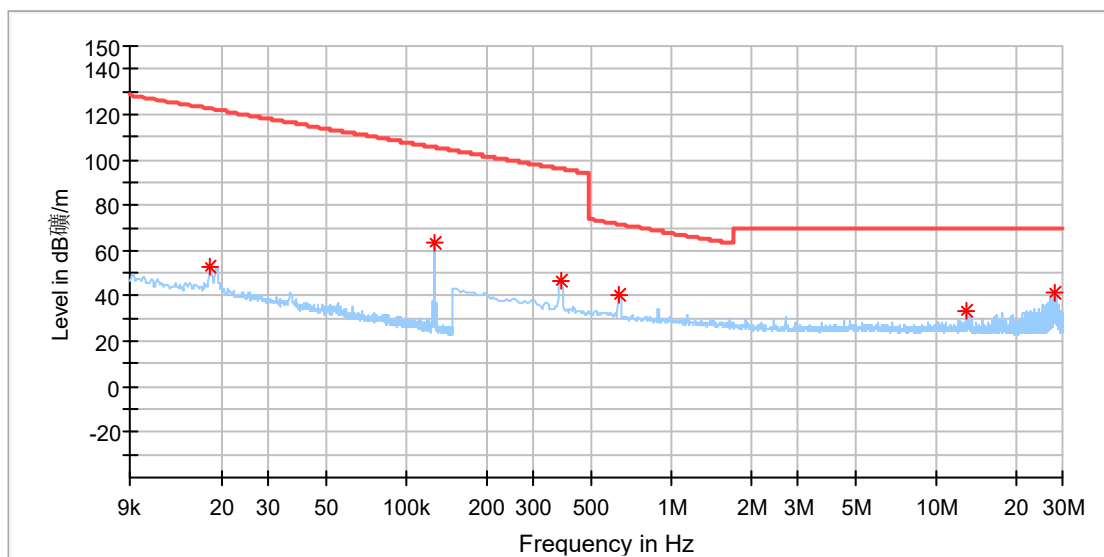

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018165	52.70	122.40	69.70	100.0	Y	284.0	20.1
0.127843	63.45	105.46	42.01	100.0	Y	221.0	20.1
0.382655	46.59	95.95	49.36	100.0	Y	36.0	20.1
0.637258	40.10	71.52	31.43	100.0	Y	76.0	20.1
12.910875	33.65	69.50	35.85	100.0	Y	205.0	20.5
27.870993	41.45	69.50	28.05	100.0	Y	283.0	20.7

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

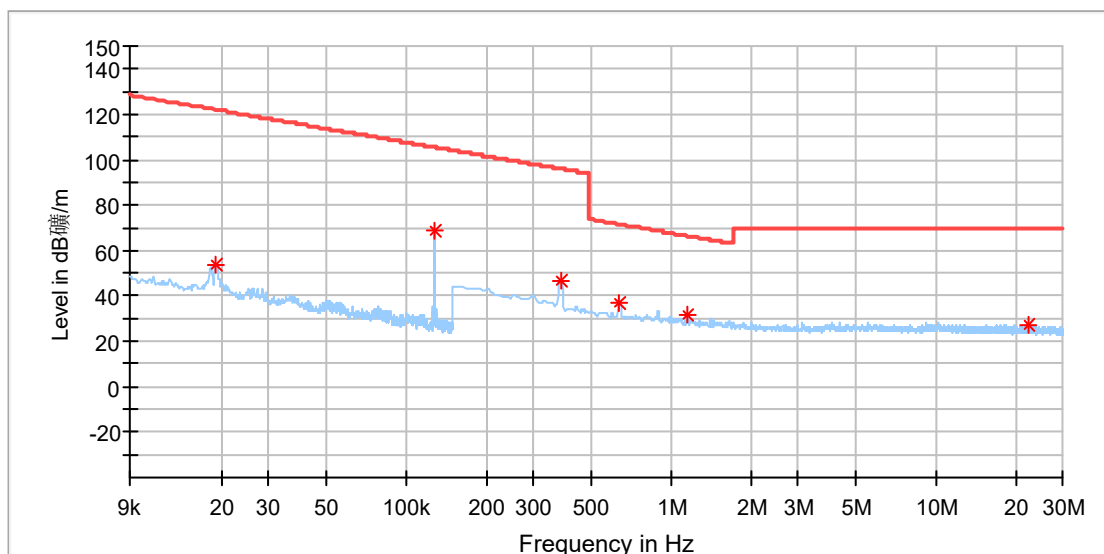

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	54.10	121.94	67.84	100.0	Z	143.0	20.1
0.127843	68.91	105.46	36.55	100.0	Z	299.0	20.1
0.382655	47.00	95.95	48.95	100.0	Z	309.0	20.1
0.637258	37.12	71.52	34.40	100.0	Z	345.0	20.1
1.150853	31.88	66.40	34.52	100.0	Z	306.0	20.1
22.458485	27.46	69.50	42.04	100.0	Z	327.0	20.6

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

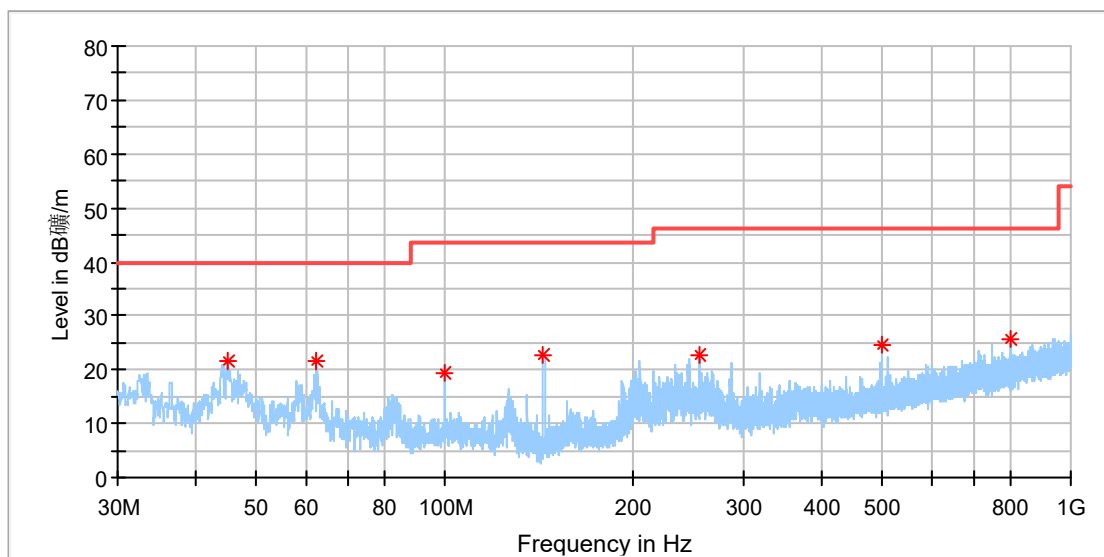

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.997692	21.60	40.00	18.40	100.0	H	299.0	-19.2
62.495000	21.63	40.00	18.37	100.0	H	224.0	-19.9
100.026539	19.24	43.50	24.26	100.0	H	93.0	-19.3
144.012308	22.64	43.50	20.86	100.0	H	102.0	-22.6
255.823462	22.55	46.00	23.45	100.0	H	134.0	-17.6
500.002308	24.44	46.00	21.56	100.0	H	18.0	-12.2
800.030769	25.54	46.00	20.46	100.0	H	76.0	-6.8

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

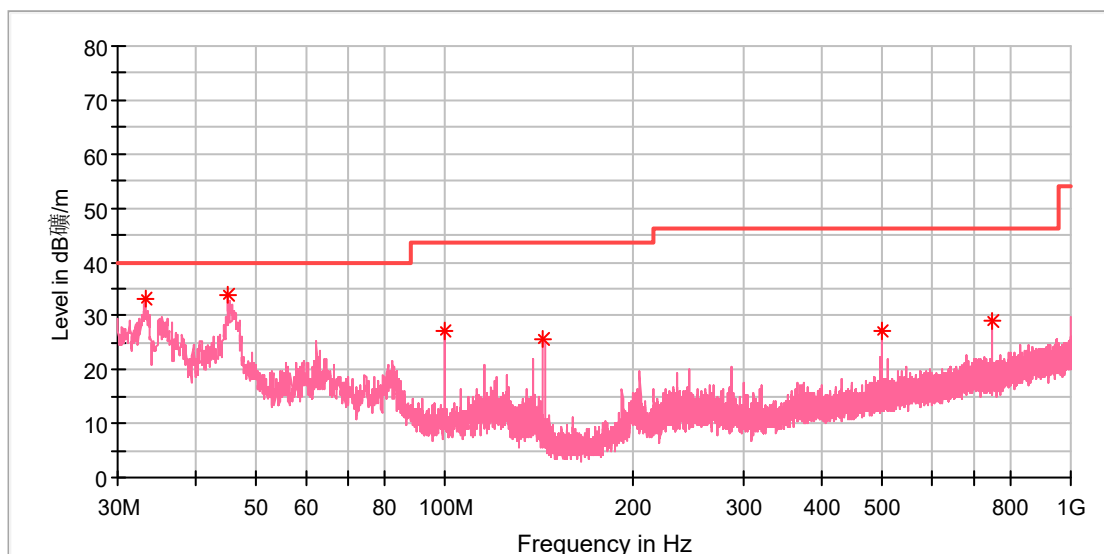

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.171154	33.01	40.00	6.99	100.0	V	334.0	-22.8
45.035000	33.92	40.00	6.08	100.0	V	236.0	-19.2
99.989231	27.21	43.50	16.29	100.0	V	126.0	-19.3
144.012308	25.73	43.50	17.77	100.0	V	126.0	-22.6
500.002308	27.23	46.00	18.77	100.0	V	126.0	-12.2
750.038462	29.12	46.00	16.88	100.0	V	28.0	-7.6


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Operating mode 2: 360kHz

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

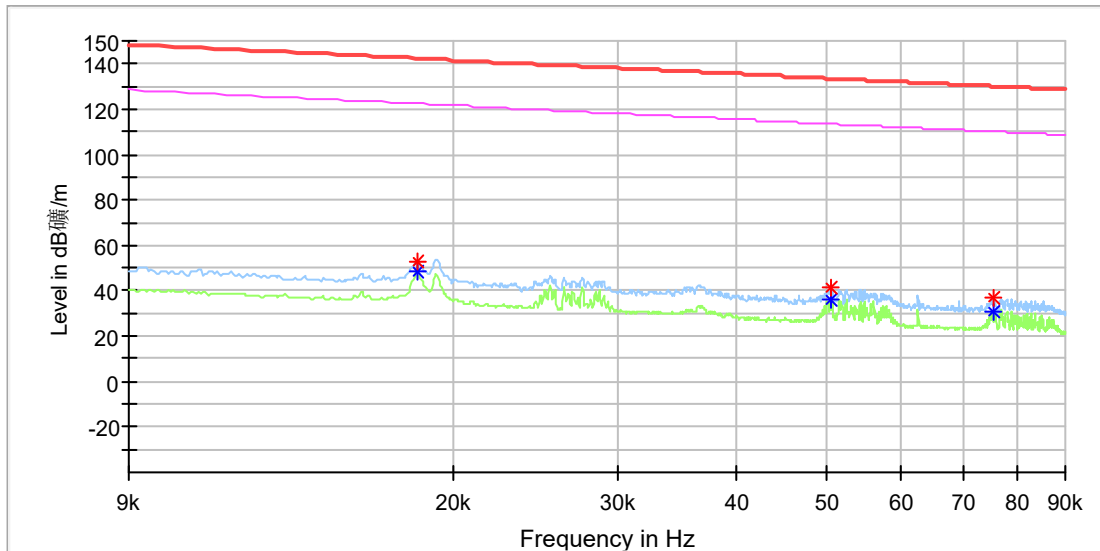


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	52.96	---	142.33	89.37	100.0	X	6.0	20.0
0.018315	---	48.17	122.33	74.16	100.0	X	6.0	20.0
0.050426	---	36.24	113.54	77.30	100.0	X	218.0	20.0
0.050484	40.90	---	133.53	92.63	100.0	X	201.0	20.0
0.075478	36.61	---	130.04	93.43	100.0	X	195.0	20.0
0.075478	---	30.68	110.04	79.36	100.0	X	195.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

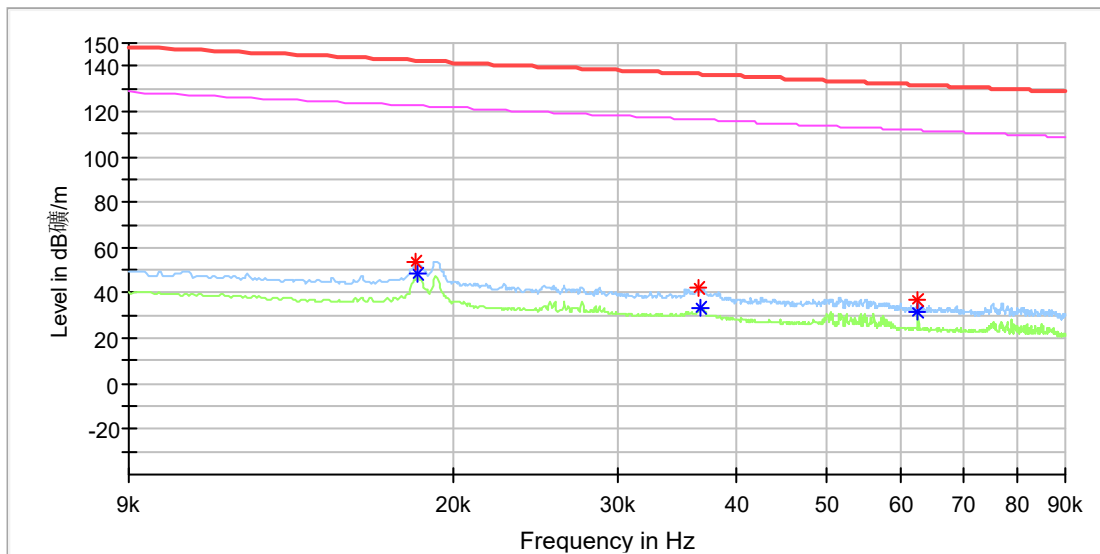


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018257	53.41	---	142.36	88.95	100.0	Y	270.0	20.0
0.018315	---	48.59	122.33	73.74	100.0	Y	270.0	20.0
0.036424	42.61	---	136.36	93.76	100.0	Y	175.0	20.0
0.036656	---	33.73	116.31	82.58	100.0	Y	101.0	20.0
0.062576	36.91	---	131.67	94.75	100.0	Y	175.0	20.0
0.062576	---	31.46	111.67	80.21	100.0	Y	175.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

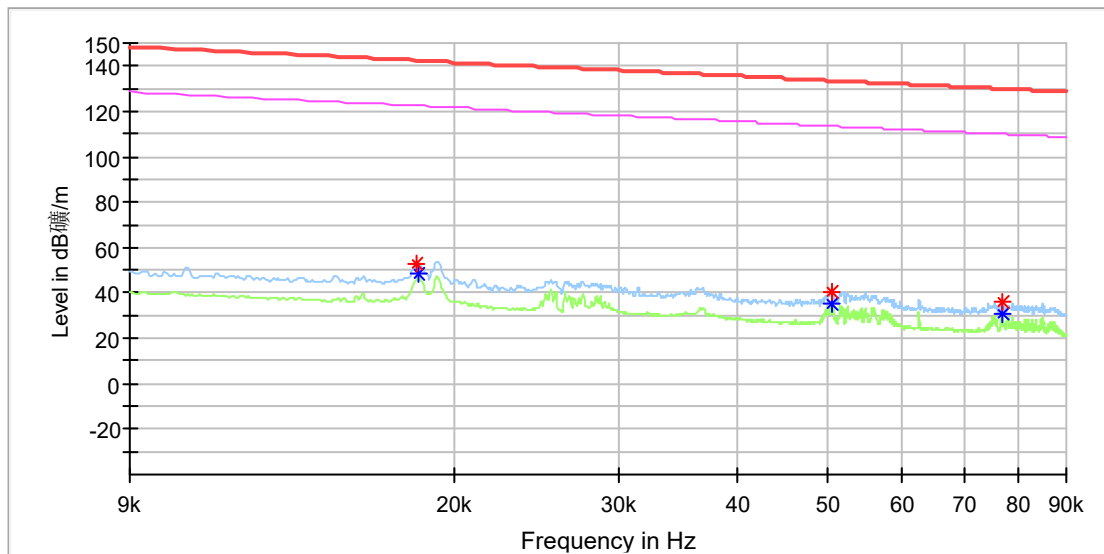


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018257	52.79	---	142.36	89.57	100.0	Z	231.0	20.0
0.018315	---	48.11	122.33	74.22	100.0	Z	231.0	20.0
0.050426	40.45	---	133.54	93.09	100.0	Z	231.0	20.0
0.050426	---	35.26	113.54	78.28	100.0	Z	231.0	20.0
0.076982	35.60	---	129.87	94.27	100.0	Z	189.0	20.0
0.076982	---	30.26	109.87	79.61	100.0	Z	189.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

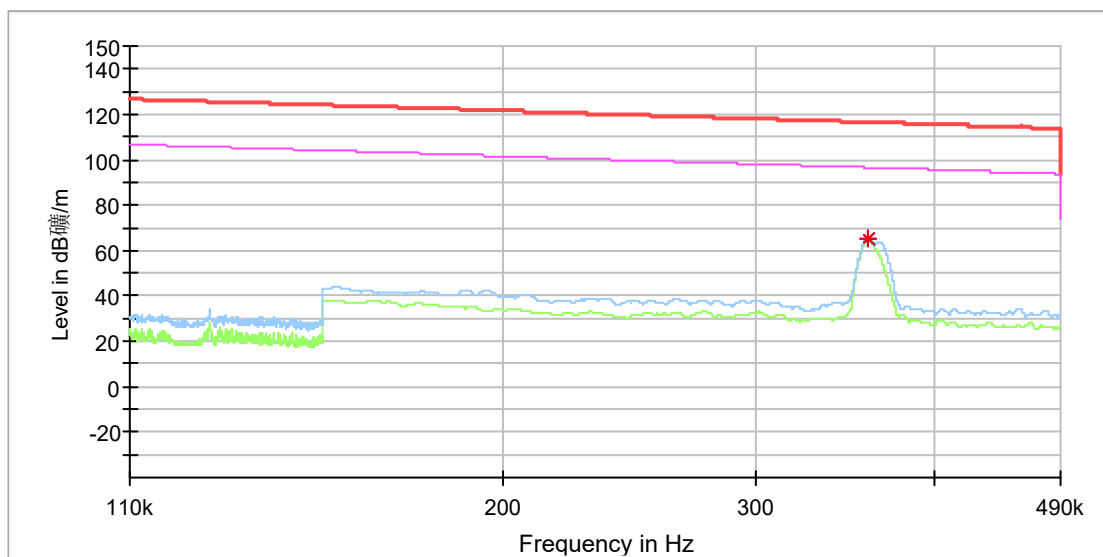


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.359950	65.33	---	116.48	51.14	100.0	X	294.0	20.0
0.360050	---	64.79	96.48	31.68	100.0	X	294.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

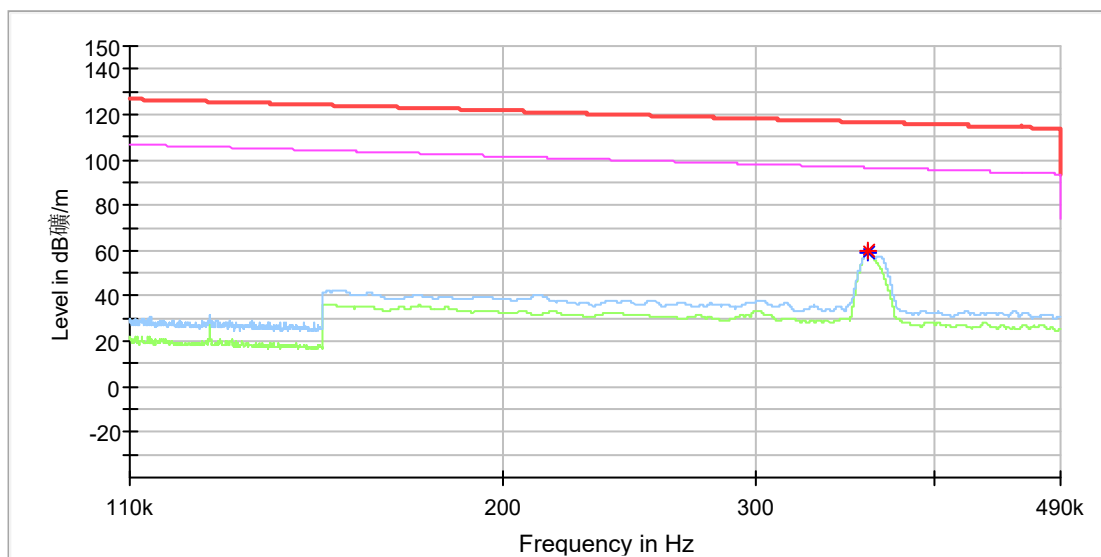


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.360000	59.66	---	116.48	56.82	100.0	Y	46.0	20.0
0.360000	---	59.21	96.48	37.26	100.0	Y	46.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No./Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

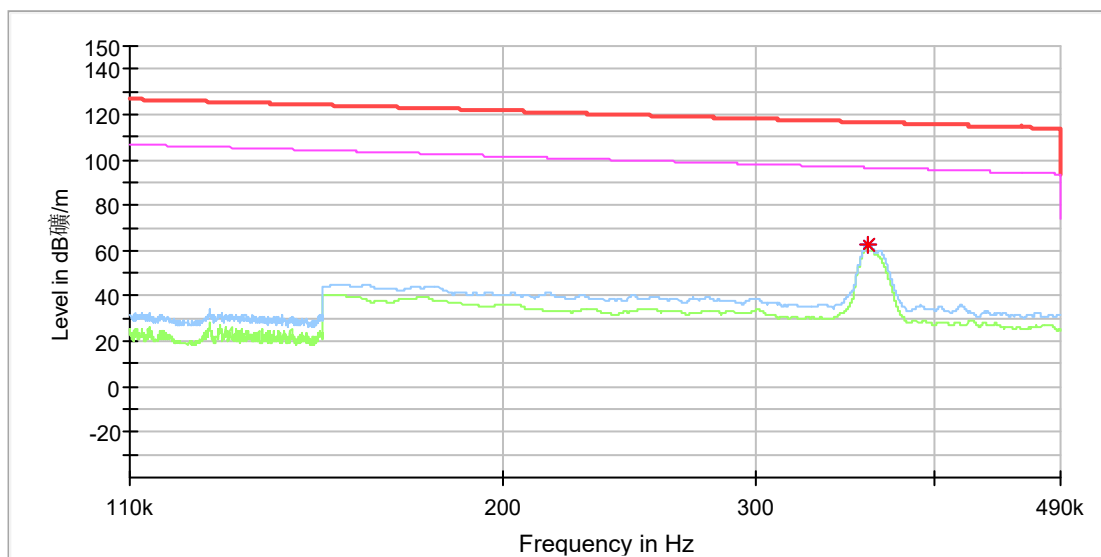


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.359950	62.43	---	116.48	54.05	100.0	Z	311.0	20.0
0.360000	---	62.13	96.48	34.35	100.0	Z	311.0	20.0

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

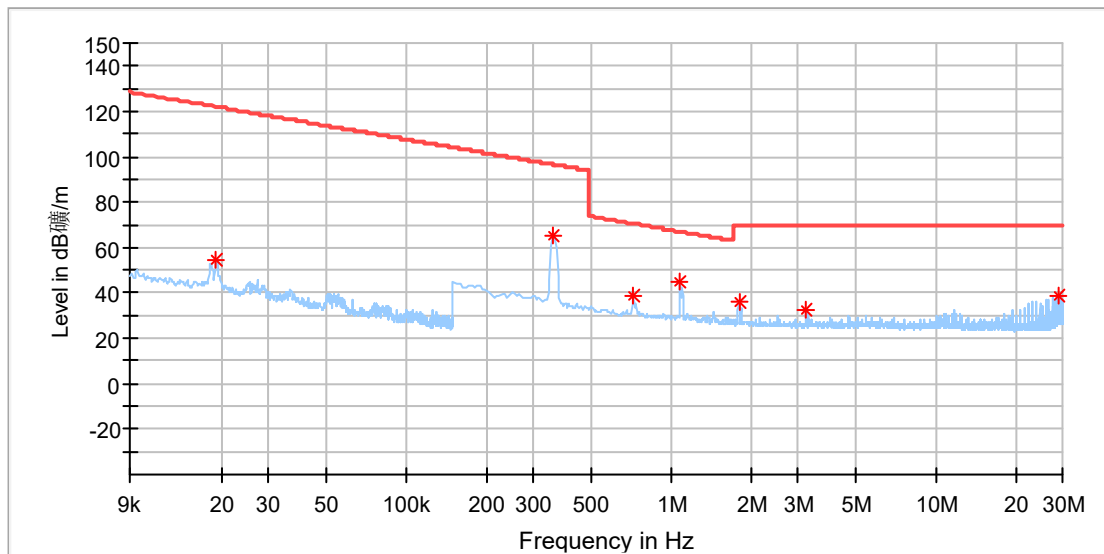

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	54.21	121.94	67.72	100.0	X	138.0	20.1
0.356316	65.57	96.57	30.99	100.0	X	305.0	20.1
0.716272	38.61	70.51	31.90	100.0	X	10.0	20.1
1.076228	44.56	66.99	22.43	100.0	X	326.0	20.1
1.796140	36.43	69.50	33.07	100.0	X	170.0	20.2
3.240353	32.78	69.50	36.72	100.0	X	113.0	20.2
28.801610	38.91	69.50	30.59	100.0	X	156.0	20.7

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

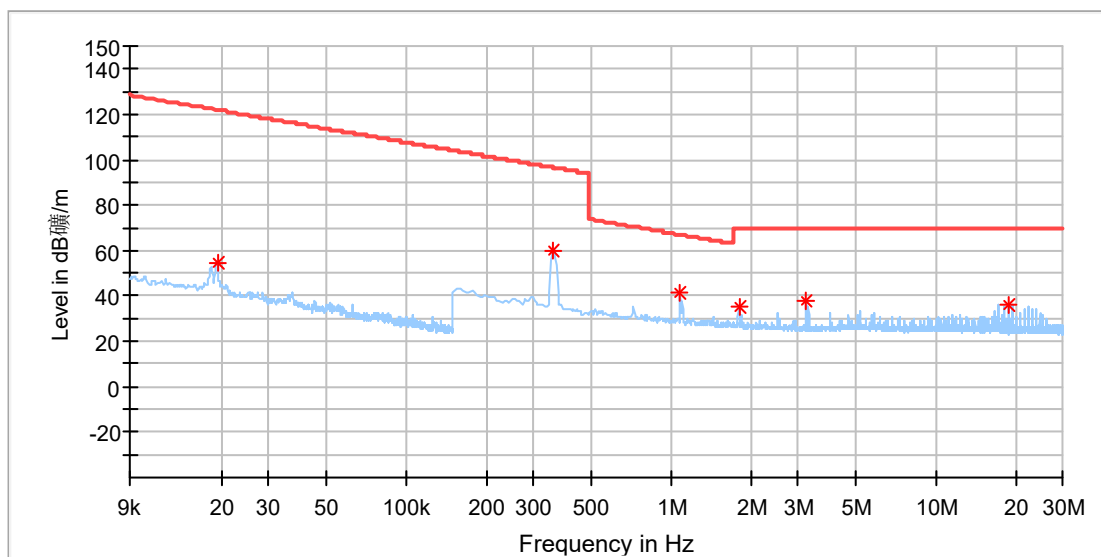

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019273	54.14	121.89	67.75	100.0	Y	69.0	20.1
0.356316	59.84	96.57	36.73	100.0	Y	27.0	20.1
1.080618	40.89	66.95	26.06	100.0	Y	41.0	20.1
1.796140	34.71	69.50	34.79	100.0	Y	88.0	20.2
3.235963	38.09	69.50	31.41	100.0	Y	45.0	20.2
18.687728	36.20	69.50	33.30	100.0	Y	56.0	20.6

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

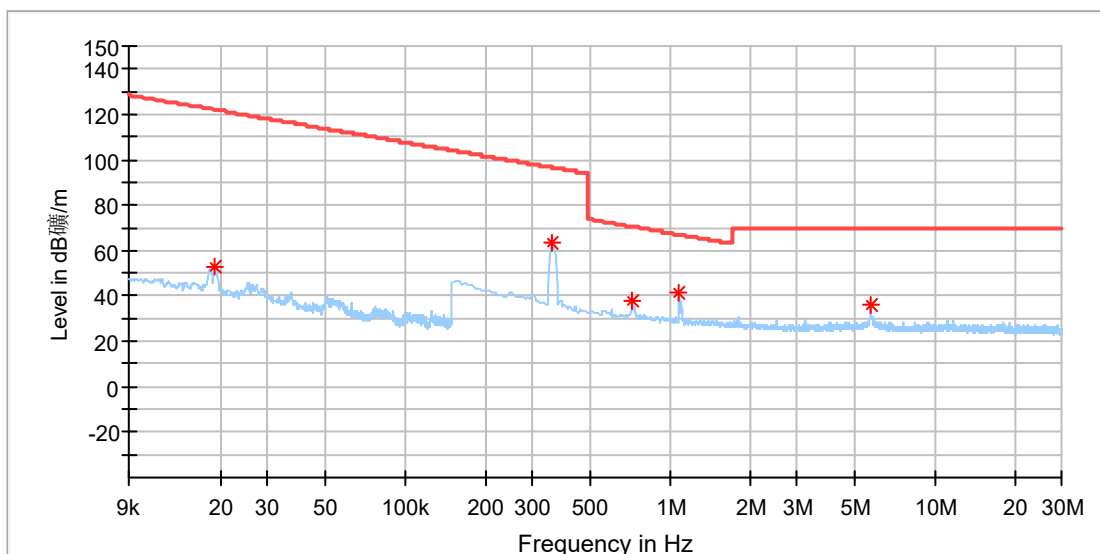

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	53.08	121.94	68.85	100.0	Z	291.0	20.1
0.356316	62.99	96.57	33.58	100.0	Z	295.0	20.1
0.720662	37.50	70.46	32.96	100.0	Z	29.0	20.1
1.076228	41.36	66.99	25.62	100.0	Z	303.0	20.1
5.720537	36.05	69.50	33.45	100.0	Z	6.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

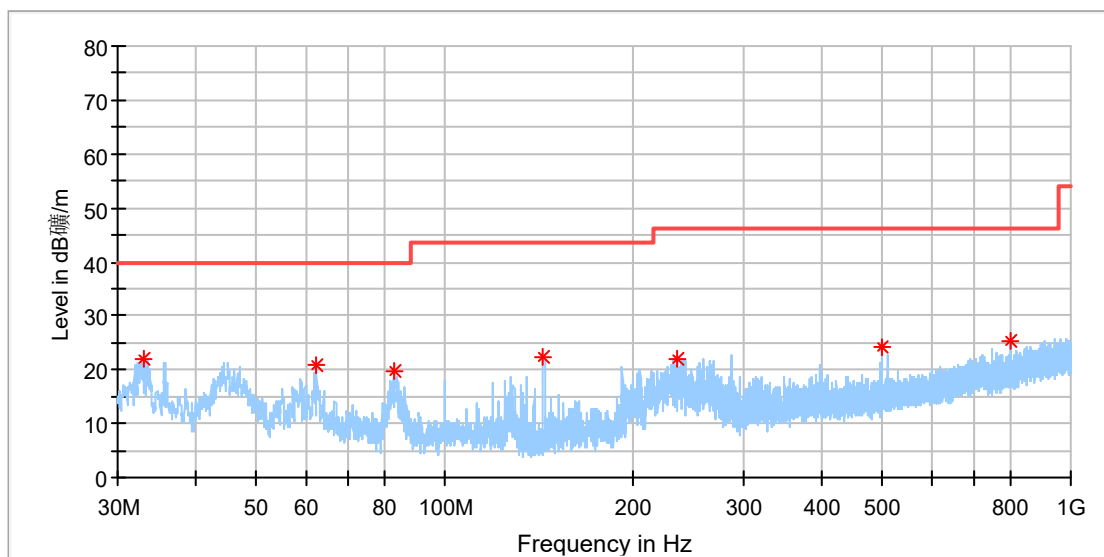

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.096539	22.08	40.00	17.92	100.0	H	247.0	-22.8
62.495000	20.86	40.00	19.14	100.0	H	0.0	-19.9
82.827692	19.66	40.00	20.34	100.0	H	1.0	-23.1
144.012308	22.21	43.50	21.29	100.0	H	126.0	-22.6
235.416154	21.95	46.00	24.05	100.0	H	62.0	-18.2
500.002308	24.08	46.00	21.92	100.0	H	229.0	-12.2
800.030769	25.21	46.00	20.79	100.0	H	298.0	-6.8

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Model:	CCNMS140
Test Mode:	Charging
Order No/Sample No:	168487434/A003733747-001
Test Voltage::	120V/60Hz
Remark:	Temp 22 Humi:52%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

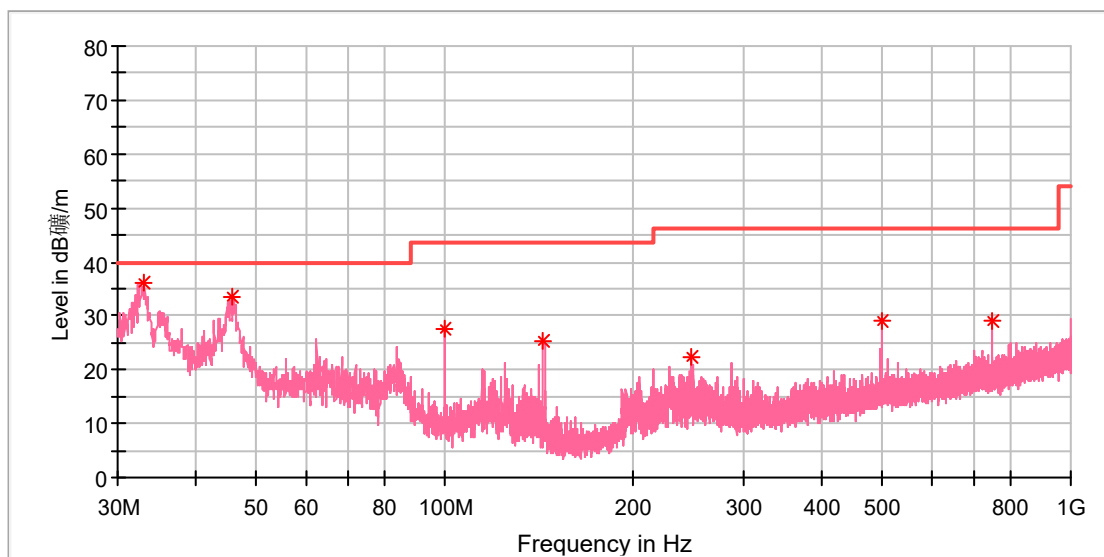

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.096539	36.23	40.00	3.77	100.0	V	152.0	-22.8
45.706539	33.47	40.00	6.53	100.0	V	243.0	-19.0
99.989231	27.53	43.50	15.97	100.0	V	286.0	-19.3
144.012308	25.14	43.50	18.36	100.0	V	152.0	-22.6
247.690385	22.26	46.00	23.74	100.0	V	0.0	-17.8
500.002308	28.90	46.00	17.10	100.0	V	218.0	-12.2
750.038462	29.19	46.00	16.81	100.0	V	347.0	-7.6


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.3: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
Order Number:	168487434(P01514699)
Model:	CCNMS140
Test Mode:	On, Type-C2+Wireless charging
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC 15B & ICES-003
Test By:/Review By:	Steve Lan / Shower Dai
Tem./Hum./Pressure:	23.4°C/51.2%/101kPa
Remark:	SR2

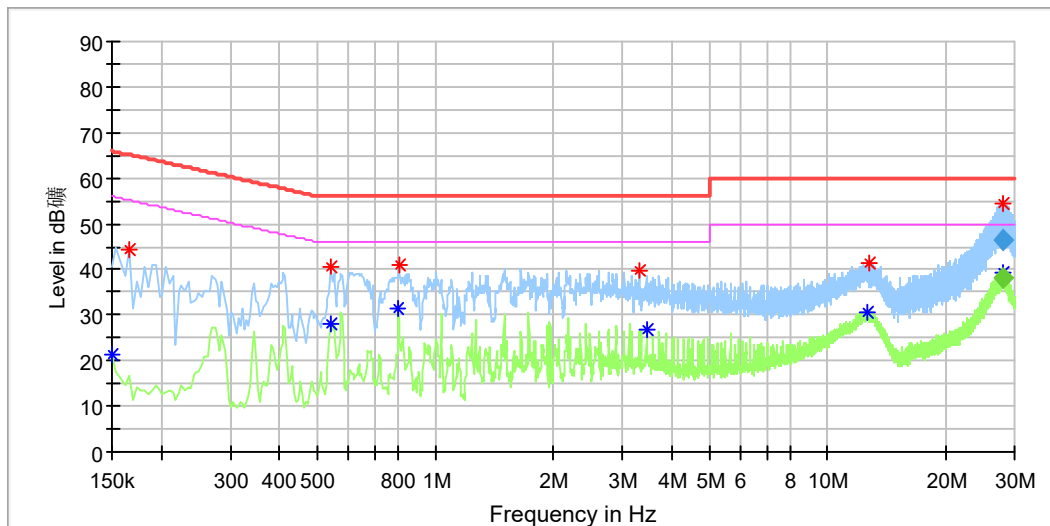

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150000	---	21.41	56.00	34.59	L1	9.9
0.166000	44.49	---	65.16	20.67	L1	9.9
0.538000	---	28.12	46.00	17.88	L1	10.0
0.538000	40.42	---	56.00	15.58	L1	10.0
0.806000	---	31.43	46.00	14.57	L1	10.0
0.810000	41.21	---	56.00	14.79	L1	10.0
3.306000	39.59	---	56.00	16.41	L1	10.2
3.446000	---	26.62	46.00	19.39	L1	10.2
12.630000	---	30.54	50.00	19.46	L1	10.4
12.826000	41.65	---	60.00	18.35	L1	10.4
27.997500	---	39.20	50.00	10.80	L1	10.4
28.086500	54.55	---	60.00	5.45	L1	10.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
27.997500	---	38.02	50.00	11.98	1000.0	9.000	L1	10.4
28.086500	46.45	---	60.00	13.55	1000.0	9.000	L1	10.4

EUT Information

EUT Name: Baseus NOMOS 5-in-1 Desktop Charger 3C+U 140W
 Order Number: 168487434(P01514699)
 Model: CCNMS140
 Test Mode: On, Type-C2+Wireless charging
 Test Voltage: AC 120V/60Hz
 Test Standard: FCC 15B & ICES-003
 Test By./Review By: Steve Lan / Shower Dai
 Tem./Hum./Pressure: 23.4°C/51.2%/101kPa
 Remark: SR2

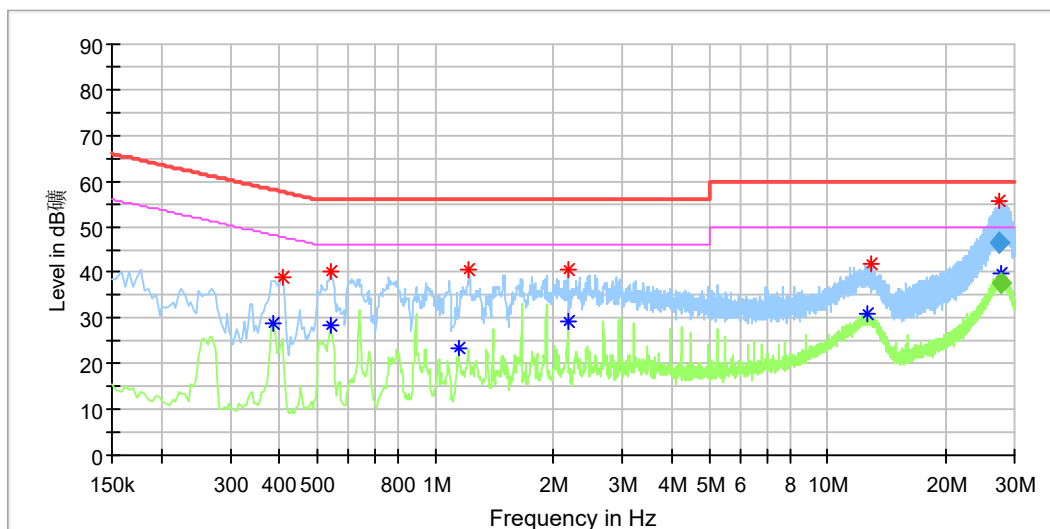

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.386000	---	28.91	48.15	19.24	N	9.8
0.406000	38.87	---	57.73	18.86	N	9.8
0.538000	---	28.31	46.00	17.69	N	9.8
0.542000	40.28	---	56.00	15.72	N	9.8
1.150000	---	23.53	46.00	22.47	N	9.8
1.222000	40.75	---	56.00	15.25	N	9.8
2.174000	---	29.50	46.00	16.50	N	9.9
2.174000	40.55	---	56.00	15.45	N	9.9
12.658000	---	31.03	50.00	18.97	N	10.1
12.974000	41.99	---	60.00	18.01	N	10.1
27.529500	55.83	---	60.00	4.17	N	10.4
27.849500	---	39.64	50.00	10.36	N	10.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
27.529500	46.40	---	60.00	13.60	1000.0	9.000	N	10.4
27.849500	---	37.63	50.00	12.37	1000.0	9.000	N	10.4