

# TEST REPORT

Product Name: WiFi LED Bulb  
FCC ID: 2AZR9-OS01006110  
Trademark: **OREIN**  
Model Number: OS01006110  
Prepared For: SYVIO TECHNOLOGY CO.,LIMITED  
Address: Room A, 8/F, Kwok Cheung Building, 635-637 Shanghai Street, Mong Kok, Hong Kong  
Manufacturer: SYVIO TECHNOLOGY CO.,LIMITED  
Address: Room A, 8/F, Kwok Cheung Building, 635-637 Shanghai Street, Mong Kok, Hong Kong  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China  
Sample Received Date: Nov. 24, 2021  
Sample tested Date: Nov. 24, 2021 to Nov. 30, 2021  
Issue Date: Dec. 2, 2021  
Report No.: CTB211202002RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

*He Xiaona*He Xiaona

Reviewed by:

*Arron Liu*Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## TABLE OF CONTENT

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	12
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 Test Result .....	14
<b>7. RADIATED SPURIOUS EMISSION</b> .....	16
7.1 Block Diagram Of Test Setup .....	16
7.2 Limit .....	16
7.3 Test procedure .....	17
7.4 Test Result .....	18
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	40
8.1 Block Diagram Of Test Setup .....	40
8.2 Limit .....	40
8.3 Test procedure .....	40
8.4 Test Result .....	41
<b>9. CONDUCTED OUTPUT POWER</b> .....	49
9.1 Block Diagram Of Test Setup .....	49
9.2 Limit .....	49
9.3 Test procedure .....	49
9.4 Test Result .....	50
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	55
10.1 Block Diagram Of Test Setup .....	55
10.2 Limit .....	55
10.3 Test procedure .....	55
10.4 Test Result .....	55
<b>11. POWER SPECTRAL DENSITY</b> .....	61
11.1 Block Diagram Of Test Setup .....	61
11.2 Limit .....	61
11.3 Test procedure .....	61



11.4 Test Result ..... 62

**12. ANTENNA REQUIREMENT ..... 67**

**13. EUT PHOTOGRAPHS ..... 68**

**14. EUT TEST SETUP PHOTOGRAPHS ..... 69**

*(Note: N/A means not applicable)*

## 1. VERSION

Report No.	Issue Date	Description	Approved
CTB211202002RFX	Dec. 2, 2021	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.



## MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

### 3. PRODUCT INFORMATION AND TEST SETUP

#### 4.1 Product Information

Model(s): OS01006110  
 Model Description: N/A  
 Wi-Fi Specification: IEEE 802.11b/g/n  
 Hardware Version: V1.0  
 Software Version: V1.0  
  
 Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel  
 IEEE 802.11n 40: 2422-2452MHz/ 7 channel  
 Max. RF output power: WiFi (2.4G) :7.706dBm  
 Type of Modulation: WiFi: DSSS, OFDM  
 Antenna installation: WiFi: PCB Antenna  
 Antenna Gain: WiFi (2.4G) : 1.0dBi  
 Ratings: AC 120V

#### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

#### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle > 98%.

#### 4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

Test mode	rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M



## 4. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY5209007 3	2020.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2020.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2020.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2020.09.27	2021.10.30
6	Signal Generator	Agilent	N5181A	MY4906092 0	2020.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY4742019 5	2020.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY5010256 7	2020.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-248 3.5MS-1154	2018101500 1	2020.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-585 0MS-1155	2018101500 1	2020.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA1 20	190821-1-1	2020.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2020.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2020.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2020.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2020.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2020.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2020.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05

19	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2020.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2020.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2020.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2020.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2020.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2020.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2020.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2020.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2020.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2020.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2020.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2020.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A 1.1	/	/	/




Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2020.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2020.09.27	2021.11.01
3	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2020.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2020.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2020.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2020.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2020.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/



## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

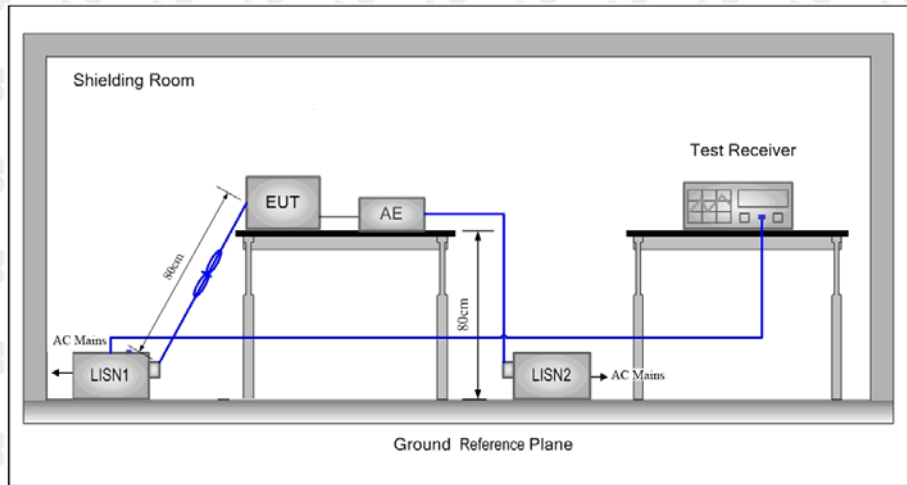

### 6.2 Limit

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference


plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

### 6.4 Test Result

Test Specification: Line  
AC 120V 60Hz

80.0 dBuV

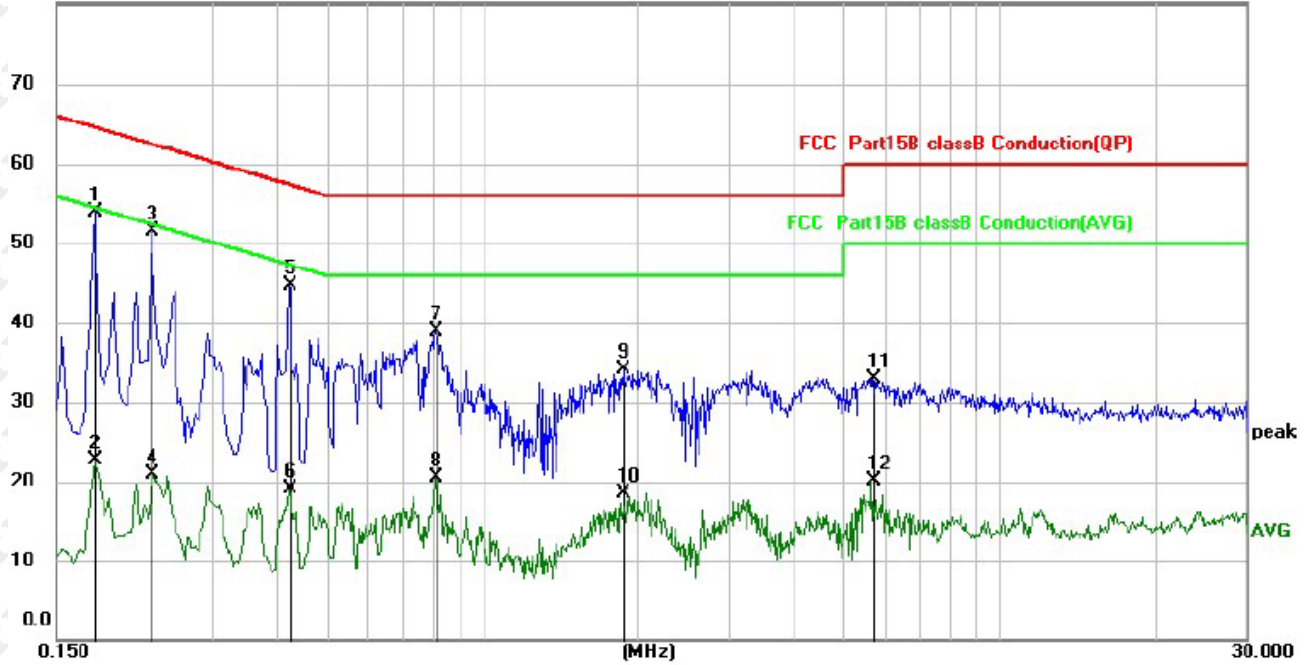


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1	*	0.1780	43.21	10.70	53.91	64.58	-10.67	QP
2		0.1780	11.96	10.70	22.66	54.58	-31.92	AVG
3		0.2300	40.90	10.67	51.57	62.45	-10.88	QP
4		0.2300	10.29	10.67	20.96	52.45	-31.49	AVG
5		0.4220	34.12	10.56	44.68	57.41	-12.73	QP
6		0.4220	8.45	10.56	19.01	47.41	-28.40	AVG
7		0.8100	28.31	10.58	38.89	56.00	-17.11	QP
8		0.8100	9.90	10.58	20.48	46.00	-25.52	AVG
9		1.8740	23.42	10.63	34.05	56.00	-21.95	QP
10		1.8740	7.82	10.63	18.45	46.00	-27.55	AVG
11		5.6860	22.27	10.67	32.94	60.00	-27.06	QP
12		5.6860	9.38	10.67	20.05	50.00	-29.95	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



Test Specification: Neutral  
AC 120V 60Hz

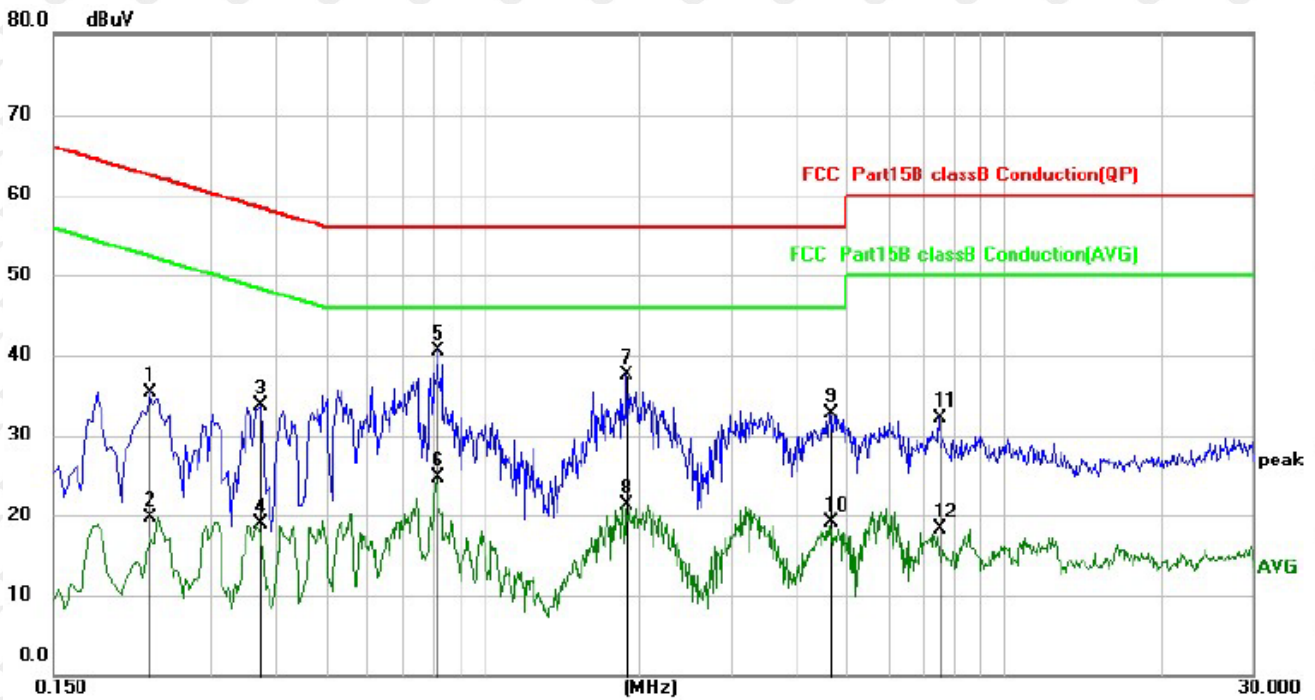

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.2300	24.68	10.67	35.35	62.45	-27.10	QP
2		0.2300	9.02	10.67	19.69	52.45	-32.76	AVG
3		0.3740	23.15	10.59	33.74	58.41	-24.67	QP
4		0.3740	8.24	10.59	18.83	48.41	-29.58	AVG
5	*	0.8180	30.02	10.58	40.60	56.00	-15.40	QP
6		0.8180	14.03	10.58	24.61	46.00	-21.39	AVG
7		1.8780	26.94	10.63	37.57	56.00	-18.43	QP
8		1.8780	10.65	10.63	21.28	46.00	-24.72	AVG
9		4.6300	22.09	10.65	32.74	56.00	-23.26	QP
10		4.6300	8.49	10.65	19.14	46.00	-26.86	AVG
11		7.5060	21.43	10.74	32.17	60.00	-27.83	QP
12		7.5060	7.58	10.74	18.32	50.00	-31.68	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

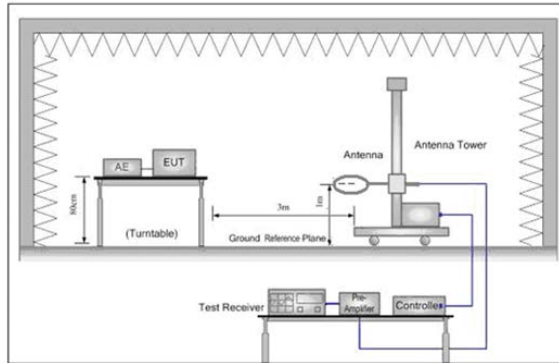


Figure 1. Below 30MHz

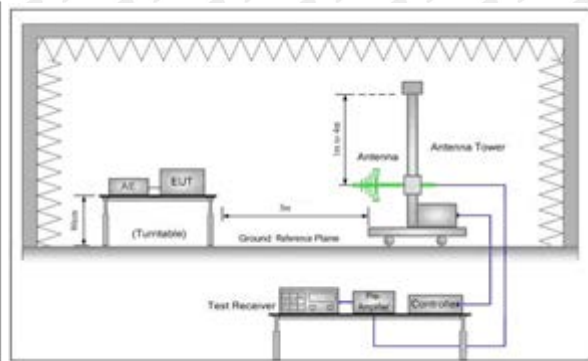


Figure 2. 30MHz to 1GHz

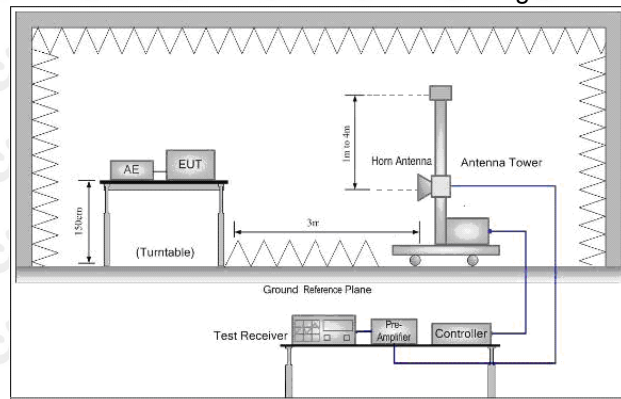


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

After pre-scanning three directions, the report recorded the worst case




### 7.4 Test Result

Below 1GHz Test Results:  
Antenna polarity: H

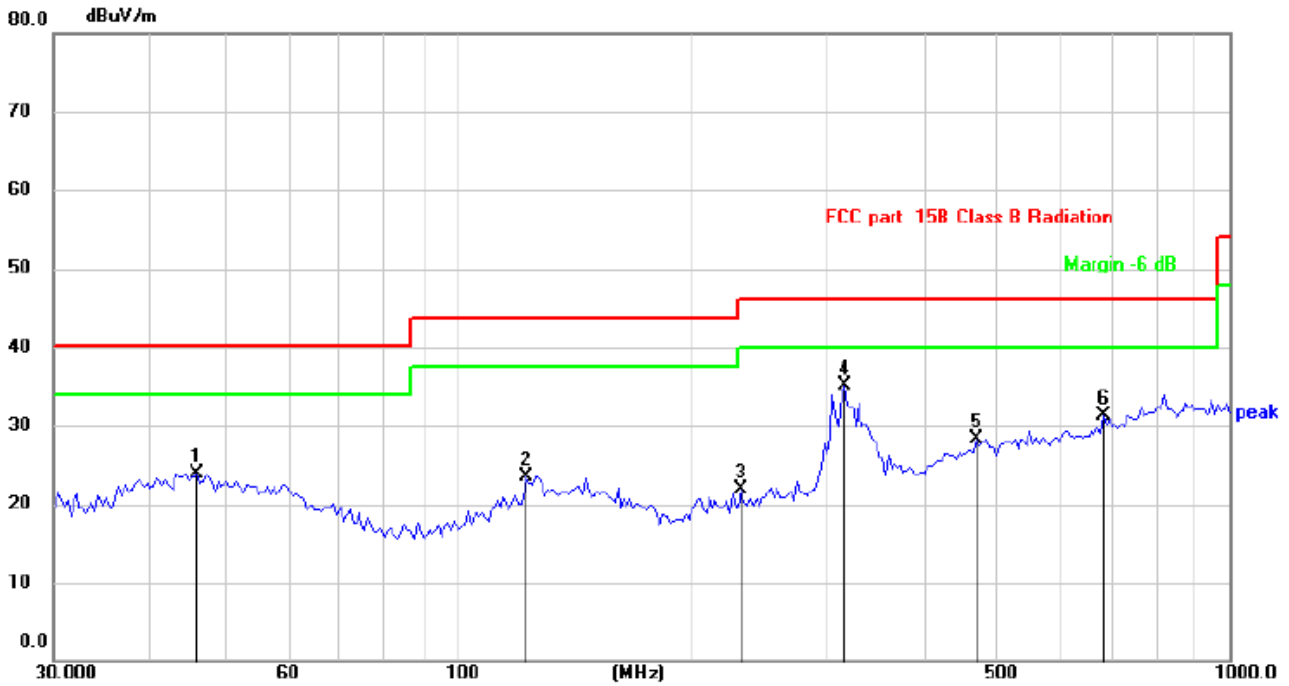

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.0970	29.46	-5.50	23.96	40.00	-16.04	QP
2		123.0494	30.21	-6.66	23.55	43.50	-19.95	QP
3		233.3486	27.72	-5.86	21.86	46.00	-24.14	QP
4	*	317.1444	39.74	-4.61	35.13	46.00	-10.87	QP
5		470.5230	28.33	0.01	28.34	46.00	-17.66	QP
6		685.9469	27.57	3.77	31.34	46.00	-14.66	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

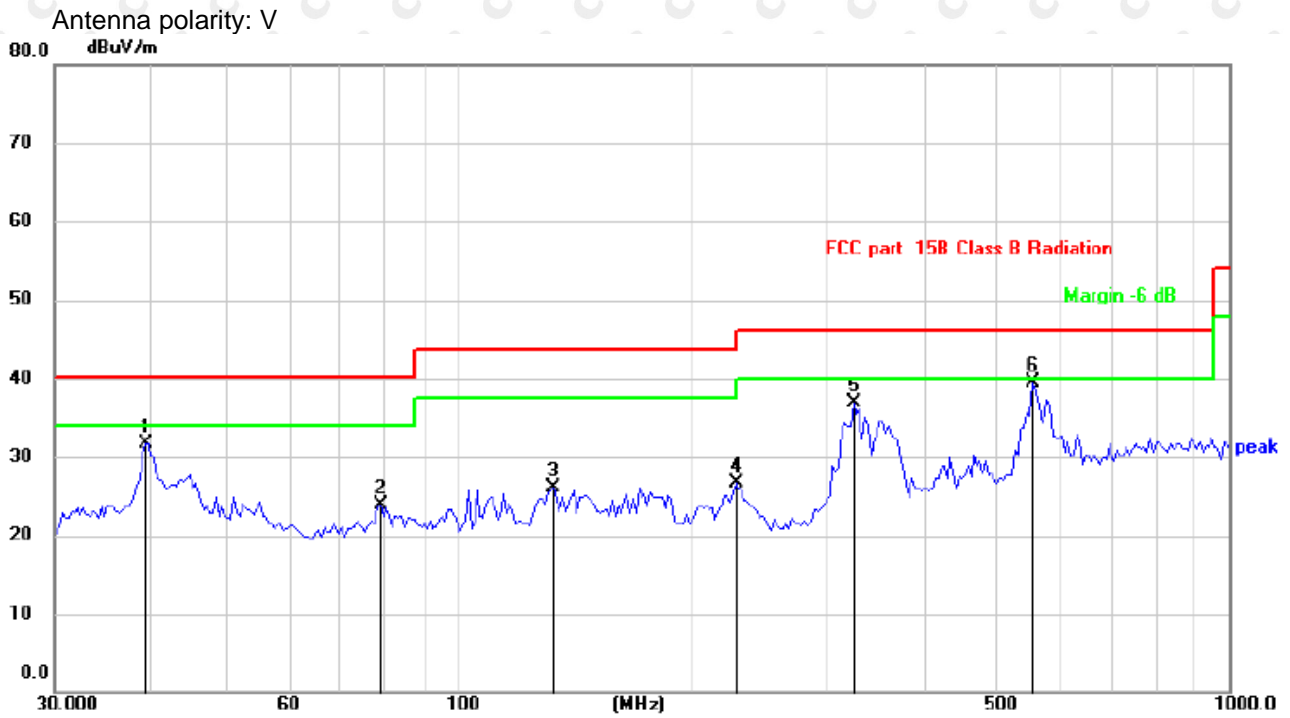

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.3680	37.18	-5.42	31.76	40.00	-8.24	QP
2		79.3816	33.57	-9.65	23.92	40.00	-16.08	QP
3		133.1510	32.04	-5.93	26.11	43.50	-17.39	QP
4		229.2930	32.59	-5.95	26.64	43.50	-16.86	QP
5		325.5957	41.28	-4.31	36.97	46.00	-9.03	QP
6	*	555.7989	37.80	1.75	39.55	46.00	-6.45	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put.

## Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	65.28	-3.64	61.64	74	-12.36	peak
4824	50.86	-3.64	47.22	54	-6.78	AVG
7236	56.97	-0.95	56.02	74	-17.98	peak
7236	44.84	-0.95	43.89	54	-10.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	65.57	-3.64	61.93	74	-12.07	peak
4824	47.05	-3.64	43.41	54	-10.59	AVG
7236	56.16	-0.95	55.21	74	-18.79	peak
7236	43.72	-0.95	42.77	54	-11.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	66.23	-3.51	62.72	74	-11.28	peak
4874	49.58	-3.51	46.07	54	-7.93	AVG
7311	59.37	-0.82	58.55	74	-15.45	peak
7311	45.14	-0.82	44.32	54	-9.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.41	-3.51	60.90	74	-13.10	peak
4874	49.31	-3.51	45.80	54	-8.20	AVG
7311	58.19	-0.82	57.37	74	-16.63	peak
7311	43.35	-0.82	42.53	54	-11.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	63.36	-3.43	59.93	74	-14.07	peak
4924	46.70	-3.43	43.27	54	-10.73	AVG
7386	57.37	-0.75	56.62	74	-17.38	peak
7386	43.30	-0.75	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	64.90	-3.43	61.47	74	-12.53	peak
4924	47.73	-3.43	44.30	54	-9.70	AVG
7386	56.64	-0.75	55.89	74	-18.11	peak
7386	43.24	-0.75	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.76	-3.64	61.12	74	-12.88	peak
4824	47.58	-3.64	43.94	54	-10.06	AVG
7236	59.64	-0.95	58.69	74	-15.31	peak
7236	46.75	-0.95	45.80	54	-8.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.28	-3.64	60.64	74	-13.36	peak
4824	48.60	-3.64	44.96	54	-9.04	AVG
7236	58.57	-0.95	57.62	74	-16.38	peak
7236	43.53	-0.95	42.58	54	-11.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	62.91	-3.51	59.40	74	-14.60	peak
4874	46.92	-3.51	43.41	54	-10.59	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	45.47	-0.82	44.65	54	-9.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	63.96	-3.51	60.45	74	-13.55	peak
4874	48.44	-3.51	44.93	54	-9.07	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	43.10	-0.82	42.28	54	-11.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	63.55	-3.43	60.12	74	-13.88	peak
4924	49.25	-3.43	45.82	54	-8.18	AVG
7386	57.09	-0.75	56.34	74	-17.66	peak
7386	41.48	-0.75	40.73	54	-13.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4924	63.13	-3.43	59.70	74	-14.30	peak
4924	47.67	-3.43	44.24	54	-9.76	AVG
7386	57.02	-0.75	56.27	74	-17.73	peak
7386	41.35	-0.75	40.60	54	-13.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	63.19	-3.64	59.55	74	-14.45	peak
4824	48.04	-3.64	44.40	54	-9.60	AVG
7236	58.22	-0.95	57.27	74	-16.73	peak
7236	42.80	-0.95	41.85	54	-12.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	62.20	-3.64	58.56	74	-15.44	peak
4824	47.13	-3.64	43.49	54	-10.51	AVG
7236	58.01	-0.95	57.06	74	-16.94	peak
7236	42.41	-0.95	41.46	54	-12.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874.00	65.94	-3.51	62.43	74.00	-11.57	peak
4874.00	48.19	-3.51	44.68	54.00	-9.32	AVG
7311.00	57.99	-0.82	57.17	74.00	-16.83	peak
7311.00	46.41	-0.82	45.59	54.00	-8.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874.00	62.39	-3.51	58.88	74.00	-15.12	peak
4874.00	45.76	-3.51	42.25	54.00	-11.75	AVG
7311.00	57.77	-0.82	56.95	74.00	-17.05	peak
7311.00	41.41	-0.82	40.59	54.00	-13.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	61.40	-3.43	57.97	74	-16.03	peak
4924	48.19	-3.43	44.76	54	-9.24	AVG
7386	58.74	-0.75	57.99	74	-16.01	peak
7386	43.06	-0.75	42.31	54	-11.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	62.99	-3.43	59.56	74	-14.44	peak
4924	46.09	-3.43	42.66	54	-11.34	AVG
7386	56.07	-0.75	55.32	74	-18.68	peak
7386	43.97	-0.75	43.22	54	-10.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.49	-3.63	61.86	74	-12.14	peak
4844	49.44	-3.63	45.81	54	-8.19	AVG
7266	60.44	-0.94	59.50	74	-14.50	peak
7266	46.53	-0.94	45.59	54	-8.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.39	-3.63	60.76	74	-13.24	peak
4844	47.81	-3.63	44.18	54	-9.82	AVG
7266	59.61	-0.94	58.67	74	-15.33	peak
7266	44.57	-0.94	43.63	54	-10.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	62.75	-3.51	59.24	74	-14.76	peak
4874	49.09	-3.51	45.58	54	-8.42	AVG
7311	59.23	-0.82	58.41	74	-15.59	peak
7311	43.87	-0.82	43.05	54	-10.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.46	-3.51	42.95	54	-11.05	AVG
7311	56.66	-0.82	55.84	74	-18.16	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.59	-3.43	61.16	74	-12.84	peak
4904	46.83	-3.43	43.40	54	-10.60	AVG
7356	56.92	-0.75	56.17	74	-17.83	peak
7356	42.84	-0.75	42.09	54	-11.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.32	-3.43	58.89	74	-15.11	peak
4904	46.36	-3.43	42.93	54	-11.07	AVG
7356	56.26	-0.75	55.51	74	-18.49	peak
7356	44.80	-0.75	44.05	54	-9.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

### Restricted bands around fundamental frequency (Radiated)

Operation Mode:  
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	56.48	-5.81	50.67	74	-23.33	peak
2390	/	-5.81	/	54	/	AVG
2399	63.67	-5.84	57.83	74	-16.17	peak
2399	49.34	-5.84	43.50	54	-10.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	55.97	-5.81	50.16	74	-23.84	peak
2390	/	-5.81	/	54	/	AVG
2399	62.60	-5.84	56.76	74	-17.24	peak
2399	46.64	-5.84	40.80	54	-13.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	57.19	-5.65	51.54	74	-22.46	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	56.66	-5.65	51.01	74	-22.99	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	58.54	-5.81	52.73	74	-21.27	peak
2390	/	-5.81	/	54	/	AVG
2399	62.38	-5.84	56.54	74	-17.46	peak
2399	47.29	-5.84	41.45	54	-12.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	56.13	-5.81	50.32	74	-23.68	peak
2390	/	-5.81	/	54	/	AVG
2399	63.08	-5.84	57.24	74	-16.76	peak
2399	45.68	-5.84	39.84	54	-14.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.58	-5.65	50.93	74	-23.07	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	56.13	-5.81	50.32	74	-23.68	peak
2390	/	-5.81	/	54	/	AVG
2399	63.93	-5.84	58.09	74	-15.91	peak
2399	47.48	-5.84	41.64	54	-12.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.24	-5.81	51.43	74	-22.57	peak
2390	/	-5.81	/	54	/	AVG
2399	59.83	-5.84	53.99	74	-20.01	peak
2399	47.02	-5.84	41.18	54	-12.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	56.65	-5.65	51.00	74	-23.00	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	57.16	-5.65	51.51	74	-22.49	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	58.76	-5.81	52.95	74	-21.05	peak
2390	/	-5.81	/	54	/	AVG
2399	62.30	-5.84	56.46	74	-17.54	peak
2399	45.99	-5.84	40.15	54	-13.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.04	-5.81	51.23	74	-22.77	peak
2390	/	-5.81	/	54	/	AVG
2399	61.34	-5.84	55.50	74	-18.50	peak
2399	45.73	-5.84	39.89	54	-14.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	56.68	-5.65	51.03	74	-22.97	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.75	-5.65	52.10	74	-21.90	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

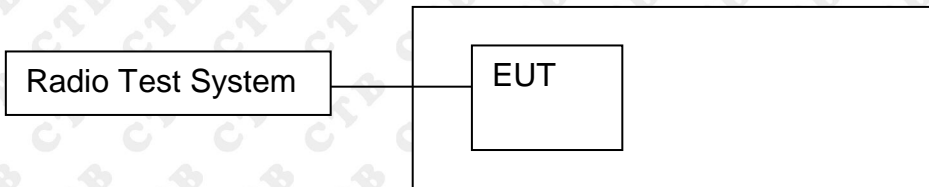


### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Blow 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100KHz, VBW = 300KHz, Sweep = auto  
Detector function = peak, Trace = max hold


### 8.4 Test Result

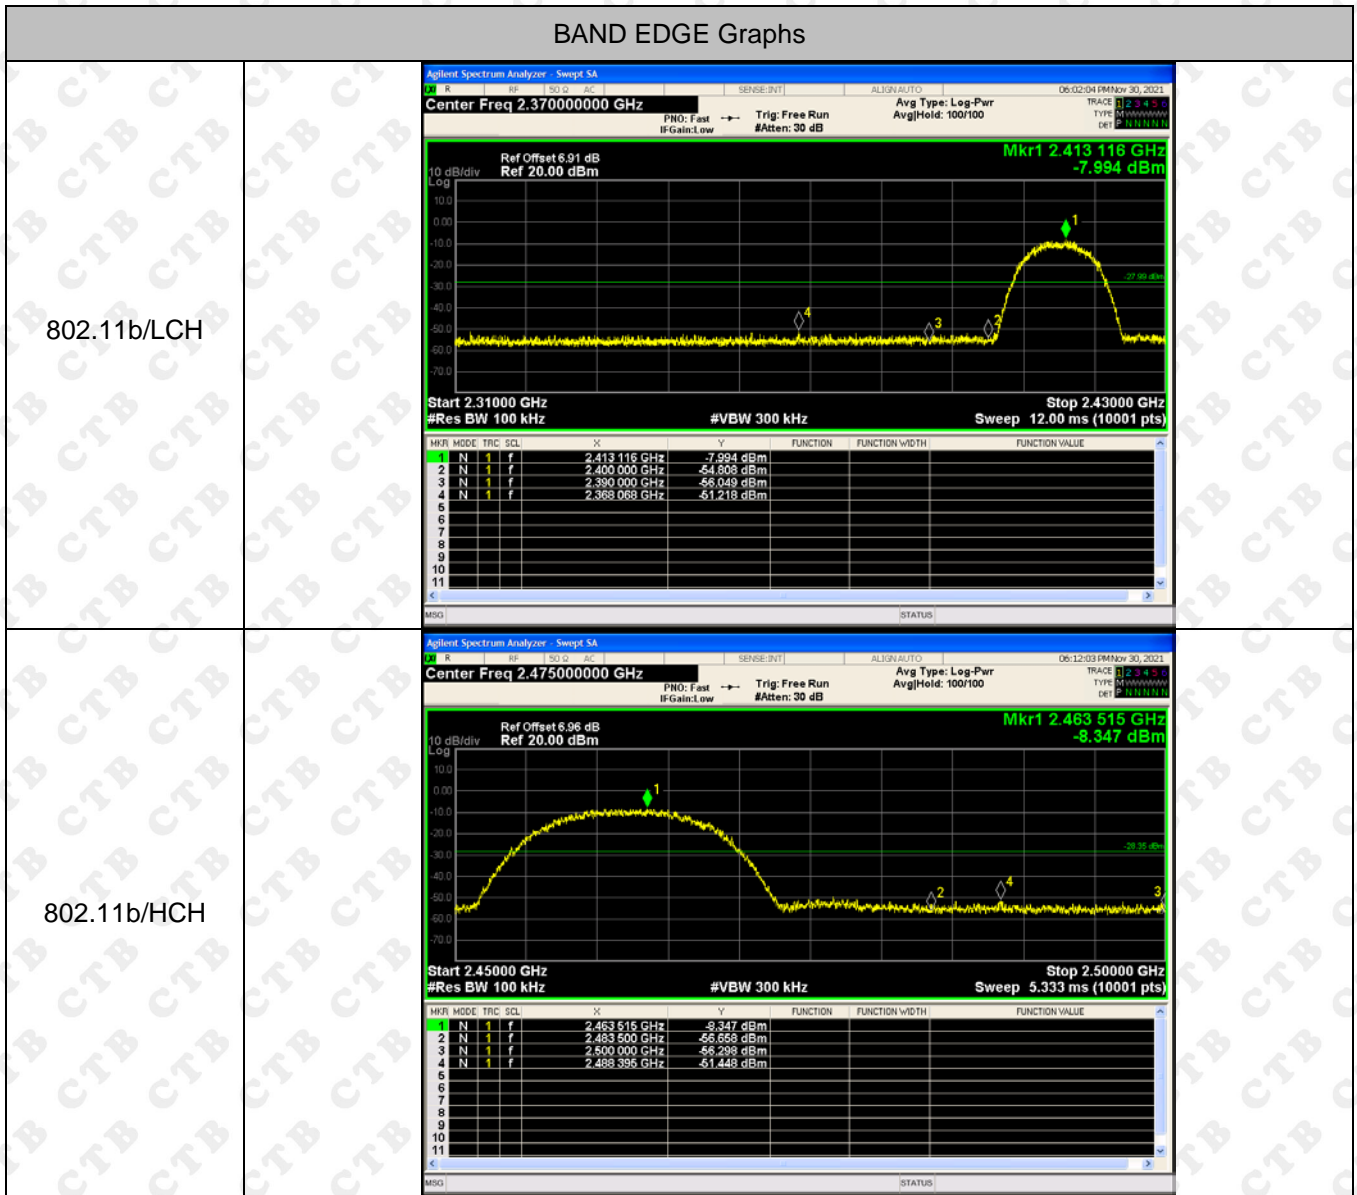




BAND EDGE Graphs

802.11g/LCH

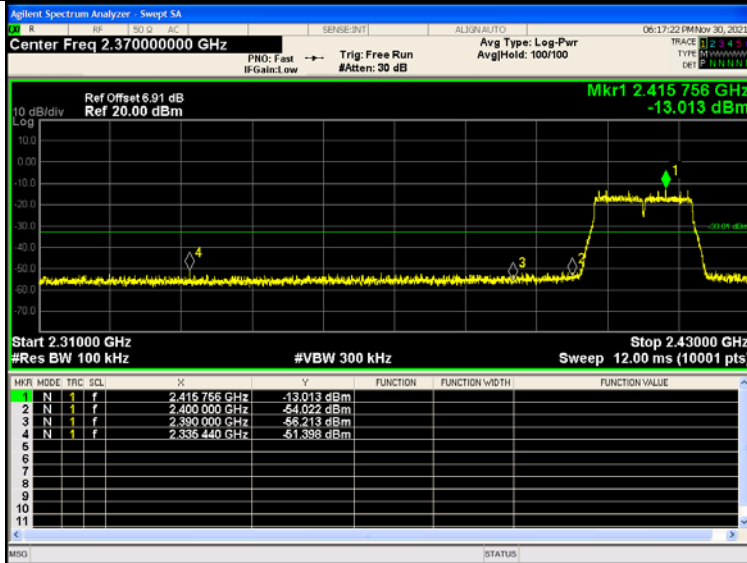


802.11g/HCH

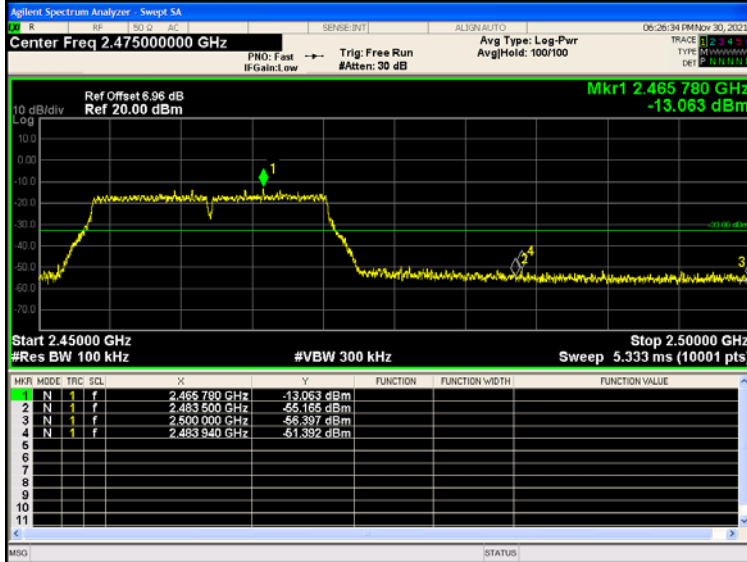

BAND EDGE Graphs


<p>802.11n(HT20)/L CH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.407008 GHz -12.322 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.407008 GHz</td> <td>-12.322 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-53.932 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390000 GHz</td> <td>-54.903 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.332836 GHz</td> <td>-51.512 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.407008 GHz	-12.322 dBm				2	N	1	f	2.400000 GHz	-53.932 dBm				3	N	1	f	2.390000 GHz	-54.903 dBm				4	N	1	f	2.332836 GHz	-51.512 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.407008 GHz	-12.322 dBm																																									
2	N	1	f	2.400000 GHz	-53.932 dBm																																									
3	N	1	f	2.390000 GHz	-54.903 dBm																																									
4	N	1	f	2.332836 GHz	-51.512 dBm																																									
<p>802.11n(HT20)/H CH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.475000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.465765 GHz -12.811 dBm Start 2.45000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 5.333 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.465765 GHz</td> <td>-12.811 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-54.516 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td>-53.955 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.466100 GHz</td> <td>-51.369 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.465765 GHz	-12.811 dBm				2	N	1	f	2.483500 GHz	-54.516 dBm				3	N	1	f	2.500000 GHz	-53.955 dBm				4	N	1	f	2.466100 GHz	-51.369 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.465765 GHz	-12.811 dBm																																									
2	N	1	f	2.483500 GHz	-54.516 dBm																																									
3	N	1	f	2.500000 GHz	-53.955 dBm																																									
4	N	1	f	2.466100 GHz	-51.369 dBm																																									
<p>802.11n(HT40)/L CH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.380000000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.404528 GHz -16.121 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.45000 GHz Sweep 14.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.404528 GHz</td> <td>-16.121 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-55.059 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390000 GHz</td> <td>-55.610 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.368412 GHz</td> <td>-51.648 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.404528 GHz	-16.121 dBm				2	N	1	f	2.400000 GHz	-55.059 dBm				3	N	1	f	2.390000 GHz	-55.610 dBm				4	N	1	f	2.368412 GHz	-51.648 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.404528 GHz	-16.121 dBm																																									
2	N	1	f	2.400000 GHz	-55.059 dBm																																									
3	N	1	f	2.390000 GHz	-55.610 dBm																																									
4	N	1	f	2.368412 GHz	-51.648 dBm																																									

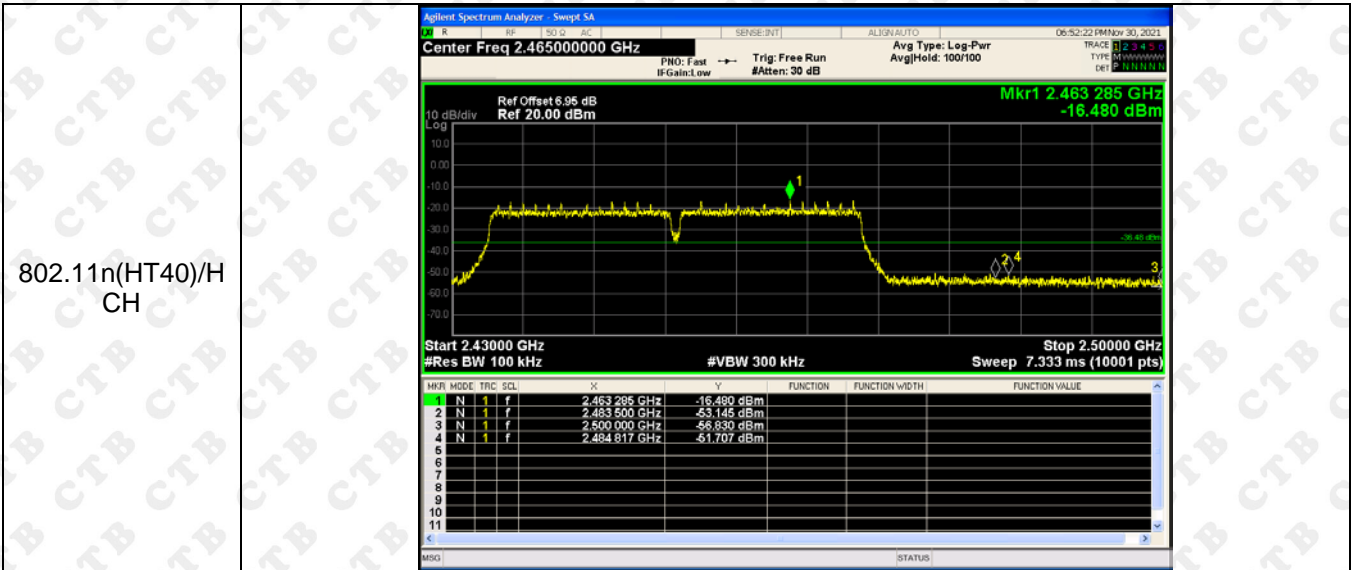




## RF Conducted Spurious Emissions Graphs


802.11b /LCH

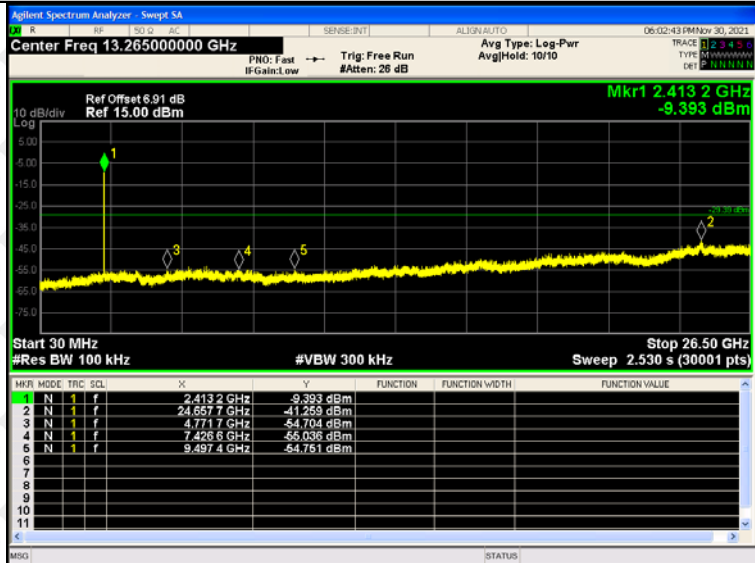

802.11b /MCH

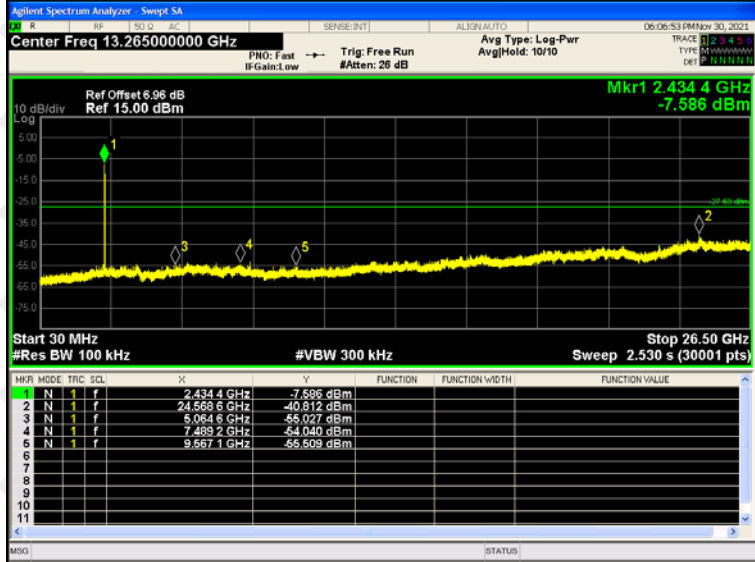

802.11b /HCH

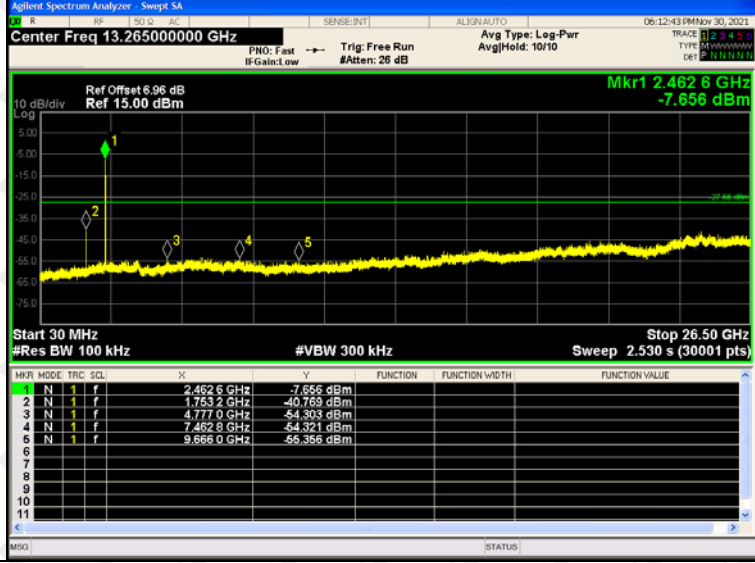

RF Conducted Spurious Emissions Graphs

<p>802.11g /LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz Ref Offset 6.91 dB Ref 15.00 dBm Mkr1 2.414 9 GHz -15.821 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.414 9 GHz</td><td>-15.821 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.633 3 GHz</td><td>-41.512 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.760 2 GHz</td><td>-54.959 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.334 8 GHz</td><td>-54.260 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.514 2 GHz</td><td>-53.544 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 9 GHz	-15.821 dBm				2	N	1	f	24.633 3 GHz	-41.512 dBm				3	N	1	f	4.760 2 GHz	-54.959 dBm				4	N	1	f	7.334 8 GHz	-54.260 dBm				5	N	1	f	9.514 2 GHz	-53.544 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.414 9 GHz	-15.821 dBm																																																			
2	N	1	f	24.633 3 GHz	-41.512 dBm																																																			
3	N	1	f	4.760 2 GHz	-54.959 dBm																																																			
4	N	1	f	7.334 8 GHz	-54.260 dBm																																																			
5	N	1	f	9.514 2 GHz	-53.544 dBm																																																			
<p>802.11g /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.433 5 GHz -15.807 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.433 5 GHz</td><td>-15.807 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.678 0 GHz</td><td>-41.454 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.899 6 GHz</td><td>-55.341 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.378 3 GHz</td><td>-54.121 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.570 7 GHz</td><td>-54.863 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.433 5 GHz	-15.807 dBm				2	N	1	f	24.678 0 GHz	-41.454 dBm				3	N	1	f	4.899 6 GHz	-55.341 dBm				4	N	1	f	7.378 3 GHz	-54.121 dBm				5	N	1	f	9.570 7 GHz	-54.863 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.433 5 GHz	-15.807 dBm																																																			
2	N	1	f	24.678 0 GHz	-41.454 dBm																																																			
3	N	1	f	4.899 6 GHz	-55.341 dBm																																																			
4	N	1	f	7.378 3 GHz	-54.121 dBm																																																			
5	N	1	f	9.570 7 GHz	-54.863 dBm																																																			
<p>802.11g /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.26500000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.469 7 GHz -15.907 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.469 7 GHz</td><td>-15.907 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.622 4 GHz</td><td>-41.173 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.058 4 GHz</td><td>-54.884 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.426 7 GHz</td><td>-53.153 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.781 5 GHz</td><td>-55.487 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.469 7 GHz	-15.907 dBm				2	N	1	f	24.622 4 GHz	-41.173 dBm				3	N	1	f	5.058 4 GHz	-54.884 dBm				4	N	1	f	7.426 7 GHz	-53.153 dBm				5	N	1	f	9.781 5 GHz	-55.487 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.469 7 GHz	-15.907 dBm																																																			
2	N	1	f	24.622 4 GHz	-41.173 dBm																																																			
3	N	1	f	5.058 4 GHz	-54.884 dBm																																																			
4	N	1	f	7.426 7 GHz	-53.153 dBm																																																			
5	N	1	f	9.781 5 GHz	-55.487 dBm																																																			

RF Conducted Spurious Emissions Graphs

<p>802.11n (HT20)/ LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4070 GHz</td> <td>-13.010 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.7730 GHz</td> <td>-41.667 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7928 GHz</td> <td>-55.245 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4337 GHz</td> <td>-53.886 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6064 GHz</td> <td>-56.086 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4070 GHz	-13.010 dBm				2	N	1	f	25.7730 GHz	-41.667 dBm				3	N	1	f	4.7928 GHz	-55.245 dBm				4	N	1	f	7.4337 GHz	-53.886 dBm				5	N	1	f	9.6064 GHz	-56.086 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4070 GHz	-13.010 dBm																																																			
2	N	1	f	25.7730 GHz	-41.667 dBm																																																			
3	N	1	f	4.7928 GHz	-55.245 dBm																																																			
4	N	1	f	7.4337 GHz	-53.886 dBm																																																			
5	N	1	f	9.6064 GHz	-56.086 dBm																																																			
<p>802.11n (HT20) /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4317 GHz</td> <td>-12.917 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6356 GHz</td> <td>-41.419 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7899 GHz</td> <td>-55.189 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4019 GHz</td> <td>-54.664 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5936 GHz</td> <td>-55.575 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4317 GHz	-12.917 dBm				2	N	1	f	24.6356 GHz	-41.419 dBm				3	N	1	f	4.7899 GHz	-55.189 dBm				4	N	1	f	7.4019 GHz	-54.664 dBm				5	N	1	f	9.5936 GHz	-55.575 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4317 GHz	-12.917 dBm																																																			
2	N	1	f	24.6356 GHz	-41.419 dBm																																																			
3	N	1	f	4.7899 GHz	-55.189 dBm																																																			
4	N	1	f	7.4019 GHz	-54.664 dBm																																																			
5	N	1	f	9.5936 GHz	-55.575 dBm																																																			
<p>802.11n (HT20) /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4670 GHz</td> <td>-12.427 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6093 GHz</td> <td>-41.728 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.1149 GHz</td> <td>-54.783 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4107 GHz</td> <td>-54.052 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6346 GHz</td> <td>-55.038 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4670 GHz	-12.427 dBm				2	N	1	f	24.6093 GHz	-41.728 dBm				3	N	1	f	5.1149 GHz	-54.783 dBm				4	N	1	f	7.4107 GHz	-54.052 dBm				5	N	1	f	9.6346 GHz	-55.038 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4670 GHz	-12.427 dBm																																																			
2	N	1	f	24.6093 GHz	-41.728 dBm																																																			
3	N	1	f	5.1149 GHz	-54.783 dBm																																																			
4	N	1	f	7.4107 GHz	-54.052 dBm																																																			
5	N	1	f	9.6346 GHz	-55.038 dBm																																																			




RF Conducted Spurious Emissions Graphs

<p>802.11 n(HT40) /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.436 1 GHz</td><td>-19.075 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.645 2 GHz</td><td>-41.485 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.789 1 GHz</td><td>-54.919 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.364 8 GHz</td><td>-54.356 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.496 6 GHz</td><td>-55.255 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 1 GHz	-19.075 dBm				2	N	1	f	24.645 2 GHz	-41.485 dBm				3	N	1	f	4.789 1 GHz	-54.919 dBm				4	N	1	f	7.364 8 GHz	-54.356 dBm				5	N	1	f	9.496 6 GHz	-55.255 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.436 1 GHz	-19.075 dBm																																																			
2	N	1	f	24.645 2 GHz	-41.485 dBm																																																			
3	N	1	f	4.789 1 GHz	-54.919 dBm																																																			
4	N	1	f	7.364 8 GHz	-54.356 dBm																																																			
5	N	1	f	9.496 6 GHz	-55.255 dBm																																																			
<p>802.11 n(HT40) /MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.448 5 GHz</td><td>-17.251 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.661 2 GHz</td><td>-40.705 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.734 6 GHz</td><td>-55.450 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.431 9 GHz</td><td>-54.430 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.928 0 GHz</td><td>-55.317 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.448 5 GHz	-17.251 dBm				2	N	1	f	24.661 2 GHz	-40.705 dBm				3	N	1	f	4.734 6 GHz	-55.450 dBm				4	N	1	f	7.431 9 GHz	-54.430 dBm				5	N	1	f	9.928 0 GHz	-55.317 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.448 5 GHz	-17.251 dBm																																																			
2	N	1	f	24.661 2 GHz	-40.705 dBm																																																			
3	N	1	f	4.734 6 GHz	-55.450 dBm																																																			
4	N	1	f	7.431 9 GHz	-54.430 dBm																																																			
5	N	1	f	9.928 0 GHz	-55.317 dBm																																																			
<p>802.11 n(HT40) /HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.434 4 GHz</td><td>-17.181 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.655 0 GHz</td><td>-41.546 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.783 1 GHz</td><td>-55.378 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.376 3 GHz</td><td>-54.263 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.891 0 GHz</td><td>-55.128 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 4 GHz	-17.181 dBm				2	N	1	f	24.655 0 GHz	-41.546 dBm				3	N	1	f	4.783 1 GHz	-55.378 dBm				4	N	1	f	7.376 3 GHz	-54.263 dBm				5	N	1	f	9.891 0 GHz	-55.128 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.434 4 GHz	-17.181 dBm																																																			
2	N	1	f	24.655 0 GHz	-41.546 dBm																																																			
3	N	1	f	4.783 1 GHz	-55.378 dBm																																																			
4	N	1	f	7.376 3 GHz	-54.263 dBm																																																			
5	N	1	f	9.891 0 GHz	-55.128 dBm																																																			

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

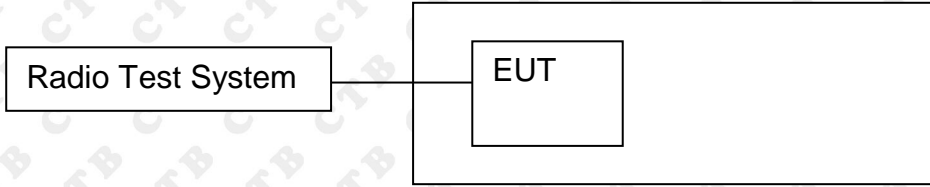

### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW =1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

## 9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.152	30	PASS
	MCH	7.5	30	PASS
	HCH	7.706	30	PASS
802.11g	LCH	6.703	30	PASS
	MCH	7.004	30	PASS
	HCH	6.676	30	PASS
802.11n(HT20)	LCH	6.676	30	PASS
	MCH	6.541	30	PASS
	HCH	6.667	30	PASS
802.11n(HT40)	LCH	5.396	30	PASS
	MCH	5.4	30	PASS
	HCH	5.496	30	PASS



Mode	Channel.	Maximum Output Power [dBm]
	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz Center Freq: 2.412000000 GHz</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Channel Power: 7.11 dBm / 9.603 MHz</p> <p>Power Spectral Density: -64.33 dBm /Hz</p>
802.11b	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz Center Freq: 2.437000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Channel Power: 7.18 dBm / 9.995 MHz</p> <p>Power Spectral Density: -64.23 dBm /Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz Center Freq: 2.462000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Channel Power: 7.62 dBm / 10.30 MHz</p> <p>Power Spectral Density: -63.82 dBm /Hz</p>

	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Channel Power: 6.52 dBm / 16.39 MHz</p> <p>Power Spectral Density: -65.65 dBm / Hz</p>
802.11g	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Channel Power: 6.84 dBm / 16.37 MHz</p> <p>Power Spectral Density: -65.34 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Channel Power: 6.42 dBm / 16.41 MHz</p> <p>Power Spectral Density: -65.76 dBm / Hz</p>


	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Channel Power: 6.58 dBm / 17.60 MHz</p> <p>Power Spectral Density: -65.89 dBm / Hz</p>
802.11n(HT20)	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Channel Power: 6.36 dBm / 17.61 MHz</p> <p>Power Spectral Density: -66.11 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 30.000 MHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Channel Power: 6.43 dBm / 17.60 MHz</p> <p>Power Spectral Density: -66.05 dBm / Hz</p>



	LCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 60.000 MHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Channel Power: 5.42 dBm / 35.74 MHz</p> <p>Power Spectral Density: -70.15 dBm / Hz</p>
802.11n(HT40)	MCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 60.000 MHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Channel Power: 5.23 dBm / 36.07 MHz</p> <p>Power Spectral Density: -70.35 dBm / Hz</p>
	HCH	<p>Agilent Spectrum Analyzer - Channel Power</p> <p>Span 60.000 MHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset 6.95 dB Ref 26.95 dBm</p> <p>Channel Power: 5.35 dBm / 36.33 MHz</p> <p>Power Spectral Density: -70.23 dBm / Hz</p>

## 10. 6DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

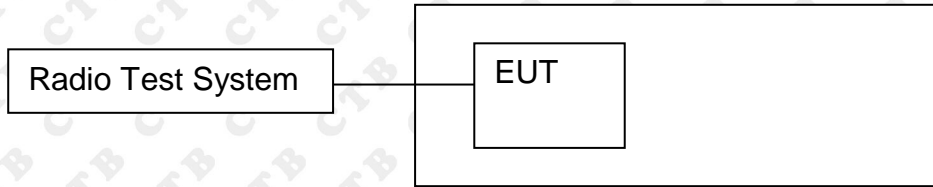

### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure


1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.603	500	PASS
	MCH	9.995	500	PASS
	HCH	10.304	500	PASS
802.11g	LCH	16.388	500	PASS
	MCH	16.369	500	PASS
	HCH	16.411	500	PASS
802.11n(HT20)	LCH	17.602	500	PASS
	MCH	17.608	500	PASS
	HCH	17.596	500	PASS
802.11n(HT40)	LCH	35.744	500	PASS
	MCH	36.07	500	PASS
	HCH	36.328	500	PASS



Test Graph:

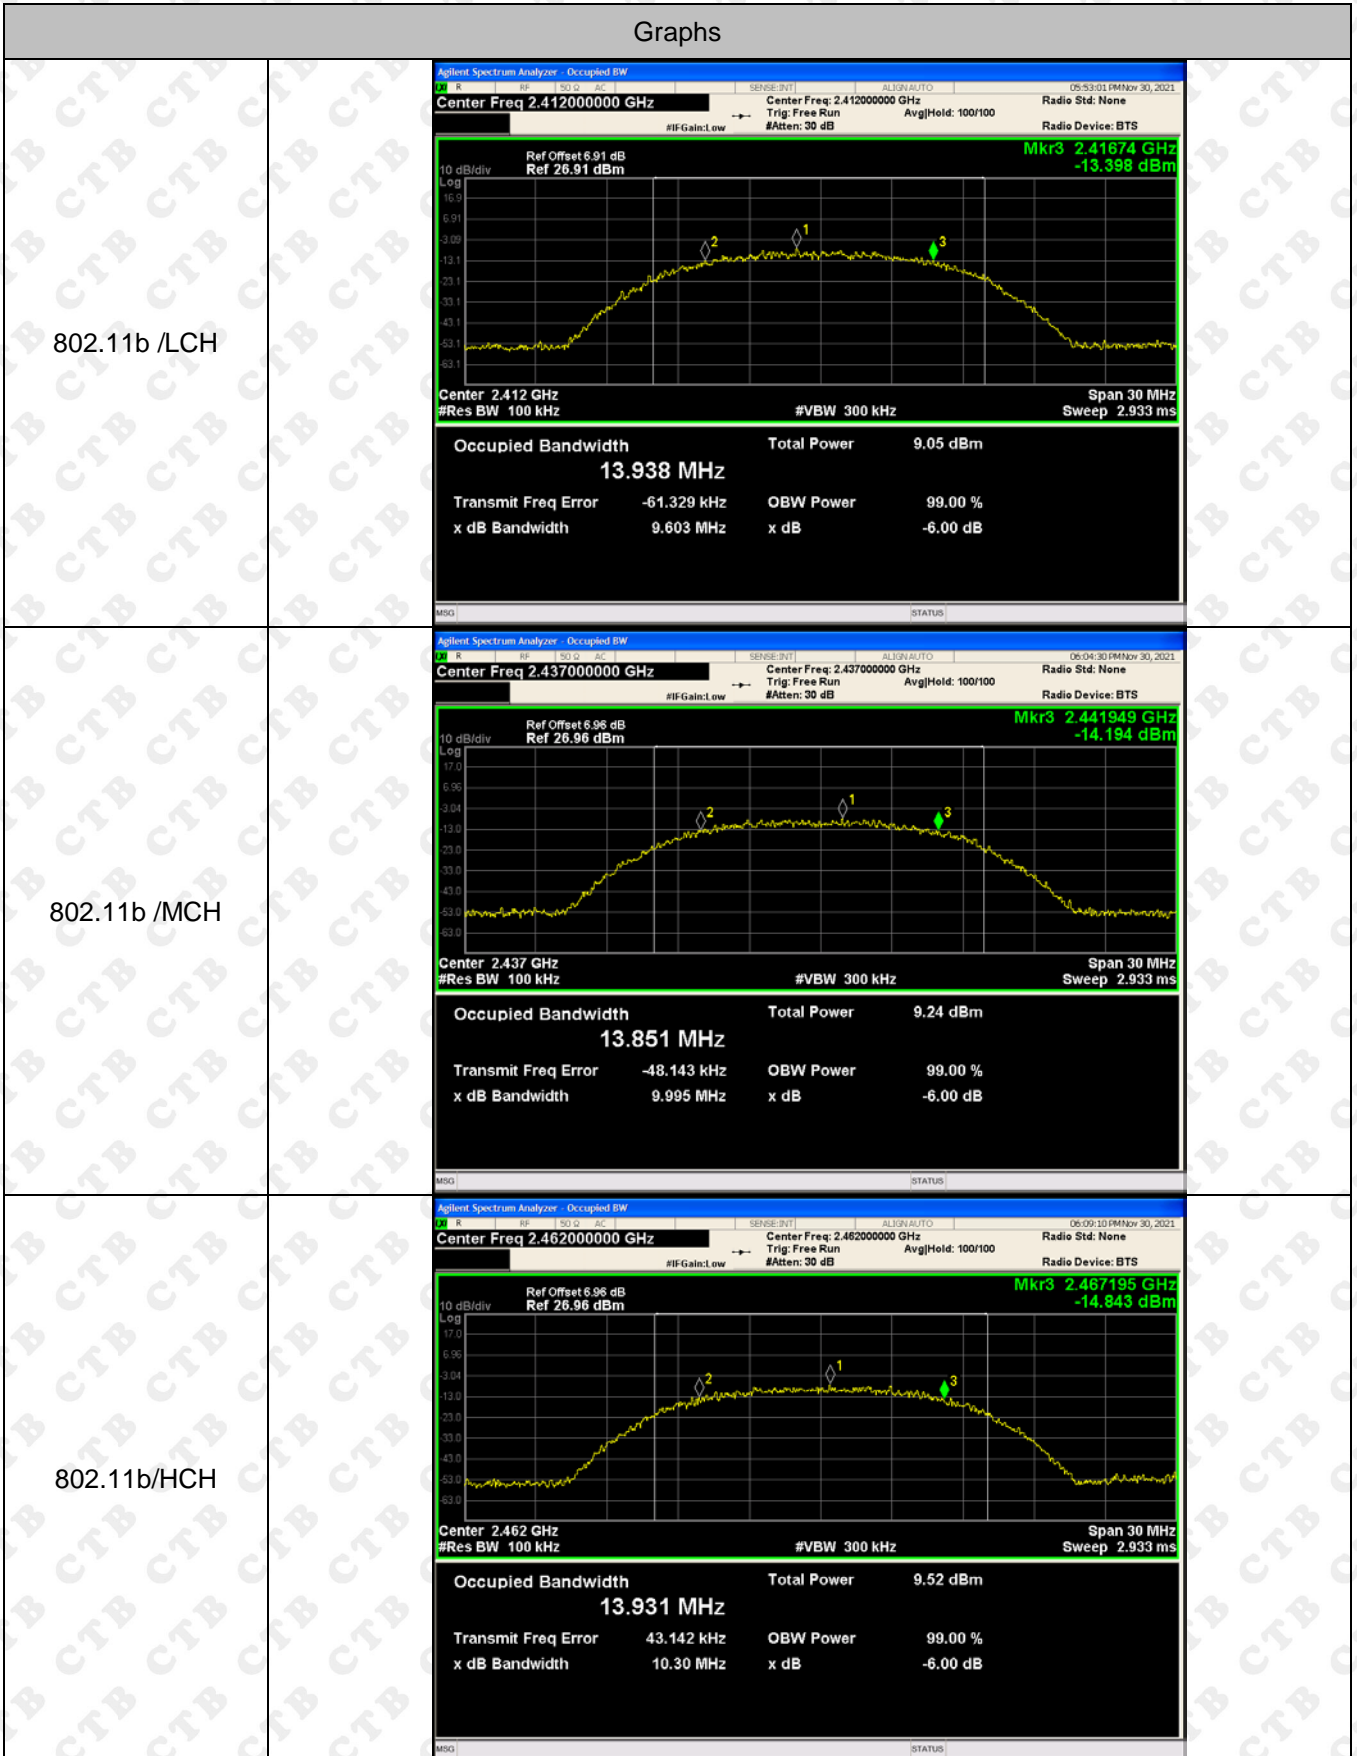

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.4202 GHz -18.529 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.07 dBm</td> </tr> <tr> <td>16.479 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>6.097 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.39 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.07 dBm	16.479 MHz			Transmit Freq Error	OBW Power	99.00 %	6.097 kHz			x dB Bandwidth	x dB	-6.00 dB	16.39 MHz		
Occupied Bandwidth	Total Power	5.07 dBm																	
16.479 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
6.097 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
16.39 MHz																			
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.445183 GHz -17.562 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.34 dBm</td> </tr> <tr> <td>16.490 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-1.182 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.37 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.34 dBm	16.490 MHz			Transmit Freq Error	OBW Power	99.00 %	-1.182 kHz			x dB Bandwidth	x dB	-6.00 dB	16.37 MHz		
Occupied Bandwidth	Total Power	5.34 dBm																	
16.490 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-1.182 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
16.37 MHz																			
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.470236 GHz -20.494 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.08 dBm</td> </tr> <tr> <td>16.515 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>30.104 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>16.41 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.08 dBm	16.515 MHz			Transmit Freq Error	OBW Power	99.00 %	30.104 kHz			x dB Bandwidth	x dB	-6.00 dB	16.41 MHz		
Occupied Bandwidth	Total Power	4.08 dBm																	
16.515 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
30.104 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
16.41 MHz																			


<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.4208 GHz -18.245 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.76 dBm</td> </tr> <tr> <td>17.648 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-1.257 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.60 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.76 dBm	17.648 MHz			Transmit Freq Error	OBW Power	99.00 %	-1.257 kHz			x dB Bandwidth	x dB	-6.00 dB	17.60 MHz		
Occupied Bandwidth	Total Power	4.76 dBm																	
17.648 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-1.257 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
17.60 MHz																			
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.445801 GHz -18.582 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.26 dBm</td> </tr> <tr> <td>17.652 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-3.248 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.61 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.26 dBm	17.652 MHz			Transmit Freq Error	OBW Power	99.00 %	-3.248 kHz			x dB Bandwidth	x dB	-6.00 dB	17.61 MHz		
Occupied Bandwidth	Total Power	4.26 dBm																	
17.652 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-3.248 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
17.61 MHz																			
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr2 2.453229 GHz -17.897 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.44 dBm</td> </tr> <tr> <td>17.678 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>26.845 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>17.60 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.44 dBm	17.678 MHz			Transmit Freq Error	OBW Power	99.00 %	26.845 kHz			x dB Bandwidth	x dB	-6.00 dB	17.60 MHz		
Occupied Bandwidth	Total Power	5.44 dBm																	
17.678 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
26.845 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
17.60 MHz																			



<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Mkr3 2.43983 GHz -22.842 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.063 MHz</p> <p>Total Power 4.29 dBm</p> <p>Transmit Freq Error -42.338 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.74 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.96 dBm</p> <p>Mkr3 2.455019 GHz -23.318 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.140 MHz</p> <p>Total Power 4.07 dBm</p> <p>Transmit Freq Error -15.534 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.07 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.95 dB Ref 26.95 dBm</p> <p>Mkr3 2.470199 GHz -22.058 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.131 MHz</p> <p>Total Power 4.27 dBm</p> <p>Transmit Freq Error 35.285 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.33 MHz</p> <p>x dB -6.00 dB</p>

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

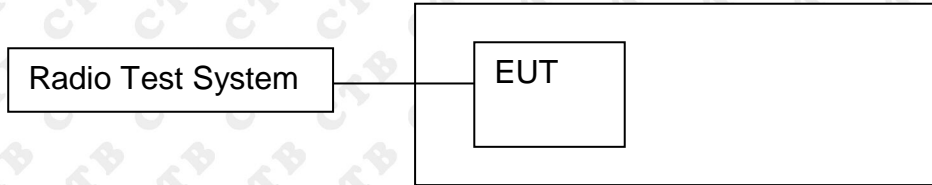

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




## 11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.936	8	PASS
	MCH	-21.704	8	PASS
	HCH	-21.844	8	PASS
802.11g	LCH	-25.174	8	PASS
	MCH	-26.126	8	PASS
	HCH	-26.482	8	PASS
802.11n(H T20)	LCH	-26.388	8	PASS
	MCH	-25.907	8	PASS
	HCH	-27.032	8	PASS
802.11n(H T40)	LCH	-30.63	8	PASS
	MCH	-29.546	8	PASS
	HCH	-30.289	8	PASS



Test Graph

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset 6.91 dB          Ref 20.00 dBm          Mkr1 2.413 41 GHz          -21.936 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.438 56 GHz          -21.704 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.464 43 GHz          -21.844 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
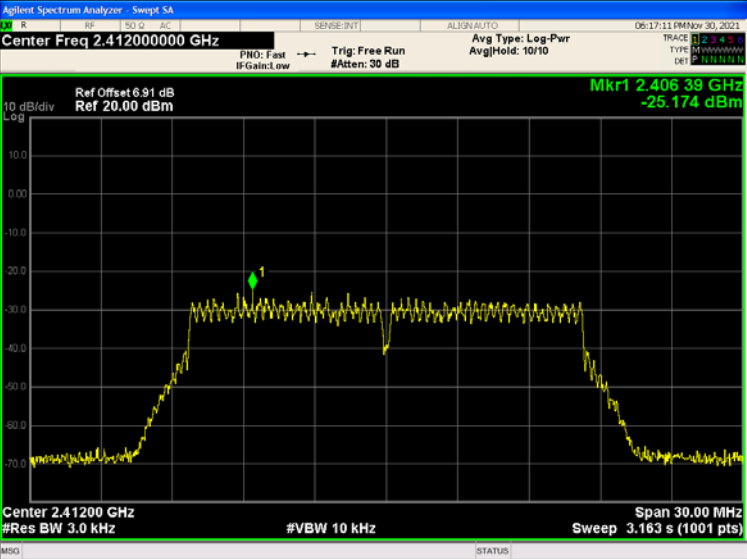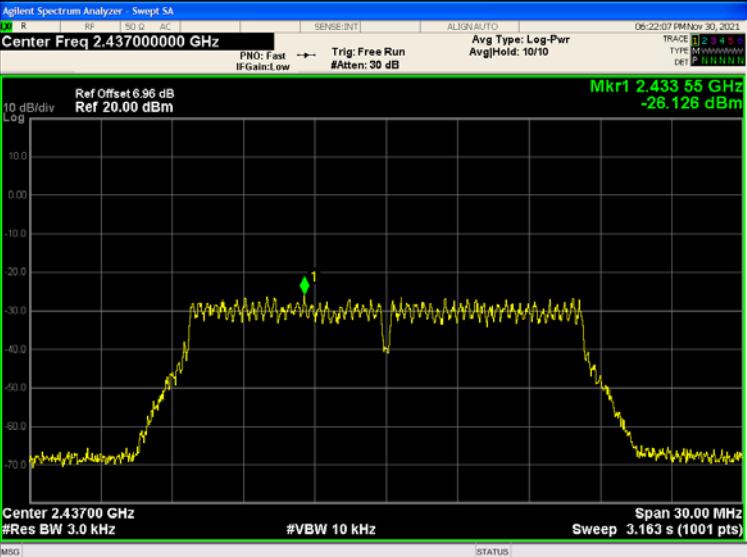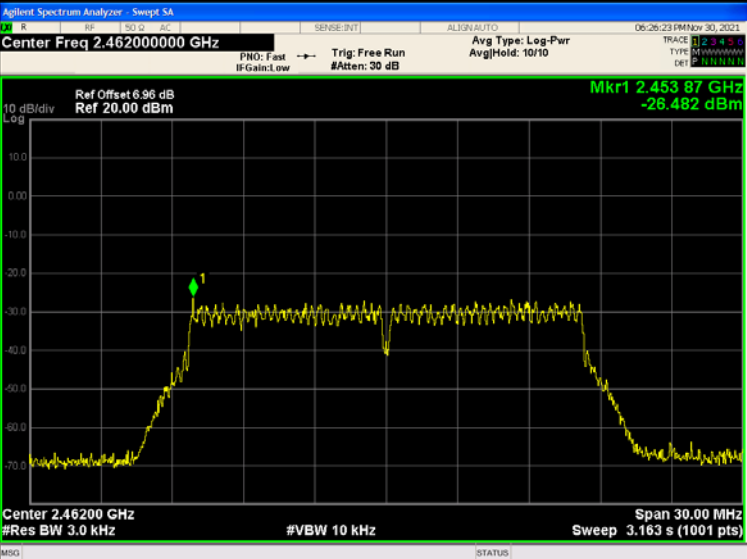
<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.91 dB Ref 20.00 dBm</p> <p>Mkr1 2.40513 GHz -26.388 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.42824 GHz -25.907 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.47043 GHz -27.032 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>



<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.41234 GHz -30.630 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.44330 GHz -29.546 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.46544 GHz -30.289 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

## 12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **EUT Antenna:**


The antenna is PCB Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

### 13. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2

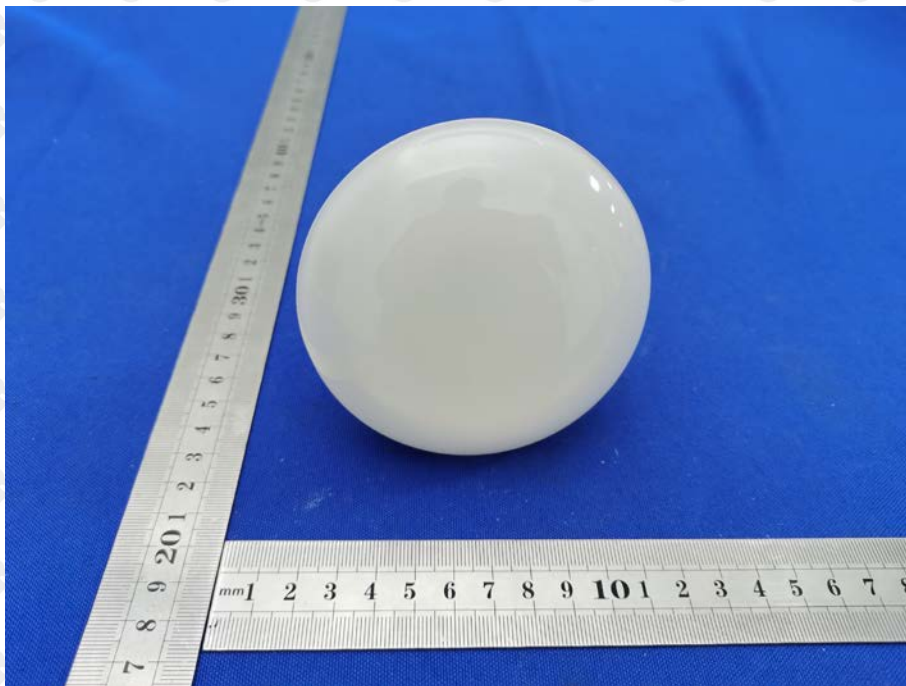



## 14. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission


Below 1G



Above 1G



## Conducted Emission

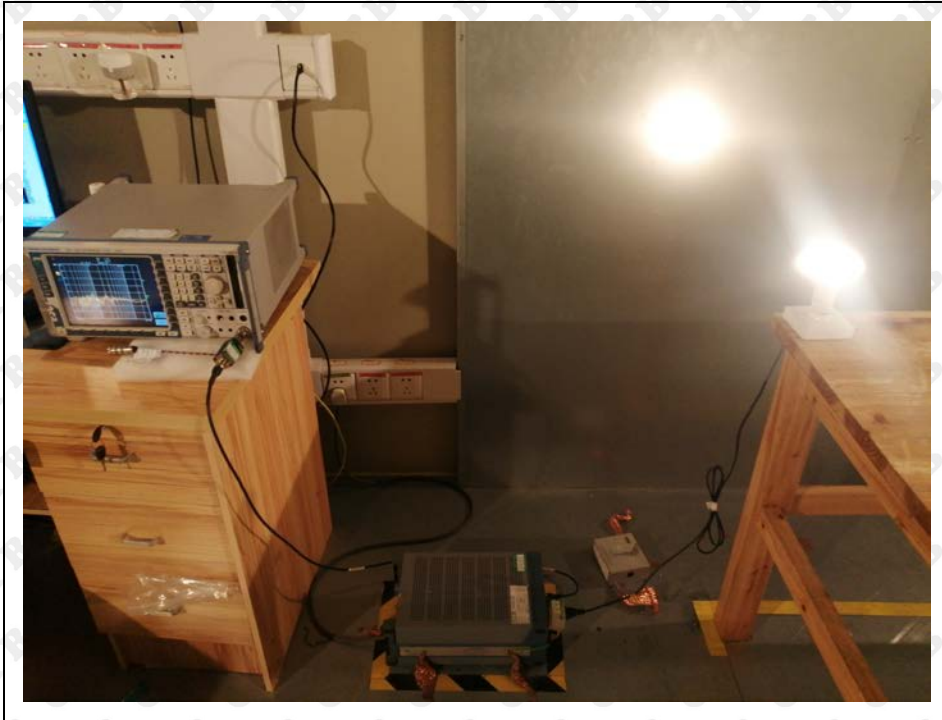

XXXXXXXX END OF REPORT XXXXXXXX