
尺寸: 14x10.5cm






NOTICE	Warning to users
The regulations of the people's Republic of China on	Product Inspection
radio administration stipulates that units and individuals that set up and use radio transmitting equipment within	Accessory Installation03-
the territory of the people's republic of China must go to the corresponding radio administration institution to	Preparation05-
apply for the establishment of a station and obtain a radio station license before they can use it.	Familiarise yourself with the walkie-talkie07-
· ·	Introduction to the buttons
	Interface Layout
	Interface Icons ·····
To the user:	Shortcut Keys·····
Thank you for choosing our FM vhe/uhe wireless interphone. This walkie talkie has novel design, reasonable and beautiful process structure and stable performance, it is designed to meet the needs of users for walkie	Basic Operation13-
talkies with convenient operation and excellent performance.	Technical Specification
in order to make you fully understand the performance of this machine, please read this manual carefully before use.	Warranty Card ·····


Catalogue	
- Jacan gas	
Warning to unoug	01
Warning to users	
Product Inspection	02
Accessory Installation	03-04
Preparation	05-06
Familiarise yourself with the walkie-talkie	07-08
Introduction to the buttons	09
Interface Layout	10
Interface Icons	11
Shortcut Keys·····	12
Basic Operation	13-15
Technical Specification	16
Manuach O and	17

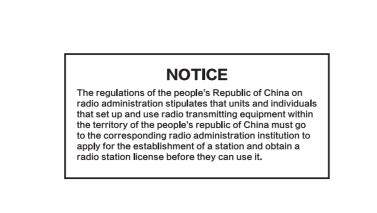


Accessories	Quantity
Intercoms	1
Antenna	1
Li-ion Battery Pack	1
Charger	1
Hand Strap	1
Instructions for use	1


Instructions for use	1	
Clips	1	
Note: For more information on optional	al accessories, please conta	ct your dealer.

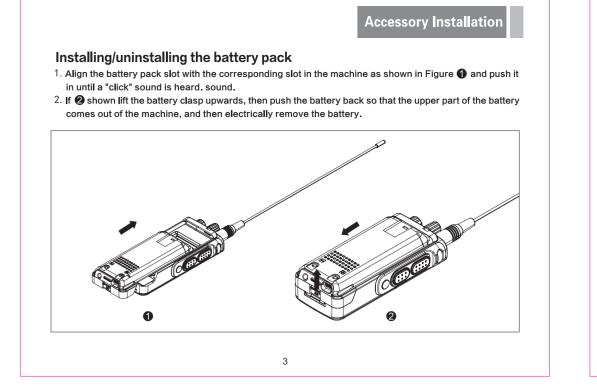


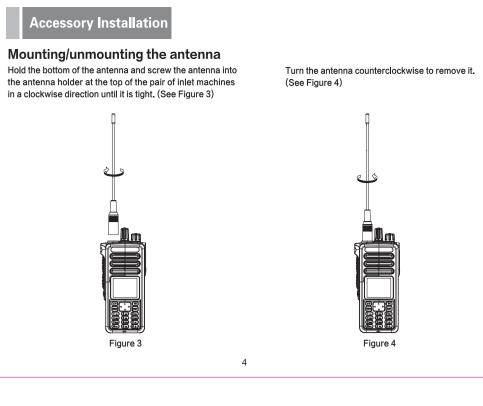


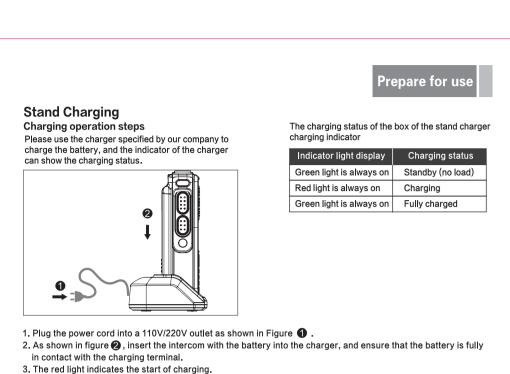


4. When the indicator light turns green, the charging is completed.

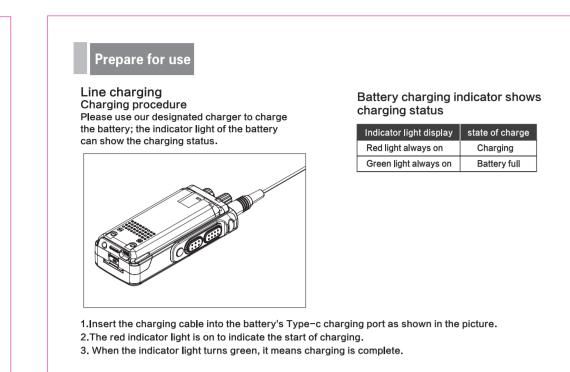

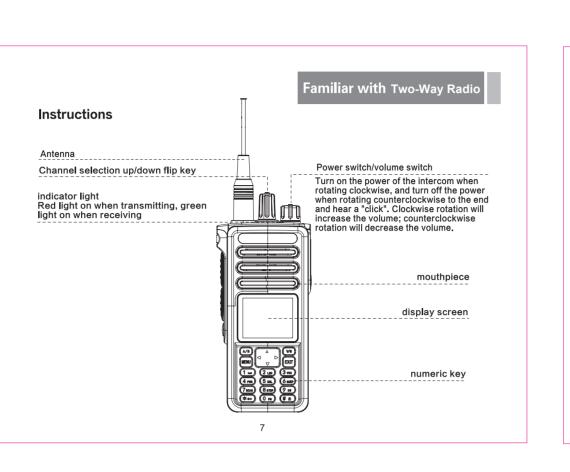

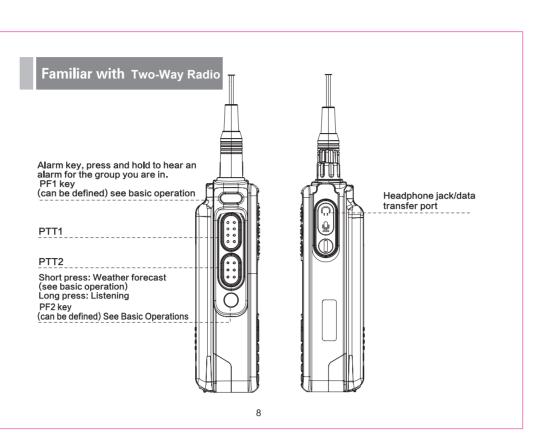

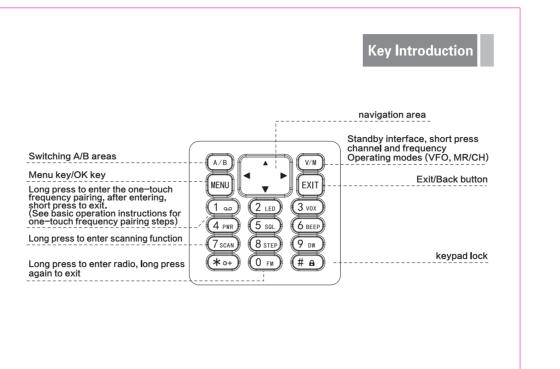

■ In a vehicle with airbags, do not place the walkie-talkie within the area that may be involved in airbag deployment.

■ Please do not continue to transmit for too long, the walkie-talkie may get too hot and hurt, or even damage the

■ Do not use the walkie-talkie when its antenna has been damaged.it may cause minor burns if damaged antenna

If you wear your portable walkie-talkie on your body, make sure that the antenna is at least 5 cm away from your body

■ In the unlikely event that you notice any odor or smoke coming from your walkie-talkie, turn off the power immediately


■ Please turn off the intercom before entering a flammable or explosive environment.


■ Do not place the walkie-talkie in direct sunlight for a long time or near a heating device.


contacts with skin.

when the walkie-talkie is transmitting.


and contact the authorized dealer nearest.

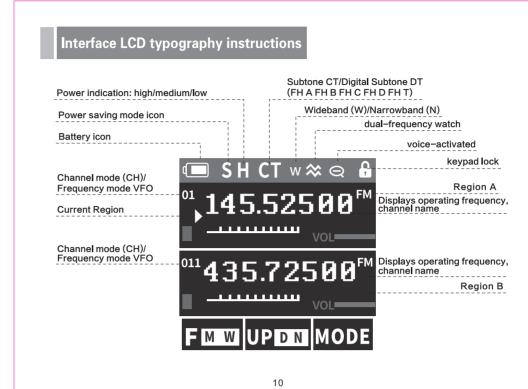


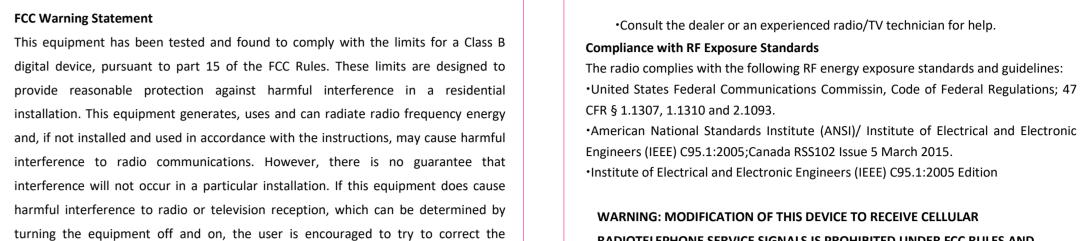




Icons	Instructions	
L	Current transmit power is low power	
Н	Current transmit power is high power	
М	Current transmit power is medium power	
СТ	This symbol indicates that the current sub-tone is an analog sub-tone	
DT	This symbol indicates that the current subsonic is a digital subsonic	
*	It means that the dual-band watch function has been set and activated at the same time, and the dual watch state can watch the frequency points of the two bands displayed on the screen at the same time	
C	This symbol appears when the keyboard is locked, and can be released by holding down the # a key for 2 seconds.	
•	Indicates that the acoustic emission function is activated, when the sound pressure level of the microphone reaches the set value, the emission is activated	
N	This symbol appears when the current channel is operating in narrowband mode	
W	This symbol appears when the current channel is operating in wideband mode	
	Display the current battery power remaining, in the case of battery is about to run out, there is a voic prompt "low battery" battery only shows the outer frame	
•	A/B segment pointer, indicating the current operating frequency point	

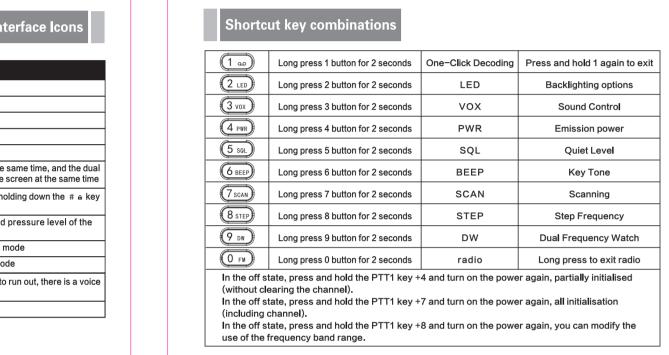

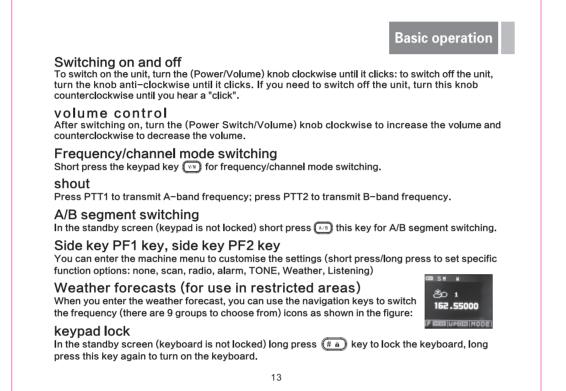


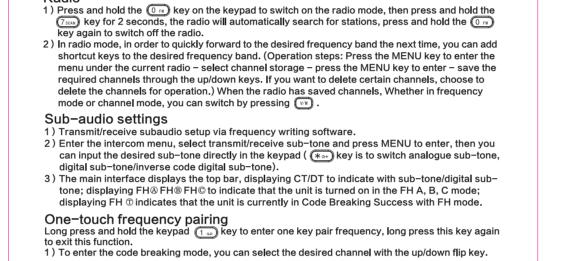


Press the MENU key and then select the End of Call Tone option, press the MENU key to enter, with

end-of-call tone

(None, Start, End, Both) available inside.

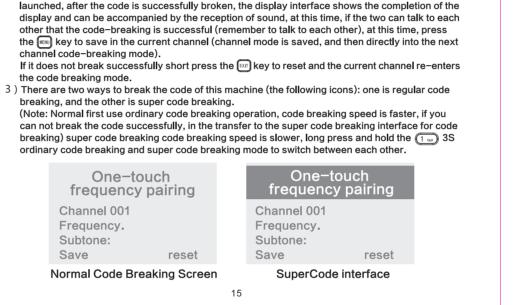

2) After entering the code-breaking mode, the machine to break the code (other models) has been

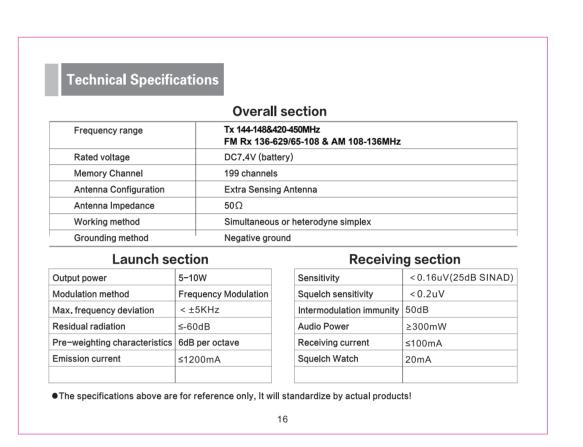



b.At the special local maintenance point of our company.

interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

the receiver is connected.

•Increase the separation between the equipment and receiver.

•Connect the equipment into an outlet on a circuit different from that to which

