

# **FCC Test Report**

Report No.: AGC11758231005FR01

**FCC ID** : 2A482-CW04

APPLICATION PURPOSE : Original Equipment

**PRODUCT DESIGNATION**: MagPro Series Magnetic Wireless Charging Car Mount

**BRAND NAME**: baseus

**MODEL NAME** : BS-CW04

**APPLICANT**: Shenzhen Baseus Technology Co., Ltd.

**DATE OF ISSUE** : Dec. 19, 2023

**STANDARD(S)** : FCC Part 15 Subpart C

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 35

# **Report Revise Record**


Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Dec. 19, 2023	Valid	Initial Release	



## **Table of Contents**

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	5
2.3 Related Submittal(S) / Grant (S)	ε
2.4 Test Methodology	ε
2.5 Special Accessories	ε
2.6 Equipment Modifications	6
2.7 Antenna Requirement	6
3. Test Environment	7
3.1 Address of The Test Laboratory	7
3.2 Test Facility	7
3.3 Environmental Conditions	8
3.4 Measurement Uncertainty	8
3.5 List of Equipment Used	9
4.System Test Configuration	10
4.1 EUT Configuration	10
4.2 EUT Exercise	10
4.3 Configuration of Tested System	10
4.4 Equipment Used in Tested System	10
4.5 Summary of Test Results	11
5. Description of Test Modes	12
6. Field Strength of Fundamental	13
6.1 Measurement Limits	13
6.3 Field Strength Calculation	15
6.4 Measurement Setup	16
6.5 Measurement Results	17
7. 20 dB Bandwidth Measurement	29
7.1 Provisions Applicable	29
7.2 Measurement Procedure	29
7.3 Measurement Setup	29
7.4 Measurement Results	29
8. AC Power Line Conducted Emission Test	31
8.1 Measurement Limits	31
8.2 Measurement Setup	31
8.3 Preliminary Procedure of Line Conducted Emission Test	32
8.4 Final Procedure of Line Conducted Emission Test	32
8.5 Measurement Results	
Appendix I: Photographs of Test Setup	35
Appendix II: Photographs of Test EUT  Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing Stars" in decreased to be invalid. Consider the starting of ACC. The starting of ACC.	/Inspection
Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. T presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of t	

Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





## 1. General Information

·
Shenzhen Baseus Technology Co., Ltd.
2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou
Community, Bantian Street, Longgang District, Shenzhen, China
Shenzhen Baseus Technology Co., Ltd.
2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou
Community, Bantian Street, Longgang District, Shenzhen, China
Shenzhen Annaijia Electronics Co., Ltd.
Building 3, Quanxinyuan Industrial Zone, Huafan Road, Dalang Sub-district,
Longhua District, Shenzhen City, Guangdong Province, China
MagPro Series Magnetic Wireless Charging Car Mount
baseus
BS-CW04
N/A
N/A
Oct. 18, 2023
Oct. 18, 2023 to Dec. 15, 2023
No any deviation from the test method
Normal
Pass
AGCER -FCC-WPT-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Thea Huang	
	Thea Huang (Project Engineer)	Dec. 19, 2023
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Dec. 19, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Dec. 19, 2023



Page 5 of 35

## 2. Product Information

# 2.1 Product Technical Description

Equipment Type	WPT System
Frequency Band	WPT Band I: 115kHz-205kHz WPT Band II: 360kHz±5kHz
Operation Frequency	127.6kHz, 359.8kHz
Hardware Version	CPS823X-V1
Software Version	V1.0
Modulation Type	ASK
Number of channels	2
Field Strength of Fundamental	61.66dBuV/m (Max)
Antenna Designation	Coil Antenna
Antenna Gain	0dBi
Wireless Charging Output Power	5W / 7.5W / 15W
Power Supply	Input: DC 5V 2.4A(Max), DC 9V 2.5A

# 2.2 Test Frequency List

Frequency Band Channel Number		Frequency
115~205kHz	01	127.6kHz

Frequency Band Channel Number		Frequency	
360kHz±5kHz	01	359.8kHz	



Page 6 of 35

#### 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for **FCC ID: 2A482-CW04**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.4 Test Methodology

The tests were performed according to following standards:

No.	o. Identity Document Title			
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
2	FCC 47 CFR Part 15	Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		

#### 2.5 Special Accessories

Not available for this EUT intended for grant.

## 2.6 Equipment Modifications

Not available for this EUT intended for grant.

#### 2.7 Antenna Requirement

## Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **EUT Antenna**:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0dBi.



Page 7 of 35

#### 3. Test Environment

#### 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to FOLLOW CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 8 of 35


#### 3.3 Environmental Conditions

	Normal Conditions		
Temperature range (℃)	15 - 35		
Relative humidity range	20% - 75%		
Pressure range (kPa)	86 - 106		

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %		





## 3.5 List of Equipment Used

RF Conducted Test System								
Used	Used Equipment No. Test Equipment Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD) (YY-MM-DD)							
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
$\boxtimes$	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30	
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023/06/03	2024/06/02	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023/06/03	2024/06/02	

Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A	
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	



Page 10 of 35

## 4. System Test Configuration

## 4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Note
1	Adapter	K-T10E0502000E	jinbaotong	AC100-240V,50-60Hz,0.35A,DC5V/ 2A	
2	Adapter	HW-200440C00	HUAWEI	Input AC100-240V 50/60Hz,24A Output: 5V3A/10V4A/12V3A	
3	Wireless charging load	N/A	HUAWEI	Support 5W,7.5W,10W,15W	
4	Cement resistance	N/A	N/A	5Ω	

#### ☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Note
1	USB Cable	N/A	N/A	1.0m, Unshielded	Accessories
2	Wireless charging load	CPS4047	QCONVENIENT POWER		
3	Cement resistance	N/A	N/A	1Ω, 12Ω	



Page 11 of 35

## 4.5 Summary of Test Results

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Radiated Spurious Emission	Pass
3	§15.215(c)	20dB Bandwidth	Pass
4	§15.205(a)	Restricted Bands of Operation	Pass
5	§15.207	AC Power Line Conducted Emission	Pass



Page 12 of 35

## 5. Description of Test Modes

Summary table of Test Cases			
	Equipment type / Modulation		
Test Item	WPT_ASK		
Radiated &Conducted Test Cases	Mode 1: AC/DC Adapter (DC 9V/2.5A)+Wireless load (Full Load) Mode 2: AC/DC Adapter (DC 9V/2.5A)+Wireless load (Half load) Mode 3: AC/DC Adapter (DC 9V/2.5A)+Wireless load (Null load) Mode 4: AC/DC Adapter (DC 5V/2.4A)+Wireless load (Full Load) Mode 5: AC/DC Adapter (DC 5V/2.4A)+Wireless load (Half load) Mode 6: AC/DC Adapter (DC 5V/2.4A)+Wireless load (Null load)		
AC Conducted Emission	Mode 1: AC/DC Adapter (DC 9V/2.5A)+Wireless load (Full Load) Mode 2: AC/DC Adapter (DC 9V/2.5A)+Wireless load (Half load) Mode 3: AC/DC Adapter (DC 9V/2.5A)+Wireless load (Null load) Mode 4: AC/DC Adapter (DC 5V/2.4A)+Wireless load (Full Load) Mode 5: AC/DC Adapter (DC 5V/2.4A)+Wireless load (Half load) Mode 6: AC/DC Adapter (DC 5V/2.4A)+Wireless load (Null load)		

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.



Page 13 of 35

# 6. Field Strength of Fundamental

#### **6.1 Measurement Limits**

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
Receiver setup:	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
rreceiver setup.	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
	Above IGHZ	Peak	1MHz	10Hz	Average

#### Limits for frequency below 30MHz

Frequency	Limit (µV /m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

## Limits for frequency Above 30MHz

Frequency	Limit (dBµV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 4CLIz	54.00	Average Value
Above 1GHz	74.00	Peak Value

Remark: (1) Emission level  $dB\mu V = 20 \log Emission level \mu V/m$ 

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance Is The Distance In Meters Between The Measuring Instrument, Antenna And The Closest Point Of Any Part Of The Device Or System.



Page 14 of 35

#### **6.2 Measurement Procedure**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.



Page 15 of 35

## 6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where  $FS = Field Strength in dB\mu V/m$ 

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m AG = Amplifier Gain in dB AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF where  $FS = Field \ Strength \ in \ dB\mu V/m$   $RR = RA - AG - AV \ in \ dB\mu V$   $LF = CF + AF \ in \ dB$ 

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m.

This value in dBµV/m was converted to its corresponding level in µV/m.

 $RA = 52.0 dB\mu V/m$ 

CF = 1.6 dB LF = 9.0 dB

 $AG = 29.0 \, dB$ 

AV = 5.0 dB

FS = RR + LF

 $FS = 18 + 9 = 27 dB\mu V/m$ 

Level in  $\mu$ V/m = Common Antilogarithm [(27 dB $\mu$ V/m)/20] = 22.4  $\mu$ V/m

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFH[dB(S/m)]$ 

Where,

H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

LC is the cable loss,

GPA is the gain of the preamplifier (if used), and

AFH is the magnetic antenna factor.

If the "electrical" antenna factor is used instead, the above equation becomes:

$$H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFE[dB(m-1)] - 51.5[dB\Omega]$$

where AFE is the "electric" antenna factor, as provided by the antenna calibration laboratory.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




## 6.4 Measurement Setup

Radiated Emission Test Setup 9kHz-30MHz

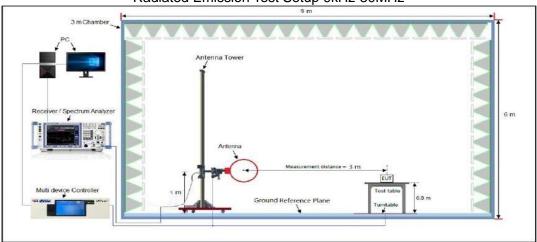

## Radiated Emission Test Setup 30MHz-1000MHz

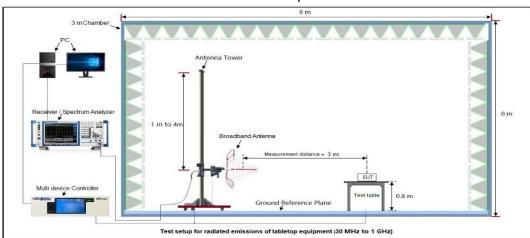


The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



#### 6.5 Measurement Result

## Electric Field Test in The Frequency Range 9kHz-150kHz

EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 1	Antenna	Face

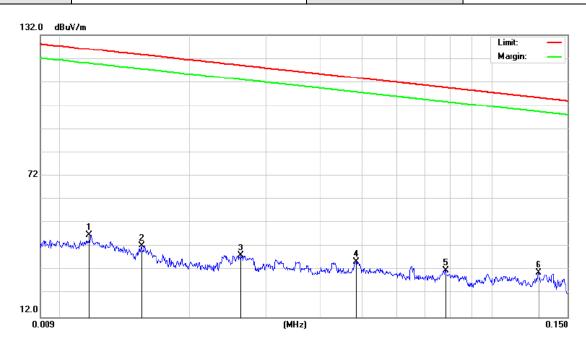


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0117	9.31	37.53	46.84	126.0	-79.20	peak
2	0.0155	5.62	36.71	42.33	123.6	-81.28	peak
3	0.0263	3.81	34.36	38.17	119.0	-80.88	peak
4	0.0485	5.29	30.17	35.46	113.7	-78.30	peak
5	0.0781	4.16	27.75	31.91	109.6	-77.74	peak
6 *	0.1280	3.36	27.62	30.98	105.3	-74.41	peak

## **Result: Pass**



EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 1	Antenna	Side

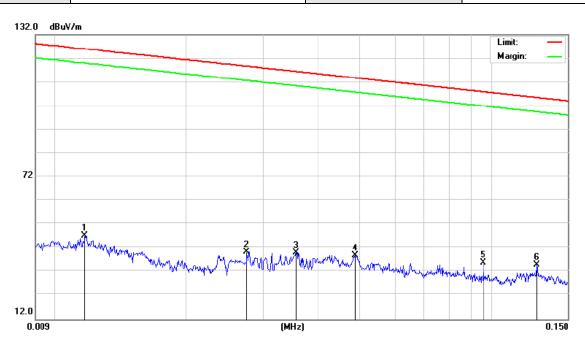


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0117	9.59	37.53	47.12	126.0	-78.92	peak
2	0.0275	6.38	34.10	40.48	118.6	-78.18	peak
3	0.0357	7.41	32.52	39.93	116.4	-76.48	peak
4	0.0488	8.80	30.12	38.92	113.7	-74.79	peak
5	0.0956	8.00	27.91	35.91	107.9	-72.00	peak
6 *	0.1270	7.21	27.64	34.85	105.4	-70.60	peak

**Result: Pass** 



EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 2	Antenna	Face

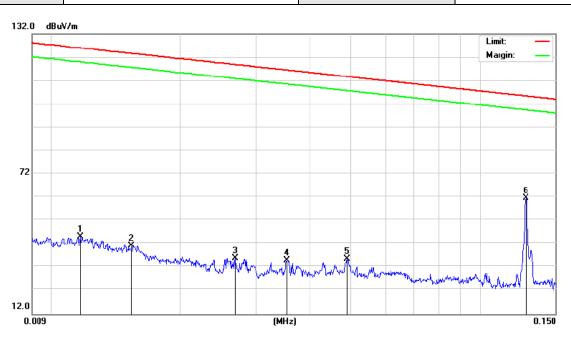


_								
	No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
-		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
-	1	0.0117	7.64	37.53	45.17	126.0	-80.87	peak
-	2	0.0154	4.39	36.73	41.12	123.6	-82.55	peak
	3	0.0268	1.65	34.25	35.90	118.8	-82.99	peak
-	4	0.0354	2.37	32.57	34.94	116.4	-81.54	peak
	5	0.0490	5.54	30.08	35.62	113.6	-78.06	peak
-	6 *	0.1276	34.03	27.63	61.66	105.4	-43.75	peak
-								

**Result: Pass** 




EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 2	Antenna	Side

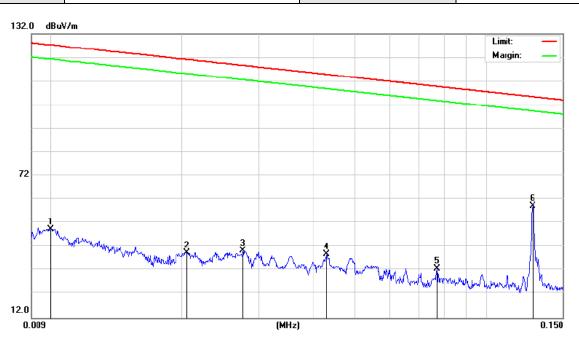


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/n	n dB	Detector
1	0.0100	11.40	37.90	49.30	127.4	-78.10	peak
2	0.0205	3.95	35.62	39.57	121.2	-81.63	peak
3	0.0276	6.33	34.08	40.41	118.6	-78.22	peak
4	0.0429	7.74	31.20	38.94	114.8	-75.88	peak
5	0.0769	4.89	27.84	32.73	109.7	-77.06	peak
6 *	0.1276	31.62	27.63	59.25	105.4	-46.16	peak

## **Result: Pass**






EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 1	Antenna	Face

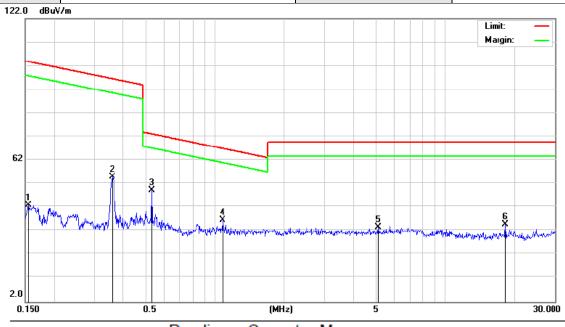


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.1547	15.66	27.26	42.92	103.7	-60.83	peak
2		0.3595	29.50	25.33	54.83	96.47	-41.64	peak
3	*	0.5322	23.72	25.39	49.11	73.08	-23.97	peak
4		1.0824	11.48	25.17	36.65	66.92	-30.27	peak
5		5.1116	10.04	23.66	33.70	69.54	-35.84	peak
6		18.2316	10.70	24.11	34.81	69.54	-34.73	peak

**Result: Pass** 






EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 1	Antenna	Side

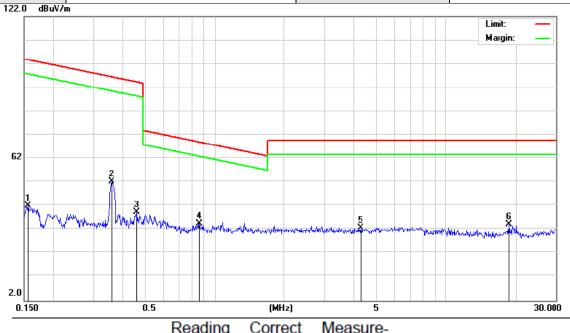


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.1556	14.94	27.25	42.19	103.7	-61.51	peak
2		0.3596	27.07	25.33	52.40	96.47	-44.07	peak
3		0.4588	13.86	25.38	39.24	94.37	-55.13	peak
4	*	0.8618	9.27	25.27	34.54	68.89	-34.35	peak
5		4.2692	8.99	23.61	32.60	69.54	-36.94	peak
6		18.7210	10.20	24.14	34.34	69.54	-35.20	peak

**Result: Pass** 






EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 2	Antenna	Face

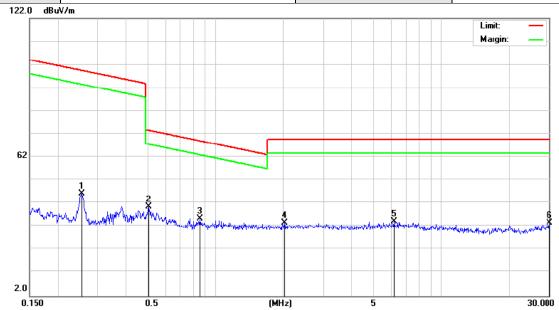


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	4
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.2548	20.25	25.91	46.16	99.44	-53.28	peak
2 *	0.5073	15.06	25.40	40.46	73.50	-33.04	peak
3	0.8572	10.32	25.27	35.59	68.94	-33.35	peak
4	2.0224	8.76	24.79	33.55	69.54	-35.99	peak
5	6.1860	10.59	23.67	34.26	69.54	-35.28	peak
6	30.0000	8.91	24.80	33.71	69.54	-35.83	peak

**Result: Pass** 





EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 2	Antenna	Side

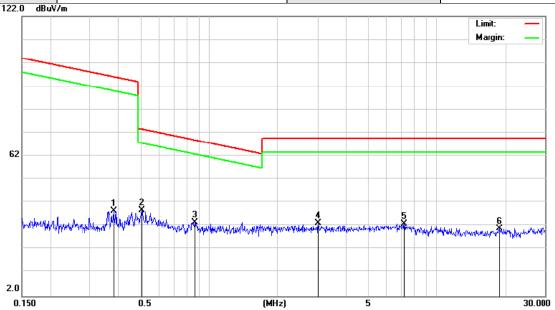

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.3811	13.25	25.34	38.59	95.97	-57.38	peak
2 *	0.5074	13.42	25.40	38.82	73.50	-34.68	peak
3	0.8664	8.29	25.27	33.56	68.85	-35.29	peak
4	3.0094	9.22	24.19	33.41	69.54	-36.13	peak
5	7.1754	9.40	23.52	32.92	69.54	-36.62	peak
6	18.8205	6.91	24.14	31.05	69.54	-38.49	peak
	·	·	·				


#### **Result: Pass**

#### Notes:

- 1. Quasi-Peak detector is used for frequency below 30MHz.
- 2. Negative value in the margin column shows emission below limit.
- 3. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
- 4. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)
- 5. Loop antenna is used for the emission under 30MHz.



EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.1°C	Relative Humidity	60.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 1	Antenna	Horizontal

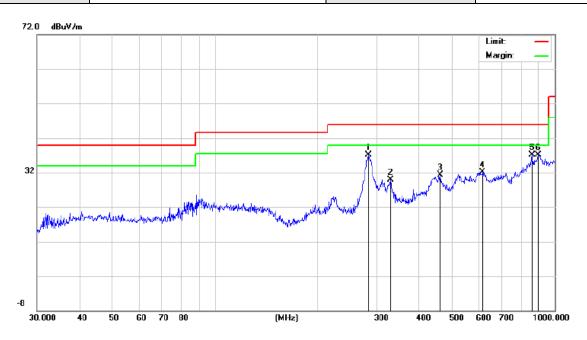


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		282.9852	21.91	15.14	37.05	46.00	-8.95	peak
2		329.0390	13.15	16.77	29.92	46.00	-16.08	peak
3		460.7271	7.00	24.31	31.31	46.00	-14.69	peak
4		614.2142	6.98	25.17	32.15	46.00	-13.85	peak
5	*	857.0247	8.22	28.92	37.14	46.00	-8.86	peak
6		896.9965	5.68	31.42	37.10	46.00	-8.90	peak

**Result: Pass** 



EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.1°C	Relative Humidity	60.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 1	Antenna	Vertical

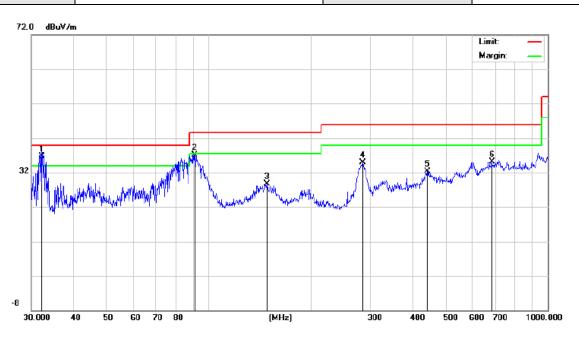


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	32.2925	22.33	14.36	36.69	40.00	-3.31	QP
2		91.1746	21.62	15.39	37.01	43.50	-6.49	peak
3		148.4410	10.41	18.20	28.61	43.50	-14.89	peak
4		284.9767	16.37	18.52	34.89	46.00	-11.11	peak
5		441.7426	6.24	26.02	32.26	46.00	-13.74	peak
6		684.7454	7.28	27.79	35.07	46.00	-10.93	peak

**Result: Pass** 




EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.1°C	Relative Humidity	60.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 2	Antenna	Horizontal

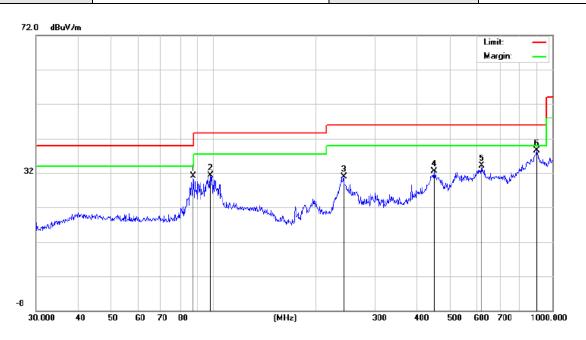


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		87.4176	16.81	14.25	31.06	40.00	-8.94	peak
2		98.1419	15.43	15.91	31.34	43.50	-12.16	peak
3		242.5252	15.60	15.32	30.92	46.00	-15.08	peak
4		447.9821	7.59	24.82	32.41	46.00	-13.59	peak
5		618.5368	8.82	25.19	34.01	46.00	-11.99	peak
6	*	900.1473	6.80	31.78	38.58	46.00	-7.42	peak

**Result: Pass** 





EUT Name	MagPro Series Magnetic Wireless Charging Car Mount	Model Name	BS-CW04
Temperature	23.1°C	Relative Humidity	60.5%
Pressure	960hPa	Test Voltage	DC 9V
Test Mode	Mode 2	Antenna	Vertical

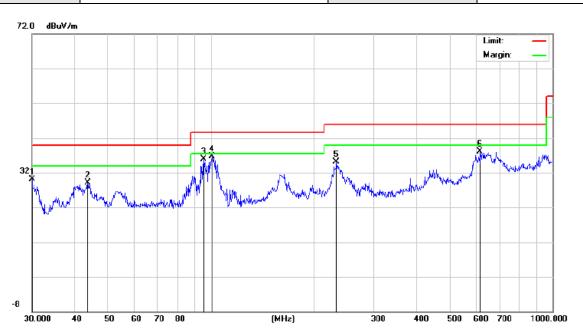

_	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
_	1		30.0000	16.60	13.60	30.20	40.00	-9.80	peak
_	2		43.6584	12.22	16.94	29.16	40.00	-10.84	peak
_	3		95.4270	21.05	14.82	35.87	43.50	-7.63	peak
_	4	*	100.9339	22.36	14.36	36.72	43.50	-6.78	peak
_	5		233.3487	18.76	16.29	35.05	46.00	-10.95	peak
	6		614.2142	13.30	24.75	38.05	46.00	-7.95	peak
_									

## **Result: Pass**

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

- 2. All test modes had been pre-tested. The mode 1 and mode 2 recorded in the report.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



## 7. 20 dB Bandwidth Measurement

## 7.1 Provisions Applicable


N/A

#### 7.2 Measurement Procedure

Set the parameters of SPA as below:


- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 300 Hz and the video bandwidth of 1 kHz were used.
- 4. Span: 3kHz, Sweep time: Auto
- 5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and Reported.

#### 7.3 Measurement Setup

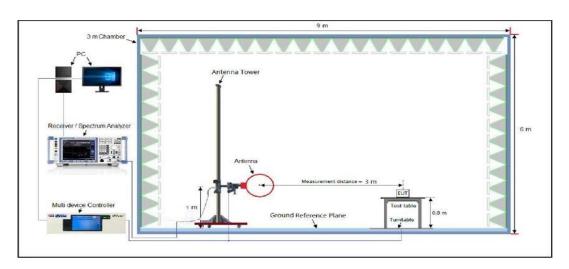

#### 7.4 Measurement Result

	Te	st Data of Occupied Bandw	idth and -20dB Bandwi	dth	
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (kHz)	Pass or Fail
ASK	0.1276	0.730	0.820	N/A	Pass
ASK	0.3598	0.697	0.816	N/A	Pass





## Test Graphs of Occupied Bandwidth



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



## 8. AC Power Line Conducted Emission Test


## **8.1 Measurement Limits**

Fraguenay Danga	Maximum RF	Line Voltage
Frequency Range	Q.P. (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 8.2 Measurement Setup

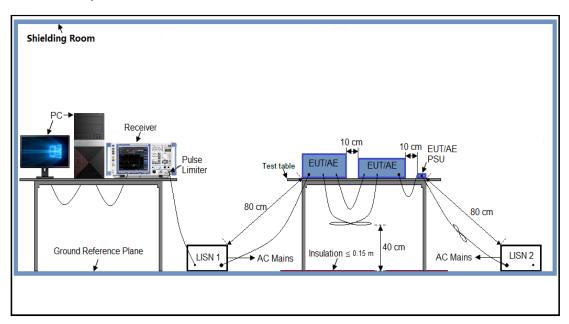



Page 32 of 35

## 8.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 24V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 8.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.



#### 8.5 Measurement Result

est Mode	Mode 1							LISN	Jli	ne	LISN Line							
	IVI	oue i								LIOI	V LI	110				Hot S	nuc	
Le	/el [dB	BuV1																
80 r																		
								-	-		<b>!</b>		-	-			-	
70			[	F		ļ		-			i – – –		-7		i i			
60	1				!			-						<u> </u>	!!		<u> </u>	
50						<u></u>								+	<del>! !</del>		+	
40	₩-		- <del>4</del>	+	-	<u></u>		-		<del>-</del>					<u> </u>			.aa : at
30		$\sim$ $\sim$ $\sim$ $\sim$ $\sim$ $\sim$ $\sim$ $\sim$	-m-	- 	-0-6	-	sensi		-1	11	mi-L	le en	يلي	dán		ارتابليناس و	باللواط لياز	- 4. 4
20	۰۸۸			+		Abdicate	A STATE OF						de de cons		-40	neterilliho	entiles.	a Blancara
	i	~ · · · · ·	a minum	******	an manage		Agricon		بالباله		Ŋ,	lil.b	Ш	[0,1]	A PARTY			
10	i			1 1 1														
0				+	-	 		-1			 				+ -   ·			
-10 L	50k	300	k 400k	600k	800k 1	M		2M	31	1 1	ш М 5	M 6	<u></u>	8M	10M		20M	30M
'	JUN	300	K 400K	OUOK	OUUK	· ·		quency		" 7	ivi J	IVI OI	V1	OIVI	TOW		2011	JUN

# MEASUREMENT RESULT: "agc\_fin"

2023/12/4 13:43

2023/12/4 13:	43					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000 1.082000 1.798000 2.518000	44.80 35.30 36.20 36.80	6.1 6.2 6.2 6.3	59 56 56 56		QP QP	L1 L1 L1 L1
3.238000 3.958000	36.90 35.60	6.3 6.3	56 56	19.1 20.4	QP QP	L1 L1


# MEASUREMENT RESULT: "agc\_fin2"

2023/12/4 13:43

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000 20.150000 23.750000 24.470000	39.10 37.10 37.60 38.20	6.1 7.1 7.8 7.9	49 50 50	9.6 12.9 12.4 11.8	AV AV AV	L1 L1 L1 L1
28.066000 28.786000	38.10 39.60	8.2 8.2	50 50	11.9 10.4	AV AV	L1 L1

#### <u>Result: Pass</u>



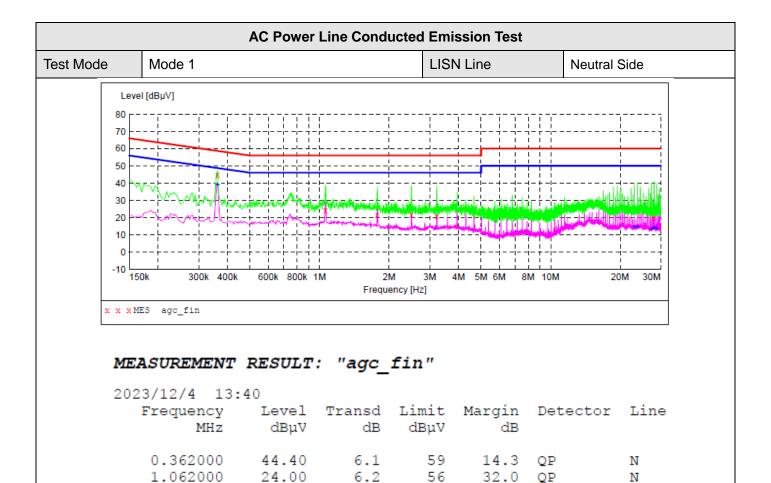

MEASUREMENT	RESULT:	"agc	fin2"

21.60

21.60

20.70

20.00

2023/12/4 13:40						
Frequen M	cy Level Hz dBµV		Limit dBµV	Margin dB	Detector	Line
0.3620	00 39.00	6.1	49	9.7	AV	N
23.0100	00 14.60	7.6	50	35.4	AV	N
23.7300	00 14.60	7.8	50	35.4	AV	N
27.3260	00 13.40	8.1	50	36.6	AV	N
28.0460	00 14.20	8.2	50	35.8	AV	N
28.7660	00 13.80	8.2	50	36.2	AV	N

6.2

6.3

6.3

8.2

56

56

56

60

34.4

34.4

35.3

40.0

QP

QP

QP

QP

Ν

Ν

Ν

Ν

#### **Result: Pass**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1.778000

2.498000

3.218000

28.046000

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 35 of 35

**Appendix I: Photographs of Test Setup** 

Refer to the Report No.: AGC11758231005AP02

**Appendix II: Photographs of Test EUT** 

Refer to the Report No.: AGC11758231005AP03

----End of Report----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.