



# Test Report

## FCC ID: 2BA8X-JR-W13

Applicant: Shenzhen Nito Power Source Technology Co., Ltd.  
Address: 201-7, Building 2, Shihua Lixing Fengda Industrial Factory, No. 49 Wuhe Avenue South, Wuhe Community, Bantian Street, Longgang District, Shenzhen  
Manufacturer: Shenzhen Nito Power Source Technology Co., Ltd.  
Address: 201-7, Building 2, Shihua Lixing Fengda Industrial Factory, No. 49 Wuhe Avenue South, Wuhe Community, Bantian Street, Longgang District, Shenzhen  
EUT: Portable Wireless Watch Charger  
Trade Mark: JOYROOM  
Model Number: JR-W13  
Date of Receipt: Jun. 21, 2024  
Test Date: Jun. 21, 2024 - Jul. 05, 2024  
Date of Report: Jul. 05, 2024  
Prepared By: Shenzhen DL Testing Technology Co., Ltd.  
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Prepared (Engineer): Alisa Song  
Reviewer (Supervisor): Jack Bu  
Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



## Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.



# Contents

<b>1</b>	<b>General Description .....</b>	<b>5</b>
1.1	Description of the EUT .....	5
1.2	Description of test modes .....	5
1.3	Description of support units .....	6
<b>2</b>	<b>Measurement uncertainty .....</b>	<b>6</b>
<b>3</b>	<b>Test facilities and accreditations.....</b>	<b>7</b>
3.1	Test laboratory .....	7
<b>4</b>	<b>List of test equipment .....</b>	<b>8</b>
<b>5</b>	<b>Test result .....</b>	<b>9</b>
5.1	Requirement .....	9
5.2	Test setup.....	10
5.3	Test Procedures.....	11
5.4	Test results.....	12
	<b>Photographs of the Test Setup.....</b>	<b>20</b>
	<b>Photographs of the EUT .....</b>	<b>20</b>



<b>Test Result Certification</b>	
<b>Applicant:</b>	Shenzhen Nito Power Source Technology Co., Ltd.
<b>Address:</b>	201-7, Building 2, Shihua Lixing Fengda Industrial Factory, No. 49 Wuhe Avenue South, Wuhe Community, Bantian Street, Longgang District, Shenzhen
<b>Manufacturer:</b>	Shenzhen Nito Power Source Technology Co., Ltd.
<b>Address:</b>	201-7, Building 2, Shihua Lixing Fengda Industrial Factory, No. 49 Wuhe Avenue South, Wuhe Community, Bantian Street, Longgang District, Shenzhen
<b>Product description</b>	
<b>Product name:</b>	Portable Wireless Watch Charger
<b>Trademark:</b>	JOYROOM
<b>Model name:</b>	JR-W13
<b>Series Model:</b>	N/A
<b>Standards:</b>	FCC CFR 47 PART 1, § 1.1310 FCC CFR 47 PART 2, § 2.1093
<b>Test method:</b>	KDB 680106 D01 Wireless Power Transfer v04
<b>Date of Test</b>	
<b>Date of test:</b>	Jun. 21, 2024 - Jul. 05, 2024
<b>Test result:</b>	Pass



## 1 General Description

### 1.1 Description of the EUT

Product name:	Portable Wireless Watch Charger
Model name:	JR-W13
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Capacity:5000mAh 3.7V(18.5Wh) Rated Capacity:3000mAh Type-C Input:5V/3A, 9V/2A Lighting Input:9V/2A Type-C Output:5V/3A, 9V/2.22A, 12V/1.67A Lighting Output:5V/3A, 9V/2.22A, 12V/1.67A Wireless Output:3W
Accessories:	Cable: USB-C to USB-C Cable 100cm
<b>RF specification:</b>	
Operation frequency:	115-205kHz
Modulation type:	MSK
Antenna type:	Coil

### 1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Wireless Output(3W)
Mode2	Charging+Wireless Output(3W)
Mode3	Standby

Note: All of the listed test mode were tested, only the data of the worst mode (Mode1) is recorded in the report



### 1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
XIAOMI Laptop Portable adapter(65W)	AD65G	/	XIAOMI
Watch (Provide by test lab)	Series 6	/	Apple

## 2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurement (9kHz~30MHz)	$\pm 7.8\%$
Electric field measurements (9kHz~30MHz)	$\pm 7.8\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



### 3 Test facilities and accreditations

#### 3.1 Test laboratory

Test laboratory:	Shenzhen DL Testing Technology Co., Ltd.
Test site location:	101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China
FCC Test Firm Registration Number:	854456
Designation Number:	CN1307
IC Registered No.:	27485
CAB ID.:	CN0118



#### 4 List of test equipment

Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	June. 24, 2024	June. 25, 2025





## 5 Test result

### 5.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

**Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(i) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
<b>(ii) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz

\* = Plane-wave equivalent power density



**Note 1:** Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

**Note 2:** General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.



### 5.2 Test setup

For portable exposure conditions:

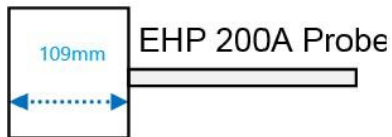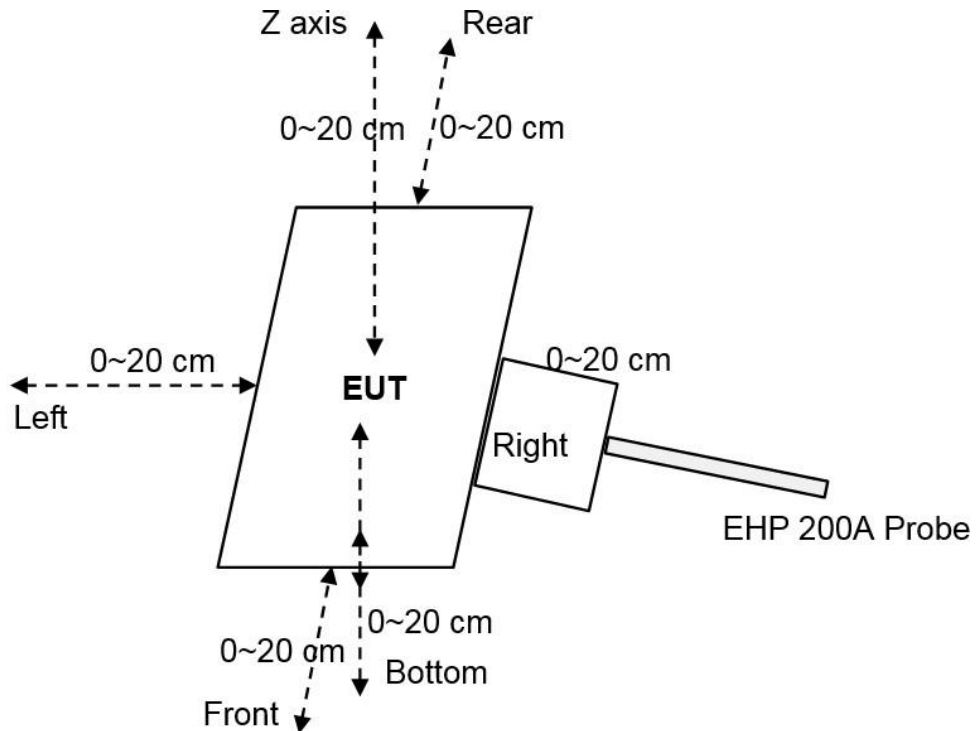

Notes: The EHP 200A Probe has a diameter of 10.9cm and a radius of 5.45cm.



### 5.3 Test Procedures

**For portable exposure conditions:**

- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- c. The highest emission level was recorded and compared with limit.


**Notes: The EUT was setted to transmit continuously with the duty cycle of 100%.**



### 5.4 Test results

#### For portable exposure condition: Note:

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) 20-2cm is the actual test value, and 0 cm is the estimated value.
- (4) Perform H-field/E-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.

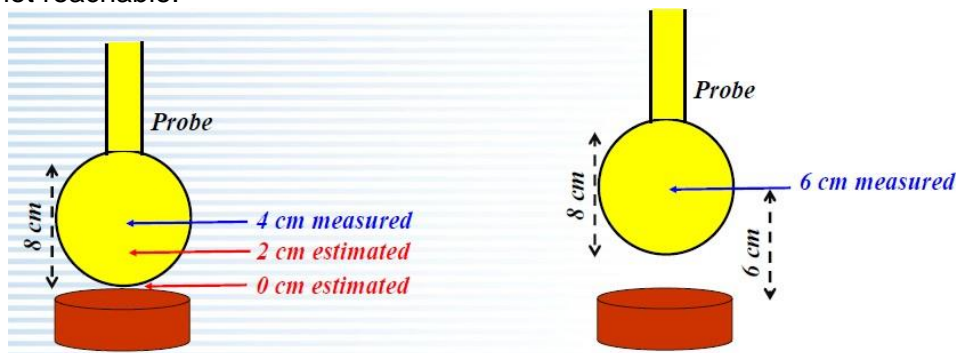


*Example of probe measurements in points close to the device surface: estimates compared with measurements at 4 and 6 cm provide validation*

According to Calibration information and specification about EHP-200A, The Probe EHP-200A's sensitive elements center are 8mm below the external surface, and the dimensions is 92x92x109mm. so the actual 0cm field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please below). And the result of test distance 2cm~20cm was measured value.

Probe	Length	Width	Height
	109mm	92mm	92mm



Note: EUT is a loop/coil emitting structure, so E-field not required. Just recorded the H-field value.

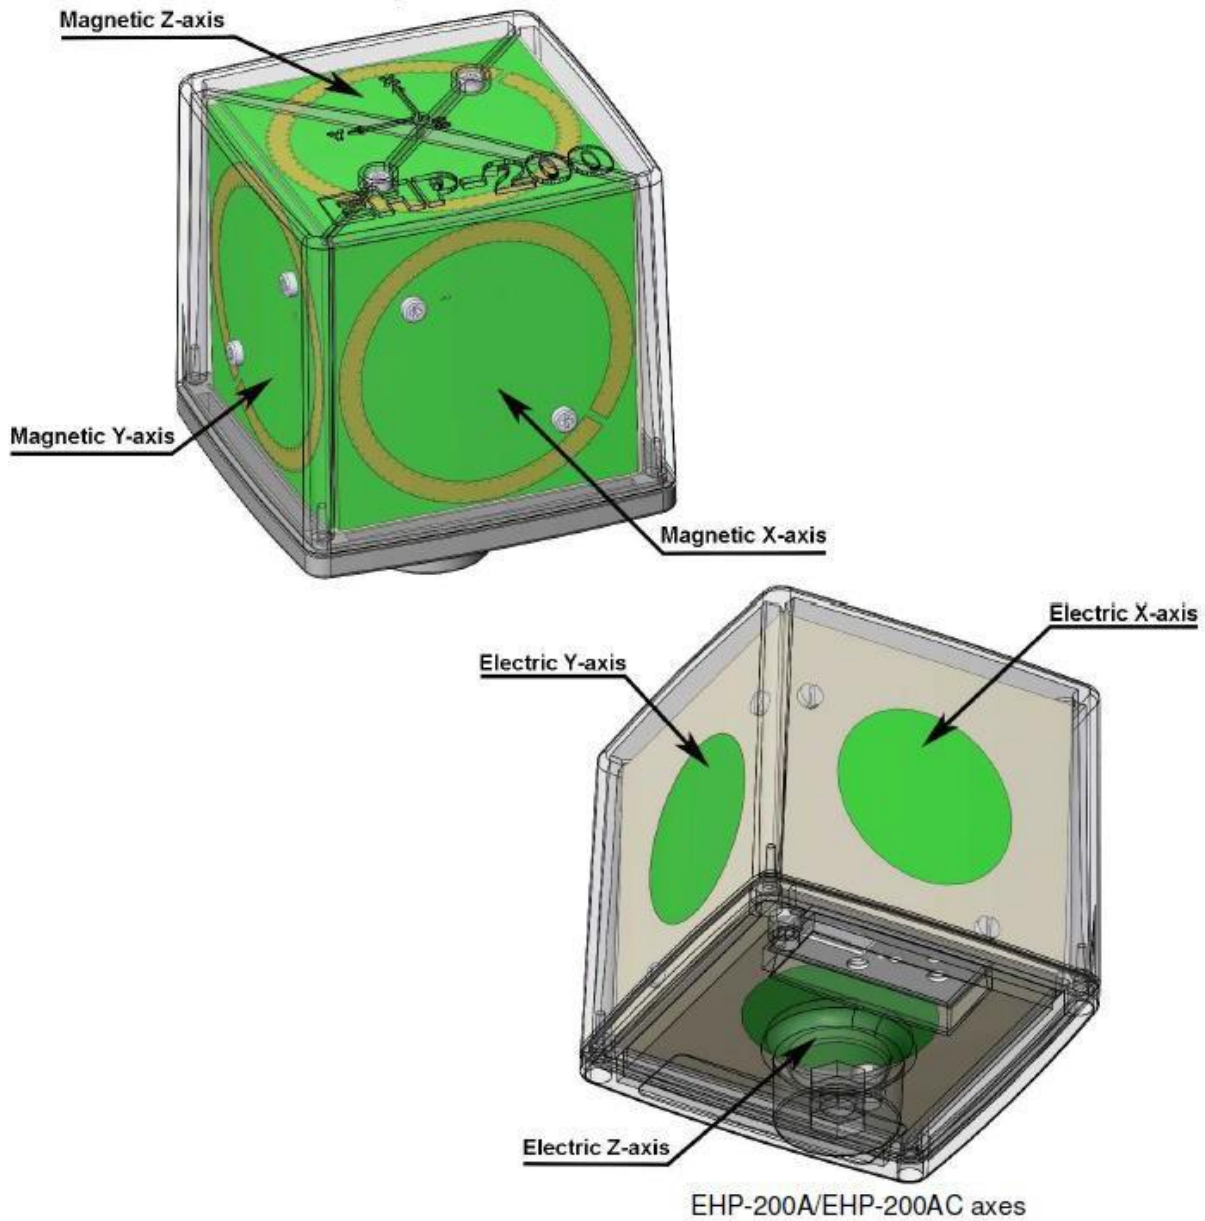


The sensitive elements are located approximately 8 mm below the external surface




## (5) Estimated method for portable RF Exposure condition:

We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

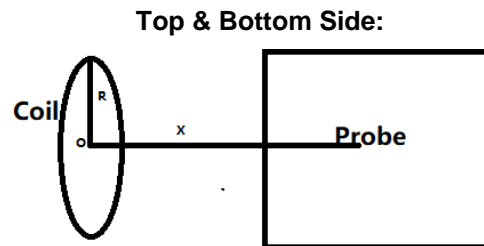

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

**Front, left, right & rear Side:**

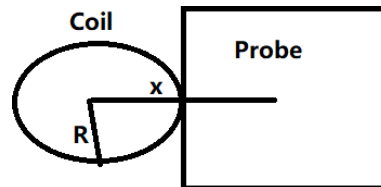

$$B = \frac{\mu_0 * I * N}{2 * x}$$

**B:** means H-field value;

$\mu_0$  is space permeability;  $\mu_0=4\pi*10^{-7}$ ;

**I:** A current element passing through a coil;

**R:** means the Radius of coil(According to provided Antenna specification: We can get the minimum

$R=38/2=19\text{mm}=0.019\text{m}$ );

**Test Distance:** The distance from the sensing element of the probe to the edge of the device surface.

**x:** means the center of the coil to the sensing elements of the probe. (For top & bottom side:  $x=\text{test distance}$ ; For other side:  $x=\text{test distance}+R$ )

**N:** Number of turns, according to providing "Antenna specification" files:  $N=10$ .

(6) For validation purposes: If the value to show a **30% agreement** between the mode and the (E- and/or H-field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

Note: The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.



**Validation:**

<b>Magnetic Field Emissions</b>							
<b>Test Distance(cm)</b>	<b>Top</b>	<b>Left</b>	<b>Right</b>	<b>Rear</b>	<b>Front</b>	<b>Bottom</b>	<b>Conclusion</b>
	<b>Unit: Agreement (%); H-field (A/m)</b>						
<b>Agreement -2cm</b>	<b>18.63</b>	<b>26.14</b>	<b>28.48</b>	<b>25.26</b>	<b>15.28</b>	<b>15.99</b>	<b>Compliance (Within 30%)</b>
<b>2cm(estimated)</b>	<b>0.4214</b>	<b>0.1634</b>	<b>0.1826</b>	<b>0.1541</b>	<b>0.1325</b>	<b>0.3325</b>	
<b>2cm(measured)</b>	<b>0.3522</b>	<b>0.1251</b>	<b>0.1317</b>	<b>0.1256</b>	<b>0.1137</b>	<b>0.2841</b>	

<b>Magnetic Field Emissions</b>							
<b>Test Distance(cm)</b>	<b>Top</b>	<b>Left</b>	<b>Right</b>	<b>Rear</b>	<b>Front</b>	<b>Bottom</b>	<b>Conclusion</b>
	<b>Unit: Agreement (%); H-field (A/m)</b>						
<b>Agreement -2cm</b>	<b>16.89</b>	<b>18.52</b>	<b>23.46</b>	<b>11.22</b>	<b>27.53</b>	<b>26.51</b>	<b>Compliance (Within 30%)</b>
<b>4cm(estimated)</b>	<b>0.1223</b>	<b>0.0553</b>	<b>0.0614</b>	<b>0.0529</b>	<b>0.0425</b>	<b>0.1041</b>	
<b>4cm(measured)</b>	<b>0.1014</b>	<b>0.0424</b>	<b>0.0511</b>	<b>0.0441</b>	<b>0.0336</b>	<b>0.0836</b>	



**Test condition 1: Mode1 operating mode with client device (1 % battery status of client device)**  
**-estimated value: 0cm**

**Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	1.0736	1.63	73.11%
	Left	1.0852		
	Right	1.1936		
	Front	1.0441		
	Rear	0.9736		
	Bottom	0.8752		

**Test condition 2: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance: 2cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.3536	1.63	21.48%
	Left	0.1241		
	Right	0.1336		
	Front	0.1252		
	Rear	0.1141		
	Bottom	0.2823		





**Test condition 3: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 4cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1152	1.63	6.81%
	Left	0.0463		
	Right	0.0414		
	Front	0.0452		
	Rear	0.0436		
	Bottom	0.0841		

**Test condition 4: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 6cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0436	1.63	6.27%
	Left	0.0241		
	Right	0.0236		
	Front	0.0252		
	Rear	0.0236		
	Bottom	0.0341		

**Test condition 5: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 8cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0452	1.63	5.76%
	Left	0.0236		
	Right	0.0252		
	Front	0.0136		
	Rear	0.0411		
	Bottom	0.0352		



**Test condition 6: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 10cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0423	1.63	5.17%
	Left	0.0256		
	Right	0.0241		
	Front	0.0129		
	Rear	0.0155		
	Bottom	0.0314		

**Test condition 7: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 12cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0346	1.63	4.74%
	Left	0.0115		
	Right	0.0136		
	Front	0.0152		
	Rear	0.0152		
	Bottom	0.0234		

**Test condition 8: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 14cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0313	1.63	4.50%
	Left	0.0141		
	Right	0.0136		
	Front	0.0152		
	Rear	0.0127		
	Bottom	0.0255		



**Test condition 9: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 16cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0336	1.63	4.11%
	Left	0.0141		
	Right	0.0125		
	Front	0.0136		
	Rear	0.0114		
	Bottom	0.0236		

**Test condition 10: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 18cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0314	1.63	4.07%
	Left	0.0136		
	Right	0.0152		
	Front	0.0136		
	Rear	0.0141		
	Bottom	0.0236		

**Test condition 11: Mode1 operating mode with client device (1 % battery status of client device)**  
**- Test distance 20cm**

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0352	1.63	3.83%
	Left	0.0136		
	Right	0.0114		
	Front	0.0136		
	Rear	0.0141		
	Bottom	0.0236		



### Photographs of the Test Setup

#### Portable exposure conditions(0cm)


Front



Left




Right

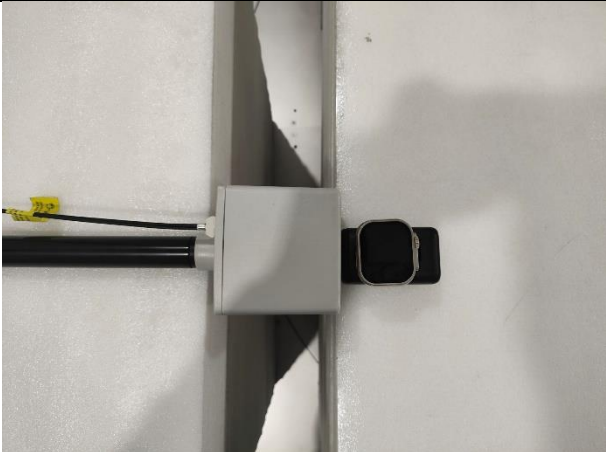

Rear



Top

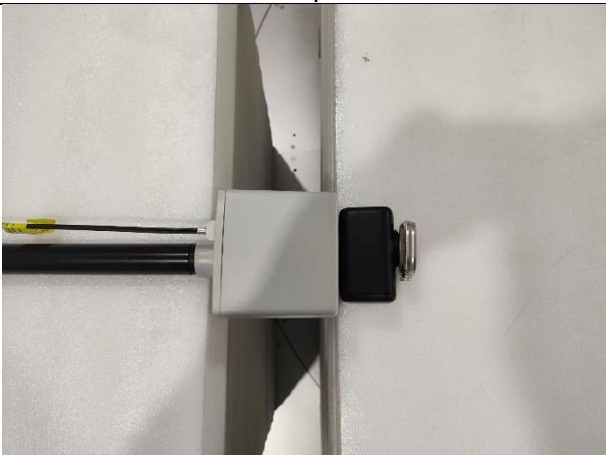

Below





## **Photographs of the EUT**

See the Appendix - EUT Photos.

**----End of Report----**