



TEST REPORT

APPLICANT : Linkplay Technology Inc.

PRODUCT NAME : WiiM Ultra Hi-Res Audio Streamer

MODEL NAME : ASR004

BRAND NAME : WiiM

FCC ID : 2BABF-ASR004

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2024-04-19

TEST DATE : 2024-04-26 to 2024-06-04

ISSUE DATE : 2024-06-07



Edited by: Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Summary of Test Result4
- 1.1. Testing Applied Standards5
- 1.2. Test Equipment List6
- 1.3. Measurement Uncertainty8
- 1.4. Testing Laboratory8
- 2. General Description9
- 2.1. Information of Applicant and Manufacturer9
- 2.2. Information of EUT9
- 2.3. Channel List of EUT 10
- 2.4. Test Configuration of EUT 11
- 2.5. Test Conditions 11
- 2.6. Test Setup Layout Diagram 11
- 3. Test Results 14
- 3.1. Antenna Requirement 14
- 3.2. Duty Cycle of Test Signal 15
- 3.3. Maximum Peak Conducted Output Power 16
- 3.4. Maximum Average Conducted Output Power 17
- 3.5. 6 dB Bandwidth 18
- 3.6. Conducted Spurious Emissions and Band Edge 19
- 3.7. Power Spectral Density 20
- 3.8. Conducted Emission 21
- 3.9. Restricted Frequency Bands 22
- 3.10. Radiated Emission 23
- Annex A Test Data and Result 25



Change History		
Version	Date	Reason for change
1.0	2024-06-07	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	May 19, 2024 Jun. 04, 2024	Su Xiaoxian	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	May 19, 2024 Jun. 04, 2024	Su Xiaoxian	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	May 19&27, 2024 Jun. 04, 2024	Su Xiaoxian	PASS	No deviation
5	15.247(a)	Bandwidth	May 19&27, 2024 Jun. 04, 2024	Su Xiaoxian	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	May 19, 2024 Jun. 04, 2024	Su Xiaoxian	PASS	No deviation
7	15.247(e)	Power Spectral Density	May 19, 2024 Jun. 04, 2024	Su Xiaoxian	PASS	No deviation
8	15.207	Conducted Emission	May 27, 2024	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	May 27, 2024	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	May 27, 2024	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the



judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F- B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0



1.2.4 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Linkplay Technology Inc.
Applicant Address	8000 Jarvis Avenue Suite #130, Newark, CA 94560
Manufacturer	Linkplay Technology Inc.
Manufacturer Address	8000 Jarvis Avenue Suite #130, Newark, CA 94560

2.2. Information of EUT

Product Name:	WiiM Ultra Hi-Res Audio Streamer
Sample No.:	1#
Hardware Version:	A98D V02+Main Board V02
Software Version:	Linkplay.5.3.613253
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.3
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PIFA Antenna
Antenna Gain:	ANT1: 3.46dBi; ANT2: 3.46dBi

Note 1: The EUT has two antennas and it operates in single antenna. Both of the two antennas were evaluated separately, only the worst test result (ANT2) were recorded in the test report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

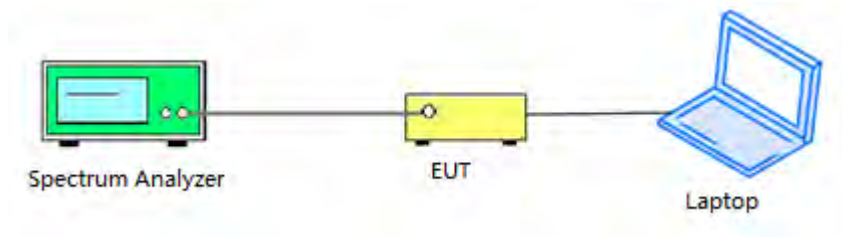


2.6.2. Conducted Emission Measurement

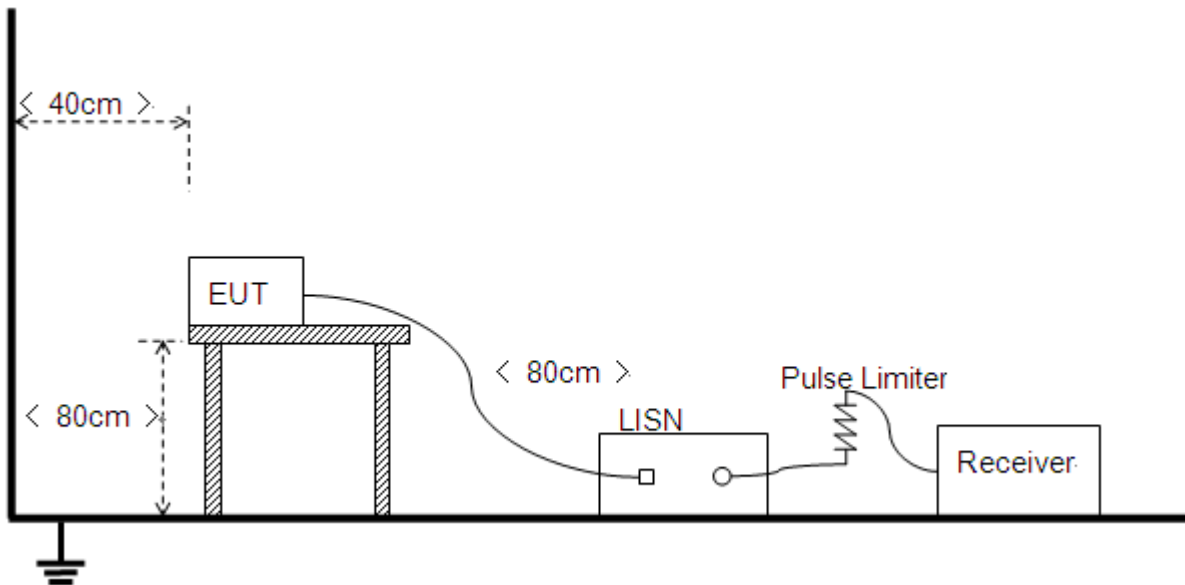


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

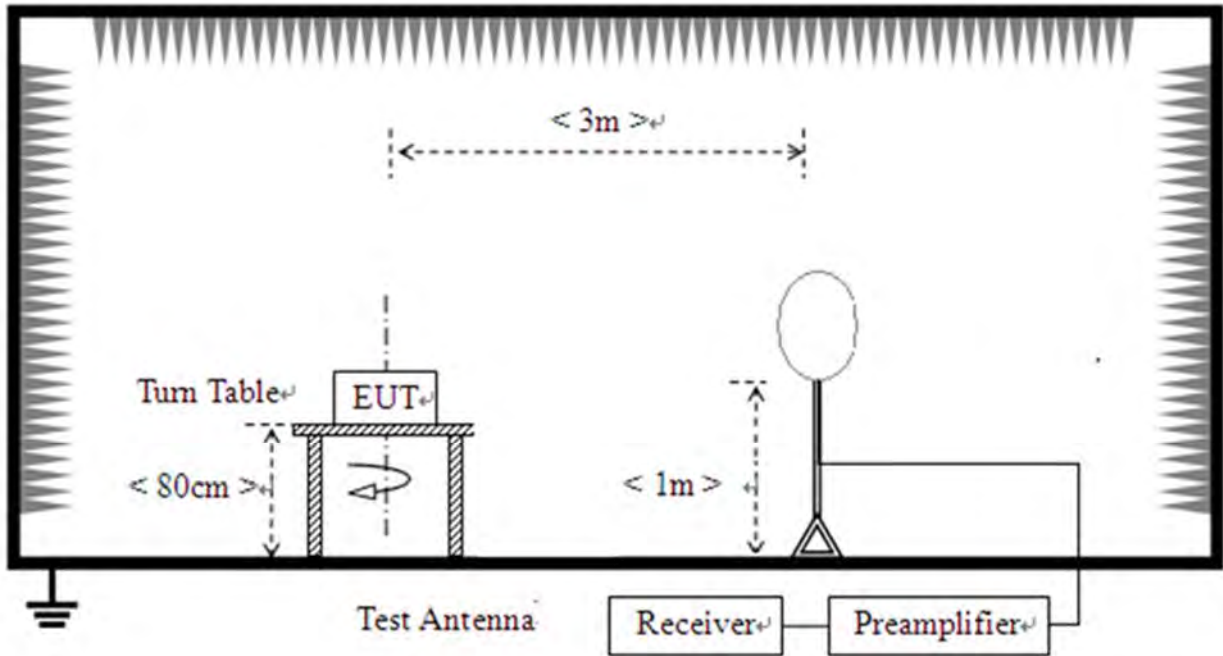

2) For radiated emissions from 30MHz to 1GHz

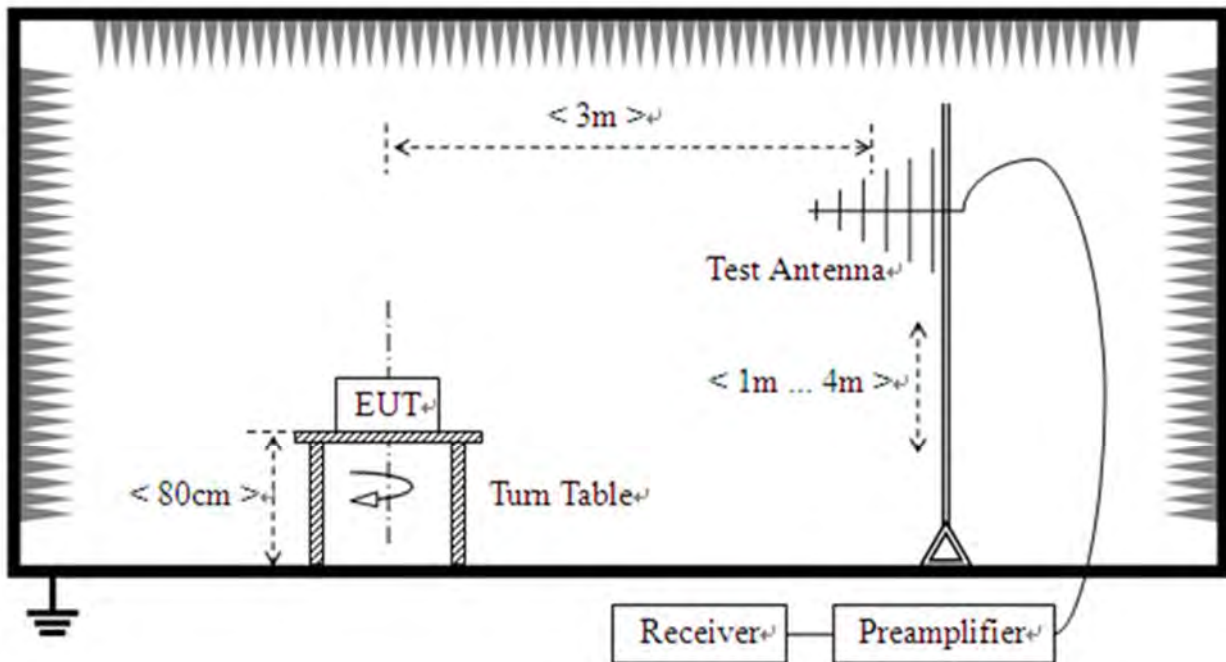

3) For radiated emissions above 1GHz

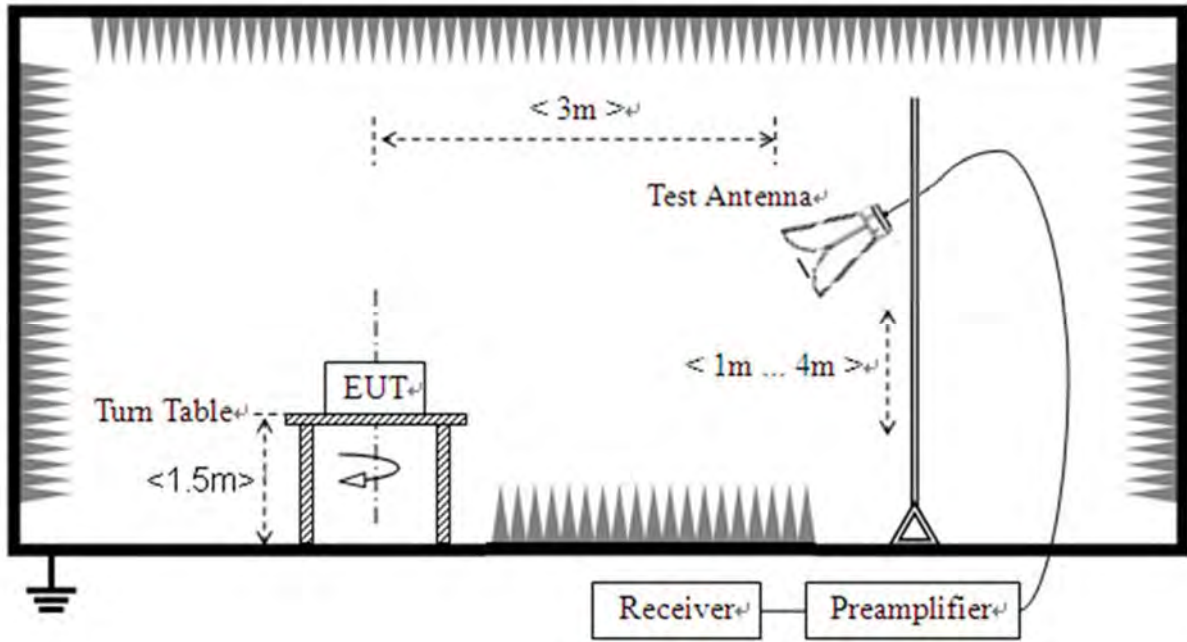



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Inside of the EUT has a PIFA antenna coupled with the I-PEX connector. Please refer to the EUT internal photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.



3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

Refer to Annex A.8 in this report.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.9 in this report.



3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4. Test Result

Refer to Annex A.10 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	85.2	0.7	0.47
NVNT	BLE 1M	2440	Ant1	85.6	0.68	0.47
NVNT	BLE 1M	2480	Ant1	85.2	0.7	0.47
NVNT	BLE 2M	2402	Ant1	57.98	2.37	0.92
NVNT	BLE 2M	2440	Ant1	57.98	2.37	0.92
NVNT	BLE 2M	2480	Ant1	57.98	2.37	0.92
NVNT	BLE 1M	2402	Ant2	85.2	0.7	0.47
NVNT	BLE 1M	2440	Ant2	85.6	0.68	0.47
NVNT	BLE 1M	2480	Ant2	85.6	0.68	0.47
NVNT	BLE 2M	2402	Ant2	58.29	2.34	0.92
NVNT	BLE 2M	2440	Ant2	57.75	2.38	0.93
NVNT	BLE 2M	2480	Ant2	57.98	2.37	0.92




Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

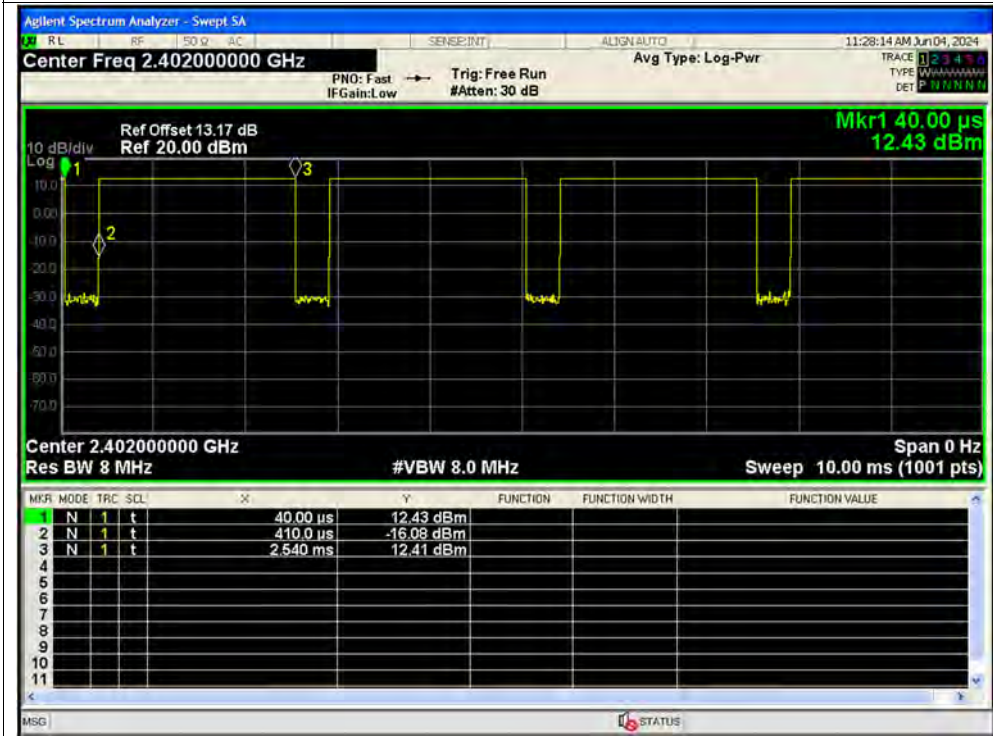


Duty Cycle NVNT BLE 1M 2440MHz Ant1

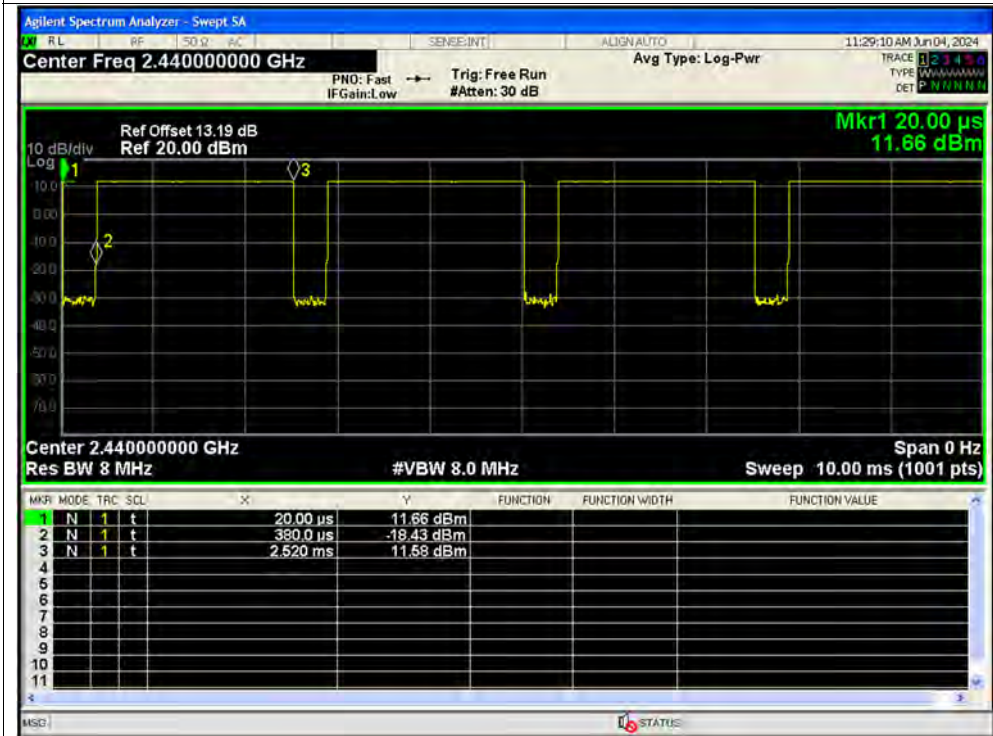




Duty Cycle NVNT BLE 1M 2480MHz Ant1

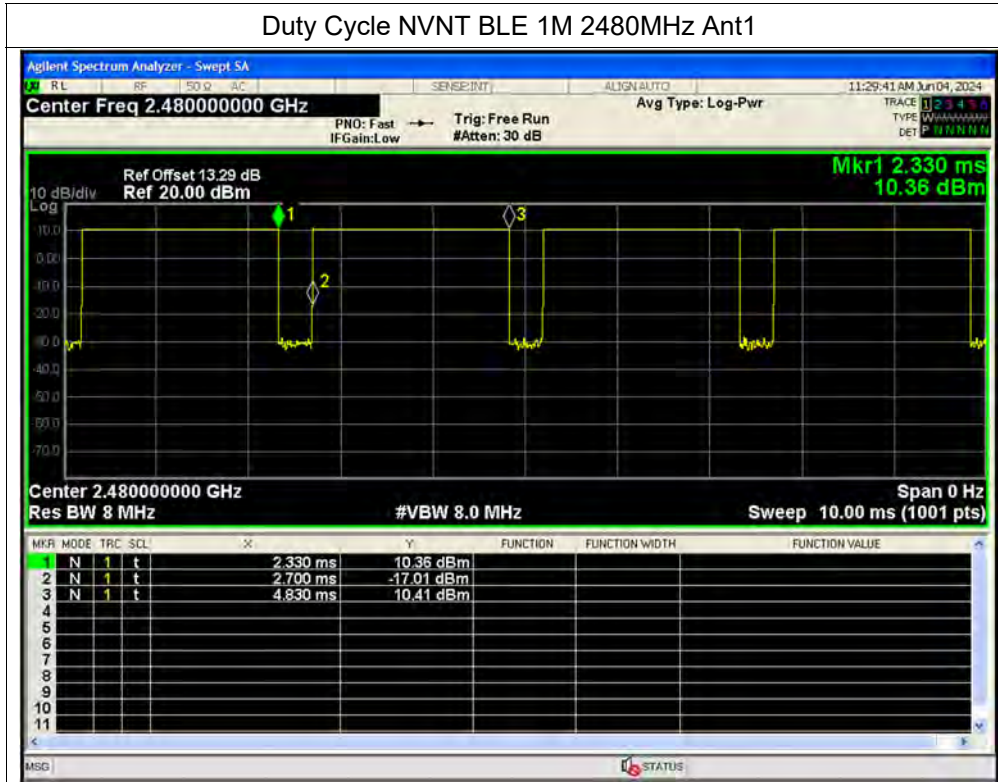


Duty Cycle NVNT BLE 2M 2402MHz Ant1

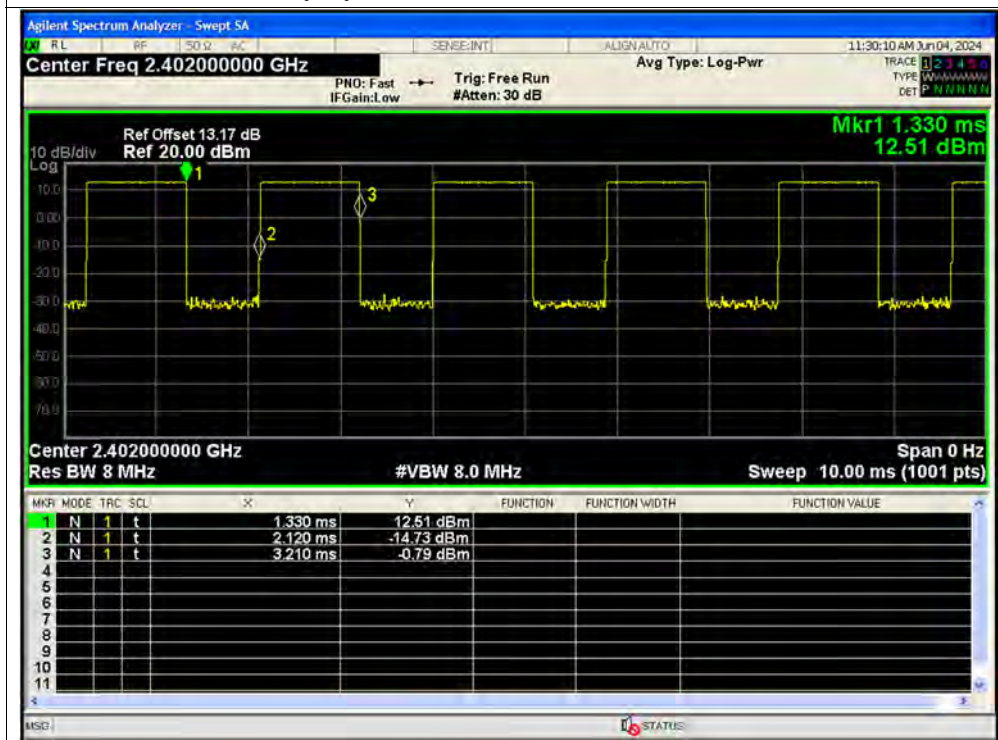




Duty Cycle NVNT BLE 2M 2440MHz Ant1

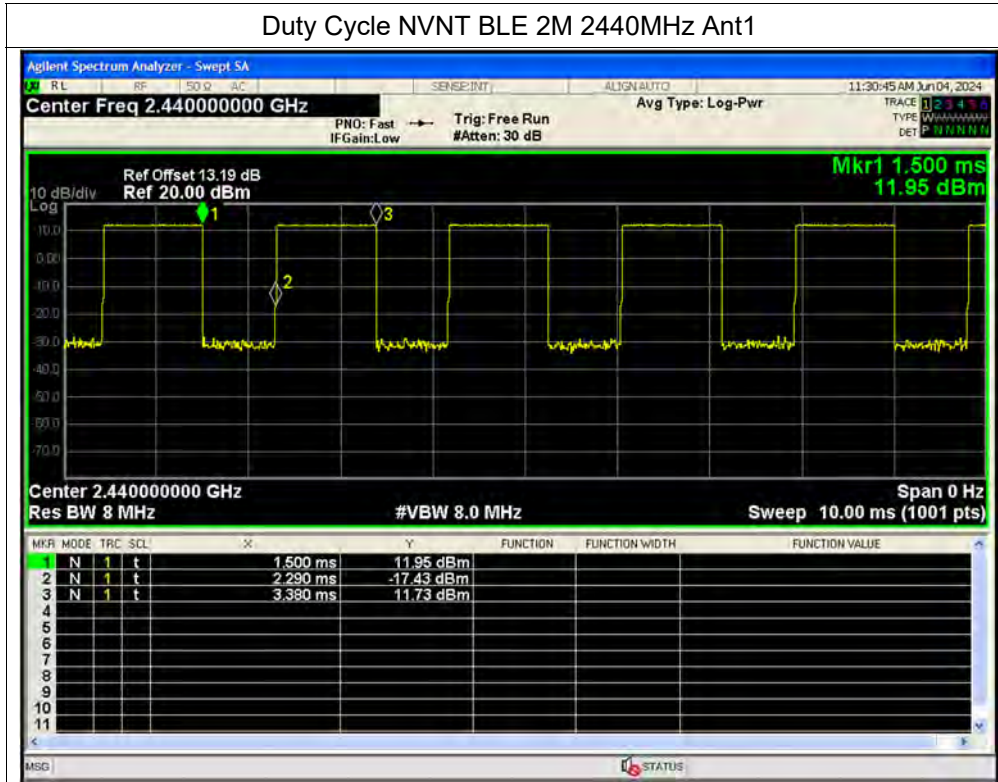


Duty Cycle NVNT BLE 2M 2480MHz Ant1

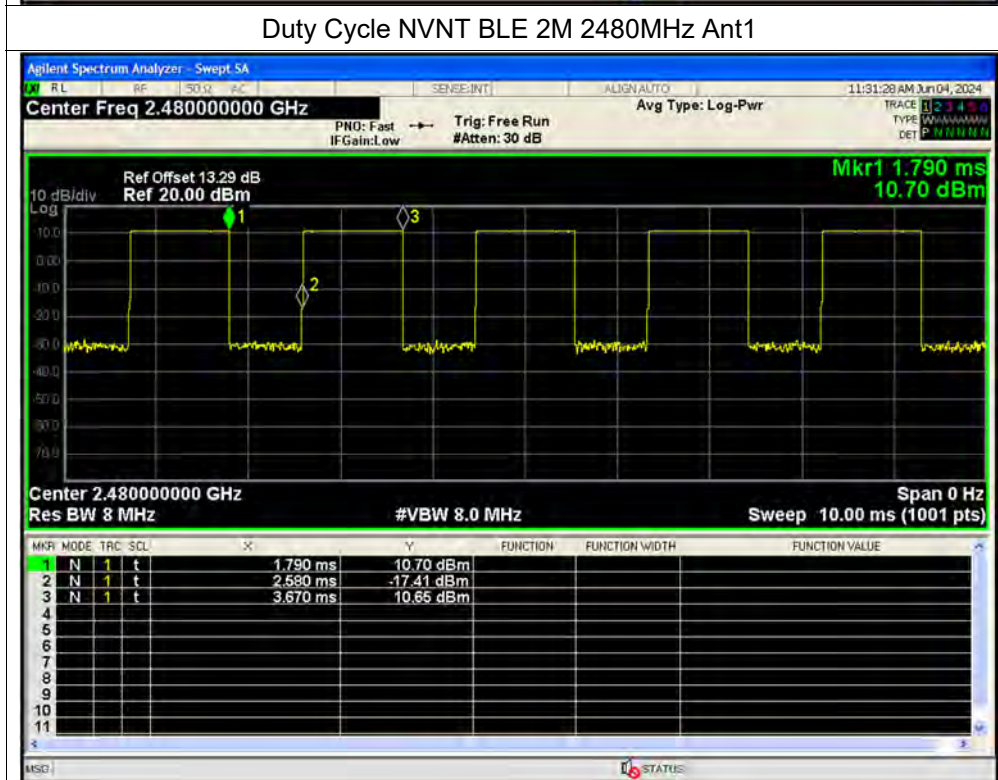




Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant2

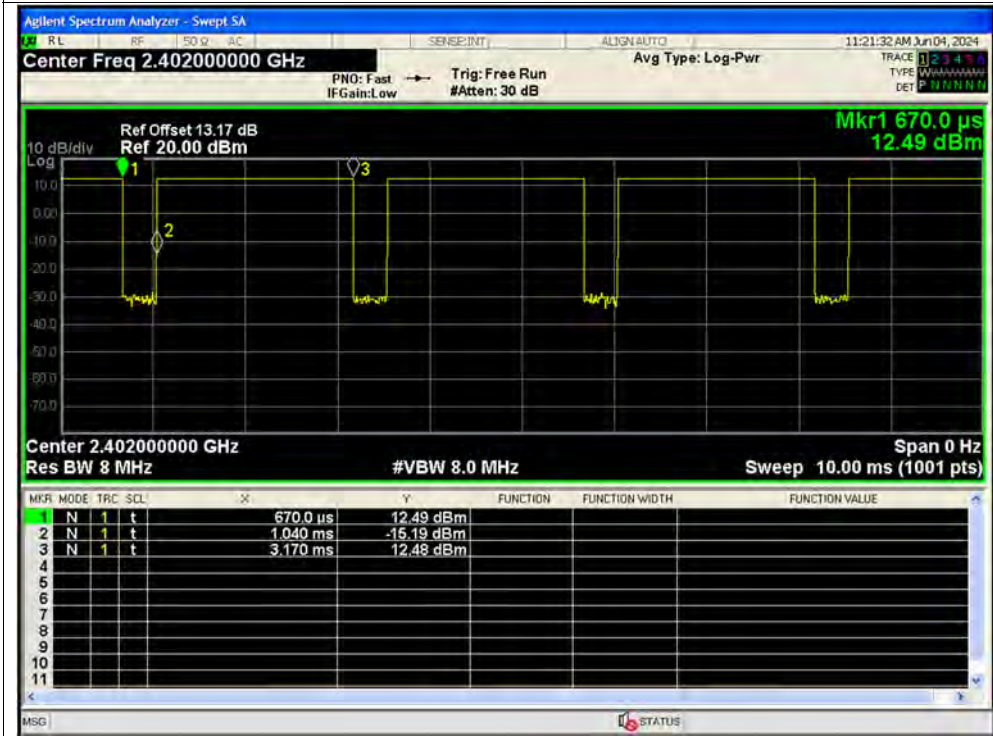


Duty Cycle NVNT BLE 1M 2440MHz Ant2

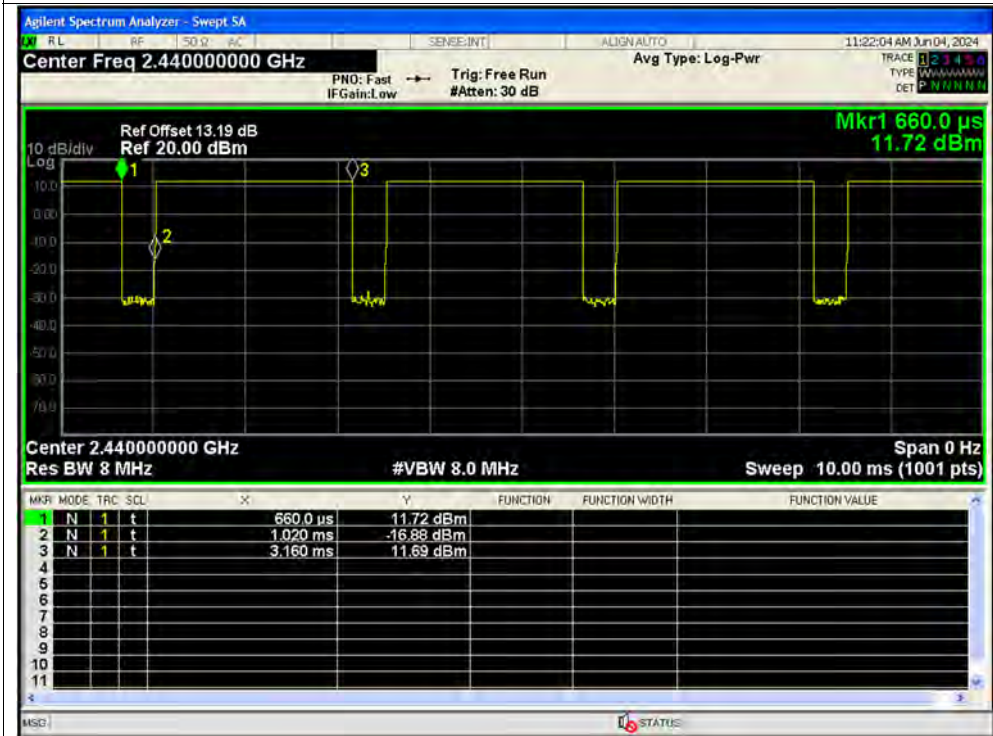




Duty Cycle NVNT BLE 1M 2480MHz Ant2

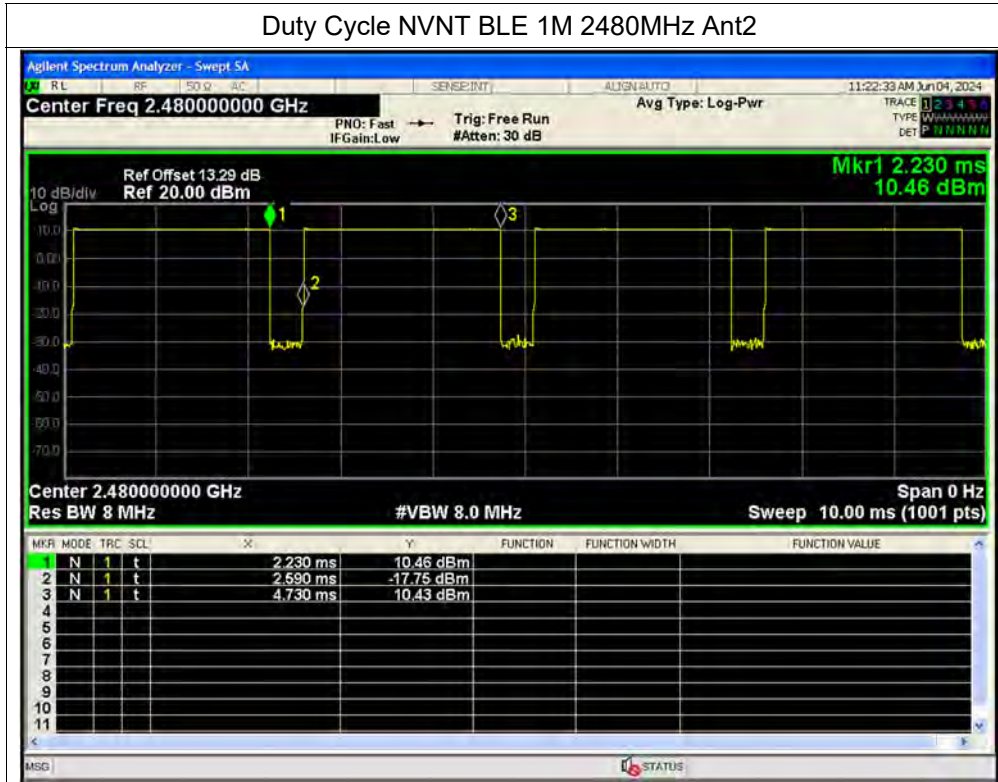


Duty Cycle NVNT BLE 2M 2402MHz Ant2

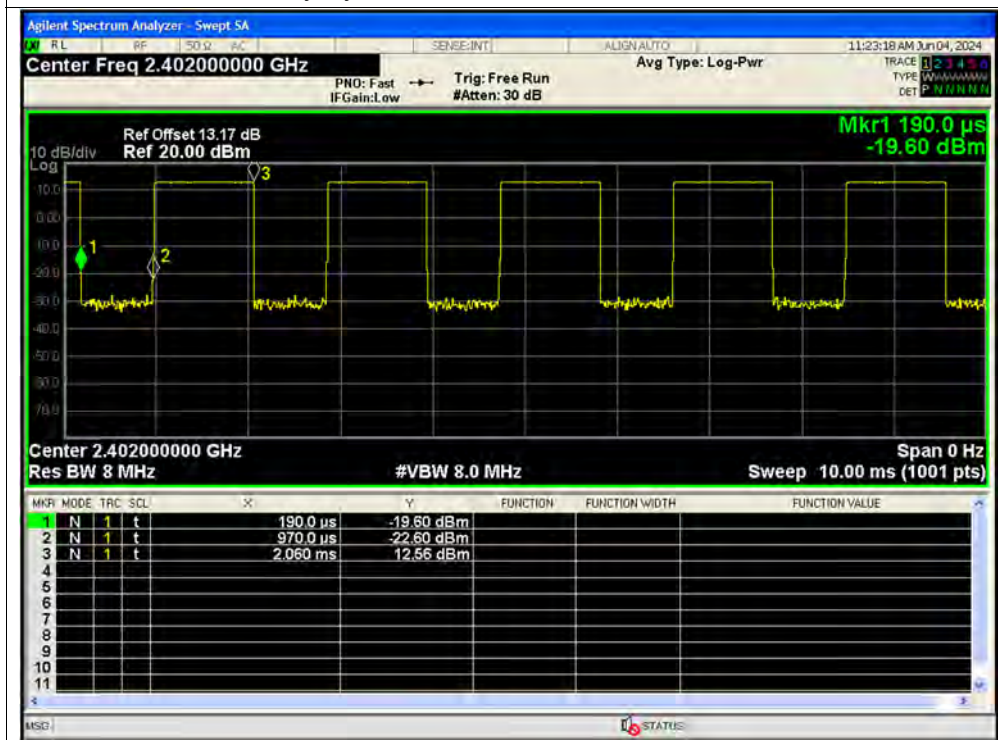




Duty Cycle NVNT BLE 2M 2440MHz Ant2

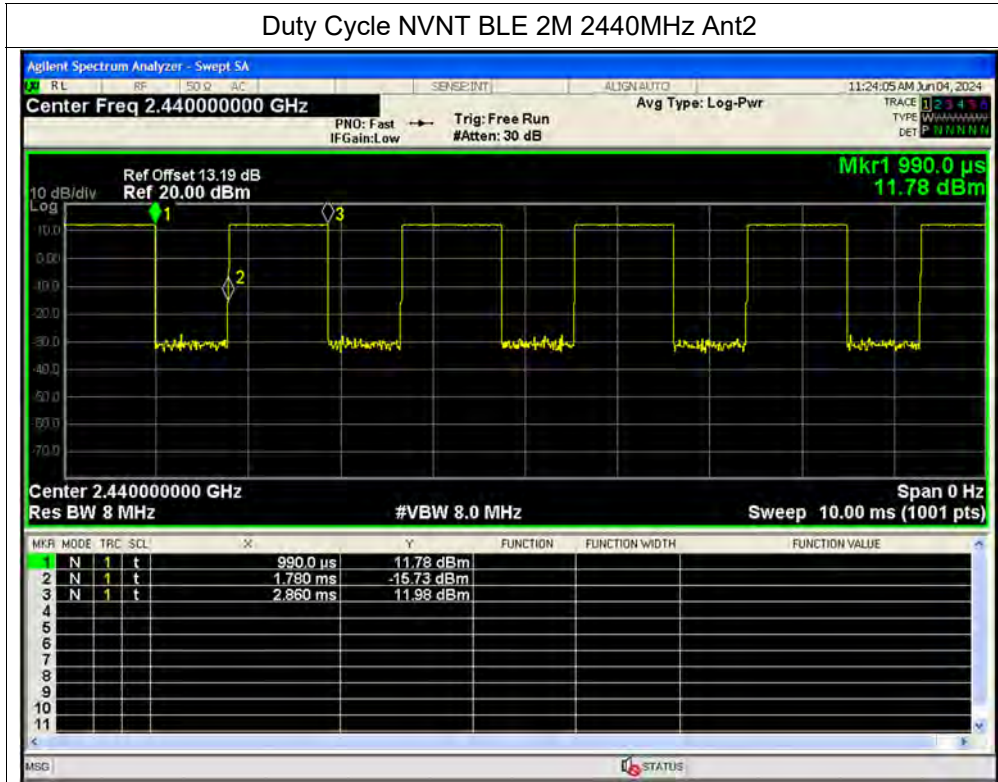

Duty Cycle NVNT BLE 2M 2480MHz Ant2

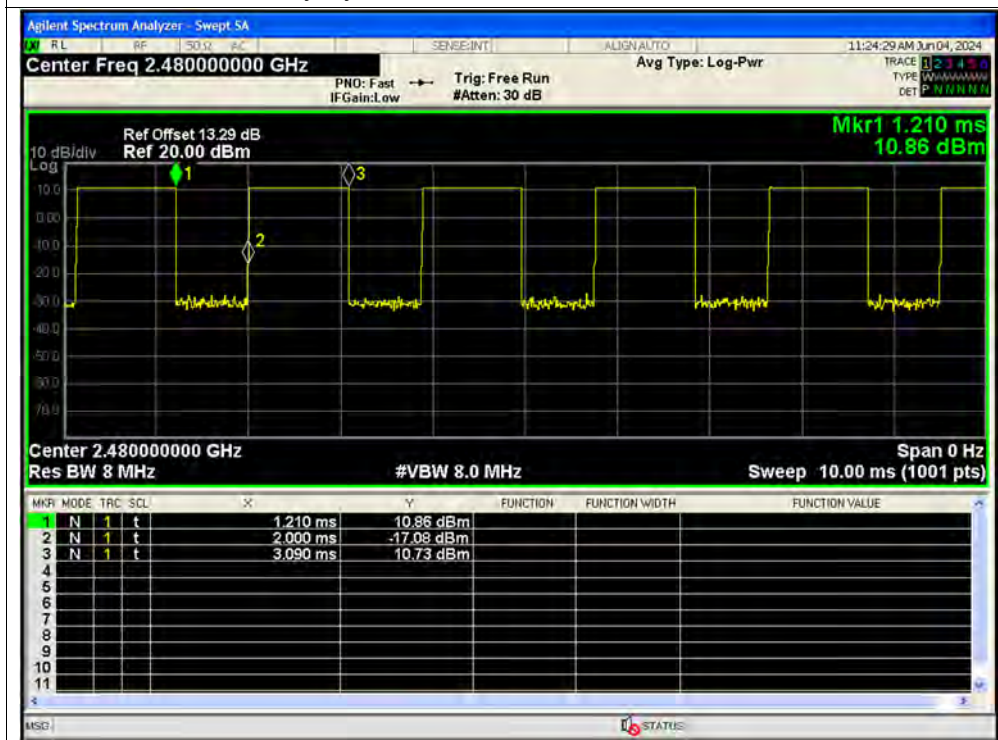

**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	12.5	0	12.5	0.01778	30	Pass
NVNT	BLE 1M	2440	Ant1	11.71	0	11.71	0.01483	30	Pass
NVNT	BLE 1M	2480	Ant1	10.53	0	10.53	0.0113	30	Pass
NVNT	BLE 2M	2402	Ant1	12.58	0	12.58	0.01811	30	Pass
NVNT	BLE 2M	2440	Ant1	11.86	0	11.86	0.01535	30	Pass
NVNT	BLE 2M	2480	Ant1	10.69	0	10.69	0.01172	30	Pass
NVNT	BLE 1M	2402	Ant2	12.54	0	12.54	0.01795	30	Pass
NVNT	BLE 1M	2440	Ant2	11.77	0	11.77	0.01503	30	Pass
NVNT	BLE 1M	2480	Ant2	10.61	0	10.61	0.01151	30	Pass
NVNT	BLE 2M	2402	Ant2	12.67	0	12.67	0.01849	30	Pass
NVNT	BLE 2M	2440	Ant2	11.94	0	11.94	0.01563	30	Pass
NVNT	BLE 2M	2480	Ant2	10.78	0	10.78	0.01197	30	Pass



Test Graphs

Peak Power NVNT BLE 1M 2402MHz Ant1



Peak Power NVNT BLE 1M 2440MHz Ant1






Peak Power NVNT BLE 1M 2480MHz Ant1




Peak Power NVNT BLE 2M 2402MHz Ant1

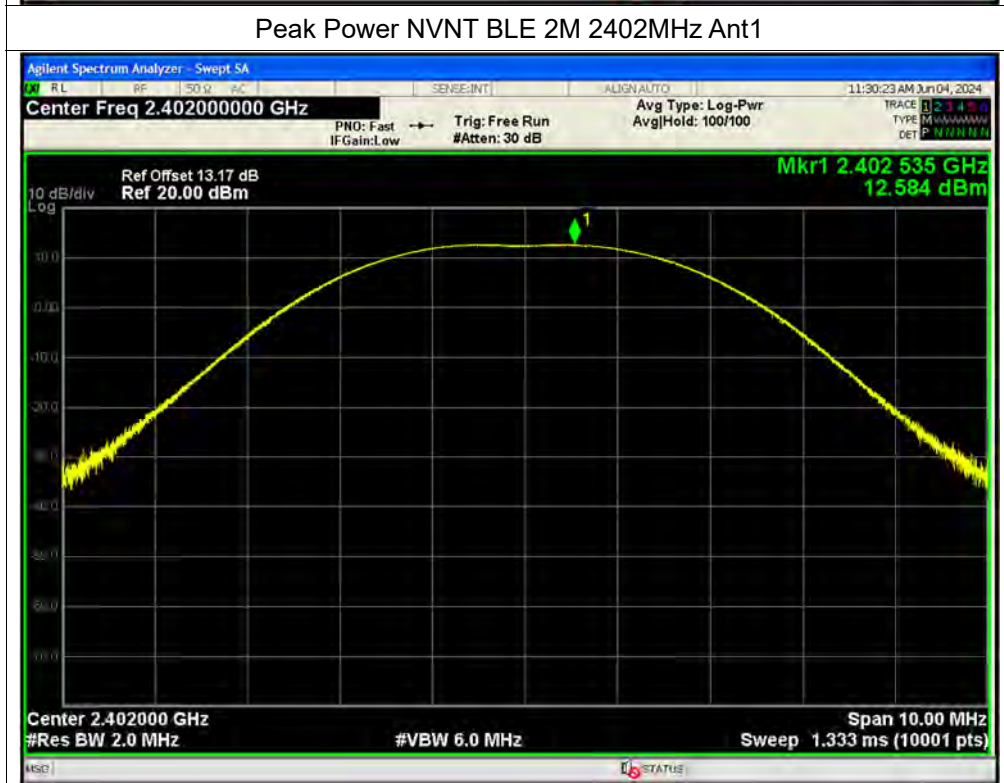




Peak Power NVNT BLE 2M 2440MHz Ant1

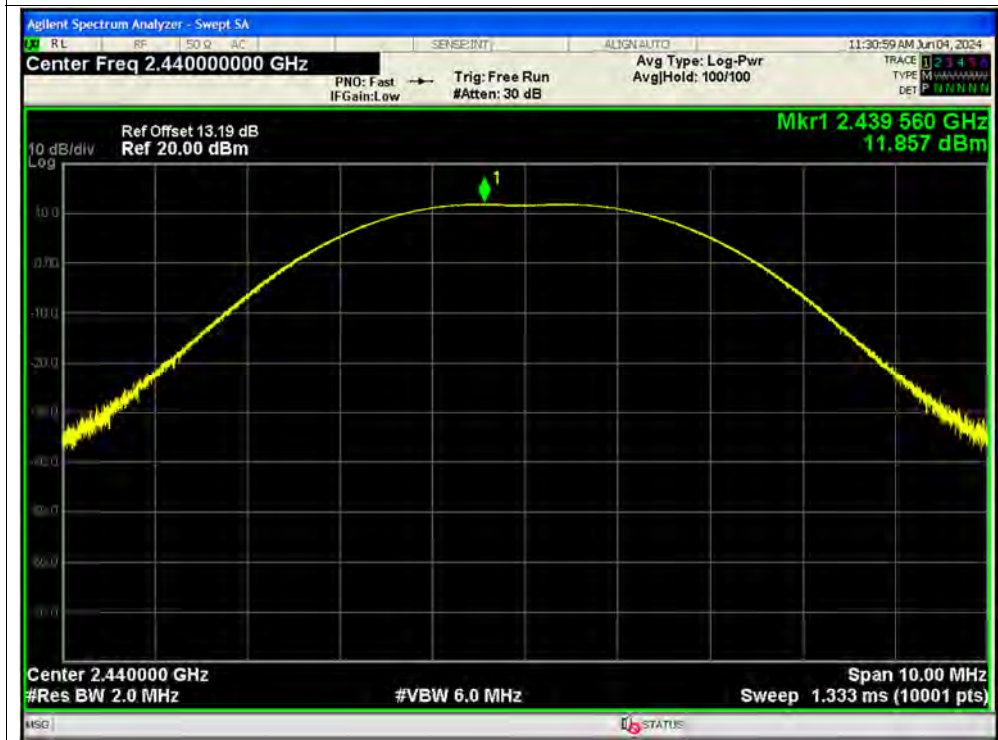


Peak Power NVNT BLE 2M 2480MHz Ant1

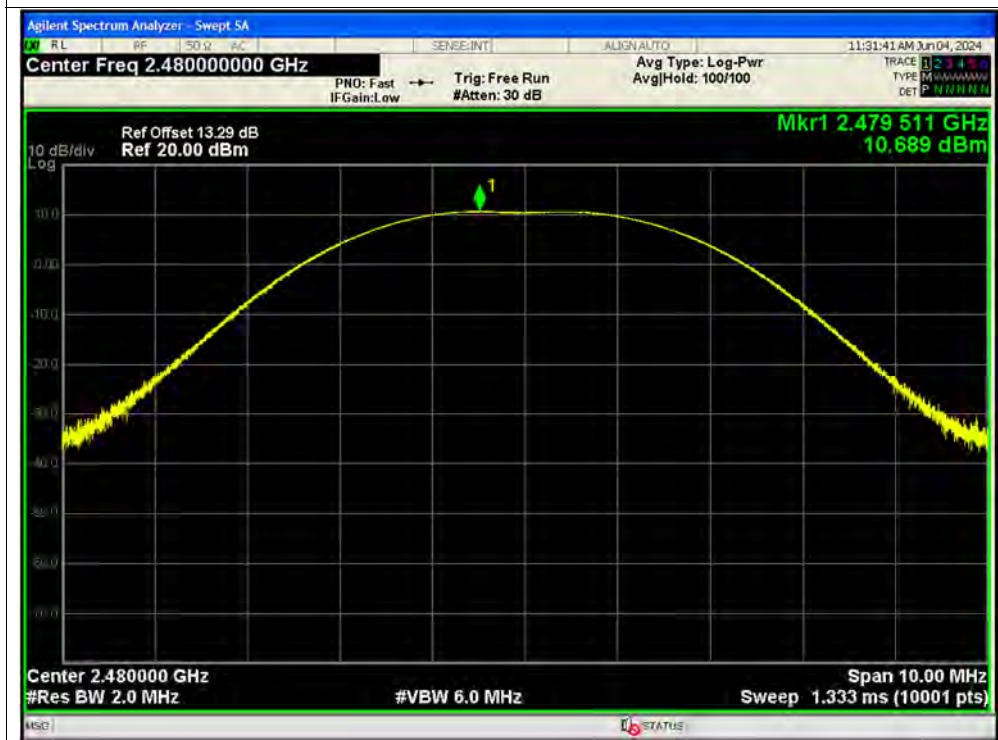



Test Graphs

Peak Power NVNT BLE 1M 2402MHz Ant2

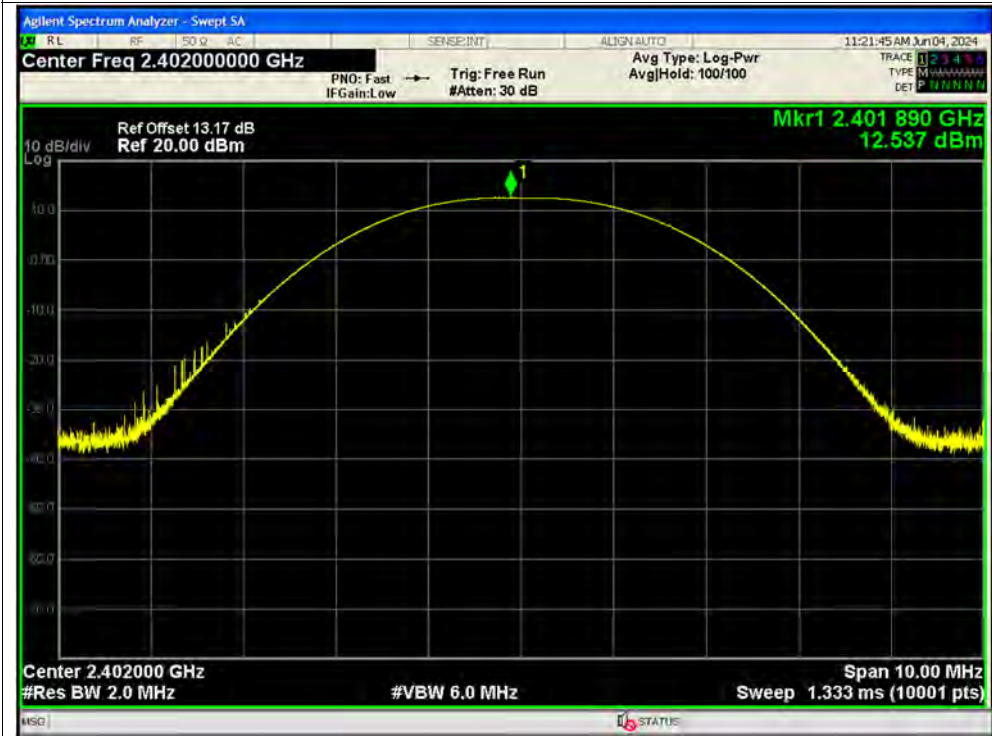


Peak Power NVNT BLE 1M 2440MHz Ant2






Peak Power NVNT BLE 1M 2480MHz Ant2

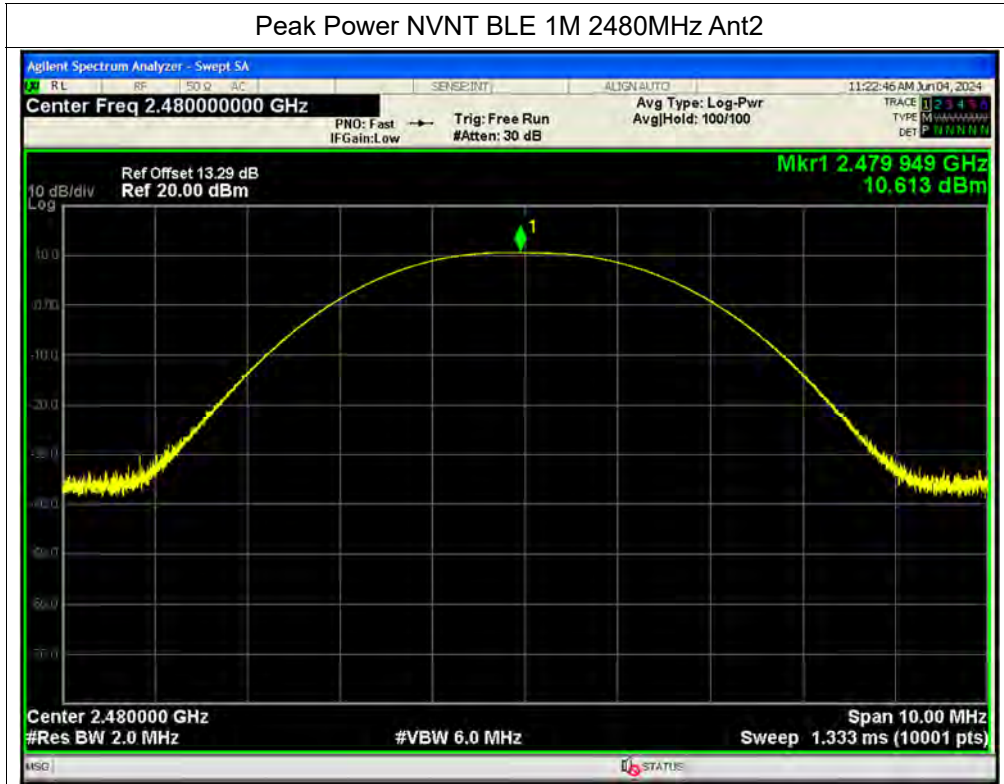


Peak Power NVNT BLE 2M 2402MHz Ant2

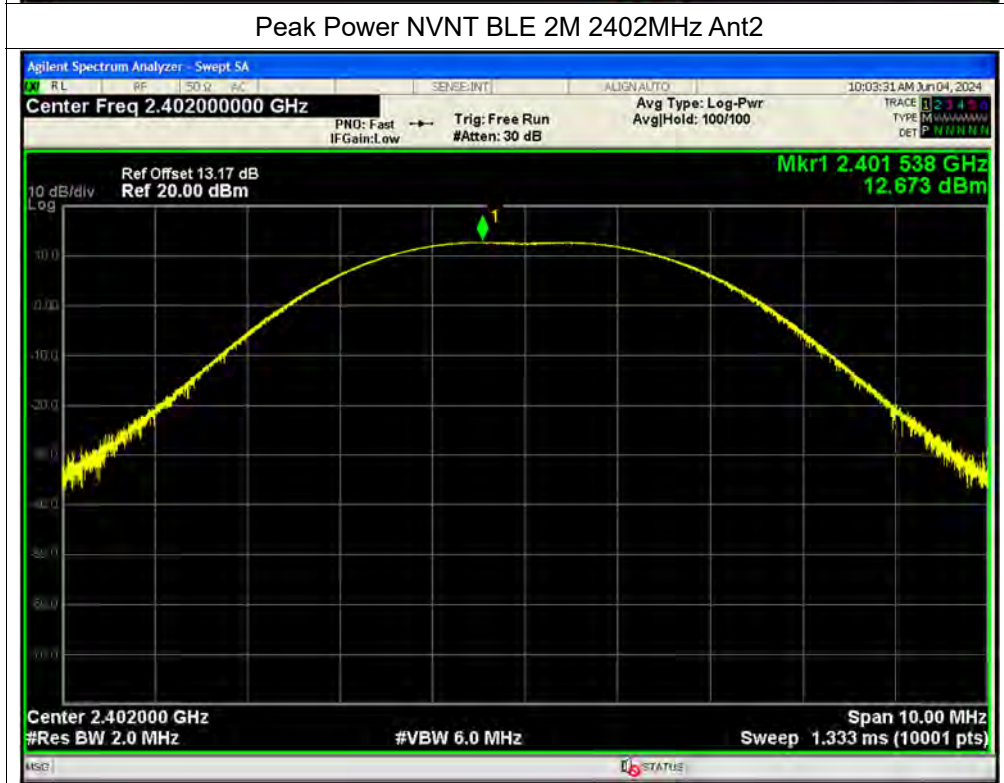



Peak Power NVNT BLE 2M 2440MHz Ant2

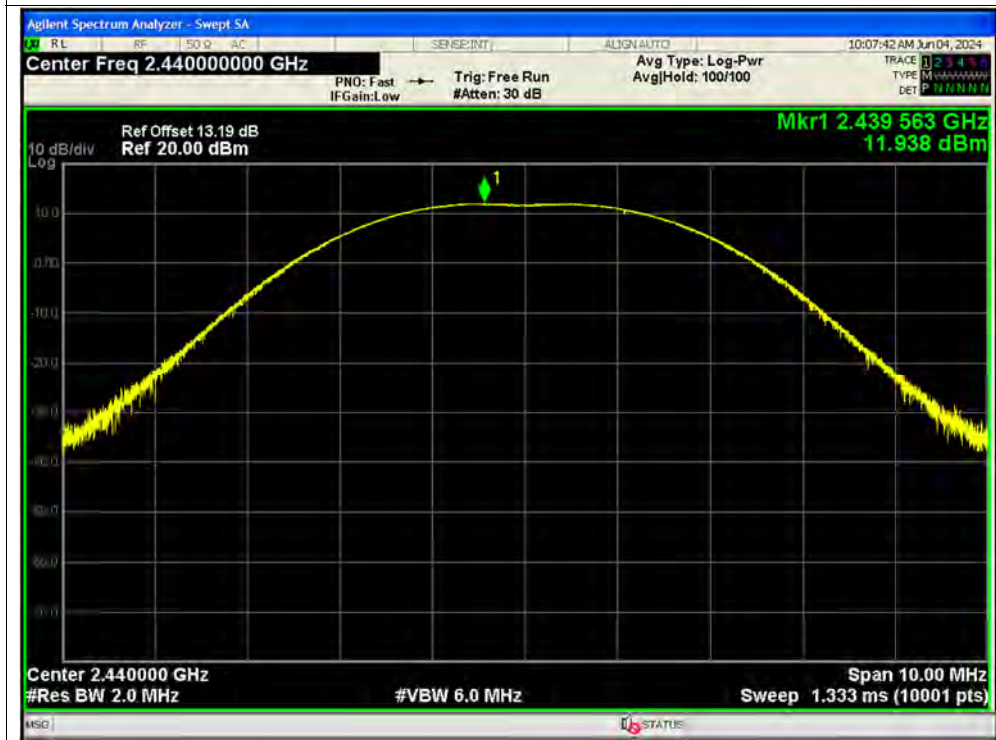

Peak Power NVNT BLE 2M 2480MHz Ant2




**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	11.51	0.7	12.21	0.01663	30	Pass
NVNT	BLE 1M	2440	Ant1	10.65	0.68	11.33	0.01358	30	Pass
NVNT	BLE 1M	2480	Ant1	9.65	0.7	10.35	0.01084	30	Pass
NVNT	BLE 2M	2402	Ant1	9.74	2.37	12.11	0.01626	30	Pass
NVNT	BLE 2M	2440	Ant1	8.97	2.37	11.34	0.01361	30	Pass
NVNT	BLE 2M	2480	Ant1	7.64	2.37	10.01	0.01002	30	Pass
NVNT	BLE 1M	2402	Ant2	11.56	0.7	12.26	0.01683	30	Pass
NVNT	BLE 1M	2440	Ant2	10.88	0.68	11.56	0.01432	30	Pass
NVNT	BLE 1M	2480	Ant2	9.54	0.68	10.22	0.01052	30	Pass
NVNT	BLE 2M	2402	Ant2	9.86	2.34	12.2	0.0166	30	Pass
NVNT	BLE 2M	2440	Ant2	8.98	2.38	11.36	0.01368	30	Pass
NVNT	BLE 2M	2480	Ant2	7.86	2.37	10.23	0.01054	30	Pass




Test Graphs

Average Power NVNT BLE 1M 2402MHz Ant1

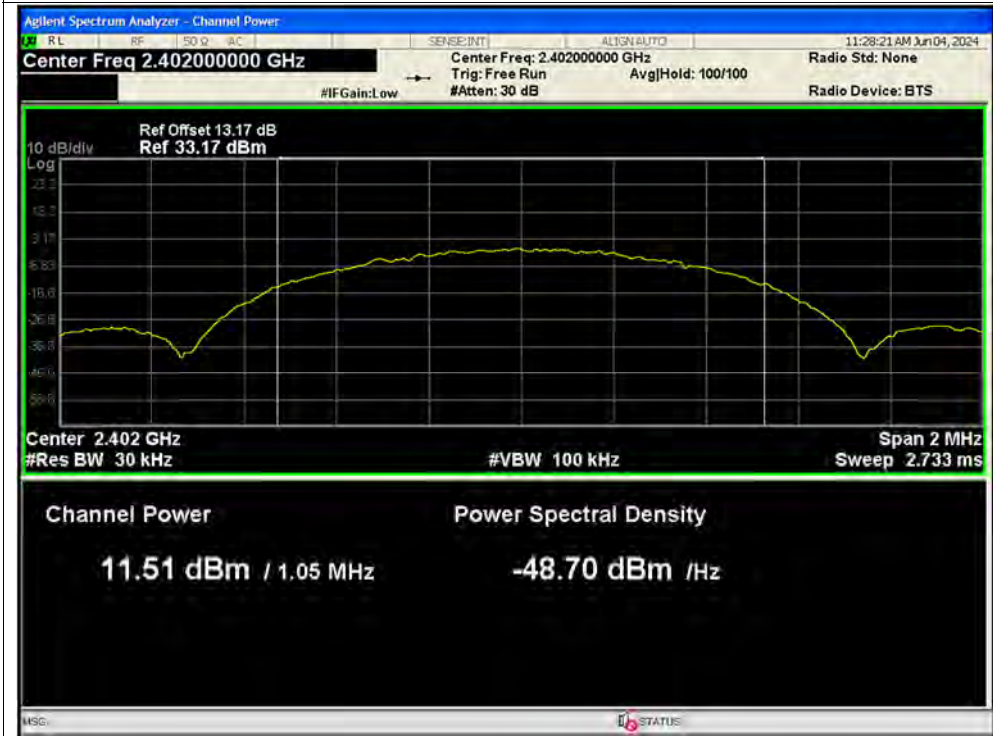

Average Power NVNT BLE 1M 2440MHz Ant1

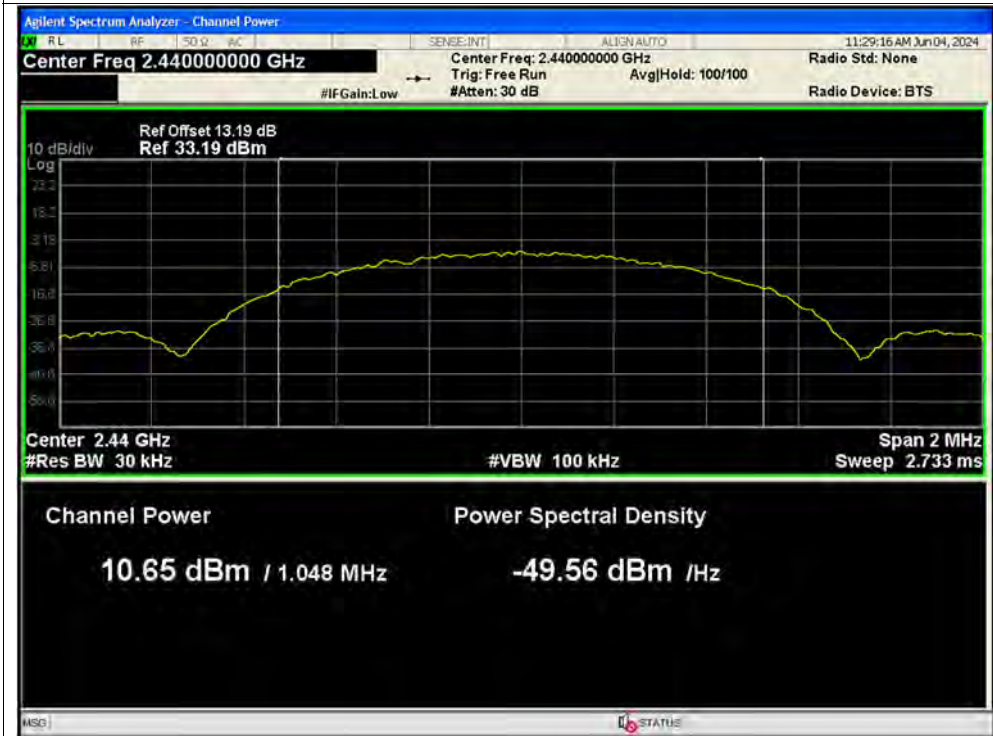



Average Power NVNT BLE 1M 2480MHz Ant1



Average Power NVNT BLE 2M 2402MHz Ant1






Average Power NVNT BLE 2M 2440MHz Ant1



Average Power NVNT BLE 2M 2480MHz Ant1

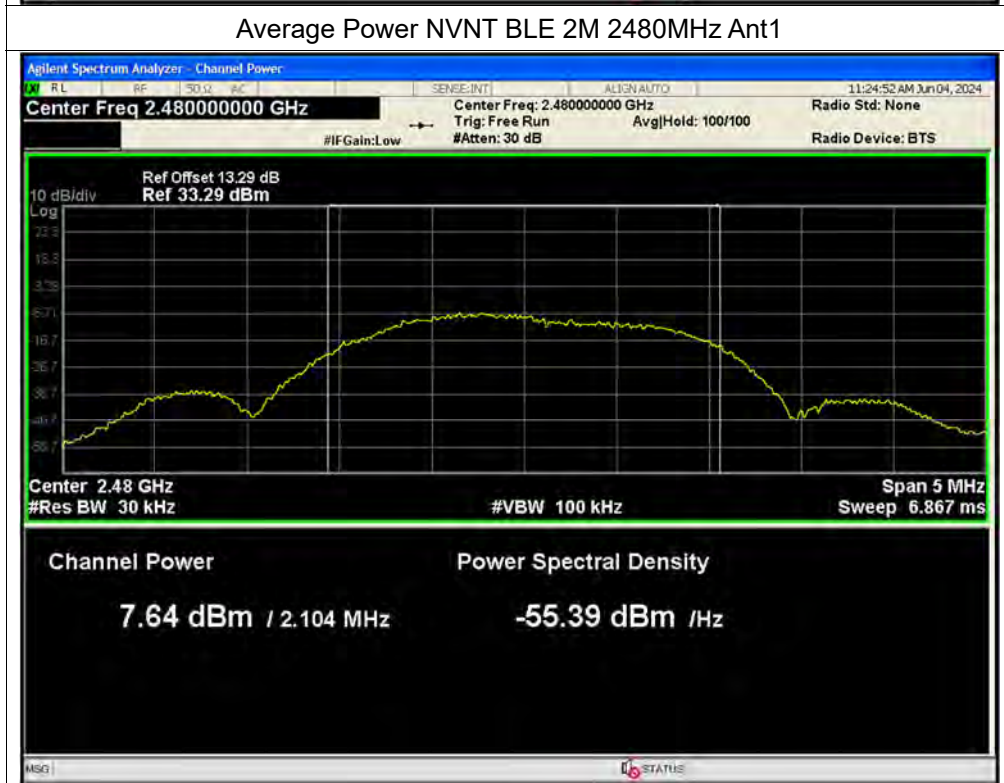




Test Graphs

Average Power NVNT BLE 1M 2402MHz Ant2



Average Power NVNT BLE 1M 2440MHz Ant2

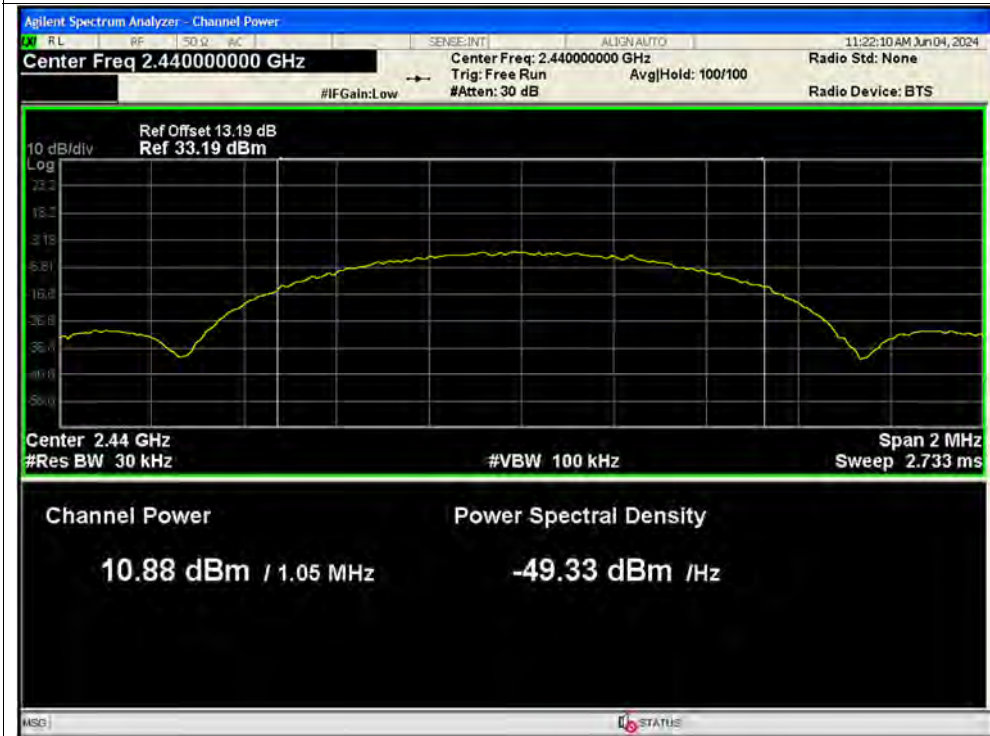



Average Power NVNT BLE 1M 2480MHz Ant2



Average Power NVNT BLE 2M 2402MHz Ant2





Average Power NVNT BLE 2M 2440MHz Ant2



Average Power NVNT BLE 2M 2480MHz Ant2



**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.692	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.695	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.714	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.329	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.272	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.268	0.5	Pass
NVNT	BLE 1M	2402	Ant2	0.647	0.5	Pass
NVNT	BLE 1M	2440	Ant2	0.714	0.5	Pass
NVNT	BLE 1M	2480	Ant2	0.683	0.5	Pass
NVNT	BLE 2M	2402	Ant2	1.25	0.5	Pass
NVNT	BLE 2M	2440	Ant2	1.222	0.5	Pass
NVNT	BLE 2M	2480	Ant2	1.308	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1



-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1






-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1



-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

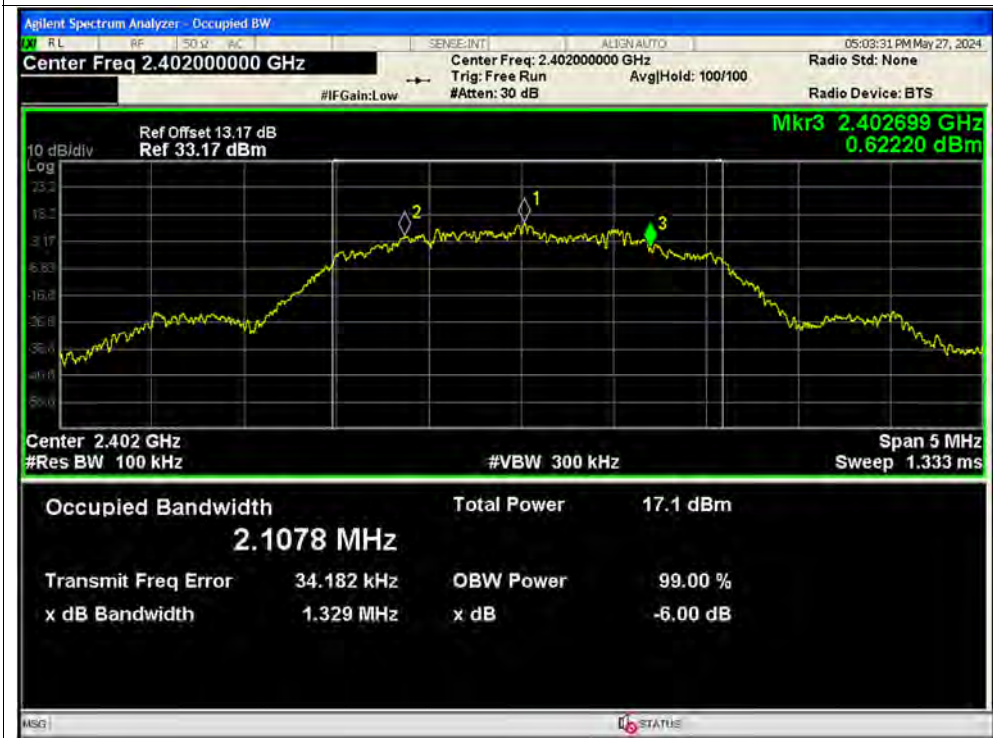




-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1



-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

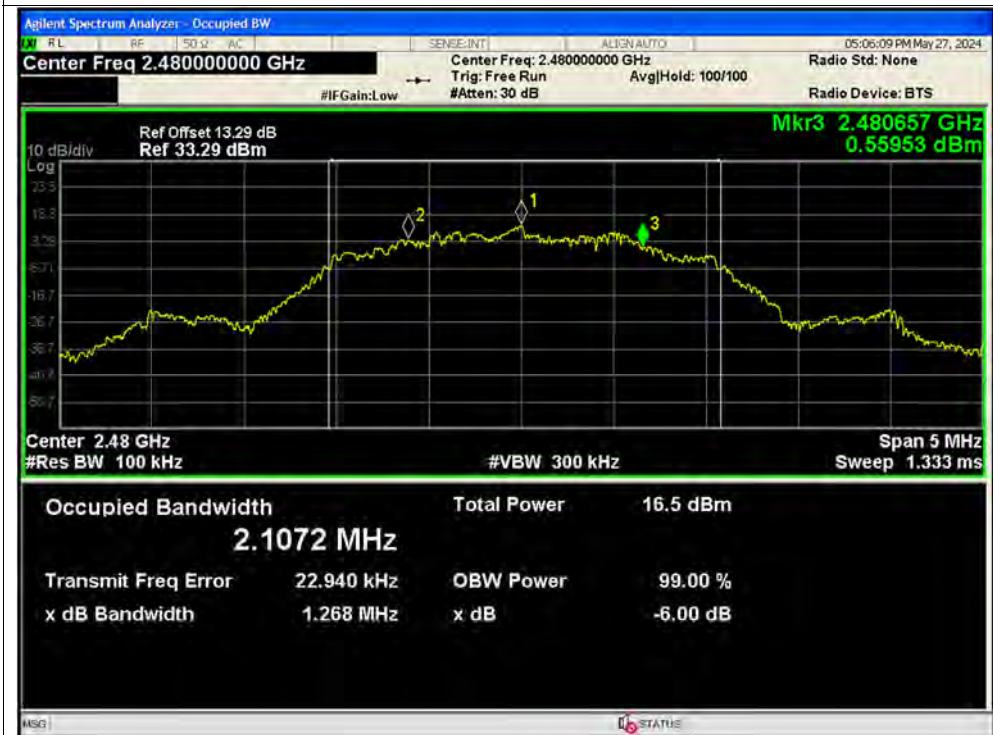



Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant2



-6dB Bandwidth NVNT BLE 1M 2440MHz Ant2





-6dB Bandwidth NVNT BLE 1M 2480MHz Ant2




-6dB Bandwidth NVNT BLE 2M 2402MHz Ant2






-6dB Bandwidth NVNT BLE 2M 2440MHz Ant2

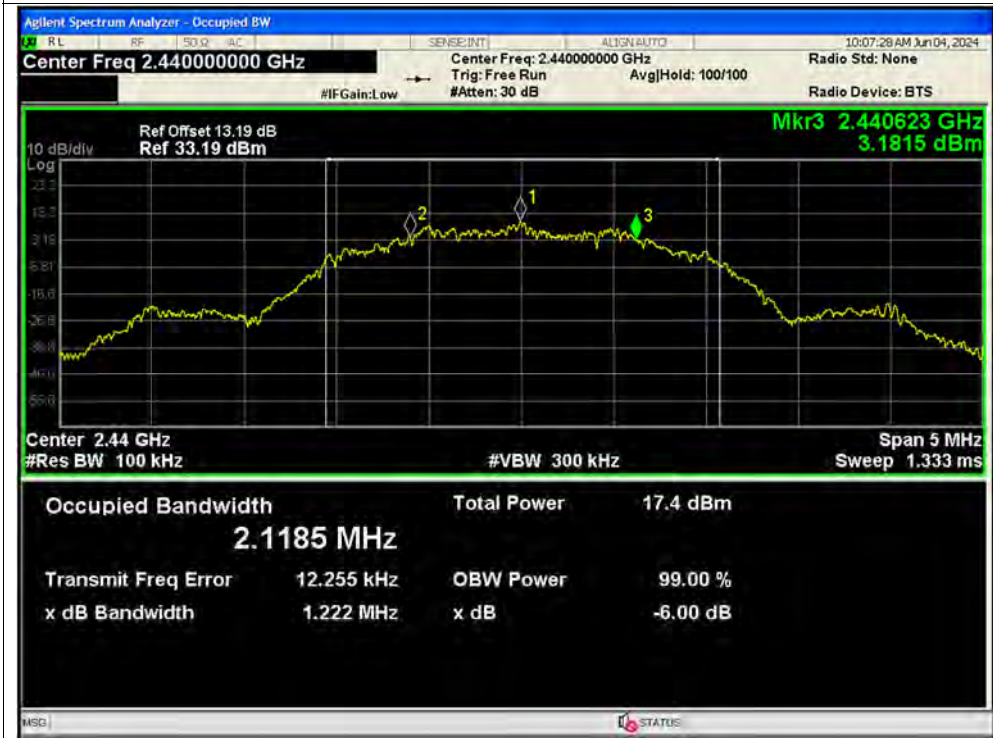

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant2

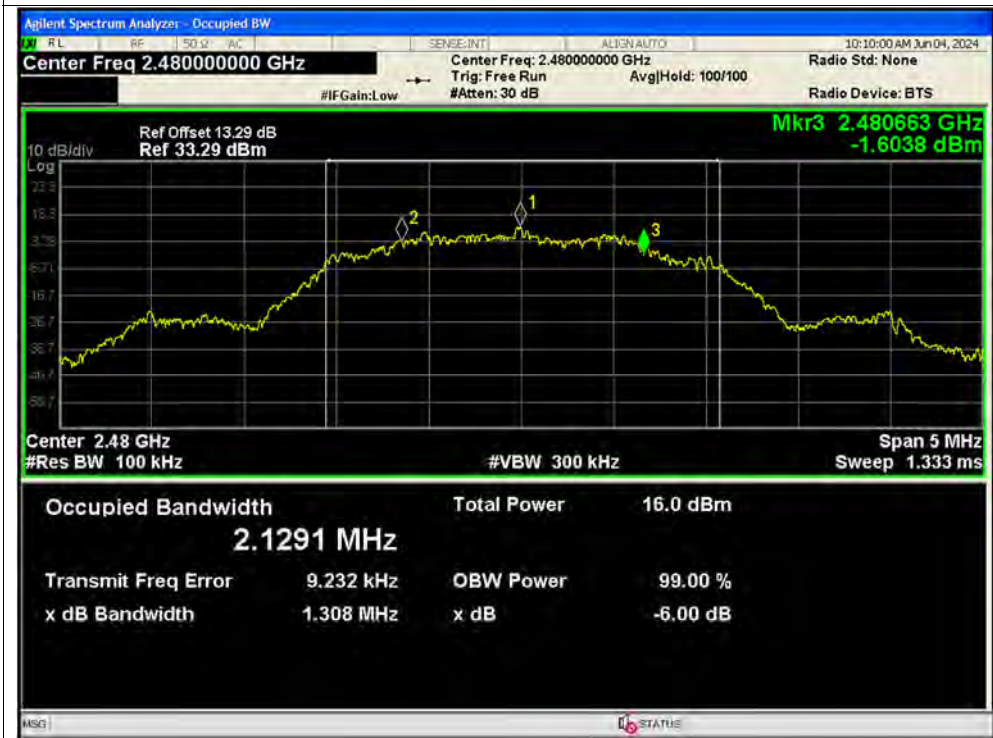

**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-39.51	-20	Pass
NVNT	BLE 1M	2440	Ant1	-39.11	-20	Pass
NVNT	BLE 1M	2480	Ant1	-38.04	-20	Pass
NVNT	BLE 2M	2402	Ant1	-38.35	-20	Pass
NVNT	BLE 2M	2440	Ant1	-37.79	-20	Pass
NVNT	BLE 2M	2480	Ant1	-37.28	-20	Pass
NVNT	BLE 1M	2402	Ant2	-40.98	-20	Pass
NVNT	BLE 1M	2440	Ant2	-40.73	-20	Pass
NVNT	BLE 1M	2480	Ant2	-38.59	-20	Pass
NVNT	BLE 2M	2402	Ant2	-39.38	-20	Pass
NVNT	BLE 2M	2440	Ant2	-37.81	-20	Pass
NVNT	BLE 2M	2480	Ant2	-37.65	-20	Pass

Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref



Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

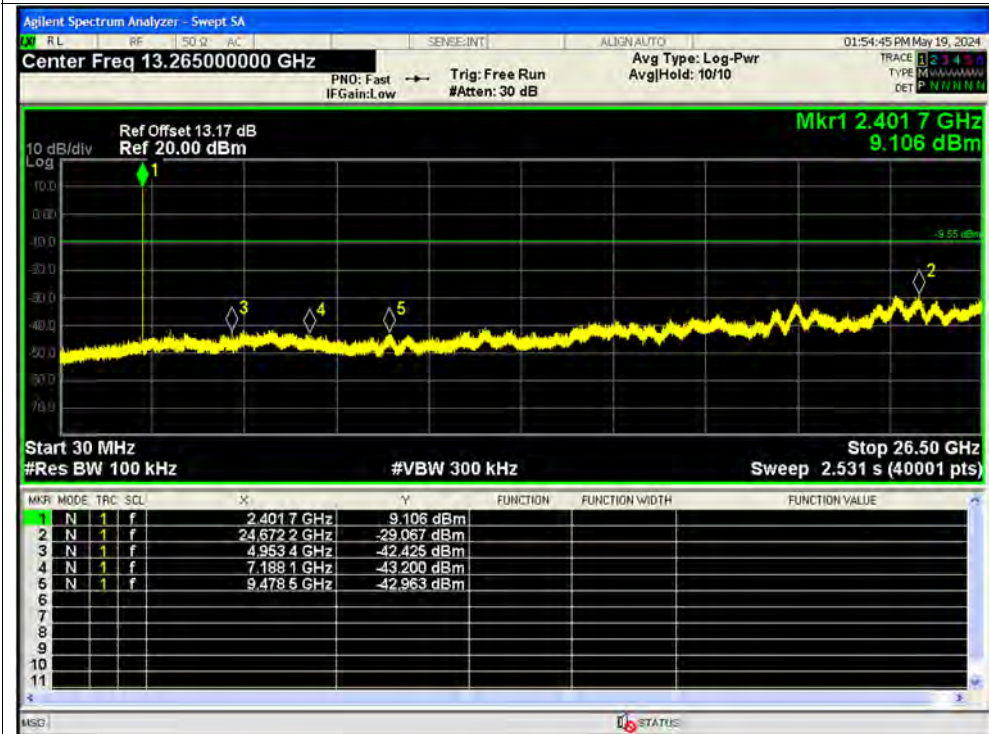




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref



Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

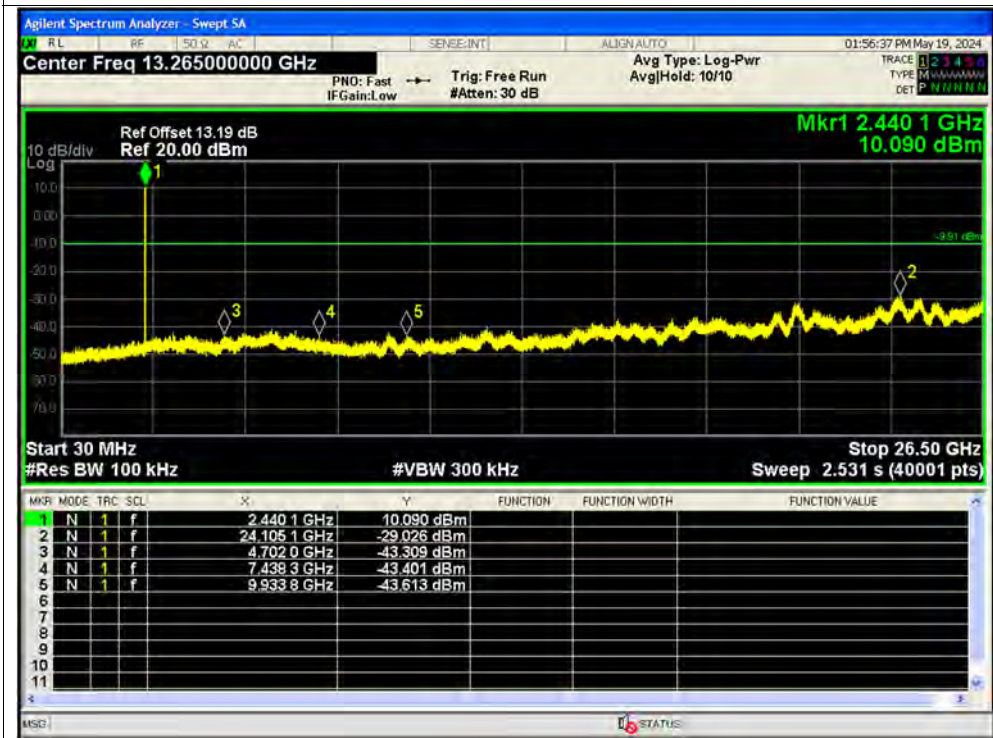




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

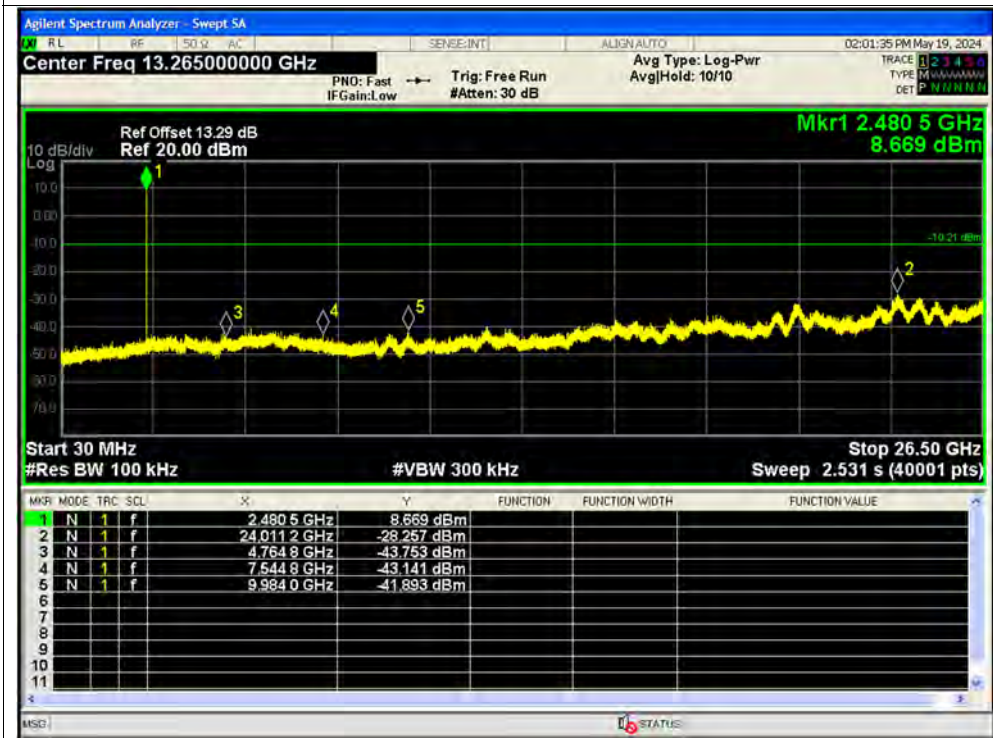




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

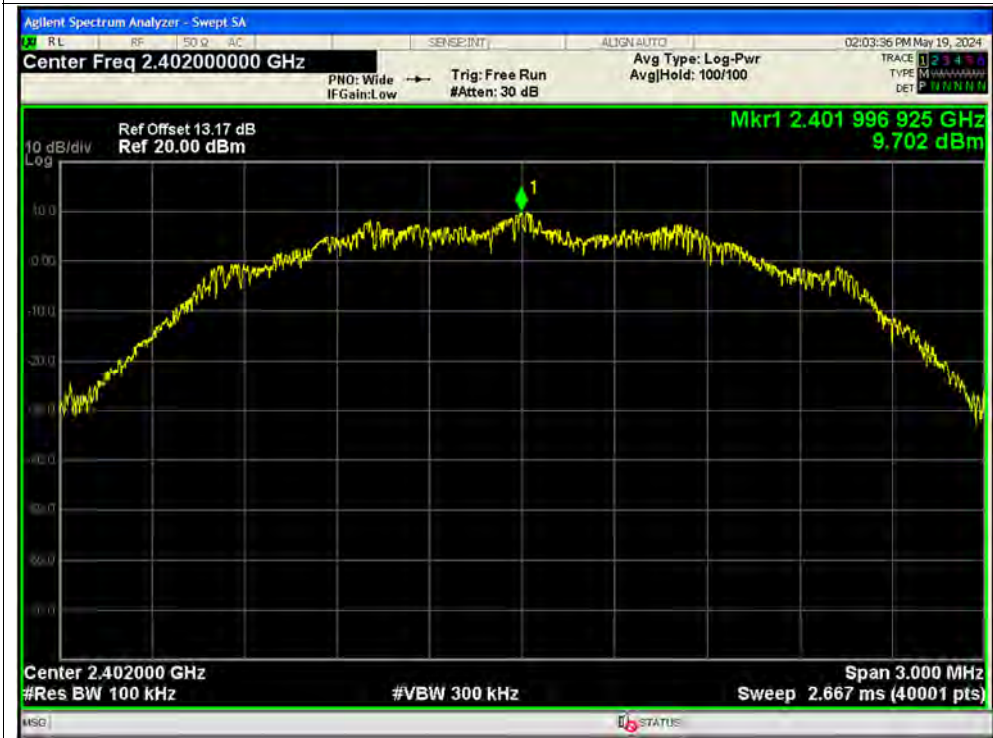

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

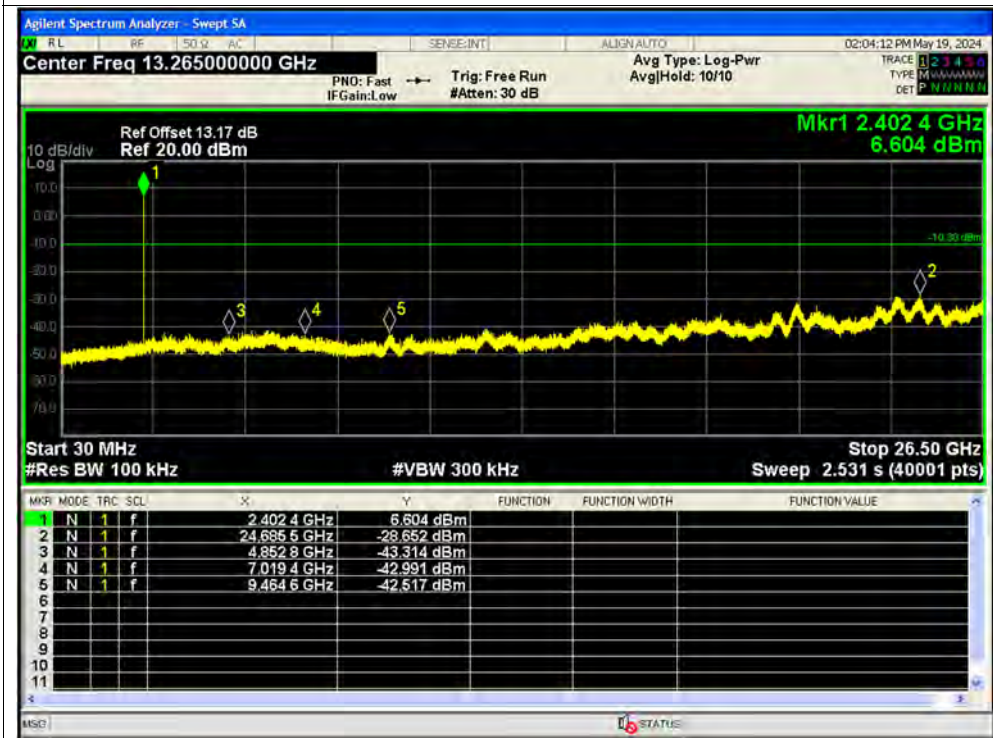




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

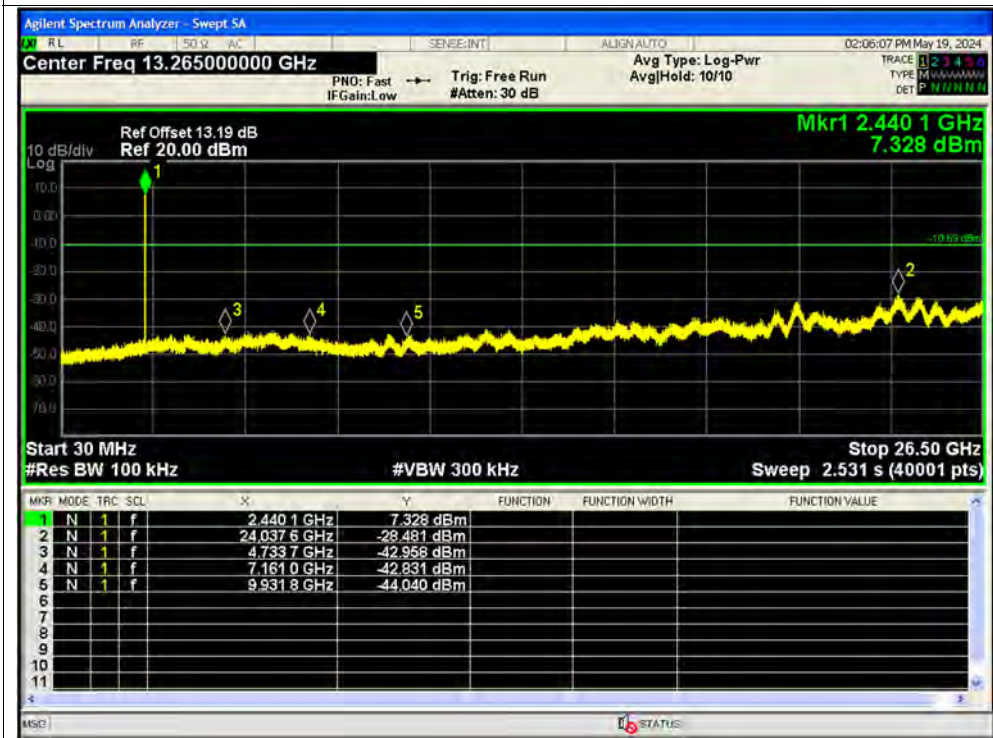




Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

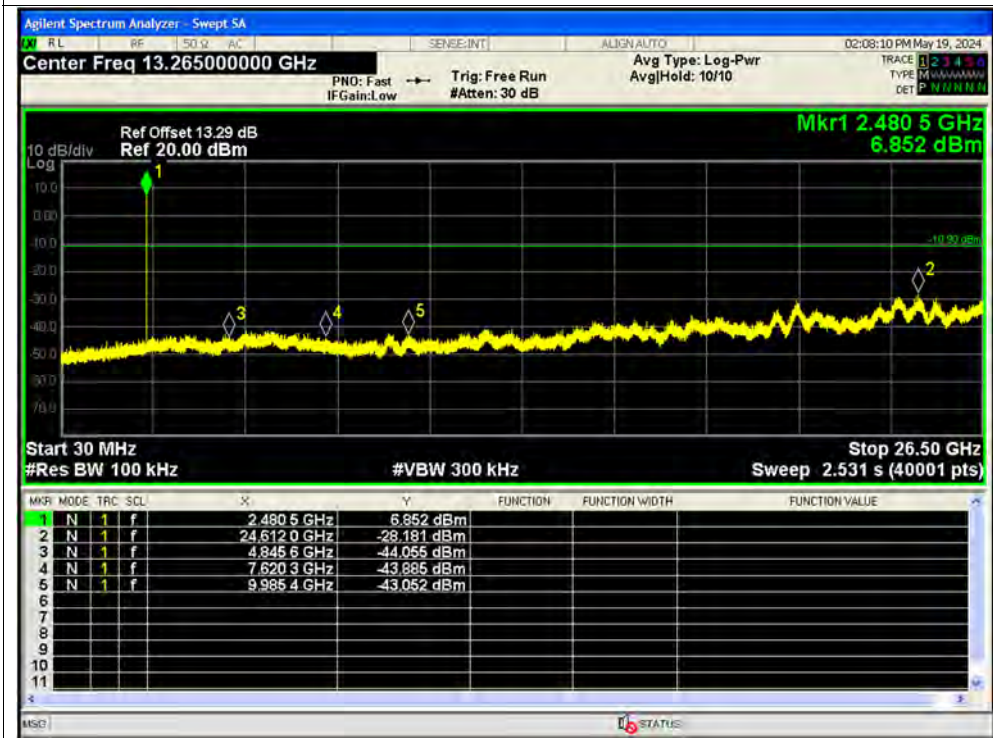


Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant2 Ref



Tx. Spurious NVNT BLE 1M 2402MHz Ant2 Emission

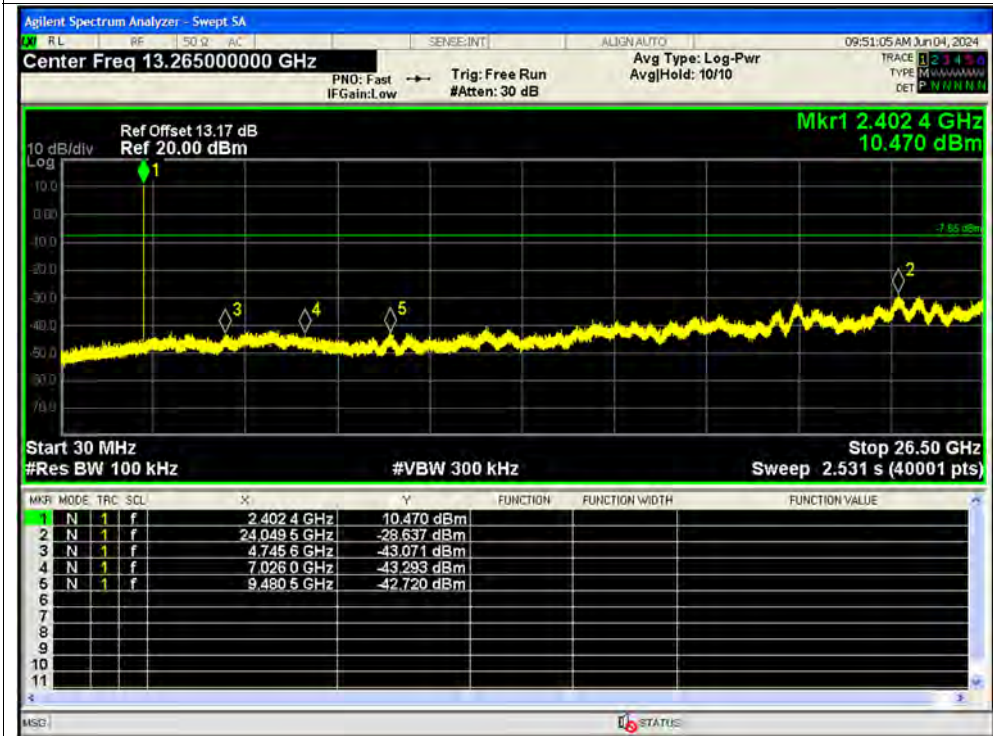




Tx. Spurious NVNT BLE 1M 2440MHz Ant2 Ref



Tx. Spurious NVNT BLE 1M 2440MHz Ant2 Emission

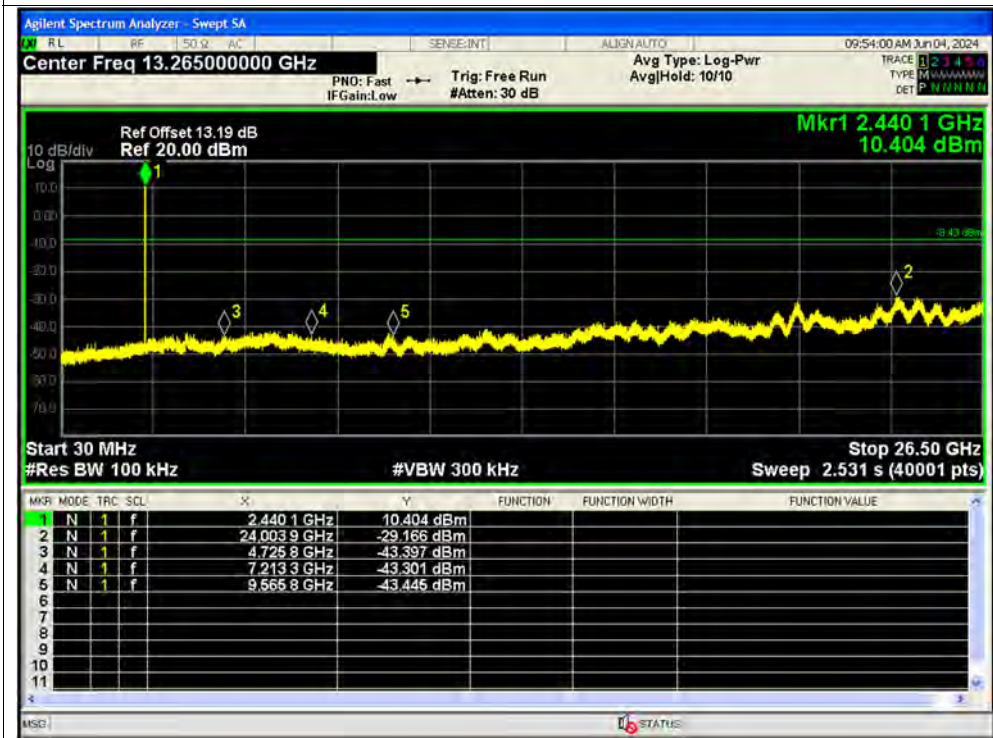




Tx. Spurious NVNT BLE 1M 2480MHz Ant2 Ref



Tx. Spurious NVNT BLE 1M 2480MHz Ant2 Emission

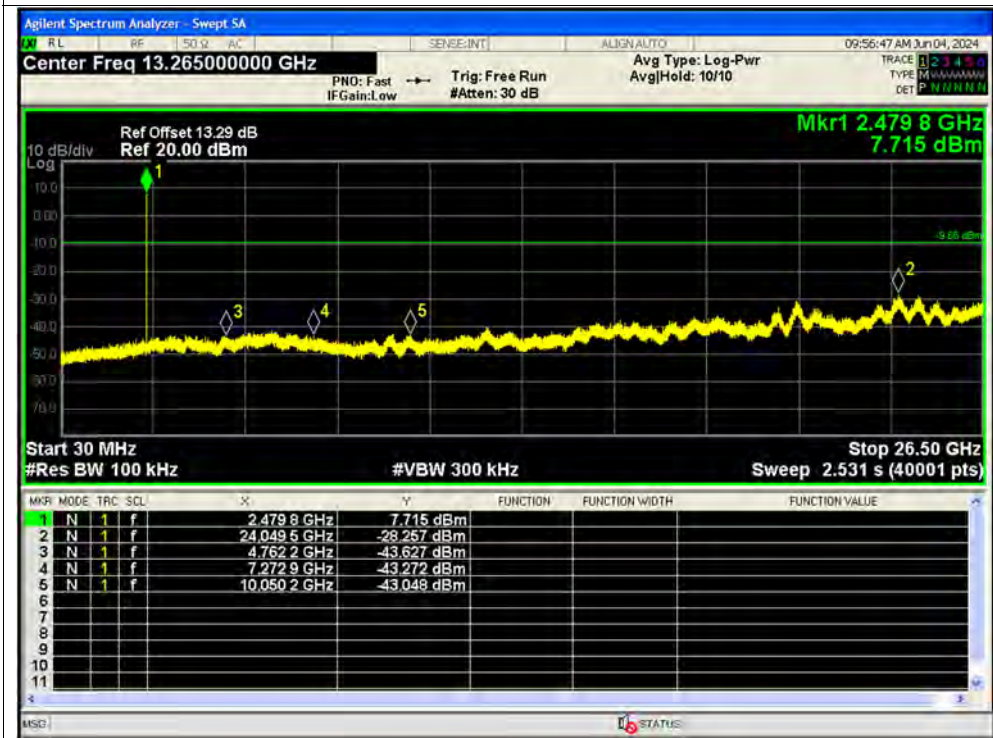




Tx. Spurious NVNT BLE 2M 2402MHz Ant2 Ref



Tx. Spurious NVNT BLE 2M 2402MHz Ant2 Emission

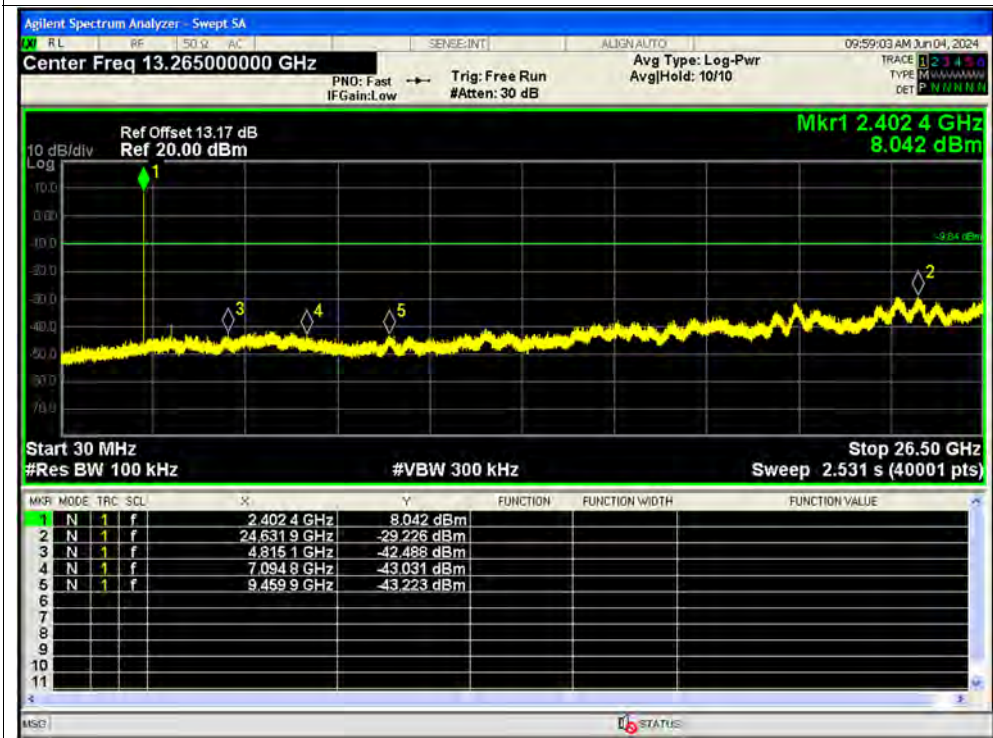




Tx. Spurious NVNT BLE 2M 2440MHz Ant2 Ref



Tx. Spurious NVNT BLE 2M 2440MHz Ant2 Emission

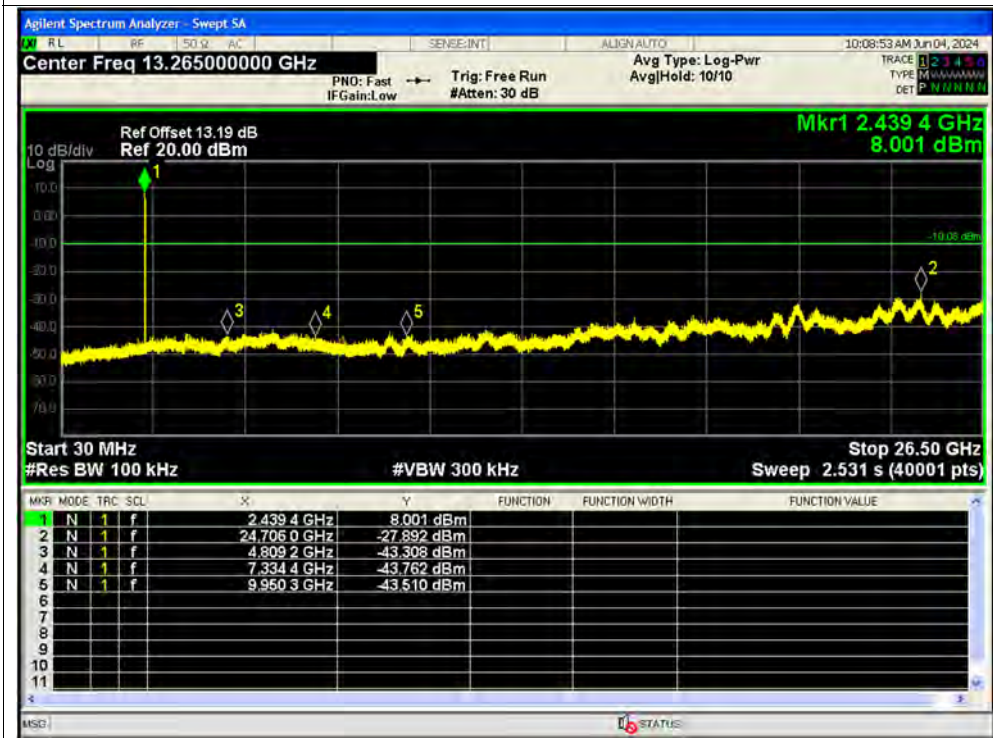




Tx. Spurious NVNT BLE 2M 2480MHz Ant2 Ref



Tx. Spurious NVNT BLE 2M 2480MHz Ant2 Emission

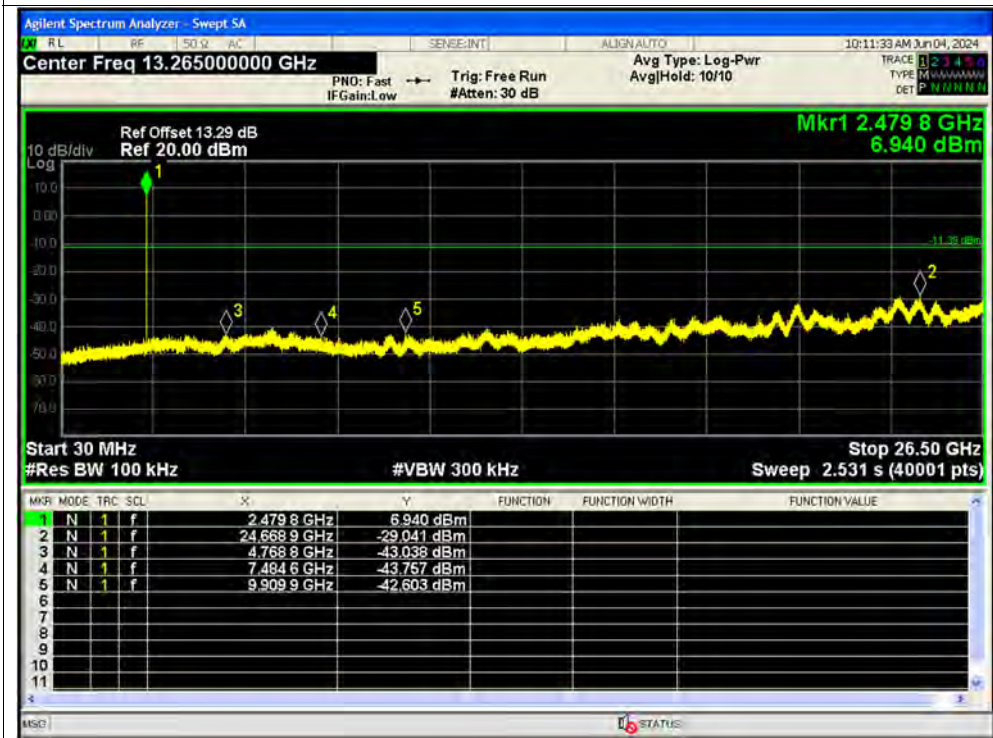

**A.6. Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-49.37	-20	Pass
NVNT	BLE 1M	2480	Ant1	-55.76	-20	Pass
NVNT	BLE 2M	2402	Ant1	-33.01	-20	Pass
NVNT	BLE 2M	2480	Ant1	-53.44	-20	Pass
NVNT	BLE 1M	2402	Ant2	-53.26	-20	Pass
NVNT	BLE 1M	2480	Ant2	-55.26	-20	Pass
NVNT	BLE 2M	2402	Ant2	-32.75	-20	Pass
NVNT	BLE 2M	2480	Ant2	-53.66	-20	Pass




Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref



Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

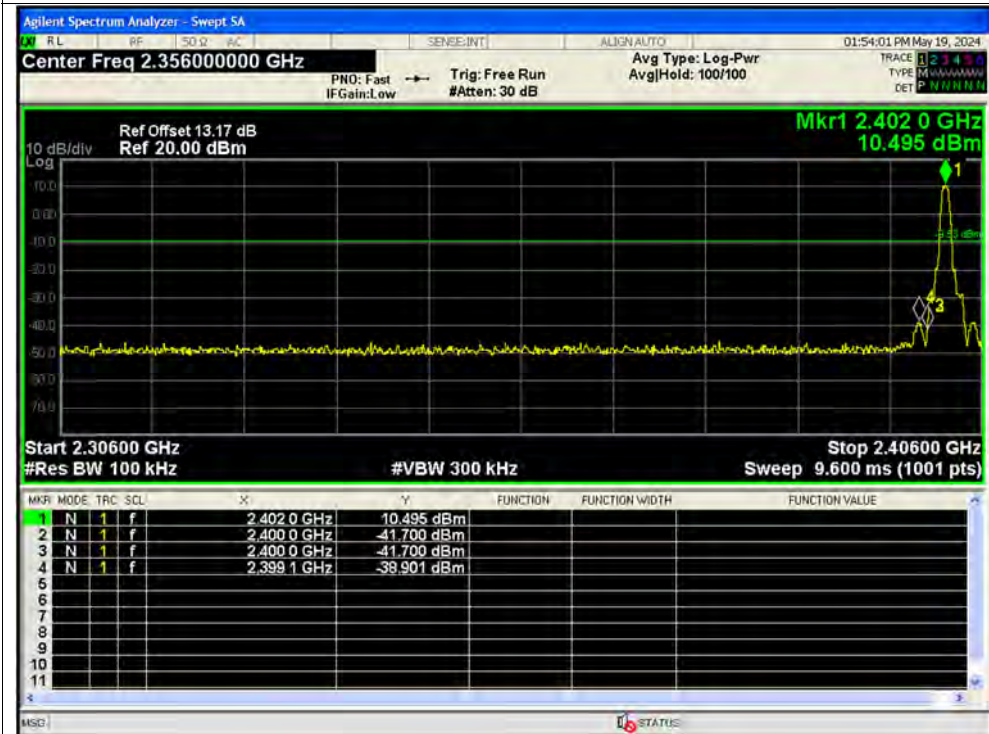




Band Edge NVNT BLE 1M 2480MHz Ant1 Ref



Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

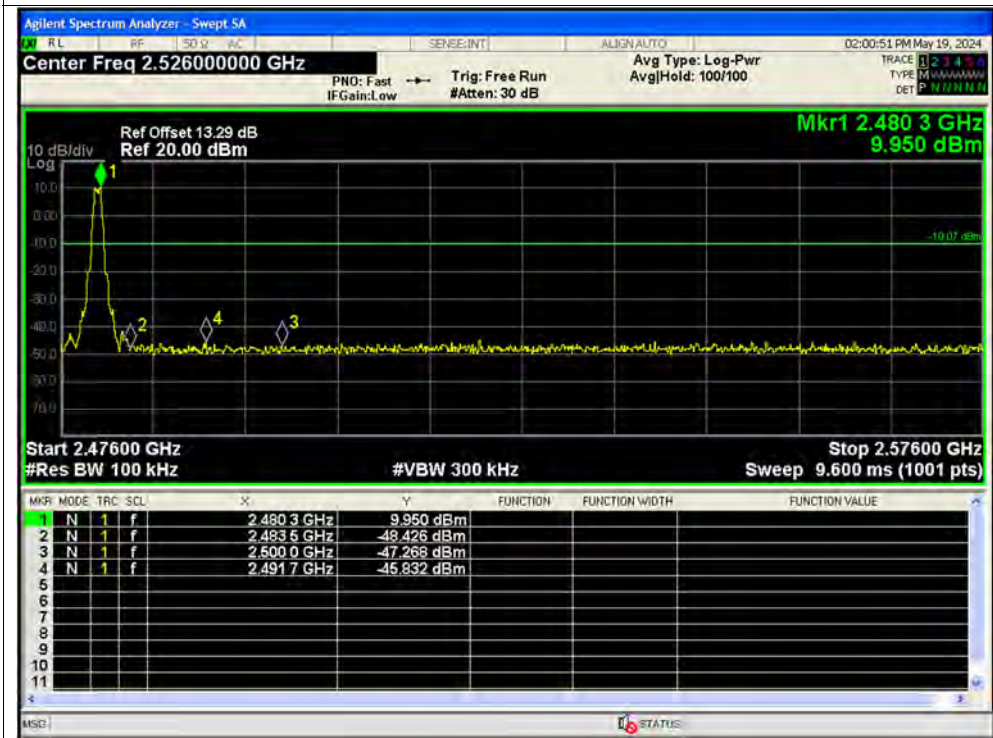




Band Edge NVNT BLE 2M 2402MHz Ant1 Ref



Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

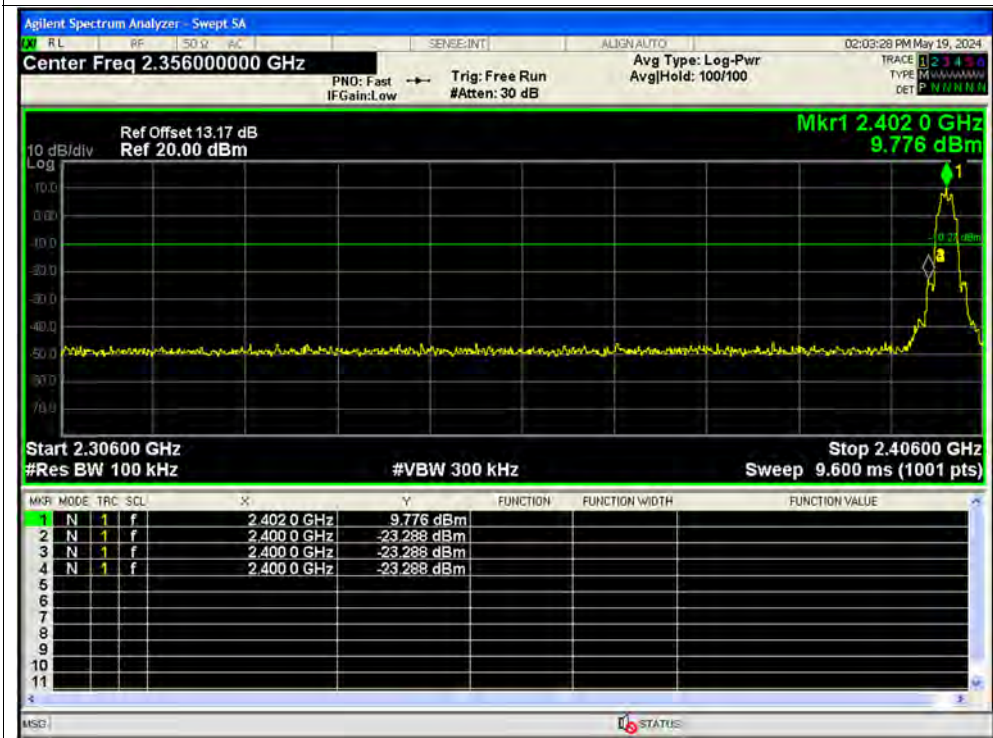




Band Edge NVNT BLE 2M 2480MHz Ant1 Ref



Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

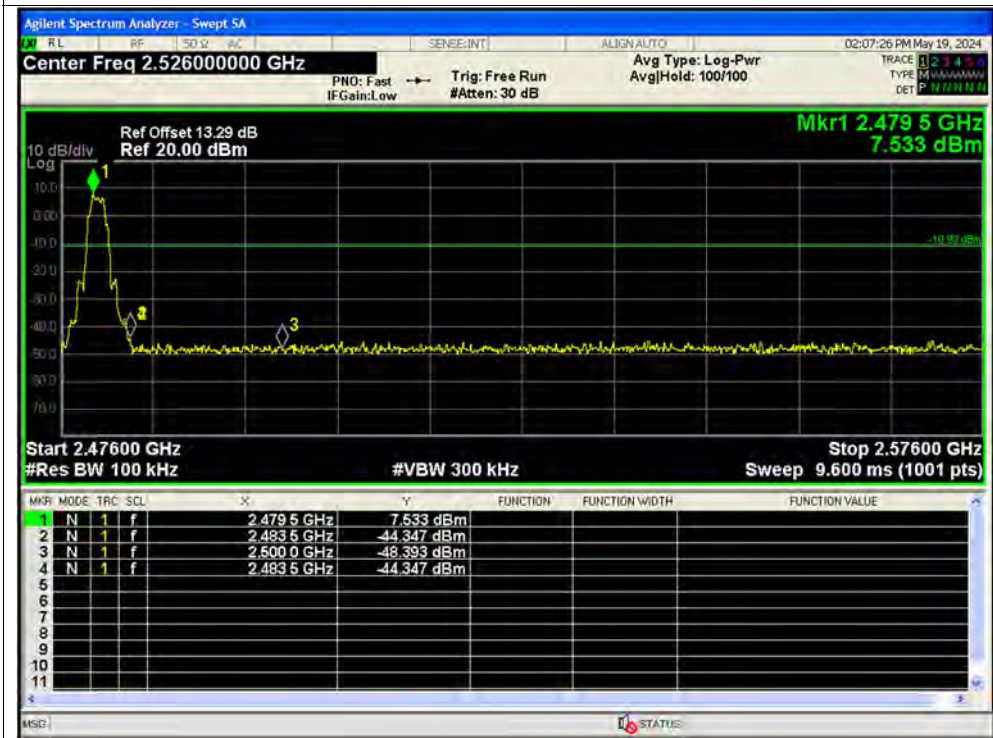




Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant2 Ref



Band Edge NVNT BLE 1M 2402MHz Ant2 Emission

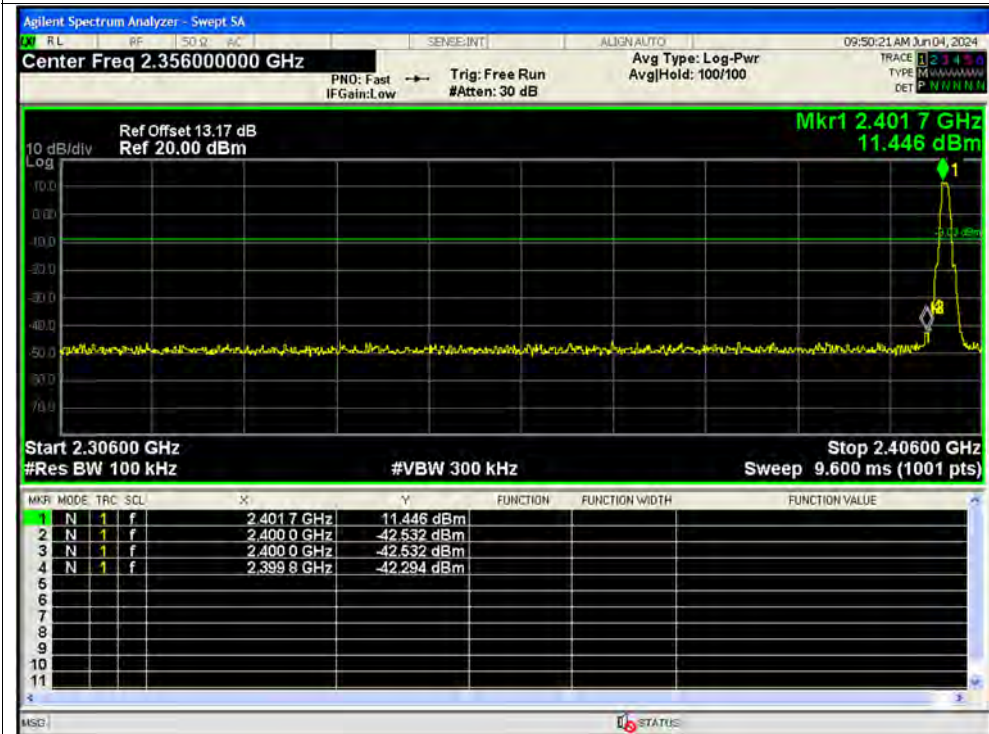




Band Edge NVNT BLE 1M 2480MHz Ant2 Ref



Band Edge NVNT BLE 1M 2480MHz Ant2 Emission

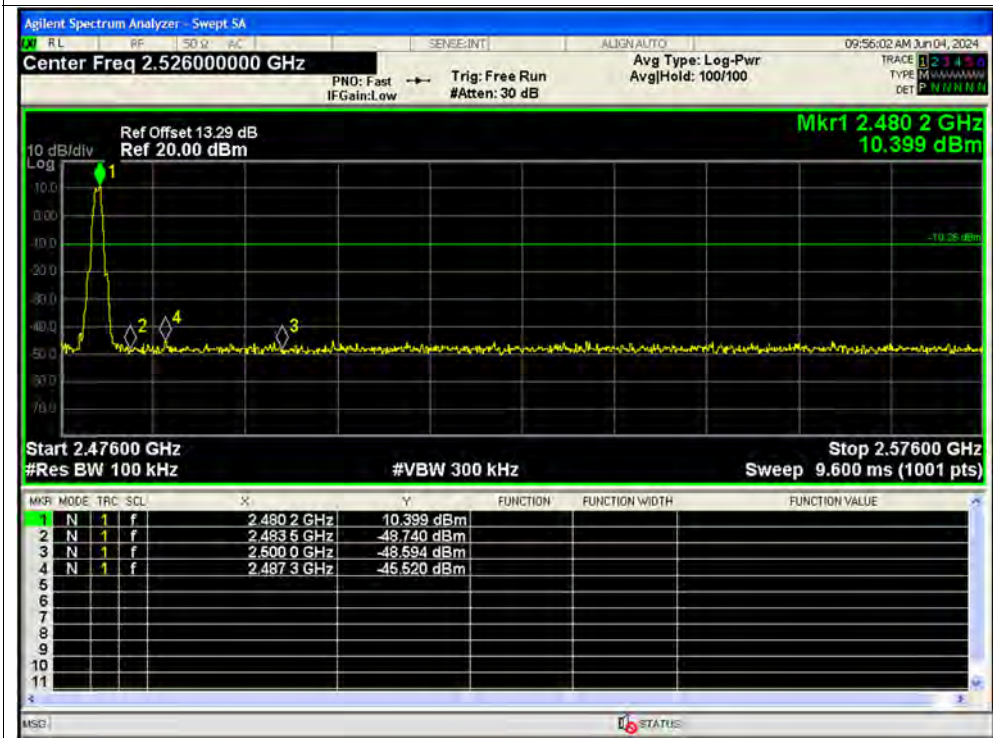




Band Edge NVNT BLE 2M 2402MHz Ant2 Ref



Band Edge NVNT BLE 2M 2402MHz Ant2 Emission

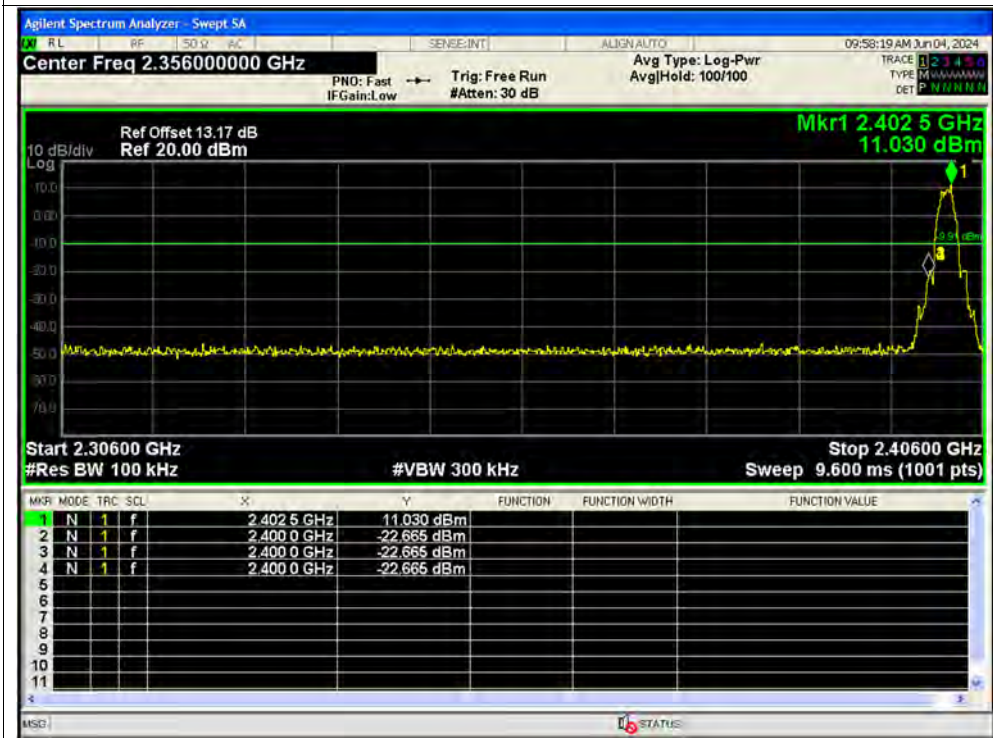




Band Edge NVNT BLE 2M 2480MHz Ant2 Ref



Band Edge NVNT BLE 2M 2480MHz Ant2 Emission

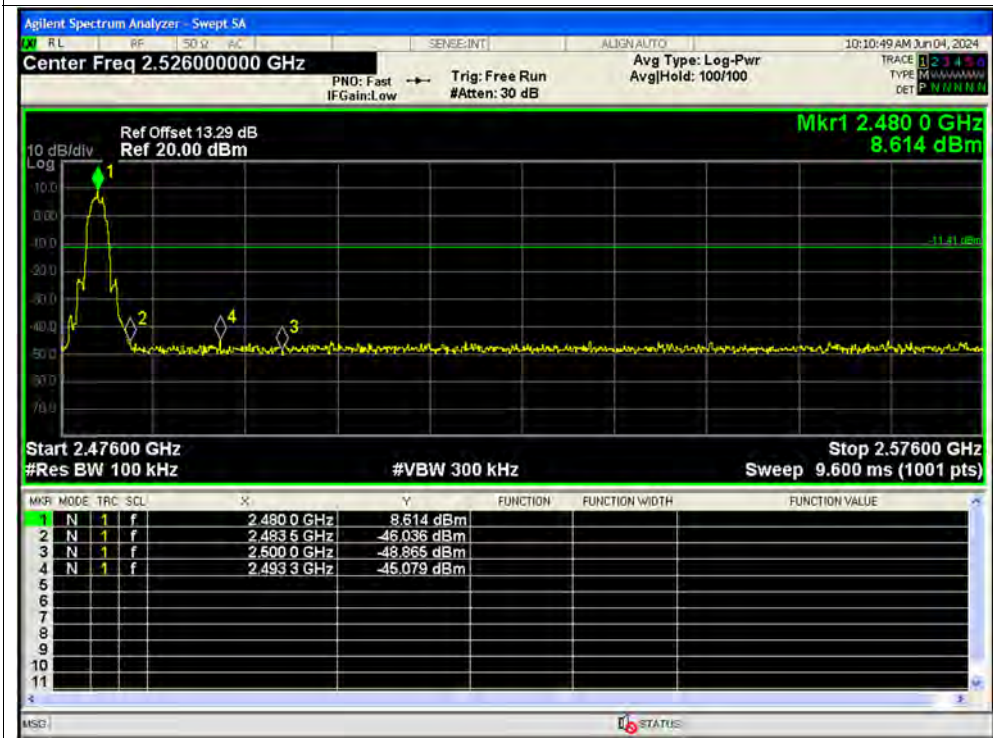


**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-4.03	0	-4.03	8	Pass
NVNT	BLE 1M	2440	Ant1	-4.37	0	-4.37	8	Pass
NVNT	BLE 1M	2480	Ant1	-4.67	0	-4.67	8	Pass
NVNT	BLE 2M	2402	Ant1	-6.48	0	-6.48	8	Pass
NVNT	BLE 2M	2440	Ant1	-6.89	0	-6.89	8	Pass
NVNT	BLE 2M	2480	Ant1	-7.11	0	-7.11	8	Pass
NVNT	BLE 1M	2402	Ant2	-3.78	0	-3.78	8	Pass
NVNT	BLE 1M	2440	Ant2	-4.54	0	-4.54	8	Pass
NVNT	BLE 1M	2480	Ant2	-5.69	0	-5.69	8	Pass
NVNT	BLE 2M	2402	Ant2	-7.27	0	-7.27	8	Pass
NVNT	BLE 2M	2440	Ant2	-6.13	0	-6.13	8	Pass
NVNT	BLE 2M	2480	Ant2	-7.39	0	-7.39	8	Pass




Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

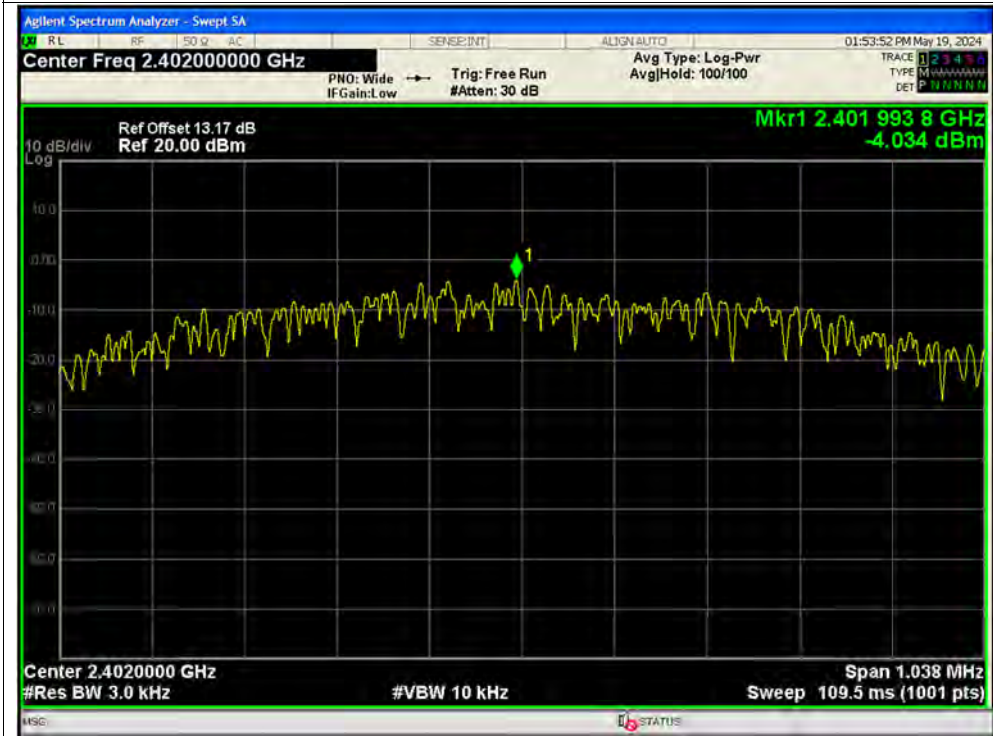


PSD NVNT BLE 1M 2440MHz Ant1

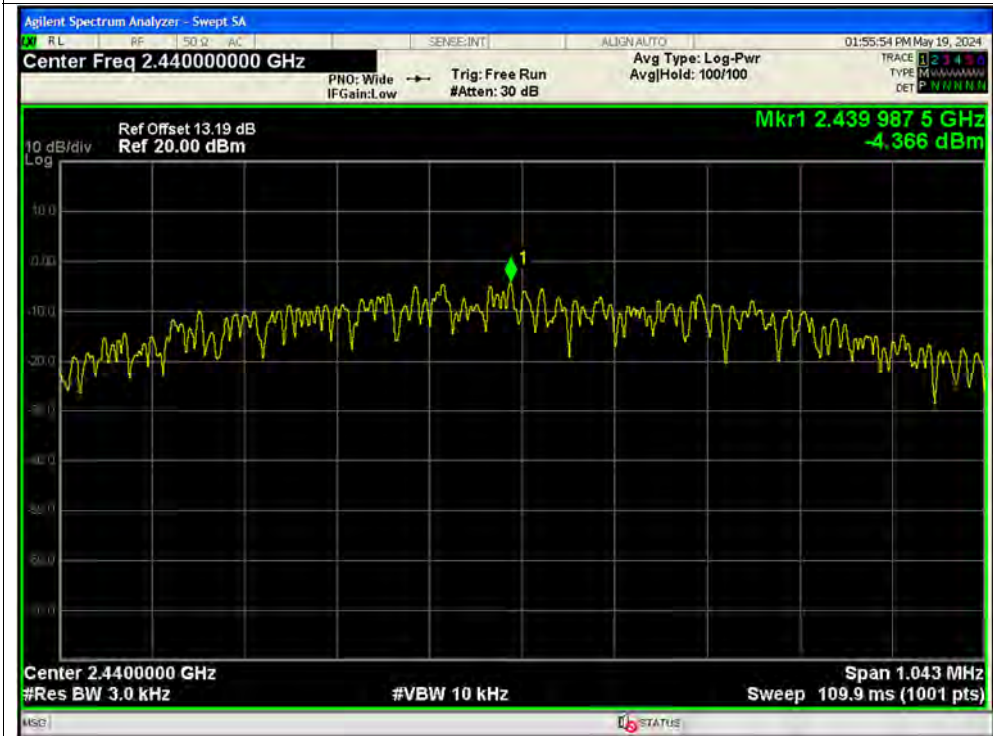



PSD NVNT BLE 1M 2480MHz Ant1

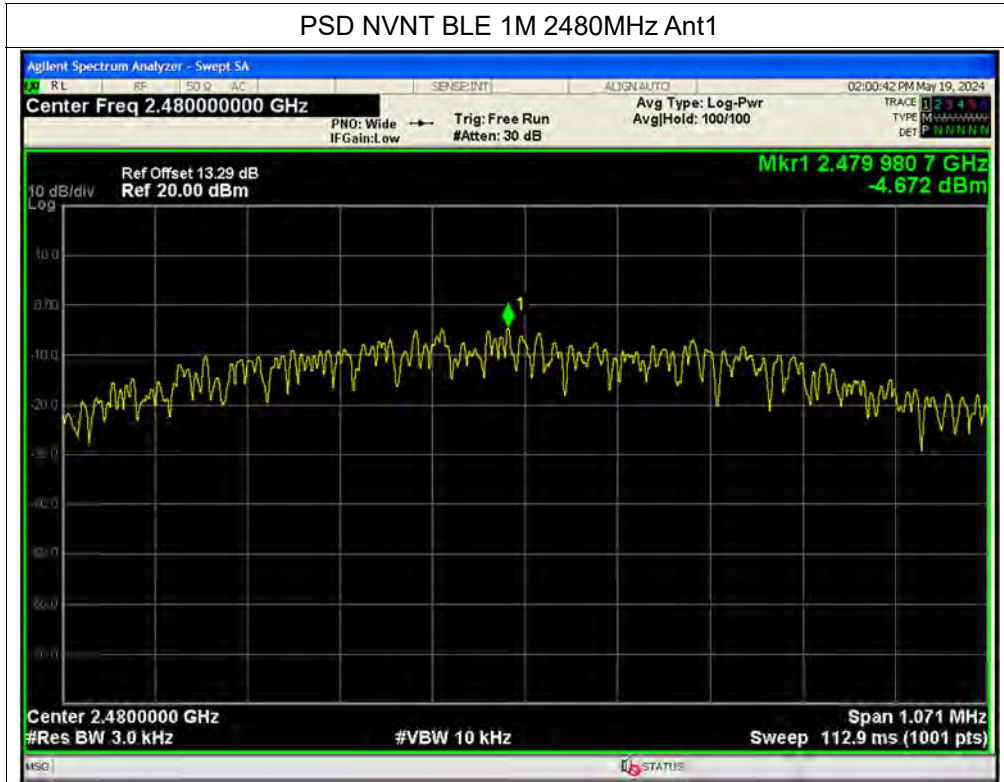


PSD NVNT BLE 2M 2402MHz Ant1





PSD NVNT BLE 2M 2440MHz Ant1

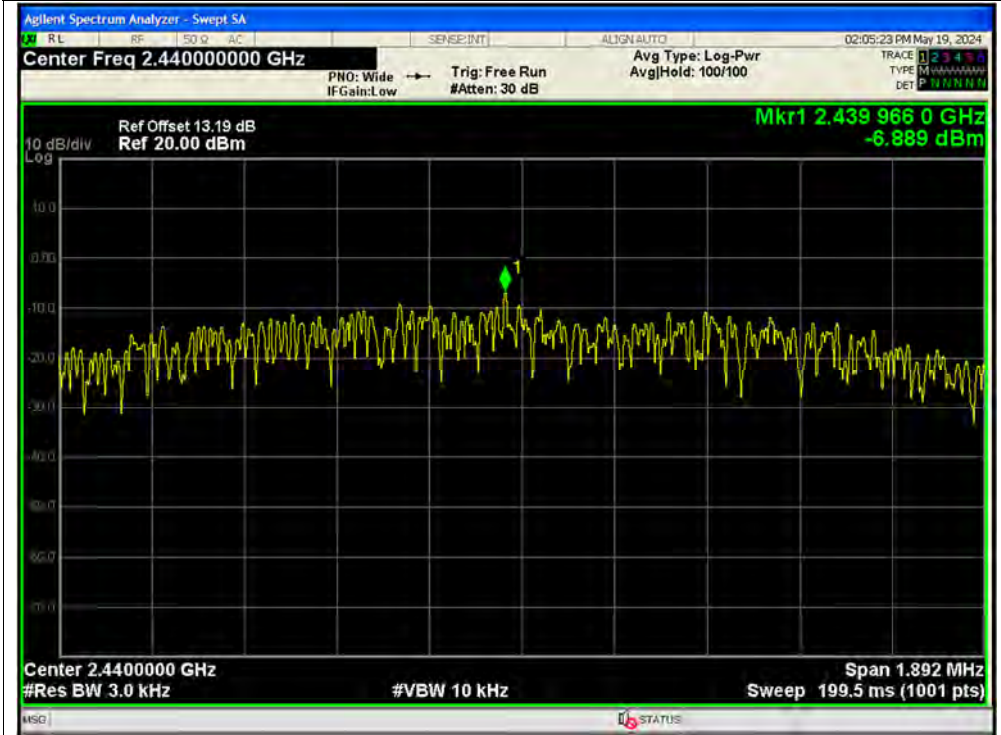

PSD NVNT BLE 2M 2480MHz Ant1





Test Graphs

PSD NVNT BLE 1M 2402MHz Ant2



PSD NVNT BLE 1M 2440MHz Ant2





PSD NVNT BLE 1M 2480MHz Ant2




PSD NVNT BLE 2M 2402MHz Ant2





PSD NVNT BLE 2M 2440MHz Ant2

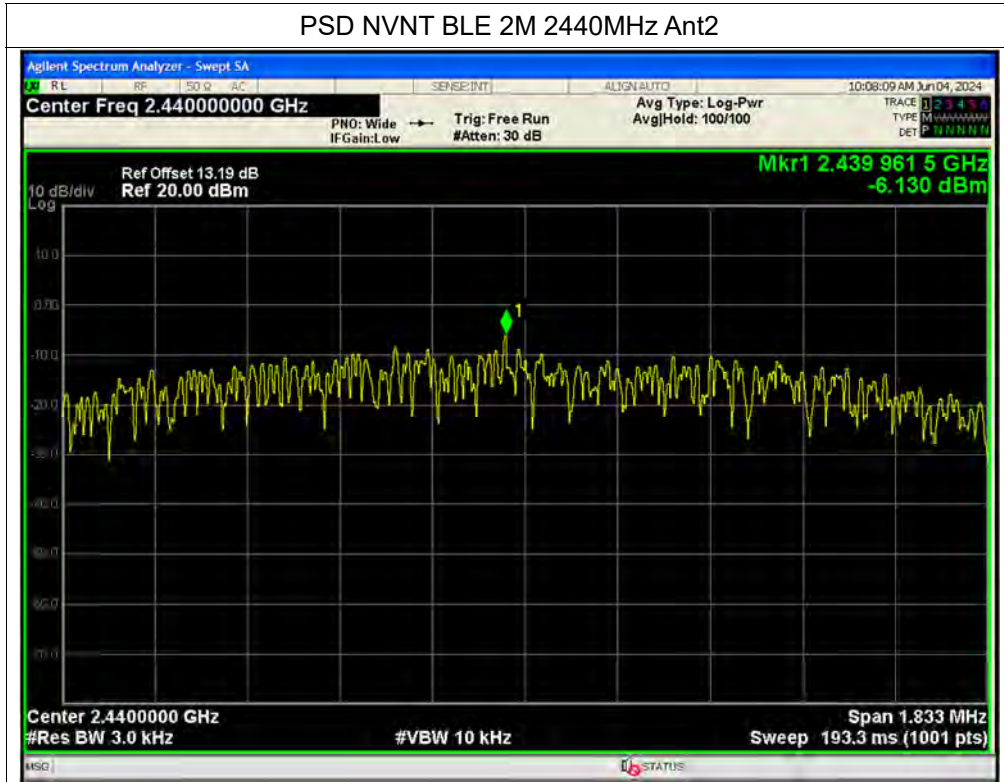

PSD NVNT BLE 2M 2480MHz Ant2





A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + RJ45 Cable + PC + BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

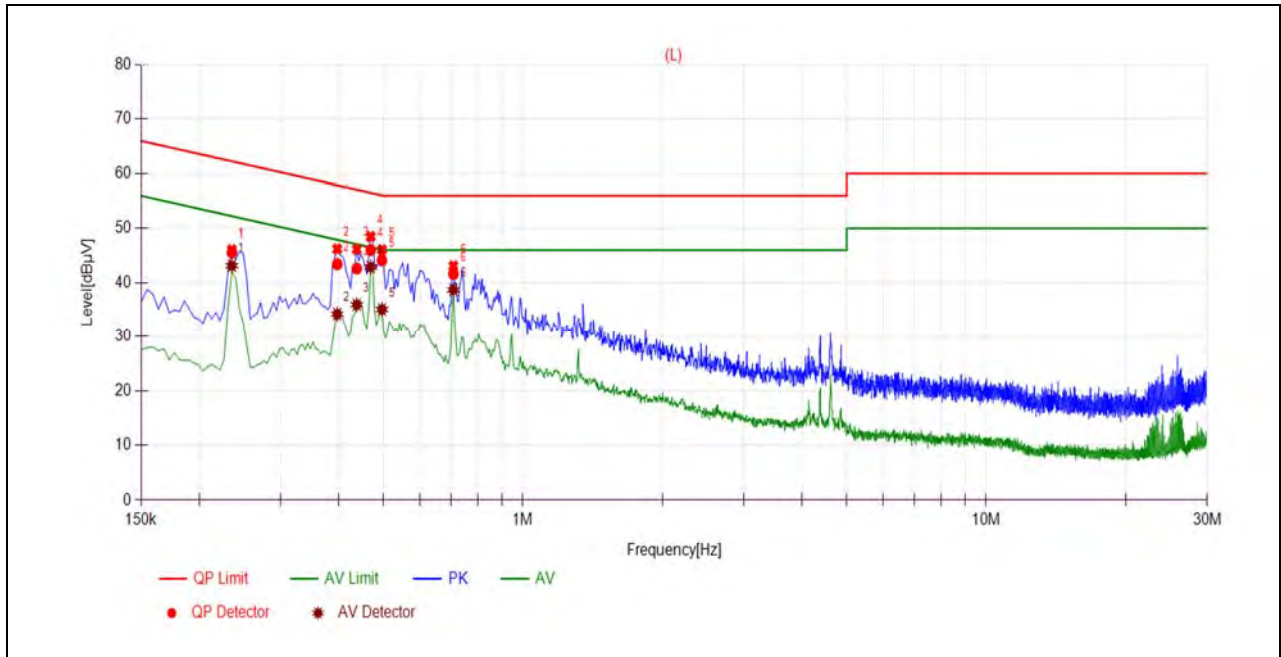

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2355	45.56	43.13	62.25	52.25	Line	PASS
2	0.3975	43.42	34.21	57.91	47.91		PASS
3	0.4380	42.62	35.95	57.10	47.10		PASS
4	0.4695	46.01	42.89	56.52	46.52		PASS
5	0.4965	44.12	35.07	56.06	46.06		PASS
6	0.7081	41.61	38.69	56.00	46.00		PASS

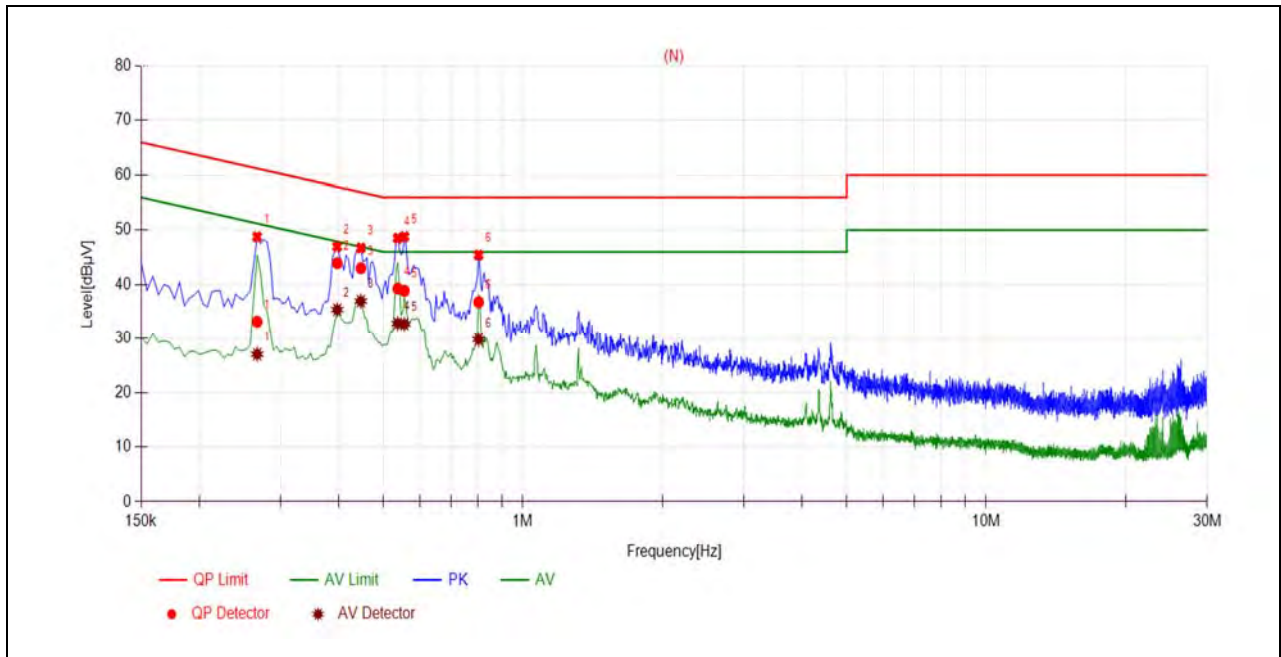

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2670	33.17	27.06	61.21	51.21	Neutral	PASS
2	0.3975	43.95	35.39	57.91	47.91		PASS
3	0.4470	43.02	36.97	56.93	46.93		PASS
4	0.5370	39.28	32.85	56.00	46.00		PASS
5	0.5550	38.87	32.72	56.00	46.00		PASS
6	0.8026	36.77	29.82	56.00	46.00		PASS

**A.9. Restricted Frequency Bands**

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (horizontal) was recorded in this test report.

1Mbps


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2390.00	PK	22.86	6.74	27.20	56.80	74	PASS
0	2390.00	AV	12.41	6.74	27.20	46.35	54	PASS
39	2486.95	PK	23.47	6.74	27.20	57.41	74	PASS
39	2488.54	AV	14.78	6.74	27.20	48.72	54	PASS

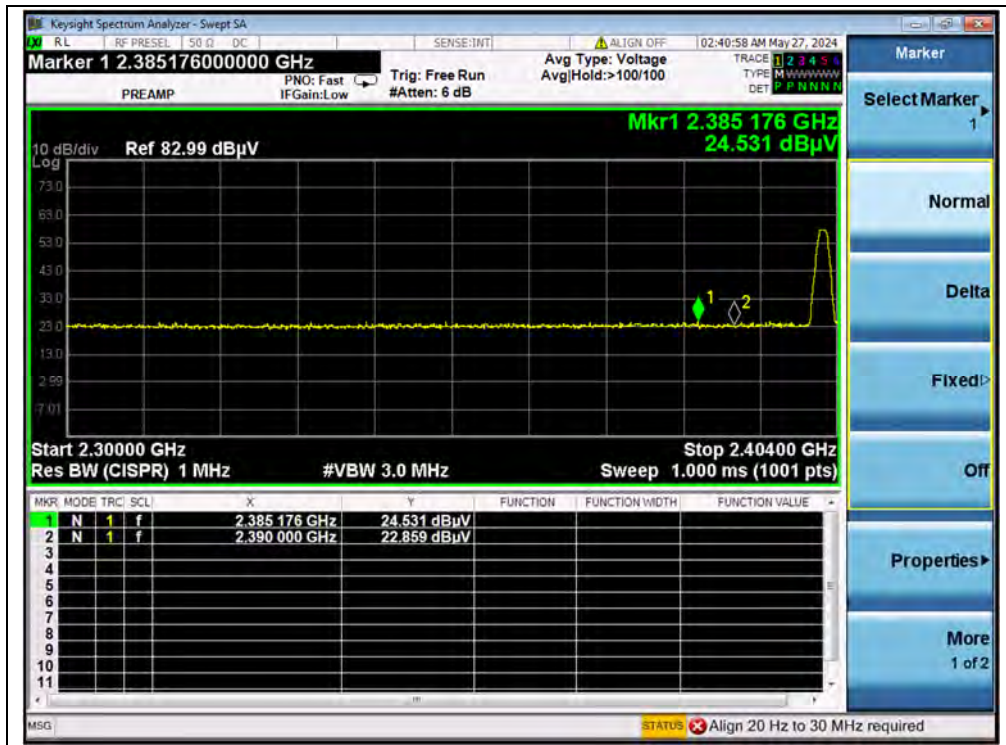


(PEAK, Channel 0)

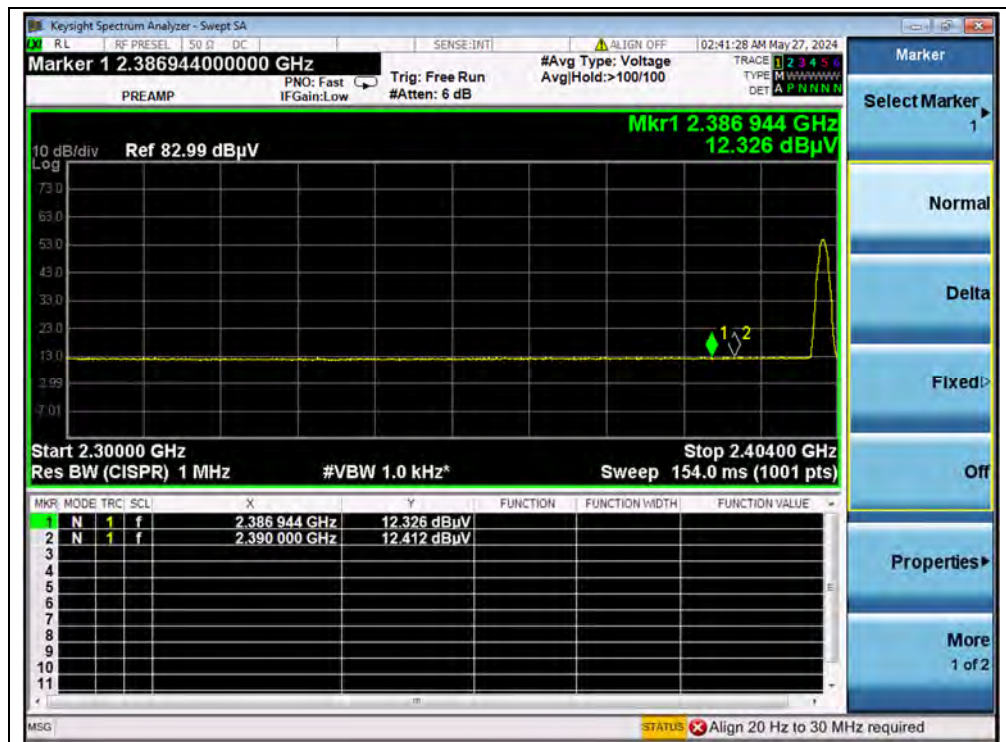

(AVERAGE, Channel 0)

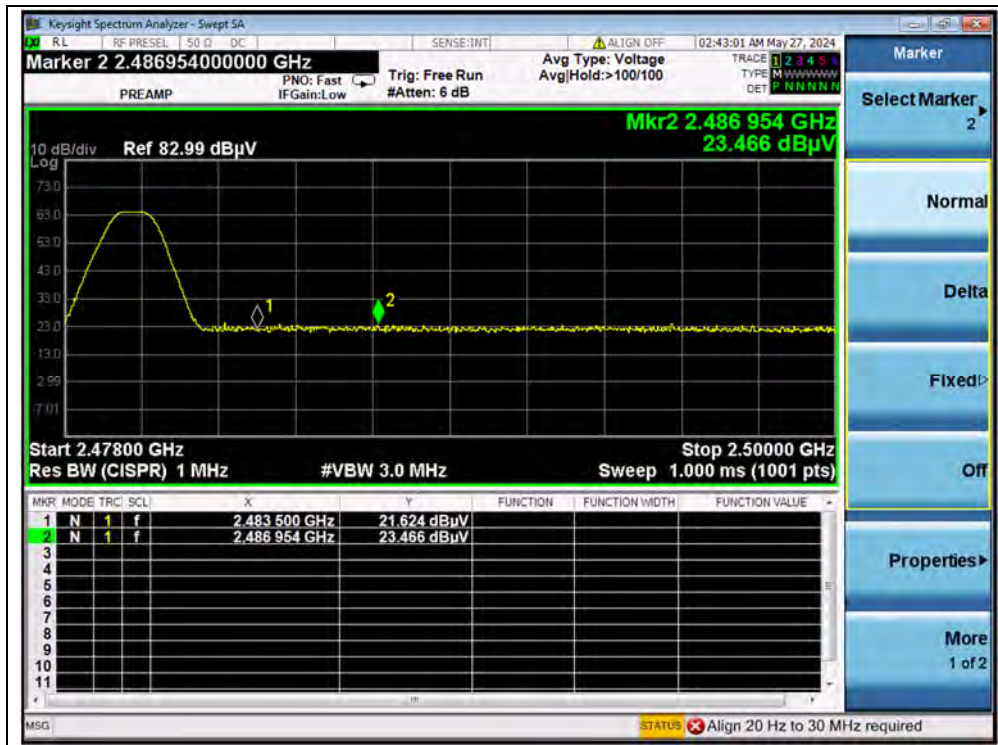

(PEAK, Channel 39)

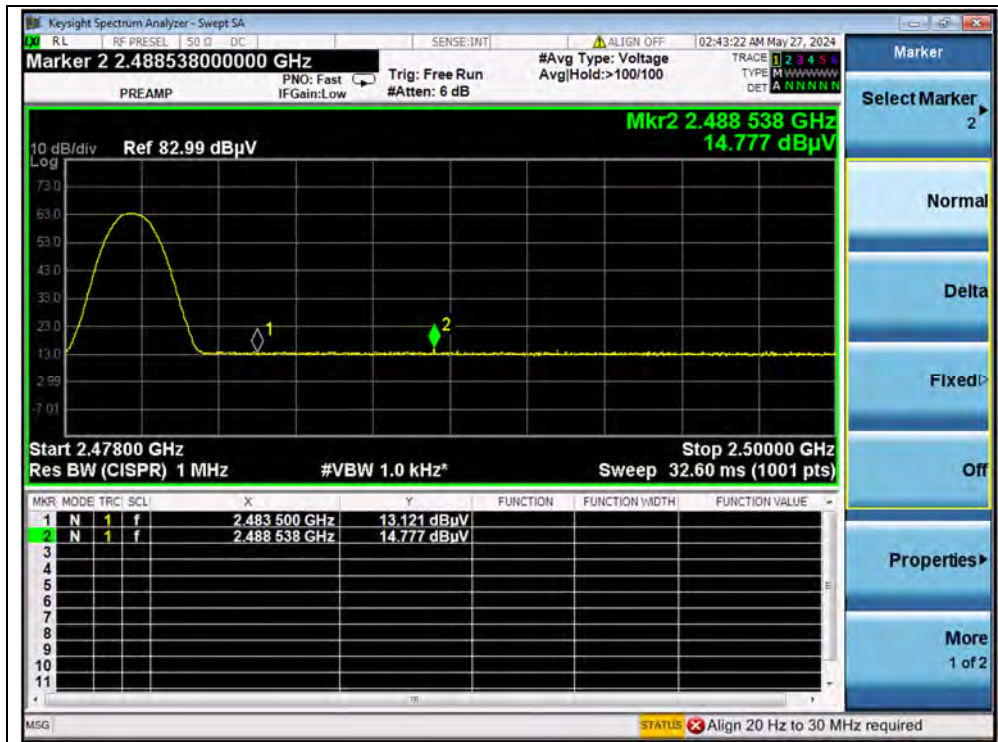

(AVERAGE, Channel 39)




2Mbps


Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBμV)					
0	2366.87	PK	23.44	6.74	27.20	57.38	74	PASS
0	2380.18	AV	12.41	6.74	27.20	46.35	54	PASS
39	2489.86	PK	23.72	6.74	27.20	57.66	74	PASS
39	2490.08	AV	14.09	6.74	27.20	48.03	54	PASS




(PEAK, Channel 0)

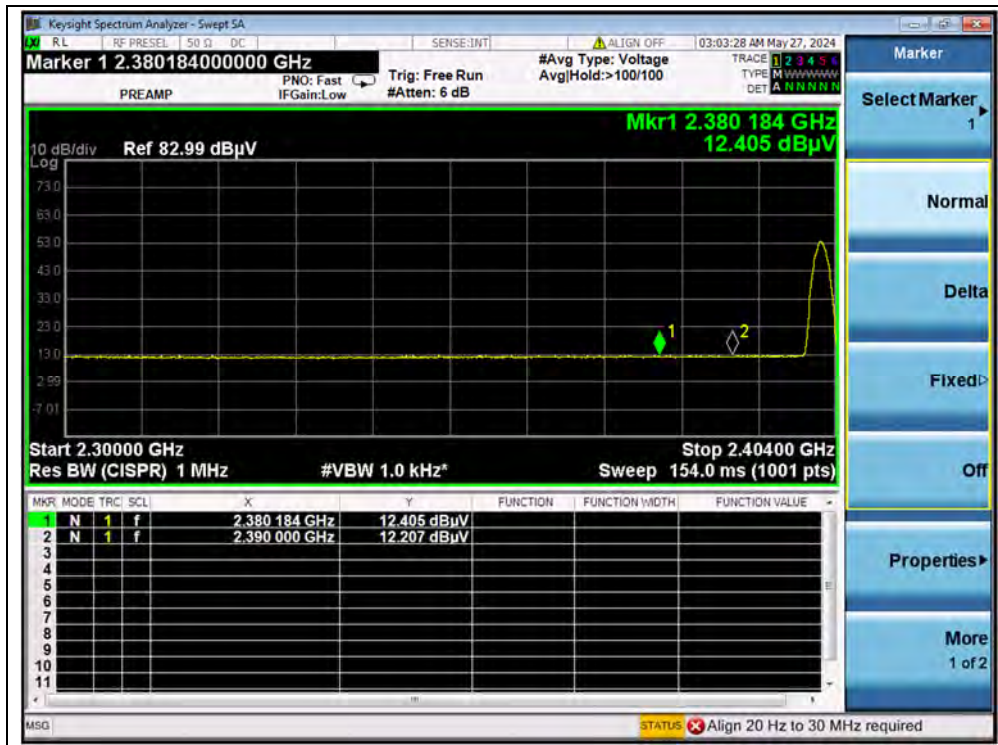

(AVERAGE, Channel 0)

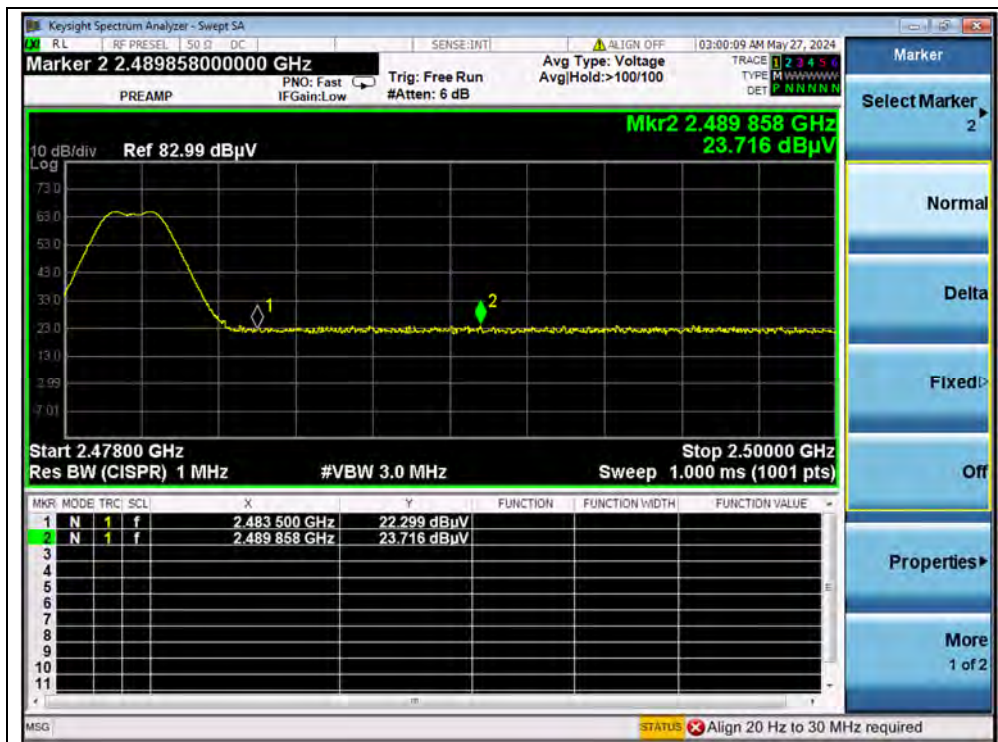

(PEAK, Channel 39)

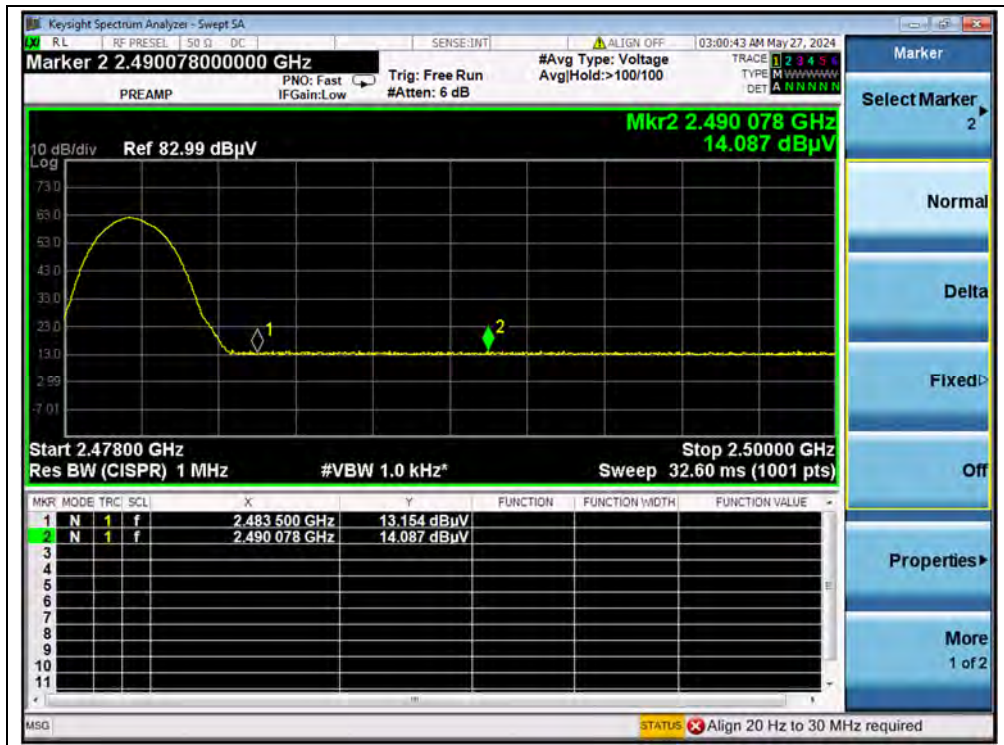

(AVERAGE, Channel 39)



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable\ loss} [dB] - G_{preamp} [dB]$$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Field strength of fundamental:

Frequency (MHz)	Reading_Peak (dBμV/m)	Antenna Factor (dB)	Path Loss (dB)	Final_Peak (dBμV/m)	Antenna Polarity
2479.47	64.88	27.20	6.74	98.82	Horizontal

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).


1Mbps

Plot for Channel 0

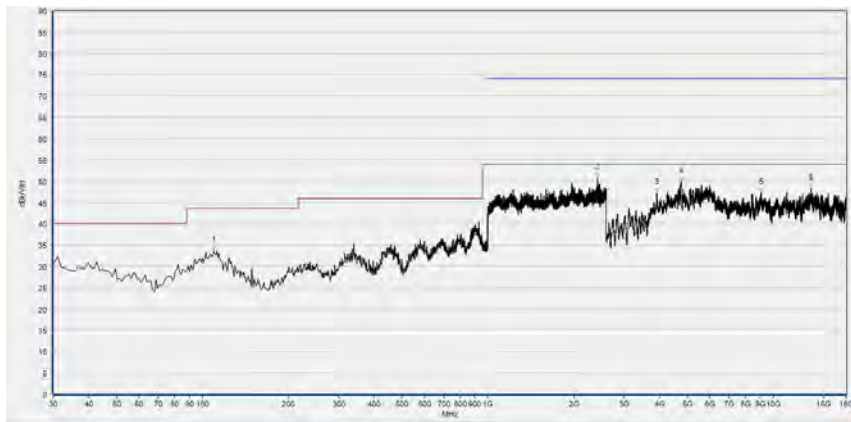

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.77	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2419.200	50.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3909.000	47.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4746.760	49.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9058.760	47.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13580.200	48.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

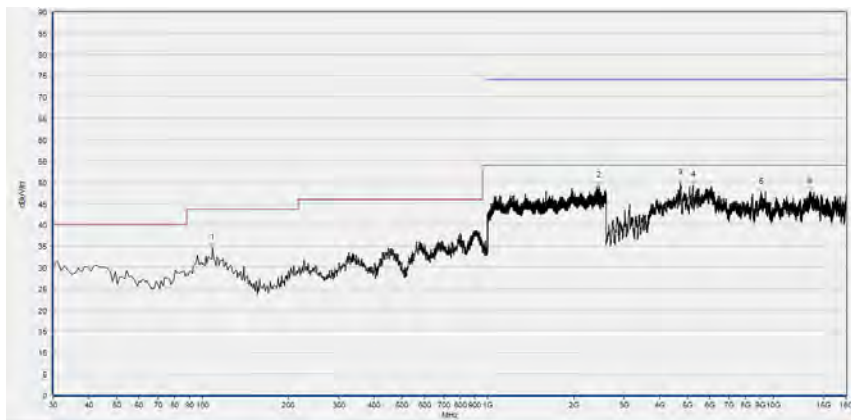

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	34.57	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2452.267	49.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4737.520	49.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5233.400	49.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9064.920	47.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13432.360	47.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 19

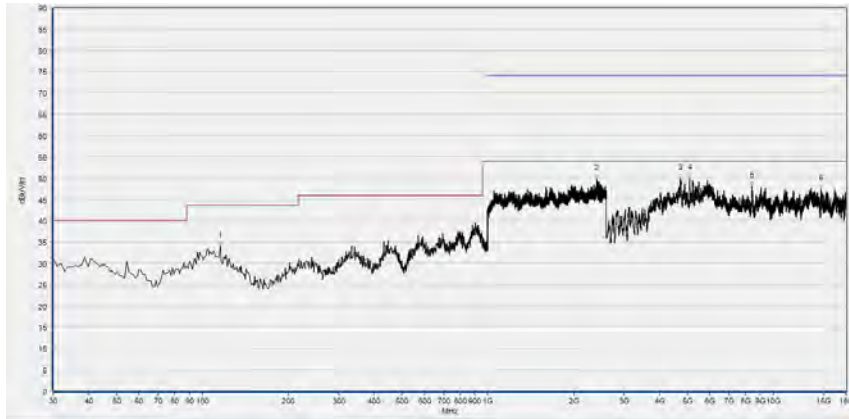

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
115.360	34.01	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2415.467	49.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4734.440	49.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5100.960	49.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8421.200	48.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14729.040	47.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

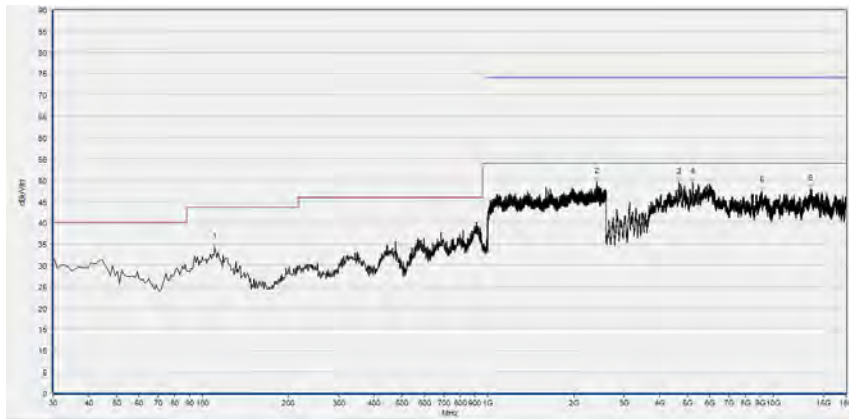

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
110.510	34.14	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2410.667	49.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4660.520	49.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5227.240	49.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9114.200	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13469.320	48.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 39

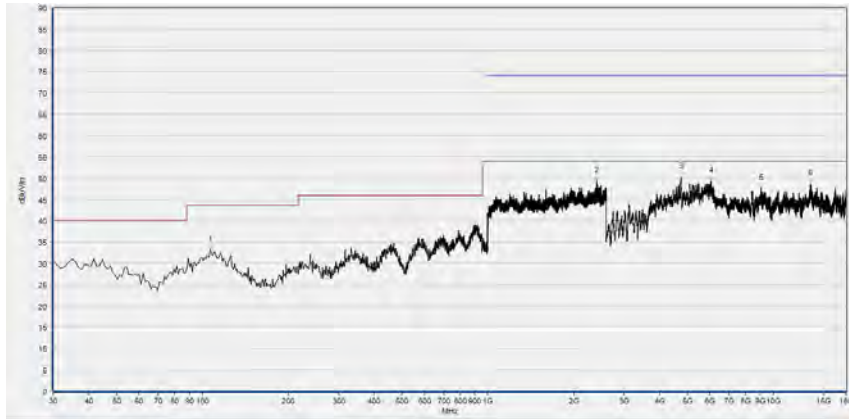

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
106.630	33.17	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2410.667	49.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4749.840	50.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6043.440	49.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9064.920	47.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13481.640	48.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

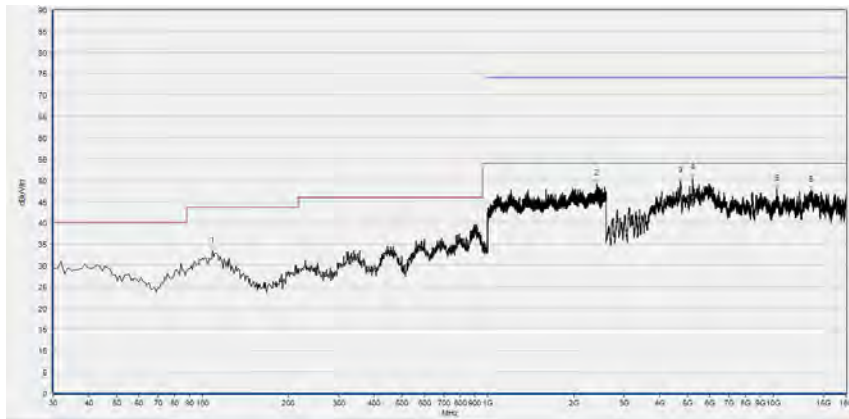


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
108.570	33.36	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2406.933	49.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4740.600	49.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5227.240	50.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10306.160	47.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13564.800	47.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


2Mbps

Plot for Channel 0

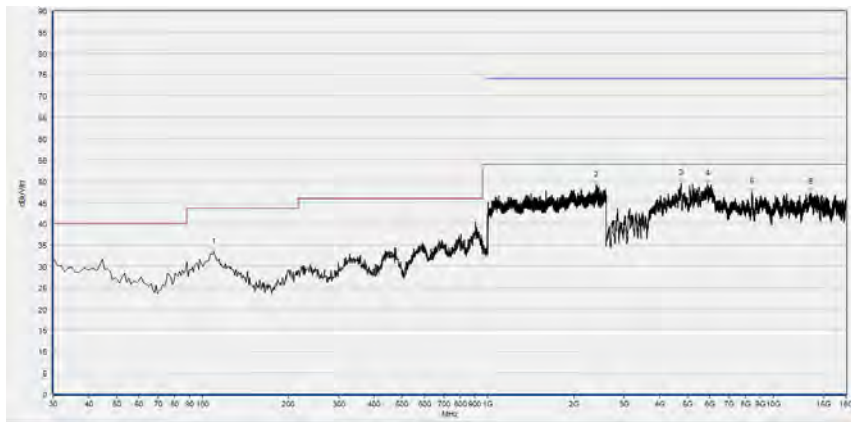

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.27	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2401.067	48.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4749.840	49.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5870.960	49.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8424.280	47.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13487.800	47.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

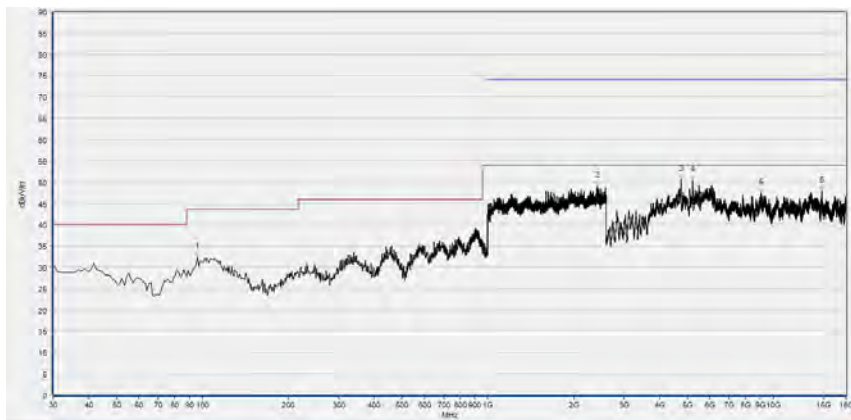

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
95.960	32.42	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2426.133	49.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4752.920	50.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5224.160	50.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9068.000	47.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14809.120	47.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 19

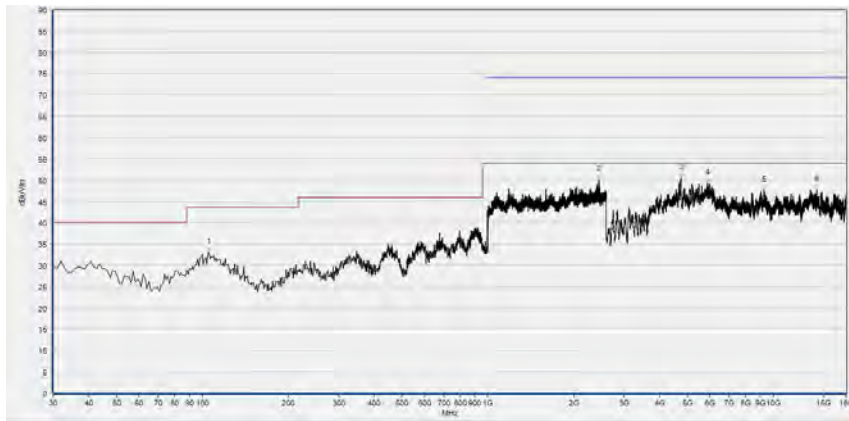

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
105.660	32.95	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2456.000	50.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4743.680	50.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5880.200	49.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9289.760	47.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14183.880	47.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

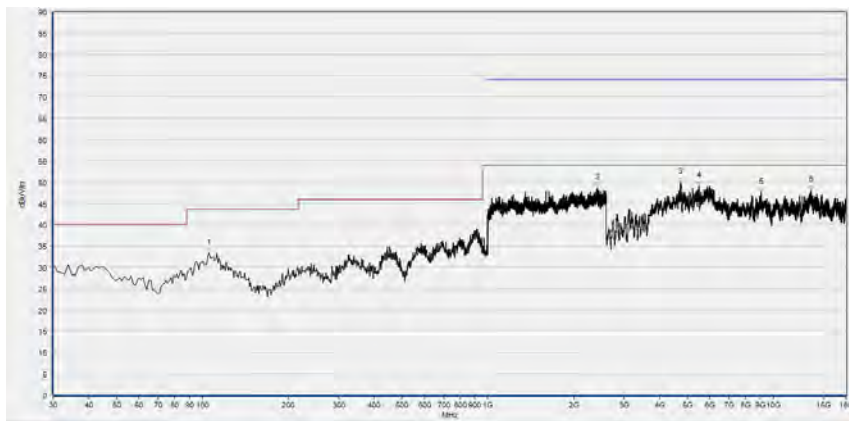


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
105.660	33.34	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2418.133	48.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4731.360	49.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5479.800	49.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9083.400	47.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13567.880	48.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 39

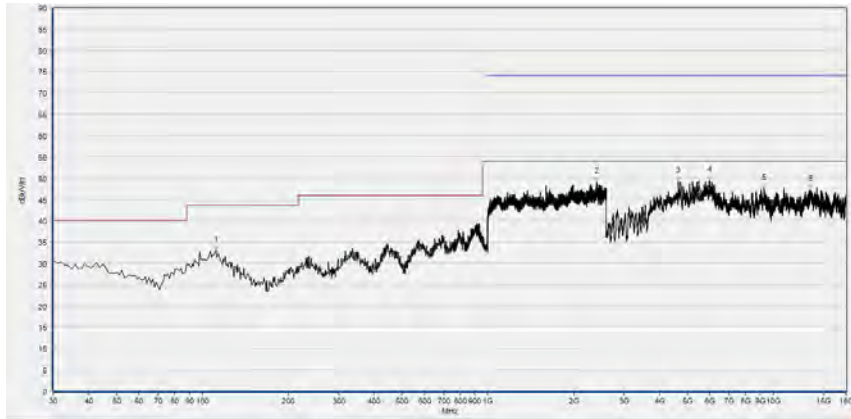

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
111.480	33.08	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2412.267	49.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4657.440	49.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5984.920	49.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9268.200	47.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13478.560	47.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
112.450	33.96	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2447.467	48.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4746.760	49.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5729.280	49.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11143.920	47.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13506.280	48.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

————— END OF REPORT —————