

● 保养及注意事项(Warning and Notes)

1. 室内使用。使用环境应保持干燥、通风；
2. 使用中不得有水或其它液体滴入产品中，以免造成内部电路短路，而损坏产品；
3. 不要使用超过额定的电压；
4. 灯体稍微有发热为正常现象；
5. 移动或安装时，需轻拿轻放，切勿撞击其它物体，以免造成灯罩变形或灯体损坏；
6. 摄影/摄像LED灯点亮时，请勿直视，避免伤害眼睛；
7. 避免将摄影/摄像灯放置在如酒精或汽油等易燃或易挥发的溶剂附近；
8. 请用干软布来清洁摄影/摄像灯，您可以用布稍稍沾上一些中性的清洁剂来擦去较难去除的污垢，然后用软布将其擦干；
9. 请勿在儿童伸手可及之内保管本产品；
10. 各灯保险丝请勿超过规定电流值；
11. 非专业人士，请勿随便拆卸、否则后果自负；
12. MT LED影室灯长时间不用时请切断电源；
13. 请遵守此注意事项，否则将可能导致受伤。

1. Please work indoor, keep dry and airy condition.
2. please do not let the device be exposed to rain or moisture, to avoid circuit problem.
3. Please do not use when the over- rated voltage.
4. The body will be a litter hot when working.
5. During transportation and installation process, please do not hit against other items, or else it may cause deformation to the lamp shade and damage to the light.
6. Please do not directly look at the light bulb with naked eyes when the photographic light on.
7. Please do not place the photographic lights in near by such as alcohol or gasoline and other flammable or volatile solvents.
8. Please use the dry soft cloth to clean photographic lights. You can wash with a cloth with some neutral detergent to remove the dirt that is difficult to remove, and then dry with a soft cloth.
9. To keep the lights out of children's reach.
10. Please do not work when over-current.
11. Do not disassemble equipment. Touch the product's internal part could result in injury. In the event of malfunction, the product should be repaired only by a qualified technician.
12. Please cut off power while the light is not necessary.
13. Please note the precautions, or could result in injury.



扫描二维码下载手机 App - Linklite


Scan QR Code to Download App - Linklite



LED说明书

User Guide

Model No. X-180RGB

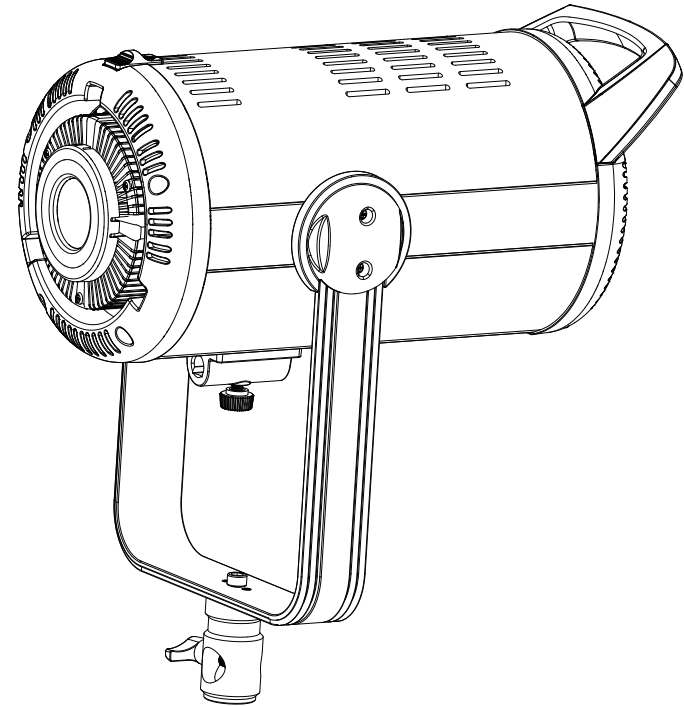

东莞市图立方影视器材有限公司

工厂地址：广东省东莞市厚街镇溪头村溪头工业区溪宝路15号
电话（国际）：0086-769-8592 4988 8599 9808 传真：0086-769-8590 5228
咨询热线（国内）：400-900-3829

Tolifo (Dongguan) Photographic Equipment Co., Ltd

Factory in china: 15 Xibao Rd, Xitou Industrial Park, Xitou Village, Houjie, Dongguan
Tel (International) : 0086-769-8592 4988 8599 9808 Fax: 0086-769-8590 5228



TOLIFOLIGHT

● 产品介绍（Product Information）


感谢选购本产品，独特的外观流线形设计，符合大众审美观念。采用铝合金和高强度工程塑料外壳，完美结合、坚固耐用；配置了HSI彩光模式，可以调节色相、饱和度、CCT模式、特效，可以定义36000余种色彩，满足用户各种需求，实现多场景设置、彰显拍摄创意。摄影、视频、直播等场合不可或缺的设备。可2.4G无线遥控及APP控制控调光，操作简便。

Thank you for purchasing the RGB COB studio Light. Built with solid aluminium alloy frame, the fixture provides wide beam spread with multi color light source. This light fixture is built-in with HSI mode that gives you access to literally more than 36000 colors and different pre-programmed creative lighting effects. The light has a wide variable color range from 2700 to 6500K and a high CRI rating. It features flicker free dimming from 0-100% and while you can make adjustments locally on the fixture, you can also make them wirelessly with a separately-available 2.4G remote controller or mobile APP. The RGB studio light operates on wide range voltage of AC power 100V-240V, it is useful for live broadcast, video, studio, still life, portrait, streaming, interview lighting, and more.

● 技术参数(Specifications)

型号 (Model No.)	X-180RGB
功耗 (Power Consumption)	180W
色温调节 (Color Temperature)	2700K-6500K ±200K
CRI	≥97
色相 (Hue)	0-360°
调光范围 (Dimmer)	0%-100%
饱和度 (Saturation)	0%-100%
光源 (LED Type)	大功率COB灯珠 High power COB (Chip on Board) LED
特效 (Special Effects)	20
特效速度 (Flash Speed)	1-9
APP控制 (App Control)	LinkLite（基于蓝牙）
遥控 (Remote Control)	99通道2.4G无线遥控 99 channels 2.4G wireless remote control
遥控距离 (Remote Control Distance)	≥30M
DMX512调光 (DMX512 dimmer)	YES（RJ45接口）YES (RJ45 interface)
DC电源输入 (DC power input)	100-240V~ 50/60Hz
尺寸 (Size)	140*140*300mm

● 部件介绍 (Product Overview)

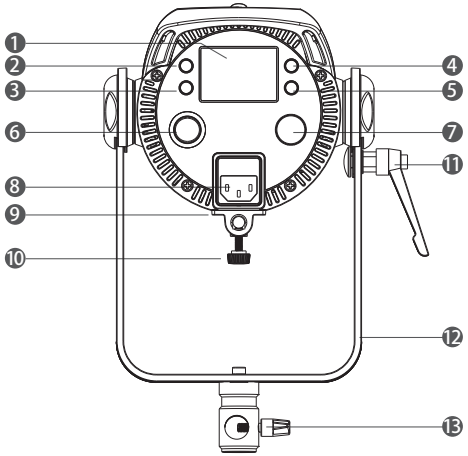

- 1 LCD显示屏

2 温度/ 蓝牙重置
短按 2 查看工作温度 / 长按 2 可蓝牙重置

3 风扇开关 / 2.4G遥控按键
短按关/开风扇 / 长按进去2.4G模式，旋转 7 可调地址
注意：如果关掉散热风扇，最大调节亮度为30%。

4 CCT /HSI /FX 模式按键
1. 在CCT模式下，短按 7 调整亮度/色温，旋转调整相应参数
2. 在CCT模式下，长按进入特效模式，短按 7 可选择不同特效，短按 7 可调整频率1-9，再次短按 7 可调整亮度0-100%，旋转可调整相应参数
3. 在HSI模式下，短按 7 调整色彩范围 0-360°，再次短按 7 调整饱和度，再次短按 7 可调整亮度0-100%。旋转可调整相应参数
4. 在HSI模式下，长按进入特效模式，短按 7 可选择不同特效，短按 7 可调整频率1-9，再次短按 7 可调整亮度0-100%，旋转可调整相应参数

焊接 / 脉冲 / 黄火 / 闪电 / 爆炸 / 电视 / 烛光 / 故障灯 / 呼吸灯 / 狗仔队 / 紧急呼救 / 渐亮 / 渐暗 / 警车 / 派对 / 烟花 / 迪斯科 / 救护车 / 消防车 / RGB循环

- 5 DMX按键

6 电源开关

7 调节旋钮

8 电源插口

9 DMX插孔

10 伞柄固定座

11 U杆调节旋钮

12 U杆

13 支架底座

- 1 LCD Screen

2 Temp / Bluetooth Reset
Shortly press 2 to check working temperature. / Long press 2 to reset bluetooth connection

3 Fan | Channel Select
Short press to switch on or off the cooling fan.
Note: When the cooling fan is switched off, the indensity is allowed to dimmer max to 30%.
Long press to allow the access to 2.4G remote control, wheel the knob 7 to select the address 01 -99.

4 CCT/HSI/FX Mode Select
Shortly press the button to switch between CCT and HSI control.
1. In the mode of CCT, shortly press the knob 7 to switch to control between dimmer and color temperature, and wheel the knob 7 to change the color temperature from 2700K to 6500K or change intensity from 0 % to 100 %.
2. In the mode of CCT, long press the button 7 to allow access to FX control. Shortly press the knob 7 to switch control of special effects x12, flash speed from 1 to 9, and dimmer from 0 % to 100 %. Wheel the knob 7 to change the number. Long press the button 4 to exist from the FX control.
3. In the mode of HSI, shortly press 7 to switch the change the hue 0-360° , saturation 0-100% and intensity 0-100%. Wheel the knob 7 to change the number.
4. In the mode of HSI, long press the button 4 to allow access to FX control.Shortly press the knob 7 to switch control of special effects x8, flash speed from 1 to 9, and dimmer from 0 % to 100 %. Wheel the knob 7 to change the number. Long press the button 4 to exist from the FX control.

FX Control (special effects)
Welding / Pulsing / Campfifire / Lightning / Explosion / TV / Candle / Fault Bulb / Breathe / Paparazzi / SOS / Flame / Fade / Cop Car / Party / Fireworks / Disco / Ambulance / Fire Siren / RGB Loop
- 5 Power switch

6 Power Switch

7 Adjustment Knob

8 Power Socket

9 DMX Input | Output

10 Umbrella Socket

11 Tilt Adjusting Knob

12 Yoke

13 16mm (5/8”) Spigot

ISED Statement

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada.

L'exploitation est soumise aux deux conditions suivantes :

- (1) Cet appareil ne doit pas provoquer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

L'appareil numérique du ciem conforme canadien peut - 3 (b) / nmb - 3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.