



RF Test Report

For

Applicant Name: EVELAB INSIGHT (SINGAPORE) PTE. LTD.
Address: 80 Robinson Road #02-00 Singapore 068898
EUT Name: EveLab Insight Eve Key
Brand Name: EveLab Insight
Model Number: MS2201
Series Model Number: --

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park,
Tantou Community, Songgang Street, Bao'an District, Shenzhen,
China

Report Number: BTF-SZ220530R-005
Test Standards: 47 CFR Part 15 Subpart E Section 15.407
FCC ID: 2BAG3MS2201
Test Conclusion: Pass
Test Date: 2023-07-22 to 2023-09-11
Date of Issue: 2023-09-11

Prepared By:

elma.yang / Project Engineer

Date:

2023-09-11

Approved By:

Ryan.CJ / EMC Manager

Date:

2023-09-11

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

| Revision History | | |
|------------------|--|-------------------|
| Version | Issue Date | Revisions Content |
| R_V0 | 2023-09-11 | Original |
| | | |
| Note: | Once the revision has been made, then previous versions reports are invalid. | |

Table of Contents

| | |
|--|----|
| 1. Introduction | 4 |
| 1.1 Identification of Testing Laboratory | 4 |
| 1.2 Identification of the Responsible Testing Location | 4 |
| 1.3 Laboratory Condition | 4 |
| 1.4 Announcement | 4 |
| 2. Product Information | 5 |
| 2.1 Application Information | 5 |
| 2.2 Manufacturer Information | 5 |
| 2.3 Factory Information | 5 |
| 2.4 General Description of Equipment under Test (EUT) | 5 |
| 2.5 Technical Information | 6 |
| 3. Summary of Test Results | 9 |
| 3.1 Test Standards | 9 |
| 3.2 Summary of Test Result | 10 |
| 3.3 Uncertainty of Test | 11 |
| 4. Test Configuration | 12 |
| 4.1 Environment Condition | 12 |
| 4.2 Test Equipment List | 12 |
| 4.3 Test Auxiliary Equipment | 13 |
| 4.4 Test Setup | 14 |
| 5. Test Items | 17 |
| 5.1 Antenna Requirements | 17 |
| 5.2 AC Conducted Emission | 18 |
| 5.3 Peak Output Power | 19 |
| 5.4 Power Spectral Density | 20 |
| 5.5 26dB Emission Bandwidth & 99% Occupied Bandwidth | 22 |
| 5.6 6 dB bandwidth | 23 |
| 5.7 Radiated Spurious Emissions | 24 |
| 5.8 Band Edge (Restricted-band) | 26 |
| 5.9 Frequency Stability | 28 |
| 5.10 Duty Cycle | 29 |
| ANNEX A Test Results | 30 |
| A.1 AC Conducted Emission | 30 |
| A.2 Peak Output Power | 32 |
| A.3 Power Spectral Density | 33 |
| A.4 26dB Emission Bandwidth & 99% Occupied Bandwidth | 44 |
| A.5 6 dB bandwidth | 55 |
| A.6 Radiated Spurious Emission | 66 |
| A.7 Band Edge (Restricted-band-edge) | 72 |
| A.8 Frequency Stability | 82 |
| A.9 Duty Cycle | 92 |

1. Introduction

1.1 Identification of Testing Laboratory

| | |
|---------------|---|
| Company Name: | BTF Testing Lab (Shenzhen) Co., Ltd. |
| Address: | F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China |
| Phone Number: | +86-0755-23146130 |
| Fax Number: | +86-0755-23146130 |

1.2 Identification of the Responsible Testing Location

| | |
|--------------------------|---|
| Test Location: | BTF Testing Lab (Shenzhen) Co., Ltd. |
| Address: | F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China |
| Description: | All measurement facilities used to collect the measurement data are located at F101,201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China |
| FCC Registration Number: | 518915 |
| Designation Number: | CN1330 |

1.3 Laboratory Condition

| | |
|----------------------------|--------------------|
| Ambient Temperature: | 20°C to 25°C |
| Ambient Relative Humidity: | 45% to 55% |
| Ambient Pressure: | 100 kPa to 102 kPa |

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

| | |
|---------------|--|
| Company Name: | EVELAB INSIGHT (SINGAPORE) PTE. LTD. |
| Address: | 80 Robinson Road #02-00 Singapore 068898 |

2.2 Manufacturer Information

| | |
|---------------|--|
| Company Name: | EVELAB INSIGHT (SINGAPORE) PTE. LTD. |
| Address: | 80 Robinson Road #02-00 Singapore 068898 |

2.3 Factory Information

| | |
|---------------|---|
| Company Name: | Kingtronics Corporation Of Elec.& Mech. Technology (Zhangzhou) Co.,Ltd. |
| Address: | No.20 Longchi Road, Longchi Industrial Park, Zhangzhou Taiwanese Investment Zone, Fujian, China |

2.4 General Description of Equipment under Test (EUT)

| | |
|---|------------------------|
| EUT Name | EveLab Insight Eve Key |
| Under Test Model Name | MS2201 |
| Series Model Name | N/A |
| Description of Model name differentiation | N/A |
| Hardware Version | V1.0 |
| Software and Firmware Version | V1.0 |

2.5 Technical Information

| | |
|--|---|
| Modulation technology | OFDM |
| Modulation Type | BPSK, QPSK, 16QAM, 64QAM, 256QAM |
| Function | <input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P <input type="checkbox"/> Client |
| Operation Frequency Range | U-NII Band 1: 5.18~5.24 GHz U-NII Band 3: 5.745~5.825 GHz |
| Frequency Block | U-NII Band 1: 5.15~5.25 GHz U-NII Band 3: 5.725~5.85 GHz |
| Channel Bandwidth | 802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz, 80 MHz |
| Antenna Type | FPCB Antenna |
| Antenna Gain [#] | ANT1:3dBi, ANT2:3dBi |
| Antenna Impedance | 50Ω |
| Antenna System (MIMO Smart Antenna) | N/A |

Note:

[#]: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

| Modulation technology | Modulation Type | Transfer Rate (Mbps) |
|-----------------------|-----------------|---------------------------|
| OFDM (802.11a) | BPSK | 6, 9 |
| | QPSK | 12, 18 |
| | 16QAM | 24, 36 |
| | 64QAM | 48, 54 |
| OFDM (802.11n(HT20)) | BPSK | 6.5, 7.2 |
| | QPSK | 13, 14.4, 19.5, 21.7 |
| | 16QAM | 26, 28.9, 39, 43.3 |
| | 64QAM | 52, 57.8, 58.5, 65, 72.2 |
| OFDM (802.11n(HT40)) | BPSK | 13.5, 15.0 |
| | QPSK | 27, 30, 40.5, 45.0 |
| | 16QAM | 54, 60, 81, 90 |
| | 64QAM | 108, 120, 121.5, 135, 150 |

OFDM (802.11ac(VHT20)/ (VHT40)/ (VHT80)):

| MCS index | Modulation type | 20 MHz channels | | 40 MHz channels | | 80 MHz channels | |
|-----------|-----------------|-----------------|----------|-----------------|----------|-----------------|----------|
| | | 800ns GI | 400ns GI | 800ns GI | 400ns GI | 800ns GI | 400ns GI |
| 0 | BPSK | 6.5 | 7.2 | 13.5 | 15 | 29.3 | 32.5 |
| 1 | QPSK | 13 | 14.4 | 27 | 30 | 58.5 | 65 |
| 2 | QPSK | 19.5 | 21.7 | 40.5 | 45 | 87.8 | 97.5 |
| 3 | 16-QAM | 26 | 28.9 | 54 | 60 | 117 | 130 |
| 4 | 16-QAM | 39 | 43.3 | 81 | 90 | 175.5 | 195 |
| 5 | 64-QAM | 52 | 57.8 | 108 | 120 | 234 | 260 |
| 6 | 64-QAM | 58.5 | 65 | 121.5 | 135 | 263.3 | 292.5 |
| 7 | 64-QAM | 65 | 72.2 | 135 | 150 | 292.5 | 325 |
| 8 | 256-QAM | 78 | 86.7 | 162 | 180 | 351 | 390 |
| 9 | 256-QAM | N/A | N/A | 180 | 200 | 390 | 433.3 |

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items | Mode | Data Rate | Modulation Type | U-NII-1 | U-NII-2A | U-NII-2C | U-NII-3 |
|--|--------------|-----------|--|----------|----------|----------|-------------|
| | | | | Channel | Channel | Channel | Channel |
| RF Output Power | 11a | 6 | BPSK QPSK 16QAM 64QAM 256QAM | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11ac(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(80 MHz) | 29.3 | | 42 | N/A | N/A | 155 |
| 26dB Emission Bandwidth & 99% Occupied Bandwidth | 11a | 6 | BPSK QPSK 16QAM 64QAM 256QAM | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11ac(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(80 MHz) | 29.3 | | 42 | N/A | N/A | 155 |
| 6 dB bandwidth | 11a | 6 | BPSK QPSK 16QAM 64QAM 256QAM | N/A | N/A | N/A | 149/157/165 |
| | 11n(20 MHz) | 6.5 | | N/A | N/A | N/A | 149/157/165 |
| | 11n(40 MHz) | 13.5 | | N/A | N/A | N/A | 151/159 |
| | 11ac(20 MHz) | 6.5 | | N/A | N/A | N/A | 149/157/165 |
| | 11ac(40 MHz) | 13.5 | | N/A | N/A | N/A | 151/159 |
| | 11ac(80 MHz) | 29.3 | | N/A | N/A | N/A | 155 |
| Power Spectral Density | 11a | 6 | BPSK QPSK 16QAM 64QAM 256QAM | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11ac(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(80 MHz) | 29.3 | | 42 | N/A | N/A | 155 |
| Radiated Spurious Emissions | 11a | 6 | BPSK QPSK 16QAM 64QAM 256QAM | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11ac(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(80 MHz) | 29.3 | | 42 | N/A | N/A | 155 |
| Band Edge (Restricted -band) | 11a | 6 | BPSK QPSK 16QAM 64QAM 256QAM | 36/48 | N/A | N/A | 149/165 |
| | 11n(20 MHz) | 6.5 | | 36/48 | N/A | N/A | 149/165 |
| | 11n(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(20 MHz) | 6.5 | | 36/48 | N/A | N/A | 149/165 |
| | 11ac(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(80 MHz) | 29.3 | | 42 | N/A | N/A | 155 |

| | | | | | | | |
|---------------------|--------------|------|--|----------|-----|-----|-------------|
| Frequency Stability | 11a | 6 | BPSK QPSK 16QAM 64QAM 256QAM | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11n(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(20 MHz) | 6.5 | | 36/44/48 | N/A | N/A | 149/157/165 |
| | 11ac(40 MHz) | 13.5 | | 38/46 | N/A | N/A | 151/159 |
| | 11ac(80 MHz) | 29.3 | | 42 | N/A | N/A | 155 |

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below .

| Band | Test Channel | 20MHz | | 40MHz | | 80MHz | |
|----------|------------------|---------|-----------------|---------|-----------------|---------|-----------------|
| | | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| U-NII-1 | CH _L | 36 | 5180 | 38 | 5190 | - | - |
| | CH _M | 44 | 5220 | - | - | 42 | 5210 |
| | CH _H | 48 | 5240 | 46 | 5230 | - | - |
| U-NII-2A | CH _L | - | - | - | - | - | - |
| | CH _M | - | - | - | - | - | - |
| | CH _H | - | - | - | - | - | - |
| U-NII-2C | CH _L | - | - | - | - | - | - |
| | CH _M | - | - | - | - | - | - |
| | CH _H | - | - | - | - | - | - |
| | CH _{H1} | - | - | - | - | - | - |
| U-NII-3 | CH _L | 149 | 5745 | 151 | 5755 | - | - |
| | CH _M | 157 | 5785 | - | - | 155 | 5775 |
| | CH _H | 165 | 5825 | 159 | 5795 | - | - |

3. Summary of Test Results

3.1 Test Standards

| No. | Identity | Document Title |
|-----|---|--|
| 1 | 47 CFR Part 15 Subpart E Section 15.407 | Unlicensed National Information Infrastructure Devices |
| 2 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |
| 3 | KDB 789033 D02 v02r01 | GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E |

3.2 Summary of Test Result

| No. | Description | FCC Part No. | Channel | Test Result | Test By | Verdict | Remark |
|-----|--|-------------------------|-----------------|-------------|---------|---------|--------|
| 1 | Antenna Requirement | 15.203 | N/A | -- | -- | Pass | -- |
| 2 | AC Conducted Emission | 15.207 | N/A | ANNEX A.1 | | Pass | -- |
| 3 | Peak Output Power | 15.407(a) | Low/Middle/High | ANNEX A.2 | | Pass | -- |
| 4 | Power Spectral Density | 15.407(a) | Low/Middle/High | ANNEX A.3 | | Pass | -- |
| 5 | 26dB Emission Bandwidth & 99% Occupied Bandwidth | 15.407(a) | Low/Middle/High | ANNEX A.4 | | Pass | -- |
| 6 | 6 dB bandwidth | 15.407(e) | Low/Middle/High | ANNEX A.5 | | Pass | -- |
| 7 | Radiated Spurious Emissions | 15.407(b) | Low/Middle/High | ANNEX A.6 | | Pass | -- |
| 8 | Band Edge (Restricted-band) | 15.407(b) | Low/High | ANNEX A.7 | | Pass | -- |
| 9 | Frequency Stability | 15.407(g) | Low/Middle/High | ANNEX A.8 | | Pass | -- |
| 10 | Duty Cycle | ANSI 63.10 Section 11.6 | Low | ANNEX A.9 | | Pass | -- |

3.3 Uncertainty of Test

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 and TR100 028-1/-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| Measurement | Value |
|-----------------------------------|---------|
| Occupied Channel Bandwidth | 69 KHz |
| RF output power, conducted | 0.87 dB |
| Power Spectral Density, conducted | 0.69 dB |
| Unwanted Emissions, conducted | 0.94 dB |
| All emissions, radiated(<1GHz) | 4.12 dB |
| All emissions, radiated(>1GHz) | 4.16 dB |
| Temperature | 0.82 °C |
| Humidity | 4.1 % |

4. Test Configuration

4.1 Environment Condition

| Environment Parameter | Selected Values During Tests | | | |
|---|------------------------------|----------------------|-------------------|--------------------|
| | Temperature | Voltage | Relative Humidity | Ambient Pressure |
| Normal Temperature, Normal Voltage (NTNV) | 20°C to 25°C | DC 3.7V from battery | 30% to 60% | 100 kPa to 102 kPa |

4.2 Test Equipment List

| Conducted Method Test | | | | | | |
|--|---|-----------|-------------|------------|------------|-----|
| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due | Use |
| MXA Signal Analyzer | KEYSIGHT | N9020A | MY50410020 | 2022.11.24 | 2023.11.23 | ☑ |
| WIDEBAND RADIO COMMUNICATION TESTER | Rohde & Schwarz | CMW500 | 161997 | 2022.11.24 | 2023.11.23 | ☑ |
| ESG VECTOR SIGNAL GENERATOR | Agilent | E4438C | MY45094854 | 2022.11.24 | 2023.11.23 | ☑ |
| MXG Vector Signal Generator | Agilent | N5182A | MY46240163 | 2022.11.24 | 2023.11.23 | ☑ |
| Adjustable Direct Current Regulated Power Supply | Dongguan Tongmen Electronic Technology Co., LTD | etm-6050c | 20211026123 | 2022.11.25 | 2023.11.24 | ☑ |
| Programmable constant temperature and humidity box | ZZCKONG | ZZ-K02A | 20210928007 | 2022.11.24 | 2023.11.23 | ☑ |
| RF Control Unit | TST | TST-Full | S01 | / | / | ☑ |
| RF Test software | TST | V2.0 | / | / | / | ☑ |

| Radiated Method Test | | | | | | |
|-----------------------|---------------|---------------|------------|------------|------------|-----|
| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due | Use |
| SIGNAL ANALYZER | ROHDE&SCHWARZ | FSQ40 | 100010 | 2022.11.24 | 2023.11.23 | ☑ |
| EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI7 | 101032 | 2022.11.24 | 2023.11.23 | ☑ |
| Log periodic antenna | SCHWARZBECK | VULB 9168 | 01328 | 2021.11.28 | 2023.11.27 | ☑ |
| Horn Antenna | SCHWARZBECK | BBHA9170 | 01157 | 2021.11.28 | 2023.11.27 | ☑ |
| POSITIONAL CONTROLLER | SKET | PCI-GPIB | / | / | / | ☑ |
| RE Cable | REBES Talent | UF2-NMNM-10m | 21101570 | 2022.11.24 | 2023.11.23 | ☑ |
| RE Cable | REBES Talent | UF2-NMNM-2.5m | 21101573 | 2022.11.24 | 2023.11.23 | ☑ |

| | | | | | | |
|-----------------------------|------------------|---------------------|----------|------------|------------|-------------------------------------|
| RE Cable | REBES Talent | UF2-NMNM-1m | 21101576 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| Coaxial cable Multiflex 141 | Schwarzbeck | N/SMA 0.5m | 517386 | 2023.3.24 | 2024.3.23 | <input checked="" type="checkbox"/> |
| RE Cable | Talent Microwave | A40-2.92M2.92 M-14M | 22080539 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| RE Cable | Talent Microwave | A81-SMAMNM-14M | 22080538 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| Preamplifier | SCHWARZBECK | BBV9744 | 00246 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| Horn Antenna | Schwarzbeck | BBHA9120D | 2597 | 2022.5.22 | 2024.5.21 | <input checked="" type="checkbox"/> |
| Broadband Preamplifier | Schwarzbeck | BBV9718D | 00008 | 2023.3.24 | 2024.3.23 | <input checked="" type="checkbox"/> |



| Conducted disturbance Test | | | | | | |
|----------------------------|---------------|----------------|-------------|------------|------------|-------------------------------------|
| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due | Use |
| EMI Receiver | ROHDE&SCHWARZ | ESC13 | 101422 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| V-LISN | SCHWARZBECK | NSLK 8127 | 01073 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| LISN | AFJ | LS16/110VAC | 16010020076 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| Coaxial Switcher | SCHWARZBECK | CX210 | CX210 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| Pulse Limiter | SCHWARZBECK | VTSD 9561-F | 00953 | 2022.11.24 | 2023.11.23 | <input checked="" type="checkbox"/> |
| EZ EMC | Frad | EMC-CON 3A1.1+ | / | / | / | <input checked="" type="checkbox"/> |

4.3 Test Auxiliary Equipment


| Title | Manufacturer | Model No. | Serial No. |
|---------|--------------|--------------|------------|
| Adapter | Huawei | HW-100225C00 | / |

4.4 Test Setup


Test Setup 1

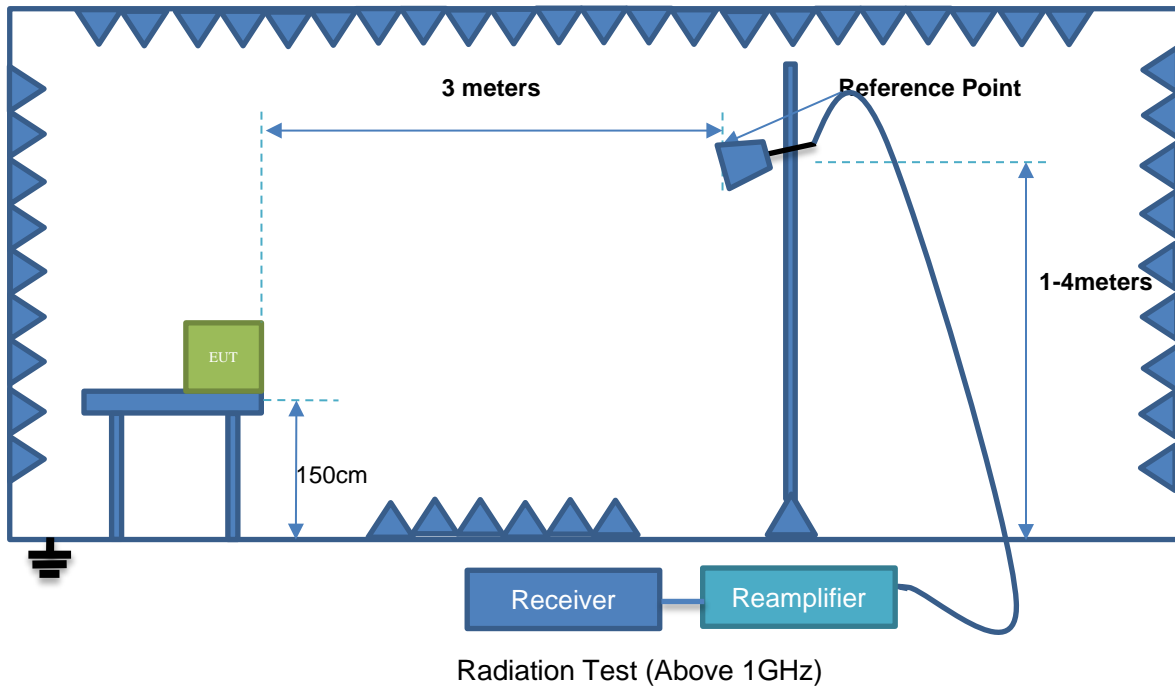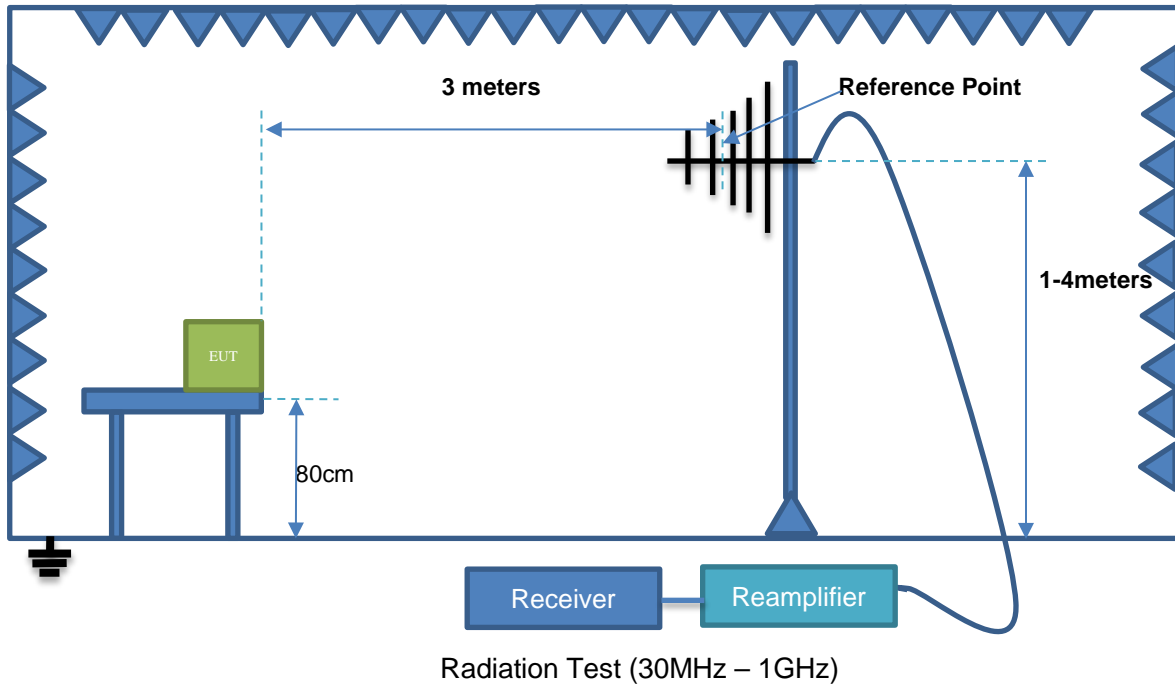


Test Setup 2

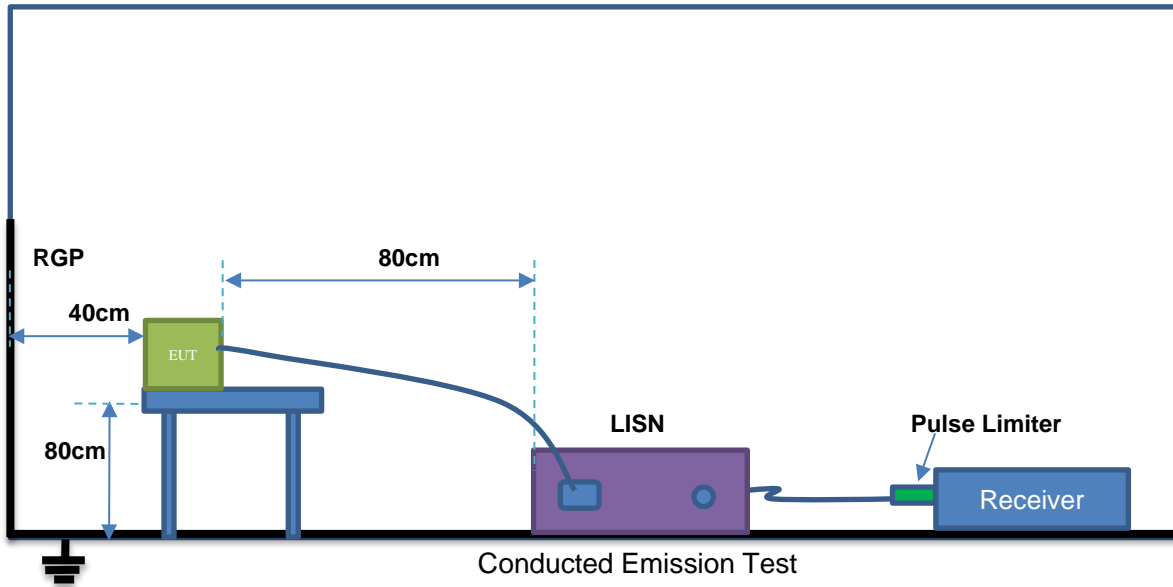

Test Setup 3

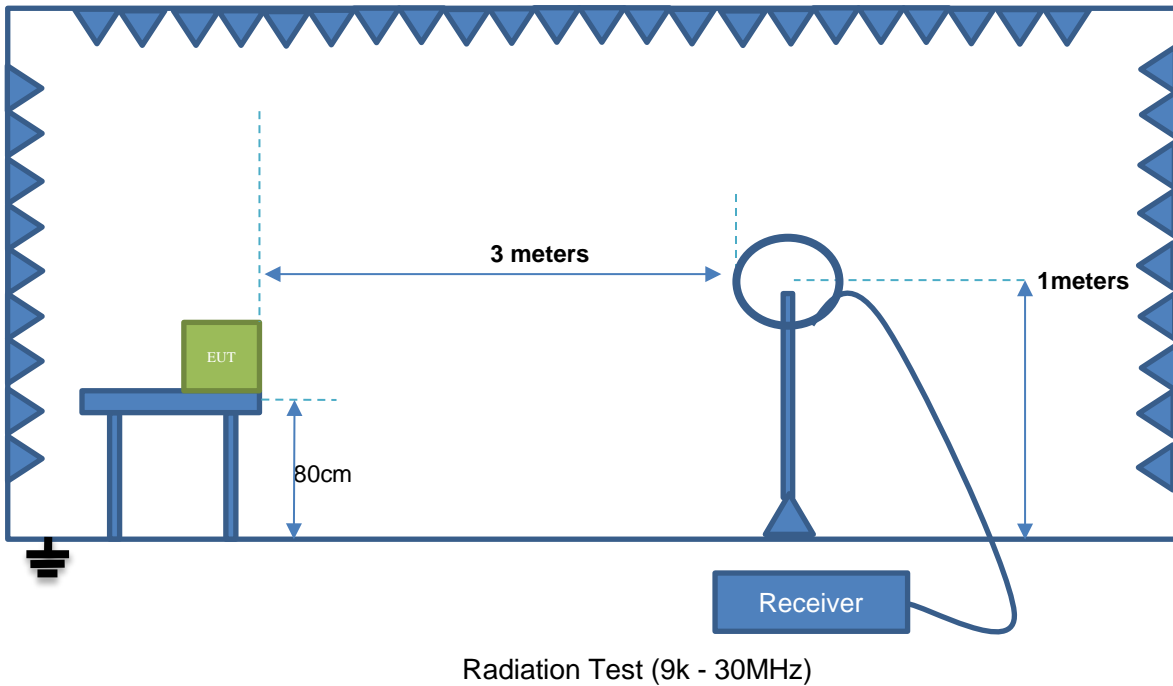

Test Setup 4

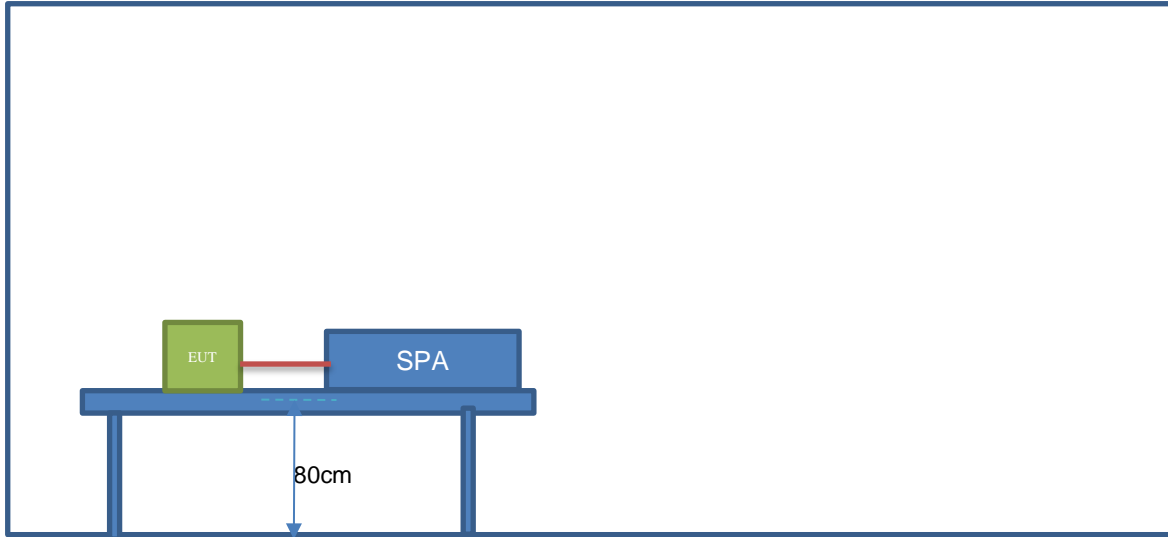

5. Test Items

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203; RSS-247, 5.4(f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

| Protected Method | Description |
|---|--|
| The antenna is embedded in the product. | An embedded in antenna design is used. |

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 AC Conducted Emission

5.2.1 Limit

FCC §15.2074

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

| Frequency range (MHz) | Conducted Limit (dB μ V) | |
|--------------------------|------------------------------|----------|
| | Quai-peak | Average |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 |
| 0.50 - 5 | 56 | 46 |
| 0.50 - 30 | 60 | 50 |

5.2.2 Test Setup

See section 4.4 for test setup description for setup 2. The photo of test setup please refer to ANNEX B

5.2.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.2.4 Test Result

Please refer to ANNEX A.1

NOTE:

1. Results (dBuV) = Reading (dBuV) + Factor (dB)
The reading level is calculated by software which is not shown in the sheet
2. Factor = Insertion loss + Cable loss
3. Over limit = Results – Limit.

5.3 Peak Output Power

5.3.1 Limit

FCC §15.407(a)

| Frequency Band (MHz) | Limit |
|----------------------|--|
| 5.15~5.25GHz band | <p>Outdoor AP The maximum conducted output power (P_{out}) shall not exceed 1W (30dBm). if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125\text{mW}$ (21dBm).</p> <p>Indoor AP The maximum conducted output power (P_{out}) shall not exceed 1W (30dBm). if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.</p> <p>Point-to-point AP The maximum conducted output power (P_{out}) shall not exceed of 1W (30dBm). if $G_{TX} > 23\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 23)$.</p> <p>Client devices The maximum conducted output power (P_{out}) shall not exceed 250mW (24dBm). if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.</p> |
| 5.25~5.35GHz band | <p>The maximum conducted output power (P_{out}) shall not exceed 250mW (24dBm) or 11dBm+10 log B, where B is the 26dB emission bandwidth in MHz. if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.</p> |
| 5.47~5.725GHz band | <p>The maximum conducted output power (P_{out}) shall not exceed 250mW (24dBm) or 11dBm+10 log B, where B is the 26dB emission bandwidth in MHz. if $G_{TX} > 6\text{dBi}$, then $P_{out} = 24 - (G_{TX} - 6)$.</p> |
| 5.725~5.85GHz band | <p>Point-to-multipoint systems (P2M) The maximum conducted output power (P_{out}) shall not exceed 1W (30dBm). if $G_{TX} > 6\text{dBi}$, then $P_{out} = 30 - (G_{TX} - 6)$.</p> <p>Point-to-point systems (P2P) The maximum conducted output power (P_{out}) shall not exceed 1W (30dBm).</p> |

5.3.2 Test Setup

See section 4.4 for test setup description for the antenna port.

5.3.4 Test Result

Please refer to ANNEX A.2

5.4 Power Spectral Density

5.4.1 Limit

FCC §15.407(a)

| Frequency Band (MHz) | Limit |
|----------------------|--|
| 5.15~5.25GHz band | <p>Outdoor AP The peak power spectral density (PSD) shall not exceed 17dBm/MHz. if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.</p> |
| | <p>Indoor AP The peak power spectral density (PSD) shall not exceed 17dBm/MHz. if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 6)$.</p> |
| | <p>Point-to-point AP The peak power spectral density (PSD) shall not exceed 17dBm/MHz. if $G_{TX} > 23\text{dBi}$, then $\text{PSD} = 17 - (G_{TX} - 23)$.</p> |
| | <p>Client devices The peak power spectral density (PSD) shall not exceed 11dBm/MHz. if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.</p> |
| 5.25~5.35GHz band | <p>The peak power spectral density (PSD) shall not exceed 11dBm/MHz. if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.</p> |
| 5.47~5.725GHz band | <p>The peak power spectral density (PSD) shall not exceed 11dBm/MHz. if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 11 - (G_{TX} - 6)$.</p> |
| 5.725~5.85GHz band | <p>Point-to-multipoint systems (P2M) The peak power spectral density (PSD) shall not exceed 30dBm/500KHz. if $G_{TX} > 6\text{dBi}$, then $\text{PSD} = 30 - (G_{TX} - 6)$.</p> |
| | <p>Point-to-point systems (P2P) The peak power spectral density (PSD) shall not exceed 30dBm/500KHz.</p> |

5.4.2 Test Setup

See section 4.4 for test setup description for the antenna port.

5.4.3 Test Procedure

According KDB 789033 D02 – Section F

Analyzer was setting as follow:

Center frequency: test channel

Span was set to encompass the entire emission bandwidth of the signal

RBW=1MHz for devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz

RBW=500kHz for devices operating in the band 5.725-5.85 GHz, VBW \geq 3 RBW

Number of sweep points $> 2 \times$ (span/RBW)

Sweep time = auto

Detector = Peak

Trigger was set to free run for all modes, trace was averaged over 100 sweeps

The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

5.4.4 Test Result

Please refer to ANNEX A.3

5.5 26dB Emission Bandwidth & 99% Occupied Bandwidth

5.5.1 Limit

FCC §15.407(a)

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 , and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

5.5.2 Test Setup

See section 4.4 for test setup description for the antenna port.

5.5.3 Test Procedure

1. According KDB 789033 D02 – Section C, 26dB bandwidth test as follow

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. According KDB 789033 D02 – Section D, 99% bandwidth test as follow

- a). Set center frequency to the nominal EUT channel center frequency.
- b). Set span = 1.5 times to 5.0 times the OBW.
- c). Set RBW = 1% to 5% of the OBW
- d). Set VBW \geq 3RBW
- e). Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f). Use the 99% power bandwidth function of the instrument

5.5.4 Test Result

Please refer to ANNEX A.4

5.6 6 dB bandwidth

5.6.1 Limit

FCC §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

5.6.2 Test Setup

See section 4.4 for test setup description for the antenna port.

5.6.3 Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency = test channel center frequency

Span = 2 x emission bandwidth

RBW = 100 kHz, VBW $\geq 3 \times$ RBW

Sweep time = auto couple

Detector = Peak

Trace mode = max hold

3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Radiated Spurious Emissions

5.7.1 Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 and Part 15 Subpart E Section 15.407(b)

| Frequency | Limit (dBuV/m) | Value |
|----------------------|-------------------|------------|
| 0.009 MHz ~0.49 MHz | 2400/F(kHz) @300m | Quasi-peak |
| 0.49 MHz ~ 1.705 MHz | 24000/F(kHz) @30m | Quasi-peak |
| 1.705 MHz ~30 MHz | 30 @30m | Quasi-peak |

Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.

| Unwanted emissions below 1GHz and Restricted band emissions above 1GHz | | |
|--|--------------------|------------|
| Frequency | Limit (dBuV/m @3m) | Value |
| 30MHz-88MHz | 40.00 | Quasi-peak |
| 88MHz-216MHz | 43.50 | Quasi-peak |
| 216MHz-960MHz | 46.00 | Quasi-peak |
| 960MHz-1GHz | 54.00 | Quasi-peak |
| Above 1GHz | 54.00 | Average |
| | 74.00 | Peak |

5.7.2 Test Setup

See section 4.4 for test setup description for setup 1 and 3.

5.7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000 | QP | 120 kHz | 300 kHz |
| Above 1000 | Peak | 1 MHz | 1 MHz |
| | Average | 1 MHz | 10 Hz |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


5.7.4 Test Result

Please refer to ANNEX A.6

5.8 Band Edge (Restricted-band)

5.8.1 Limit

FCC §15.407(b)
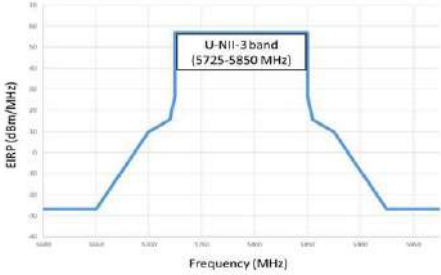
| Un-restricted band emissions above 1GHz | | | |
|---|-------------------|---|-------|
| Operating Band | Frequency | EIRP Limit | Value |
| 5150-5250MHz | Above 1GHz | -27dBm/MHz(68.2dBuV/m)@3m | Peak |
| 5250-5350MHz | Above 1GHz | -27dBm/MHz(68.2dBuV/m)@3m | Peak |
| 5470-5725MHz | Above 1GHz | -27dBm/MHz(68.2dBuV/m)@3m | Peak |
|  <p>5725-5850 MHz</p> | 1GHz-5.65GHz | -27 dBm/MHz(68.2dBuV/m)@3m | Peak |
| | 5.65GHz-5.7GHz | -27dBm/MHz to 10dBm/MHz* (68.2dBuV/m to 105.6dBuV/m) * | Peak |
| | 5.7GHz-5.72GHz | 10dBm/MHz to 15.6dBm/MHz* (105.6dBuV/m to 110.8dBuV/m) * | Peak |
| | 5.72GHz-5.725GHz | 15.6dBm/MHz to 27dBm/MHz* (110.8dBuV/m to 122.2dBuV/m) * | Peak |
| | 5.85GHz-5.855GHz | 27dBm/MHz to 15.6dBm/MHz* (122.2dBuV/m to 110.8dBuV/m)* | Peak |
| | 5.855GHz-5.875GHz | 15.6dBm/MHz to 10dBm/MHz* (110.8dBuV/m to 105.6dBuV/m)* | Peak |
| | 5.875GHz-5.925GHz | 10dBm/MHz to -27dBm/MHz* (105.6dBuV/m to 68.2dBuV/m) * | Peak |
| | Above 5.925GHz | -27 dBm/MHz(68.2dBuV/m)@3m | Peak |

* Increase/Decreases with the linearity of the frequency.

For emission above 1GHz and in restricted band, according to FCC KDB 789033 D02 General UNII Test Procedure, all emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit. $E[dBuV/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

5.8.2 Test Setup

See section 4.4 for test setup description for setup 4.

5.8.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenaternal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.



5. Repeat above procedures until all measured frequencies were complete.

5.8.4 Test Result

Please refer to ANNEX A.7

5.9 Frequency Stability

5.9.1 Limit

FCC §15.407(g)

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

5.9.2 Test Setup

See section 4.4 for test setup description for antenna port. The photo of test setup please refer to ANNEX B

5.9.3 Test Procedure

Frequency stability with respect to ambient temperature

1. The equipment under test was connected to an external power supply.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution.
5. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached..

Frequency stability when varying supply voltage

1. The equipment under test was connected to an external power supply.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed in normal room temperature of 25°C .
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution.
5. Measure the frequency when EUT supply by normal rate voltage.
6. Repeat step measure when supply voltage adjusted to 85% and 115%.

5.9.4 Test Result

Please refer to ANNEX A.8

5.10 Duty Cycle

5.10.1 Limit

No limit requirement.

5.10.2 Test Setup

See section 4.4 for test setup description for antenna port. The photo of test setup please refer to ANNEX B

5.10.3 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0(b) in KDB 558074 D01 DTS Meas Guidance v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz (the largest available value)

VBW = 50MHz (\geq RBW)

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure Total and Ton

Calculate Duty Cycle = $Ton / Total$


5.10.4 Test Result

Please refer to ANNEX A.9

ANNEX A Test Results


A.1 AC Conducted Emission

(150kHz ~ 30MHz) Phase: N

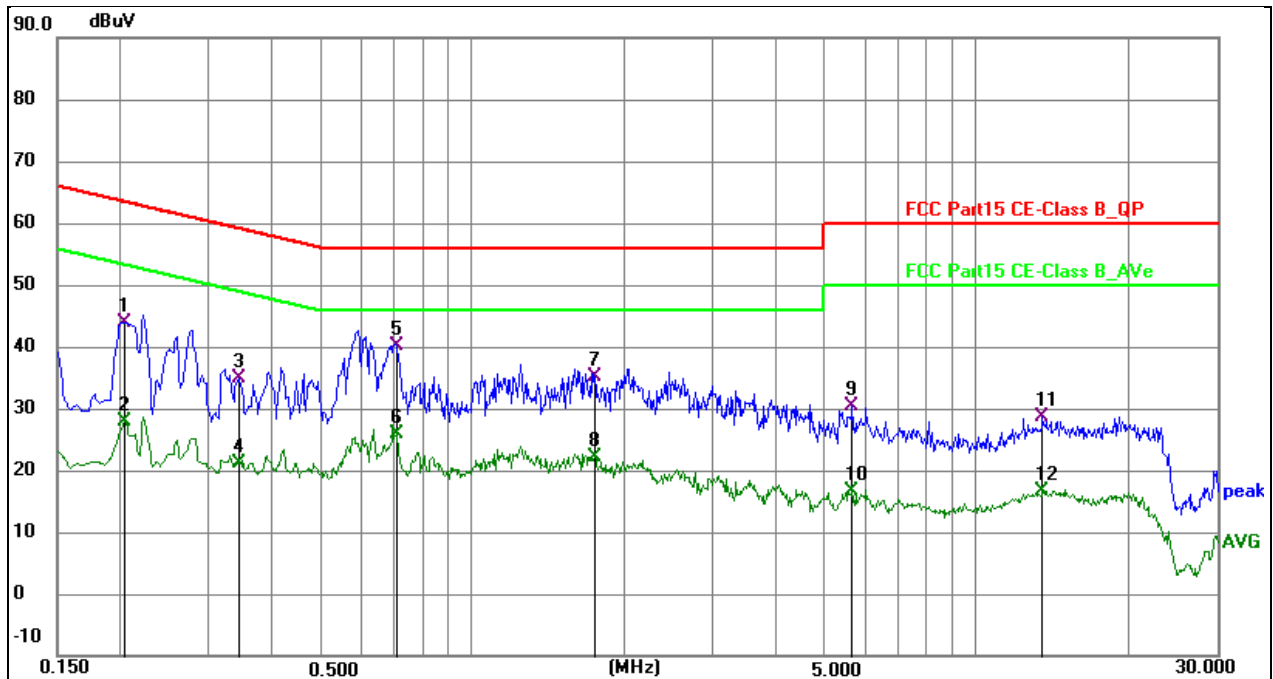

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 | 0.2040 | 34.33 | 9.60 | 43.93 | 63.45 | -19.52 | QP | P | |
| 2 | 0.2040 | 18.24 | 9.60 | 27.84 | 53.45 | -25.61 | AVG | P | |
| 3 | 0.3435 | 25.61 | 9.39 | 35.00 | 59.12 | -24.12 | QP | P | |
| 4 | 0.3435 | 11.75 | 9.39 | 21.14 | 49.12 | -27.98 | AVG | P | |
| 5 * | 0.7047 | 30.44 | 9.62 | 40.06 | 56.00 | -15.94 | QP | P | |
| 6 | 0.7047 | 16.21 | 9.62 | 25.83 | 46.00 | -20.17 | AVG | P | |
| 7 | 1.7475 | 25.18 | 10.04 | 35.22 | 56.00 | -20.78 | QP | P | |
| 8 | 1.7475 | 12.04 | 10.04 | 22.08 | 46.00 | -23.92 | AVG | P | |
| 9 | 5.6760 | 20.23 | 10.23 | 30.46 | 60.00 | -29.54 | QP | P | |
| 10 | 5.6760 | 6.35 | 10.23 | 16.58 | 50.00 | -33.42 | AVG | P | |
| 11 | 13.5240 | 18.49 | 10.09 | 28.58 | 60.00 | -31.42 | QP | P | |
| 12 | 13.5240 | 6.47 | 10.09 | 16.56 | 50.00 | -33.44 | AVG | P | |

(150kHz ~ 30MHz) Phase: L

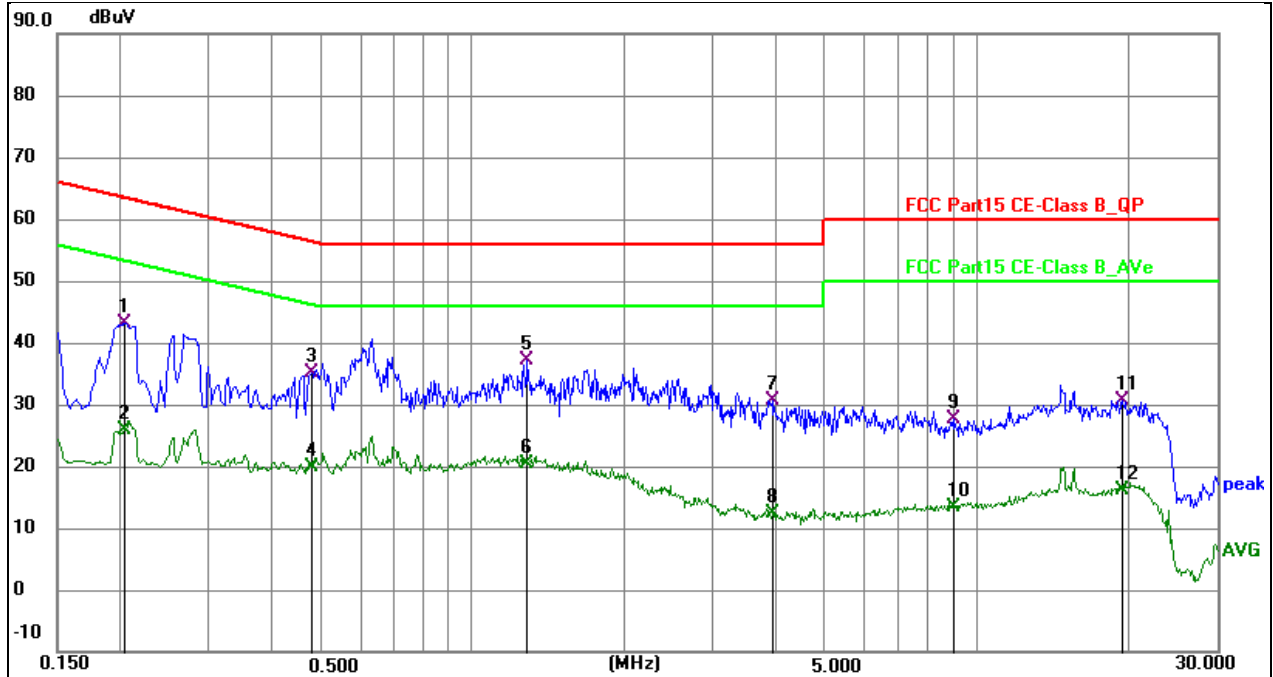

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 | 0.2040 | 34.02 | 9.00 | 43.02 | 63.45 | -20.43 | QP | P | |
| 2 | 0.2040 | 16.76 | 9.00 | 25.76 | 53.45 | -27.69 | AVG | P | |
| 3 | 0.4785 | 25.23 | 9.93 | 35.16 | 56.37 | -21.21 | QP | P | |
| 4 | 0.4785 | 10.04 | 9.93 | 19.97 | 46.37 | -26.40 | AVG | P | |
| 5 * | 1.2839 | 27.19 | 10.03 | 37.22 | 56.00 | -18.78 | QP | P | |
| 6 | 1.2839 | 10.43 | 10.03 | 20.46 | 46.00 | -25.54 | AVG | P | |
| 7 | 3.9300 | 20.57 | 10.13 | 30.70 | 56.00 | -25.30 | QP | P | |
| 8 | 3.9300 | 2.20 | 10.13 | 12.33 | 46.00 | -33.67 | AVG | P | |
| 9 | 8.9790 | 17.40 | 10.12 | 27.52 | 60.00 | -32.48 | QP | P | |
| 10 | 8.9790 | 3.36 | 10.12 | 13.48 | 50.00 | -36.52 | AVG | P | |
| 11 | 19.4325 | 20.09 | 10.50 | 30.59 | 60.00 | -29.41 | QP | P | |
| 12 | 19.4325 | 5.71 | 10.50 | 16.21 | 50.00 | -33.79 | AVG | P | |

A.2 Peak Output Power

Sub-band(5.2GHz): 5150-5250MHz

| Mode | Frequency | ANT1 Power (dBm) | ANT2 Power (dBm) | Total Power (dBm) | Limit (dBm/MHz) |
|-------------|-----------|------------------|------------------|-------------------|-----------------|
| 802.11 a | 5180 MHz | 1.71 | 2.26 | 5 | 23.98 |
| | 5200 MHz | 1.13 | 1.89 | 4.54 | 23.98 |
| | 5240 MHz | 0.9 | 1.81 | 4.39 | 23.98 |
| 802.11 ac20 | 5180 MHz | 0.91 | 1.55 | 4.25 | 23.98 |
| | 5200 MHz | 0.37 | 0.67 | 3.53 | 23.98 |
| | 5240 MHz | -0.09 | 0.8 | 3.39 | 23.98 |
| 802.11 n20 | 5180 MHz | 0.89 | 1.47 | 4.2 | 23.98 |
| | 5200 MHz | 0.33 | 0.69 | 3.52 | 23.98 |
| | 5240 MHz | -0.09 | 0.78 | 3.38 | 23.98 |
| 802.11 n40 | 5190 MHz | -0.34 | -0.07 | 2.81 | 23.98 |
| | 5230 MHz | -0.89 | -0.39 | 2.38 | 23.98 |
| 802.11 ac40 | 5190 MHz | -0.28 | 0.05 | 2.9 | 23.98 |
| | 5230 MHz | -0.84 | -0.26 | 2.47 | 23.98 |
| 802.11 ac80 | 5210 MHz | -0.55 | -0.05 | 2.72 | 23.98 |

Sub-band(5.8GHz): 5725-5850MHz

| Mode | Frequency | ANT1 Power (dBm) | ANT2 Power (dBm) | Total Power (dBm) | Limit (dBm/MHz) |
|-------------|-----------|------------------|------------------|-------------------|-----------------|
| 802.11 a | 5745 MHz | -1.03 | 0.8 | 2.99 | 30 |
| | 5785 MHz | 0.65 | 1.37 | 4.04 | 30 |
| | 5825 MHz | 0.15 | 2.08 | 4.23 | 30 |
| 802.11 ac20 | 5745 MHz | -1.99 | 0.14 | 2.21 | 30 |
| | 5785 MHz | -0.52 | 1.06 | 3.35 | 30 |
| | 5825 MHz | -0.67 | 0.76 | 3.11 | 30 |
| 802.11 n20 | 5745 MHz | -1.95 | 0.11 | 2.21 | 30 |
| | 5785 MHz | -0.55 | 1.01 | 3.31 | 30 |
| | 5825 MHz | -0.71 | 0.73 | 3.08 | 30 |
| 802.11 n40 | 5755 MHz | -2.53 | -0.8 | 1.43 | 30 |
| | 5795 MHz | -1.44 | -0.48 | 2.08 | 30 |
| 802.11 ac40 | 5755 MHz | -2.46 | -0.64 | 1.55 | 30 |
| | 5795 MHz | -1.37 | -0.32 | 2.2 | 30 |
| 802.11 ac80 | 5775 MHz | -1.77 | 0.28 | 2.39 | 30 |

A.3 Power Spectral Density

Sub-band(5.2GHz): 5150-5250MHz


| Mode | Frequency | ANT1 PSD (dBm/MHz) | ANT2 PSD (dBm/MHz) | Total PSD (dBm/MHz) | Limit (dBm/MHz) |
|-------------|-----------|--------------------|--------------------|---------------------|-----------------|
| 802.11 a | 5180 MHz | -21.07 | -22.48 | -18.71 | 11 |
| | 5200 MHz | -21.6 | -21.64 | -18.61 | 11 |
| | 5240 MHz | -19.04 | -23.8 | -17.79 | 11 |
| 802.11 ac20 | 5180 MHz | -26.61 | -24.38 | -22.34 | 11 |
| | 5200 MHz | -22.73 | -27.26 | -21.42 | 11 |
| | 5240 MHz | -26.06 | -24.39 | -22.13 | 11 |
| 802.11 n20 | 5180 MHz | -22.22 | -22.94 | -19.55 | 11 |
| | 5200 MHz | -23.69 | -24.09 | -20.88 | 11 |
| | 5240 MHz | -24.32 | -22.25 | -20.15 | 11 |
| 802.11 n40 | 5190 MHz | -32.1 | -30.78 | -28.38 | 11 |
| | 5230 MHz | -34.35 | -34.25 | -31.29 | 11 |
| 802.11 ac40 | 5190 MHz | -33.42 | -32.24 | -29.78 | 11 |
| | 5230 MHz | -29.93 | -32.04 | -27.85 | 11 |
| 802.11 ac80 | 5210 MHz | -41.44 | -40.18 | -37.75 | 11 |

Sub-band(5.8GHz): 5725-5850MHz


| Mode | Frequency | ANT1 PSD (dBm/500kHz) | ANT2 PSD (dBm/500kHz) | Total PSD (dBm/500kHz) | Limit (dBm/500kHz) |
|-------------|-----------|-----------------------|-----------------------|------------------------|--------------------|
| 802.11 a | 5745 MHz | -25.65 | -27.91 | -23.62 | 30 |
| | 5785 MHz | -21.41 | -27.63 | -20.48 | 30 |
| | 5825 MHz | -24.59 | -26.51 | -22.43 | 30 |
| 802.11 ac20 | 5745 MHz | -30.17 | -32.13 | -28.03 | 30 |
| | 5785 MHz | -28.08 | -28.87 | -25.45 | 30 |
| | 5825 MHz | -27.65 | -27.22 | -24.42 | 30 |
| 802.11 n20 | 5745 MHz | -28.21 | -30.02 | -26.01 | 30 |
| | 5785 MHz | -27.32 | -26.54 | -23.9 | 30 |
| | 5825 MHz | -25.47 | -29.98 | -24.15 | 30 |
| 802.11 n40 | 5755 MHz | -36.55 | -36.97 | -33.74 | 30 |
| | 5795 MHz | -35.17 | -36.42 | -32.74 | 30 |
| 802.11 ac40 | 5755 MHz | -35.74 | -37.53 | -33.53 | 30 |
| | 5795 MHz | -39.45 | -38.68 | -36.04 | 30 |
| 802.11 ac80 | 5775 MHz | -41.25 | -45.3 | -39.81 | 30 |

5.2GHz Power Spectrum Density

802.11a on channel 36 ANT1

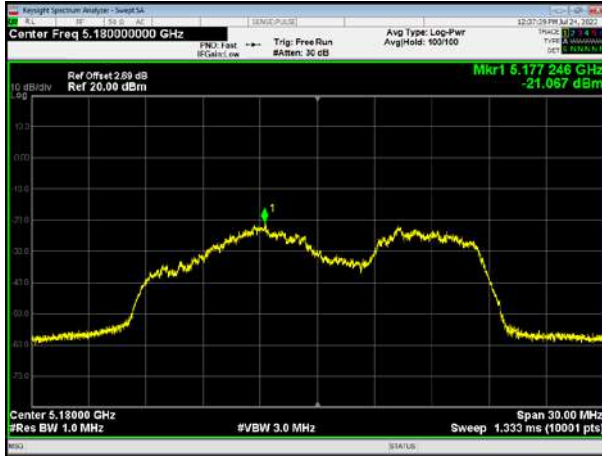

802.11a on channel 36 ANT2

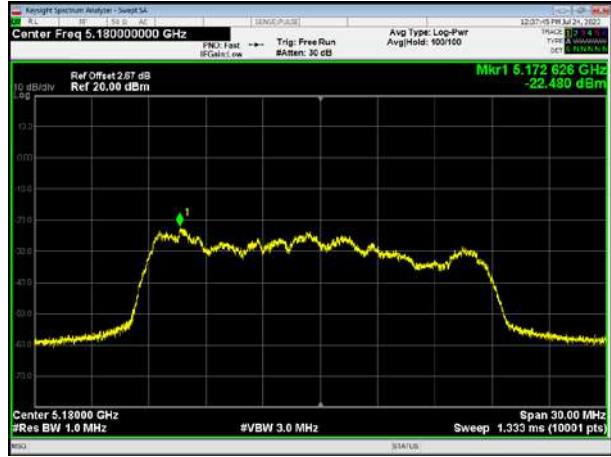

802.11a on channel 40 ANT1



802.11a on channel 40 ANT2



802.11a on channel 48 ANT1



802.11a on channel 48 ANT2



802.11ac20 on channel 36 ANT1




802.11ac20 on channel 36 ANT2



802.11ac20 on channel 40 ANT1



802.11ac20 on channel 40 ANT2

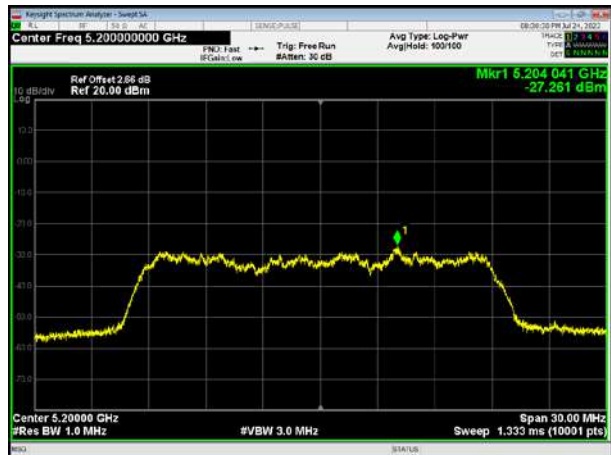

802.11ac20 on channel 48 ANT1



802.11ac20 on channel 48 ANT2



802.11n20 on channel 36 ANT1



802.11n20 on channel 36 ANT2



802.11n20 on channel 40 ANT1



802.11n20 on channel 40 ANT2



802.11n20 on channel 48 ANT1




802.11n20 on channel 48 ANT2



802.11n40 on channel 38 ANT1



802.11n40 on channel 38 ANT2

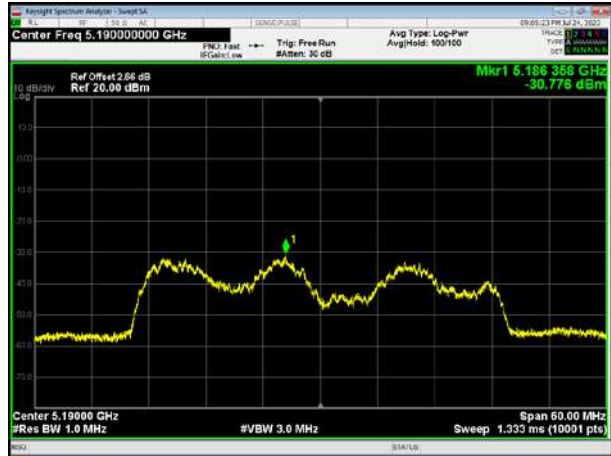

802.11n40 on channel 46 ANT1



802.11n40 on channel 46 ANT2



802.11ac40 on channel 38 ANT1



802.11ac40 on channel 38 ANT2



802.11ac40 on channel 46 ANT1



802.11ac40 on channel 46 ANT2



802.11ac80 on channel 42 ANT1



802.11ac80 on channel 42 ANT2




5.8GHz Power Spectrum Density


802.11a on channel 149 ANT1



802.11a on channel 149 ANT2

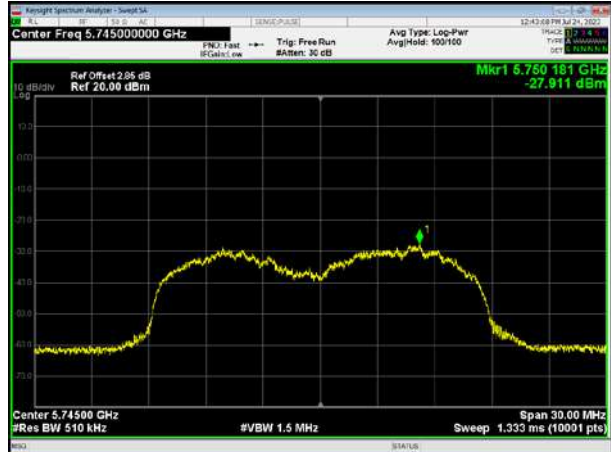

802.11a on channel 157 ANT1

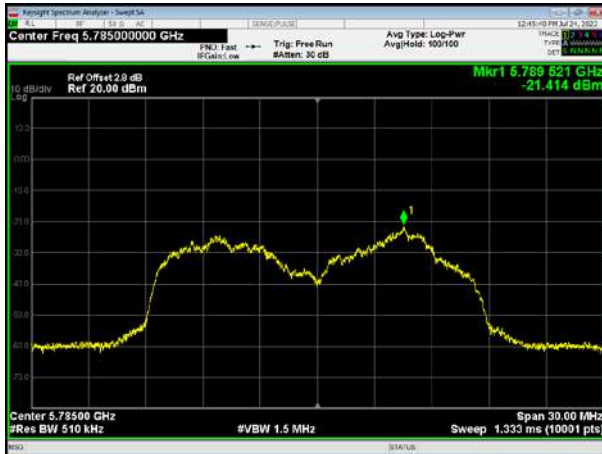

802.11a on channel 157 ANT2




802.11a on channel 165 ANT1




802.11a on channel 165 ANT2



802.11ac20 on channel 149 ANT1

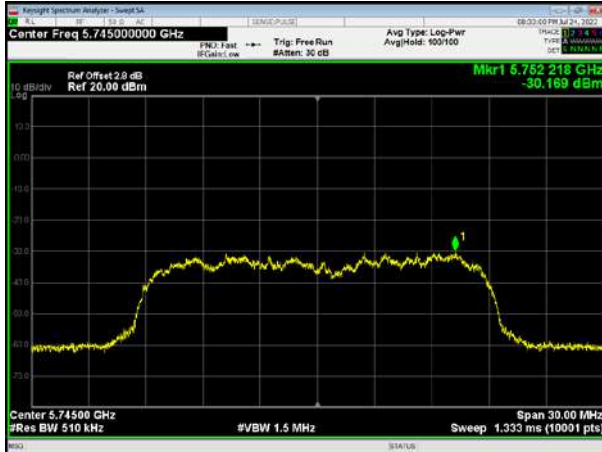

802.11ac20 on channel 149 ANT2

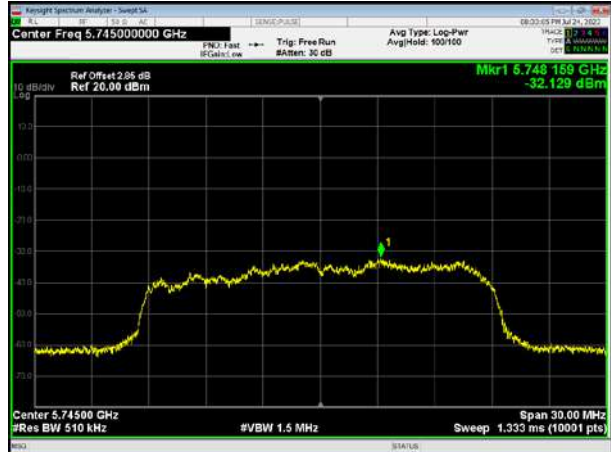


802.11ac20 on channel 157 ANT1



802.11ac20 on channel 157 ANT2




802.11ac20 on channel 165 ANT1

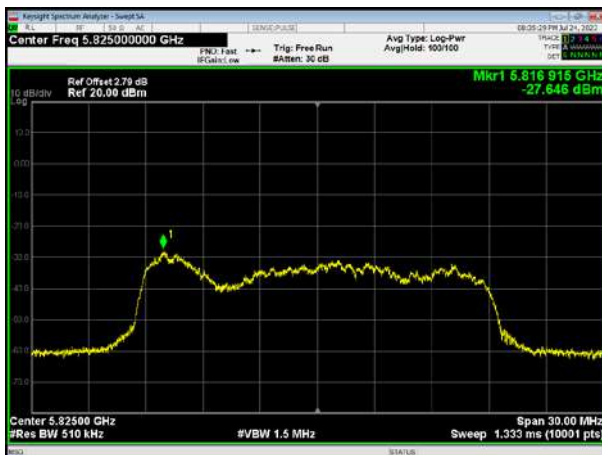


802.11ac20 on channel 165 ANT2



802.11n20 on channel 149 ANT1

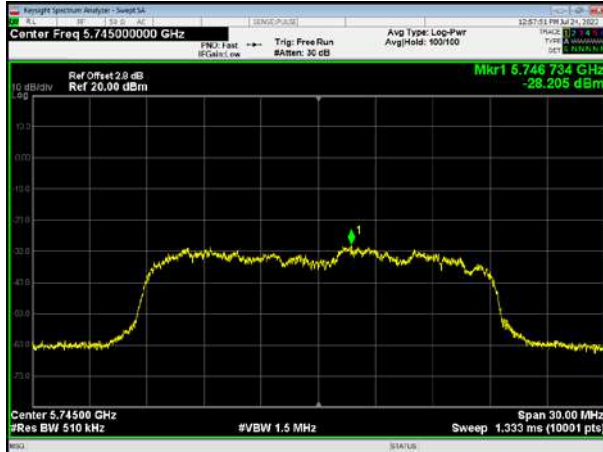

802.11n20 on channel 149 ANT2

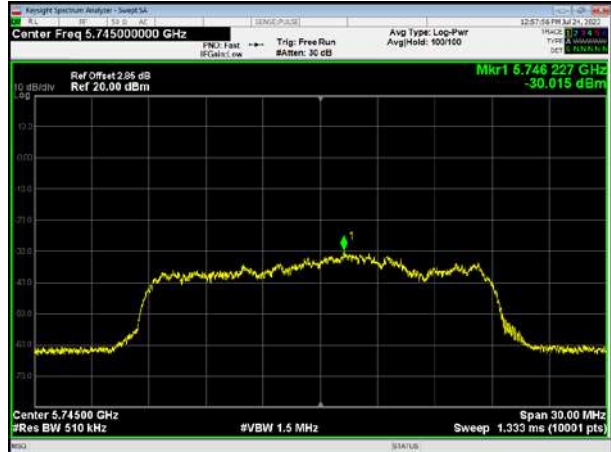

802.11n20 on channel 157 ANT1



802.11n20 on channel 157 ANT2



802.11n20 on channel 165 ANT1



802.11n20 on channel 165 ANT2



802.11n40 on channel 151 ANT1



802.11n40 on channel 151 ANT2



802.11n40 on channel 159 ANT1



802.11n40 on channel 159 ANT2



802.11ac40 on channel 151 ANT1



802.11ac40 on channel 151 ANT2



802.11ac40 on channel 159 ANT1



802.11ac40 on channel 159 ANT2



802.11ac80 on channel 155 ANT1



802.11ac80 on channel 155 ANT2



A.4 26dB Emission Bandwidth & 99% Occupied Bandwidth

Sub-band(5.2GHz): 5150-5250MHz

| Mode | Frequency | -26dB Bandwidth | | 99% Bandwidth | | Limit (kHz) |
|-------------|-----------|-----------------|------------|---------------|------------|-------------|
| | | ANT1 (MHz) | ANT2 (MHz) | ANT1 (MHz) | ANT2 (MHz) | |
| 802.11 a | 5180 MHz | 18.256 | 17.972 | 16.308 | 16.298 | -- |
| | 5200 MHz | 18.254 | 18.23 | 16.309 | 16.312 | -- |
| | 5240 MHz | 17.811 | 18.222 | 16.299 | 16.306 | -- |
| 802.11 ac20 | 5180 MHz | 19.083 | 19.305 | 17.514 | 17.551 | -- |
| | 5200 MHz | 19.079 | 18.966 | 17.553 | 17.48 | -- |
| | 5240 MHz | 19.209 | 19.199 | 17.517 | 17.542 | -- |
| 802.11 n20 | 5180 MHz | 19.161 | 19.212 | 17.508 | 17.504 | -- |
| | 5200 MHz | 18.996 | 19.184 | 17.483 | 17.505 | -- |
| | 5240 MHz | 19.319 | 19.385 | 17.5 | 17.547 | -- |
| 802.11 n40 | 5190 MHz | 38.342 | 38.106 | 35.907 | 35.903 | -- |
| | 5230 MHz | 38.194 | 38.282 | 35.907 | 36.004 | -- |
| 802.11 ac40 | 5190 MHz | 38.085 | 38.579 | 35.998 | 35.822 | -- |
| | 5230 MHz | 38.365 | 38.359 | 35.993 | 35.86 | -- |
| 802.11 ac80 | 5210 MHz | 79.871 | 79.966 | 75.593 | 75.474 | -- |

5.2GHz -26dB Bandwidth

802.11a on channel 36 ANT1



802.11a on channel 36 ANT2



802.11a on channel 40 ANT1




802.11a on channel 40 ANT2




802.11a on channel 48 ANT1



802.11a on channel 48 ANT2

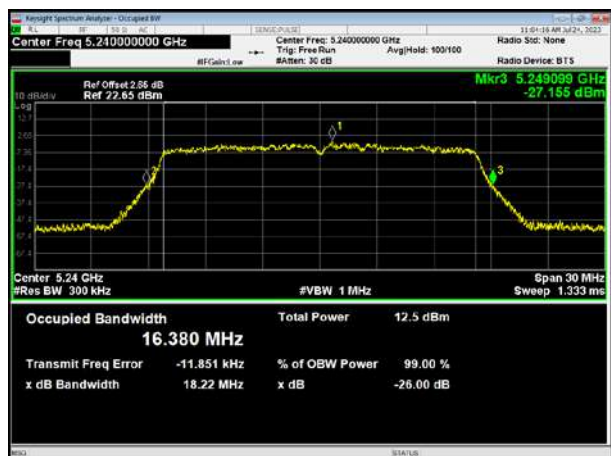

802.11ac20 on channel 36 ANT1

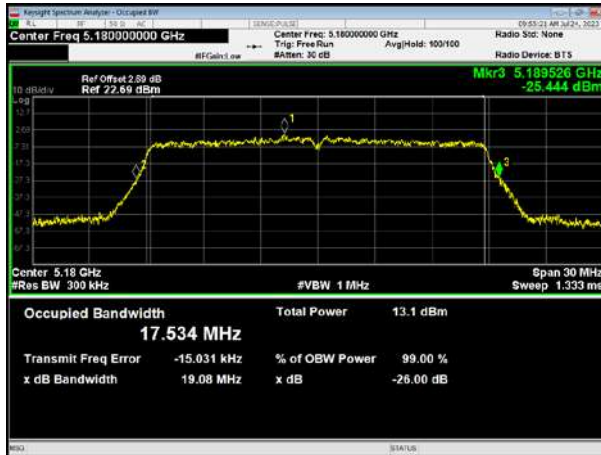

802.11ac20 on channel 36 ANT2



802.11ac20 on channel 40 ANT1



802.11ac20 on channel 40 ANT2



802.11ac20 on channel 48 ANT1




802.11ac20 on channel 48 ANT2



802.11n20 on channel 36 ANT1



802.11n20 on channel 36 ANT2

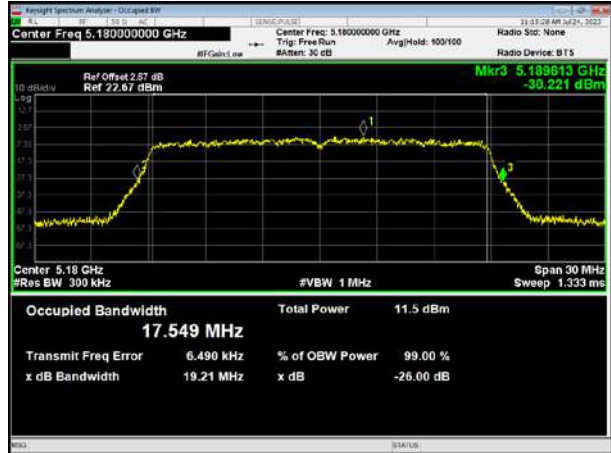

802.11n20 on channel 40 ANT1



802.11n20 on channel 40 ANT2




802.11n20 on channel 48 ANT1



802.11n20 on channel 48 ANT2



802.11n40 on channel 38 ANT1

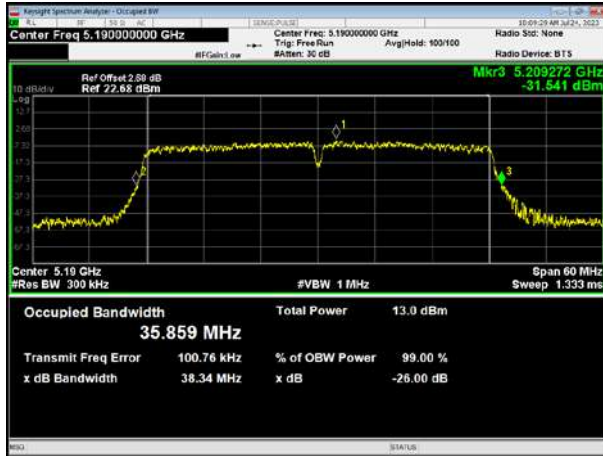

802.11n40 on channel 38 ANT2



802.11n40 on channel 46 ANT1




802.11n40 on channel 46 ANT2



802.11ac40 on channel 38 ANT1



802.11ac40 on channel 38 ANT2

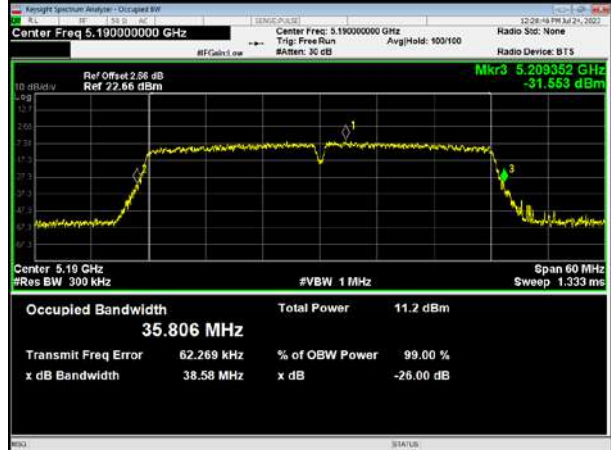

802.11ac40 on channel 46 ANT1




802.11ac40 on channel 46 ANT2



802.11ac80 on channel 42 ANT1




802.11ac80 on channel 42 ANT2

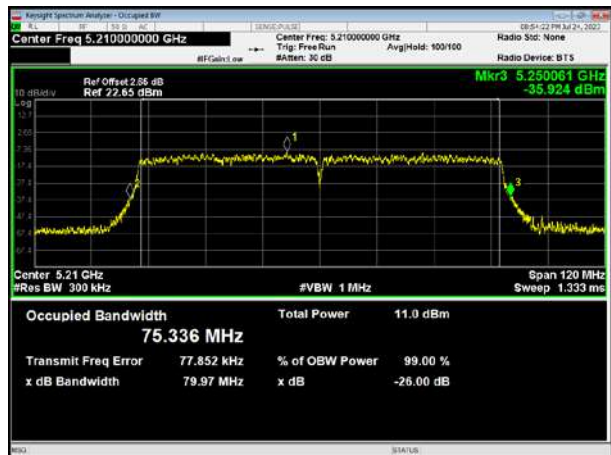


5.2GHz 99% Bandwidth


802.11a on channel 36 ANT1

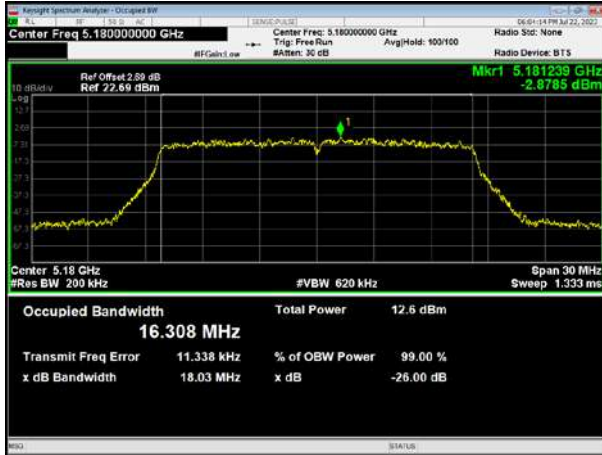


802.11a on channel 36 ANT2

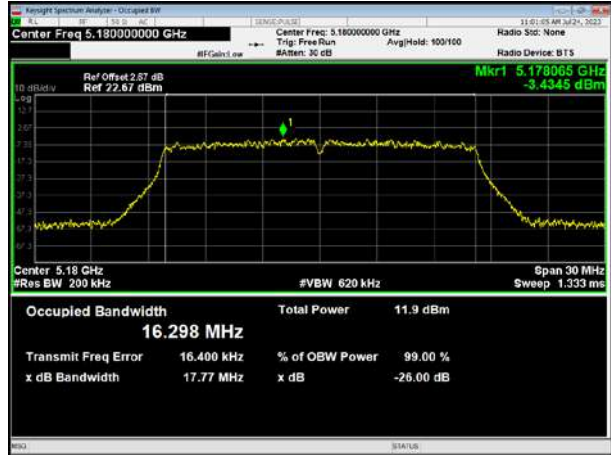

802.11a on channel 40 ANT1

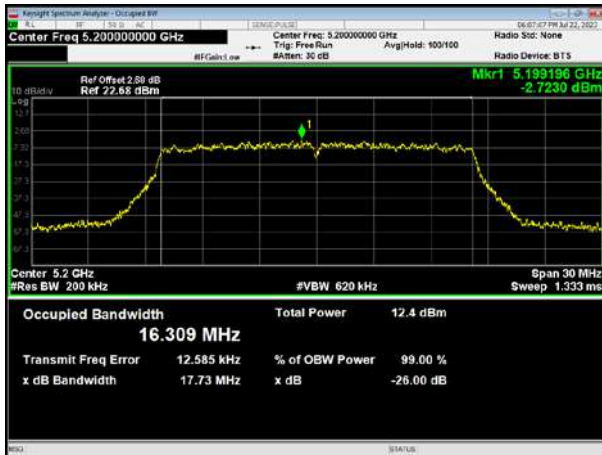


802.11a on channel 40 ANT2

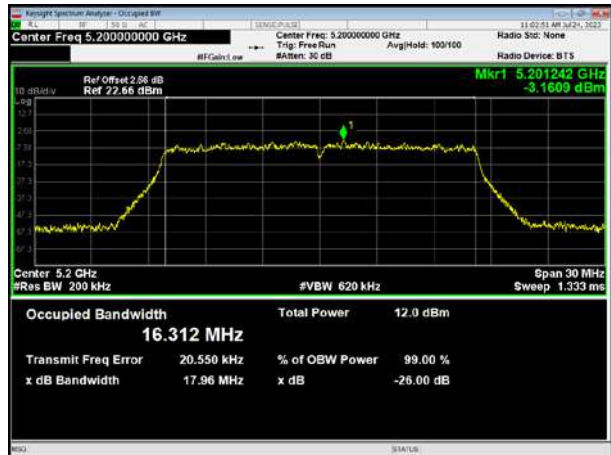


802.11a on channel 48 ANT1




802.11a on channel 48 ANT2

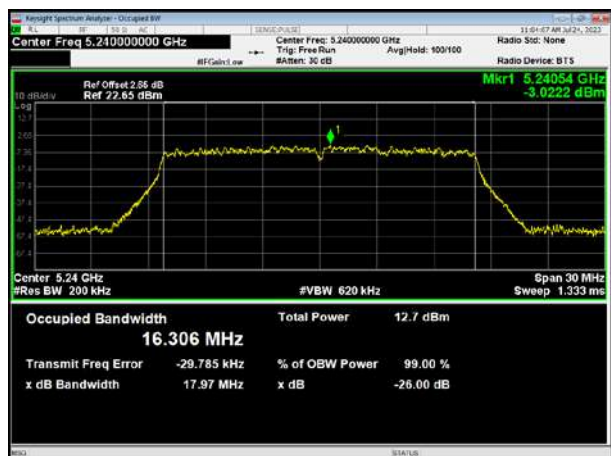


802.11ac20 on channel 36 ANT1

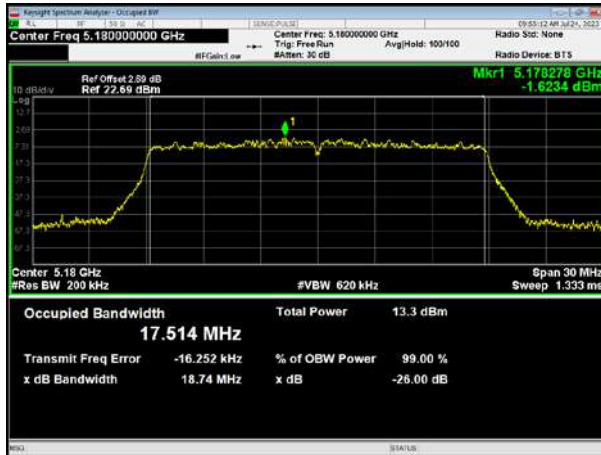

802.11ac20 on channel 36 ANT2

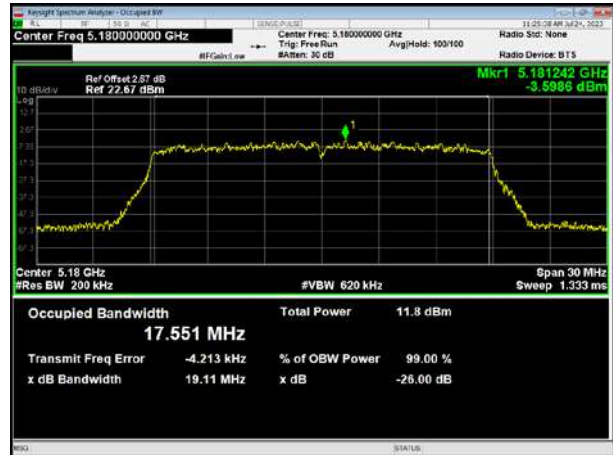


802.11ac20 on channel 40 ANT1

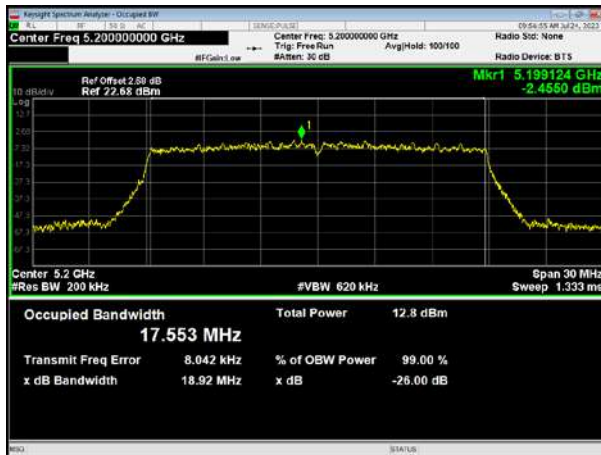


802.11ac20 on channel 40 ANT2




802.11ac20 on channel 48 ANT1

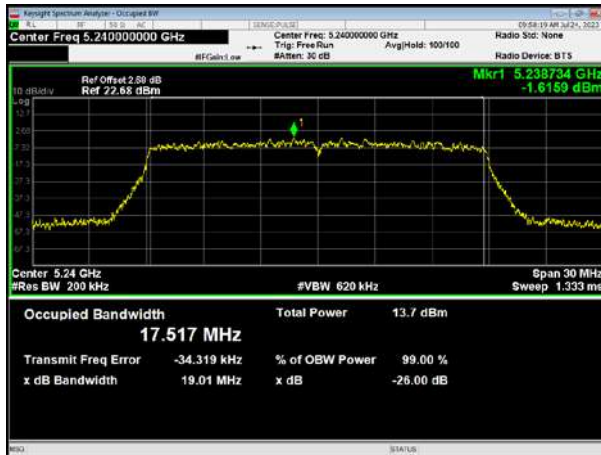


802.11ac20 on channel 48 ANT2

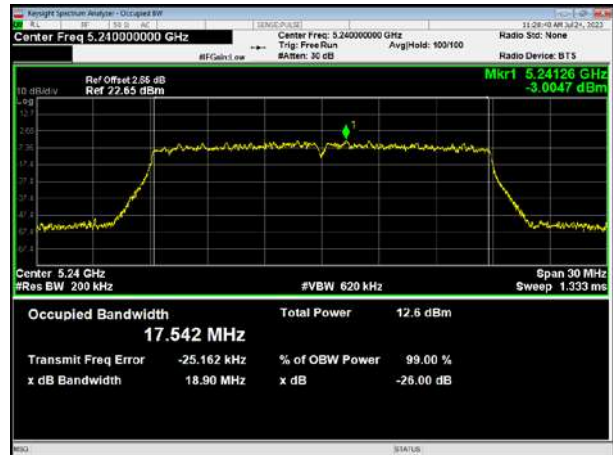


802.11n20 on channel 36 ANT1

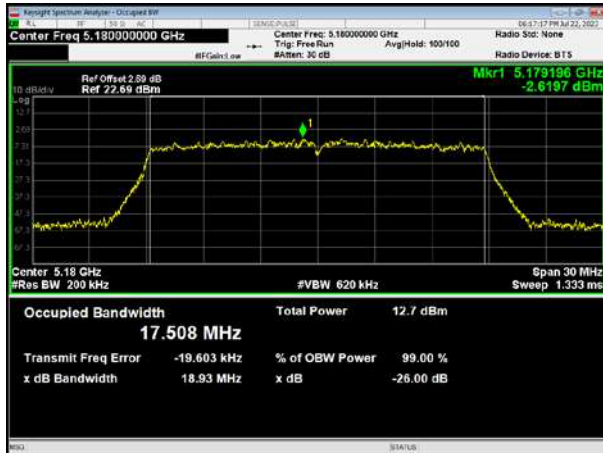


802.11n20 on channel 36 ANT2

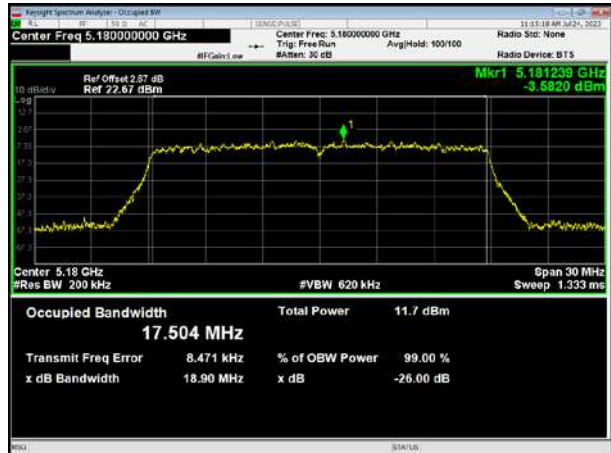


802.11n20 on channel 40 ANT1

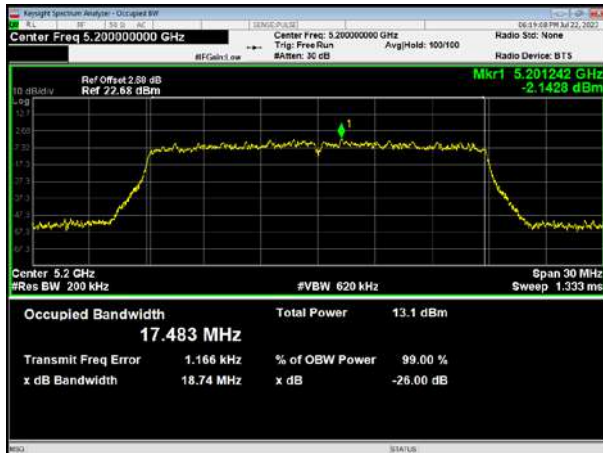


802.11n20 on channel 40 ANT2

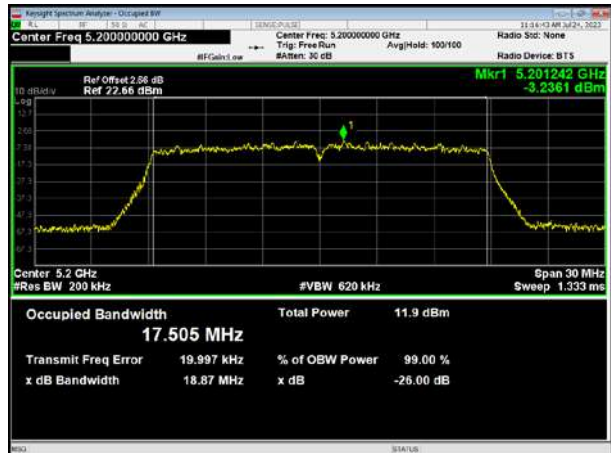

802.11n20 on channel 48 ANT1

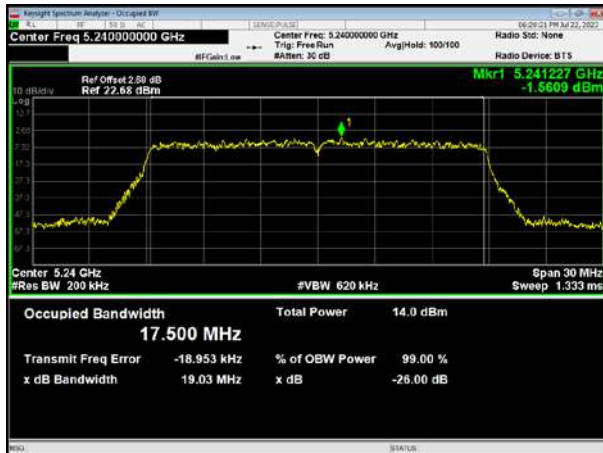


802.11n20 on channel 48 ANT2

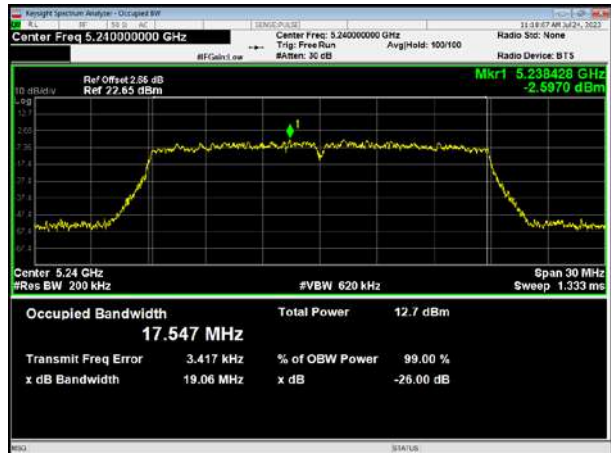

802.11n40 on channel 38 ANT1



802.11n40 on channel 38 ANT2

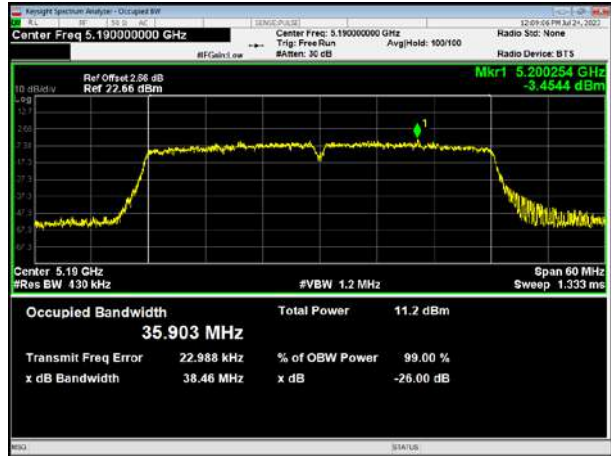


802.11n40 on channel 46 ANT1




802.11n40 on channel 46 ANT2




802.11ac40 on channel 38 ANT1

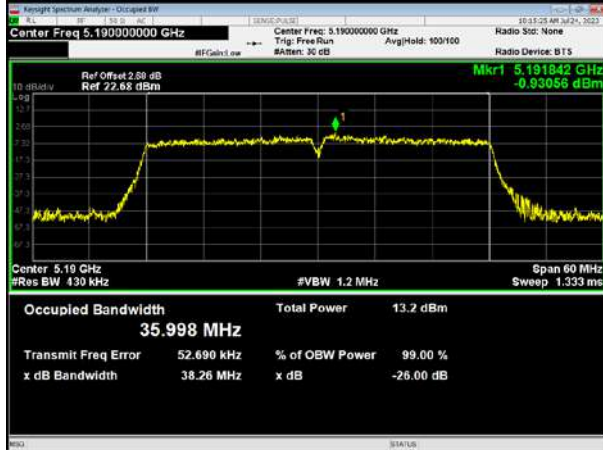

802.11ac40 on channel 38 ANT2

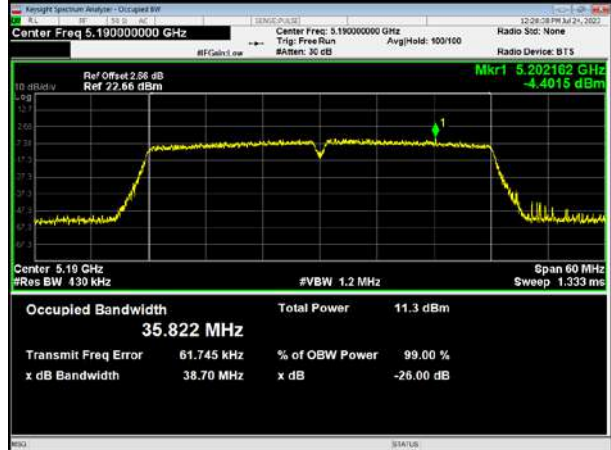


802.11ac40 on channel 46 ANT1

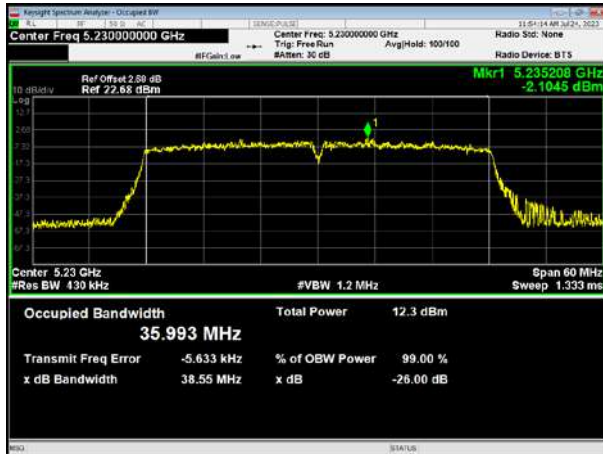


802.11ac40 on channel 46 ANT2



802.11ac80 on channel 42 ANT1

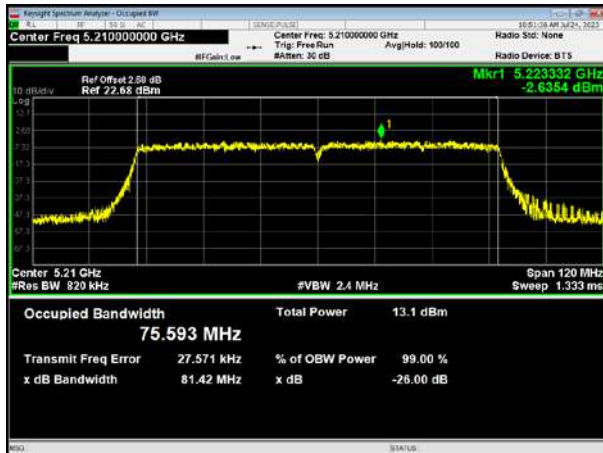

802.11ac80 on channel 42 ANT2

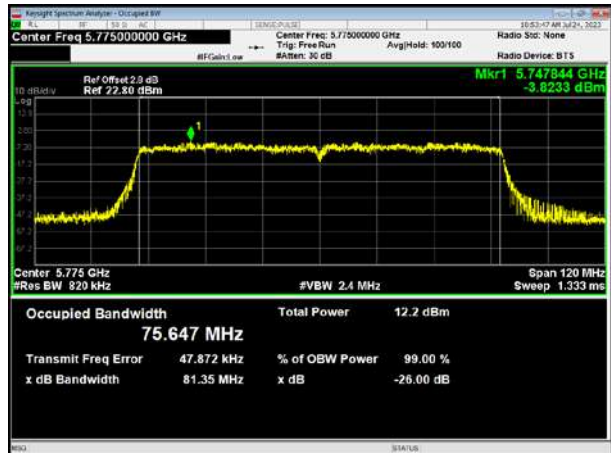


A.5 6 dB bandwidth

Sub-band(5.8GH): 5725-5850MHz


| Mode | Frequency | -6dB Bandwidth | | 99% Bandwidth | | -6dB Bandwidth Limit (kHz) |
|-------------|-----------|----------------|------------|---------------|------------|----------------------------|
| | | ANT1 (MHz) | ANT2 (MHz) | ANT1 (MHz) | ANT2 (MHz) | |
| 802.11 a | 5745 MHz | 16.344 | 15.653 | 16.352 | 16.323 | 500 |
| | 5785 MHz | 16.306 | 16.069 | 16.34 | 16.311 | 500 |
| | 5825 MHz | 15.613 | 15.975 | 16.312 | 16.339 | 500 |
| 802.11 ac20 | 5745 MHz | 15.698 | 15.736 | 17.502 | 17.525 | 500 |
| | 5785 MHz | 16.893 | 15.981 | 17.53 | 17.493 | 500 |
| | 5825 MHz | 17.49 | 16.05 | 17.514 | 17.476 | 500 |
| 802.11 n20 | 5745 MHz | 16.054 | 16.822 | 17.495 | 17.437 | 500 |
| | 5785 MHz | 16.935 | 16.166 | 17.49 | 17.545 | 500 |
| | 5825 MHz | 16.031 | 16.927 | 17.477 | 17.497 | 500 |
| 802.11 n40 | 5755 MHz | 35.086 | 35.121 | 35.916 | 35.95 | 500 |
| | 5795 MHz | 35.093 | 33.828 | 35.869 | 35.883 | 500 |
| 802.11 ac40 | 5755 MHz | 35.045 | 35.096 | 35.994 | 35.936 | 500 |
| | 5795 MHz | 35.112 | 35.112 | 35.825 | 35.902 | 500 |
| 802.11 ac80 | 5775 MHz | 75.131 | 75.136 | 75.647 | 75.546 | 500 |

5.8GHz -6dB Bandwidth


802.11a on channel 149 ANT1

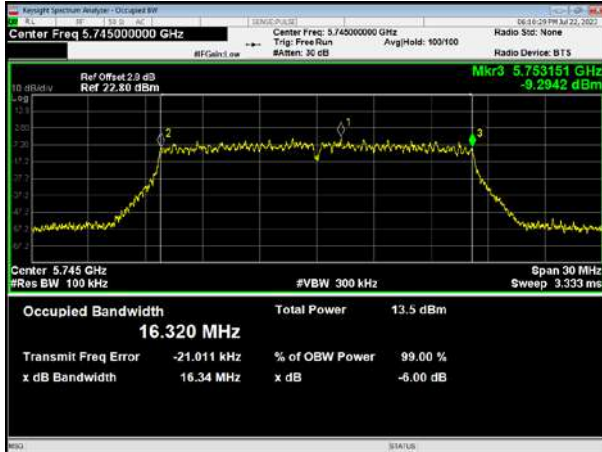


802.11a on channel 149 ANT2

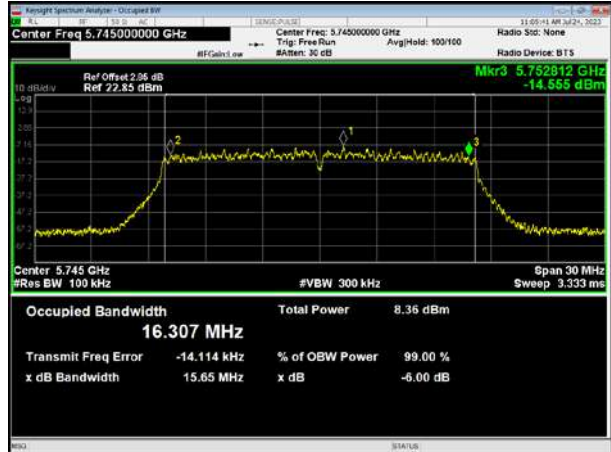


802.11a on channel 157 ANT1

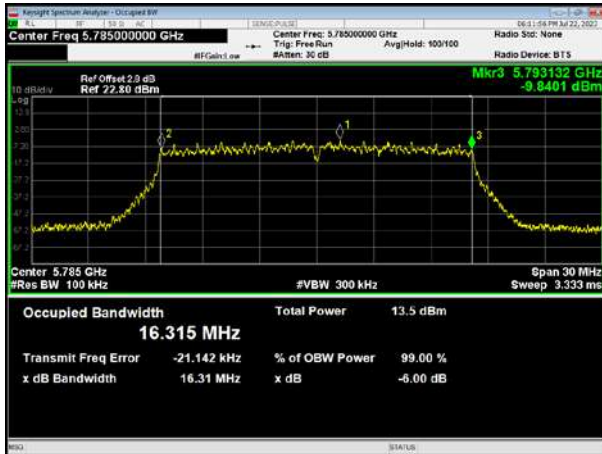


802.11a on channel 157 ANT2

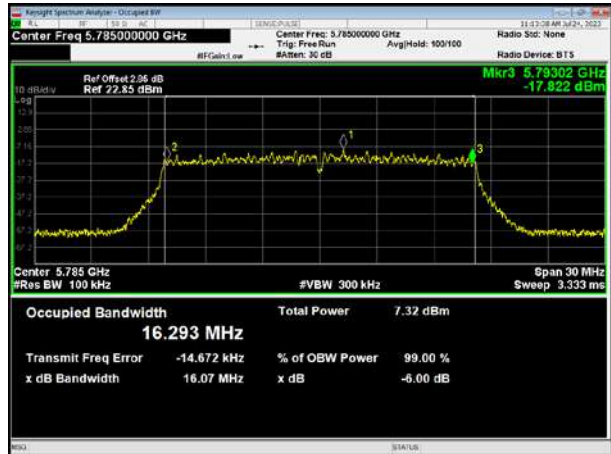


802.11a on channel 165 ANT1

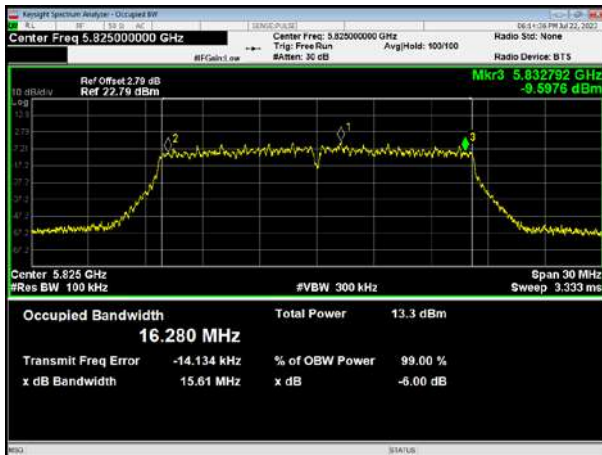


802.11a on channel 165 ANT2

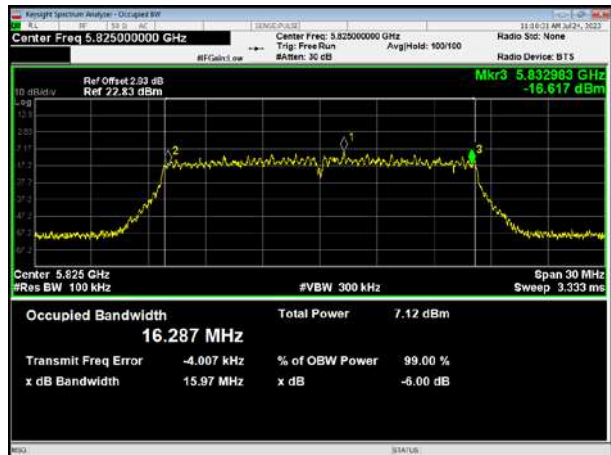


802.11ac20 on channel 149 ANT1

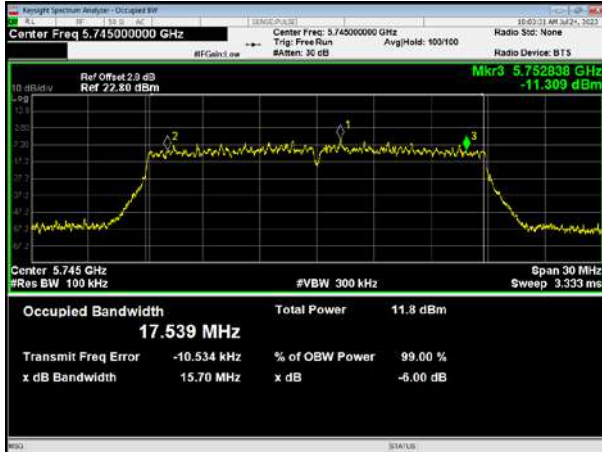


802.11ac20 on channel 149 ANT2

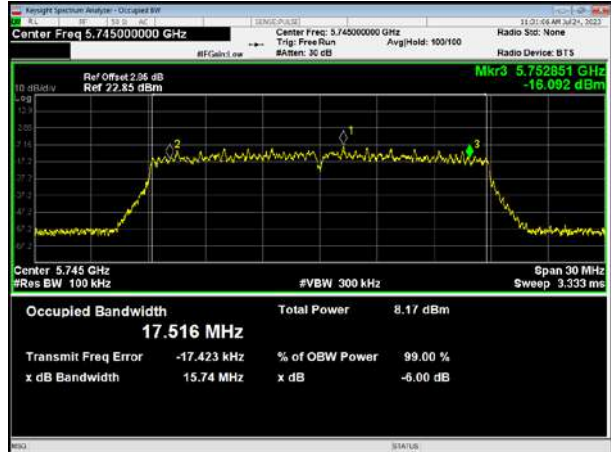


802.11ac20 on channel 157 ANT1

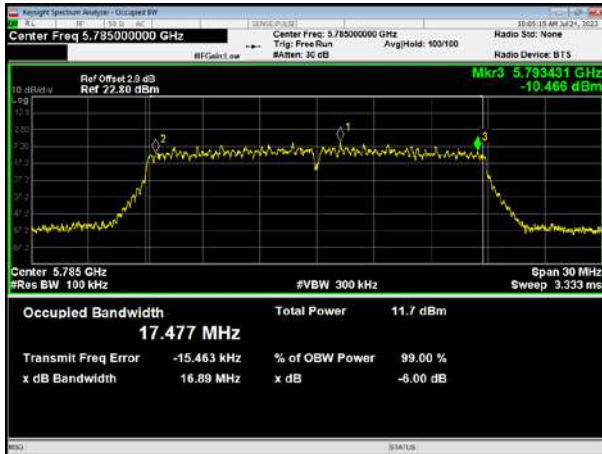


802.11ac20 on channel 157 ANT2

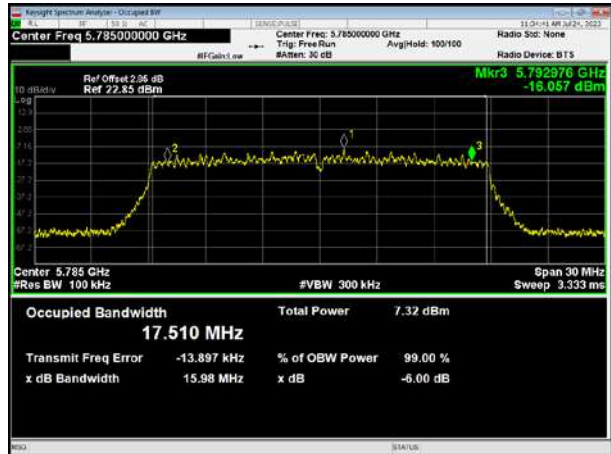


802.11ac20 on channel 165 ANT1

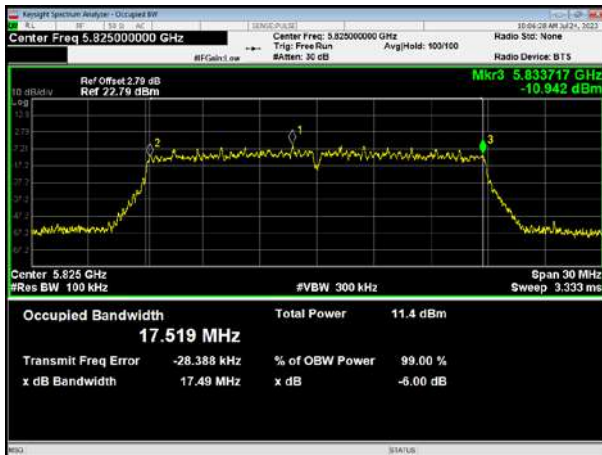


802.11ac20 on channel 165 ANT2

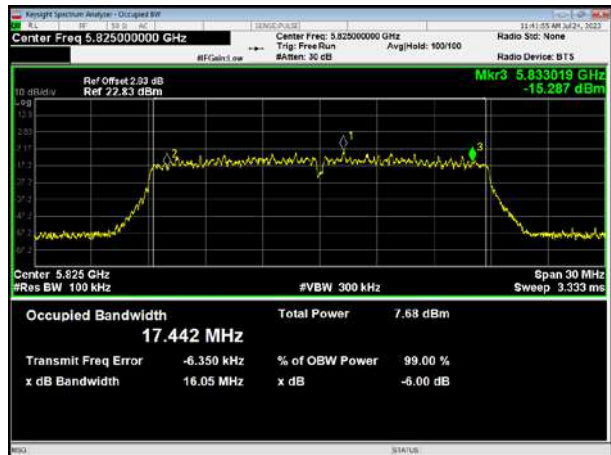


802.11n20 on channel 149 ANT1

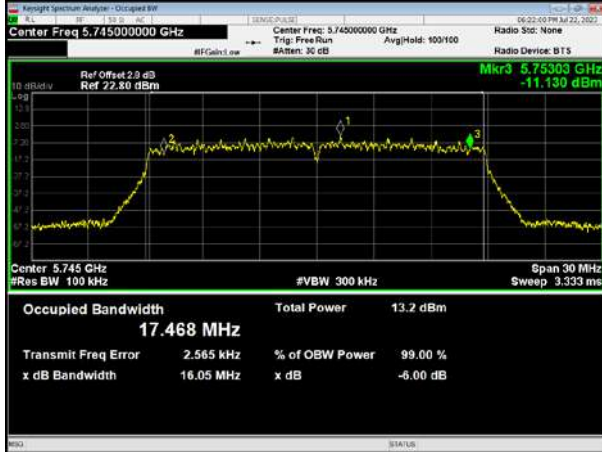


802.11n20 on channel 149 ANT2

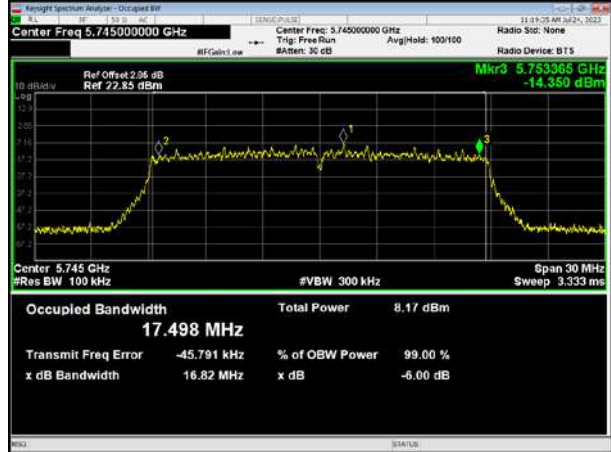


802.11n20 on channel 157 ANT1

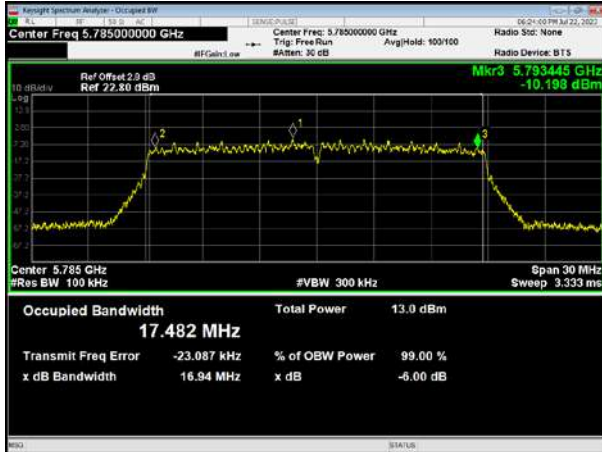


802.11n20 on channel 157 ANT2

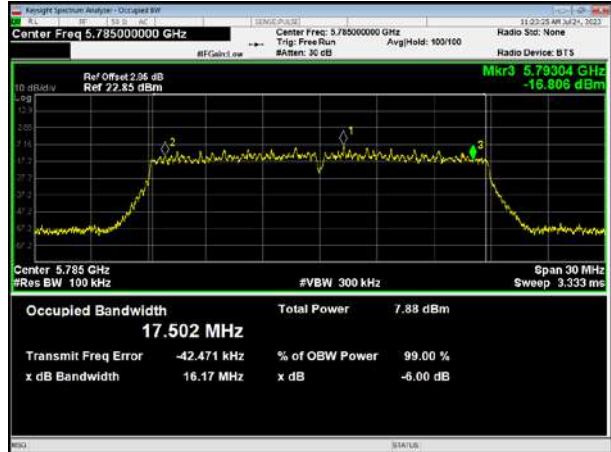


802.11n20 on channel 165 ANT1

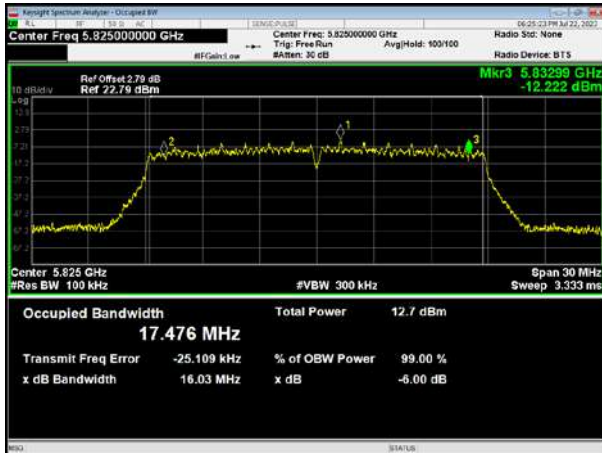


802.11n20 on channel 165 ANT2

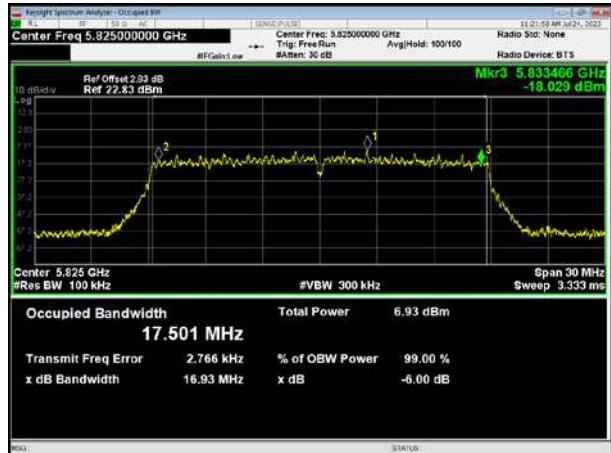


802.11n40 on channel 151 ANT1

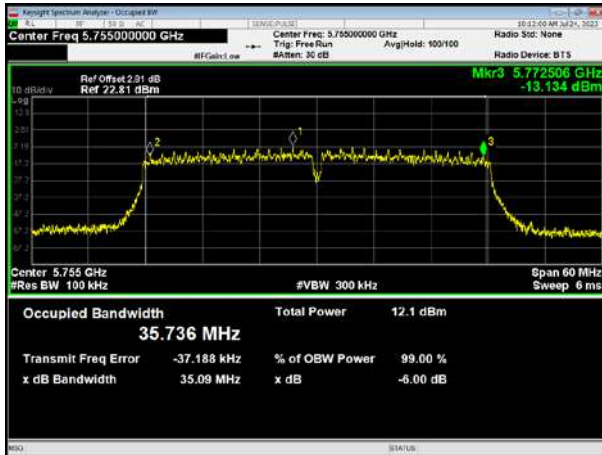


802.11n40 on channel 151 ANT2

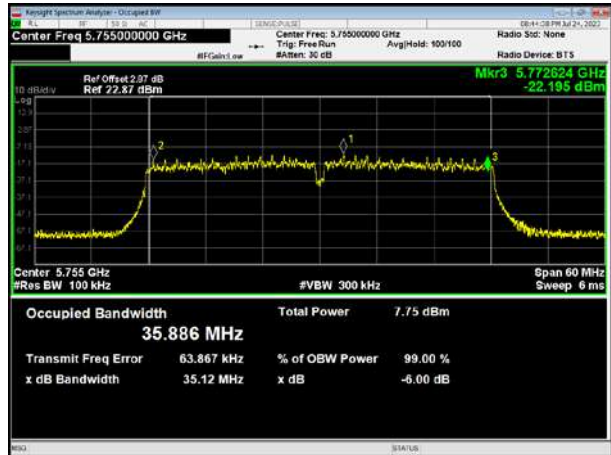


802.11n40 on channel 159 ANT1

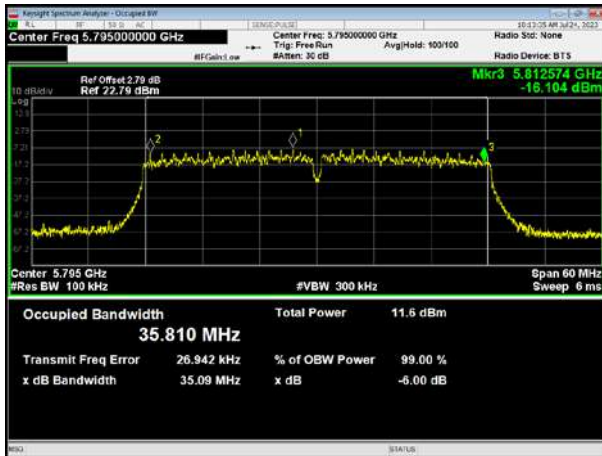


802.11n40 on channel 159 ANT2

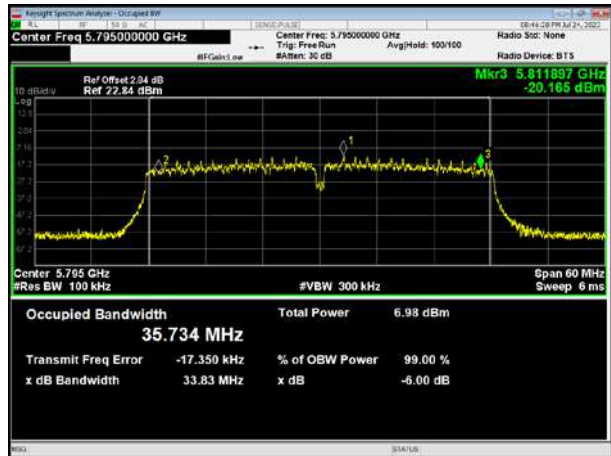


802.11ac40 on channel 151 ANT1

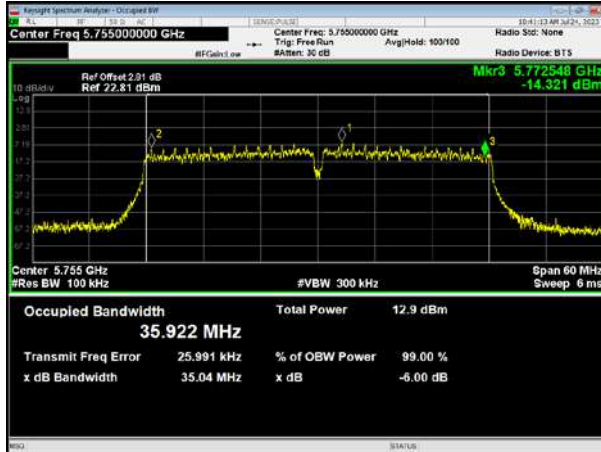


802.11ac40 on channel 151 ANT2

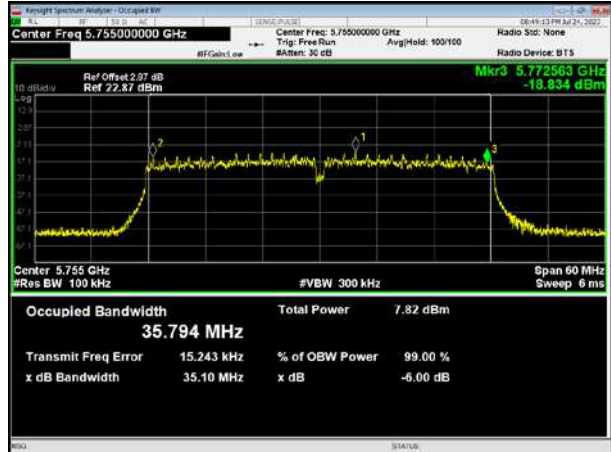


802.11ac40 on channel 159 ANT1

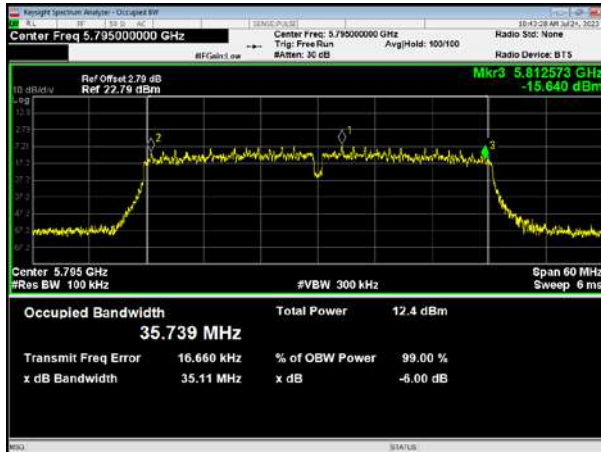


802.11ac40 on channel 159 ANT2

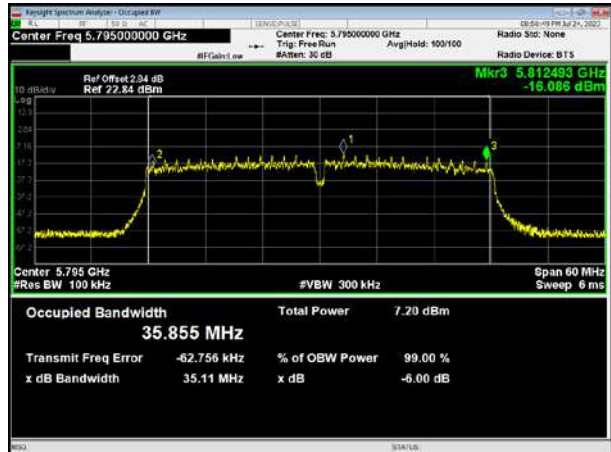

802.11ac80 on channel 155 ANT1

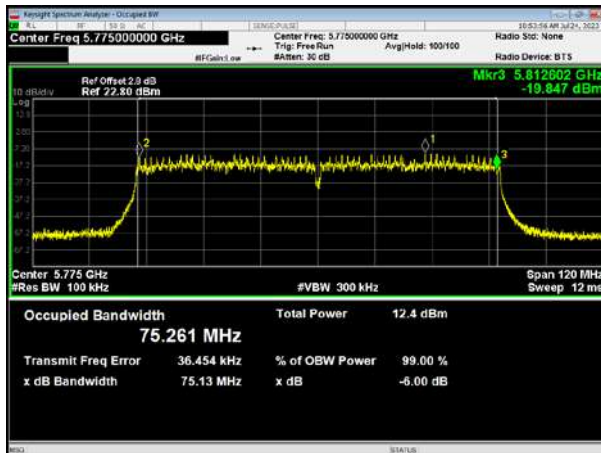


802.11ac80 on channel 155 ANT2

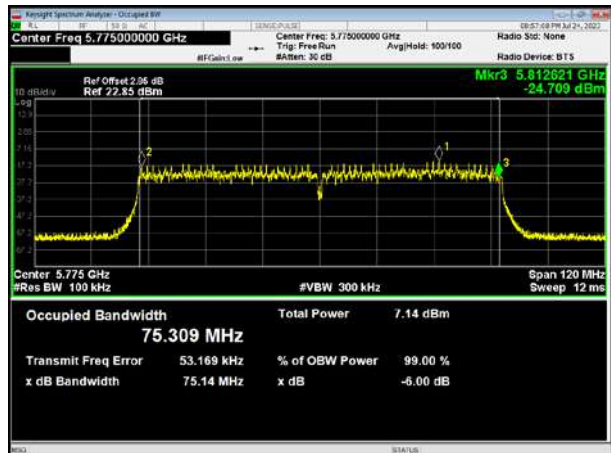


5.8GHz 99%dB Bandwidth


802.11a on channel 149 ANT1

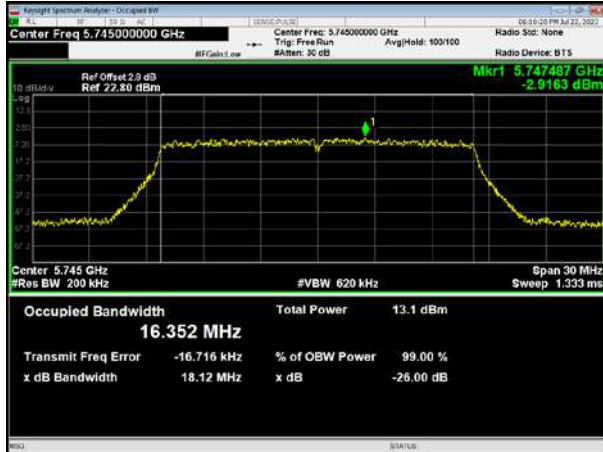


802.11a on channel 149 ANT2

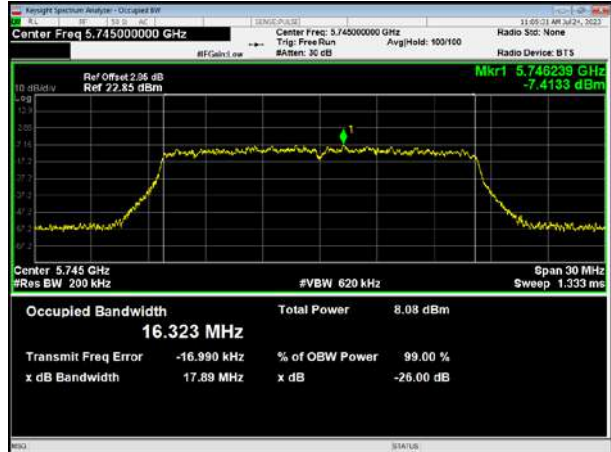


802.11a on channel 157 ANT1

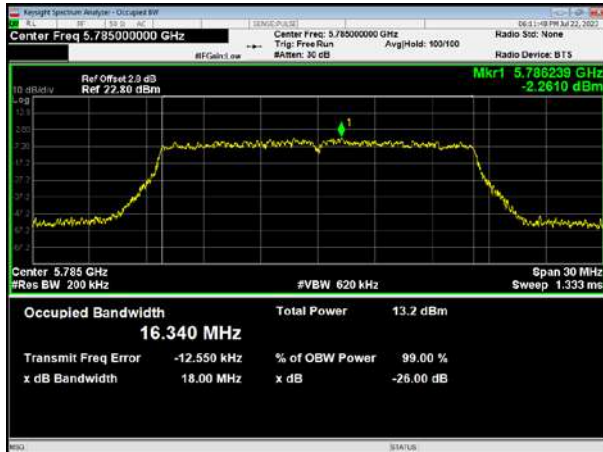


802.11a on channel 157 ANT2

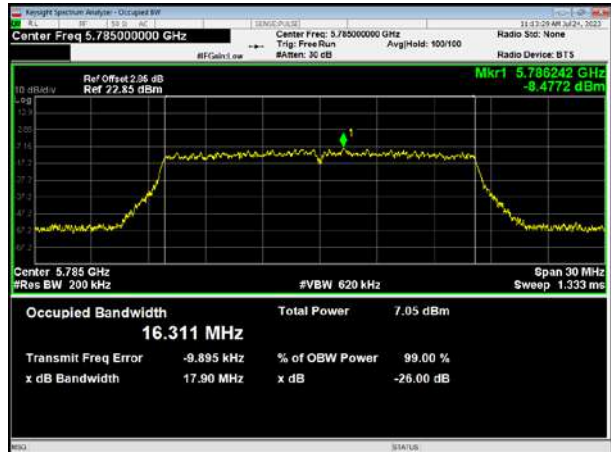


802.11a on channel 165 ANT1

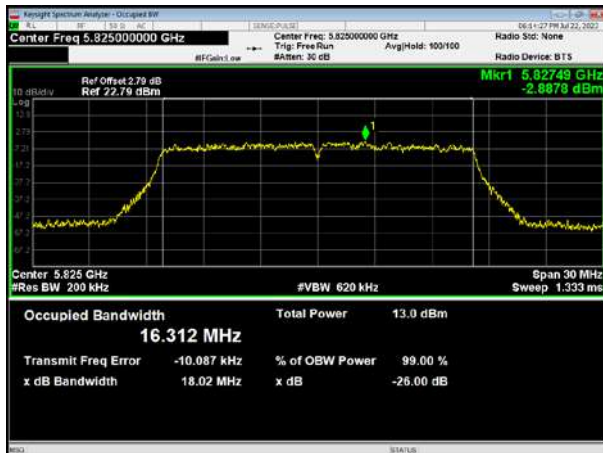


802.11a on channel 165 ANT2

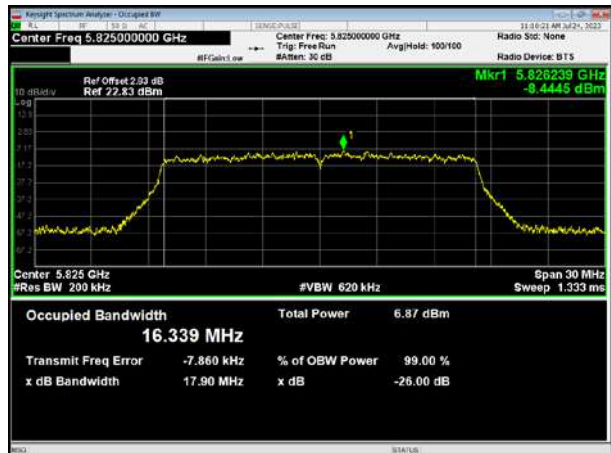


802.11ac20 on channel 149 ANT1

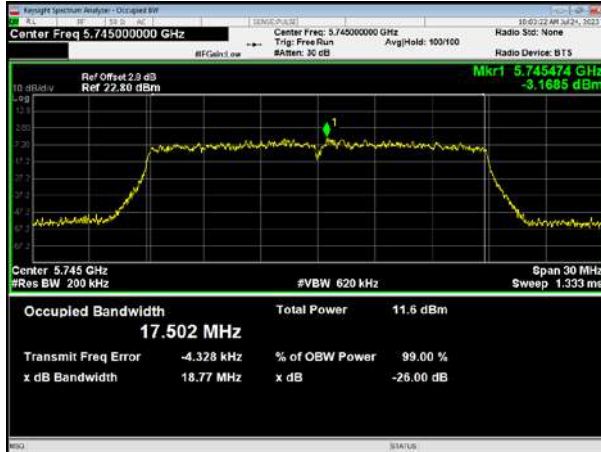


802.11ac20 on channel 149 ANT2

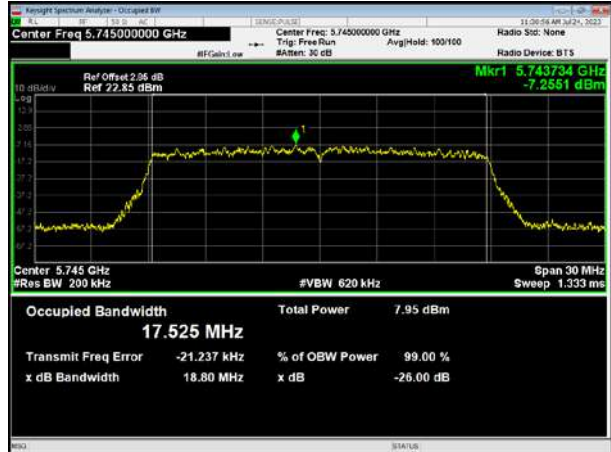


802.11ac20 on channel 157 ANT1

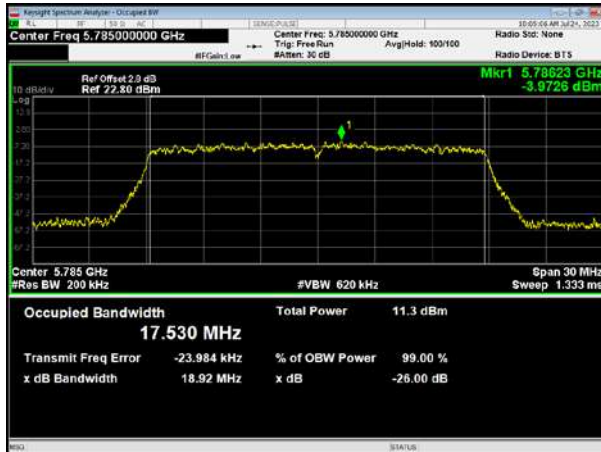


802.11ac20 on channel 157 ANT2

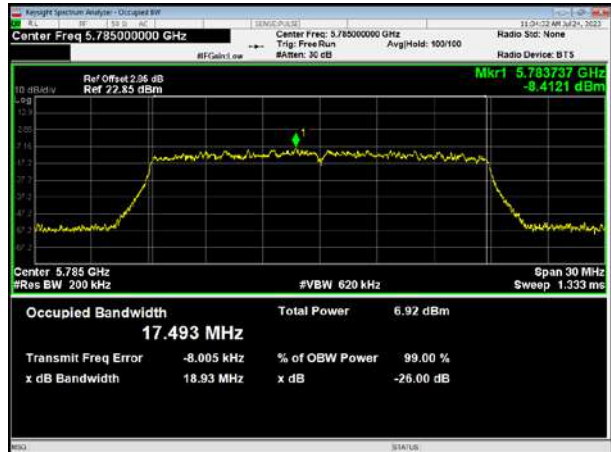


802.11ac20 on channel 165 ANT1

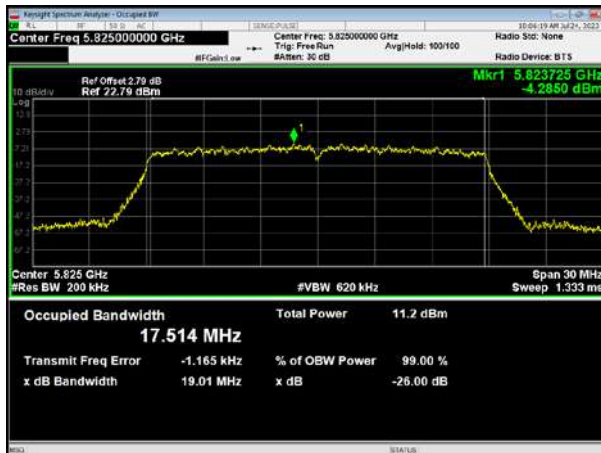


802.11ac20 on channel 165 ANT2

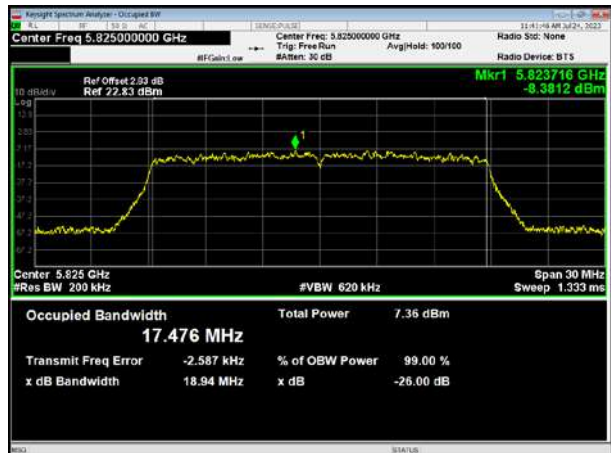


802.11n20 on channel 149 ANT1

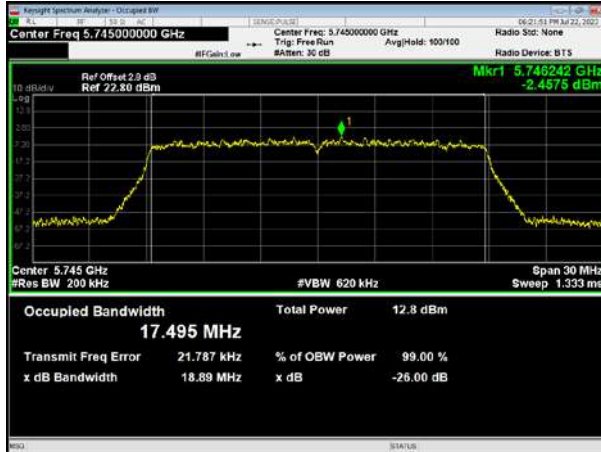


802.11n20 on channel 149 ANT2

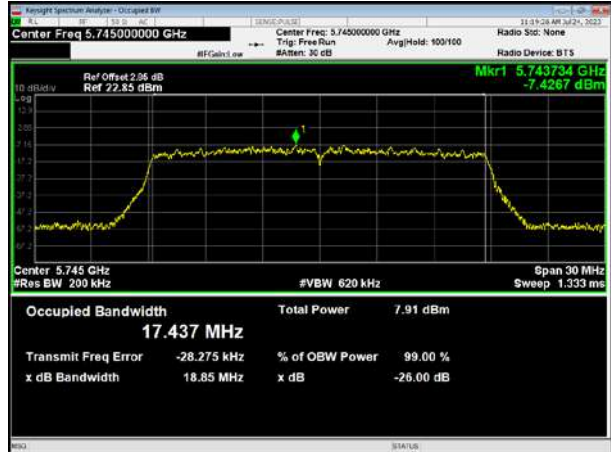


802.11n20 on channel 157 ANT1

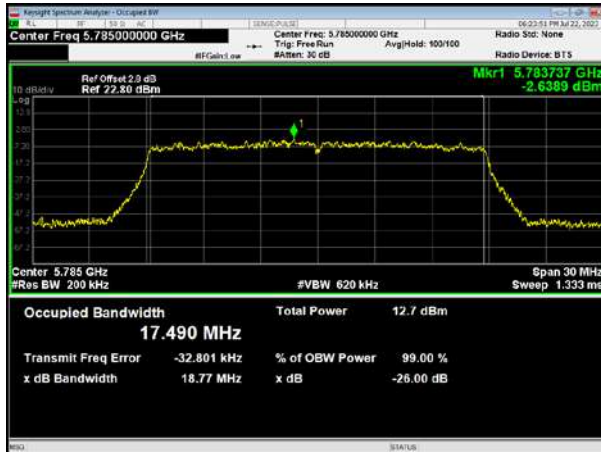


802.11n20 on channel 157 ANT2

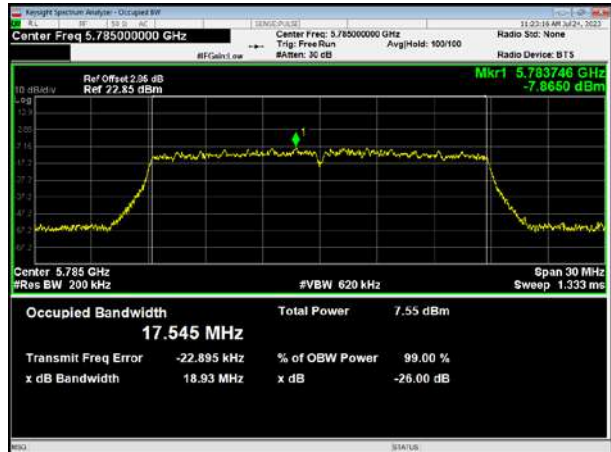


802.11n20 on channel 165 ANT1

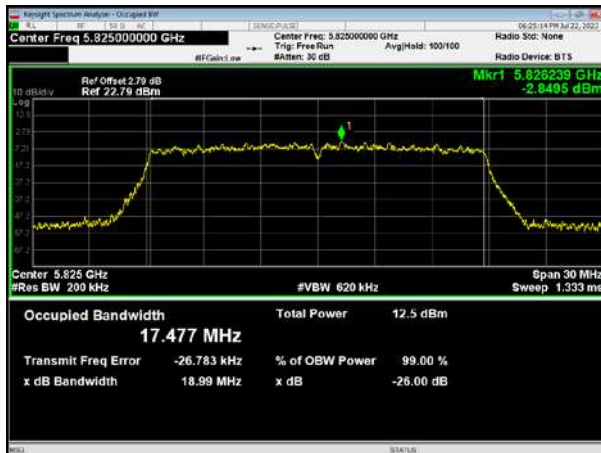

802.11n20 on channel 165 ANT2

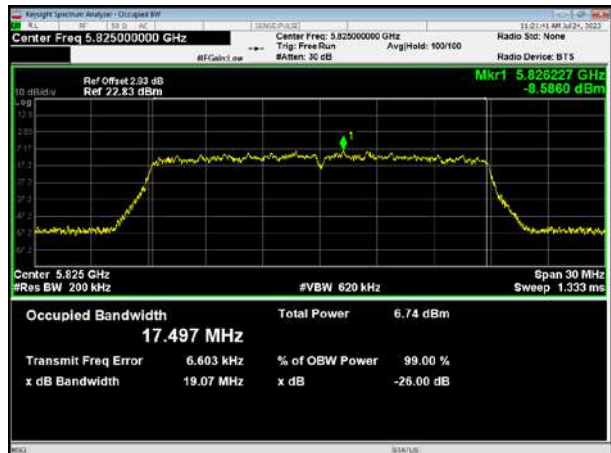

802.11n40 on channel 151 ANT1

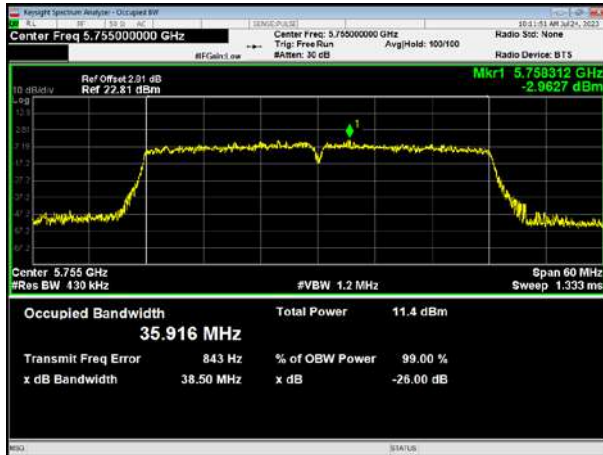

802.11n40 on channel 151 ANT2




802.11n40 on channel 159 ANT1




802.11n40 on channel 159 ANT2




802.11ac40 on channel 151 ANT1

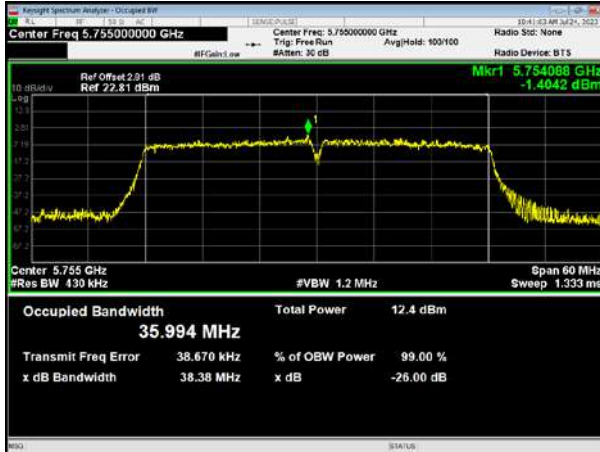

802.11ac40 on channel 151 ANT2

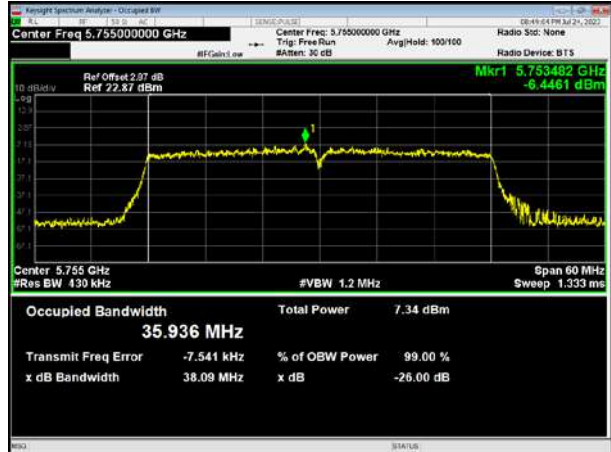


802.11ac40 on channel 159 ANT1

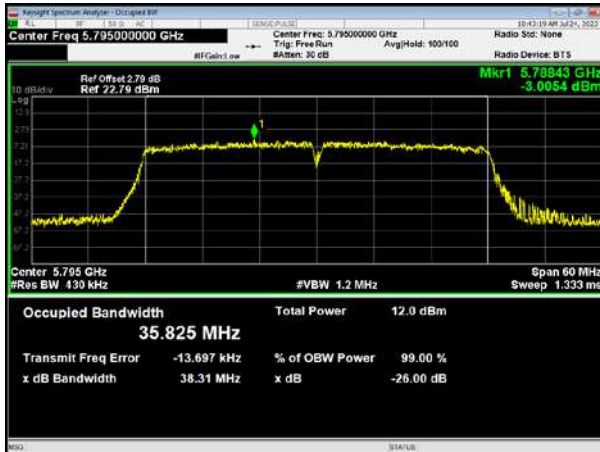


802.11ac40 on channel 159 ANT2



802.11ac80 on channel 155 ANT1

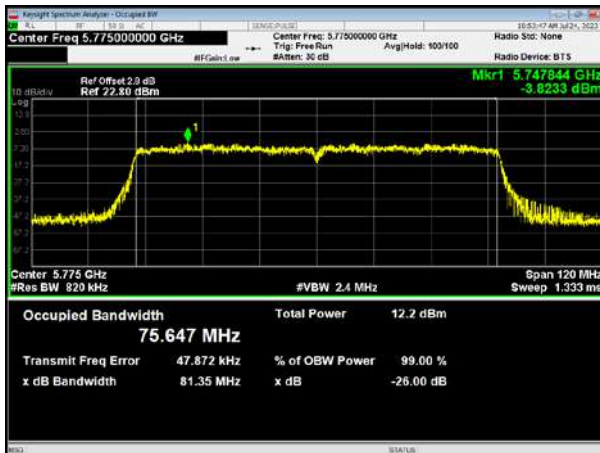

802.11ac80 on channel 155 ANT2

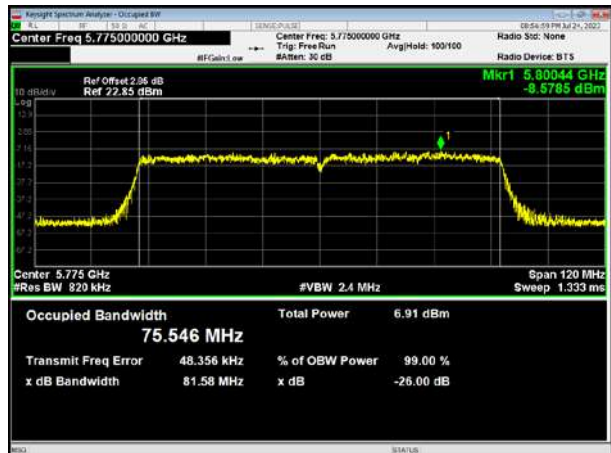

A.6 Radiated Spurious Emission

Note 1: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, only show the worst case mode for each band.

Note 2: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and 802.11a mode is the worst.


Note 3: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line was not reported.


Note 4: The worst mode is 802.11a, only the worst data is recorded.

Note 5: The test data shows ANT1 and ANT2 Simultaneous emission mode

(30 MHz ~ 1GHz) ANT Horizontal

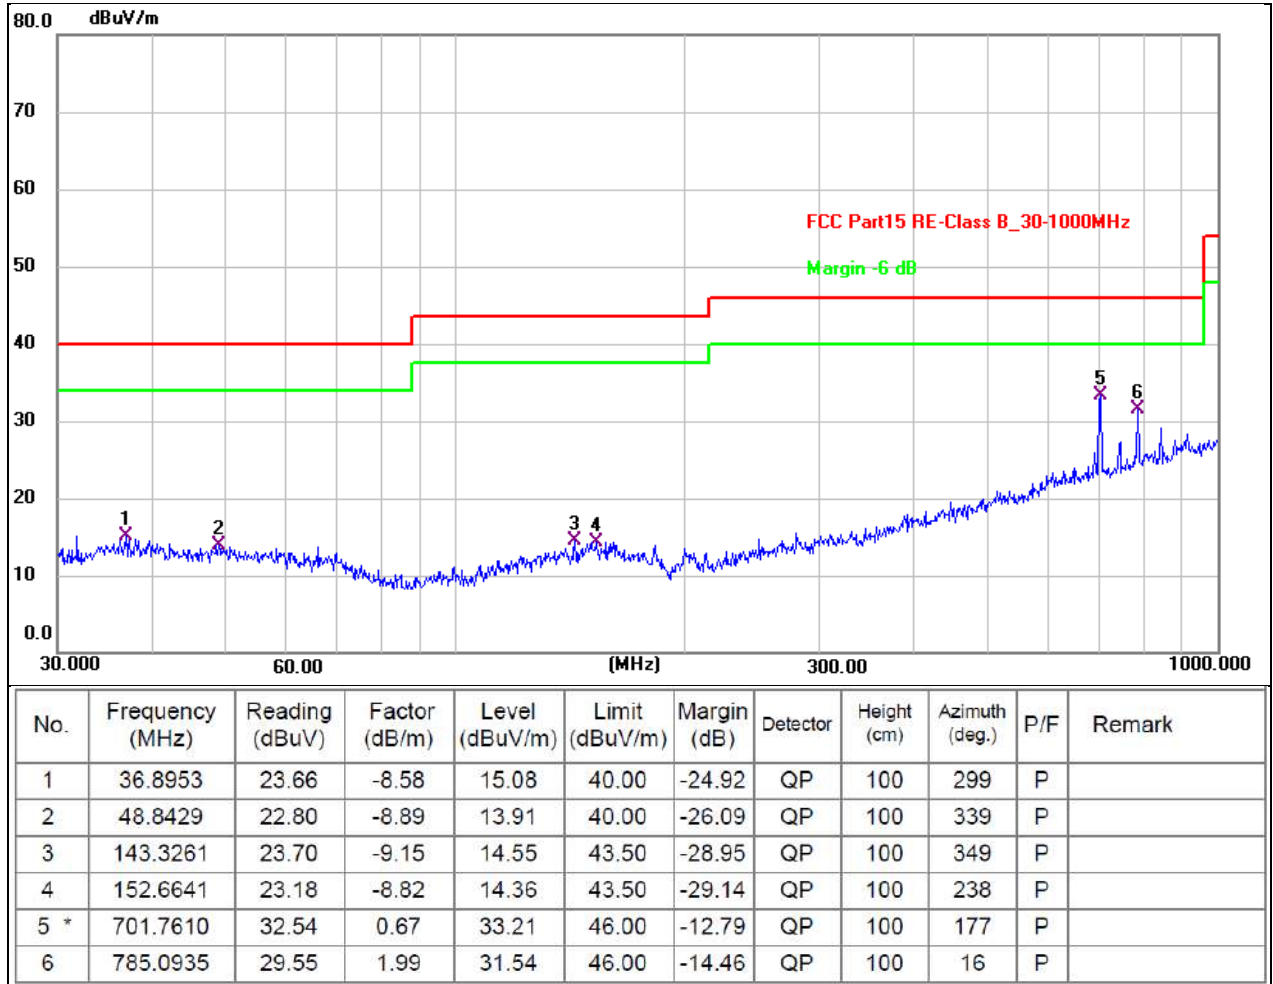

(30 MHz ~ 1GHz) ANT Vertical

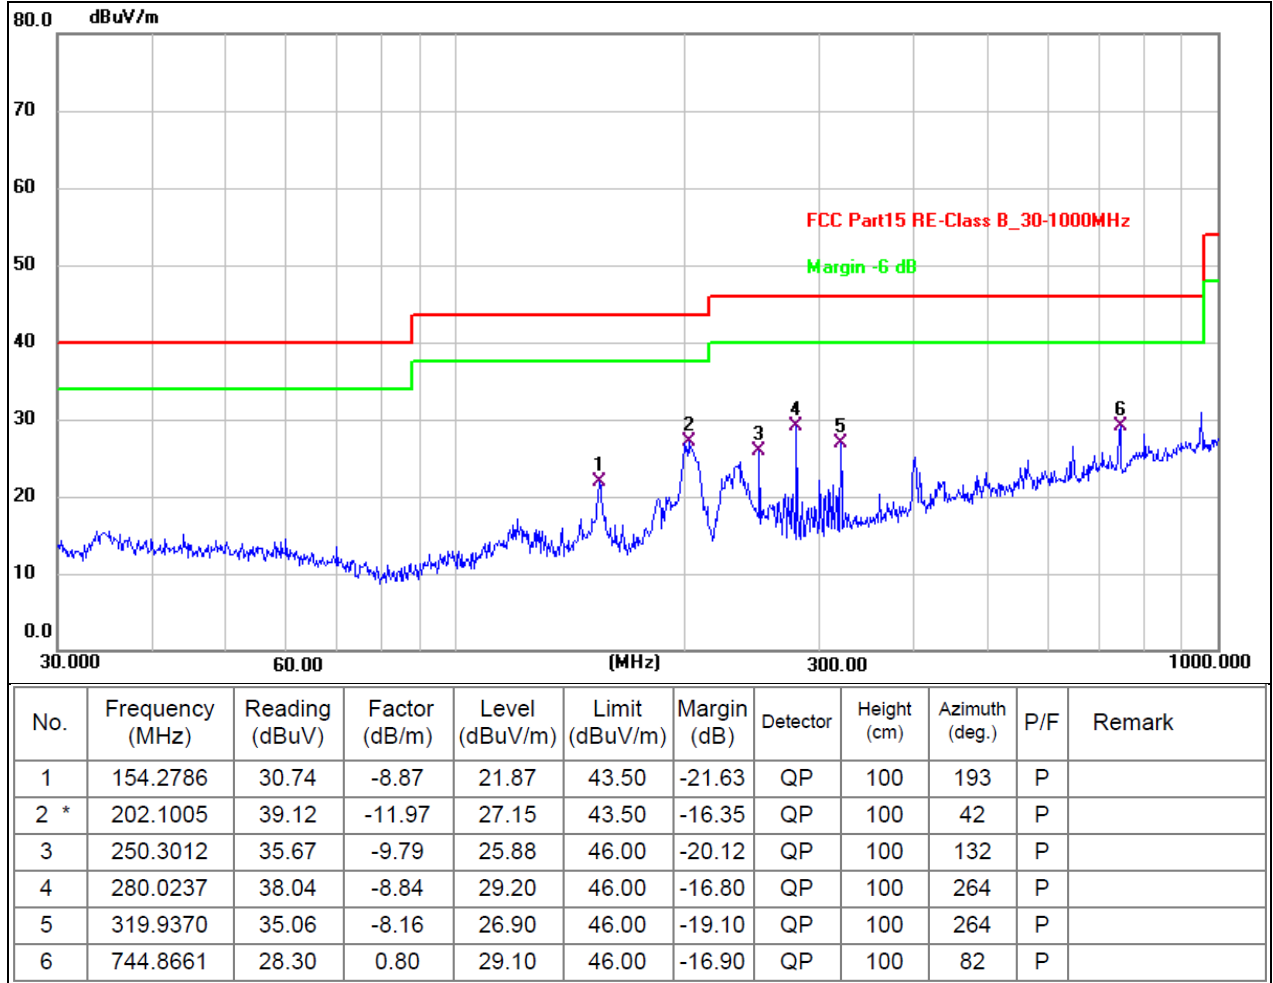

(1 GHz ~ 10th Harmonic)

Sub-band: 5180MHz~5240MHz 802.11a

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|----------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel: 5180MHz | | | | | | | | | |
| V | 10360.00 | 55.39 | 30.55 | 5.77 | 24.66 | 55.27 | 74.00 | -18.73 | PK |
| V | 10360.00 | 42.52 | 30.55 | 5.77 | 24.66 | 42.40 | 54.00 | -11.60 | AV |
| V | 15540.00 | 50.48 | 30.33 | 6.32 | 24.55 | 51.02 | 74.00 | -22.98 | PK |
| V | 15540.00 | 41.54 | 30.33 | 6.32 | 24.55 | 42.08 | 54.00 | -11.92 | AV |
| V | 20720.00 | 51.95 | 30.85 | 7.45 | 24.69 | 53.24 | 74.00 | -20.76 | PK |
| V | 20720.00 | 43.43 | 30.85 | 7.45 | 24.69 | 44.72 | 54.00 | -9.28 | AV |
| V | 25900.00 | 48.05 | 31.02 | 8.99 | 25.57 | 51.59 | 74.00 | -22.41 | PK |
| V | 25900.00 | 40.09 | 31.02 | 8.99 | 25.57 | 43.63 | 54.00 | -10.37 | AV |
| H | 10360.00 | 55.16 | 30.55 | 5.77 | 24.66 | 55.04 | 74.00 | -18.96 | PK |
| H | 10360.00 | 45.68 | 30.55 | 5.77 | 24.66 | 45.56 | 54.00 | -8.44 | AV |
| H | 15540.00 | 54.34 | 30.33 | 6.32 | 24.55 | 54.88 | 74.00 | -19.12 | PK |
| H | 15540.00 | 42.60 | 30.33 | 6.32 | 24.55 | 43.14 | 54.00 | -10.86 | AV |
| H | 20720.00 | 50.20 | 30.85 | 7.45 | 24.69 | 51.49 | 74.00 | -22.51 | PK |
| H | 20720.00 | 44.39 | 30.85 | 7.45 | 24.69 | 45.68 | 54.00 | -8.32 | AV |
| H | 25900.00 | 51.71 | 31.02 | 8.99 | 25.57 | 55.25 | 74.00 | -18.75 | PK |
| H | 25900.00 | 41.07 | 31.02 | 8.99 | 25.57 | 44.61 | 54.00 | -9.39 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|----------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel: 5200MHz | | | | | | | | | |
| V | 10400.00 | 52.74 | 30.55 | 5.77 | 24.66 | 52.62 | 74.00 | -21.38 | PK |
| V | 10400.00 | 46.05 | 30.55 | 5.77 | 24.66 | 45.93 | 54.00 | -8.07 | AV |
| V | 15600.00 | 51.20 | 30.33 | 6.32 | 24.55 | 51.74 | 74.00 | -22.26 | PK |
| V | 15600.00 | 43.42 | 30.33 | 6.32 | 24.55 | 43.96 | 54.00 | -10.04 | AV |
| V | 20800.00 | 51.87 | 30.85 | 7.45 | 24.69 | 53.16 | 74.00 | -20.84 | PK |
| V | 20800.00 | 42.36 | 30.85 | 7.45 | 24.69 | 43.65 | 54.00 | -10.35 | AV |
| V | 26000.00 | 49.84 | 31.02 | 8.99 | 25.57 | 53.38 | 74.00 | -20.62 | PK |
| V | 26000.00 | 39.61 | 31.02 | 8.99 | 25.57 | 43.15 | 54.00 | -10.85 | AV |
| H | 10400.00 | 51.19 | 30.55 | 5.77 | 24.66 | 51.07 | 74.00 | -22.93 | PK |
| H | 10400.00 | 42.68 | 30.55 | 5.77 | 24.66 | 42.56 | 54.00 | -11.44 | AV |
| H | 15600.00 | 54.29 | 30.33 | 6.32 | 24.55 | 54.83 | 74.00 | -19.17 | PK |
| H | 15600.00 | 41.30 | 30.33 | 6.32 | 24.55 | 41.84 | 54.00 | -12.16 | AV |
| H | 20800.00 | 50.19 | 30.85 | 7.45 | 24.69 | 51.48 | 74.00 | -22.52 | PK |
| H | 20800.00 | 40.10 | 30.85 | 7.45 | 24.69 | 41.39 | 54.00 | -12.61 | AV |
| H | 26000.00 | 49.73 | 31.02 | 8.99 | 25.57 | 53.27 | 74.00 | -20.73 | PK |
| H | 26000.00 | 39.53 | 31.02 | 8.99 | 25.57 | 43.07 | 54.00 | -10.93 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|----------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel: 5240MHz | | | | | | | | | |
| V | 10480.00 | 53.78 | 30.55 | 5.77 | 24.66 | 53.66 | 74.00 | -20.34 | PK |
| V | 10480.00 | 44.32 | 30.55 | 5.77 | 24.66 | 44.20 | 54.00 | -9.80 | AV |
| V | 15720.00 | 50.75 | 30.33 | 6.32 | 24.55 | 51.29 | 74.00 | -22.71 | PK |
| V | 15720.00 | 43.59 | 30.33 | 6.32 | 24.55 | 44.13 | 54.00 | -9.87 | AV |
| V | 20960.00 | 50.00 | 30.85 | 7.45 | 24.69 | 51.29 | 74.00 | -22.71 | PK |
| V | 20960.00 | 44.25 | 30.85 | 7.45 | 24.69 | 45.54 | 54.00 | -8.46 | AV |
| V | 26200.00 | 51.33 | 31.02 | 8.99 | 25.57 | 54.87 | 74.00 | -19.13 | PK |
| V | 26200.00 | 37.82 | 31.02 | 8.99 | 25.57 | 41.36 | 54.00 | -12.64 | AV |
| H | 10480.00 | 52.54 | 30.55 | 5.77 | 24.66 | 52.42 | 74.00 | -21.58 | PK |
| H | 10480.00 | 42.00 | 30.55 | 5.77 | 24.66 | 41.88 | 54.00 | -12.12 | AV |
| H | 15720.00 | 51.36 | 30.33 | 6.32 | 24.55 | 51.90 | 74.00 | -22.10 | PK |
| H | 15720.00 | 42.19 | 30.33 | 6.32 | 24.55 | 42.73 | 54.00 | -11.27 | AV |
| H | 20960.00 | 50.78 | 30.85 | 7.45 | 24.69 | 52.07 | 74.00 | -21.93 | PK |
| H | 20960.00 | 40.21 | 30.85 | 7.45 | 24.69 | 41.50 | 54.00 | -12.50 | AV |
| H | 26200.00 | 50.13 | 31.02 | 8.99 | 25.57 | 53.67 | 74.00 | -20.33 | PK |
| H | 26200.00 | 39.63 | 31.02 | 8.99 | 25.57 | 43.17 | 54.00 | -10.83 | AV |

Sub-band: 5745MHz~5825MHz 802.11a

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|----------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel: 5745MHz | | | | | | | | | |
| V | 11490.00 | 54.09 | 30.55 | 5.77 | 24.66 | 53.97 | 74.00 | -20.03 | PK |
| V | 11490.00 | 45.02 | 30.55 | 5.77 | 24.66 | 44.90 | 54.00 | -9.10 | AV |
| V | 17235.00 | 50.67 | 30.33 | 6.32 | 24.55 | 51.21 | 74.00 | -22.79 | PK |
| V | 17235.00 | 45.18 | 30.33 | 6.32 | 24.55 | 45.72 | 54.00 | -8.28 | AV |
| V | 22980.00 | 53.11 | 30.85 | 7.45 | 24.69 | 54.40 | 74.00 | -19.60 | PK |
| V | 22980.00 | 41.52 | 30.85 | 7.45 | 24.69 | 42.81 | 54.00 | -11.19 | AV |
| V | 28725.00 | 49.52 | 31.02 | 8.99 | 25.57 | 53.06 | 74.00 | -20.94 | PK |
| V | 28725.00 | 37.65 | 31.02 | 8.99 | 25.57 | 41.19 | 54.00 | -12.81 | AV |
| H | 11490.00 | 53.52 | 30.55 | 5.77 | 24.66 | 53.40 | 74.00 | -20.60 | PK |
| H | 11490.00 | 45.70 | 30.55 | 5.77 | 24.66 | 45.58 | 54.00 | -8.42 | AV |
| H | 17235.00 | 50.78 | 30.33 | 6.32 | 24.55 | 51.32 | 74.00 | -22.68 | PK |
| H | 17235.00 | 44.73 | 30.33 | 6.32 | 24.55 | 45.27 | 54.00 | -8.73 | AV |
| H | 22980.00 | 49.94 | 30.85 | 7.45 | 24.69 | 51.23 | 74.00 | -22.77 | PK |
| H | 22980.00 | 41.37 | 30.85 | 7.45 | 24.69 | 42.66 | 54.00 | -11.34 | AV |
| H | 28725.00 | 51.75 | 31.02 | 8.99 | 25.57 | 55.29 | 74.00 | -18.71 | PK |
| H | 28725.00 | 41.50 | 31.02 | 8.99 | 25.57 | 45.04 | 54.00 | -8.96 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|----------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel: 5785MHz | | | | | | | | | |
| V | 11570.00 | 54.87 | 30.55 | 5.77 | 24.66 | 54.75 | 74.00 | -19.25 | PK |
| V | 11570.00 | 44.18 | 30.55 | 5.77 | 24.66 | 44.06 | 54.00 | -9.94 | AV |
| V | 17335.00 | 50.70 | 30.33 | 6.32 | 24.55 | 51.24 | 74.00 | -22.76 | PK |
| V | 17335.00 | 44.43 | 30.33 | 6.32 | 24.55 | 44.97 | 54.00 | -9.03 | AV |
| V | 23140.00 | 51.13 | 30.85 | 7.45 | 24.69 | 52.42 | 74.00 | -21.58 | PK |
| V | 23140.00 | 39.80 | 30.85 | 7.45 | 24.69 | 41.09 | 54.00 | -12.91 | AV |
| V | 28925.00 | 48.53 | 31.02 | 8.99 | 25.57 | 52.07 | 74.00 | -21.93 | PK |
| V | 28925.00 | 38.80 | 31.02 | 8.99 | 25.57 | 42.34 | 54.00 | -11.66 | AV |
| H | 11570.00 | 55.60 | 30.55 | 5.77 | 24.66 | 55.48 | 74.00 | -18.52 | PK |
| H | 11570.00 | 45.25 | 30.55 | 5.77 | 24.66 | 45.13 | 54.00 | -8.87 | AV |
| H | 17335.00 | 52.53 | 30.33 | 6.32 | 24.55 | 53.07 | 74.00 | -20.93 | PK |
| H | 17335.00 | 43.83 | 30.33 | 6.32 | 24.55 | 44.37 | 54.00 | -9.63 | AV |
| H | 23140.00 | 51.11 | 30.85 | 7.45 | 24.69 | 52.40 | 74.00 | -21.60 | PK |
| H | 23140.00 | 41.15 | 30.85 | 7.45 | 24.69 | 42.44 | 54.00 | -11.56 | AV |
| H | 28925.00 | 50.81 | 31.02 | 8.99 | 25.57 | 54.35 | 74.00 | -19.65 | PK |
| H | 28925.00 | 40.32 | 31.02 | 8.99 | 25.57 | 43.86 | 54.00 | -10.14 | AV |

| Polar (H/V) | Frequency | Meter Reading | Pre-amplifier | Cable Loss | Antenna Factor | Emission Level | Limits | Margin | Detector Type |
|----------------------|-----------|---------------|---------------|------------|----------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| Low Channel: 5825MHz | | | | | | | | | |
| V | 11650.00 | 55.20 | 30.55 | 5.77 | 24.66 | 55.08 | 74.00 | -18.92 | PK |
| V | 11650.00 | 45.28 | 30.55 | 5.77 | 24.66 | 45.16 | 54.00 | -8.84 | AV |
| V | 17475.00 | 53.66 | 30.33 | 6.32 | 24.55 | 54.20 | 74.00 | -19.80 | PK |
| V | 17475.00 | 42.75 | 30.33 | 6.32 | 24.55 | 43.29 | 54.00 | -10.71 | AV |
| V | 23300.00 | 52.57 | 30.85 | 7.45 | 24.69 | 53.86 | 74.00 | -20.14 | PK |
| V | 23300.00 | 44.58 | 30.85 | 7.45 | 24.69 | 45.87 | 54.00 | -8.13 | AV |
| V | 29125.00 | 50.50 | 31.02 | 8.99 | 25.57 | 54.04 | 74.00 | -19.96 | PK |
| V | 29125.00 | 40.81 | 31.02 | 8.99 | 25.57 | 44.35 | 54.00 | -9.65 | AV |
| H | 11650.00 | 51.13 | 30.55 | 5.77 | 24.66 | 51.01 | 74.00 | -22.99 | PK |
| H | 11650.00 | 45.80 | 30.55 | 5.77 | 24.66 | 45.68 | 54.00 | -8.32 | AV |
| H | 17475.00 | 53.30 | 30.33 | 6.32 | 24.55 | 53.84 | 74.00 | -20.16 | PK |
| H | 17475.00 | 42.31 | 30.33 | 6.32 | 24.55 | 42.85 | 54.00 | -11.15 | AV |
| H | 23300.00 | 53.76 | 30.85 | 7.45 | 24.69 | 55.05 | 74.00 | -18.95 | PK |
| H | 23300.00 | 43.04 | 30.85 | 7.45 | 24.69 | 44.33 | 54.00 | -9.67 | AV |
| H | 29125.00 | 49.26 | 31.02 | 8.99 | 25.57 | 52.80 | 74.00 | -21.20 | PK |
| H | 29125.00 | 38.77 | 31.02 | 8.99 | 25.57 | 42.31 | 54.00 | -11.69 | AV |

A.7 Band Edge (Restricted-band-edge)

Sub-band(5.2GHz): 5150-5250MHz


| Mode | Frequency (MHz) | Antenna | Max Value (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|--------|-----------------|---------|---------------------|-----------------|---------|
| 11a | 5180 | ANT1 | -46.91 | -27 | Pass |
| 11a | 5240 | ANT1 | -46.45 | -27 | Pass |
| 11a | 5180 | ANT2 | -46.82 | -27 | Pass |
| 11a | 5240 | ANT2 | -46.52 | -27 | Pass |
| 11ac20 | 5180 | ANT1 | -46.57 | -27 | Pass |
| 11ac20 | 5240 | ANT1 | -46.05 | -27 | Pass |
| 11ac20 | 5180 | ANT2 | -45.79 | -27 | Pass |
| 11ac20 | 5240 | ANT2 | -46.98 | -27 | Pass |
| 11n20 | 5180 | ANT1 | -46.74 | -27 | Pass |
| 11n20 | 5240 | ANT1 | -46.3 | -27 | Pass |
| 11n20 | 5180 | ANT2 | -46.55 | -27 | Pass |
| 11n20 | 5240 | ANT2 | -46.67 | -27 | Pass |
| 11n40 | 5190 | ANT1 | -45.56 | -27 | Pass |
| 11n40 | 5230 | ANT1 | -46.02 | -27 | Pass |
| 11n40 | 5190 | ANT2 | -46.92 | -27 | Pass |
| 11n40 | 5230 | ANT2 | -46.32 | -27 | Pass |
| 11ac40 | 5190 | ANT1 | -44.86 | -27 | Pass |
| 11ac40 | 5230 | ANT1 | -46.26 | -27 | Pass |
| 11ac40 | 5190 | ANT2 | -46.52 | -27 | Pass |
| 11ac40 | 5230 | ANT2 | -46.16 | -27 | Pass |

Sub-band(5.8GHz): 5725-5850MHz


| Mode | Frequency (MHz) | Antenna | Max Value (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|--------|-----------------|---------|---------------------|-----------------|---------|
| 11a | 5745 | ANT1 | -45.28 | -27 | Pass |
| 11a | 5825 | ANT1 | -45.92 | -27 | Pass |
| 11a | 5745 | ANT2 | -46.62 | -27 | Pass |
| 11a | 5825 | ANT2 | -45.51 | -27 | Pass |
| 11ac20 | 5745 | ANT1 | -46.16 | -27 | Pass |
| 11ac20 | 5825 | ANT1 | -45.41 | -27 | Pass |
| 11ac20 | 5745 | ANT2 | -45.81 | -27 | Pass |
| 11ac20 | 5825 | ANT2 | -45.81 | -27 | Pass |
| 11n20 | 5745 | ANT1 | -45.96 | -27 | Pass |
| 11n20 | 5825 | ANT1 | -45.39 | -27 | Pass |
| 11n20 | 5745 | ANT2 | -46.61 | -27 | Pass |
| 11n20 | 5825 | ANT2 | -46.53 | -27 | Pass |
| 11n40 | 5755 | ANT1 | -42.06 | -27 | Pass |
| 11n40 | 5795 | ANT1 | -45.81 | -27 | Pass |
| 11n40 | 5755 | ANT2 | -46.41 | -27 | Pass |
| 11n40 | 5795 | ANT2 | -46.3 | -27 | Pass |
| 11ac40 | 5755 | ANT1 | -42.28 | -27 | Pass |
| 11ac40 | 5795 | ANT1 | -46.66 | -27 | Pass |
| 11ac40 | 5755 | ANT2 | -45.59 | -27 | Pass |
| 11ac40 | 5795 | ANT2 | -46.09 | -27 | Pass |

5.2GHz Band Edge


802.11a Left Side, ANT1

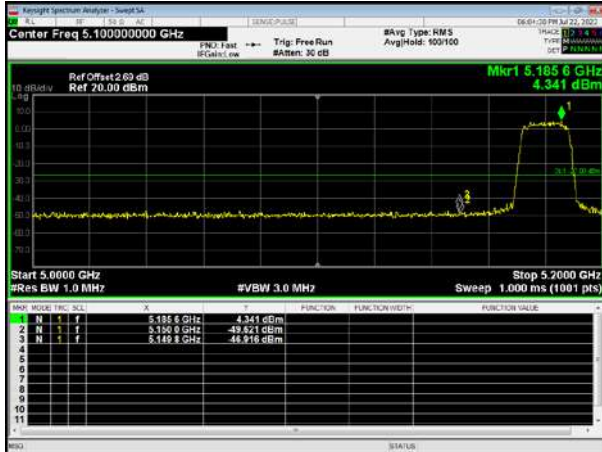


802.11a Right Side, ANT1

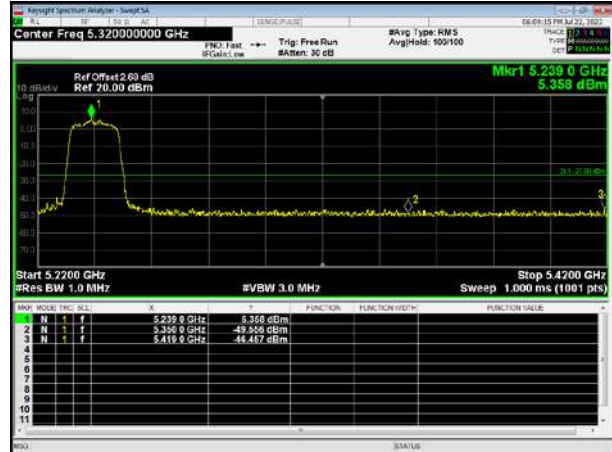


802.11a Left Side, ANT2

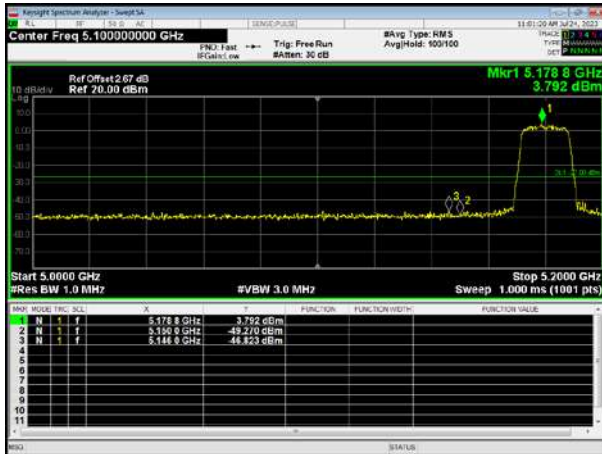


802.11a Right Side, ANT2

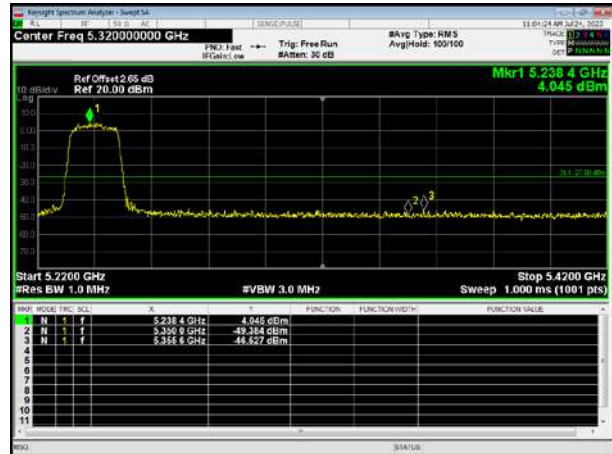


802.11ac20 Left Side, ANT1

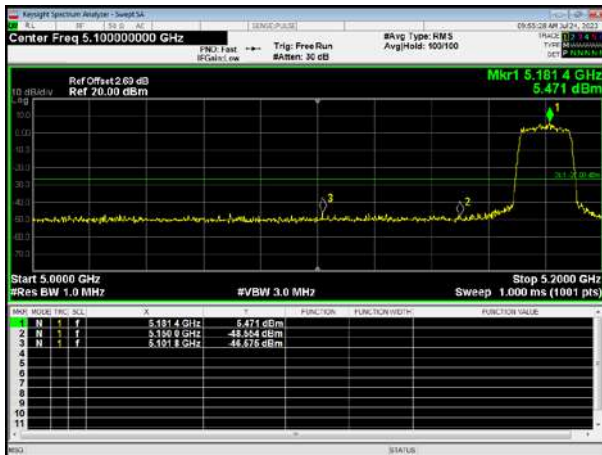


802.11ac20 Right Side, ANT1

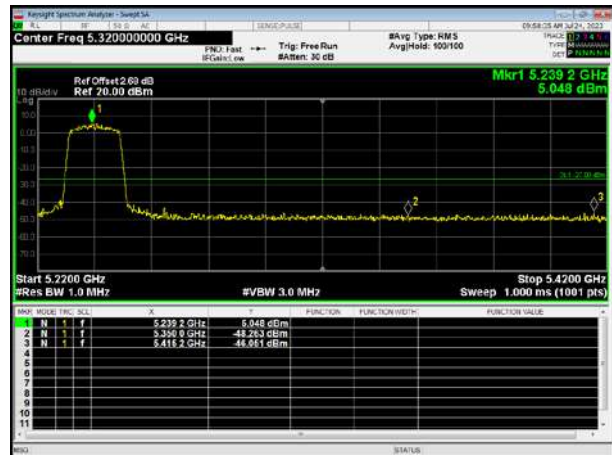


802.11ac20 Left Side, ANT2

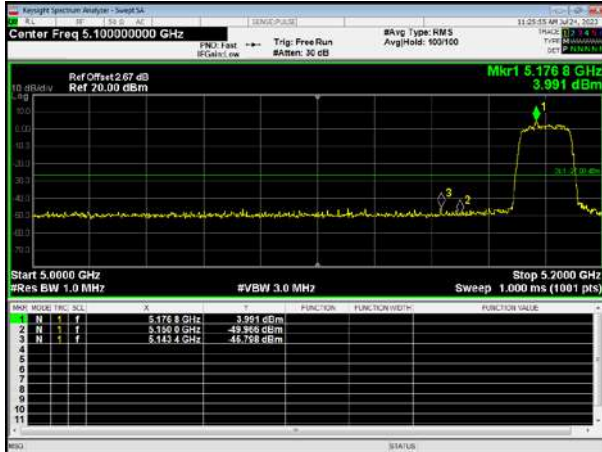


802.11ac20 Right Side, ANT2

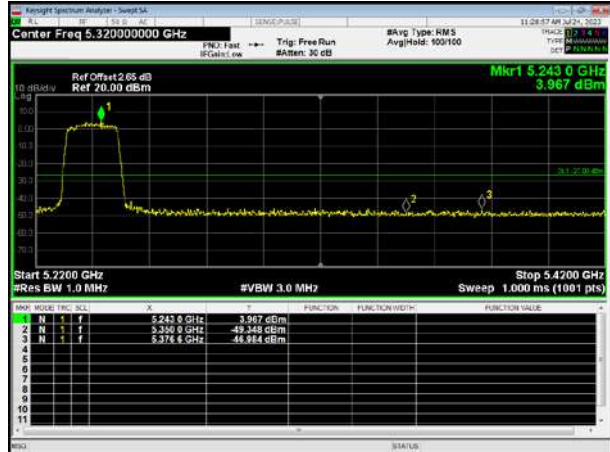


802.11n20 Left Side, ANT1

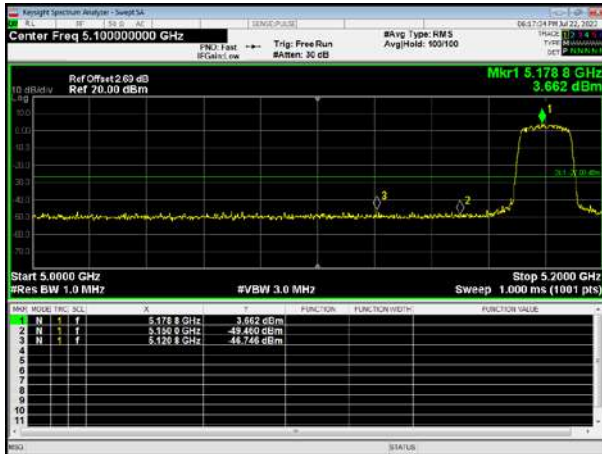


802.11n20 Right Side, ANT1

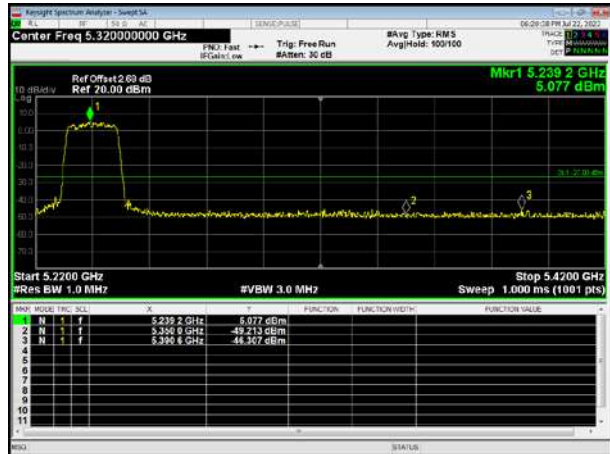


802.11n20 Left Side, ANT2

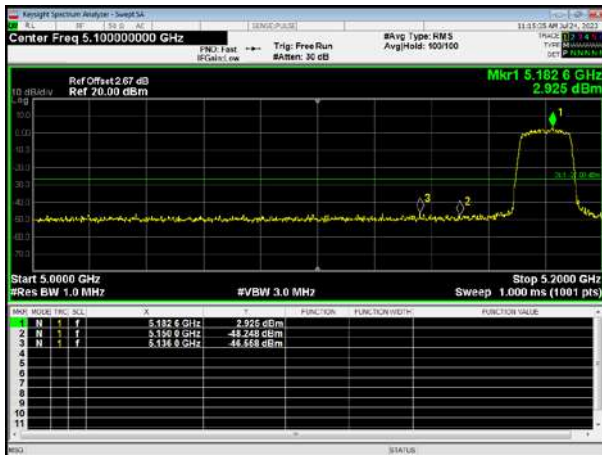


802.11n20 Right Side, ANT2

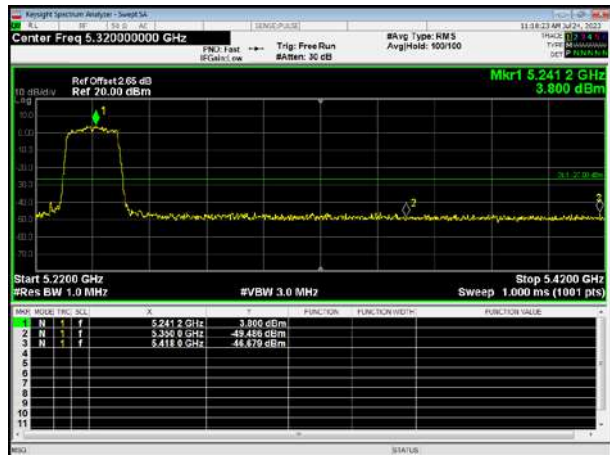


802.11n40 Left Side, ANT1

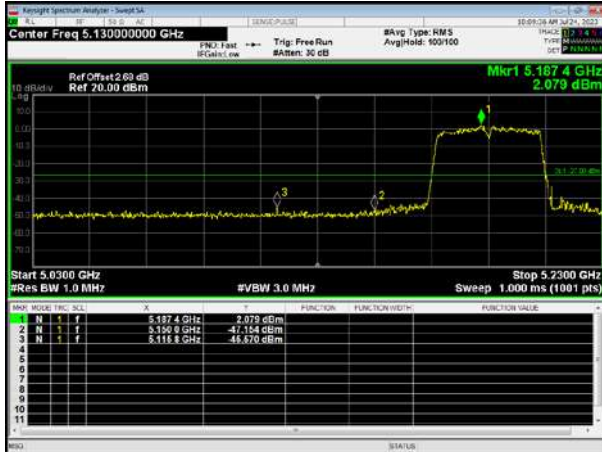


802.11n40 Right Side, ANT1

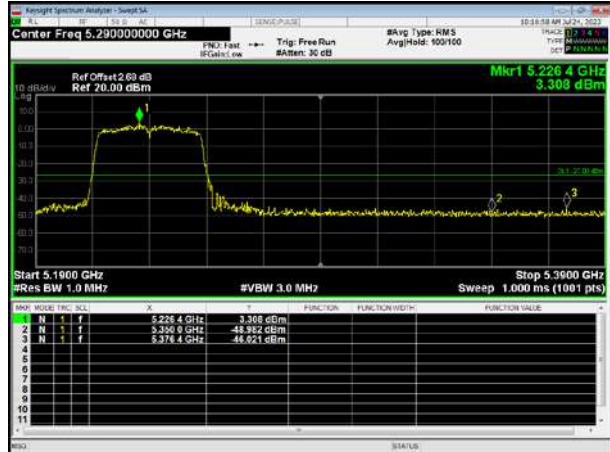


802.11n40 Left Side, ANT2

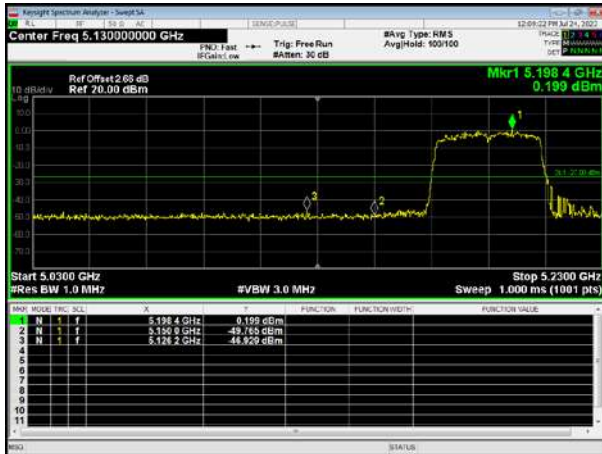


802.11n40 Right Side, ANT2

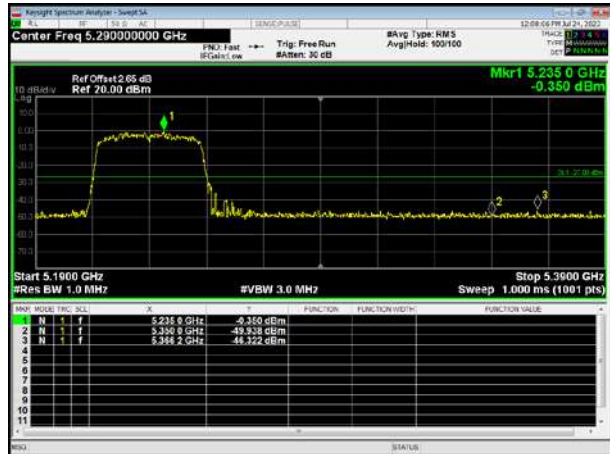


802.11ac40 Left Side, ANT1

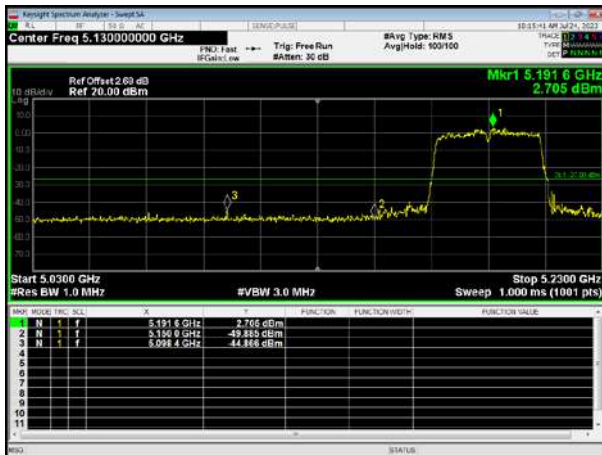


802.11ac40 Right Side, ANT1

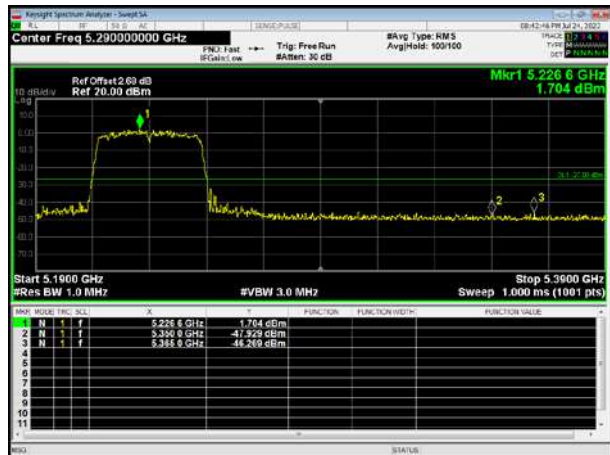

802.11ac40 Left Side, ANT2

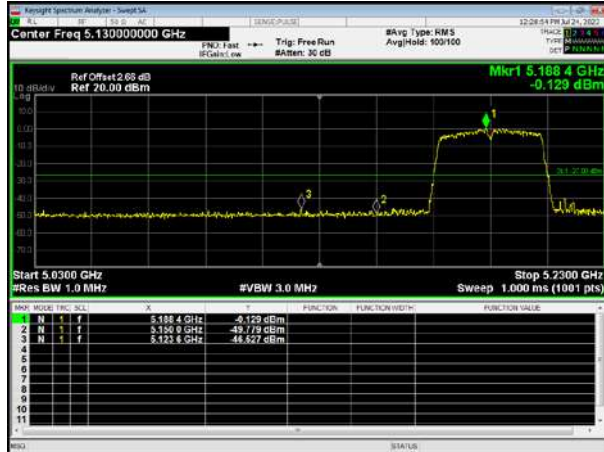


802.11ac40 Right Side, ANT2

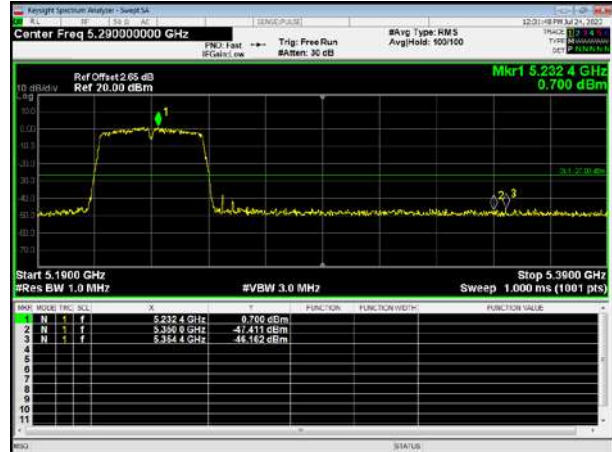


5.8GHz Band Edge


802.11a Left Side, ANT1

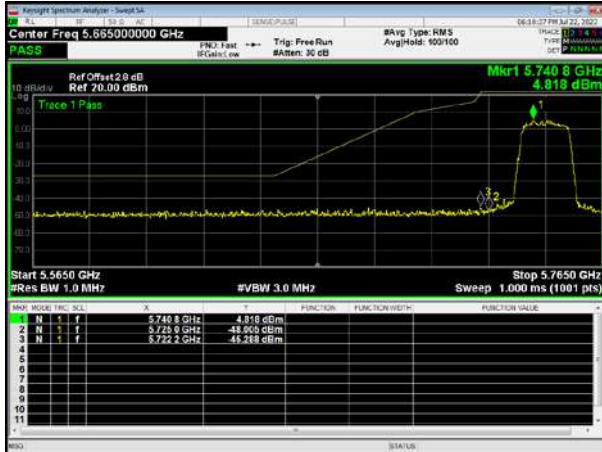


802.11a Right Side, ANT1

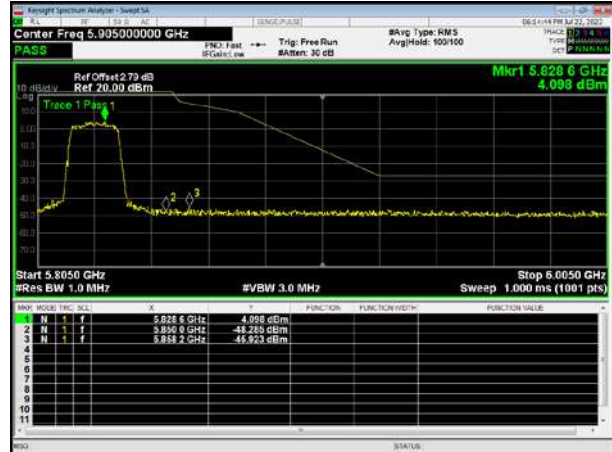


802.11a Left Side, ANT2

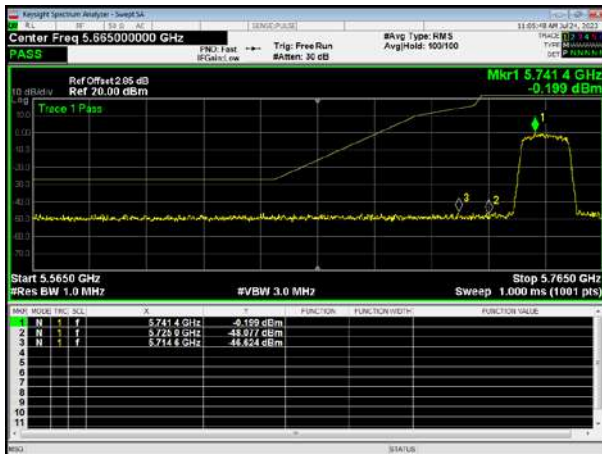


802.11a Right Side, ANT2

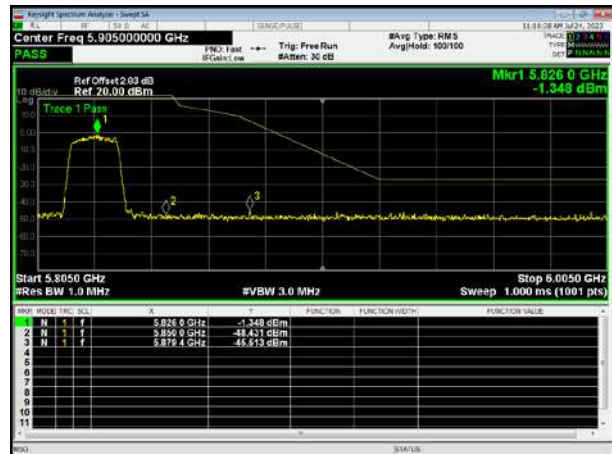


802.11ac20 Left Side, ANT1

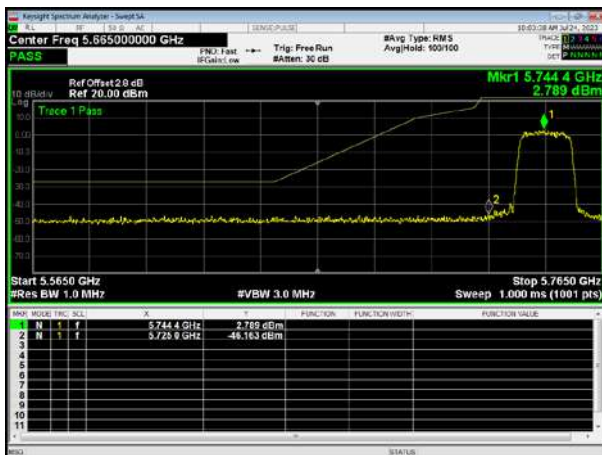


802.11ac20 Right Side, ANT1

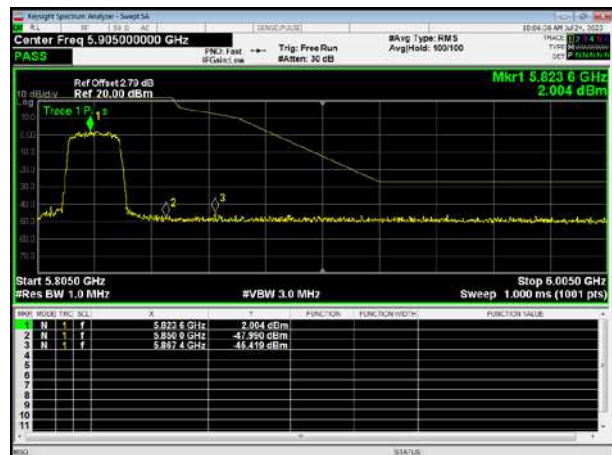


802.11ac20 Left Side, ANT2

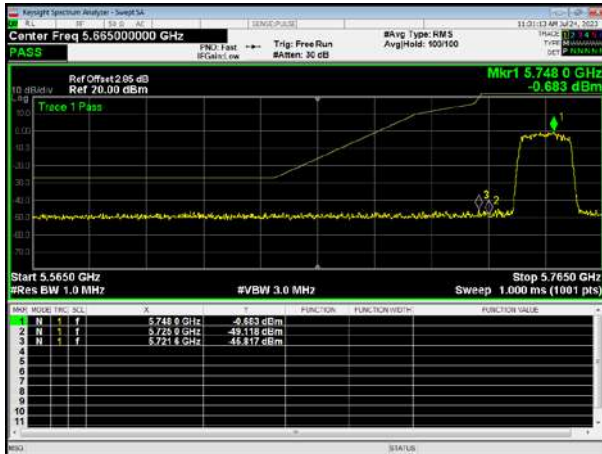


802.11ac20 Right Side, ANT2

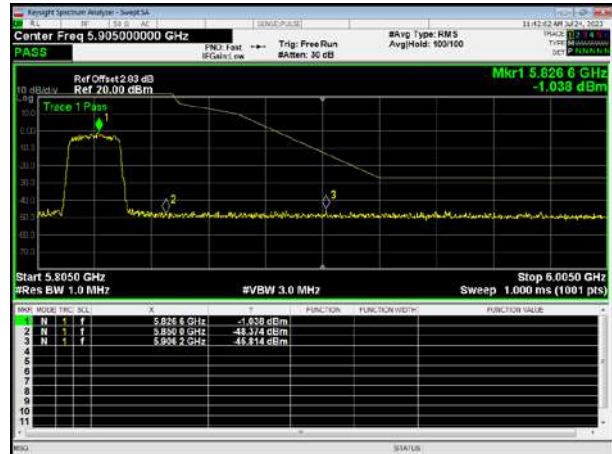


802.11n20 Left Side, ANT1

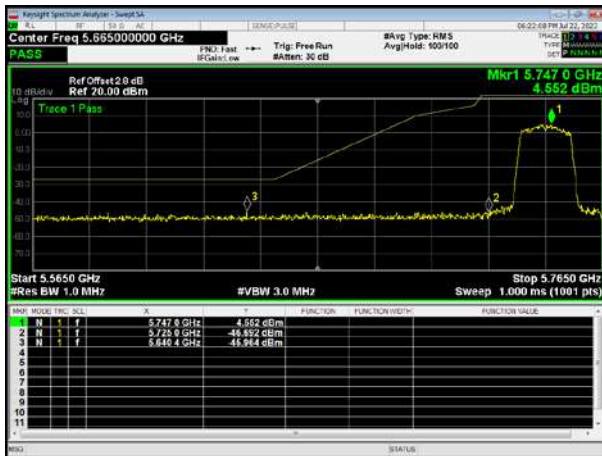


802.11n20 Right Side, ANT1

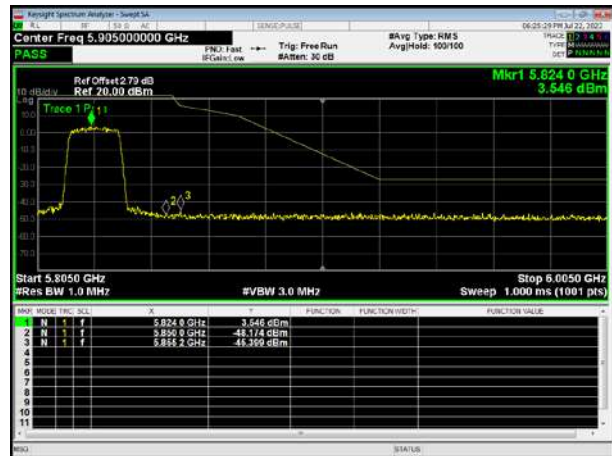


802.11n20 Left Side, ANT2

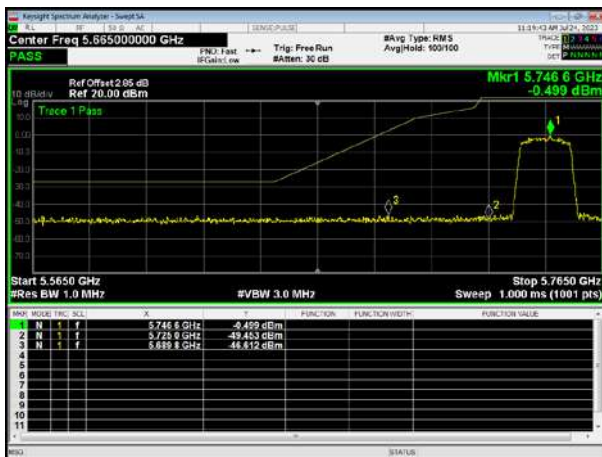


802.11n20 Right Side, ANT2

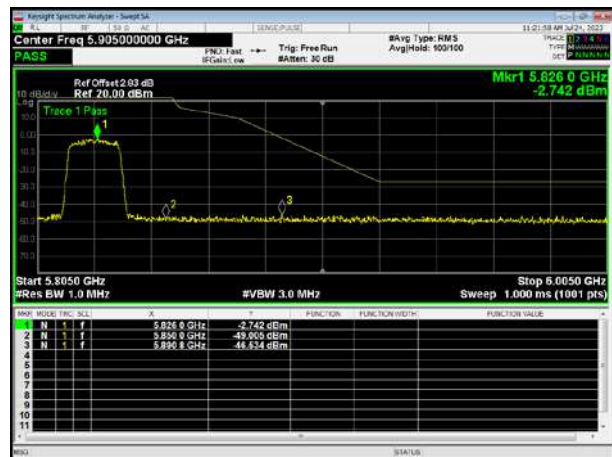


802.11n40 Left Side, ANT1

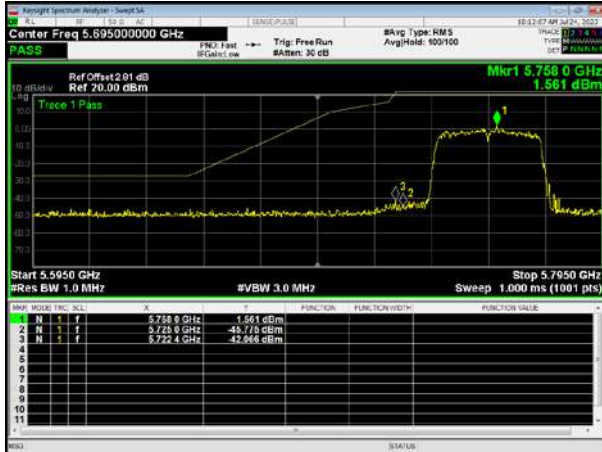


802.11n40 Right Side, ANT1

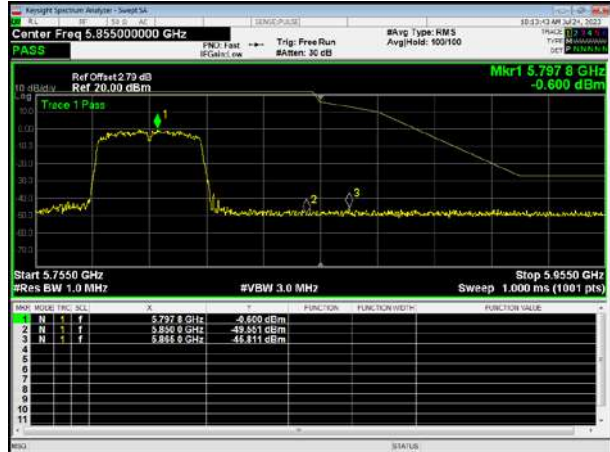


802.11n40 Left Side, ANT2

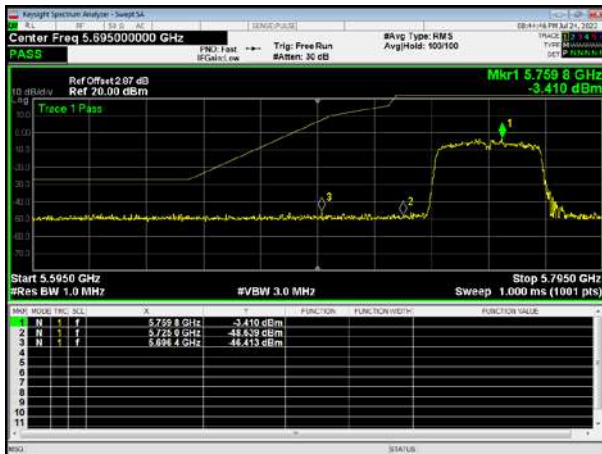

802.11n40 Right Side, ANT2

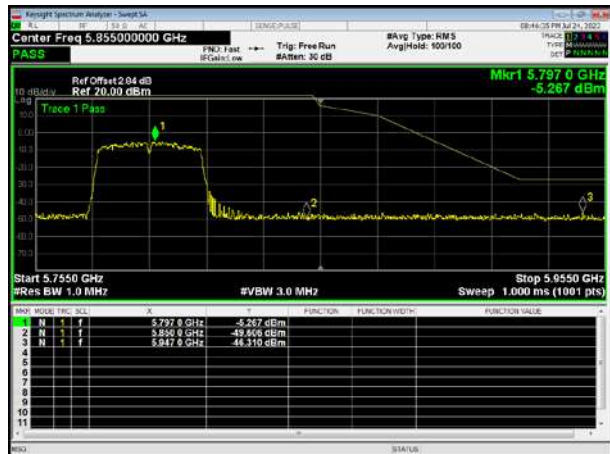


802.11ac40 Left Side, ANT1

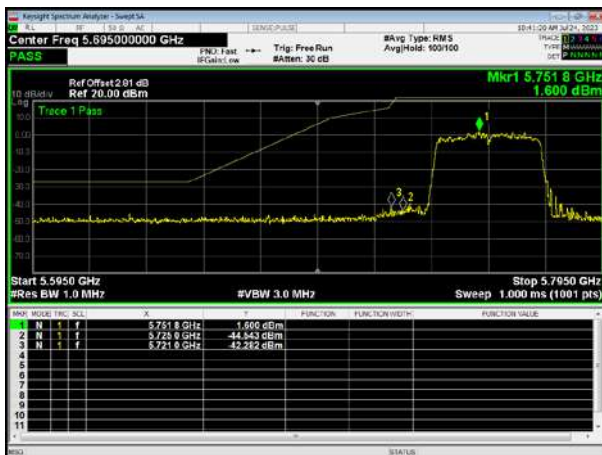


802.11ac40 Right Side, ANT1



802.11ac40 Left Side, ANT2

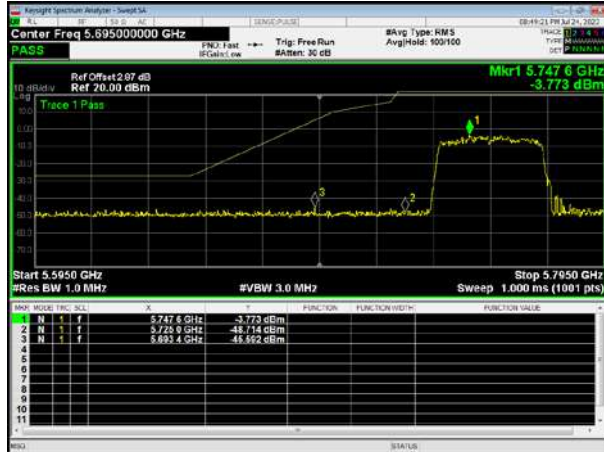

802.11ac40 Right Side, ANT2

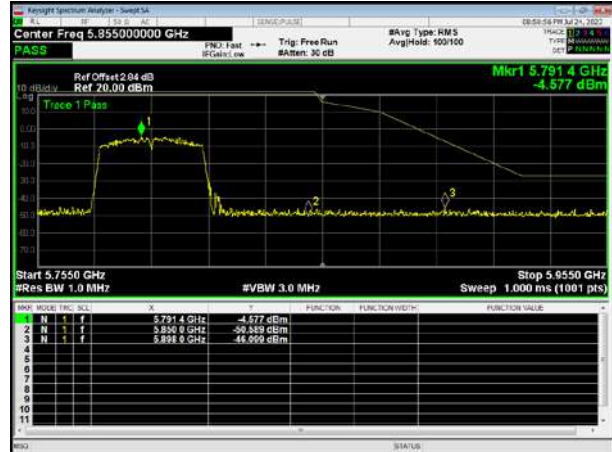

A.8 Frequency Stability

5.2G

802.11a

| Reference Frequency(Middle Channel): 5200 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 65 | 0.01250 |
| 40 | 7.4 | 37 | 0.00712 |
| 30 | 7.4 | 47 | 0.00904 |
| 20 | 7.4 | 47 | 0.00904 |
| 10 | 7.4 | 38 | 0.00731 |
| 0 | 7.4 | 39 | 0.00750 |
| -10 | 7.4 | 38 | 0.00731 |
| -20 | 7.4 | 28 | 0.00538 |
| -30 | 7.4 | 46 | 0.00885 |

802.11ac20

| Reference Frequency(Middle Channel): 5200 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 47 | 0.00904 |
| 40 | 7.4 | 34 | 0.00654 |
| 30 | 7.4 | 38 | 0.00731 |
| 20 | 7.4 | 24 | 0.00462 |
| 10 | 7.4 | 23 | 0.00442 |
| 0 | 7.4 | 38 | 0.00731 |
| -10 | 7.4 | 48 | 0.00923 |
| -20 | 7.4 | 48 | 0.00923 |
| -30 | 7.4 | 38 | 0.00731 |

802.11n_HT20

| Reference Frequency(Middle Channel): 5200MHz | | | |
|--|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 74 | 0.01423 |
| 40 | 7.4 | 37 | 0.00712 |
| 30 | 7.4 | 45 | 0.00865 |
| 20 | 7.4 | 28 | 0.00538 |
| 10 | 7.4 | 89 | 0.01712 |
| 0 | 7.4 | 35 | 0.00673 |
| -10 | 7.4 | 63 | 0.01212 |
| -20 | 7.4 | 37 | 0.00712 |
| -30 | 7.4 | 37 | 0.00712 |

802.11ac40

| Reference Frequency(Middle Channel): 5190MHz | | | |
|--|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 37 | 0.00713 |
| 40 | 7.4 | 46 | 0.00886 |
| 30 | 7.4 | 47 | 0.00906 |
| 20 | 7.4 | 23 | 0.00443 |
| 10 | 7.4 | 23 | 0.00443 |
| 0 | 7.4 | 36 | 0.00694 |
| -10 | 7.4 | 37 | 0.00713 |
| -20 | 7.4 | 28 | 0.00539 |
| -30 | 7.4 | 47 | 0.00906 |

802.11n_HT40

| Reference Frequency(Middle Channel): 5190MHz | | | |
|--|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 37 | 0.00713 |
| 40 | 7.4 | 34 | 0.00655 |
| 30 | 7.4 | 38 | 0.00732 |
| 20 | 7.4 | 47 | 0.00906 |
| 10 | 7.4 | 38 | 0.00732 |
| 0 | 7.4 | 29 | 0.00559 |
| -10 | 7.4 | 48 | 0.00925 |
| -20 | 7.4 | 37 | 0.00713 |
| -30 | 7.4 | 78 | 0.01503 |

802.11ac80

| Reference Frequency(Middle Channel): 5210MHz | | | |
|--|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 38 | 0.00729 |
| 40 | 7.4 | 34 | 0.00653 |
| 30 | 7.4 | 46 | 0.00883 |
| 20 | 7.4 | 73 | 0.01401 |
| 10 | 7.4 | 73 | 0.01401 |
| 0 | 7.4 | 26 | 0.00499 |
| -10 | 7.4 | 36 | 0.00691 |
| -20 | 7.4 | 67 | 0.01286 |
| -30 | 7.4 | 83 | 0.01593 |

So, Frequency Stability Versus Input Voltage is:

802.11a

| Reference Frequency(Middle Channel): 5200 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 37 | 0.00712 |
| | 6.6 | 27 | 0.00519 |
| | 8.4 | 36 | 0.00692 |

802.11ac20

| Reference Frequency(Middle Channel): 5200 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 36 | 0.00692 |
| | 6.6 | 38 | 0.00731 |
| | 8.4 | 38 | 0.00731 |

802.11n_HT20

| Reference Frequency(Middle Channel): 5200 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 48 | 0.00923 |
| | 6.6 | 28 | 0.00538 |
| | 8.4 | 29 | 0.00558 |

802.11ac40

| Reference Frequency(Middle Channel): 5190 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 77 | 0.01484 |
| | 6.6 | 62 | 0.01195 |
| | 8.4 | 58 | 0.01118 |

802.11n_HT40

| Reference Frequency(Middle Channel): 5190 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 28 | 0.00539 |
| | 6.6 | 63 | 0.01214 |
| | 8.4 | 12 | 0.00231 |

802.11ac80

| Reference Frequency(Middle Channel): 5210 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 64 | 0.01228 |
| | 6.6 | 62 | 0.01190 |
| | 8.4 | 82 | 0.01577 |

5.8G

802.11a

| Reference Frequency(Middle Channel): 5785 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 73 | 0.01262 |
| 40 | 7.4 | 63 | 0.01089 |
| 30 | 7.4 | 67 | 0.01158 |
| 20 | 7.4 | 34 | 0.00588 |
| 10 | 7.4 | 78 | 0.01348 |
| 0 | 7.4 | 82 | 0.01417 |
| -10 | 7.4 | 67 | 0.01158 |
| -20 | 7.4 | 63 | 0.01089 |
| -30 | 7.4 | 72 | 0.01245 |

802.11ac20

| Reference Frequency(Middle Channel): 5785 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 63 | 0.01089 |
| 40 | 7.4 | 72 | 0.01245 |
| 30 | 7.4 | 73 | 0.01262 |
| 20 | 7.4 | 26 | 0.00449 |
| 10 | 7.4 | 63 | 0.01089 |
| 0 | 7.4 | 72 | 0.01245 |
| -10 | 7.4 | 29 | 0.00501 |
| -20 | 7.4 | 72 | 0.01245 |
| -30 | 7.4 | 92 | 0.01590 |

802.11n_HT20

| Reference Frequency(Middle Channel): 5785 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 82 | 0.01417 |
| 40 | 7.4 | 62 | 0.01072 |
| 30 | 7.4 | 78 | 0.01348 |
| 20 | 7.4 | 73 | 0.01262 |
| 10 | 7.4 | 23 | 0.00398 |
| 0 | 7.4 | 23 | 0.00398 |
| -10 | 7.4 | 63 | 0.01089 |
| -20 | 7.4 | 37 | 0.00640 |
| -30 | 7.4 | 28 | 0.00484 |

802.11ac40

| Reference Frequency(Middle Channel): 5755 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 63 | 0.01095 |
| 40 | 7.4 | 26 | 0.00452 |
| 30 | 7.4 | 36 | 0.00626 |
| 20 | 7.4 | 47 | 0.00817 |
| 10 | 7.4 | 28 | 0.00487 |
| 0 | 7.4 | 67 | 0.01164 |
| -10 | 7.4 | 83 | 0.01442 |
| -20 | 7.4 | 72 | 0.01251 |
| -30 | 7.4 | 23 | 0.00400 |

802.11n_HT40

| Reference Frequency(Middle Channel): 5755 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 63 | 0.01095 |
| 40 | 7.4 | 72 | 0.01251 |
| 30 | 7.4 | 28 | 0.00487 |
| 20 | 7.4 | 36 | 0.00626 |
| 10 | 7.4 | 19 | 0.00330 |
| 0 | 7.4 | 37 | 0.00643 |
| -10 | 7.4 | 37 | 0.00643 |
| -20 | 7.4 | 47 | 0.00817 |
| -30 | 7.4 | 27 | 0.00469 |

802.11ac80

| Reference Frequency(Middle Channel): 5775 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | MCF | Error (ppm) |
| 50 | 7.4 | 27 | 0.00468 |
| 40 | 7.4 | 38 | 0.00658 |
| 30 | 7.4 | 23 | 0.00398 |
| 20 | 7.4 | 47 | 0.00814 |
| 10 | 7.4 | 23 | 0.00398 |
| 0 | 7.4 | 49 | 0.00848 |
| -10 | 7.4 | 37 | 0.00641 |
| -20 | 7.4 | 45 | 0.00779 |
| -30 | 7.4 | 23 | 0.00398 |

So, Frequency Stability Versus Input Voltage is:

802.11a

| Reference Frequency(Middle Channel): 5785 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 34 | 0.00588 |
| | 6.6 | 23 | 0.00398 |
| | 8.4 | 38 | 0.00657 |

802.11ac20

| Reference Frequency(Middle Channel): 5785 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 74 | 0.01279 |
| | 6.6 | 47 | 0.00812 |
| | 8.4 | 37 | 0.00640 |

802.11n_HT20

| Reference Frequency(Middle Channel): 5785 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 23 | 0.00398 |
| | 6.6 | 12 | 0.00207 |
| | 8.4 | 27 | 0.00467 |

802.11ac40

| Reference Frequency(Middle Channel): 5755 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 83 | 0.01442 |
| | 6.6 | 34 | 0.00591 |
| | 8.4 | 63 | 0.01095 |

802.11n_HT40

| Reference Frequency(Middle Channel): 5755 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 45 | 0.00782 |
| | 6.6 | 34 | 0.00591 |
| | 8.4 | 39 | 0.00678 |


802.11ac80

| Reference Frequency(Middle Channel): 5775 MHz | | | |
|---|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C) | Power Supplied (VDC) | Frequency Measure with Time Elapsed | |
| | | Frequency | Error (ppm) |
| 20 | 7.4 | 64 | 0.01108 |
| | 6.6 | 53 | 0.00918 |
| | 8.4 | 52 | 0.00900 |


A.9 Duty Cycle

5.2GHz


802.11a

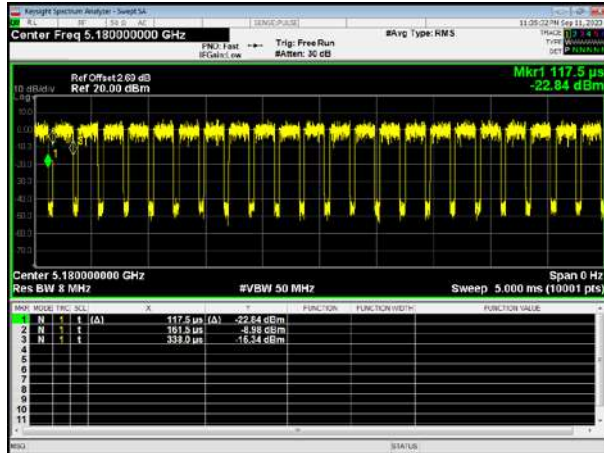

802.11n-HT20

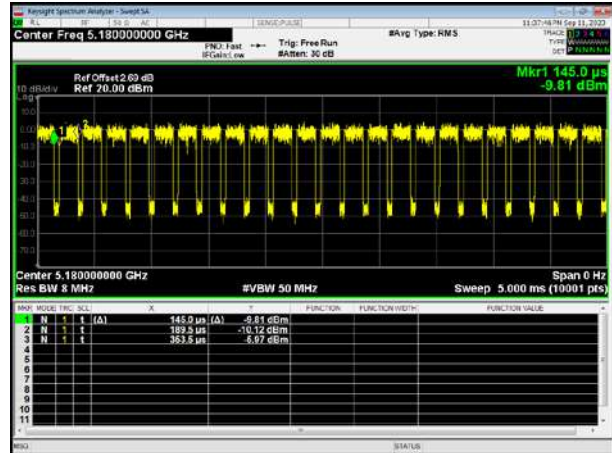


802.11n-HT40

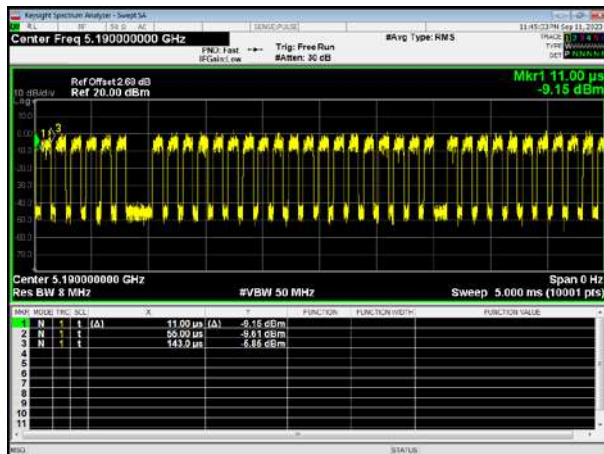


802.11ac20



802.11ac40

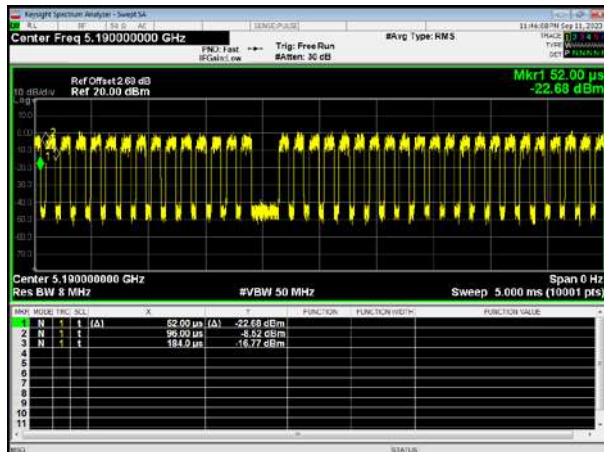


802.11ac80

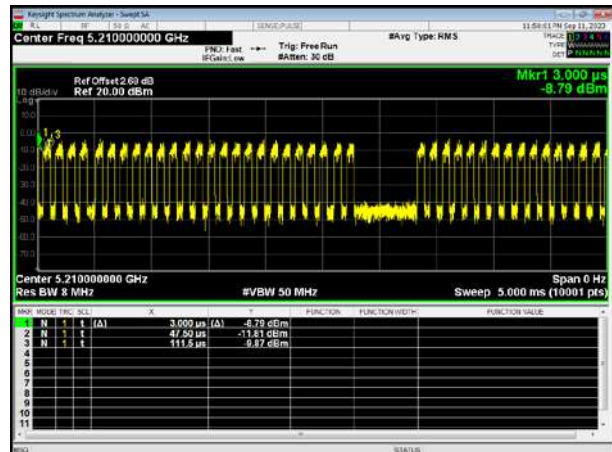


5.8GHz


802.11a

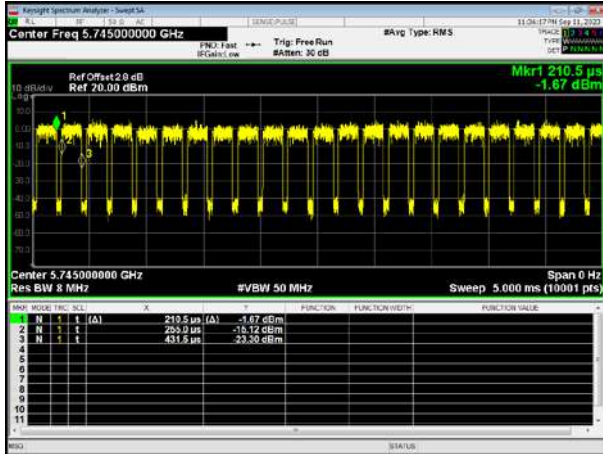


802.11n-HT20

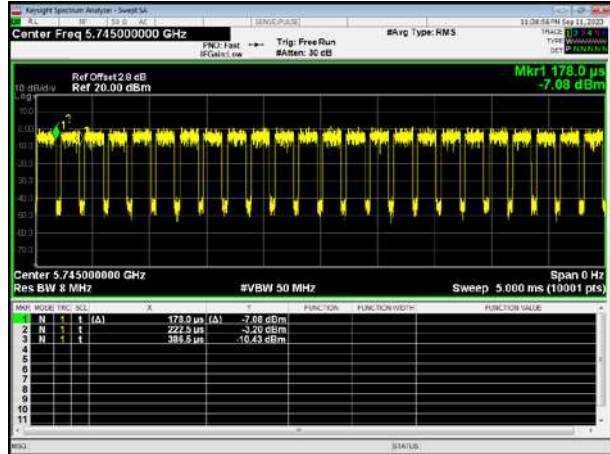


802.11n-HT40

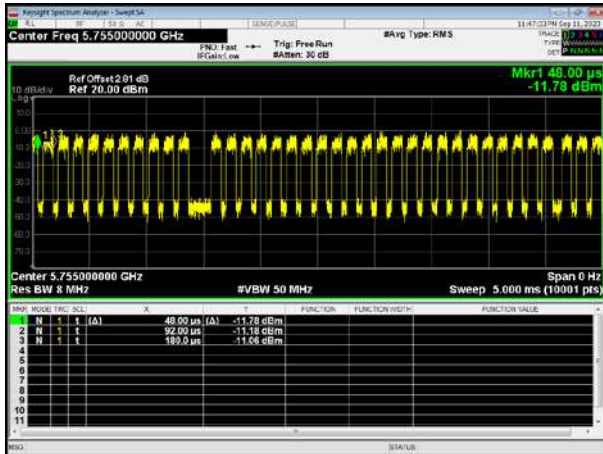


802.11ac20

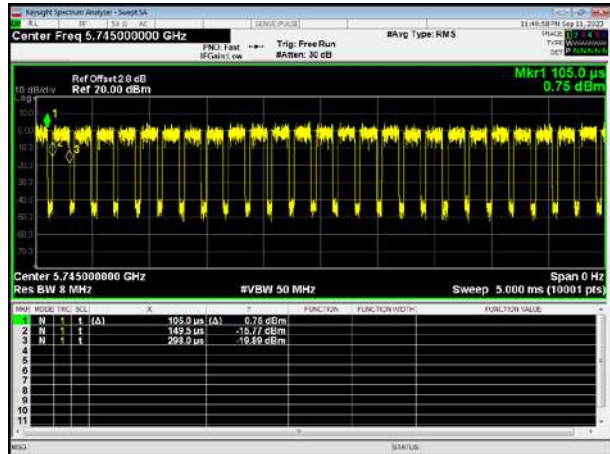

802.11ac40

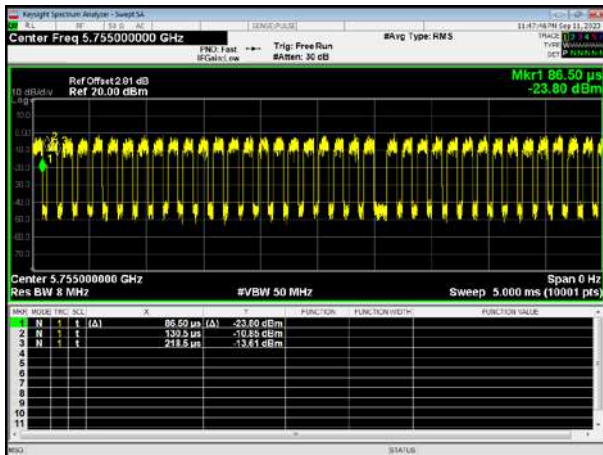

802.11ac80

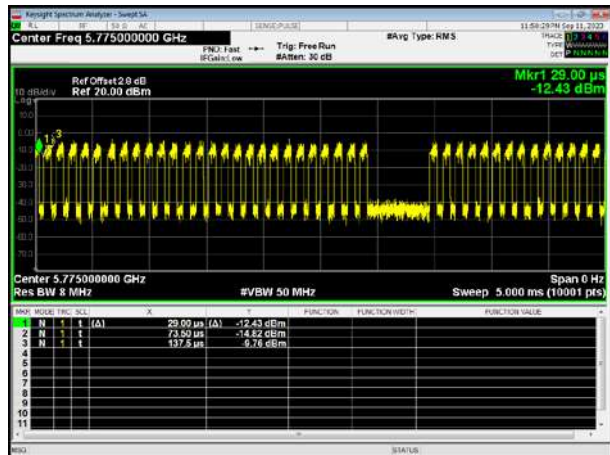



Test Report Number: BTF230801R00103



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--