



RF TEST REPORT

Product Name: 5G Smart phone

Model Name: TANK3, Titan P30000 Ultra 5G

FCC ID: 2BAVY-TANK3

Issued For : Shenzhen OBLUE Communication Technology Co., Ltd.

Room 702, Hepingdayou industrial and trade industrial park, No.
41, Yonghe Road, Heping Community, Fuhai Street, Baoan
District, Shenzhen City, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT23I086RF03

Sample Received Date: Sep. 27, 2023

Date of Test: Sep. 27, 2023 – Nov. 07, 2023

Date of Issue: Nov. 07, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Shenzhen OBLUE Communication Technology Co., Ltd.
Room 702, Hepingdayou industrial and trade industrial park, No.
Address: 41, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen City, China

Manufacturer: Shenzhen OBLUE Communication Technology Co., Ltd.
Room 702, Hepingdayou industrial and trade industrial park, No.
Address: 41, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen City, China

Product Name: 5G Smart phone

Trademark: 8849, Unihertz, iHunt

Model Name: TANK3, Titan P30000 Ultra 5G

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	17
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	28
4.1 LIMIT	28
4.2 TEST PROCEDURE	28
4.3 DEVIATION FROM STANDARD	28
4.4 TEST SETUP	28
4.5 EUT OPERATION CONDITIONS	28
4.6 TEST RESULTS	28
5. POWER SPECTRAL DENSITY TEST	29
5.1 LIMIT	29
5.2 TEST PROCEDURE	29
5.3 DEVIATION FROM STANDARD	29
5.4 TEST SETUP	29
5.5 EUT OPERATION CONDITIONS	29
5.6 TEST RESULTS	29
6. BANDWIDTH TEST	30
6.1 LIMIT	30
6.2 TEST PROCEDURE	30
6.3 DEVIATION FROM STANDARD	30
6.4 TEST SETUP	30
6.5 EUT OPERATION CONDITIONS	30
6.6 TEST RESULTS	30



Table of Contents	Page
7. PEAK OUTPUT POWER TEST	31
7.1 LIMIT	31
7.2 TEST PROCEDURE	31
7.3 DEVIATION FROM STANDARD	31
7.4 TEST SETUP	31
7.5 EUT OPERATION CONDITIONS	31
7.6 TEST RESULTS	31
8. ANTENNA REQUIREMENT	32
8.1 STANDARD REQUIREMENT	32
8.2 EUT ANTENNA	32
APPENDIX I:TEST RESULTS	33
DUTY CYCLE	33
MAXIMUM PEAK CONDUCTED OUTPUT POWER	50
-6DB BANDWIDTH	52
OCCUPIED CHANNEL BANDWIDTH	65
MAXIMUM POWER SPECTRAL DENSITY LEVEL	78
BAND EDGE	100
CONDUCTED RF SPURIOUS EMISSION	117



Revision History

Rev.	Issue Date	Contents
00	Nov. 07, 2023	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF Output Power, Conducted	$\pm 0.71\text{dB}$
2	Power Spectral Density, Conducted	$\pm 1.57\text{ dB}$
3	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
4	Conducted emission	$\pm 2.80\text{dB}$
5	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
6	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.40\text{dB}$
7	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	5G Smart phone	
Trademark:	8849,Unihertz, iHunt	
Model Name:	TANK3	
Series Model:	Titan P30000 Ultra 5G	
Model Difference:	Different make and model.	
Product Description:	Operation Frequency:	802.11b/g/n/ax(20MHz): 2412~2462MHz 802.11n/ax(40MHz):2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM): BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM
	Number of Channel:	802.11b/g/n/ax: 11CH 802.11n/ax: 7CH
	Antenna Designation:	FPC
	Antenna Gain(dBi):	Ant 1: -1.2dBi Ant 2: -0.6dBi MIMO: 2.41dBi
	Channel List:	Please refer to the Note 3.
Adapter:	Model: HJ-PD120W-US Input: 100-240V, 50/60Hz, 1.8A Output: 5V, 3A, OR 9V, 3A, OR 12V, 3A, OR 15V, 3A, OR 20V, 5A PPS:3.6V-20V,6A 120W MAX	
Battery:	Capacity: 23000mAh, 89Wh Rated Voltage: 3.87V	
Hardware Version:	G91_V2.0	
Software Version:	TANK3_20231008	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Operation Frequency of channel			
802.11b/g/n/ax(20MHz)		Channel List for 802.11n/ax(40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n/ax (HT20)		For 802.11n/ax (HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n/ax HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n/ax HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n/ax HT20 CH11	MCS 0
Mode 10	TX IEEE 802.11n/ax HT40 CH3	MCS 0
Mode 11	TX IEEE 802.11/axn HT40 CH6	MCS 0
Mode 12	TX IEEE 802.11n/ax HT40 CH9	MCS 0

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 13: Keeping TX + WLAN Link

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 2.4G WIFI	
Engineering Mode	Mode Or Modulation type	Power setting
	b	15
	g	15
	n20	15
	n40	15
	ax20	15
	ax40	15



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Adapter	Shenzhen Huajin Electronics Co., Ltd	HJ-PD120W-US	N/A	Input: 100-240V ~ 50/60Hz 1.8A Output: 5V, 3A, OR 9V,3A, OR 12V,3A, OR 15V,3A, OR 20V,5A, PPS:3.6V,6A 120W MAX
USB-C to USB-C Cable	N/A	N/A	N/A	1m, shielded, without ferrite core

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
LISN	COM-POWER	LI-115	02032	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8122	00160	2023.04.07	2024.04.06
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2023.04.07	2024.04.06
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
Active loop Antenna	ETS	6502	00049544	2022.06.02	2025.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Bilog Antenna(30M-1G)	SCHWARZBECK	VULB 9168	2705	2022.06.05	2025.06.04
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Horn Antenna(18-40G)	A-INFO	LB-180400-KF	J211060273	2022.06.08	2025.06.07
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2023.04.07	2024.04.06
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2023.04.07	2024.04.06
Pre-amplifier(18-40G)	com-mw	LNPA_18-40-01	18050003	2023.04.07	2024.04.06
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Band-stop filter(2.4-2.5GHz)	Micro-Tronics	BRM50702	169	2023.04.29	2024.04.27
Testing Software	EMC-I_V1.4.0.3_SKET				

Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2023.04.07	2024.04.06
Power Sensor	MW	MW100-RFCB	MW220324LG-33	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2023.05.10	2024.05.09
Attenuator	eastsheep	90db	N.A	2023.04.10	2024.04.09
Testing Software	MTS8200_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

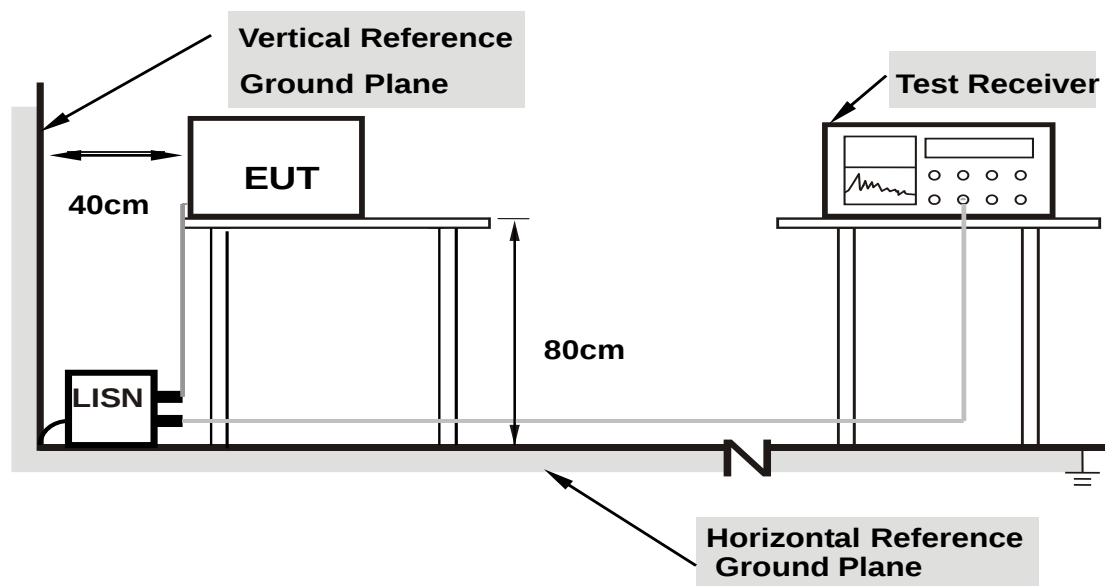

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT


Project: LGT23I086	Test Engineer: LiuH
EUT: 5G Smart phone	Temperature: 26.5°C
M/N: TANK3	Humidity: 54%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-02
Test Mode: TX 802.11b 2412	
Note:	

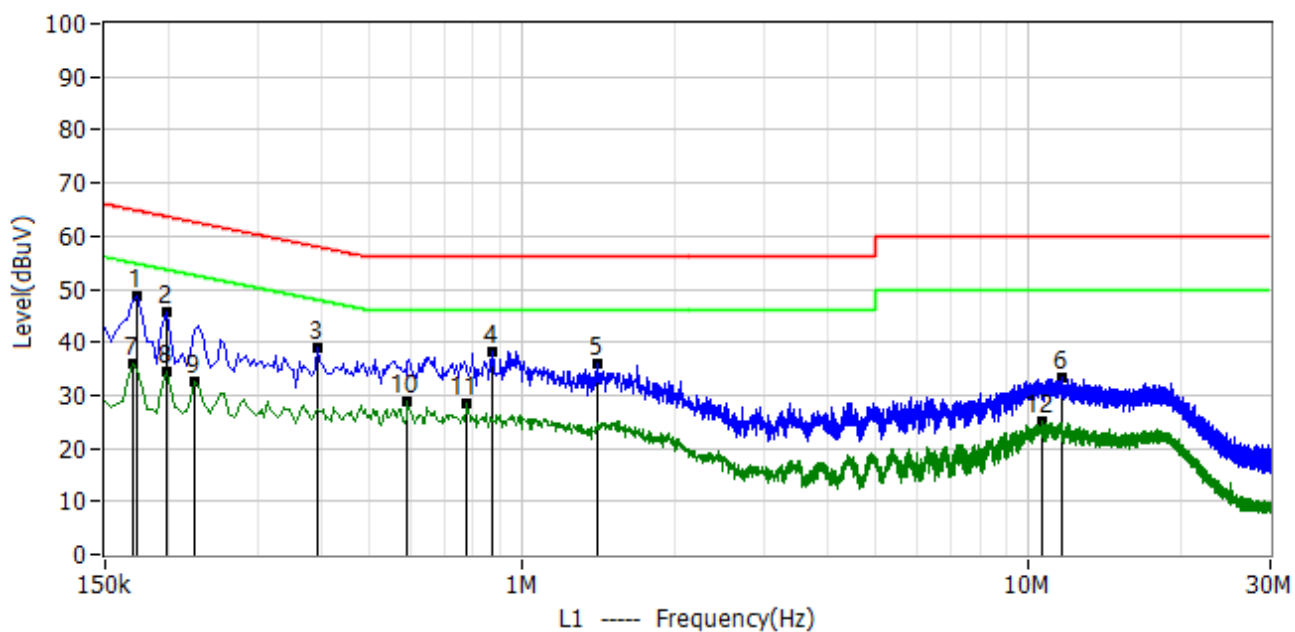

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.174	38.29	10.58	48.87	64.77	-15.89	QP	L1
2*	0.198	35.28	10.60	45.88	63.69	-17.82	QP	L1
3*	0.394	28.25	10.58	38.83	57.98	-19.14	QP	L1
4*	0.874	27.75	10.58	38.33	56.00	-17.67	QP	L1
5*	1.410	25.30	10.66	35.96	56.00	-20.04	QP	L1
6*	11.642	22.54	10.91	33.45	60.00	-26.55	QP	L1
7*	0.170	25.28	10.58	35.86	54.96	-19.10	AV	L1
8*	0.198	24.02	10.60	34.62	53.69	-19.07	AV	L1
9*	0.226	21.91	10.60	32.51	52.60	-20.08	AV	L1
10*	0.594	18.21	10.58	28.79	46.00	-17.21	AV	L1
11*	0.778	17.73	10.58	28.31	46.00	-17.69	AV	L1
12*	10.594	14.23	10.87	25.10	50.00	-24.90	AV	L1



Project: LGT23I086	Test Engineer: LiuH
EUT: 5G Smart phone	Temperature: 26.5°C
M/N: TANK3	Humidity: 54%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-11-02
Test Mode: TX 802.11b 2412	
Note:	

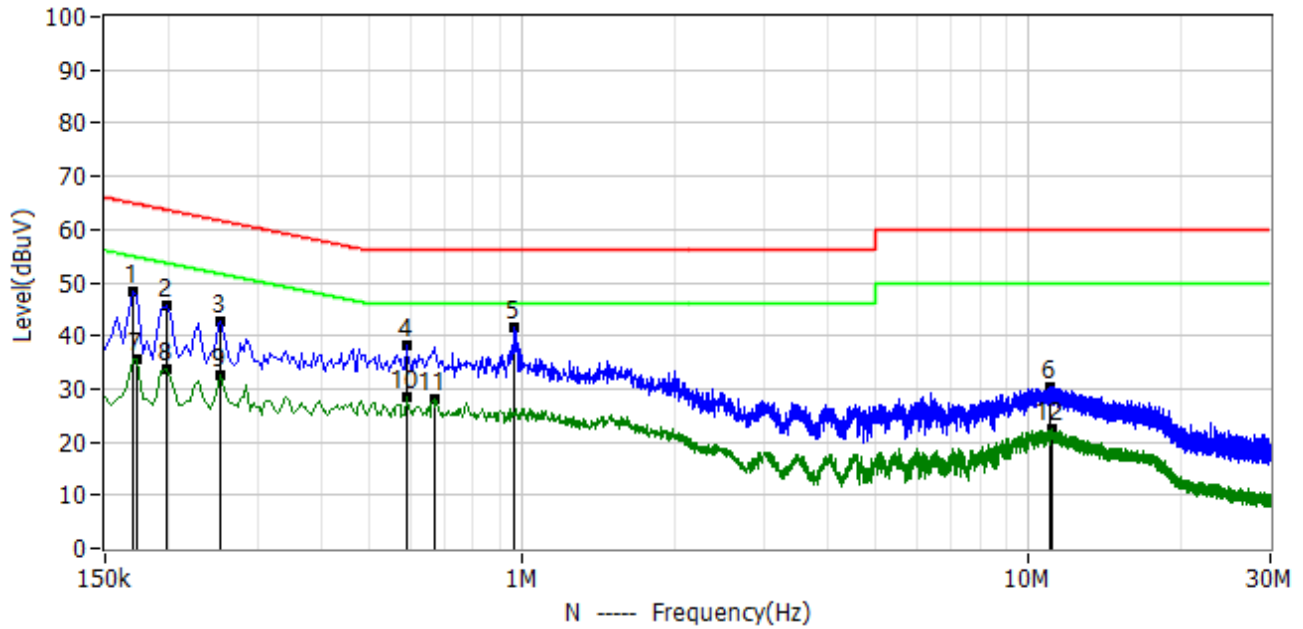

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.170	37.68	10.58	48.26	64.96	-16.70	QP	N
2*	0.198	35.01	10.60	45.61	63.69	-18.09	QP	N
3*	0.254	31.98	10.59	42.57	61.63	-19.06	QP	N
4*	0.590	27.50	10.58	38.08	56.00	-17.92	QP	N
5*	0.966	31.03	10.59	41.62	56.00	-14.38	QP	N
6*	11.062	19.58	10.91	30.49	60.00	-29.51	QP	N
7*	0.174	25.18	10.58	35.76	54.77	-19.00	AV	N
8*	0.198	23.10	10.60	33.70	53.69	-19.99	AV	N
9*	0.254	21.93	10.59	32.52	51.63	-19.11	AV	N
10*	0.590	17.79	10.58	28.37	46.00	-17.63	AV	N
11*	0.670	17.34	10.58	27.92	46.00	-18.08	AV	N
12*	11.102	11.40	10.91	22.31	50.00	-27.69	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

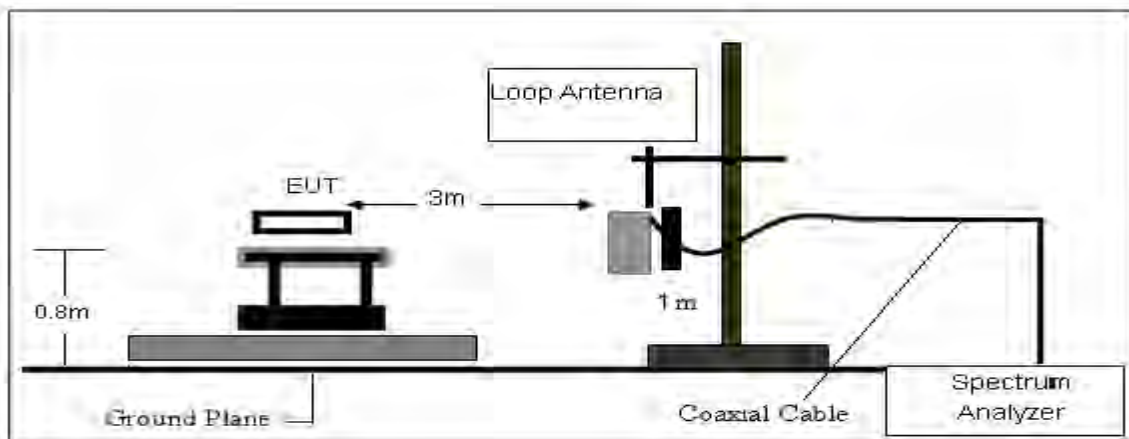

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

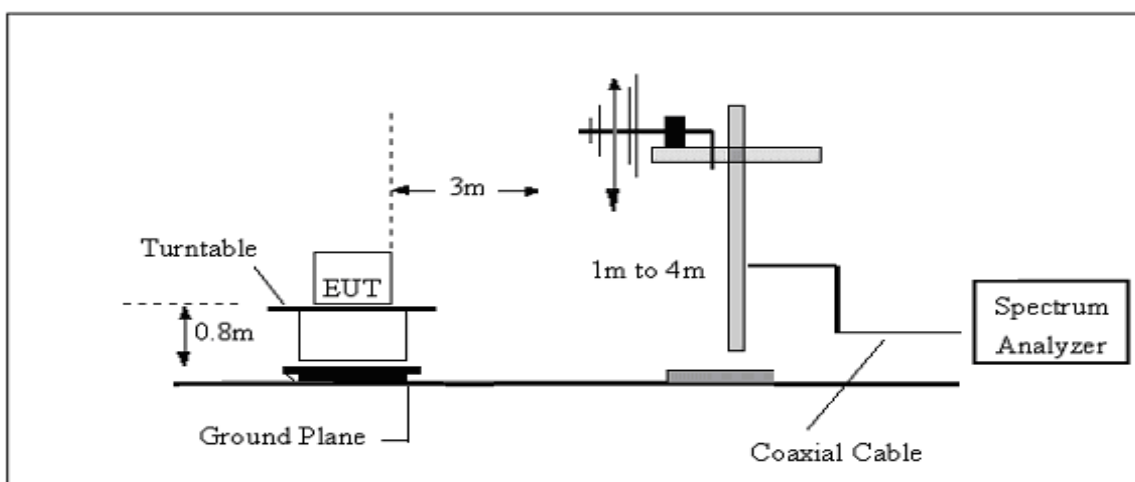

(C) Radiated Emission Test-Up Frequency Above 1GHz

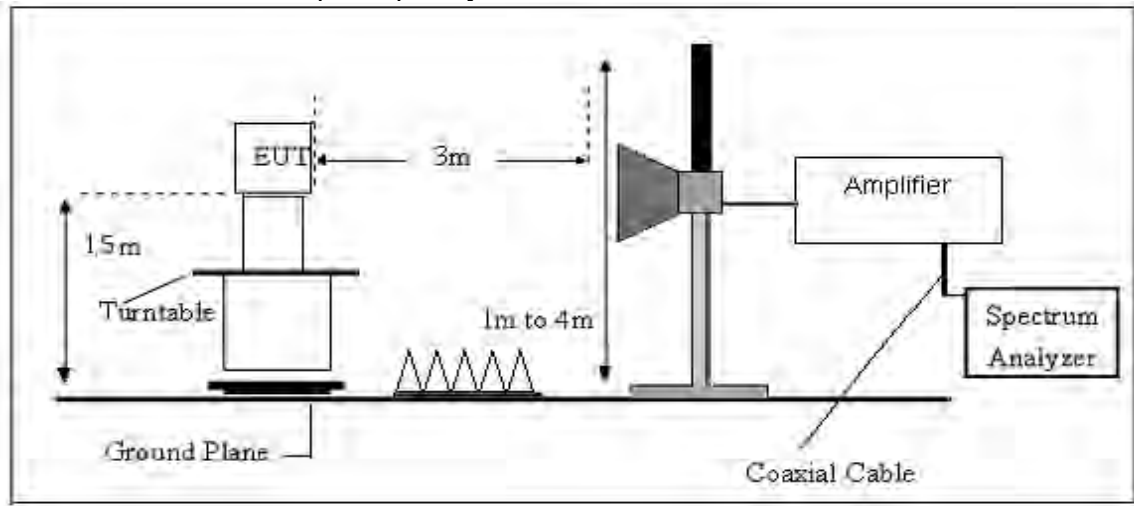

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dBμV/m)	RA (dBμV/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$



3.2.6 TEST RESULT

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Project: LGT23I086	Test Engineer: Xiangdong Ma
EUT: Smart phone	Temperature: 28°C
M/N: TANK3	Humidity: 57%RH
Test Voltage: Battery	Test Data: 2023-10-08
Test Mode: TX 802.11ax20 2412	
Note:	

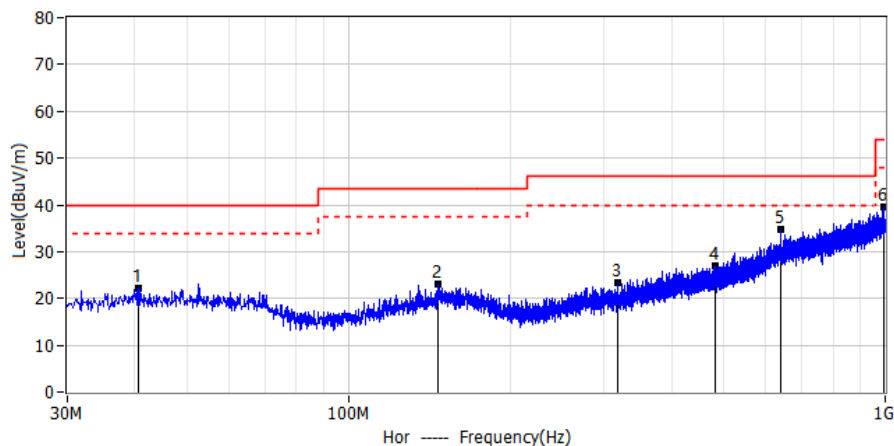

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	40.670	2.91	19.36	22.27	40.00	-17.73	QP	Hor
2*	147.128	3.48	19.72	23.20	43.50	-20.30	QP	Hor
3*	316.878	2.98	20.45	23.43	46.00	-22.57	QP	Hor
4*	482.869	2.25	24.59	26.84	46.00	-19.16	QP	Hor
5*	639.403	5.86	28.97	34.83	46.00	-11.17	QP	Hor
6*	995.878	4.87	34.55	39.42	54.00	-14.58	QP	Hor

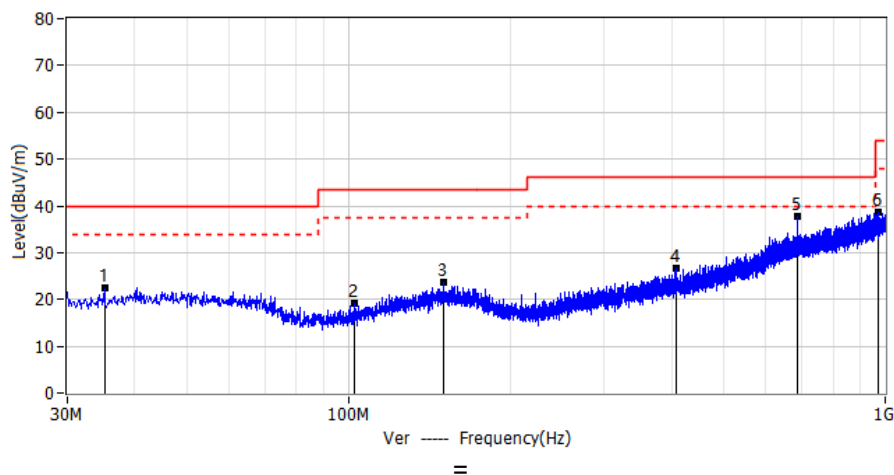


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	35.214	3.82	18.58	22.40	40.00	-17.60	QP	Ver
2*	102.993	3.35	15.97	19.32	43.50	-24.18	QP	Ver
3*	150.523	3.60	19.98	23.58	43.50	-19.92	QP	Ver
4*	407.694	3.56	22.96	26.52	46.00	-19.48	QP	Ver
5*	687.539	8.18	29.69	37.87	46.00	-8.13	QP	Ver
6*	972.113	4.20	34.39	38.59	54.00	-15.41	QP	Ver




Results of Radiated Emissions (Above 1000MHz)

Project: LGT23I086	Test Engineer: Xiangdong Ma
EUT: Smart phone	Temperature: 28.2°C
M/N: TANK3	Humidity: 61%RH
Test Voltage: Battery	Test Data: 2023-10-29
Test Mode: 802.11ax20 2412	
Note: Worst case	

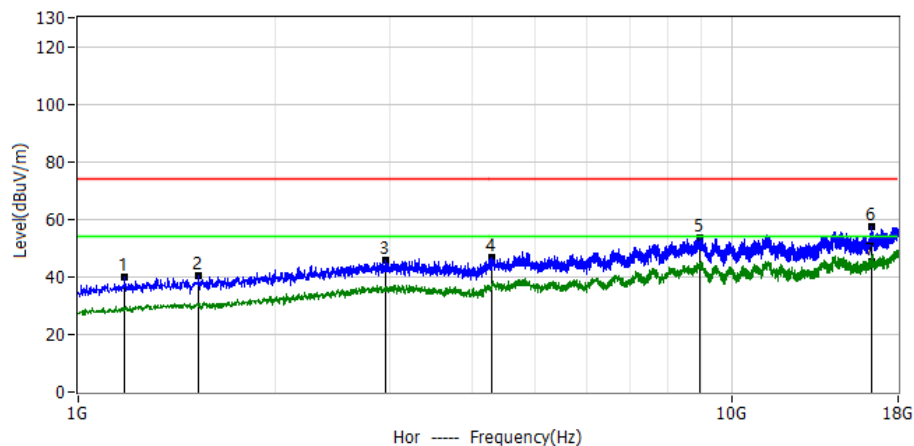


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1178.5000	63.07	-23.16	39.91	74.00	-34.09	PK	Hor
2*	1527.0000	60.91	-20.66	40.25	74.00	-33.75	PK	Hor
3*	2952.9000	54.39	-8.59	45.80	74.00	-28.20	PK	Hor
4*	4295.9000	53.50	-6.62	46.88	74.00	-27.12	PK	Hor
5*	8953.9000	54.71	-1.30	53.41	74.00	-20.59	PK	Hor
6*	16368.0000	50.47	6.83	57.30	74.00	-16.70	PK	Hor
7*	16368.0000	38.57	6.83	45.40	54.00	-8.60	AV	Hor

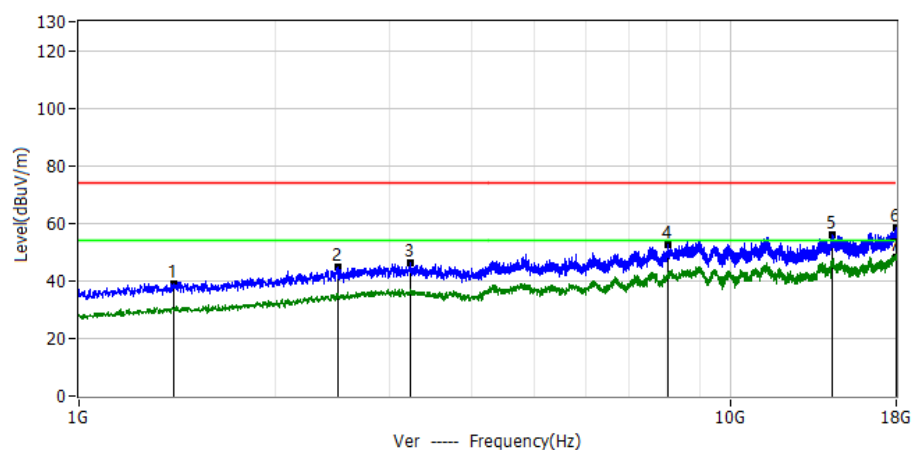


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1395.2000	60.53	-21.42	39.11	74.00	-34.89	PK	Ver
2*	2493.9000	56.03	-11.05	44.98	74.00	-29.02	PK	Ver
3*	3222.7000	54.60	-8.41	46.19	74.00	-27.81	PK	Ver
4*	8010.4000	56.33	-3.97	52.36	74.00	-21.64	PK	Ver
5*	14359.9000	50.03	5.90	55.93	74.00	-18.07	PK	Ver
6*	17963.9000	50.11	8.49	58.60	74.00	-15.40	PK	Ver
7*	17963.9000	39.51	8.49	48.00	54.00	-6.00	AV	Ver



Project: LGT23I086	Test Engineer: Xiangdong Ma
EUT: Smart phone	Temperature: 28.2°C
M/N: TANK3	Humidity: 61%RH
Test Voltage: Battery	Test Data: 2023-10-29
Test Mode: 802.11ax20 2437	
Note: Worst case	

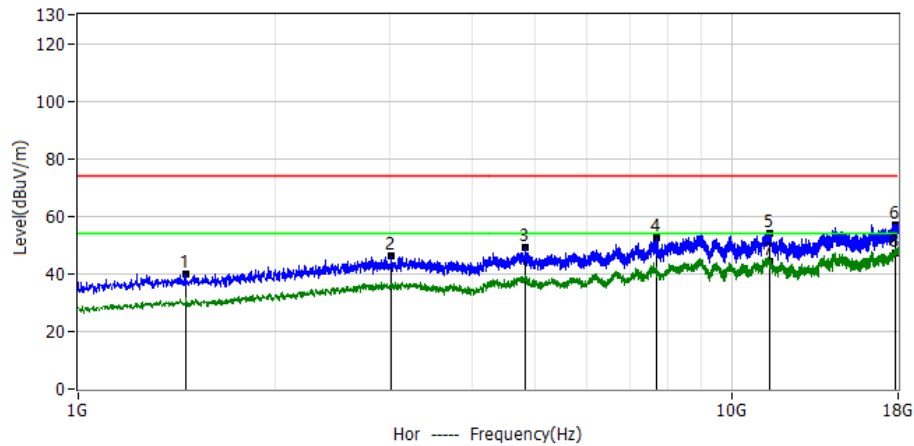


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1459.0000	61.18	-21.06	40.12	74.00	-33.88	PK	Hor
2*	3014.5000	54.36	-8.34	46.02	74.00	-27.98	PK	Hor
3*	4827.1000	55.06	-6.01	49.05	74.00	-24.95	PK	Hor
4*	7672.5000	56.58	-4.19	52.39	74.00	-21.61	PK	Hor
5*	11431.6000	52.20	1.88	54.08	74.00	-19.92	PK	Hor
6*	17804.5000	48.73	8.38	57.11	74.00	-16.89	PK	Hor
7*	11431.6000	42.62	1.88	44.50	54.00	-9.50	AV	Hor
8*	17804.5000	38.82	8.38	47.20	54.00	-6.80	AV	Hor

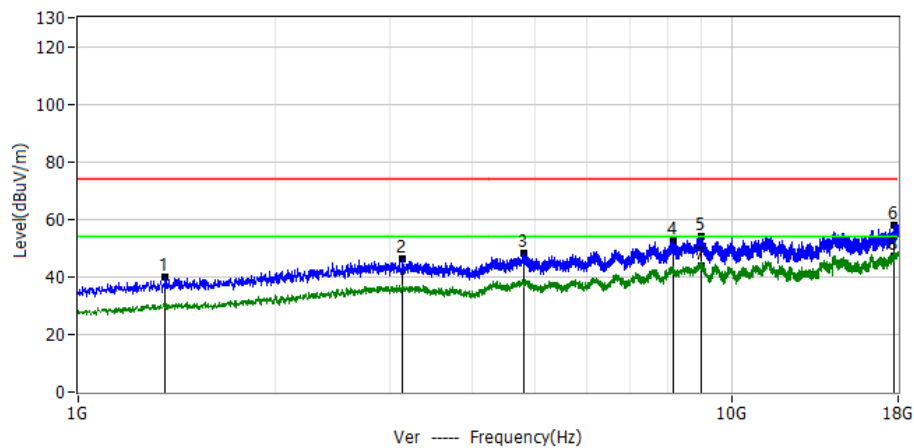


No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1357.0000	61.64	-21.72	39.92	74.00	-34.08	PK	Ver
2*	3135.6000	54.85	-8.38	46.47	74.00	-27.53	PK	Ver
3*	4799.5000	54.18	-5.99	48.19	74.00	-25.81	PK	Ver
4*	8135.7000	56.21	-3.62	52.59	74.00	-21.41	PK	Ver
5*	9009.1000	55.22	-1.17	54.05	74.00	-19.95	PK	Ver
6*	17717.4000	49.73	8.32	58.05	74.00	-15.95	PK	Ver
7*	9009.1000	45.07	-1.17	43.90	54.00	-10.10	AV	Ver
8*	17717.4000	38.78	8.32	47.10	54.00	-6.90	AV	Ver



Project: LGT23I086	Test Engineer: Xiangdong Ma
EUT: Smart phone	Temperature: 28.2°C
M/N: TANK3	Humidity: 61%RH
Test Voltage: Battery	Test Data: 2023-10-29
Test Mode: 802.11ax20 2462	
Note: Worst case	

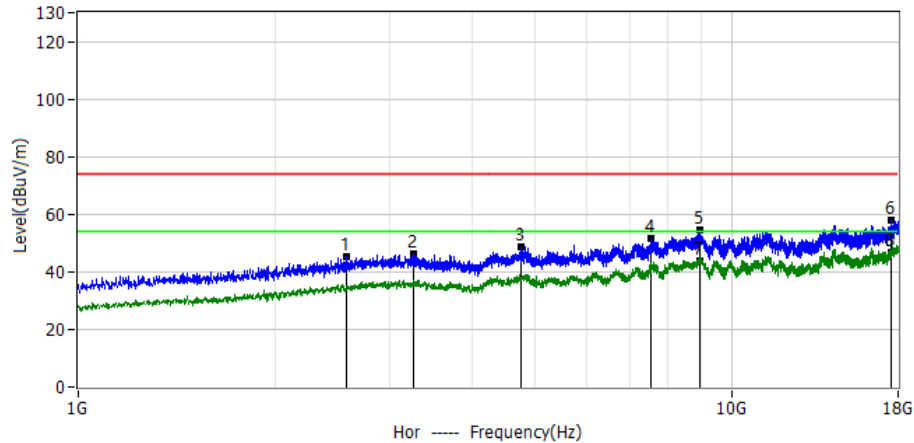

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2570.4000	55.85	-10.61	45.24	74.00	-28.76	PK	Hor
2*	3254.6000	54.46	-8.42	46.04	74.00	-27.96	PK	Hor
3*	4771.9000	54.86	-5.96	48.90	74.00	-25.10	PK	Hor
4*	7530.1000	55.67	-4.28	51.39	74.00	-22.61	PK	Hor
5*	8932.6000	55.73	-1.36	54.37	74.00	-19.63	PK	Hor
6*	17555.9000	49.56	8.21	57.77	74.00	-16.23	PK	Hor
7*	8932.6000	45.16	-1.36	43.80	54.00	-10.20	AV	Hor
8*	17555.9000	38.39	8.21	46.60	54.00	-7.40	AV	Hor

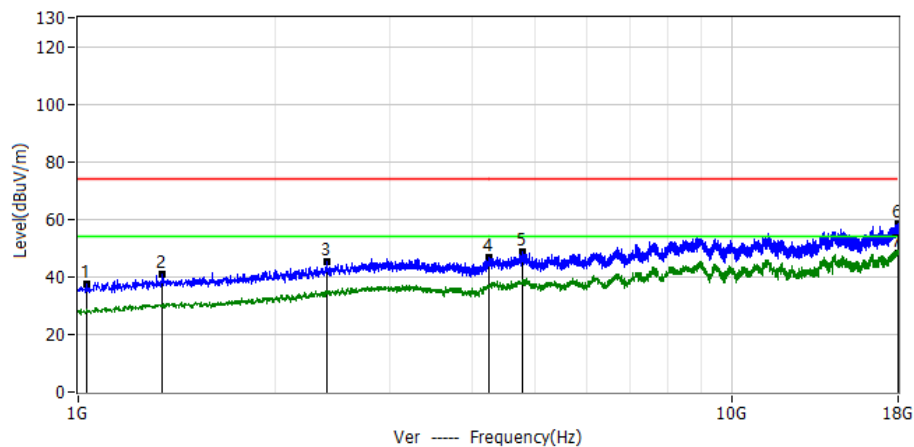

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1027.6000	61.81	-24.50	37.31	74.00	-36.69	PK	Ver
2*	1346.4000	62.53	-21.81	40.72	74.00	-33.28	PK	Ver
3*	2406.7000	57.21	-11.96	45.25	74.00	-28.75	PK	Ver
4*	4247.0000	53.42	-6.83	46.59	74.00	-27.41	PK	Ver
5*	4788.9000	54.58	-5.98	48.60	74.00	-25.40	PK	Ver
6*	17961.7000	50.12	8.49	58.61	74.00	-15.39	PK	Ver
7*	17961.7000	39.61	8.49	48.10	54.00	-5.90	AV	Ver


Remark:

In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.




3.2.7 TEST RESULTS(Band edge Requirements)

Project: LGT23I086	Test Engineer: Xiangdong Ma
EUT: Smart phone	Temperature: 28°C
M/N: TANK3	Humidity: 57%RH
Test Voltage: Battery	Test Data: 2023-11-04
Test Mode: 802.11ax20 2412	
Note:	

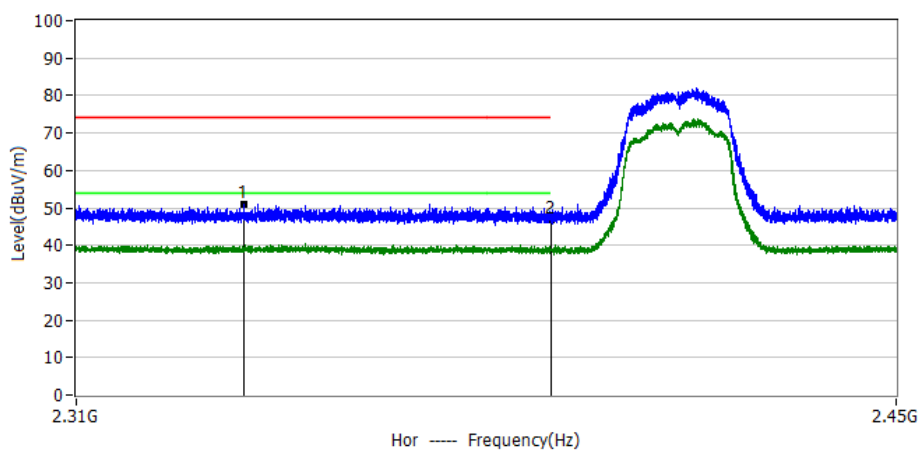


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3380GHz	16.83	34.08	50.91	74.00	-23.09	PK	Hor
2*	2.3900GHz	12.95	33.95	46.90	74.00	-27.10	PK	Hor

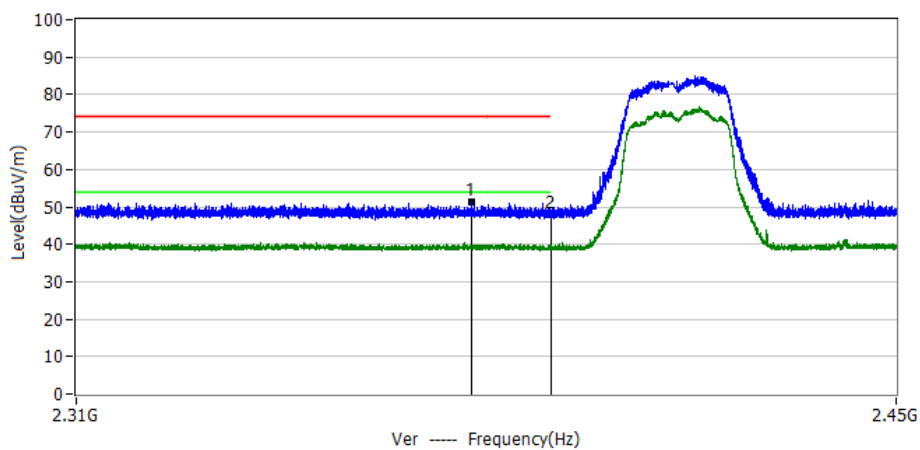


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3764GHz	17.41	33.99	51.40	74.00	-22.60	PK	Ver
2*	2.3900GHz	14.05	33.95	48.00	74.00	-26.00	PK	Ver



Project: LGT23I086	Test Engineer: Xiangdong Ma
EUT: Smart phone	Temperature: 28°C
M/N: TANK3	Humidity: 57%RH
Test Voltage: Battery	Test Data: 2023-11-04
Test Mode: 802.11ax20 2462	
Note:	

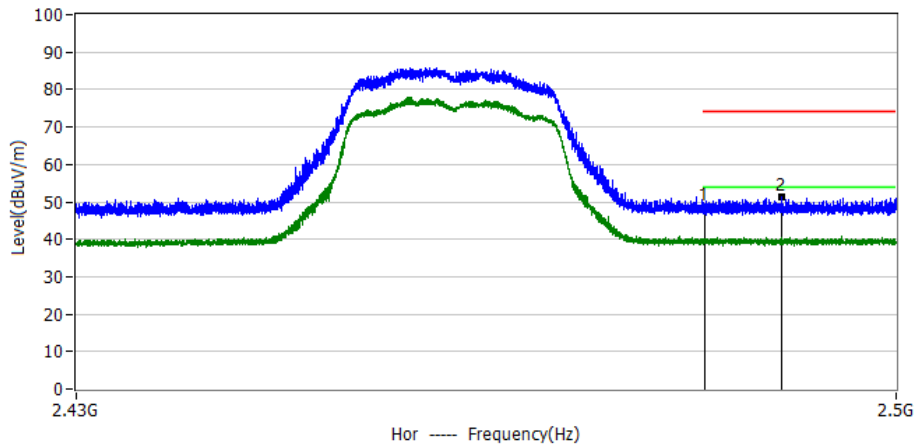

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	14.57	34.13	48.70	74.00	-25.30	PK	Hor
2*	2.4901GHz	17.32	34.14	51.46	74.00	-22.54	PK	Hor

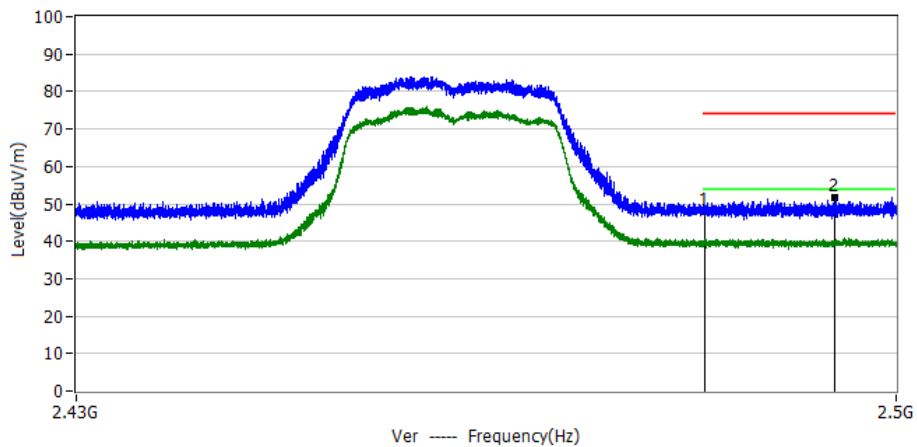

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	13.77	34.13	47.90	74.00	-26.10	PK	Ver
2*	2.4947GHz	17.37	34.15	51.52	74.00	-22.48	PK	Ver



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

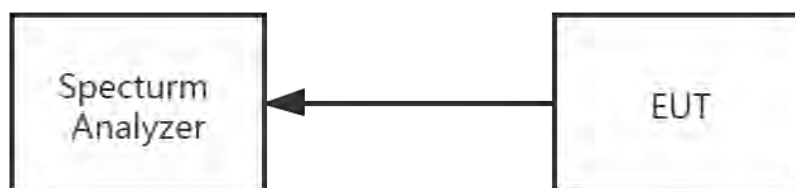

The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

For the measurement records, refer to the appendix I.



6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

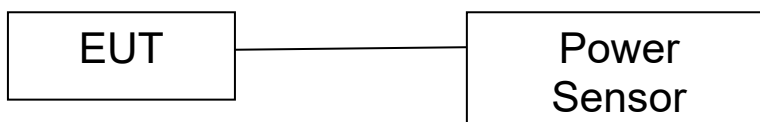

7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

For the measurement records, refer to the appendix I.



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA


The EUT antenna is FPC Antenna. It comply with the standard requirement.





APPENDIX I:TEST RESULTS


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	100	0	0
NVNT	b	2437	Ant1	100	0	0
NVNT	b	2462	Ant1	100	0	0
NVNT	b	2412	Ant2	100	0	0
NVNT	b	2437	Ant2	100	0	0
NVNT	b	2462	Ant2	100	0	0
NVNT	g	2412	Ant1	100	0	0
NVNT	g	2437	Ant1	100	0	0
NVNT	g	2462	Ant1	100	0	0
NVNT	g	2412	Ant2	100	0	0
NVNT	g	2437	Ant2	100	0	0
NVNT	g	2462	Ant2	100	0	0
NVNT	n20	2412	Ant1	100	0	0
NVNT	n20	2437	Ant1	100	0	0
NVNT	n20	2462	Ant1	100	0	0
NVNT	n20	2412	Ant2	100	0	0
NVNT	n20	2437	Ant2	100	0	0
NVNT	n20	2462	Ant2	100	0	0
NVNT	n20	2412	Sum	100	0	0
NVNT	n20	2437	Sum	100	0	0
NVNT	n20	2462	Sum	100	0	0
NVNT	n40	2422	Ant1	100	0	0
NVNT	n40	2437	Ant1	100	0	0
NVNT	n40	2452	Ant1	100	0	0
NVNT	n40	2422	Ant2	100	0	0
NVNT	n40	2437	Ant2	100	0	0
NVNT	n40	2452	Ant2	100	0	0
NVNT	n40	2422	Sum	100	0	0
NVNT	n40	2437	Sum	100	0	0
NVNT	n40	2452	Sum	100	0	0
NVNT	ax20	2412	Ant1	100	0	0
NVNT	ax20	2437	Ant1	100	0	0
NVNT	ax20	2462	Ant1	100	0	0
NVNT	ax20	2412	Ant2	100	0	0
NVNT	ax20	2437	Ant2	100	0	0
NVNT	ax20	2462	Ant2	100	0	0
NVNT	ax20	2412	Sum	100	0	0
NVNT	ax20	2437	Sum	100	0	0
NVNT	ax20	2462	Sum	100	0	0
NVNT	ax40	2422	Ant1	100	0	0
NVNT	ax40	2437	Ant1	100	0	0
NVNT	ax40	2452	Ant1	100	0	0
NVNT	ax40	2422	Ant2	100	0	0
NVNT	ax40	2437	Ant2	100	0	0
NVNT	ax40	2452	Ant2	100	0	0
NVNT	ax40	2422	Sum	100	0	0
NVNT	ax40	2437	Sum	100	0	0
NVNT	ax40	2452	Sum	100	0	0

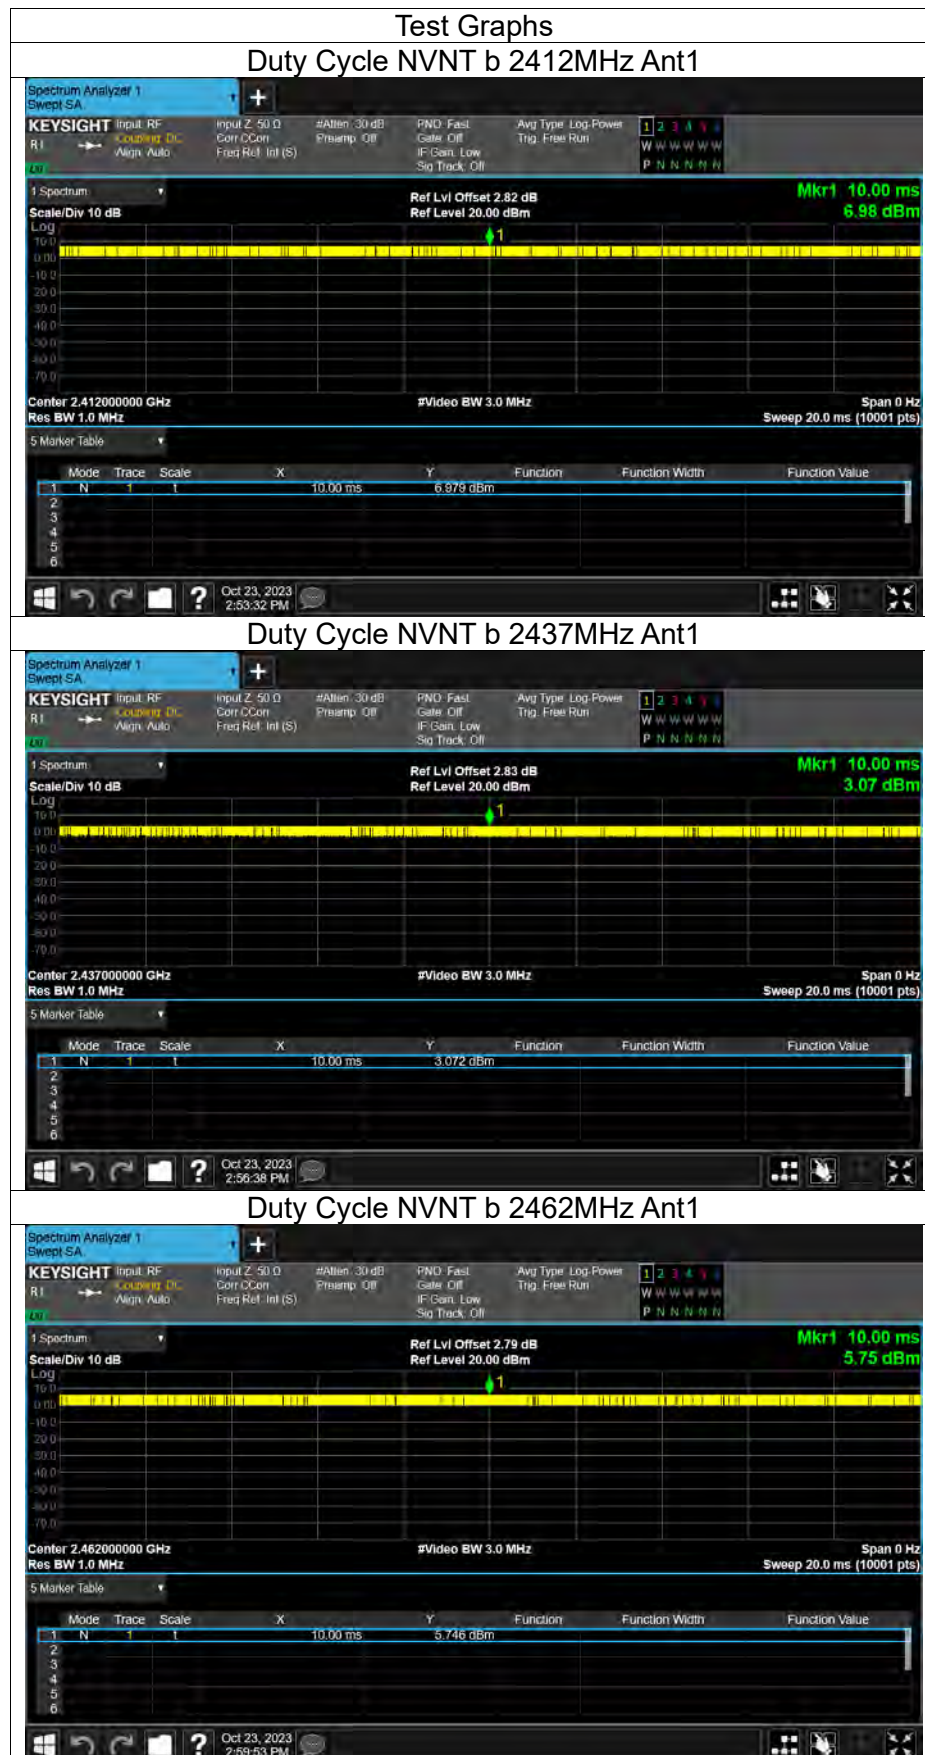

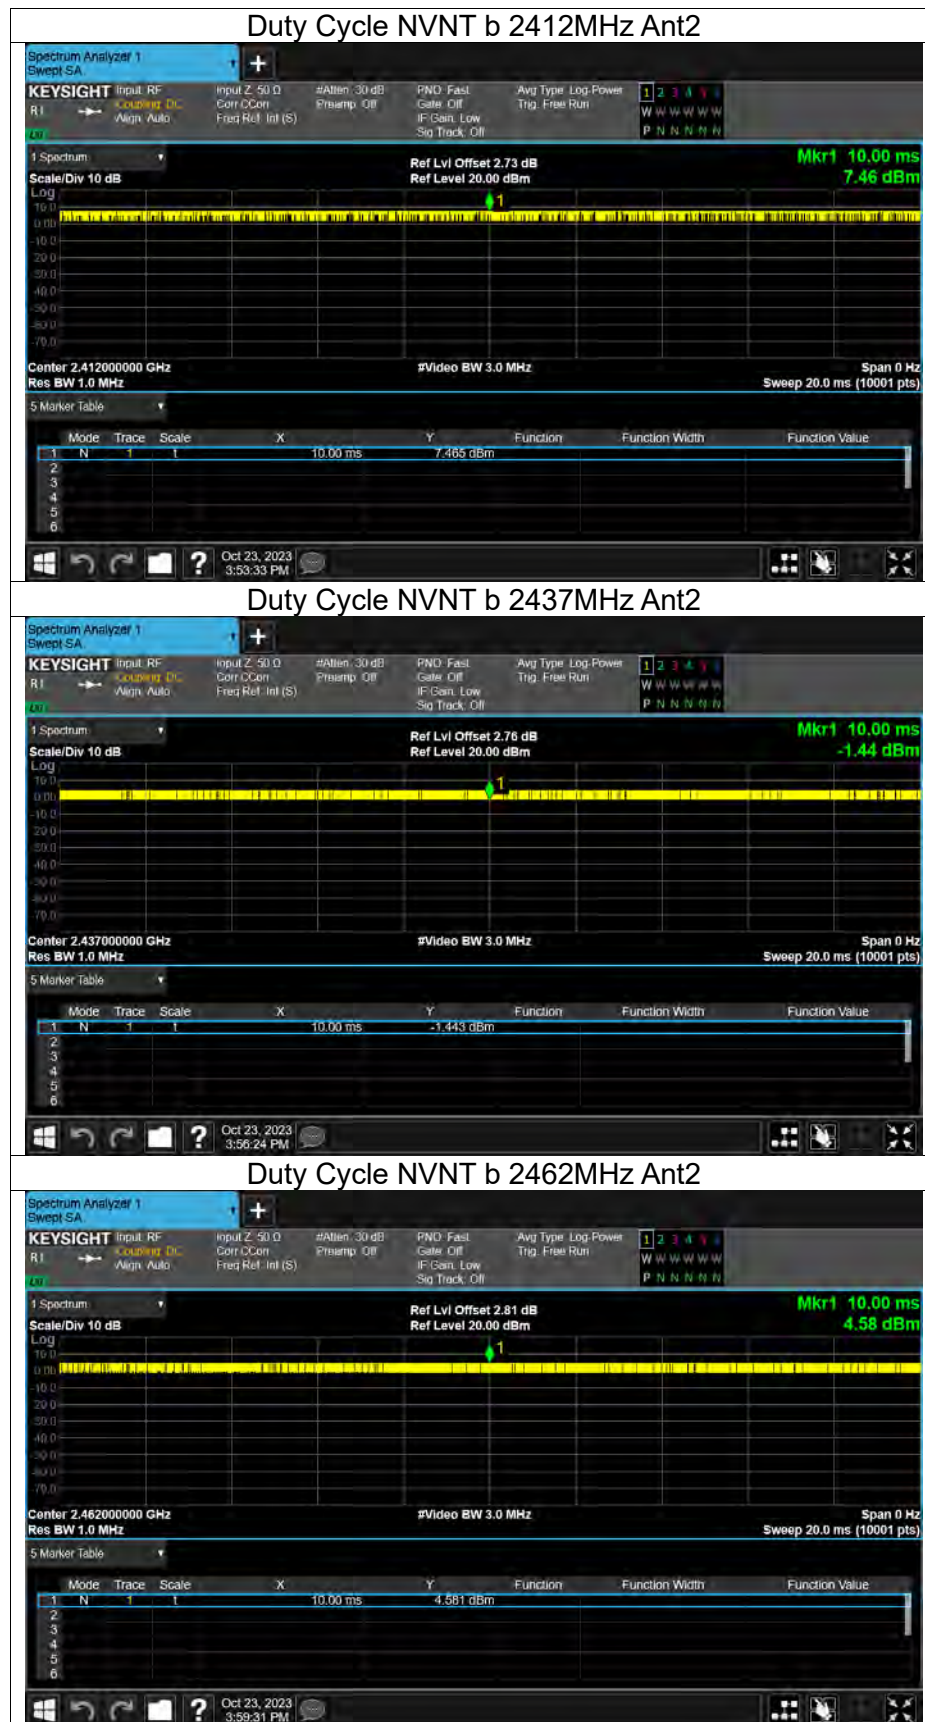


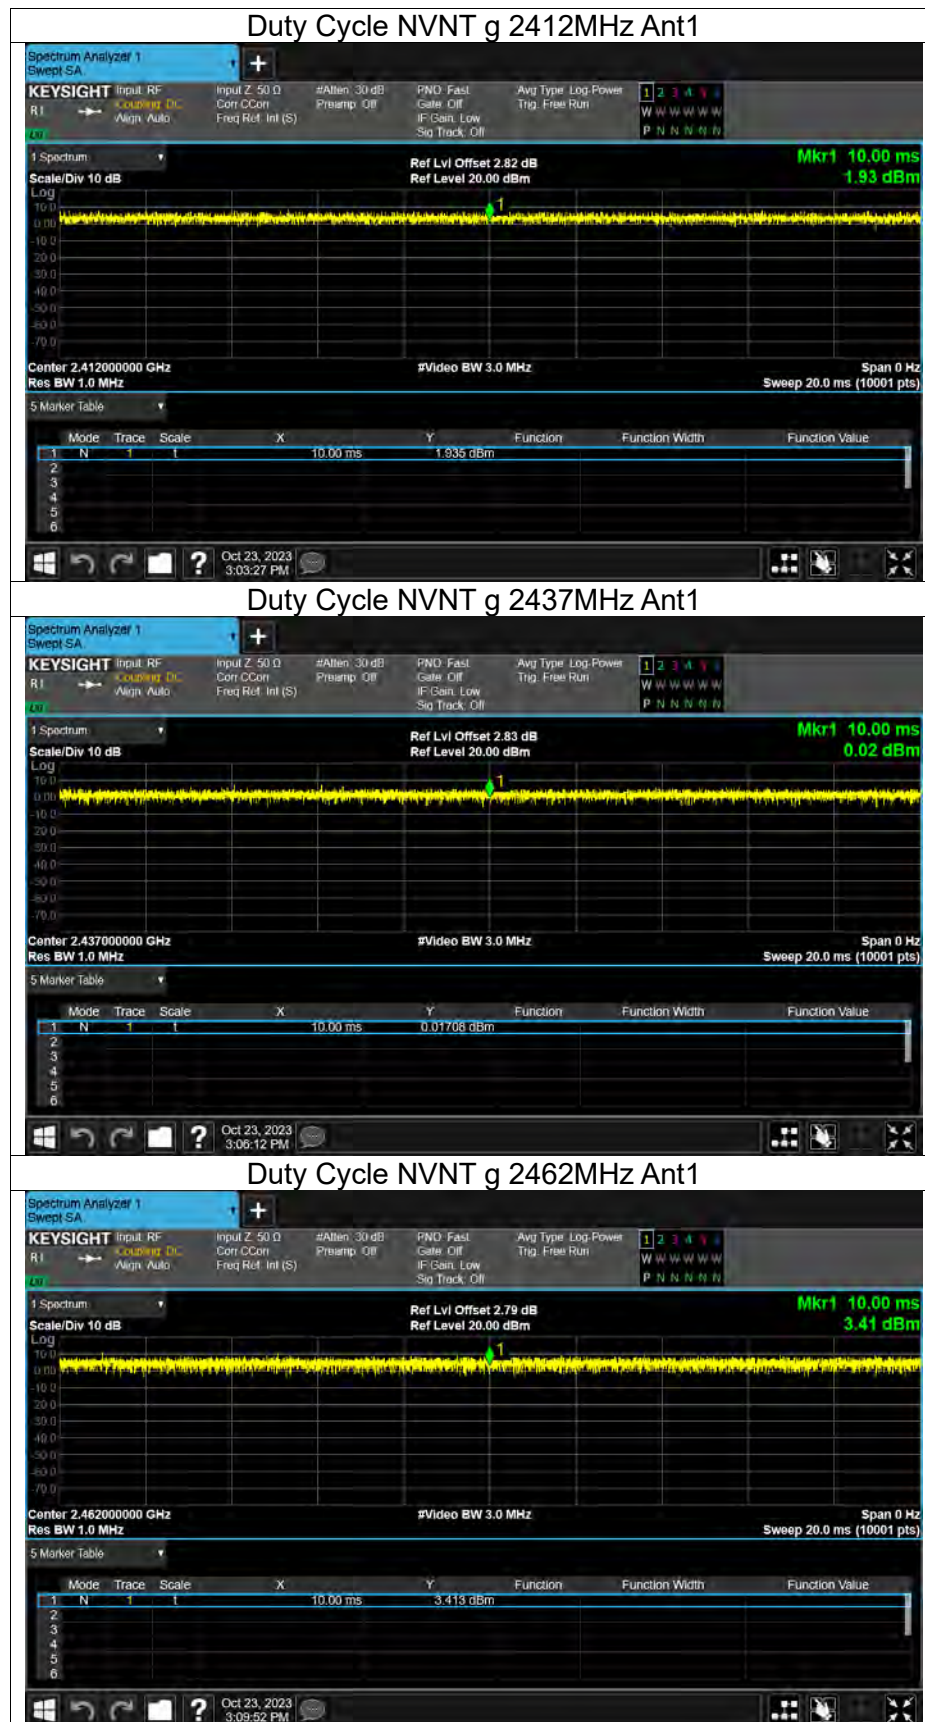


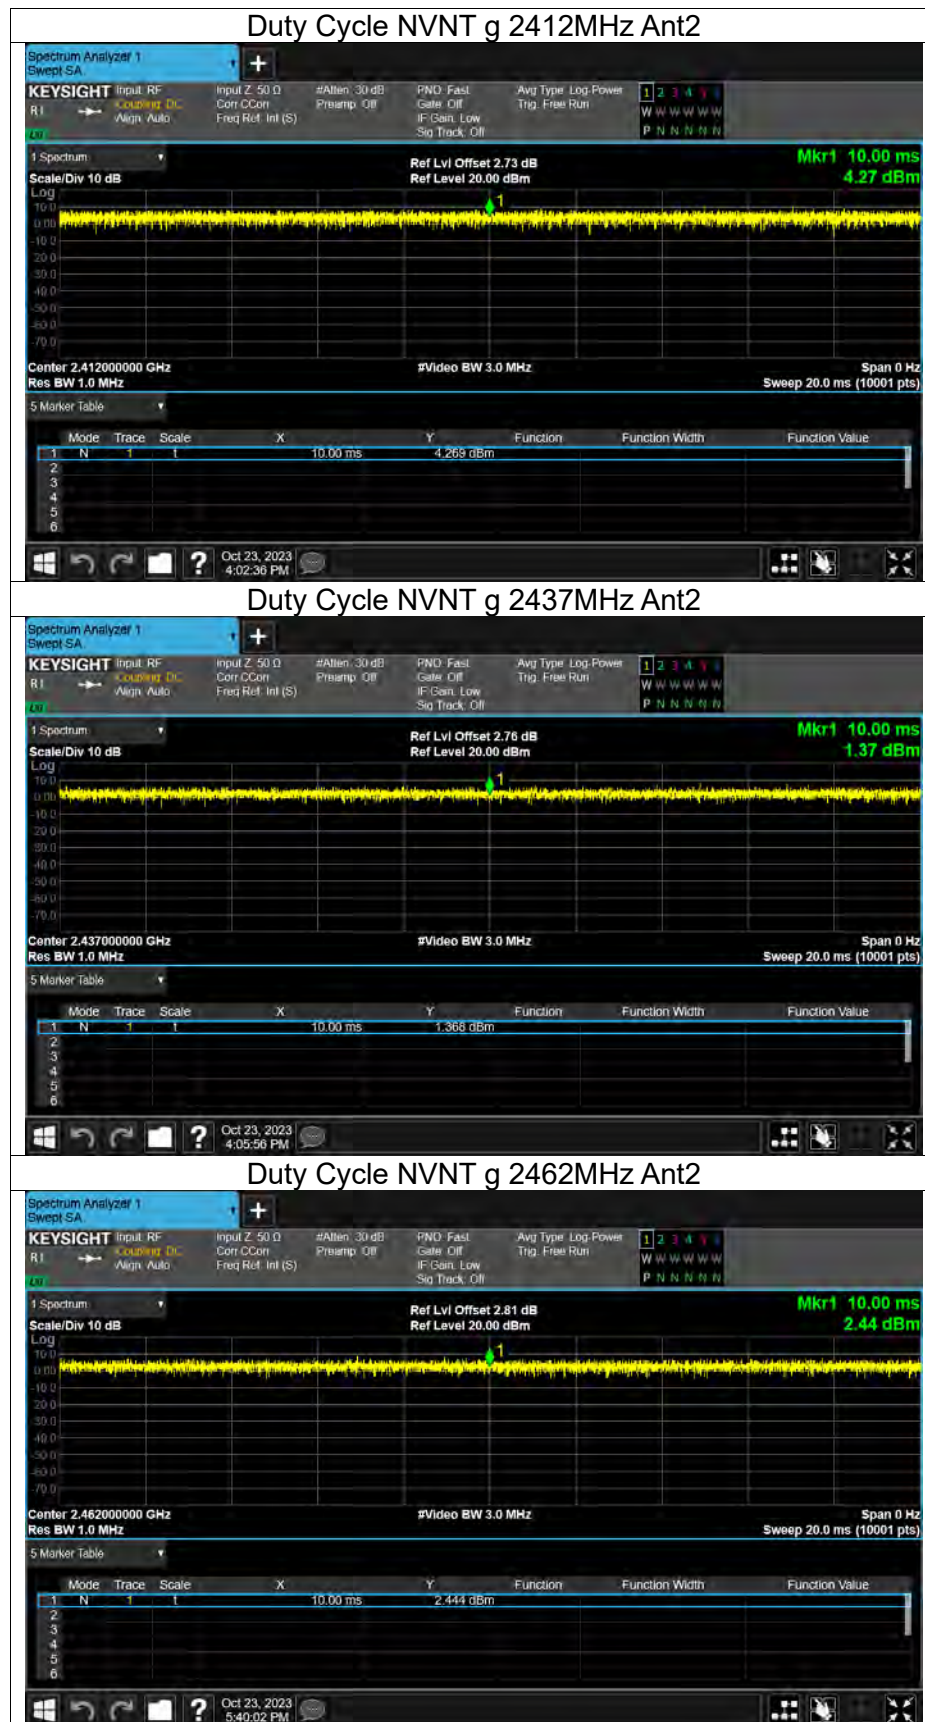


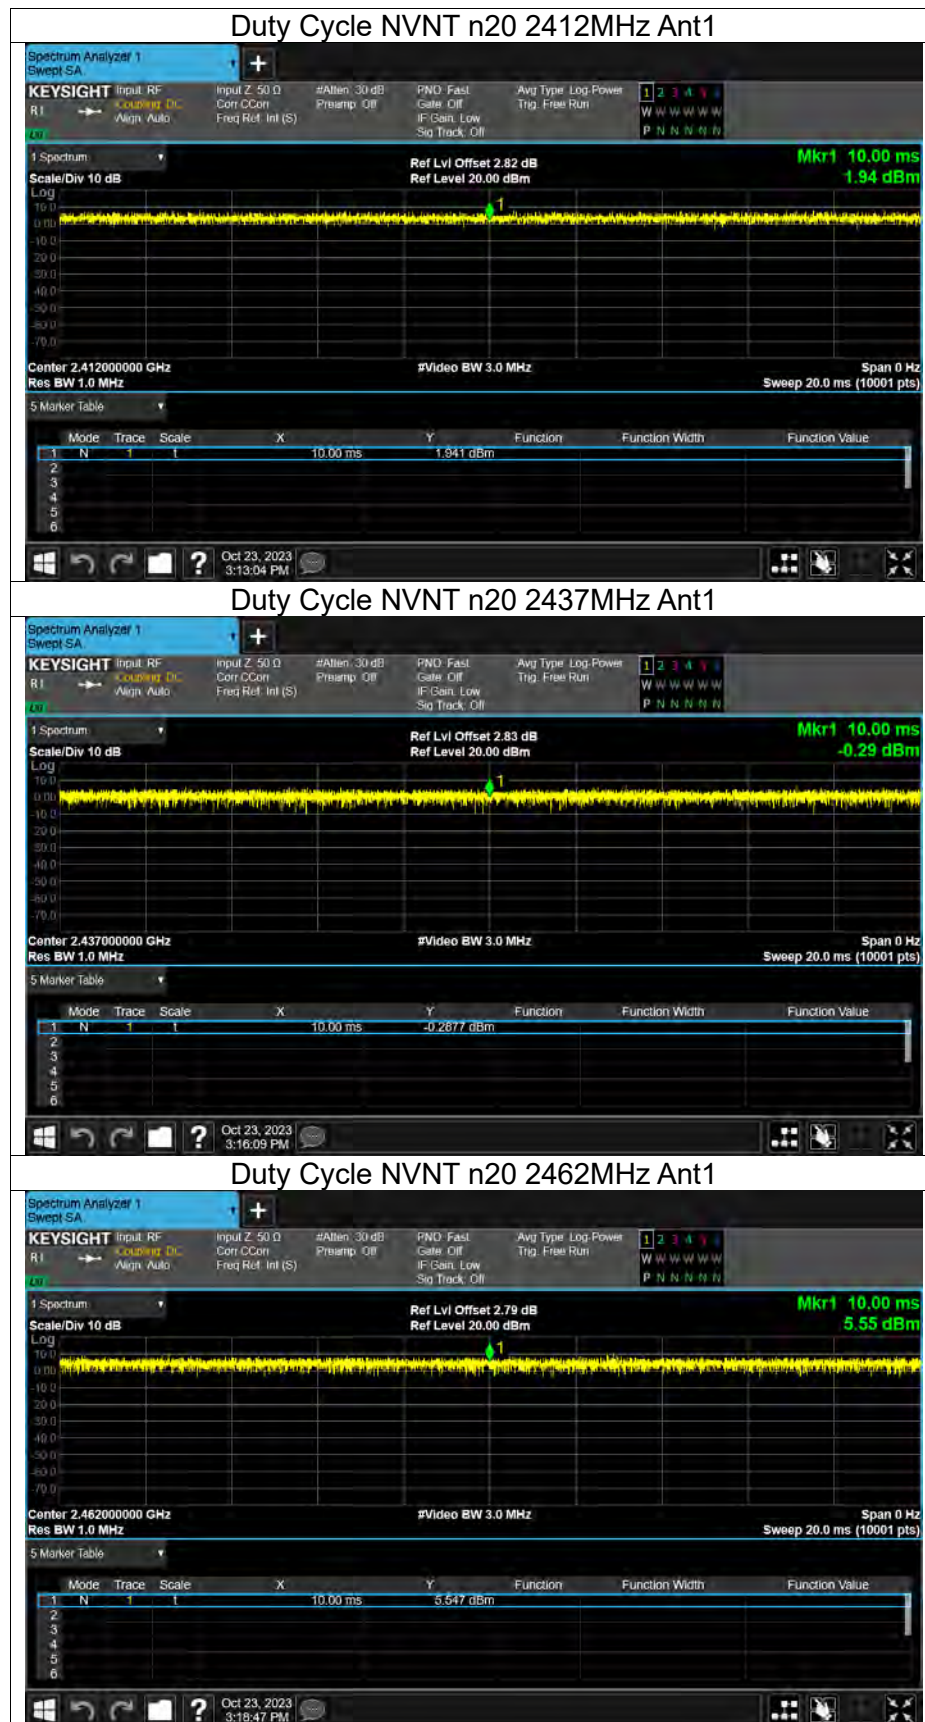




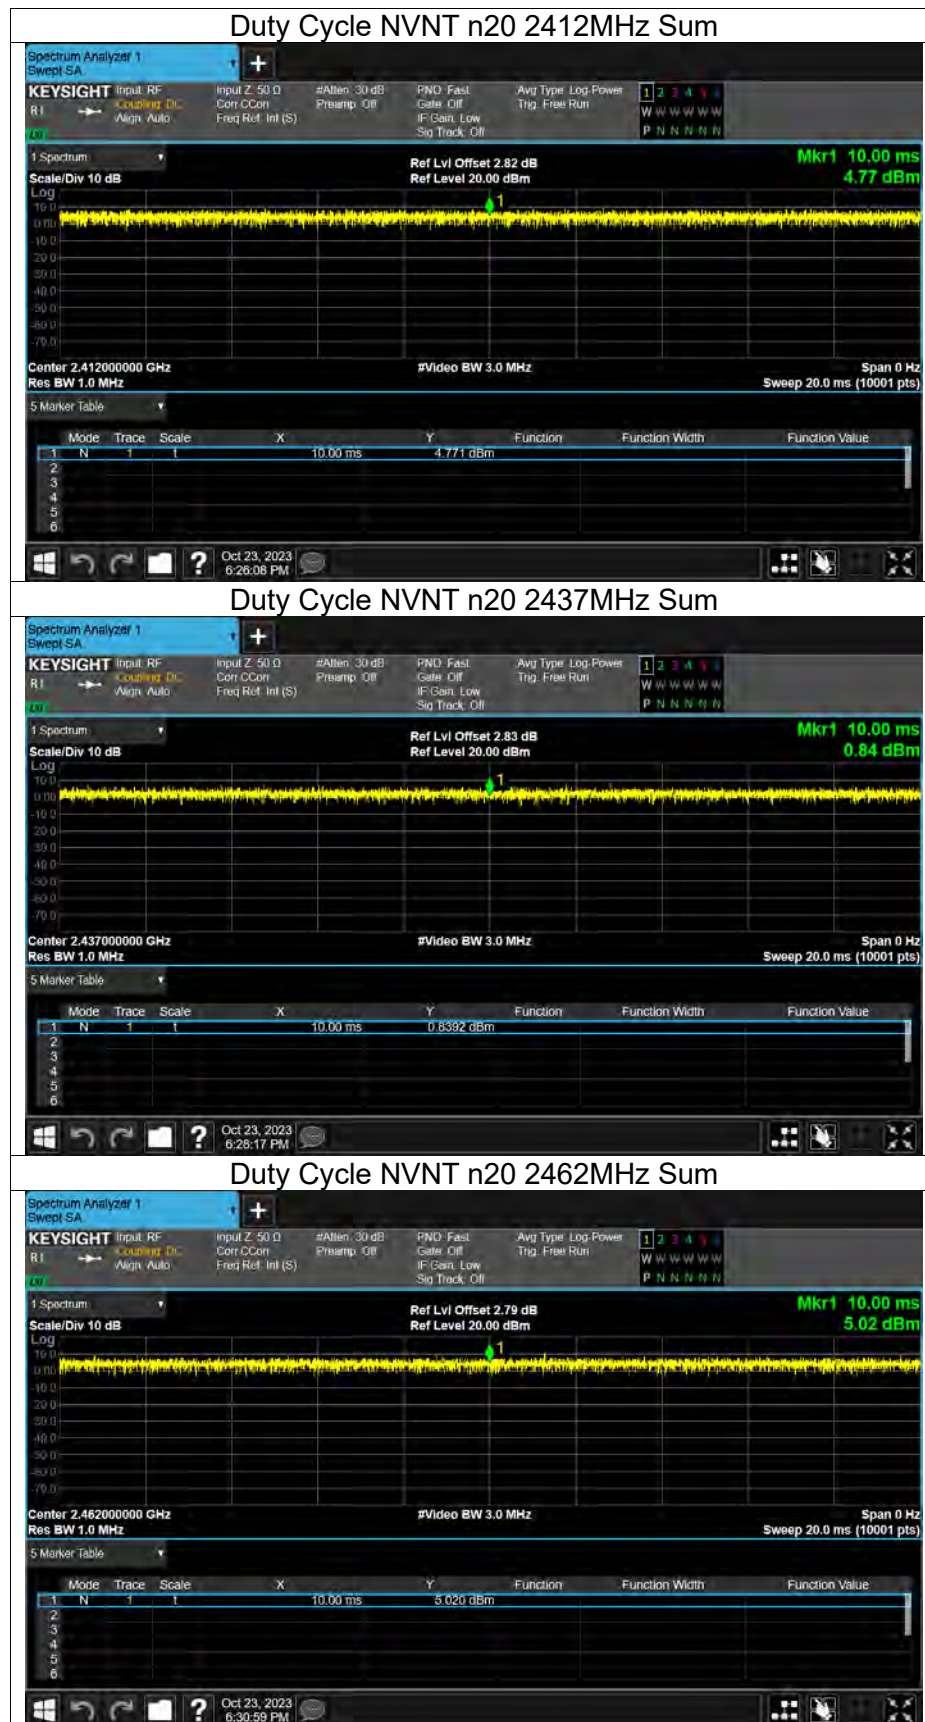


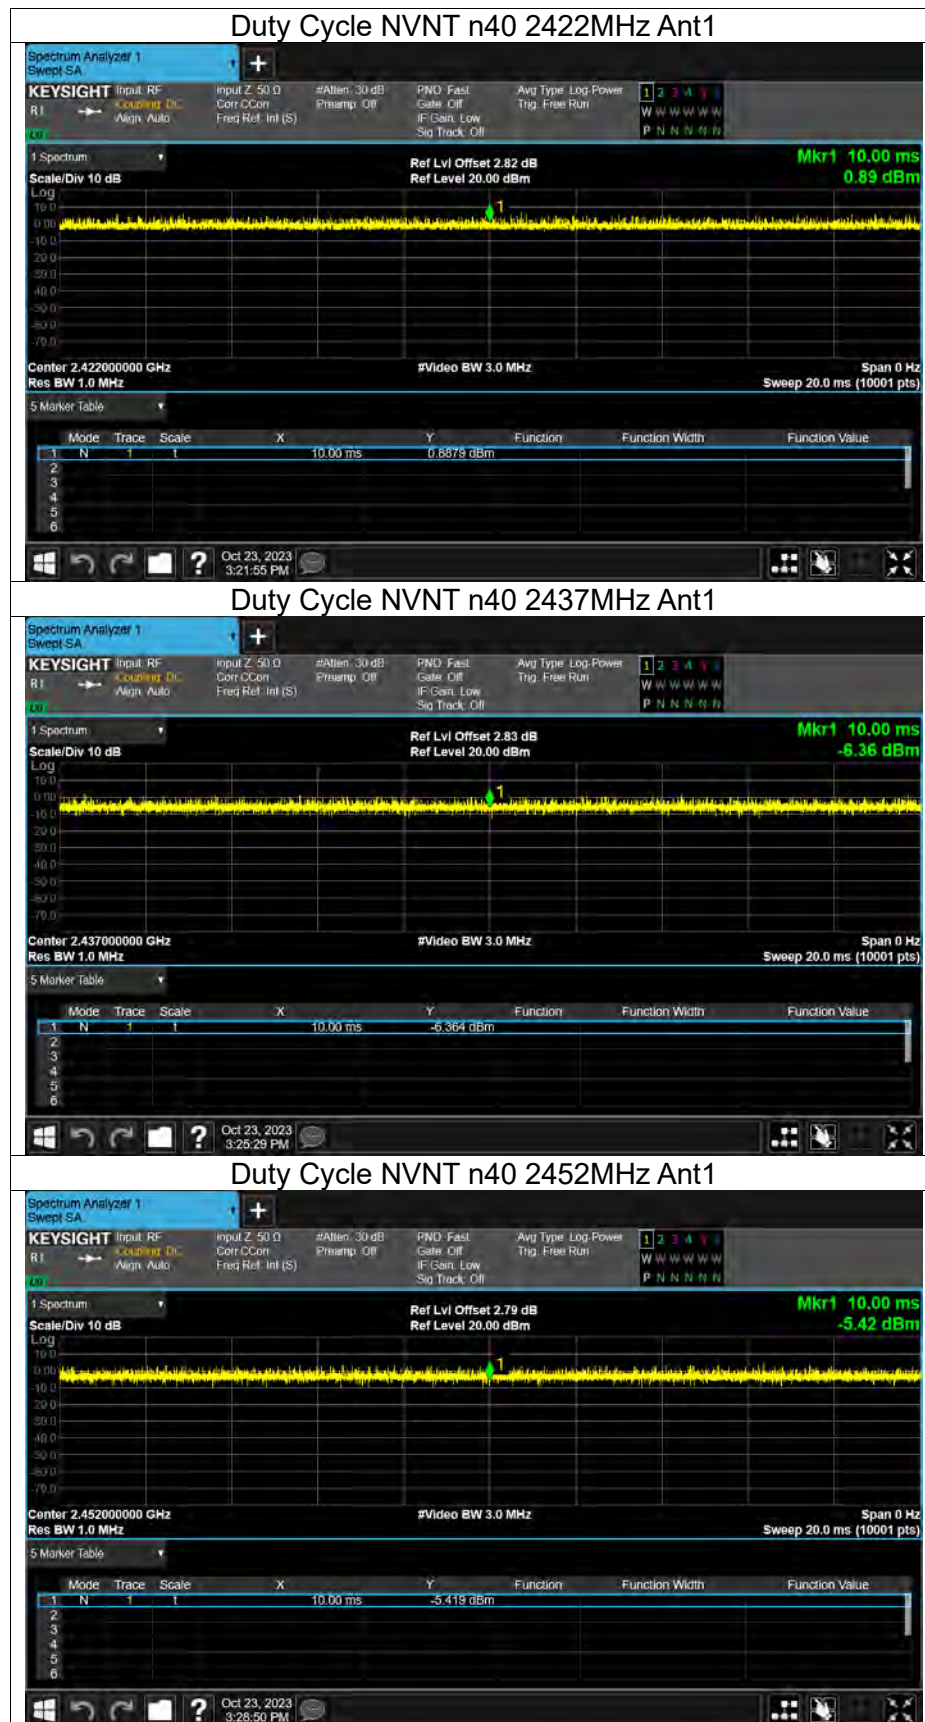


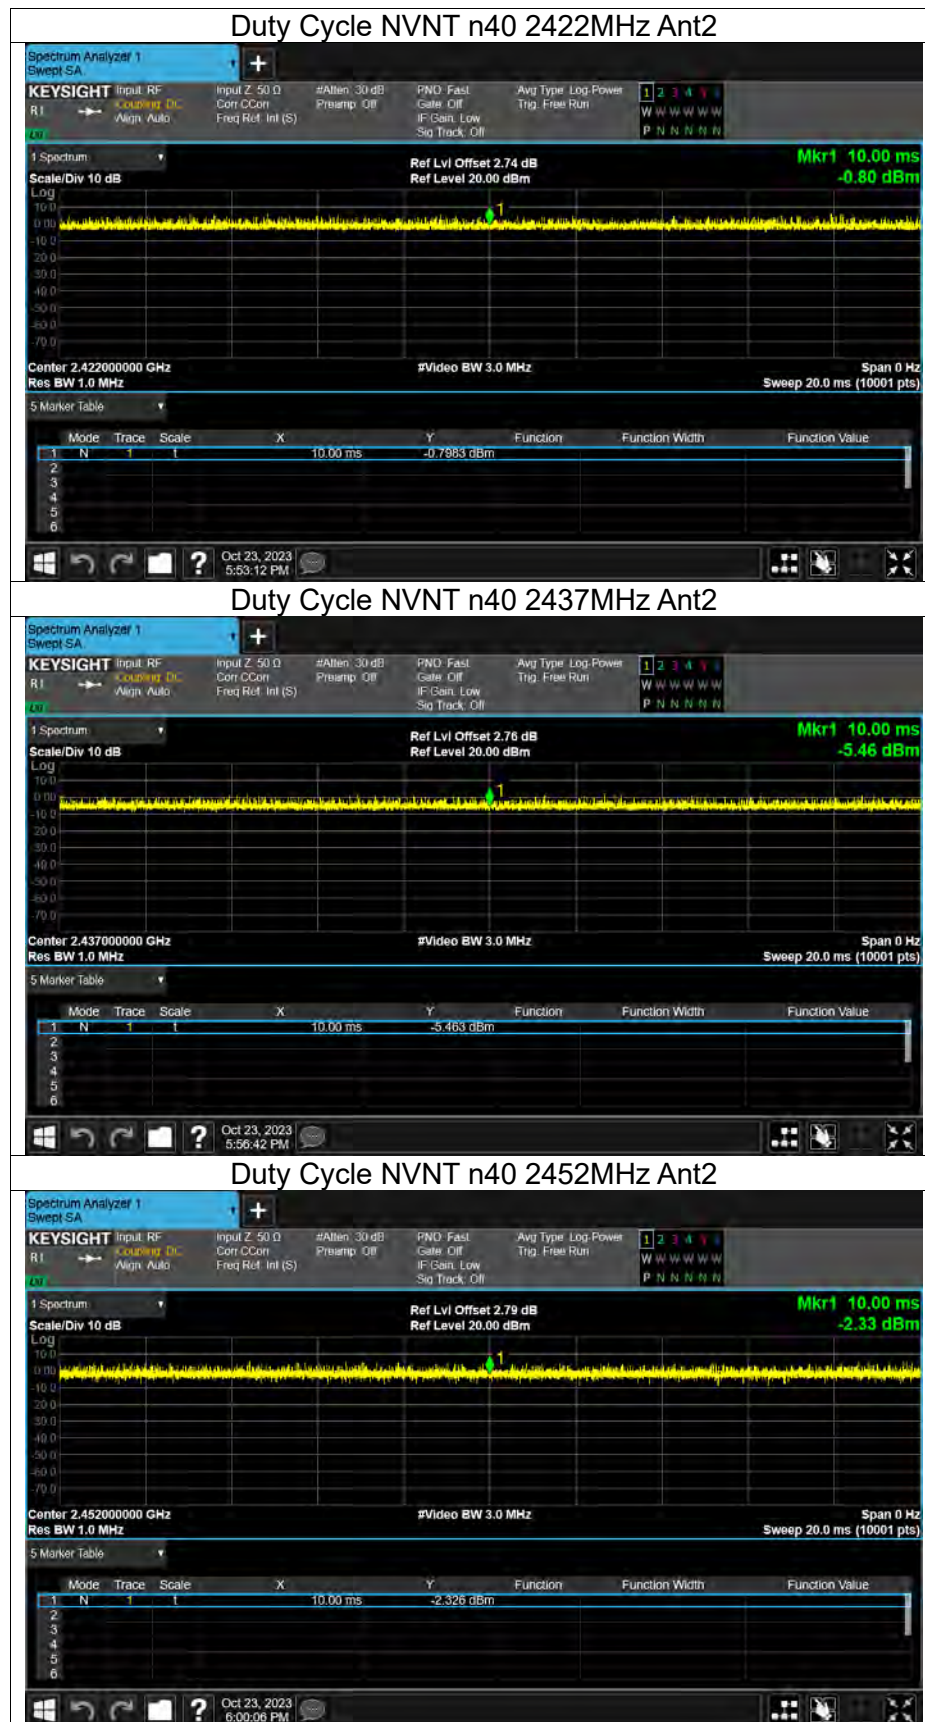





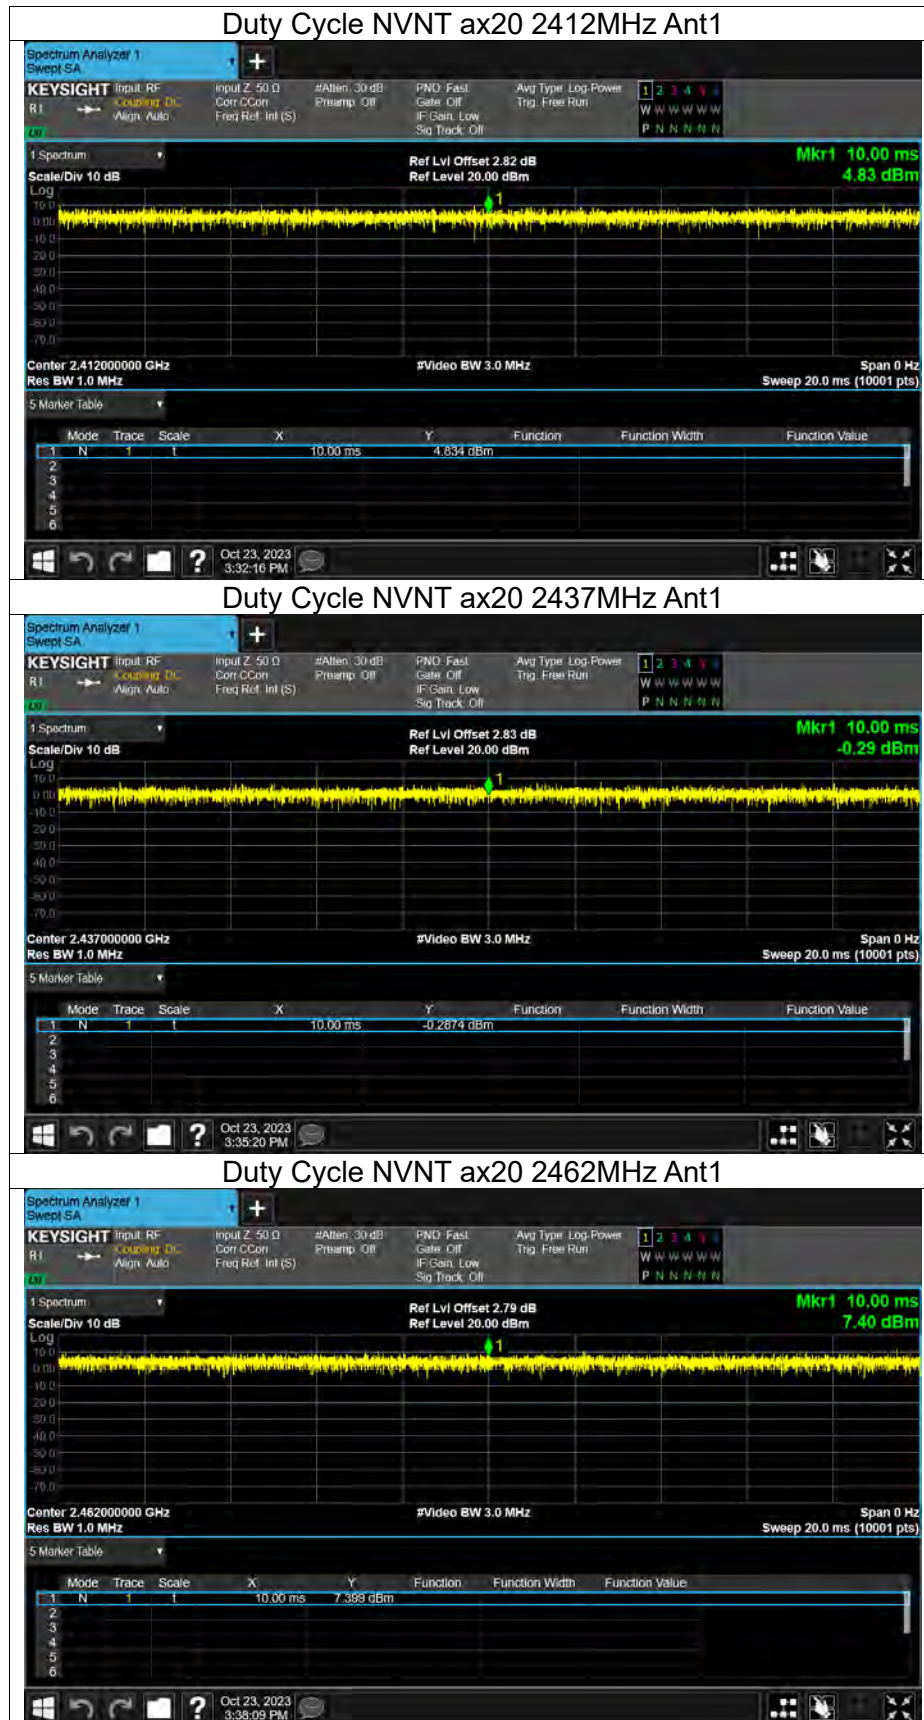


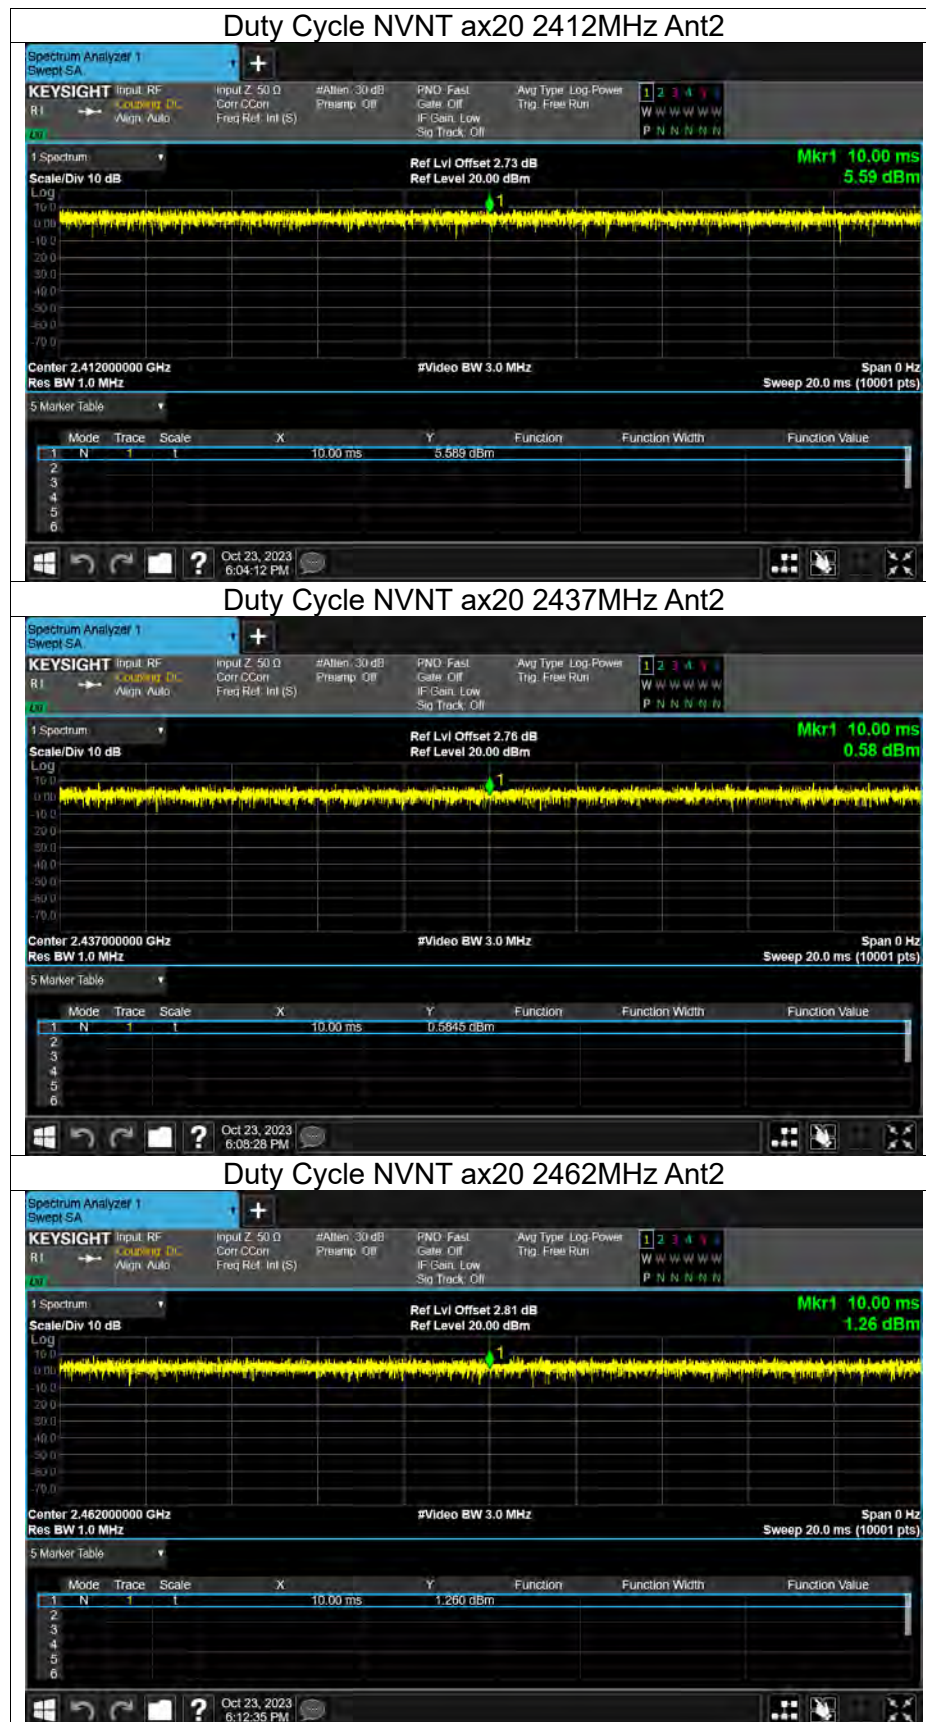

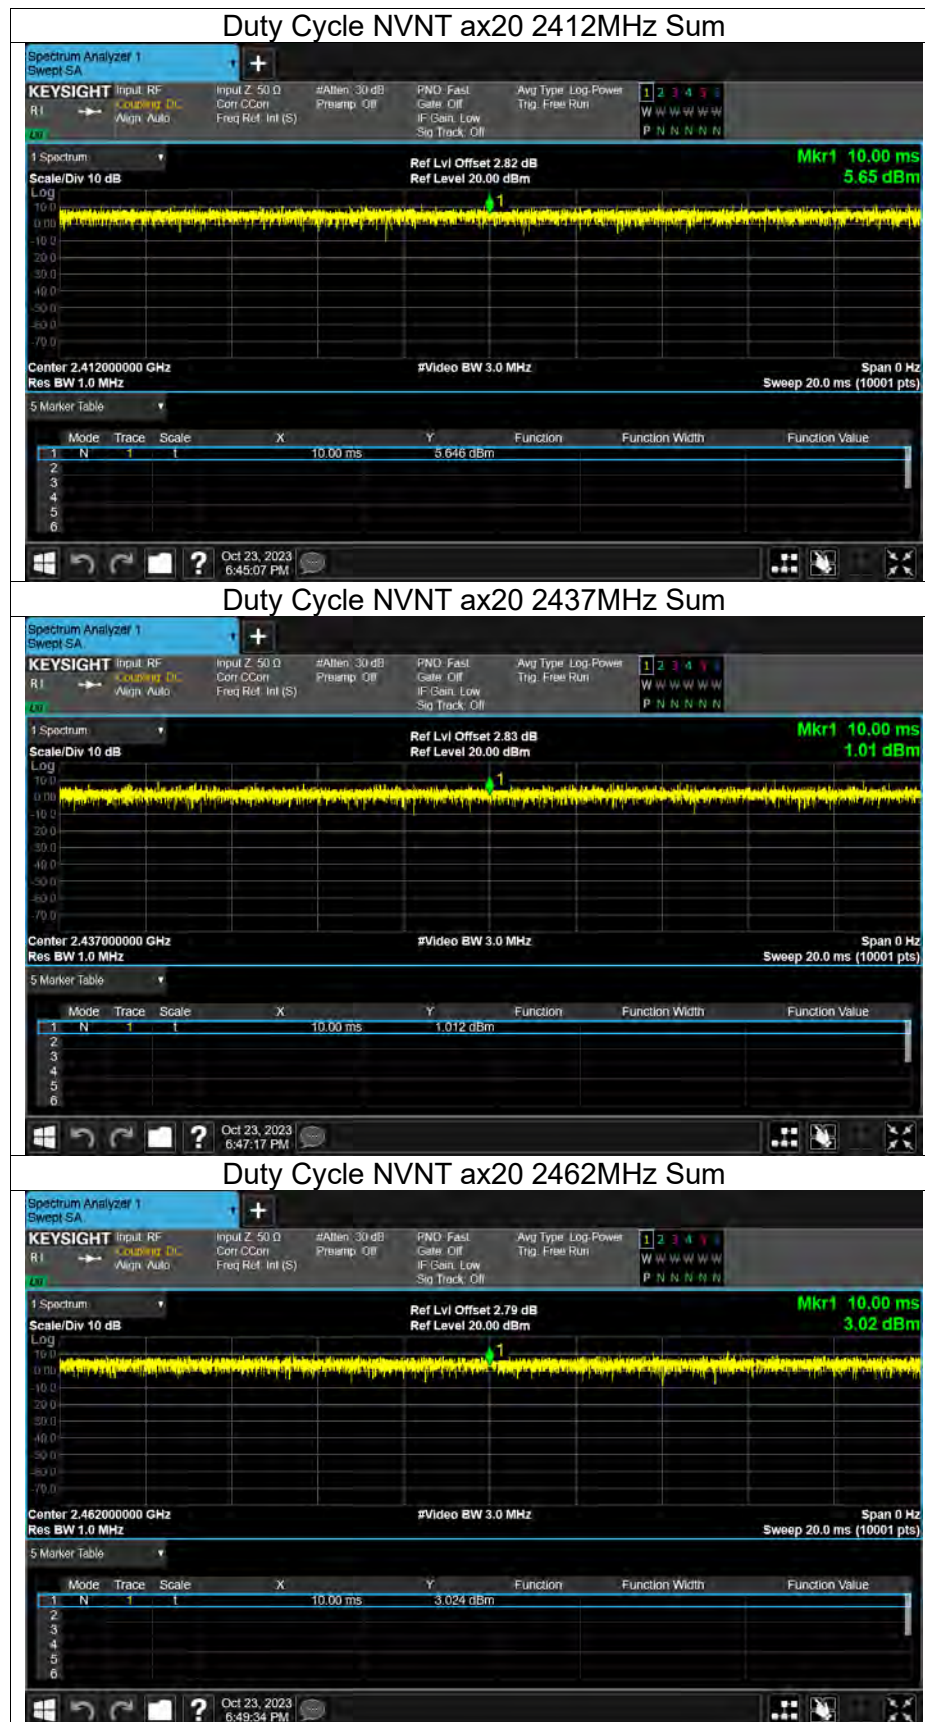

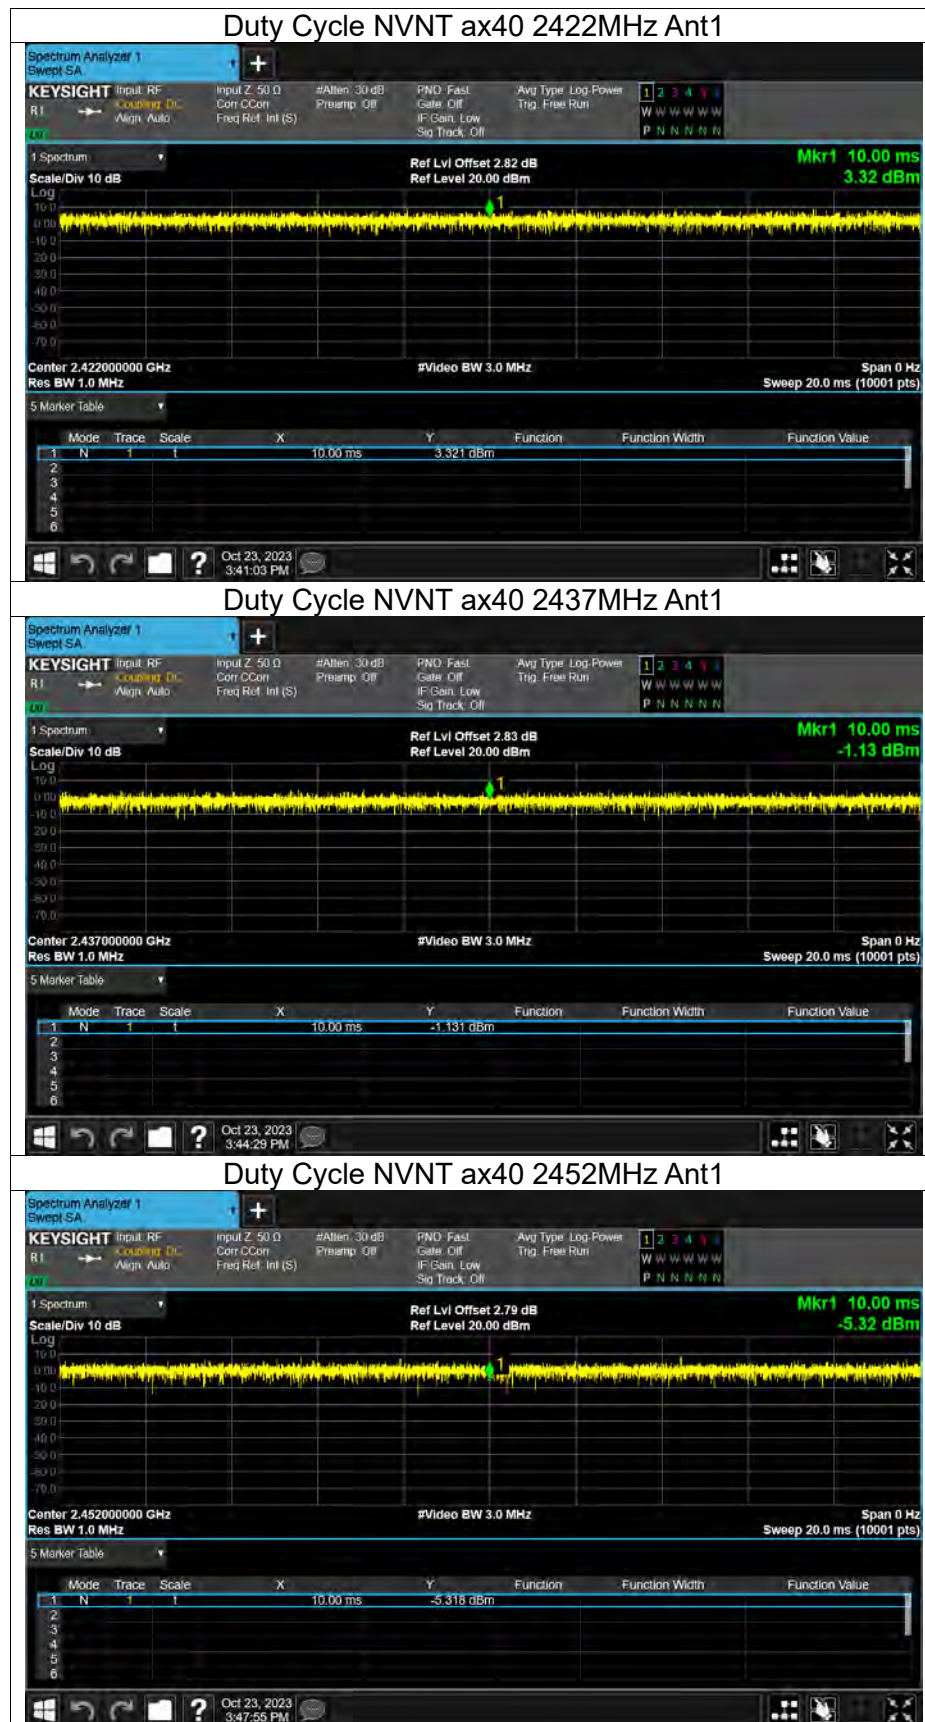

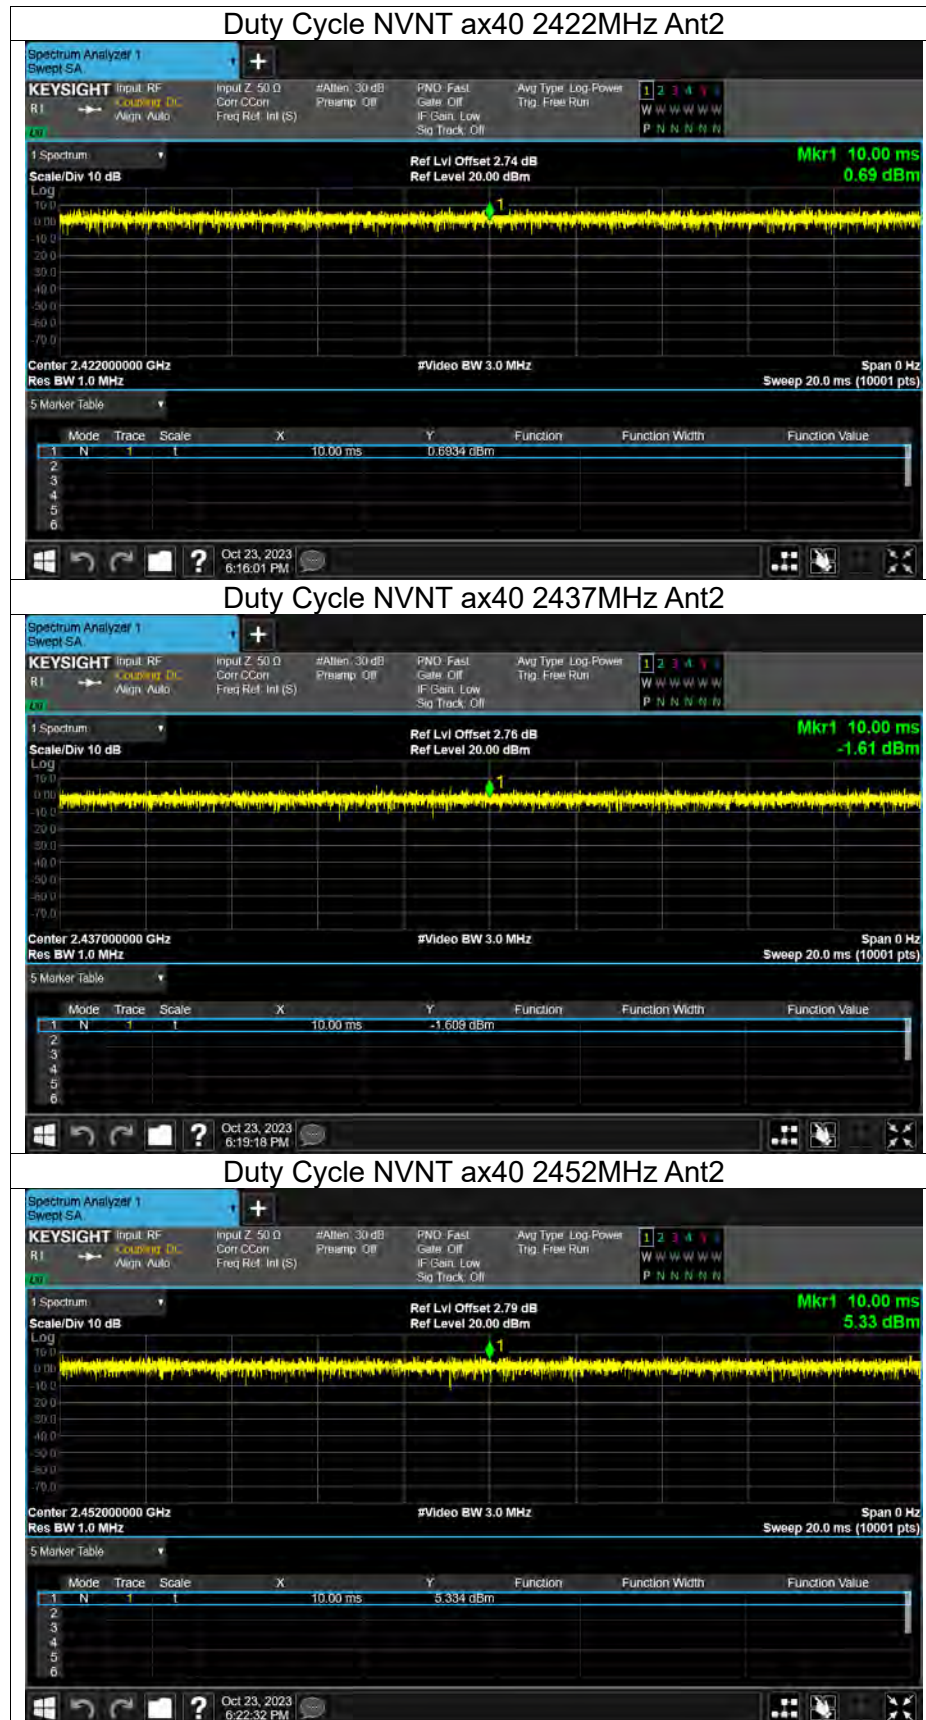

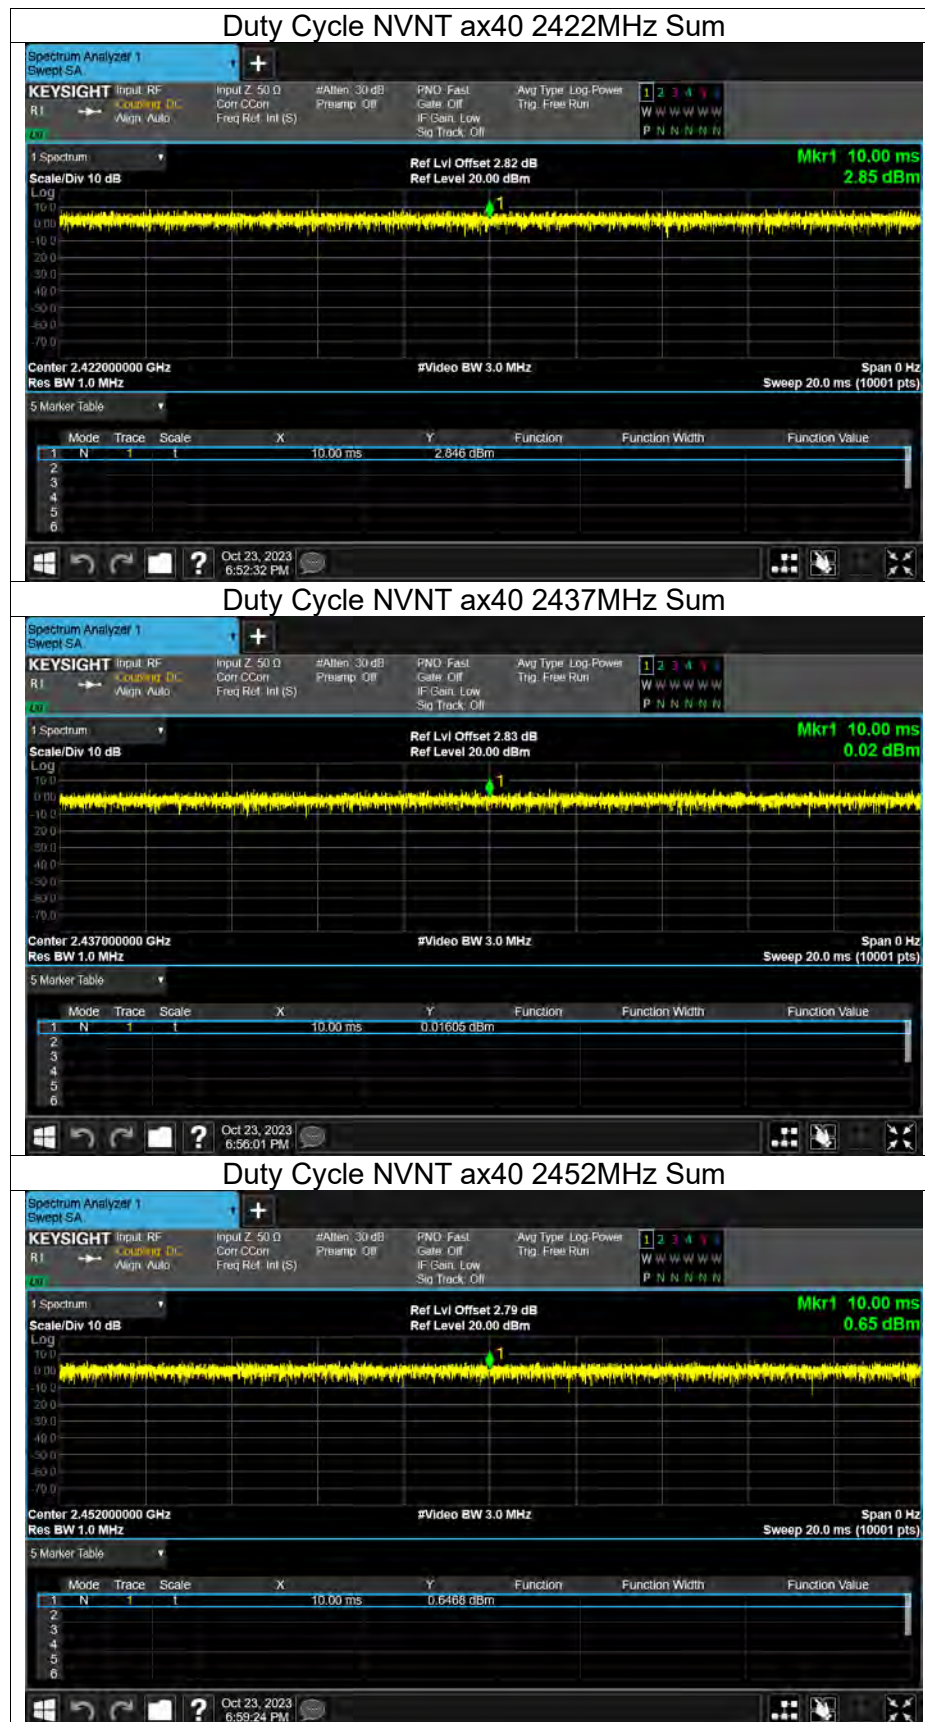



Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	13.85	30	Pass
NVNT	b	2437	Ant1	9.77	30	Pass
NVNT	b	2462	Ant1	11.83	30	Pass
NVNT	b	2412	Ant2	14.22	30	Pass
NVNT	b	2437	Ant2	10.69	30	Pass
NVNT	b	2462	Ant2	11.3	30	Pass
NVNT	g	2412	Ant1	17.27	30	Pass
NVNT	g	2437	Ant1	15.15	30	Pass
NVNT	g	2462	Ant1	16.81	30	Pass
NVNT	g	2412	Ant2	18	30	Pass
NVNT	g	2437	Ant2	15.72	30	Pass
NVNT	g	2462	Ant2	16.44	30	Pass
NVNT	n20	2412	Ant1	17.72	30	Pass
NVNT	n20	2437	Ant1	15.31	30	Pass
NVNT	n20	2462	Ant1	16.63	30	Pass
NVNT	n20	2412	Ant2	17.97	30	Pass
NVNT	n20	2437	Ant2	15.78	30	Pass
NVNT	n20	2462	Ant2	16.51	30	Pass
NVNT	n20	2412	Ant1	18.87	30	Pass
NVNT	n20	2412	Ant2	18.35	30	Pass
NVNT	n20	2412	Sum	21.63	30	Pass
NVNT	n20	2437	Ant1	15.93	30	Pass
NVNT	n20	2437	Ant2	16.23	30	Pass
NVNT	n20	2437	Sum	19.09	30	Pass
NVNT	n20	2462	Ant1	16.46	30	Pass
NVNT	n20	2462	Ant2	17.15	30	Pass
NVNT	n20	2462	Sum	19.83	30	Pass
NVNT	n40	2422	Ant1	17.21	30	Pass
NVNT	n40	2437	Ant1	16.75	30	Pass
NVNT	n40	2452	Ant1	16.64	30	Pass
NVNT	n40	2422	Ant2	17.04	30	Pass
NVNT	n40	2437	Ant2	16.38	30	Pass
NVNT	n40	2452	Ant2	17.04	30	Pass
NVNT	n40	2422	Ant1	17.52	30	Pass
NVNT	n40	2422	Ant2	17.47	30	Pass
NVNT	n40	2422	Sum	20.51	30	Pass
NVNT	n40	2437	Ant1	17.14	30	Pass
NVNT	n40	2437	Ant2	16.9	30	Pass
NVNT	n40	2437	Sum	20.03	30	Pass
NVNT	n40	2452	Ant1	16.6	30	Pass
NVNT	n40	2452	Ant2	17.61	30	Pass
NVNT	n40	2452	Sum	20.14	30	Pass
NVNT	ax20	2412	Ant1	18.7	30	Pass
NVNT	ax20	2437	Ant1	16.16	30	Pass
NVNT	ax20	2462	Ant1	17.52	30	Pass
NVNT	ax20	2412	Ant2	18.9	30	Pass
NVNT	ax20	2437	Ant2	16.79	30	Pass
NVNT	ax20	2462	Ant2	17.55	30	Pass
NVNT	ax20	2412	Ant1	20.7	30	Pass
NVNT	ax20	2412	Ant2	18.93	30	Pass
NVNT	ax20	2412	Sum	22.91	30	Pass
NVNT	ax20	2437	Ant1	17.17	30	Pass



NVNT	ax20	2437	Ant2	17.02	30	Pass
NVNT	ax20	2437	Sum	20.11	30	Pass
NVNT	ax20	2462	Ant1	17.47	30	Pass
NVNT	ax20	2462	Ant2	17.82	30	Pass
NVNT	ax20	2462	Sum	20.66	30	Pass
NVNT	ax40	2422	Ant1	18.4	30	Pass
NVNT	ax40	2437	Ant1	18.06	30	Pass
NVNT	ax40	2452	Ant1	17.67	30	Pass
NVNT	ax40	2422	Ant2	18.35	30	Pass
NVNT	ax40	2437	Ant2	17.67	30	Pass
NVNT	ax40	2452	Ant2	18.06	30	Pass
NVNT	ax40	2422	Ant1	18.53	30	Pass
NVNT	ax40	2422	Ant2	18.18	30	Pass
NVNT	ax40	2422	Sum	21.37	30	Pass
NVNT	ax40	2437	Ant1	18.35	30	Pass
NVNT	ax40	2437	Ant2	17.71	30	Pass
NVNT	ax40	2437	Sum	21.05	30	Pass
NVNT	ax40	2452	Ant1	17.65	30	Pass
NVNT	ax40	2452	Ant2	18.25	30	Pass
NVNT	ax40	2452	Sum	20.97	30	Pass



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.016	0.5	Pass
NVNT	b	2437	Ant1	9.051	0.5	Pass
NVNT	b	2462	Ant1	7.059	0.5	Pass
NVNT	b	2412	Ant2	7.605	0.5	Pass
NVNT	b	2437	Ant2	7.593	0.5	Pass
NVNT	b	2462	Ant2	8.052	0.5	Pass
NVNT	g	2412	Ant1	16.482	0.5	Pass
NVNT	g	2437	Ant1	16.547	0.5	Pass
NVNT	g	2462	Ant1	13.052	0.5	Pass
NVNT	g	2412	Ant2	16.166	0.5	Pass
NVNT	g	2437	Ant2	16.591	0.5	Pass
NVNT	g	2462	Ant2	16.437	0.5	Pass
NVNT	n20	2412	Ant1	17.783	0.5	Pass
NVNT	n20	2437	Ant1	17.824	0.5	Pass
NVNT	n20	2462	Ant1	13.553	0.5	Pass
NVNT	n20	2412	Ant2	17.422	0.5	Pass
NVNT	n20	2437	Ant2	17.829	0.5	Pass
NVNT	n20	2462	Ant2	17.701	0.5	Pass
NVNT	n40	2422	Ant1	25.273	0.5	Pass
NVNT	n40	2437	Ant1	36.48	0.5	Pass
NVNT	n40	2452	Ant1	31.563	0.5	Pass
NVNT	n40	2422	Ant2	23.303	0.5	Pass
NVNT	n40	2437	Ant2	36.525	0.5	Pass
NVNT	n40	2452	Ant2	26.879	0.5	Pass
NVNT	ax20	2412	Ant1	19.151	0.5	Pass
NVNT	ax20	2437	Ant1	19.078	0.5	Pass
NVNT	ax20	2462	Ant1	16.18	0.5	Pass
NVNT	ax20	2412	Ant2	18.996	0.5	Pass
NVNT	ax20	2437	Ant2	19.218	0.5	Pass
NVNT	ax20	2462	Ant2	19.025	0.5	Pass
NVNT	ax40	2422	Ant1	30.55	0.5	Pass
NVNT	ax40	2437	Ant1	38.082	0.5	Pass
NVNT	ax40	2452	Ant1	28.953	0.5	Pass
NVNT	ax40	2422	Ant2	21.2	0.5	Pass
NVNT	ax40	2437	Ant2	38.191	0.5	Pass
NVNT	ax40	2452	Ant2	22.66	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1



-6dB Bandwidth NVNT b 2437MHz Ant1



-6dB Bandwidth NVNT b 2462MHz Ant1





-6dB Bandwidth NVNT b 2412MHz Ant2





-6dB Bandwidth NVNT b 2437MHz Ant2



-6dB Bandwidth NVNT b 2462MHz Ant2



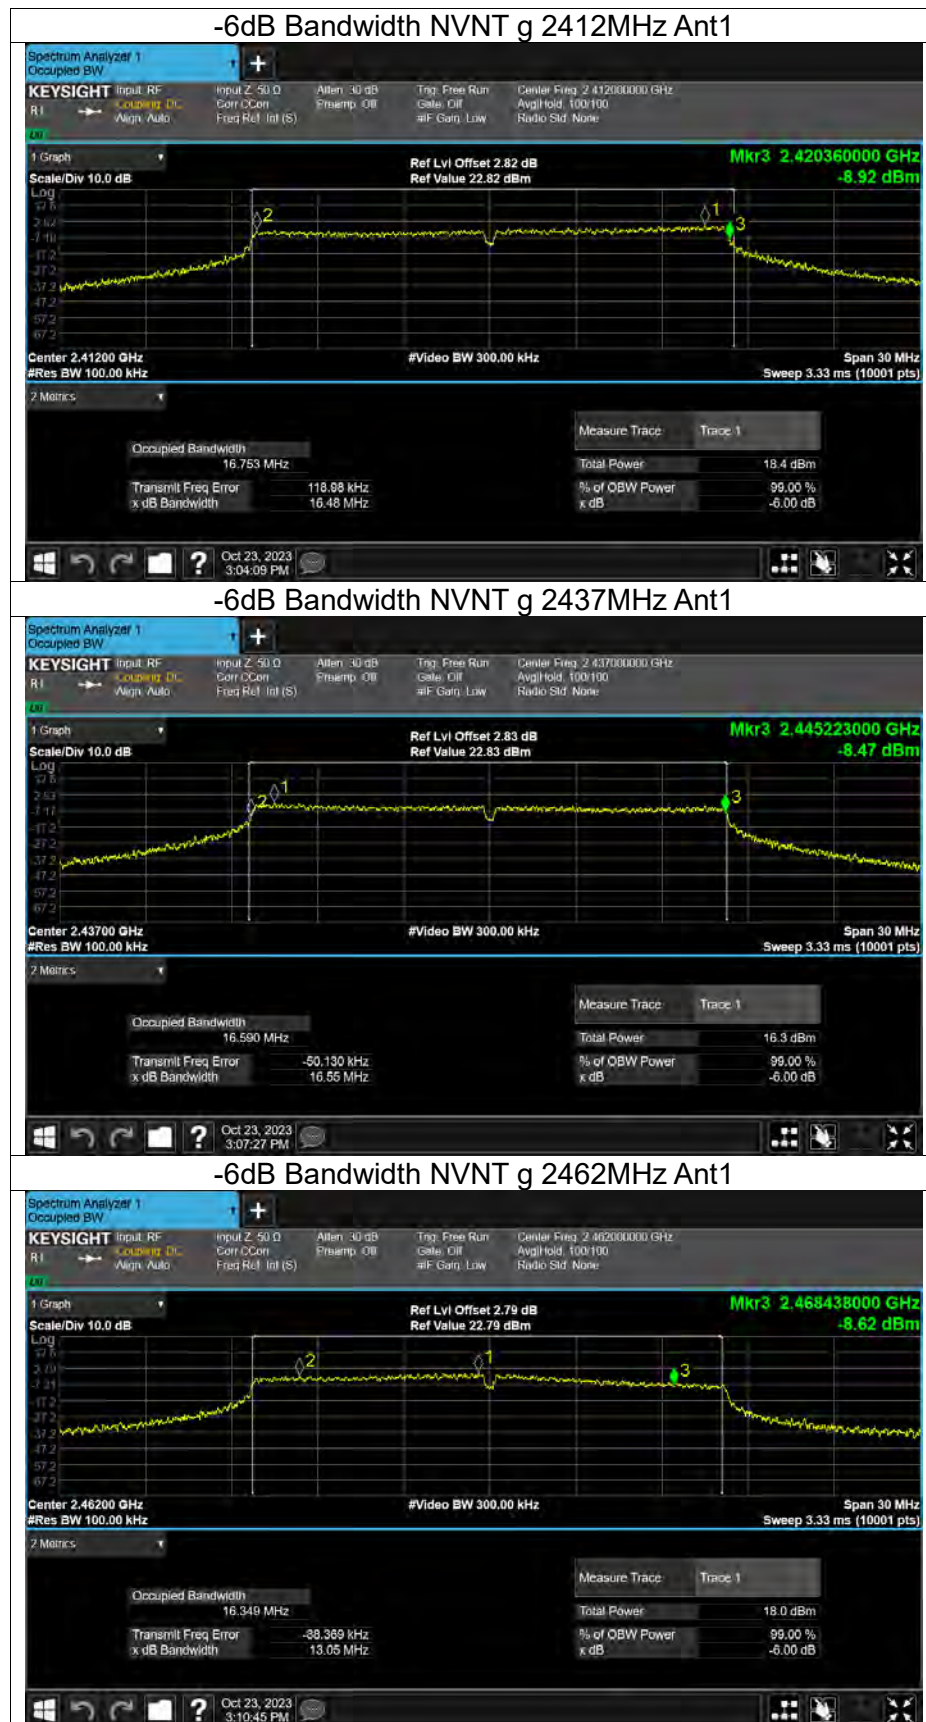

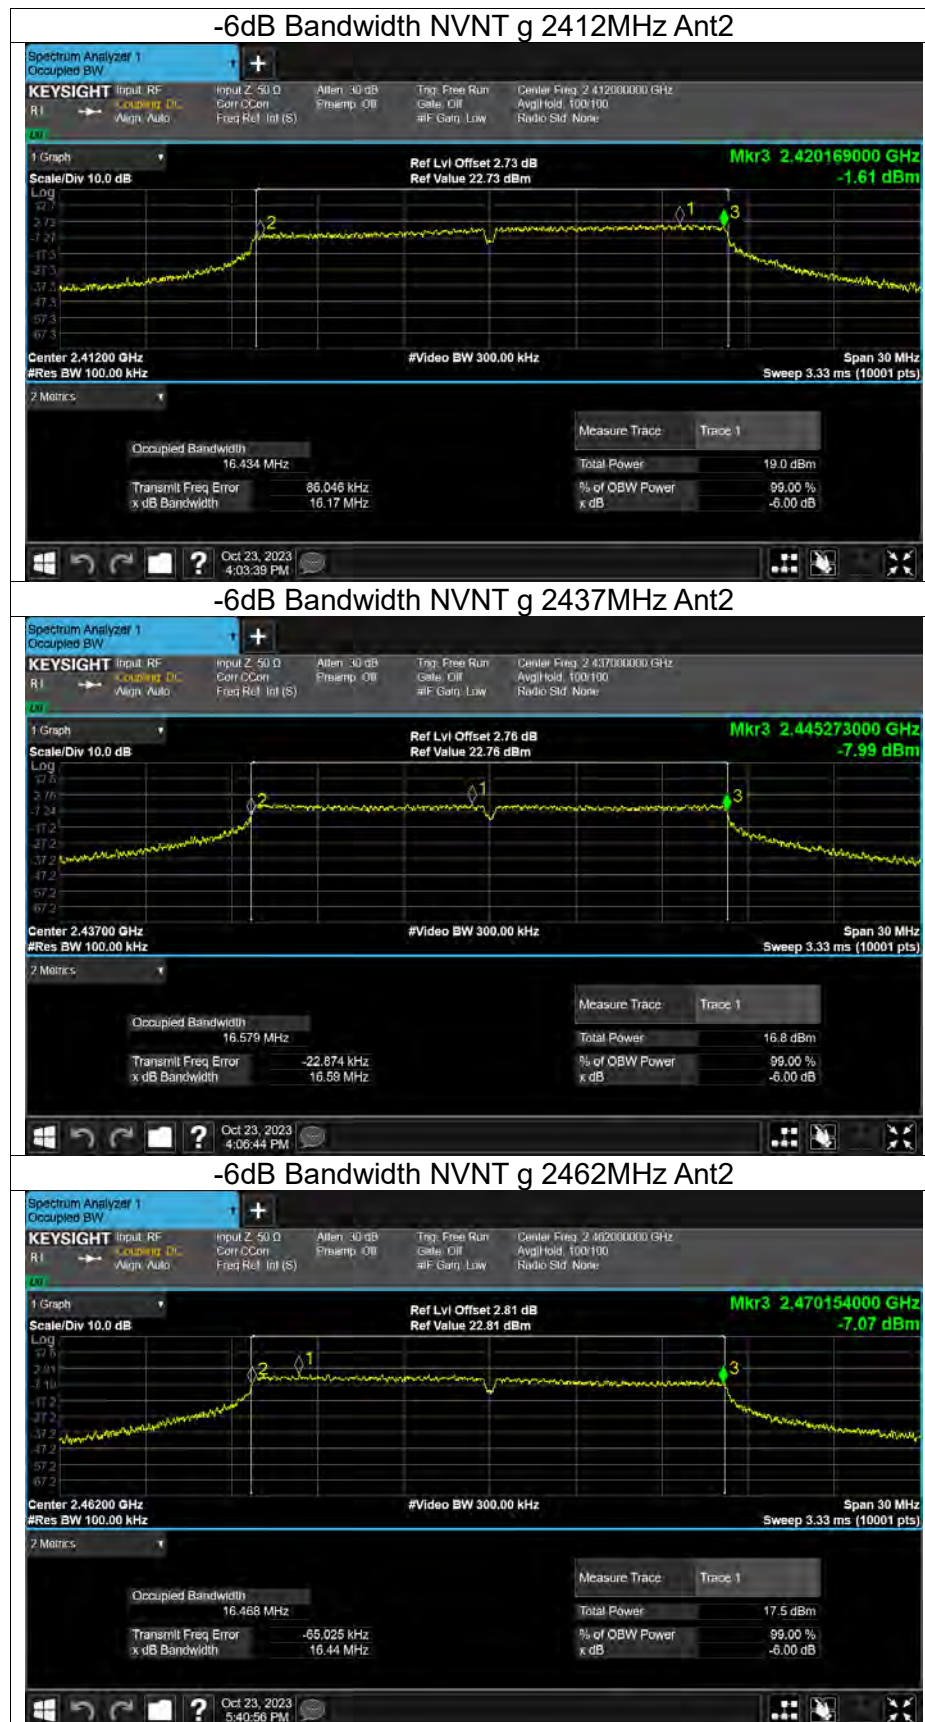





-6dB Bandwidth NVNT n20 2412MHz Ant2



-6dB Bandwidth NVNT n20 2437MHz Ant2



-6dB Bandwidth NVNT n20 2462MHz Ant2





-6dB Bandwidth NVNT n40 2422MHz Ant1



-6dB Bandwidth NVNT n40 2437MHz Ant1



-6dB Bandwidth NVNT n40 2452MHz Ant1





-6dB Bandwidth NVNT n40 2422MHz Ant2



-6dB Bandwidth NVNT n40 2437MHz Ant2



-6dB Bandwidth NVNT n40 2452MHz Ant2





-6dB Bandwidth NVNT ax20 2412MHz Ant1



-6dB Bandwidth NVNT ax20 2437MHz Ant1



-6dB Bandwidth NVNT ax20 2462MHz Ant1





-6dB Bandwidth NVNT ax20 2412MHz Ant2



-6dB Bandwidth NVNT ax20 2437MHz Ant2



-6dB Bandwidth NVNT ax20 2462MHz Ant2






-6dB Bandwidth NVNT ax40 2422MHz Ant1



-6dB Bandwidth NVNT ax40 2437MHz Ant1



-6dB Bandwidth NVNT ax40 2452MHz Ant1

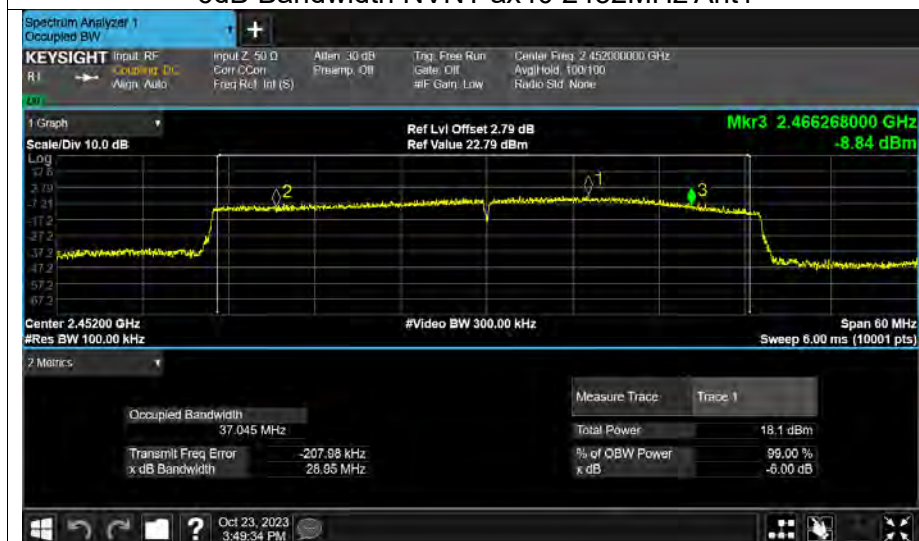



-6dB Bandwidth NVNT ax40 2422MHz Ant2



-6dB Bandwidth NVNT ax40 2437MHz Ant2



-6dB Bandwidth NVNT ax40 2452MHz Ant2





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.063
NVNT	b	2437	Ant1	12.961
NVNT	b	2462	Ant1	11.546
NVNT	b	2412	Ant2	12.362
NVNT	b	2437	Ant2	12.919
NVNT	b	2462	Ant2	12.642
NVNT	g	2412	Ant1	16.972
NVNT	g	2437	Ant1	16.796
NVNT	g	2462	Ant1	16.412
NVNT	g	2412	Ant2	16.539
NVNT	g	2437	Ant2	16.837
NVNT	g	2462	Ant2	16.587
NVNT	n20	2412	Ant1	18.137
NVNT	n20	2437	Ant1	18.045
NVNT	n20	2462	Ant1	17.633
NVNT	n20	2412	Ant2	17.742
NVNT	n20	2437	Ant2	18.021
NVNT	n20	2462	Ant2	17.795
NVNT	n40	2422	Ant1	35.86
NVNT	n40	2437	Ant1	36.485
NVNT	n40	2452	Ant1	35.609
NVNT	n40	2422	Ant2	35.684
NVNT	n40	2437	Ant2	36.559
NVNT	n40	2452	Ant2	35.767
NVNT	ax20	2412	Ant1	19.175
NVNT	ax20	2437	Ant1	19.113
NVNT	ax20	2462	Ant1	18.862
NVNT	ax20	2412	Ant2	19.039
NVNT	ax20	2437	Ant2	19.152
NVNT	ax20	2462	Ant2	19.02
NVNT	ax40	2422	Ant1	37.307
NVNT	ax40	2437	Ant1	37.894
NVNT	ax40	2452	Ant1	37.16
NVNT	ax40	2422	Ant2	37.271
NVNT	ax40	2437	Ant2	37.937
NVNT	ax40	2452	Ant2	37.278





OBW NVNT b 2412MHz Ant2



OBW NVNT b 2437MHz Ant2



OBW NVNT b 2462MHz Ant2





OBW NVNT g 2412MHz Ant1



OBW NVNT g 2437MHz Ant1



OBW NVNT g 2462MHz Ant1





OBW NVNT g 2412MHz Ant2





OBW NVNT g 2437MHz Ant2




OBW NVNT g 2462MHz Ant2



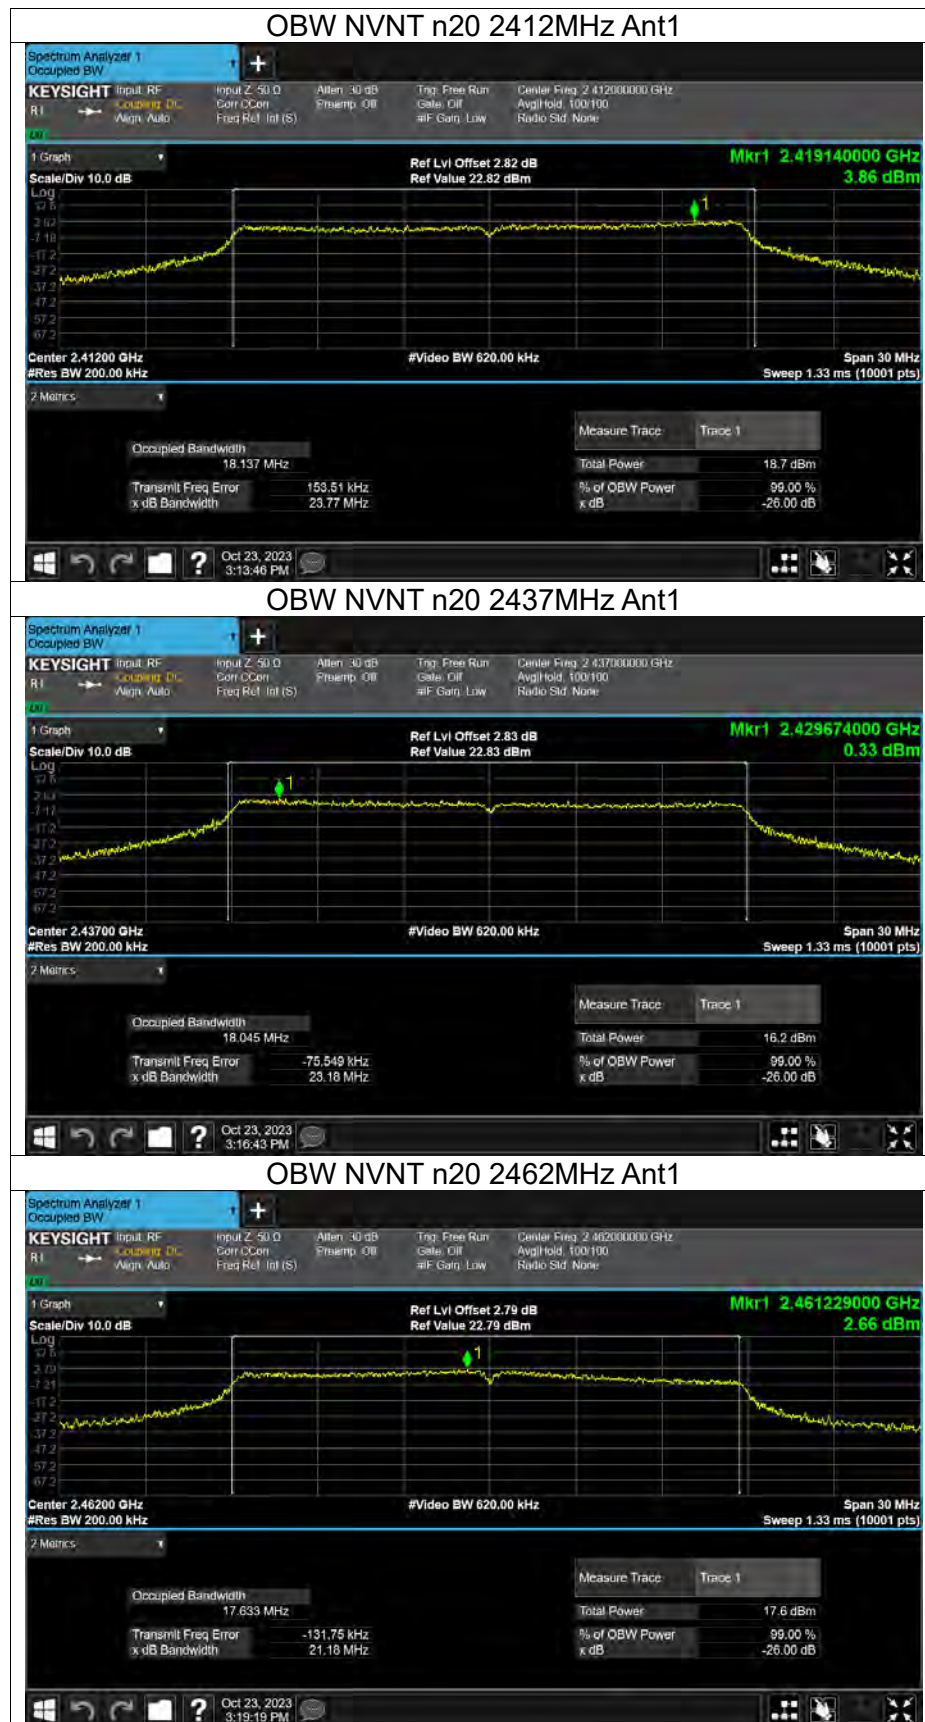

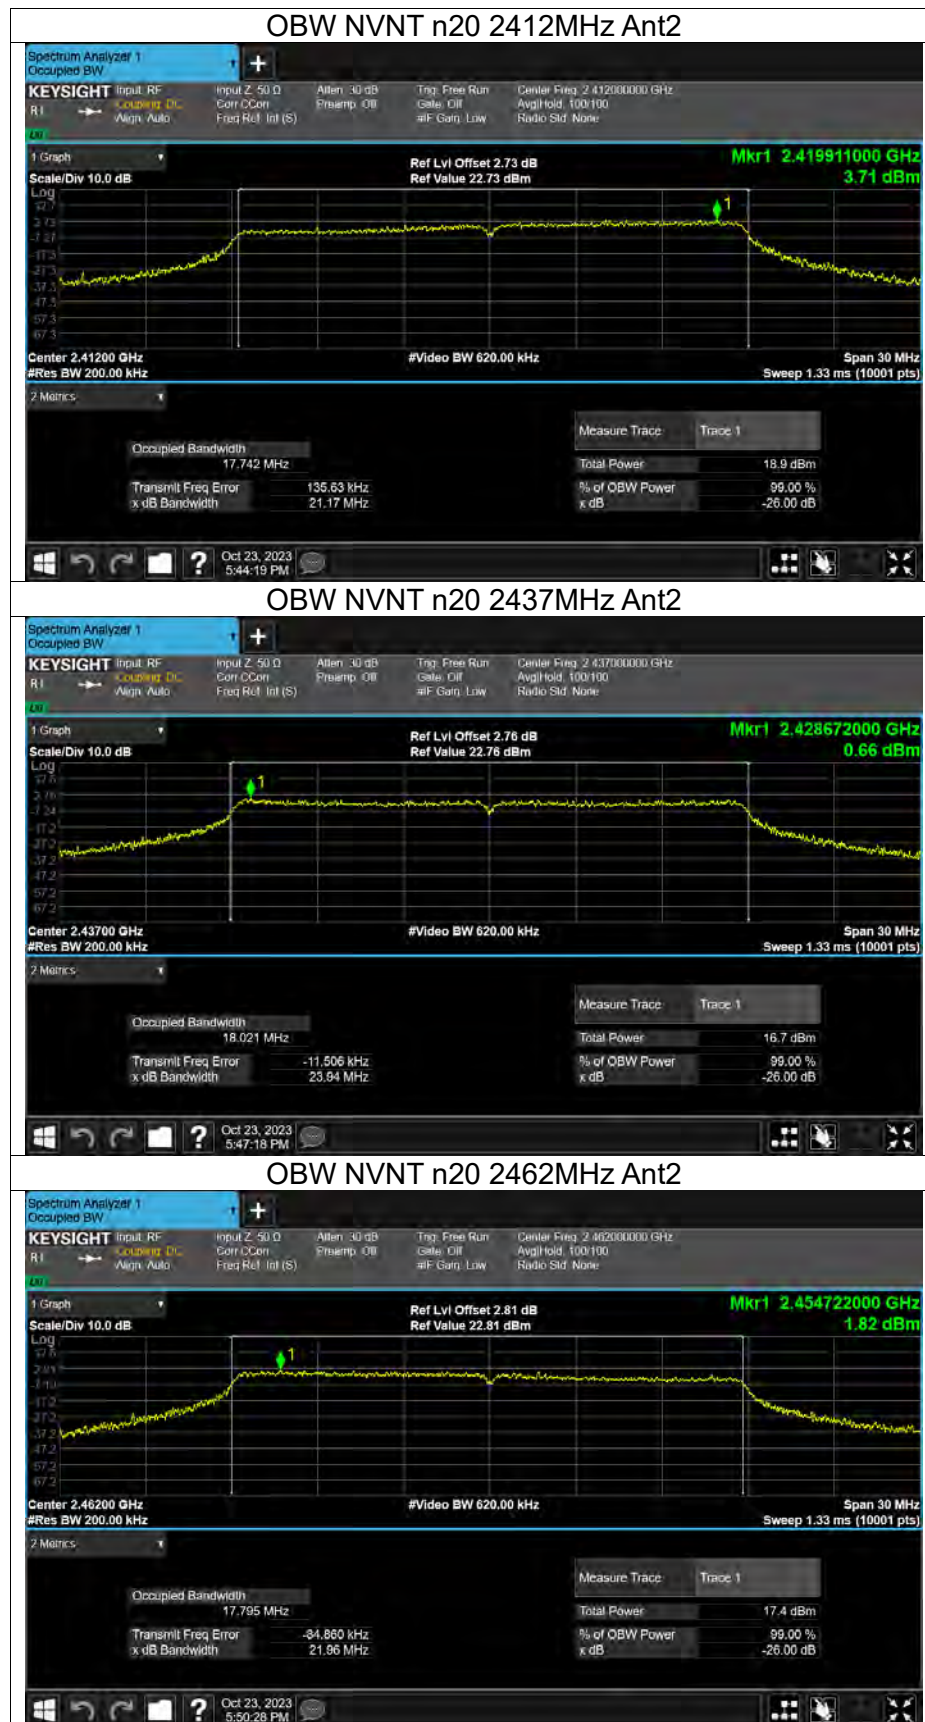

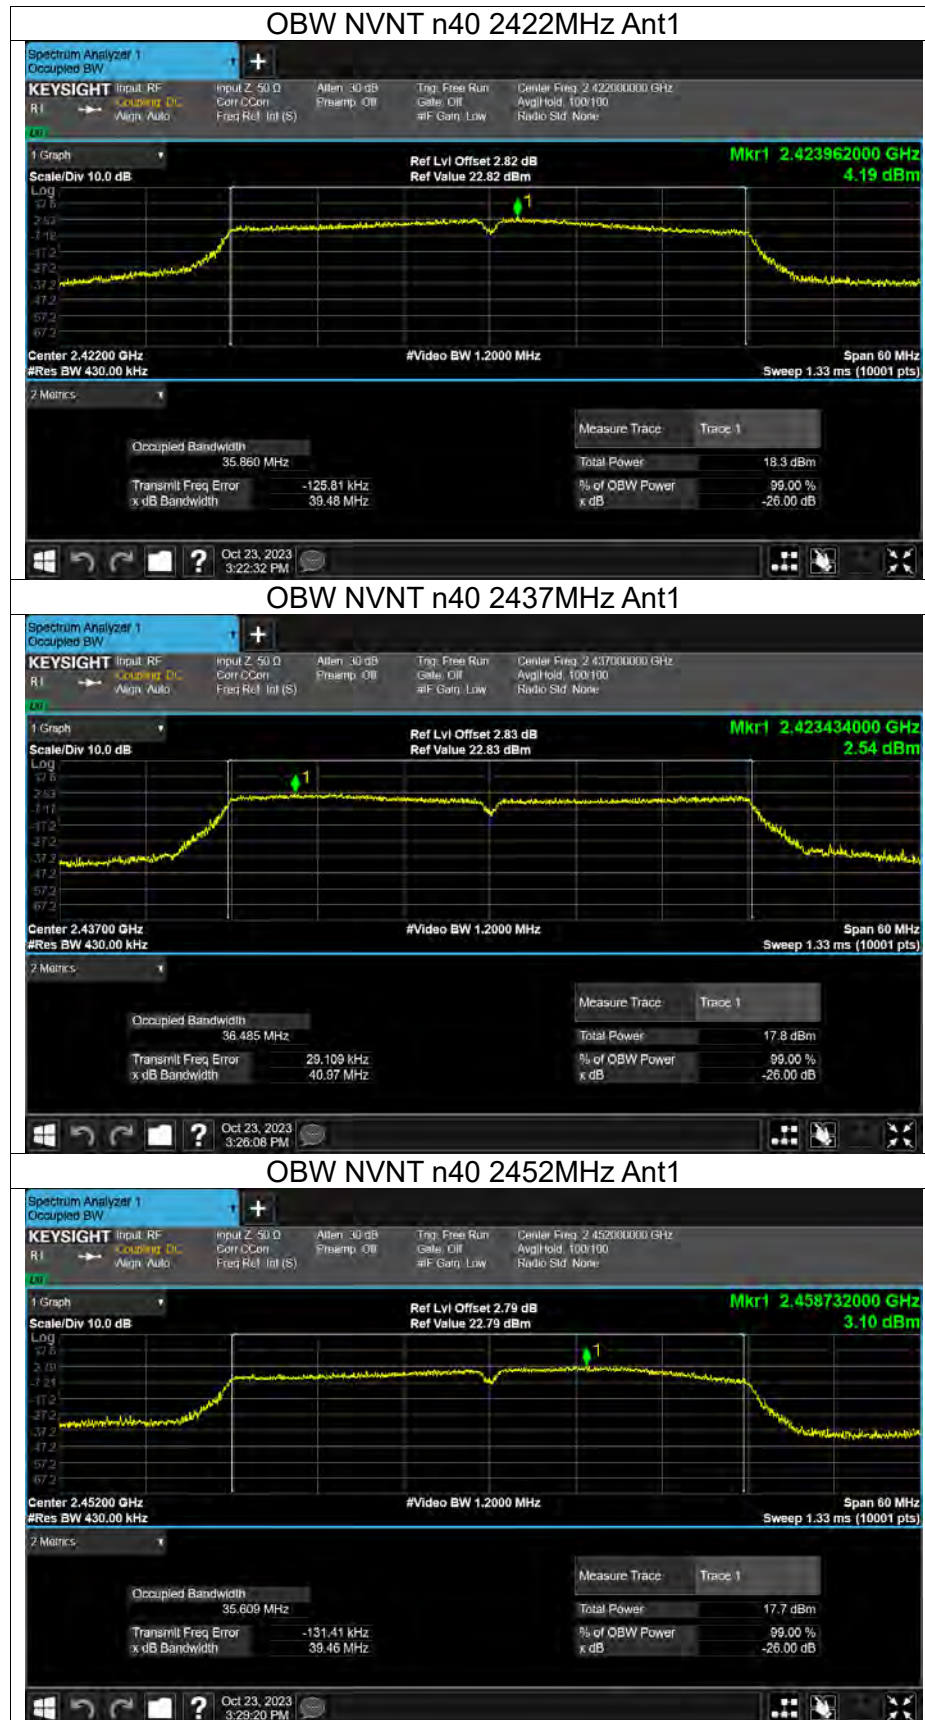







OBW NVNT ax20 2412MHz Ant2



OBW NVNT ax20 2437MHz Ant2



OBW NVNT ax20 2462MHz Ant2





OBW NVNT ax40 2422MHz Ant1




OBW NVNT ax40 2437MHz Ant1



OBW NVNT ax40 2452MHz Ant1



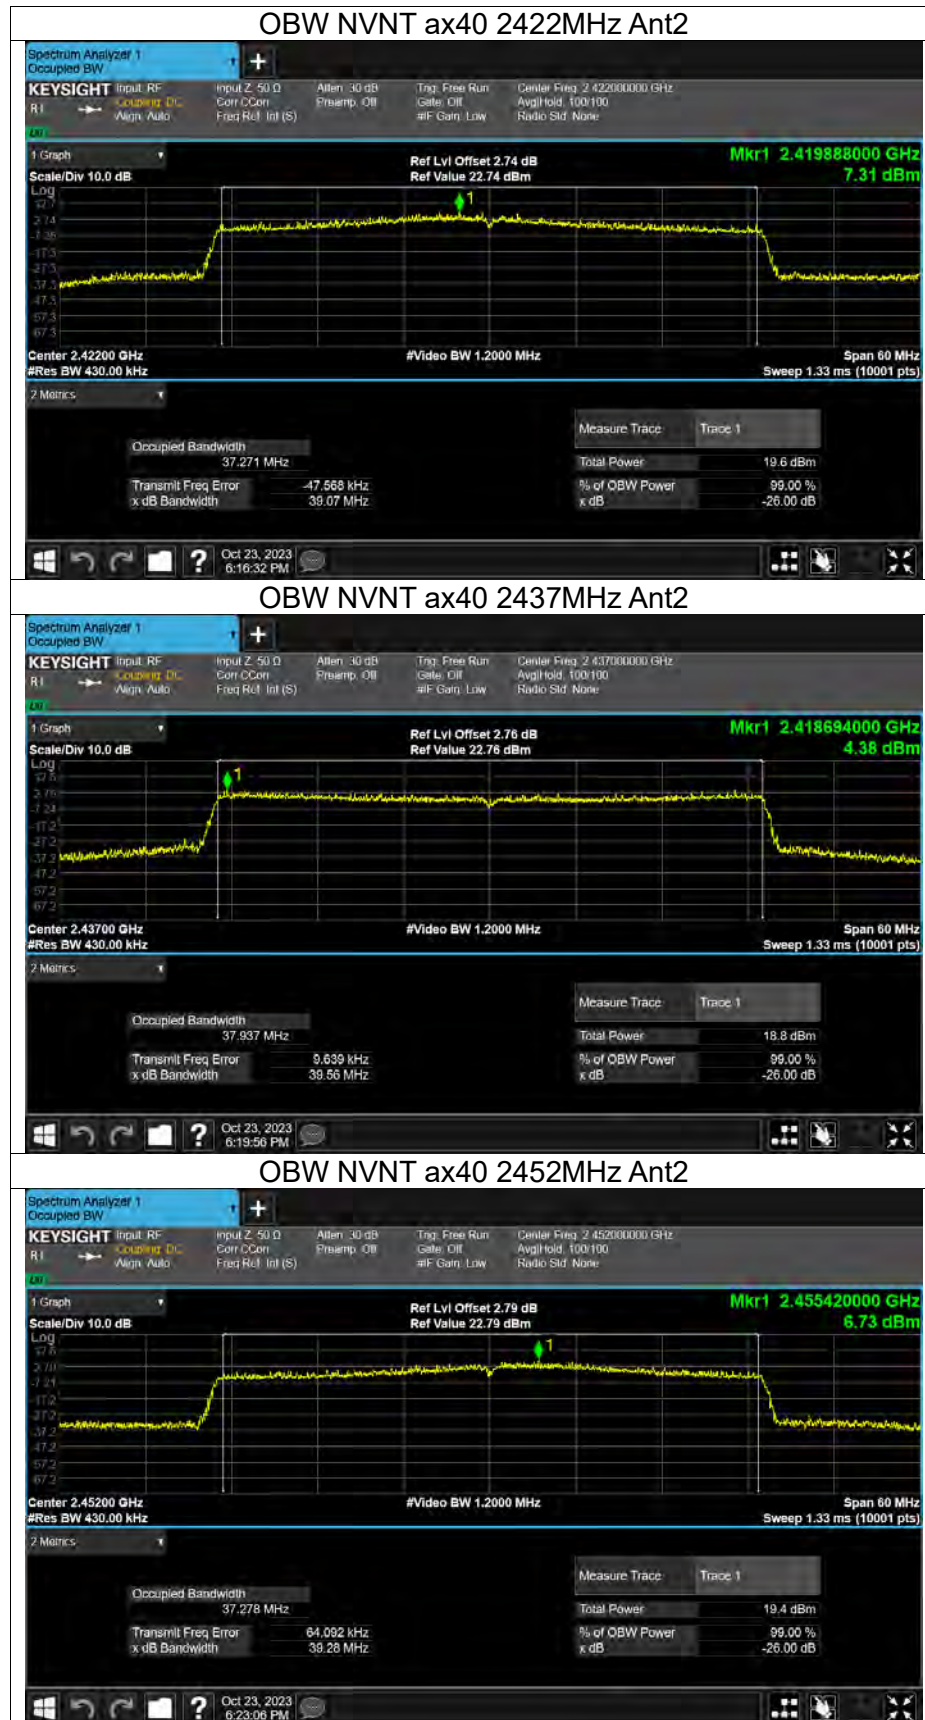




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-10.09	8	Pass
NVNT	b	2437	Ant1	-14.18	8	Pass
NVNT	b	2462	Ant1	-10.55	8	Pass
NVNT	b	2412	Ant2	-9.13	8	Pass
NVNT	b	2437	Ant2	-11.85	8	Pass
NVNT	b	2462	Ant2	-12.97	8	Pass
NVNT	g	2412	Ant1	-10.57	8	Pass
NVNT	g	2437	Ant1	-12.27	8	Pass
NVNT	g	2462	Ant1	-10.97	8	Pass
NVNT	g	2412	Ant2	-9.61	8	Pass
NVNT	g	2437	Ant2	-12.65	8	Pass
NVNT	g	2462	Ant2	-12.41	8	Pass
NVNT	n20	2412	Ant1	-10.39	8	Pass
NVNT	n20	2437	Ant1	-12.67	8	Pass
NVNT	n20	2462	Ant1	-11.63	8	Pass
NVNT	n20	2412	Ant2	-10.76	8	Pass
NVNT	n20	2437	Ant2	-14.3	8	Pass
NVNT	n20	2462	Ant2	-12.75	8	Pass
NVNT	n20	2412	Ant1	-8.3	8	Pass
NVNT	n20	2412	Ant2	-11.59	8	Pass
NVNT	n20	2412	Sum	-6.63	8	Pass
NVNT	n20	2437	Ant1	-12.7	8	Pass
NVNT	n20	2437	Ant2	-13.78	8	Pass
NVNT	n20	2437	Sum	-10.2	8	Pass
NVNT	n20	2462	Ant1	-11.9	8	Pass
NVNT	n20	2462	Ant2	-11.5	8	Pass
NVNT	n20	2462	Sum	-8.69	8	Pass
NVNT	n40	2422	Ant1	-13.53	8	Pass
NVNT	n40	2437	Ant1	-14.01	8	Pass
NVNT	n40	2452	Ant1	-13.98	8	Pass
NVNT	n40	2422	Ant2	-12.57	8	Pass
NVNT	n40	2437	Ant2	-14.95	8	Pass
NVNT	n40	2452	Ant2	-13.32	8	Pass
NVNT	n40	2422	Ant1	-13.02	8	Pass
NVNT	n40	2422	Ant2	-13.05	8	Pass
NVNT	n40	2422	Sum	-10.02	8	Pass
NVNT	n40	2437	Ant1	-14.23	8	Pass
NVNT	n40	2437	Ant2	-14	8	Pass
NVNT	n40	2437	Sum	-11.1	8	Pass
NVNT	n40	2452	Ant1	-14.1	8	Pass
NVNT	n40	2452	Ant2	-13.35	8	Pass
NVNT	n40	2452	Sum	-10.7	8	Pass
NVNT	ax20	2412	Ant1	-10.26	8	Pass
NVNT	ax20	2437	Ant1	-14.52	8	Pass
NVNT	ax20	2462	Ant1	-12.33	8	Pass
NVNT	ax20	2412	Ant2	-11.41	8	Pass
NVNT	ax20	2437	Ant2	-13.51	8	Pass
NVNT	ax20	2462	Ant2	-13.18	8	Pass
NVNT	ax20	2412	Ant1	-8.6	8	Pass
NVNT	ax20	2412	Ant2	-11.13	8	Pass
NVNT	ax20	2412	Sum	-6.67	8	Pass
NVNT	ax20	2437	Ant1	-13.44	8	Pass



NVNT	ax20	2437	Ant2	-14.25	8	Pass
NVNT	ax20	2437	Sum	-10.82	8	Pass
NVNT	ax20	2462	Ant1	-13.58	8	Pass
NVNT	ax20	2462	Ant2	-13.13	8	Pass
NVNT	ax20	2462	Sum	-10.34	8	Pass
NVNT	ax40	2422	Ant1	-12.94	8	Pass
NVNT	ax40	2437	Ant1	-14.23	8	Pass
NVNT	ax40	2452	Ant1	-14.83	8	Pass
NVNT	ax40	2422	Ant2	-13.06	8	Pass
NVNT	ax40	2437	Ant2	-15.17	8	Pass
NVNT	ax40	2452	Ant2	-13.95	8	Pass
NVNT	ax40	2422	Ant1	-13.62	8	Pass
NVNT	ax40	2422	Ant2	-13.96	8	Pass
NVNT	ax40	2422	Sum	-10.78	8	Pass
NVNT	ax40	2437	Ant1	-14.82	8	Pass
NVNT	ax40	2437	Ant2	-15.94	8	Pass
NVNT	ax40	2437	Sum	-12.33	8	Pass
NVNT	ax40	2452	Ant1	-14.41	8	Pass
NVNT	ax40	2452	Ant2	-13.13	8	Pass
NVNT	ax40	2452	Sum	-10.71	8	Pass

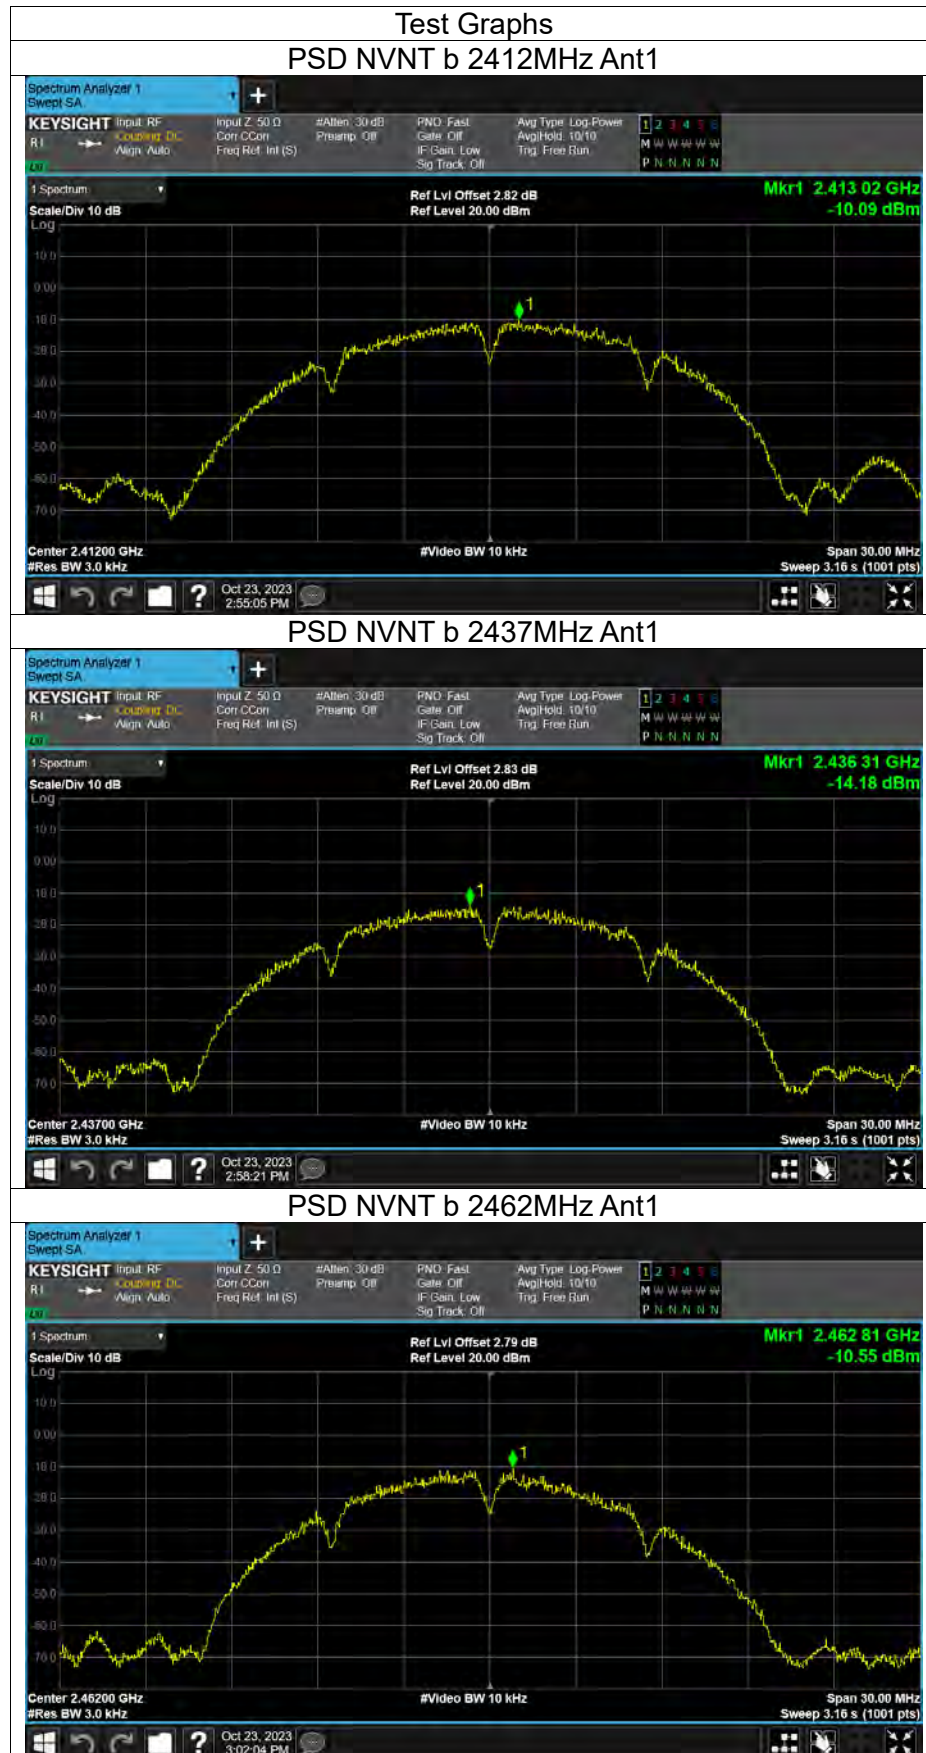



PSD NVNT b 2412MHz Ant2



PSD NVNT b 2437MHz Ant2



PSD NVNT b 2462MHz Ant2







PSD NVNT g 2412MHz Ant1



PSD NVNT g 2437MHz Ant1

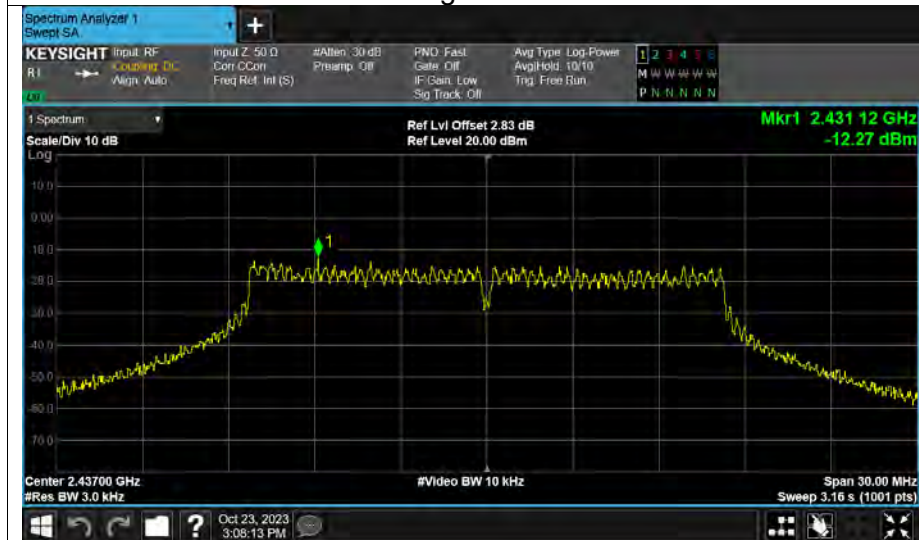

PSD NVNT g 2462MHz Ant1

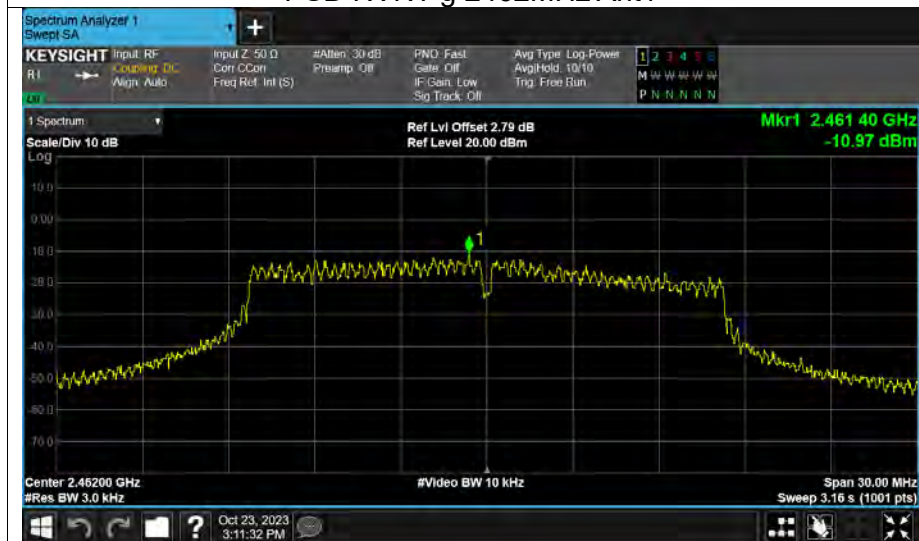




PSD NVNT g 2412MHz Ant2



PSD NVNT g 2437MHz Ant2

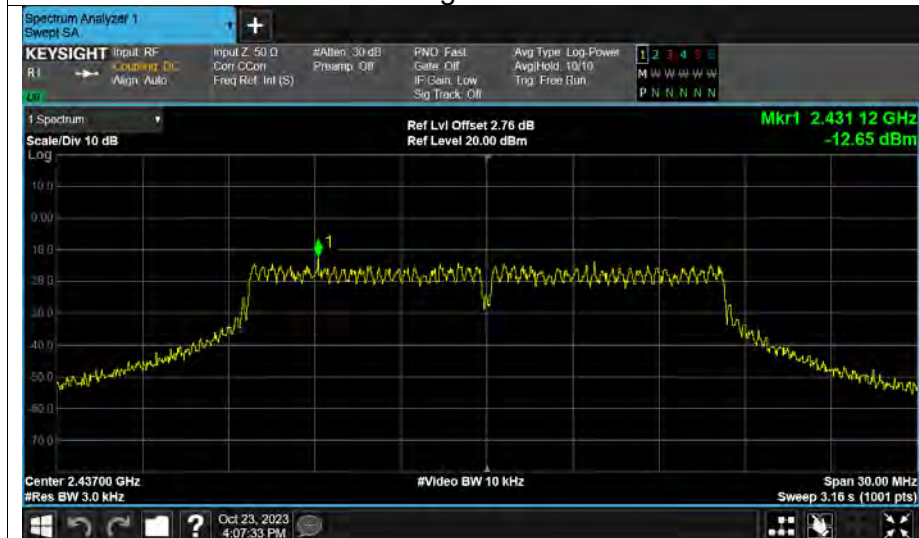

PSD NVNT g 2462MHz Ant2

