



## FCC TEST REPORT

**FCC ID: 2BAYW-XPEJ011**

On Behalf of

ZhenShi Information Technology (Shenzhen) Co., Ltd

Mibro OpenEar Pro

Model No.: XPEJ011

Prepared for : ZhenShi Information Technology (Shenzhen) Co., Ltd  
Address : RM1401-1403, 1408, Tower E, Galaxy World, Minzhi Street, Longhua  
District, Shenzhen, China


Prepared By : Shenzhen PSI Testing Co., Ltd.  
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,  
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2410011-C01-R02  
Date of Receipt : October 14, 2024  
Date of Test : October 14 - 29, 2024  
Date of Report : October 29, 2024  
Version Number : V0

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
<b>1. Summary Of Standards And Results.....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. General Information.....</b>	<b>7</b>
2.1. Description of Device (EUT) .....	7
2.2. Accessories of Device (EUT) .....	8
2.3. Tested Supporting System Details .....	8
2.4. Block Diagram of connection between EUT and simulators .....	8
2.5. Test Mode Description .....	8
2.6. Test Conditions .....	9
2.7. Test Facility .....	9
2.8. Measurement Uncertainty .....	9
2.9. Test Equipment List .....	10
<b>3. Maximum Peak Output Power .....</b>	<b>11</b>
3.1. Limit .....	11
3.2. Test Procedure .....	11
3.3. Test Setup.....	11
3.4. Test Result.....	11
<b>4. Bandwidth .....</b>	<b>12</b>
4.1. Limit .....	12
4.2. Test Procedure .....	12
4.3. Test Result.....	12
<b>5. Carrier Frequency Separation .....</b>	<b>33</b>
5.1. Limit .....	33
5.2. Test Procedure .....	33
5.3. Test Result.....	33
<b>6. Number Of Hopping Channel .....</b>	<b>37</b>
6.1. Limit .....	37
6.2. Test Procedure .....	37
6.3. Test Result.....	37
<b>7. Dwell Time .....</b>	<b>41</b>
7.1. Test limit.....	41
7.2. Test Procedure .....	41
7.3. Test Result.....	41
<b>8. Out-of-band Emissions .....</b>	<b>61</b>
8.1. Test Limits.....	61
8.2. Test Procedure .....	61
8.3. Test Setup.....	61
8.4. Test Results .....	61
<b>9. Radiated Emissions.....</b>	<b>104</b>
9.1. Limit .....	104
9.2. Block Diagram of Test setup.....	105
9.3. Test Procedure .....	106

9.4. Test Results .....	106
<b>10. Band Edge Test.....</b>	<b>119</b>
10.1. Block Diagram of Test Setup .....	119
10.2. Test Limit .....	119
10.3. Test Procedure .....	119
10.4. Test Results .....	120
<b>11. Power Line Conducted Emissions.....</b>	<b>126</b>
11.1. Block Diagram of Test Setup .....	126
11.2. Limit .....	126
11.3. Test Procedure .....	126
11.4. Test Results .....	127
<b>12. Antenna Requirements .....</b>	<b>132</b>
12.1. Limit .....	132
12.2. Result .....	132
<b>13. Photos of test setup .....</b>	<b>133</b>
<b>14. Photos of EUT .....</b>	<b>133</b>

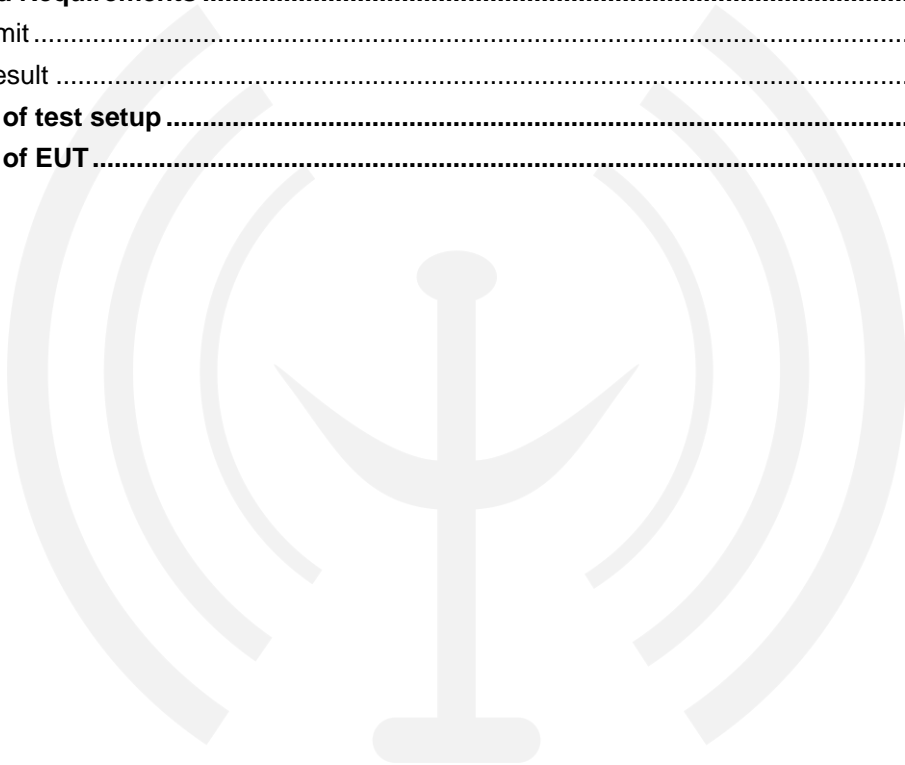

### TEST REPORT DECLARATION

Applicant : ZhenShi Information Technology (Shenzhen) Co., Ltd  
 Address : RM1401-1403, 1408, Tower E, Galaxy World, Minzhi Street, Longhua District, Shenzhen, China  
 Manufacturer : ZhenShi Information Technology (Shanghai) Co., Ltd  
 Address : Room 4015, Building 2, No.588 Zixing Road, Minhang Distric, Shanghai, China  
 EUT Description : Mibro OpenEar Pro  
 (A) Model No. : XPEJ011  
 (B) Trademark : **mibro**

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247, ANSI C63.10-2013**

**Test Result: PASS**

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Jensen Wang  
 Test Engineer *Jensen Wang*

Approved by (name + signature).....: Simple Guan  
 Project Manager *Simple Guan*

Date of issue.....: October 28, 2024

## Revision History

Revision	Issue Date	Revisions	Revised By
V0	October 28, 2024	Initial released Issue	Jensen Wang



## 1. Summary Of Standards And Results

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15:15.247(a)(1)	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	P
Out-of-band Emissions	FCC Part 15: 15.247(d)	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty. 5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.	

## 2. General Information

### 2.1. Description of Device (EUT)

Description/PMN : Mibro OpenEar Pro

Model List : XPEJ011

Diff : N/A

Test Voltage : DC 3.7V from battery, DC 5V from Charging Case

Radio Technology : Bluetooth V5.4 EDR

Operation frequency : 2402MHz-2480MHz

Modulation : GFSK,  $\pi/4$ -DQPSK, 8 DPSK

Channel No. : 79 Channels

Channel Separation : 1MHz

Antenna Type : Left earphone :Internal Antenna, max gain -0.51dBi.  
Right earphone :Internal Antenna, max gain -1.13dBi.

Software version : V1.0

Hardware version : V1.0

Intend use environment : Residential, commercial and light industrial environment

Note : Antenna information is provided by applicant.  
Testing lab is not responsible for the accuracy of the information.

Because the antennas of the left and right earphones are different, they are both tested.


## 2.2. Accessories of Device (EUT)

Accessories	: Charging Case
Manufacturer	: ZhenShi Information Technology (Shanghai) Co., Ltd
Model	: N/A
Input	: N/A
Output	: N/A

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	Baseus	CCXFK65CC	N/A
2	USB Cable	N/A	N/A	N/A

## 2.4. Block Diagram of connection between EUT and simulators

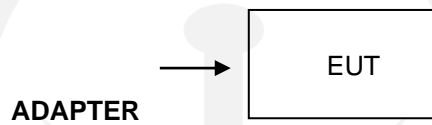

## 2.5. Test Mode Description

The test software used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK / Pi/4-DQPSK / 8 DPSK Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8 DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK / 8 DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480



## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	26°C
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	98kPa

## 2.7. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power line Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied Bandwidth	968Hz
Conducted Spurious Emission	1.26dB

## 2.9. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2023.12.19	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2023.12.19	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2023.12.19	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2023.04.03	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2022.12.26	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2023.12.19	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2022.12.26	2 Year
9.	Amplifier	SKET	LAPA_01G18 G-45dB	SK20220329 01	/	2023.12.19	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2022.12.25	2 Year
11.	Amplifier	SKET	LNPA_0118G -45	SK20200108 01	/	2023.12.19	1 Year
12	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2023.12.19	1 Year
13	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2023.12.19	1 Year
14	Temp. & Humid Chamber	Auchno	9606	/	/	2023.12.19	1 Year
15	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38		2023.12.19	1 Year
16	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2023.12.19	1 Year

## For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ_EMCC	Farad	PSI-3A1
CE	EZ_EMCC	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0

### 3. Maximum Peak Output Power

#### 3.1. Limit


Please refer FCC part 15.247 & RSS-247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

#### 3.3. Test Setup

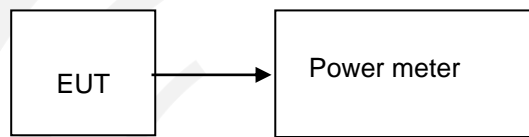

#### 3.4. Test Result

Left earphone:

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH1	2402.00	2.26	1.68	1000	Pass
NVNT	ANT1	1-DH1	2441.00	2.66	1.84	125	Pass
NVNT	ANT1	1-DH1	2480.00	2.74	1.88	125	Pass
NVNT	ANT1	2-DH1	2402.00	3.09	2.04	125	Pass
NVNT	ANT1	2-DH1	2441.00	3.38	2.18	125	Pass
NVNT	ANT1	2-DH1	2480.00	<b>3.52</b>	<b>2.25</b>	125	Pass
NVNT	ANT1	3-DH1	2402.00	1.96	1.57	125	Pass
NVNT	ANT1	3-DH1	2441.00	2.16	1.64	125	Pass
NVNT	ANT1	3-DH1	2480.00	2.23	1.67	125	Pass

Right earphone:

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH1	2402.00	2.08	1.61	1000	Pass
NVNT	ANT1	1-DH1	2441.00	2.34	1.71	125	Pass
NVNT	ANT1	1-DH1	2480.00	2.39	1.73	125	Pass
NVNT	ANT1	2-DH1	2402.00	2.76	1.89	125	Pass
NVNT	ANT1	2-DH1	2441.00	3.00	2.00	125	Pass
NVNT	ANT1	2-DH1	2480.00	<b>3.06</b>	<b>2.02</b>	125	Pass
NVNT	ANT1	3-DH1	2402.00	1.50	1.41	125	Pass
NVNT	ANT1	3-DH1	2441.00	1.71	1.48	125	Pass
NVNT	ANT1	3-DH1	2480.00	1.69	1.47	125	Pass

## 4. Bandwidth

### 4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 4.3. Test Result

Left earphone:



Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH1	2402.00	0.984	No
NVNT	ANT1	1-DH1	2441.00	1.016	Yes
NVNT	ANT1	1-DH1	2480.00	1.029	Yes
NVNT	ANT1	2-DH1	2402.00	1.279	Yes
NVNT	ANT1	2-DH1	2441.00	1.272	Yes
NVNT	ANT1	2-DH1	2480.00	1.284	Yes
NVNT	ANT1	3-DH1	2402.00	1.171	Yes
NVNT	ANT1	3-DH1	2441.00	1.171	Yes
NVNT	ANT1	3-DH1	2480.00	1.171	Yes



-20dB\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2402\_00





-20dB\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2441\_00




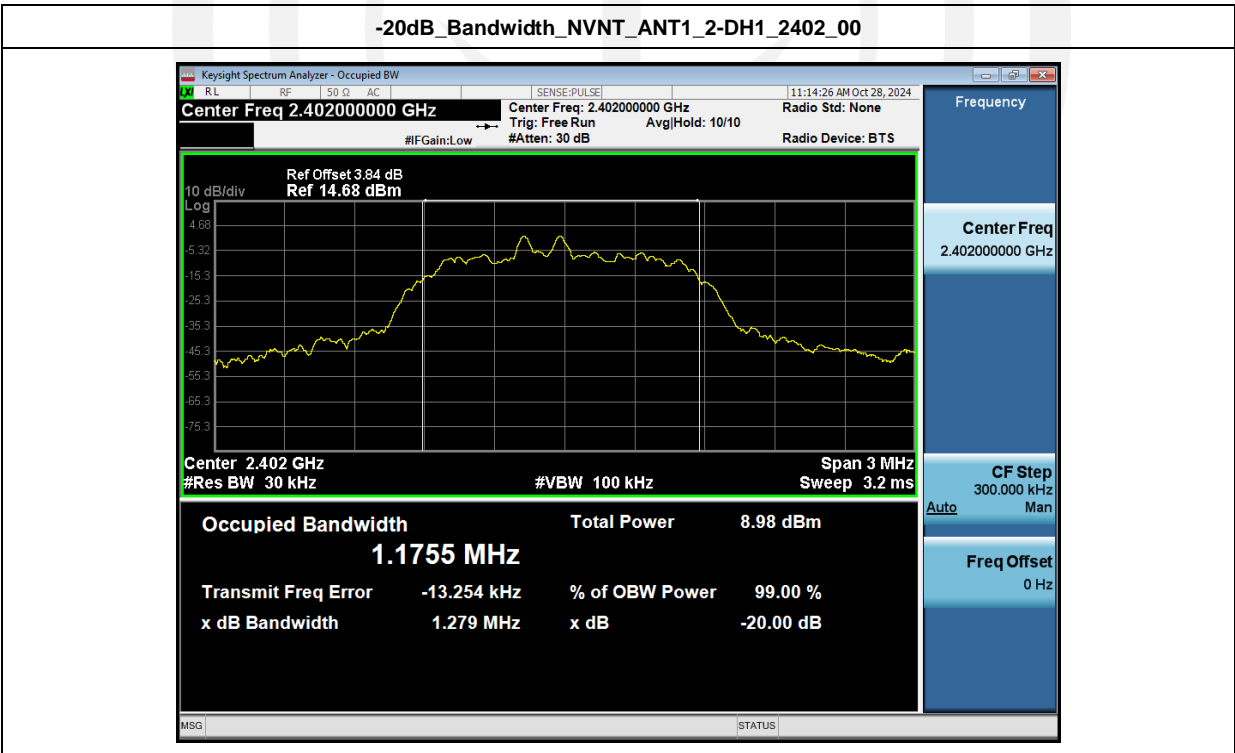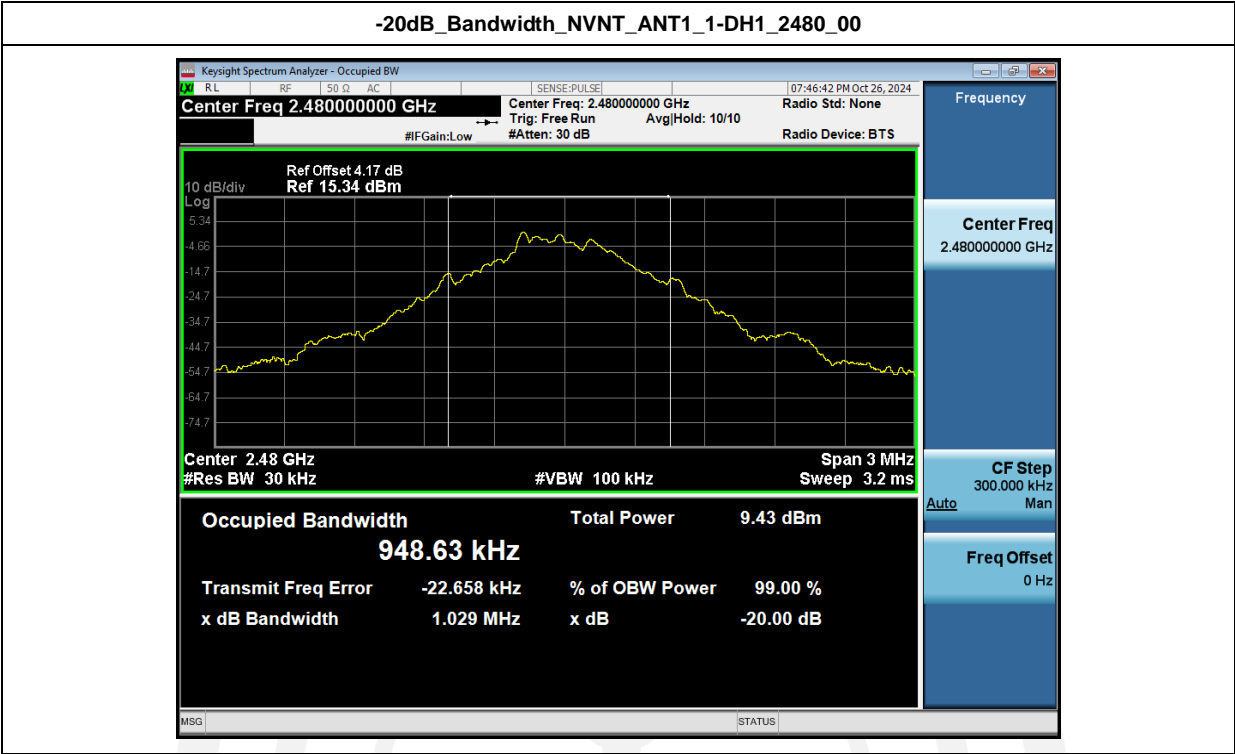

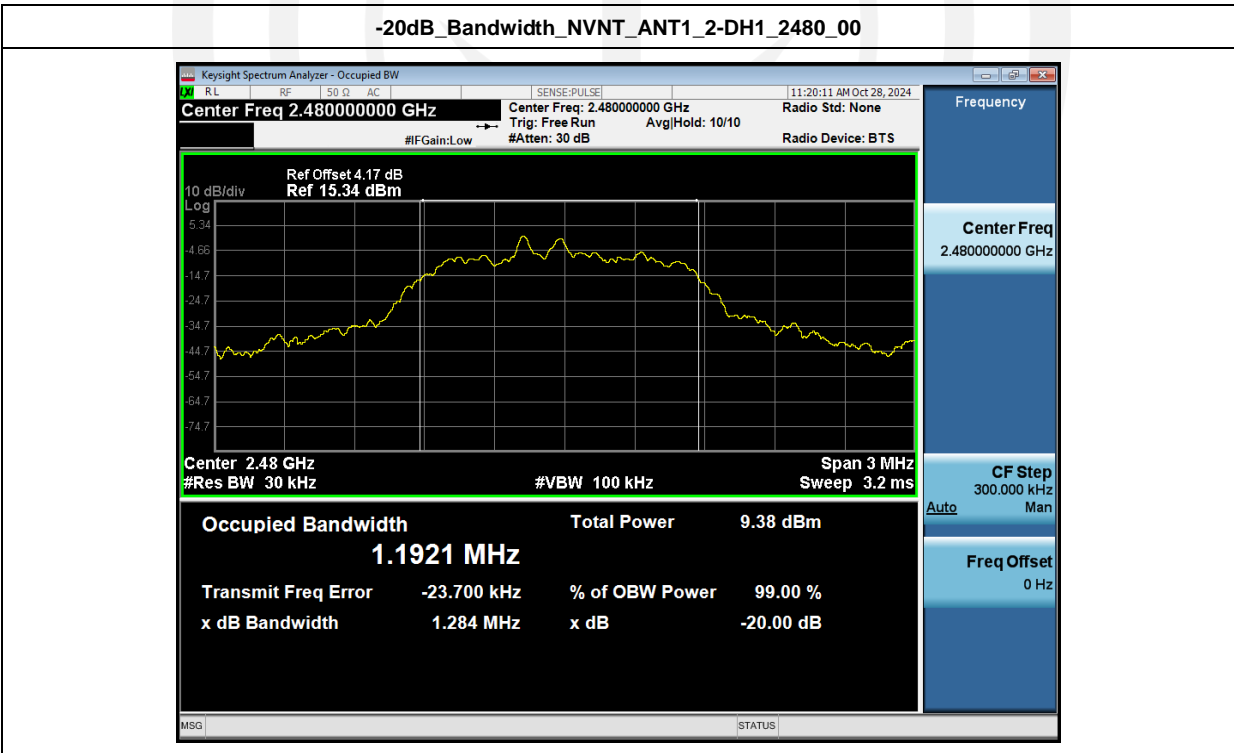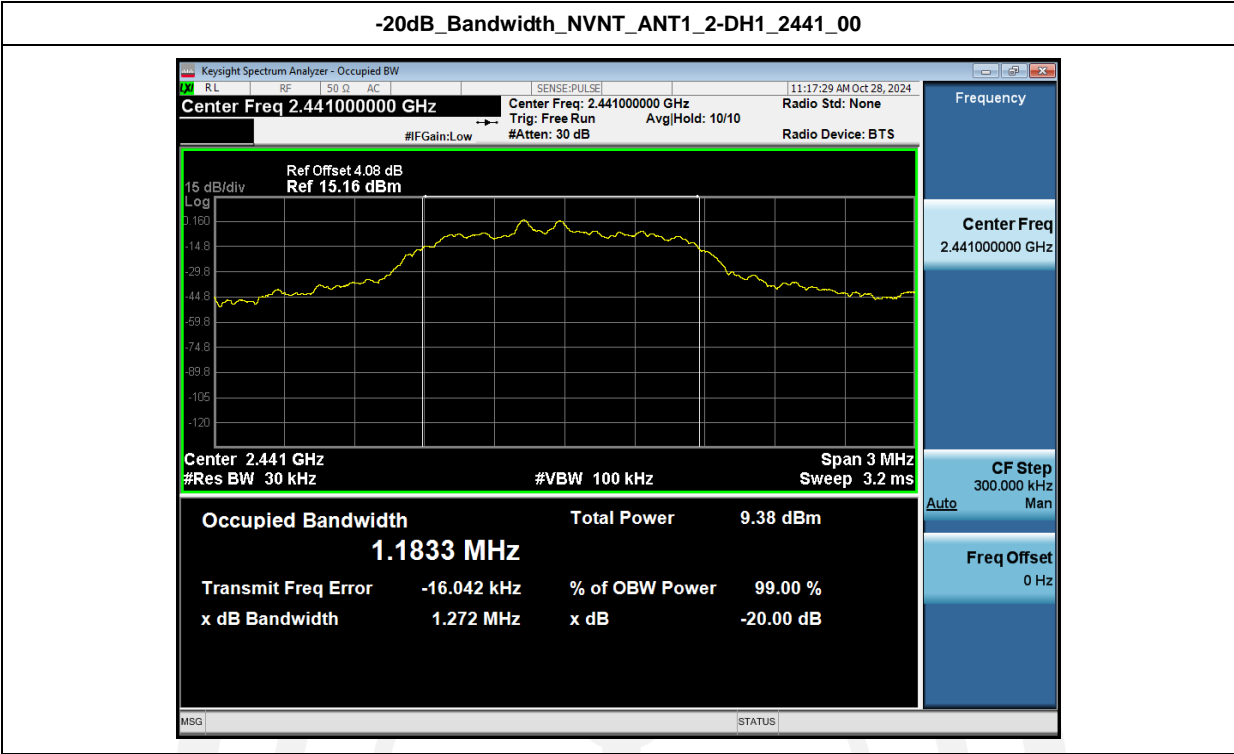

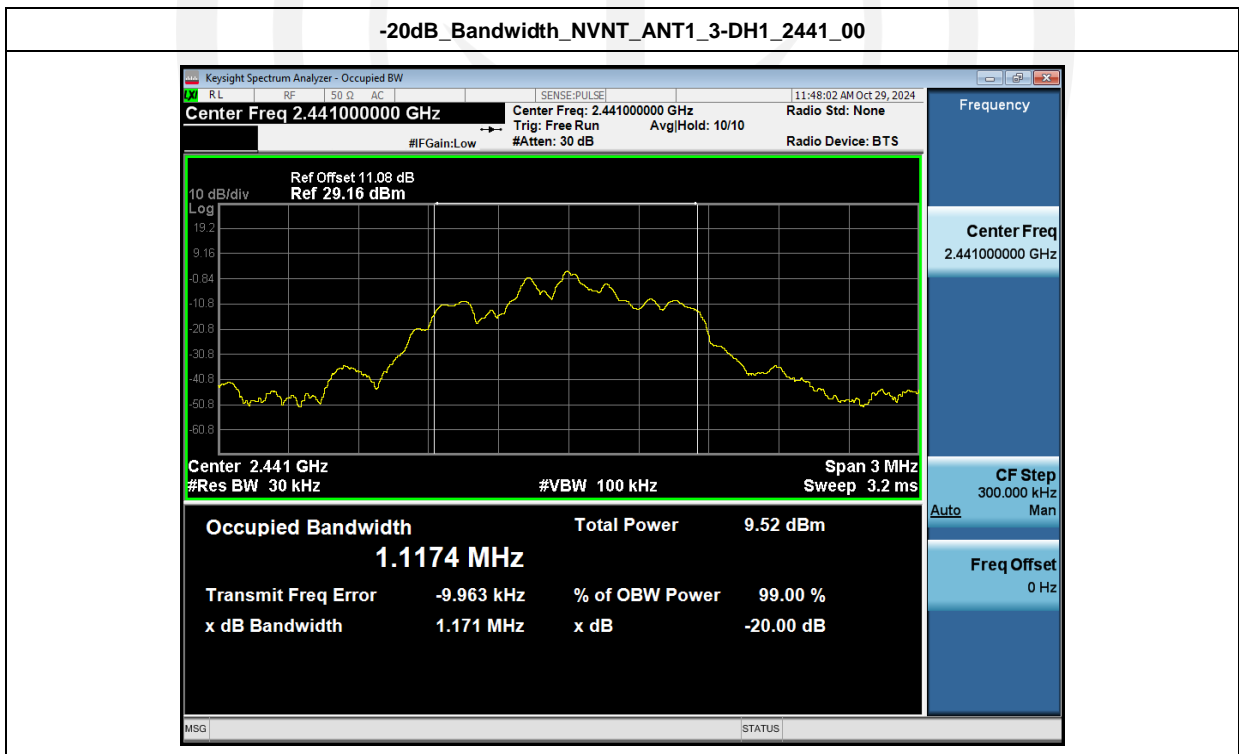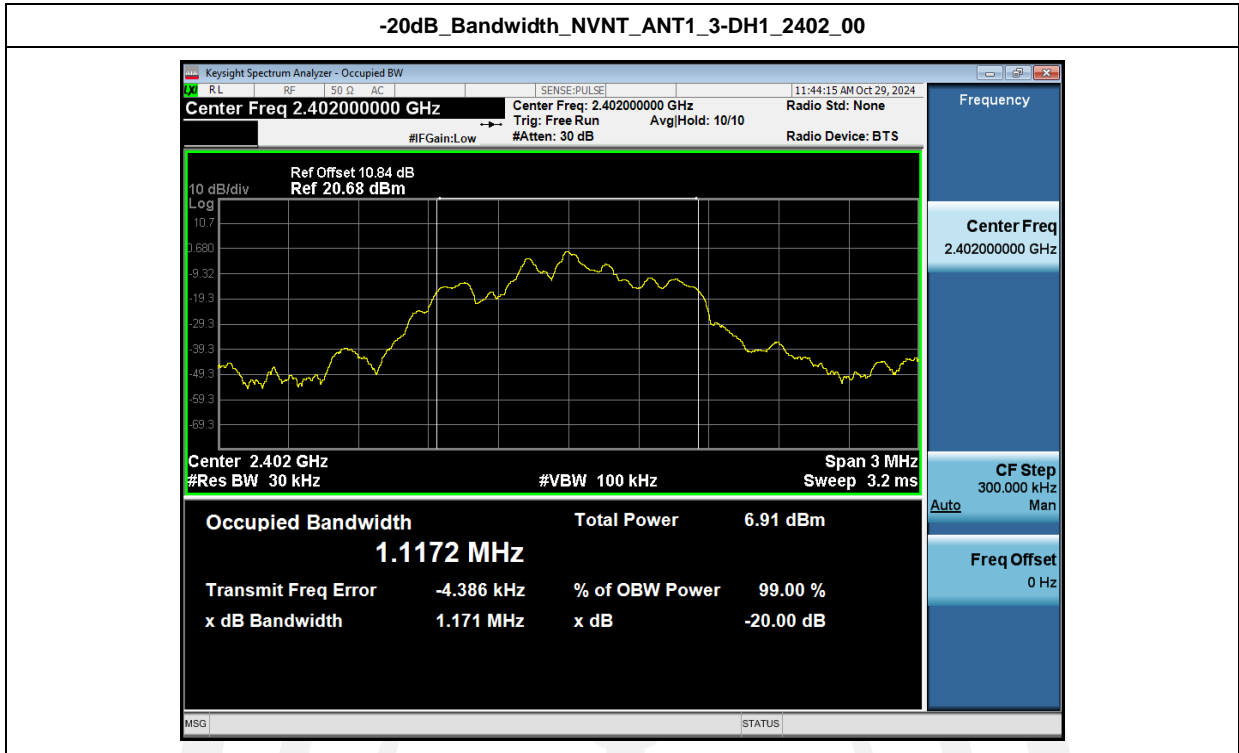



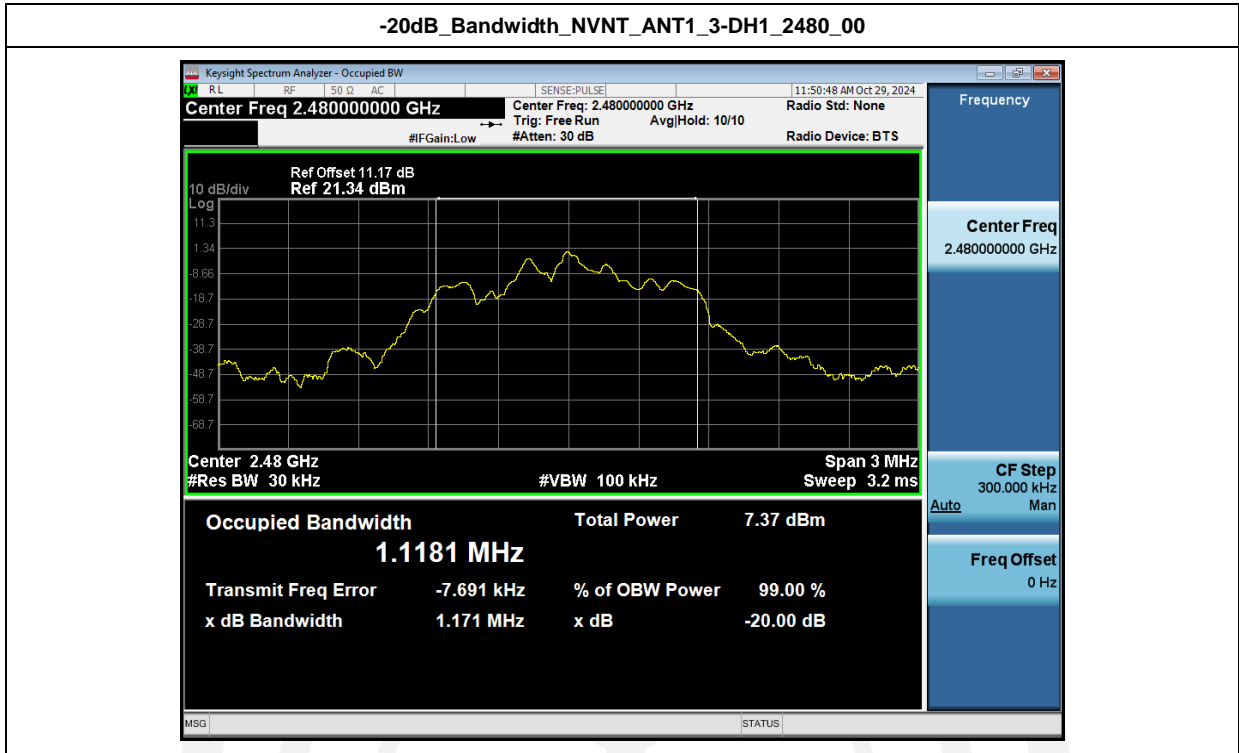

Condition	Antenna	Modulation	Frequency (MHz)	99%%BW(MHz)
NVNT	ANT1	1-DH1	2402.00	0.866
NVNT	ANT1	1-DH1	2441.00	0.915
NVNT	ANT1	1-DH1	2480.00	0.949
NVNT	ANT1	2-DH1	2402.00	1.177
NVNT	ANT1	2-DH1	2441.00	1.183
NVNT	ANT1	2-DH1	2480.00	1.194
NVNT	ANT1	3-DH1	2402.00	1.117
NVNT	ANT1	3-DH1	2441.00	1.118
NVNT	ANT1	3-DH1	2480.00	1.118


99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2402\_00




99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2441\_00



99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2480\_00

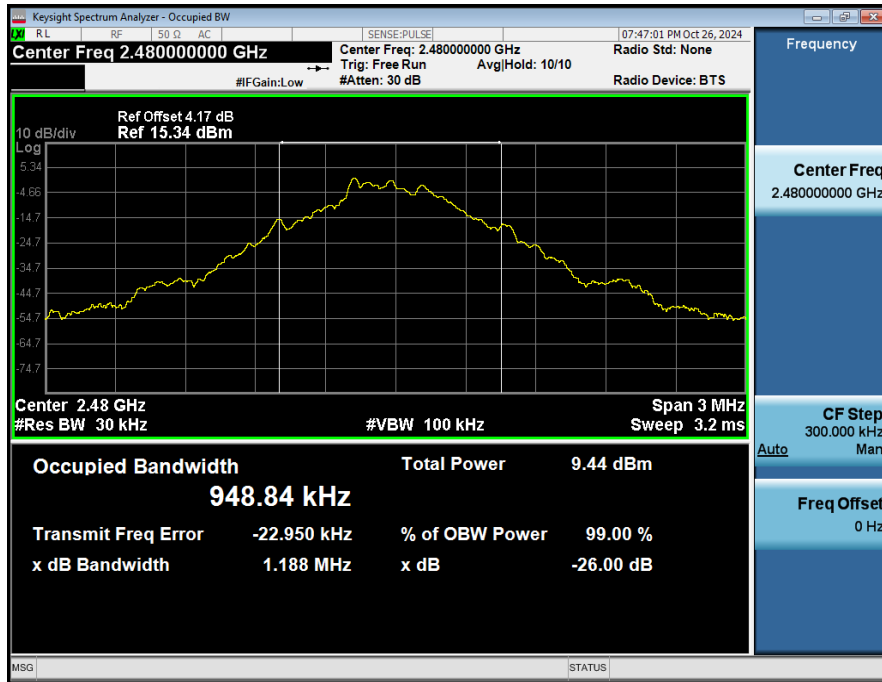

99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2402\_00

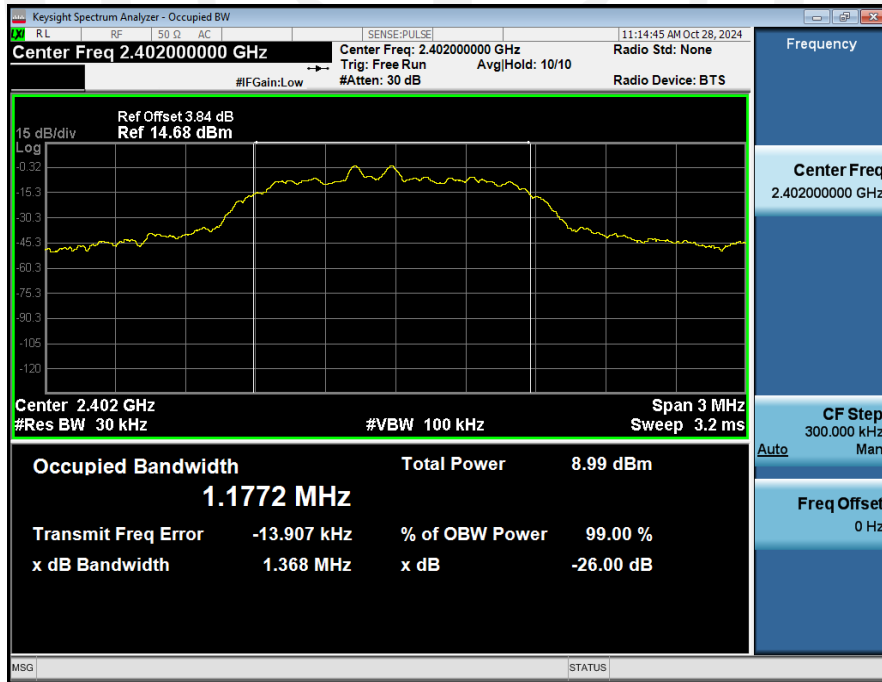

99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2441\_00



99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2480\_00




99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_3-DH1\_2402\_00





99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_3-DH1\_2441\_00



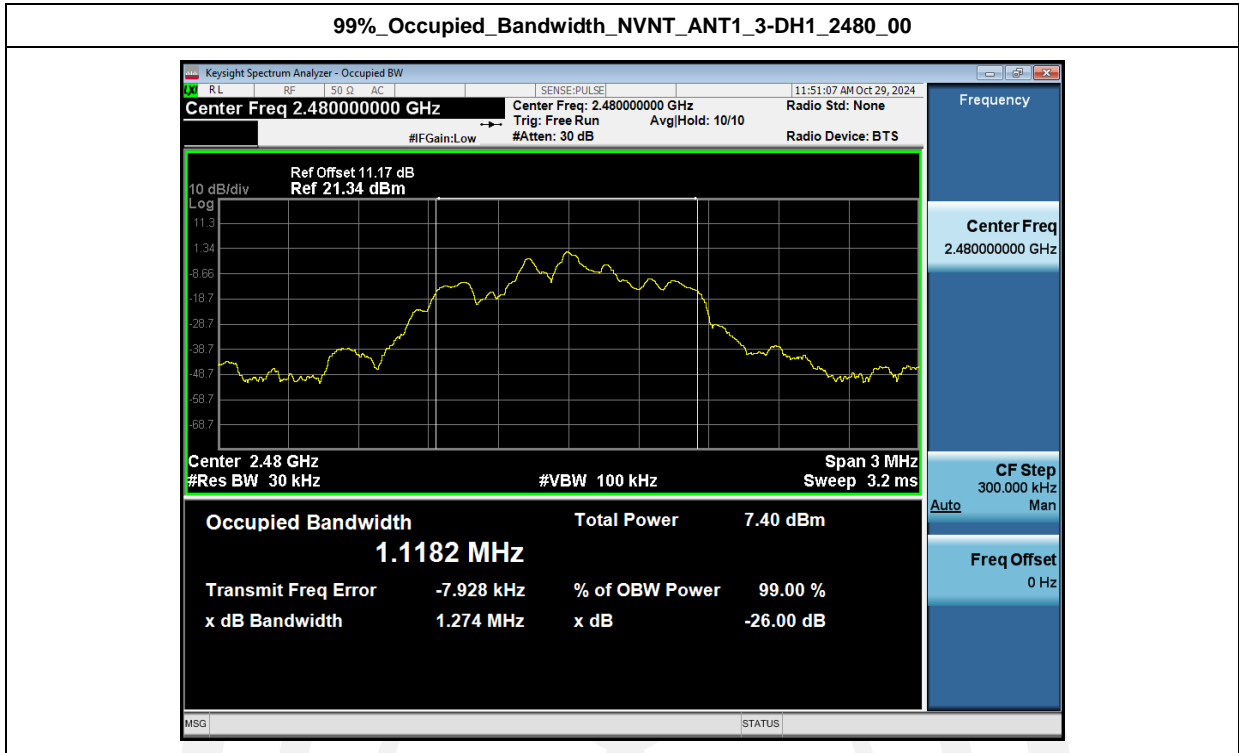

Right earphone:

Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH1	2402.00	0.975	No
NVNT	ANT1	1-DH1	2441.00	1.001	Yes
NVNT	ANT1	1-DH1	2480.00	1.022	Yes
NVNT	ANT1	2-DH1	2402.00	1.270	Yes
NVNT	ANT1	2-DH1	2441.00	1.266	Yes
NVNT	ANT1	2-DH1	2480.00	1.283	Yes
NVNT	ANT1	3-DH1	2402.00	1.011	Yes
NVNT	ANT1	3-DH1	2441.00	1.023	Yes
NVNT	ANT1	3-DH1	2480.00	1.038	Yes

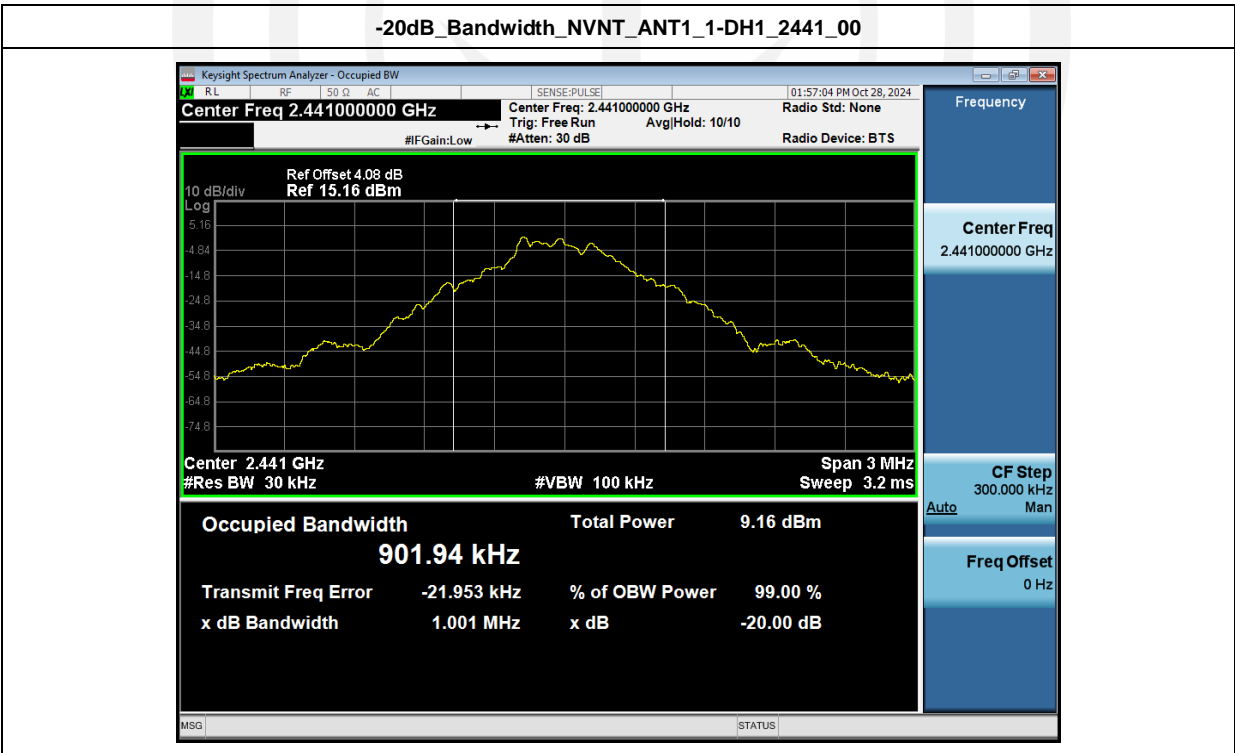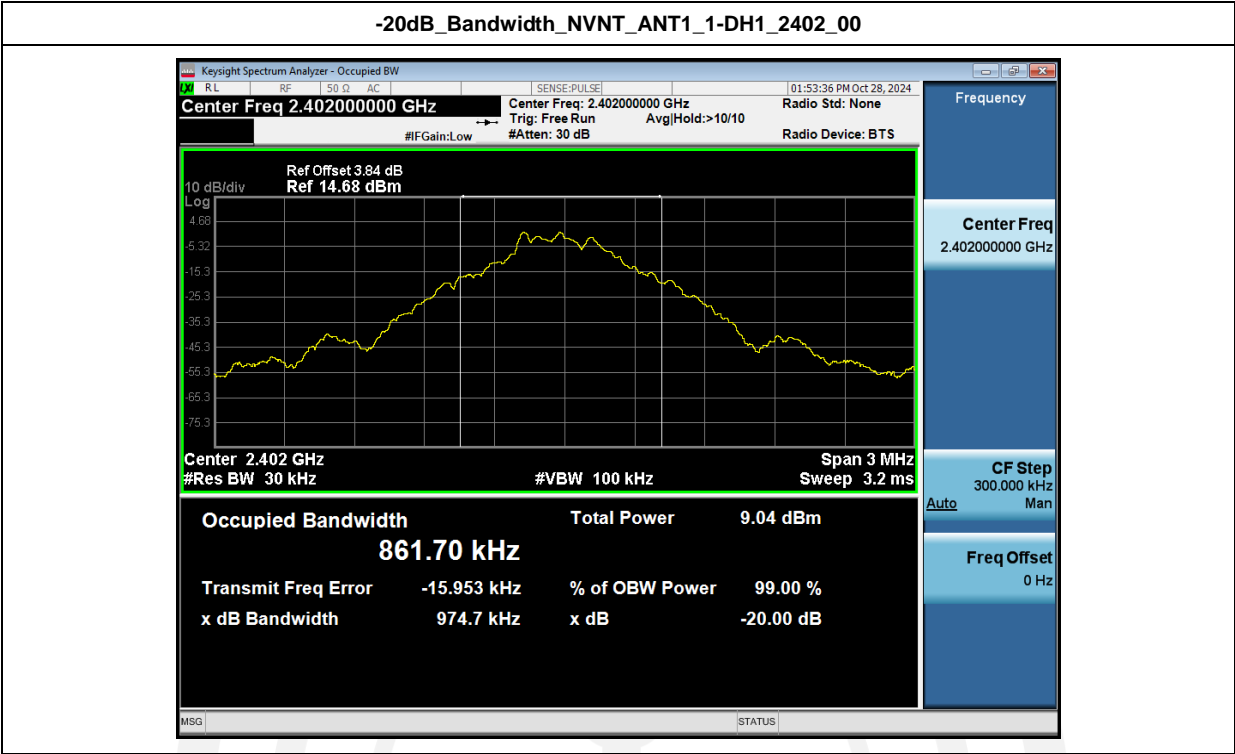

-20dB\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2480\_00



-20dB\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2402\_00






-20dB\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2441\_00



-20dB\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2480\_00

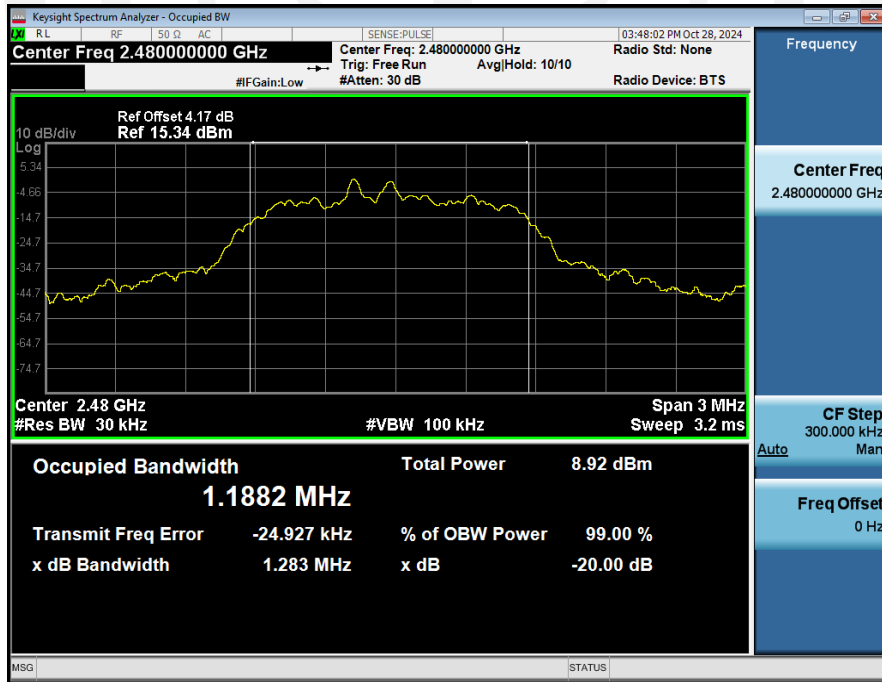


-20dB\_Bandwidth\_NVNT\_ANT1\_3-DH1\_2402\_00



-20dB\_Bandwidth\_NVNT\_ANT1\_3-DH1\_2441\_00



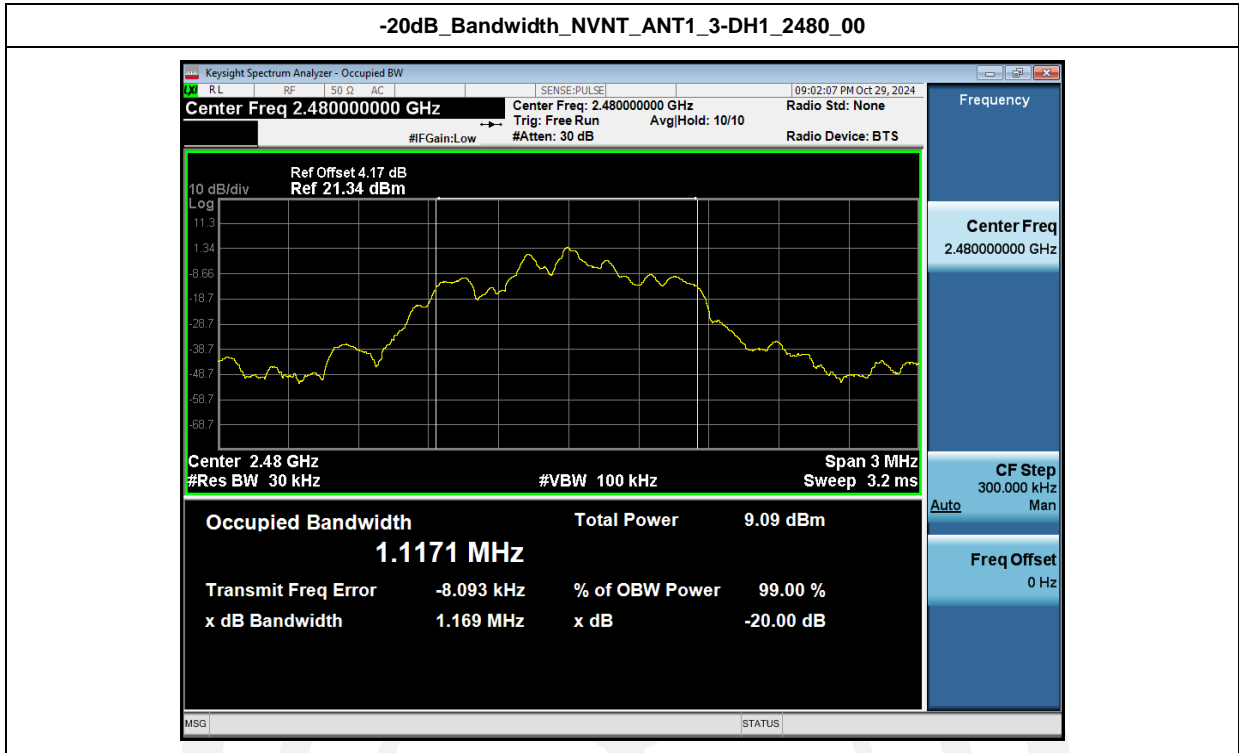

Condition	Antenna	Modulation	Frequency (MHz)	99%%BW(MHz)
NVNT	ANT1	1-DH1	2402.00	0.862
NVNT	ANT1	1-DH1	2441.00	0.905
NVNT	ANT1	1-DH1	2480.00	0.931
NVNT	ANT1	2-DH1	2402.00	1.176
NVNT	ANT1	2-DH1	2441.00	1.183
NVNT	ANT1	2-DH1	2480.00	1.189
NVNT	ANT1	3-DH1	2402.00	1.117
NVNT	ANT1	3-DH1	2441.00	1.118
NVNT	ANT1	3-DH1	2480.00	1.118


99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2402\_00




99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2441\_00




99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_1-DH1\_2480\_00

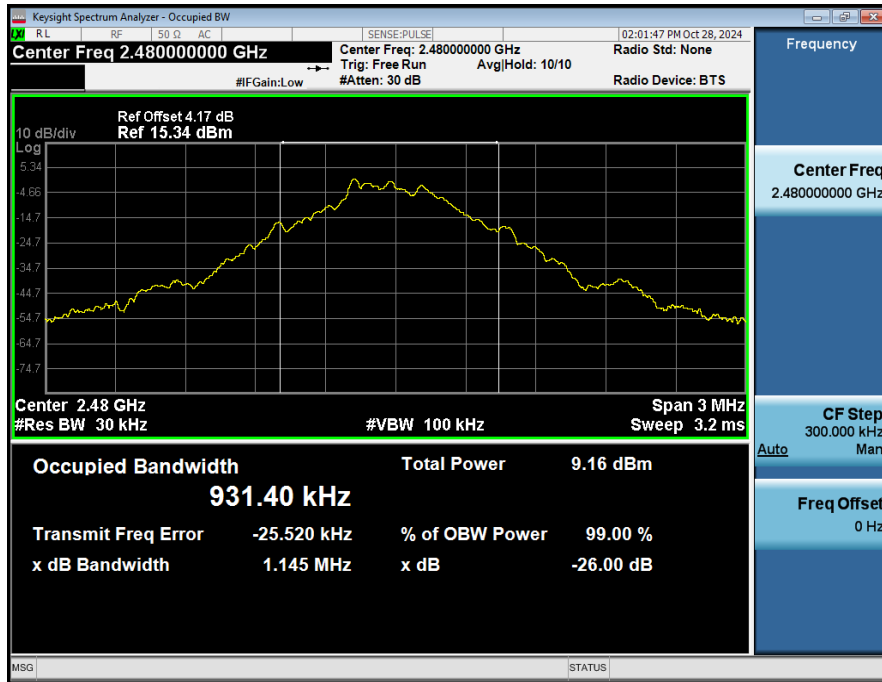


99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2402\_00

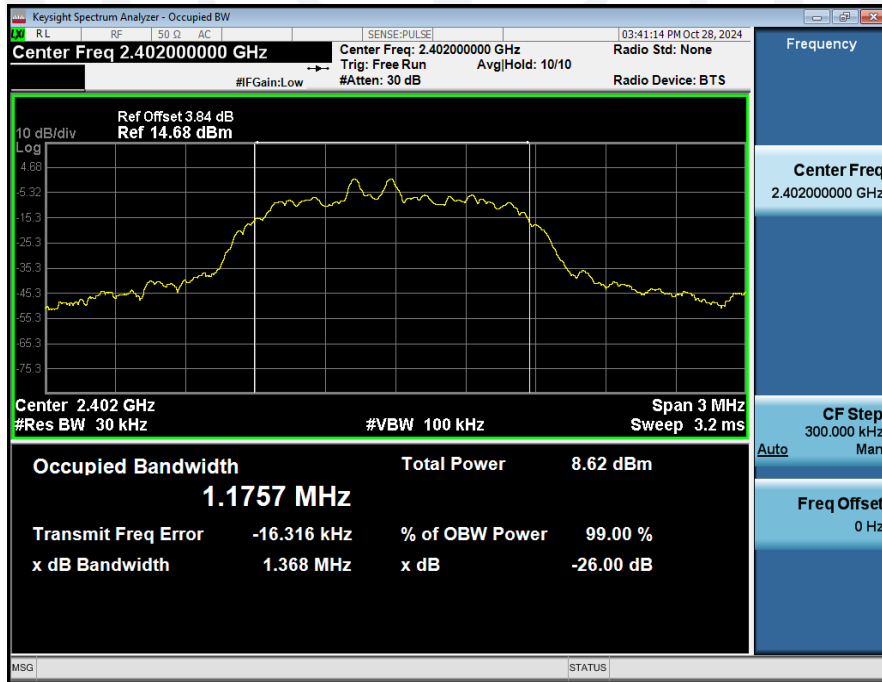

99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2441\_00

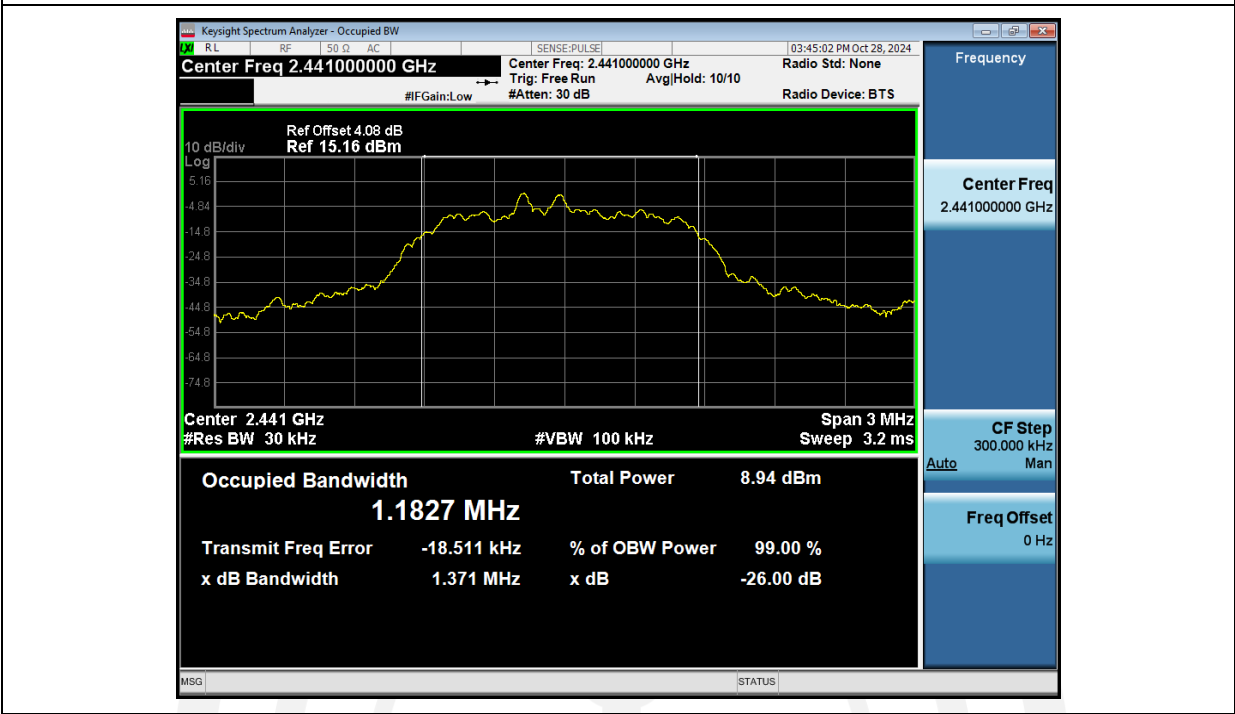

99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_2-DH1\_2480\_00

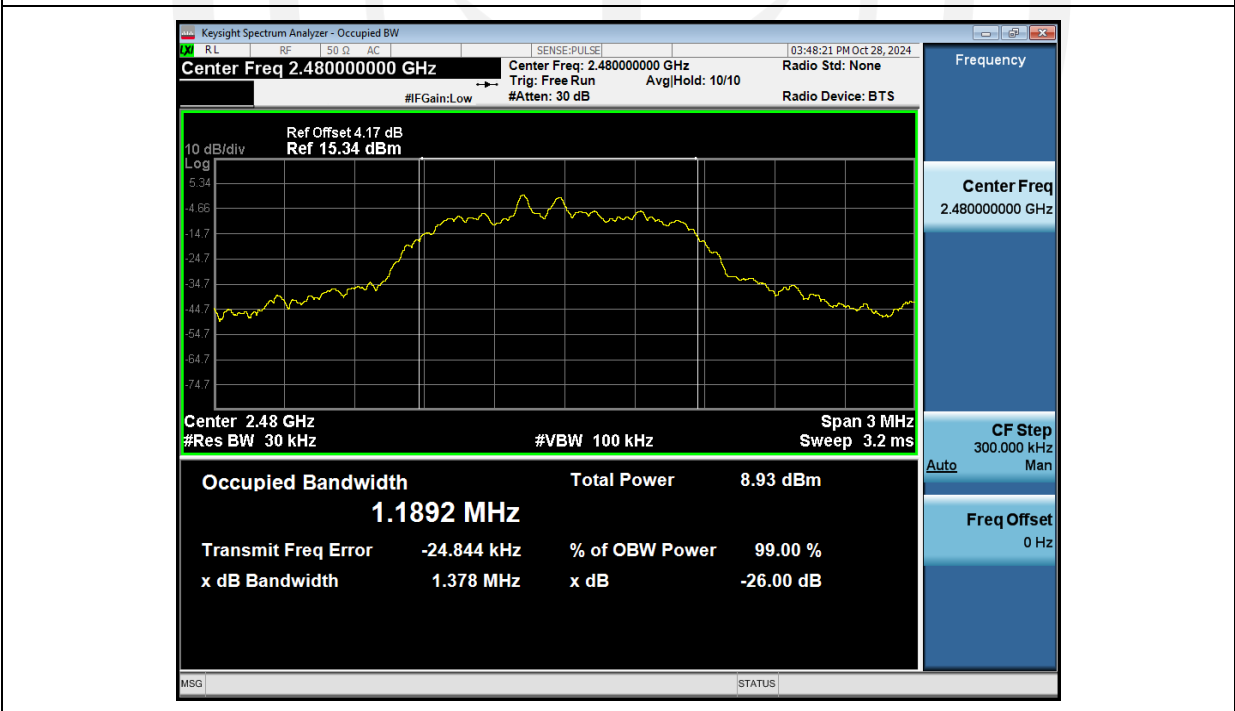


99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_3-DH1\_2402\_00



99%\_Occupied\_Bandwidth\_NVNT\_ANT1\_3-DH1\_2441\_00



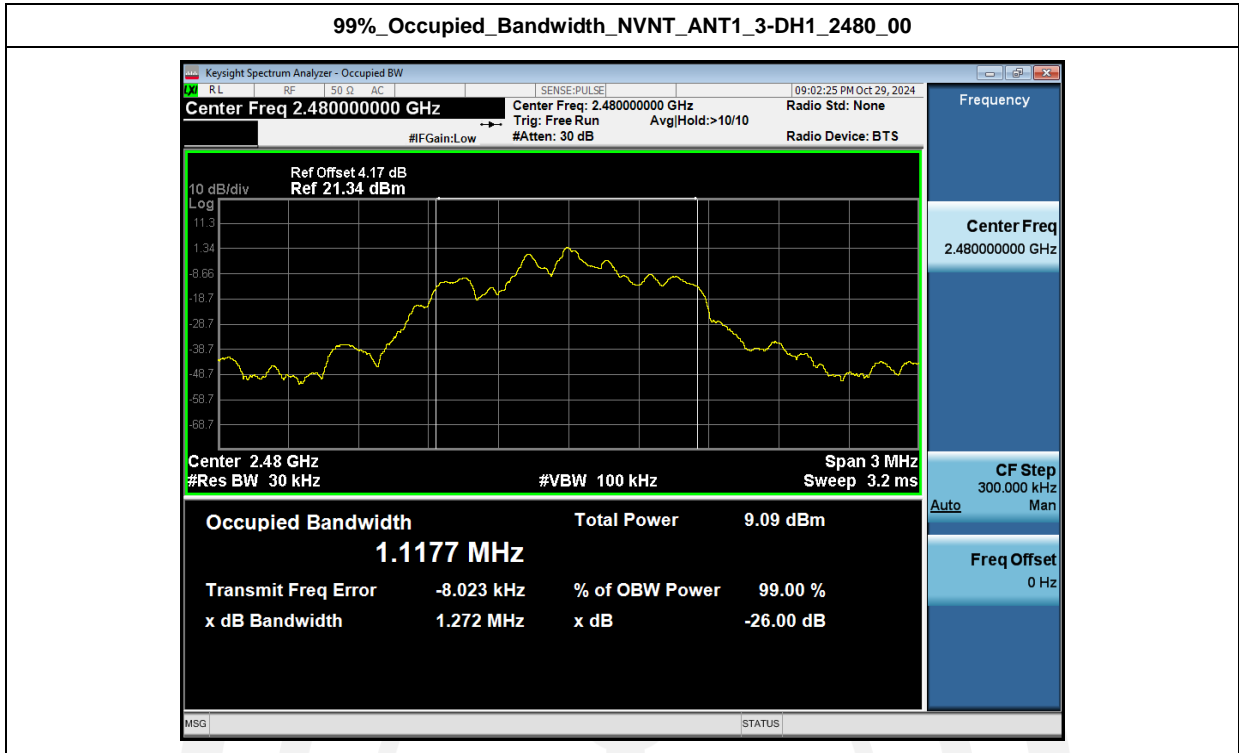



## 5. Carrier Frequency Separation

### 5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


### 5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

### 5.3. Test Result

Left earphone:

Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH1	2441.00	2440.993	2441.995	1.00	0.677	Pass
NVNT	ANT1	2-DH1	2441.00	2440.831	2441.995	1.16	0.848	Pass
NVNT	ANT1	3-DH1	2441.00	2440.831	2441.833	1.00	0.781	Pass

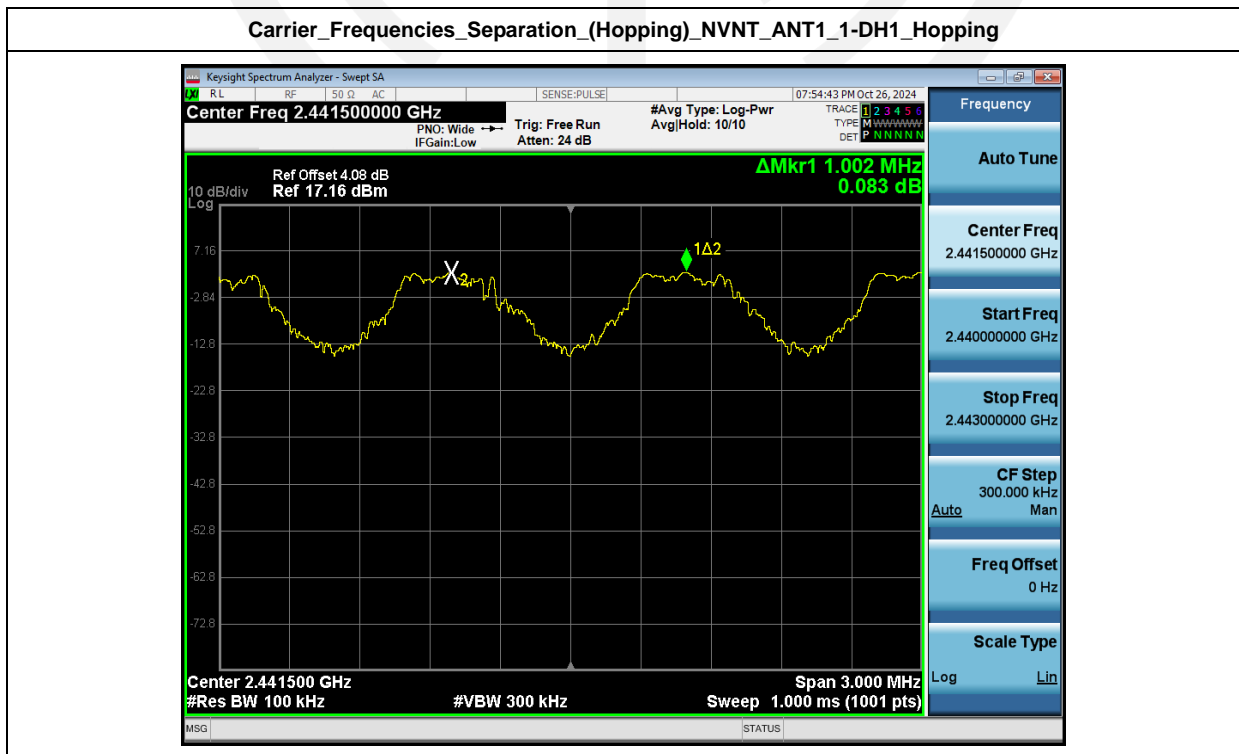

Carrier\_Frequencies\_Separation\_(Hopping)\_NVNT\_ANT1\_2-DH1\_Hopping




Carrier\_Frequencies\_Separation\_(Hopping)\_NVNT\_ANT1\_3-DH1\_Hopping




Right earphone:

Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH1	2441.00	2440.996	2441.992	1.00	0.667	Pass
NVNT	ANT1	2-DH1	2441.00	2440.990	2441.992	1.00	0.844	Pass
NVNT	ANT1	3-DH1	2441.00	2441.032	2441.836	0.80	0.778	Pass

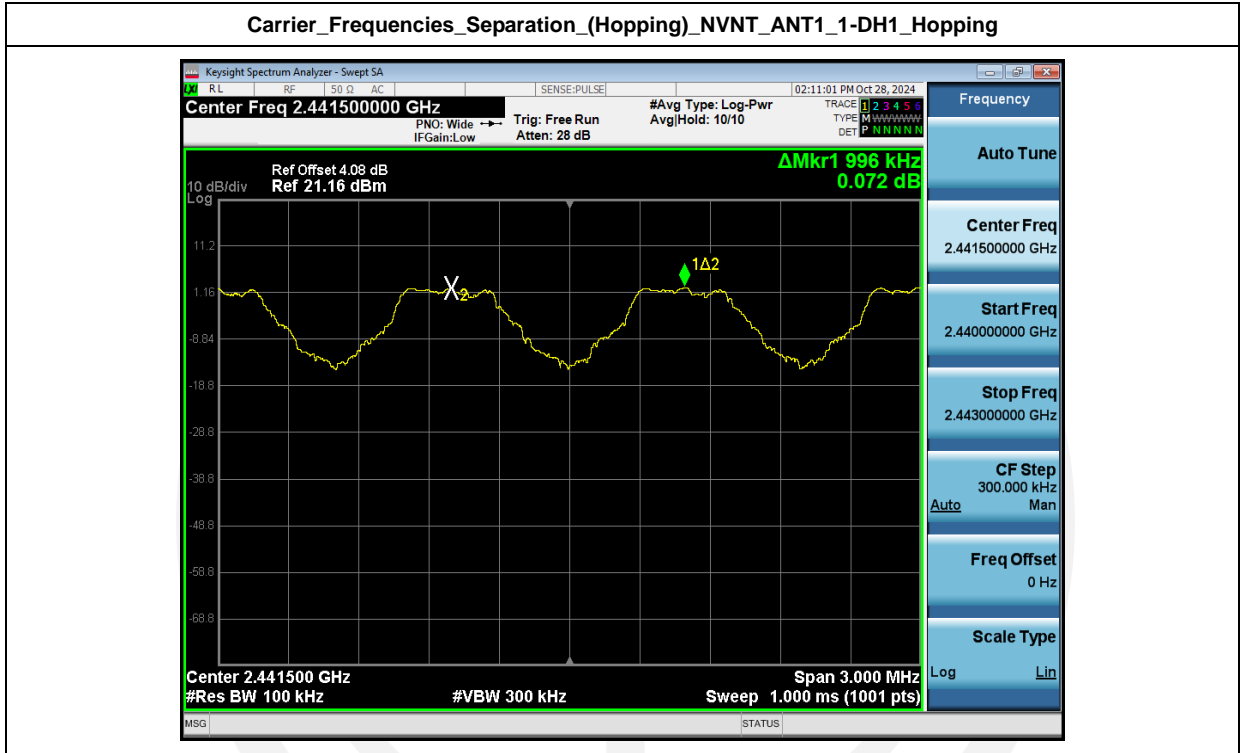

Carrier\_Frequencies\_Separation\_(Hopping)\_NVNT\_ANT1\_2-DH1\_Hopping

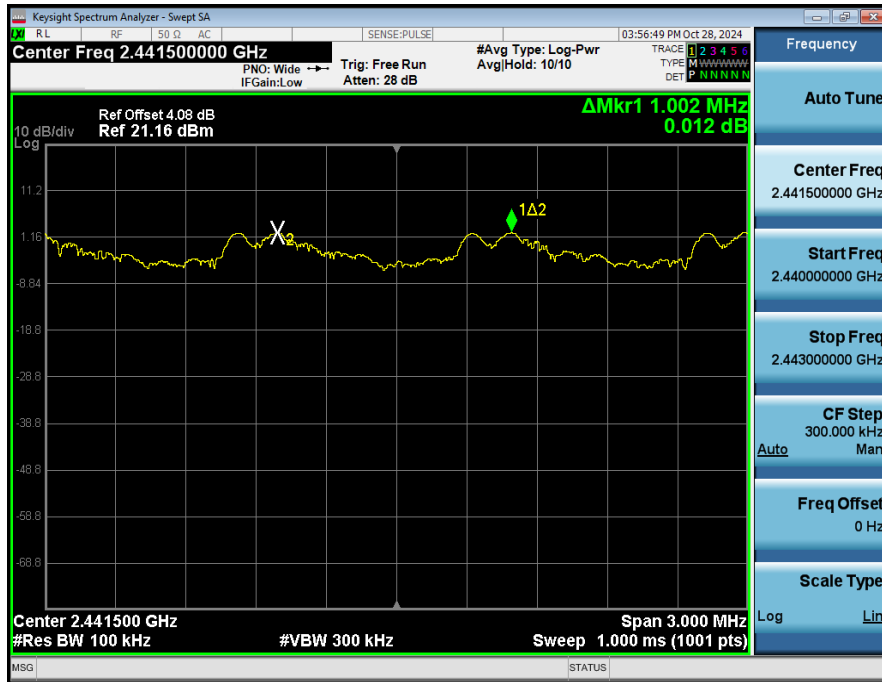

Carrier\_Frequencies\_Separation\_(Hopping)\_NVNT\_ANT1\_3-DH1\_Hopping



## 6. Number Of Hopping Channel

### 6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


### 6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.


### 6.3. Test Result

Left earphone:


Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH1	79	15	Pass
NVNT	ANT1	2-DH1	79	15	Pass
NVNT	ANT1	3-DH1	79	15	Pass

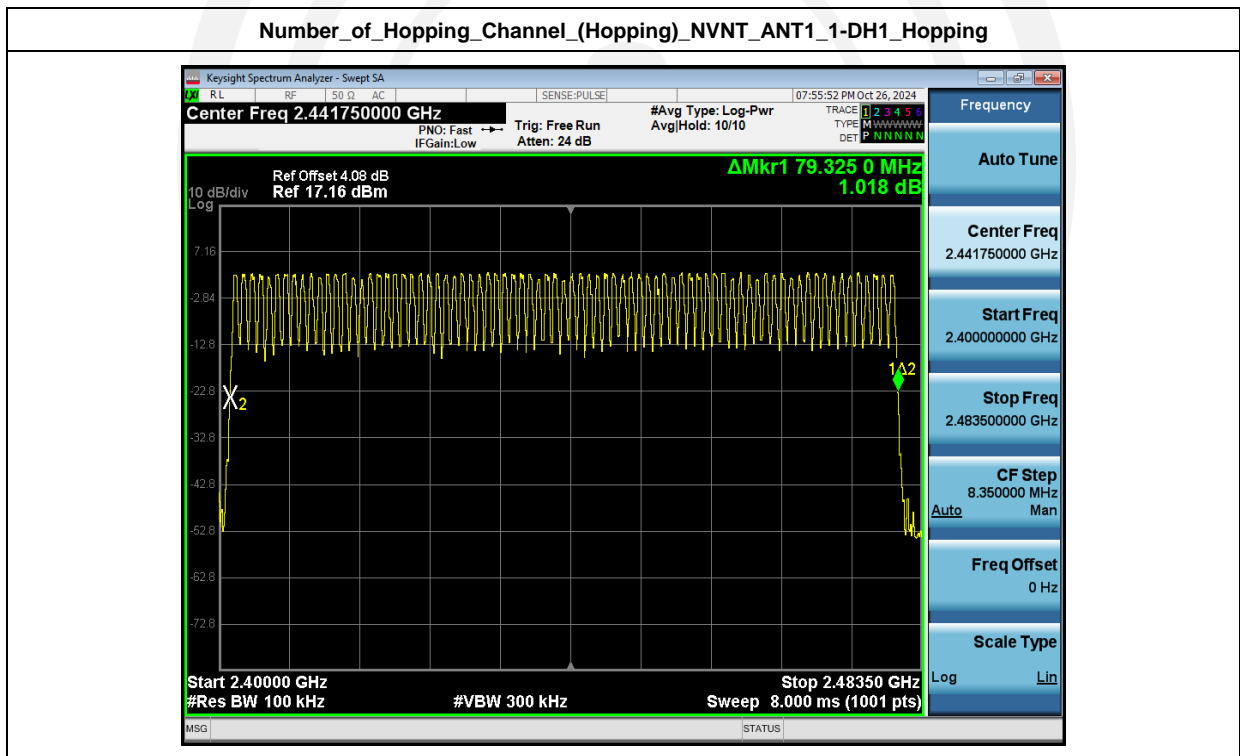

Number\_of\_Hopping\_Channel\_(Hopping)\_NVNT\_ANT1\_2-DH1\_Hopping

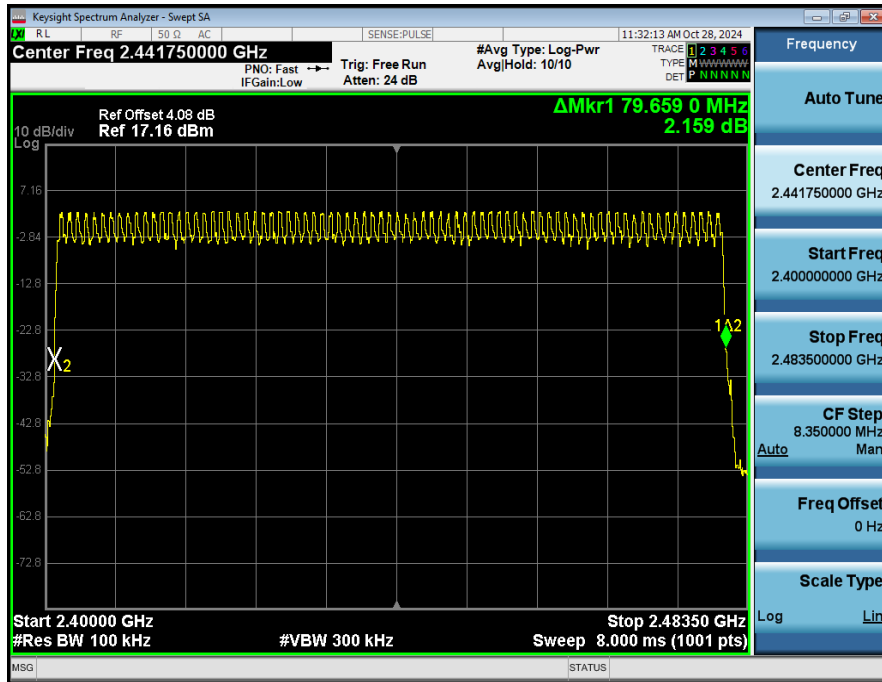


Number\_of\_Hopping\_Channel\_(Hopping)\_NVNT\_ANT1\_3-DH1\_Hopping

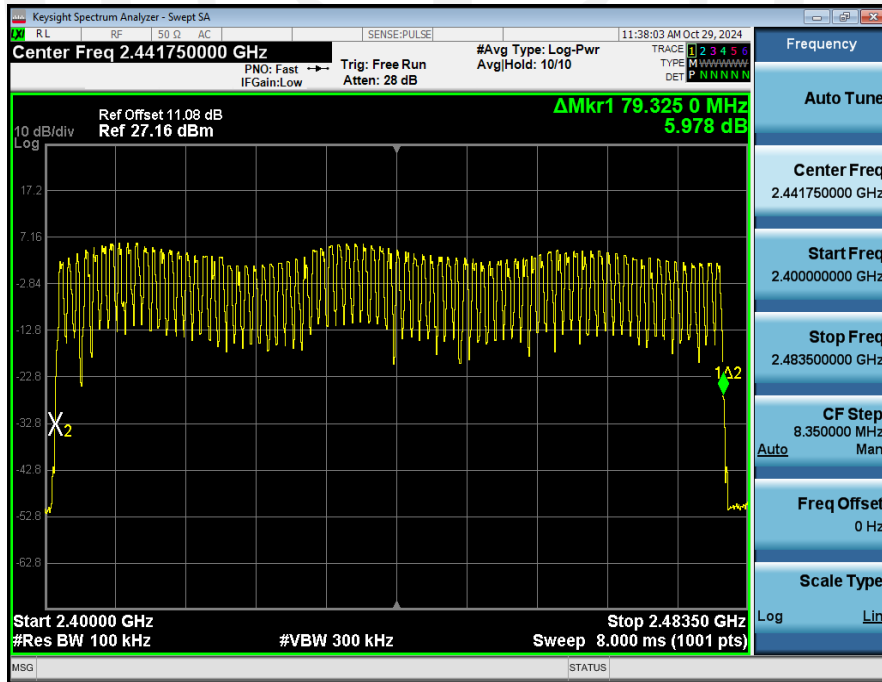


Right earphone:


Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH1	79	15	Pass
NVNT	ANT1	2-DH1	79	15	Pass
NVNT	ANT1	3-DH1	79	15	Pass

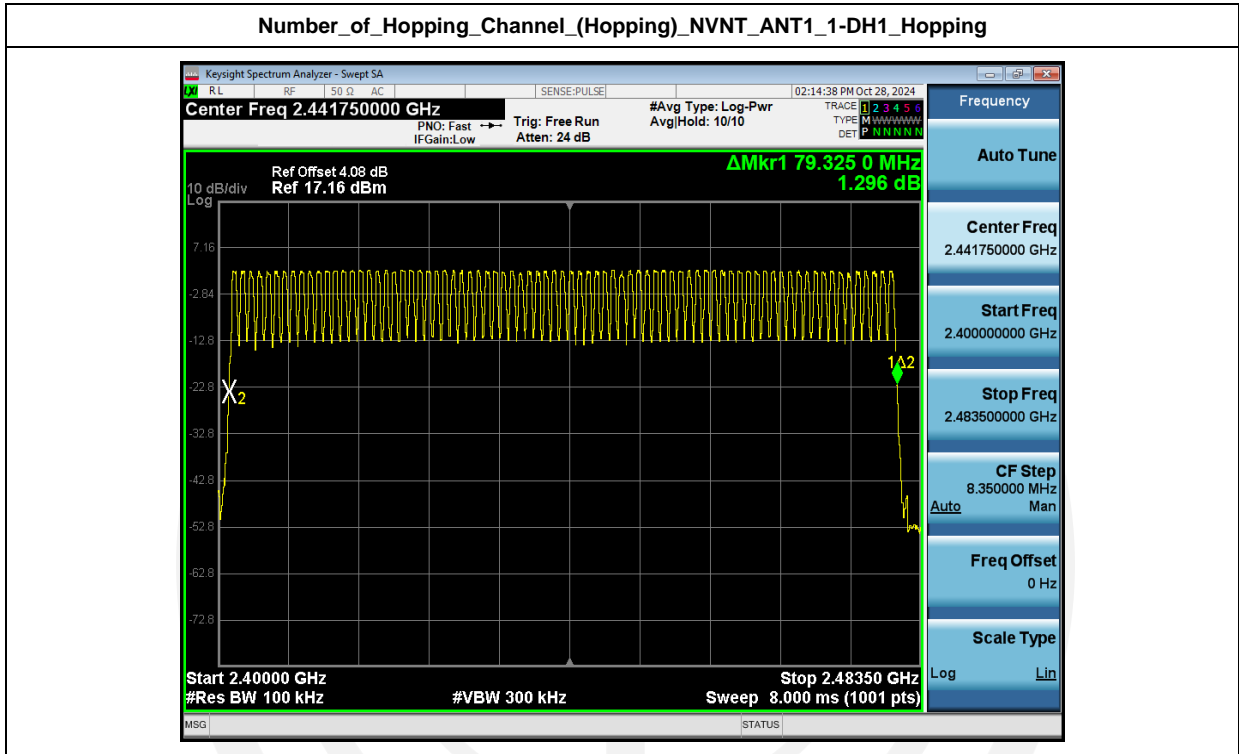

Number\_of\_Hopping\_Channel\_(Hopping)\_NVNT\_ANT1\_2-DH1\_Hopping

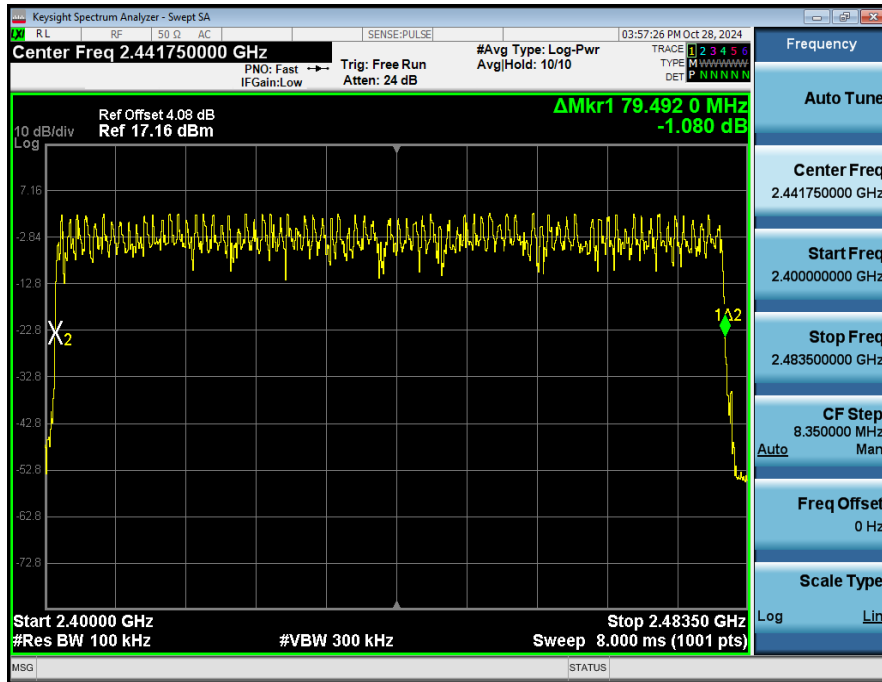

Number\_of\_Hopping\_Channel\_(Hopping)\_NVNT\_ANT1\_3-DH1\_Hopping

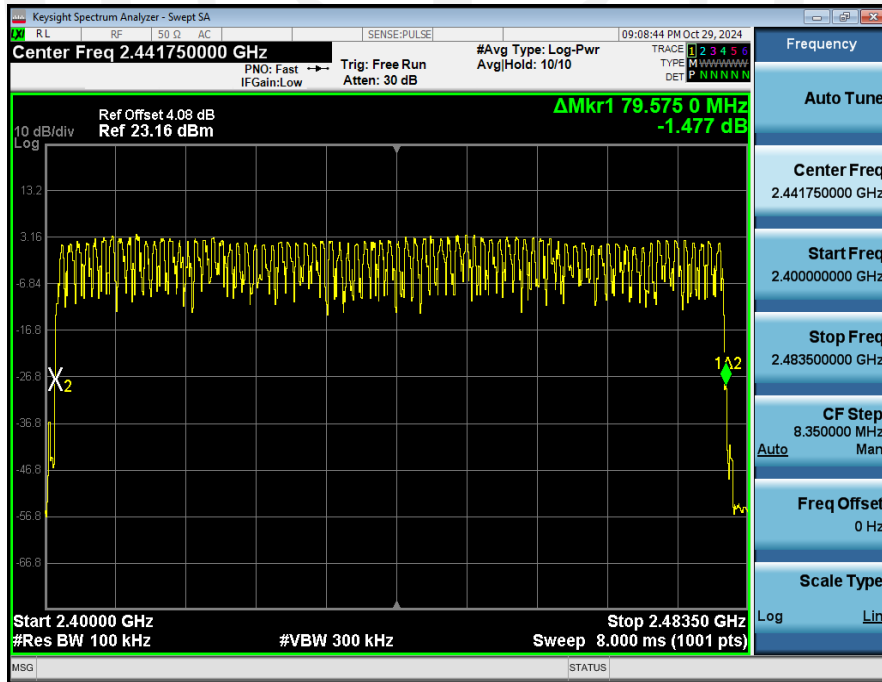



## 7. Dwell Time

### 7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

### 7.2. Test Procedure

- 7.2.1. Place the EUT on the table and set it in transmitting mode.
- 7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 7.2.3. Set center frequency of spectrum analyzer = operating frequency.
- 7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 7.2.5. Repeat above procedures until all frequency measured were complete.

### 7.3. Test Result


Note:

1. The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
2. Dwell Time = Pulse Time \* Hops Number


Left earphone:

Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH1	0.383	319.00	122.177	0.40	Pass
NVNT	ANT1	2-DH1	0.393	319.00	125.367	0.40	Pass
NVNT	ANT1	3-DH1	0.407	318.00	129.426	0.40	Pass
NVNT	ANT1	1-DH3	1.640	158.00	259.120	0.40	Pass
NVNT	ANT1	1-DH5	2.888	115.00	332.120	0.40	Pass
NVNT	ANT1	2-DH3	1.639	153.00	250.767	0.40	Pass
NVNT	ANT1	2-DH5	2.888	106.00	306.128	0.40	Pass
NVNT	ANT1	3-DH3	1.663	164.00	272.732	0.40	Pass
NVNT	ANT1	3-DH5	2.910	115.00	334.650	0.40	Pass


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH1\_2441\_00\_One\_Burst\_Time

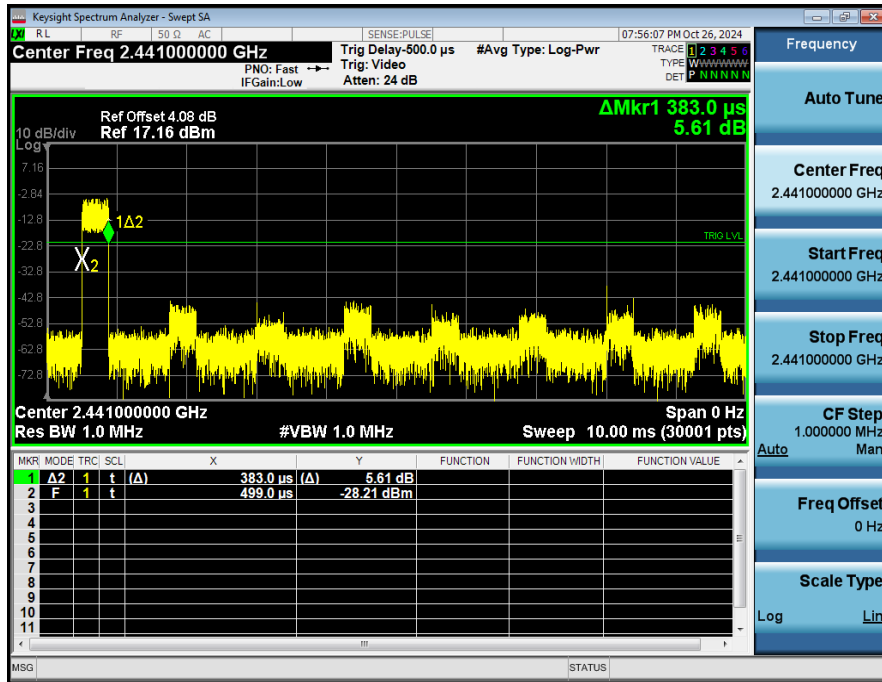


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH1\_2441\_00\_Accumulated

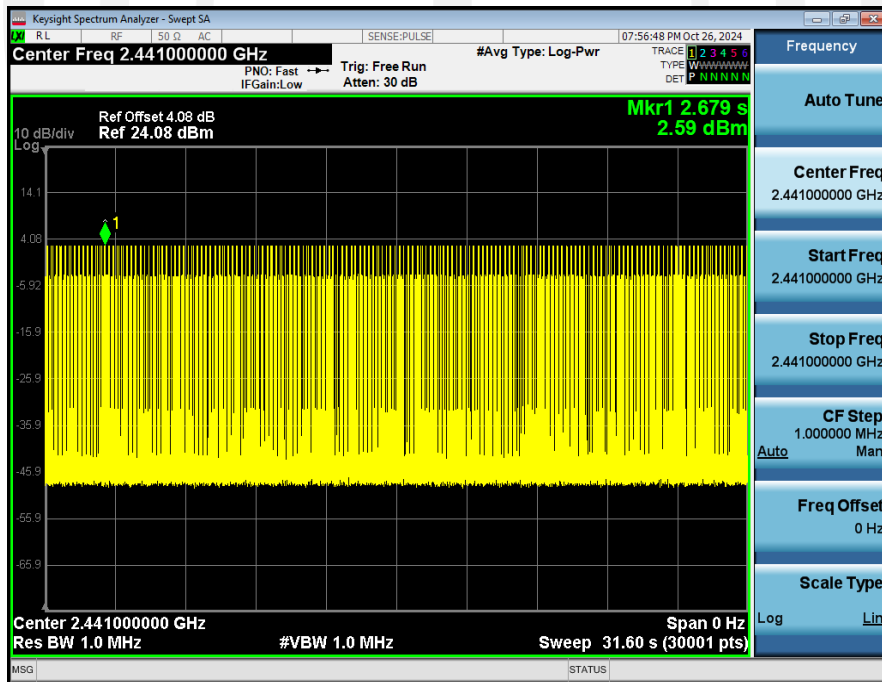


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH1\_2441\_00\_One\_Burst\_Time

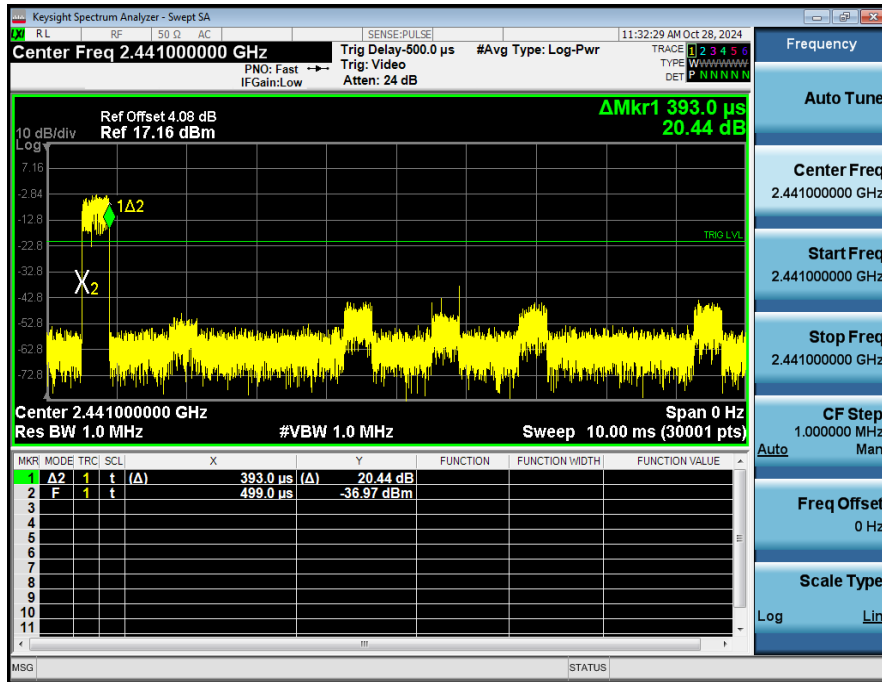


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH1\_2441\_00\_Accumulated

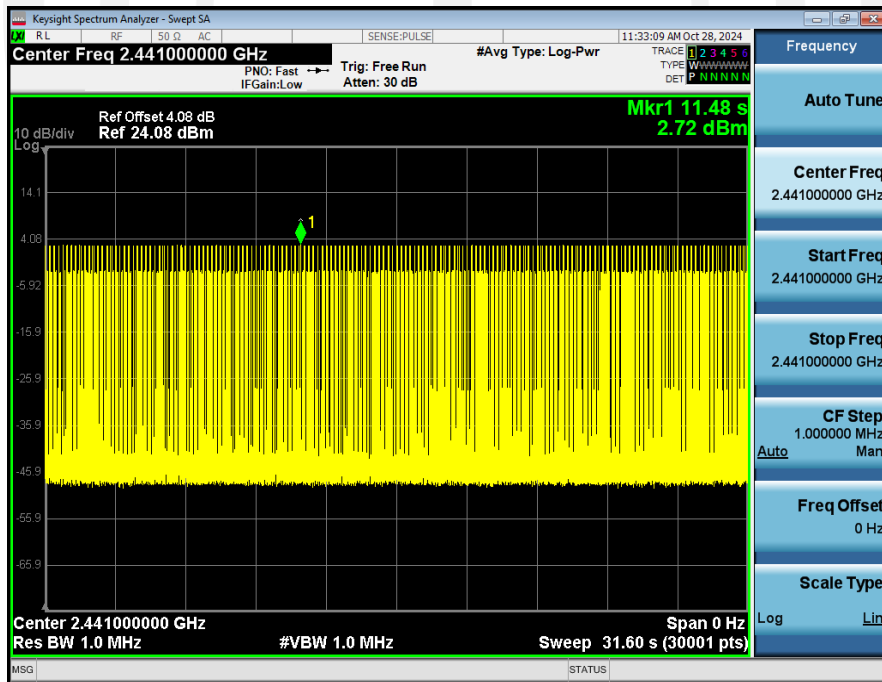


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH1\_2441\_00\_One\_Burst\_Time

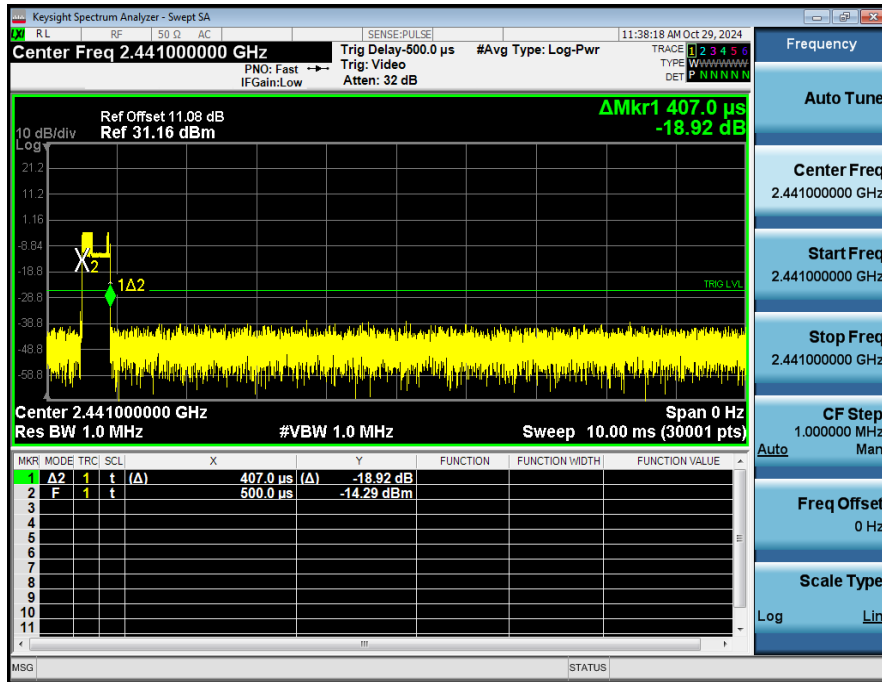


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH1\_2441\_00\_Accumulated

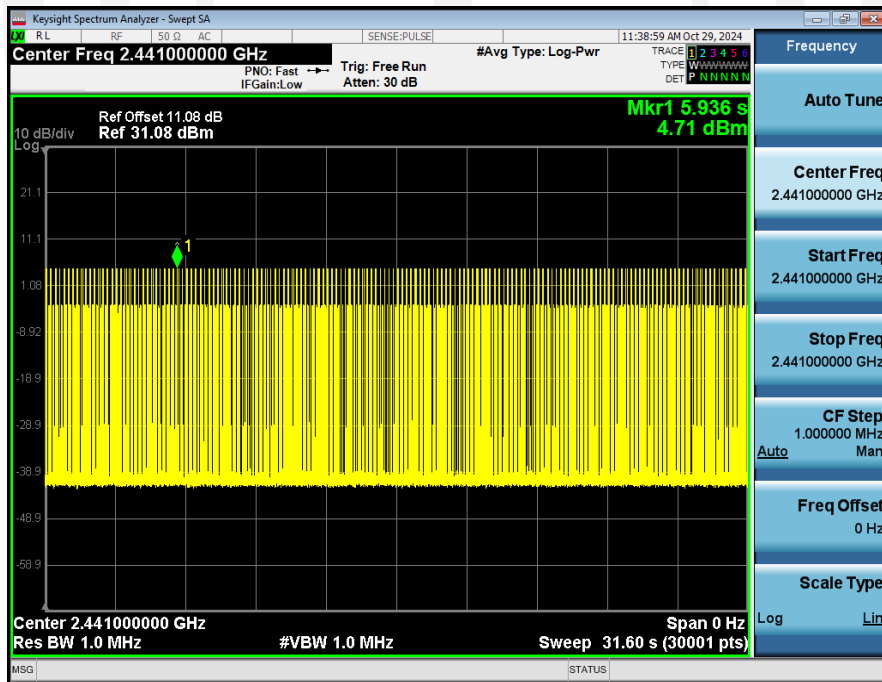


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH3\_2441\_00\_One\_Burst\_Time

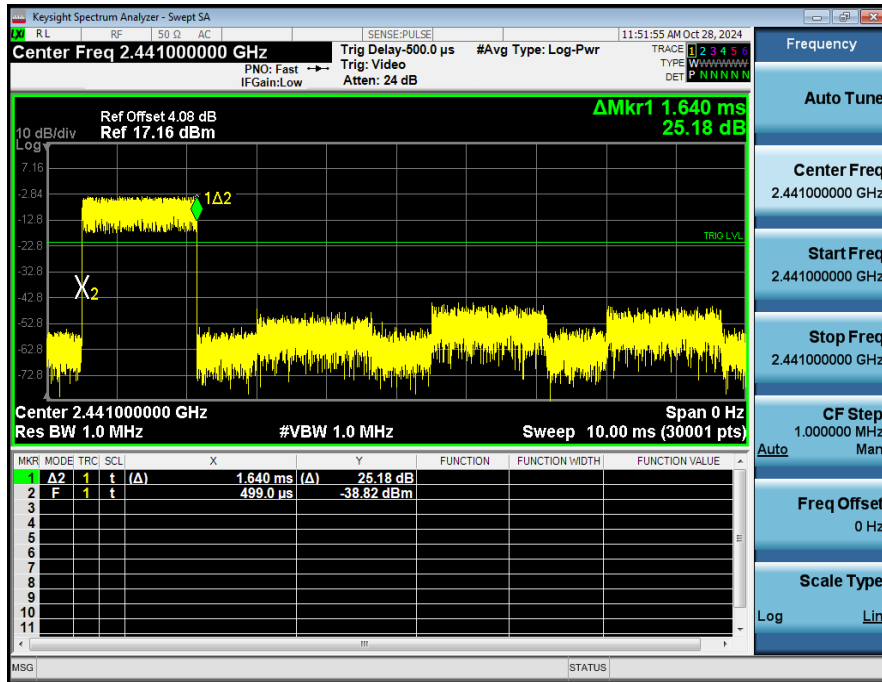


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH3\_2441\_00\_Accumulated

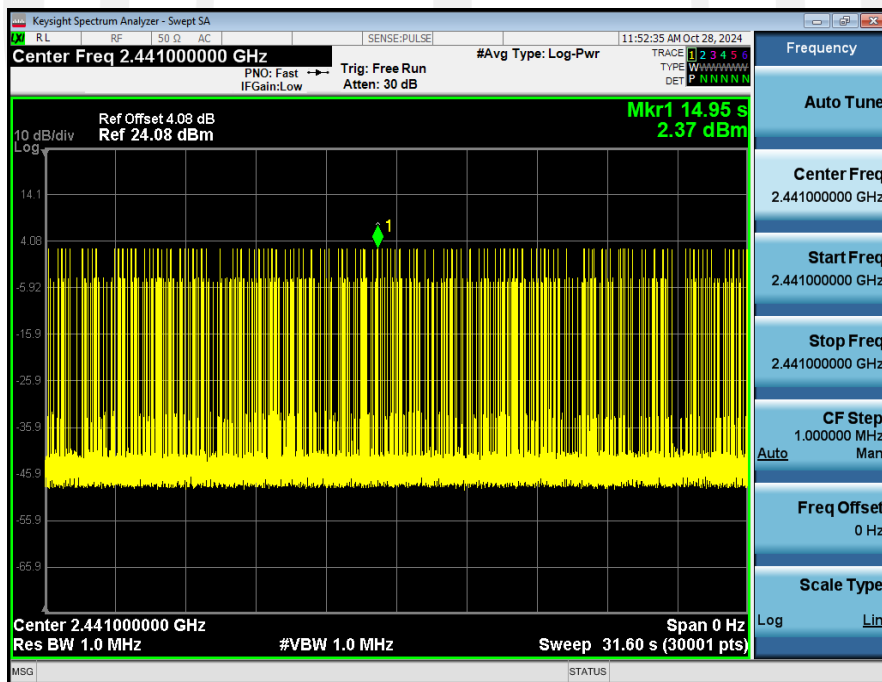


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH5\_2441\_00\_One\_Burst\_Time

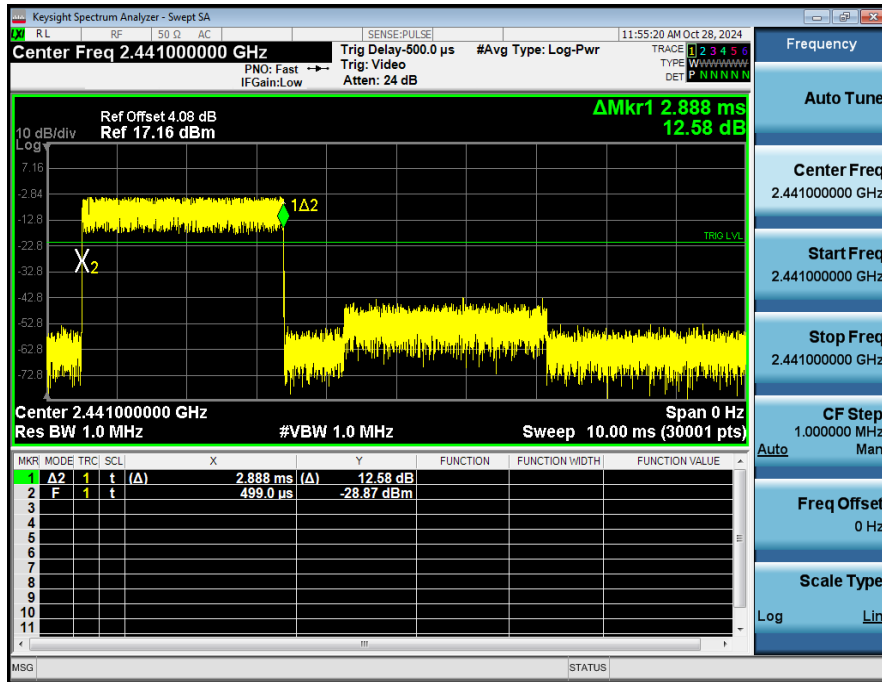


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH5\_2441\_00\_Accumulated

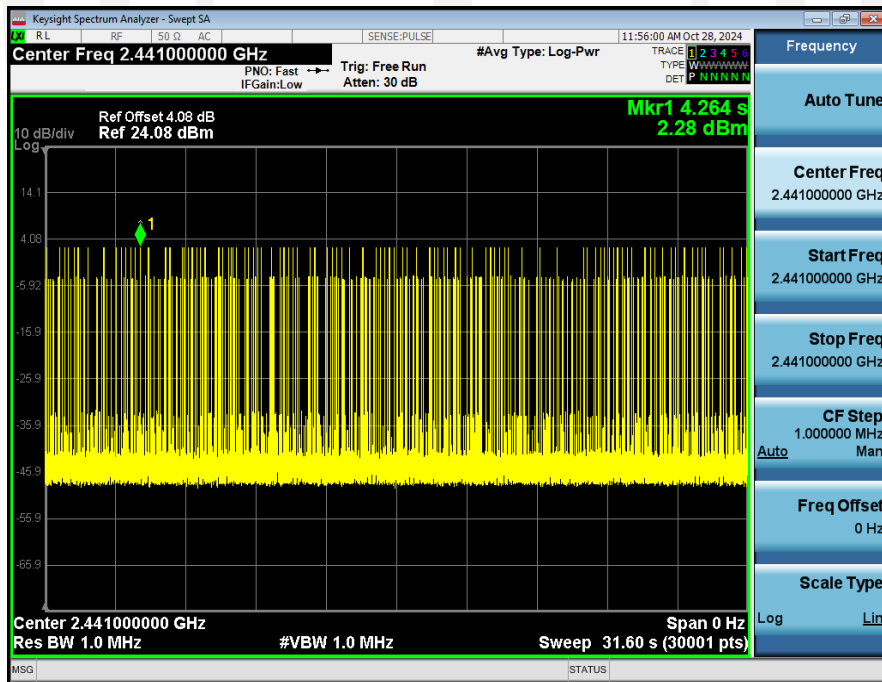


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH3\_2441\_00\_One\_Burst\_Time

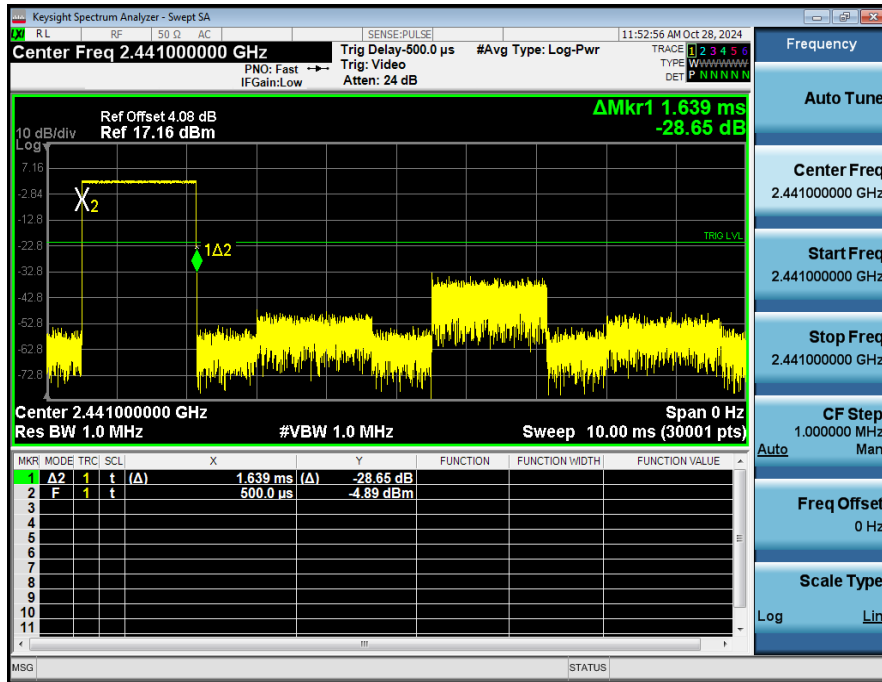


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH3\_2441\_00\_Accumulated

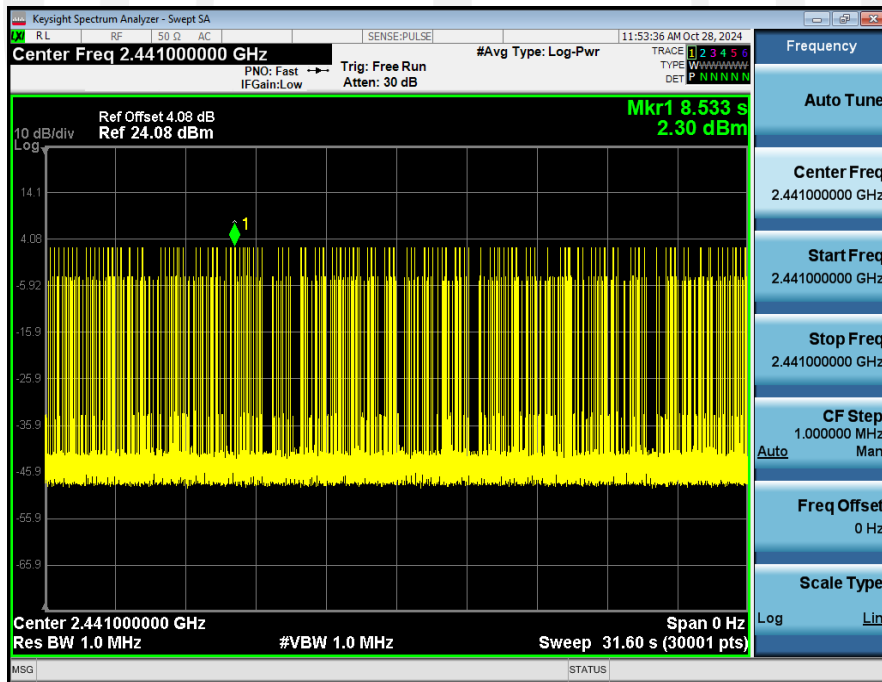

Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH5\_2441\_00\_One\_Burst\_Time

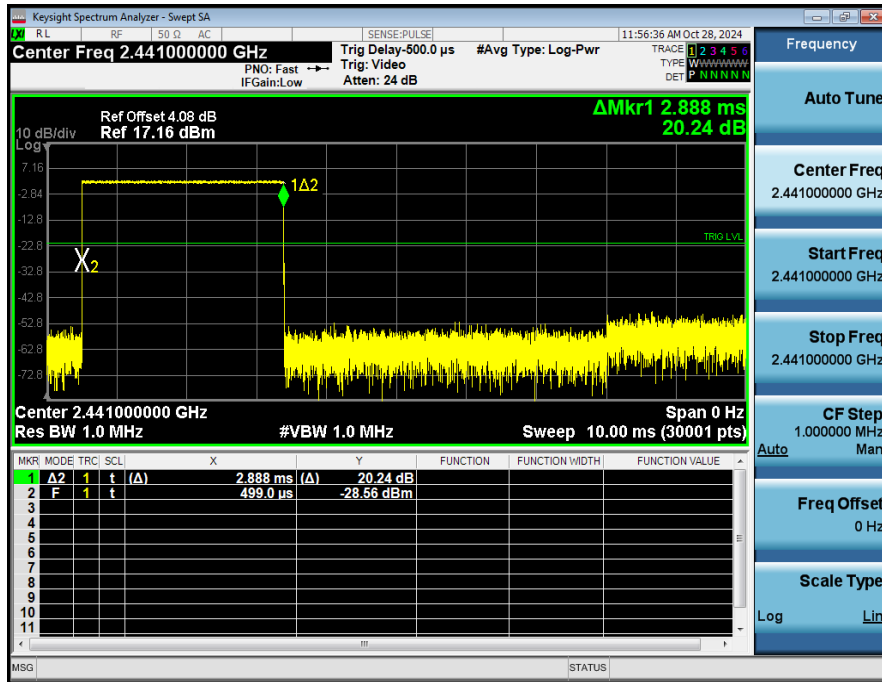


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH5\_2441\_00\_Accumulated

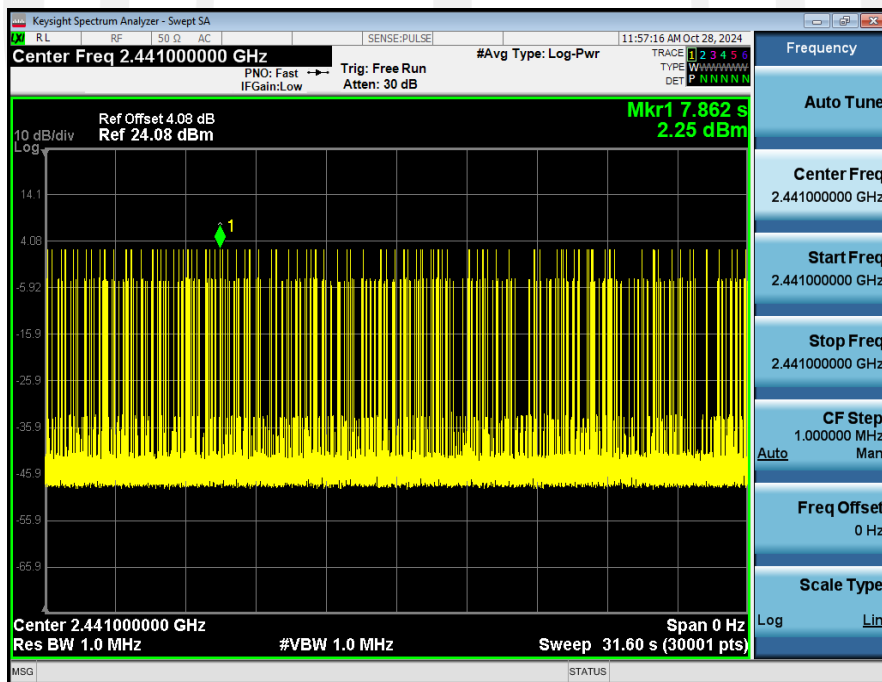





Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH3\_2441\_00\_One\_Burst\_Time

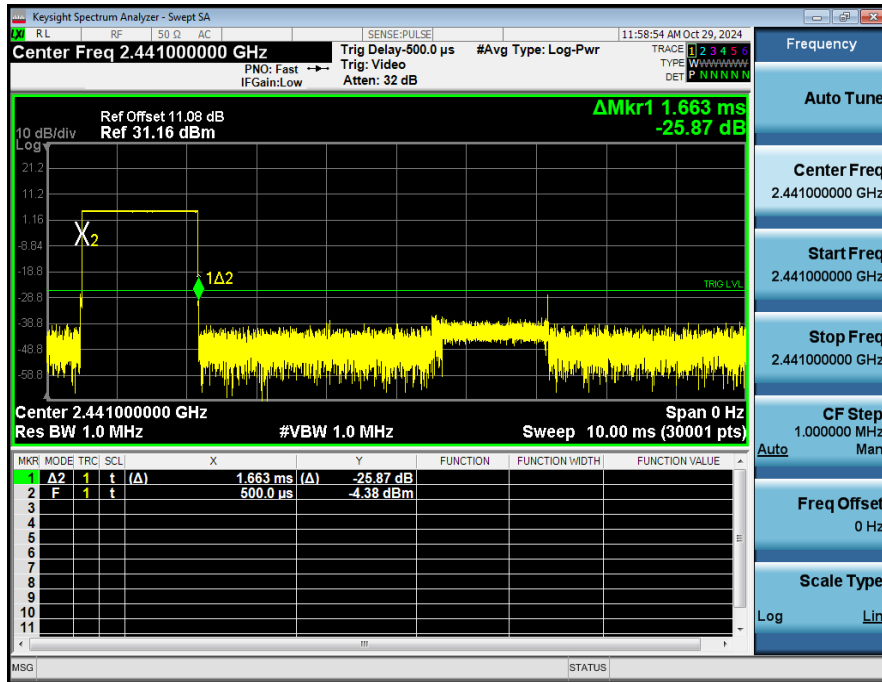


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH3\_2441\_00\_Accumulated

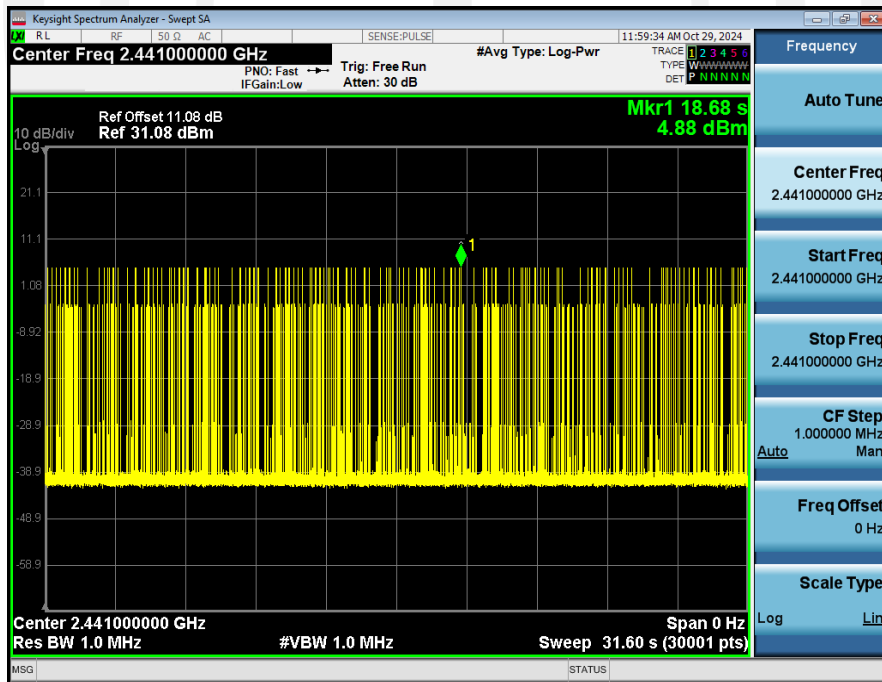

Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH5\_2441\_00\_One\_Burst\_Time

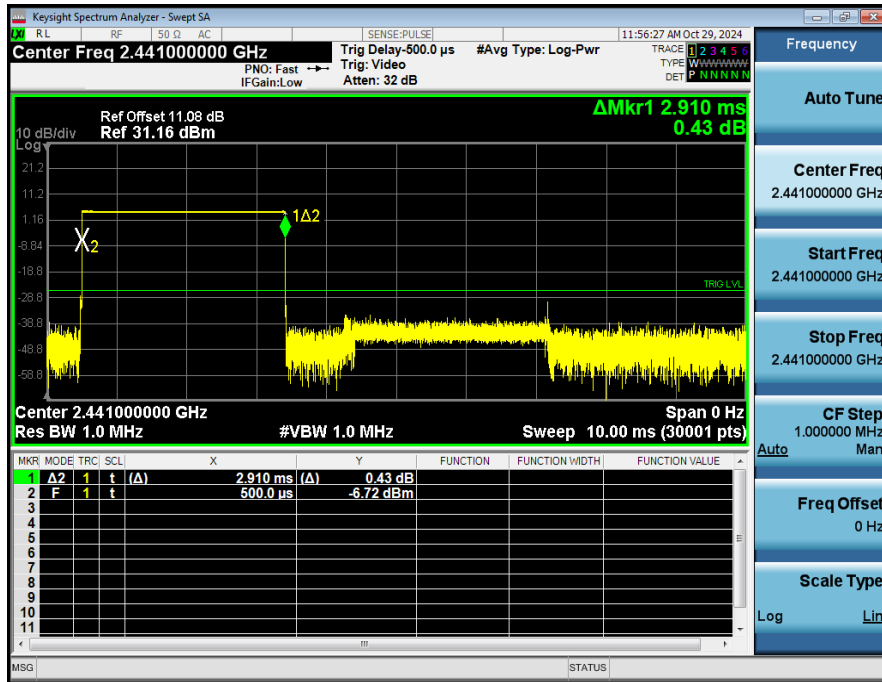

Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH5\_2441\_00\_Accumulated

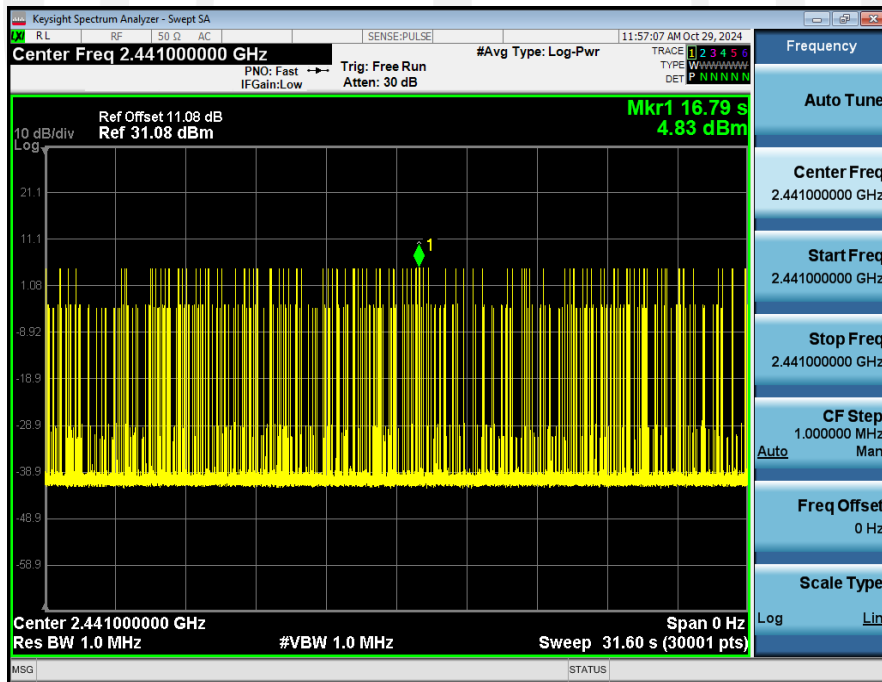


Right earphone:


Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH1	0.384	317.00	121.728	0.40	Pass
NVNT	ANT1	2-DH1	0.393	320.00	125.760	0.40	Pass
NVNT	ANT1	3-DH1	0.407	320.00	130.240	0.40	Pass
NVNT	ANT1	1-DH3	1.639	167.00	273.713	0.40	Pass
NVNT	ANT1	1-DH5	2.888	104.00	300.352	0.40	Pass
NVNT	ANT1	2-DH3	1.640	160.00	262.400	0.40	Pass
NVNT	ANT1	2-DH5	2.887	122.00	352.214	0.40	Pass
NVNT	ANT1	3-DH3	1.662	150.00	249.300	0.40	Pass
NVNT	ANT1	3-DH5	2.911	107.00	311.477	0.40	Pass




Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH1\_2441\_00\_One\_Burst\_Time

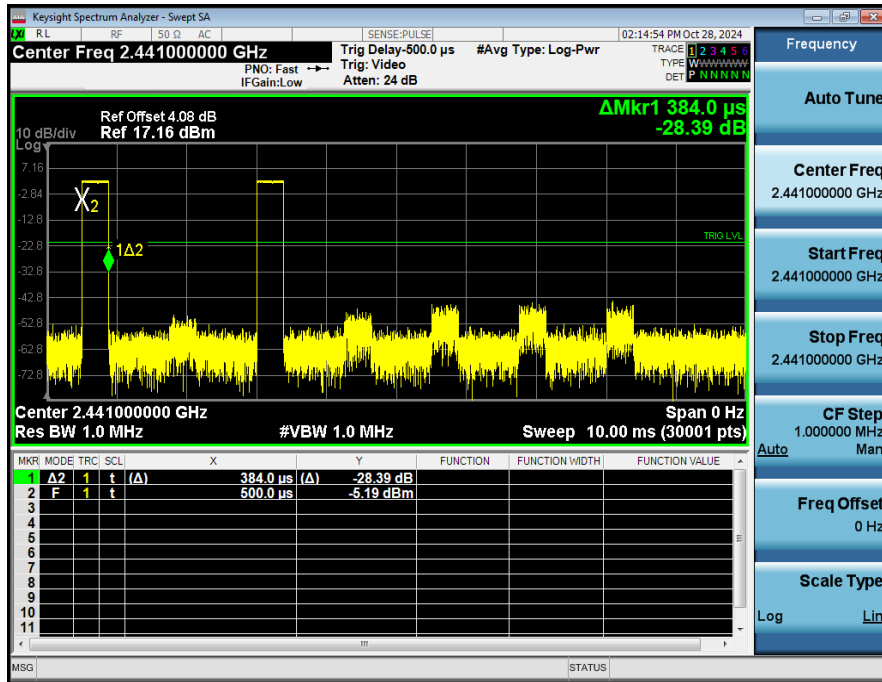


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH1\_2441\_00\_Accumulated

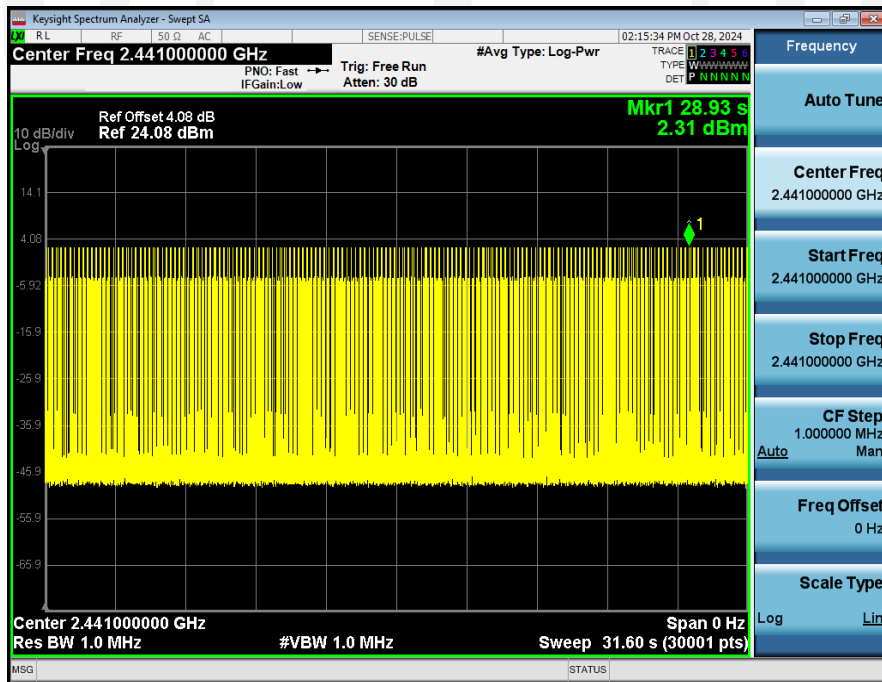


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH1\_2441\_00\_One\_Burst\_Time

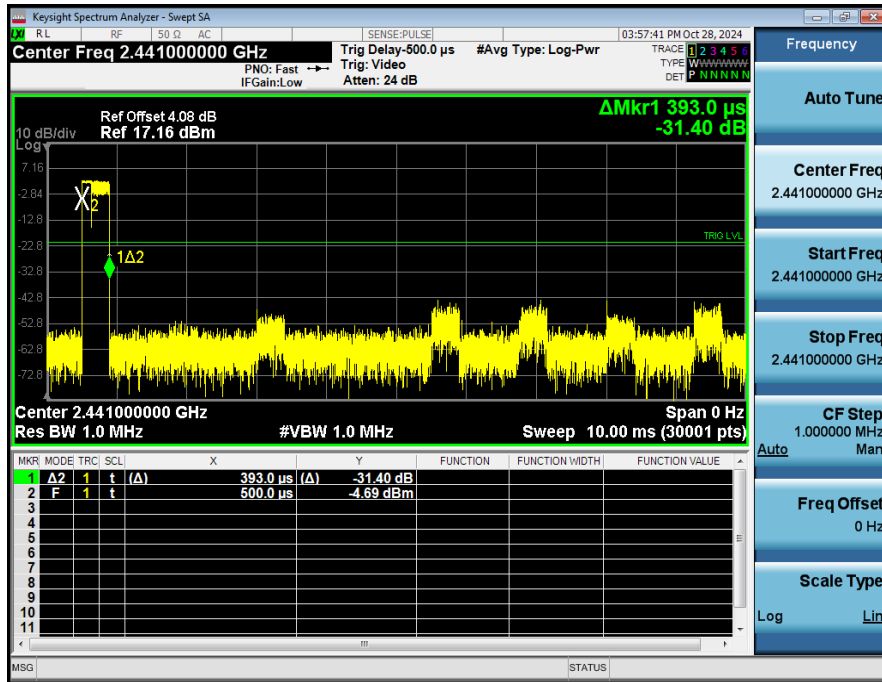


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH1\_2441\_00\_Accumulated

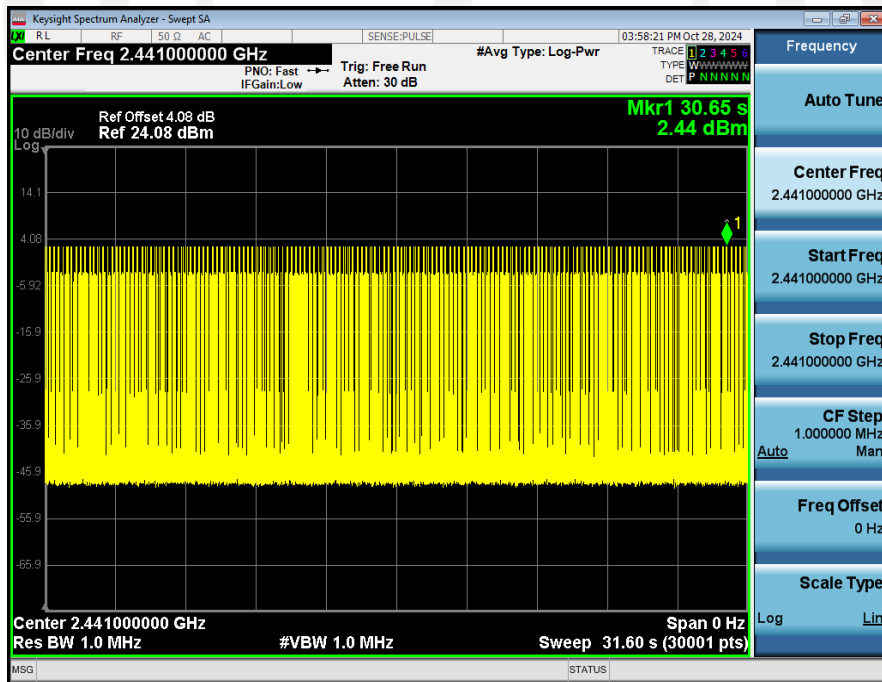


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH1\_2441\_00\_One\_Burst\_Time

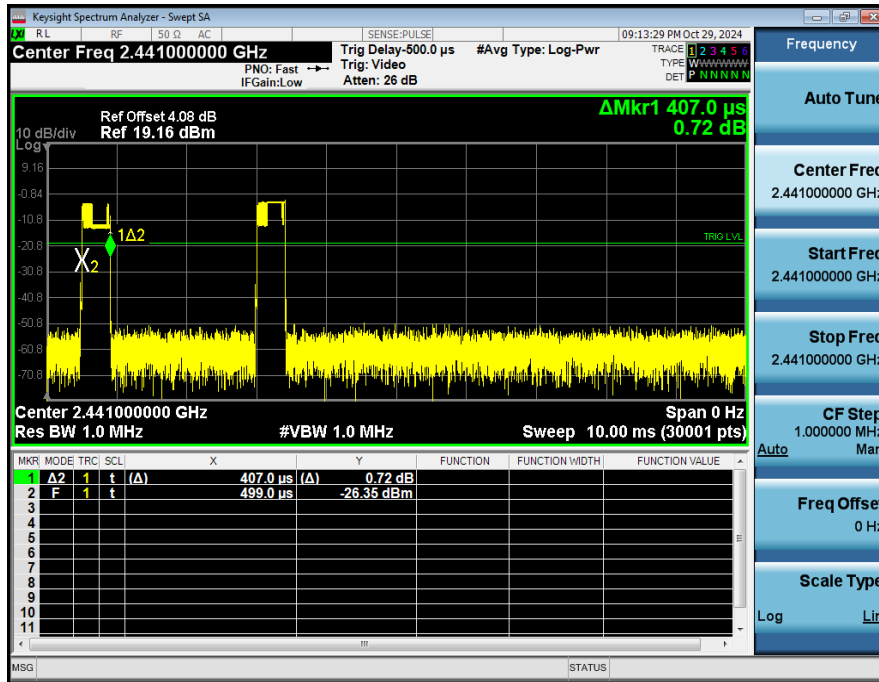


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_3-DH1\_2441\_00\_Accumulated

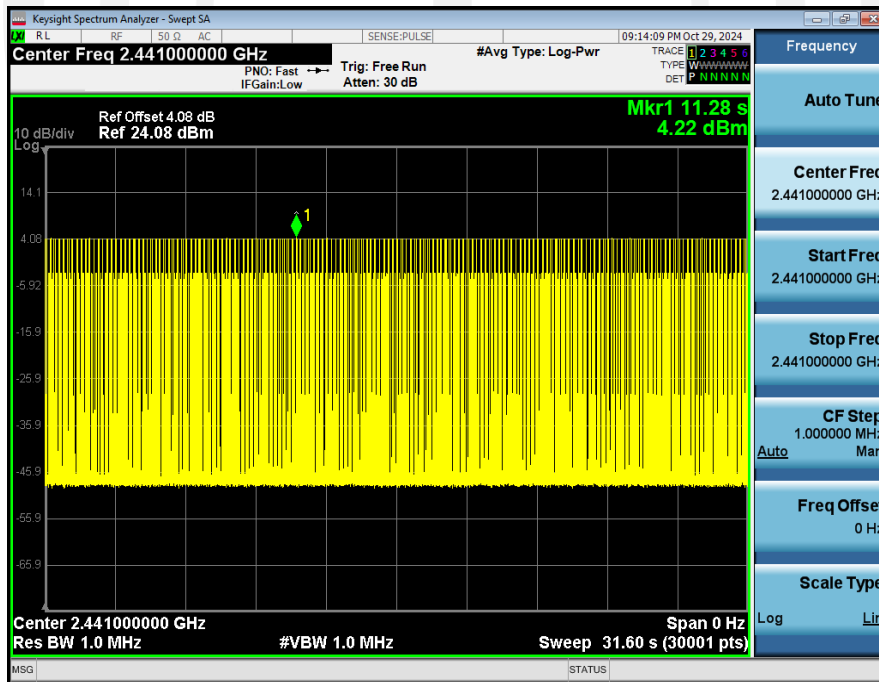


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH3\_2441\_00\_One\_Burst\_Time

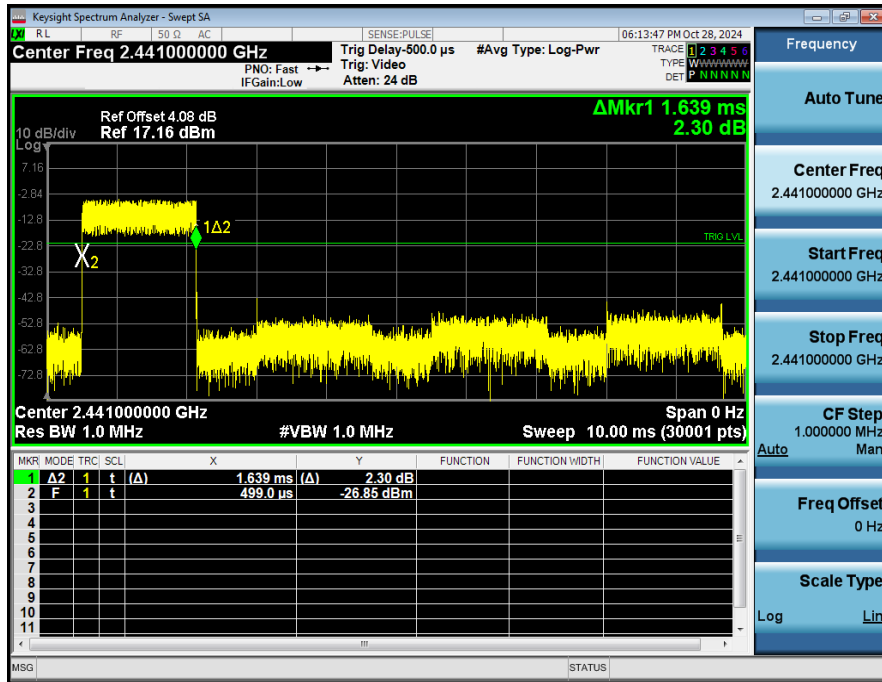


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH3\_2441\_00\_Accumulated

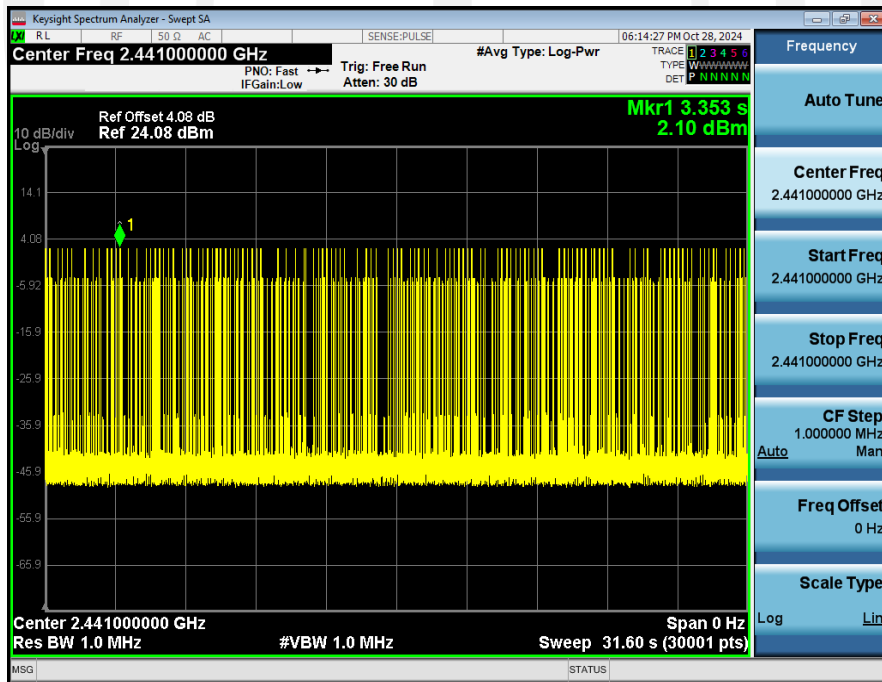

Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH5\_2441\_00\_One\_Burst\_Time

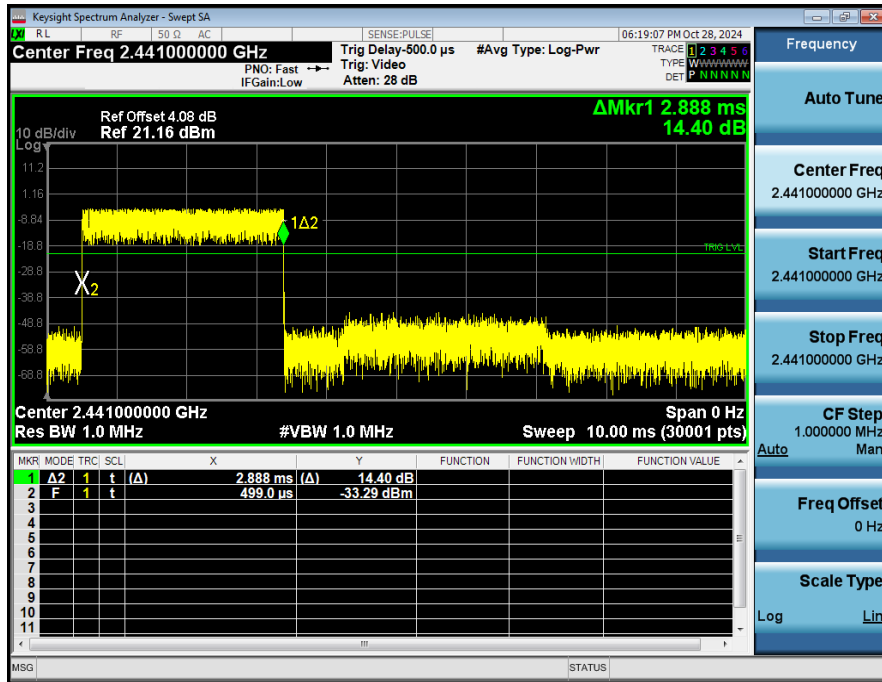


Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_1-DH5\_2441\_00\_Accumulated

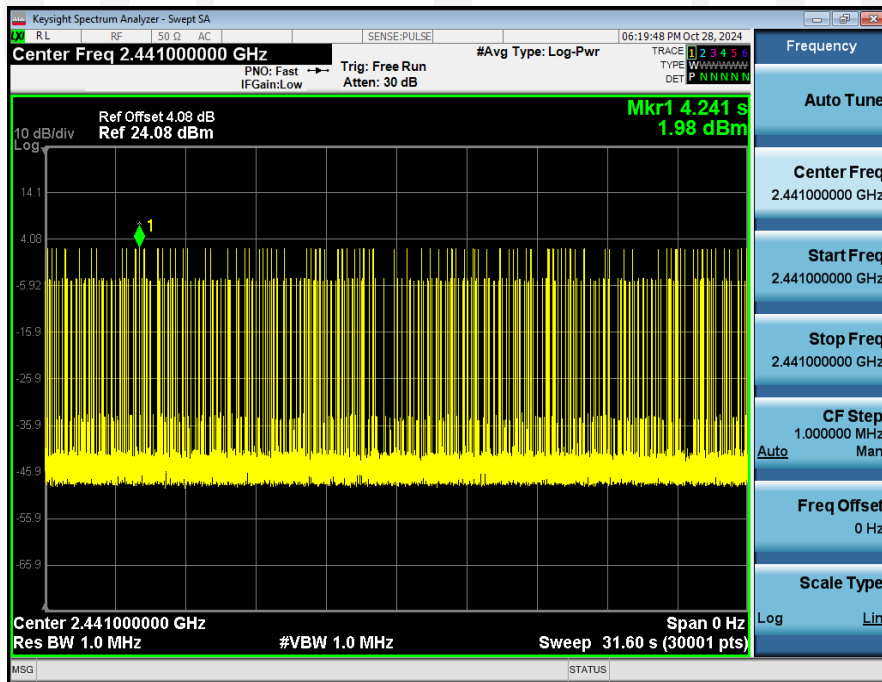



Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH3\_2441\_00\_One\_Burst\_Time

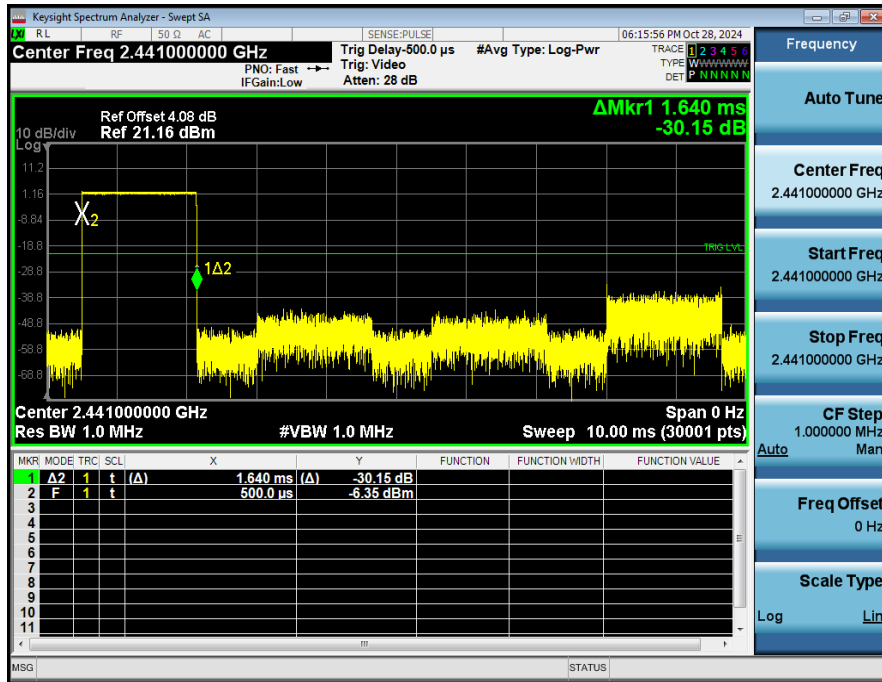

Dwell\_Time\_(Hopping)\_NVNT\_ANT1\_2-DH3\_2441\_00\_Accumulated

