

# TEST REPORT

Report No.: BCTC2311025648-1E

---

Applicant: Shenzhen Baseus Technology Co., Ltd.

---

Product Name: Power Bank

---

Model/Type  
reference: PPCXM10

---

Tested Date: 2023-11-14 to 2023-11-23

---

Issued Date: 2023-11-23

---


**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: 2A482-PPCXM10B

Product Name: Power Bank  
Trademark: baseus  
Model/Type reference: PPCXM10  
Prepared For: Shenzhen Baseus Technology Co., Ltd.  
Address: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China  
Manufacturer: Shenzhen Baseus Technology Co., Ltd.  
Address: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2023-11-14  
Sample tested Date: 2023-11-14 to 2023-11-23  
Issue Date: 2023-11-23  
Report No.: BCTC2311025648-1E  
Test Standards: FCC Part15.209  
ANSI C63.10-2013  
Test Results: PASS

Tested by:

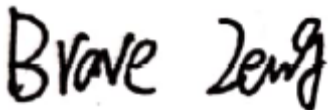

Brave Zeng/ Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content


Test Report Declaration	Page
1. Version .....	4
2. Test Summary .....	5
3. Measurement Uncertainty .....	6
4. Product Information And Test Setup .....	7
4.1 Product Information.....	7
4.2 Support Equipment .....	7
4.3 Test Setup Configuration .....	8
4.4 Test Mode .....	8
5. Test Facility And Test Instrument Used.....	9
5.1 Test Facility.....	9
5.2 Test Instrument Used.....	9
6. Conducted Emissions.....	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limit .....	11
6.3 Test Procedure .....	11
6.4 EUT Operating Conditions .....	11
6.5 Test Result.....	12
7. Radiated Emissions.....	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit .....	17
7.3 Test Procedure .....	17
7.4 Test Result.....	19
8. Bandwidth Test.....	29
8.1 Test Setup .....	29
8.2 Test Procedure .....	29
8.3 Test Result.....	30
9. Antenna Requirements.....	31
10. EUT Photographs.....	32
11. EUT Test Setup Photographs.....	33

(Note: N/A Means Not Applicable)

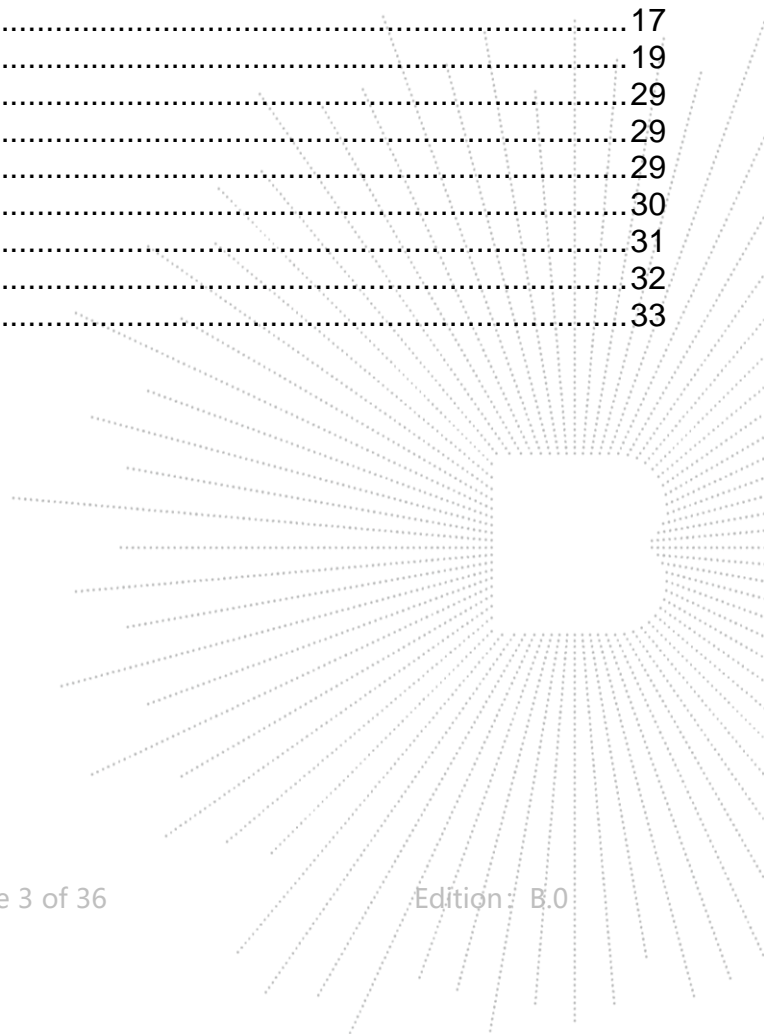

**1. Version**


<b>Report No.</b>	<b>Issue Date</b>	<b>Description</b>	<b>Approved</b>
BCTC2311025648-1E	2023-11-23	Original	Valid

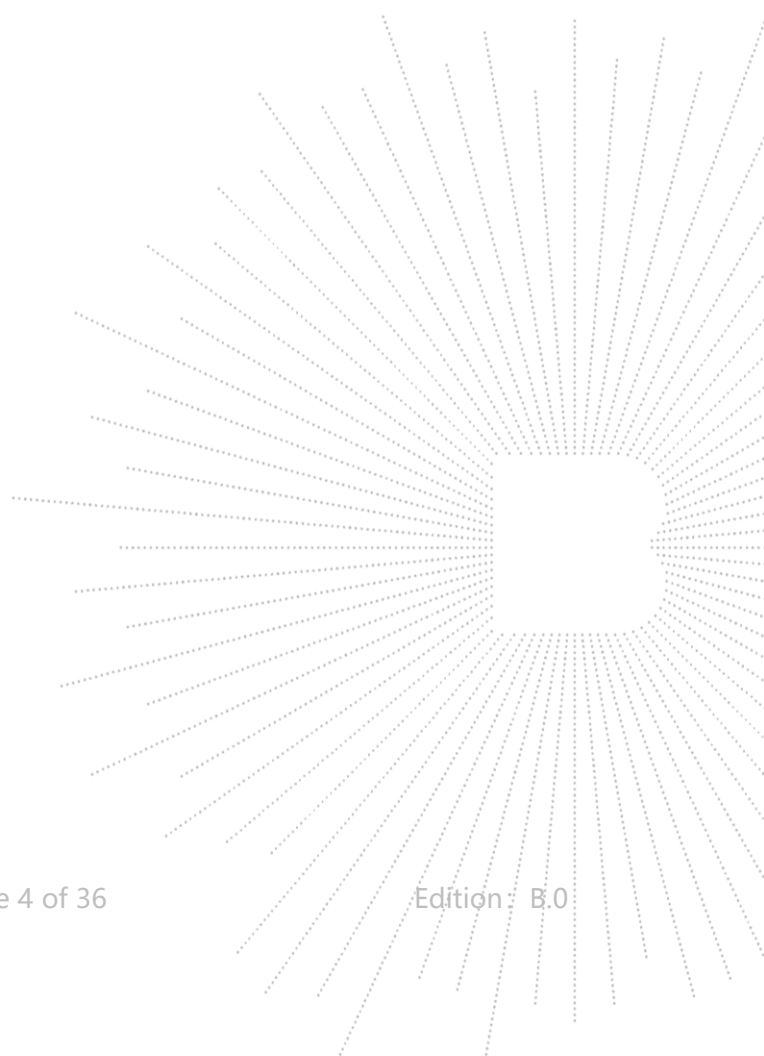

## 2. Test Summary

The Product has been tested according to the following specifications:


No.	Test Parameter	Clause No	Results
1	Conducted Emission	15.207	PASS
2	Radiated Emission	15.209	PASS
3	20dB Bandwidth	15.215	PASS
4	Antenna Requirement	15.203	PASS

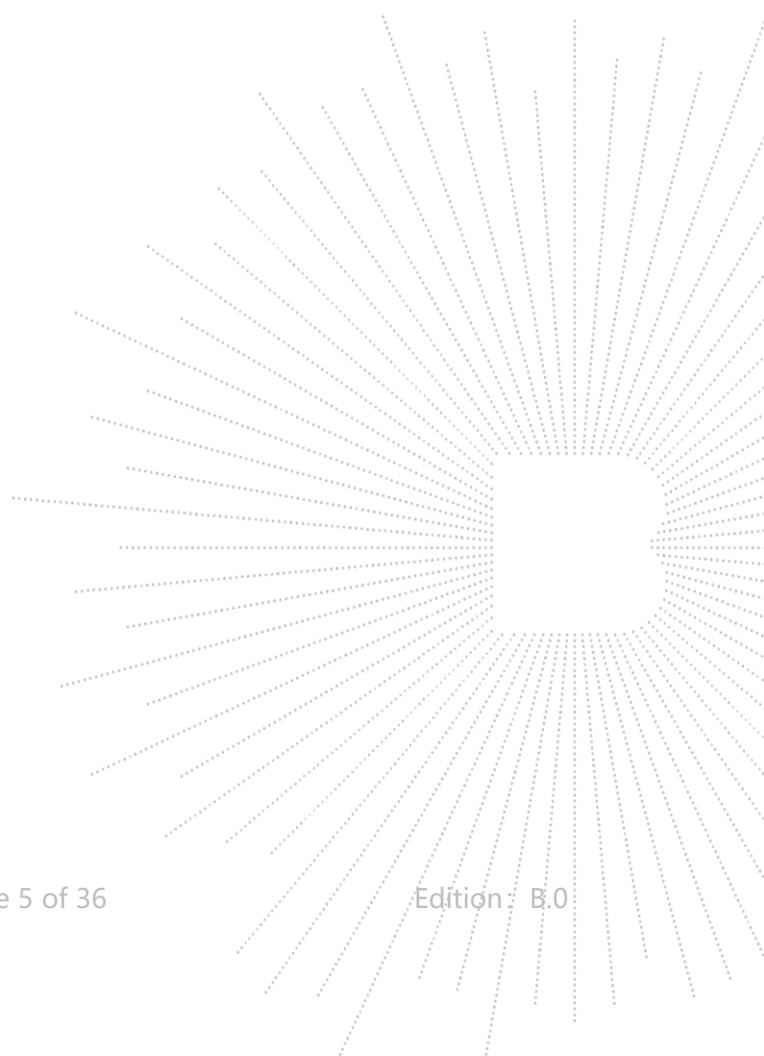

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

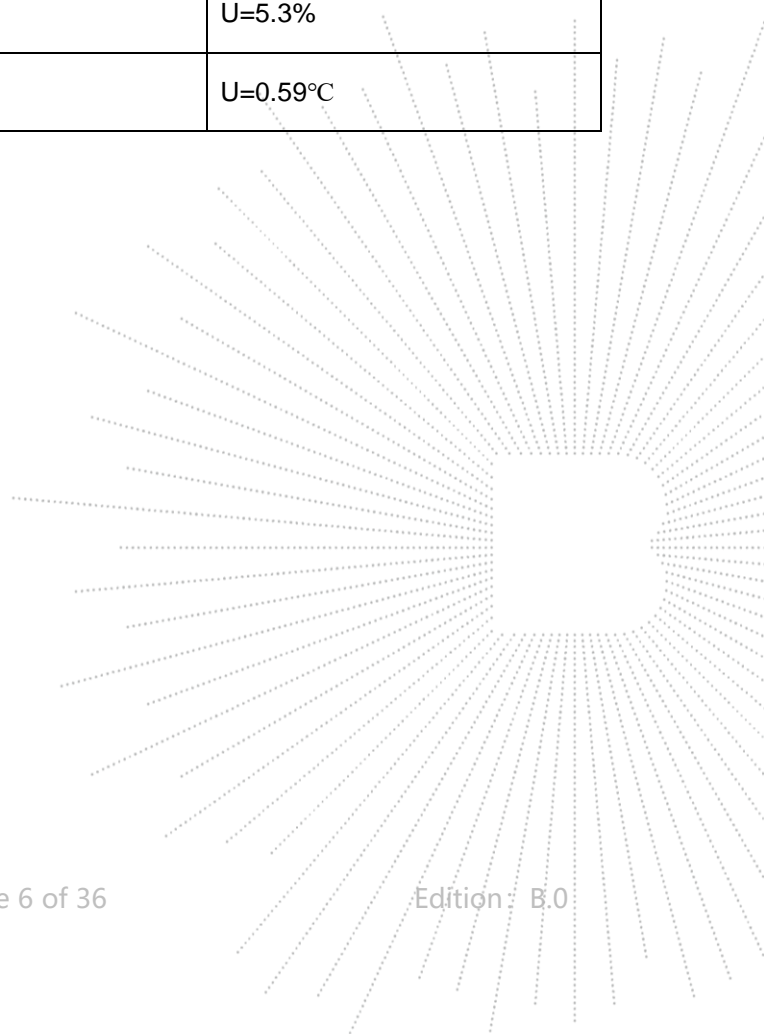

## 4. Product Information And Test Setup

### 4.1 Product Information

Model/Type reference:	PPCXM10
Model differences:	N/A
Hardware Version:	V2.2
Software Version:	EB269549
Product Description:	Power Bank
Operation Frequency:	112kHz-205kHz
Antenna installation:	loop coil antenna
Ratings:	Type-C Input: 5V=3A, 9V=2A Type-C Output: 5V=3A, 9V=2.22A, 12V=1.5A Wireless Output: 5W, 7.5W, 10W, 15W Total Output:5V=2.4A

#### Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	With a ferrite ring in mid Detachable
2	--	--	BCTC	--	Yes/No	--

### 4.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
1.	Adapter	UGREEN	CD122	---	auxiliary
2.	Wireless charging load	---	---	---	auxiliary

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. The wireless charging load supports 15W.

### 4.3 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.


### 4.4 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

AC Mode	Test Mode 1	AC Charging+Wireless Charging+Full load
	Test Mode 2	AC Charging+Wireless Charging+Half-load
	Test Mode 3	AC Charging+Wireless Charging+(Null load)
DC Mode	Test Mode 4	Wireless Charging+Full load
	Test Mode 5	Wireless Charging+Half-load
	Test Mode 6	Wireless Charging+(Null load)

**Note:**

- 1.All test modes have been tested and passed, only the worst mode full load mode is shown in the report.
- 2.The battery models differ, and both different batteries have been tested.

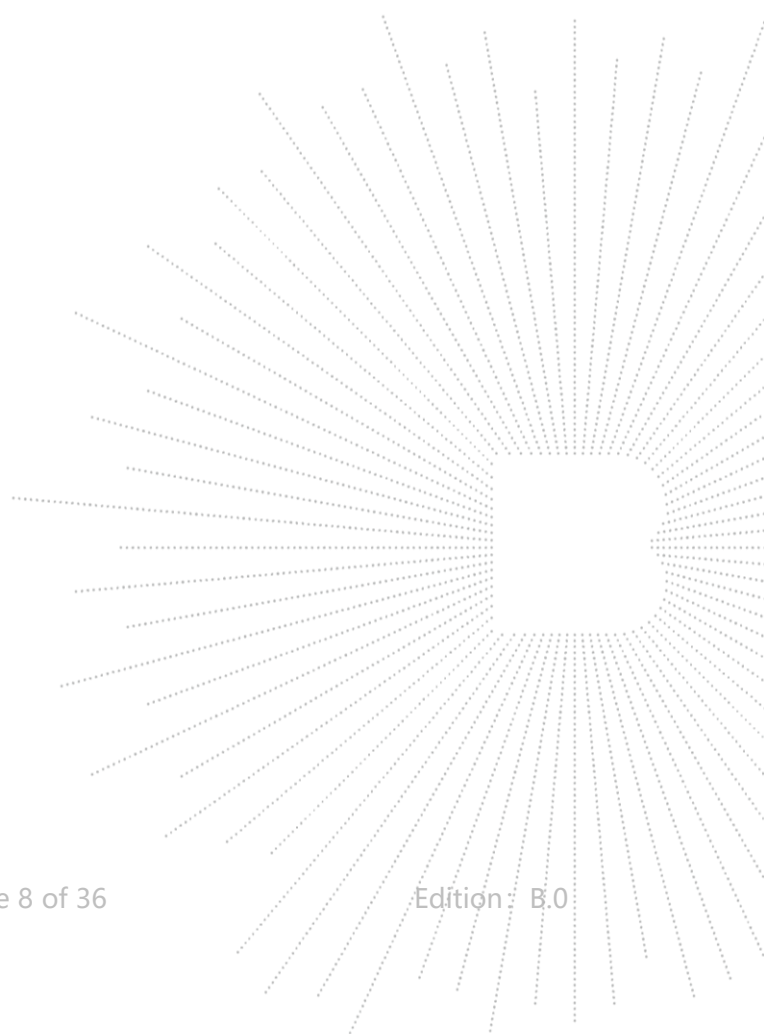



## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

FCC Designation Number: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
LISN	R&S	ENV216	101375	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	Sept. 22, 2023	Sept 21, 2024


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 15, 2023	May 14, 2024
Power Sensor (AV)	Keysight	E9300A	\	May 15, 2023	May 14, 2024
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 15, 2023	May 14, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
Receiver	R&S	ESRP	101154	May 15, 2023	May 14, 2024
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 15, 2023	May 14, 2024
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 29, 2023	May 28, 2024
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 31, 2023	May 30, 2024
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 15, 2023	May 14, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 31, 2023	May 30, 2024
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 15, 2023	May 14, 2024
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 31, 2023	May 30, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

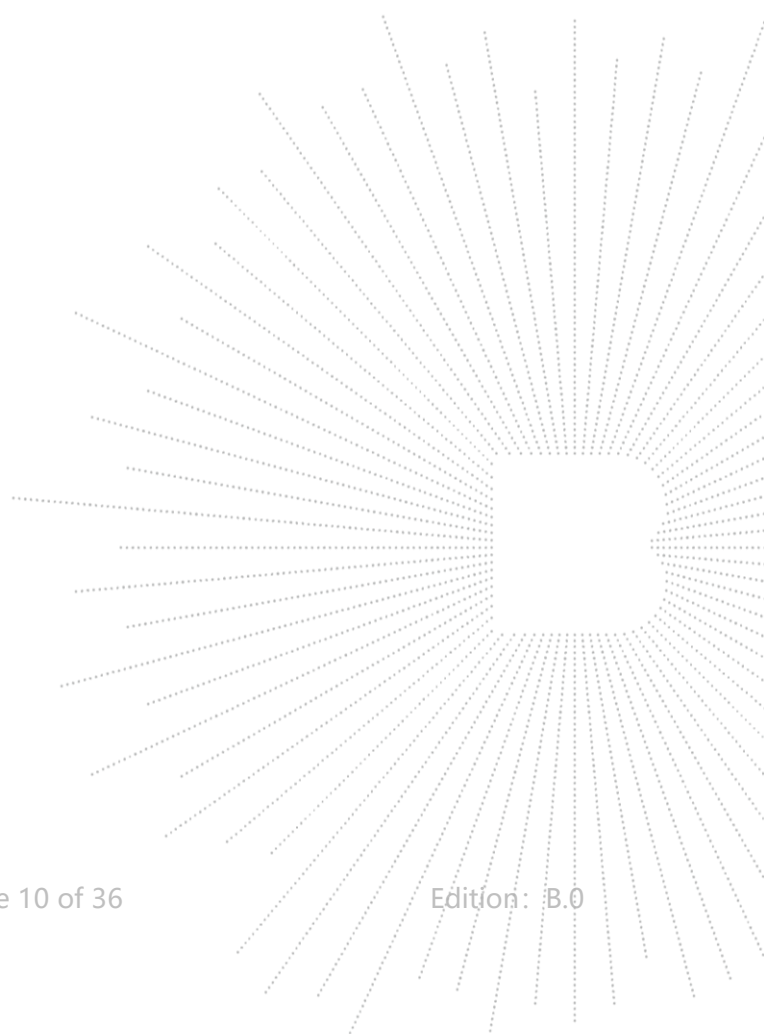

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

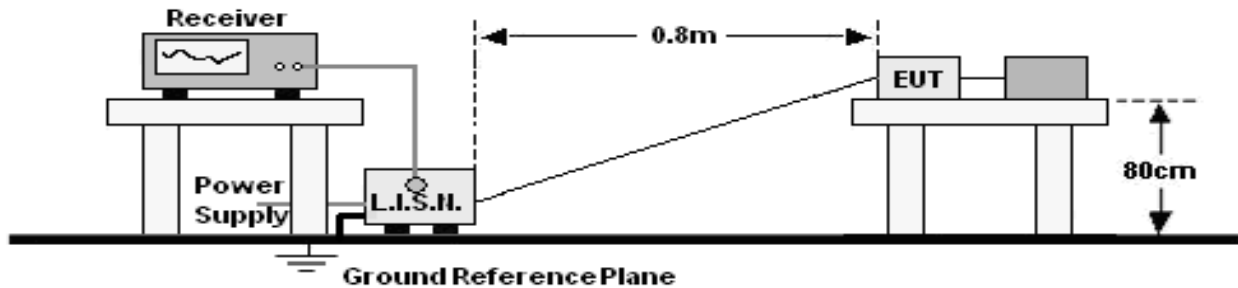

### 6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:  
 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

### 6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


### 6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

Battery model: 676076GH

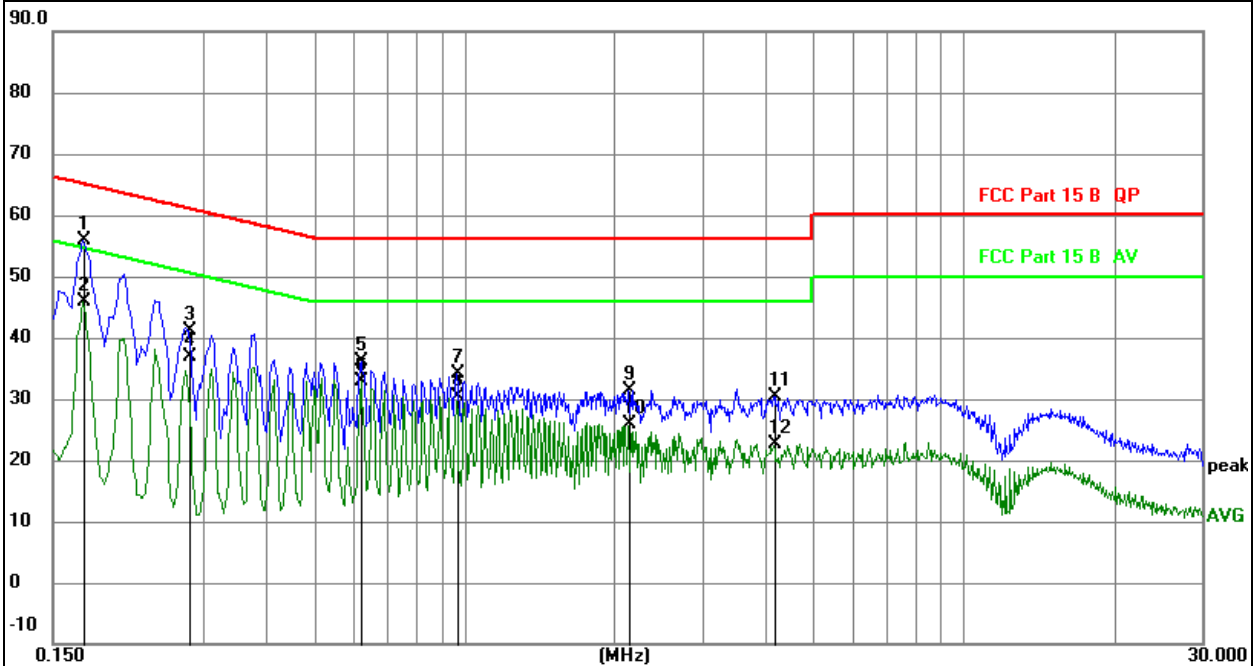


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz		dB	dBuV	dBuV	dB	
1	*	0.1722	36.14	19.77	55.91	64.85	-8.94	QP
2		0.1722	26.07	19.77	45.84	54.85	-9.01	AVG
3		0.2803	21.19	19.83	41.02	60.81	-19.79	QP
4		0.2803	16.95	19.83	36.78	50.81	-14.03	AVG
5		0.6205	16.40	19.84	36.24	56.00	-19.76	QP
6		0.6205	13.14	19.84	32.98	46.00	-13.02	AVG
7		0.9633	14.13	19.94	34.07	56.00	-21.93	QP
8		0.9633	10.39	19.94	30.33	46.00	-15.67	AVG
9		2.1326	11.40	20.00	31.40	56.00	-24.60	QP
10		2.1326	5.96	20.00	25.96	46.00	-20.04	AVG
11		4.1796	9.75	20.62	30.37	56.00	-25.63	QP
12		4.1796	2.01	20.62	22.63	46.00	-23.37	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

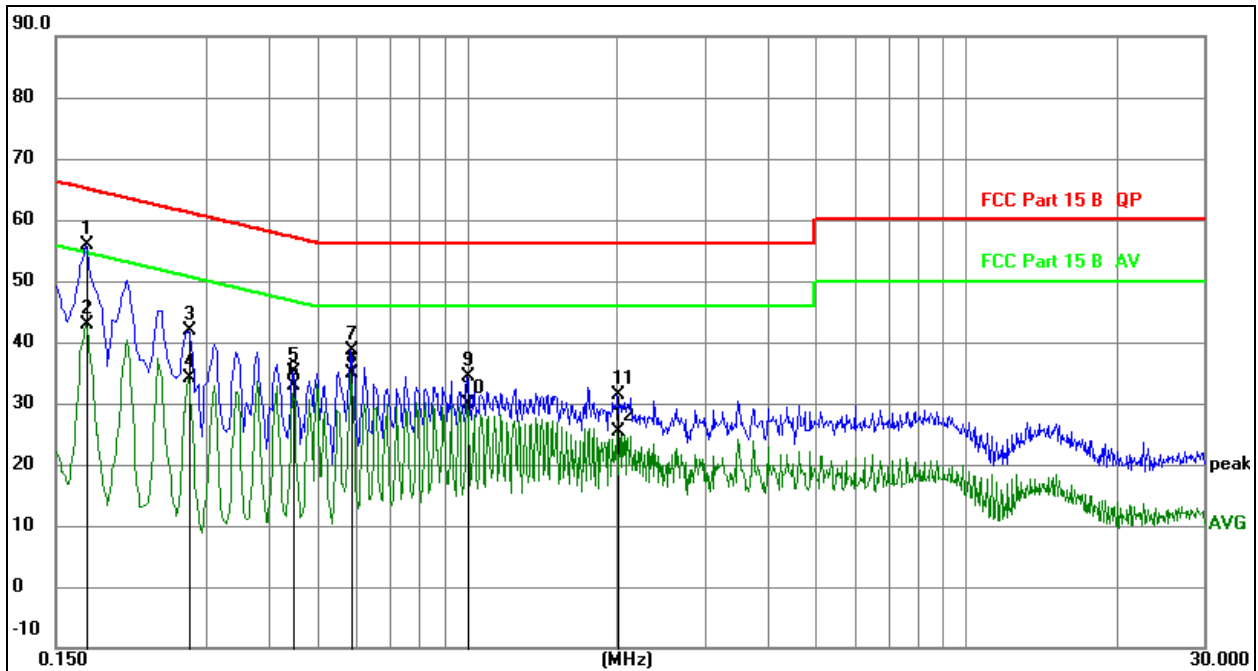

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1725	36.03	19.78	55.81	64.84	-9.03	QP
2		0.1725	23.16	19.78	42.94	54.84	-11.90	AVG
3		0.2760	22.17	19.83	42.00	60.94	-18.94	QP
4		0.2760	14.27	19.83	34.10	50.94	-16.84	AVG
5		0.4470	15.20	19.84	35.04	56.93	-21.89	QP
6		0.4470	12.98	19.84	32.82	46.93	-14.11	AVG
7		0.5864	18.73	19.84	38.57	56.00	-17.43	QP
8		0.5864	15.11	19.84	34.95	46.00	-11.05	AVG
9		1.0004	14.53	19.95	34.48	56.00	-21.52	QP
10		1.0004	9.85	19.95	29.80	46.00	-16.20	AVG
11		2.0039	11.43	19.95	31.38	56.00	-24.62	QP
12		2.0039	5.34	19.95	25.29	46.00	-20.71	AVG

Battery model: H676076CH

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

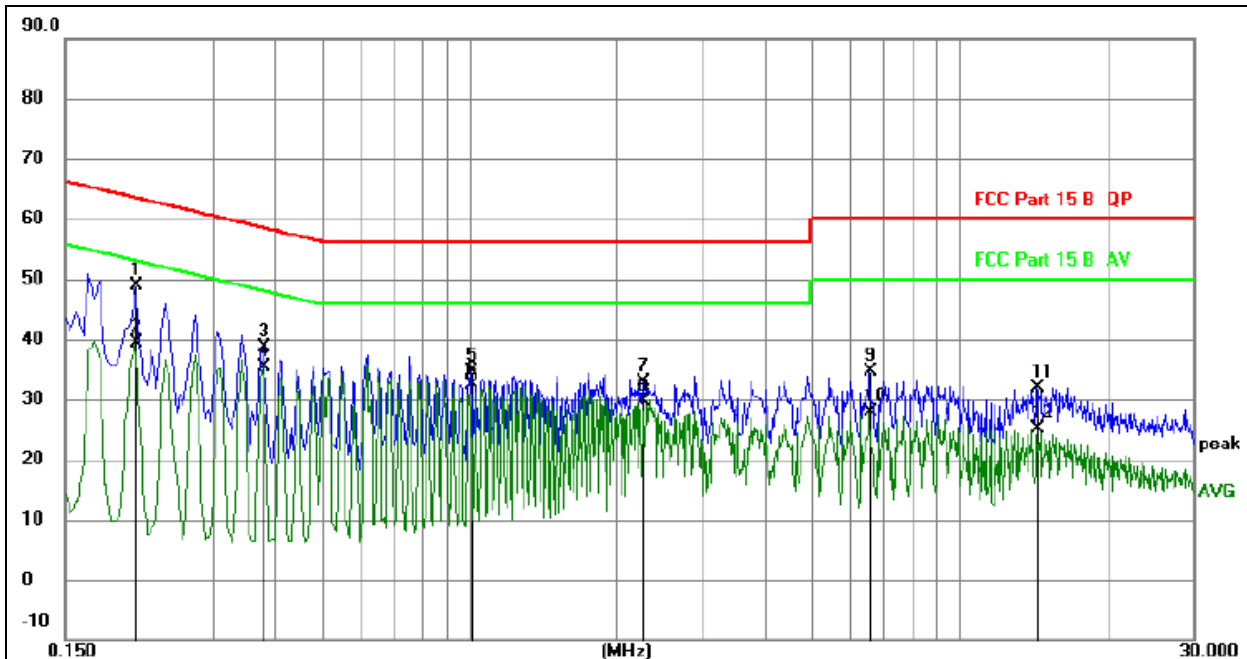


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2085	29.06	19.83	48.89	63.26	-14.37	QP
2		0.2085	19.48	19.83	39.31	53.26	-13.95	AVG
3		0.3795	18.79	19.84	38.63	58.29	-19.66	QP
4	*	0.3795	15.50	19.84	35.34	48.29	-12.95	AVG
5		1.0095	14.72	19.95	34.67	56.00	-21.33	QP
6		1.0095	12.37	19.95	32.32	46.00	-13.68	AVG
7		2.2695	12.71	20.05	32.76	56.00	-23.24	QP
8		2.2695	9.70	20.05	29.75	46.00	-16.25	AVG
9		6.5580	14.51	20.06	34.57	60.00	-25.43	QP
10		6.5580	7.78	20.06	27.84	50.00	-22.16	AVG
11		14.3790	11.96	19.88	31.84	60.00	-28.16	QP
12		14.3790	5.24	19.88	25.12	50.00	-24.88	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

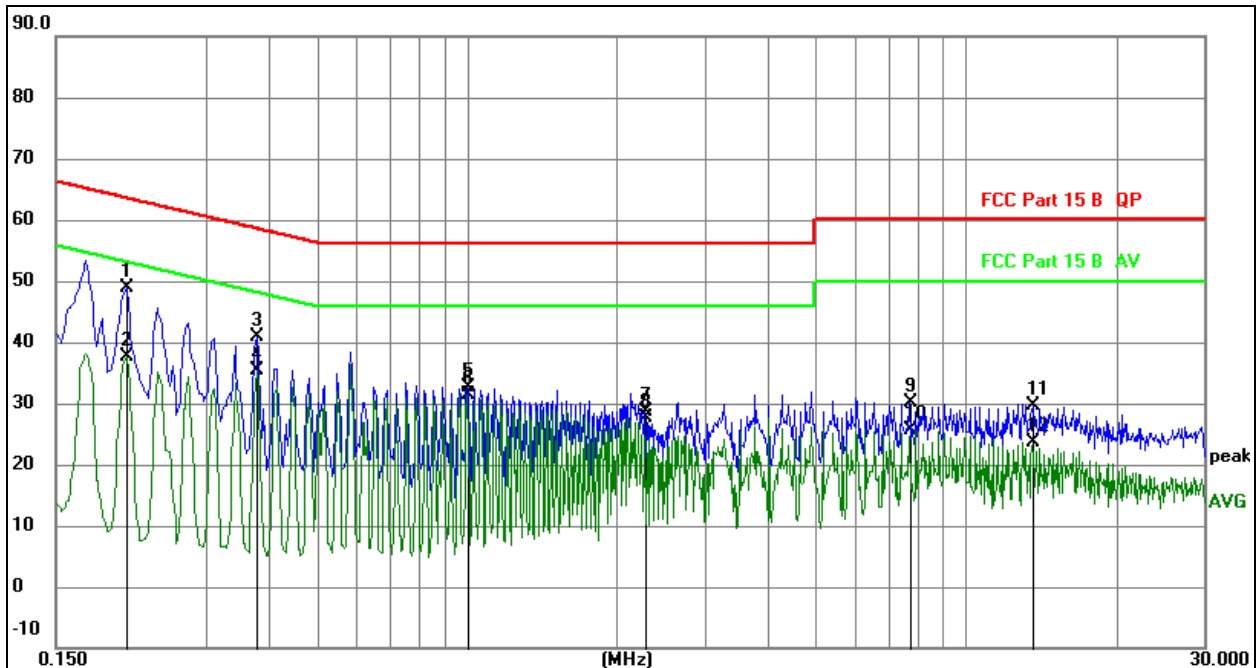
**Remark:**


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2083	28.95	19.83	48.78	63.27	-14.49	QP
2		0.2083	17.87	19.83	37.70	53.27	-15.57	AVG
3		0.3791	21.08	19.84	40.92	58.30	-17.38	QP
4	*	0.3791	15.43	19.84	35.27	48.30	-13.03	AVG
5		0.9997	12.79	19.95	32.74	56.00	-23.26	QP
6		0.9997	11.51	19.95	31.46	46.00	-14.54	AVG
7		2.2726	8.65	20.05	28.70	56.00	-27.30	QP
8		2.2726	7.47	20.05	27.52	46.00	-18.48	AVG
9		7.6870	10.16	19.94	30.10	60.00	-29.90	QP
10		7.6870	5.60	19.94	25.54	50.00	-24.46	AVG
11		13.6228	9.64	19.88	29.52	60.00	-30.48	QP
12		13.6228	3.74	19.88	23.62	50.00	-26.38	AVG


## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup

(A) Radiated Emission Test-Up Frequency Below 30MHz

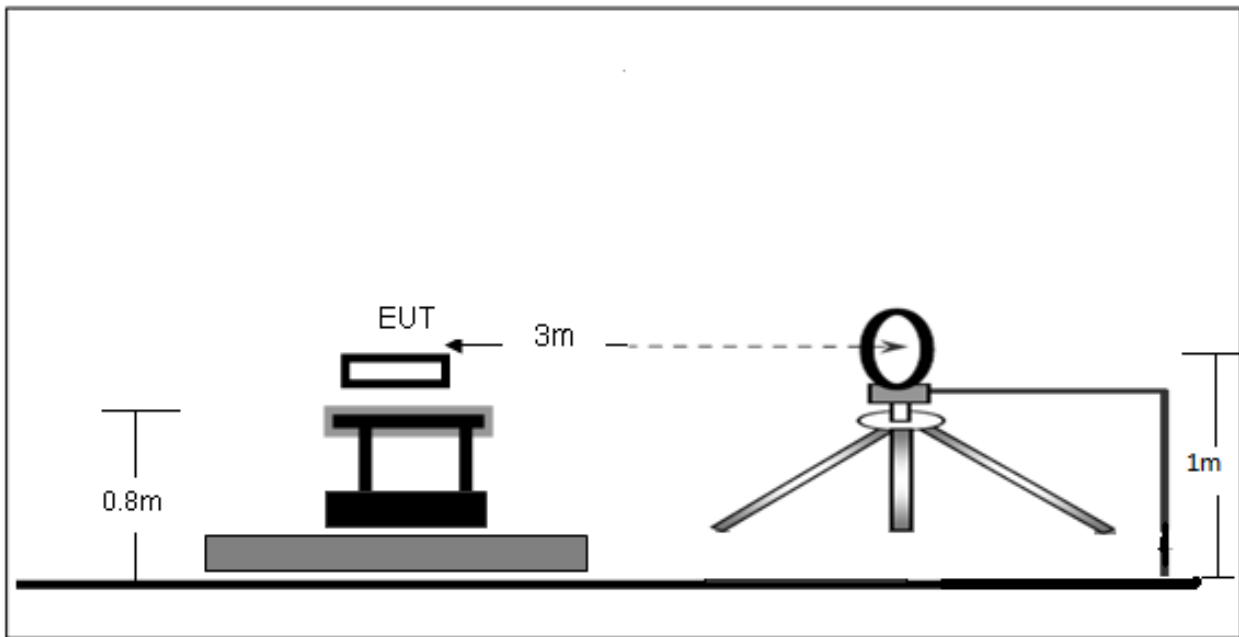

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

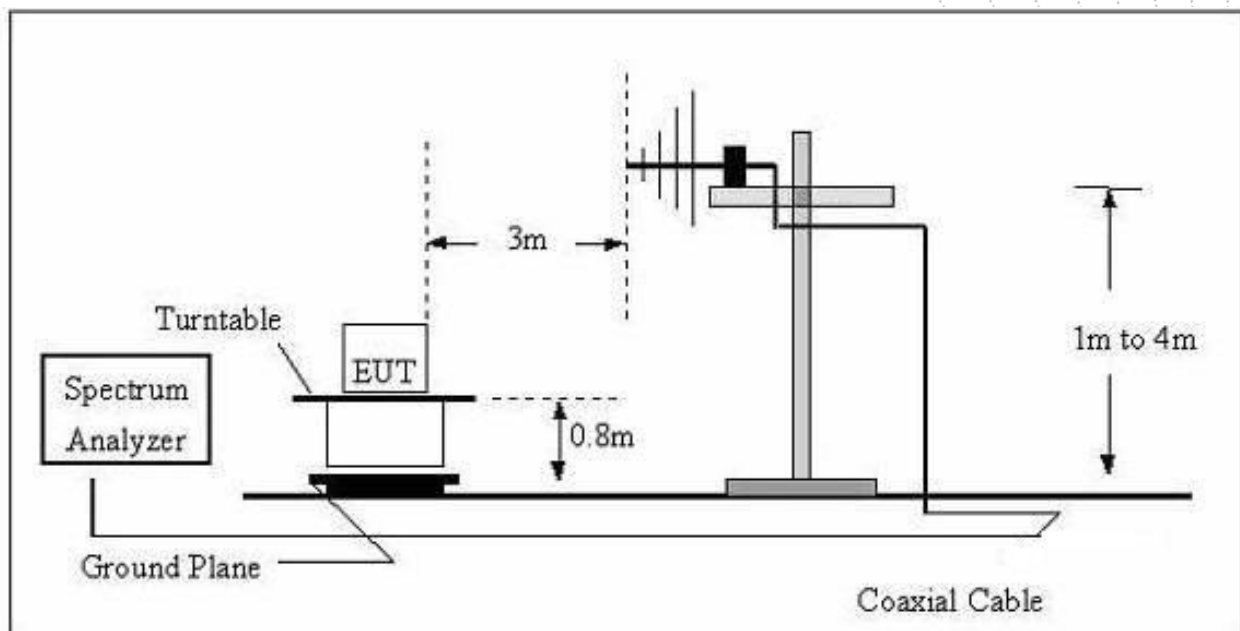



## 7.2 Limit

FCC §15.209; §15.205.

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

## 7.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

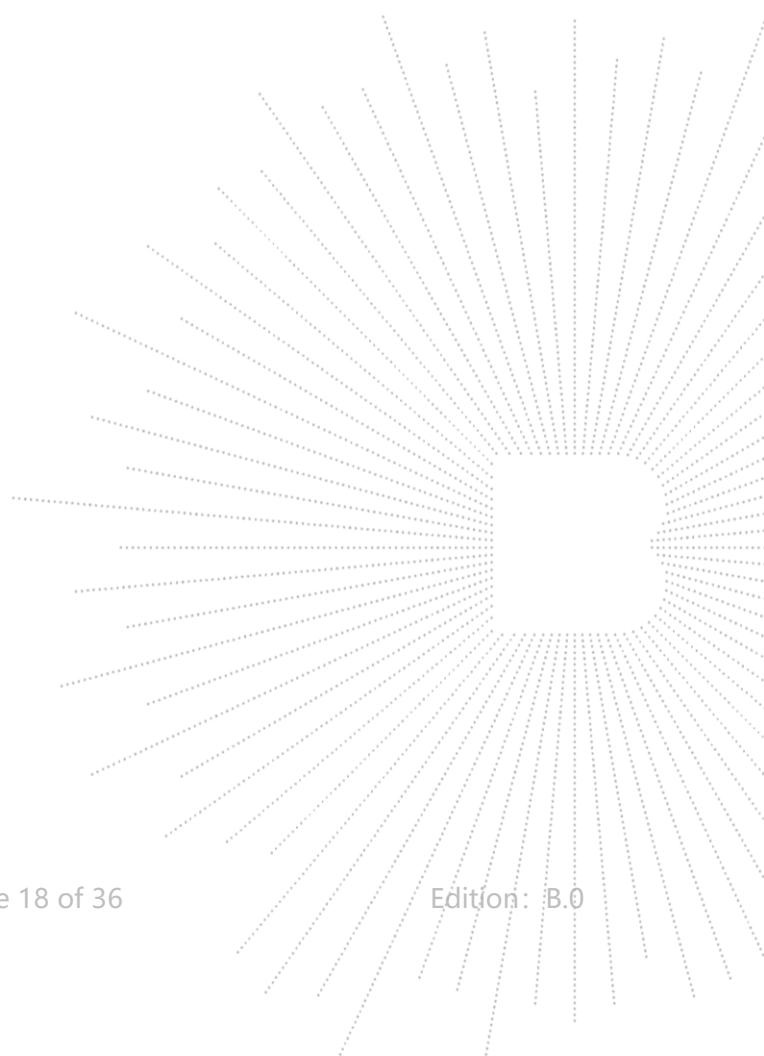

## 7.4 Test Result

Between 9kHz – 30MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1	Polarization :	Coaxial

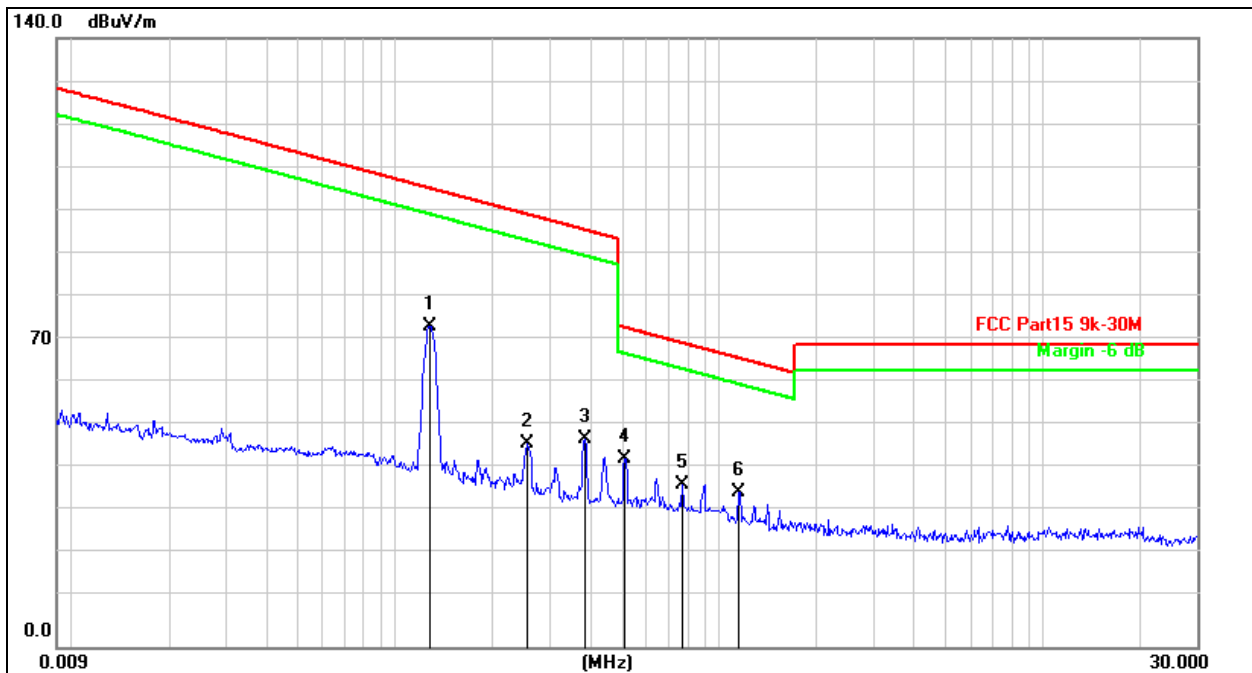


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.1277	83.58	-9.74	73.84	105.4	-31.64	peak
2		0.2545	56.70	-9.86	46.84	99.49	-52.65	peak
3		0.3849	57.70	-9.98	47.72	95.90	-48.18	peak
4	*	0.5110	53.29	-10.07	43.22	73.44	-30.22	peak
5		0.7731	47.16	-9.82	37.34	69.85	-32.51	peak
6		1.1506	45.37	-9.68	35.69	66.41	-30.72	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	Coaxial

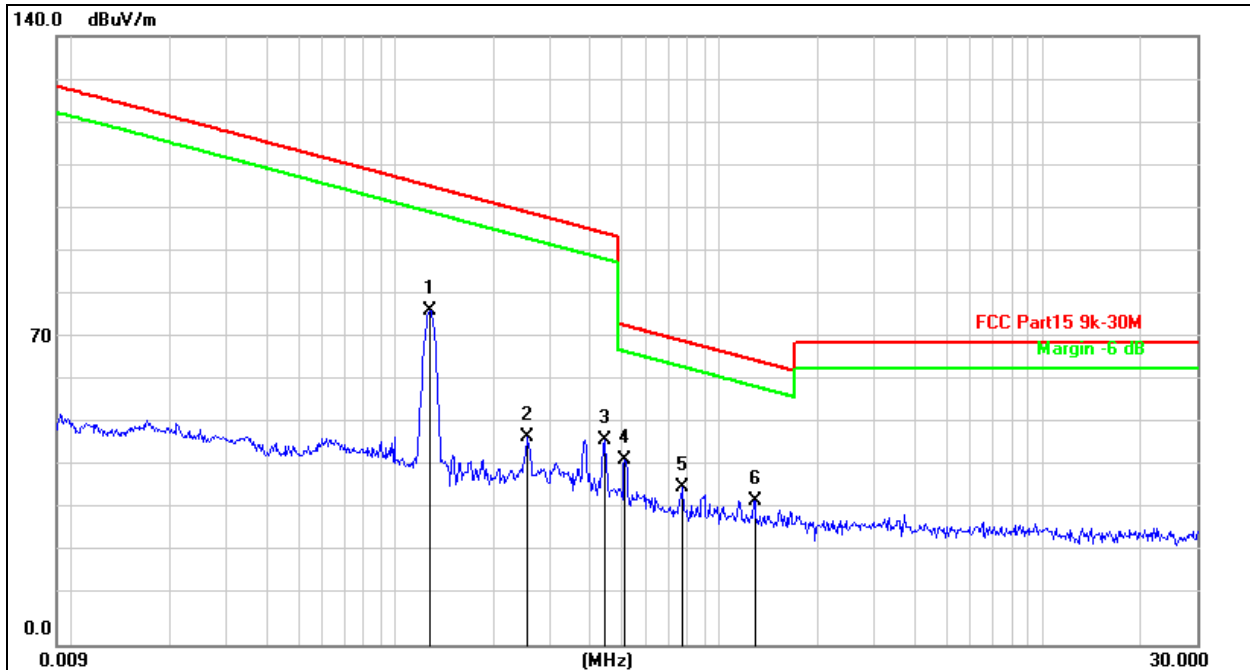
**Remark:**


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	*	0.1277	86.50	-9.74	76.76	105.4	-28.72	peak
2		0.2545	57.60	-9.86	47.74	99.49	-51.75	peak
3		0.4418	57.20	-10.03	47.17	94.70	-47.53	peak
4		0.5110	52.67	-10.07	42.60	73.44	-30.84	peak
5		0.7670	45.96	-9.82	36.14	69.92	-33.78	peak
6		1.2885	42.86	-9.63	33.23	65.43	-32.20	peak

Note: Only the prototype of the worst battery model is reflected, and the worst model is 676076GH.

Between 30MHz – 1GHz(Battery model: 676076GH)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4(portable)	Polarization :	Horizontal

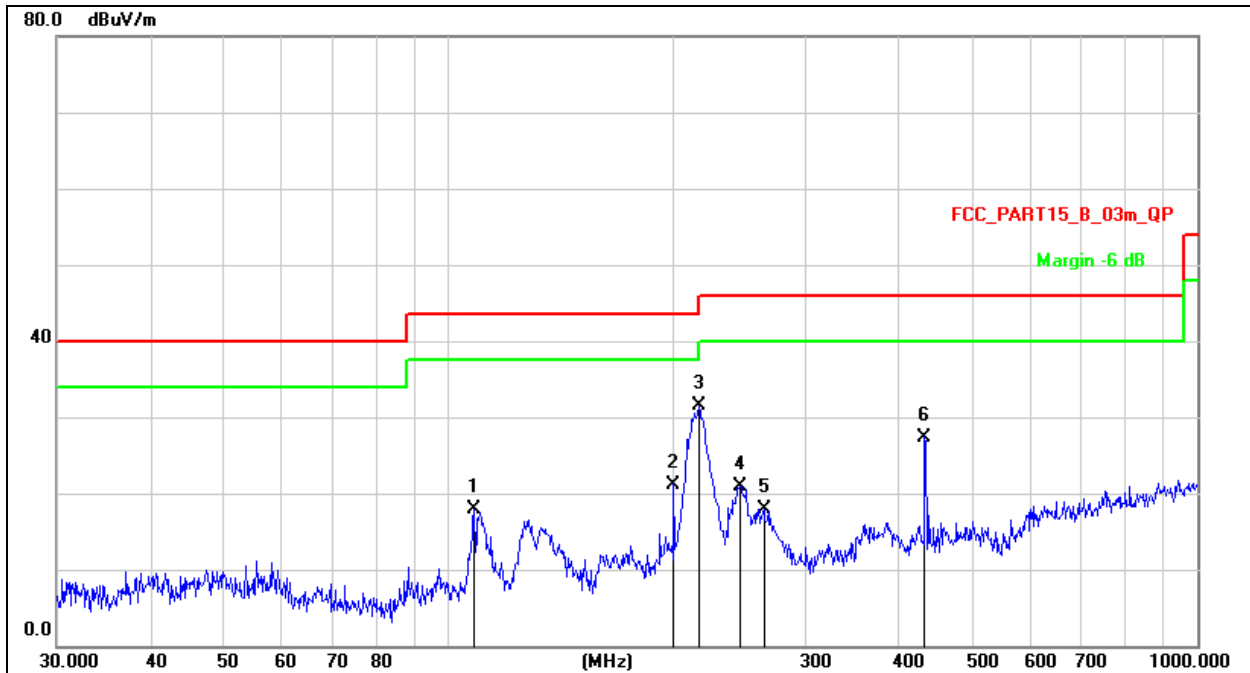


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		108.2667	34.49	-16.51	17.98	43.50	-25.52	QP
2		199.9856	36.92	-15.72	21.20	43.50	-22.30	QP
3	*	216.0240	46.74	-15.26	31.48	46.00	-14.52	QP
4		245.0900	35.41	-14.43	20.98	46.00	-25.02	QP
5		263.8190	31.98	-14.00	17.98	46.00	-28.02	QP
6		432.5457	37.60	-10.20	27.40	46.00	-18.60	QP


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4(portable)	Polarization :	Vertical

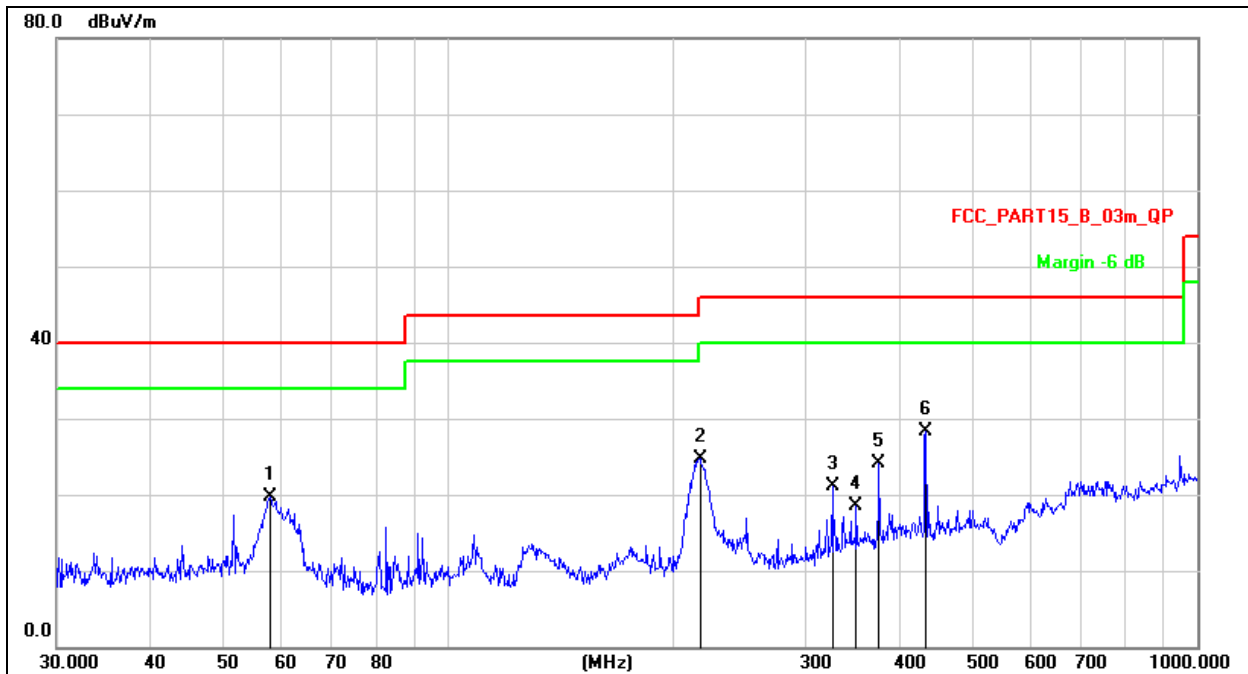
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		57.7962	34.65	-14.95	19.70	40.00	-20.30	QP
2		216.7828	40.03	-15.24	24.79	46.00	-21.21	QP
3		325.5958	33.40	-12.34	21.06	46.00	-24.94	QP
4		350.4768	29.88	-11.47	18.41	46.00	-27.59	QP
5		375.9385	35.24	-11.15	24.09	46.00	-21.91	QP
6	*	434.0651	38.40	-10.17	28.23	46.00	-17.77	QP


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1(mobile)	Polarization :	Horizontal

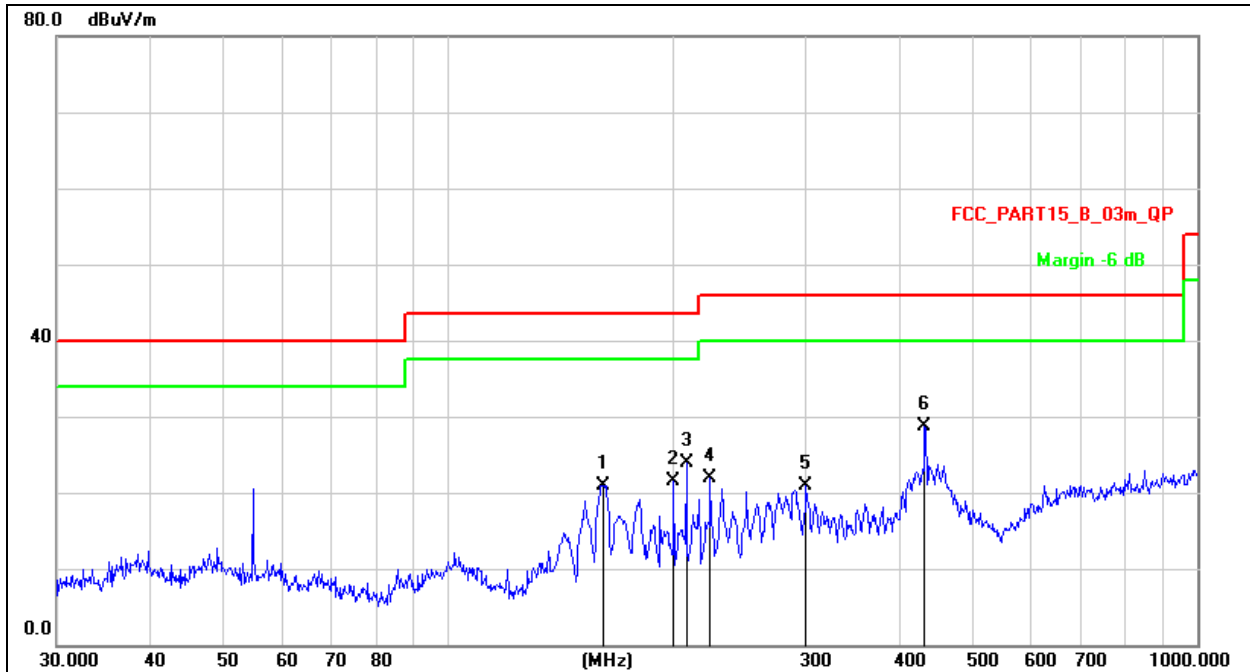
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		160.9089	39.62	-18.62	21.00	43.50	-22.50	QP
2		199.9856	37.16	-15.72	21.44	43.50	-22.06	QP
3		207.8501	39.39	-15.50	23.89	43.50	-19.61	QP
4		223.7334	36.89	-15.04	21.85	46.00	-24.15	QP
5		300.3672	34.15	-13.23	20.92	46.00	-25.08	QP
6	*	432.5457	38.95	-10.20	28.75	46.00	-17.25	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1(mobile)	Polarization :	Vertical

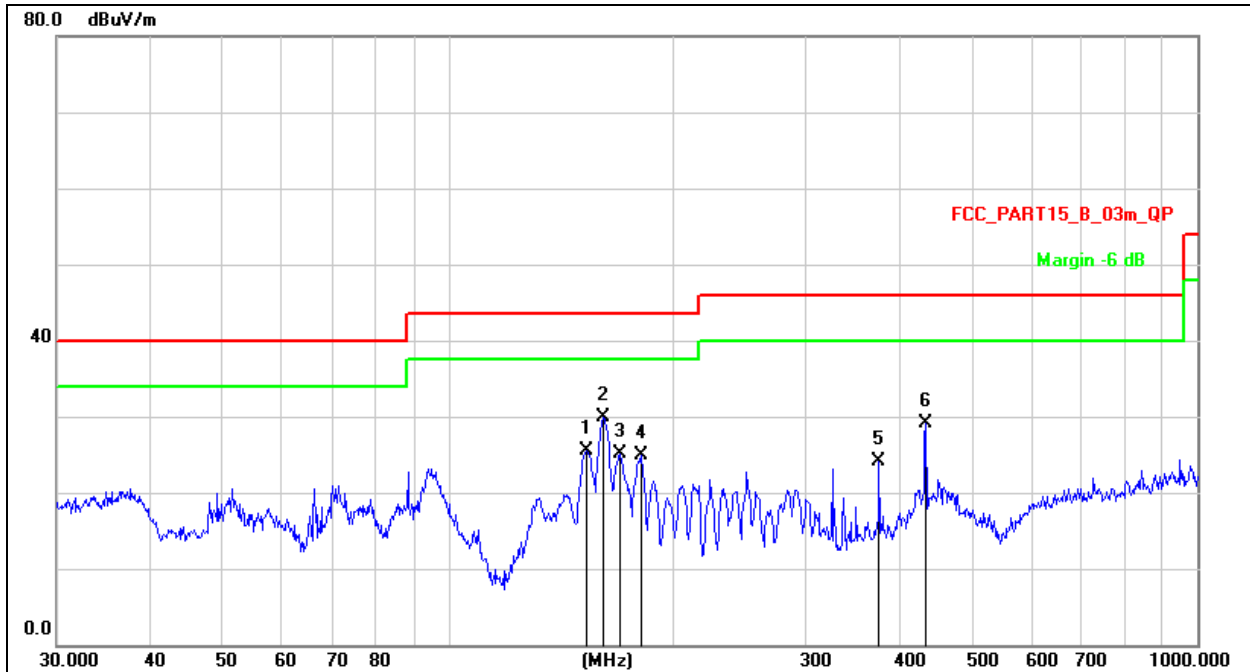
**Remark:**


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		152.6641	44.81	-19.23	25.58	43.50	-17.92	QP
2	*	160.9089	48.50	-18.62	29.88	43.50	-13.62	QP
3		169.5990	43.09	-17.98	25.11	43.50	-18.39	QP
4		180.6488	41.98	-17.16	24.82	43.50	-18.68	QP
5		375.9385	35.32	-11.15	24.17	46.00	-21.83	QP
6		434.0651	39.21	-10.17	29.04	46.00	-16.96	QP



Battery model: H676076CH

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1(mobile)	Polarization :	Horizontal

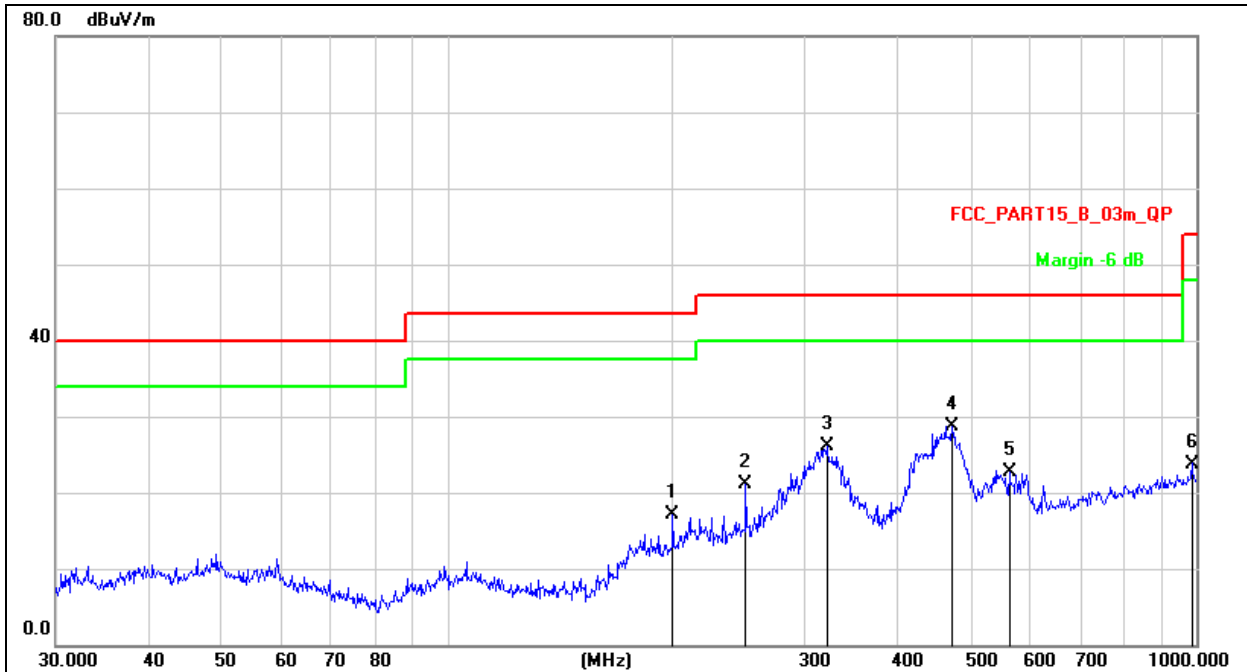


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	199.9856	32.87	-15.72	17.15	43.50	-26.35	QP
2	250.3011	35.47	-14.28	21.19	46.00	-24.81	QP
3	321.0607	38.54	-12.50	26.04	46.00	-19.96	QP
4 *	472.1759	38.05	-9.31	28.74	46.00	-17.26	QP
5	562.6624	32.22	-9.53	22.69	46.00	-23.31	QP
6	986.0716	26.32	-2.52	23.80	54.00	-30.20	QP


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1(mobile)	Polarization :	Vertical

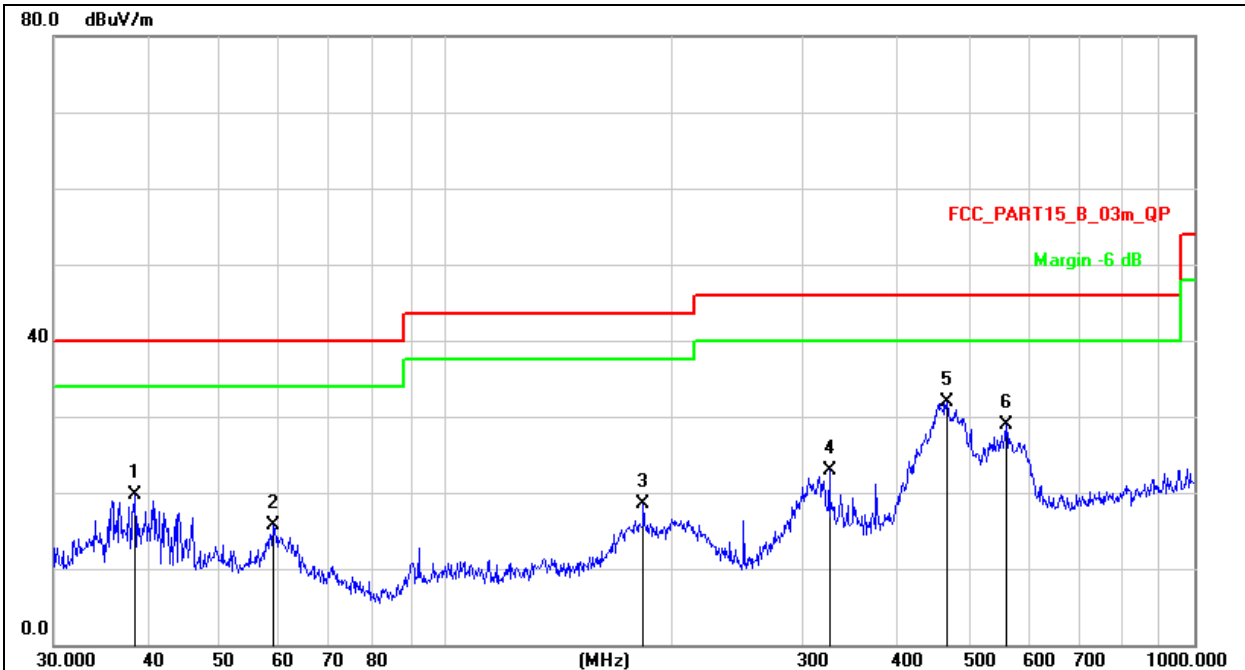
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	38.4809	34.69	-15.01	19.68	40.00	-20.32	QP
2	58.8185	30.77	-15.09	15.68	40.00	-24.32	QP
3	183.8440	35.34	-16.92	18.42	43.50	-25.08	QP
4	325.5958	35.15	-12.34	22.81	46.00	-23.19	QP
5 *	467.2349	41.33	-9.43	31.90	46.00	-14.10	QP
6	560.6928	38.65	-9.66	28.99	46.00	-17.01	QP


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4(portable)	Polarization :	Horizontal

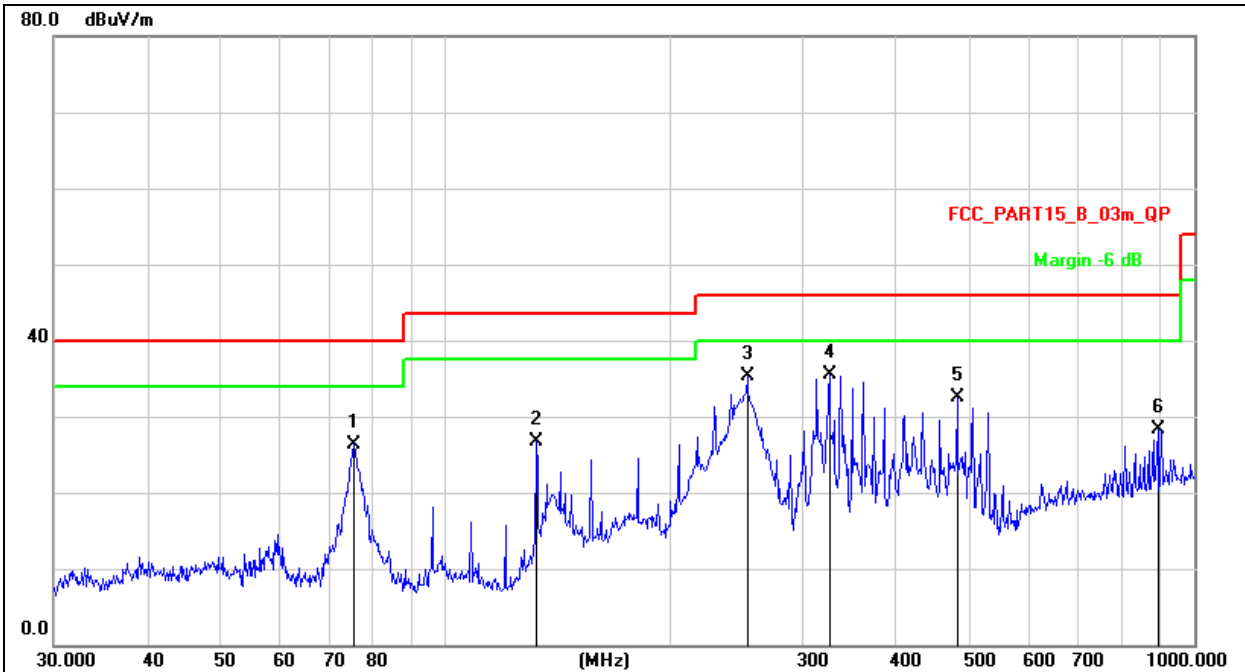
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	75.4464	45.35	-18.95	26.40	40.00	-13.60	QP
2	132.2206	44.83	-18.19	26.64	43.50	-16.86	QP
3	252.9482	49.46	-14.23	35.23	46.00	-10.77	QP
4 *	325.5958	47.88	-12.34	35.54	46.00	-10.46	QP
5	482.2156	41.56	-9.05	32.51	46.00	-13.49	QP
6	893.8567	31.50	-3.23	28.27	46.00	-17.73	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4(portable)	Polarization :	Vertical

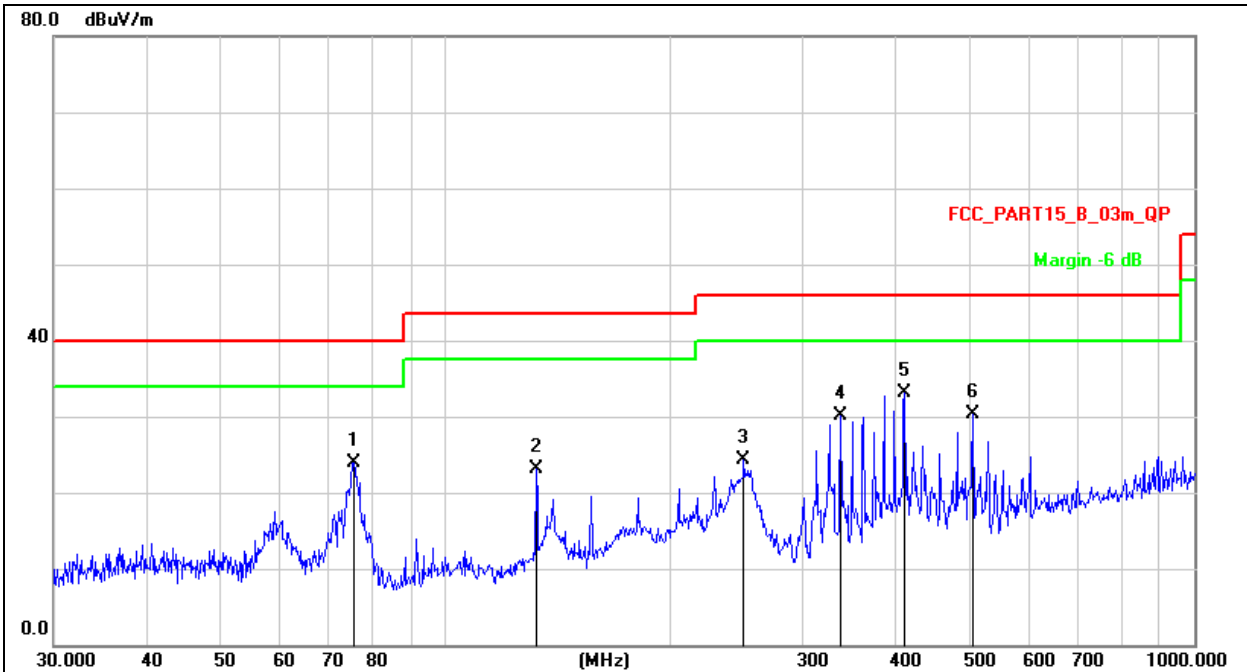
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		75.4464	42.81	-18.95	23.86	40.00	-16.14	QP
2		132.2206	41.20	-18.19	23.01	43.50	-20.49	QP
3		250.3012	38.61	-14.28	24.33	46.00	-21.67	QP
4		337.2155	41.98	-11.93	30.05	46.00	-15.95	QP
5	*	410.3825	43.67	-10.64	33.03	46.00	-12.97	QP
6		506.4791	39.07	-8.84	30.23	46.00	-15.77	QP


## 8. Bandwidth Test

### 8.1 Test Setup



### 8.2 Test Procedure

1. Set RBW = 1%~5% OBW.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

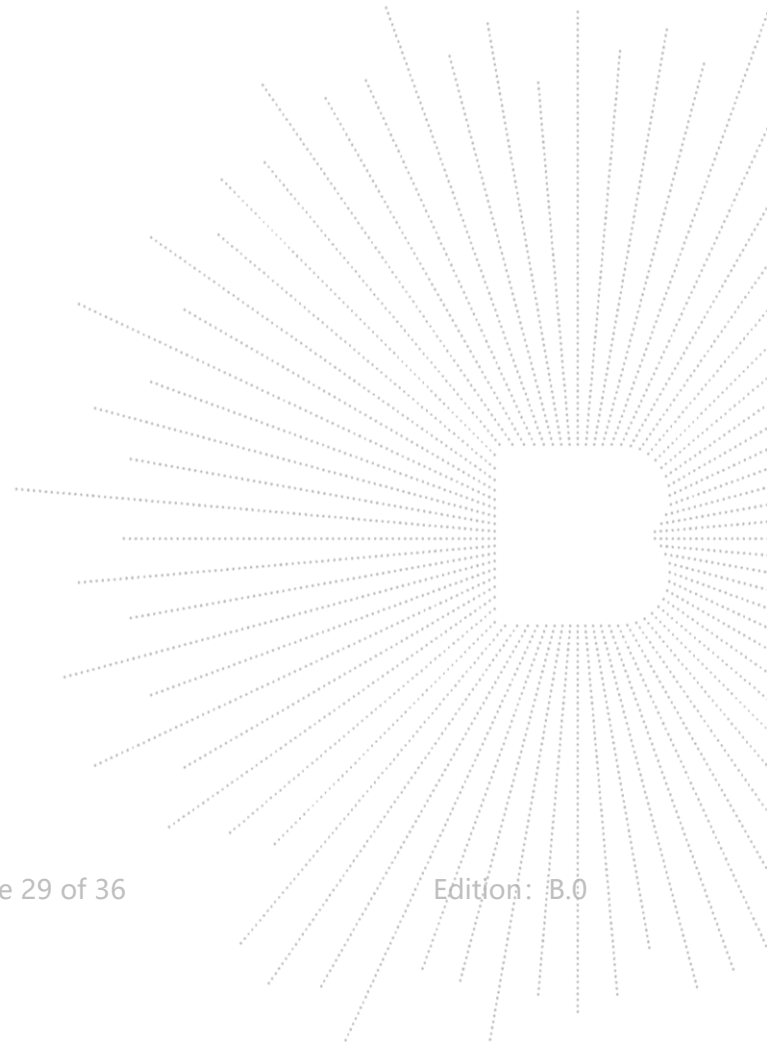

## 8.3 Test Result


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa		

Frequency (KHz)	20dB bandwidth (Hz)	Result
127.7	46	Pass



## 9. Antenna Requirements

For intentional device, according to FCC 47 CFR Section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The antenna used for this product is Inductive loop coil antenna.

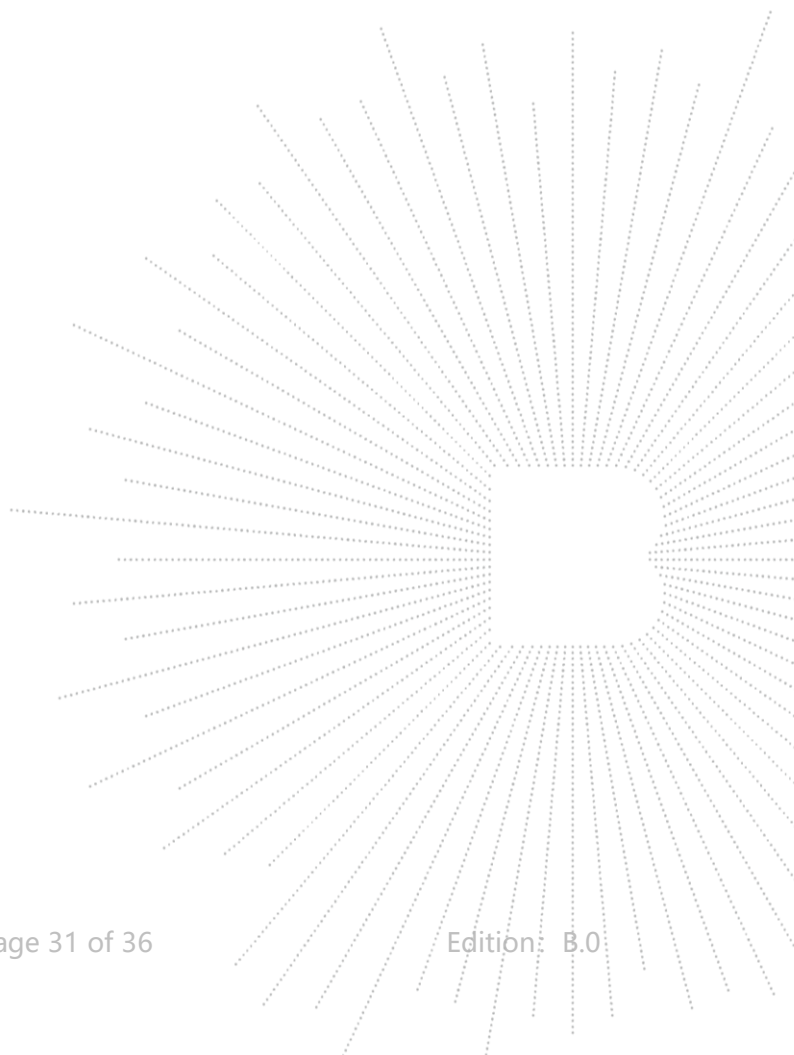


### 10. EUT Photographs

EUT Photo 1



EUT Photo 2

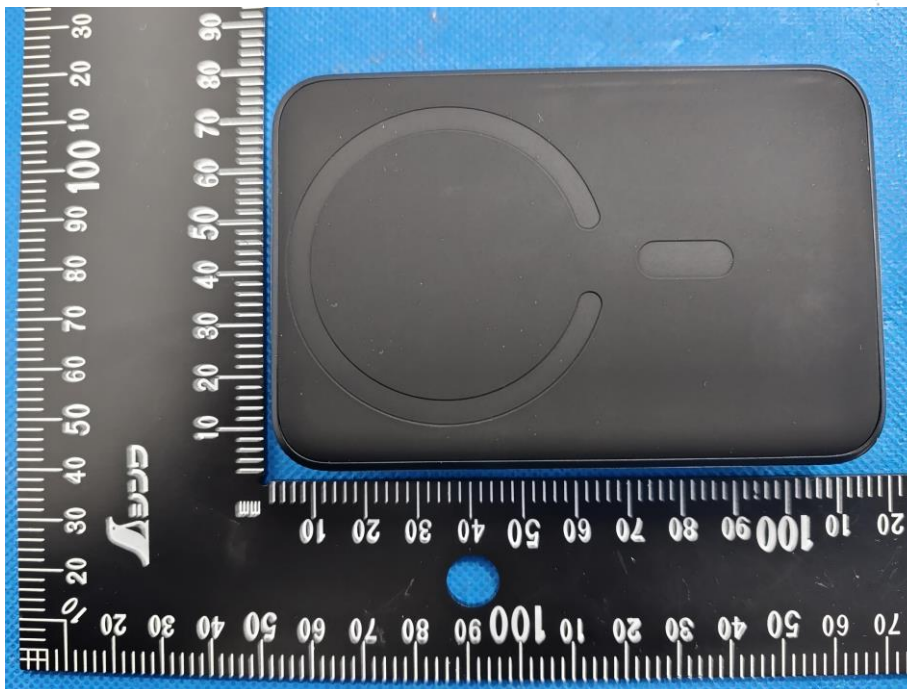







## 11. EUT Test Setup Photographs


### Conducted Emissions Photo



### Radiated Measurement Photos

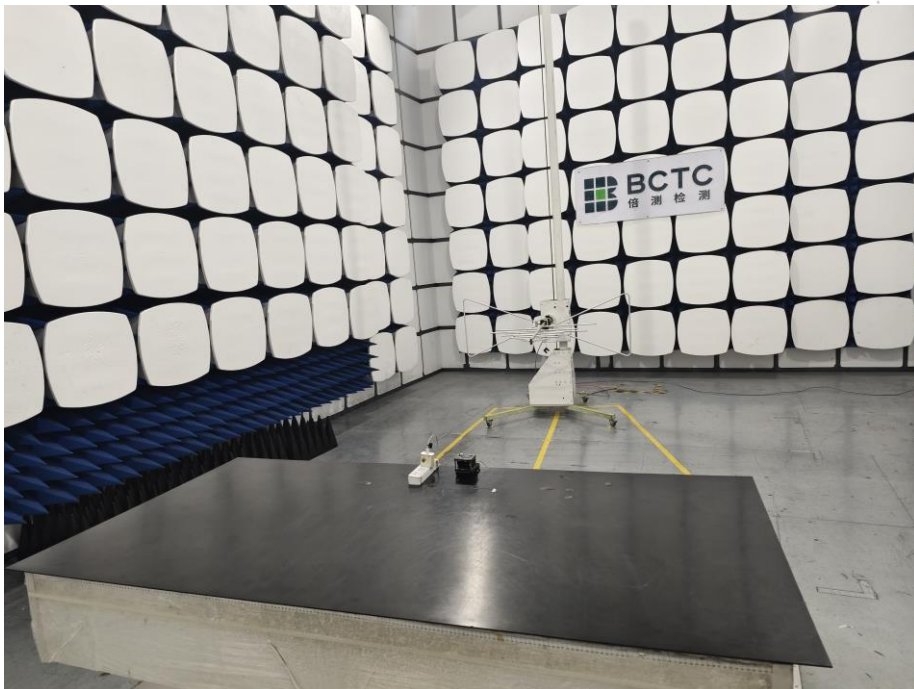

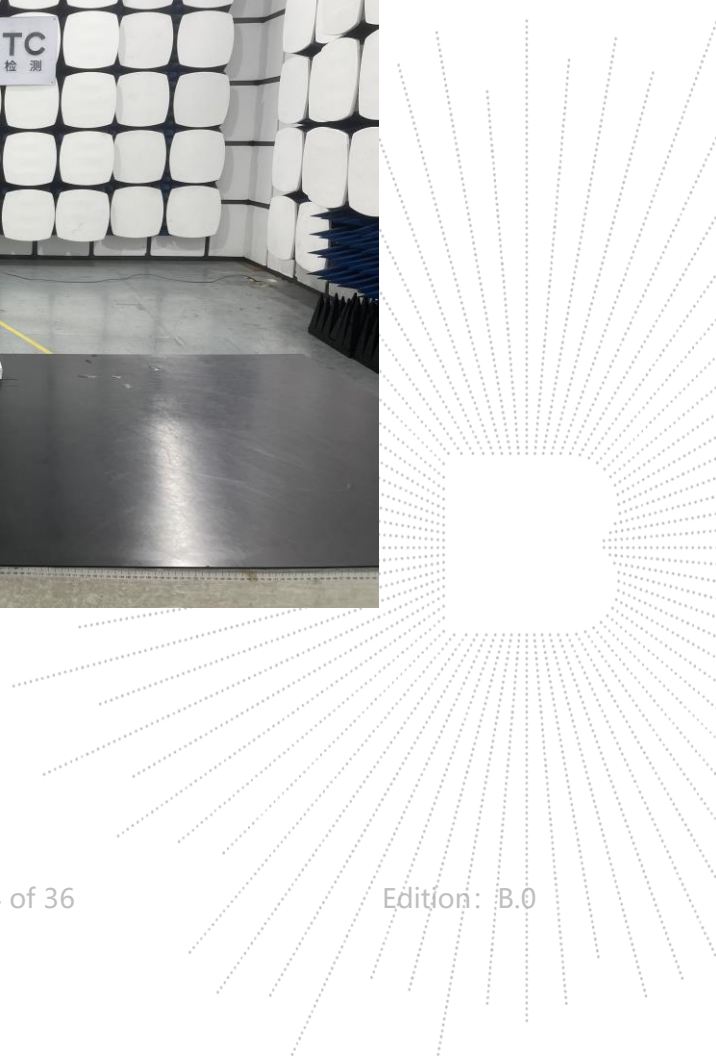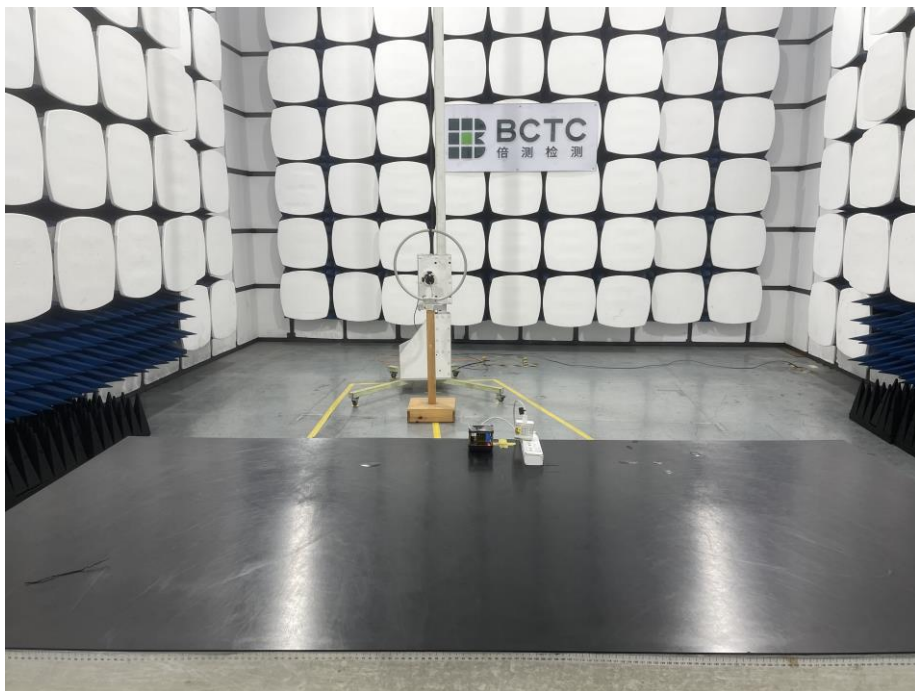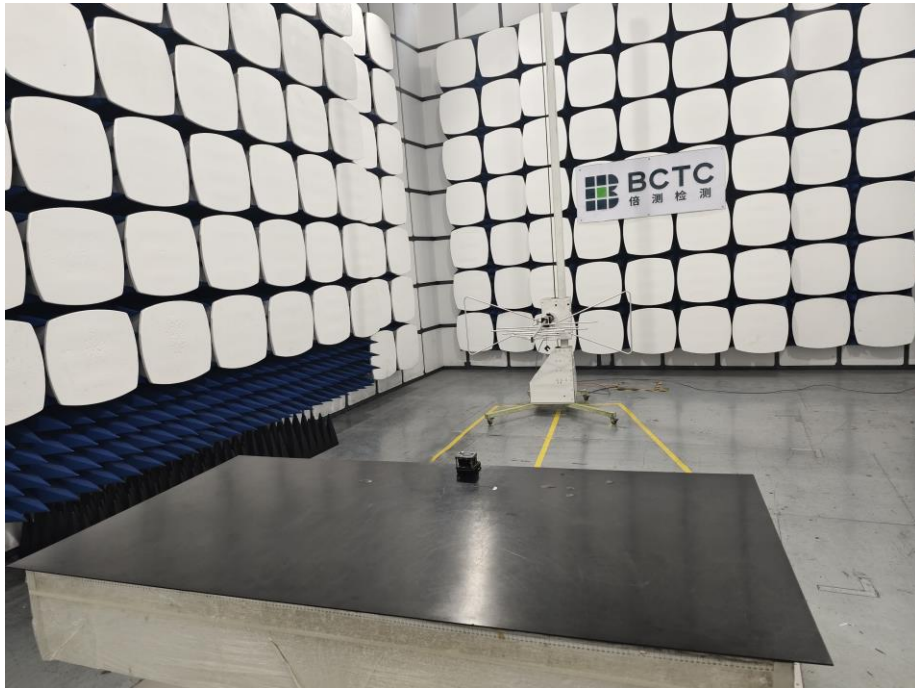

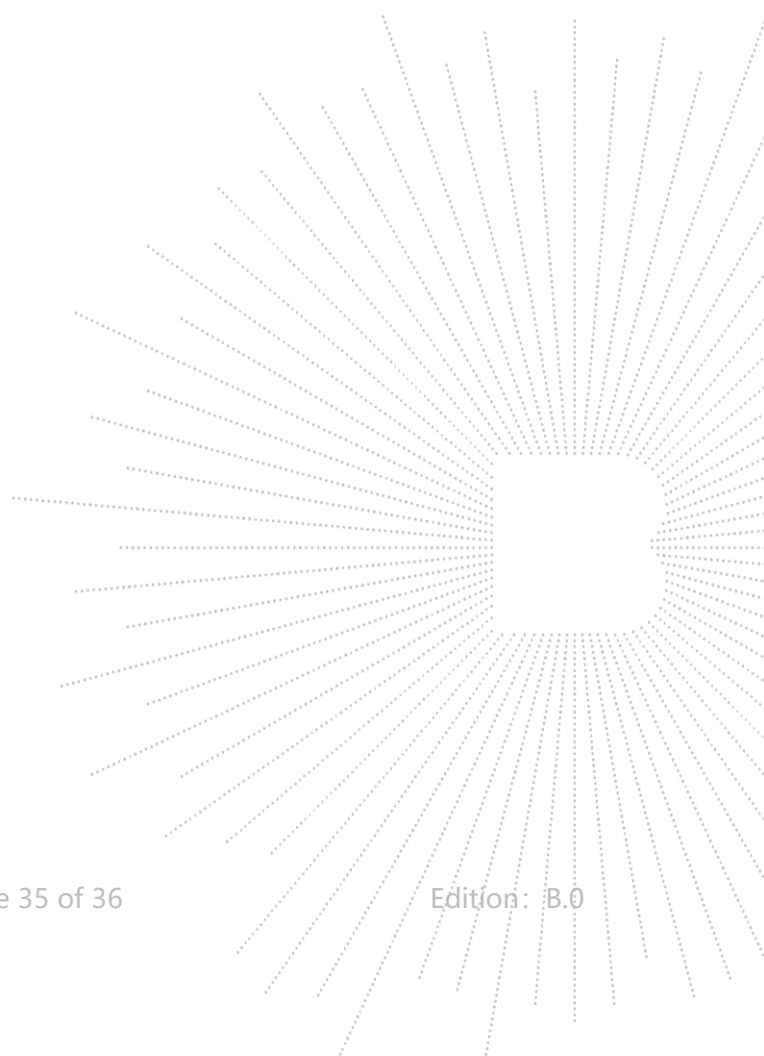

**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

※※※※※ END ※※※※※

