

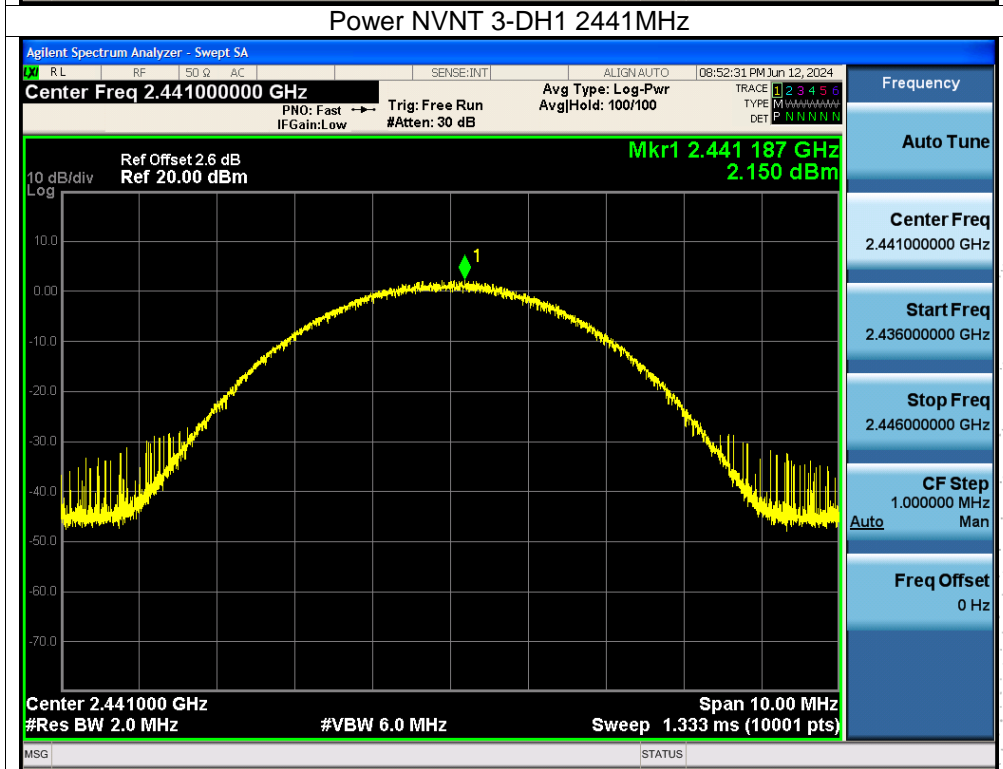


SHENZHEN

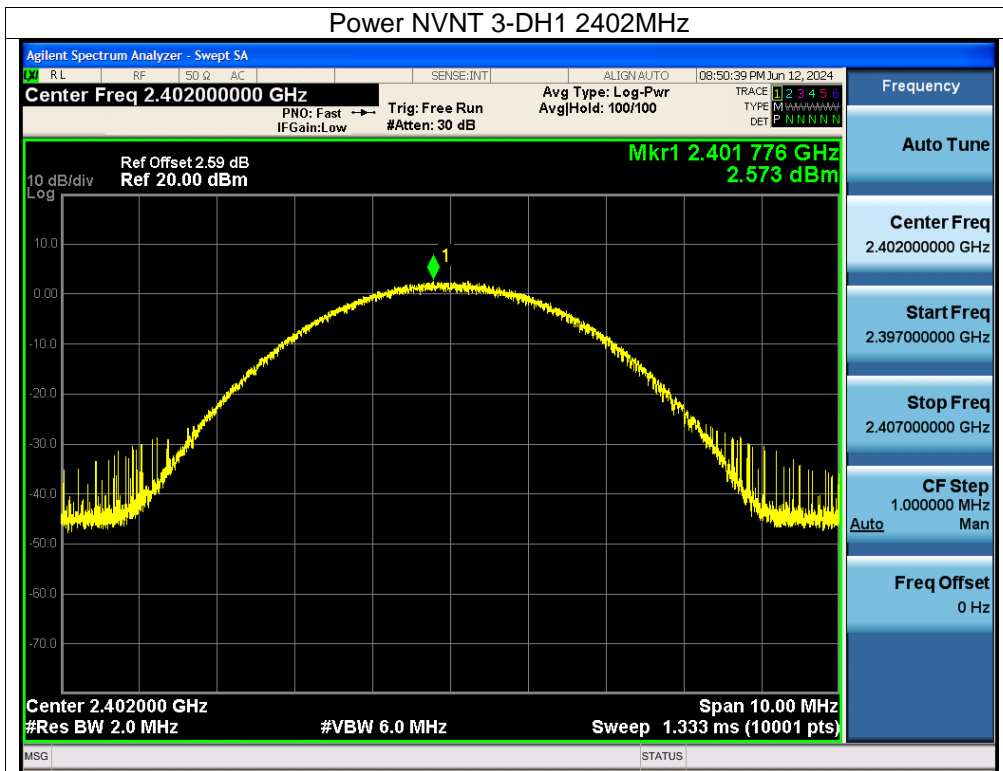


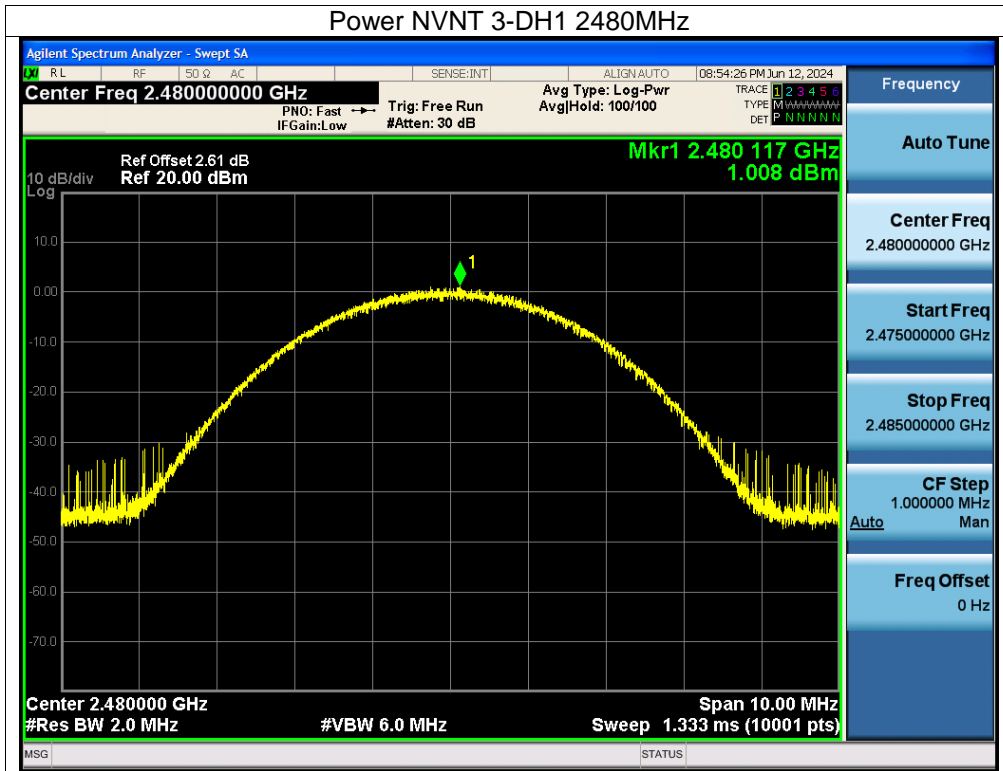

BCTC
3C
PPR
Report

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup

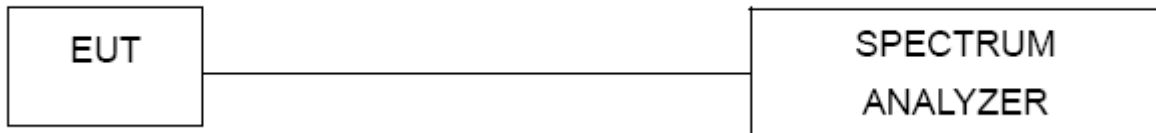

12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


12.4 Test Result



Left

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.006	0.581	PASS
GFSK	Middle	1.000	0.587	PASS
GFSK	High	1.000	0.573	PASS
$\pi/4$ DQPSK	Low	1.000	0.828	PASS
$\pi/4$ DQPSK	Middle	1.000	0.840	PASS
$\pi/4$ DQPSK	High	1.010	0.837	PASS
8DPSK	Low	1.000	0.819	PASS
8DPSK	Middle	0.998	0.817	PASS
8DPSK	High	1.000	0.811	PASS



Right



Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	0.998	0.623	PASS
GFSK	Middle	0.998	0.621	PASS
GFSK	High	1.000	0.618	PASS
$\pi/4$ DQPSK	Low	1.000	0.848	PASS
$\pi/4$ DQPSK	Middle	1.004	0.847	PASS
$\pi/4$ DQPSK	High	1.002	0.867	PASS
8DPSK	Low	1.000	0.812	PASS
8DPSK	Middle	1.000	0.814	PASS
8DPSK	High	1.000	0.821	PASS


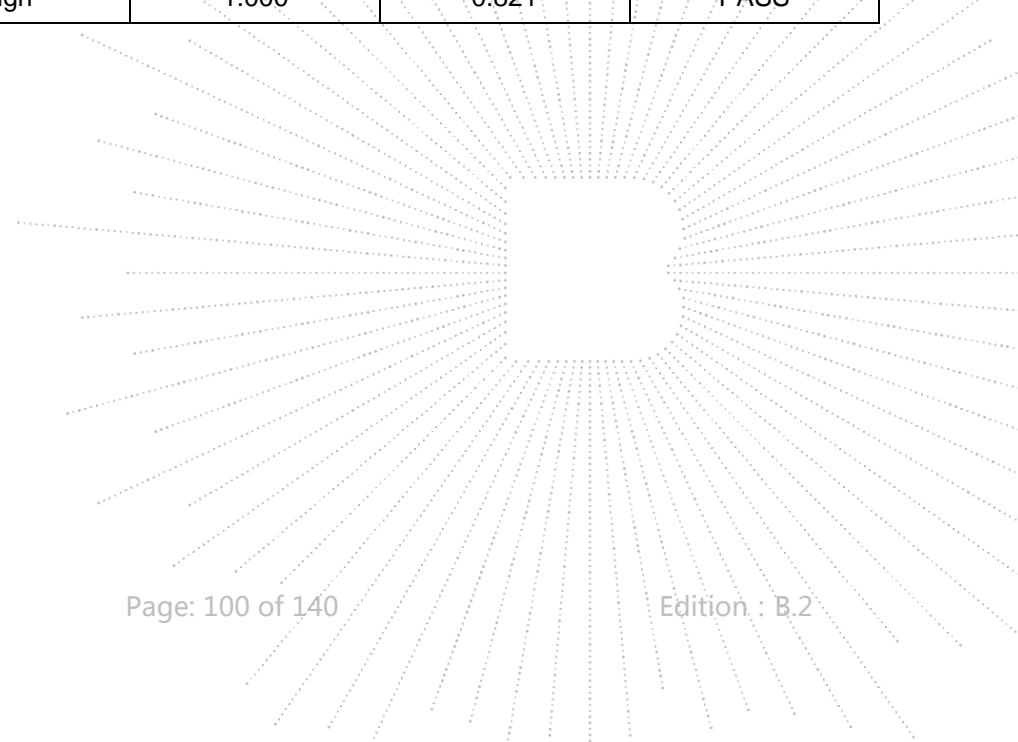


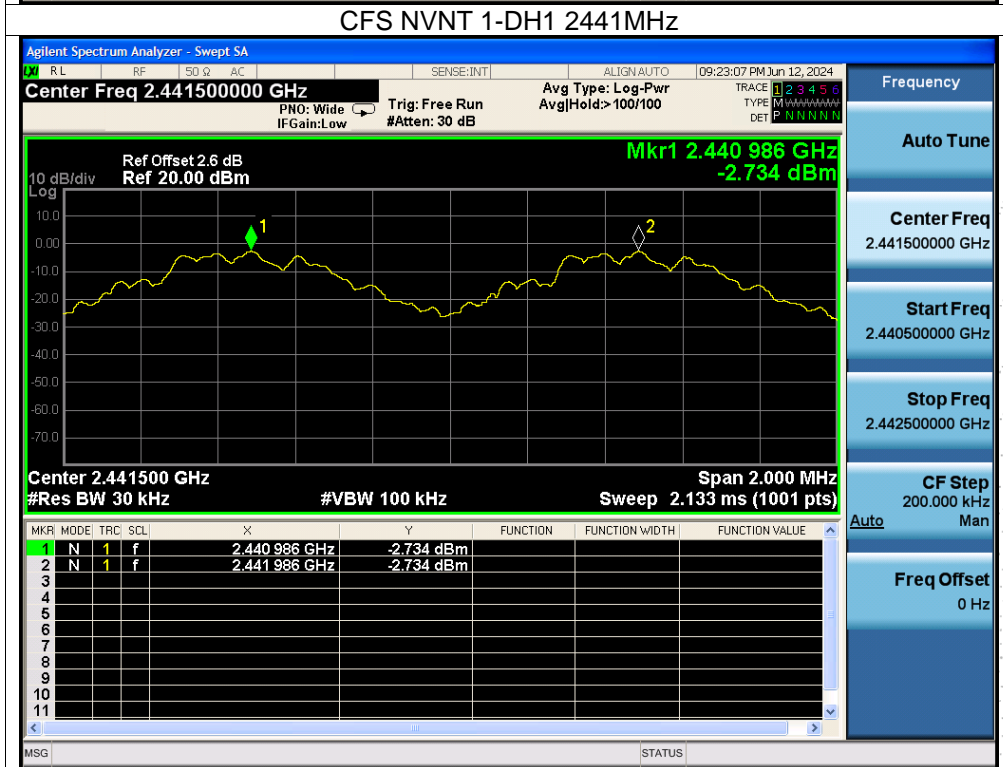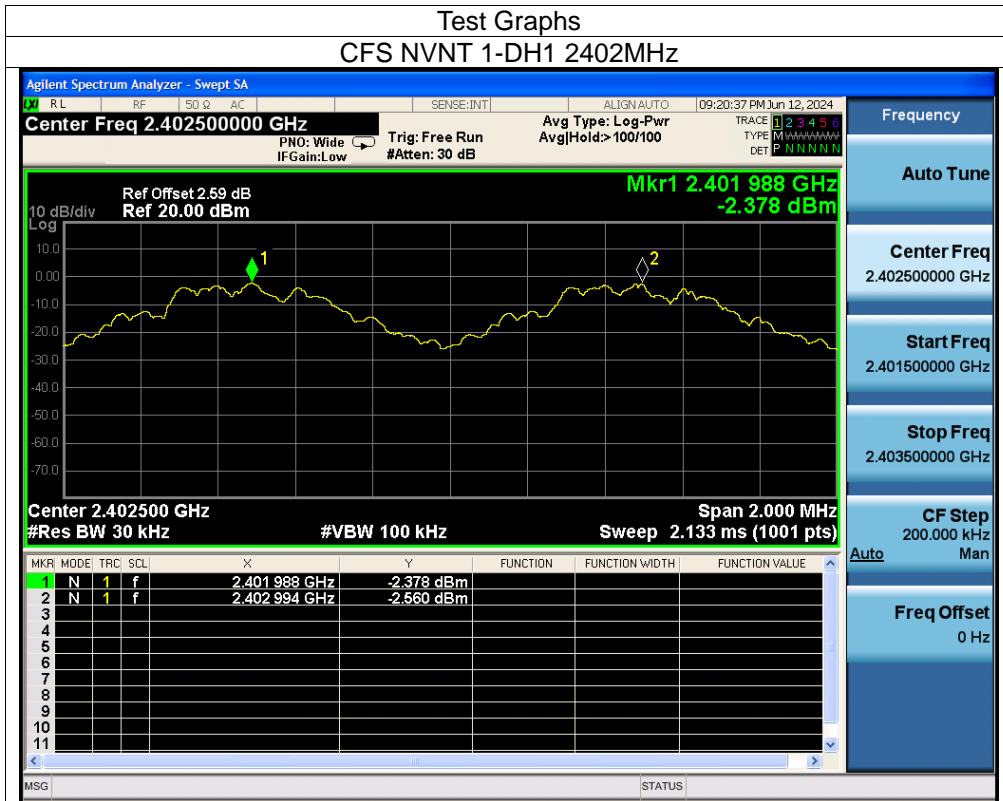


CO., LTD

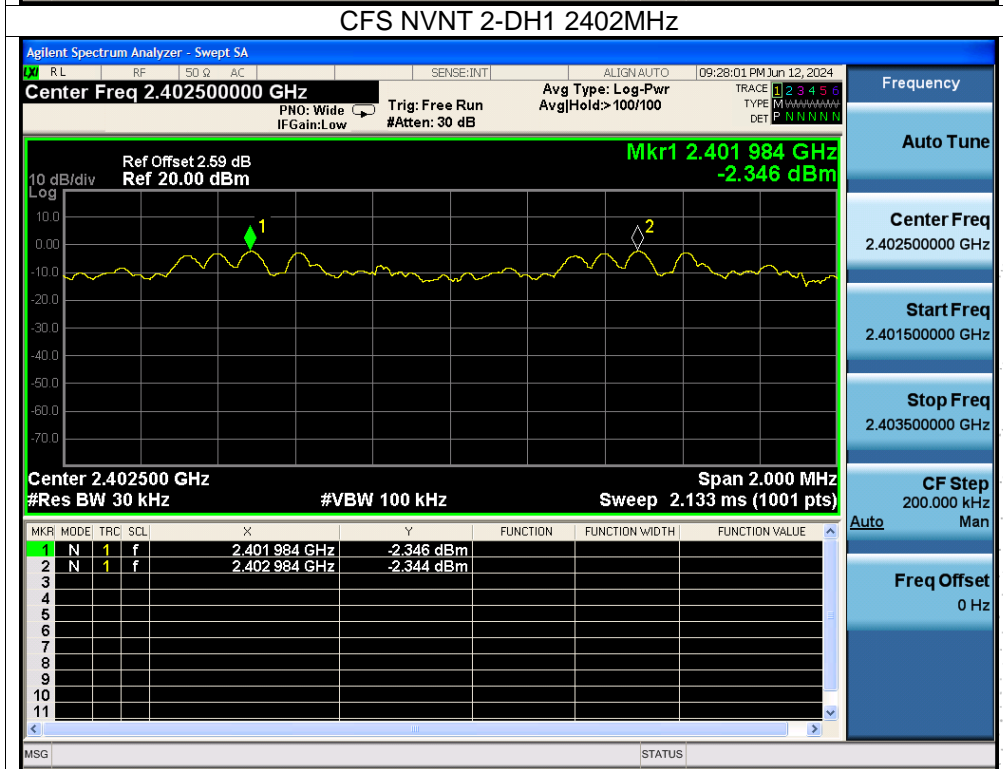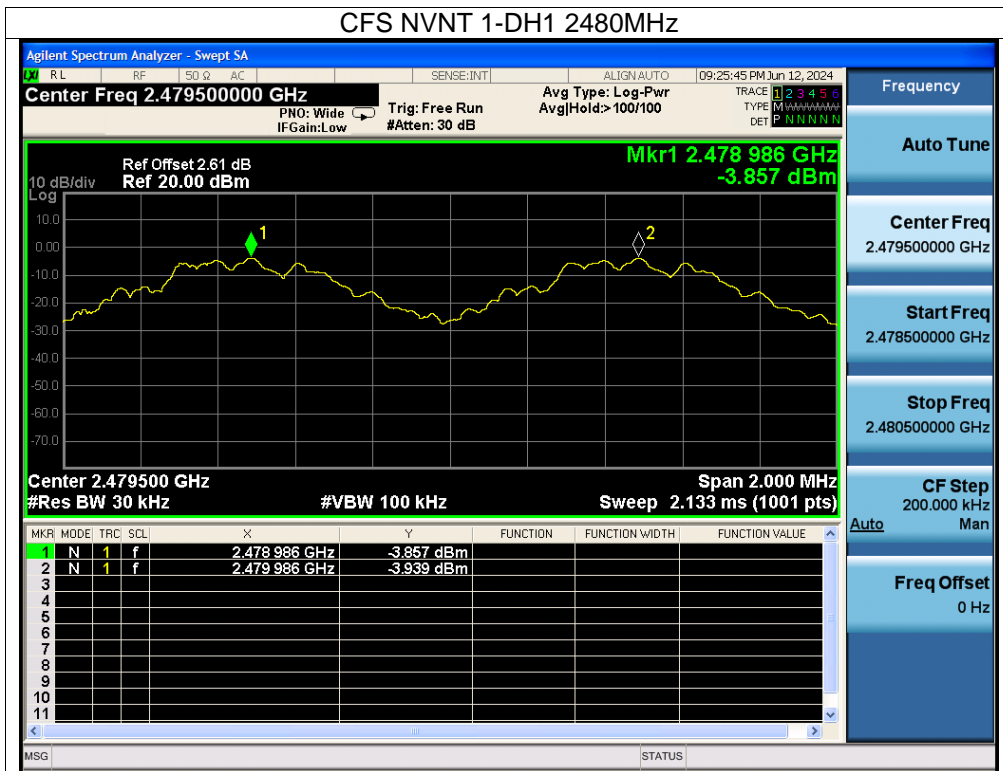

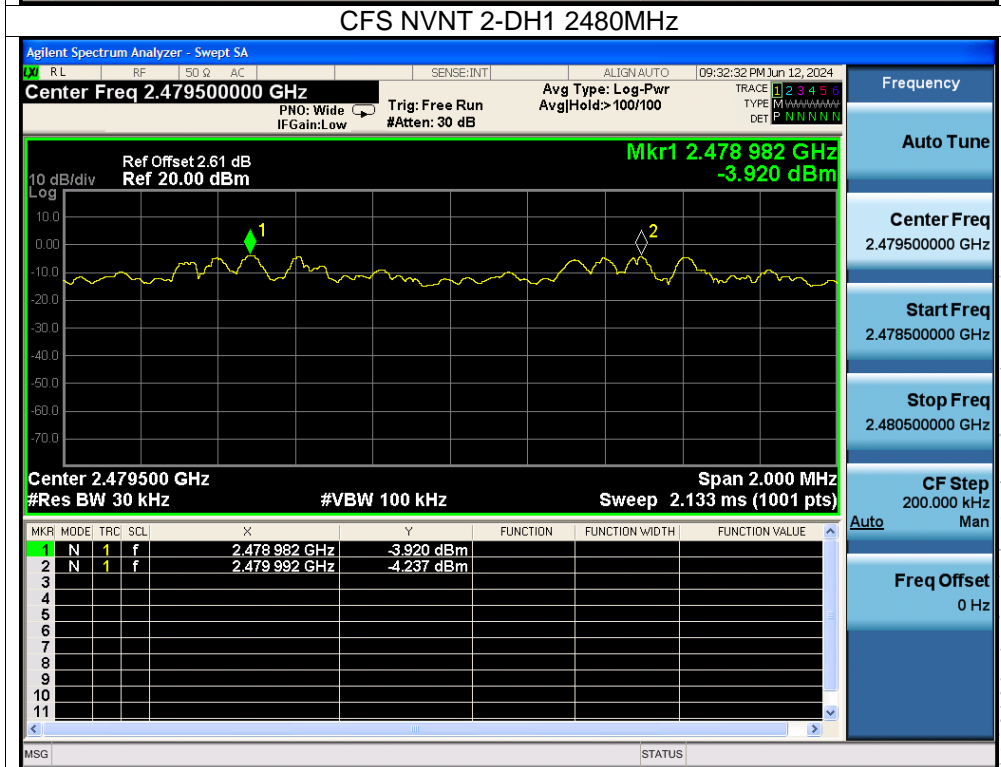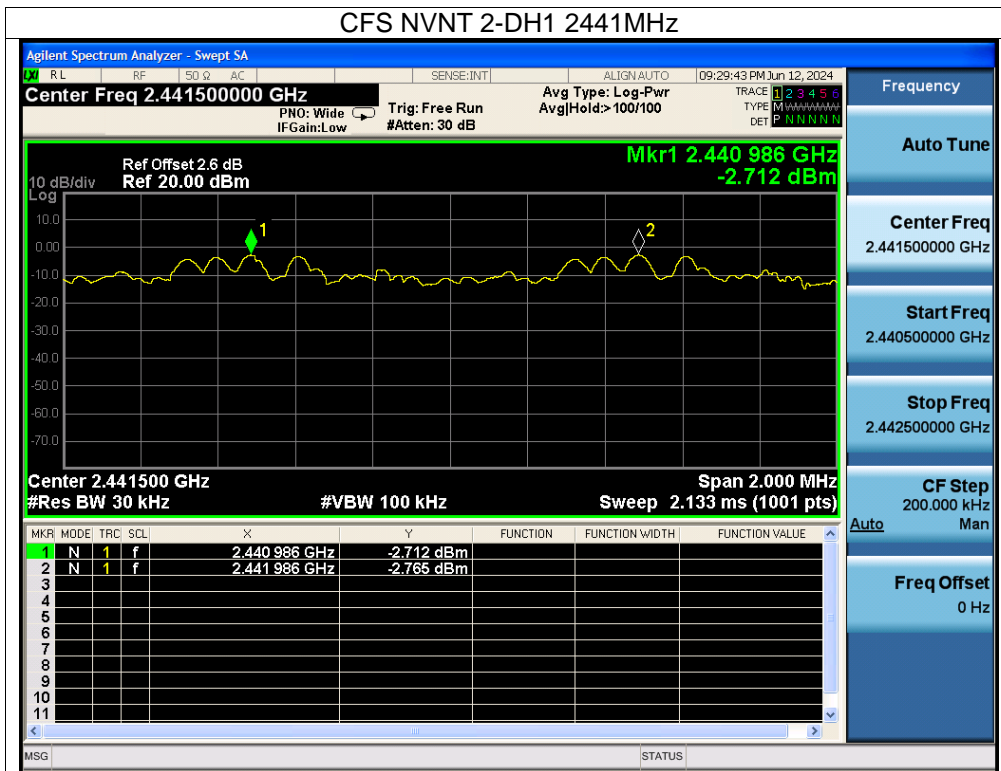


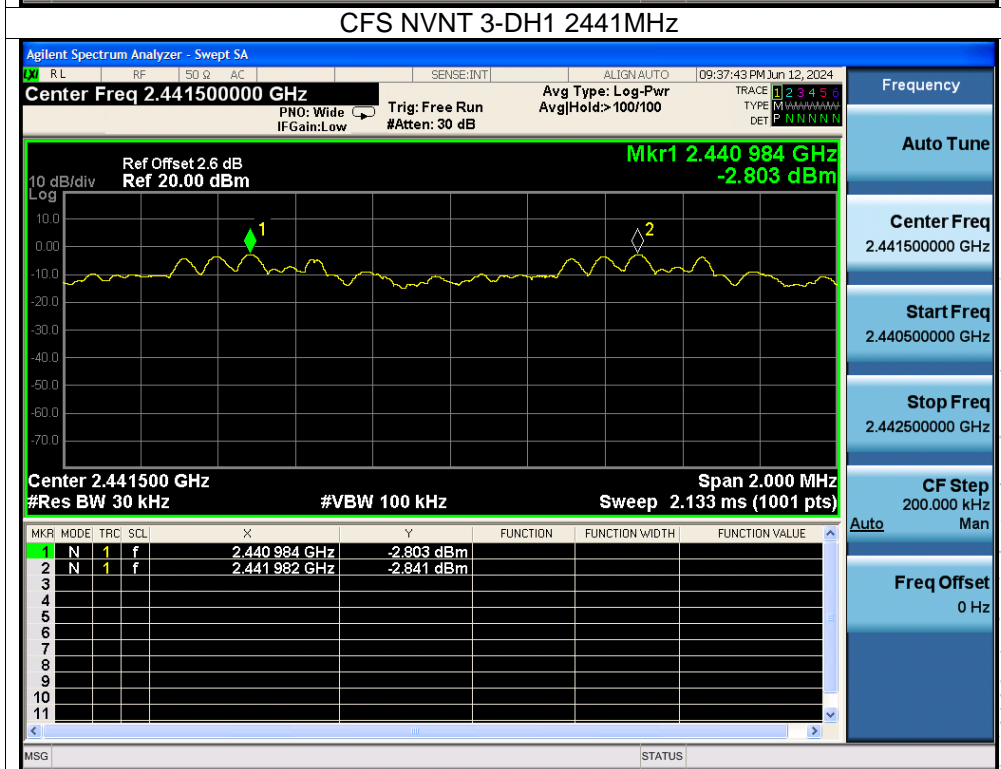
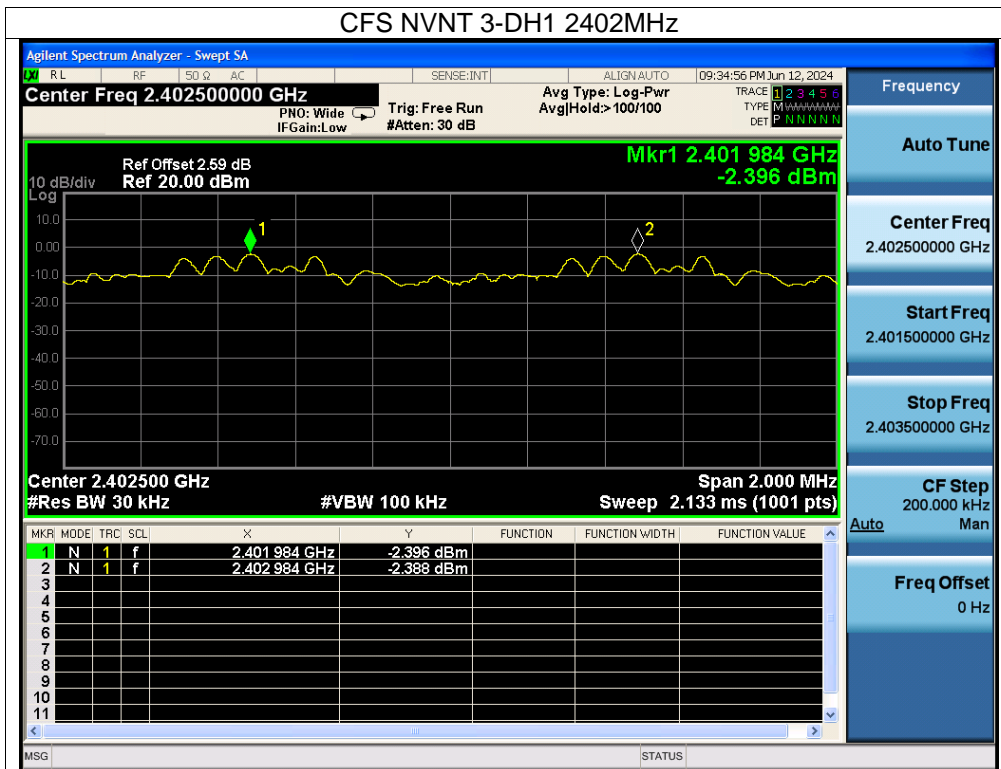


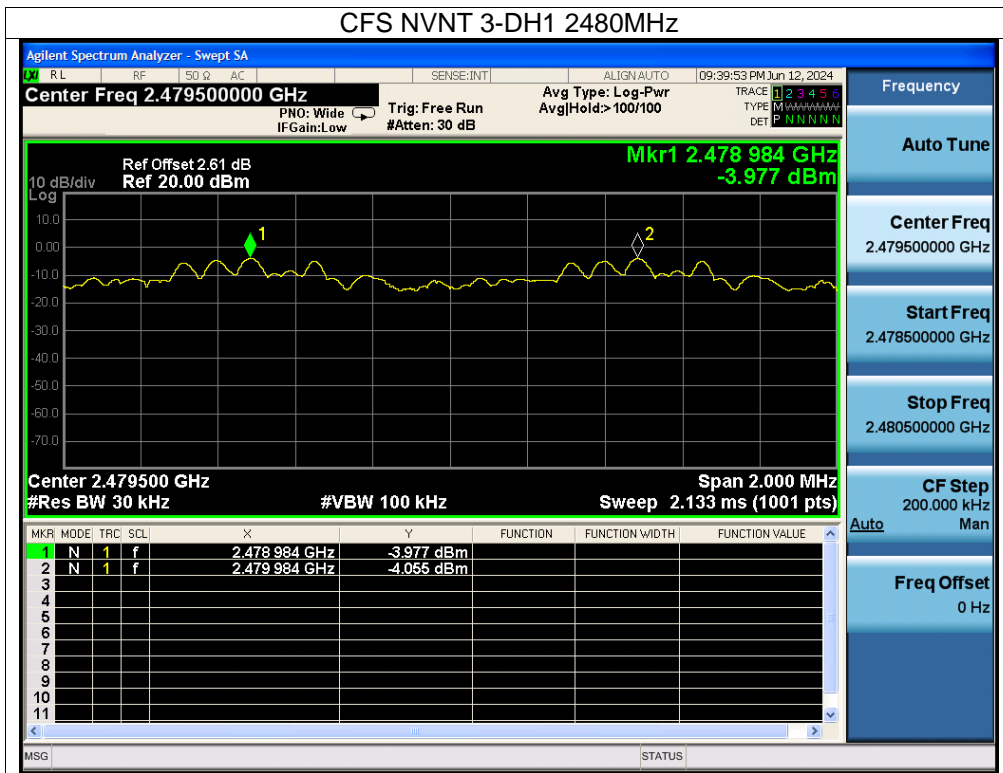TEC
TO
OVB
t See







Right

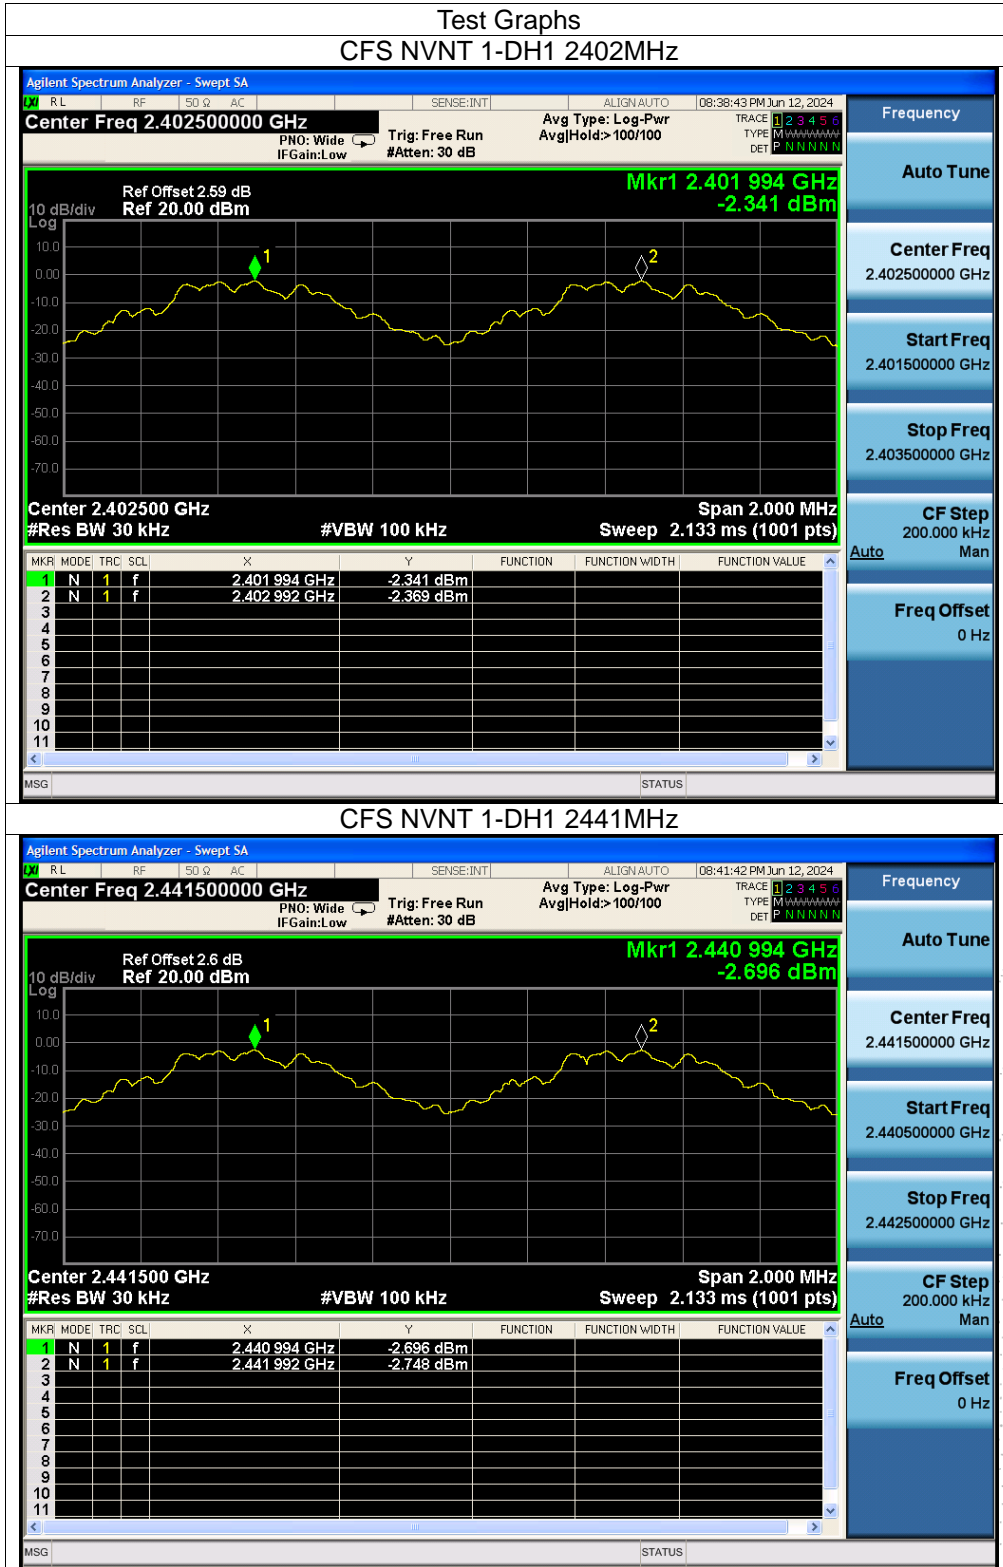


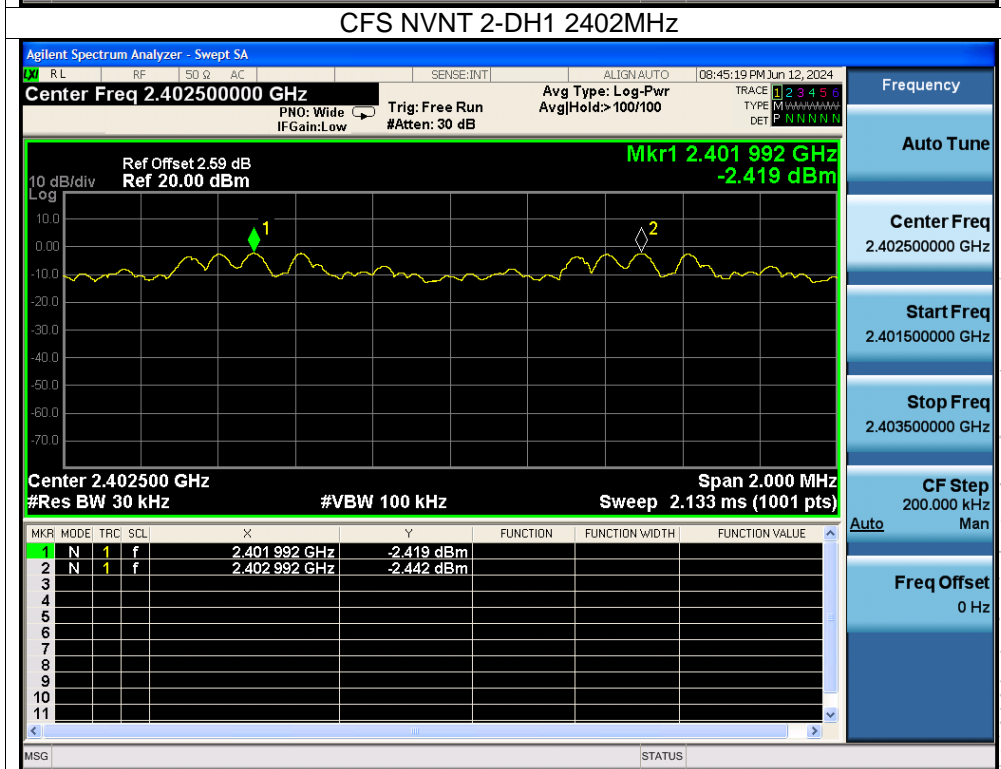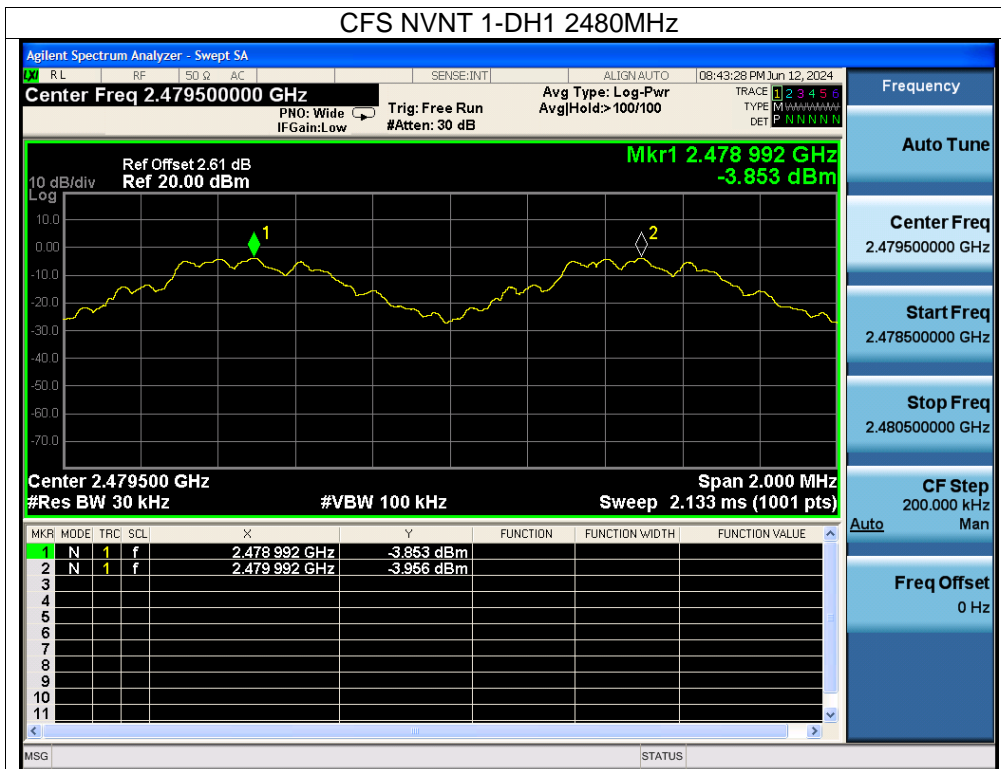


CO., LTD.

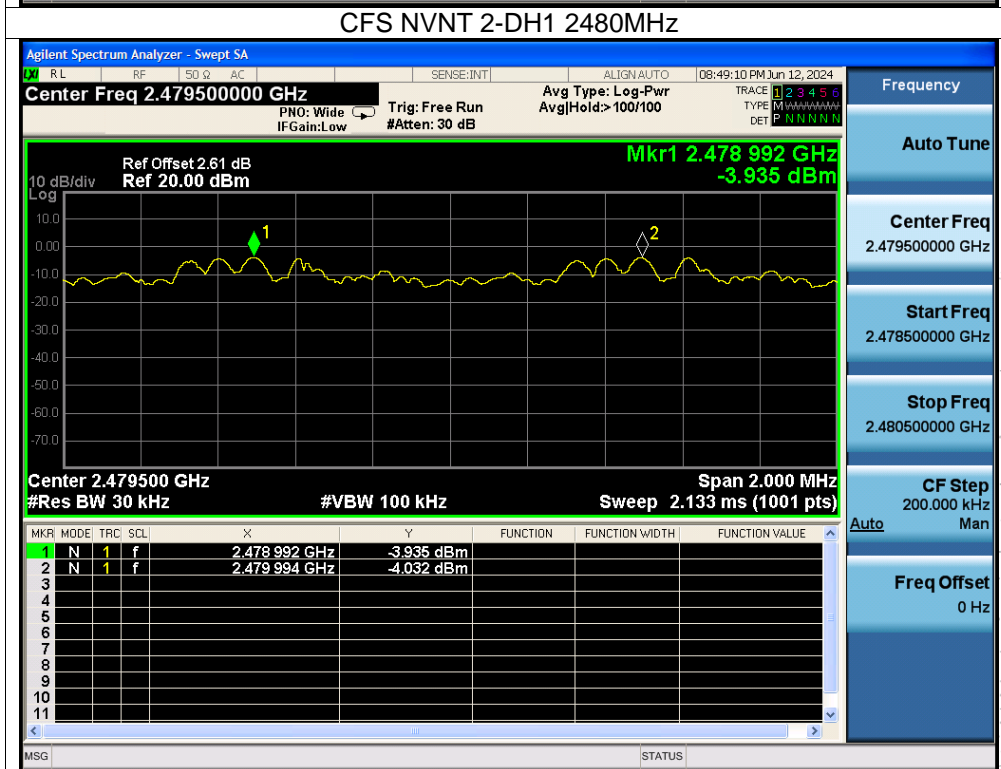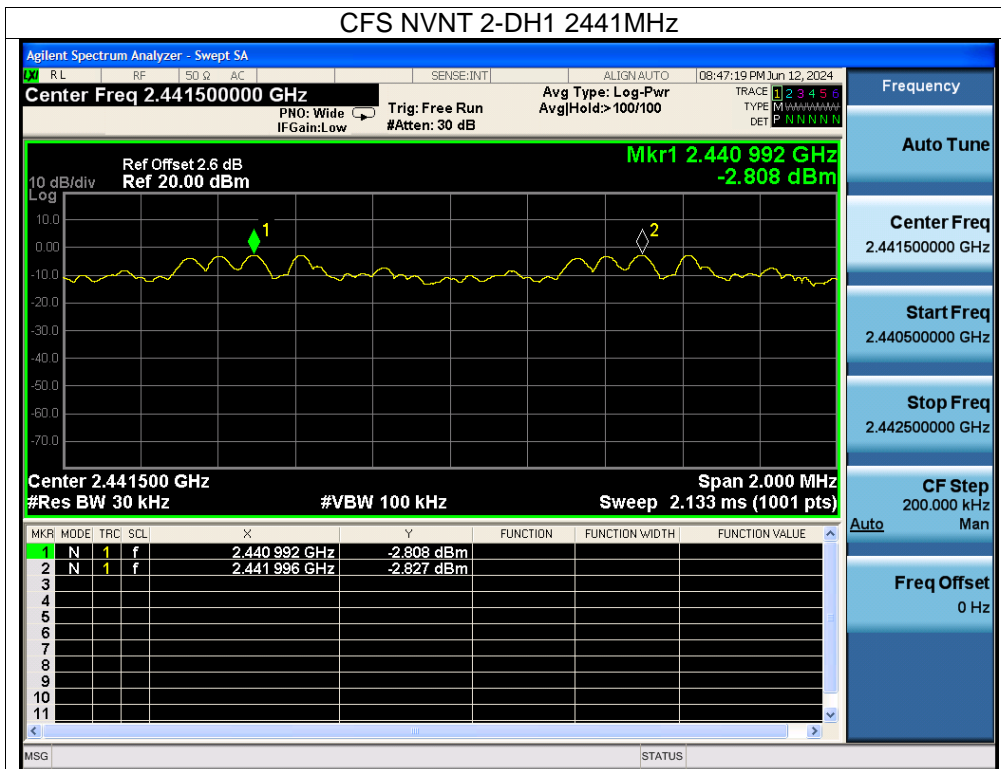

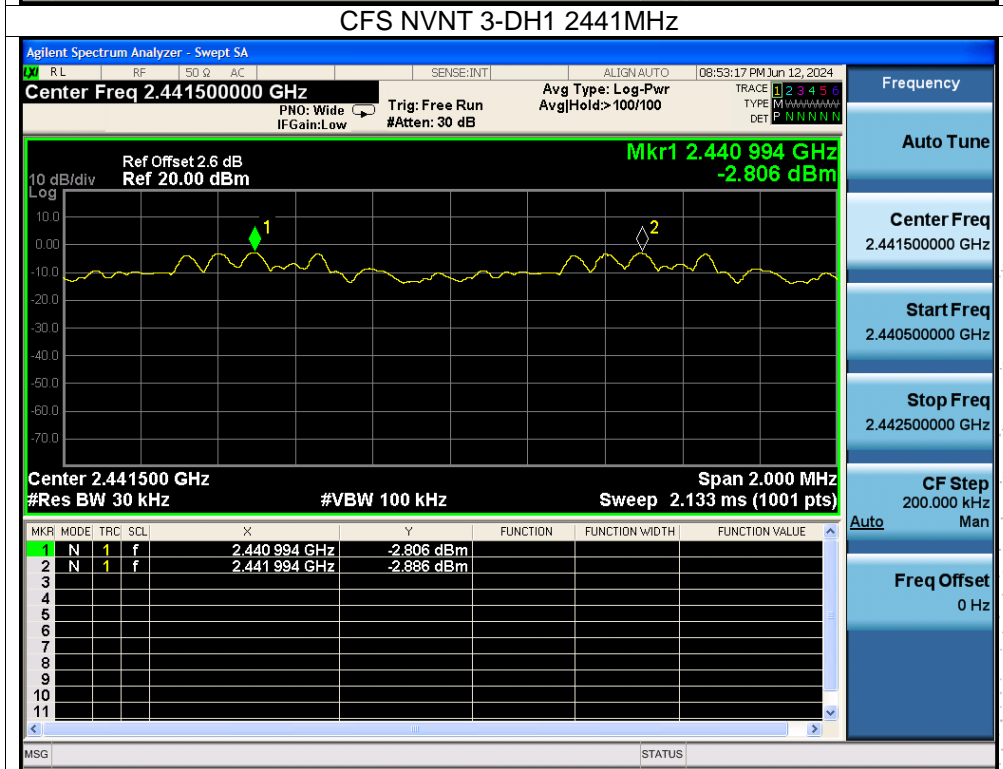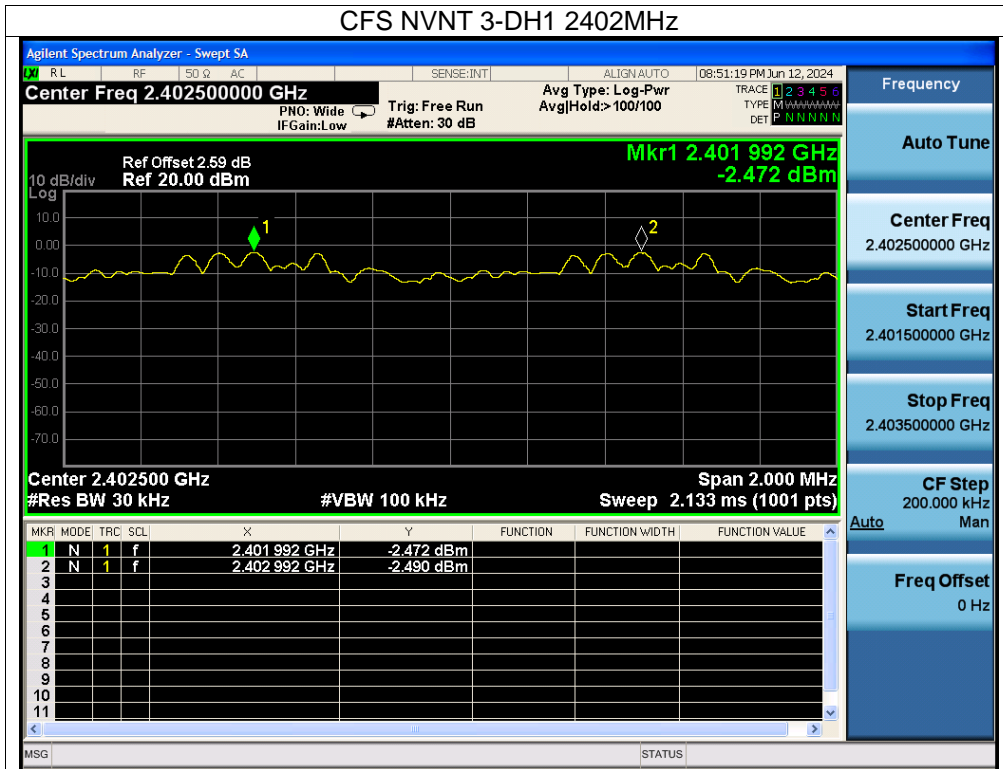

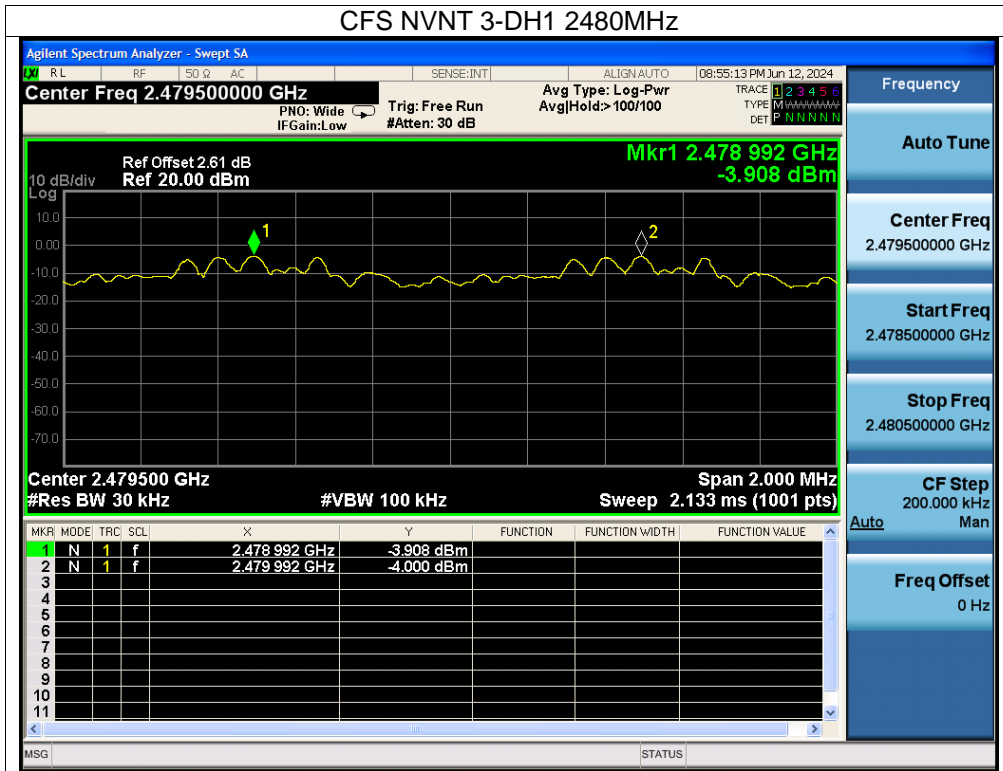BCTC
 BCTC
 PPR
 Report

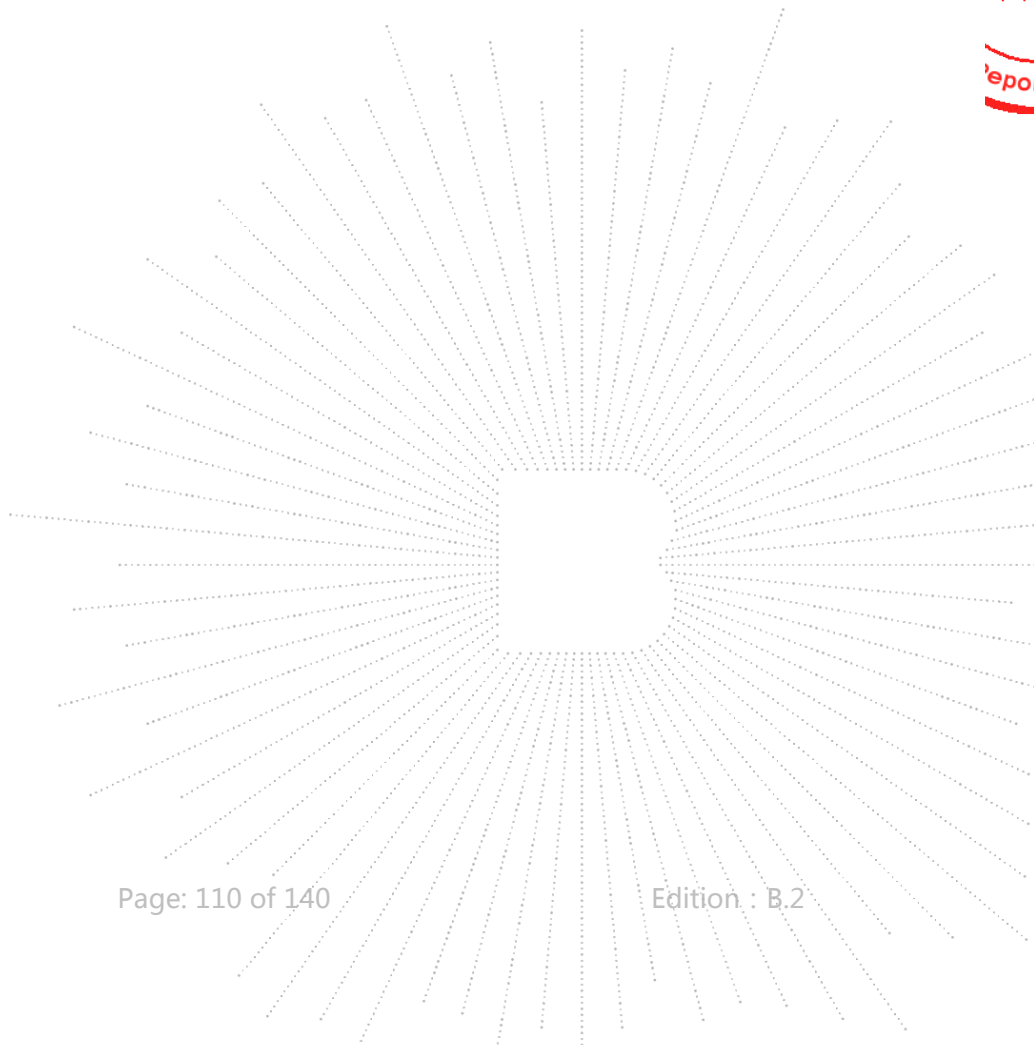

13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup



13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



13.4 Test Result


Left


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

Right

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

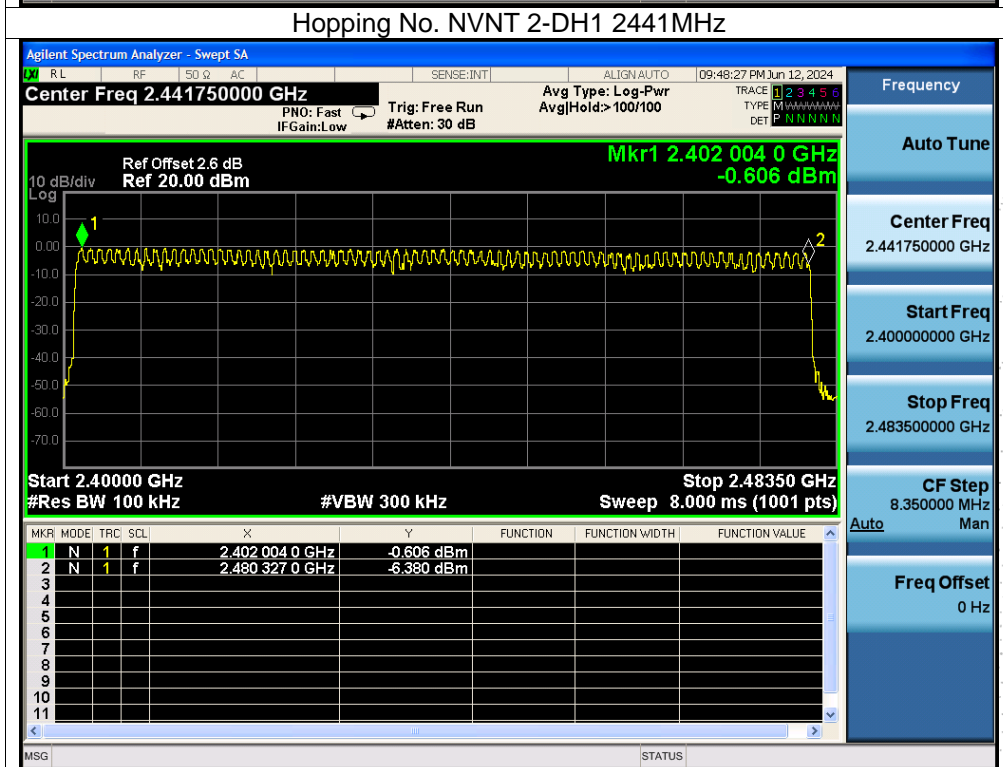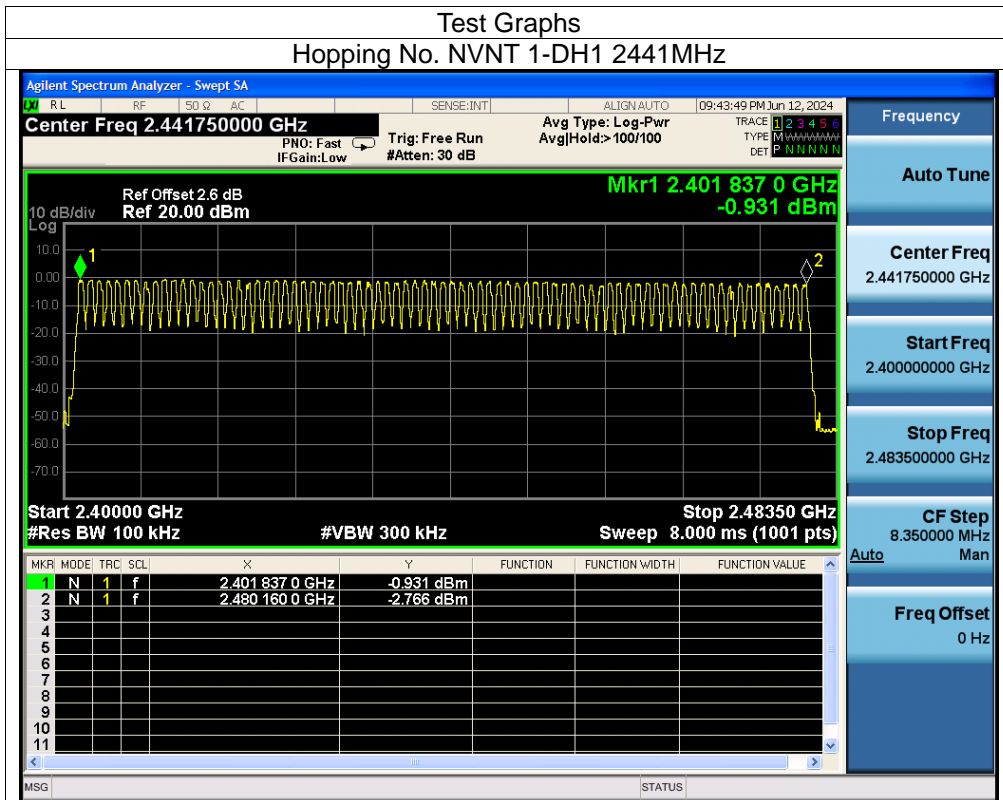


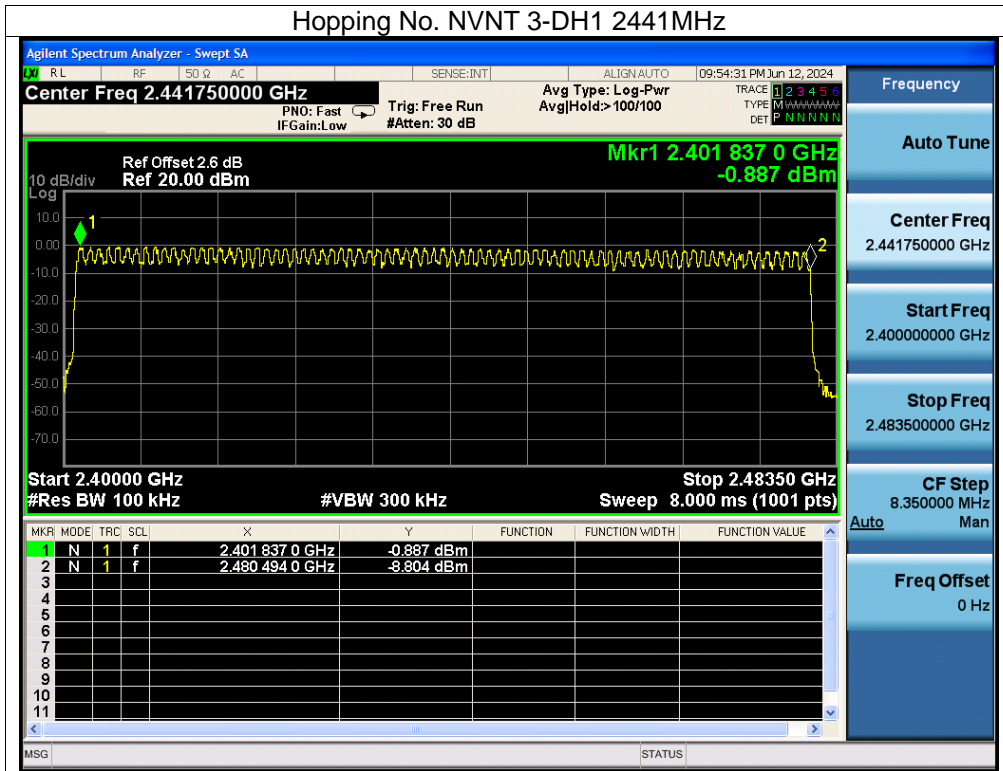


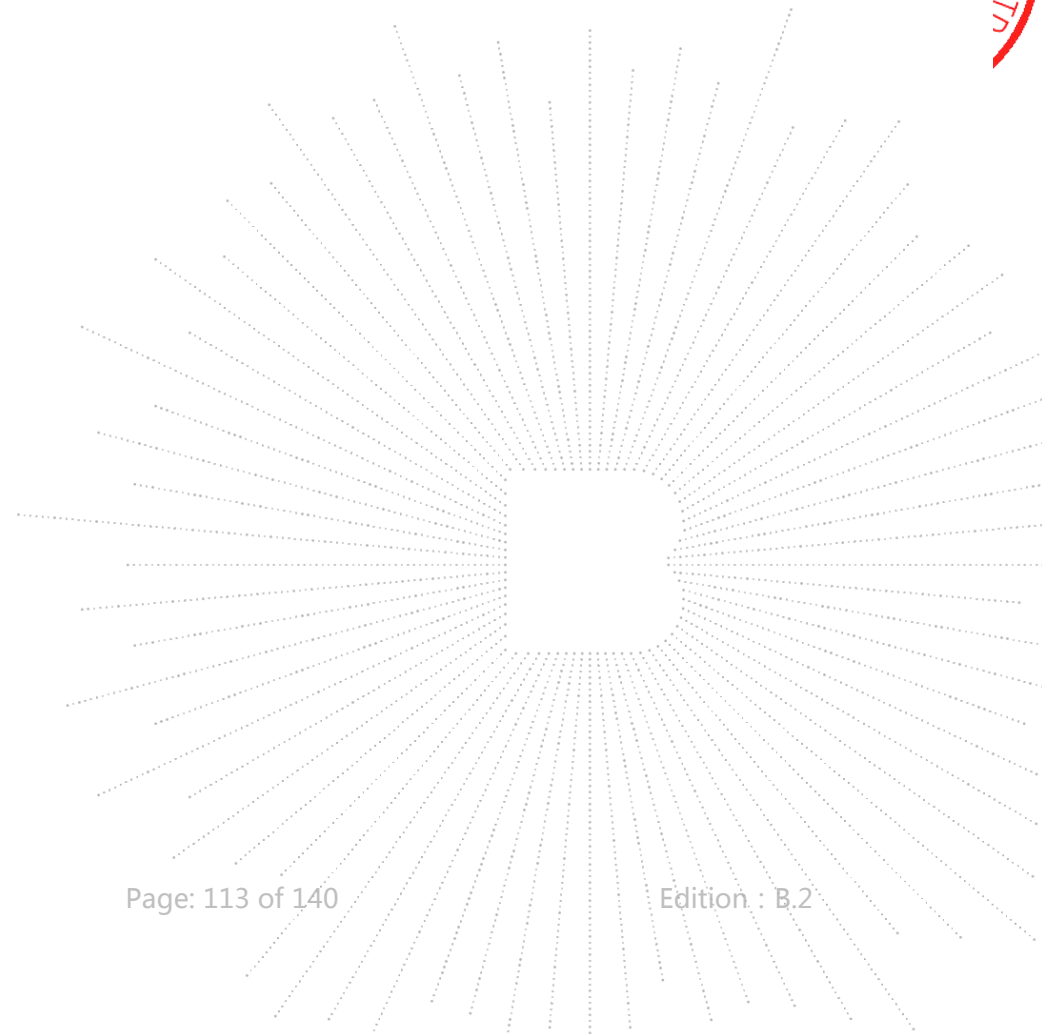




Right

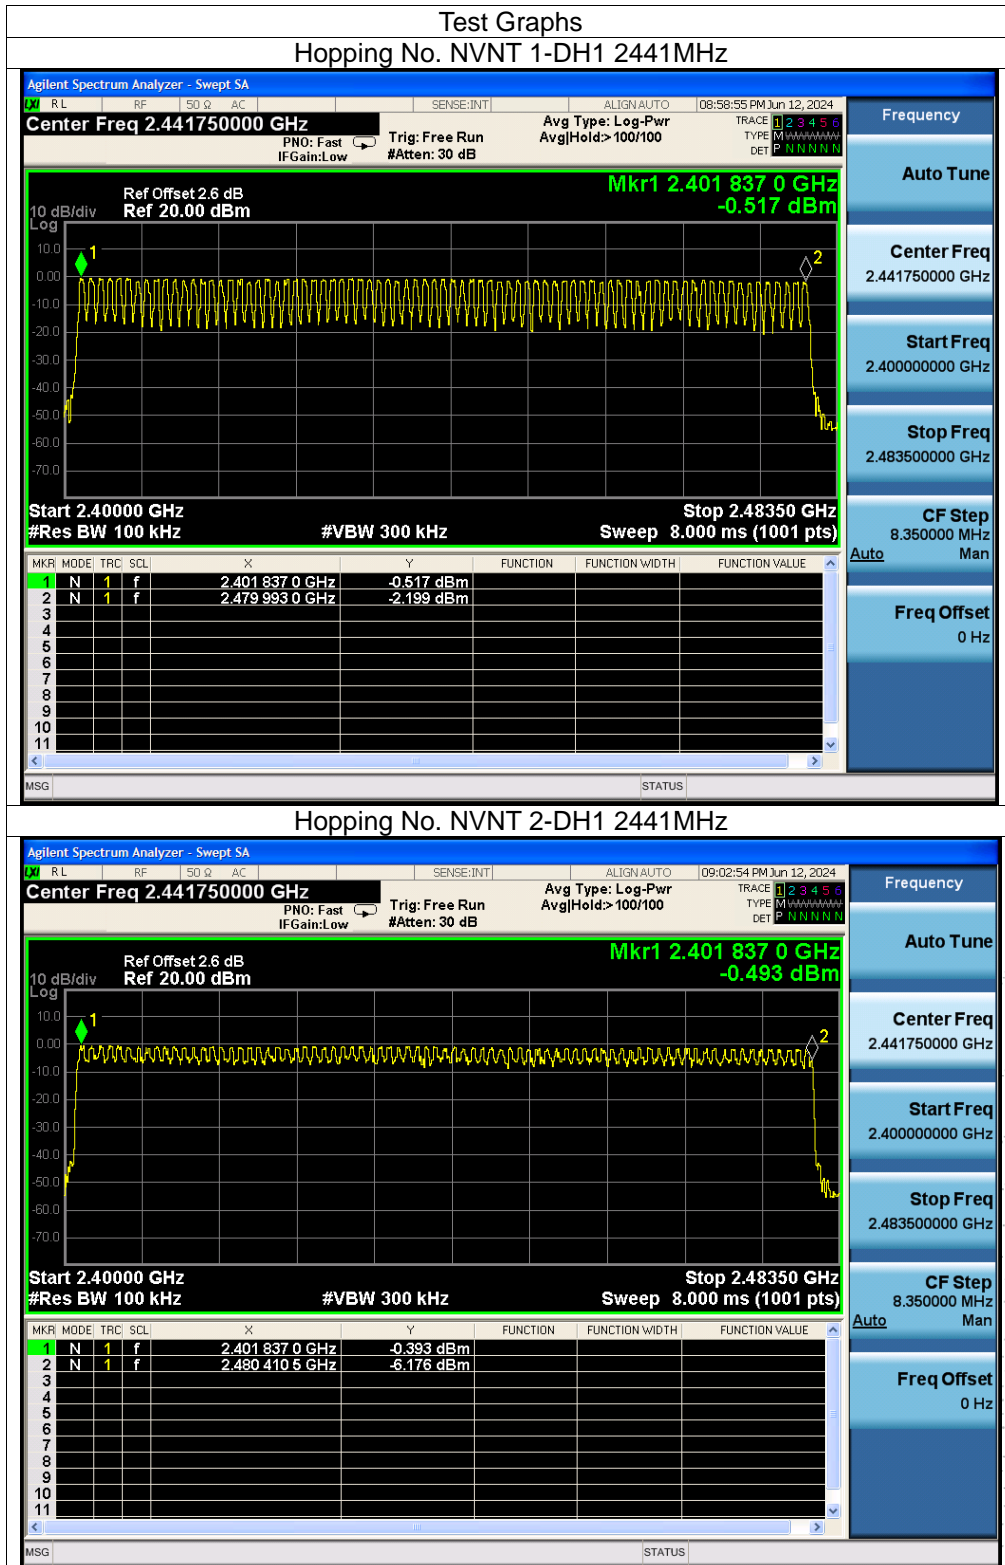

SHENZHEN

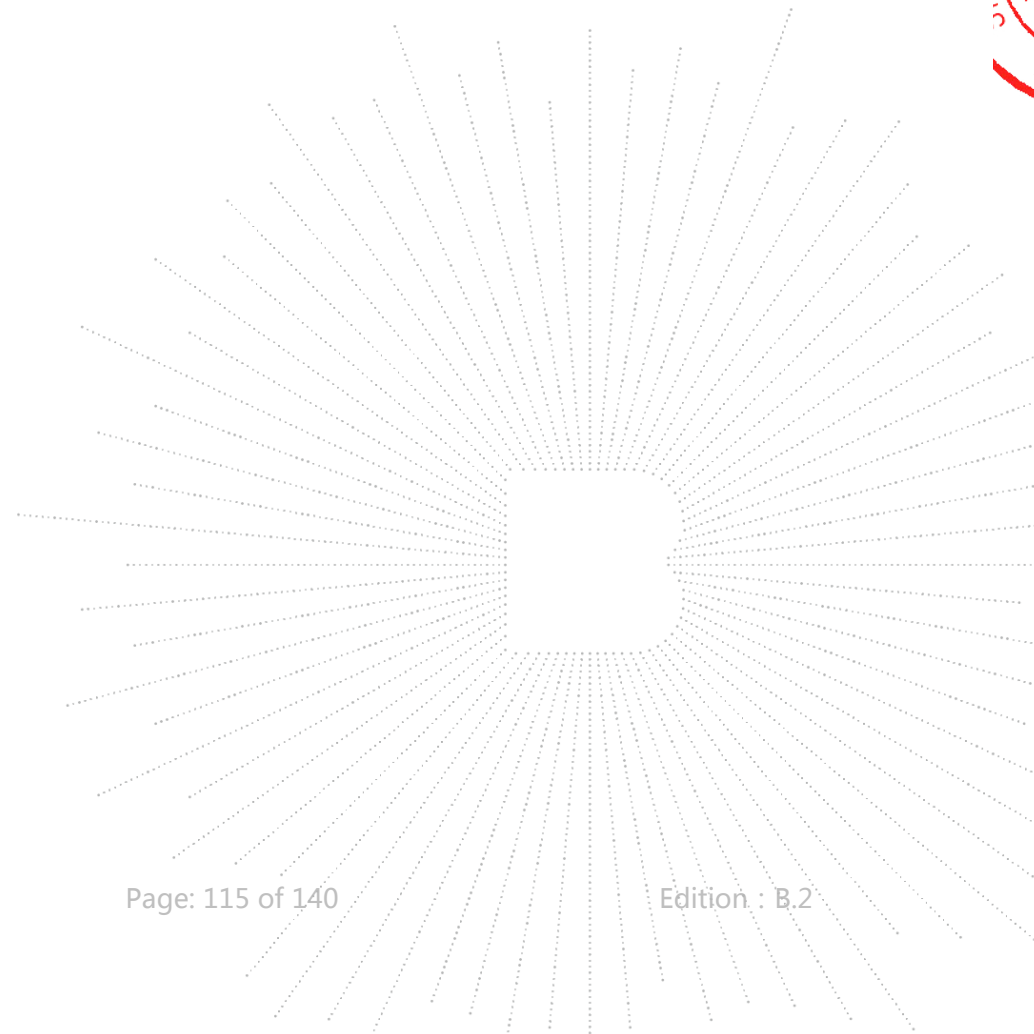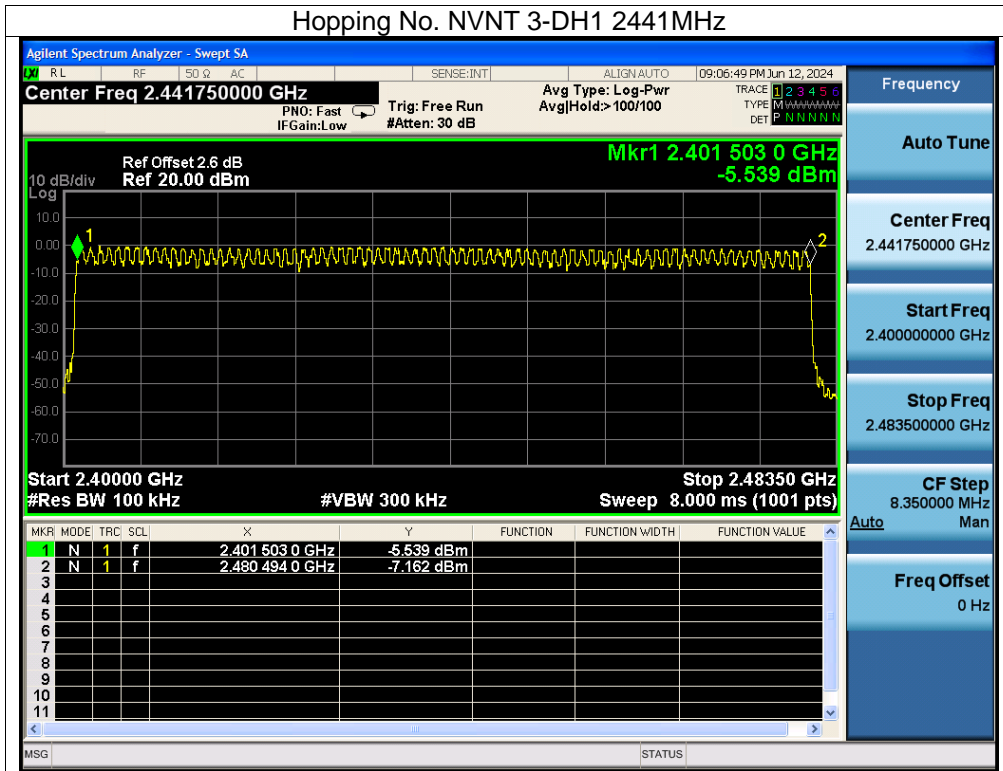

14. Dwell Time

14.1 Block Diagram Of Test Setup



14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.4 Test Result

Left

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	0.401	127.919	319	31600	400	Pass
1-DH3	2441	1.657	251.864	152	31600	400	Pass
1-DH5	2441	2.904	304.92	105	31600	400	Pass
2-DH1	2441	0.409	130.471	319	31600	400	Pass
2-DH3	2441	1.662	274.23	165	31600	400	Pass
2-DH5	2441	2.893	292.193	101	31600	400	Pass
3-DH1	2441	0.41	130.79	319	31600	400	Pass
3-DH3	2441	1.658	268.596	162	31600	400	Pass
3-DH5	2441	2.909	299.627	103	31600	400	Pass

Note: Total Dwell Time (ms) = Pulse Time (ms)*Burst Count

Right


Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	0.401	127.117	317	31600	400	Pass
1-DH3	2441	1.657	271.748	164	31600	400	Pass
1-DH5	2441	2.904	325.248	112	31600	400	Pass
2-DH1	2441	0.41	129.56	316	31600	400	Pass
2-DH3	2441	1.66	270.58	163	31600	400	Pass
2-DH5	2441	2.91	325.92	112	31600	400	Pass
3-DH1	2441	0.411	130.698	318	31600	400	Pass
3-DH3	2441	1.66	268.92	162	31600	400	Pass
3-DH5	2441	2.909	293.809	101	31600	400	Pass



Note: Total Dwell Time (ms) = Pulse Time (ms)*Burst Count

 TE
 TC
 OVE
 t See





Left


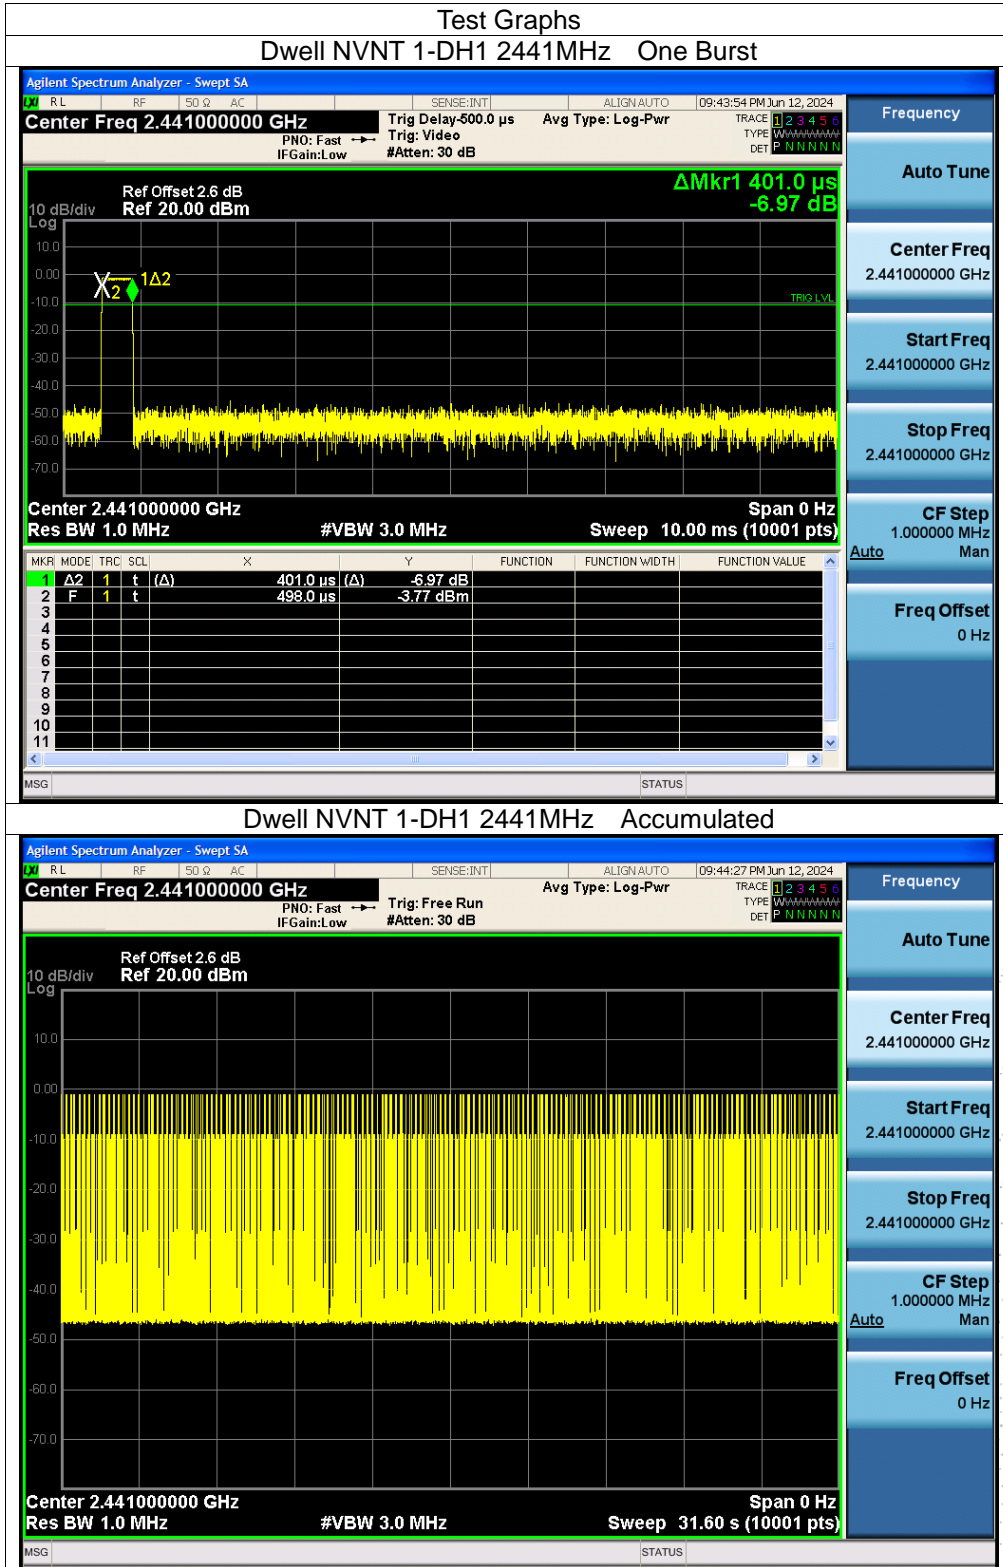


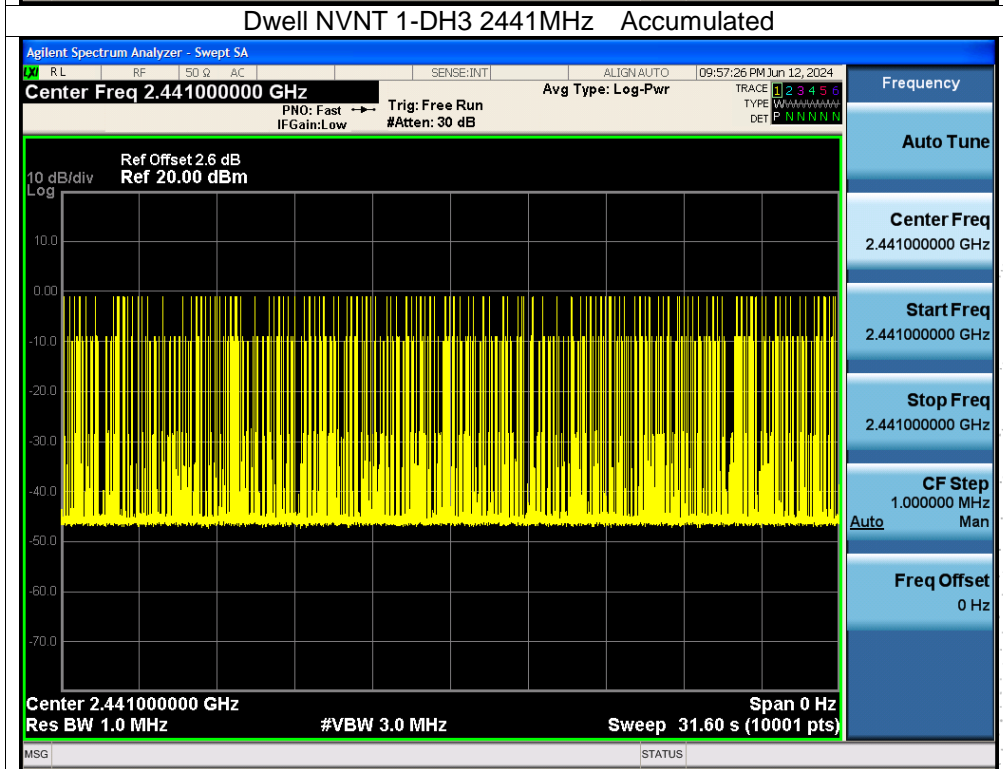
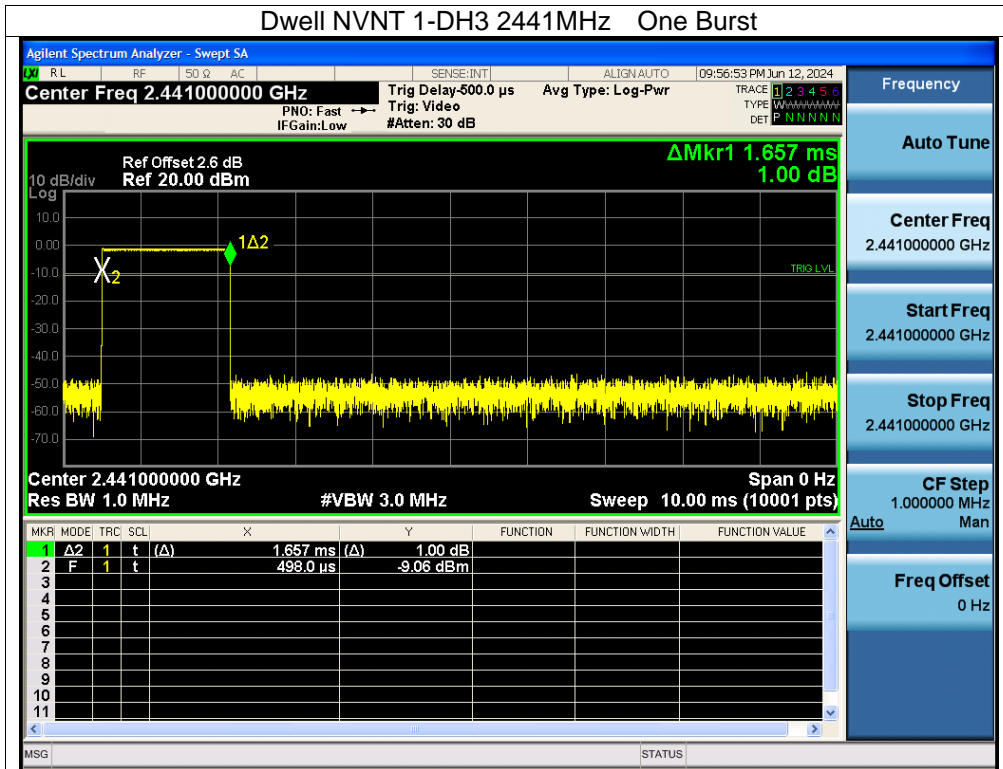




CO., LTD

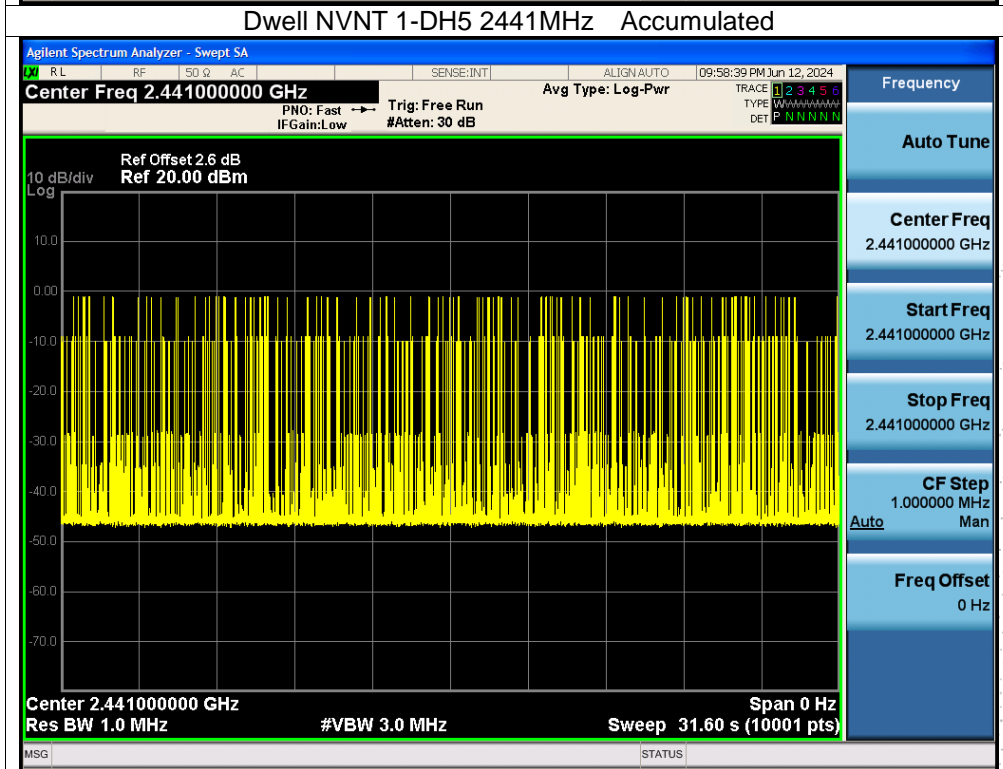
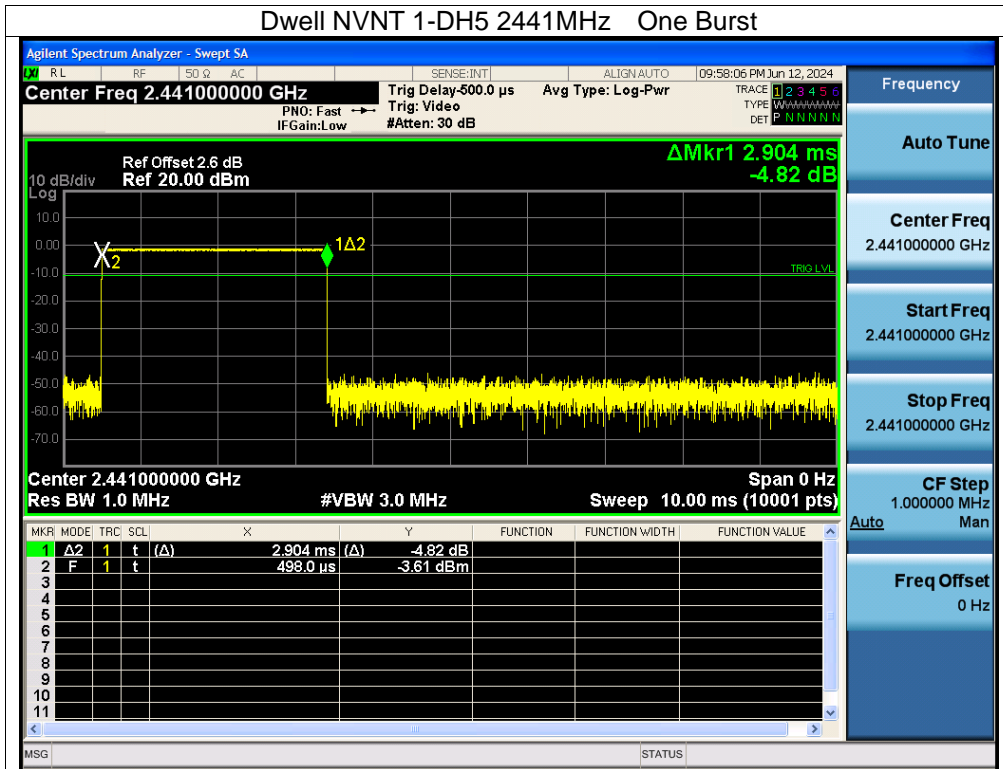




SHENZHEN

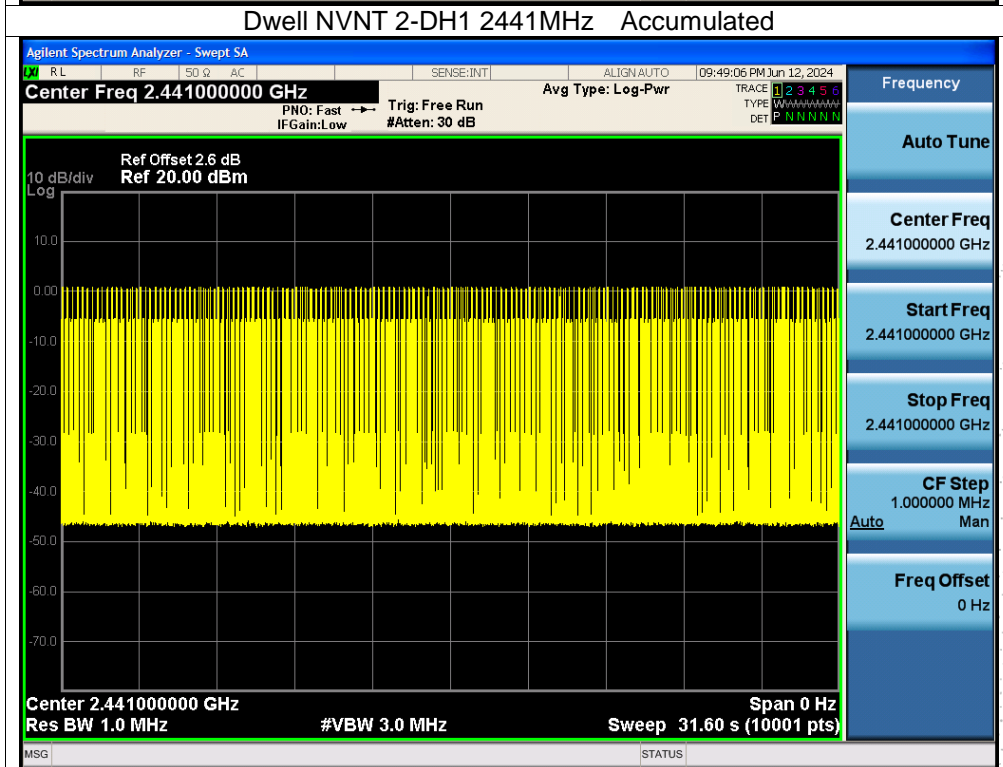
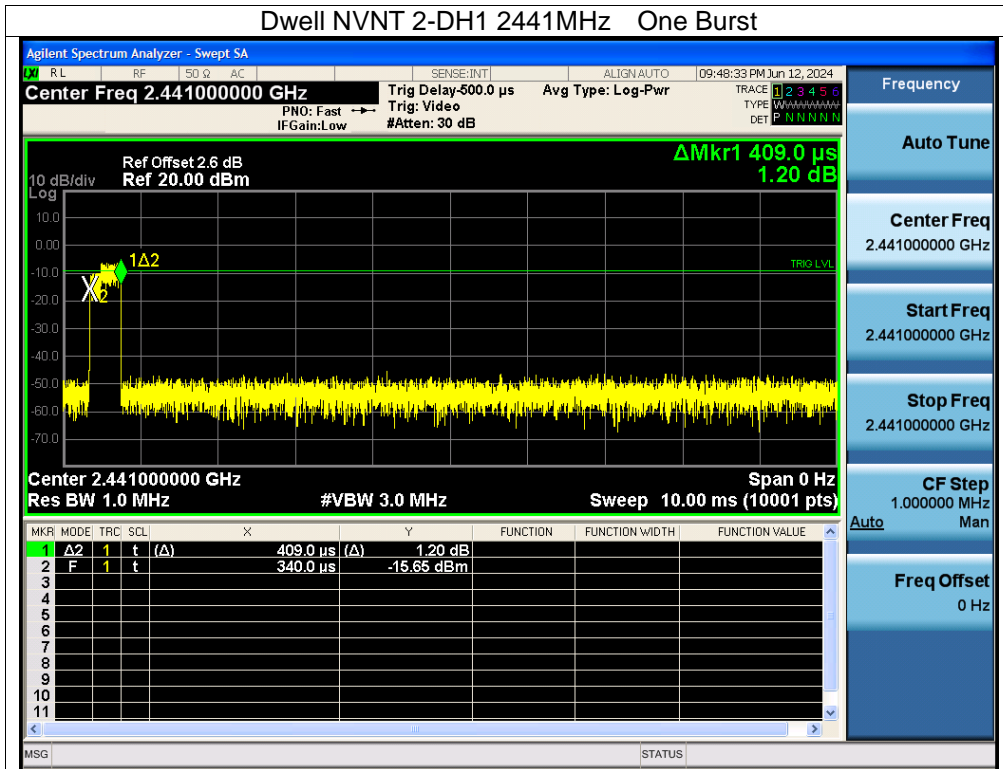


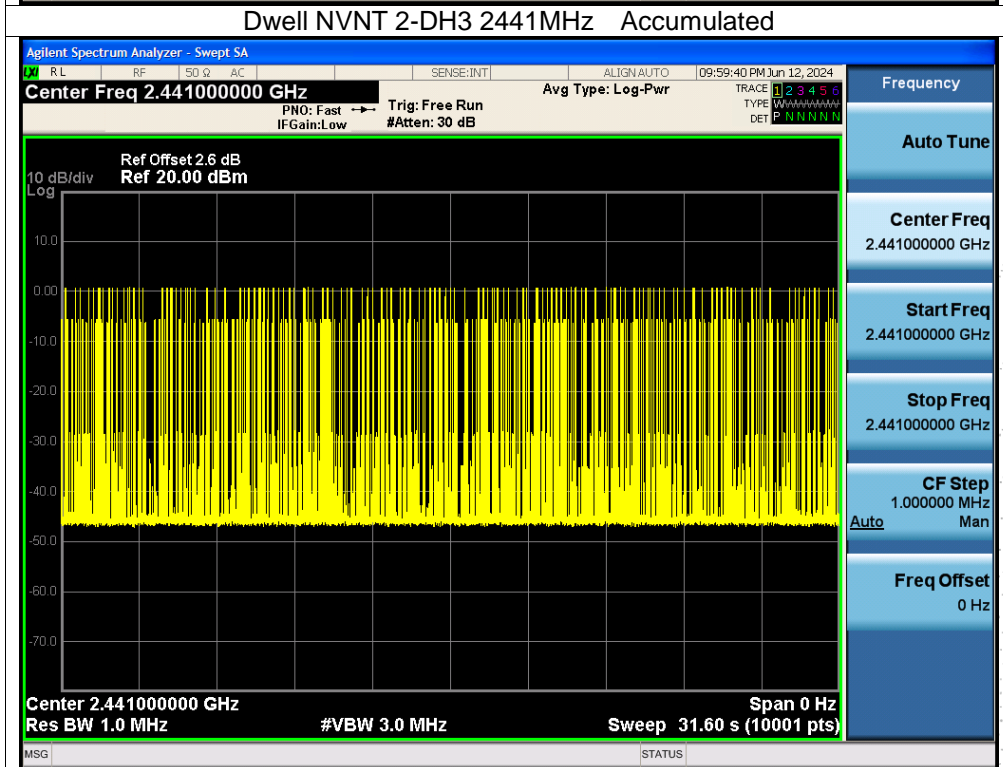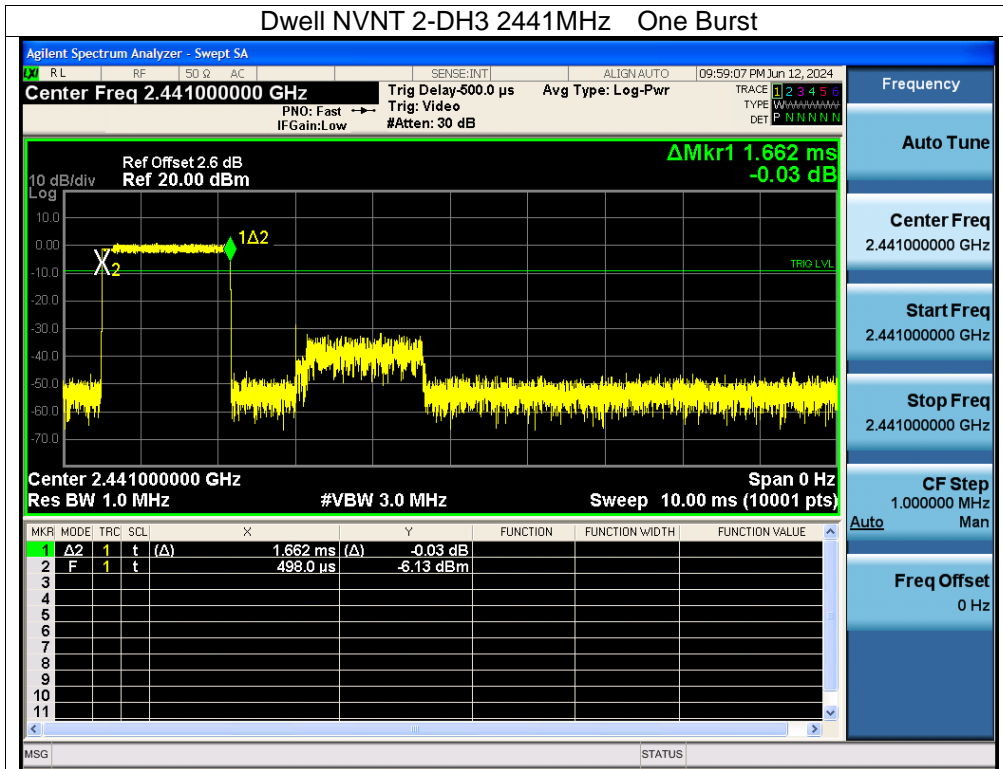

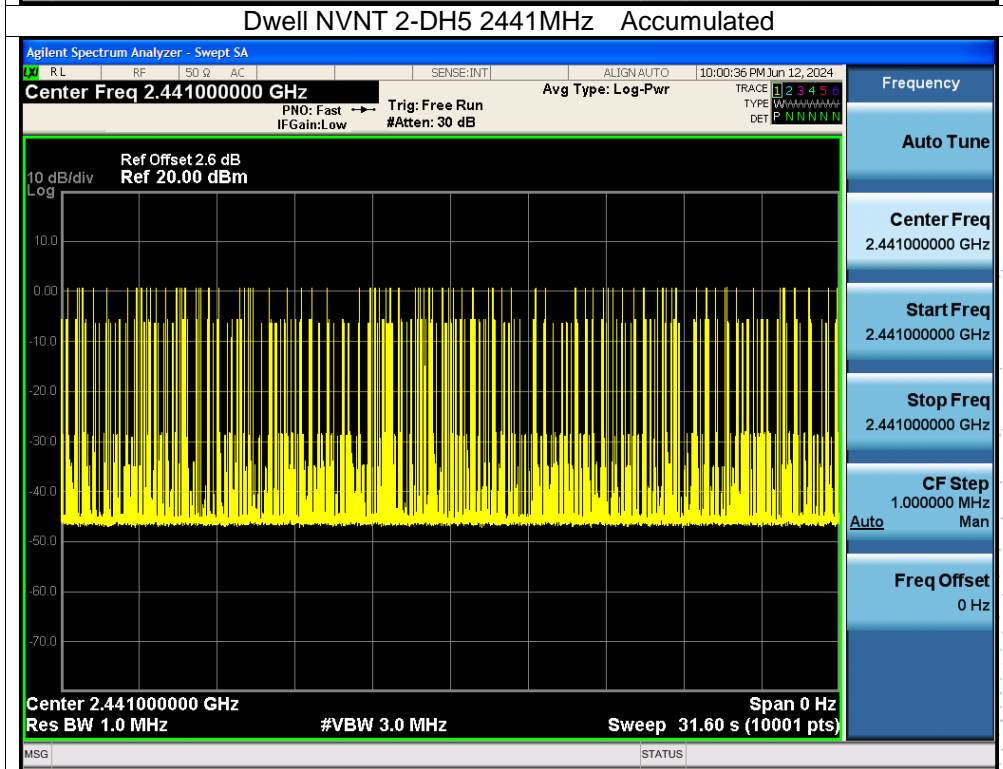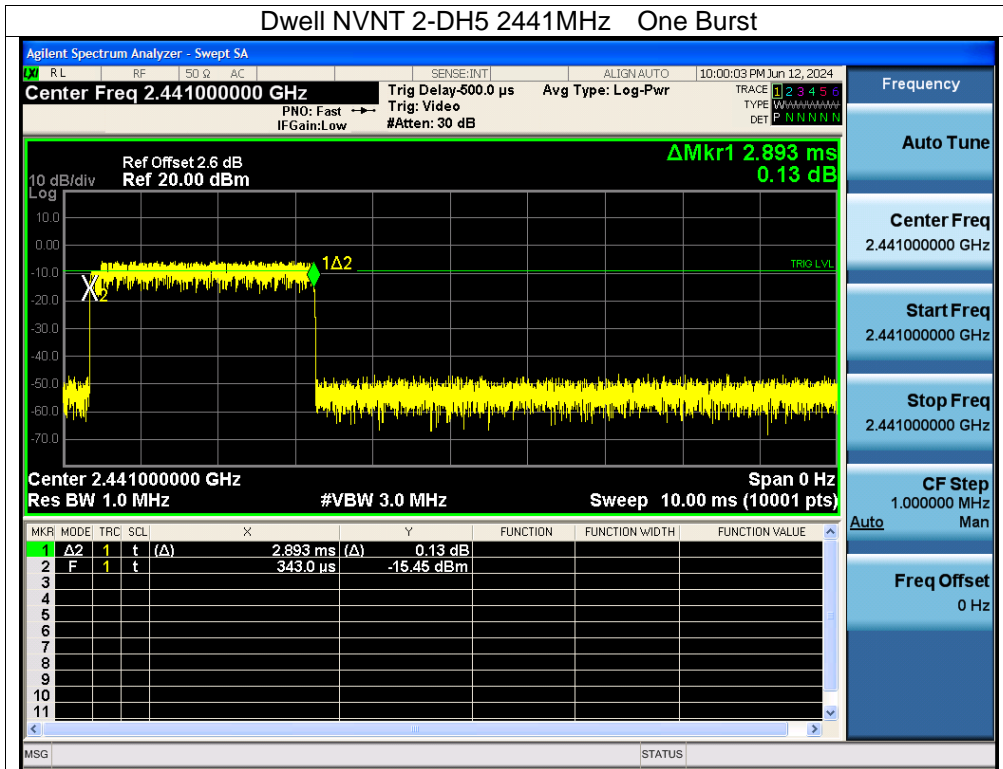

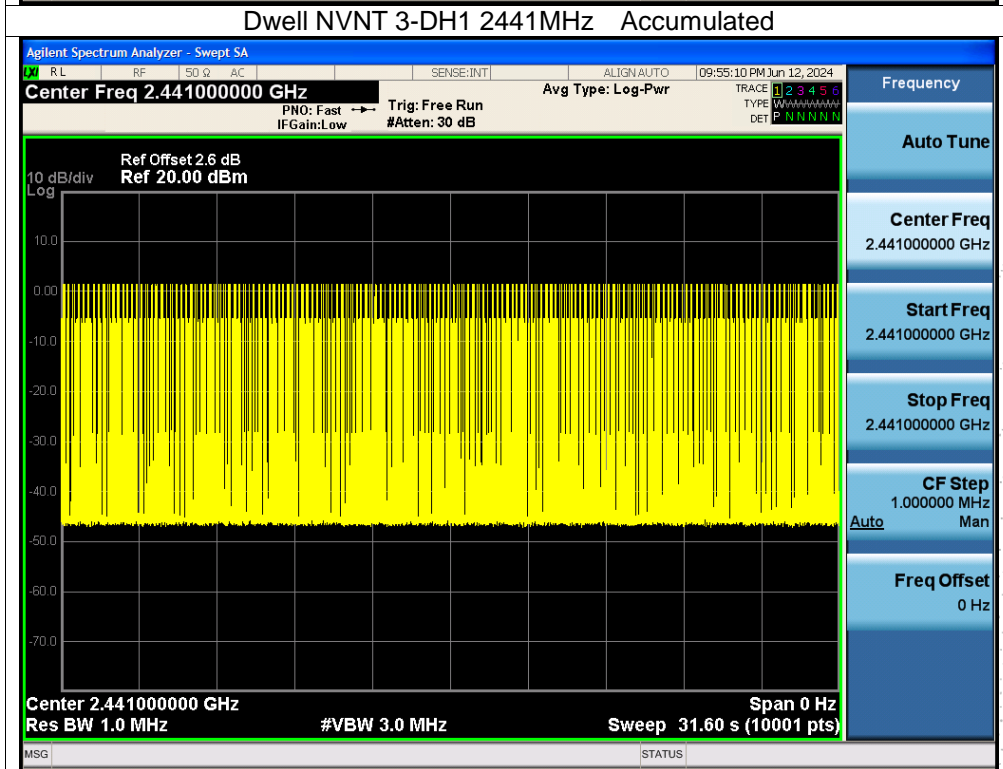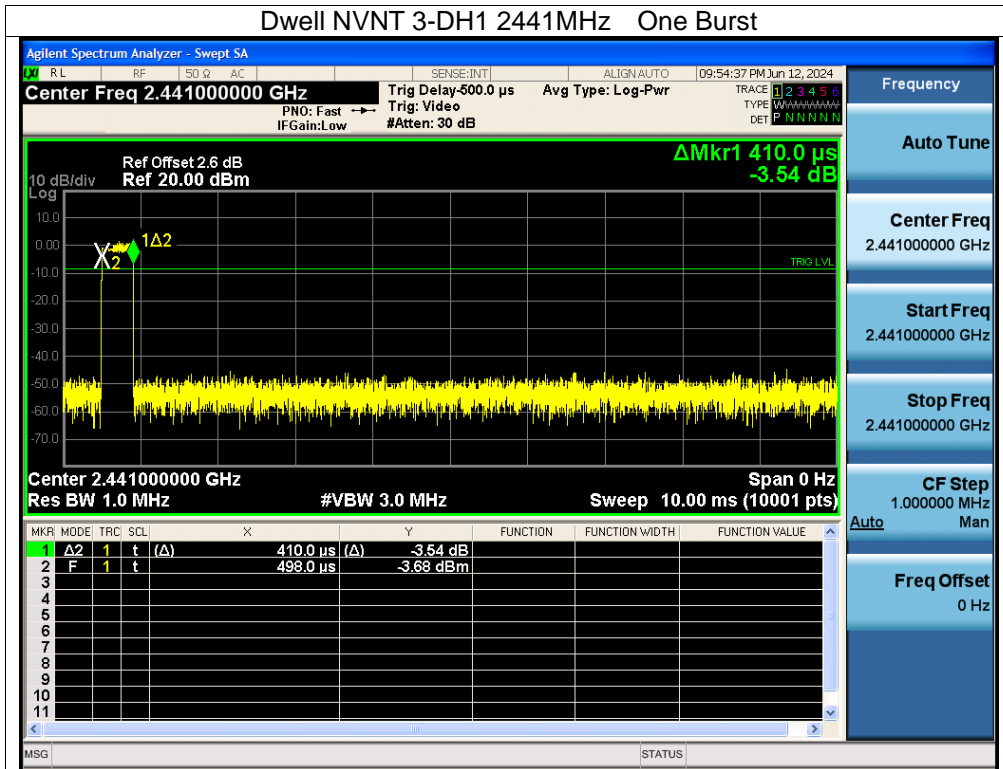


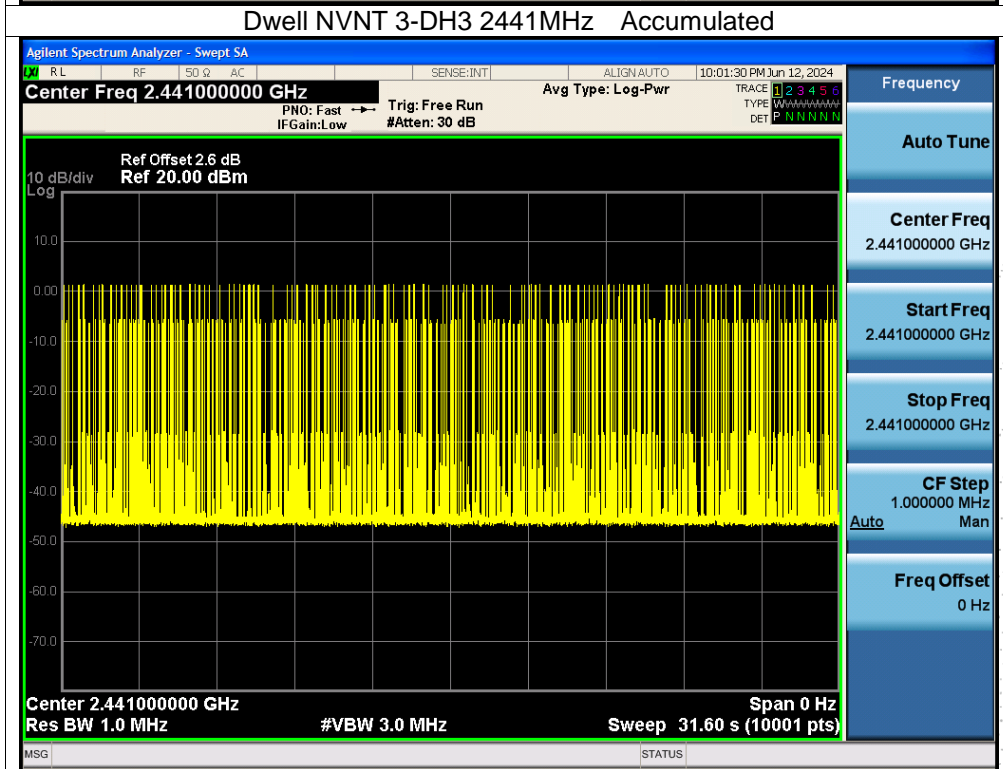
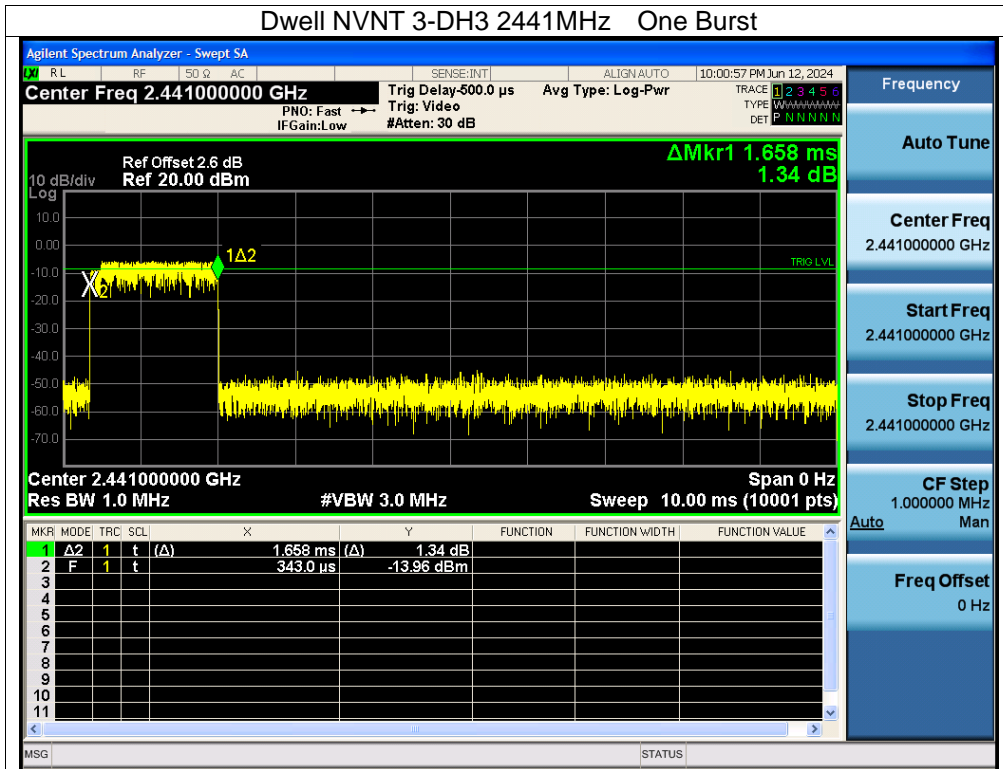


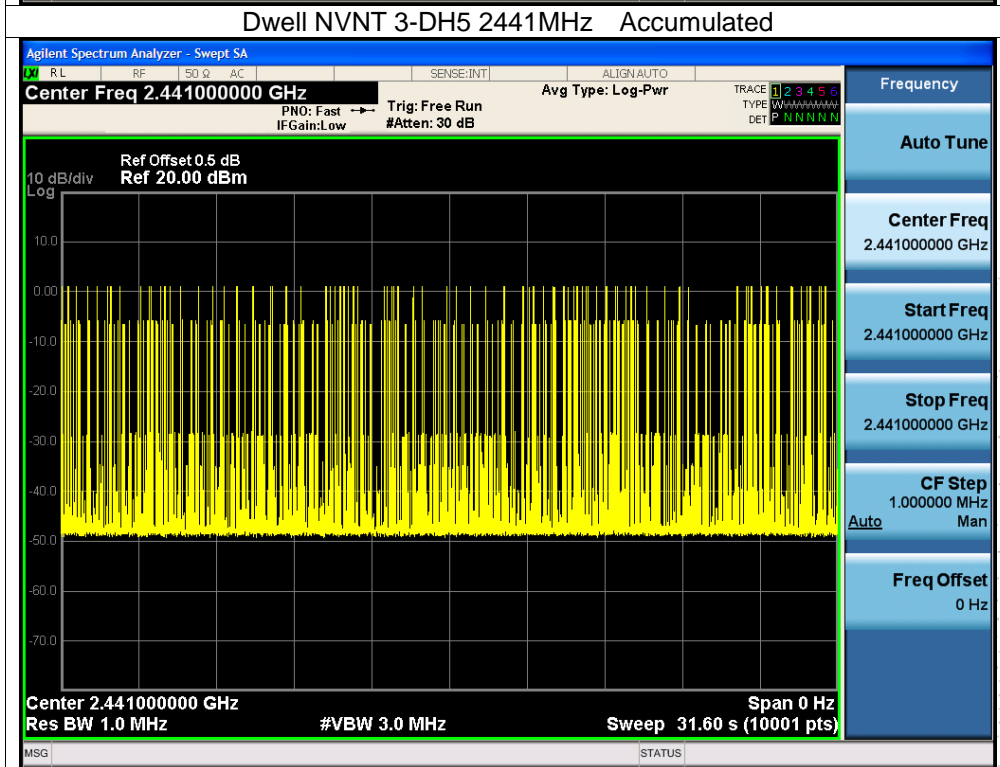
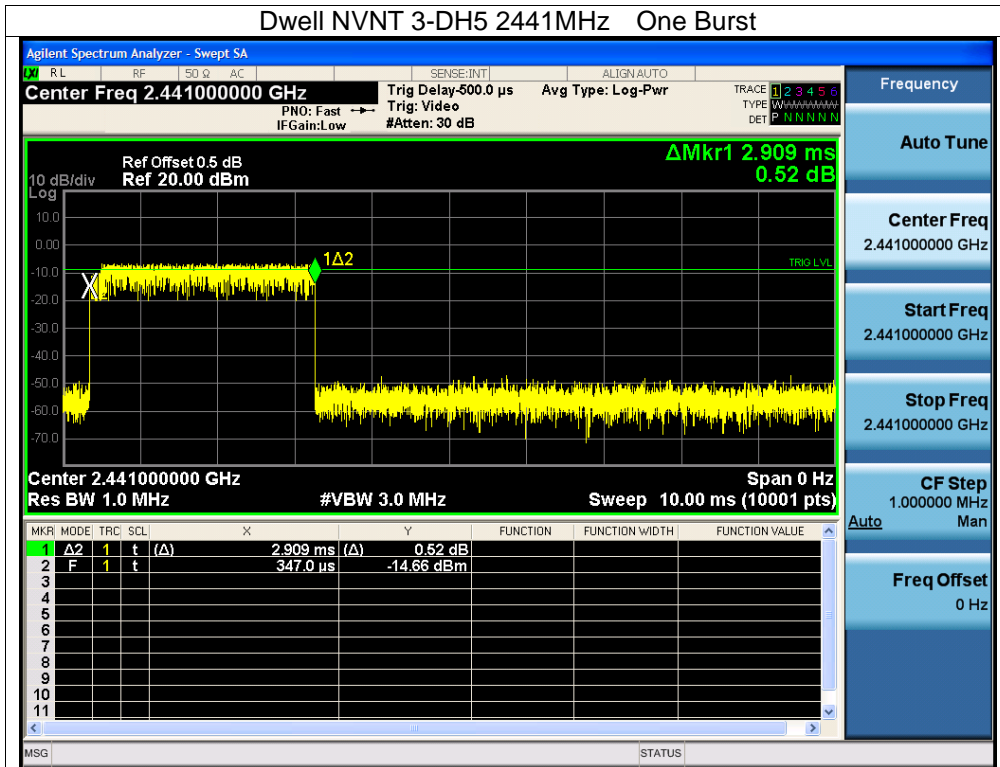



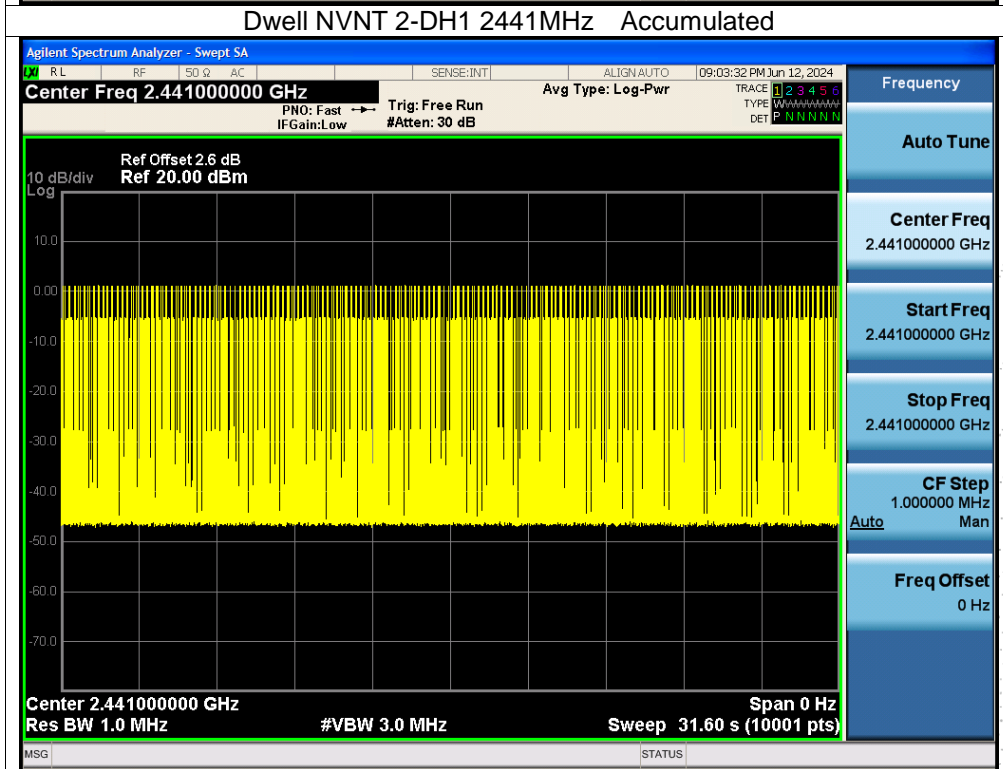
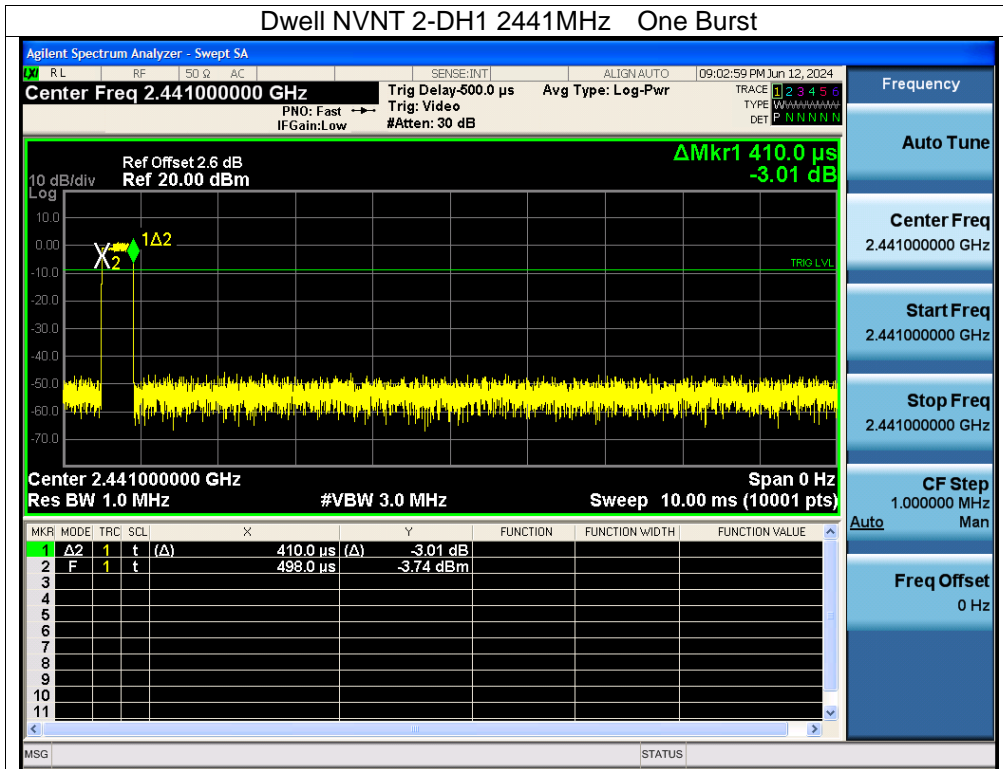




Right


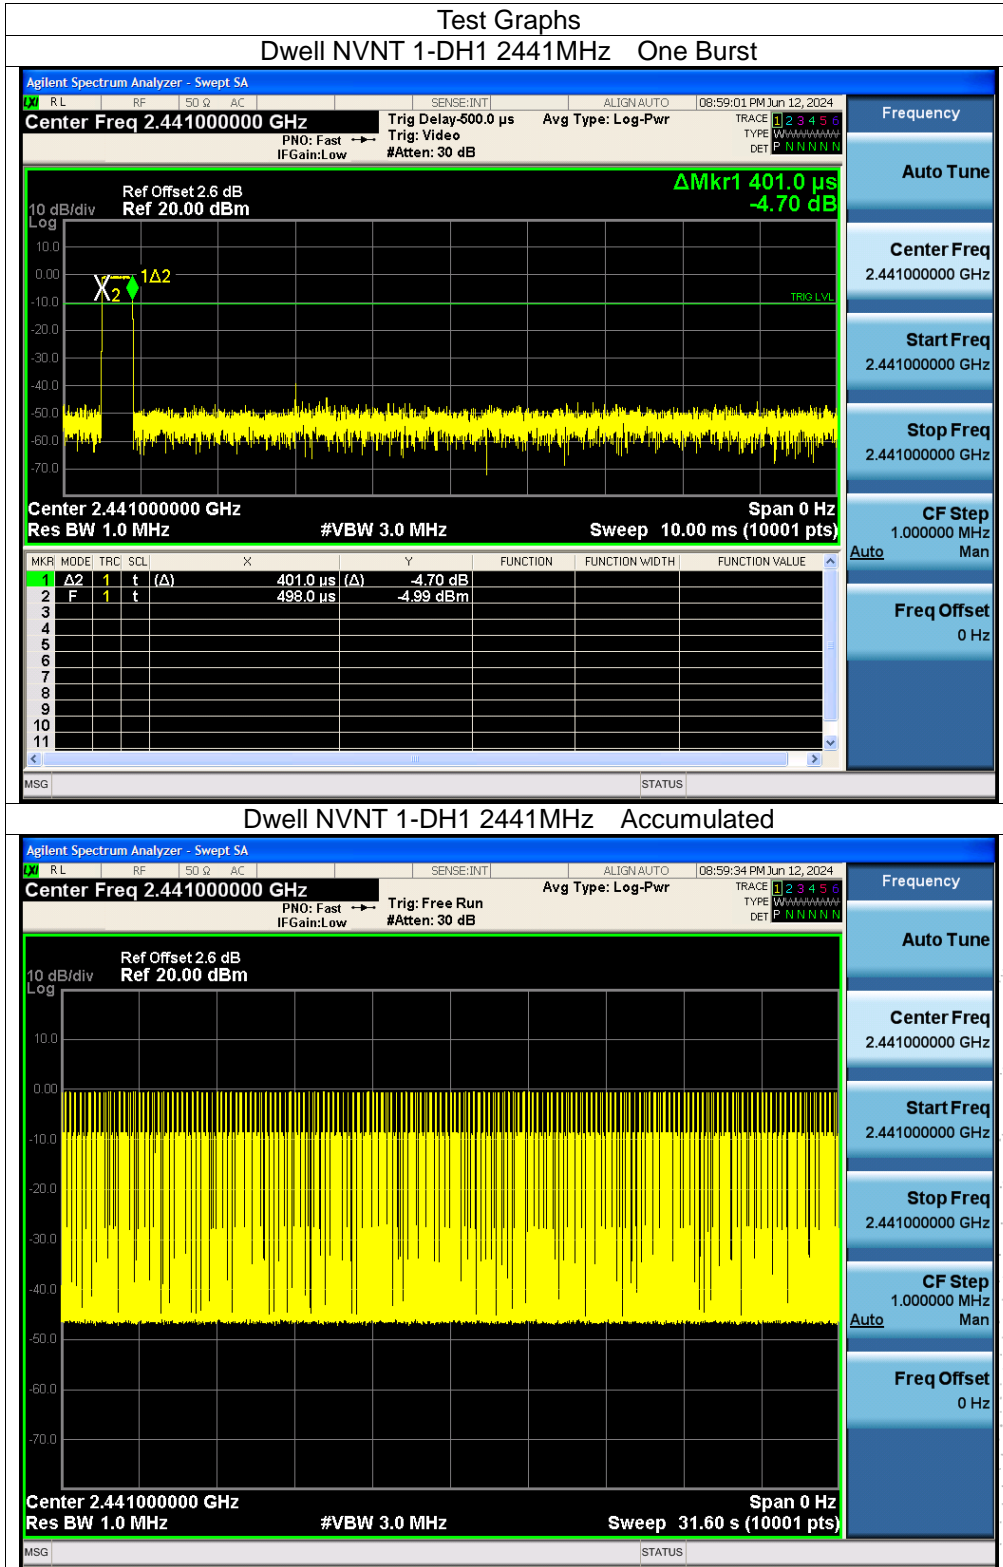


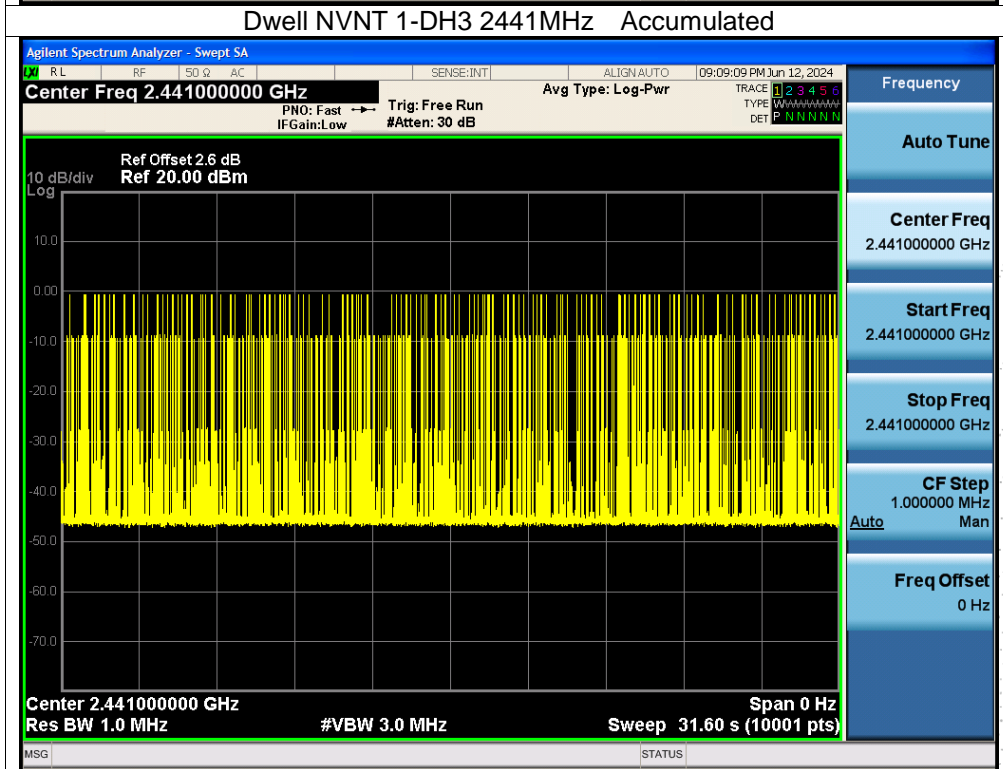
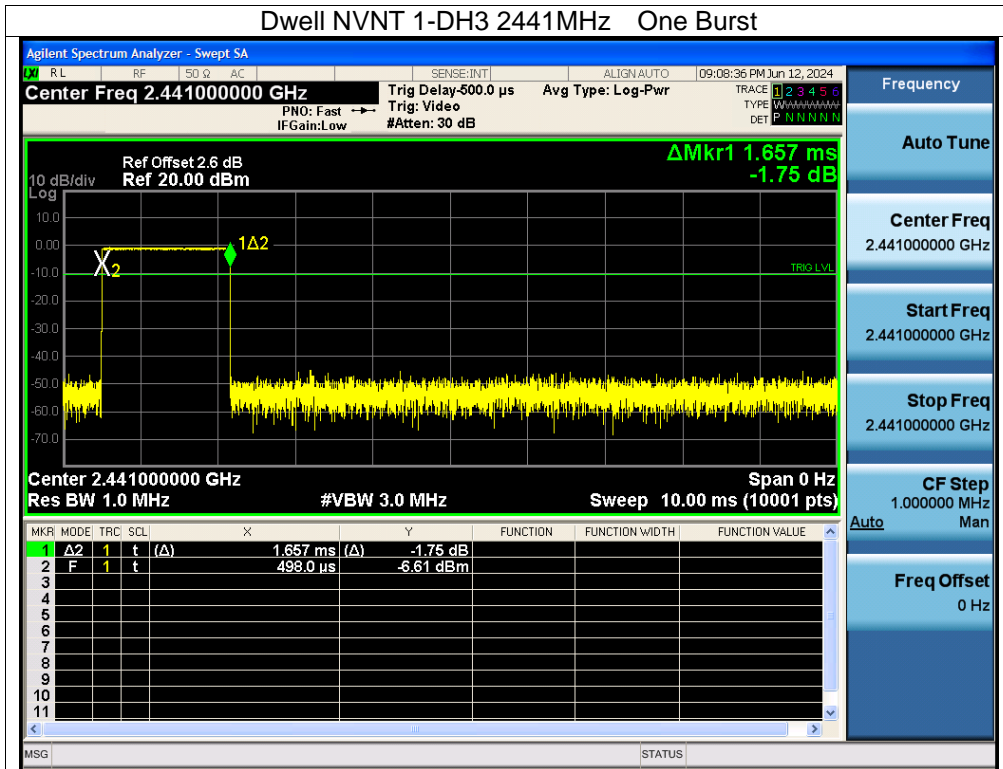


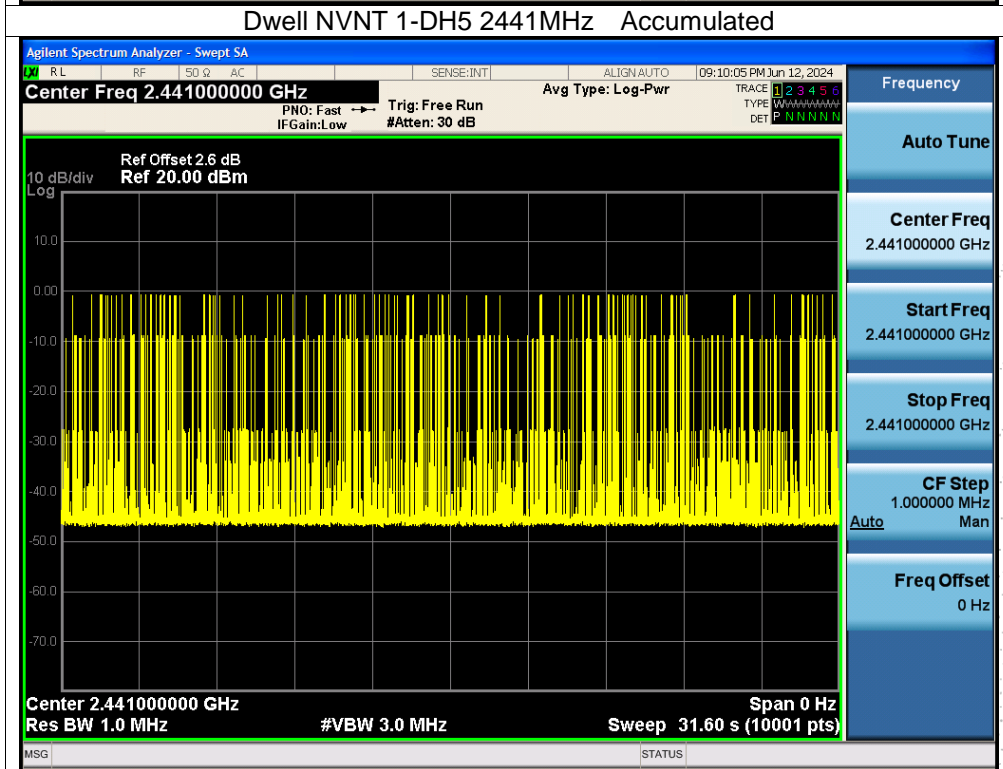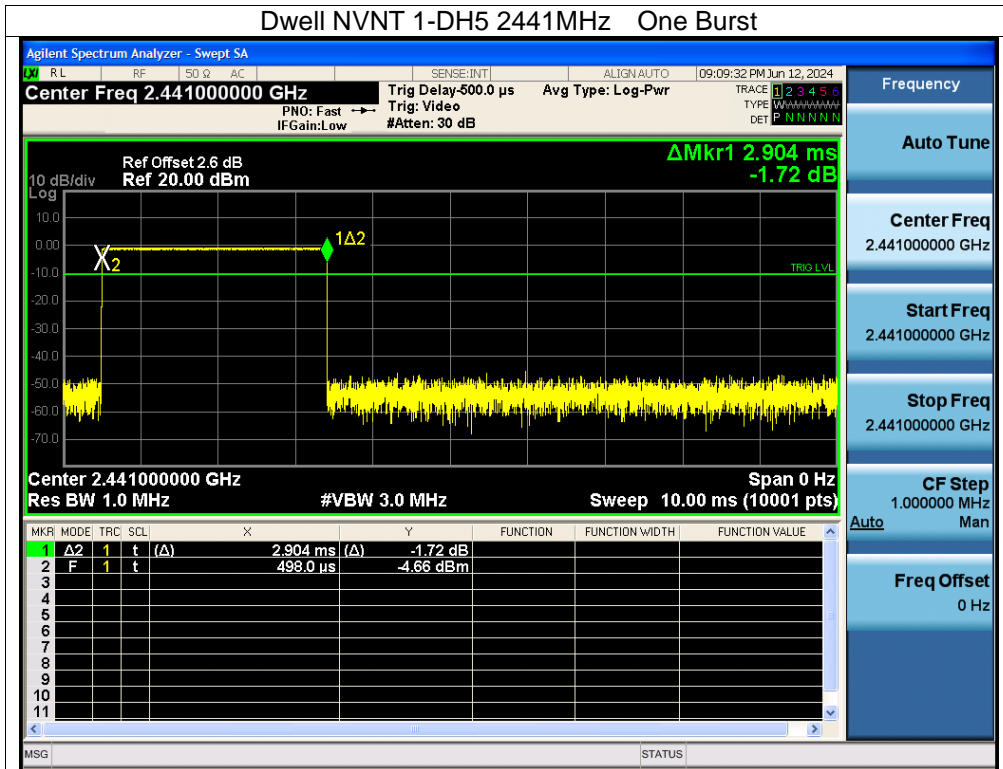



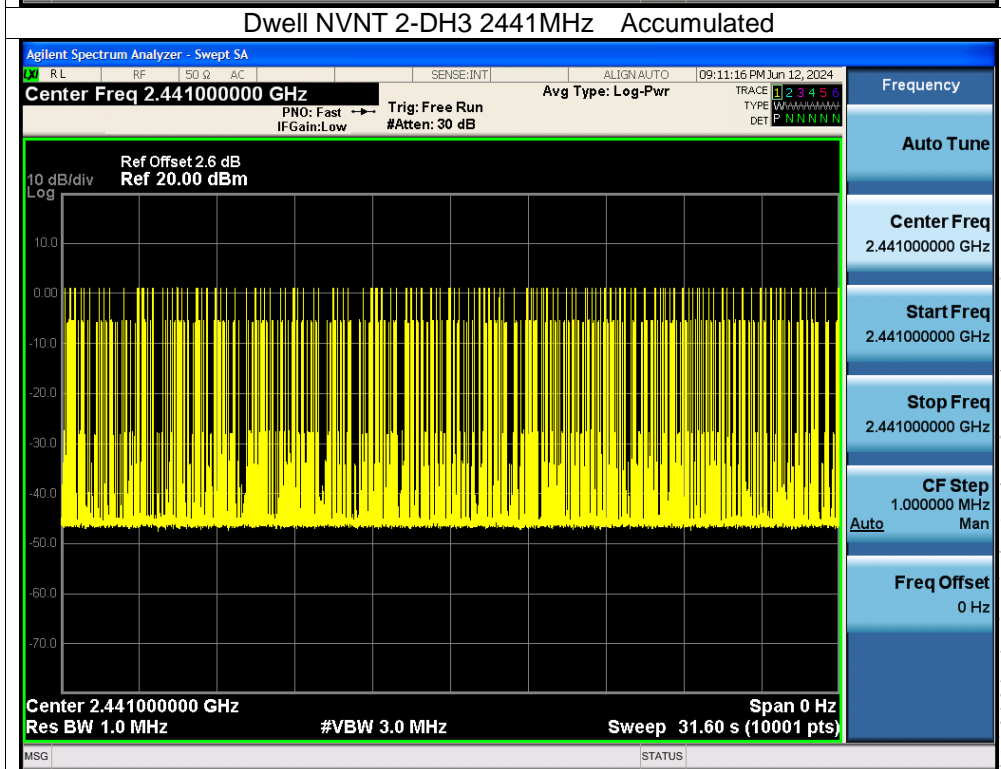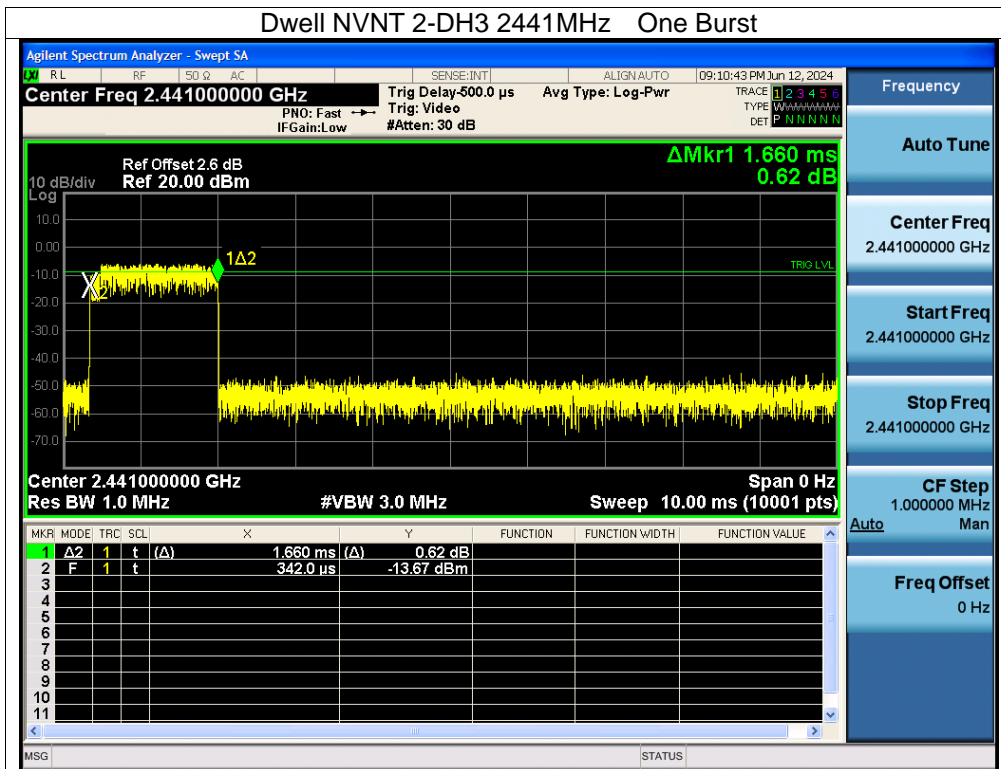

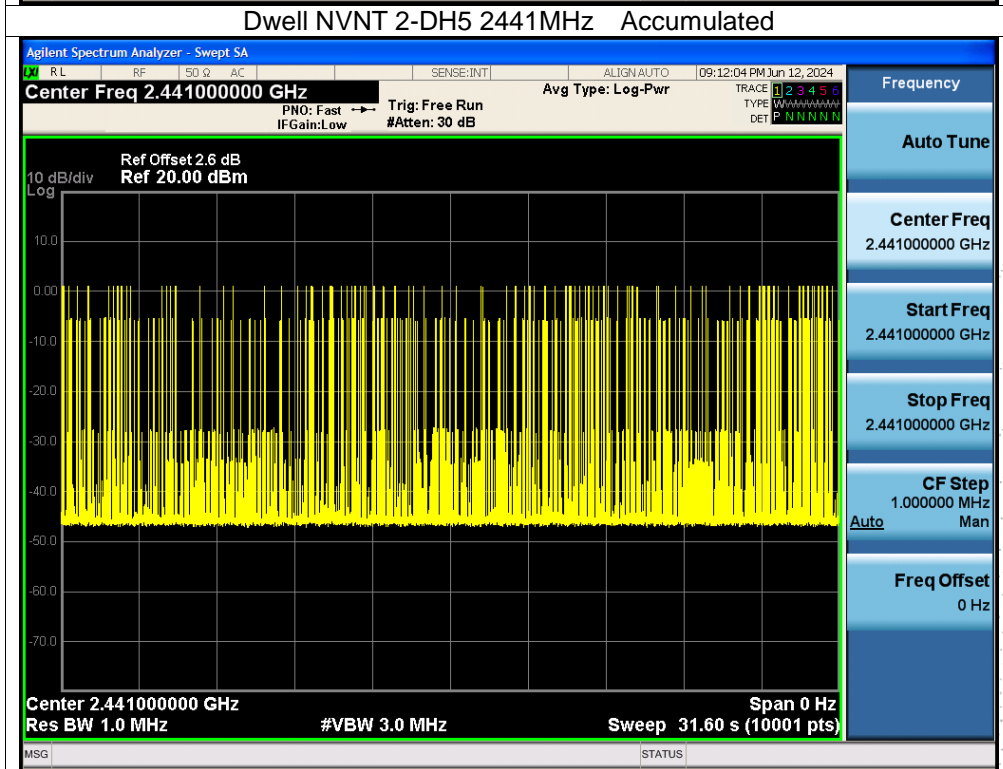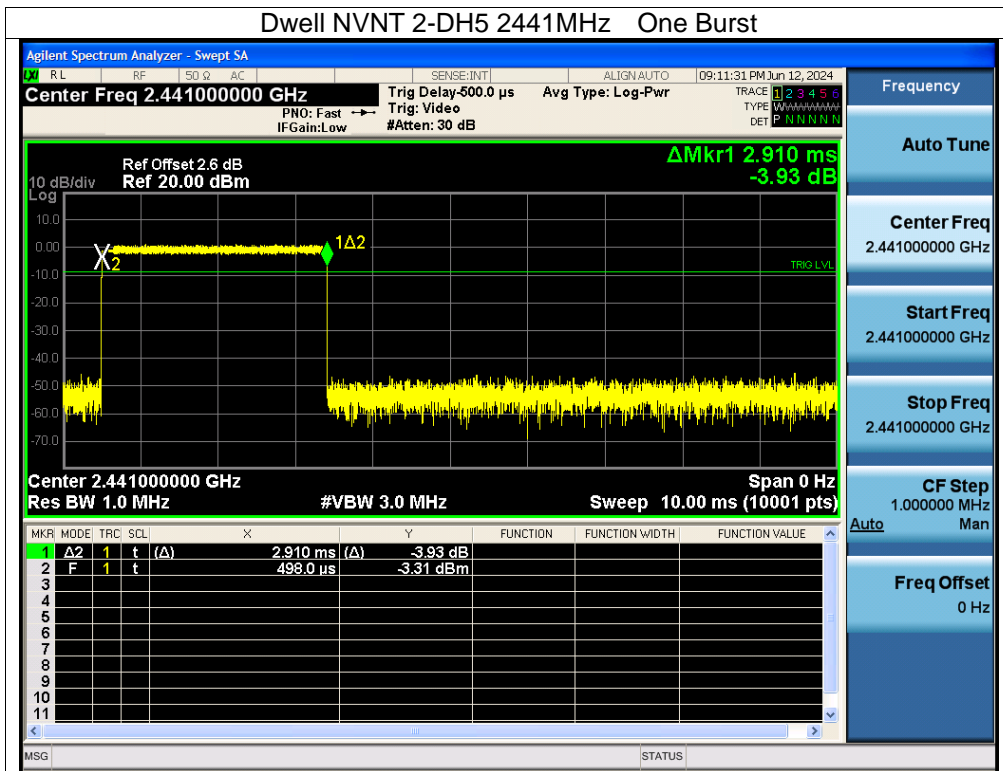

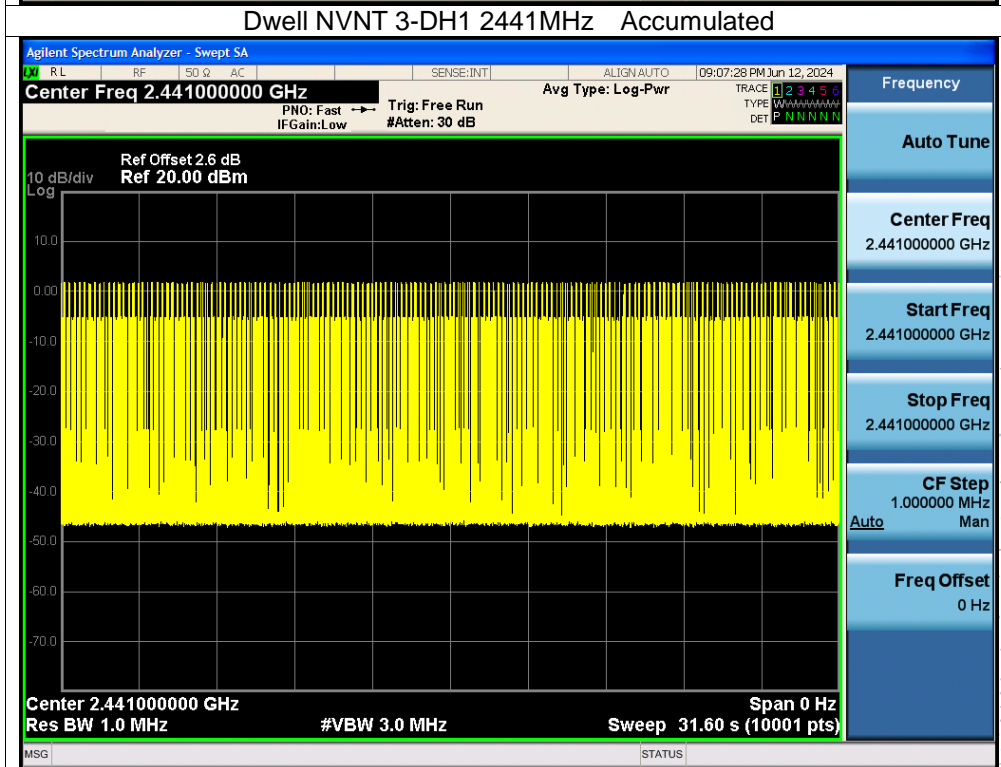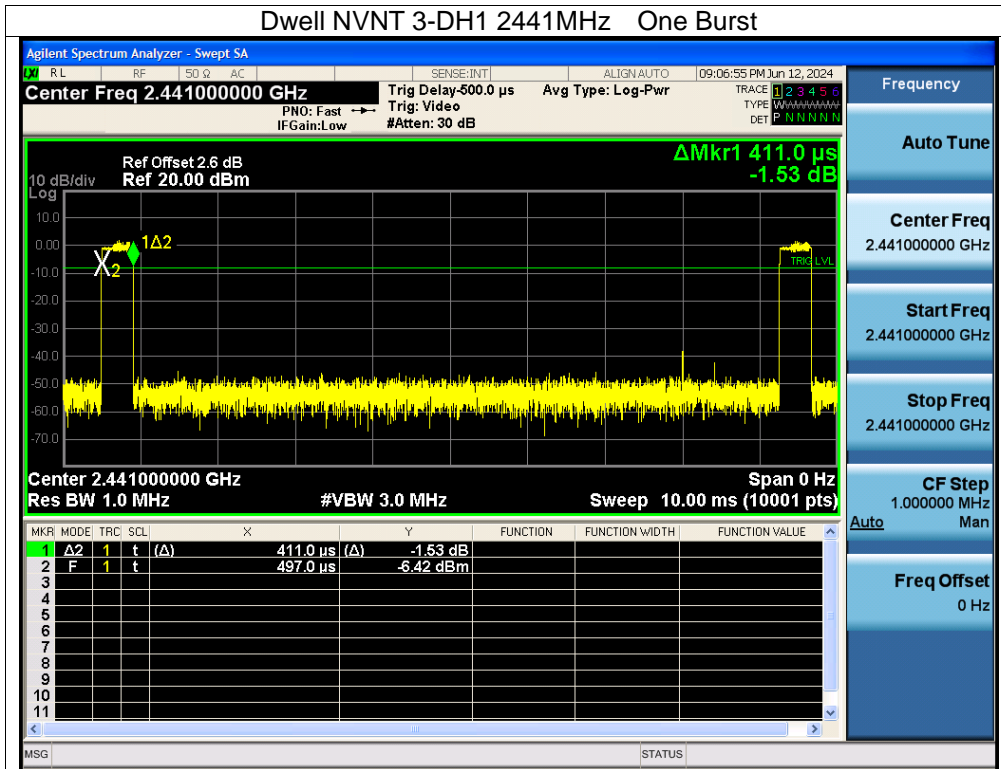

017